


Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUNTKEY


Horizontal

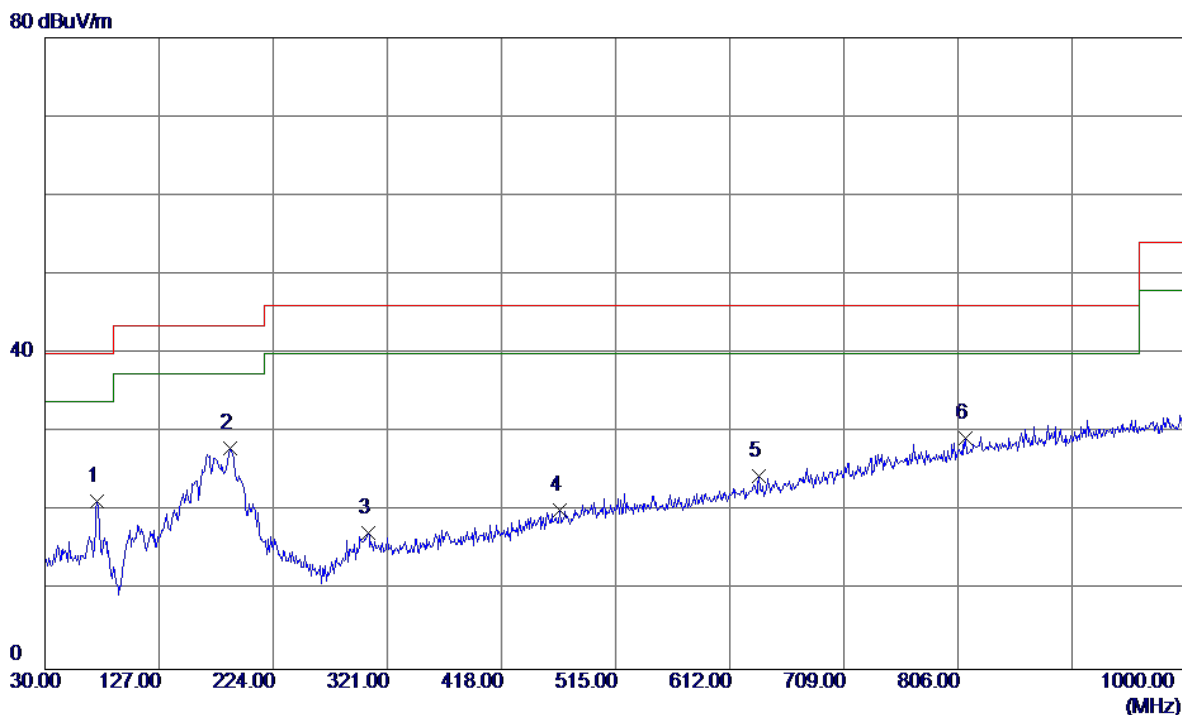

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	38.26	-17.04	21.22	40.00	-18.78	Peak	
2 *	187.1400	40.61	-12.61	28.00	43.50	-15.50	Peak	
3	304.5100	29.97	-12.75	17.22	46.00	-28.78	Peak	
4	467.4700	29.64	-9.51	20.13	46.00	-25.87	Peak	
5	637.2199	30.19	-5.72	24.47	46.00	-21.53	Peak	
6	812.7900	30.33	-1.01	29.32	46.00	-16.68	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUNTKEY


Vertical

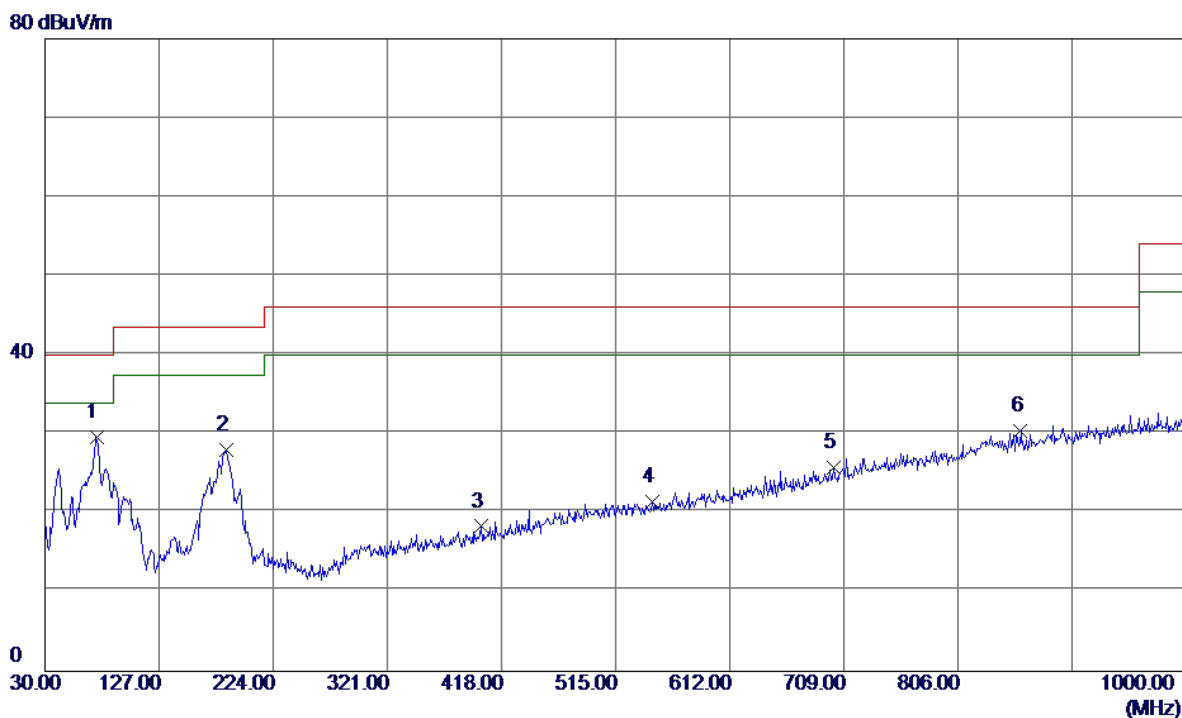

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	73.6500	46.46	-16.93	29.53	40.00	-10.47	Peak	
2	184.2300	40.37	-12.38	27.99	43.50	-15.51	Peak	
3	400.5400	29.66	-11.34	18.32	46.00	-27.68	Peak	
4	546.0400	29.17	-7.79	21.38	46.00	-24.62	Peak	
5	700.2700	29.64	-3.93	25.71	46.00	-20.29	Peak	
6	859.3500	30.19	0.19	30.38	46.00	-15.62	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUNTKEY


Horizontal

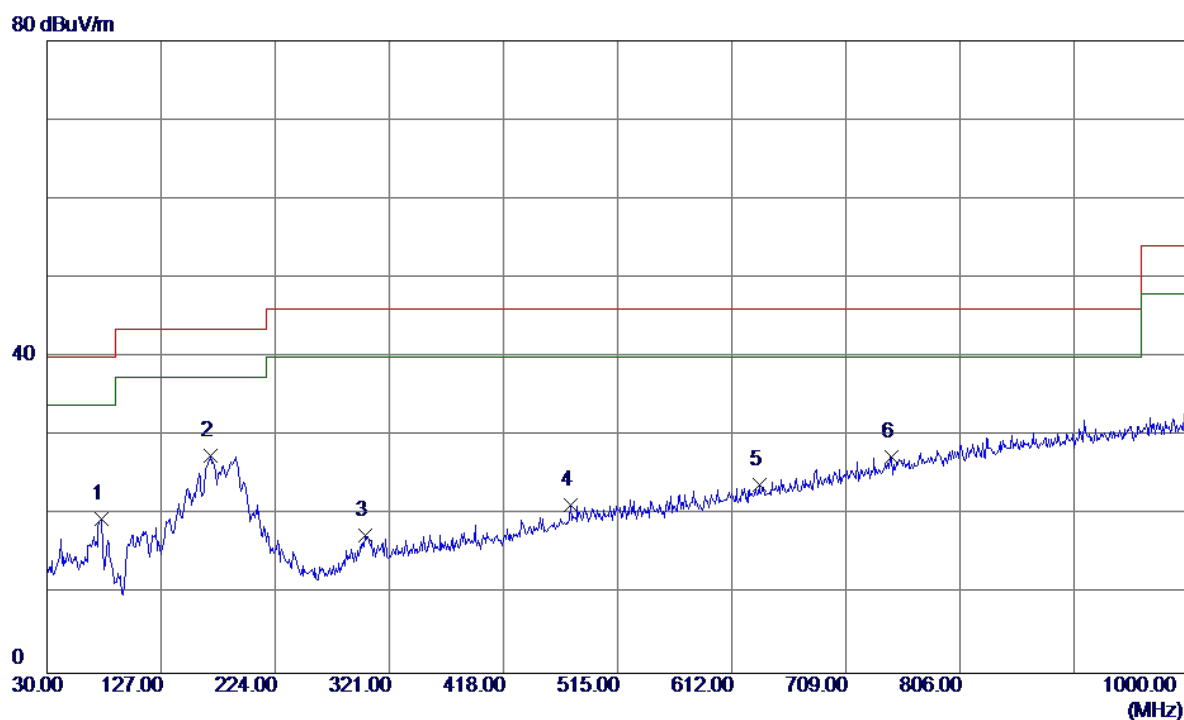

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	76.5600	36.90	-17.44	19.46	40.00	-20.54	Peak	
2 *	168.7100	39.93	-12.41	27.52	43.50	-15.98	Peak	
3	300.6300	30.22	-12.82	17.40	46.00	-28.60	Peak	
4	475.2300	30.54	-9.32	21.22	46.00	-24.78	Peak	
5	635.2800	29.63	-5.75	23.88	46.00	-22.12	Peak	
6	747.8000	29.91	-2.51	27.40	46.00	-18.60	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUNTKEY


Vertical

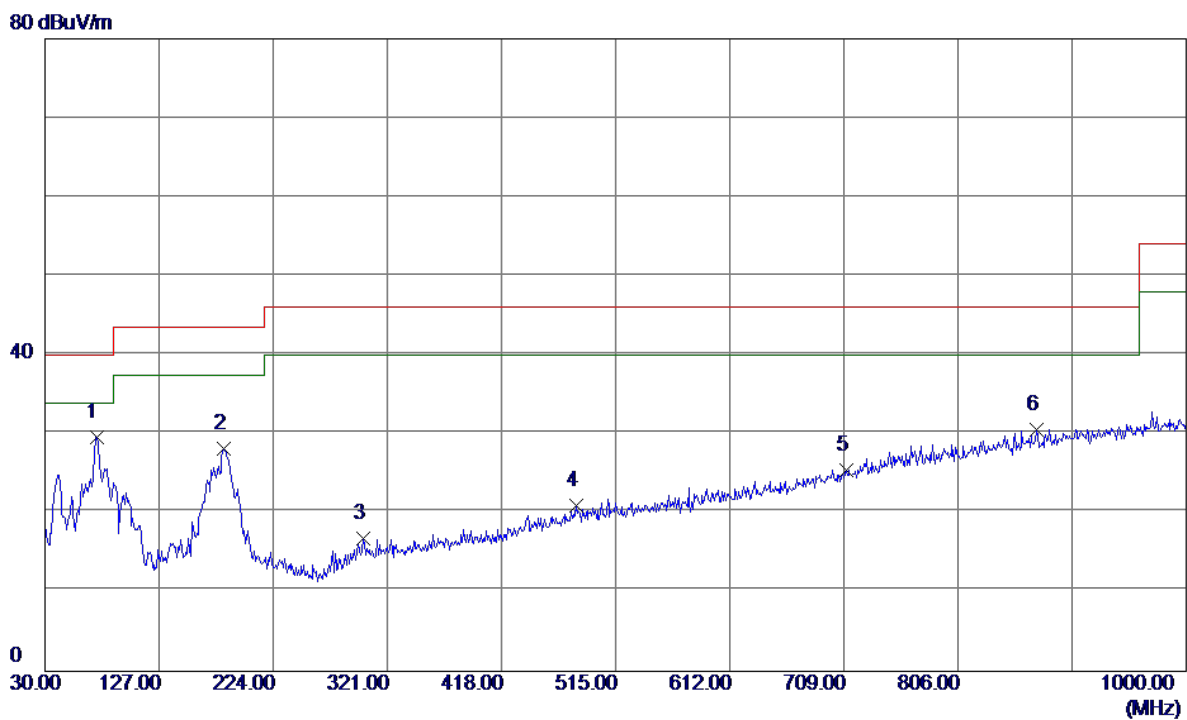

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	73.6500	46.54	-16.93	29.61	40.00	-10.39	Peak	
2	182.2899	40.36	-12.22	28.14	43.50	-15.36	Peak	
3	300.6300	29.55	-12.82	16.73	46.00	-29.27	Peak	
4	482.0200	30.11	-9.16	20.95	46.00	-25.05	Peak	
5	710.9400	29.07	-3.61	25.46	46.00	-20.54	Peak	
6	872.9300	30.15	0.47	30.62	46.00	-15.38	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUNTKEY

Horizontal

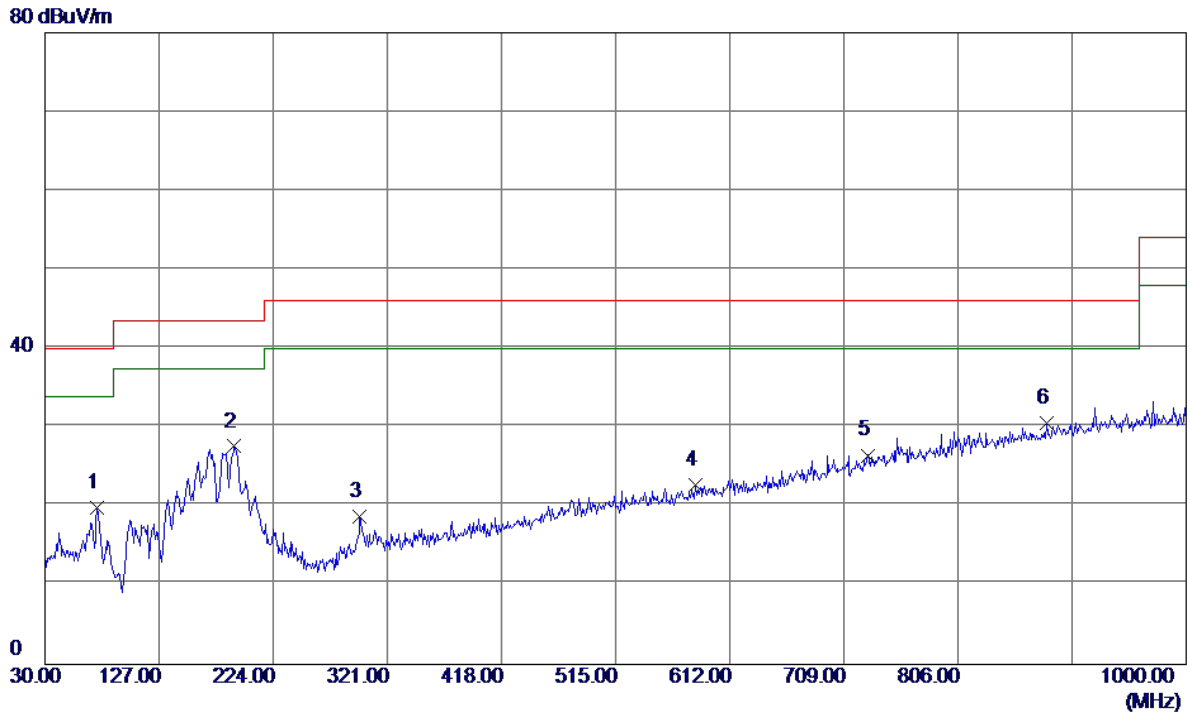


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	36.89	-17.04	19.85	40.00	-20.15	Peak	
2	191.0200	40.54	-12.94	27.60	43.50	-15.90	Peak	
3	297.7200	31.87	-13.14	18.73	46.00	-27.27	Peak	
4	582.9000	29.60	-6.86	22.74	46.00	-23.26	Peak	
5	729.3700	29.54	-3.06	26.48	46.00	-19.52	Peak	
6 *	881.6600	29.89	0.65	30.54	46.00	-15.46	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUNTKEY

Vertical

80 dBuV/m

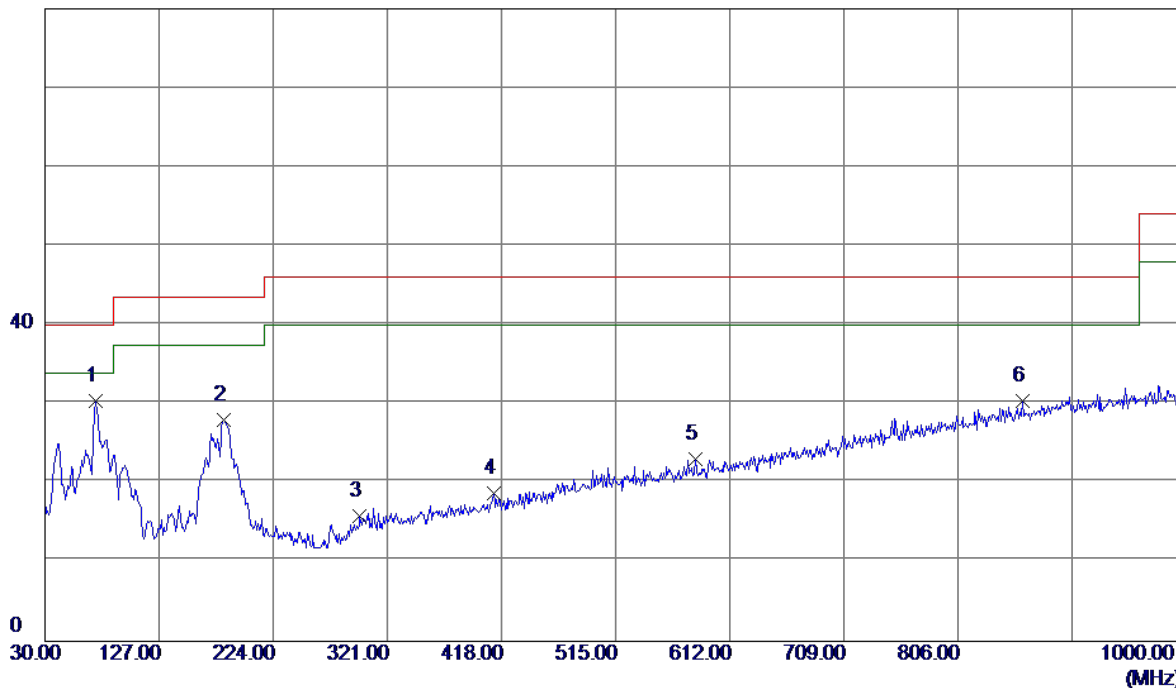


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	72.6800	47.21	-16.82	30.39	40.00	-9.61	Peak	
2	182.2899	40.25	-12.22	28.03	43.50	-15.47	Peak	
3	297.7200	28.93	-13.14	15.79	46.00	-30.21	Peak	
4	411.2100	29.72	-11.04	18.68	46.00	-27.32	Peak	
5	582.9000	29.86	-6.86	23.00	46.00	-23.00	Peak	
6	861.2900	30.18	0.23	30.41	46.00	-15.59	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUNTKEY

Horizontal

80 dBuV/m

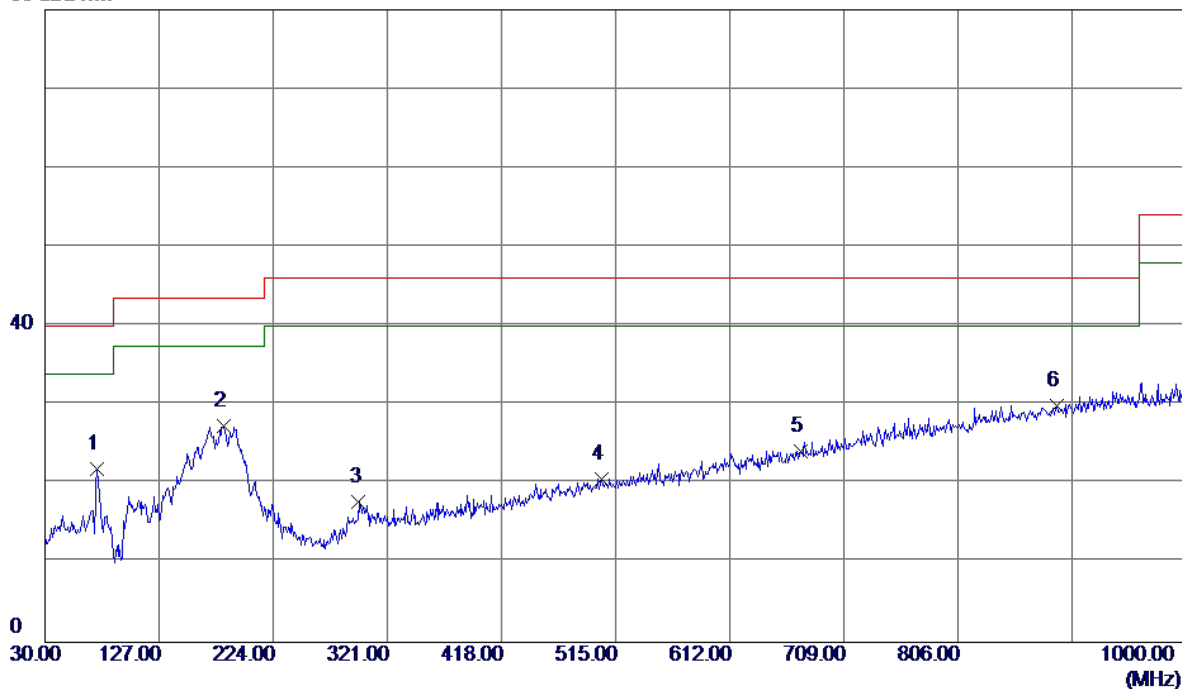


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	39.01	-17.04	21.97	40.00	-18.03	Peak	
2	182.2899	39.59	-12.22	27.37	43.50	-16.13	Peak	
3	296.7500	31.00	-13.28	17.72	46.00	-28.28	Peak	
4	503.3600	29.36	-8.65	20.71	46.00	-25.29	Peak	
5	672.1400	29.02	-4.80	24.22	46.00	-21.78	Peak	
6 *	890.3900	29.16	0.83	29.99	46.00	-16.01	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: Salcomp

Vertical


80 dBuV/m

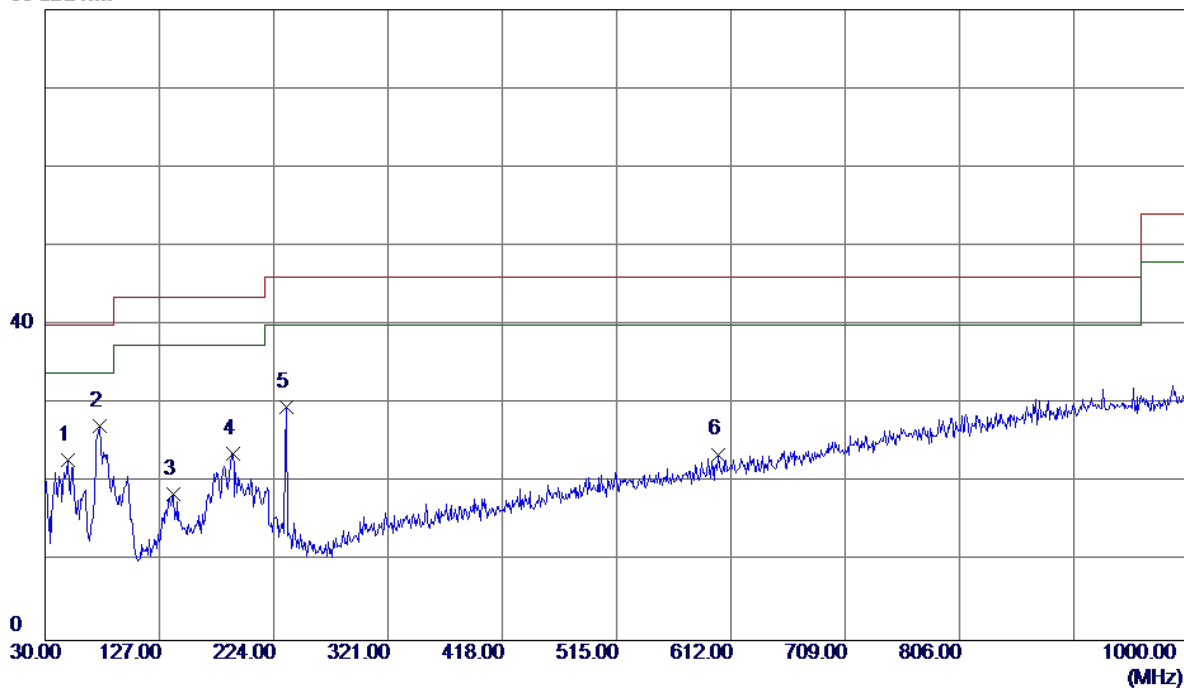

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	49.4000	36.29	-13.46	22.83	40.00	-17.17	Peak	
2 *	76.5600	44.66	-17.44	27.22	40.00	-12.78	Peak	
3	138.6400	32.84	-14.28	18.56	43.50	-24.94	Peak	
4	189.0800	36.51	-12.77	23.74	43.50	-19.76	Peak	
5	234.6700	43.79	-14.24	29.55	46.00	-16.45	Peak	
6	601.3300	29.99	-6.39	23.60	46.00	-22.40	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: Salcomp


Horizontal

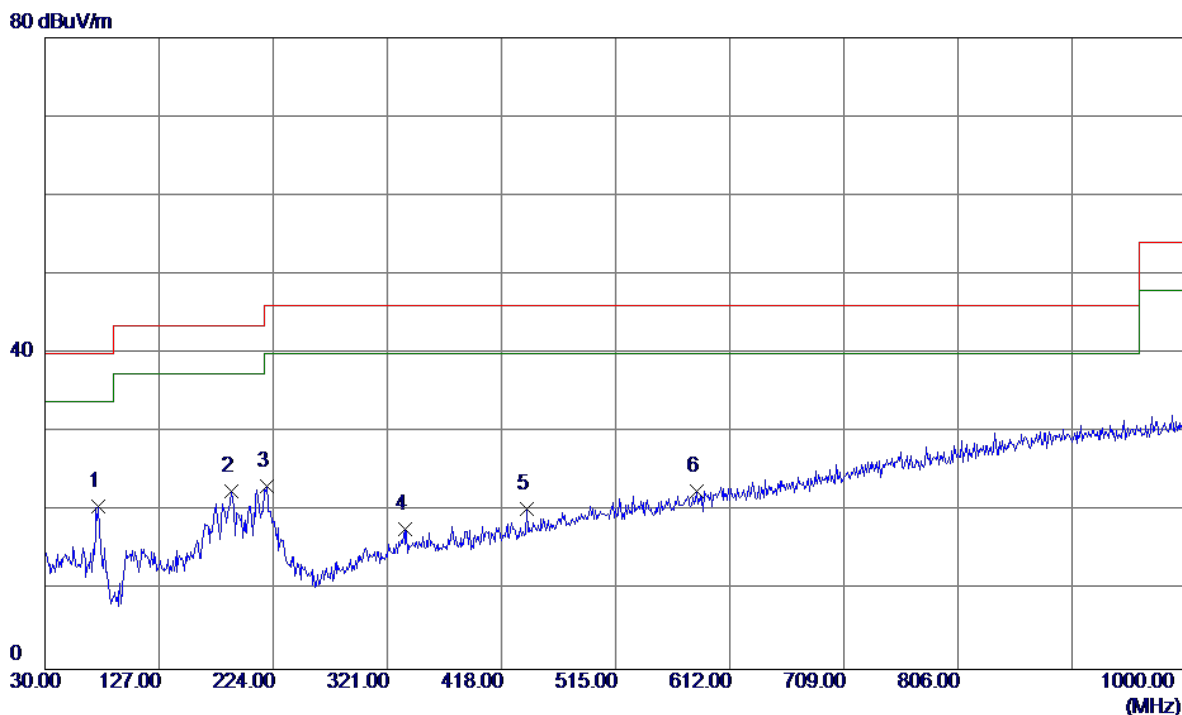

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	37.88	-17.22	20.66	40.00	-19.34	Peak	
2	188.1100	35.29	-12.69	22.60	43.50	-20.90	Peak	
3	218.1800	37.11	-13.92	23.19	46.00	-22.81	Peak	
4	336.5200	29.90	-12.19	17.71	46.00	-28.29	Peak	
5	439.3400	30.59	-10.24	20.35	46.00	-25.65	Peak	
6	583.8700	29.42	-6.84	22.58	46.00	-23.42	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Vertical

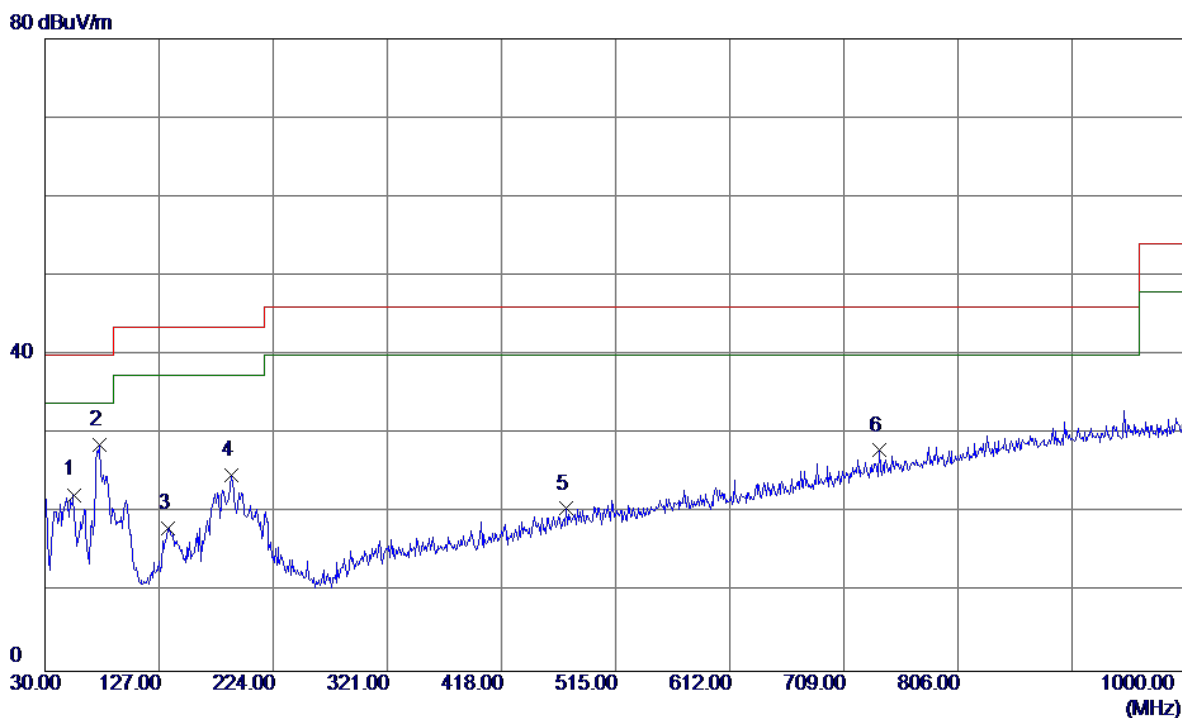

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	54.2500	36.27	-13.95	22.32	40.00	-17.68	Peak	
2 *	76.5600	46.07	-17.44	28.63	40.00	-11.37	Peak	
3	134.7600	32.52	-14.47	18.05	43.50	-25.45	Peak	
4	188.1100	37.44	-12.69	24.75	43.50	-18.75	Peak	
5	473.2900	29.93	-9.37	20.56	46.00	-25.44	Peak	
6	739.0700	30.69	-2.77	27.92	46.00	-18.08	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: Salcomp


Horizontal

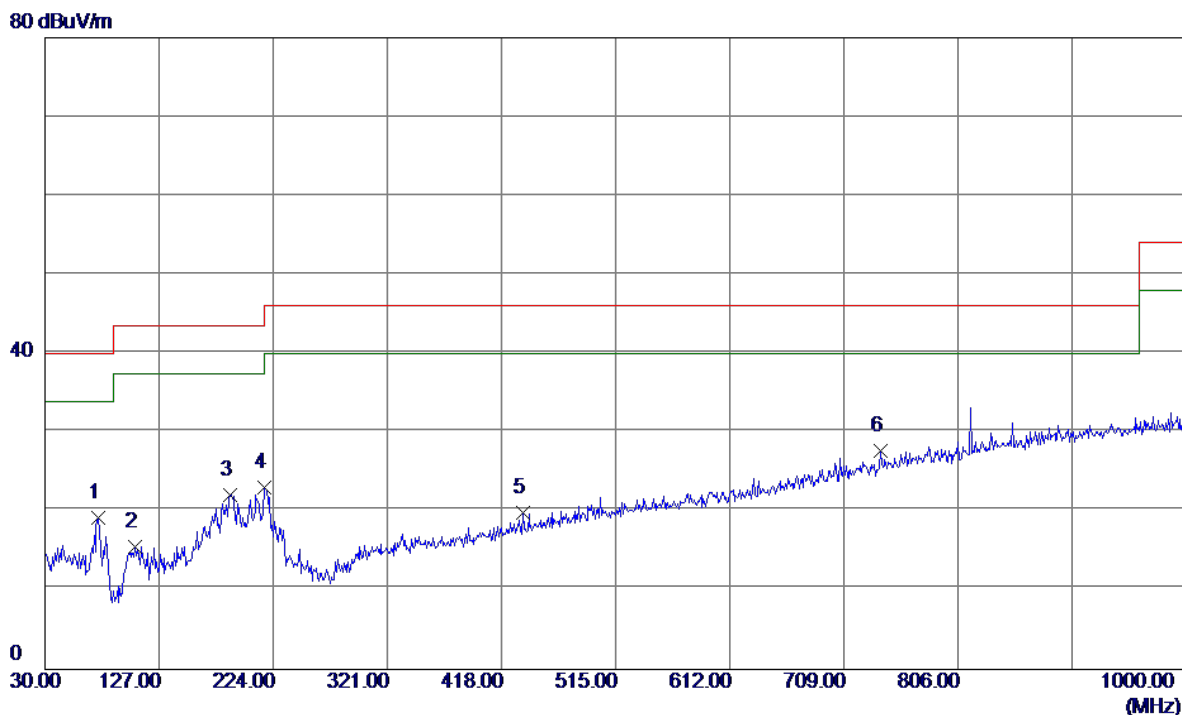

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	36.37	-17.22	19.15	40.00	-20.85	Peak	
2	106.6300	32.11	-16.62	15.49	43.50	-28.01	Peak	
3	187.1400	34.72	-12.61	22.11	43.50	-21.39	Peak	
4	216.2400	36.96	-13.93	23.03	46.00	-22.97	Peak	
5	436.4300	30.13	-10.33	19.80	46.00	-26.20	Peak	
6 *	740.0400	30.48	-2.74	27.74	46.00	-18.26	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp


Vertical

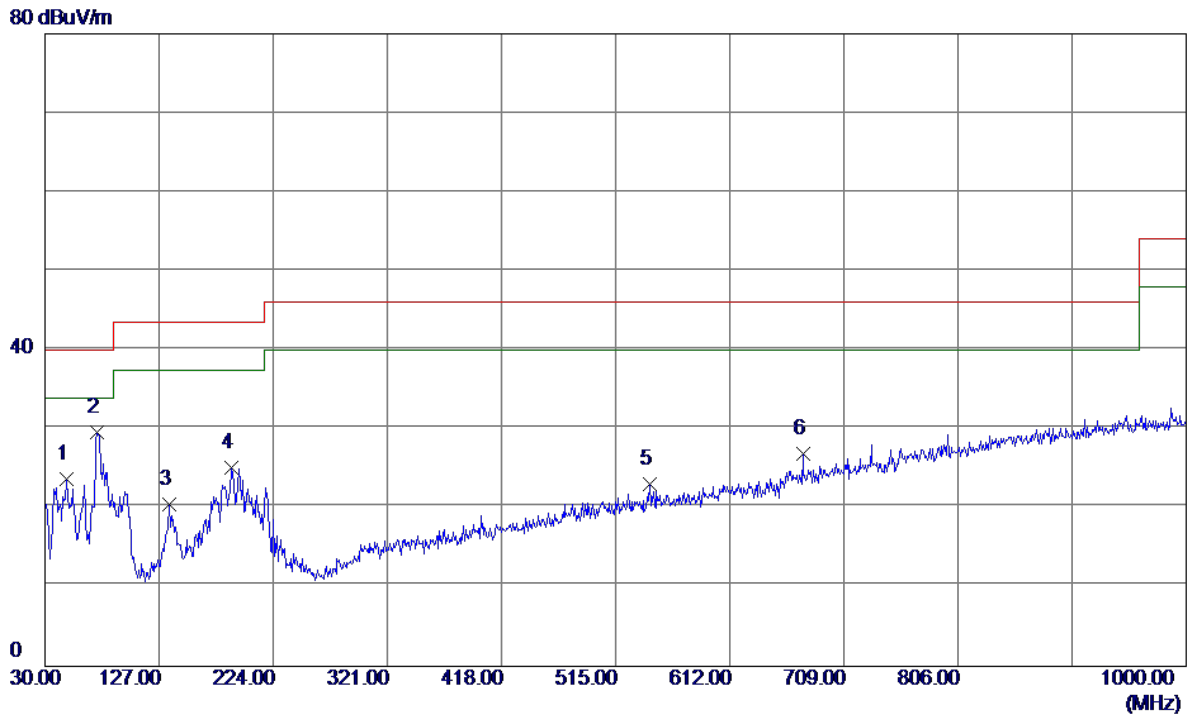

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	48.4300	36.93	-13.28	23.65	40.00	-16.35	Peak	
2 *	74.6200	46.65	-17.04	29.61	40.00	-10.39	Peak	
3	135.7300	34.84	-14.43	20.41	43.50	-23.09	Peak	
4	188.1100	37.80	-12.69	25.11	43.50	-18.39	Peak	
5	544.1000	30.88	-7.83	23.05	46.00	-22.95	Peak	
6	674.0800	31.64	-4.74	26.90	46.00	-19.10	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: Salcomp


Horizontal

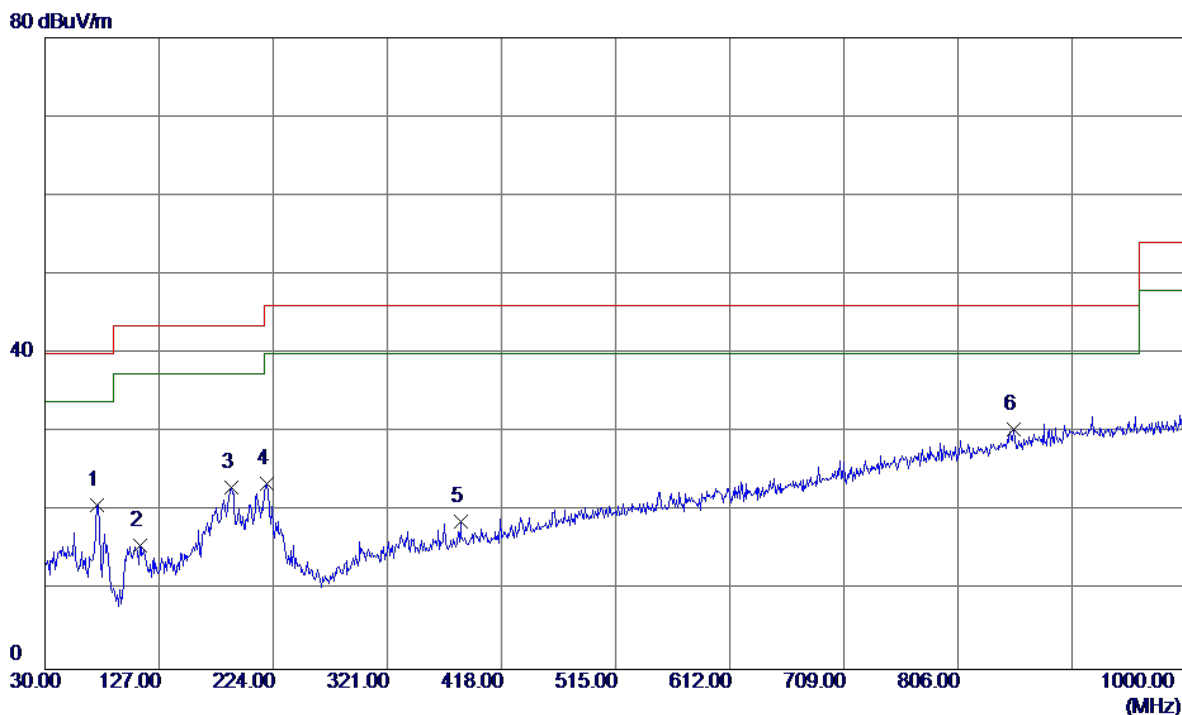

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	37.92	-17.04	20.88	40.00	-19.12	Peak	
2	110.5100	31.79	-16.15	15.64	43.50	-27.86	Peak	
3	188.1100	35.68	-12.69	22.99	43.50	-20.51	Peak	
4	218.1800	37.39	-13.92	23.47	46.00	-22.53	Peak	
5	383.0799	30.31	-11.56	18.75	46.00	-27.25	Peak	
6 *	853.5300	30.32	0.07	30.39	46.00	-15.61	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: Salcomp

Vertical

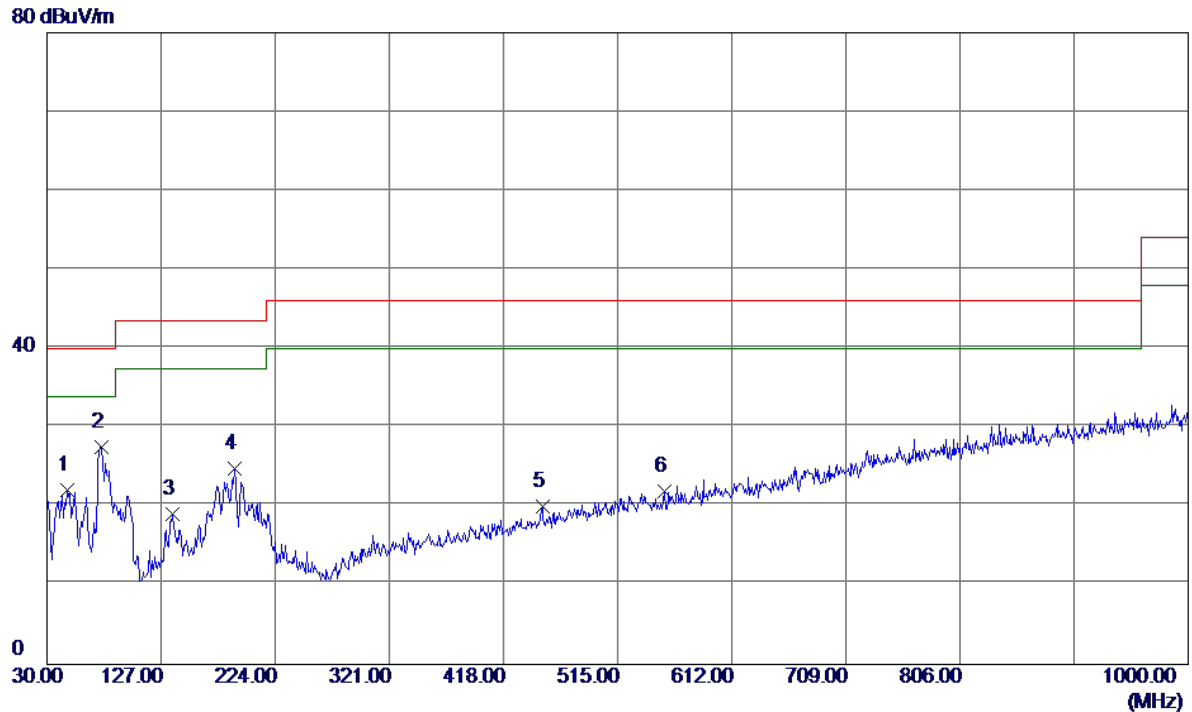


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	47.4600	35.20	-13.12	22.08	40.00	-17.92	Peak	
2 *	76.5600	45.00	-17.44	27.56	40.00	-12.44	Peak	
3	136.7000	33.41	-14.38	19.03	43.50	-24.47	Peak	
4	189.0800	37.54	-12.77	24.77	43.50	-18.73	Peak	
5	450.9800	29.92	-9.92	20.00	46.00	-26.00	Peak	
6	554.7700	29.57	-7.59	21.98	46.00	-24.02	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz _Adapter: Salcomp

Horizontal


80 dBuV/m

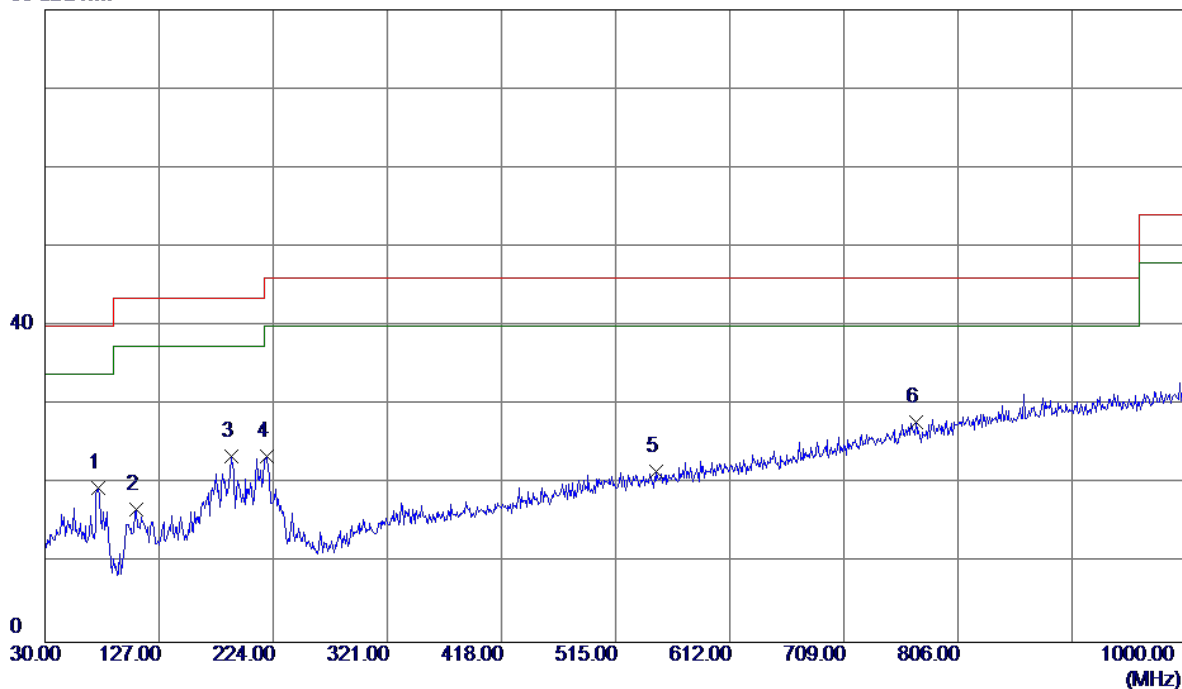

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	36.77	-17.22	19.55	40.00	-20.45	Peak	
2	107.6000	33.32	-16.50	16.82	43.50	-26.68	Peak	
3	188.1100	36.28	-12.69	23.59	43.50	-19.91	Peak	
4	218.1800	37.43	-13.92	23.51	46.00	-22.49	Peak	
5	549.9200	29.36	-7.72	21.64	46.00	-24.36	Peak	
6 *	770.1100	29.79	-2.01	27.78	46.00	-18.22	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: Salcomp


Vertical

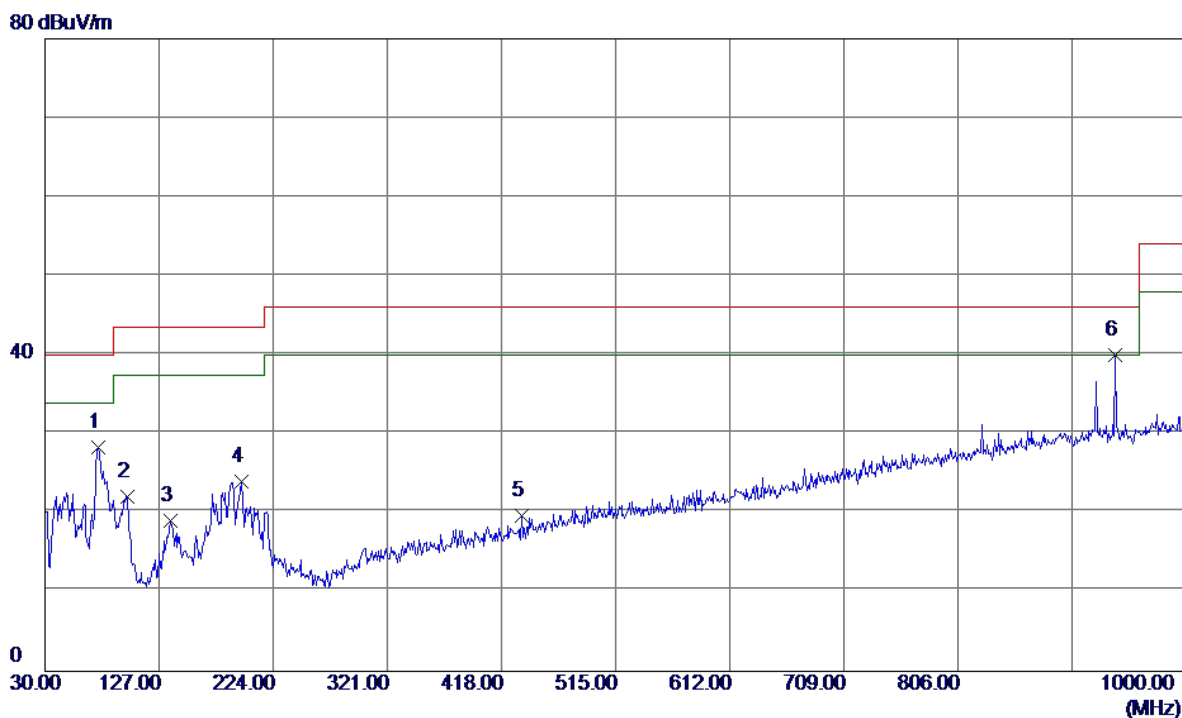

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	45.51	-17.22	28.29	40.00	-11.71	Peak	
2	99.8399	39.61	-17.52	22.09	43.50	-21.41	Peak	
3	136.7000	33.43	-14.38	19.05	43.50	-24.45	Peak	
4	196.8400	37.41	-13.46	23.95	43.50	-19.55	Peak	
5	435.4600	30.09	-10.35	19.74	46.00	-26.26	Peak	
6 *	939.8600	38.14	1.80	39.94	46.00	-6.06	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: Salcomp


Horizontal

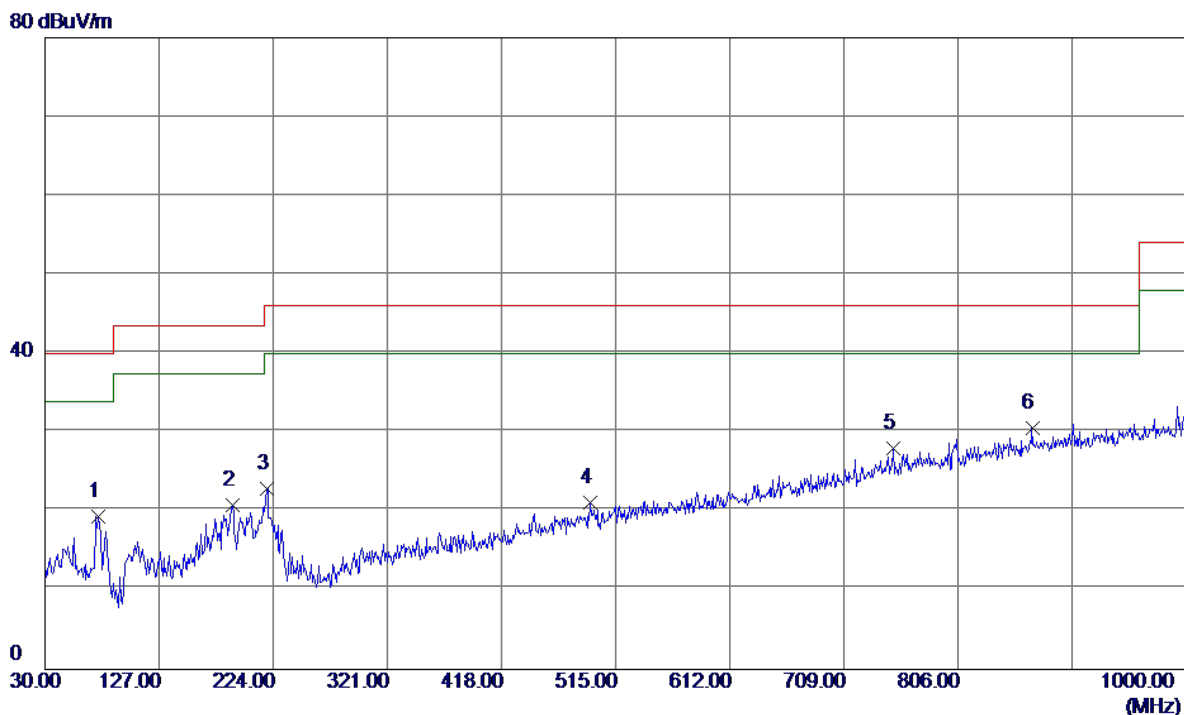

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	75.5899	36.64	-17.22	19.42	40.00	-20.58	Peak	
2	189.0800	33.52	-12.77	20.75	43.50	-22.75	Peak	
3	218.1800	36.80	-13.92	22.88	46.00	-23.12	Peak	
4	493.6600	30.03	-8.87	21.16	46.00	-24.84	Peak	
5	750.7100	30.50	-2.43	28.07	46.00	-17.93	Peak	
6 *	869.0500	30.14	0.39	30.53	46.00	-15.47	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: Salcomp

Vertical

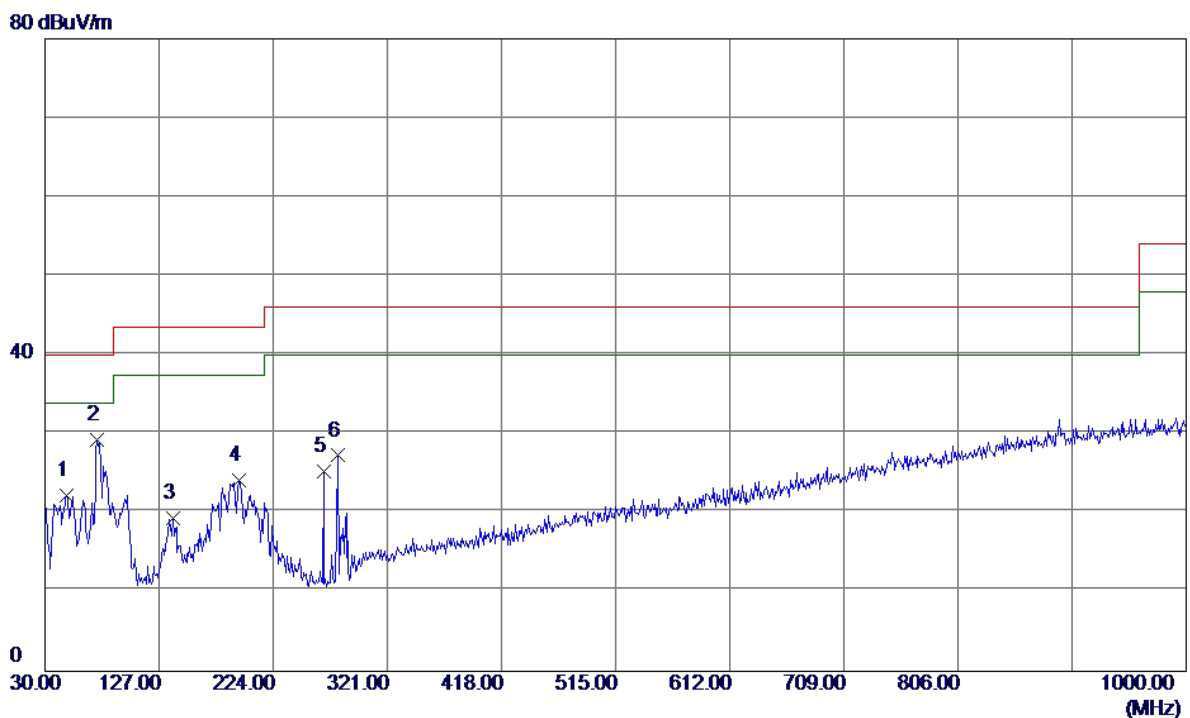


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	48.4300	35.51	-13.28	22.23	40.00	-17.77	Peak	
2 *	74.6200	46.30	-17.04	29.26	40.00	-10.74	Peak	
3	138.6400	33.70	-14.28	19.42	43.50	-24.08	Peak	
4	194.9000	37.46	-13.29	24.17	43.50	-19.33	Peak	
5	266.6800	41.08	-15.80	25.28	46.00	-20.72	Peak	
6	279.2900	42.13	-14.85	27.28	46.00	-18.72	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz _Adapter: Salcomp

Horizontal

80 dBuV/m

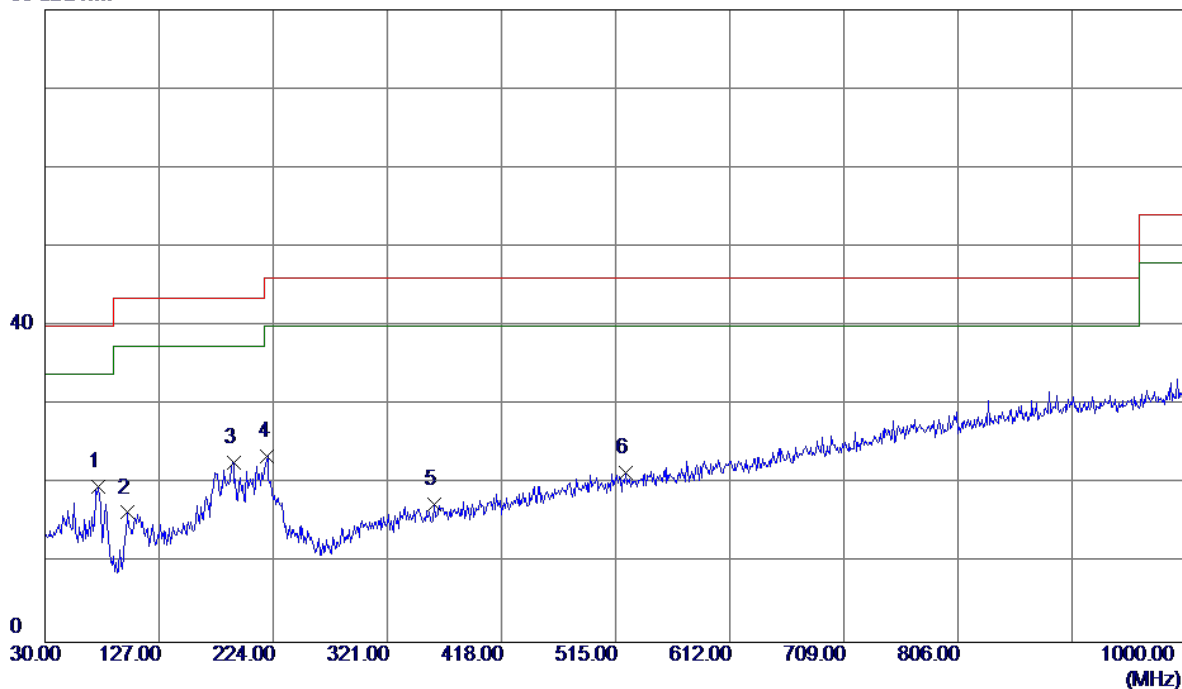


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	36.90	-17.22	19.68	40.00	-20.32	Peak	
2	99.8399	33.92	-17.52	16.40	43.50	-27.10	Peak	
3	190.0500	35.64	-12.85	22.79	43.50	-20.71	Peak	
4	219.1500	37.50	-13.91	23.59	46.00	-22.41	Peak	
5	360.7700	29.23	-11.83	17.40	46.00	-28.60	Peak	
6	523.7300	29.65	-8.24	21.41	46.00	-24.59	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: Salcomp

Vertical


80 dBuV/m

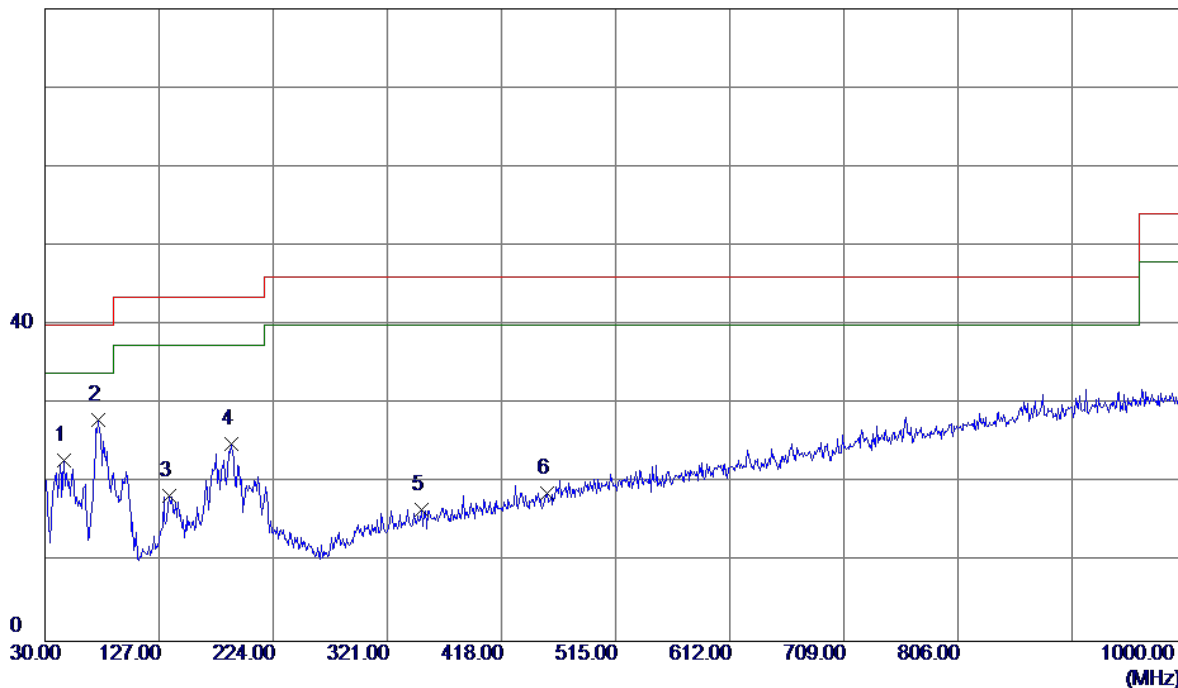

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	46.4900	35.87	-12.98	22.89	40.00	-17.11	Peak	
2 *	75.5899	45.22	-17.22	28.00	40.00	-12.00	Peak	
3	135.7300	32.86	-14.43	18.43	43.50	-25.07	Peak	
4	188.1100	37.64	-12.69	24.95	43.50	-18.55	Peak	
5	350.1000	28.64	-11.95	16.69	46.00	-29.31	Peak	
6	456.8000	28.55	-9.77	18.78	46.00	-27.22	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz _Adapter: Salcomp

Horizontal

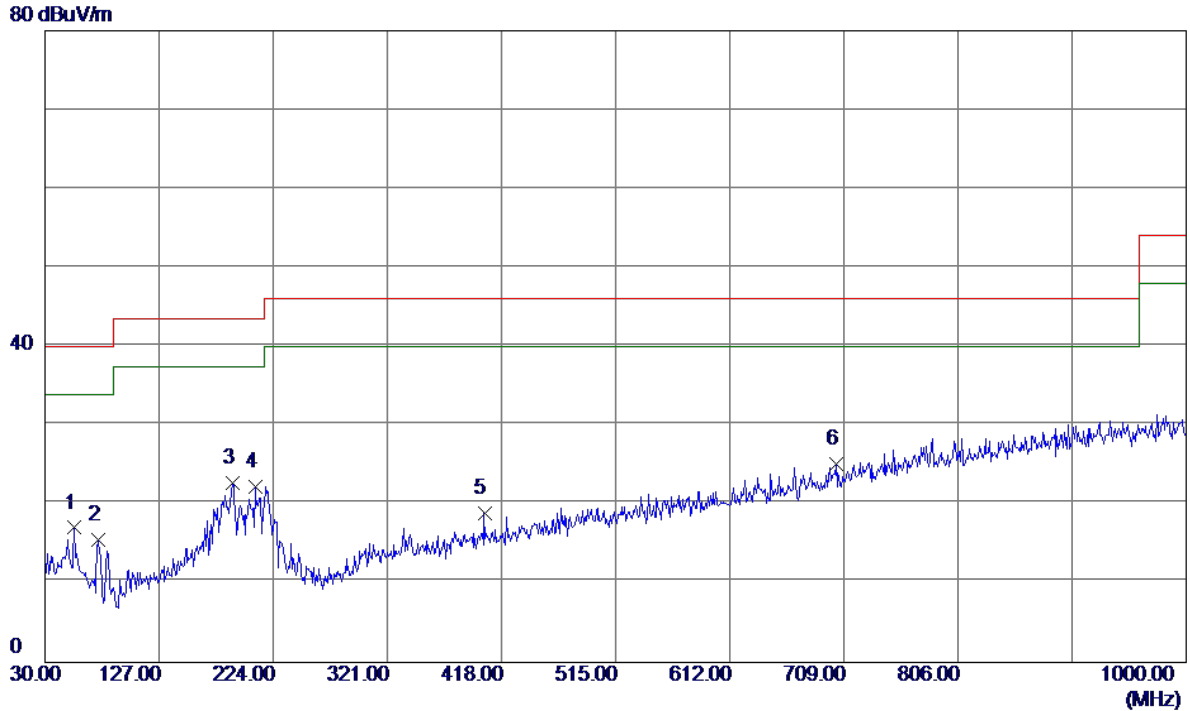


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	55.2200	30.98	-13.94	17.04	40.00	-22.96	Peak	
2	75.5899	32.77	-17.22	15.55	40.00	-24.45	Peak	
3 *	189.0800	35.48	-12.77	22.71	43.50	-20.79	Peak	
4	208.4800	36.24	-13.94	22.30	43.50	-21.20	Peak	
5	403.4500	30.21	-11.26	18.95	46.00	-27.05	Peak	
6	702.2100	29.03	-3.87	25.16	46.00	-20.84	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: Salcomp

Vertical

80 dBuV/m

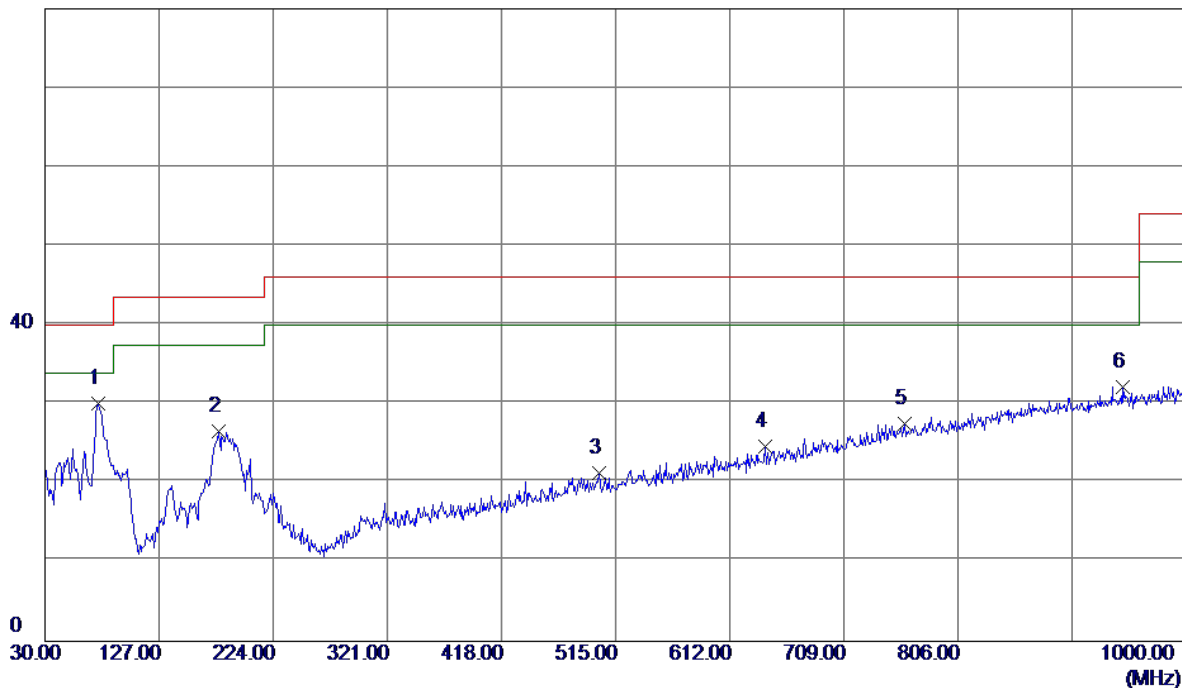


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	75.5899	47.23	-17.22	30.01	40.00	-9.99	Peak	
2	177.4400	38.70	-12.12	26.58	43.50	-16.92	Peak	
3	501.4200	29.98	-8.69	21.29	46.00	-24.71	Peak	
4	642.0700	30.31	-5.62	24.69	46.00	-21.31	Peak	
5	760.4099	29.67	-2.22	27.45	46.00	-18.55	Peak	
6	945.6800	30.28	1.91	32.19	46.00	-13.81	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: Salcomp

Horizontal


80 dBuV/m

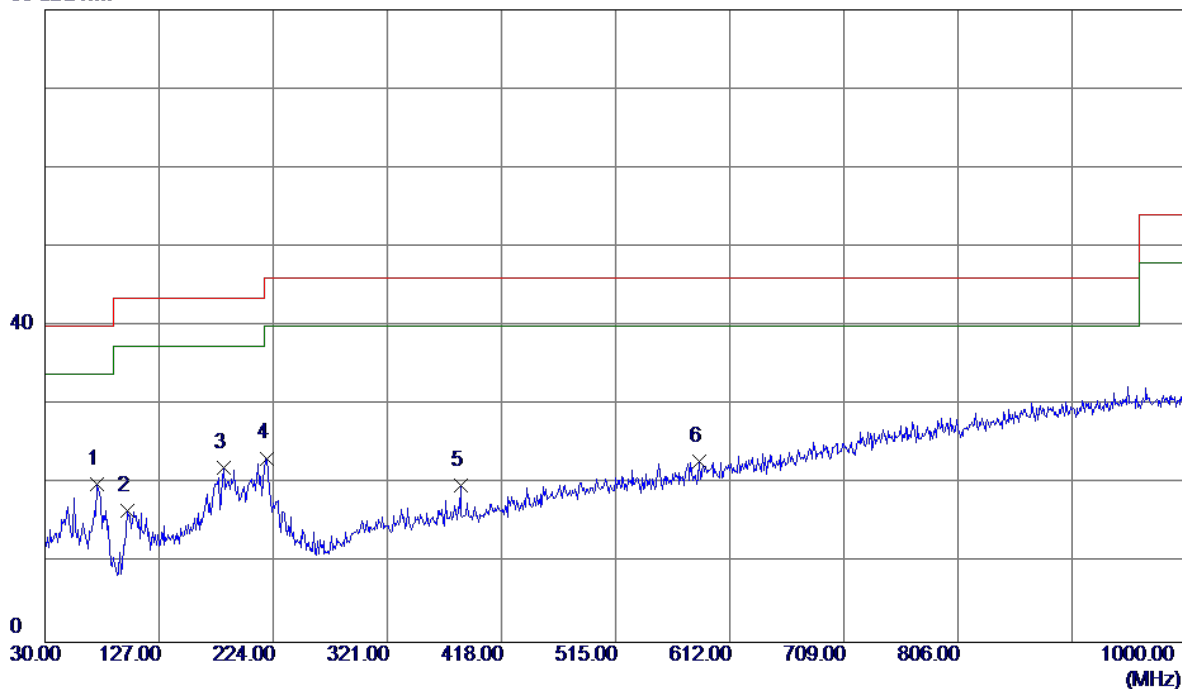

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	74.6200	37.09	-17.04	20.05	40.00	-19.95	Peak	
2	99.8399	34.15	-17.52	16.63	43.50	-26.87	Peak	
3	182.2899	34.31	-12.22	22.09	43.50	-21.41	Peak	
4	218.1800	37.20	-13.92	23.28	46.00	-22.72	Peak	
5	383.0799	31.36	-11.56	19.80	46.00	-26.20	Peak	
6	585.8100	29.69	-6.79	22.90	46.00	-23.10	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUAWEI


Vertical

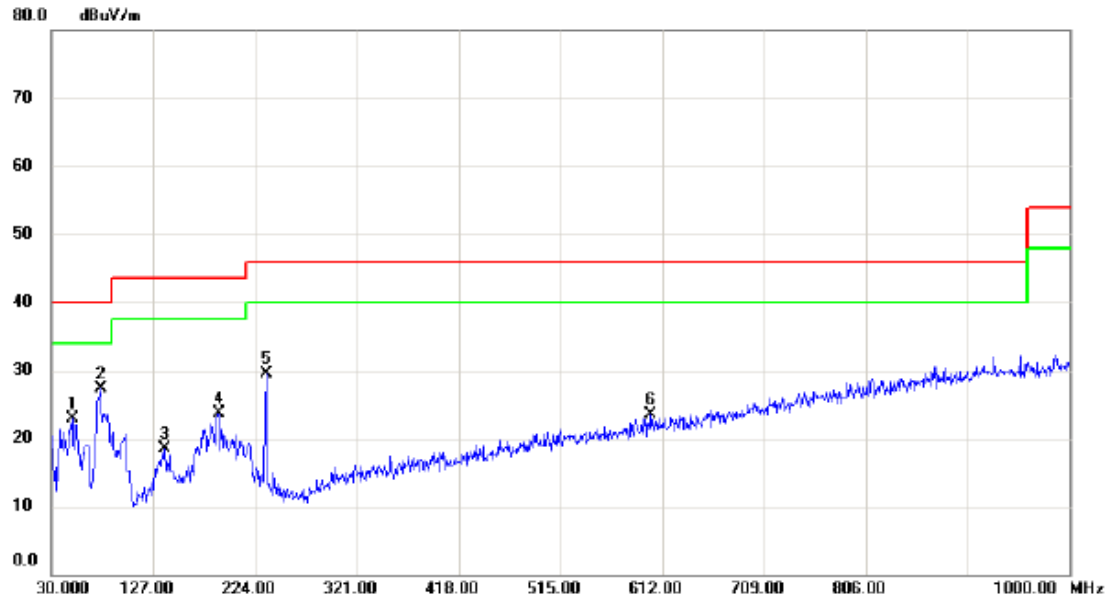

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		49.400	36.29	-13.46	22.83	40.00	-17.17	peak	
2	*	76.560	44.66	-17.44	27.22	40.00	-12.78	peak	
3		138.640	32.84	-14.28	18.56	43.50	-24.94	peak	
4		189.080	36.51	-12.77	23.74	43.50	-19.76	peak	
5		234.670	43.78	-14.23	29.55	46.00	-16.45	peak	
6		601.330	29.99	-6.39	23.60	46.00	-22.40	peak	

Test Mode: UNII-1/TX A Mode 5180MHz_Adapter: HUAWEI


Horizontal

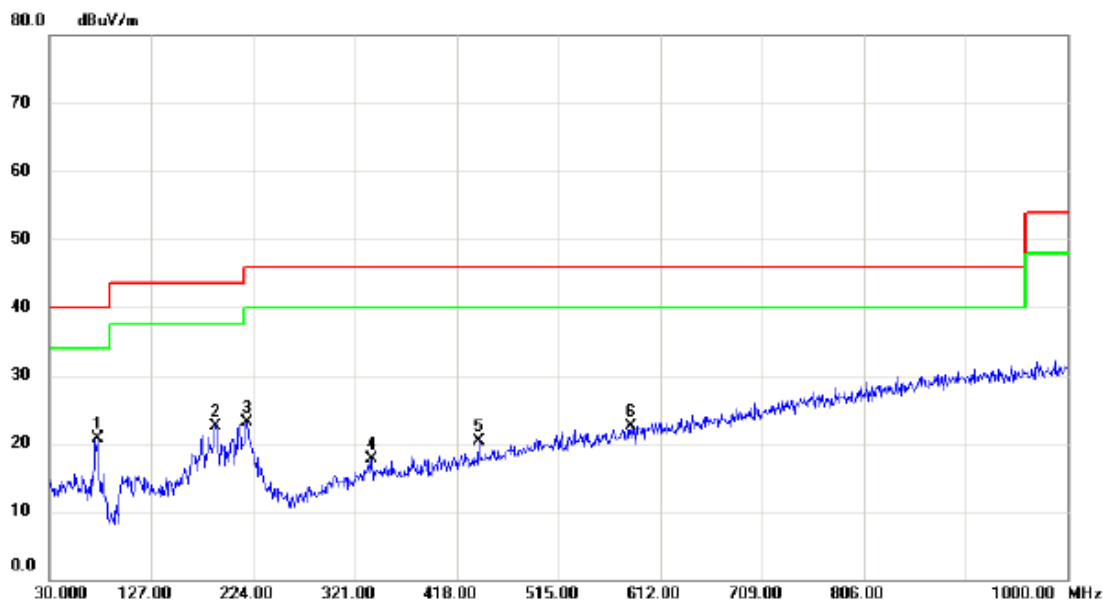

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	75.590	37.88	-17.22	20.66	40.00	-19.34	peak	
2		188.110	35.30	-12.70	22.60	43.50	-20.90	peak	
3		218.180	37.11	-13.92	23.19	46.00	-22.81	peak	
4		336.520	29.90	-12.19	17.71	46.00	-28.29	peak	
5		439.340	30.59	-10.24	20.35	46.00	-25.65	peak	
6		583.870	29.42	-6.84	22.58	46.00	-23.42	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUAWEI


Vertical

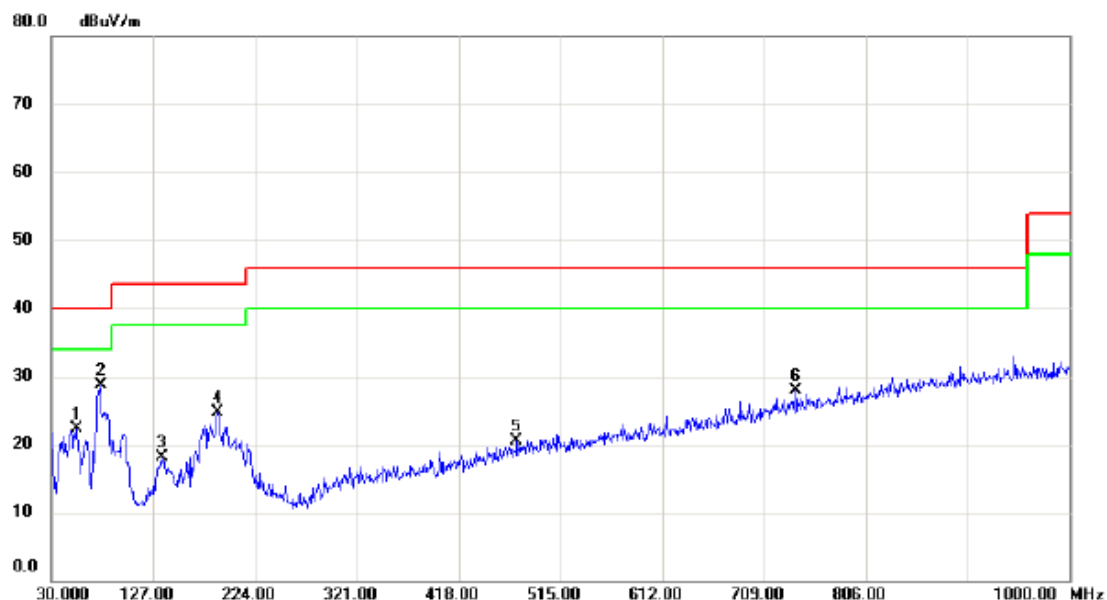

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		54.250	36.27	-13.95	22.32	40.00	-17.68	peak	
2	*	76.560	46.07	-17.44	28.63	40.00	-11.37	peak	
3		134.760	32.52	-14.47	18.05	43.50	-25.45	peak	
4		188.110	37.45	-12.70	24.75	43.50	-18.75	peak	
5		473.290	29.92	-9.36	20.56	46.00	-25.44	peak	
6		739.070	30.69	-2.77	27.92	46.00	-18.08	peak	

Test Mode: UNII-1/TX A Mode 5240MHz_Adapter: HUAWEI


Horizontal

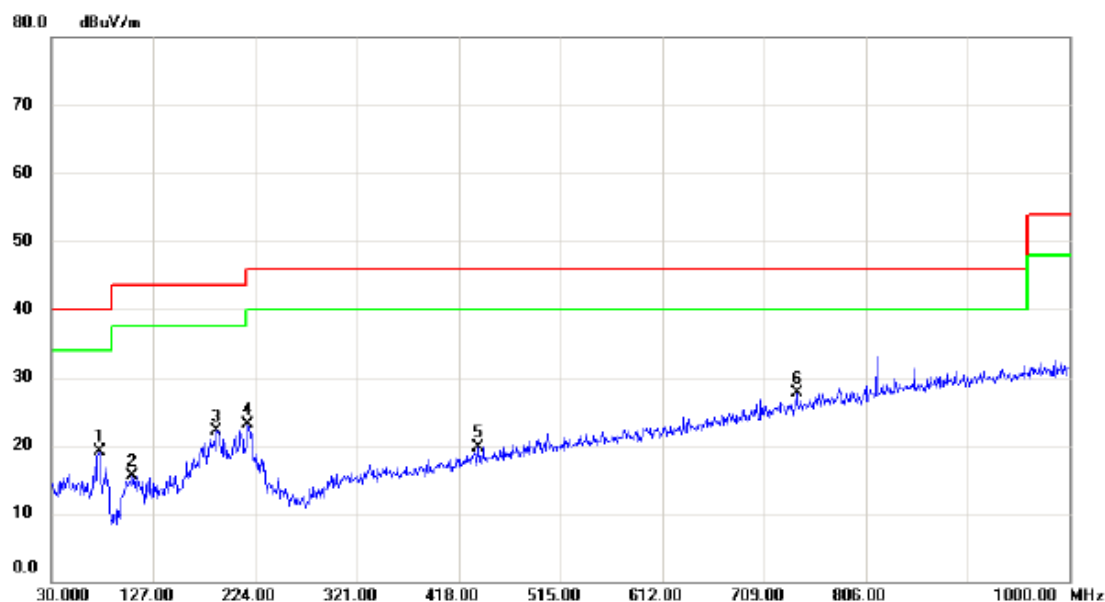

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		75.590	36.37	-17.22	19.15	40.00	-20.85	peak	
2		106.630	32.11	-16.62	15.49	43.50	-28.01	peak	
3		187.140	34.72	-12.61	22.11	43.50	-21.39	peak	
4		216.240	36.96	-13.93	23.03	46.00	-22.97	peak	
5		436.430	30.13	-10.33	19.80	46.00	-26.20	peak	
6	*	740.040	30.49	-2.75	27.74	46.00	-18.26	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUAWEI


Vertical

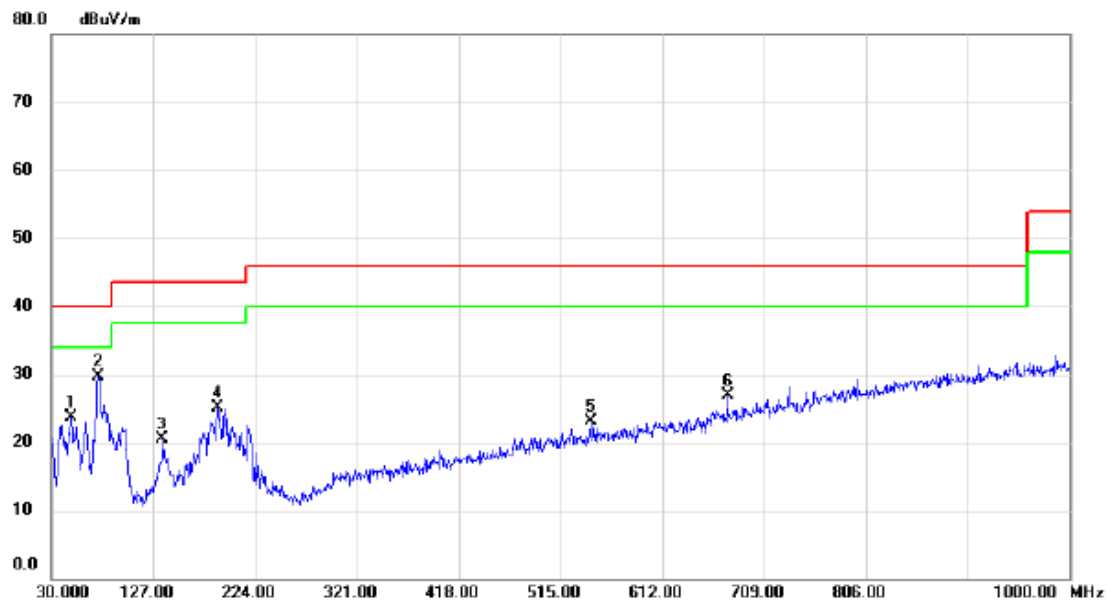

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.430	36.93	-13.28	23.65	40.00	-16.35	peak	
2	*	74.620	46.64	-17.03	29.61	40.00	-10.39	peak	
3		135.730	34.83	-14.42	20.41	43.50	-23.09	peak	
4		188.110	37.81	-12.70	25.11	43.50	-18.39	peak	
5		544.100	30.89	-7.84	23.05	46.00	-22.95	peak	
6		674.080	31.63	-4.73	26.90	46.00	-19.10	peak	

Test Mode: UNII-2A/TX A Mode 5260MHz_Adapter: HUAWEI


Horizontal

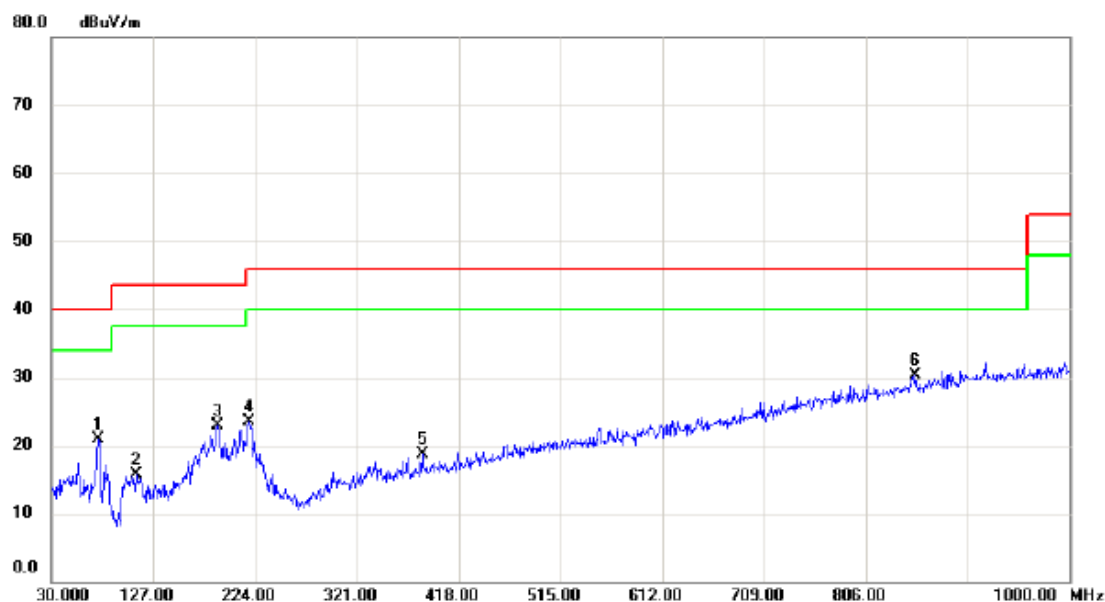

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		74.620	37.91	-17.03	20.88	40.00	-19.12	peak	
2		110.510	31.79	-16.15	15.64	43.50	-27.86	peak	
3		188.110	35.69	-12.70	22.99	43.50	-20.51	peak	
4		218.180	37.39	-13.92	23.47	46.00	-22.53	peak	
5		383.080	30.31	-11.56	18.75	46.00	-27.25	peak	
6	*	853.530	30.32	0.07	30.39	46.00	-15.61	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUAWEI


Vertical

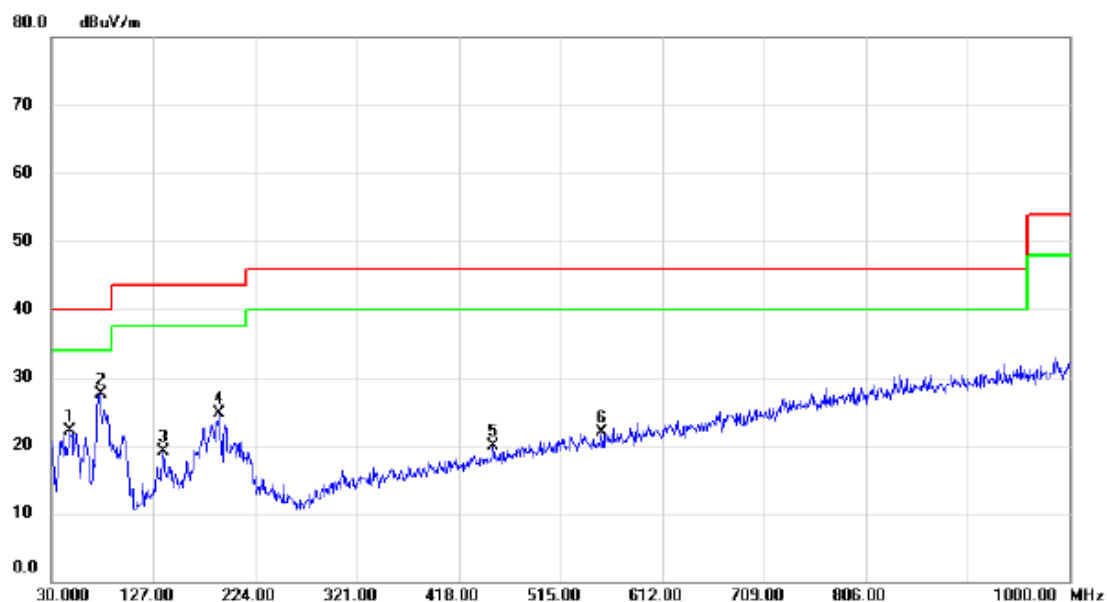

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		47.460	35.20	-13.12	22.08	40.00	-17.92	peak	
2	*	76.560	45.00	-17.44	27.56	40.00	-12.44	peak	
3		136.700	33.41	-14.38	19.03	43.50	-24.47	peak	
4		189.080	37.54	-12.77	24.77	43.50	-18.73	peak	
5		450.980	29.92	-9.92	20.00	46.00	-26.00	peak	
6		554.770	29.58	-7.60	21.98	46.00	-24.02	peak	

Test Mode: UNII-2A/TX A Mode 5320MHz_Adapter: HUAWEI


Horizontal

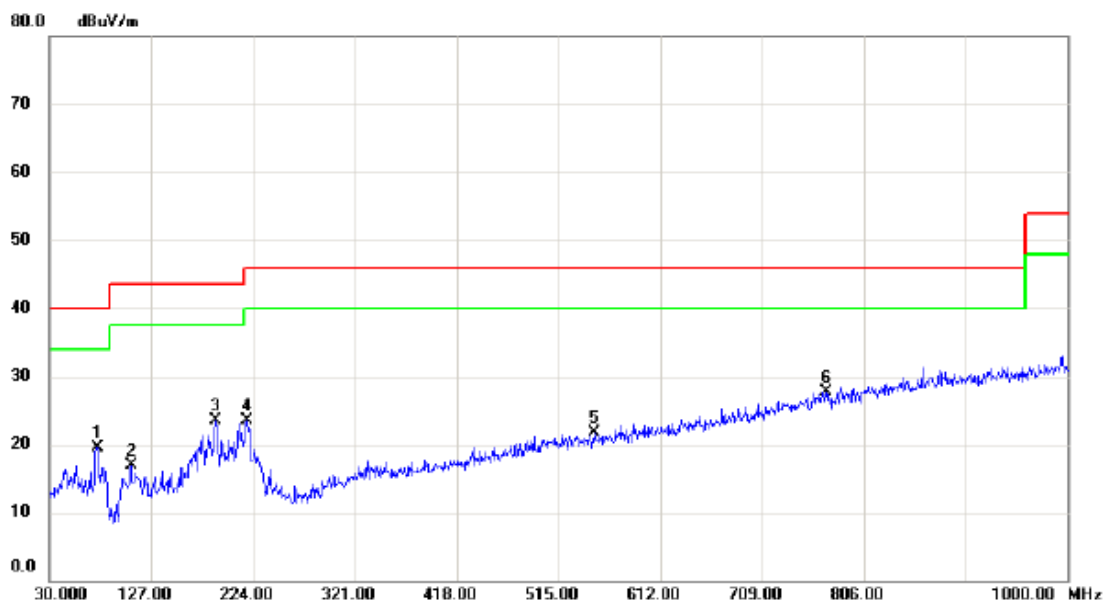

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		75.590	36.77	-17.22	19.55	40.00	-20.45	peak	
2		107.600	33.32	-16.50	16.82	43.50	-26.68	peak	
3		188.110	36.29	-12.70	23.59	43.50	-19.91	peak	
4		218.180	37.43	-13.92	23.51	46.00	-22.49	peak	
5		549.920	29.35	-7.71	21.64	46.00	-24.36	peak	
6 *		770.110	29.79	-2.01	27.78	46.00	-18.22	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUAWEI


Vertical

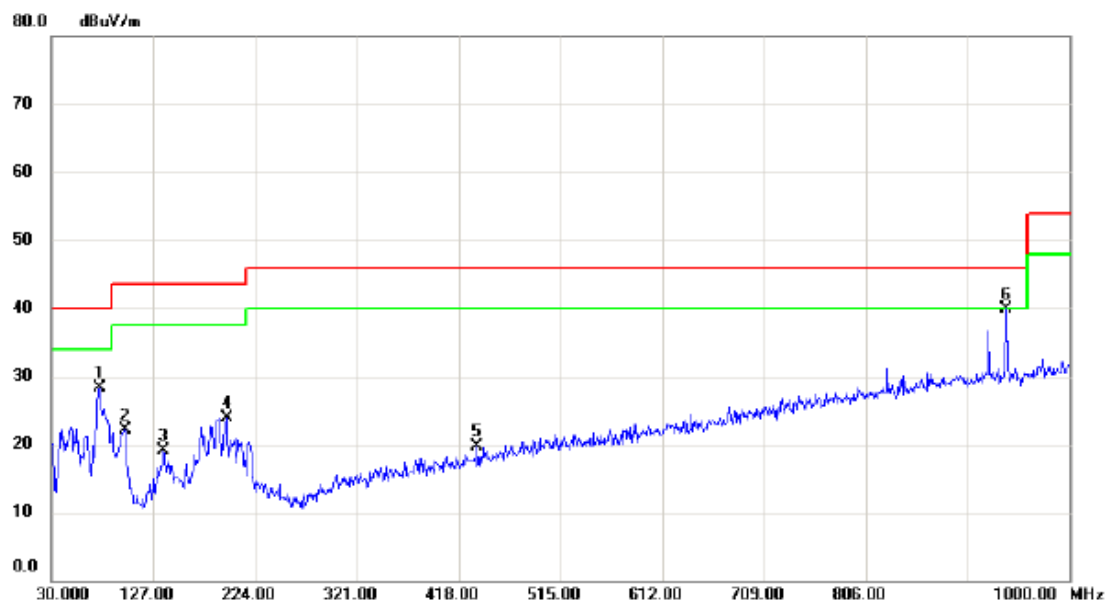

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		75.590	45.51	-17.22	28.29	40.00	-11.71	peak	
2		99.840	39.61	-17.52	22.09	43.50	-21.41	peak	
3		136.700	33.43	-14.38	19.05	43.50	-24.45	peak	
4		196.840	37.41	-13.46	23.95	43.50	-19.55	peak	
5		435.460	30.10	-10.36	19.74	46.00	-26.26	peak	
6	*	939.860	38.13	1.81	39.94	46.00	-6.06	peak	

Test Mode: UNII-2C/TX A Mode 5500MHz_Adapter: HUAWEI


Horizontal

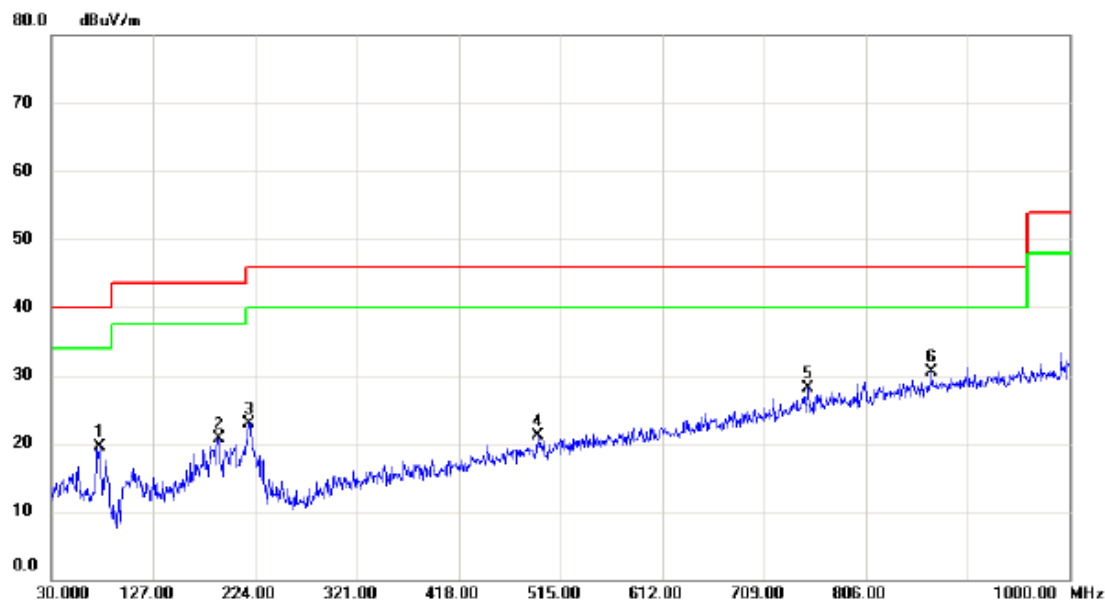

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		75.590	36.64	-17.22	19.42	40.00	-20.58	peak	
2		189.080	33.52	-12.77	20.75	43.50	-22.75	peak	
3		218.180	36.80	-13.92	22.88	46.00	-23.12	peak	
4		493.660	30.03	-8.87	21.16	46.00	-24.84	peak	
5		750.710	30.50	-2.43	28.07	46.00	-17.93	peak	
6	*	869.050	30.13	0.40	30.53	46.00	-15.47	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUAWEI


Vertical

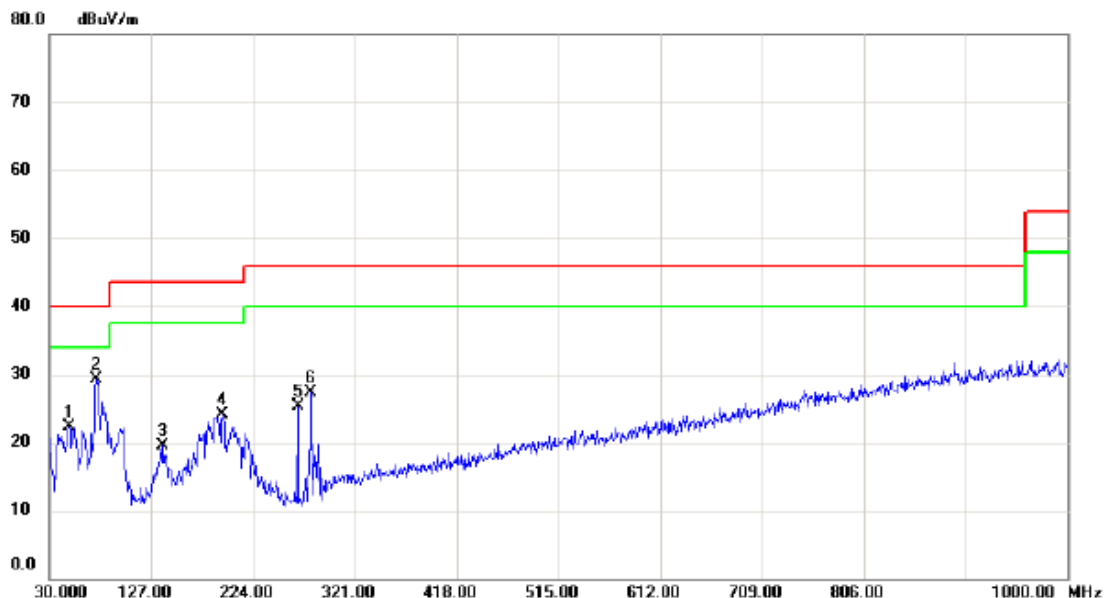

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.430	35.51	-13.28	22.23	40.00	-17.77	peak	
2	*	74.620	46.29	-17.03	29.26	40.00	-10.74	peak	
3		138.640	33.70	-14.28	19.42	43.50	-24.08	peak	
4		194.900	37.46	-13.29	24.17	43.50	-19.33	peak	
5		266.680	41.07	-15.79	25.28	46.00	-20.72	peak	
6		279.290	42.13	-14.85	27.28	46.00	-18.72	peak	

Test Mode: UNII-2C/TX A Mode 5700MHz_Adapter: HUAWEI


Horizontal

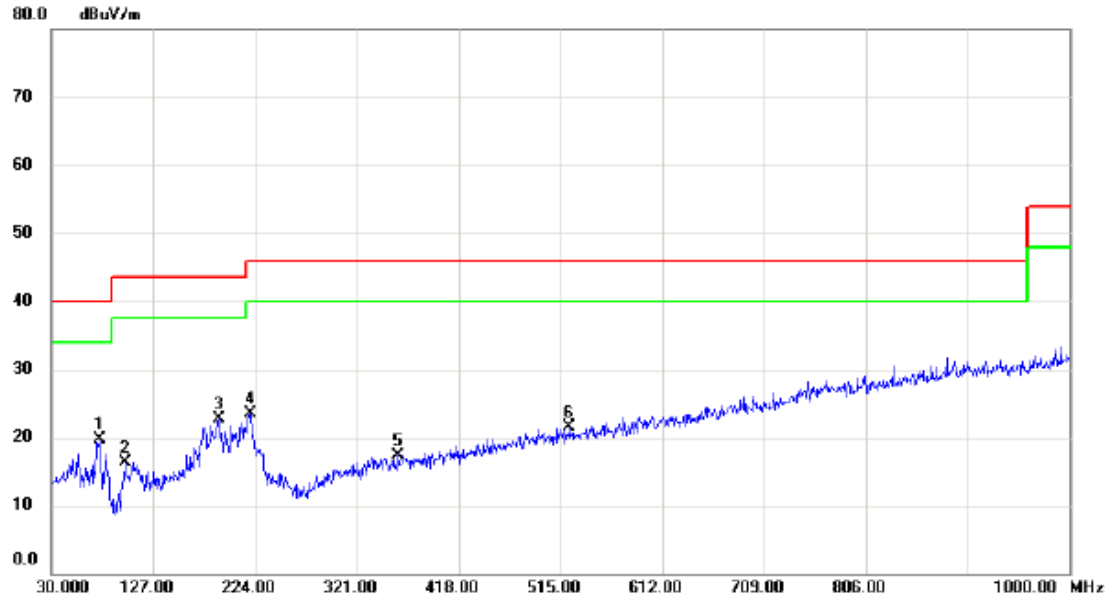

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	75.590	36.90	-17.22	19.68	40.00	-20.32	peak	
2		99.840	33.92	-17.52	16.40	43.50	-27.10	peak	
3		190.050	35.65	-12.86	22.79	43.50	-20.71	peak	
4		219.150	37.50	-13.91	23.59	46.00	-22.41	peak	
5		360.770	29.23	-11.83	17.40	46.00	-28.60	peak	
6		523.730	29.65	-8.24	21.41	46.00	-24.59	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUAWEI


Vertical

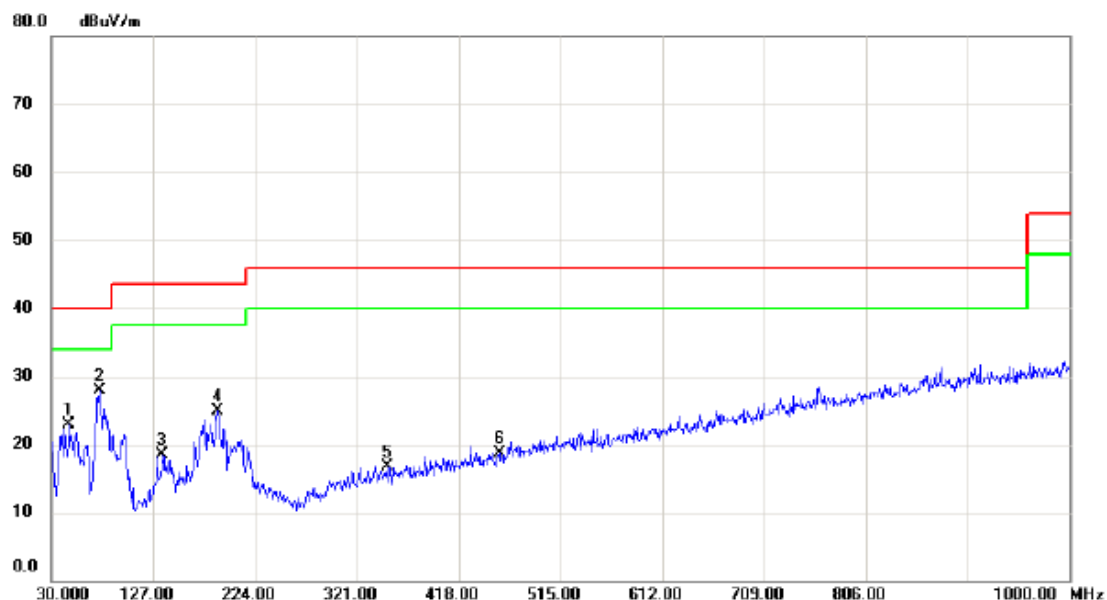

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.490	35.87	-12.98	22.89	40.00	-17.11	peak	
2	*	75.590	45.22	-17.22	28.00	40.00	-12.00	peak	
3		135.730	32.85	-14.42	18.43	43.50	-25.07	peak	
4		188.110	37.65	-12.70	24.95	43.50	-18.55	peak	
5		350.100	28.65	-11.96	16.69	46.00	-29.31	peak	
6		456.800	28.55	-9.77	18.78	46.00	-27.22	peak	

Test Mode: UNII-3/TX A Mode 5745MHz_Adapter: HUAWEI


Horizontal

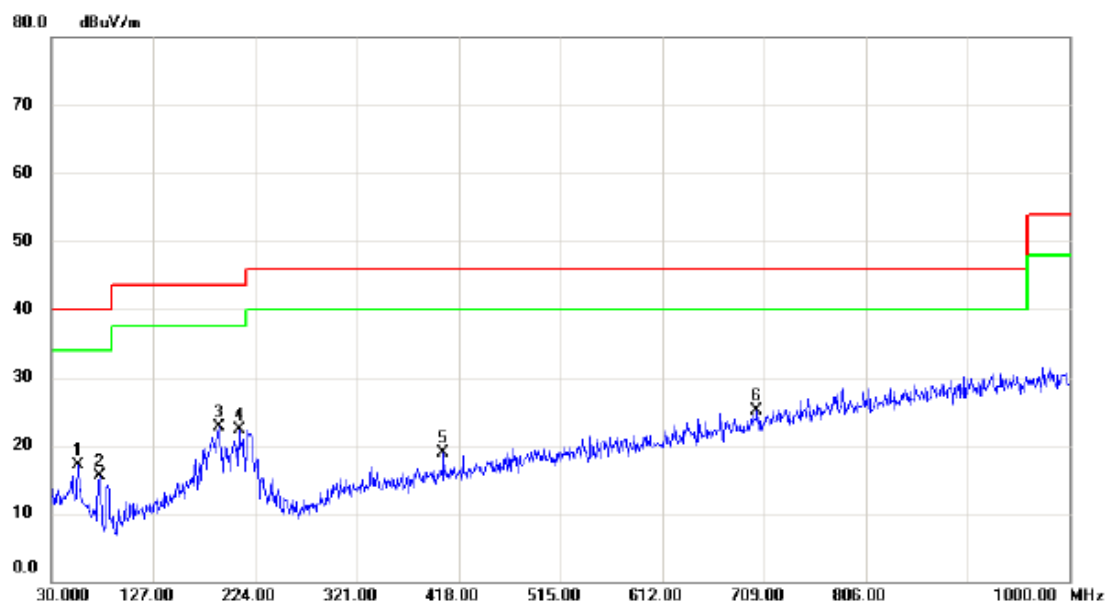

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		55.220	30.98	-13.94	17.04	40.00	-22.96	peak	
2		75.590	32.77	-17.22	15.55	40.00	-24.45	peak	
3	*	189.080	35.48	-12.77	22.71	43.50	-20.79	peak	
4		208.480	36.23	-13.93	22.30	43.50	-21.20	peak	
5		403.450	30.21	-11.26	18.95	46.00	-27.05	peak	
6		702.210	29.04	-3.88	25.16	46.00	-20.84	peak	


Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUAWEI

Vertical

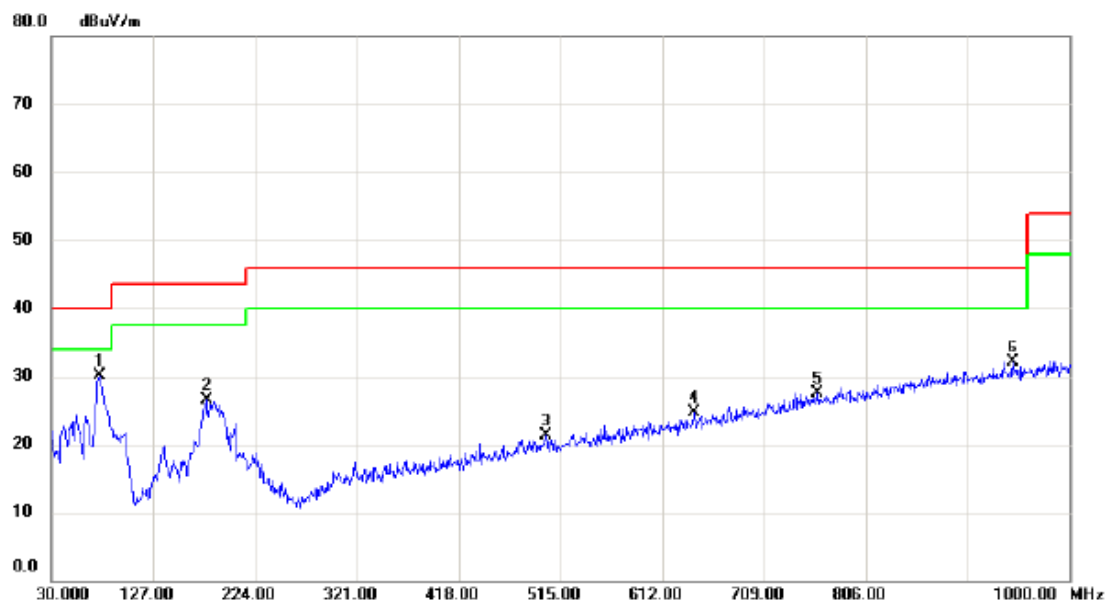

Test Mode: UNII-3/TX A Mode 5825MHz_Adapter: HUAWEI

Horizontal

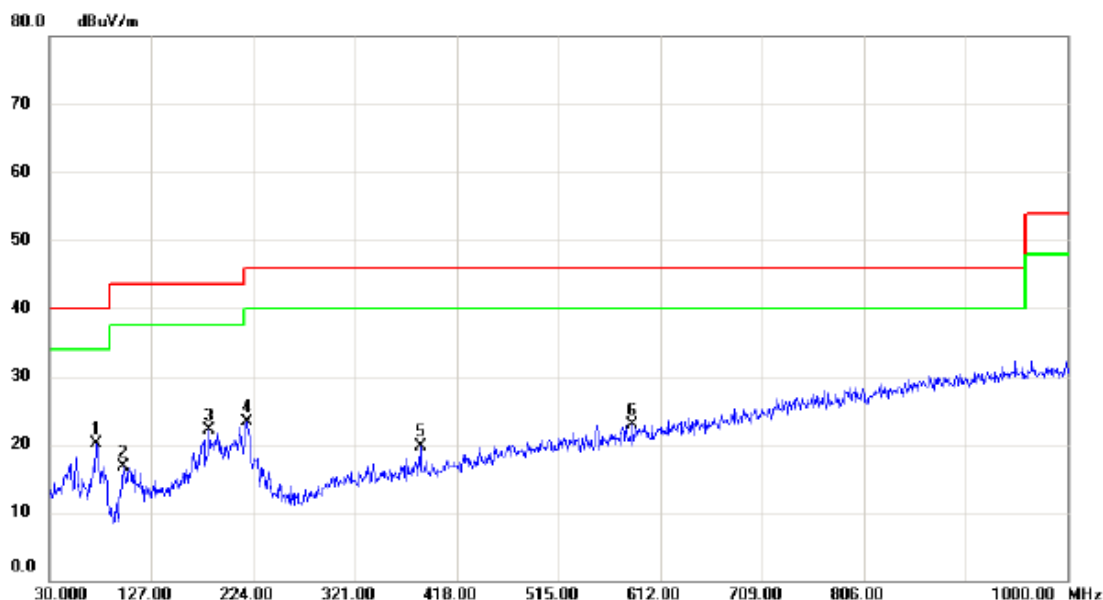


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	74.620	37.08	-17.03	20.05	40.00	-19.95	peak	
2		99.840	34.15	-17.52	16.63	43.50	-26.87	peak	
3		182.290	34.32	-12.23	22.09	43.50	-21.41	peak	
4		218.180	37.20	-13.92	23.28	46.00	-22.72	peak	
5		383.080	31.36	-11.56	19.80	46.00	-26.20	peak	
6		585.810	29.69	-6.79	22.90	46.00	-23.10	peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

ANT 1

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

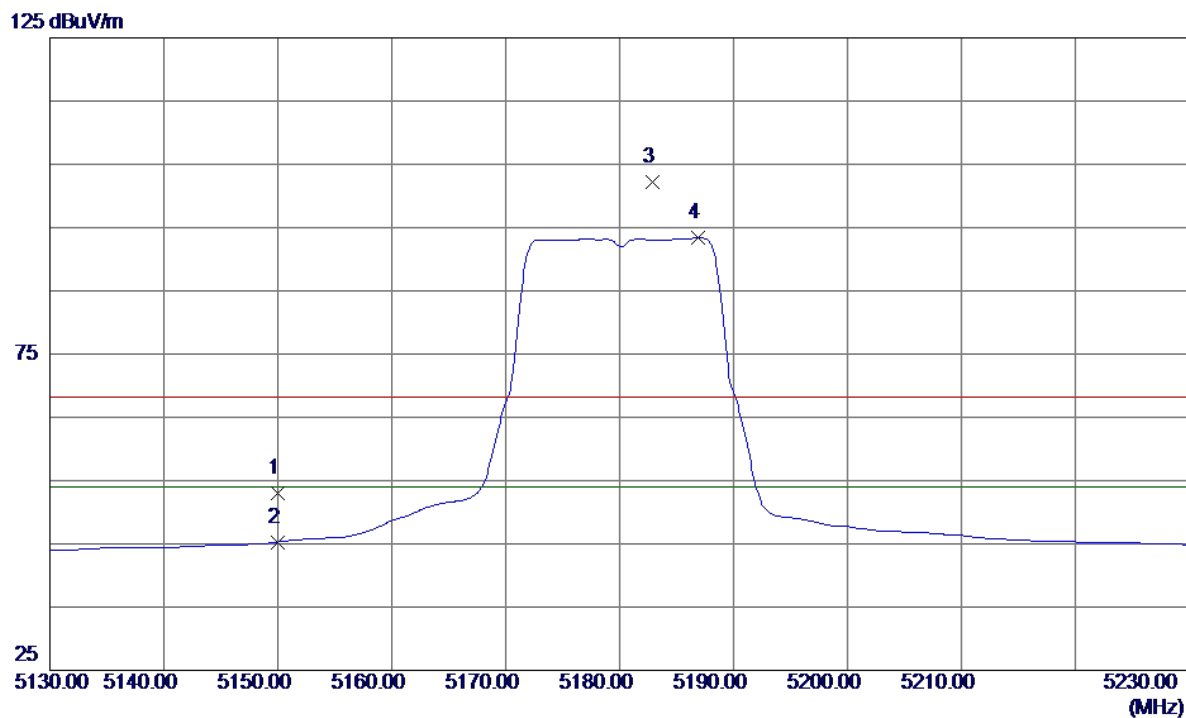


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	11.88	41.10	52.98	68.30	-15.32	Peak	
2	5150.0000	4.19	41.10	45.29	54.00	-8.71	AVG	
3	5182.9000	60.98	41.27	102.25	68.30	33.95	Peak	No Limit
4 *	5186.9000	52.08	41.29	93.37	54.00	39.37	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

115 dBuV/m

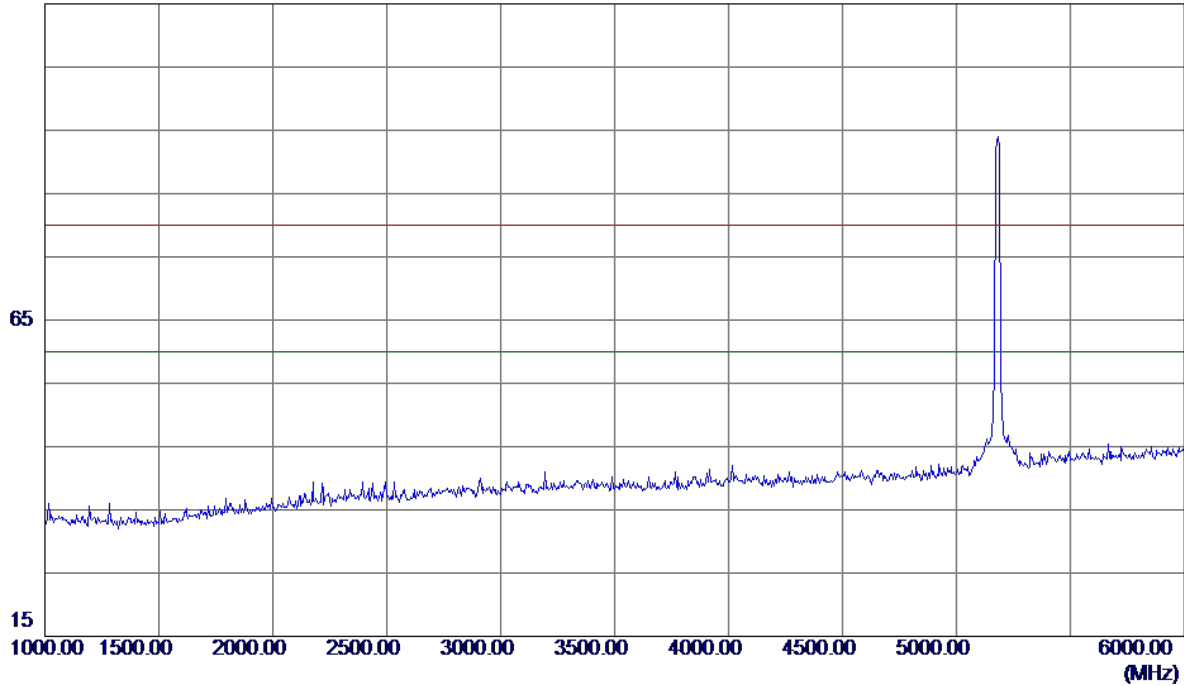


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

115 dBuV/m

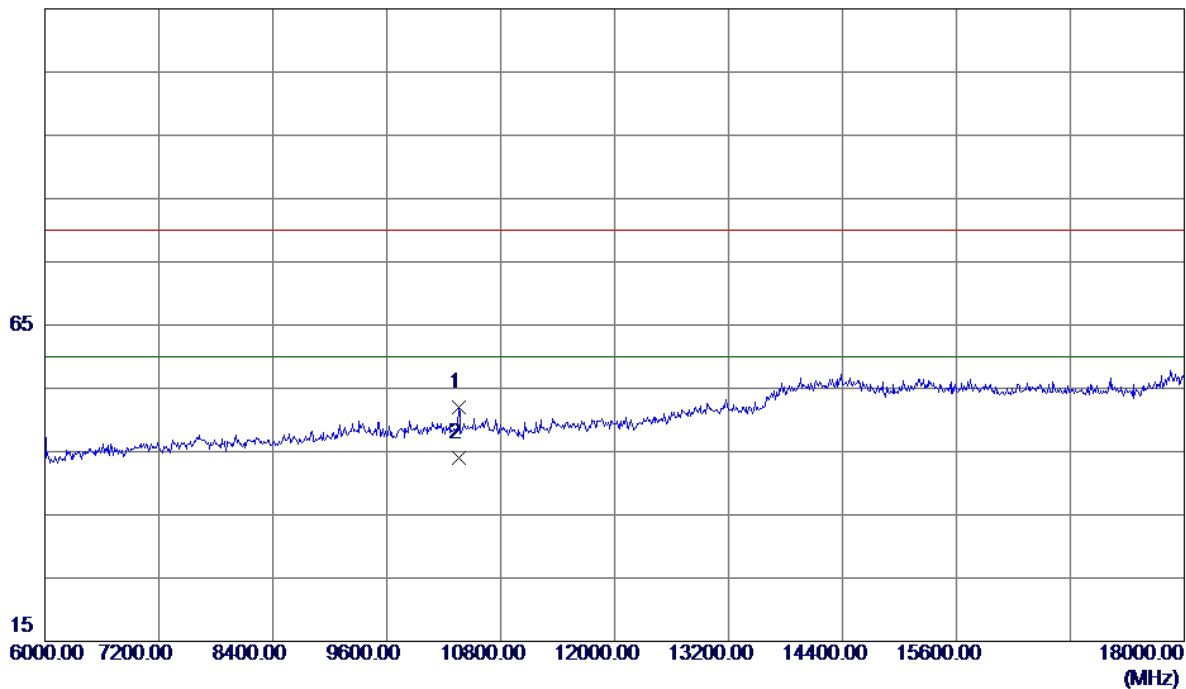


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10356.0000	34.92	17.09	52.01	80.00	-27.99	Peak	
2 *	10359.6000	26.88	17.10	43.98	60.00	-16.02	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

100 dBuV/m

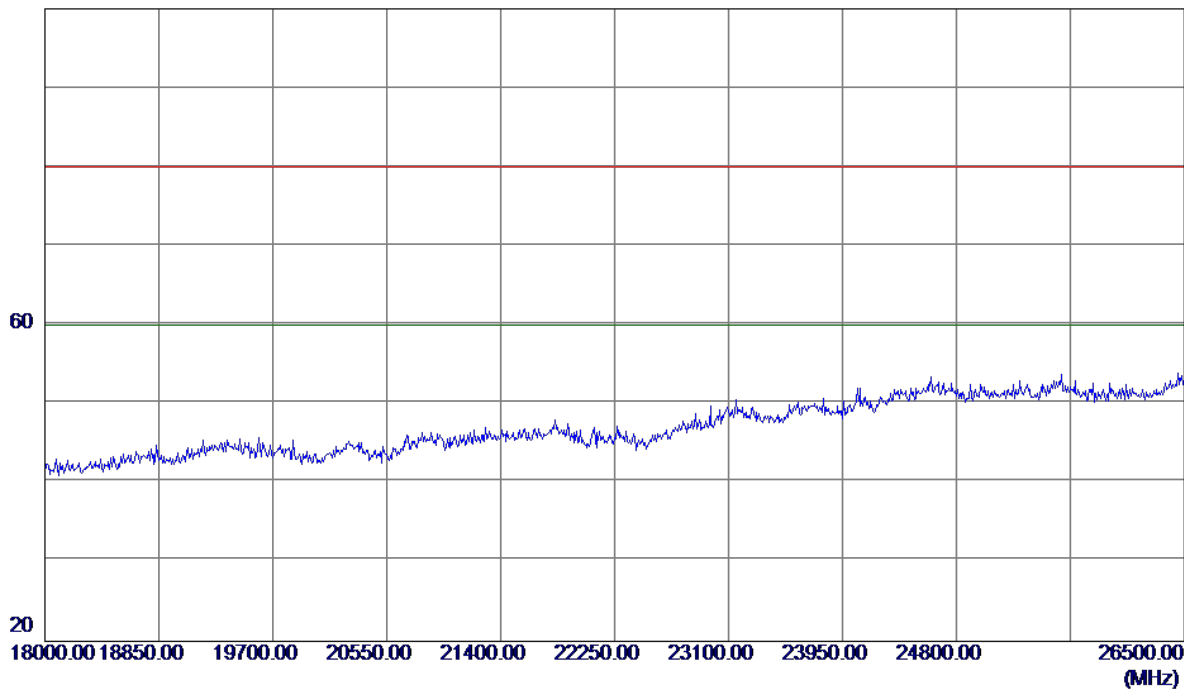


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

115 dBuV/m

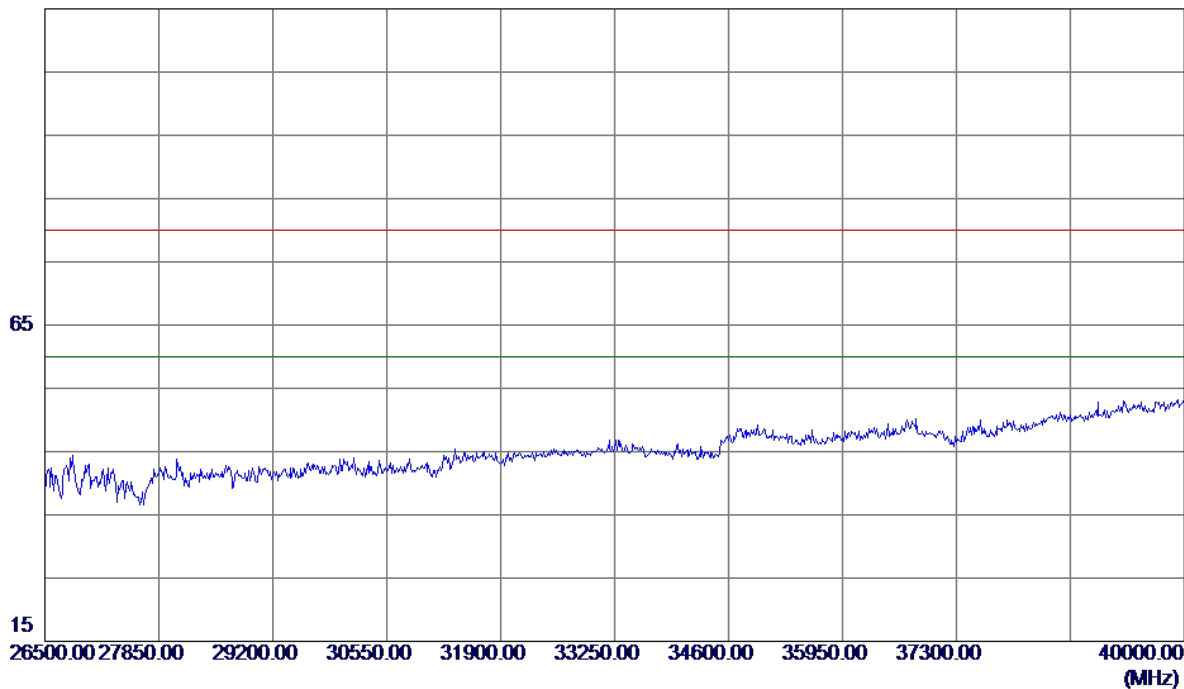


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

125 dBuV/m

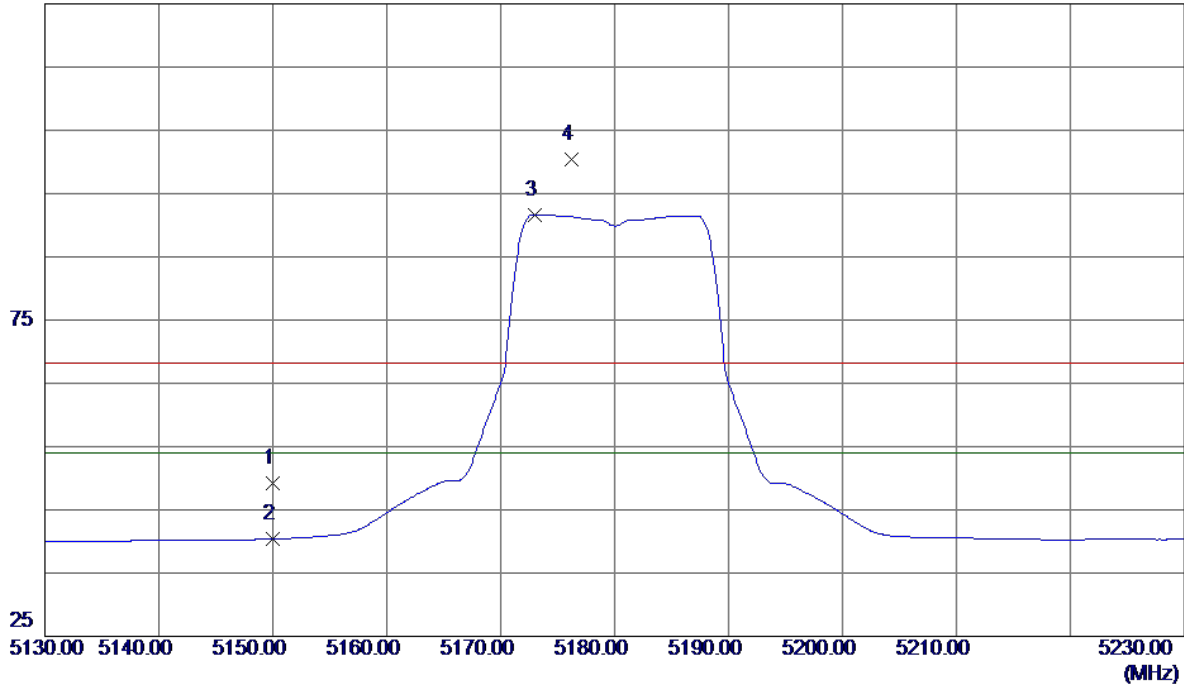


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	8.80	40.32	49.12	68.30	-19.18	Peak	
2	5150.0000	0.08	40.32	40.40	54.00	-13.60	AVG	
3 *	5173.0000	51.22	40.45	91.67	54.00	37.67	AVG	No Limit
4	5176.2000	59.99	40.46	100.45	68.30	32.15	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

115 dBuV/m

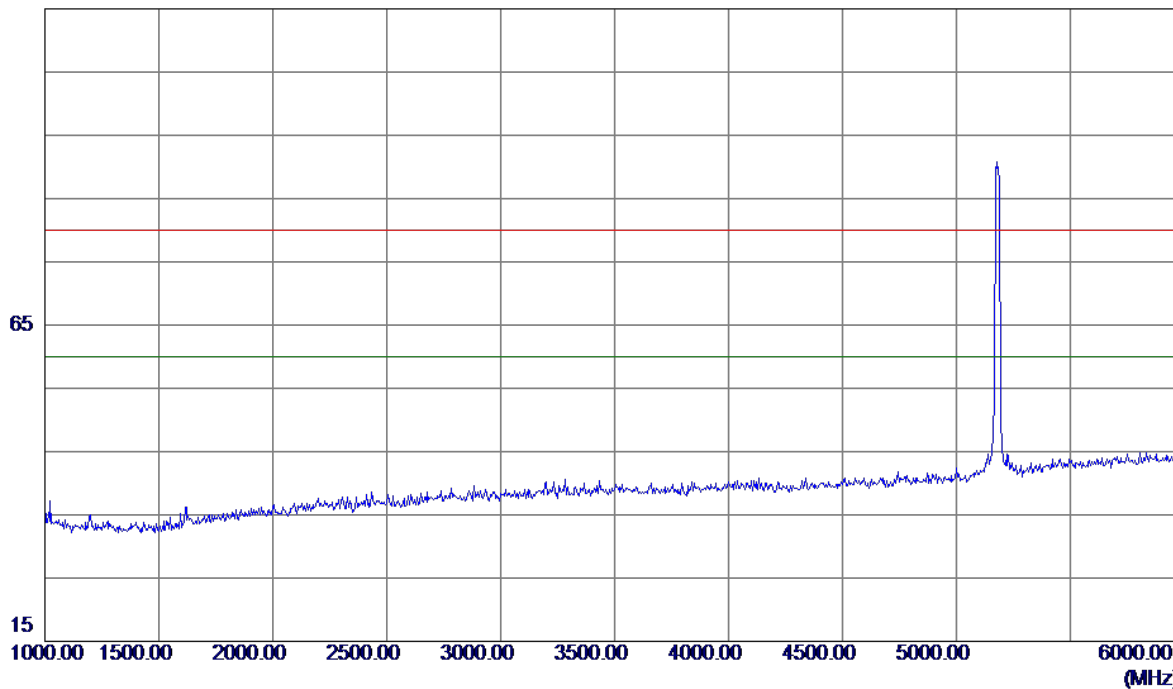


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

115 dBuV/m

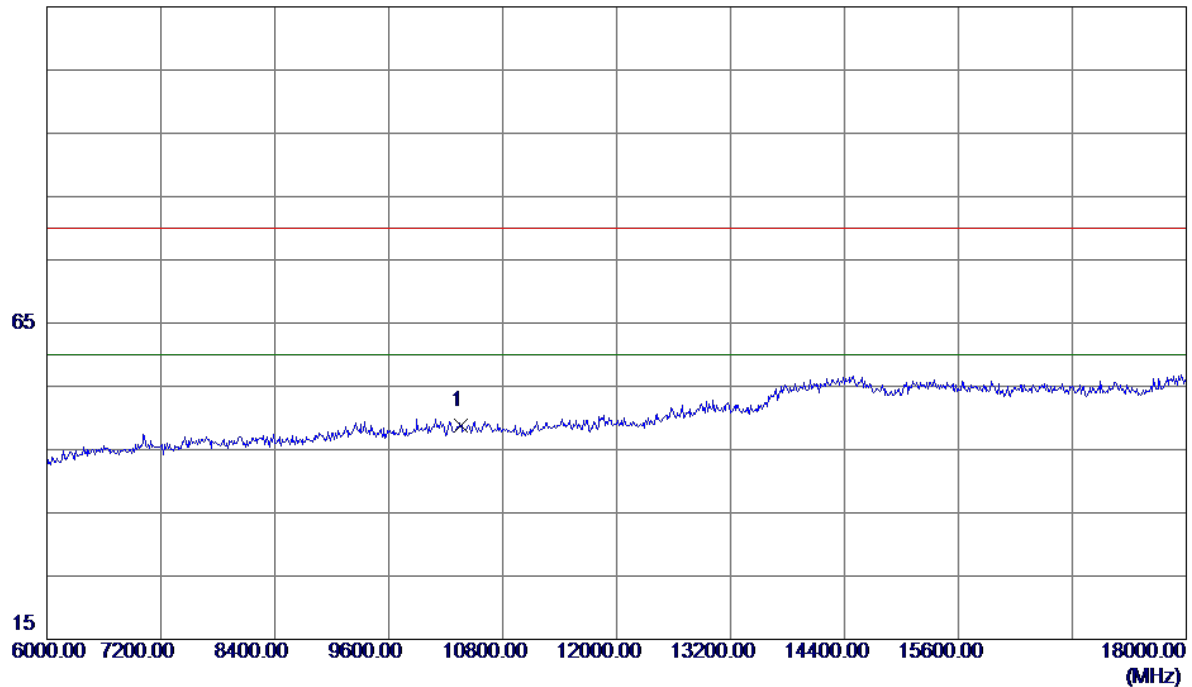


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	31.67	17.11	48.78	80.00	-31.22	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

100 dBuV/m

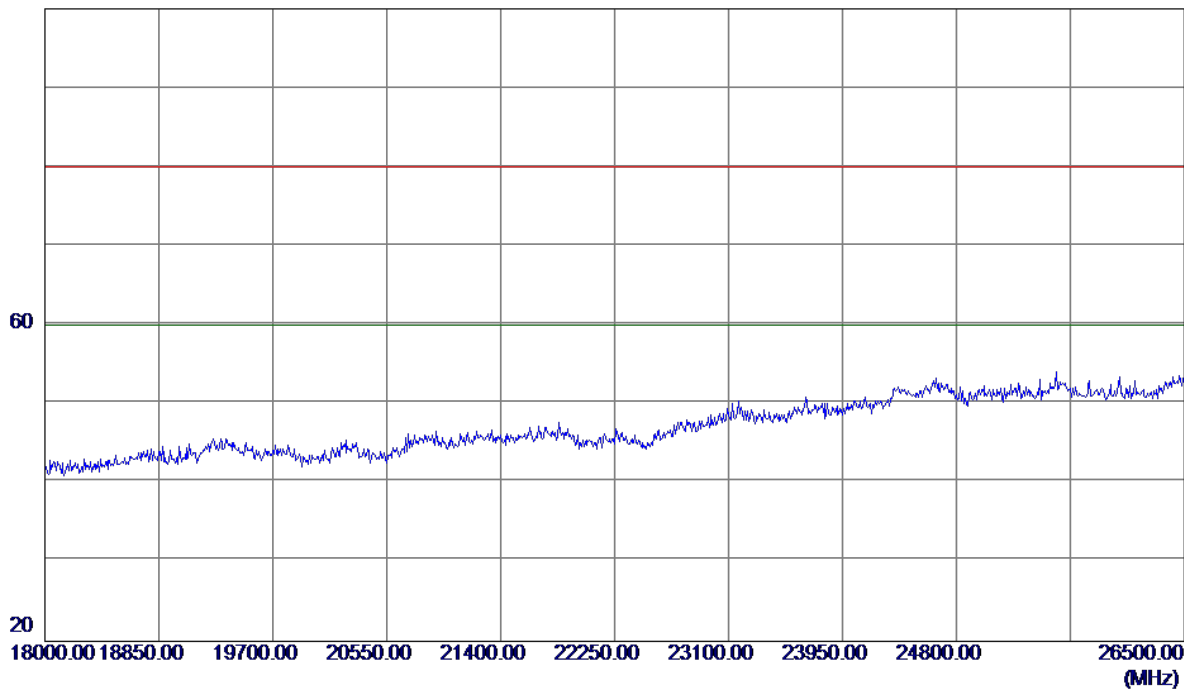


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal


115 dBuV/m

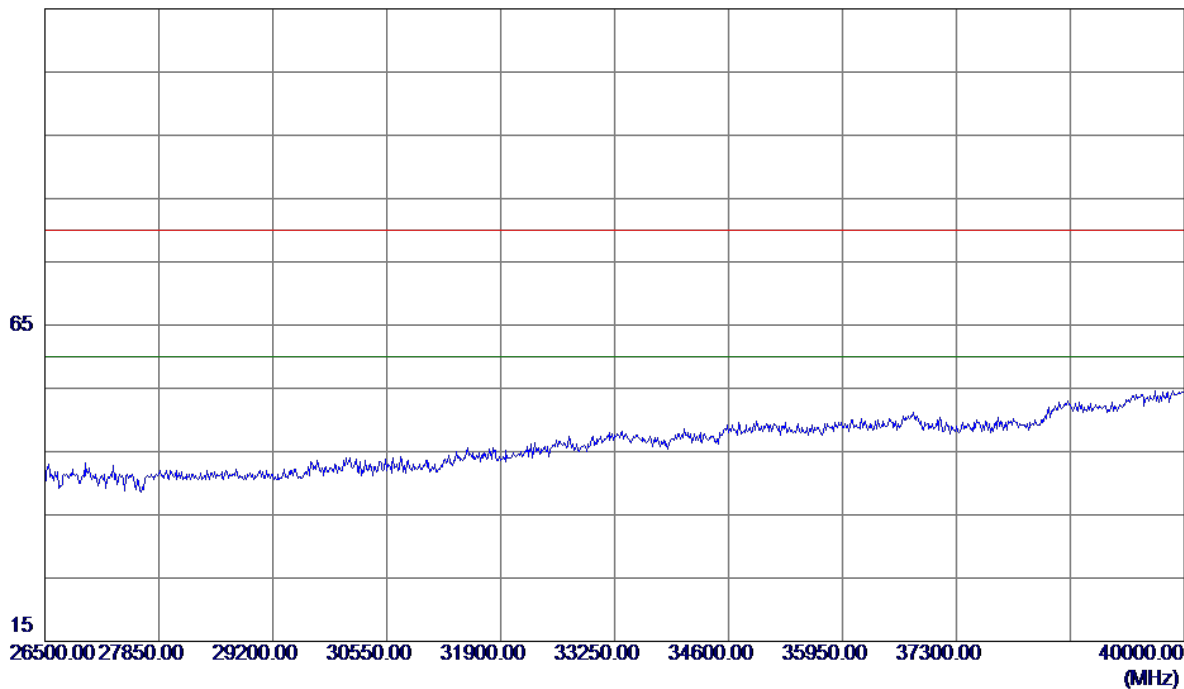

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

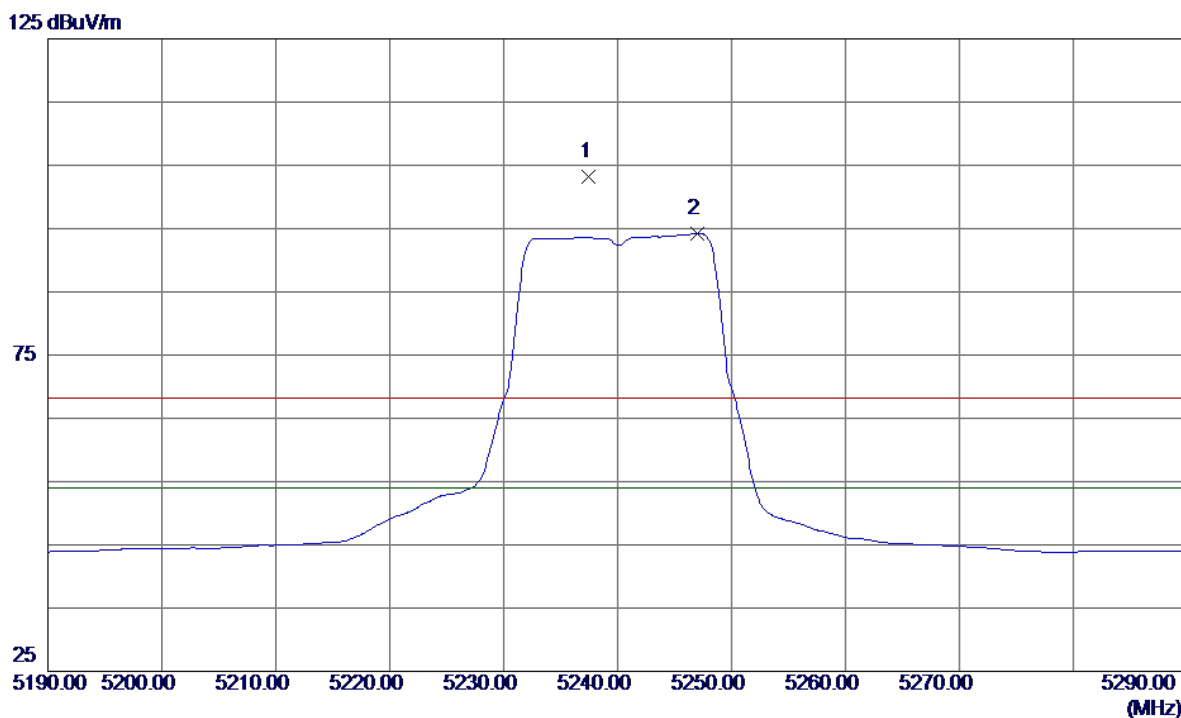


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5237.5000	61.57	41.55	103.12	68.30	34.82	Peak	No Limit
2 *	5247.0000	52.62	41.59	94.21	54.00	40.21	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

115 dBuV/m

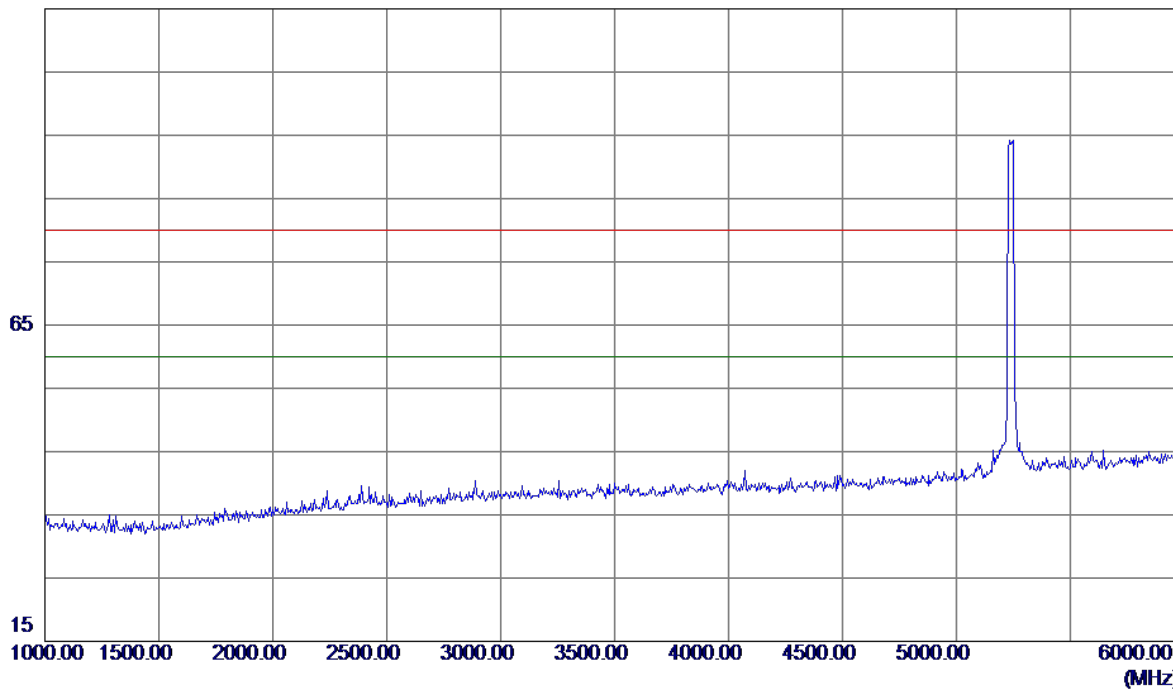


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

115 dBuV/m

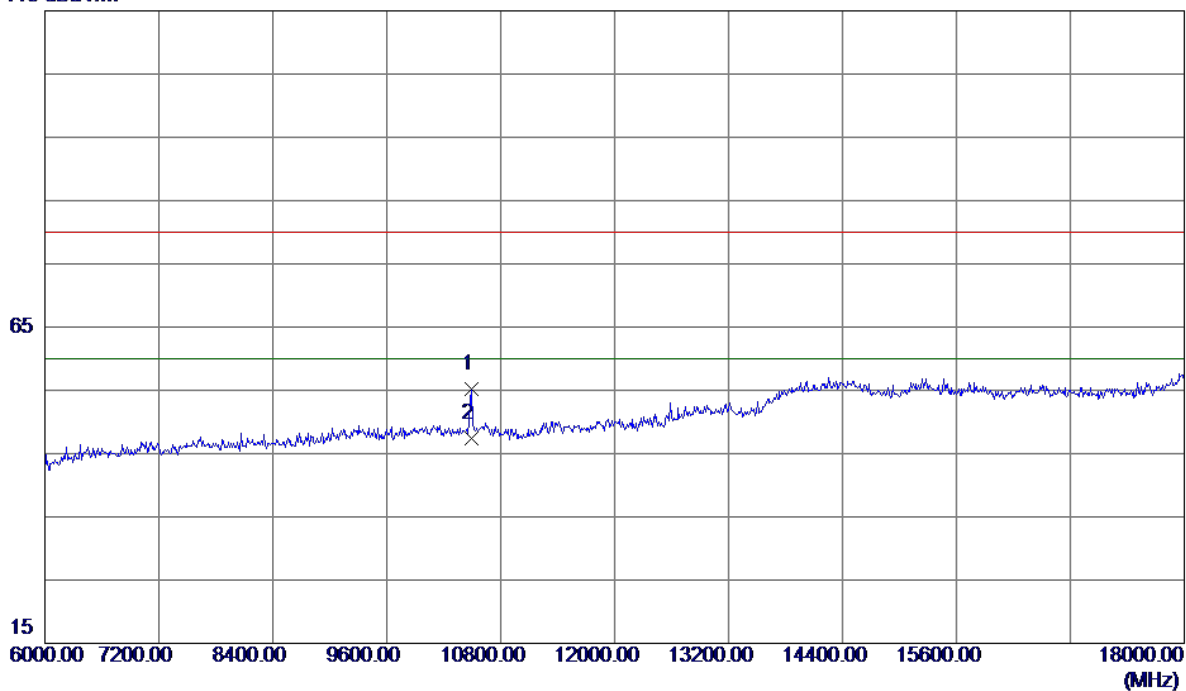


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10488.0000	37.65	17.47	55.12	80.00	-24.88	Peak	
2 *	10488.0000	29.86	17.47	47.33	60.00	-12.67	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

100 dBuV/m

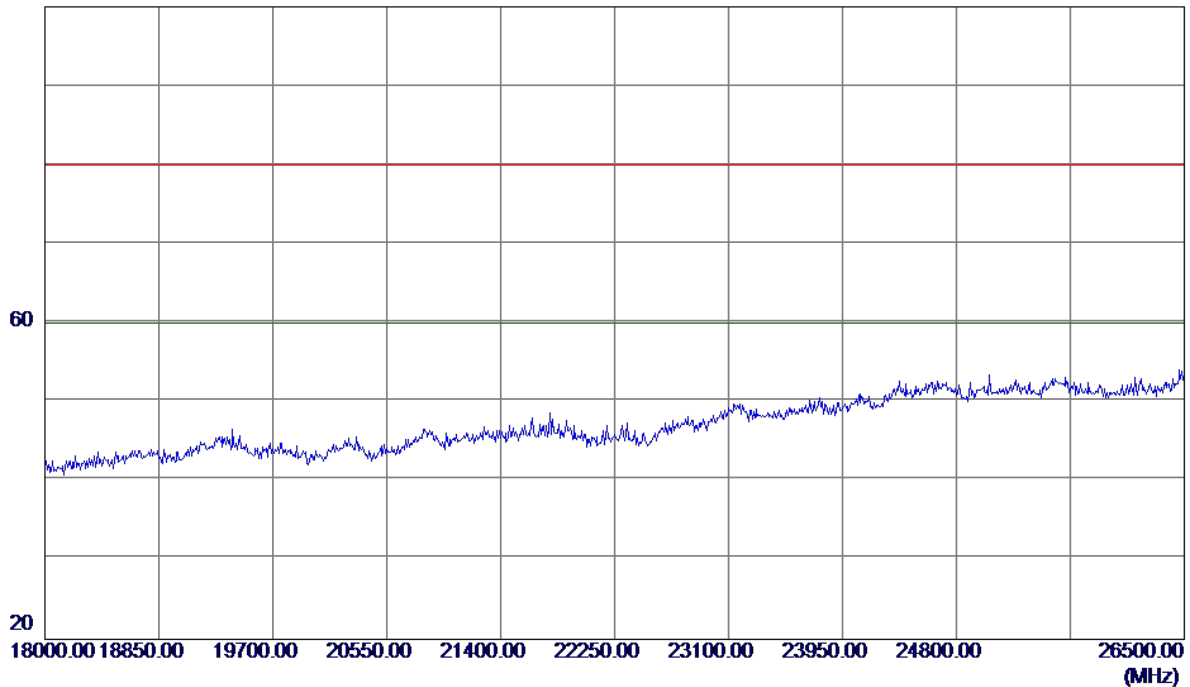


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

115 dBuV/m

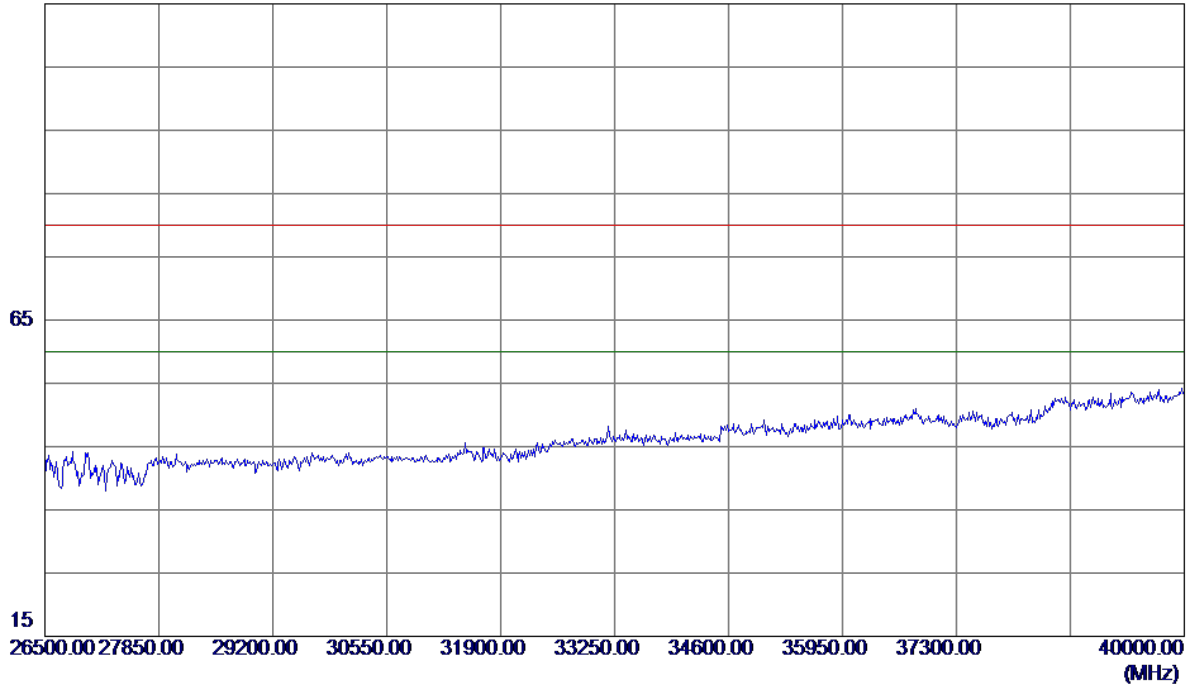


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

125 dBuV/m

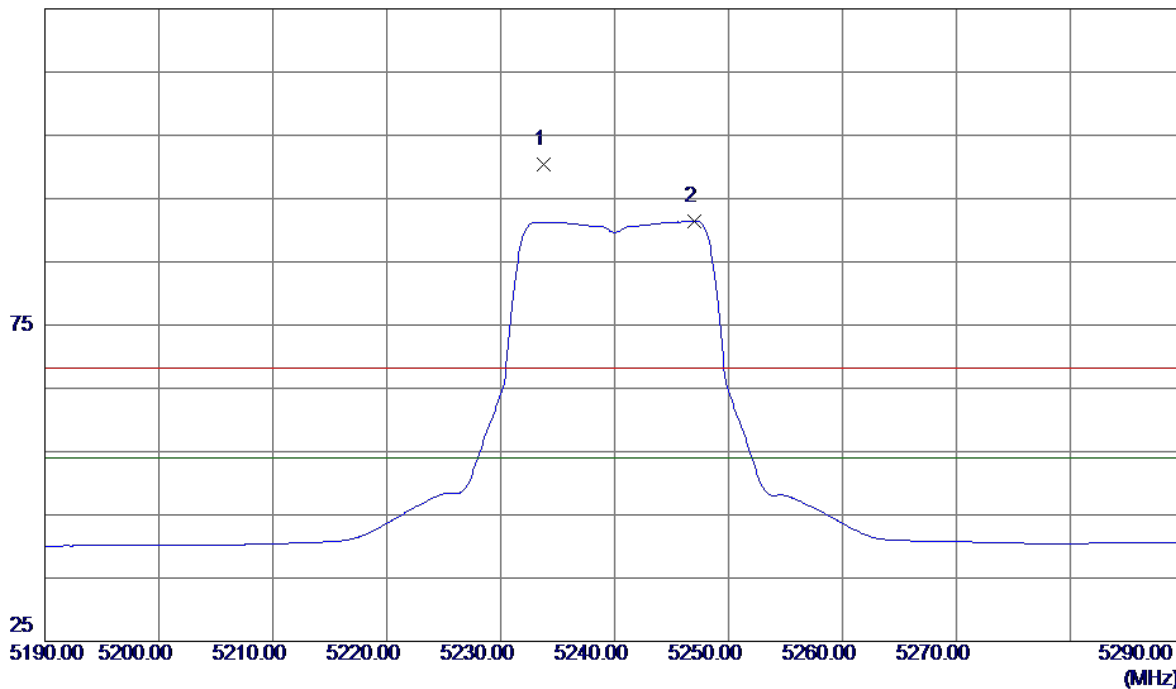


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5233.8000	59.68	40.77	100.45	68.30	32.15	Peak	No Limit
2 *	5247.0000	50.57	40.84	91.41	54.00	37.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

115 dBuV/m

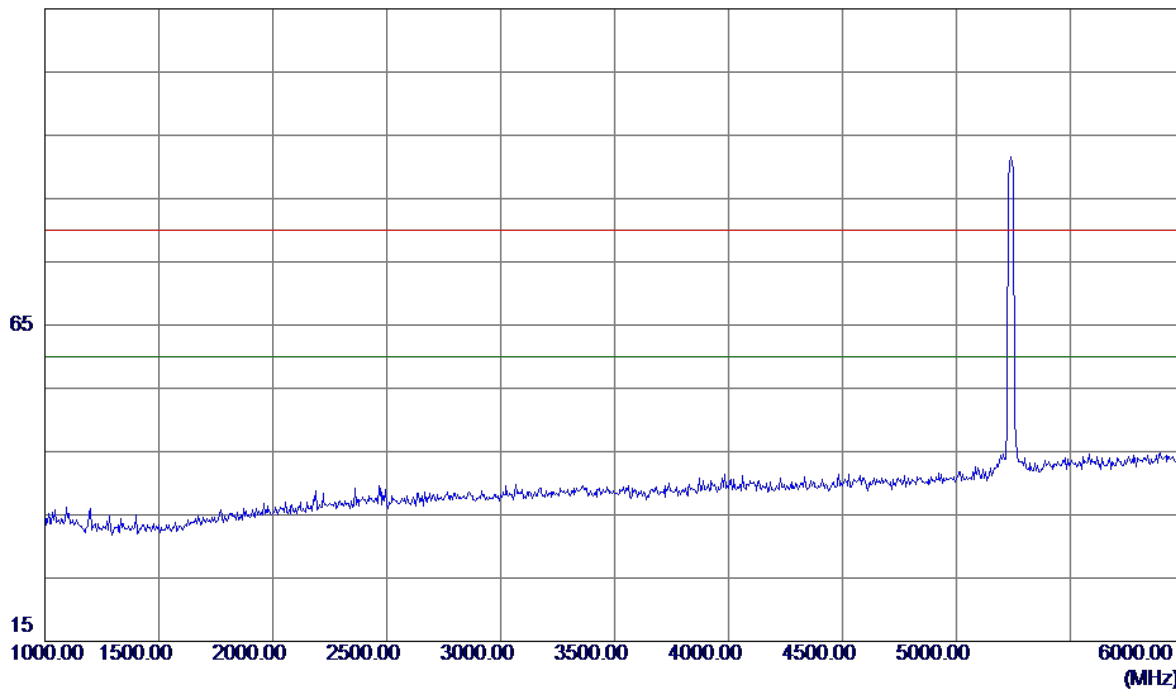


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

115 dBuV/m

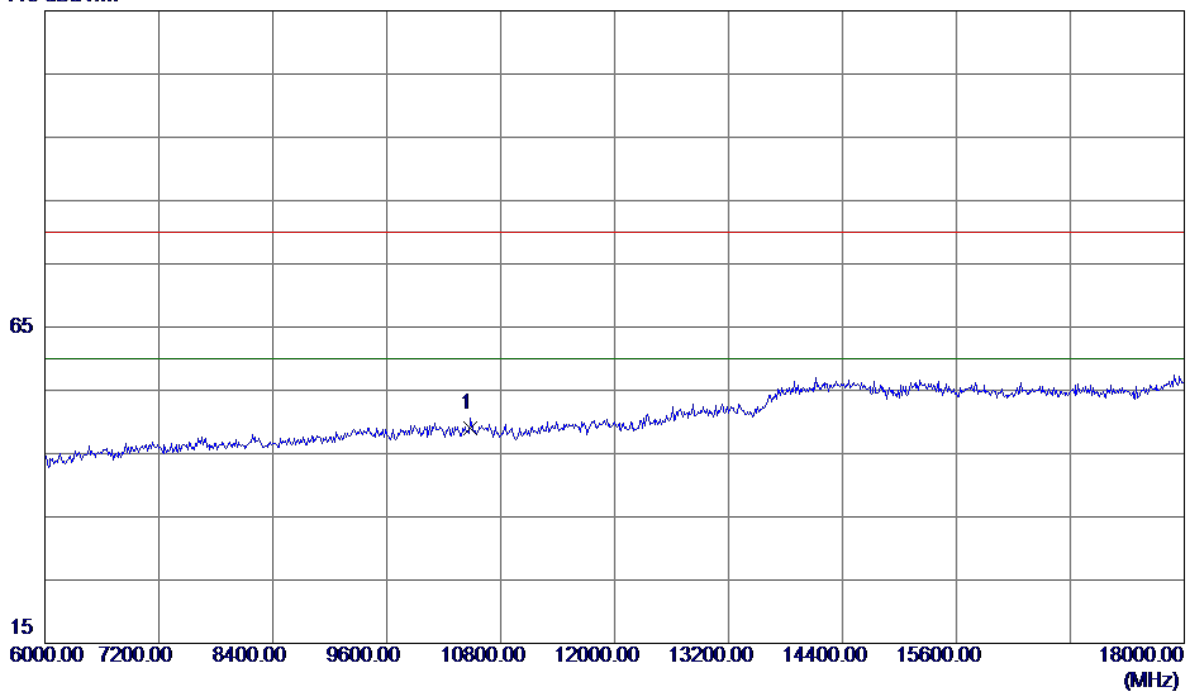


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	31.59	17.44	49.03	80.00	-30.97	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

100 dBuV/m

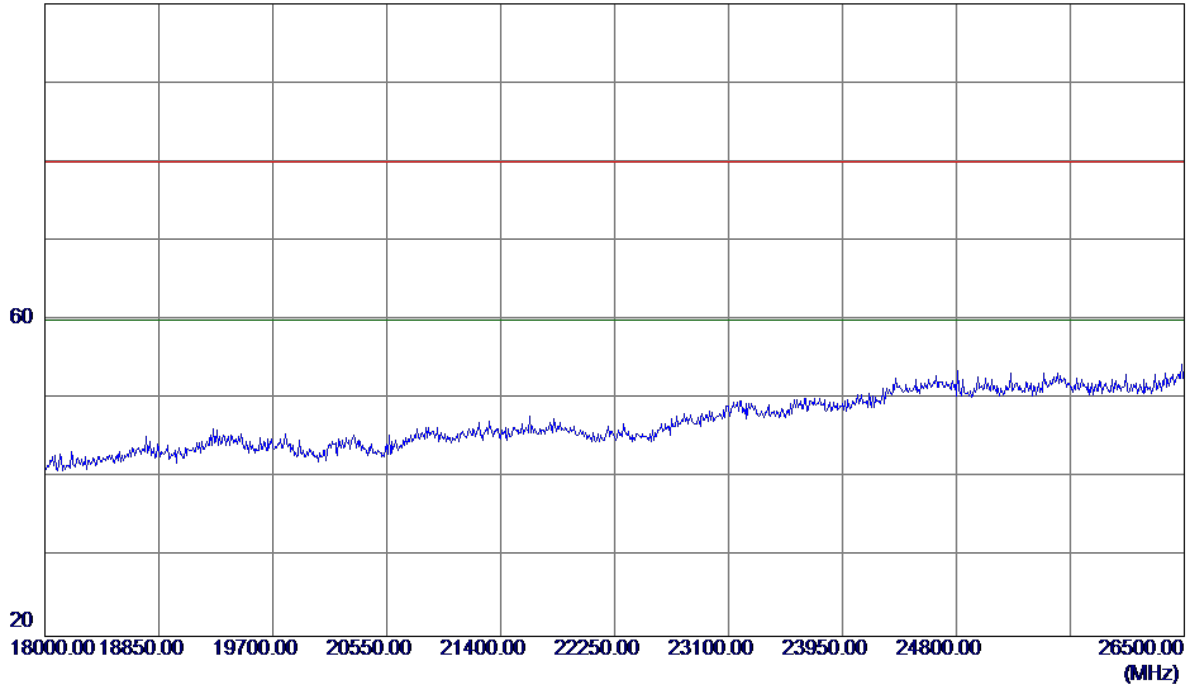


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

115 dBuV/m

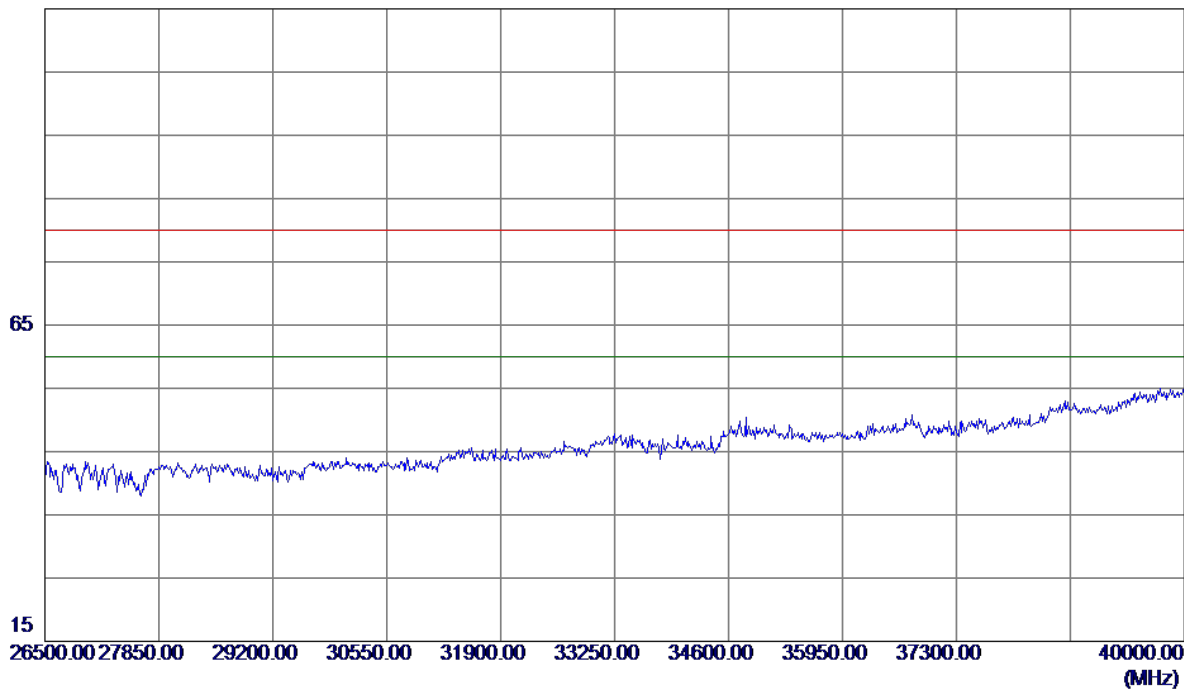


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

125 dBuV/m

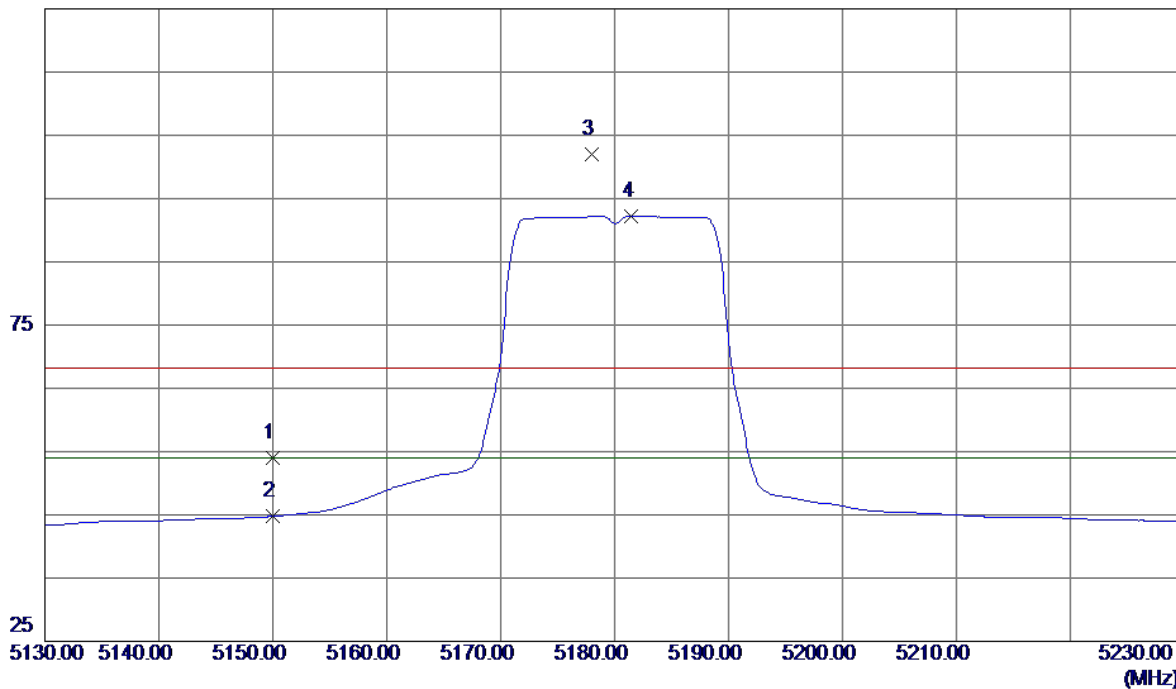


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	12.98	41.10	54.08	68.30	-14.22	Peak	
2	5150.0000	3.67	41.10	44.77	54.00	-9.23	AVG	
3	5178.0000	60.69	41.24	101.93	68.30	33.63	Peak	No Limit
4 *	5181.5000	50.99	41.26	92.25	54.00	38.25	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

115 dBuV/m

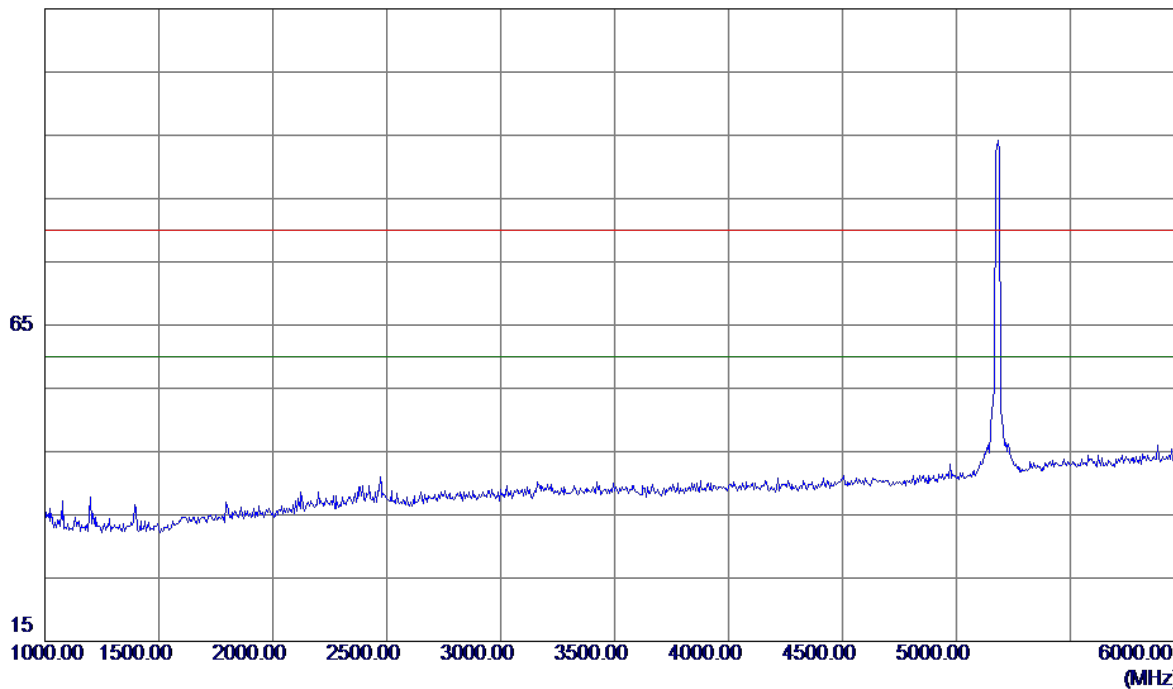


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

115 dBuV/m

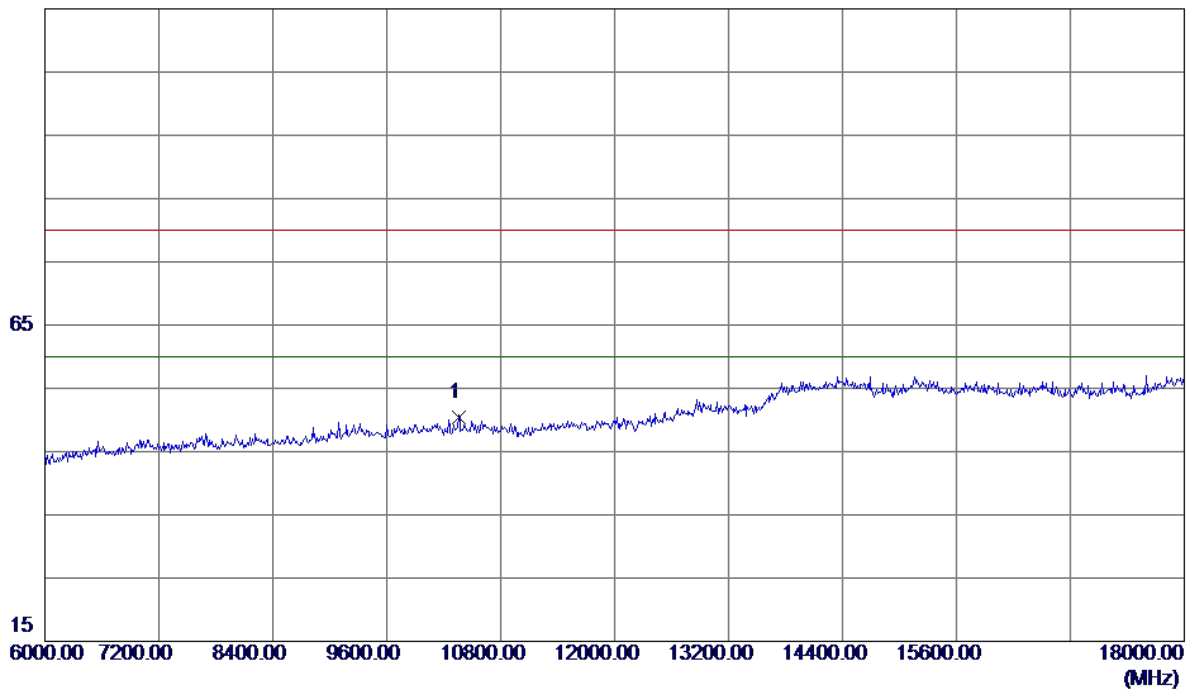


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	33.33	17.11	50.44	80.00	-29.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

100 dBuV/m

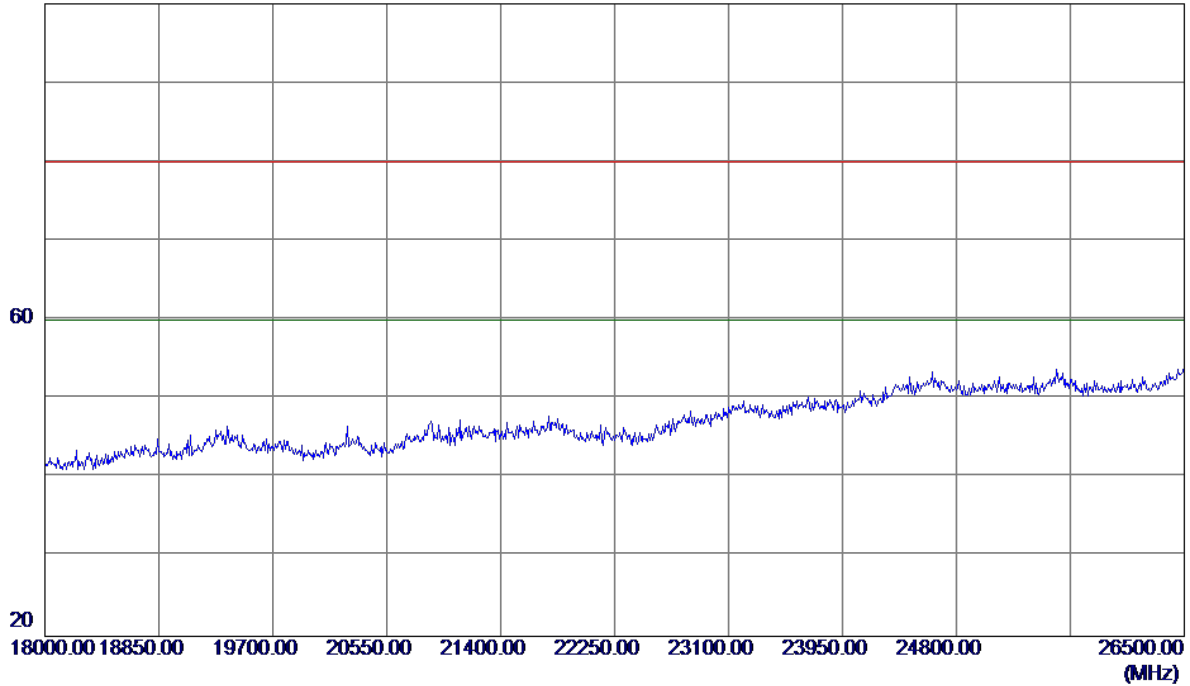


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

115 dBuV/m

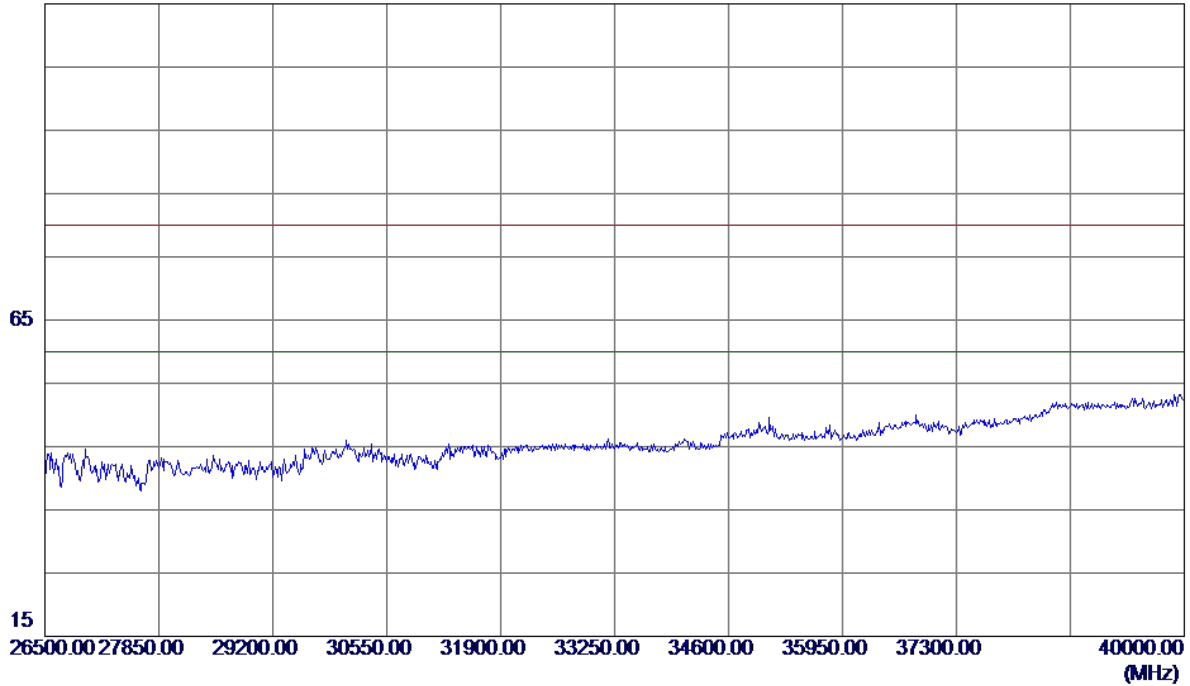


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

125 dBuV/m

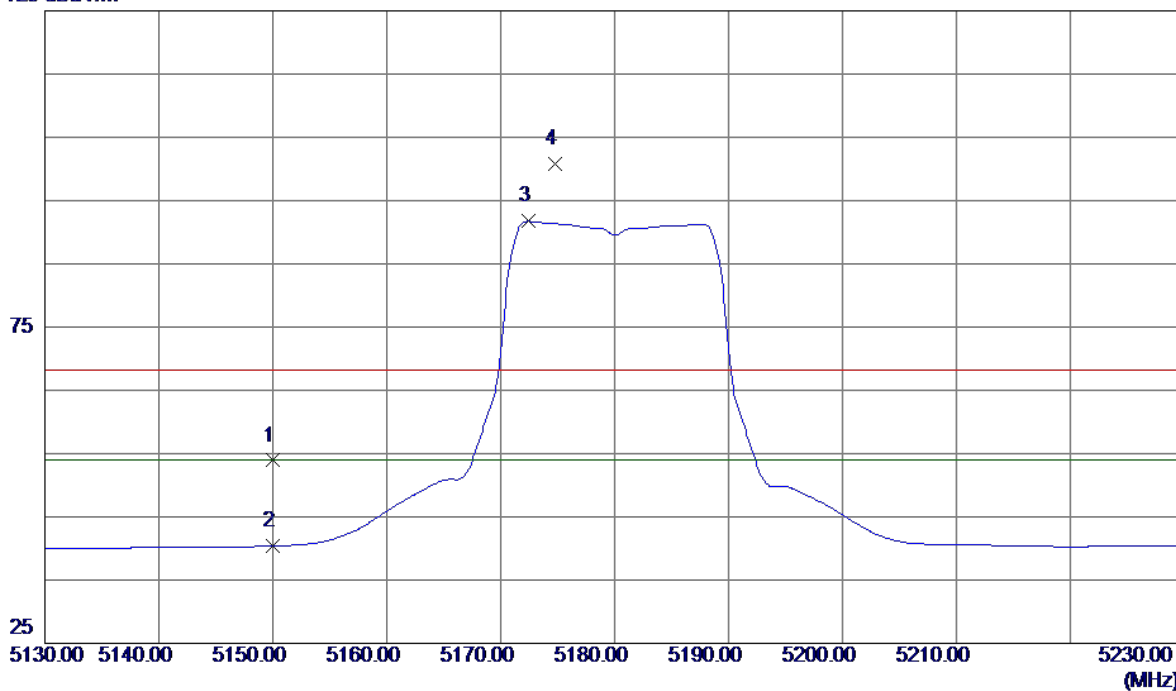


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	13.58	40.32	53.90	68.30	-14.40	Peak	
2	5150.0000	0.06	40.32	40.38	54.00	-13.62	AVG	
3 *	5172.4000	51.28	40.44	91.72	54.00	37.72	AVG	No Limit
4	5174.8000	60.26	40.46	100.72	68.30	32.42	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

115 dBuV/m

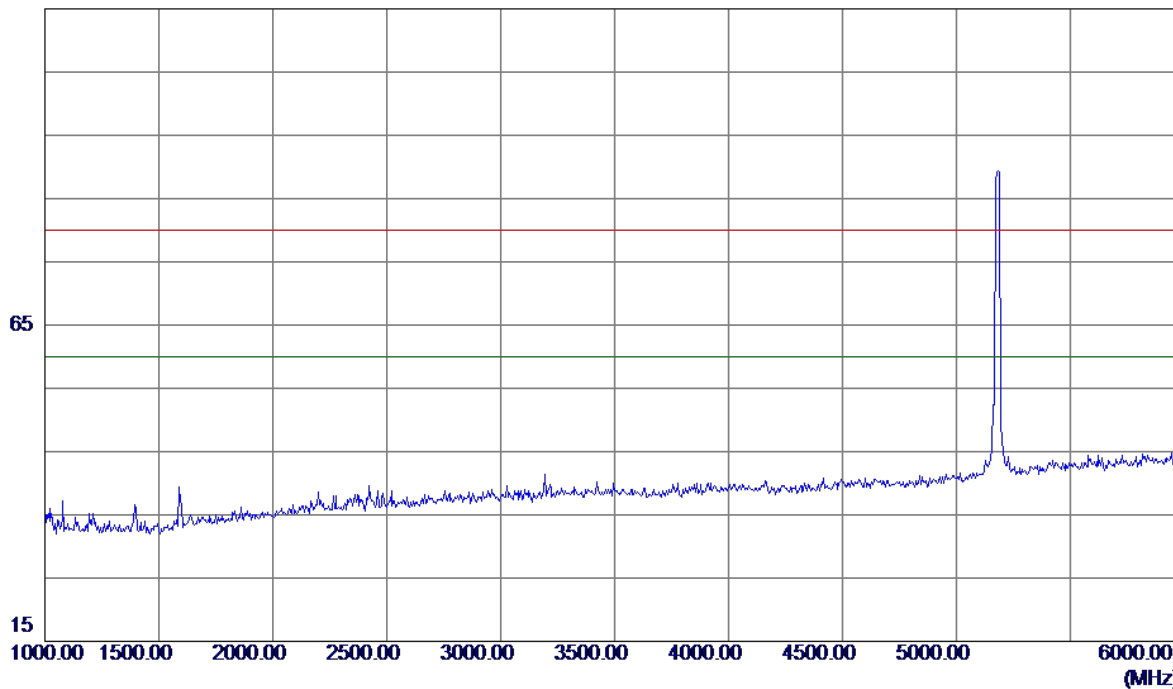


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

115 dBuV/m

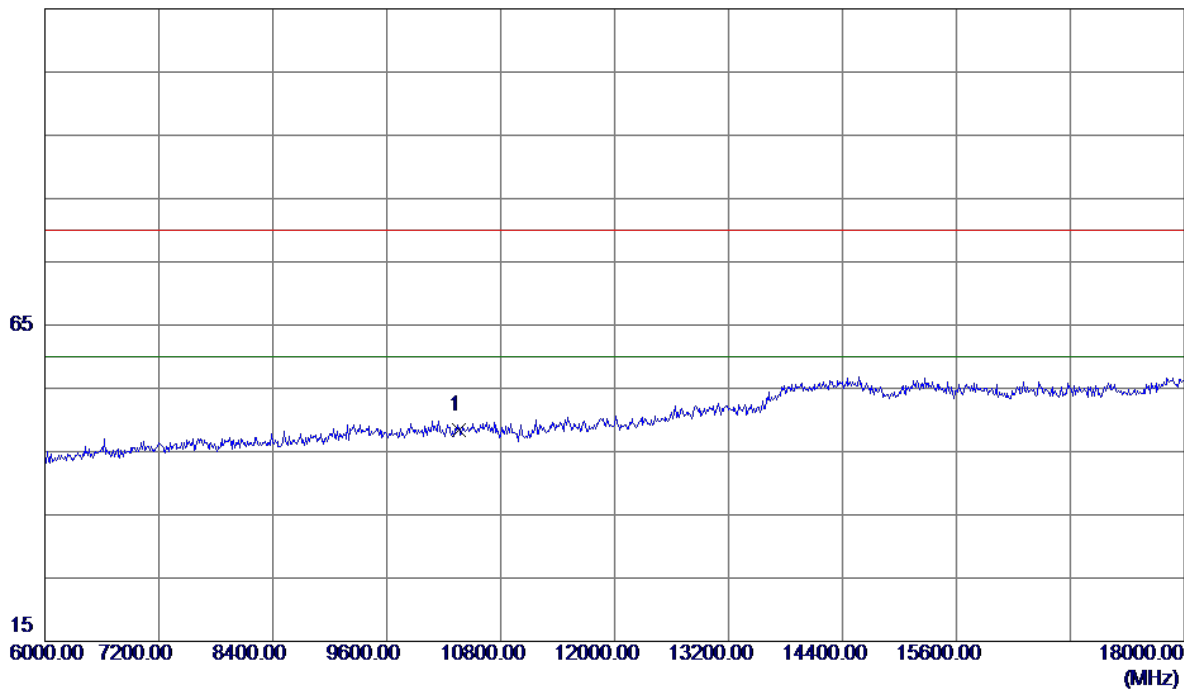


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	31.34	17.11	48.45	80.00	-31.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

100 dBuV/m

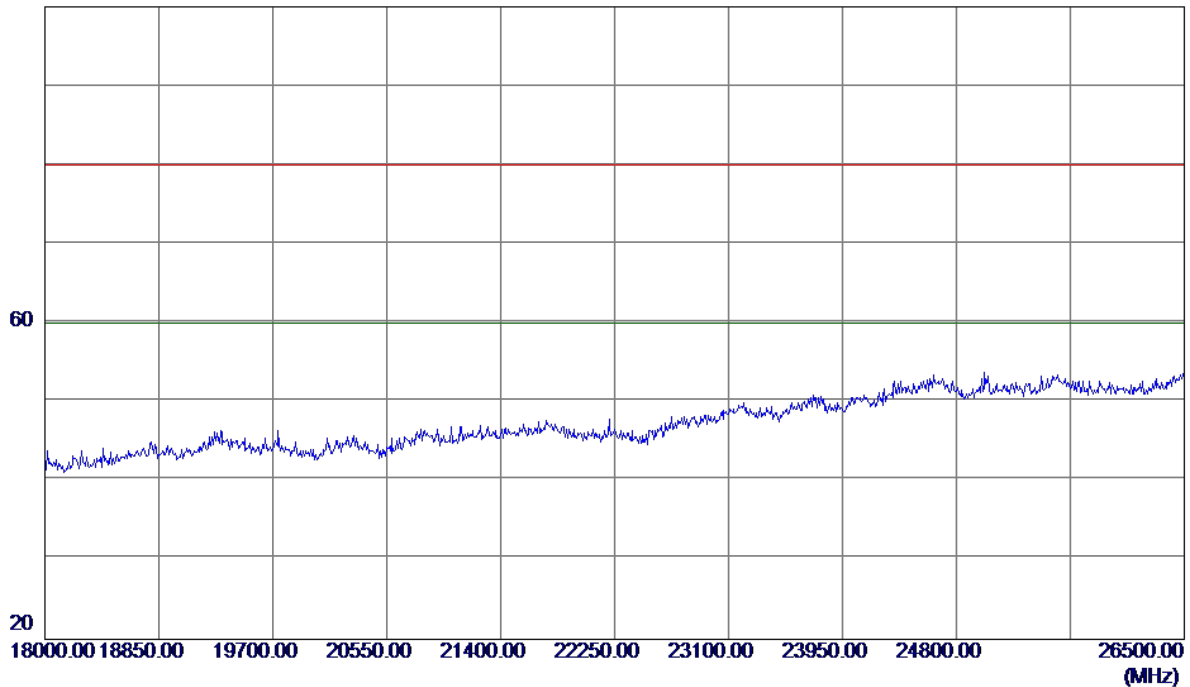


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal


115 dBuV/m

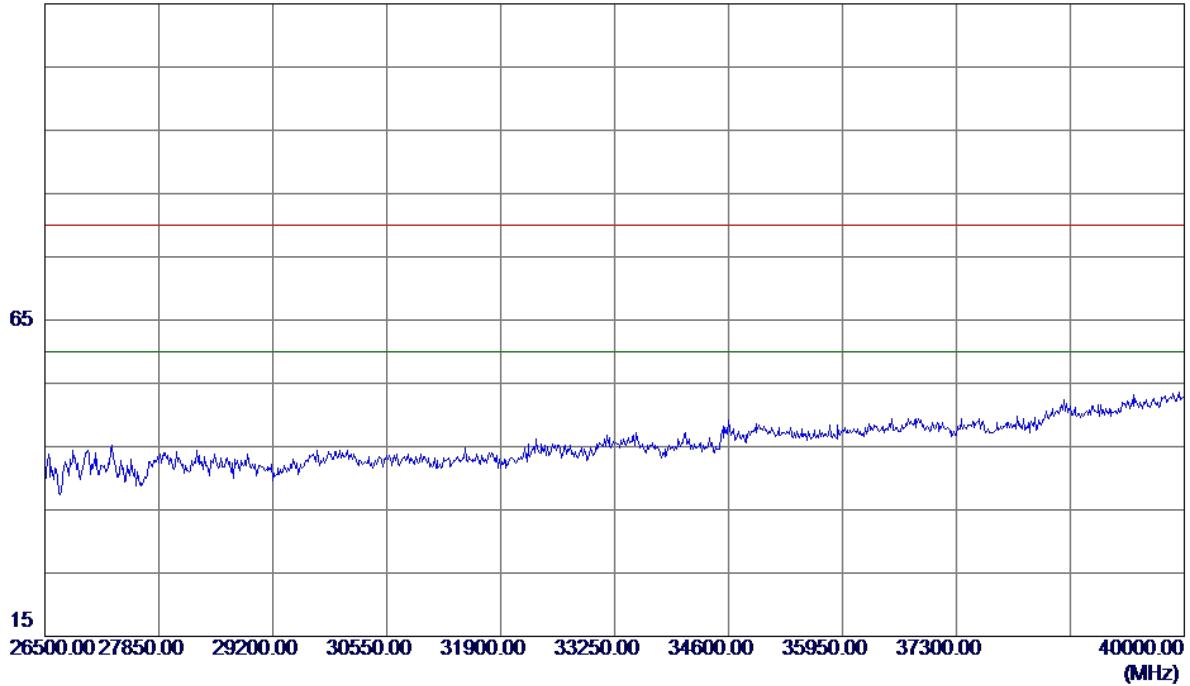

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

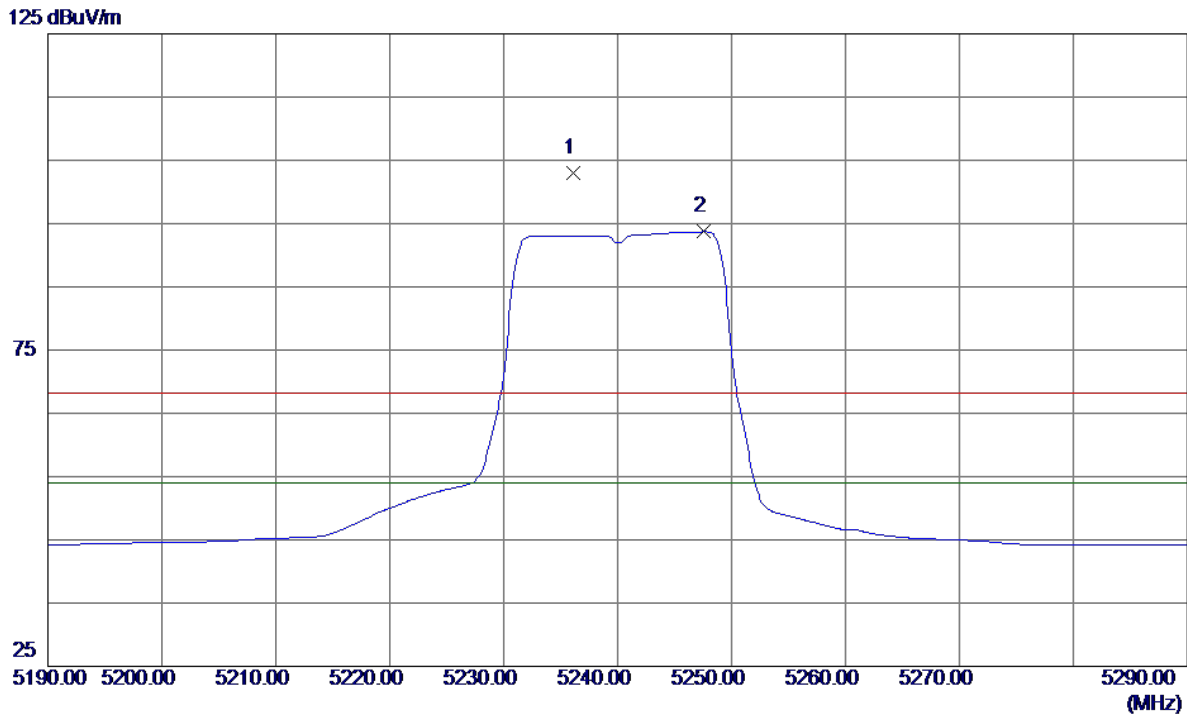


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5236.1000	61.36	41.54	102.90	68.30	34.60	Peak	No Limit
2 *	5247.6000	52.11	41.60	93.71	54.00	39.71	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

115 dBuV/m

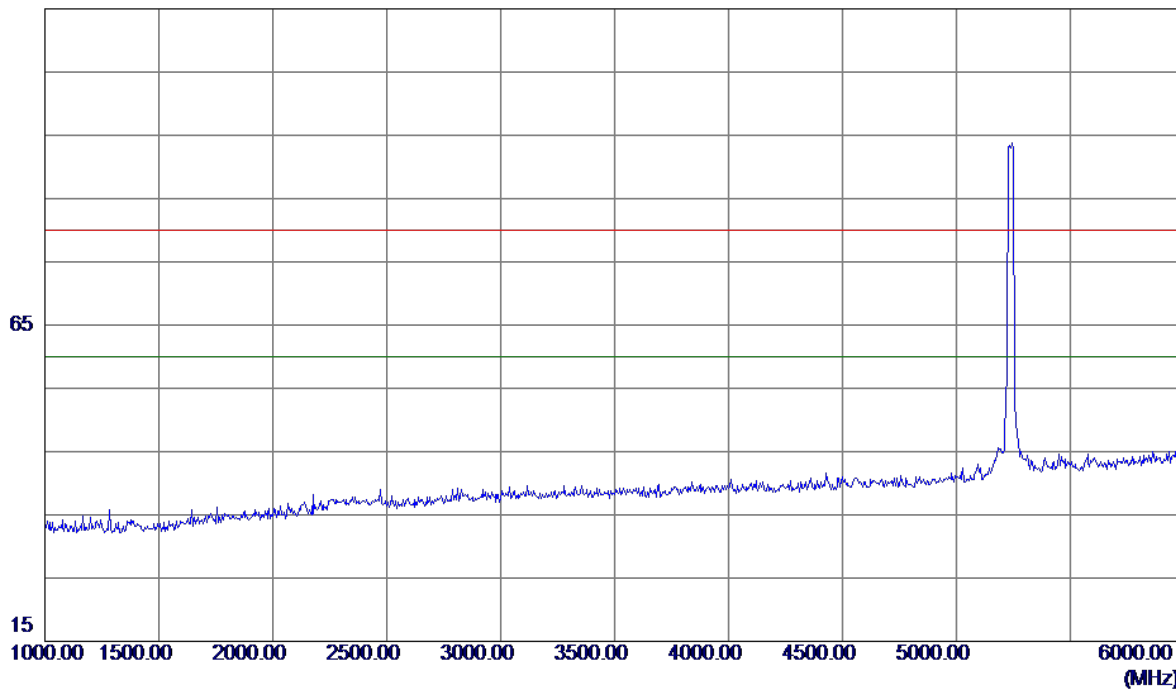


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

115 dBuV/m

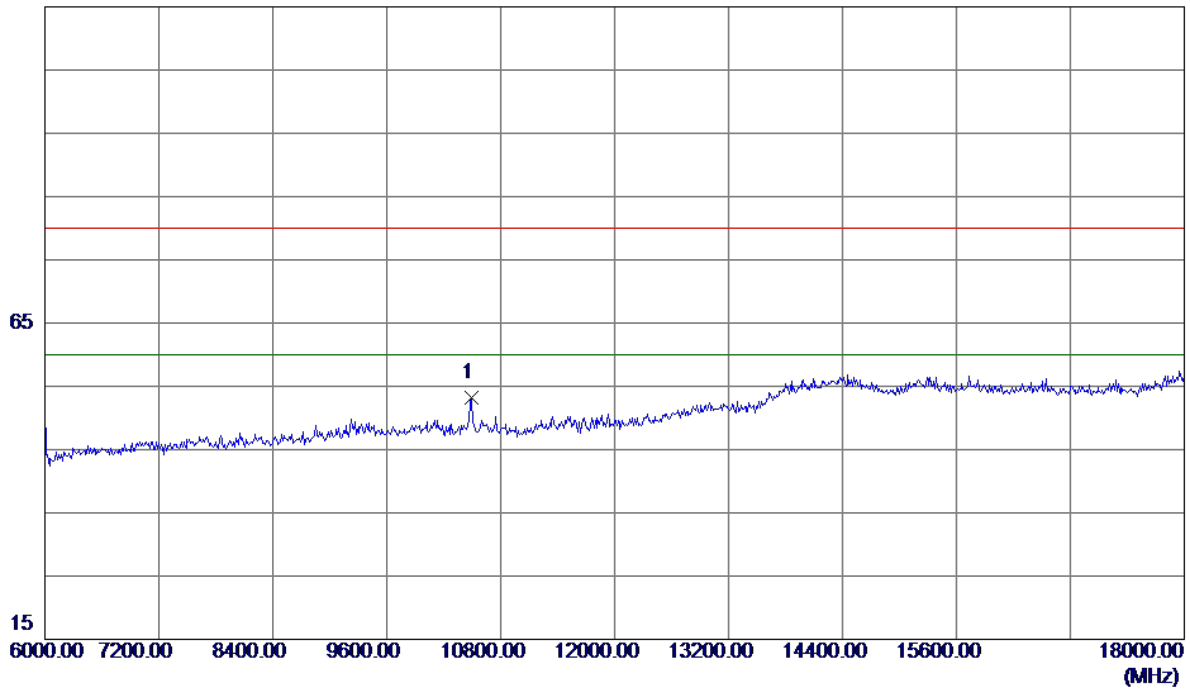


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10488.0000	35.76	17.47	53.23	80.00	-26.77	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

100 dBuV/m

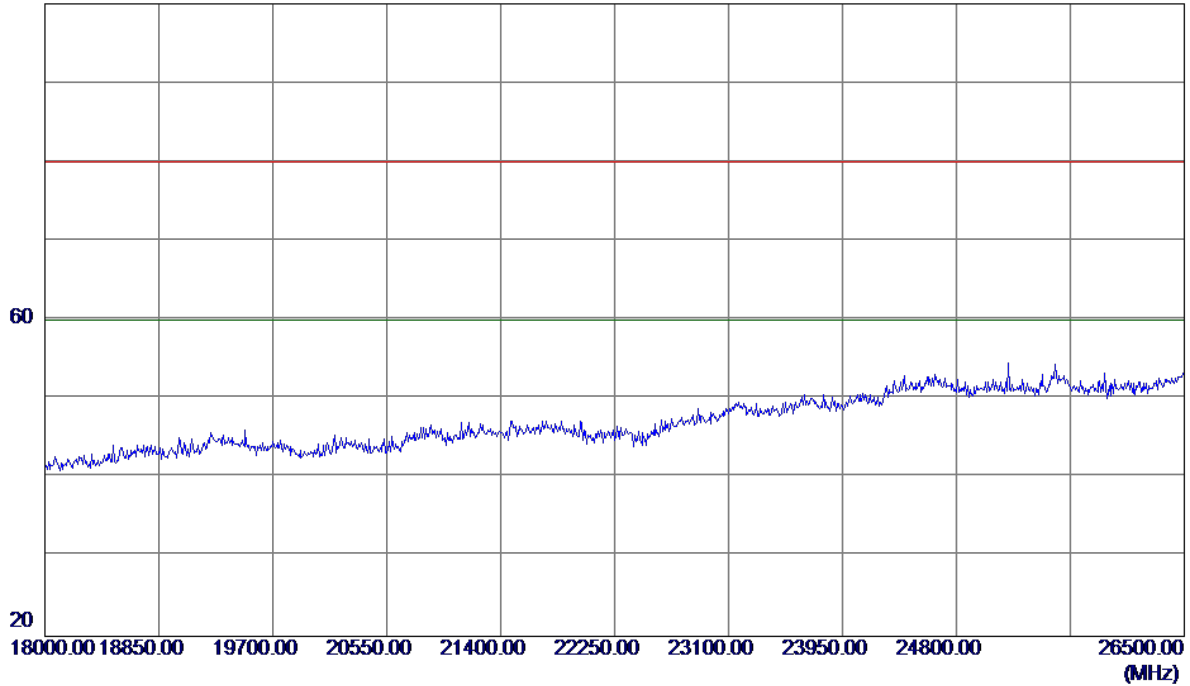


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

115 dBuV/m

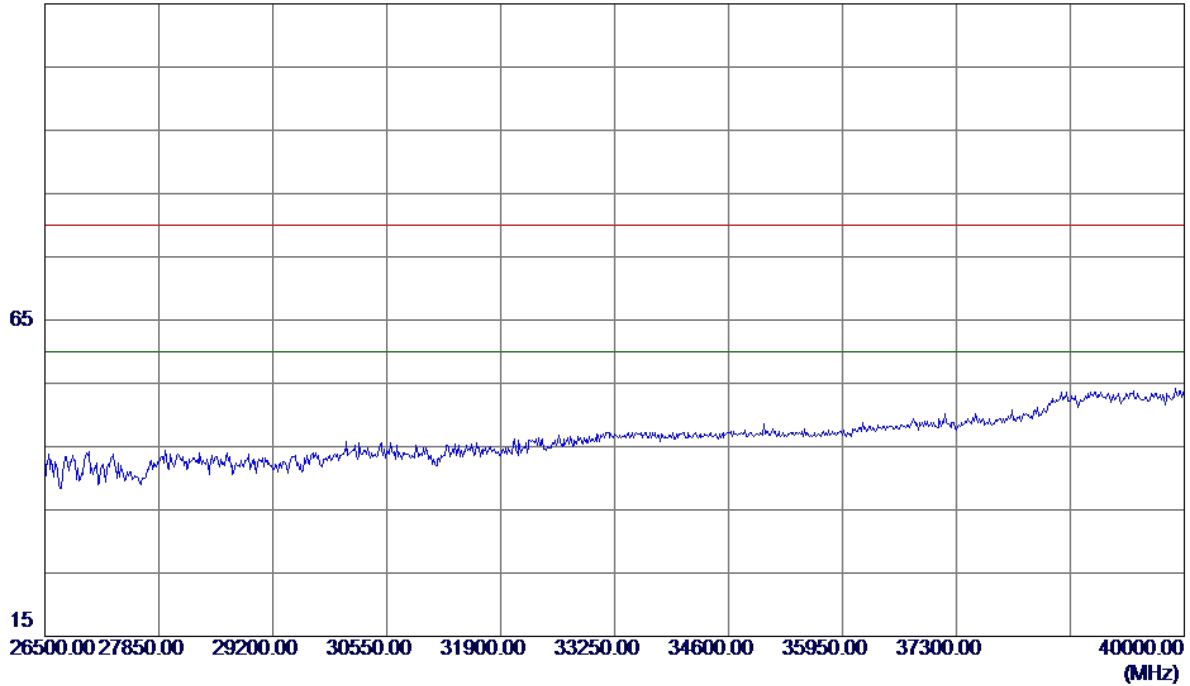


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

125 dBuV/m

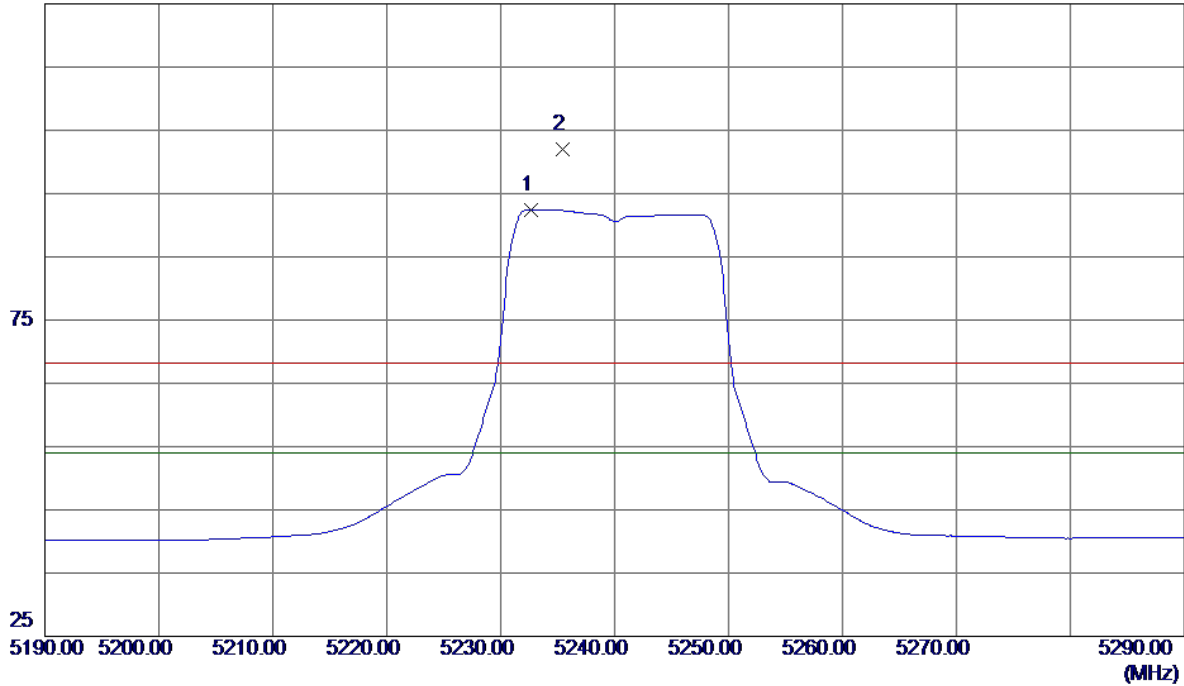


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.7000	51.69	40.76	92.45	54.00	38.45	AVG	No Limit
2	5235.4000	61.15	40.78	101.93	68.30	33.63	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

115 dBuV/m

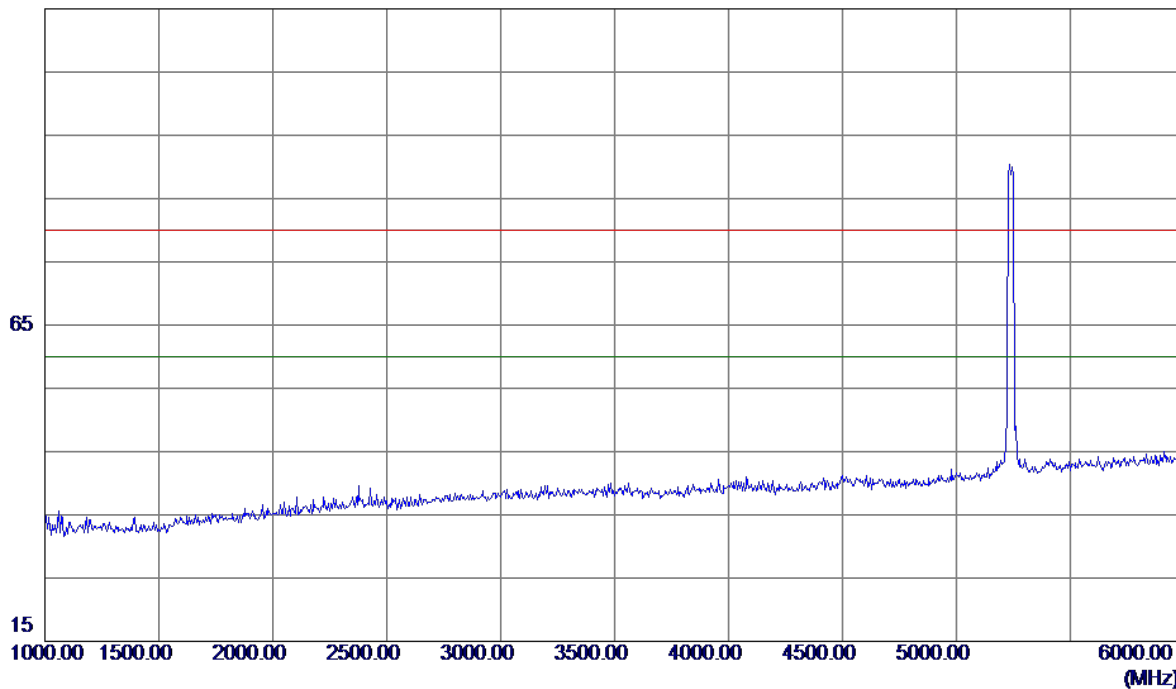


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

115 dBuV/m

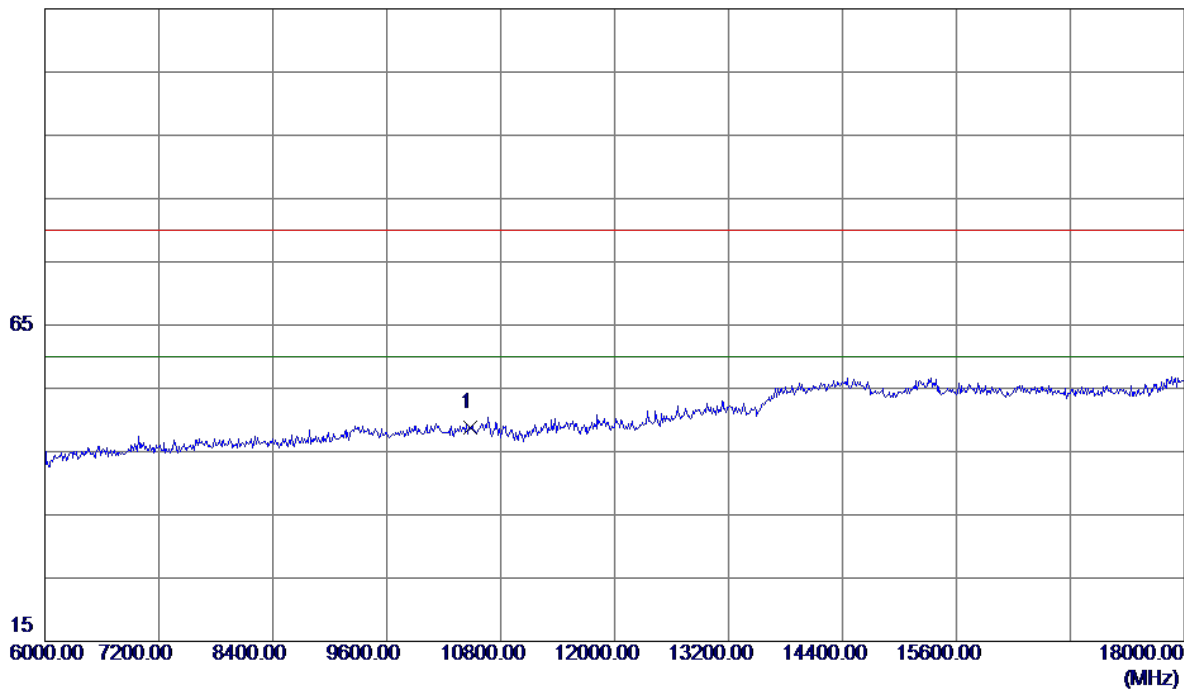


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10480.0000	31.41	17.44	48.85	80.00	-31.15	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

100 dBuV/m

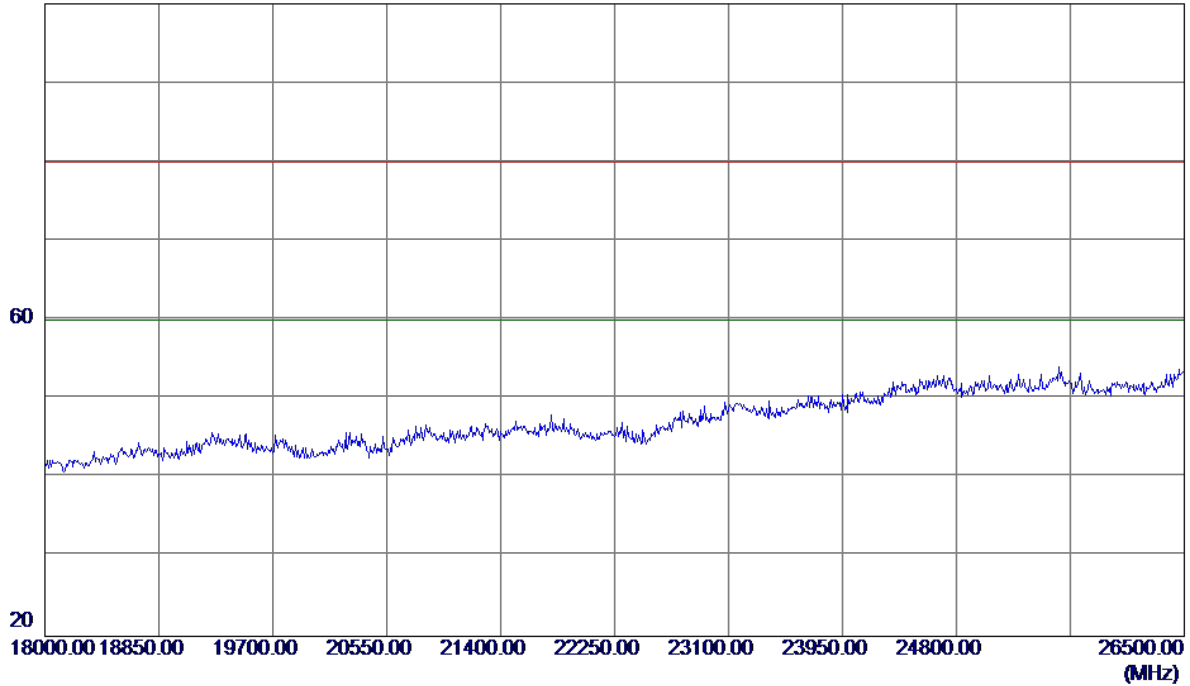


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

115 dBuV/m

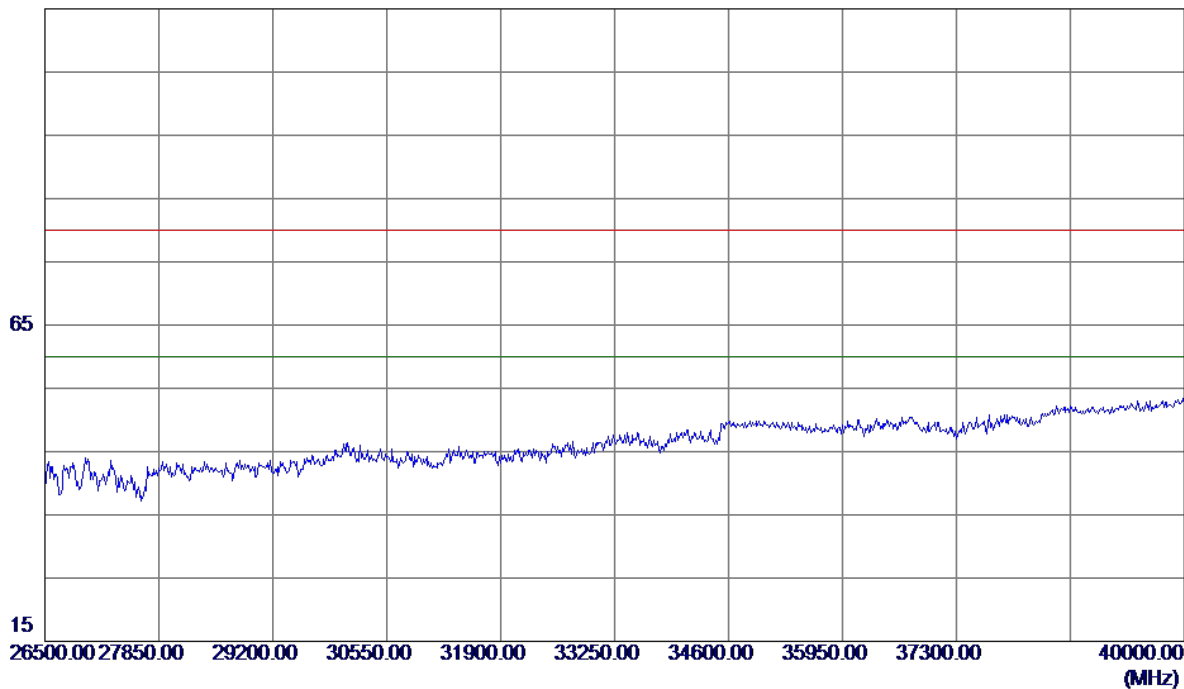


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

125 dBuV/m

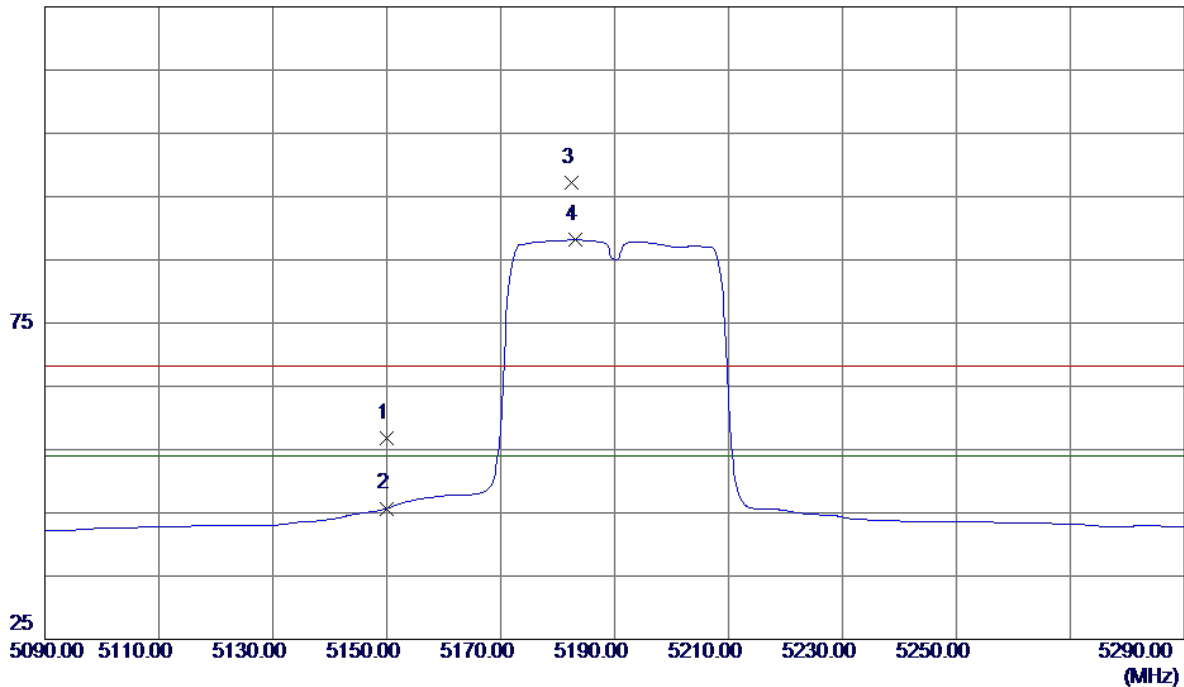


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	15.62	41.10	56.72	68.30	-11.58	Peak	
2	5150.0000	4.60	41.10	45.70	54.00	-8.30	AVG	
3	5182.4000	55.87	41.27	97.14	68.30	28.84	Peak	No Limit
4 *	5183.2000	46.86	41.27	88.13	54.00	34.13	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

115 dBuV/m

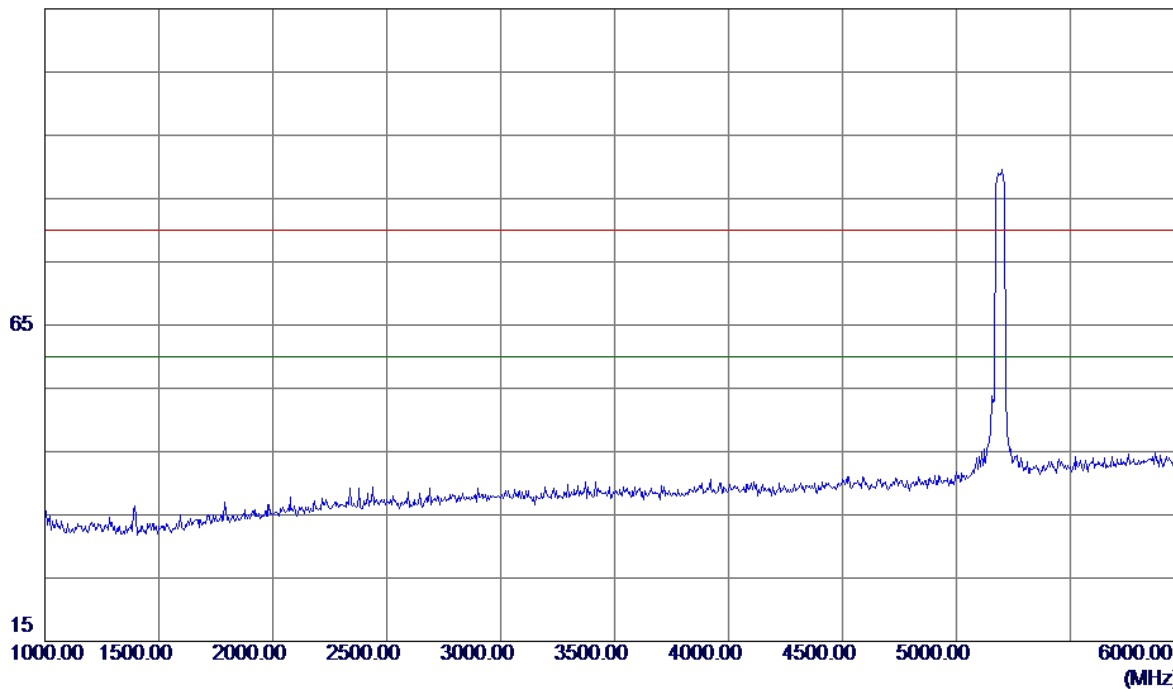


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

115 dBuV/m

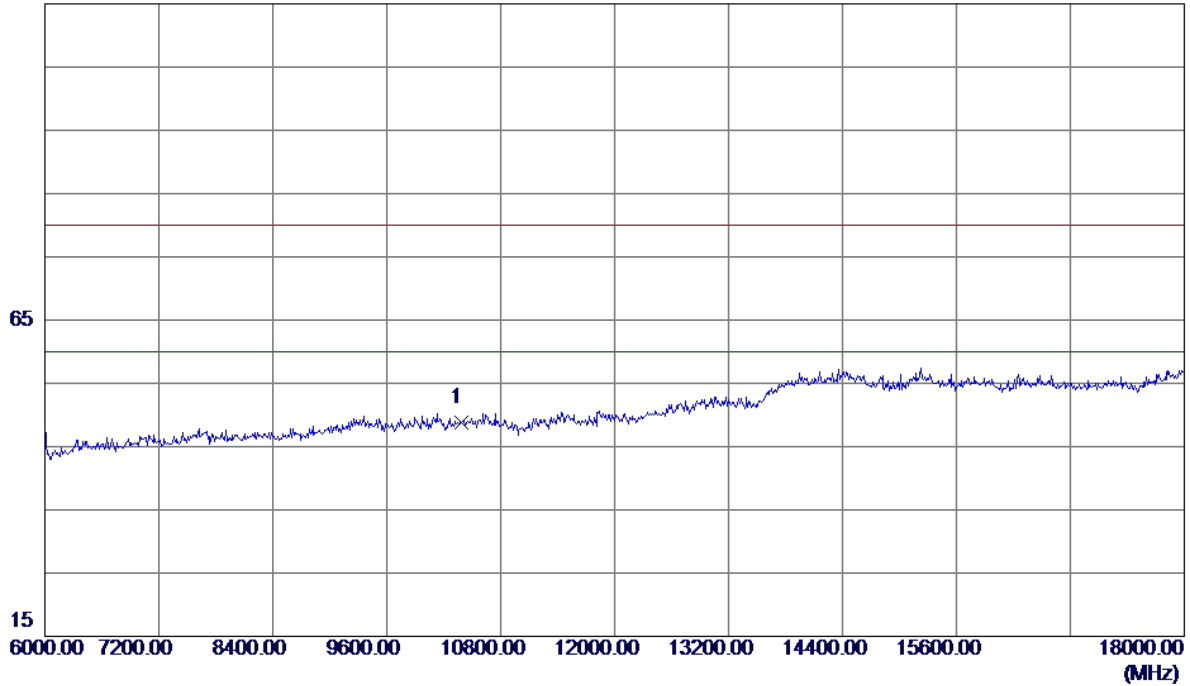


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	31.68	17.16	48.84	80.00	-31.16	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

100 dBuV/m

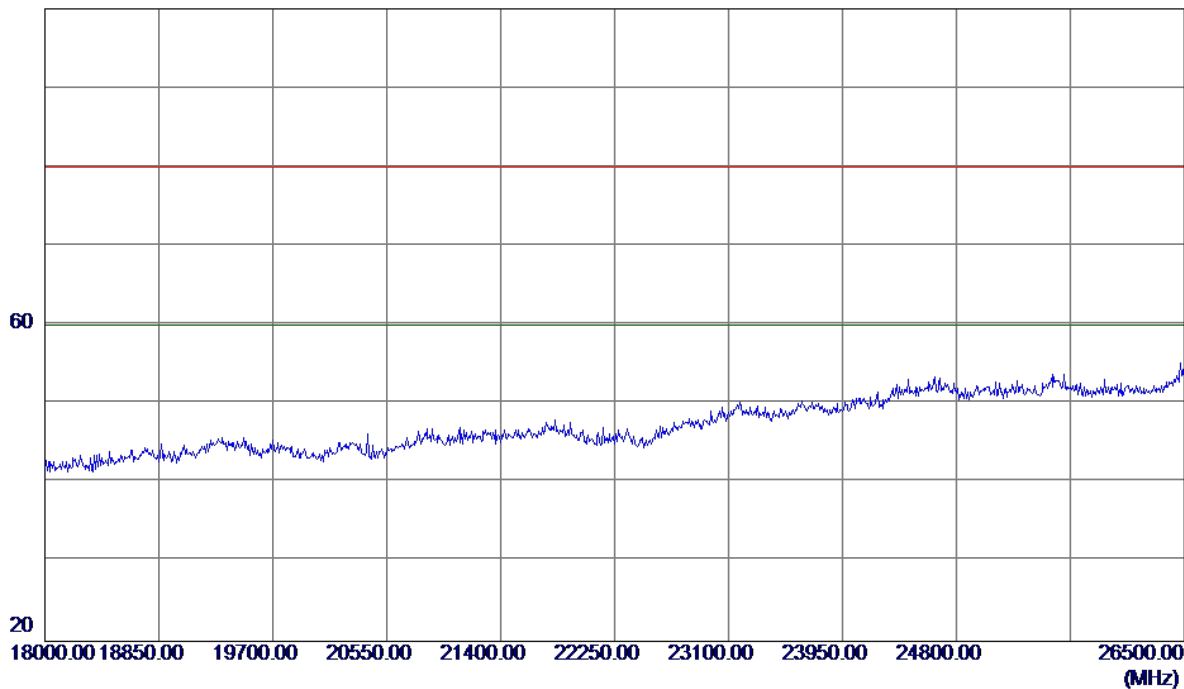


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


115 dBuV/m

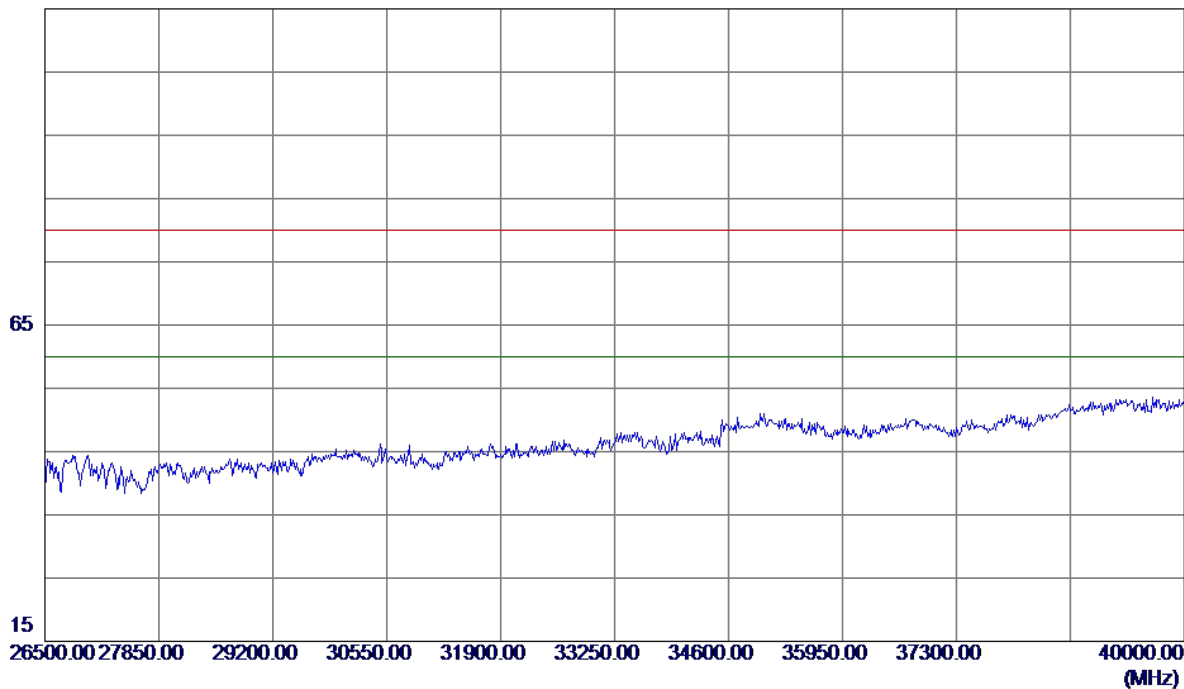

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

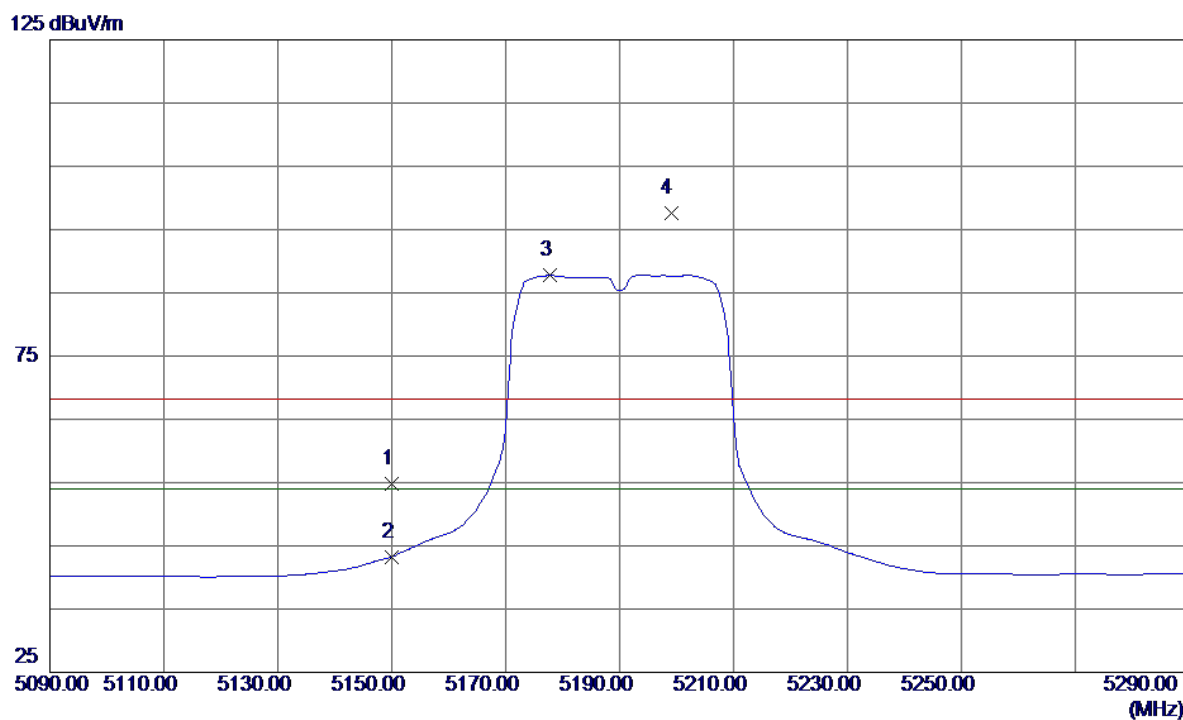


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	14.44	40.32	54.76	68.30	-13.54	Peak	
2	5150.0000	2.96	40.32	43.28	54.00	-10.72	AVG	
3 *	5177.8000	47.28	40.47	87.75	54.00	33.75	AVG	No Limit
4	5199.0000	57.02	40.58	97.60	68.30	29.30	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

115 dBuV/m

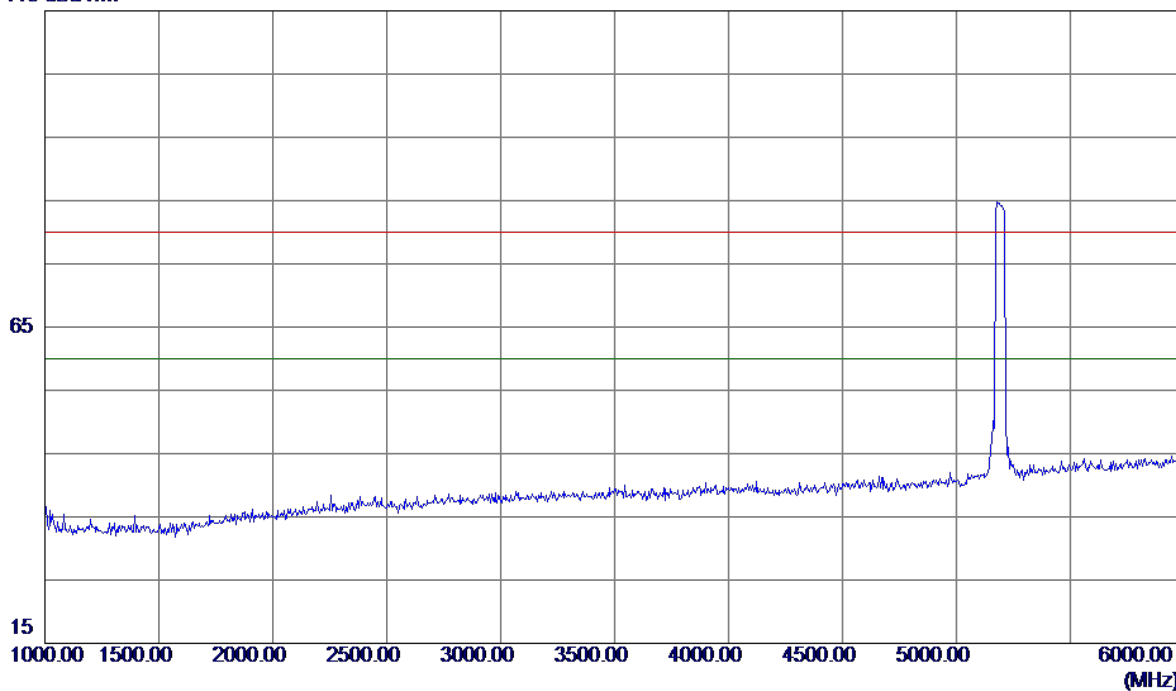


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

115 dBuV/m

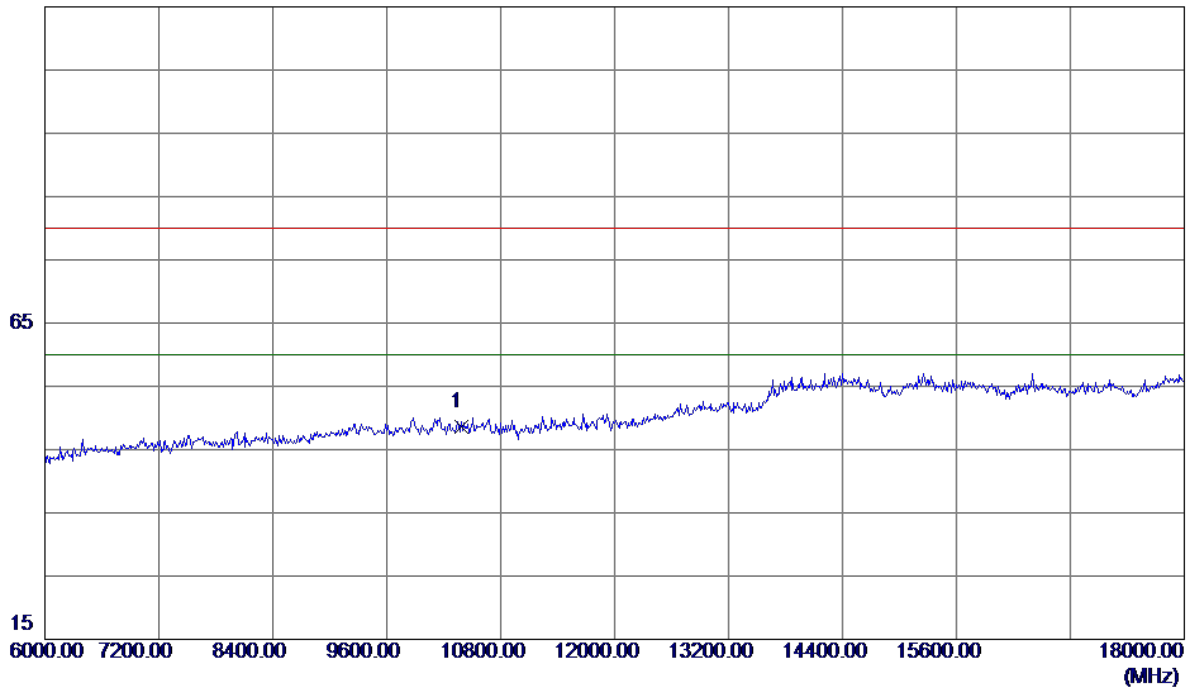


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	31.40	17.16	48.56	80.00	-31.44	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

100 dBuV/m

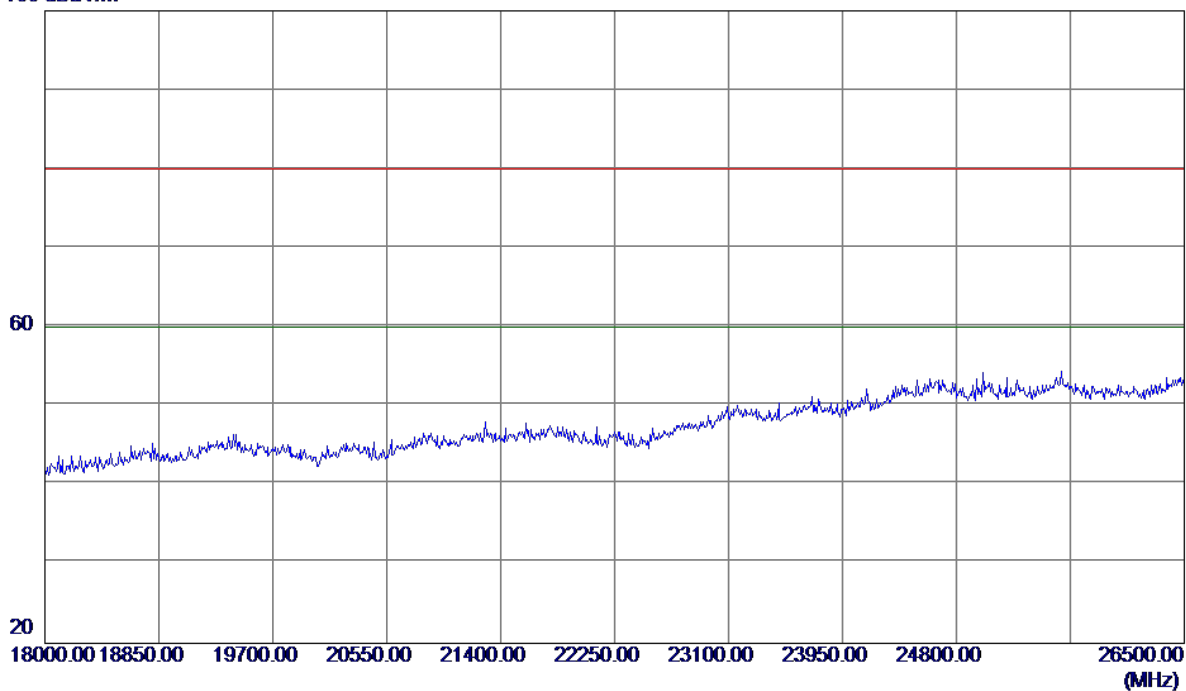


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

115 dBuV/m

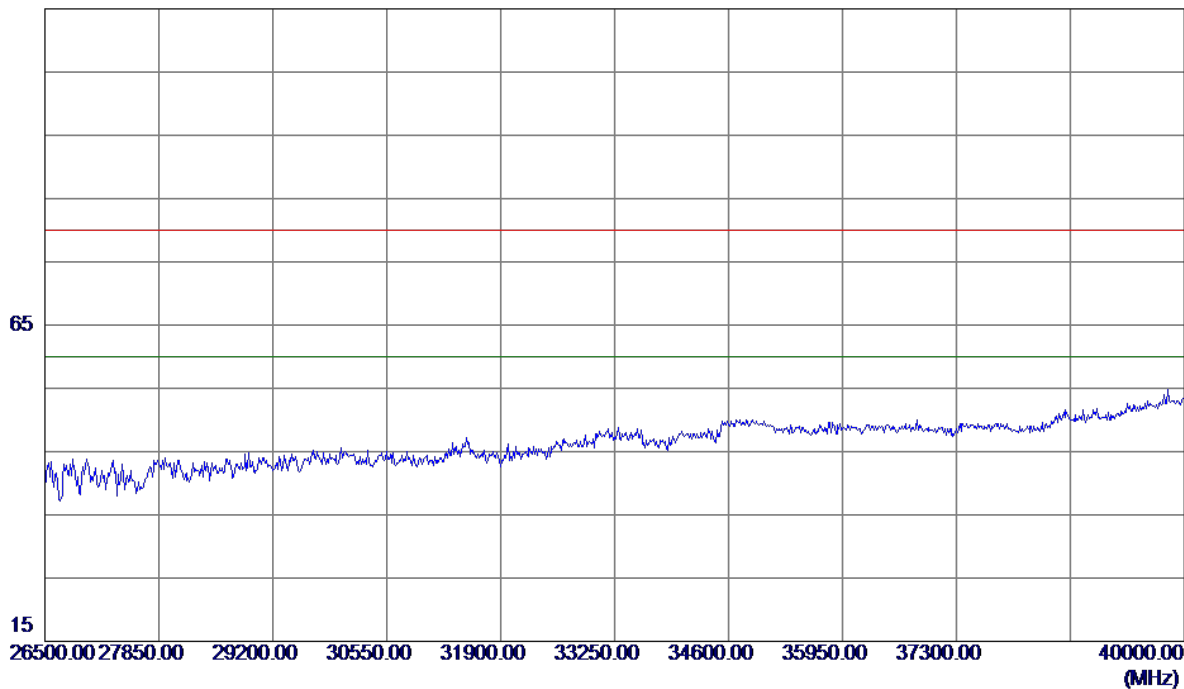


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

125 dBuV/m

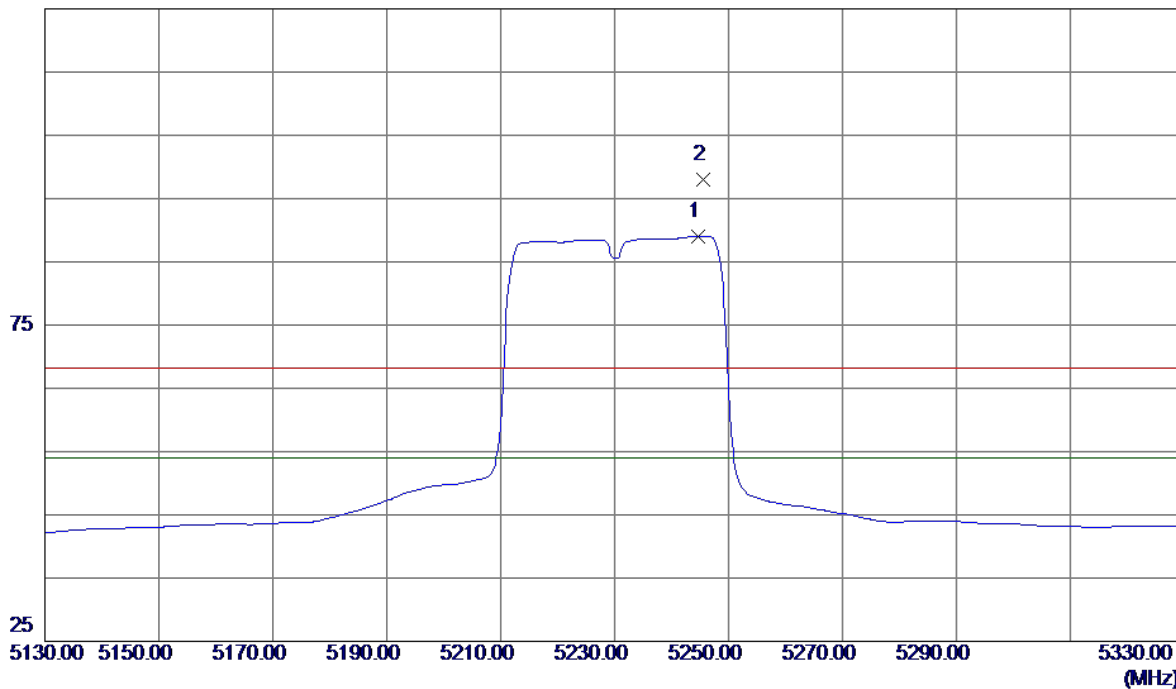


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5244.6000	47.49	41.58	89.07	54.00	35.07	AVG	No Limit
2	5245.6000	56.35	41.59	97.94	68.30	29.64	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

115 dBuV/m

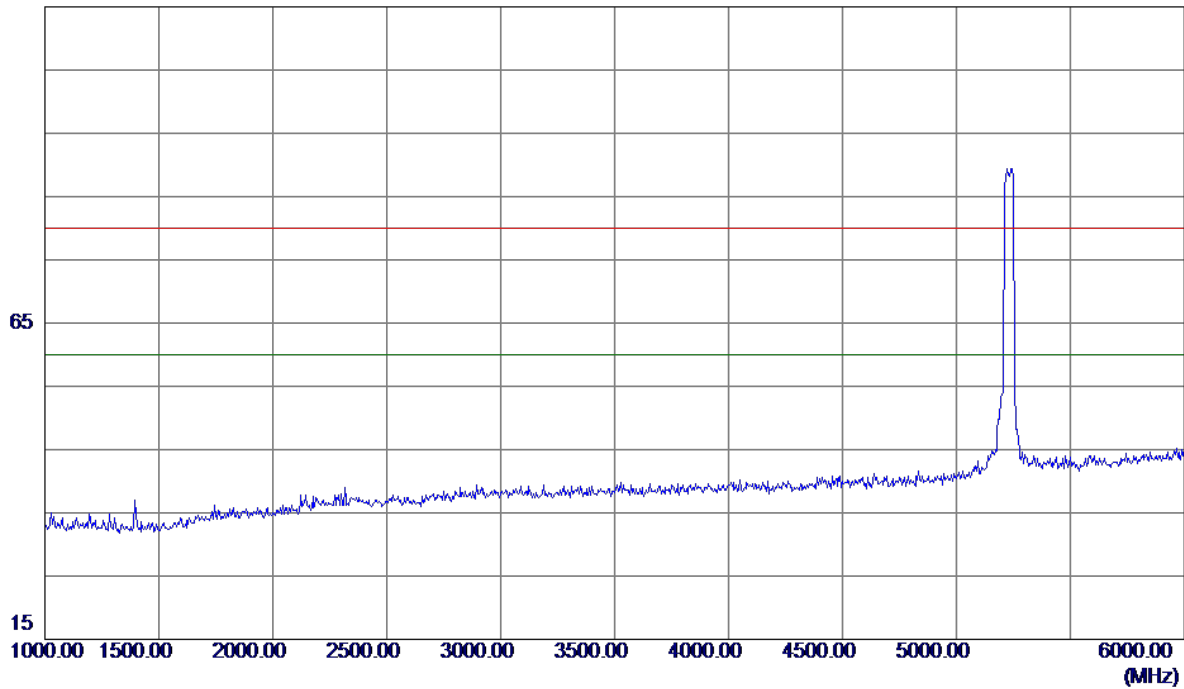


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

115 dBuV/m

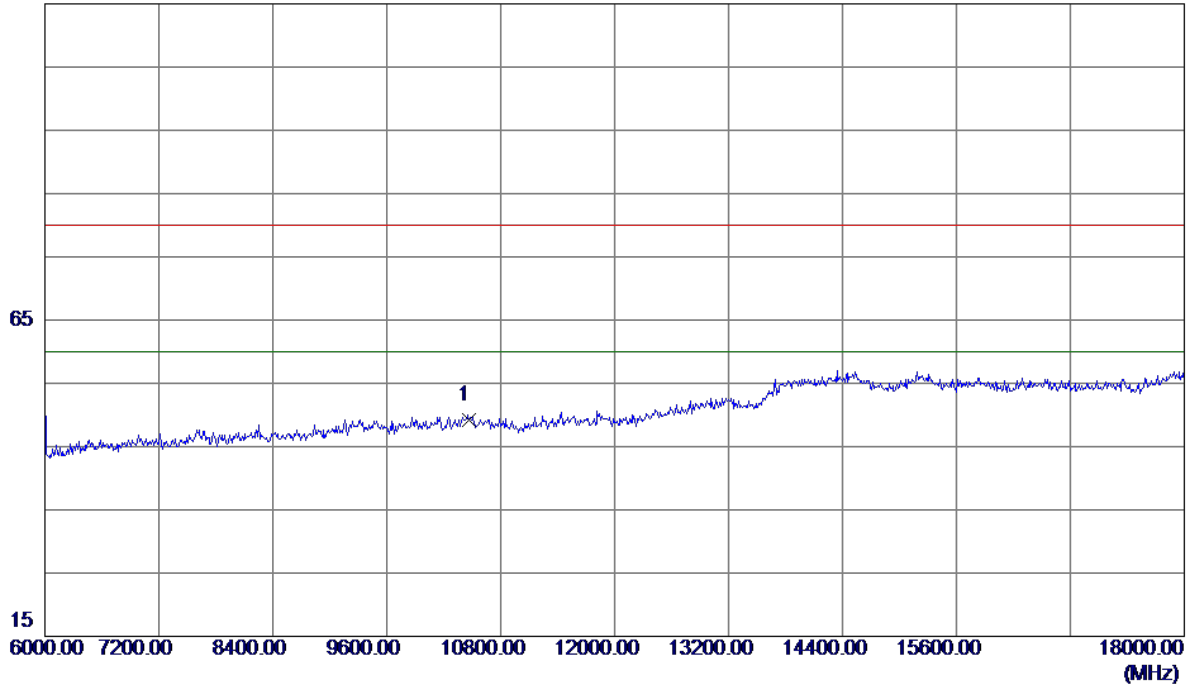


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	31.88	17.39	49.27	80.00	-30.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

100 dBuV/m

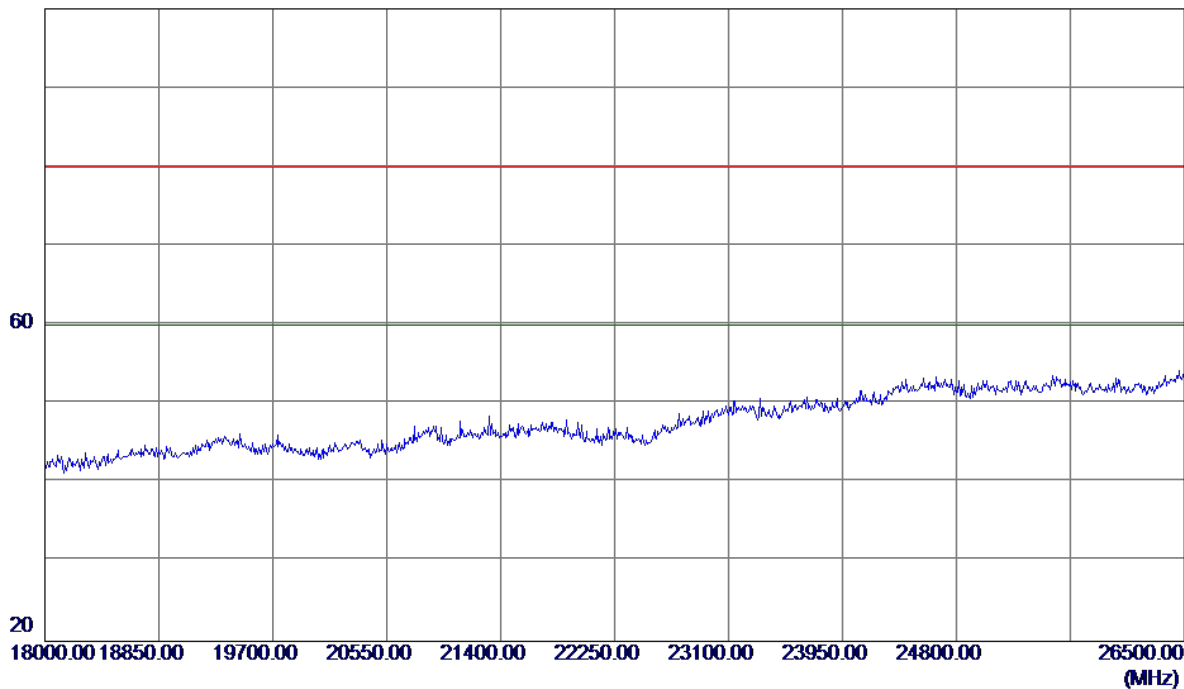


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


115 dBuV/m

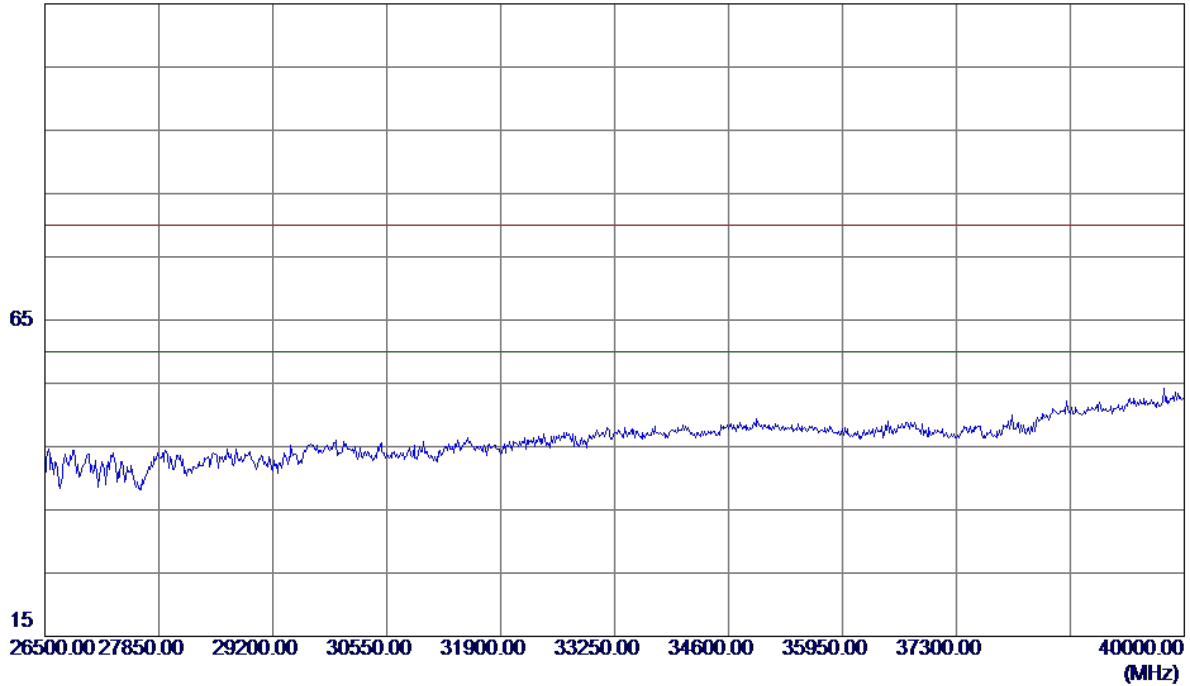

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

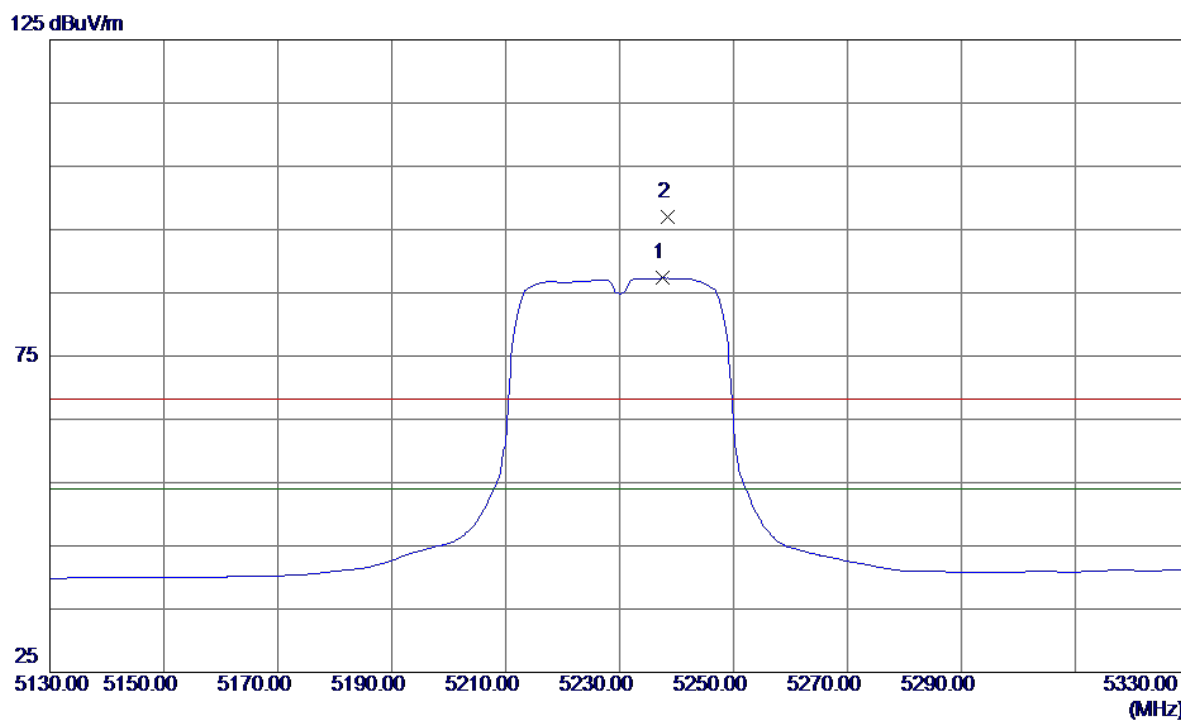


No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5237.6000	46.54	40.79	87.33	54.00	33.33	AVG	No Limit
2	5238.4000	56.20	40.79	96.99	68.30	28.69	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

115 dBuV/m

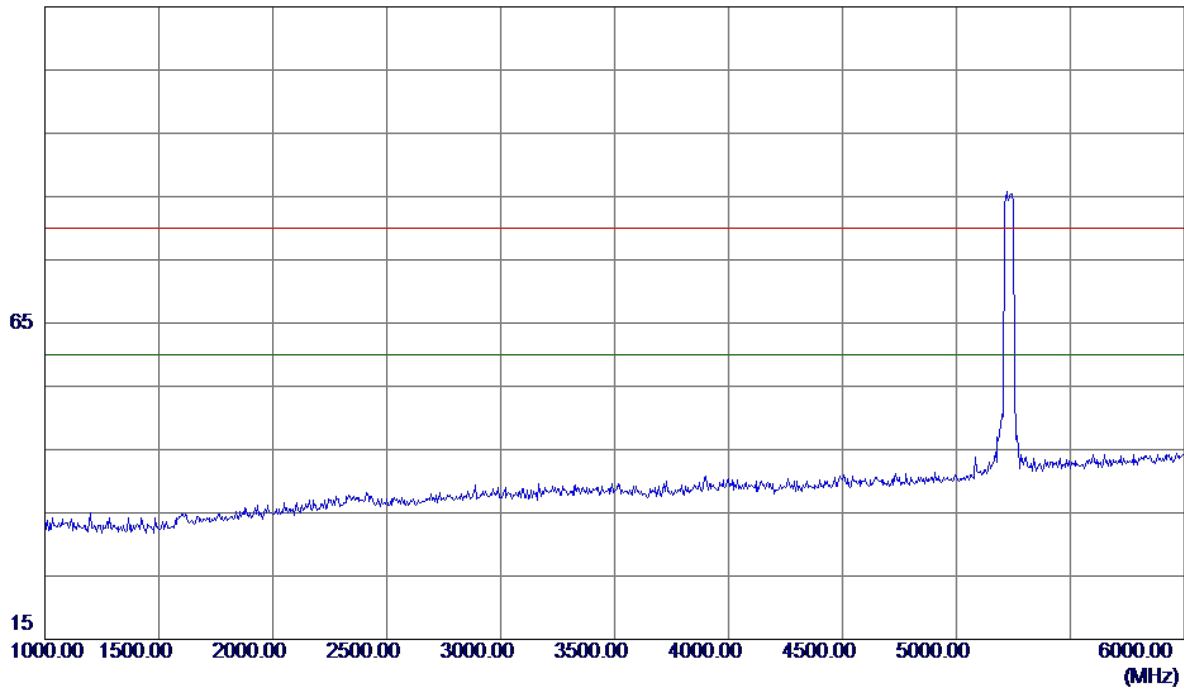


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

115 dBuV/m

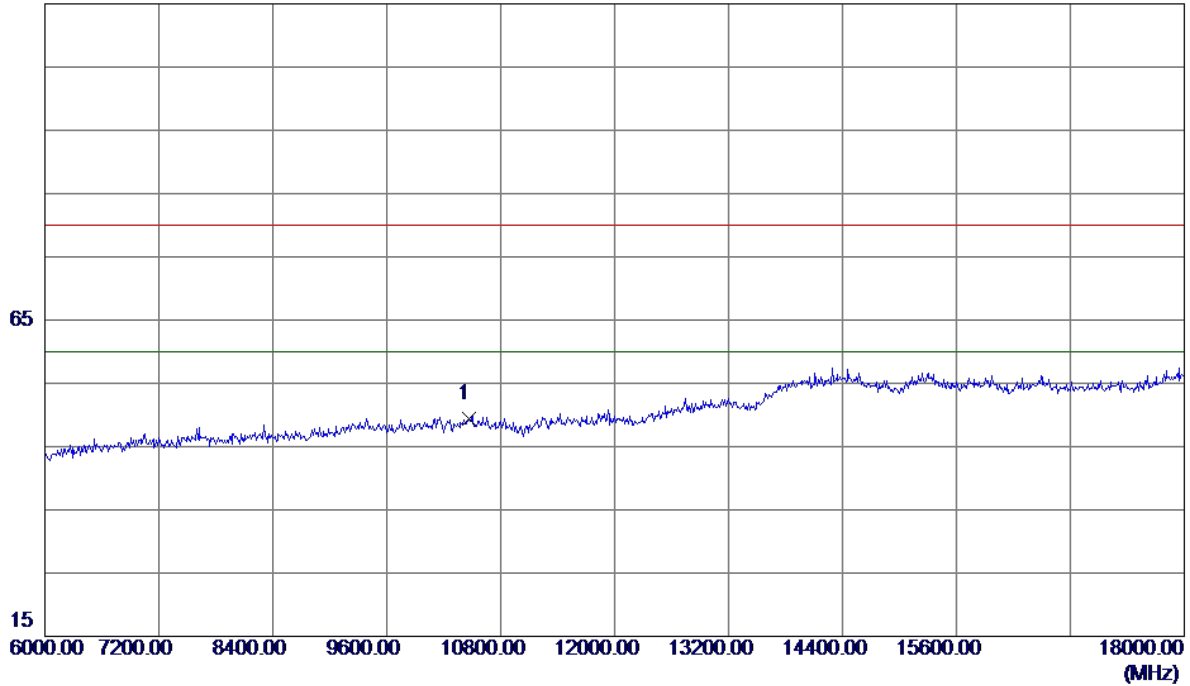


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	31.98	17.39	49.37	80.00	-30.63	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

100 dBuV/m

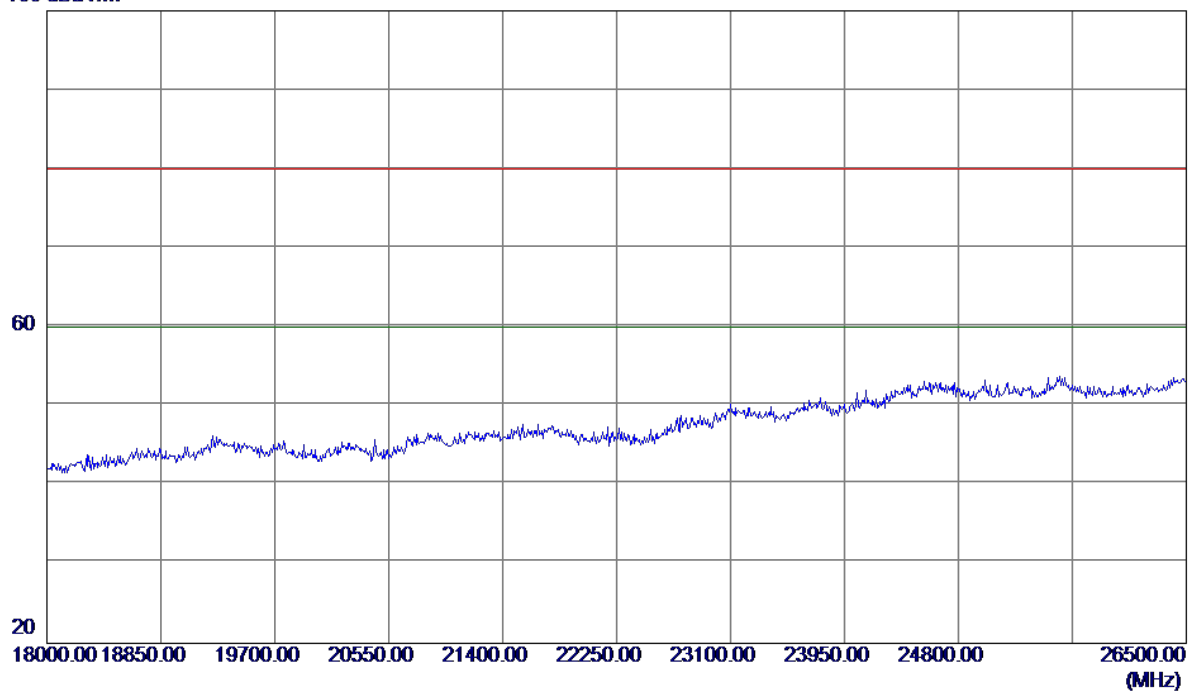


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

115 dBuV/m

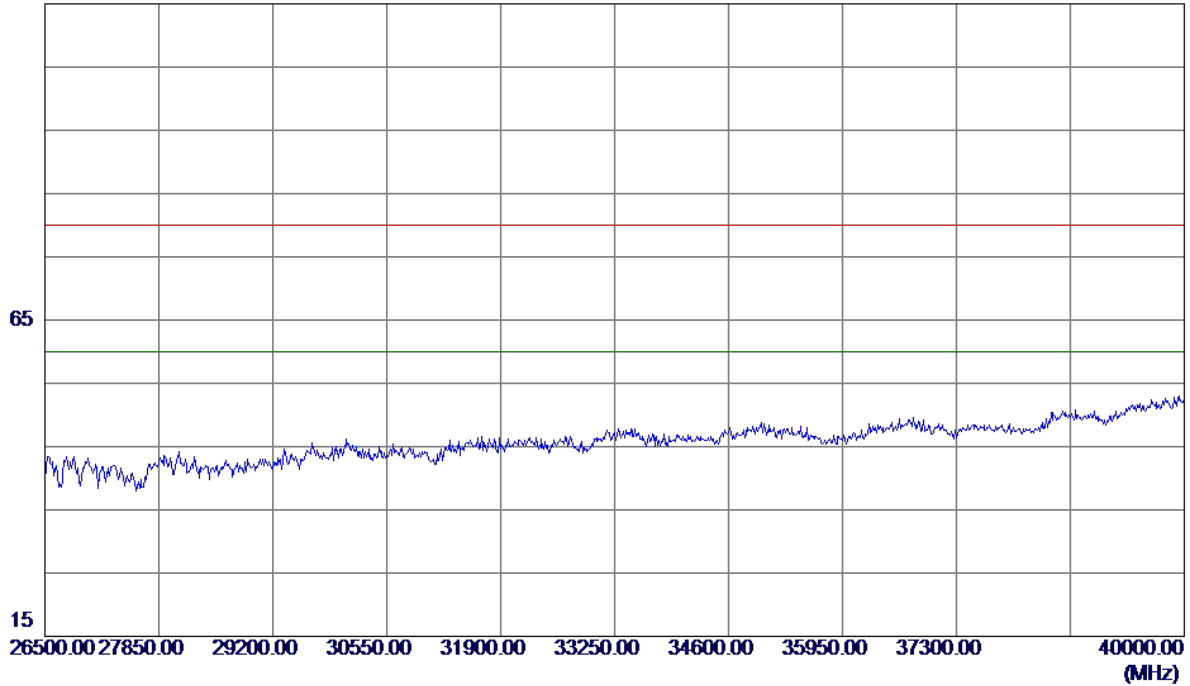


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

125 dBuV/m

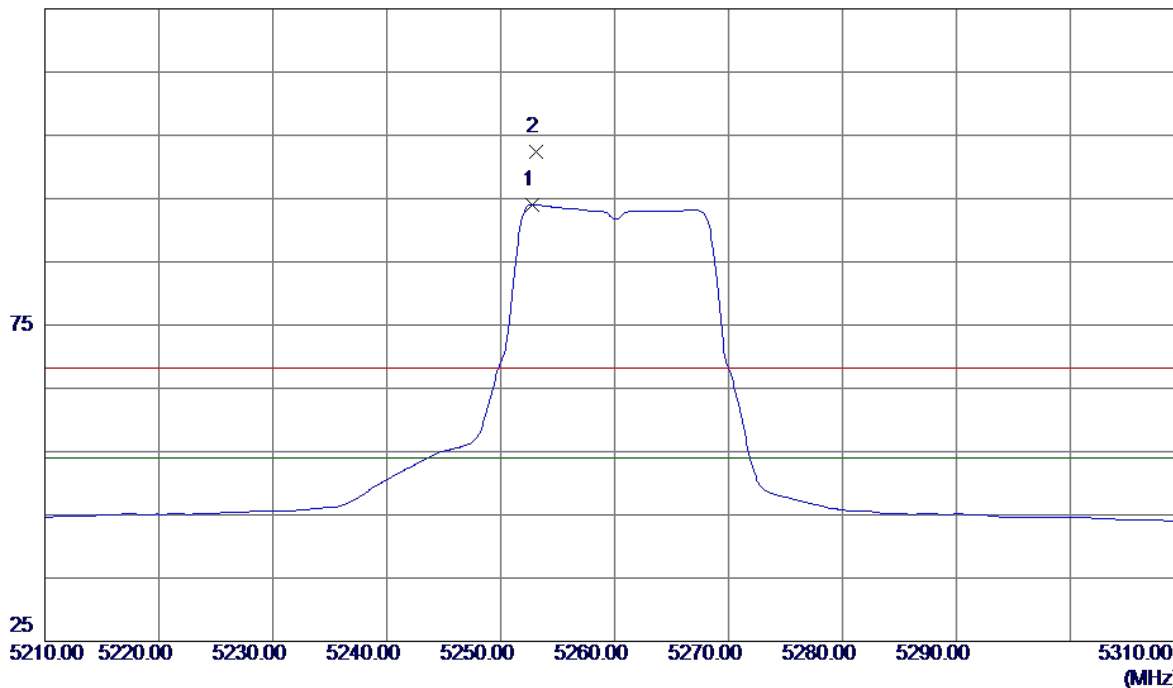


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5252.8000	52.47	41.62	94.09	54.00	40.09	AVG	No Limit
2	5253.1000	60.70	41.63	102.33	68.30	34.03	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

115 dBuV/m

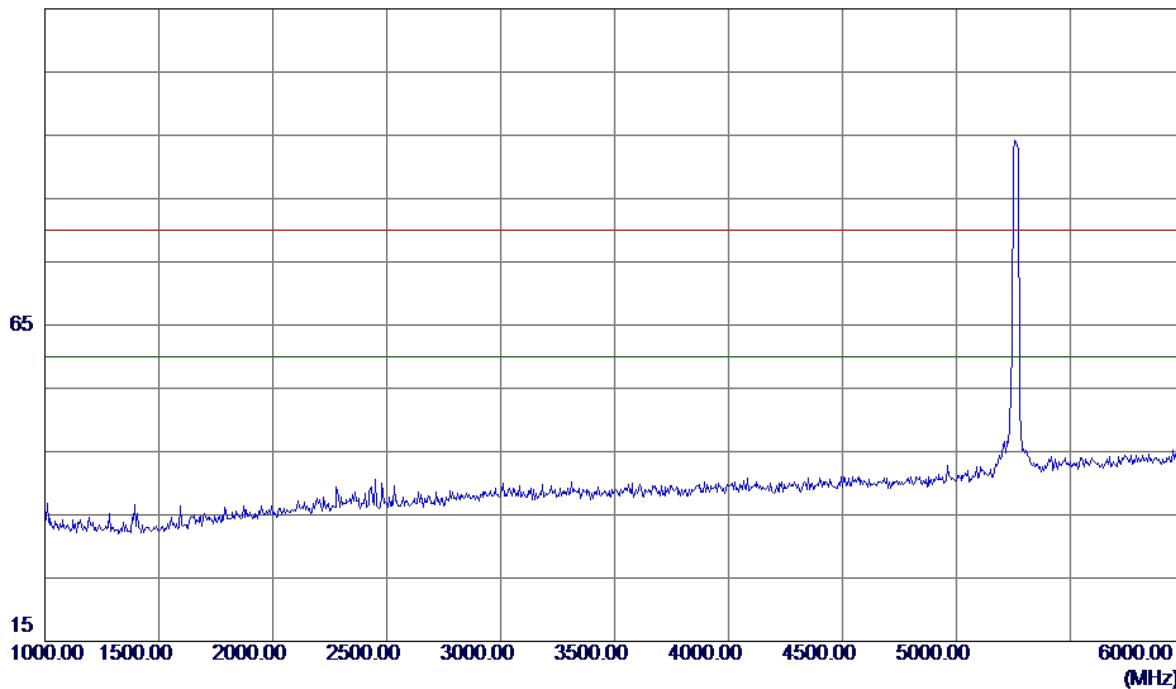


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

115 dBuV/m

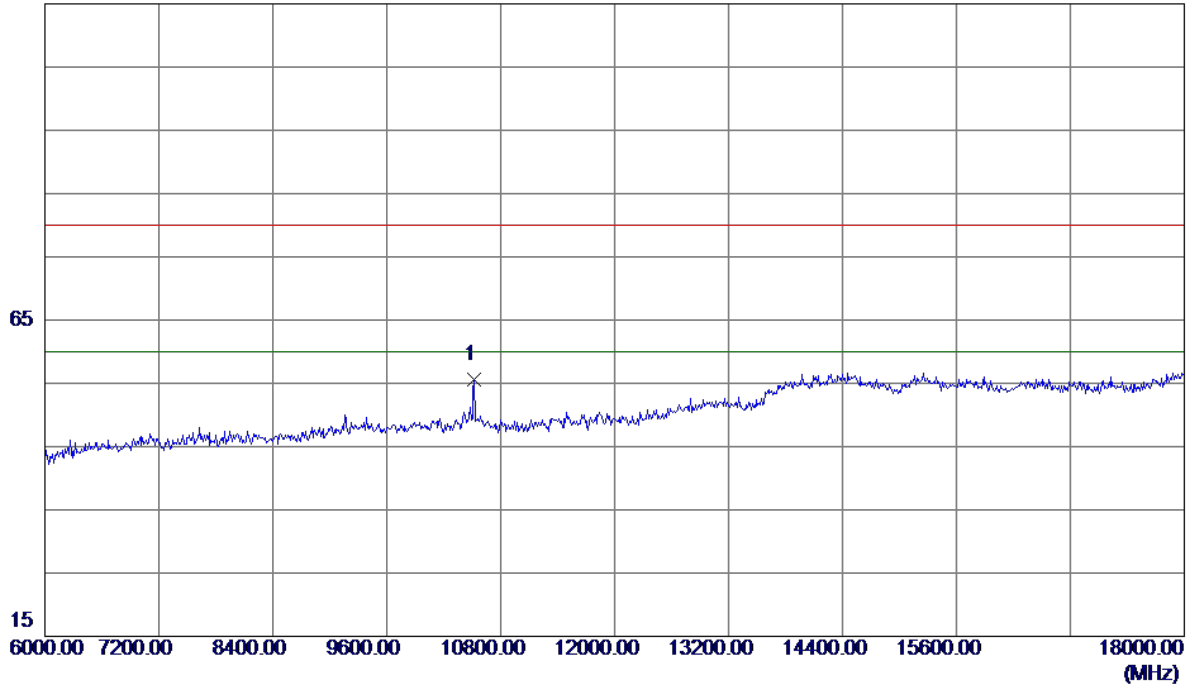


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10524.0000	38.22	17.47	55.69	80.00	-24.31	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

100 dBuV/m

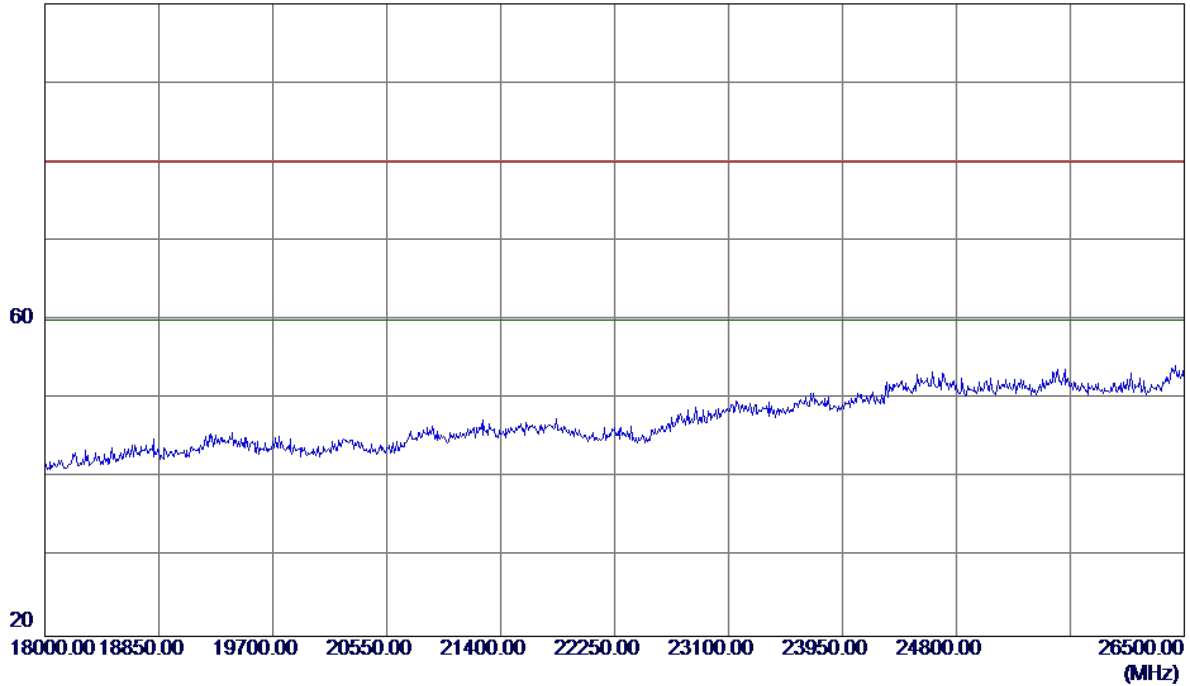


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

115 dBuV/m

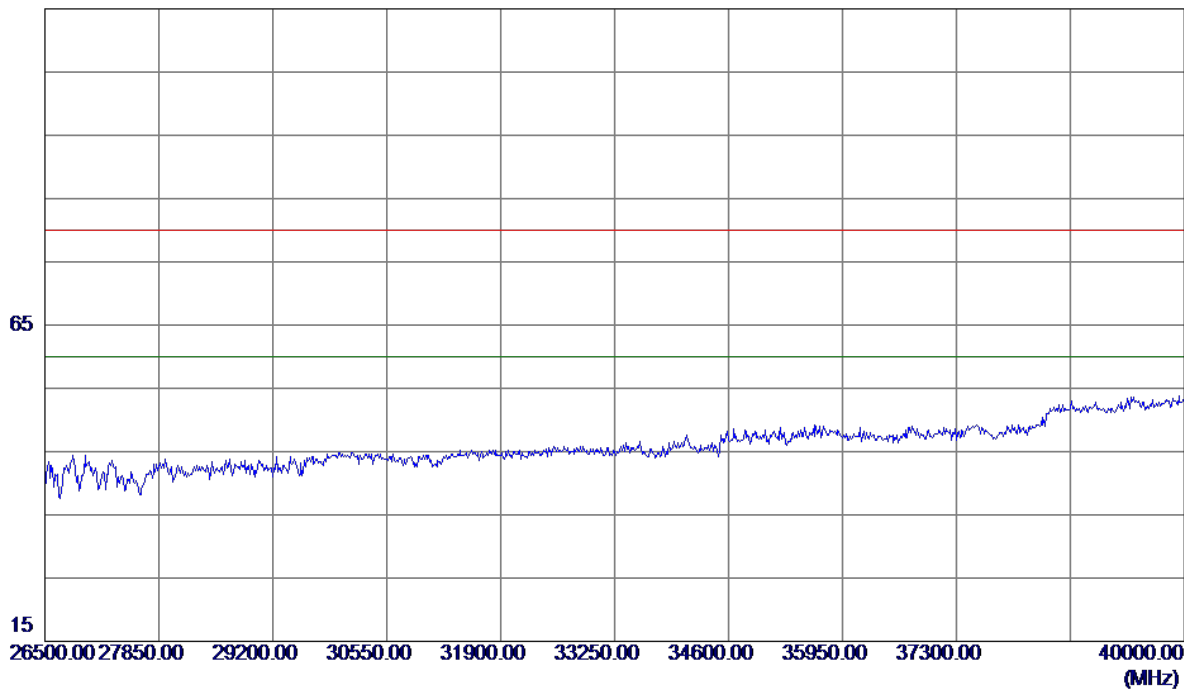


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

125 dBuV/m

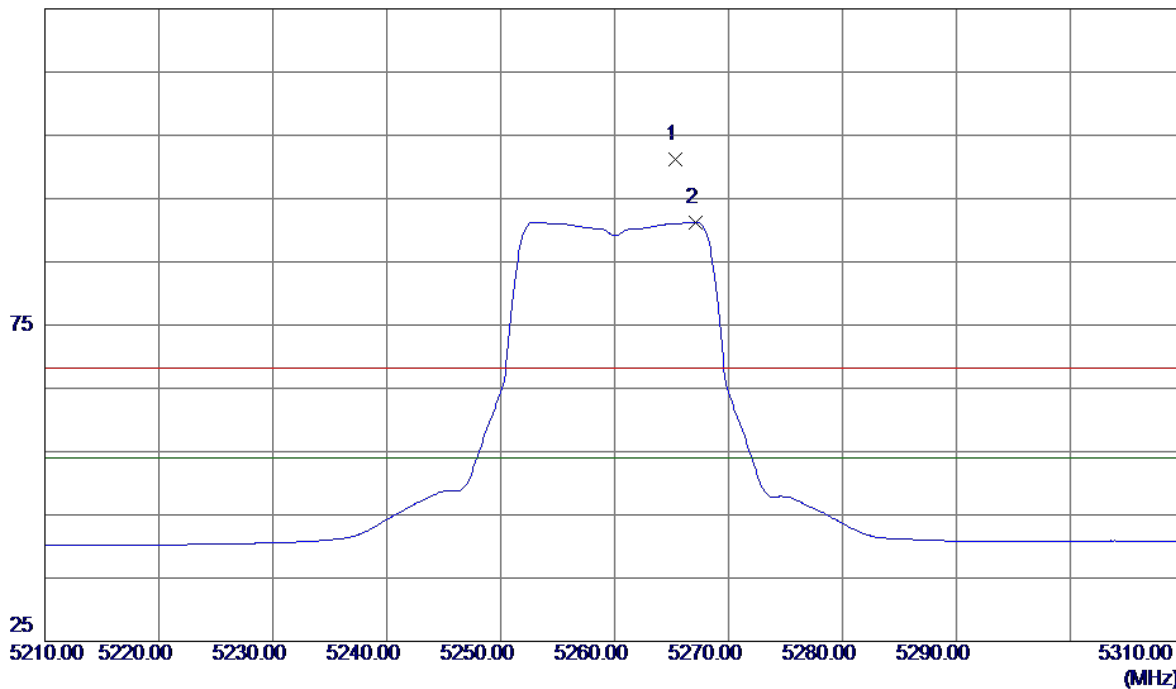


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5265.3000	60.21	40.94	101.15	68.30	32.85	Peak	No Limit
2 *	5267.1000	50.27	40.95	91.22	54.00	37.22	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

115 dBuV/m

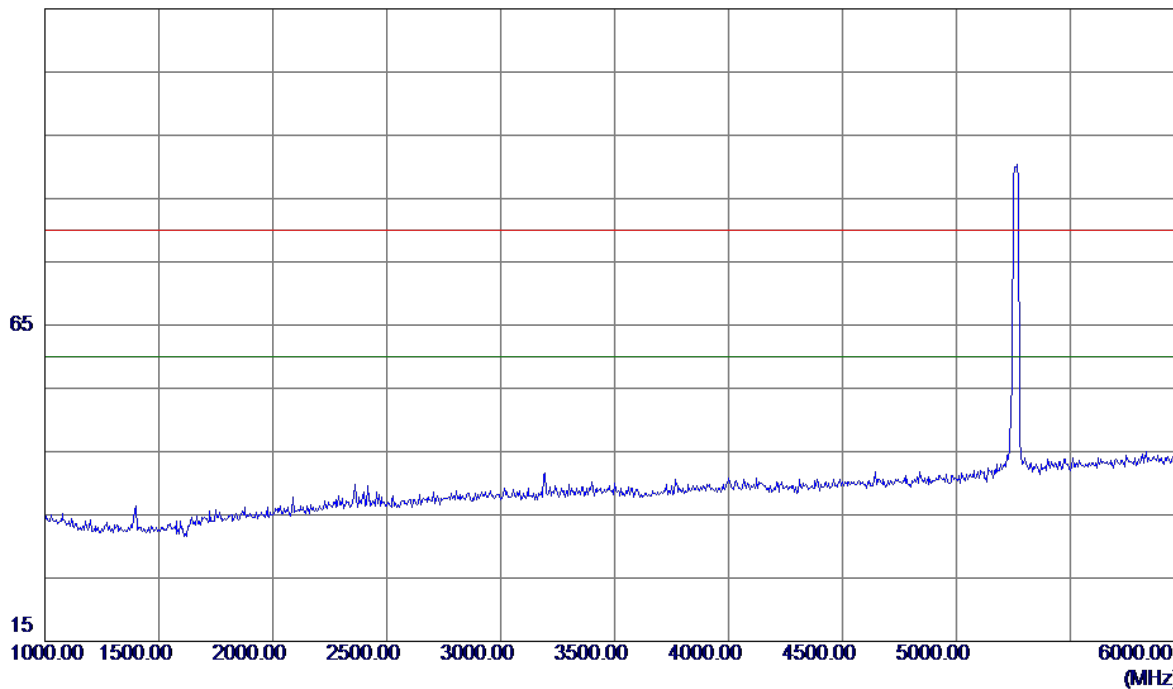


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

115 dBuV/m

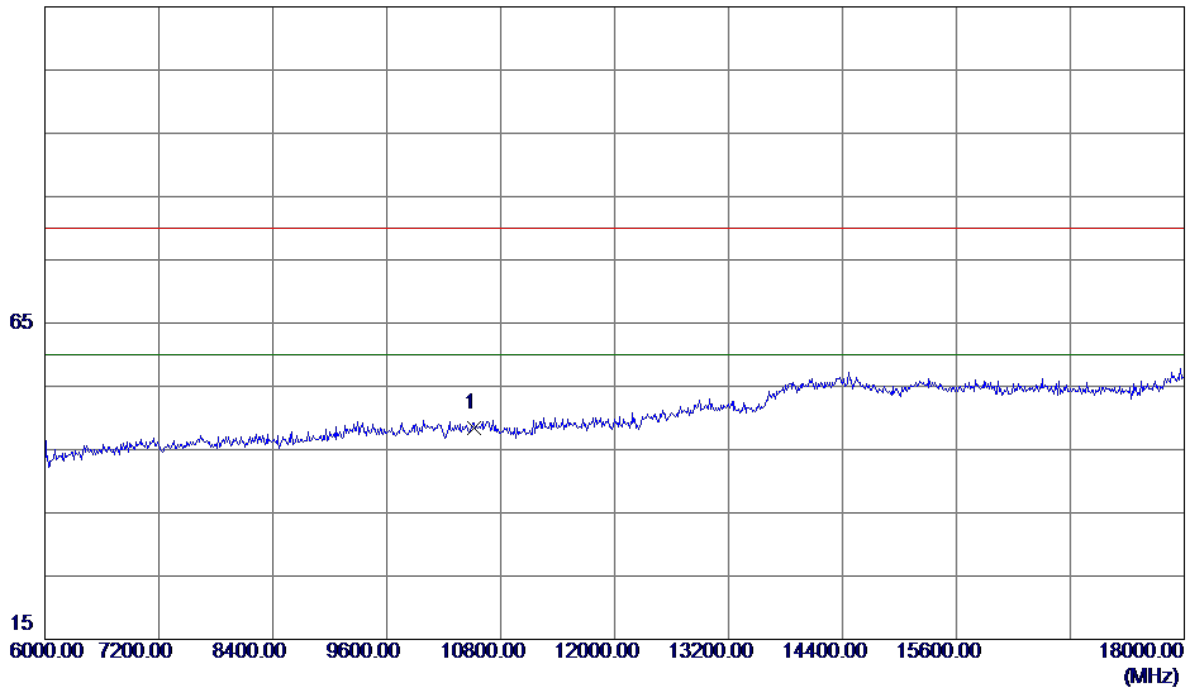


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	30.88	17.48	48.36	80.00	-31.64	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

100 dBuV/m

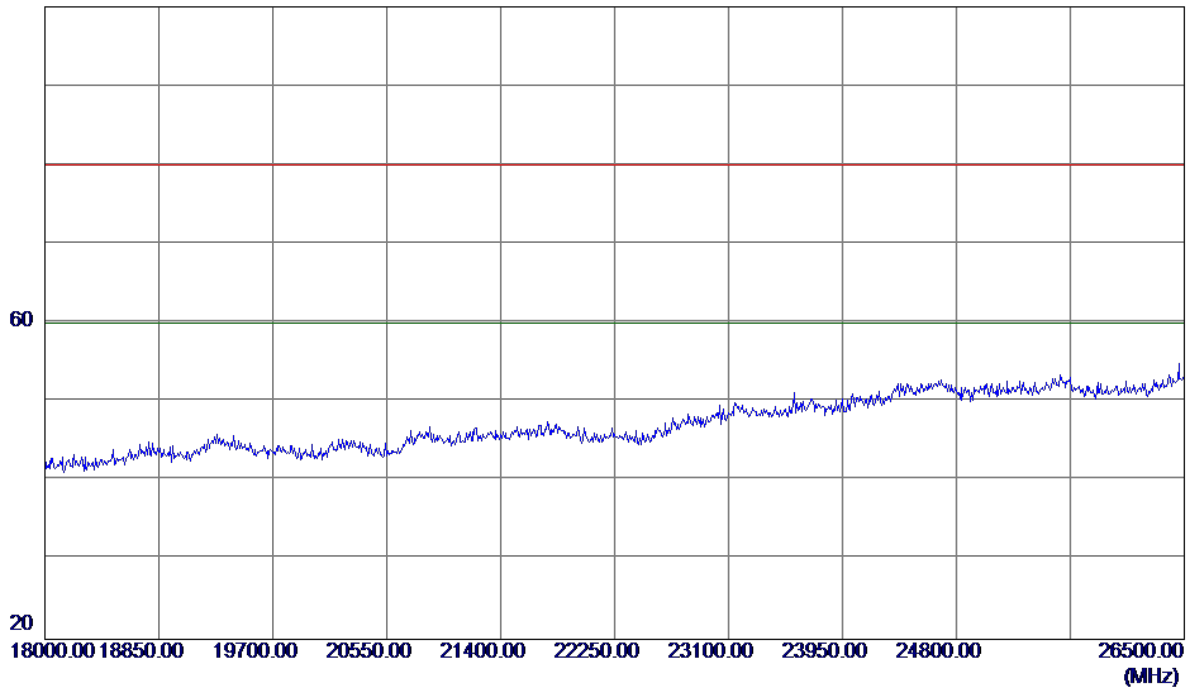


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal

115 dBuV/m

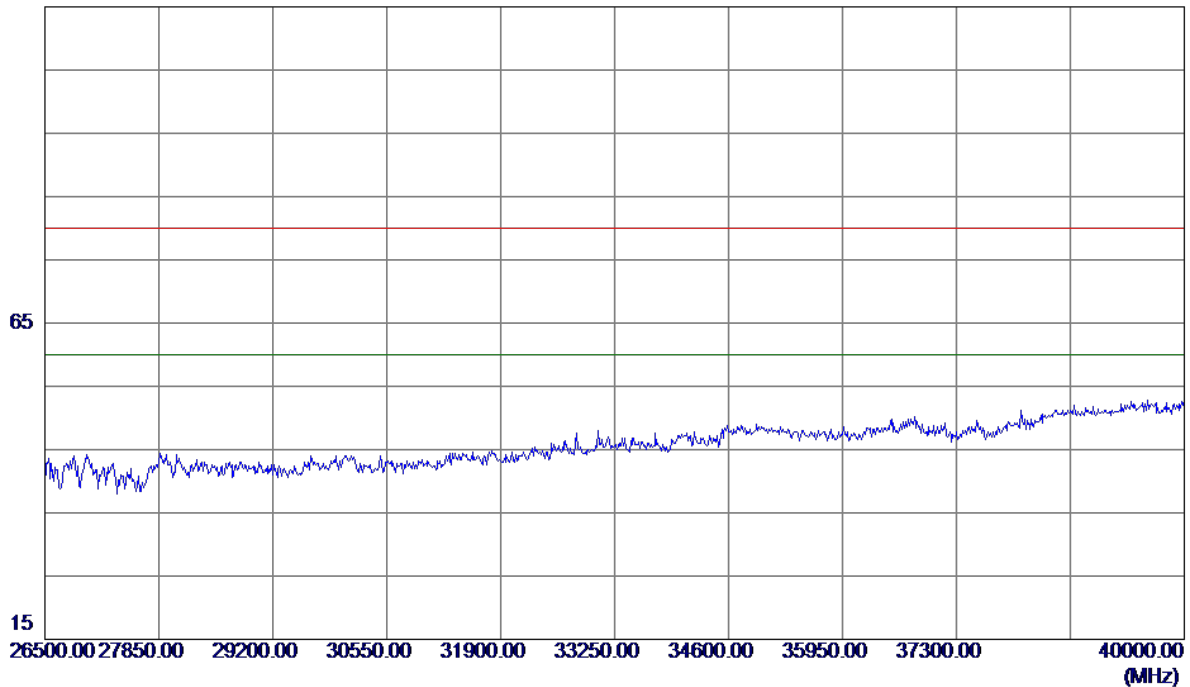


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

125 dBuV/m

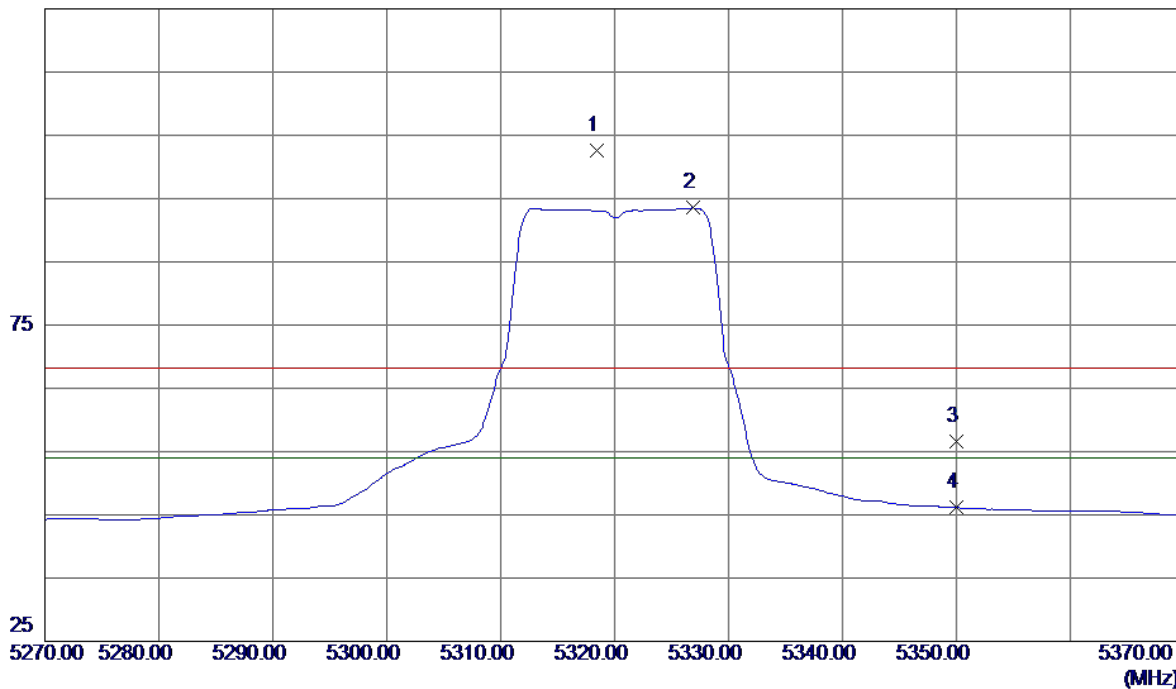


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.4000	60.58	41.96	102.54	68.30	34.24	Peak	No Limit
2 *	5326.9000	51.51	42.00	93.51	54.00	39.51	AVG	No Limit
3	5350.0000	14.53	42.12	56.65	68.30	-11.65	Peak	
4	5350.0000	4.03	42.12	46.15	54.00	-7.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

115 dBuV/m

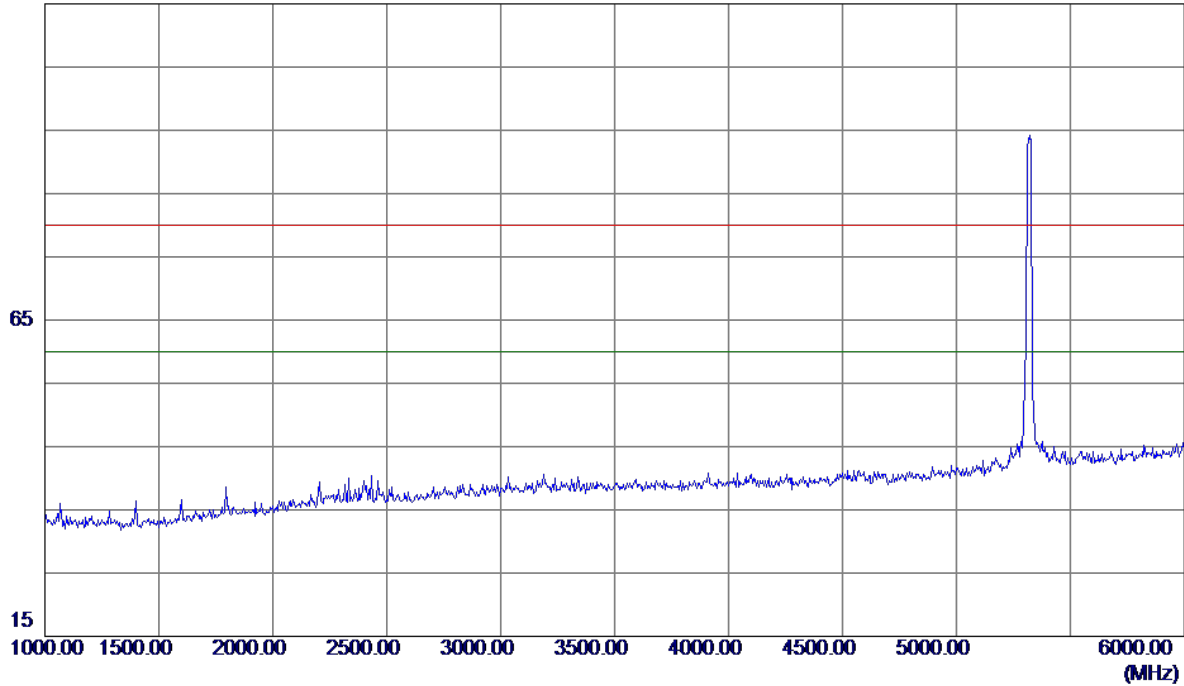


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

115 dBuV/m

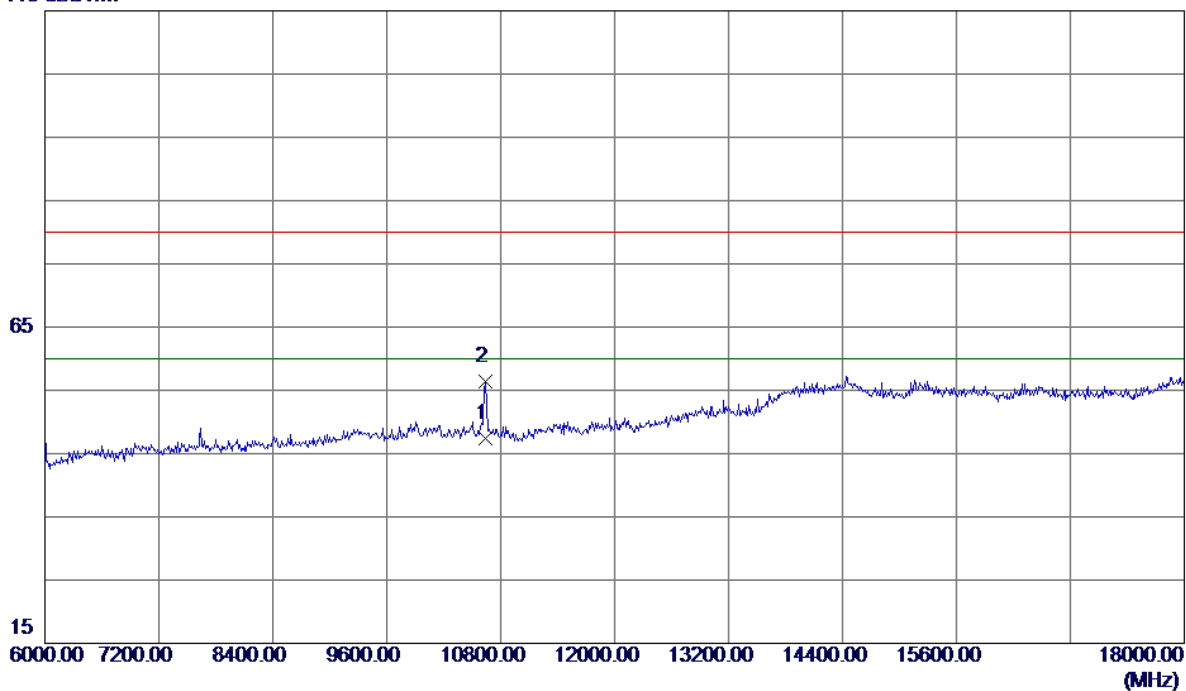


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10641.5000	30.02	17.33	47.35	60.00	-12.65	AVG	
2	10644.0000	39.06	17.33	56.39	80.00	-23.61	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

100 dBuV/m

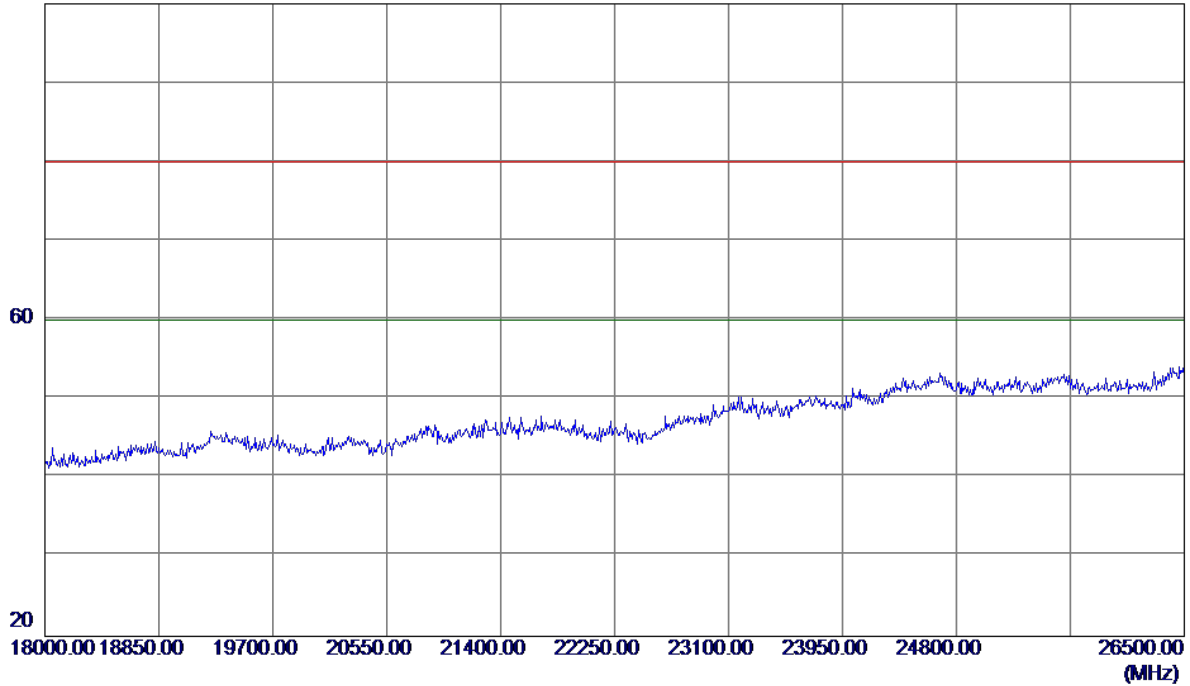


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

115 dBuV/m

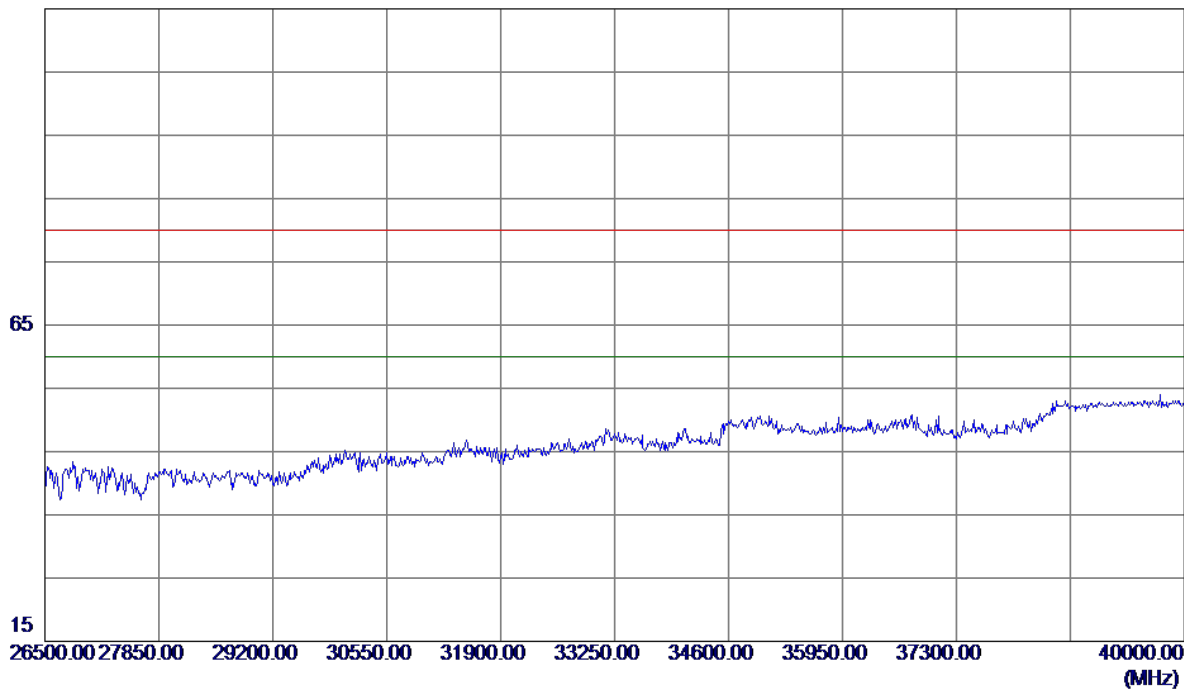


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

125 dBuV/m

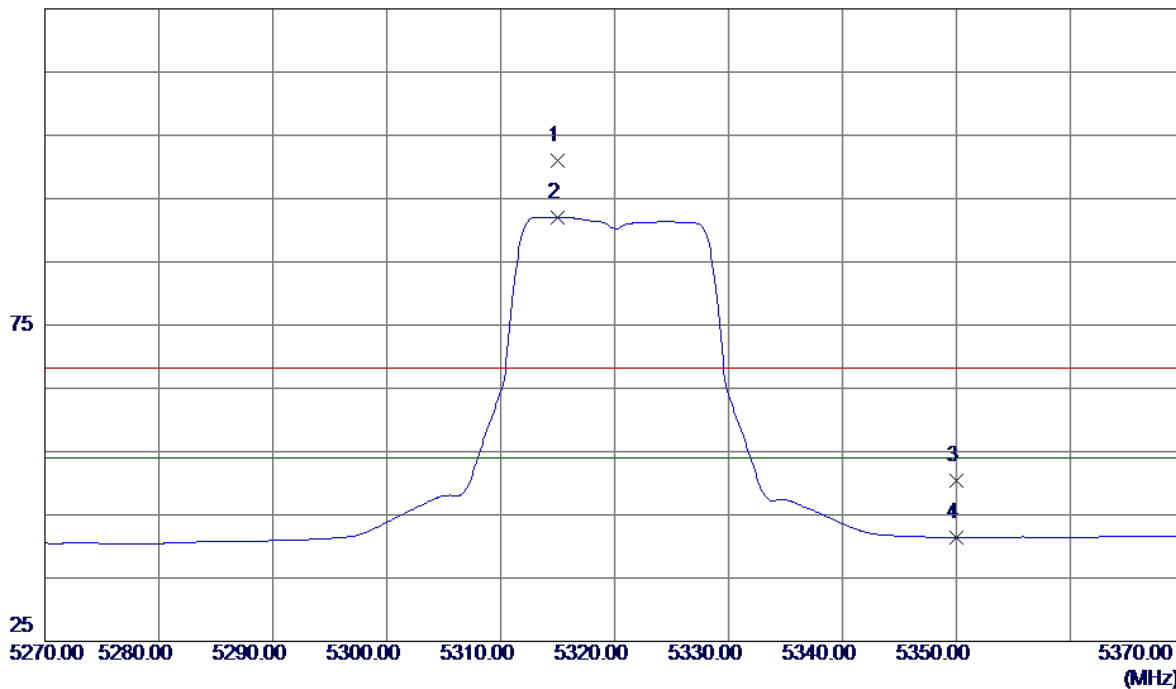


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5315.0000	59.84	41.20	101.04	68.30	32.74	Peak	No Limit
2 *	5315.0000	50.90	41.20	92.10	54.00	38.10	AVG	No Limit
3	5350.0000	9.03	41.38	50.41	68.30	-17.89	Peak	
4	5350.0000	-0.03	41.38	41.35	54.00	-12.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

115 dBuV/m

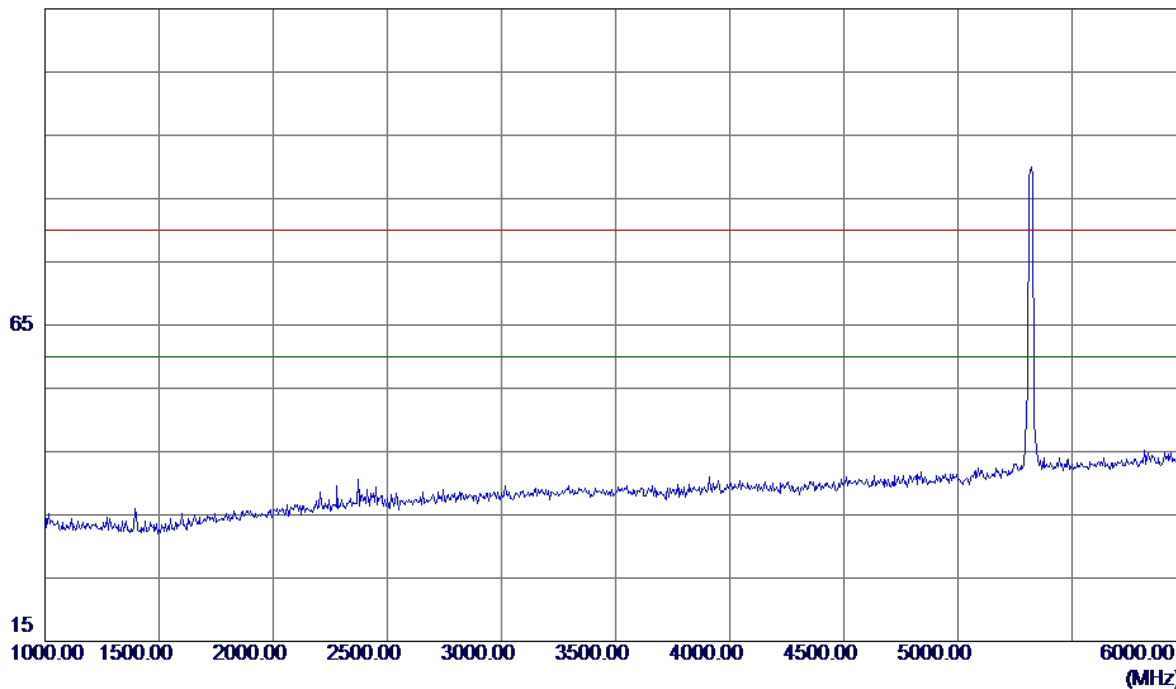


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

115 dBuV/m

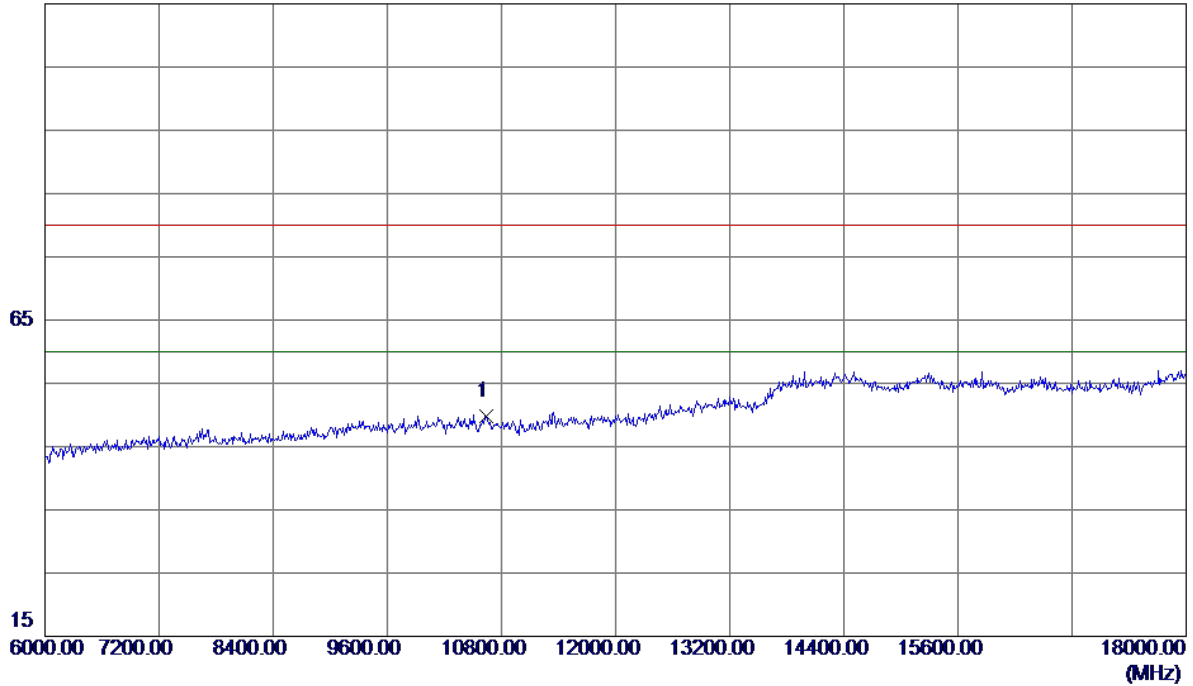


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	32.41	17.33	49.74	80.00	-30.26	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

100 dBuV/m

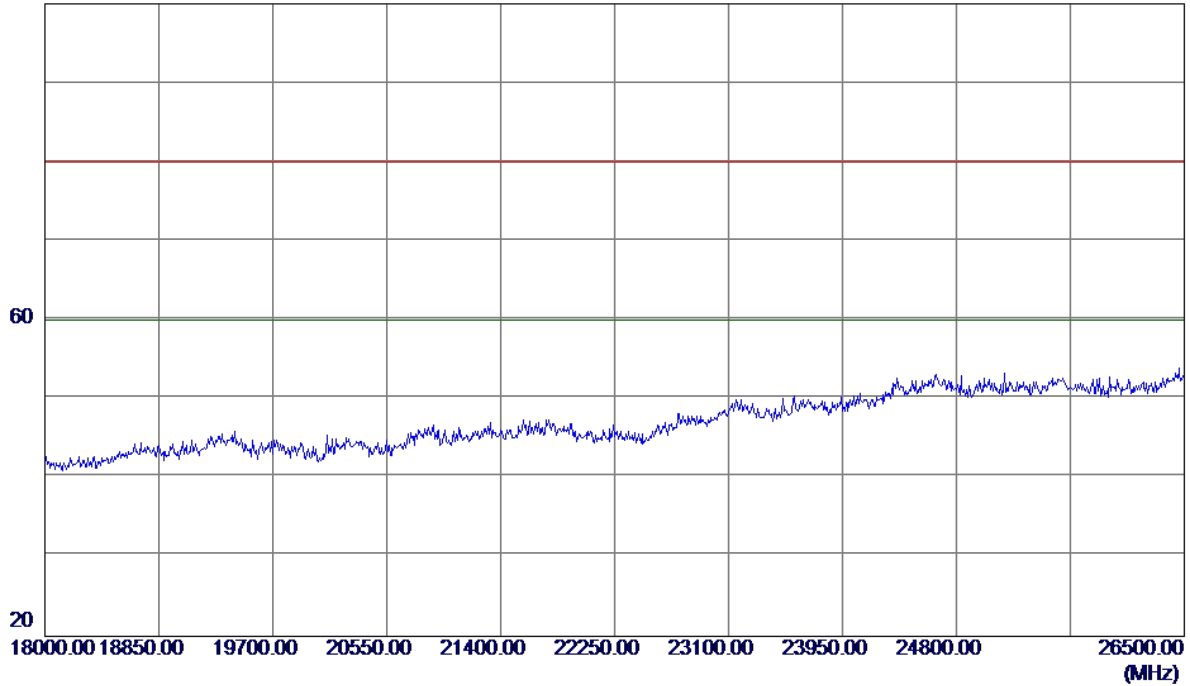


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Horizontal

115 dBuV/m

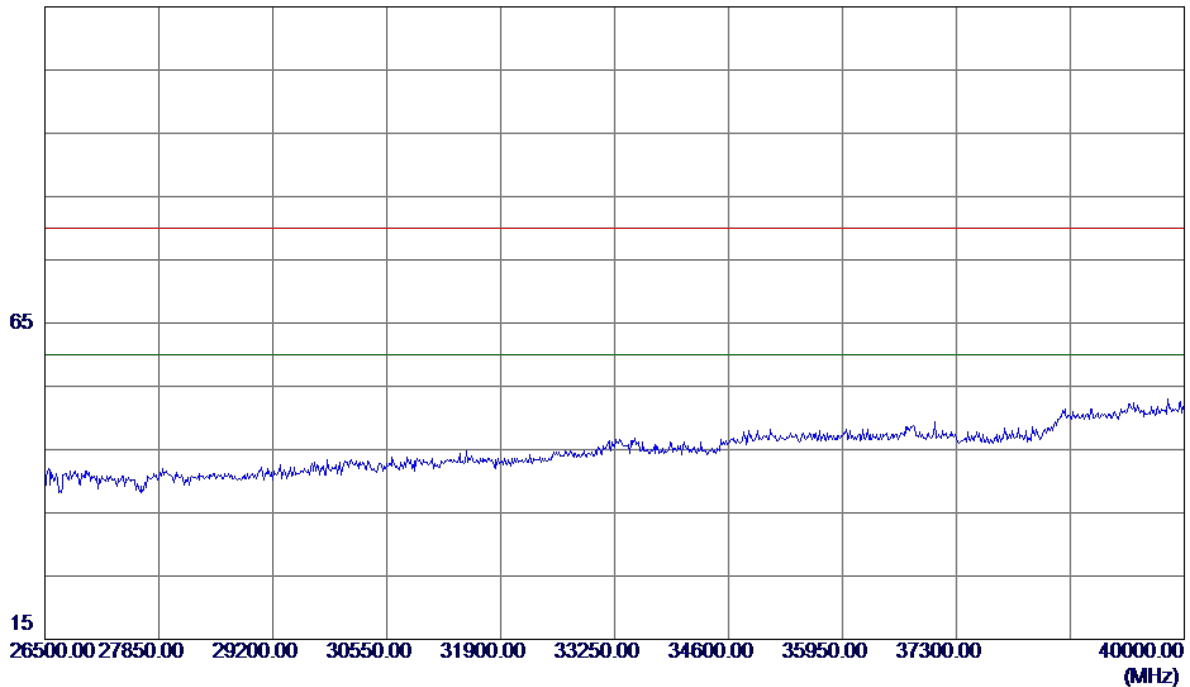


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

125 dBuV/m

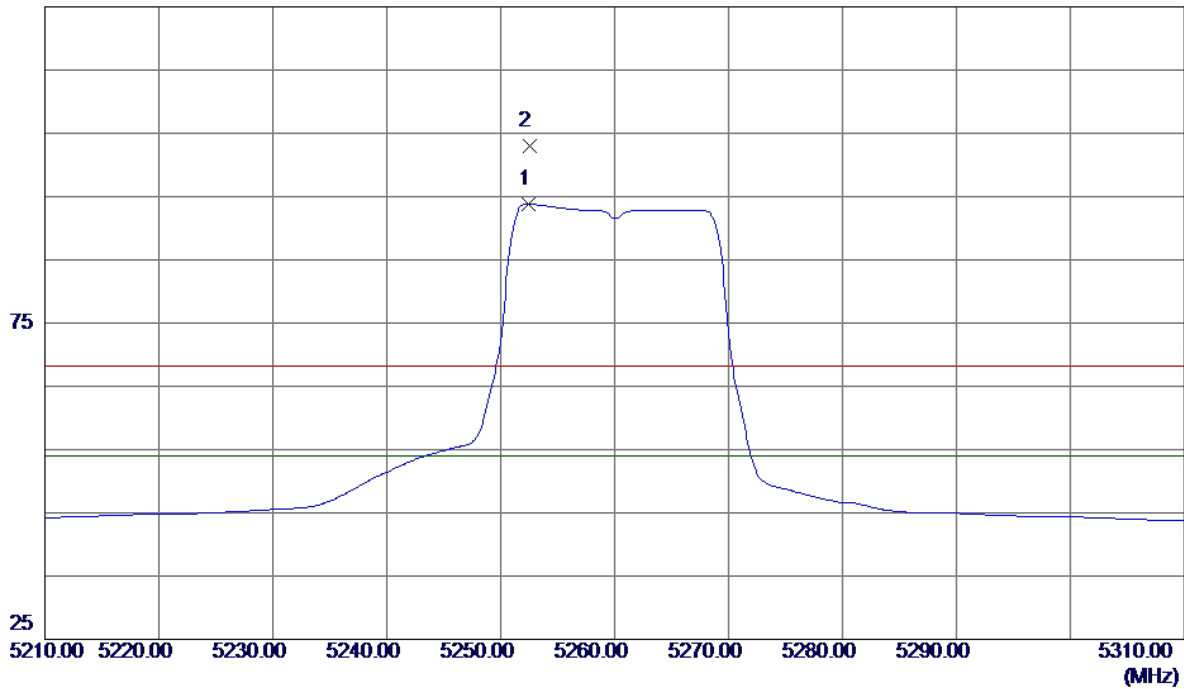


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5252.4000	52.20	41.62	93.82	54.00	39.82	AVG	No Limit
2	5252.5000	61.37	41.62	102.99	68.30	34.69	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

115 dBuV/m

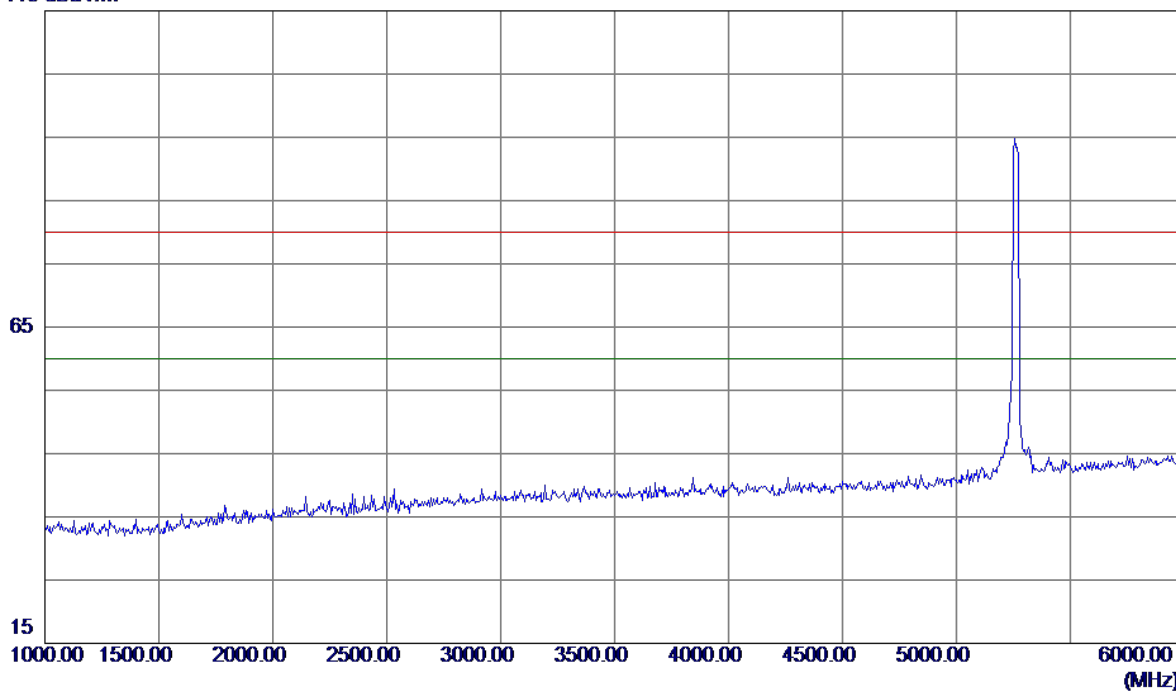


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

115 dBuV/m

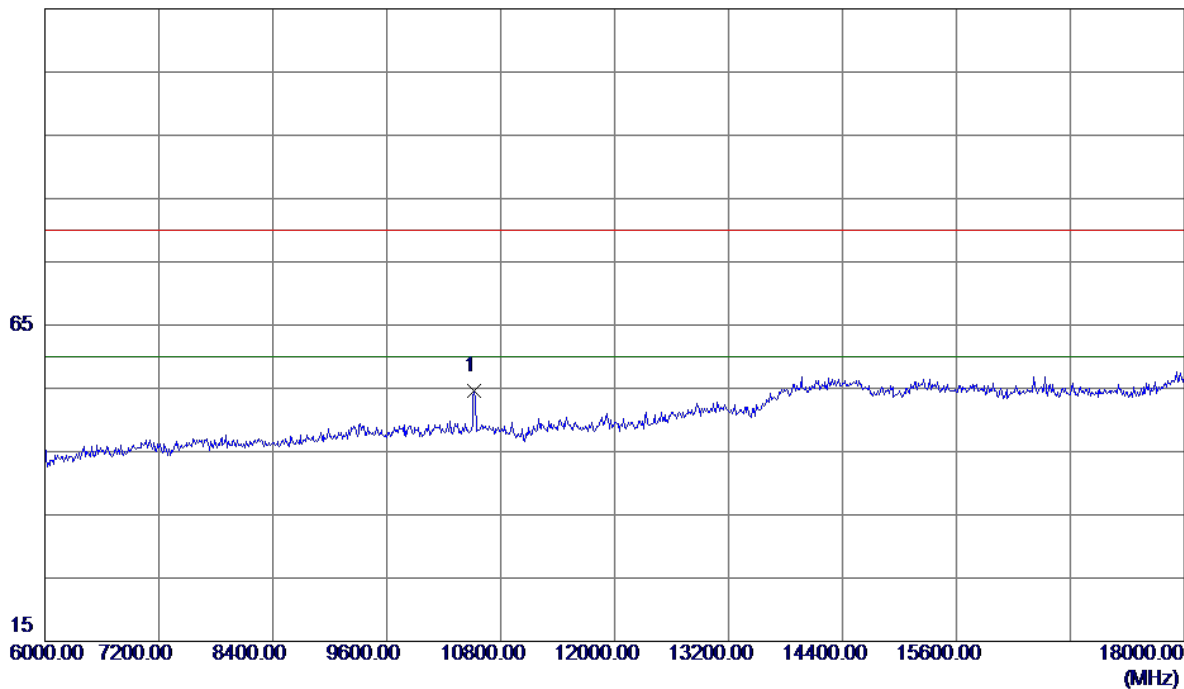


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10524.0000	37.09	17.47	54.56	80.00	-25.44	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

100 dBuV/m

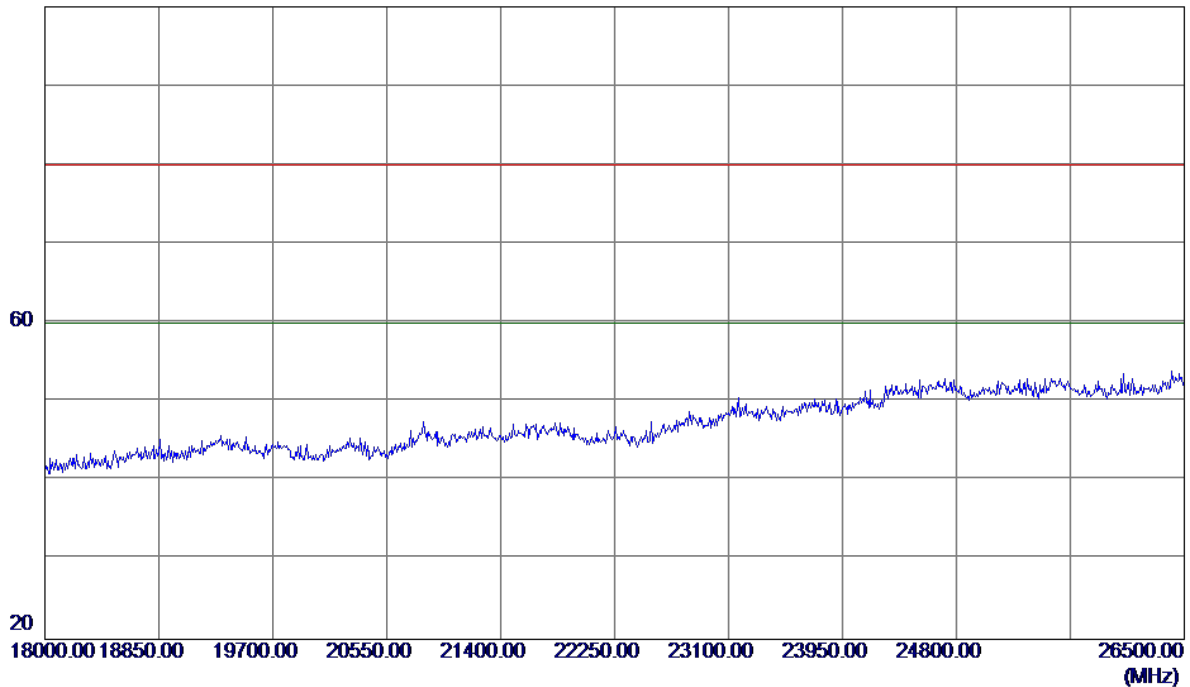


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical


115 dBuV/m

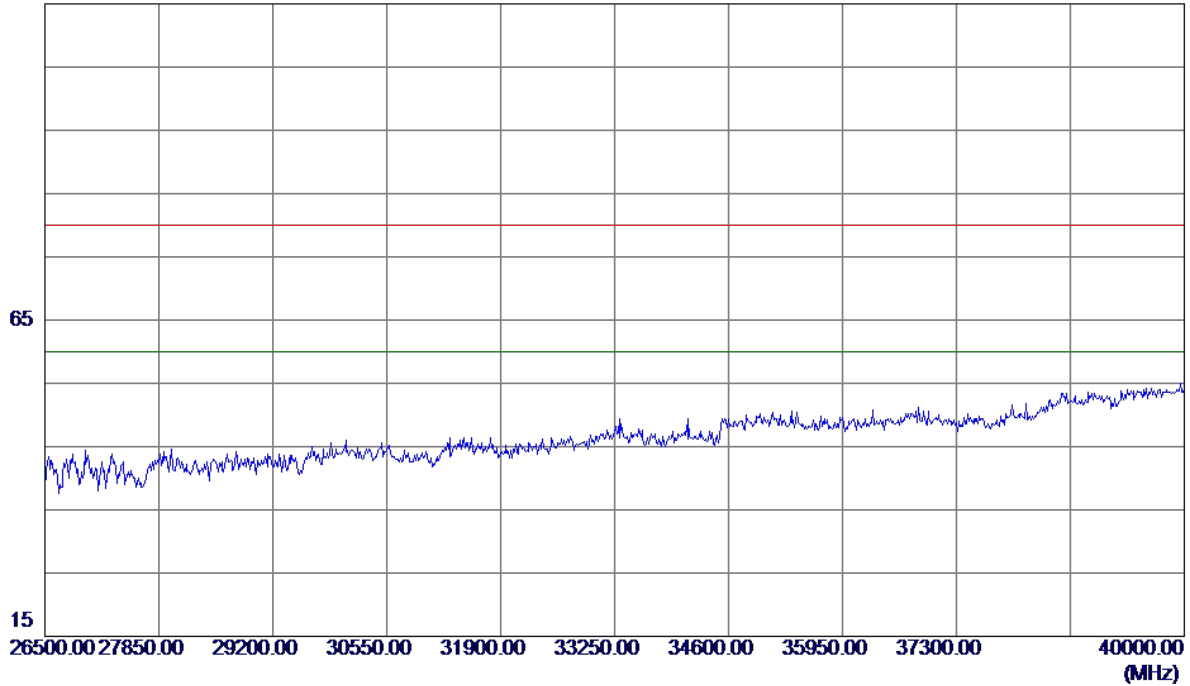

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

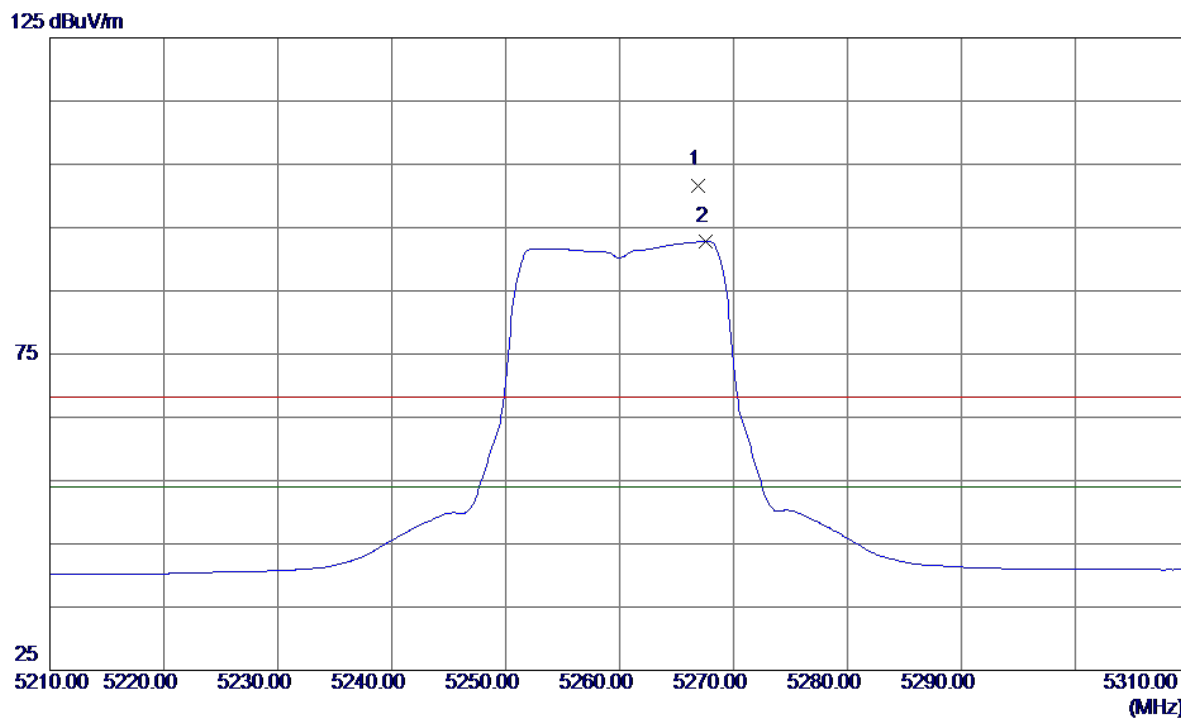


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5266.9000	60.76	40.94	101.70	68.30	33.40	Peak	No Limit
2 *	5267.6000	51.90	40.95	92.85	54.00	38.85	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

115 dBuV/m

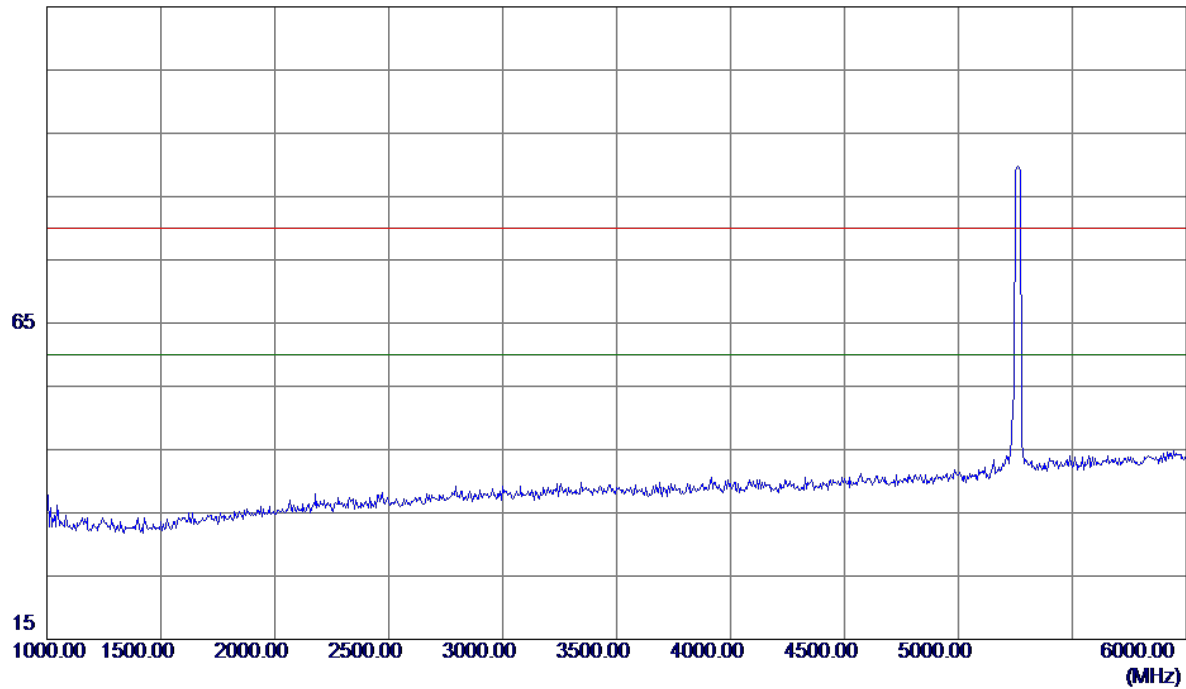


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

115 dBuV/m

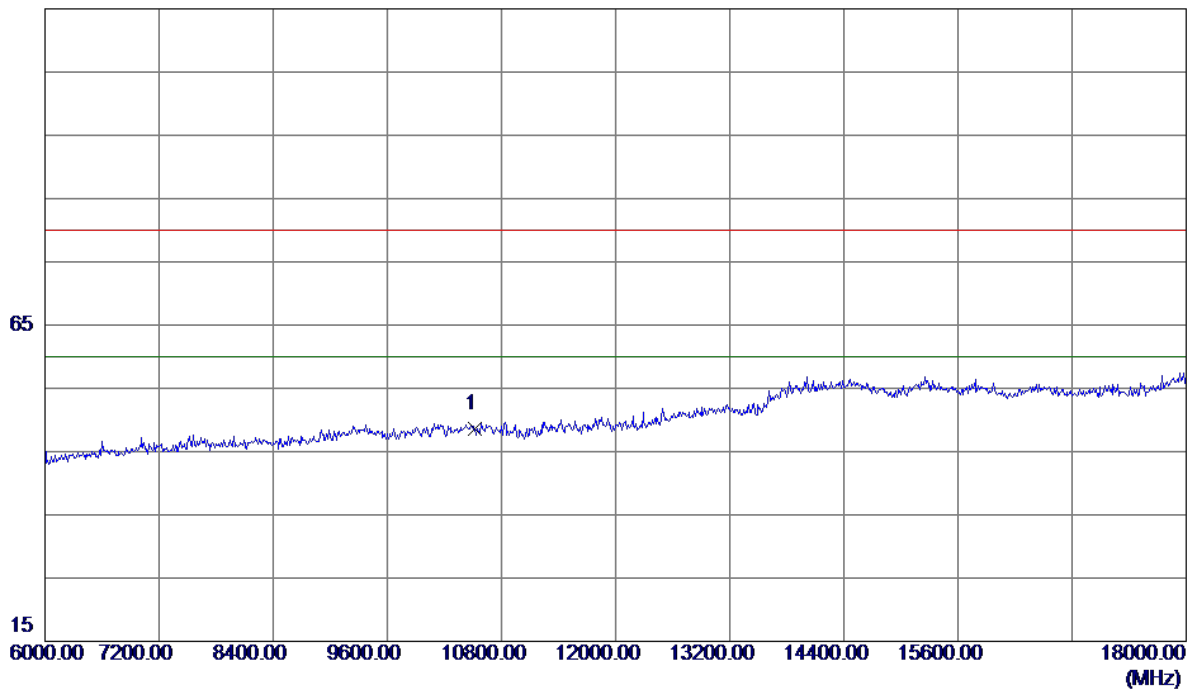


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10520.0000	31.16	17.48	48.64	80.00	-31.36	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

100 dBuV/m

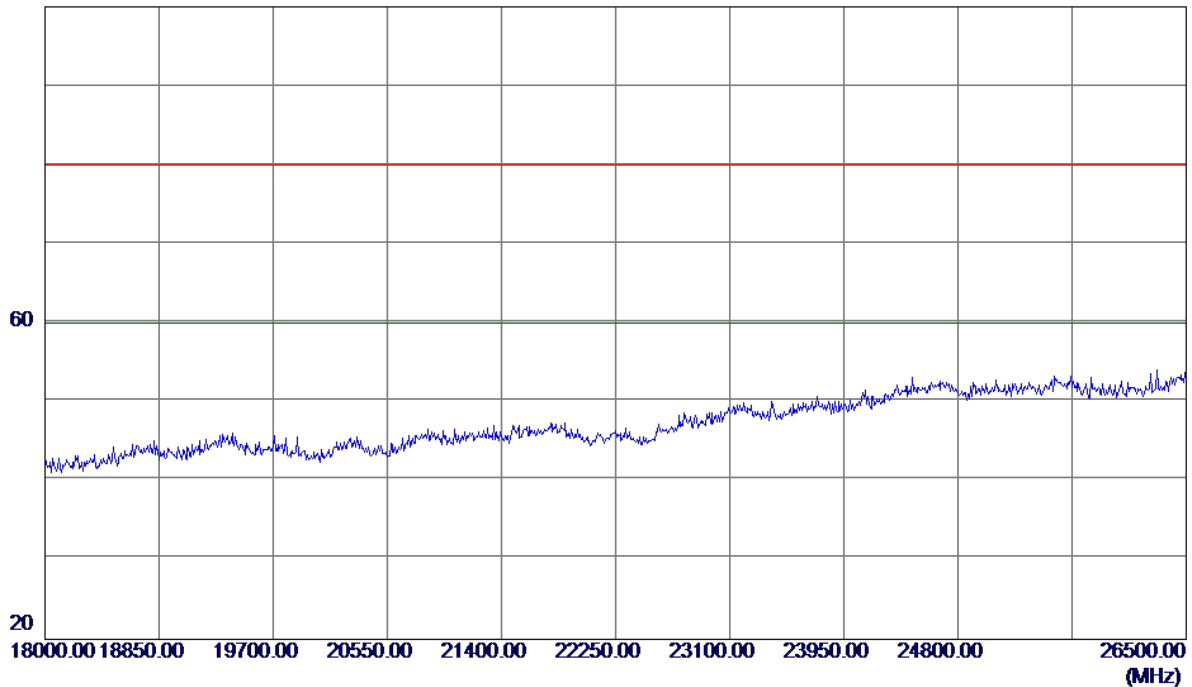


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

115 dBuV/m

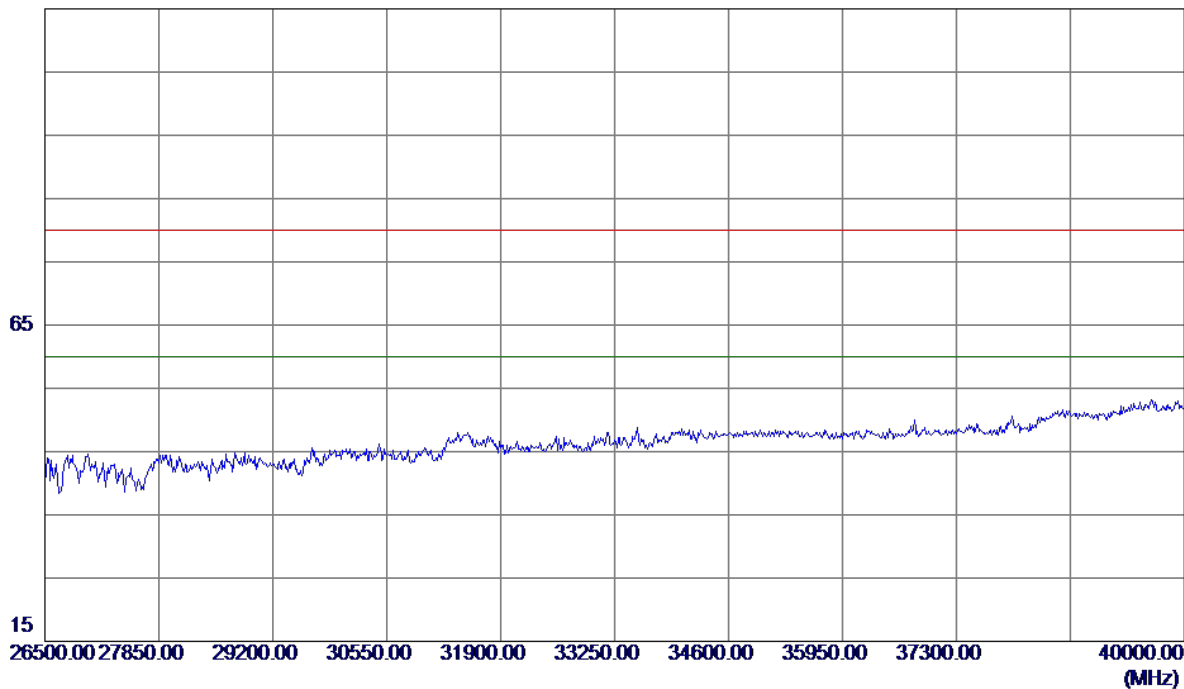


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

125 dBuV/m

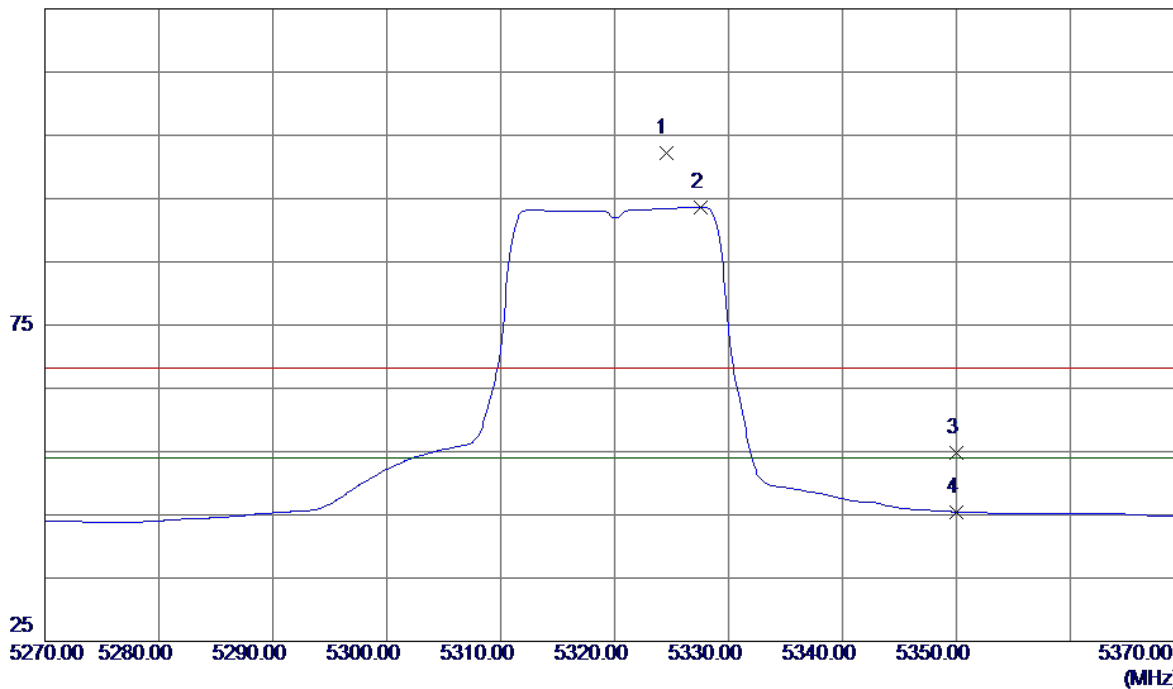


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5324.5000	60.15	41.99	102.14	68.30	33.84	Peak	No Limit
2 *	5327.6000	51.66	42.00	93.66	54.00	39.66	AVG	No Limit
3	5350.0000	12.70	42.12	54.82	68.30	-13.48	Peak	
4	5350.0000	3.35	42.12	45.47	54.00	-8.53	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

115 dBuV/m

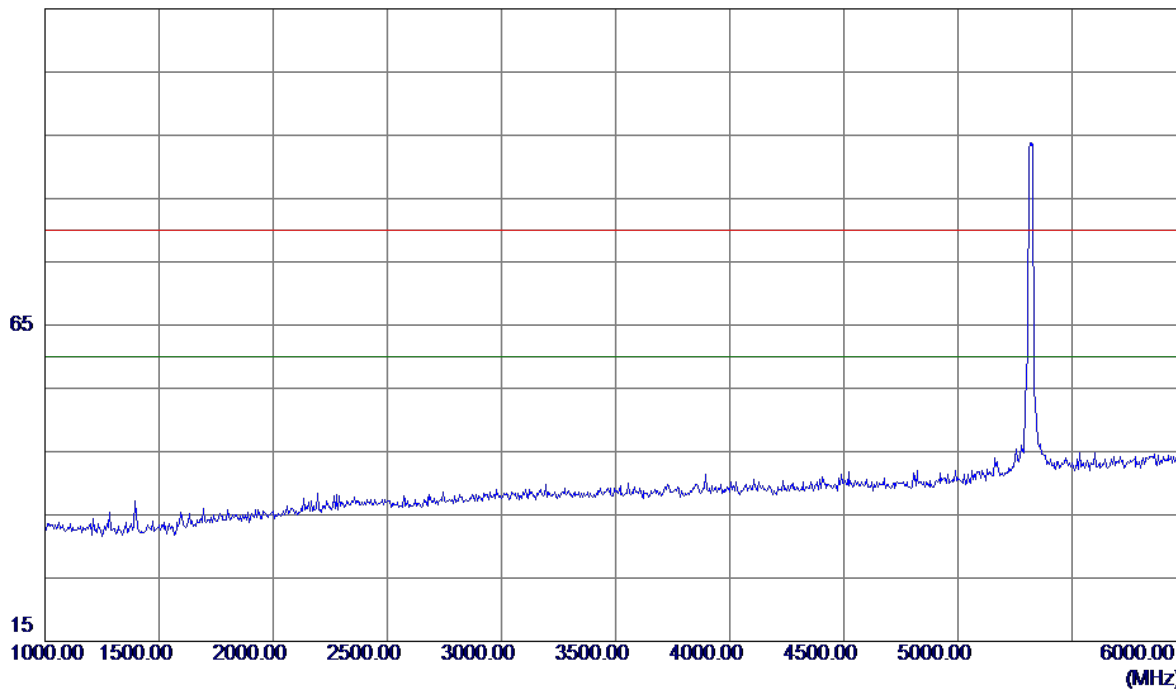


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

115 dBuV/m

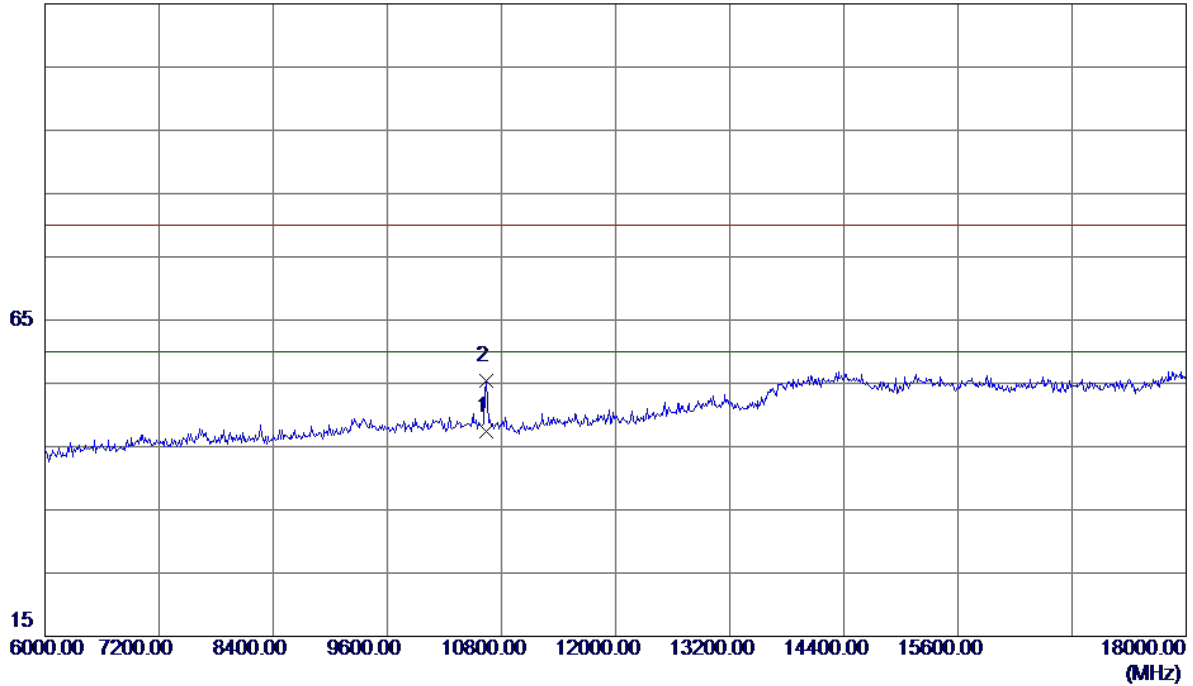


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10641.0000	30.01	17.33	47.34	60.00	-12.66	AVG	
2	10644.0000	38.03	17.33	55.36	80.00	-24.64	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

100 dBuV/m

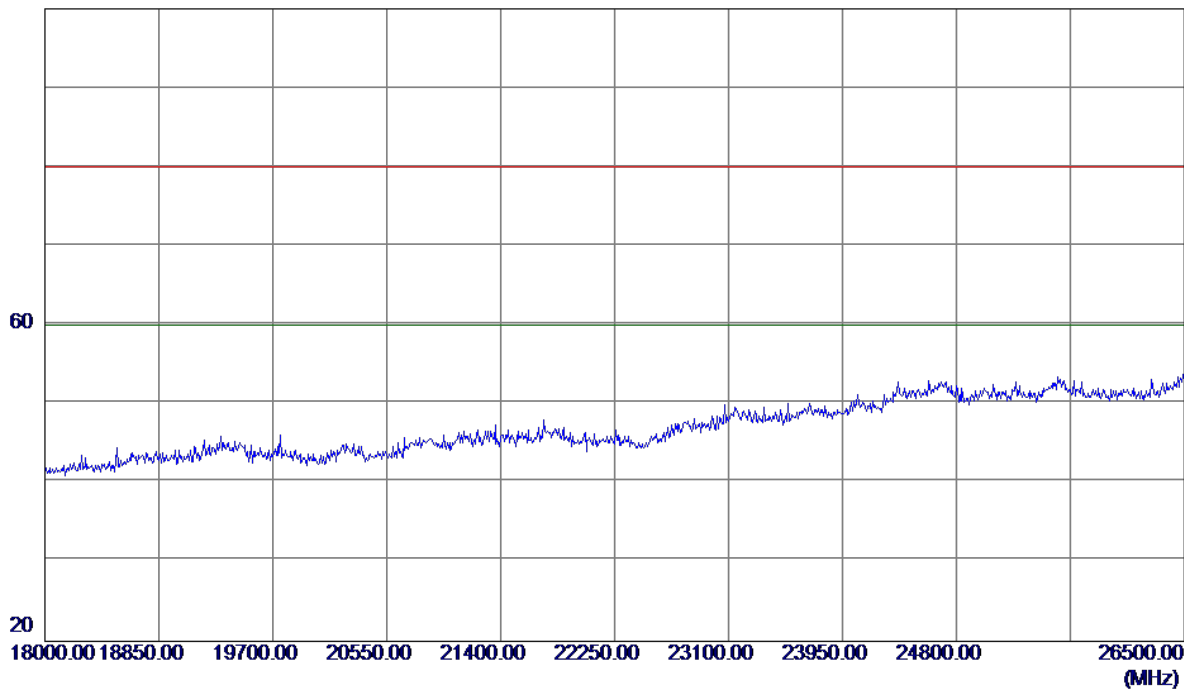


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

115 dBuV/m

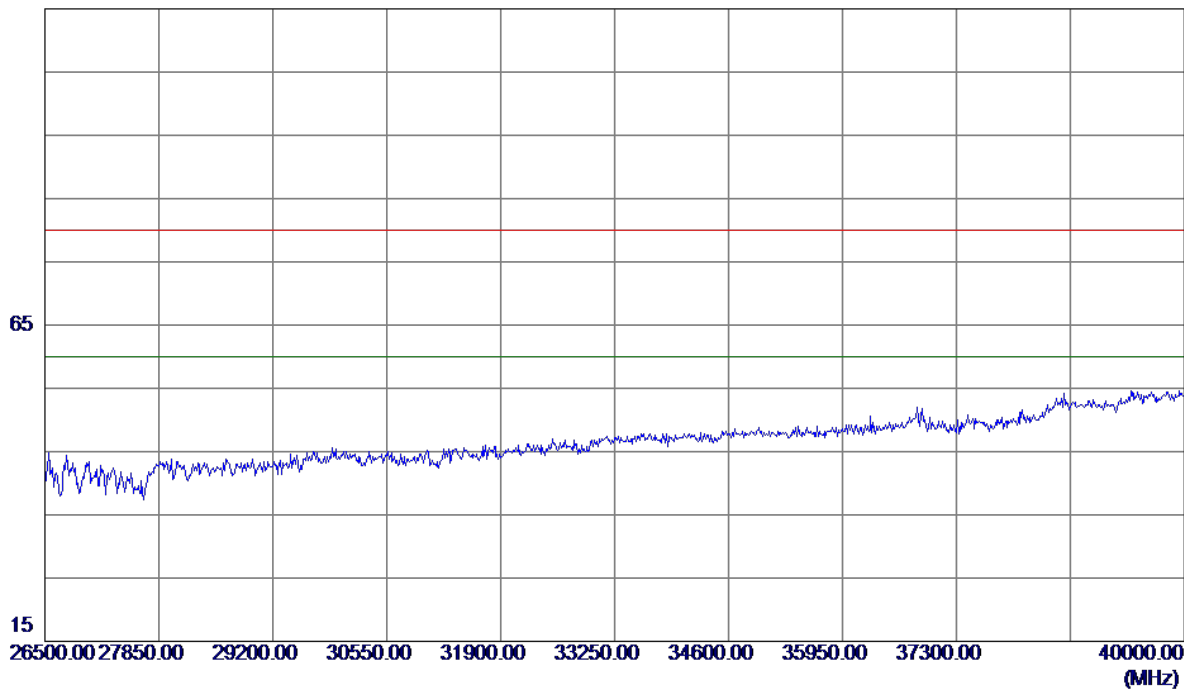


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

125 dBuV/m

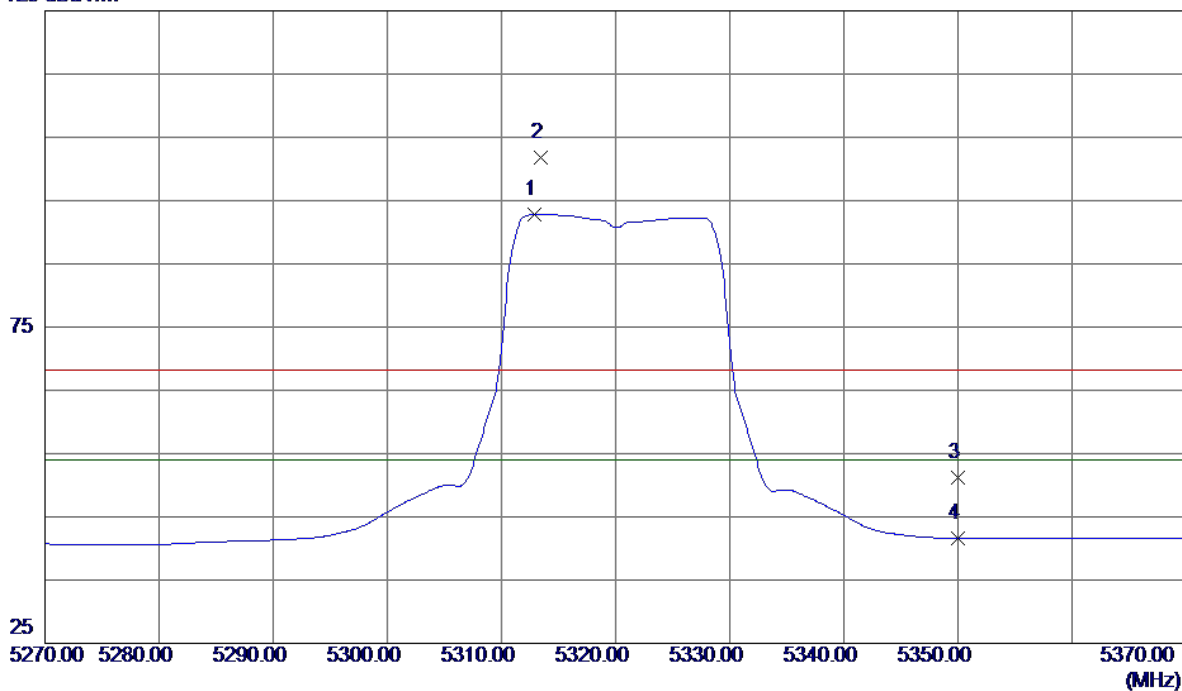


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5312.9000	51.56	41.19	92.75	54.00	38.75	AVG	No Limit
2	5313.4000	60.67	41.19	101.86	68.30	33.56	Peak	No Limit
3	5350.0000	9.91	41.38	51.29	68.30	-17.01	Peak	
4	5350.0000	0.15	41.38	41.53	54.00	-12.47	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

115 dBuV/m

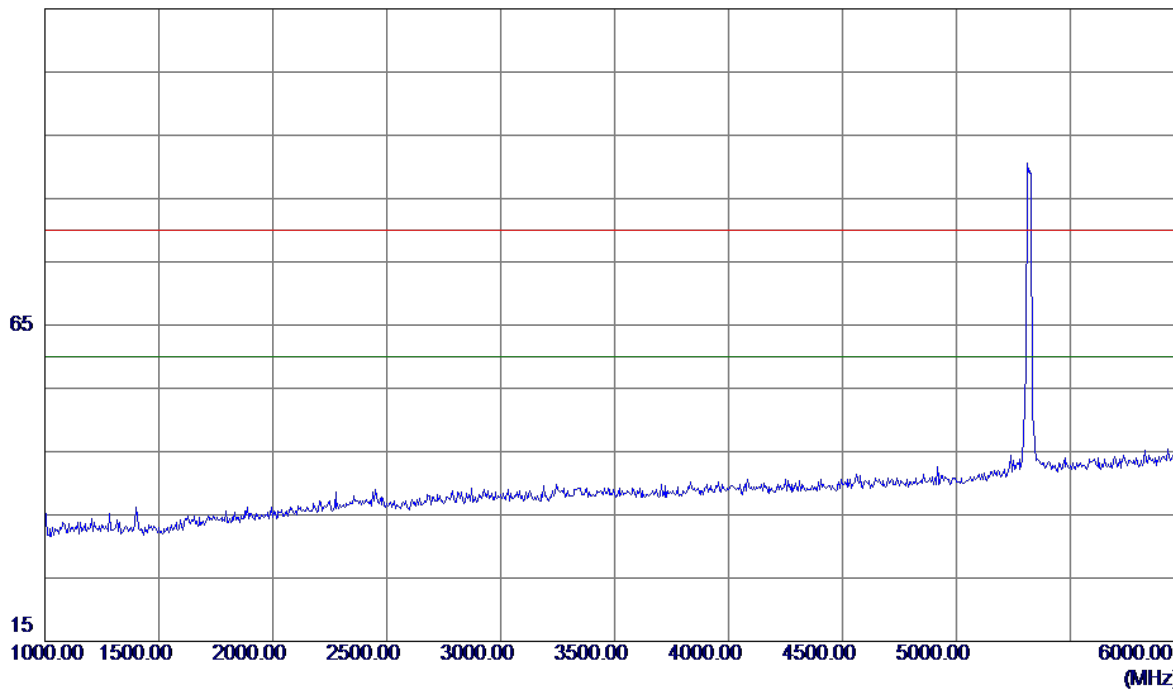


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

115 dBuV/m

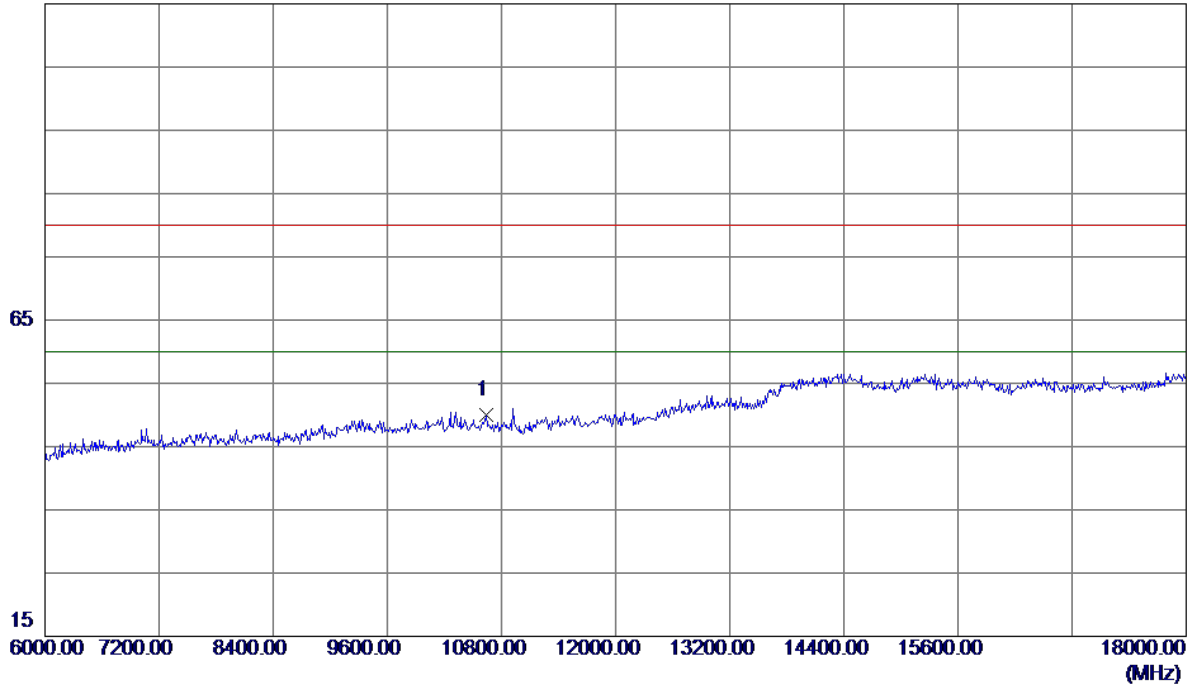


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	32.68	17.33	50.01	80.00	-29.99	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

100 dBuV/m

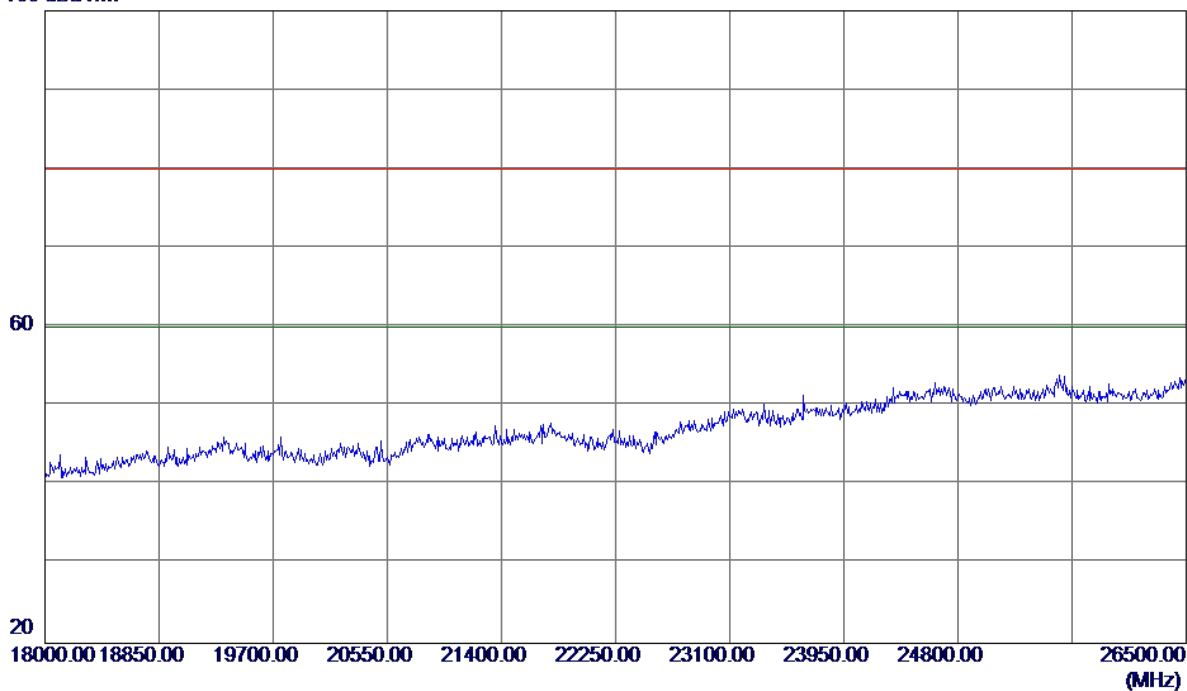


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal


115 dBuV/m

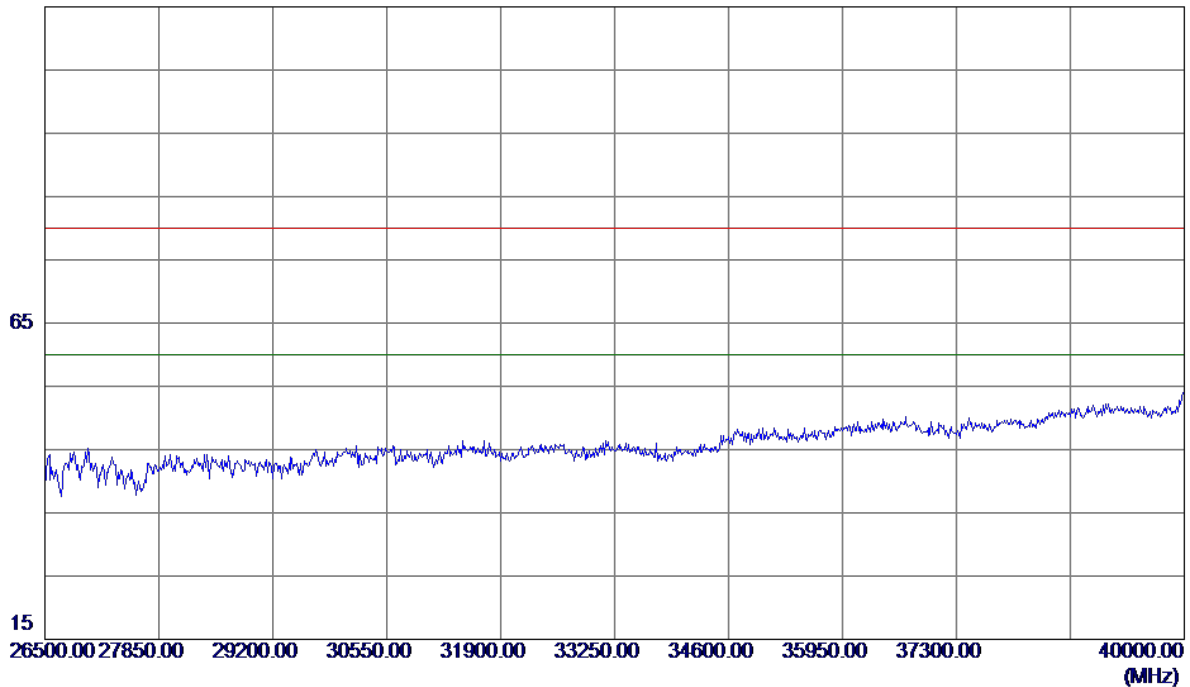

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

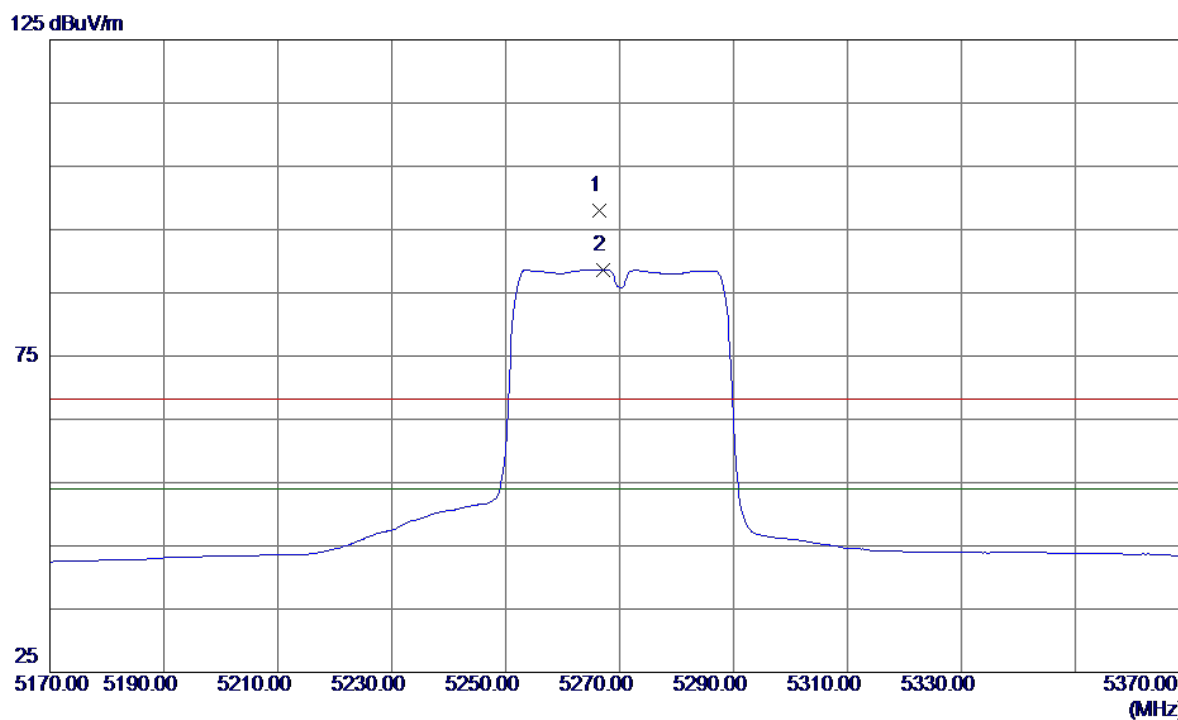


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5266.4000	56.22	41.69	97.91	68.30	29.61	Peak	No Limit
2 *	5267.2000	46.94	41.70	88.64	54.00	34.64	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

115 dBuV/m

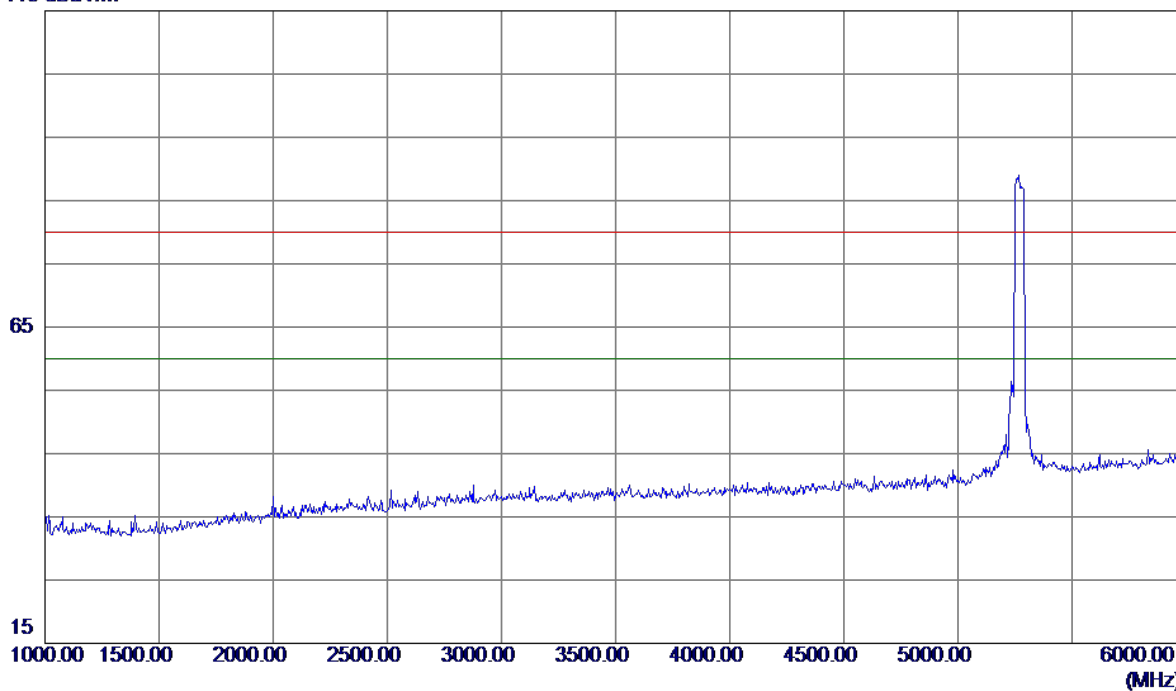


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

115 dBuV/m

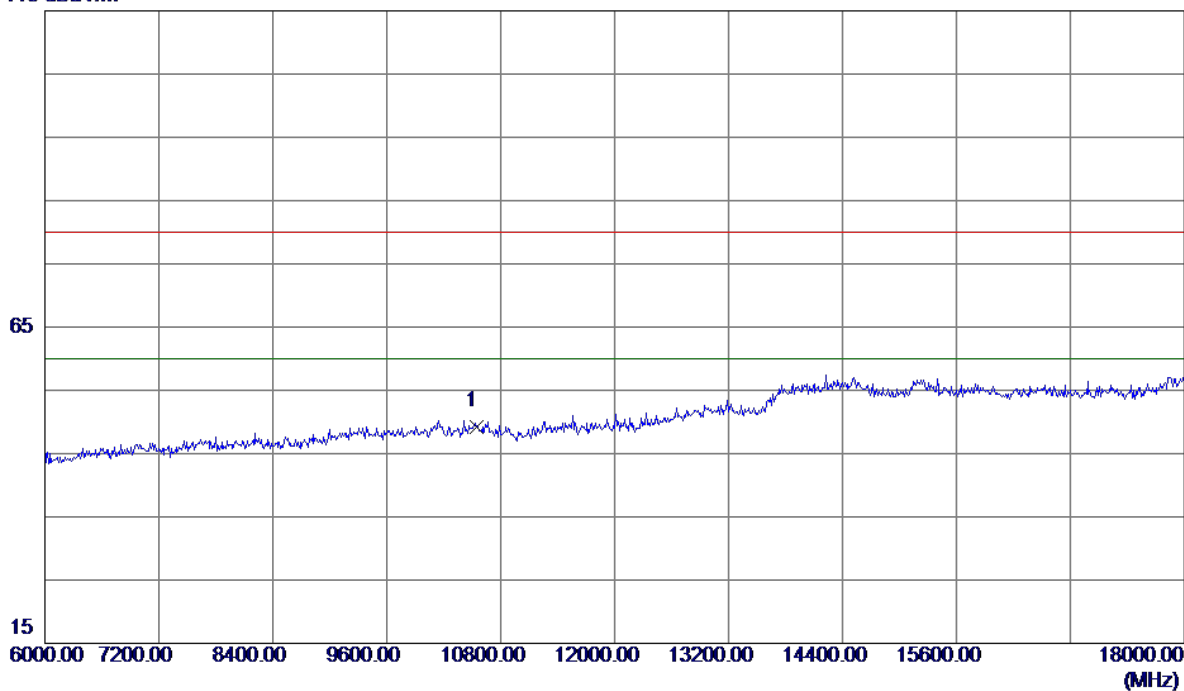


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	31.85	17.45	49.30	80.00	-30.70	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

100 dBuV/m

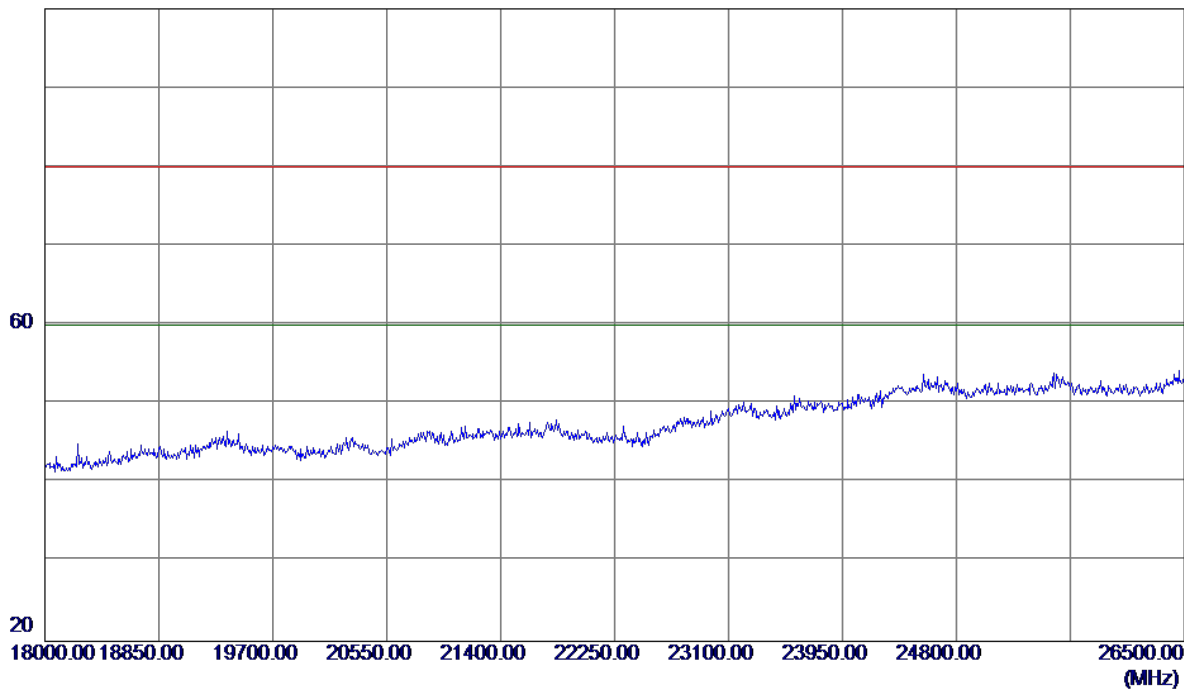


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

115 dBuV/m

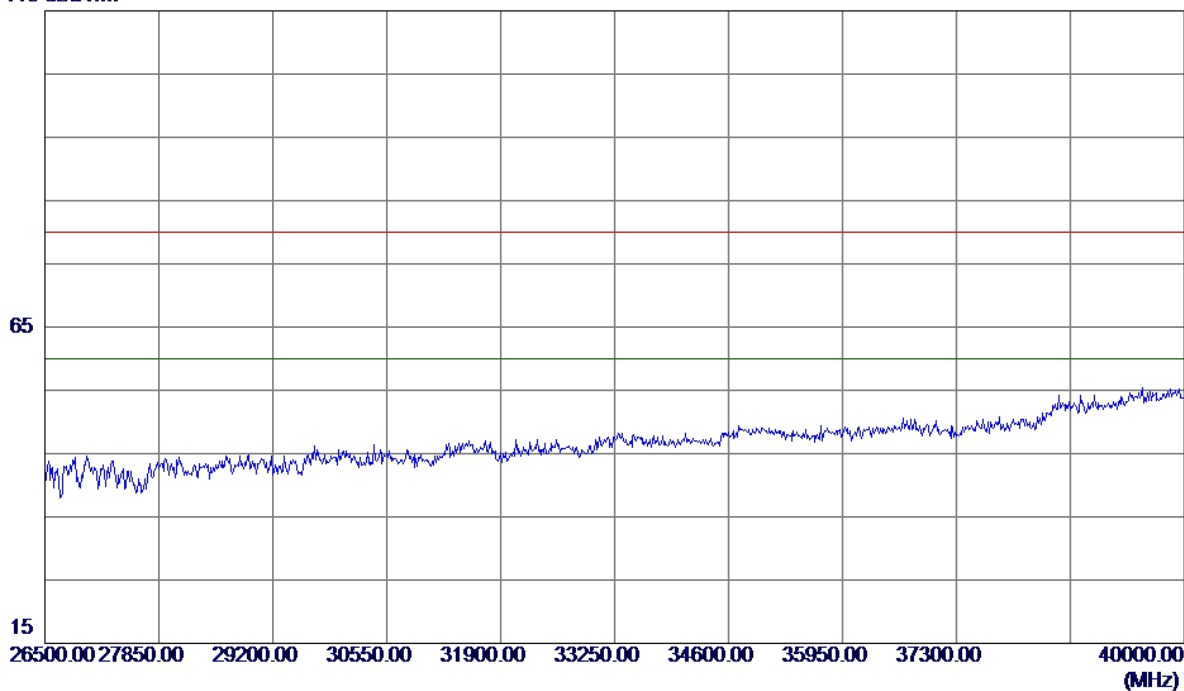


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

125 dBuV/m

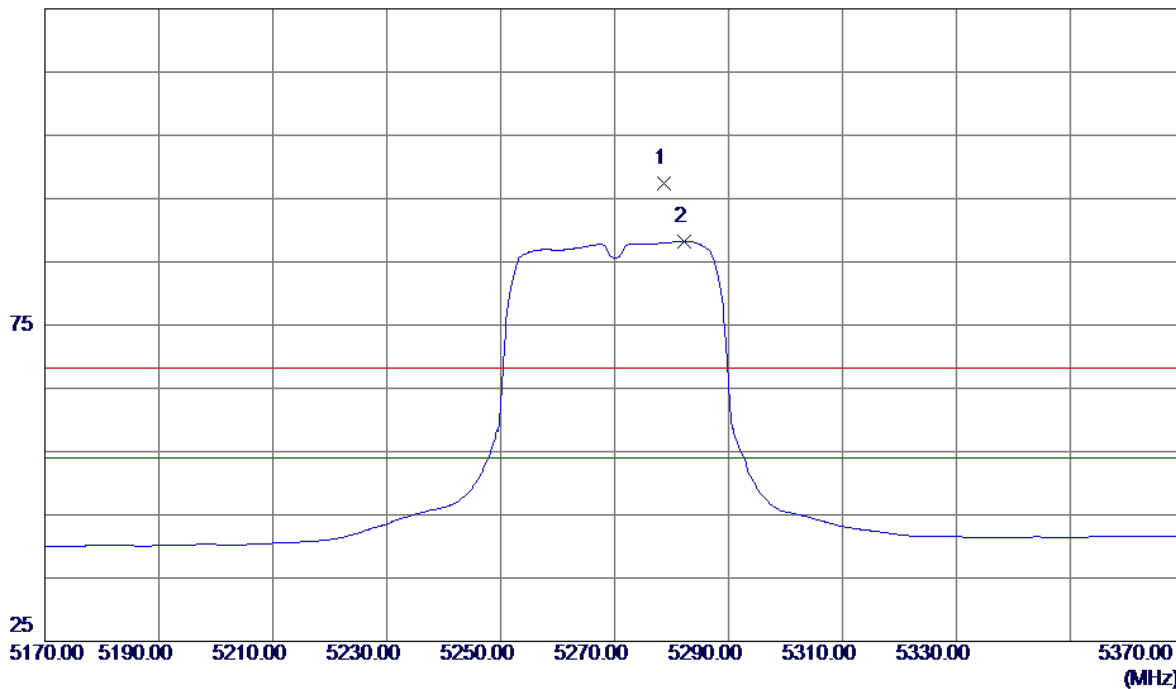


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5278.6000	56.44	41.01	97.45	68.30	29.15	Peak	No Limit
2 *	5282.2000	47.25	41.03	88.28	54.00	34.28	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

115 dBuV/m

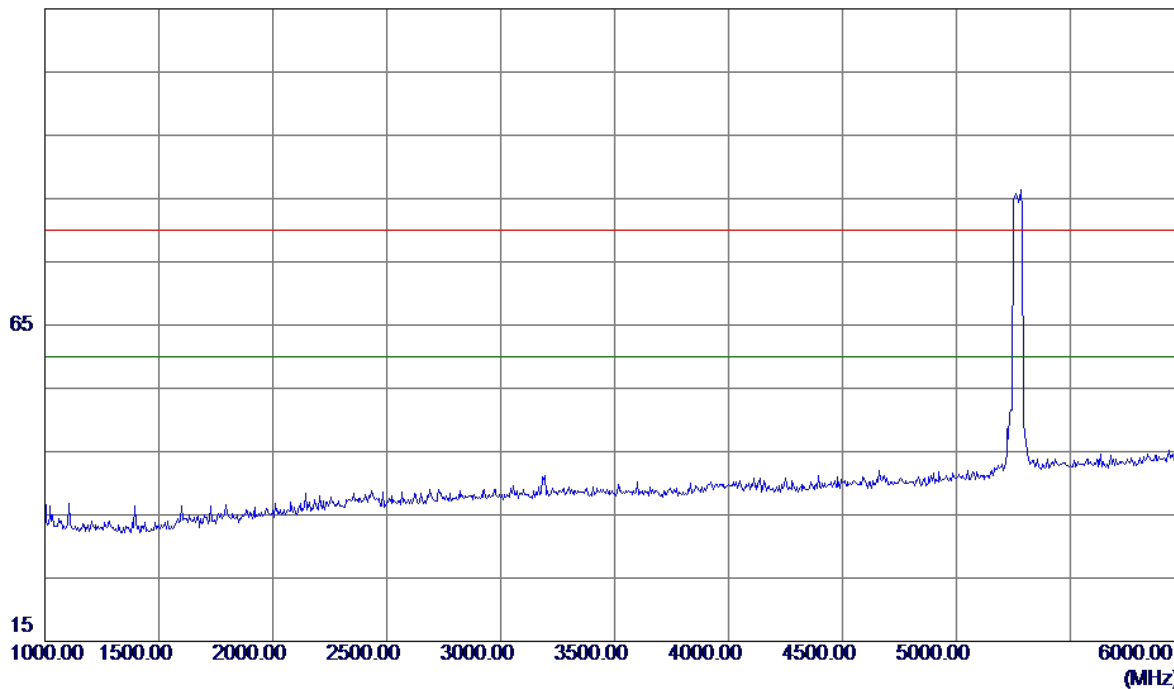


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

115 dBuV/m

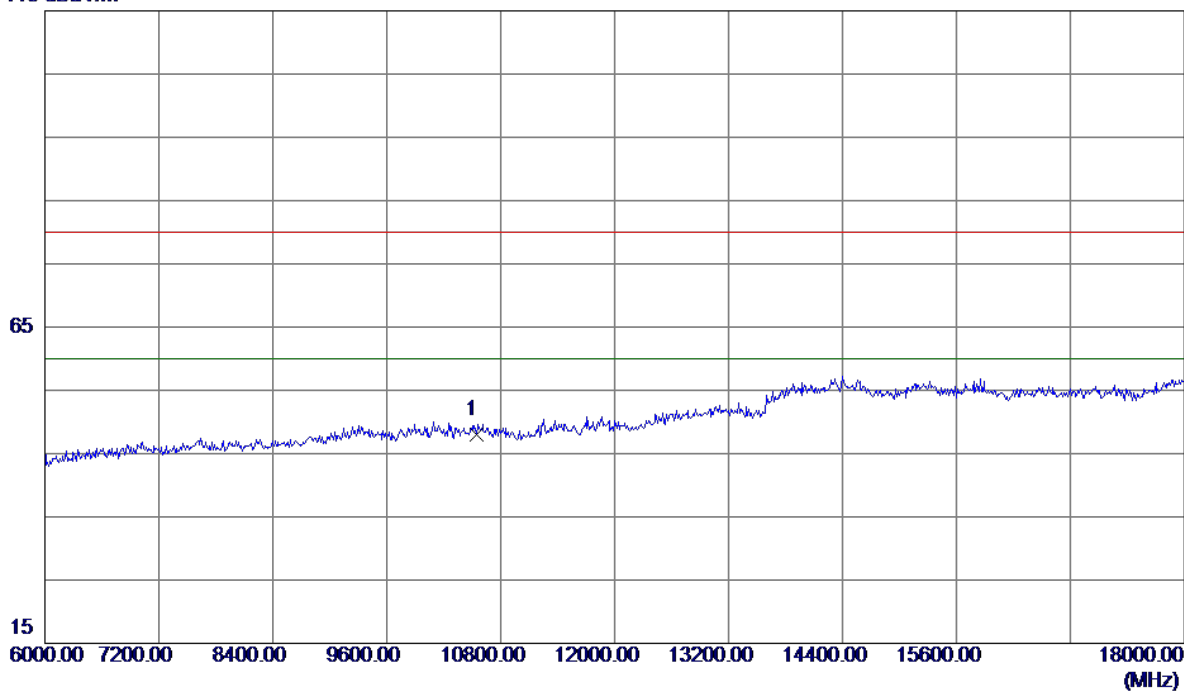


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10540.0000	30.48	17.45	47.93	80.00	-32.07	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

100 dBuV/m

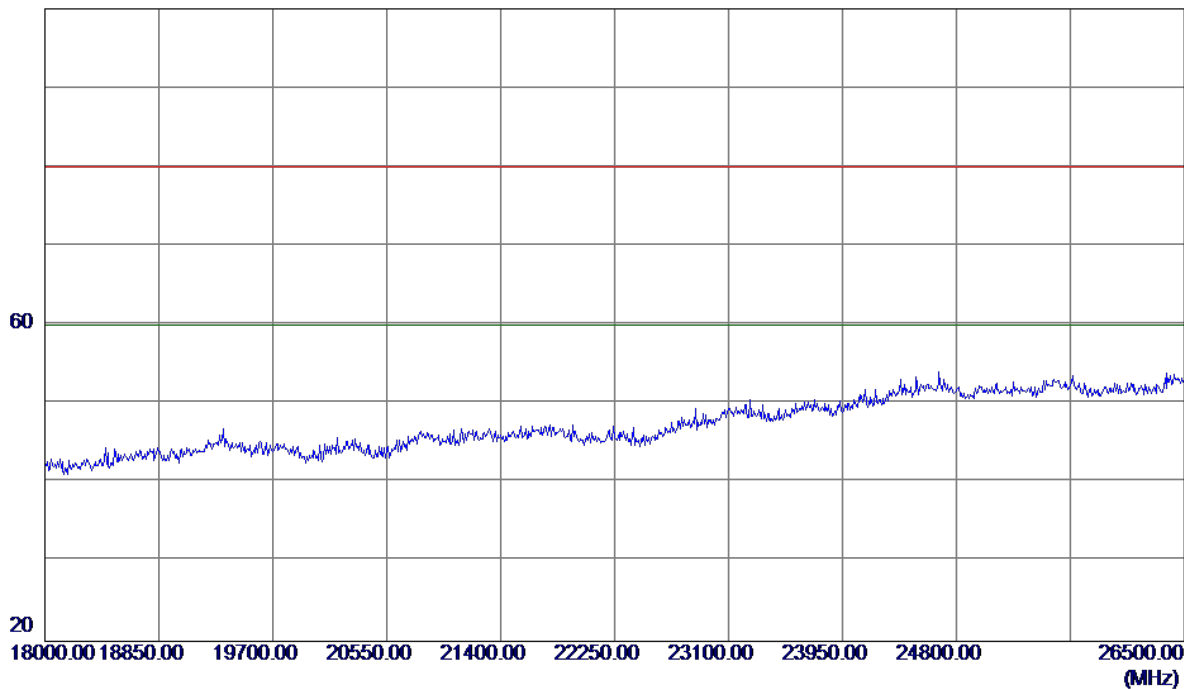


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

115 dBuV/m

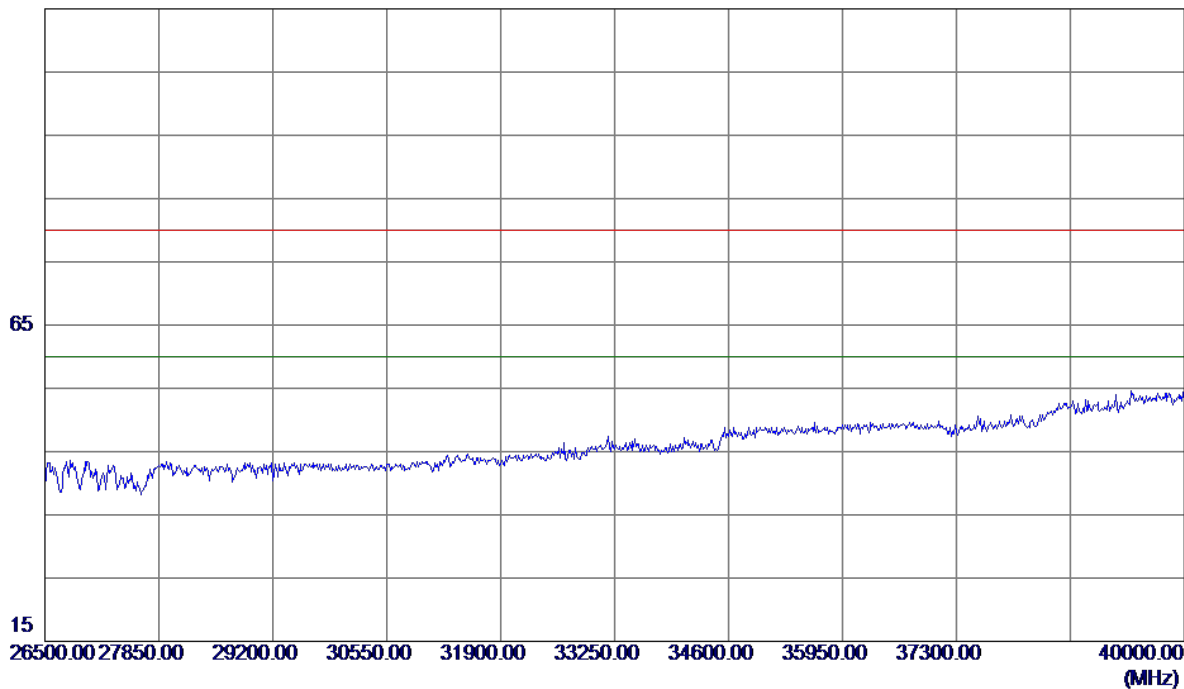


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

125 dBuV/m

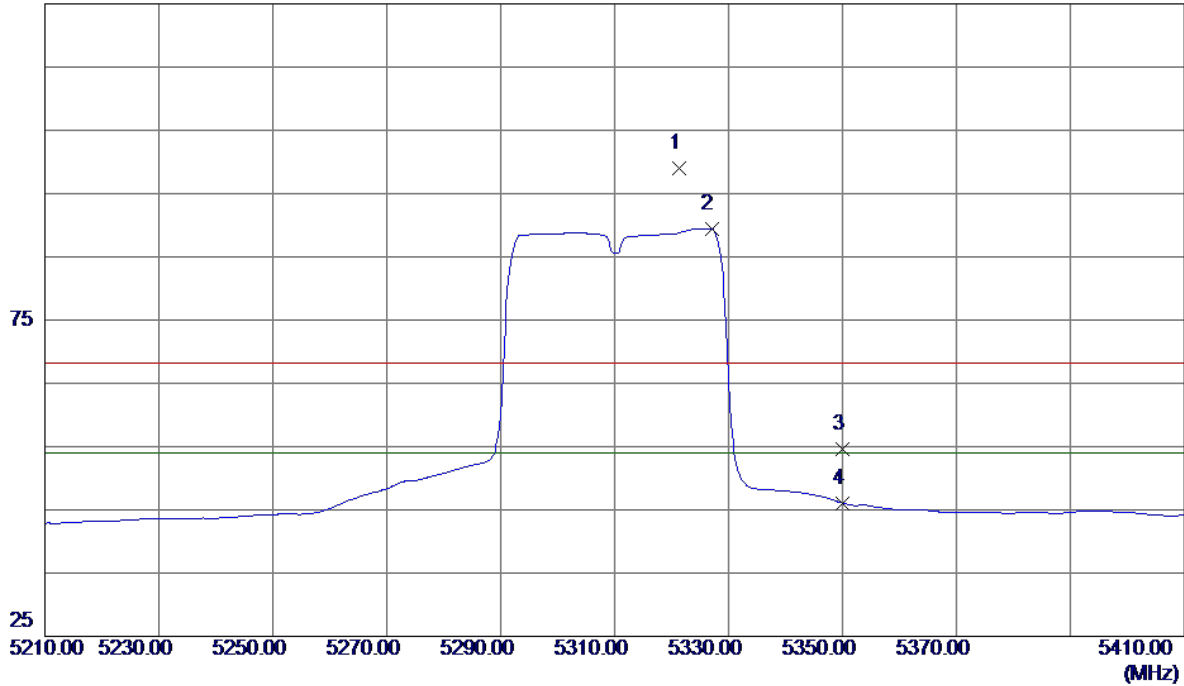


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5321.4000	56.97	41.97	98.94	68.30	30.64	Peak	No Limit
2 *	5327.0000	47.47	42.00	89.47	54.00	35.47	AVG	No Limit
3	5350.0000	12.56	42.12	54.68	68.30	-13.62	Peak	
4	5350.0000	3.93	42.12	46.05	54.00	-7.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

115 dBuV/m

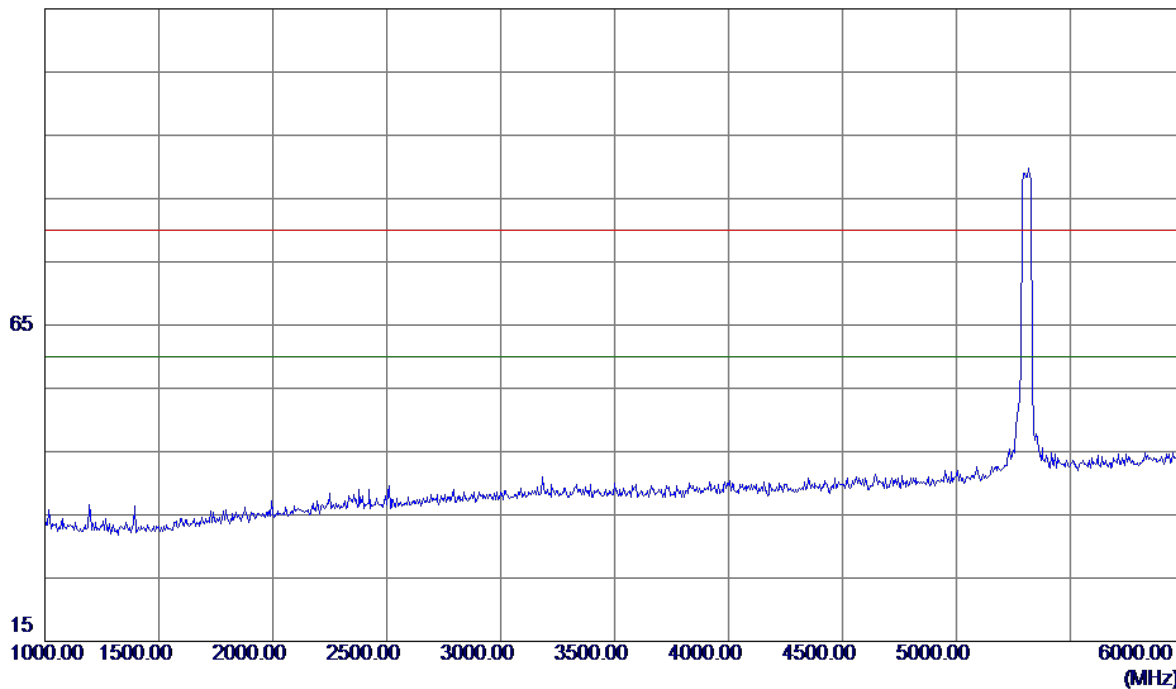


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

115 dBuV/m

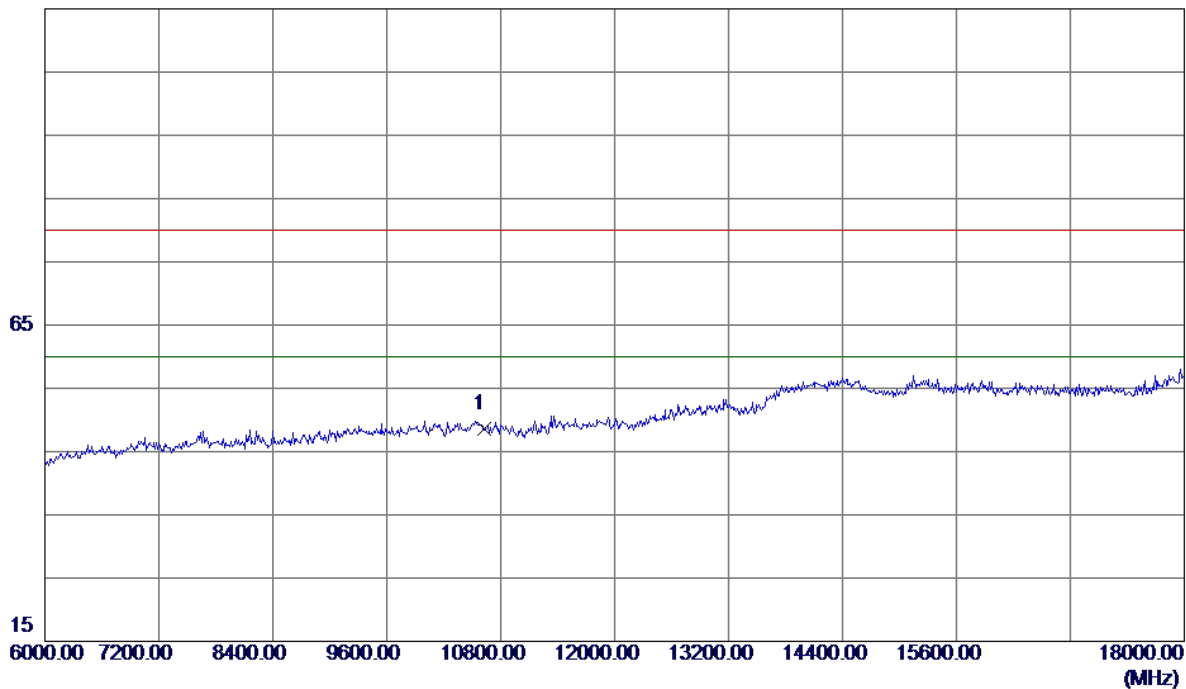


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.0000	31.21	17.36	48.57	80.00	-31.43	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

100 dBuV/m

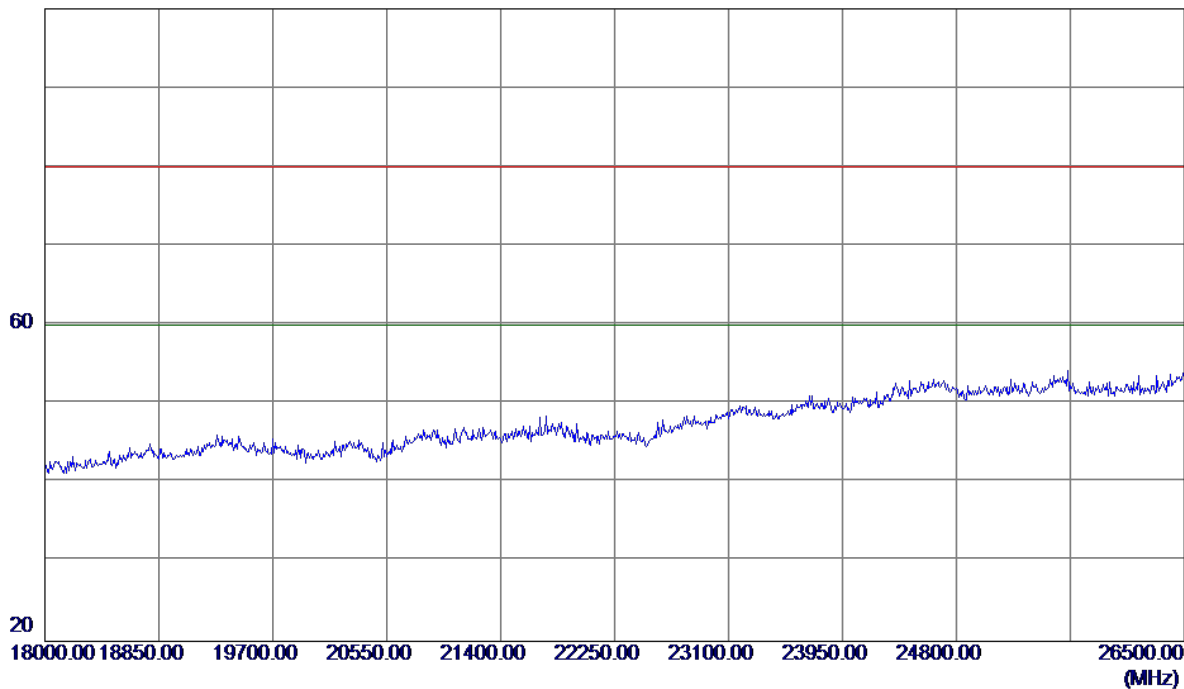


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

115 dBuV/m

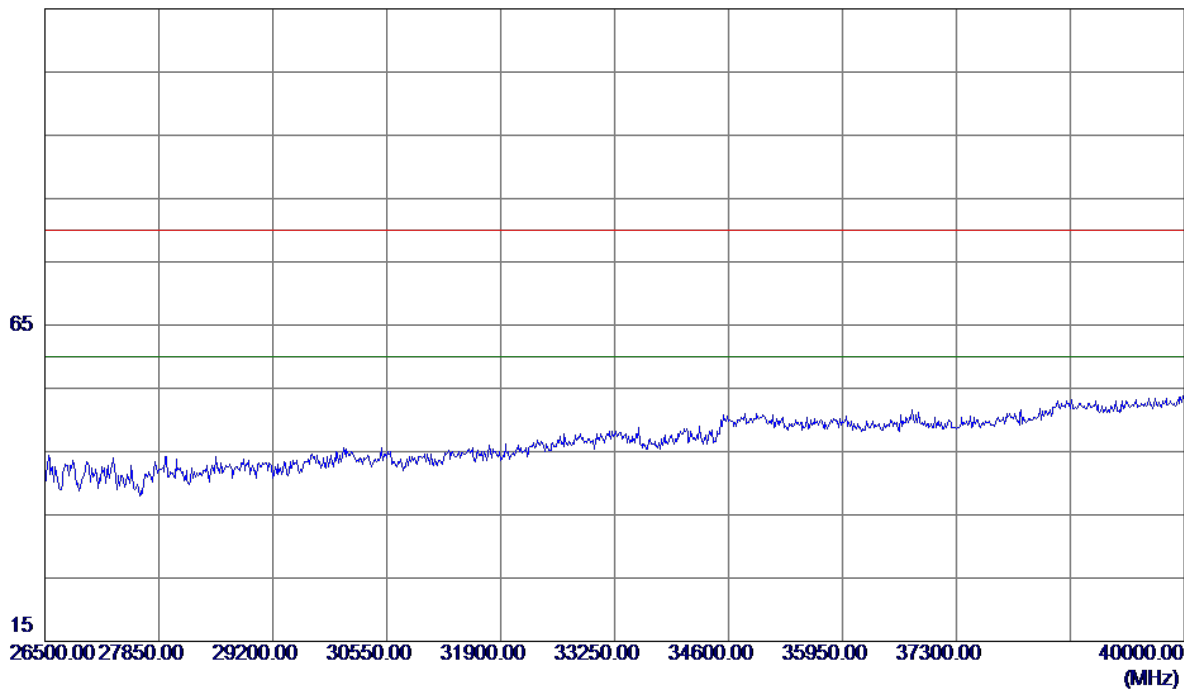


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

125 dBuV/m

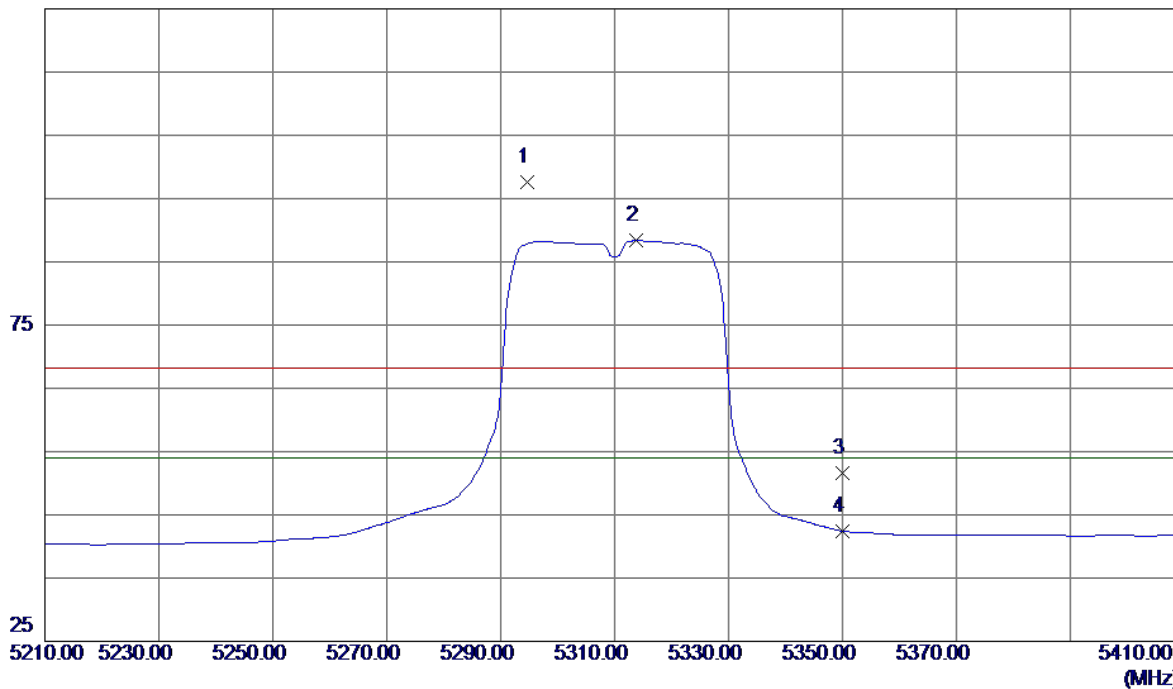


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5294.6000	56.46	41.09	97.55	68.30	29.25	Peak	No Limit
2 *	5313.8000	47.15	41.19	88.34	54.00	34.34	AVG	No Limit
3	5350.0000	10.24	41.38	51.62	68.30	-16.68	Peak	
4	5350.0000	1.05	41.38	42.43	54.00	-11.57	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

115 dBuV/m

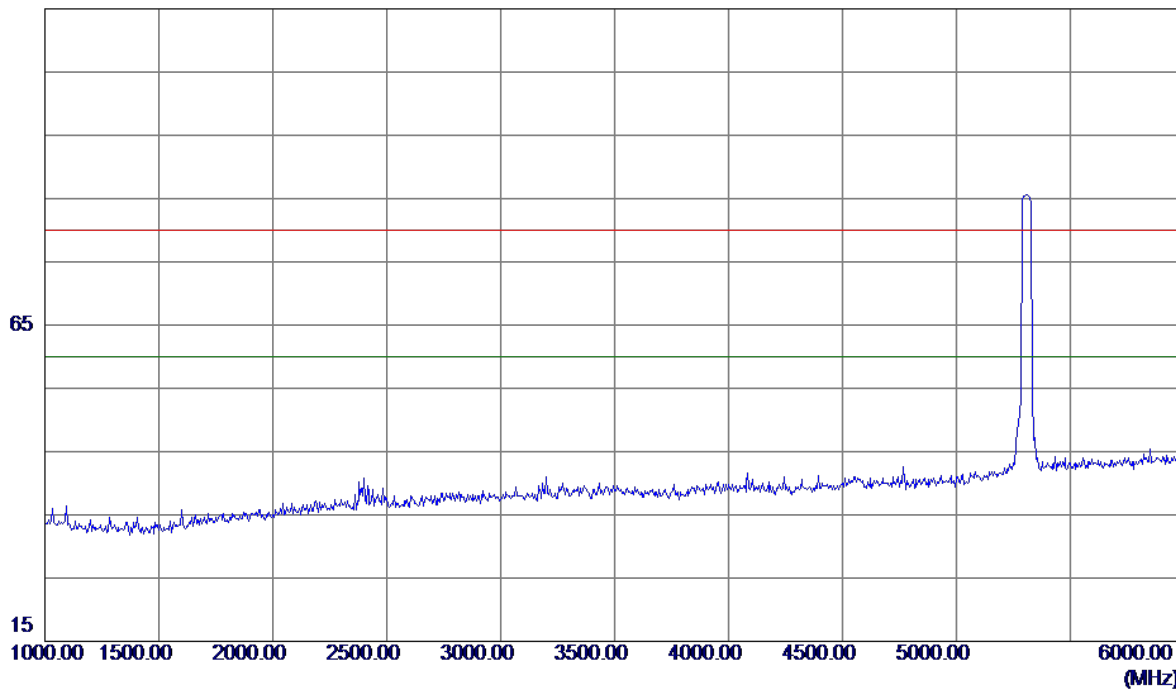


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

115 dBuV/m

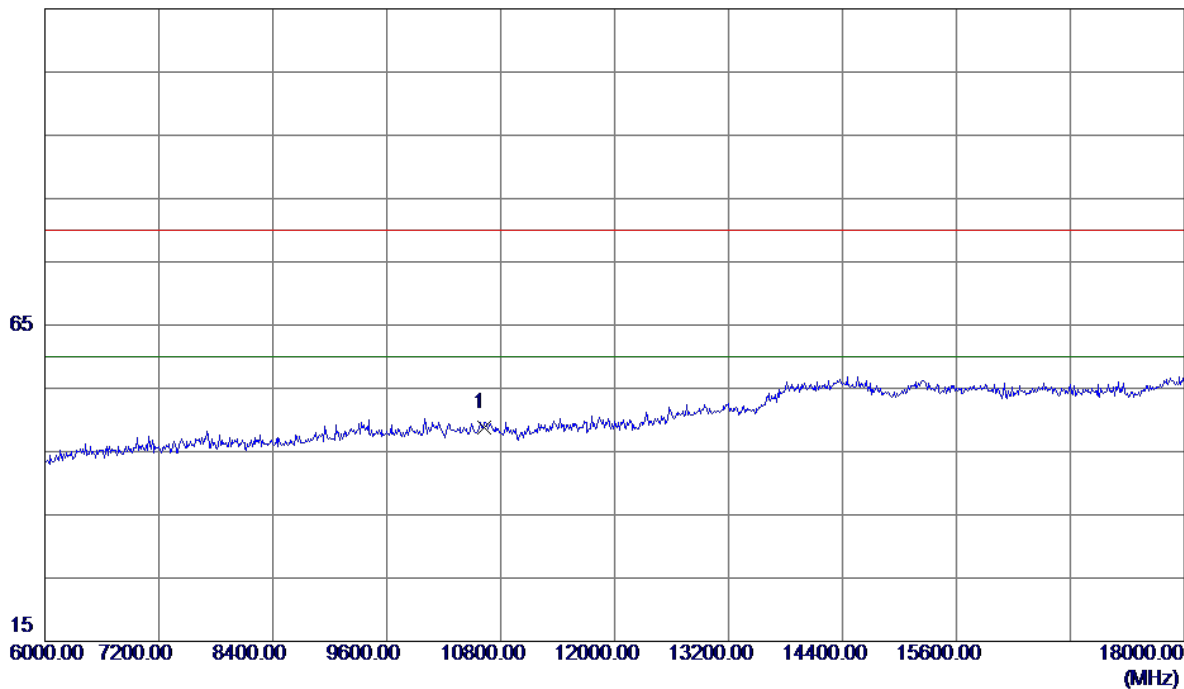


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.0000	31.48	17.36	48.84	80.00	-31.16	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

100 dBuV/m

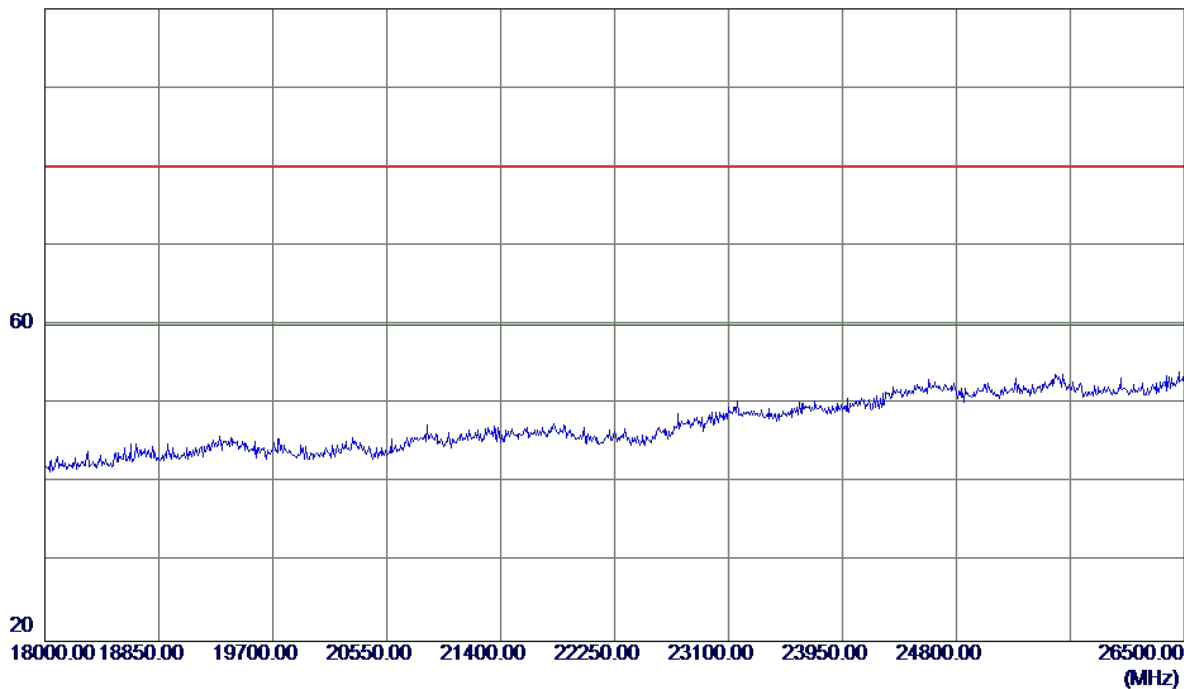


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Horizontal

115 dBuV/m

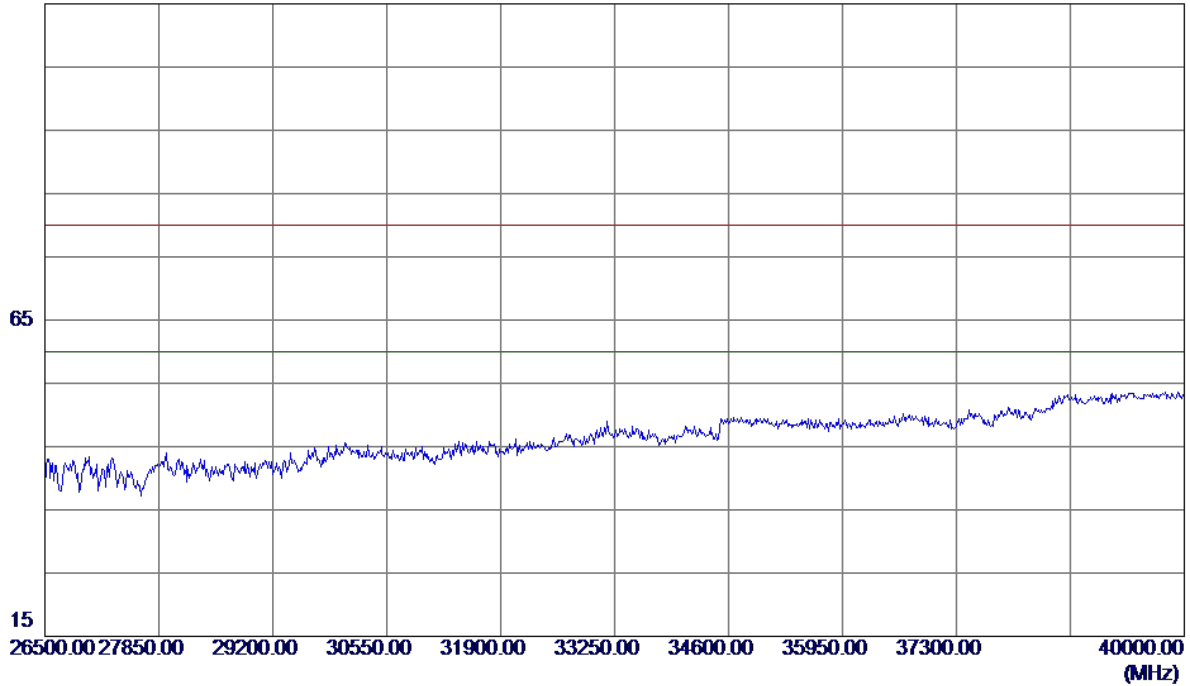


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

125 dBuV/m

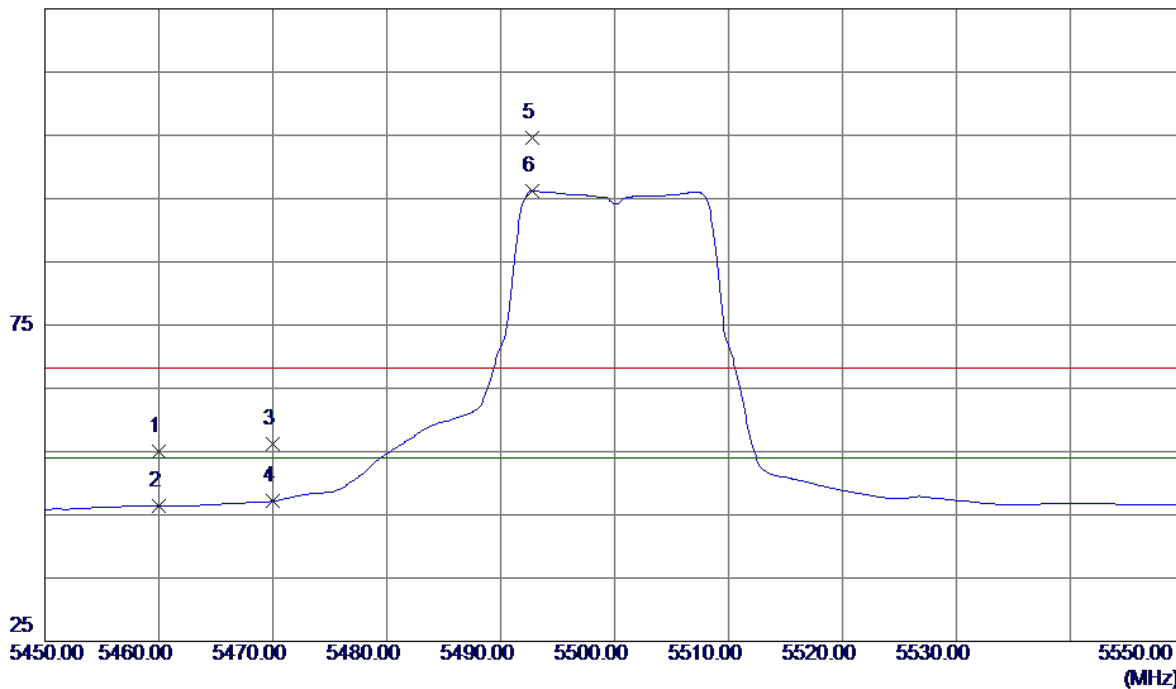


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	12.31	42.68	54.99	68.30	-13.31	Peak	
2	5460.0000	3.66	42.68	46.34	54.00	-7.66	AVG	
3	5470.0000	13.54	42.73	56.27	68.30	-12.03	Peak	
4	5470.0000	4.41	42.73	47.14	54.00	-6.86	AVG	
5	5492.8000	61.75	42.84	104.59	68.30	36.29	Peak	No Limit
6 *	5492.8000	53.34	42.84	96.18	54.00	42.18	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

115 dBuV/m

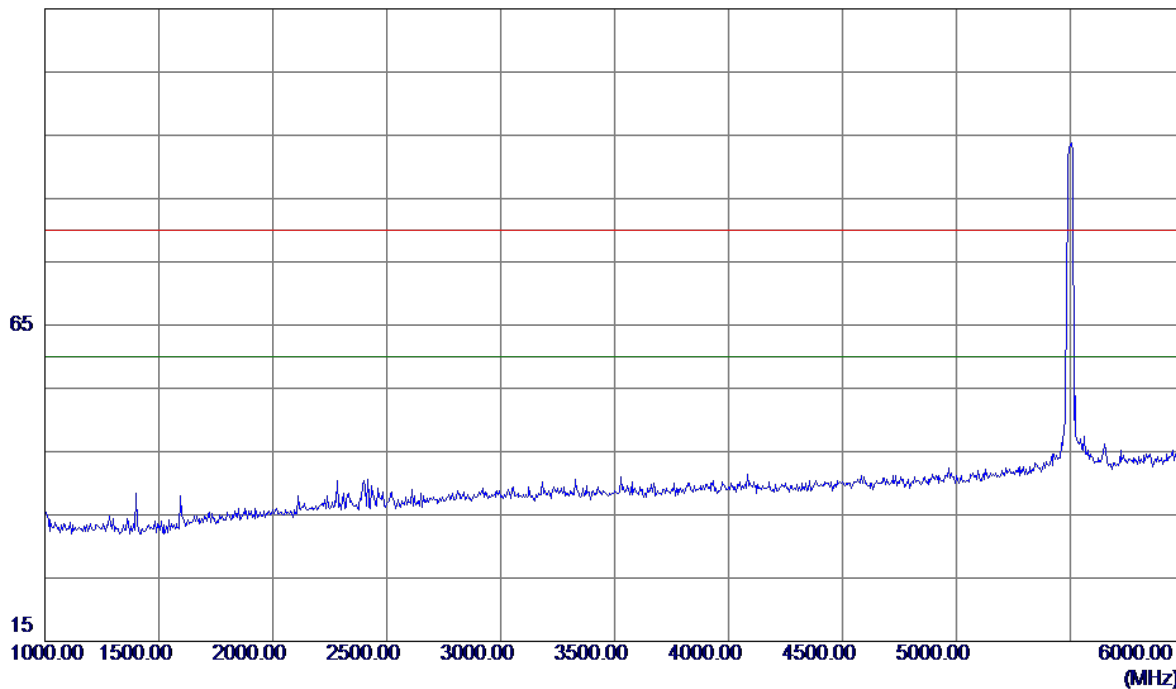


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

115 dBuV/m

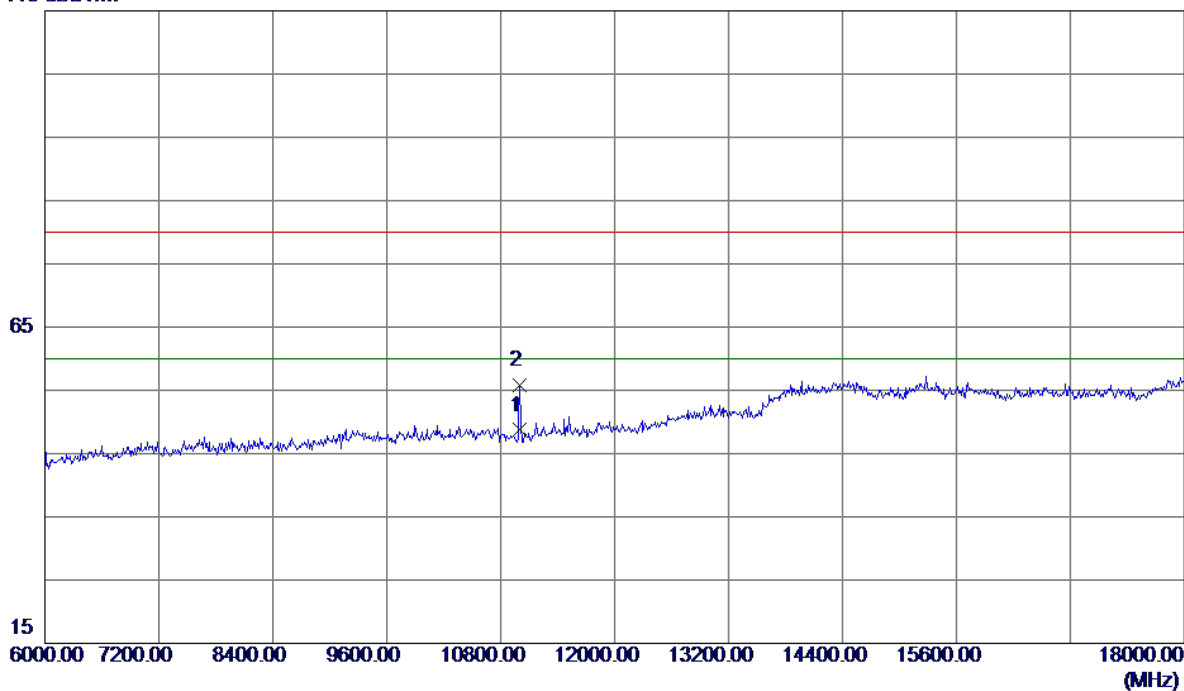


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.1000	31.80	16.90	48.70	60.00	-11.30	AVG	
2	11004.0000	38.87	16.91	55.78	80.00	-24.22	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

100 dBuV/m

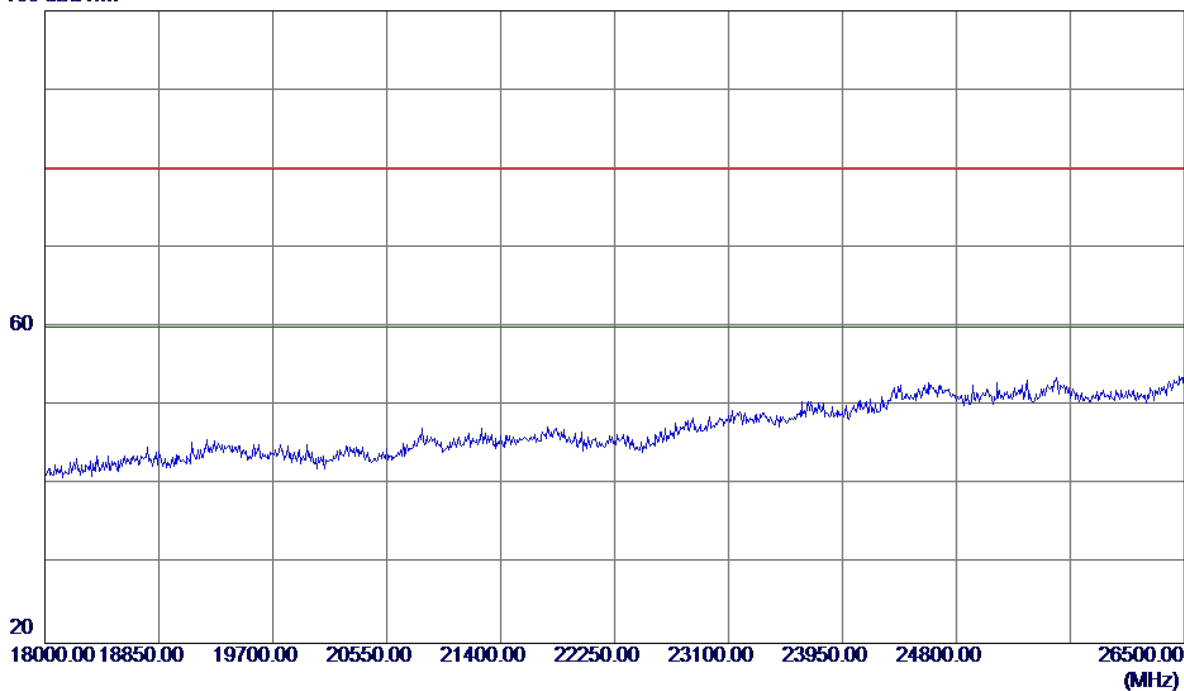


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

115 dBuV/m

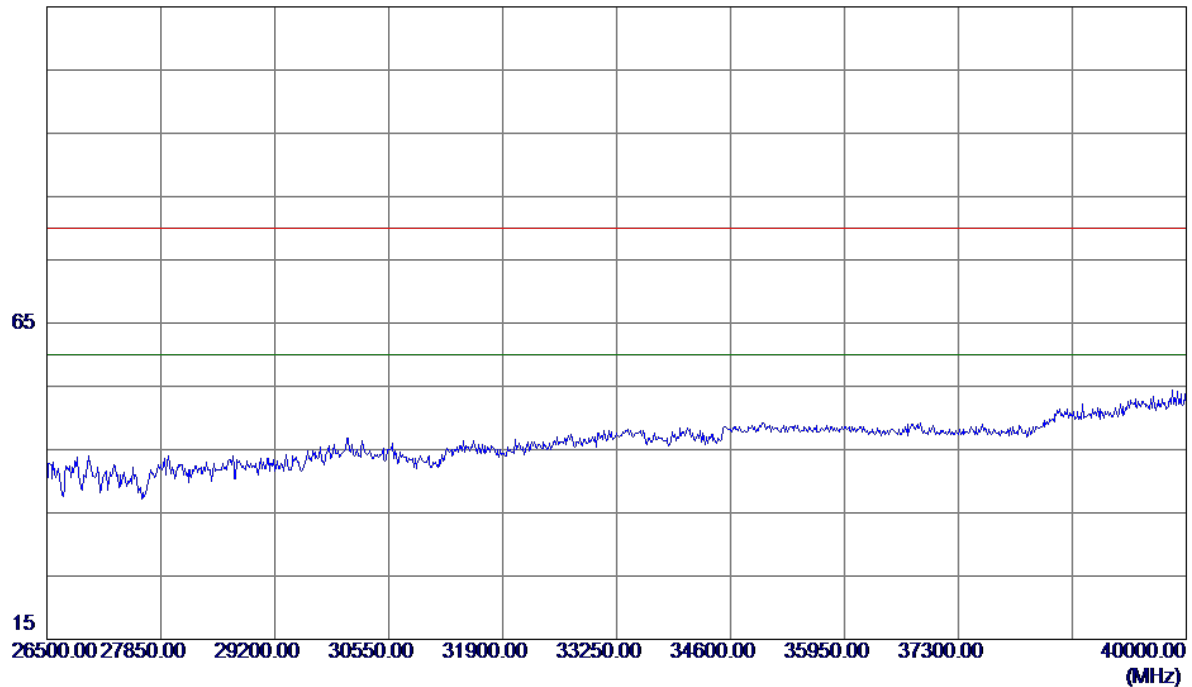


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

125 dBuV/m

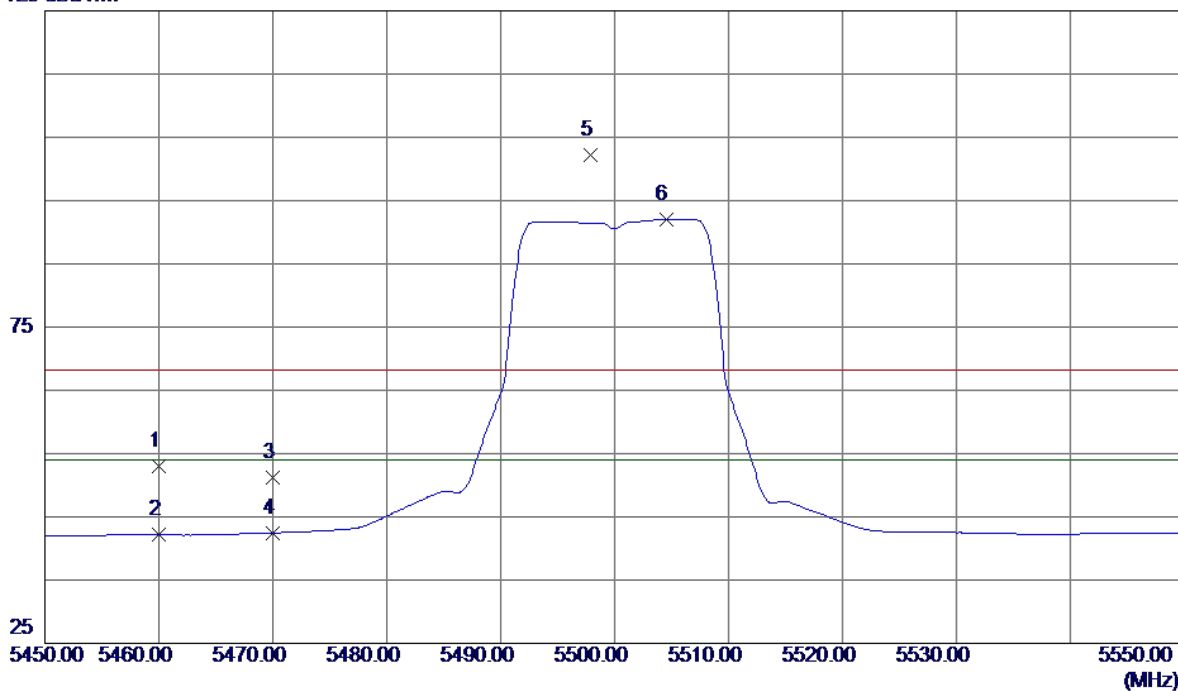


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.98	41.97	52.95	68.30	-15.35	Peak	
2	5460.0000	0.19	41.97	42.16	54.00	-11.84	AVG	
3	5470.0000	9.11	42.02	51.13	68.30	-17.17	Peak	
4	5470.0000	0.42	42.02	42.44	54.00	-11.56	AVG	
5	5497.9000	59.99	42.17	102.16	68.30	33.86	Peak	No Limit
6 *	5504.5000	49.86	42.20	92.06	54.00	38.06	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

115 dBuV/m

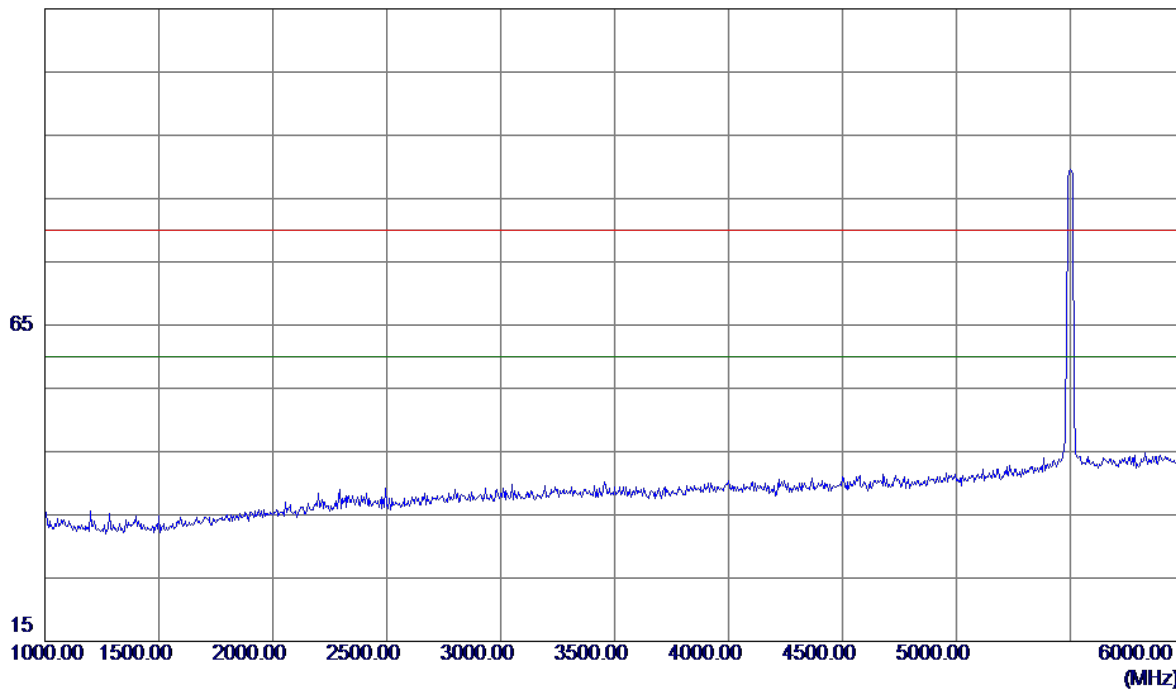


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

115 dBuV/m

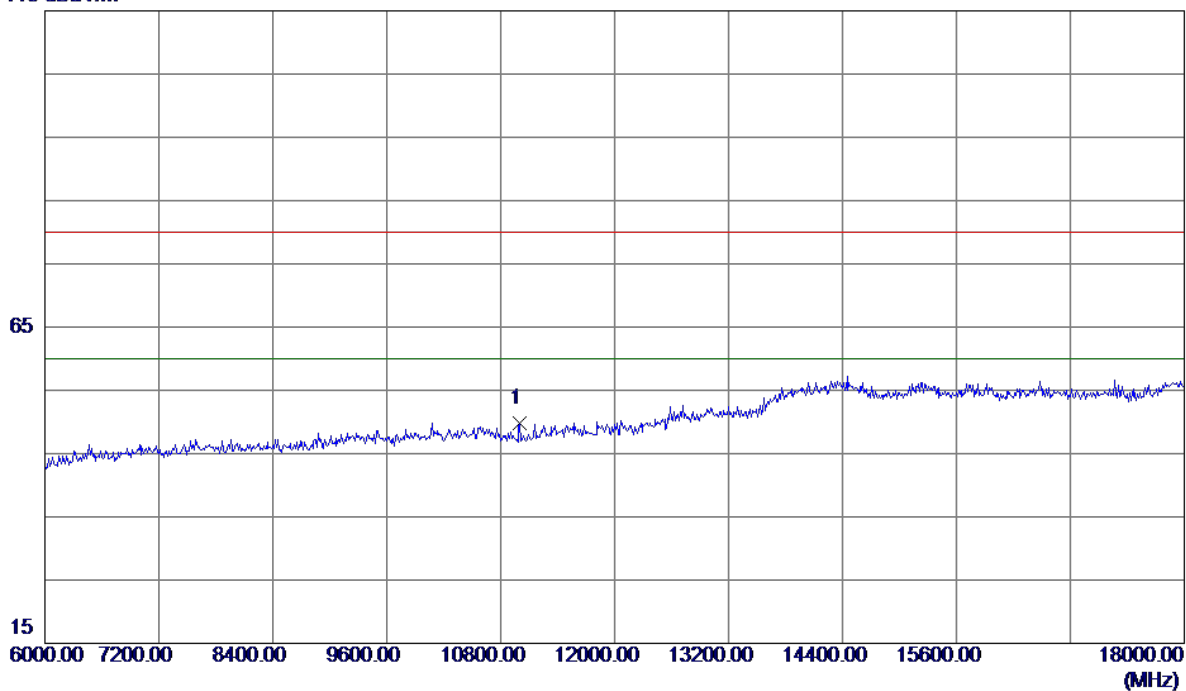


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11000.0000	32.90	16.90	49.80	80.00	-30.20	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

100 dBuV/m

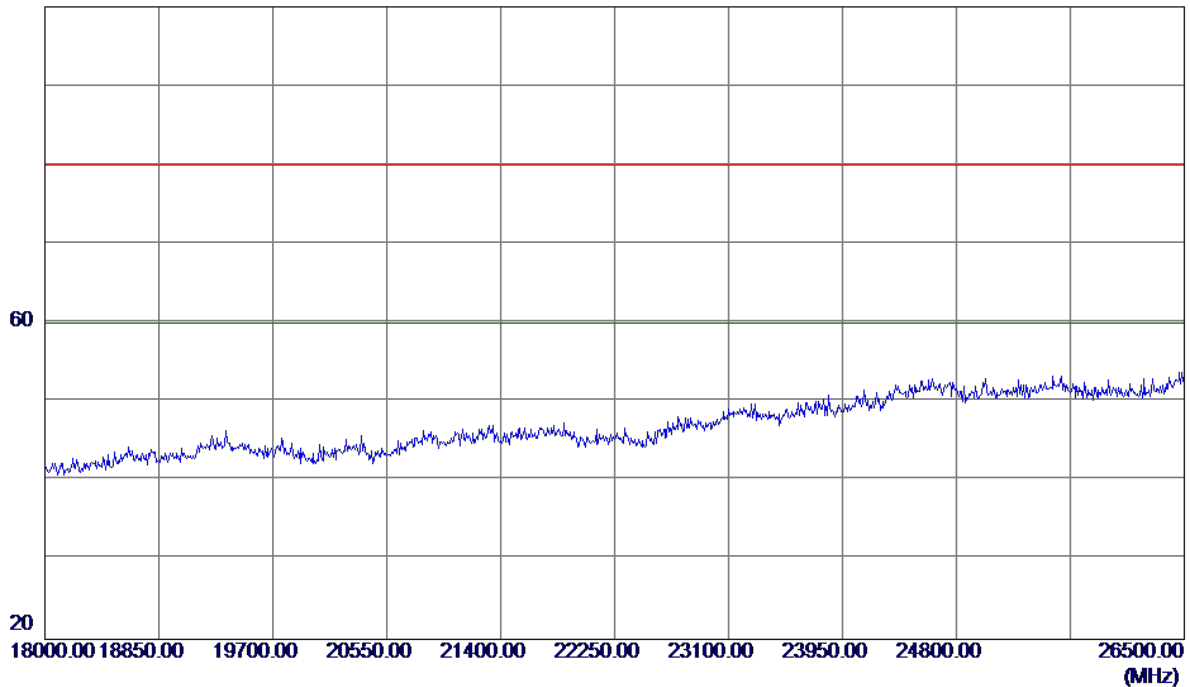


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

115 dBuV/m

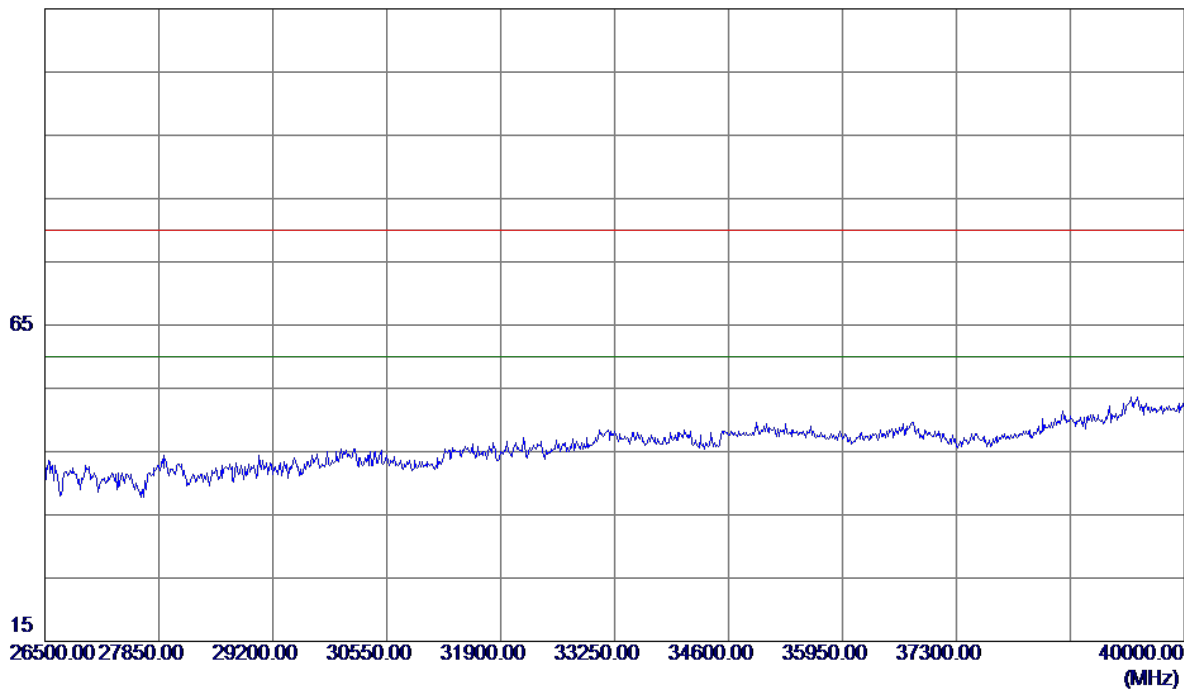


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

125 dBuV/m

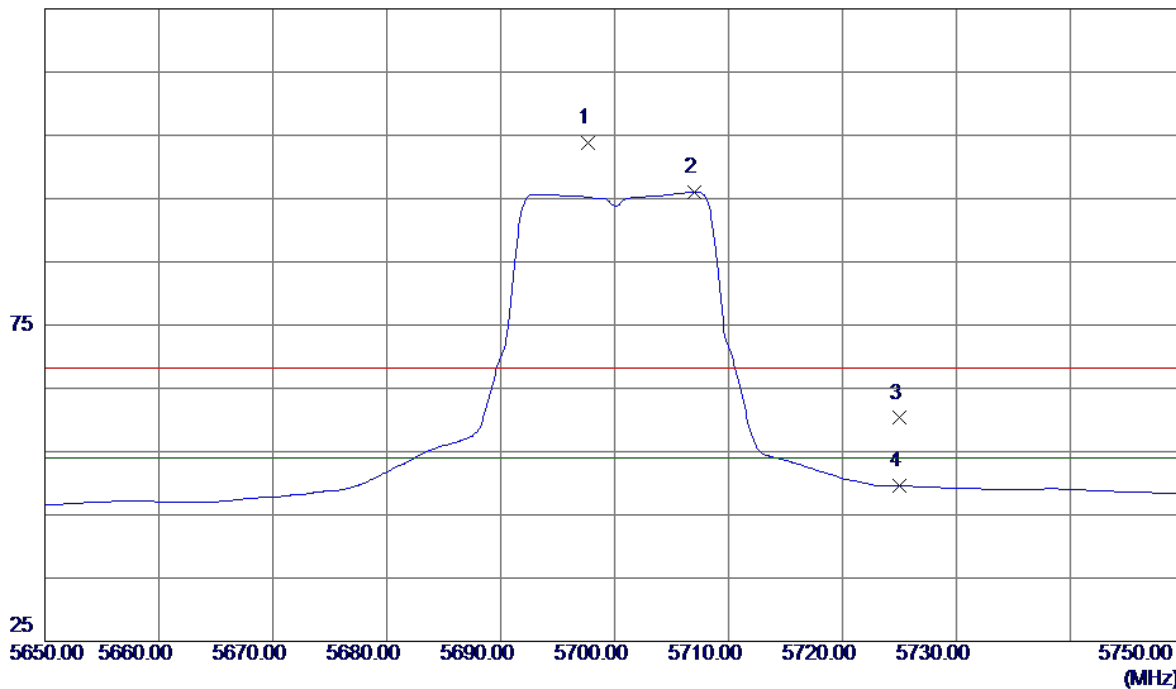


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5697.7000	60.41	43.48	103.89	68.30	35.59	Peak	No Limit
2 *	5707.0000	52.55	43.51	96.06	54.00	42.06	AVG	No Limit
3	5725.0000	16.74	43.56	60.30	68.30	-8.00	Peak	
4	5725.0000	5.99	43.56	49.55	54.00	-4.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

115 dBuV/m

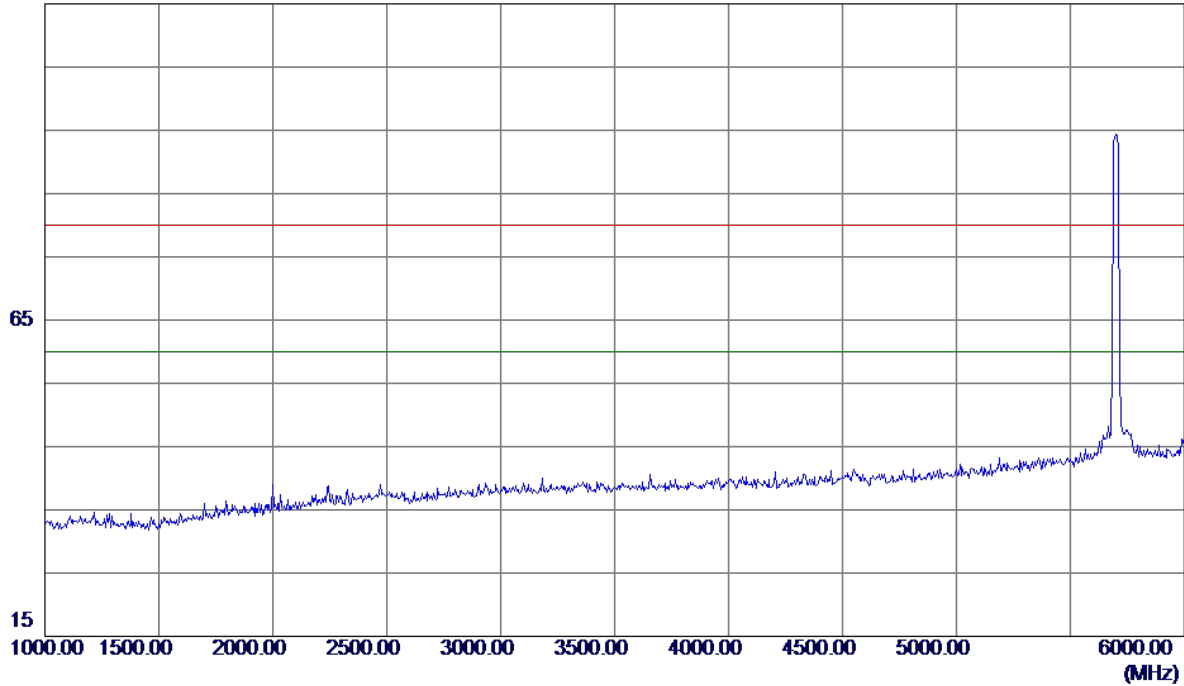


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

115 dBuV/m

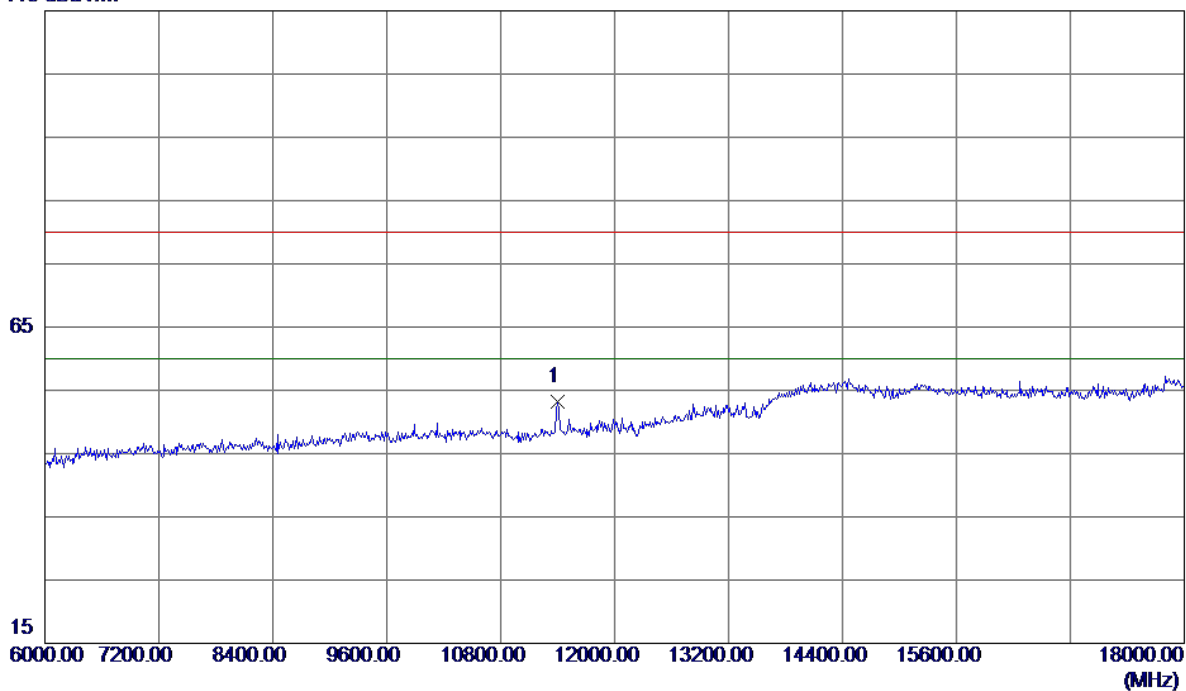


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11400.0000	35.21	17.96	53.17	80.00	-26.83	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

100 dBuV/m

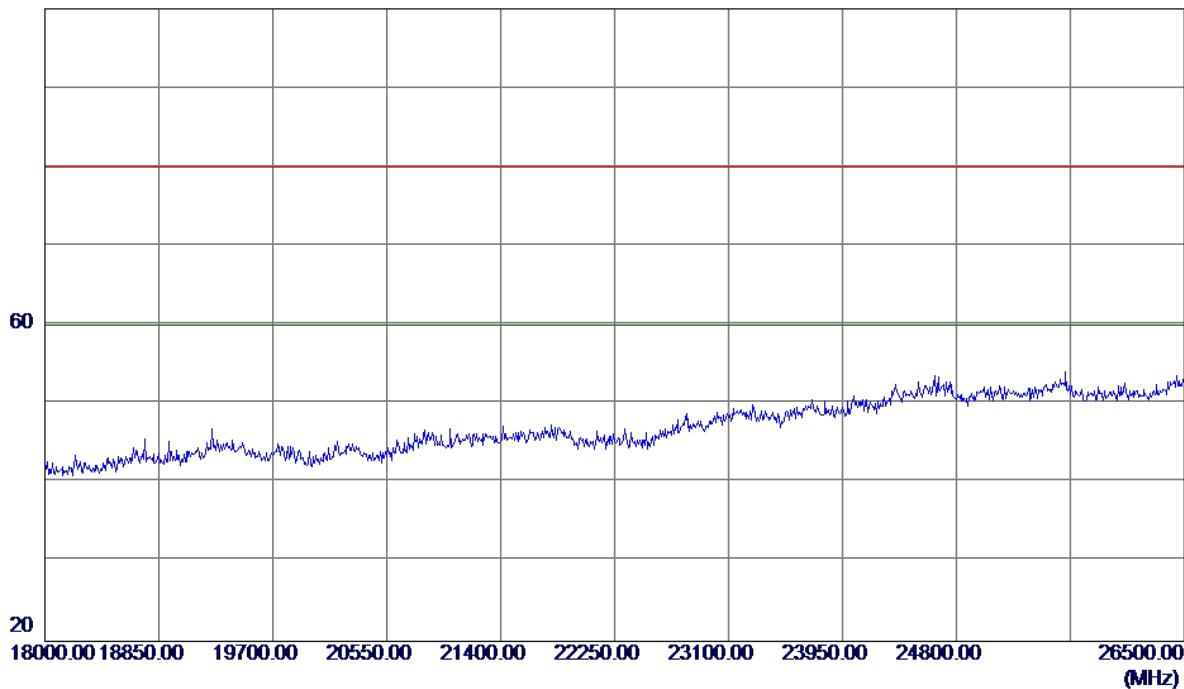


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

115 dBuV/m

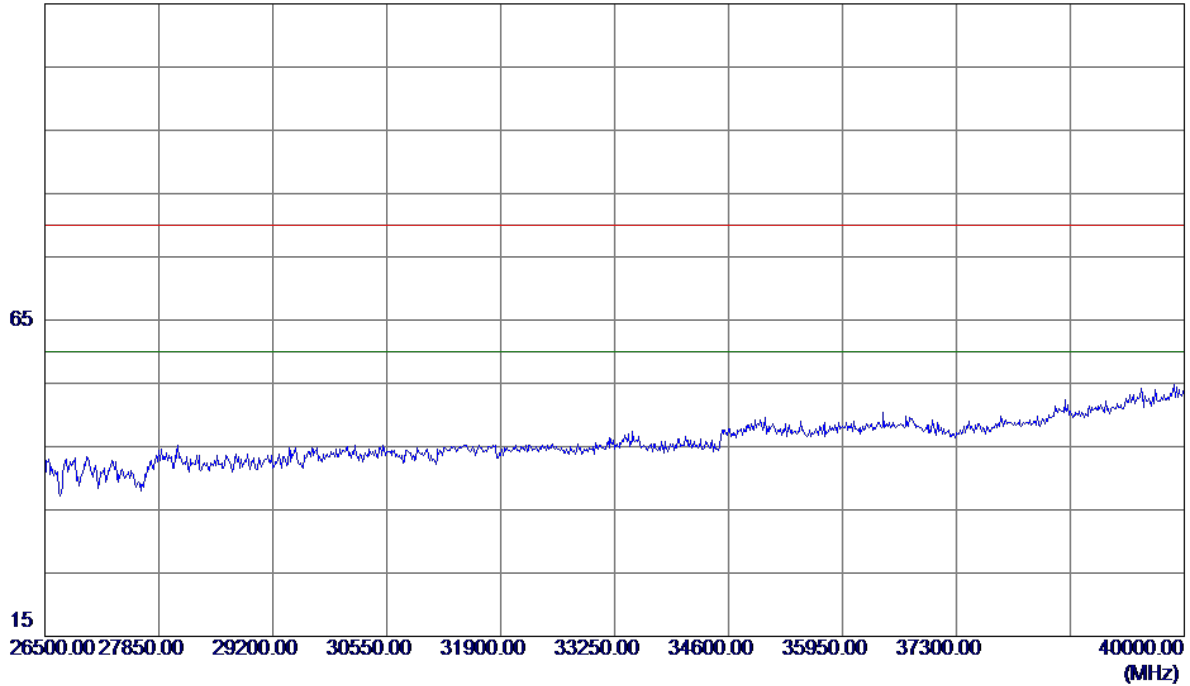


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

125 dBuV/m

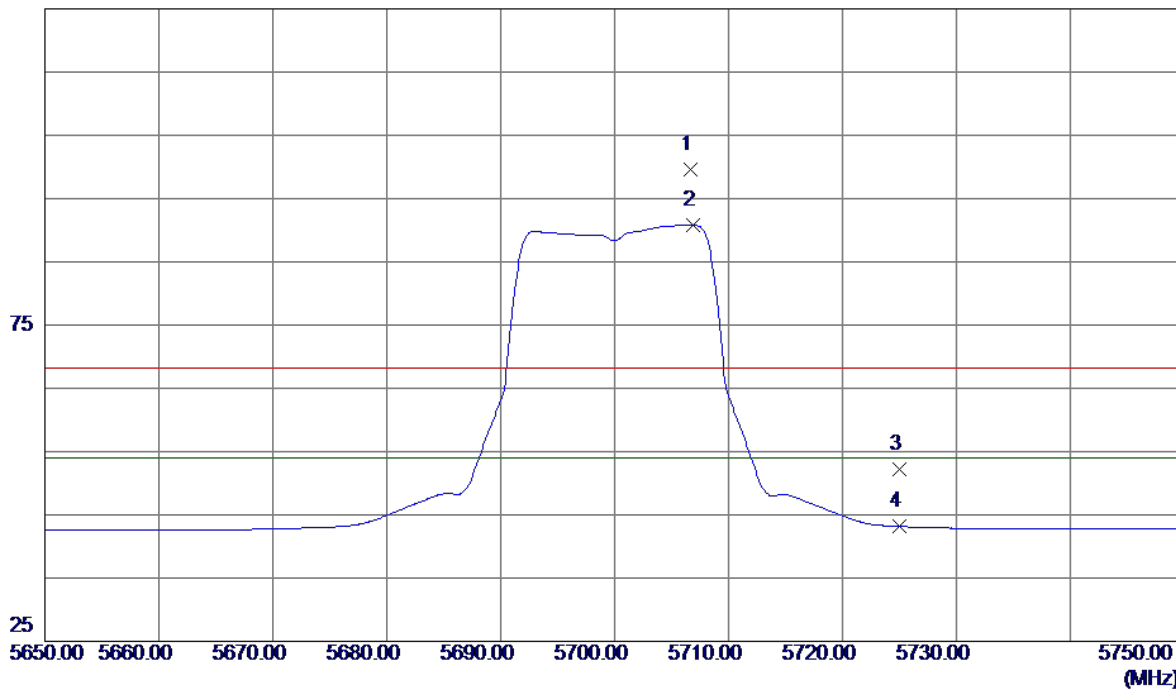


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5706.7000	56.73	42.87	99.60	68.30	31.30	Peak	No Limit
2 *	5706.9000	47.87	42.88	90.75	54.00	36.75	AVG	No Limit
3	5725.0000	9.23	42.94	52.17	68.30	-16.13	Peak	
4	5725.0000	0.20	42.94	43.14	54.00	-10.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

115 dBuV/m

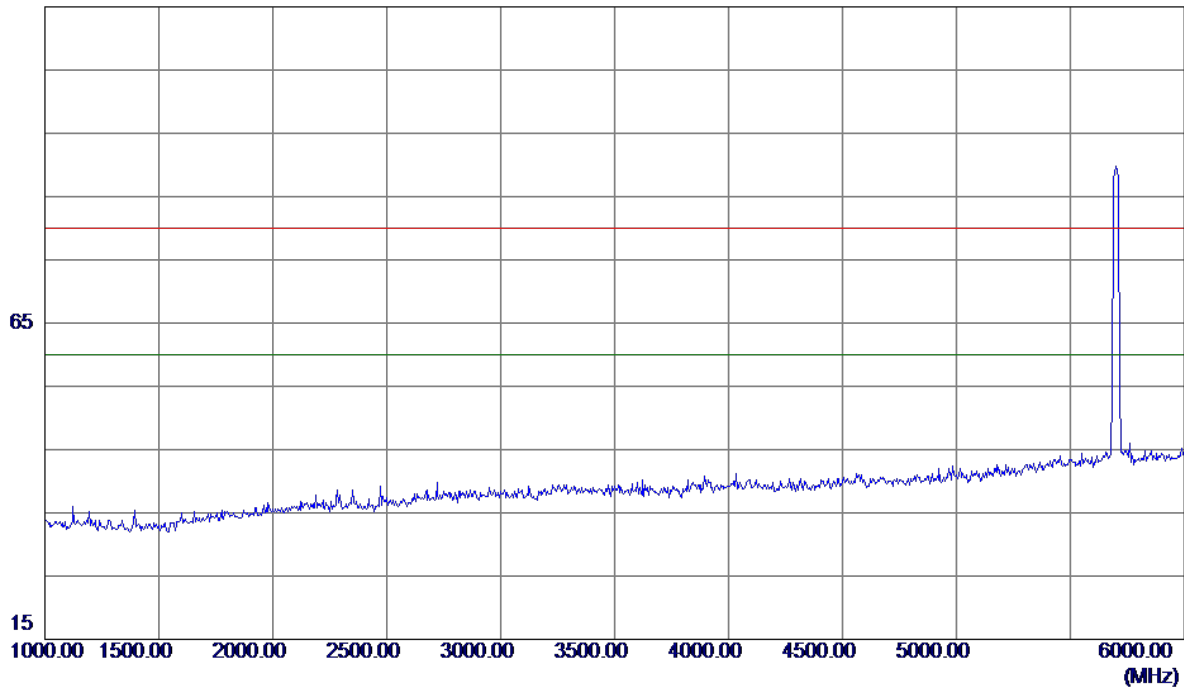


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

115 dBuV/m

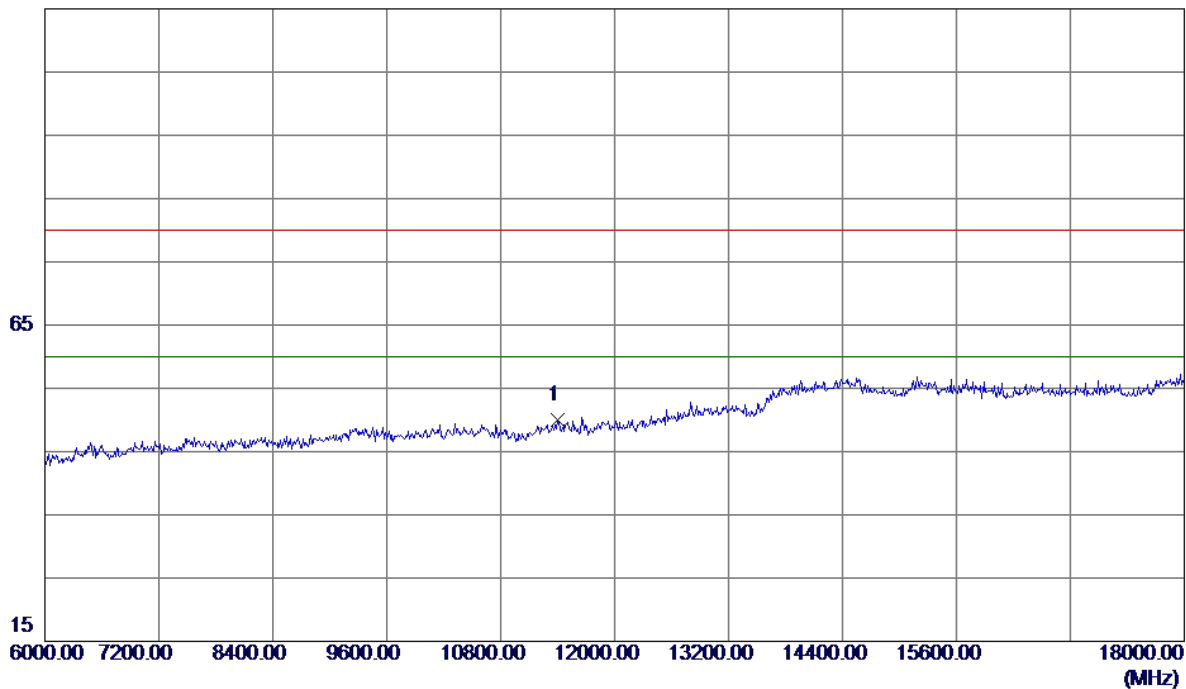


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	32.13	17.96	50.09	80.00	-29.91	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

100 dBuV/m

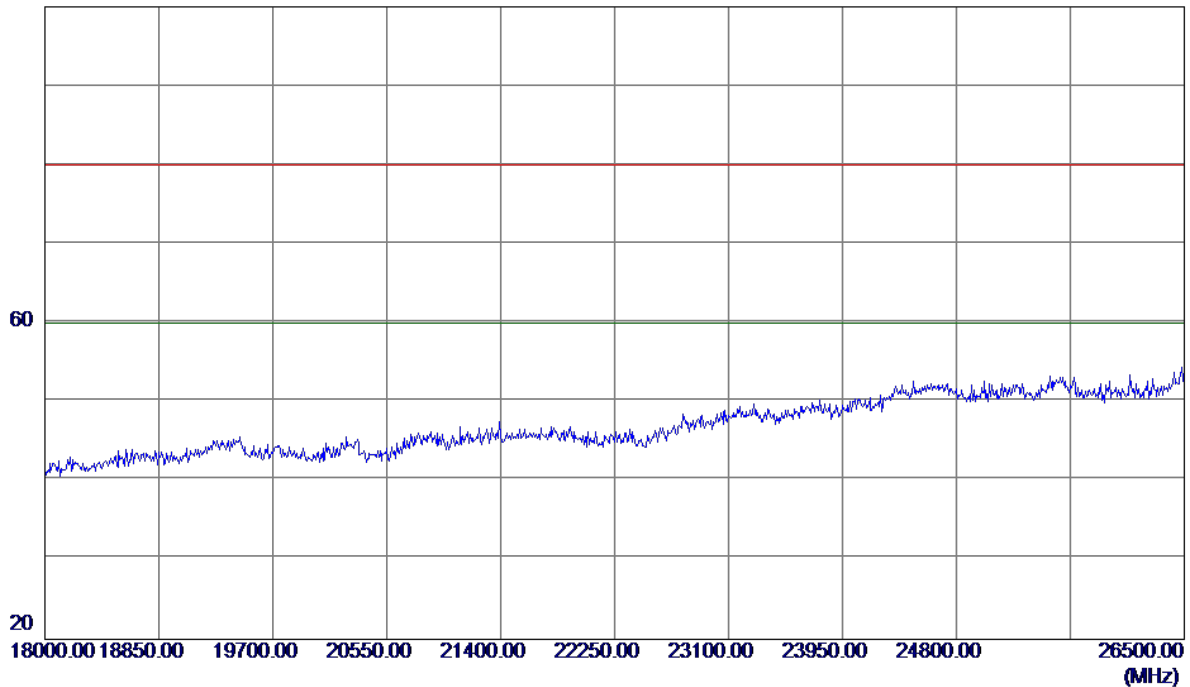


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

115 dBuV/m

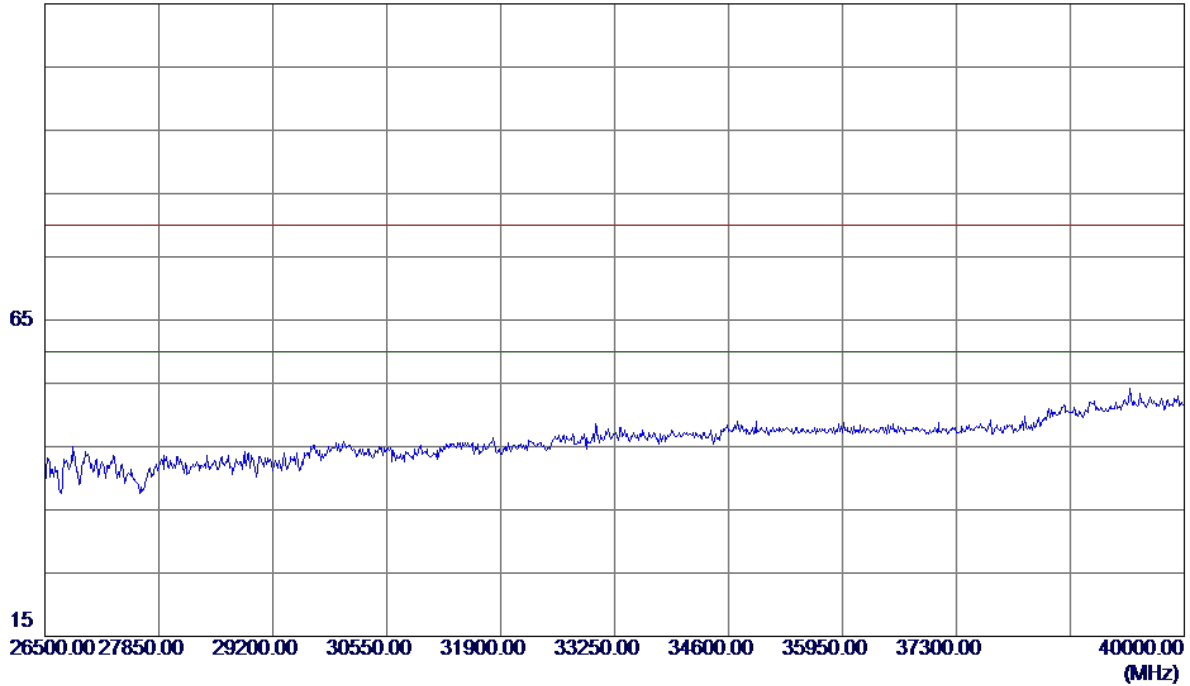


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

125 dBuV/m

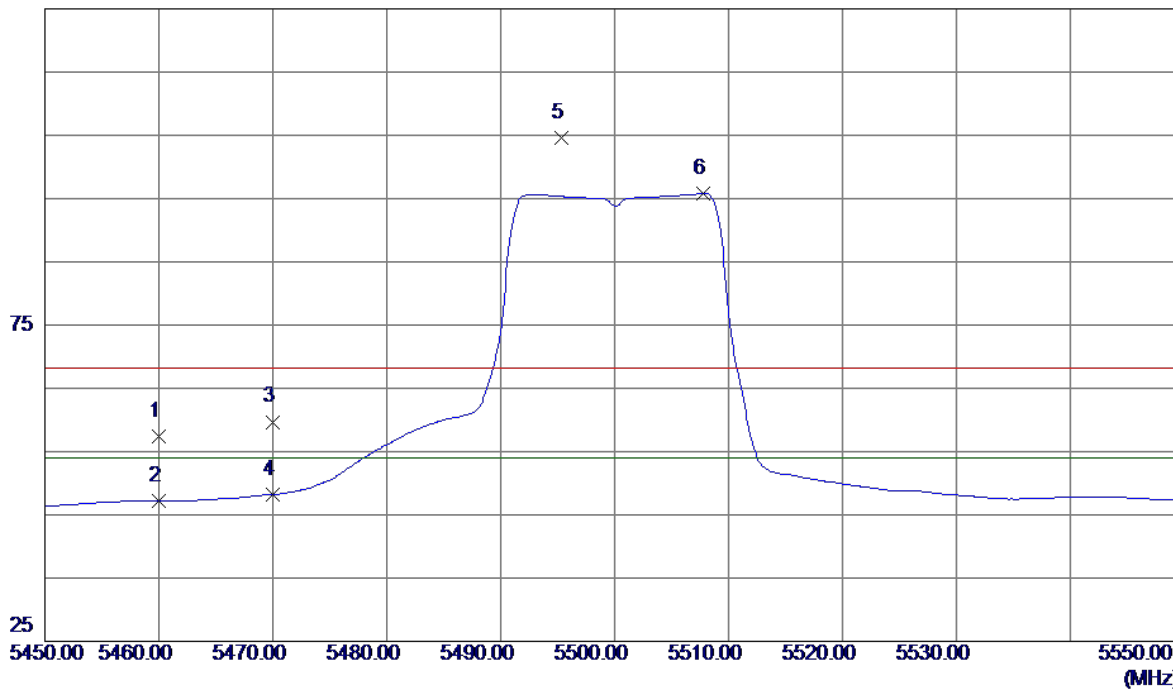


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.72	42.68	57.40	68.30	-10.90	Peak	
2	5460.0000	4.46	42.68	47.14	54.00	-6.86	AVG	
3	5470.0000	16.97	42.73	59.70	68.30	-8.60	Peak	
4	5470.0000	5.43	42.73	48.16	54.00	-5.84	AVG	
5	5495.3000	61.69	42.86	104.55	68.30	36.25	Peak	No Limit
6 *	5507.8000	52.89	42.90	95.79	54.00	41.79	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

115 dBuV/m

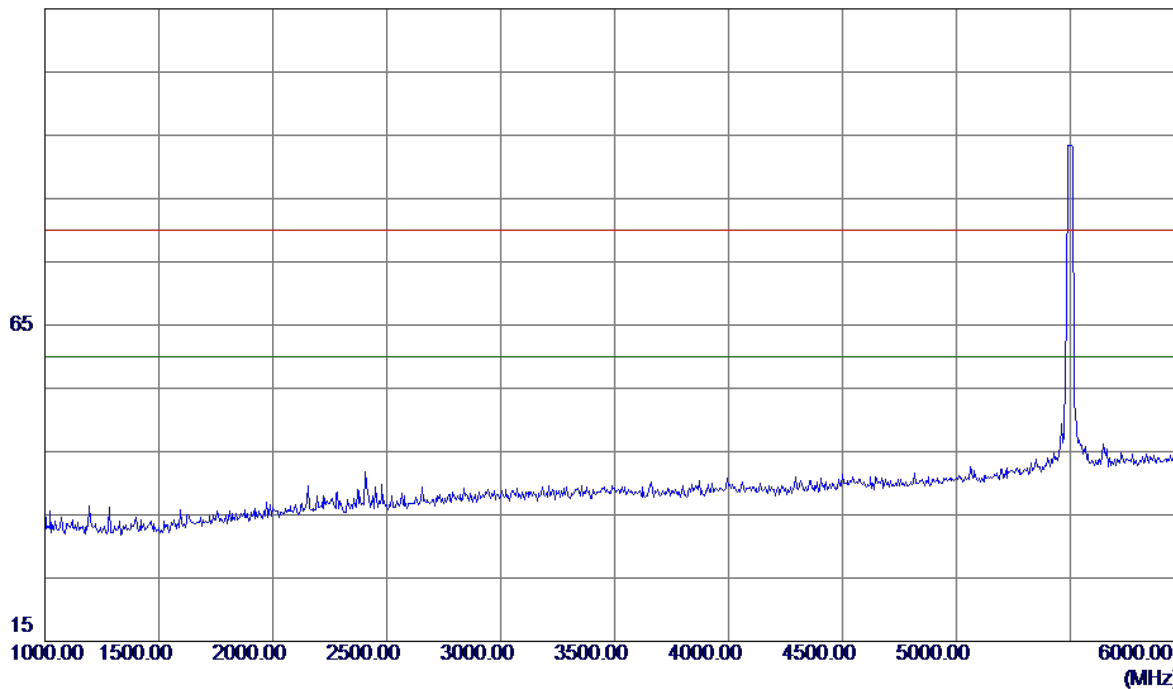


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

115 dBuV/m

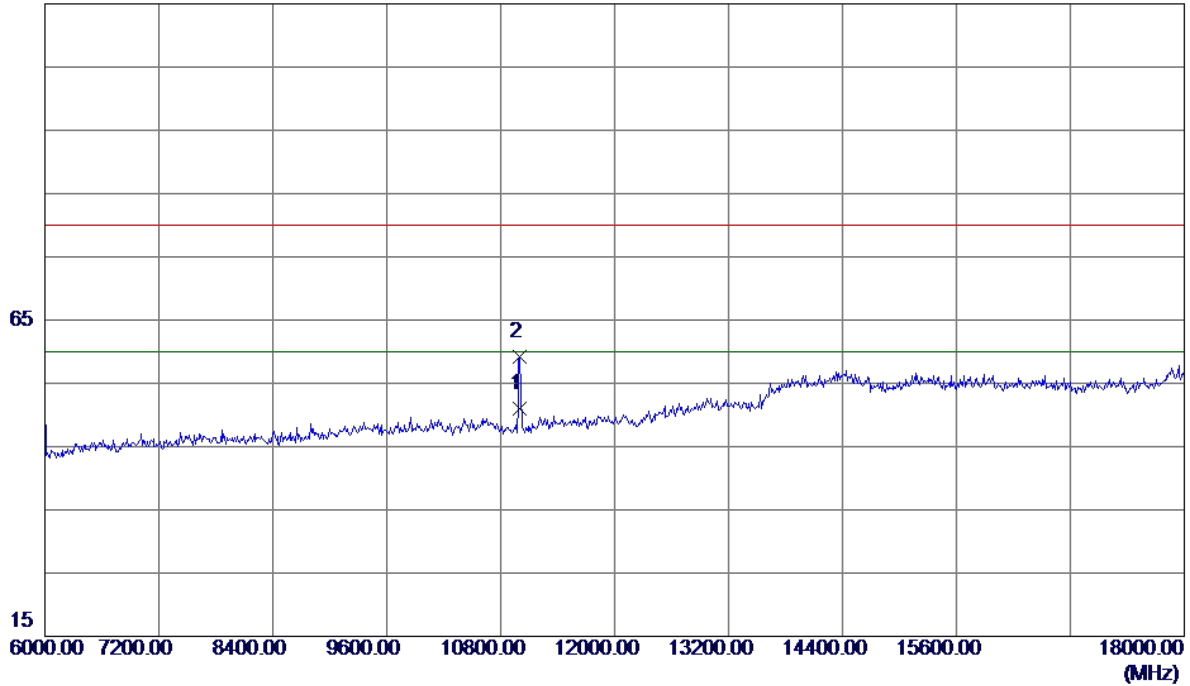


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	34.02	16.90	50.92	60.00	-9.08	AVG	
2	11004.0000	42.30	16.91	59.21	80.00	-20.79	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

100 dBuV/m

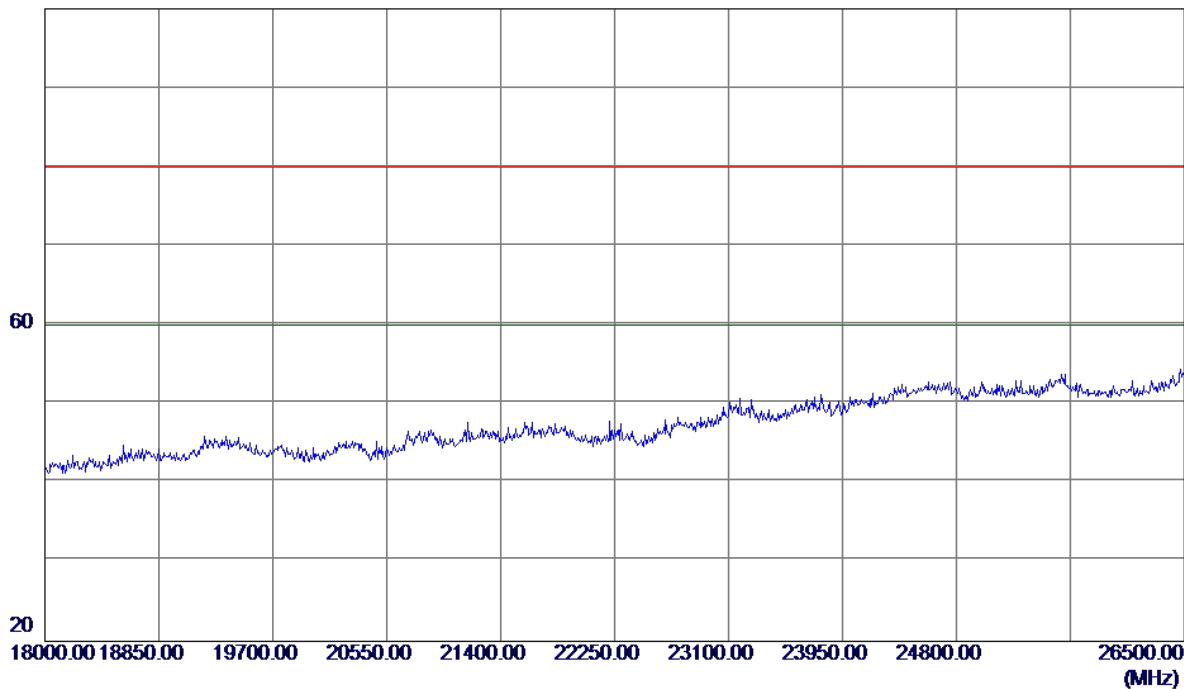


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

115 dBuV/m

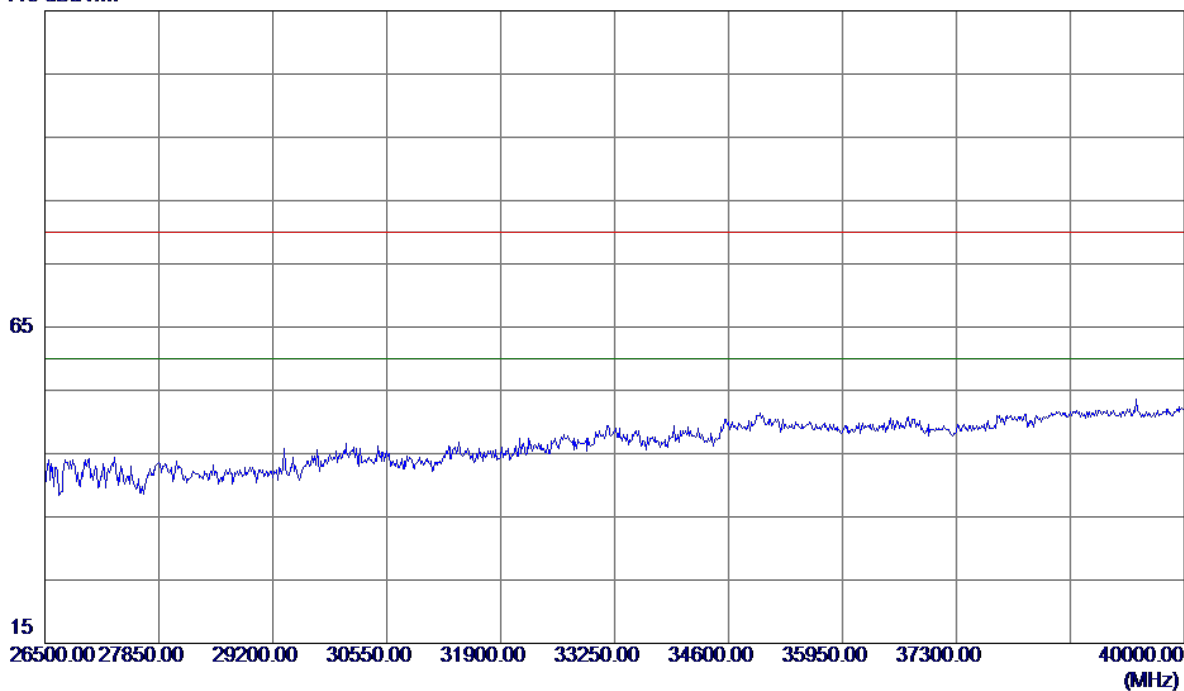


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

125 dBuV/m

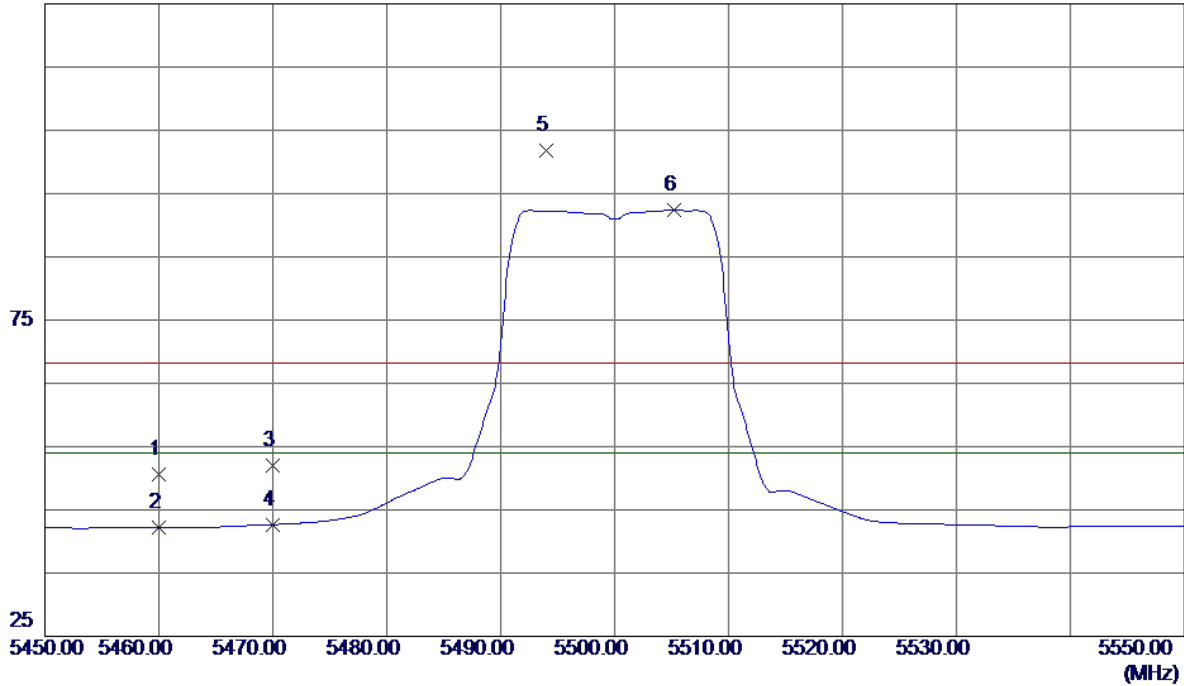


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	8.54	41.97	50.51	68.30	-17.79	Peak	
2	5460.0000	0.26	41.97	42.23	54.00	-11.77	AVG	
3	5470.0000	10.04	42.02	52.06	68.30	-16.24	Peak	
4	5470.0000	0.64	42.02	42.66	54.00	-11.34	AVG	
5	5494.0000	59.73	42.15	101.88	68.30	33.58	Peak	No Limit
6 *	5505.2000	50.14	42.20	92.34	54.00	38.34	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

115 dBuV/m

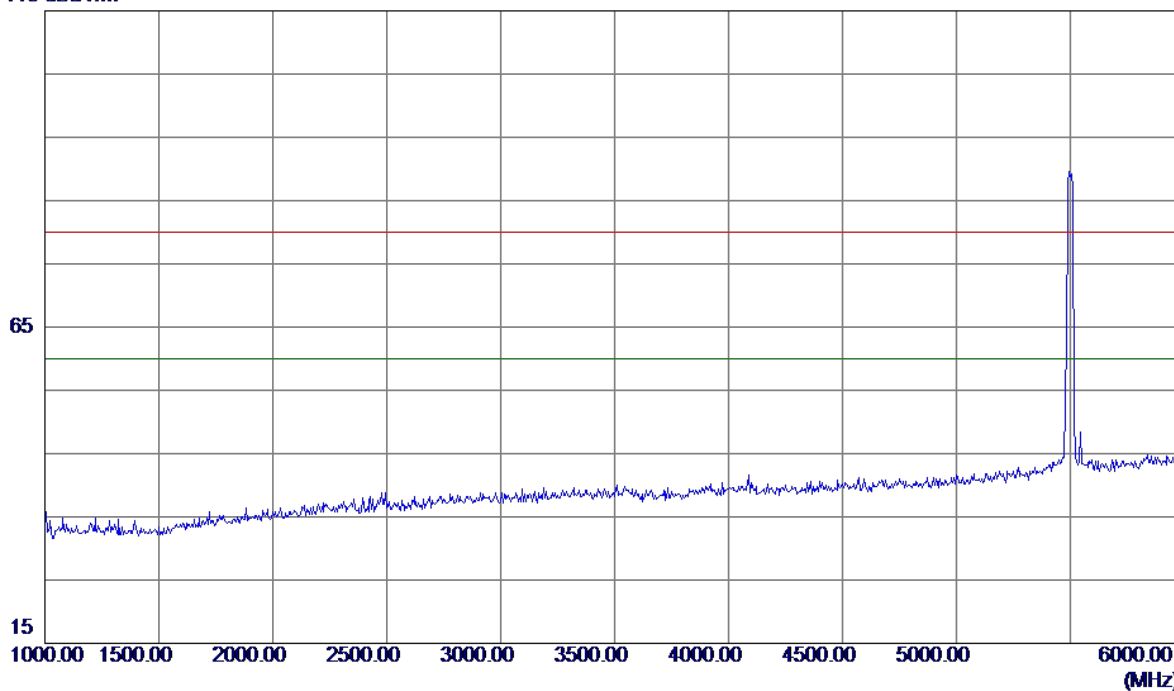


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

115 dBuV/m

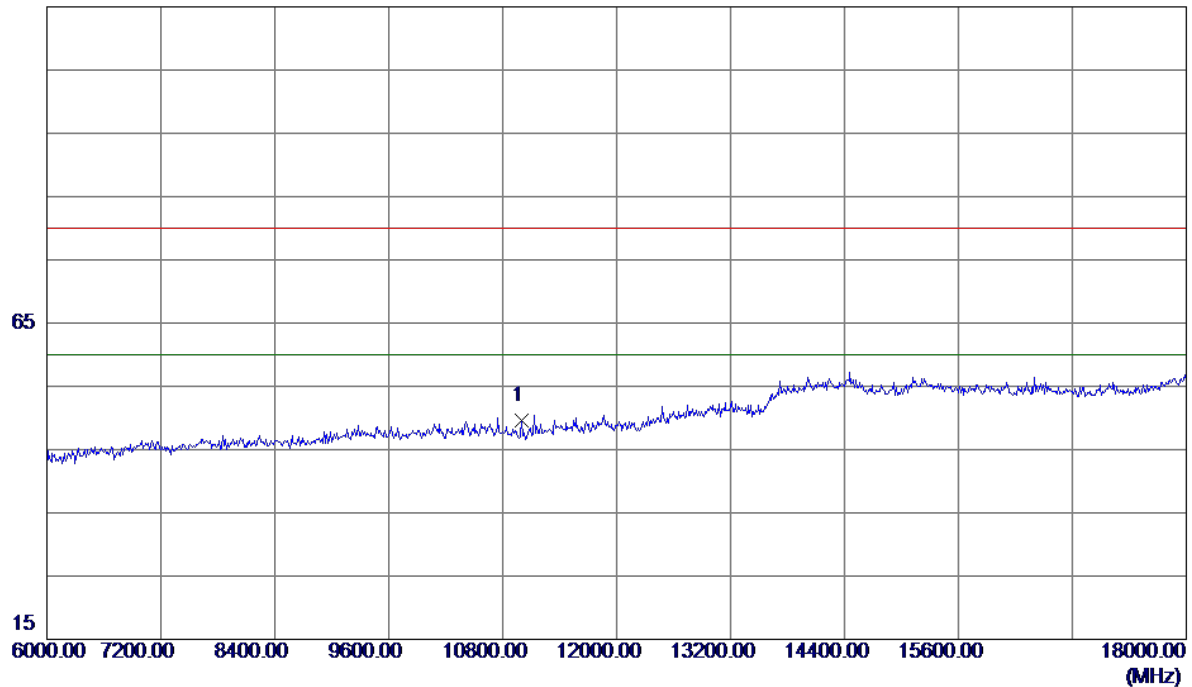


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11000.0000	32.76	16.90	49.66	80.00	-30.34	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

100 dBuV/m

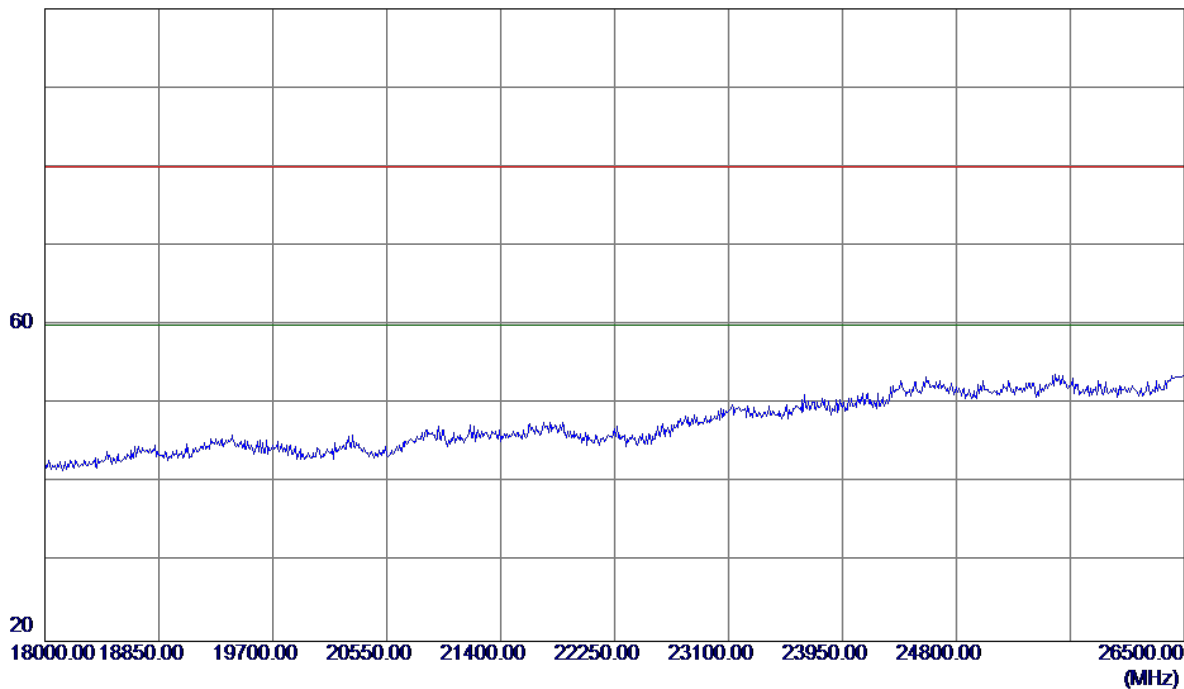


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal


115 dBuV/m

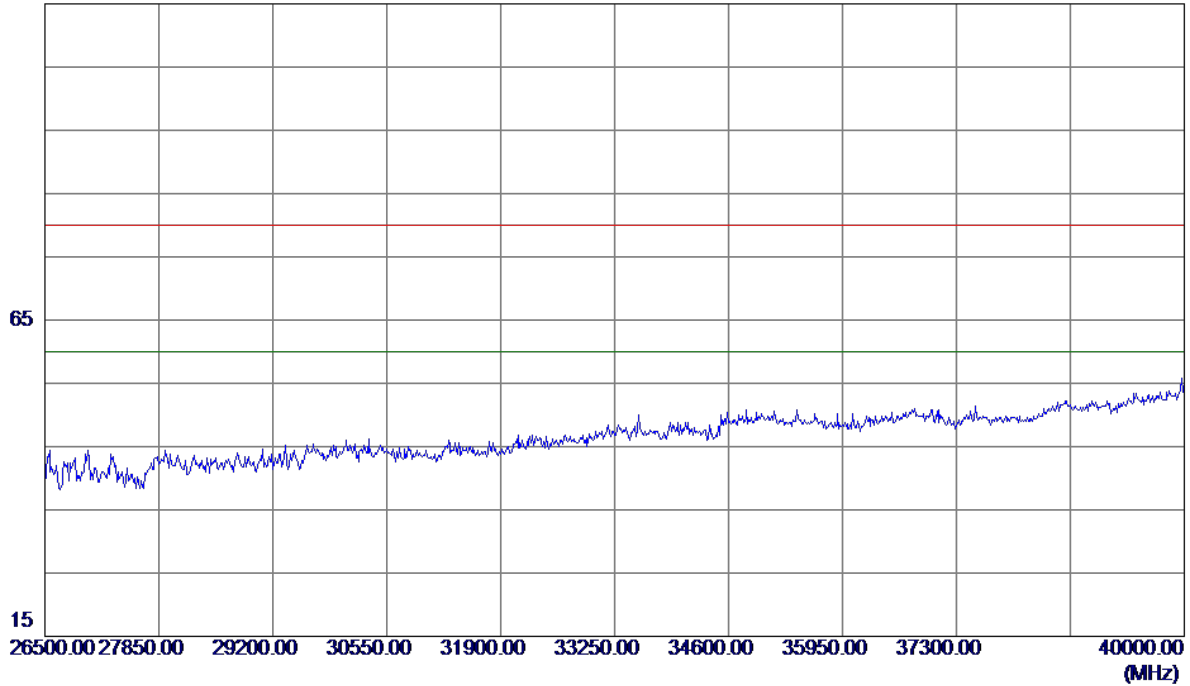

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

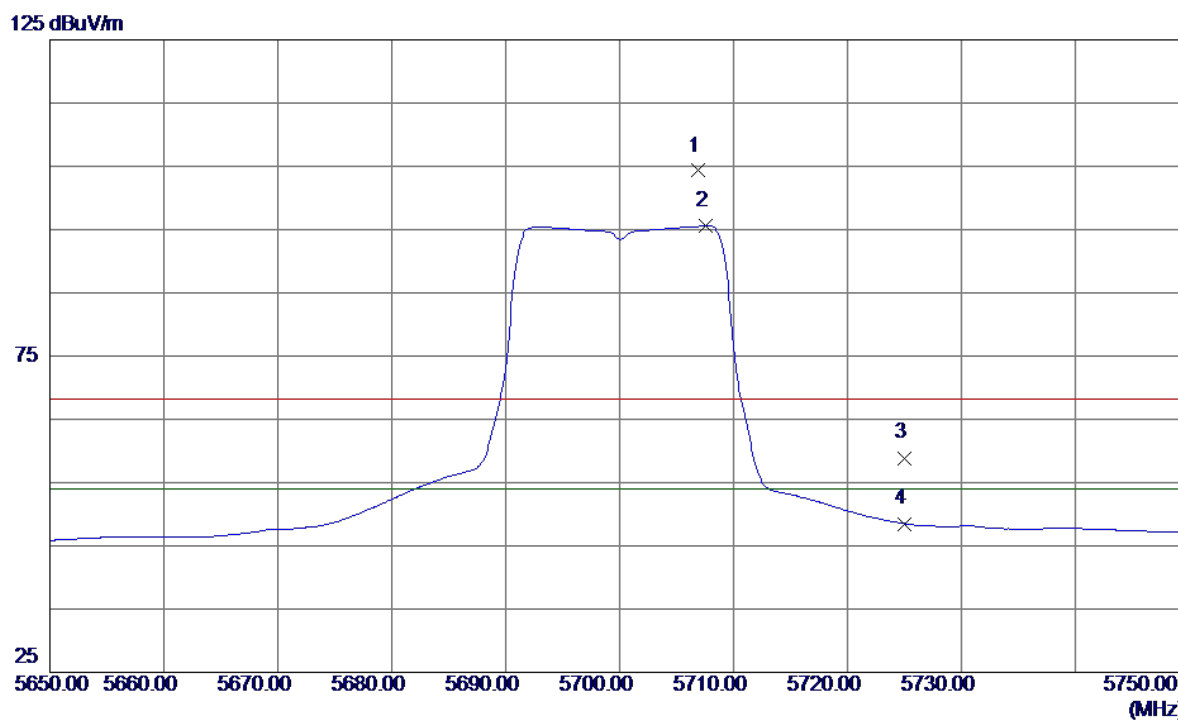


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5706.9000	60.80	43.50	104.30	68.30	36.00	Peak	No Limit
2 *	5707.6000	52.05	43.51	95.56	54.00	41.56	AVG	No Limit
3	5725.0000	15.34	43.56	58.90	68.30	-9.40	Peak	
4	5725.0000	4.94	43.56	48.50	54.00	-5.50	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

115 dBuV/m

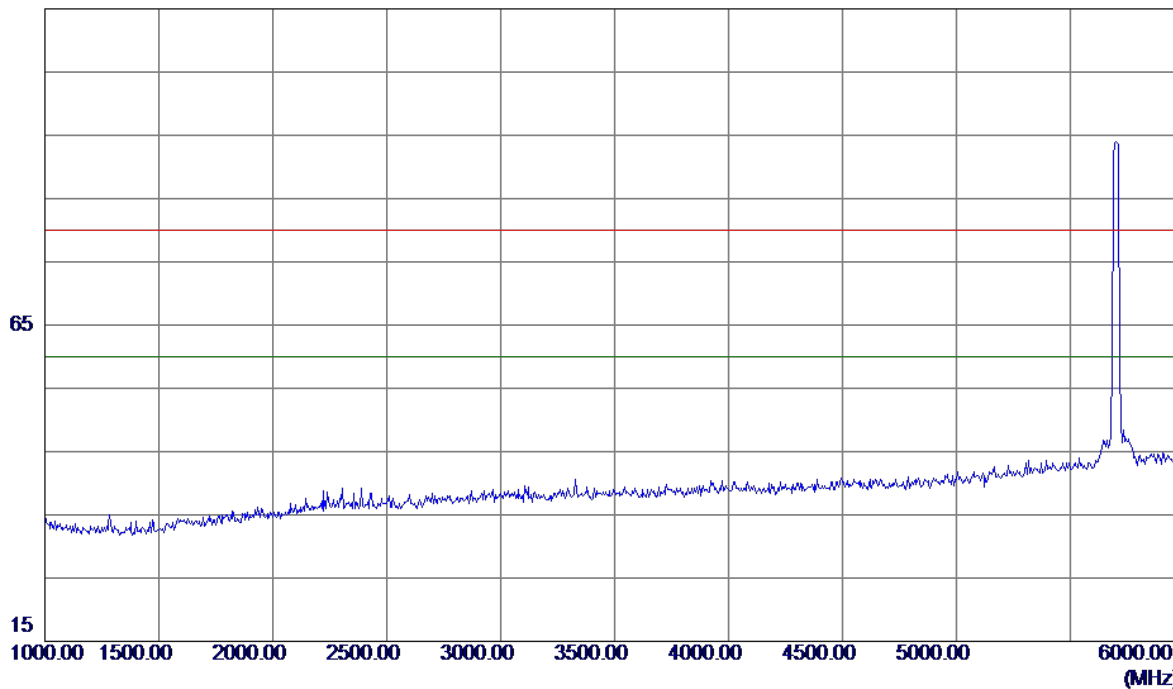


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

115 dBuV/m

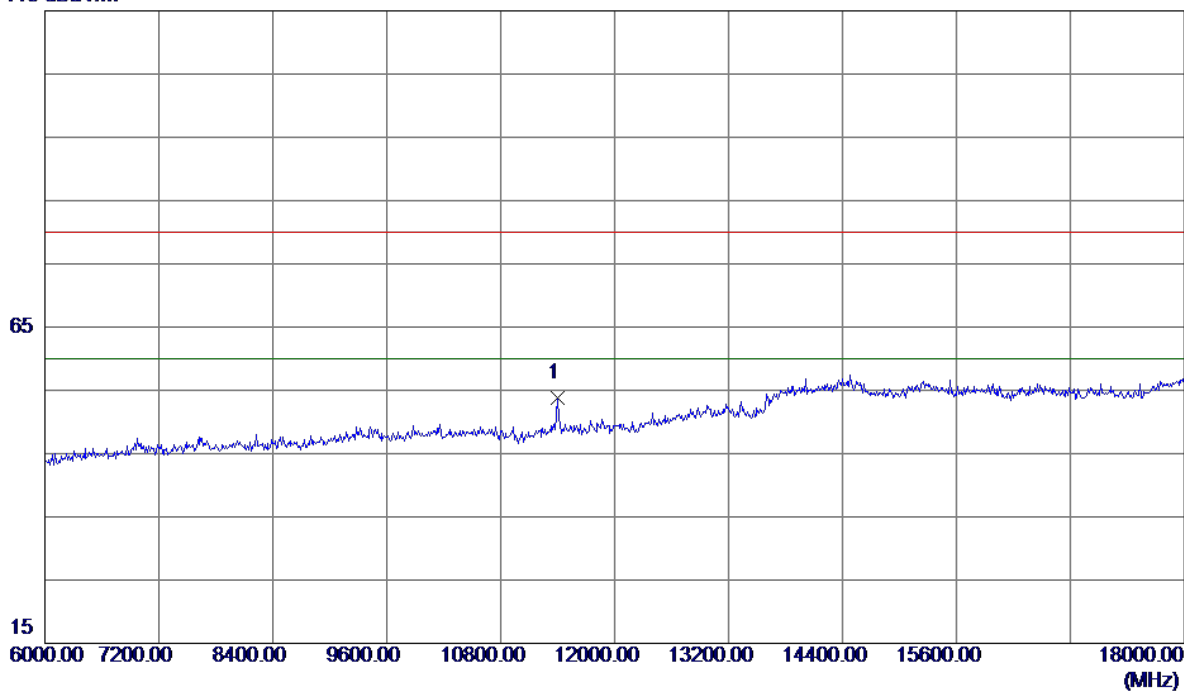


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	35.87	17.96	53.83	80.00	-26.17	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

100 dBuV/m

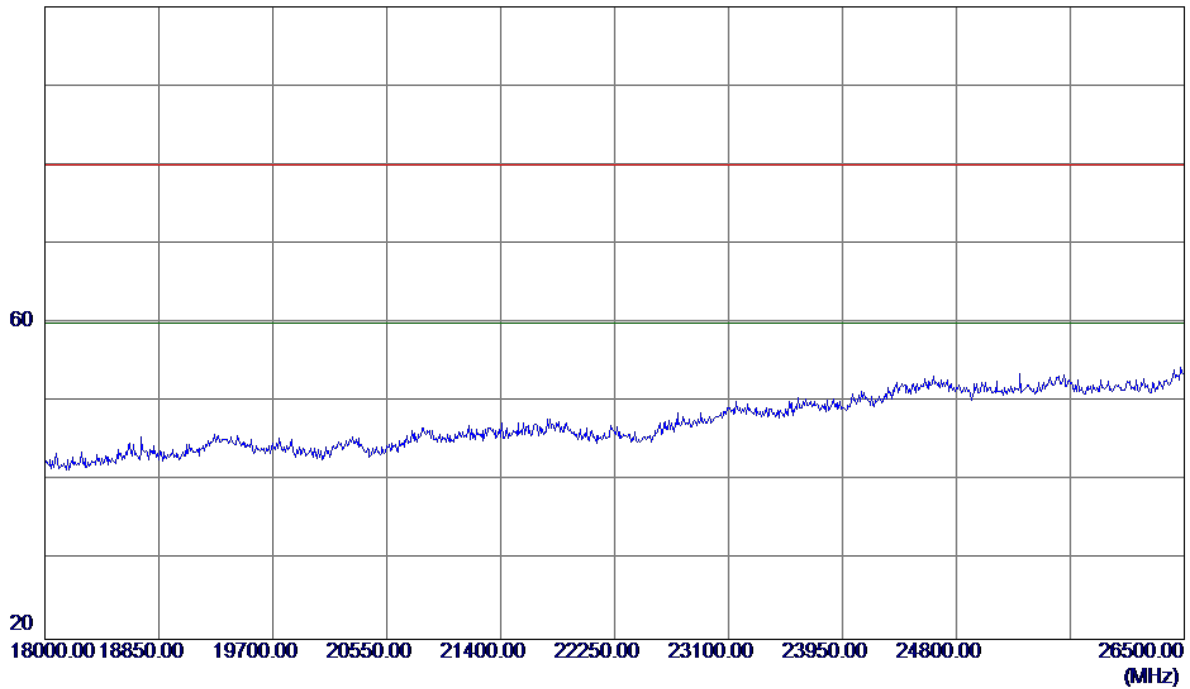


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

115 dBuV/m

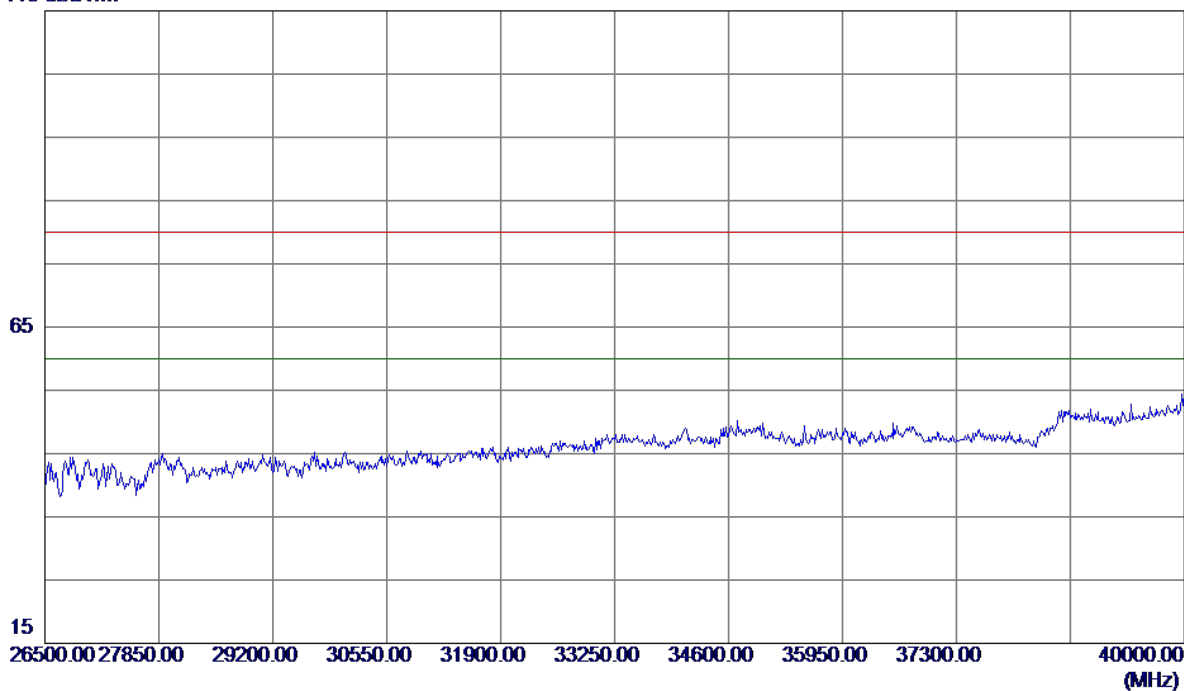


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

125 dBuV/m

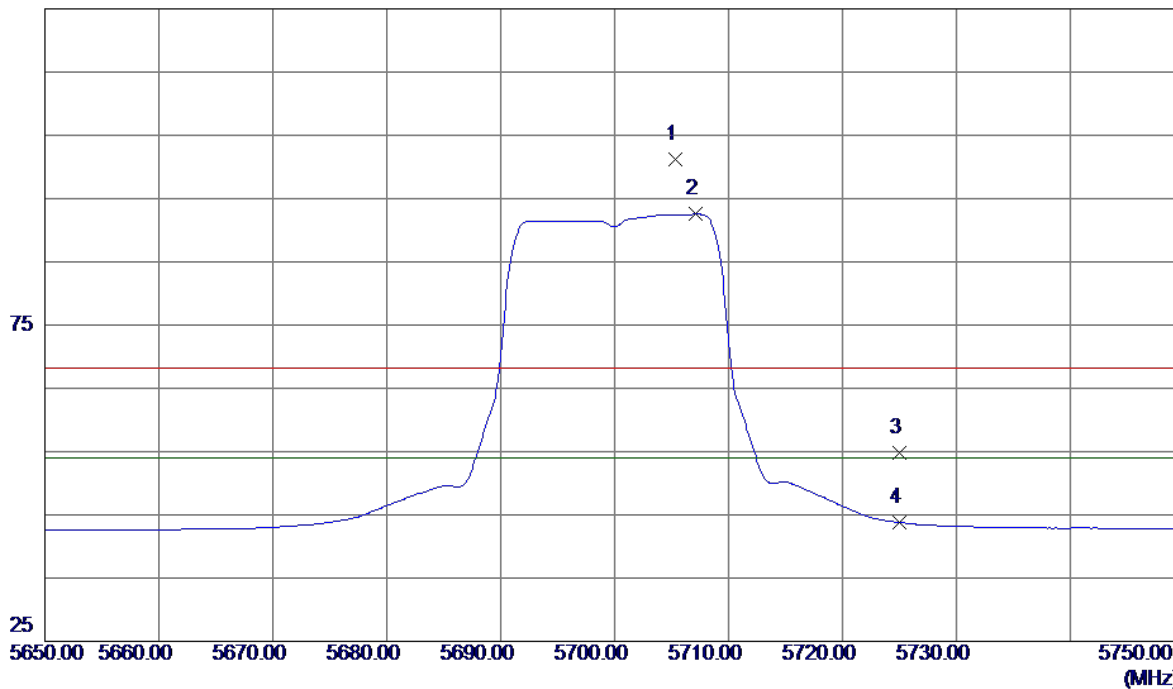


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5705.3000	58.39	42.87	101.26	68.30	32.96	Peak	No Limit
2 *	5707.1000	49.64	42.88	92.52	54.00	38.52	AVG	No Limit
3	5725.0000	11.83	42.94	54.77	68.30	-13.53	Peak	
4	5725.0000	0.84	42.94	43.78	54.00	-10.22	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

115 dBuV/m

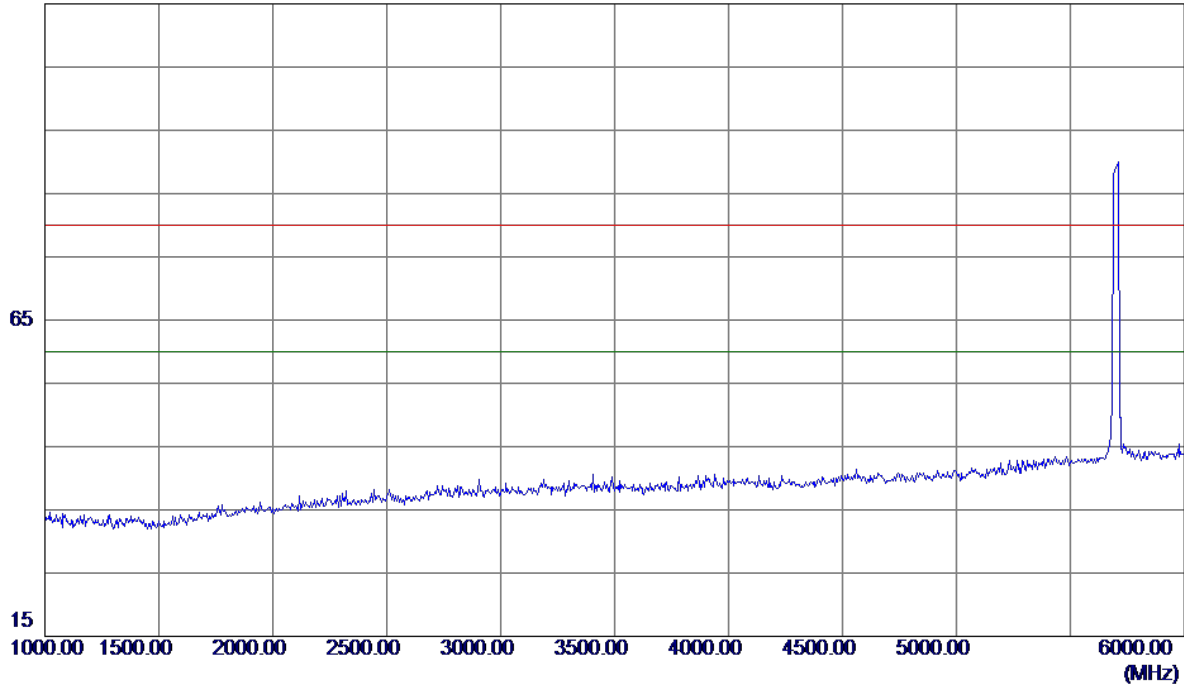


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

115 dBuV/m

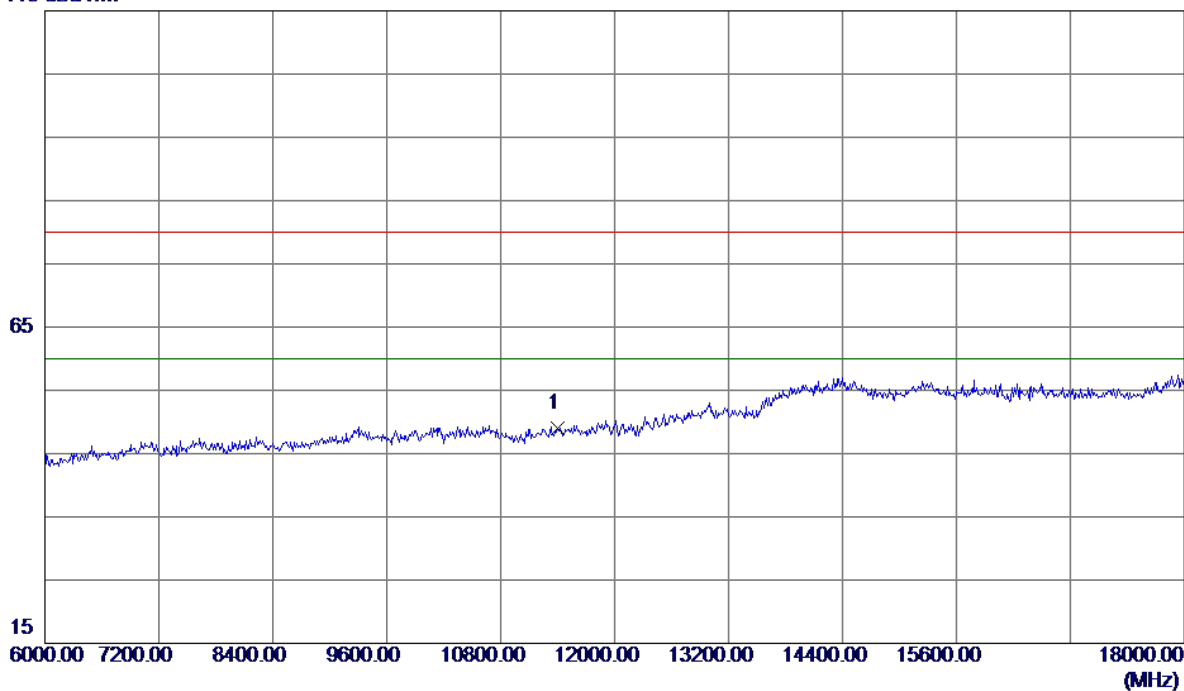


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11400.0000	31.05	17.96	49.01	80.00	-30.99	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

100 dBuV/m

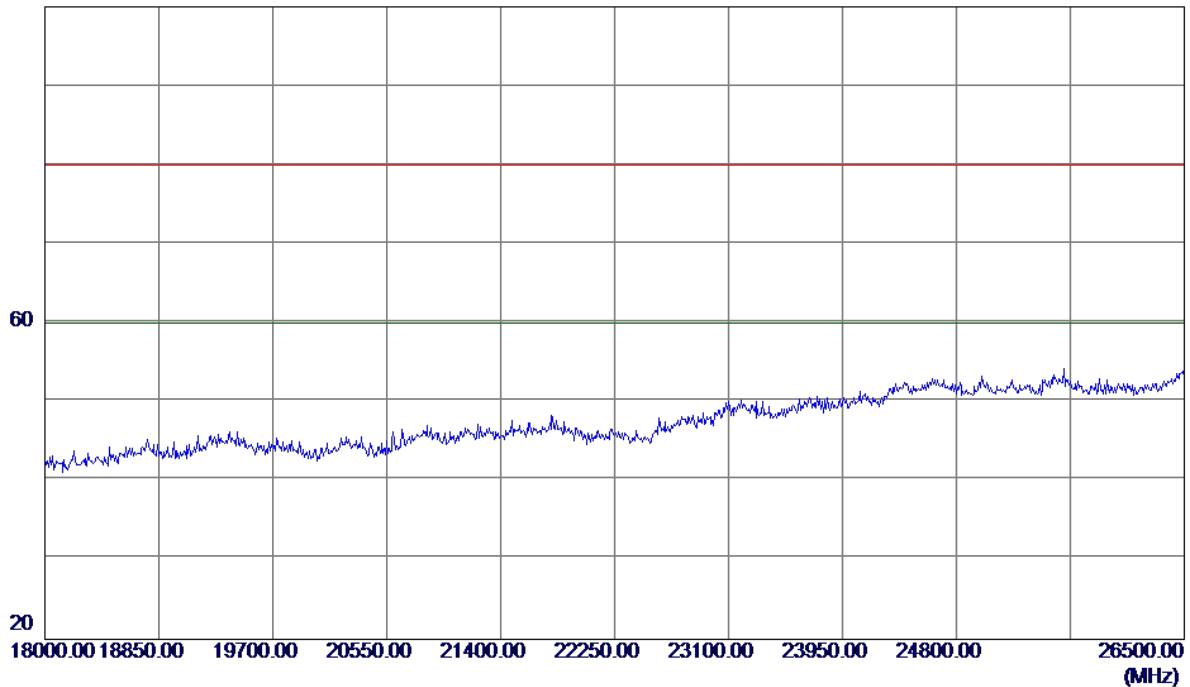


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

115 dBuV/m

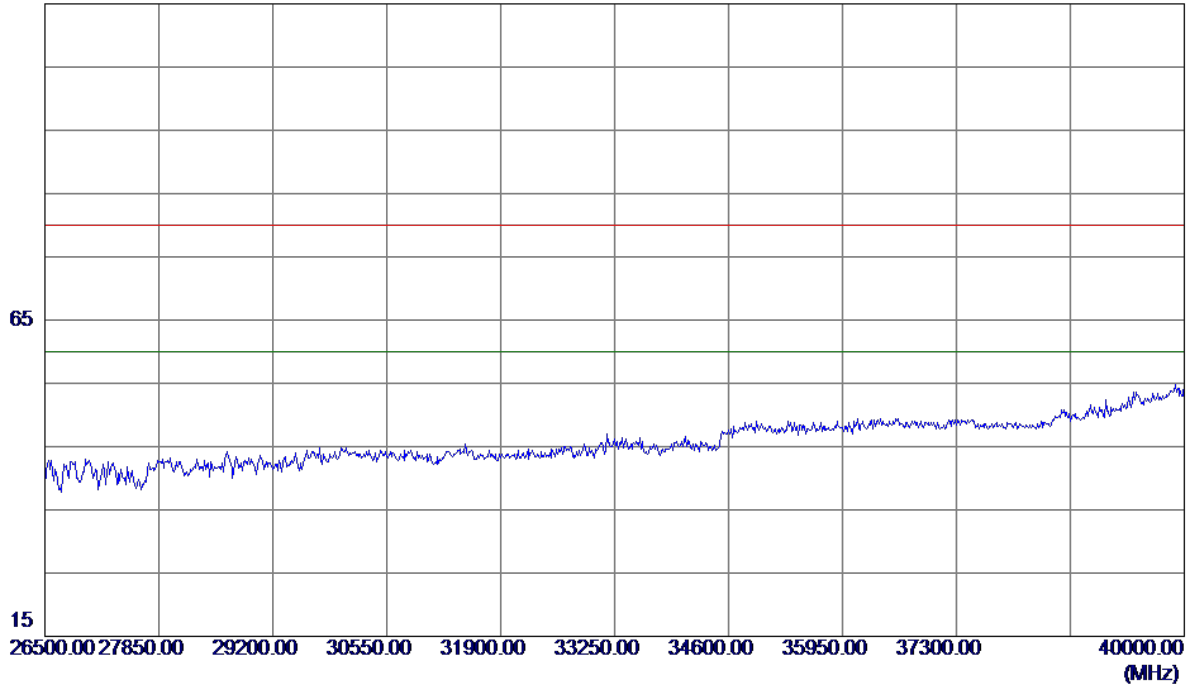


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

125 dBuV/m

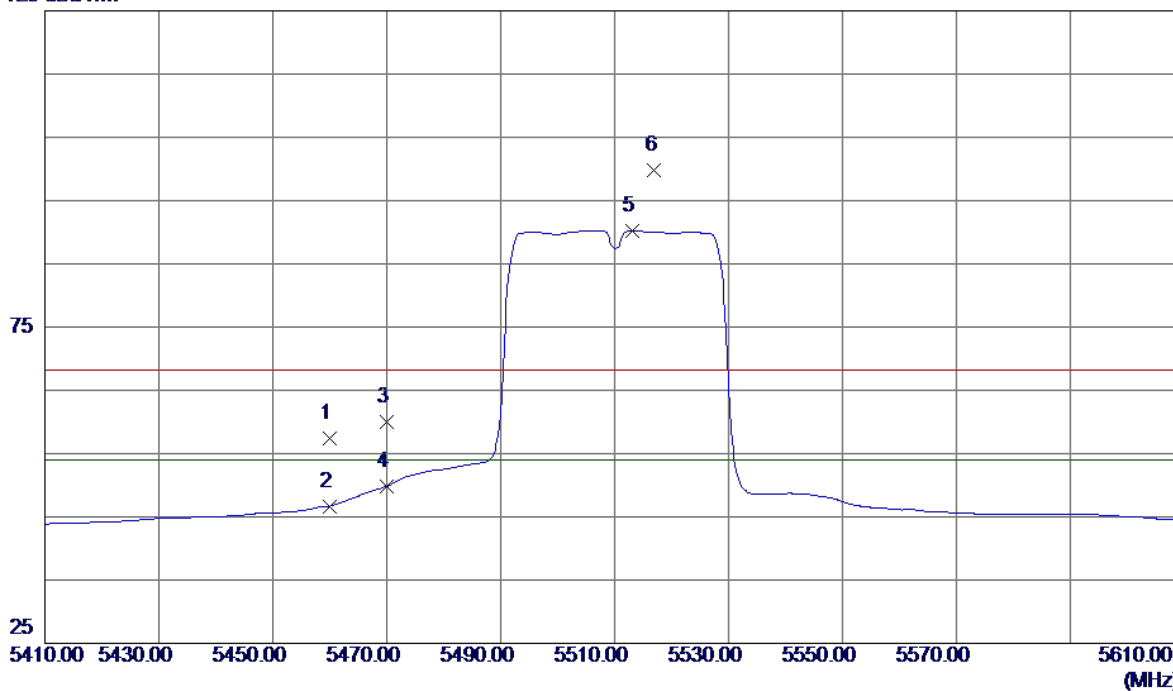


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	14.77	42.68	57.45	68.30	-10.85	Peak	
2	5460.0000	4.01	42.68	46.69	54.00	-7.31	AVG	
3	5470.0000	17.19	42.73	59.92	68.30	-8.38	Peak	
4	5470.0000	7.09	42.73	49.82	54.00	-4.18	AVG	
5 *	5513.2000	47.32	42.92	90.24	54.00	36.24	AVG	No Limit
6	5517.0000	56.79	42.93	99.72	68.30	31.42	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

115 dBuV/m

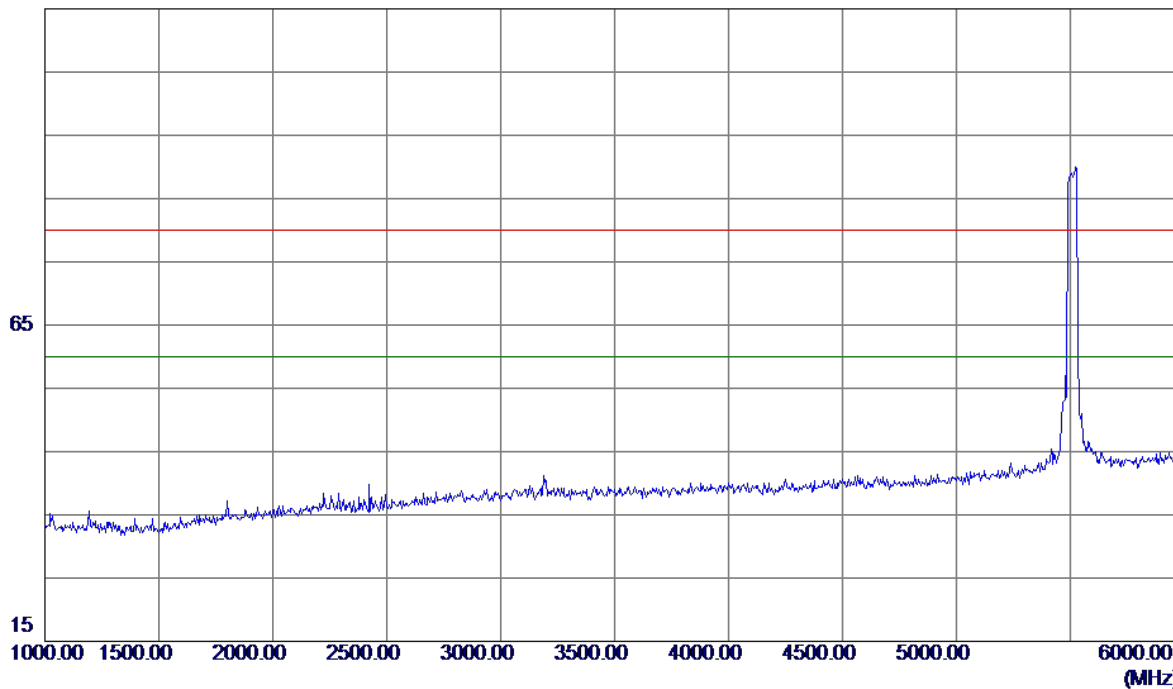


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

115 dBuV/m

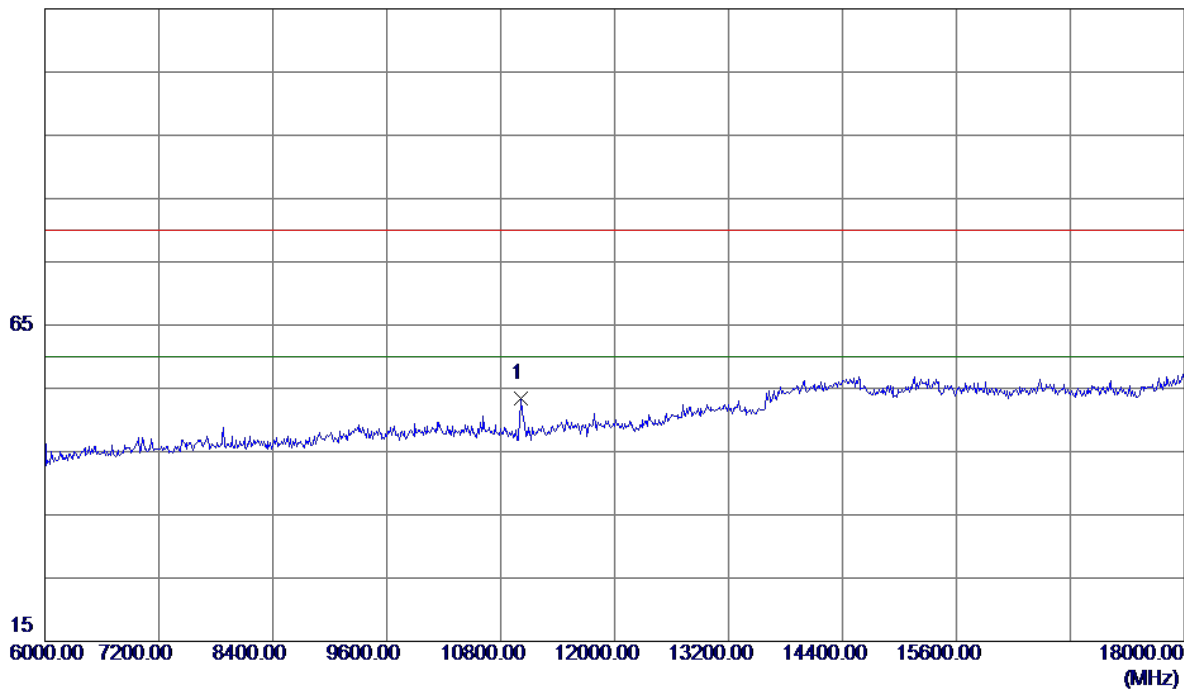


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11016.0000	36.48	16.94	53.42	80.00	-26.58	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

100 dBuV/m

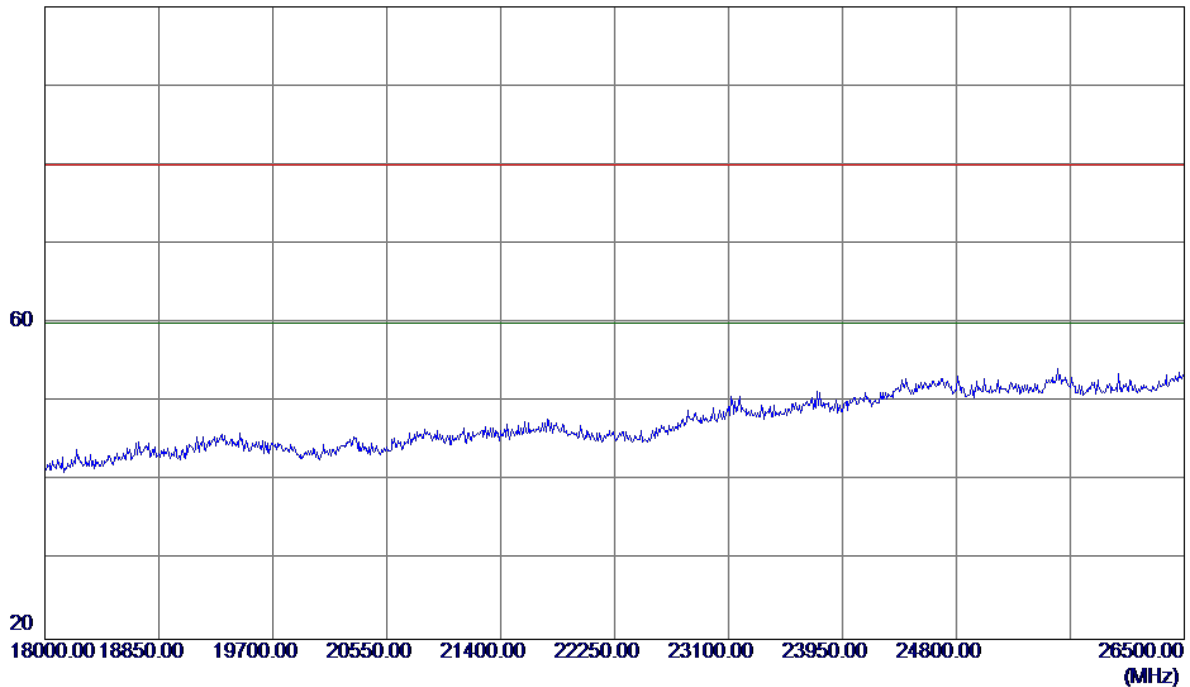


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

115 dBuV/m

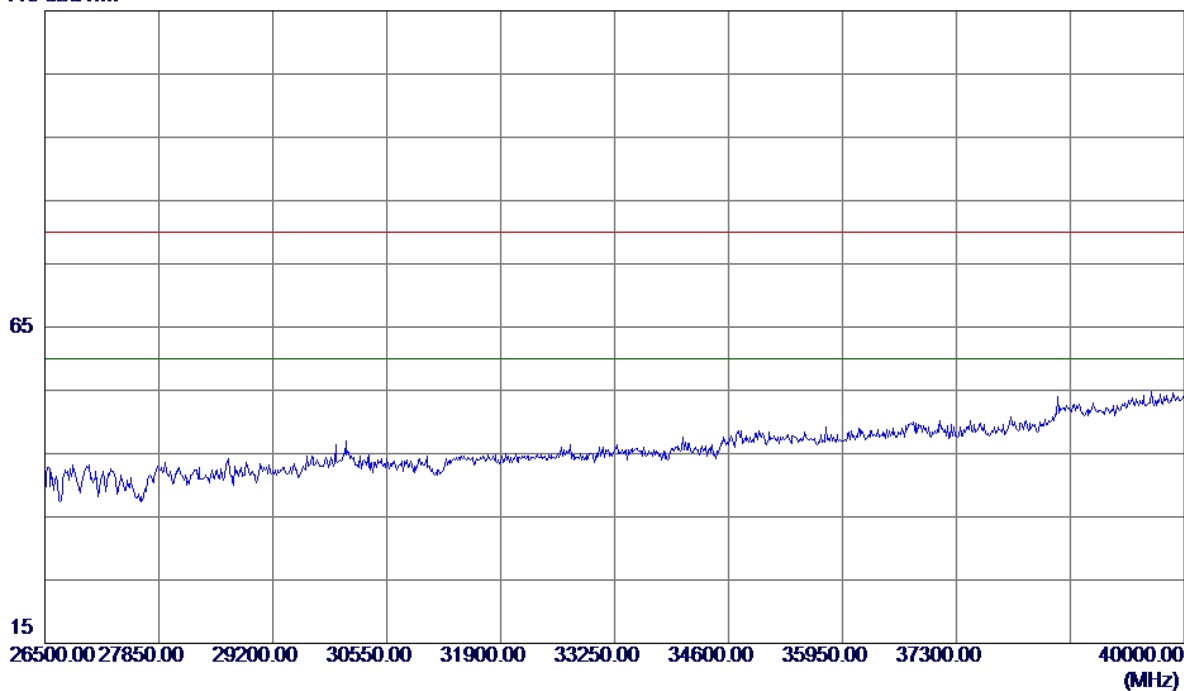


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

125 dBuV/m

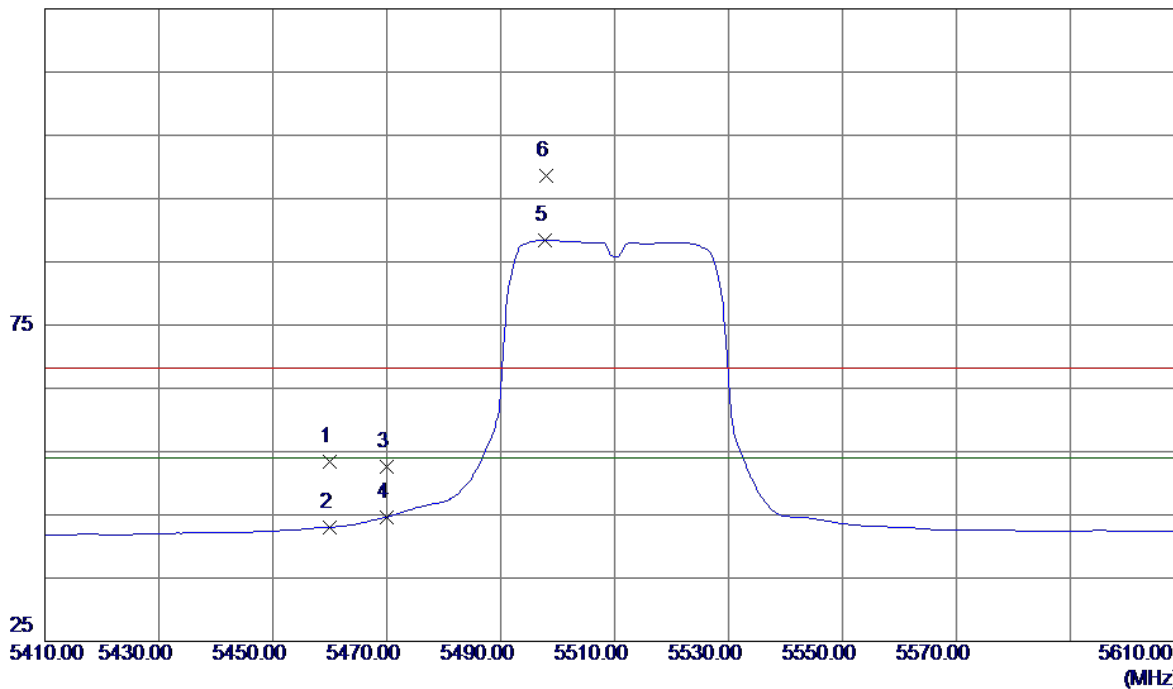


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	11.48	41.97	53.45	68.30	-14.85	Peak	
2	5460.0000	1.09	41.97	43.06	54.00	-10.94	AVG	
3	5470.0000	10.50	42.02	52.52	68.30	-15.78	Peak	
4	5470.0000	2.61	42.02	44.63	54.00	-9.37	AVG	
5 *	5497.8000	46.30	42.17	88.47	54.00	34.47	AVG	No Limit
6	5498.0000	56.41	42.17	98.58	68.30	30.28	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

115 dBuV/m

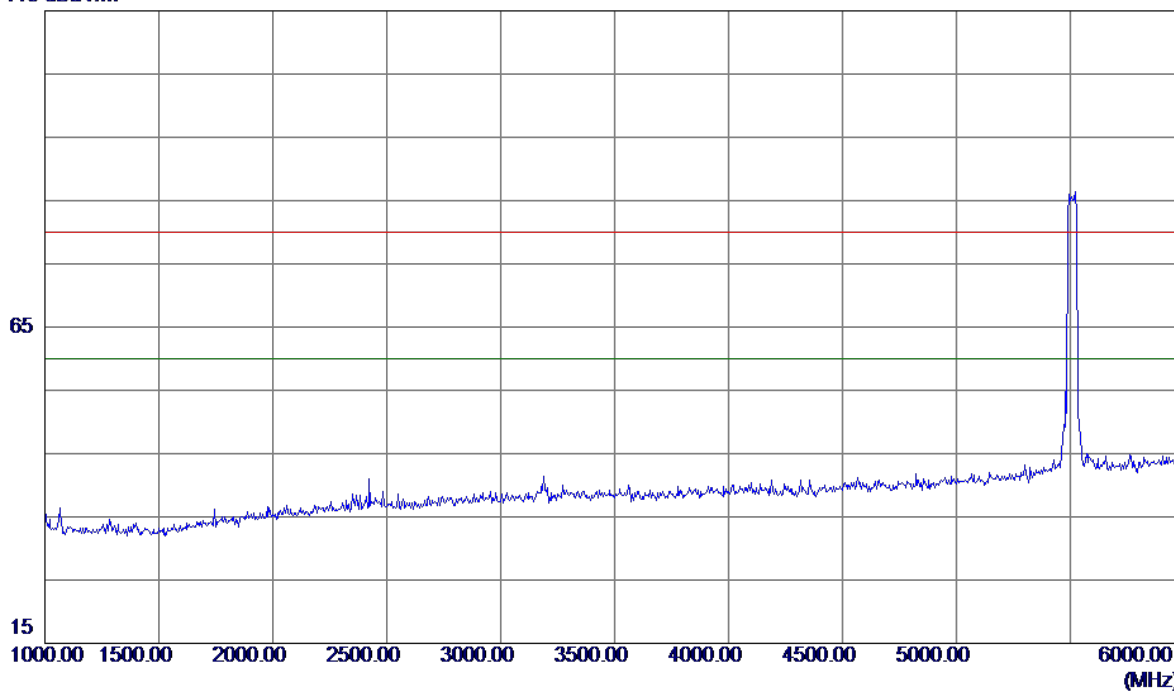


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

115 dBuV/m

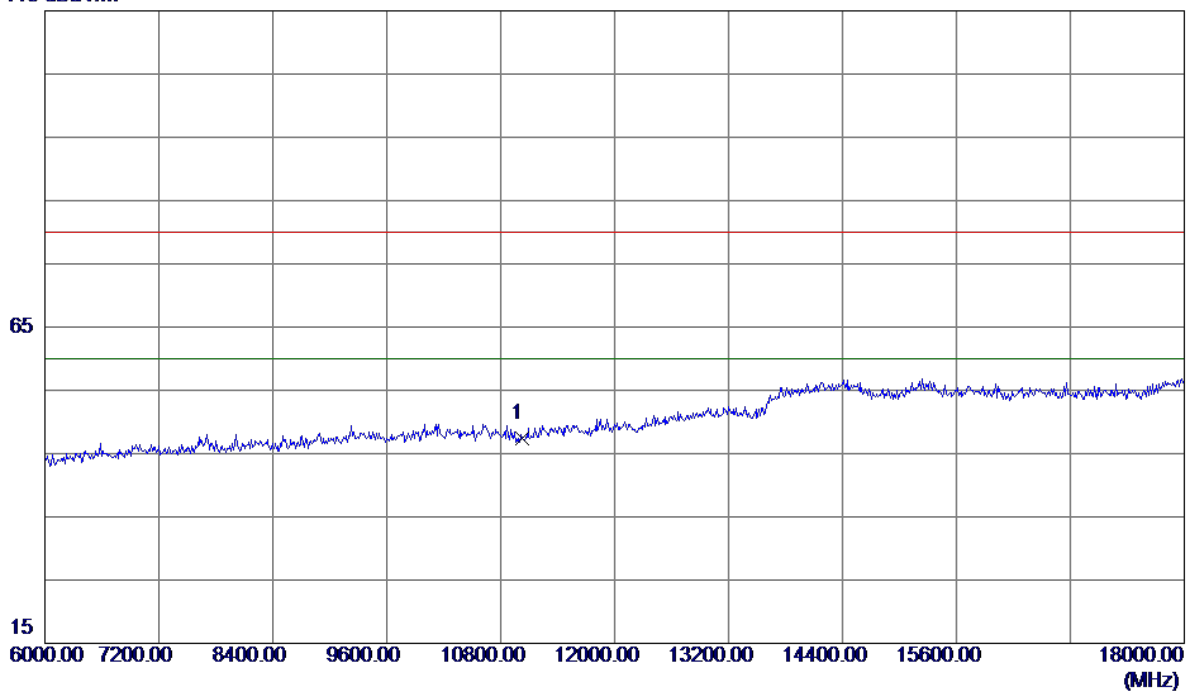


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.0000	30.37	16.95	47.32	80.00	-32.68	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

100 dBuV/m

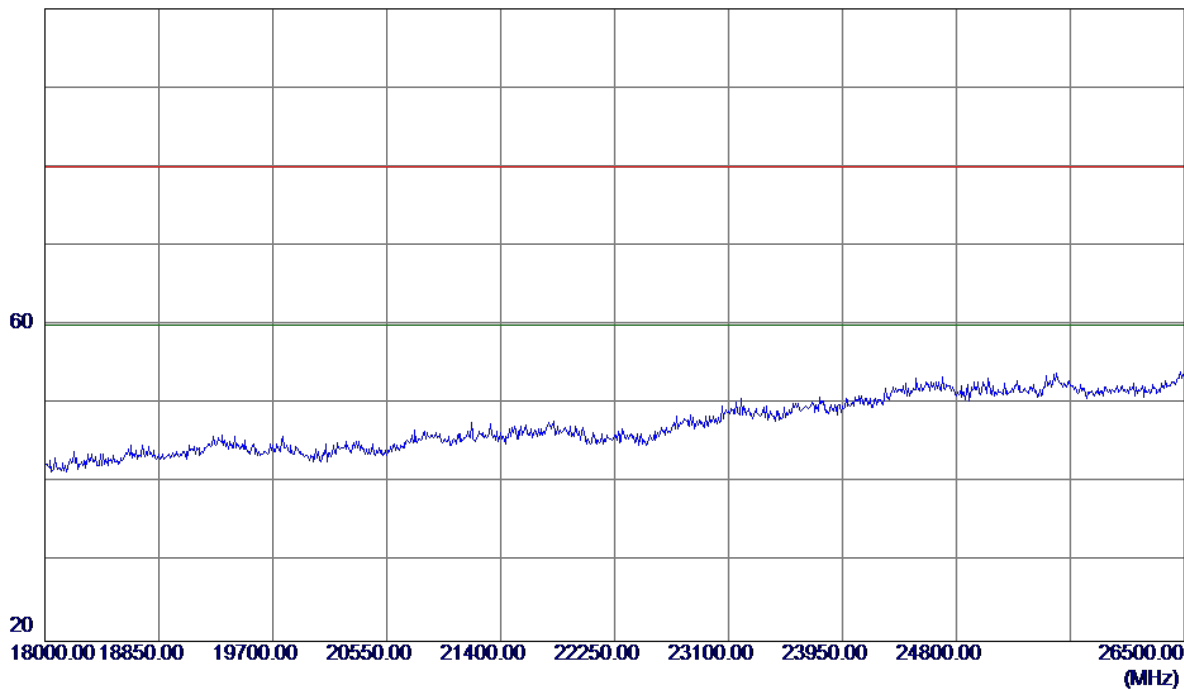


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

115 dBuV/m

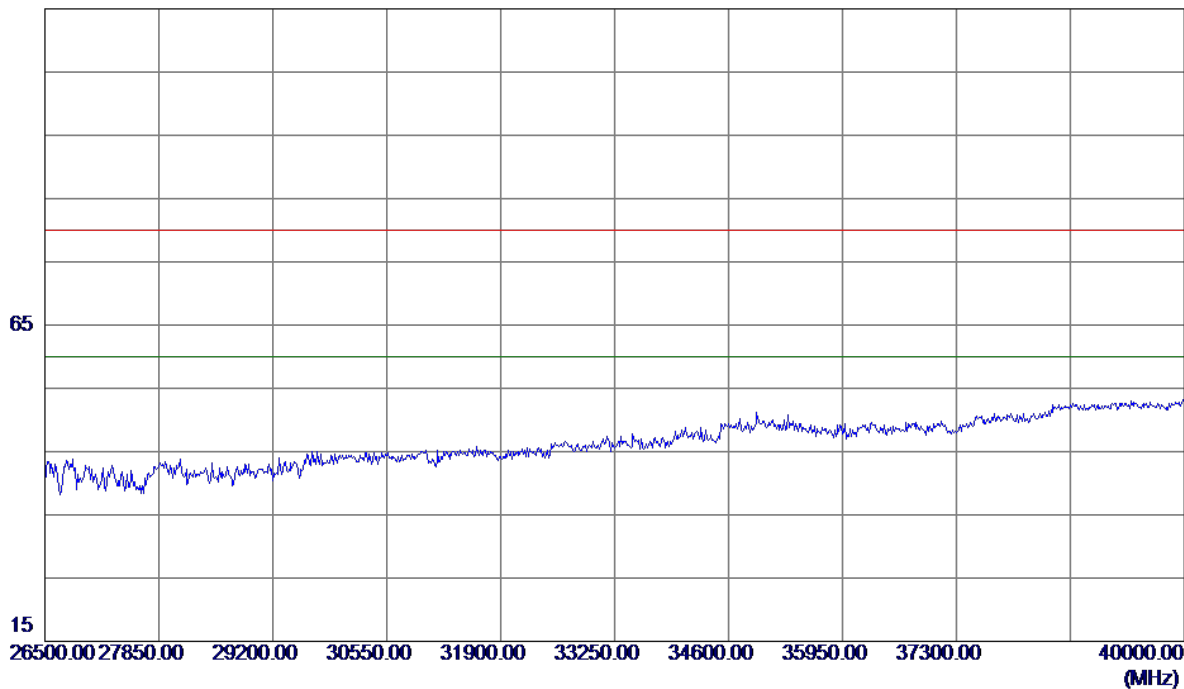


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

125 dBuV/m

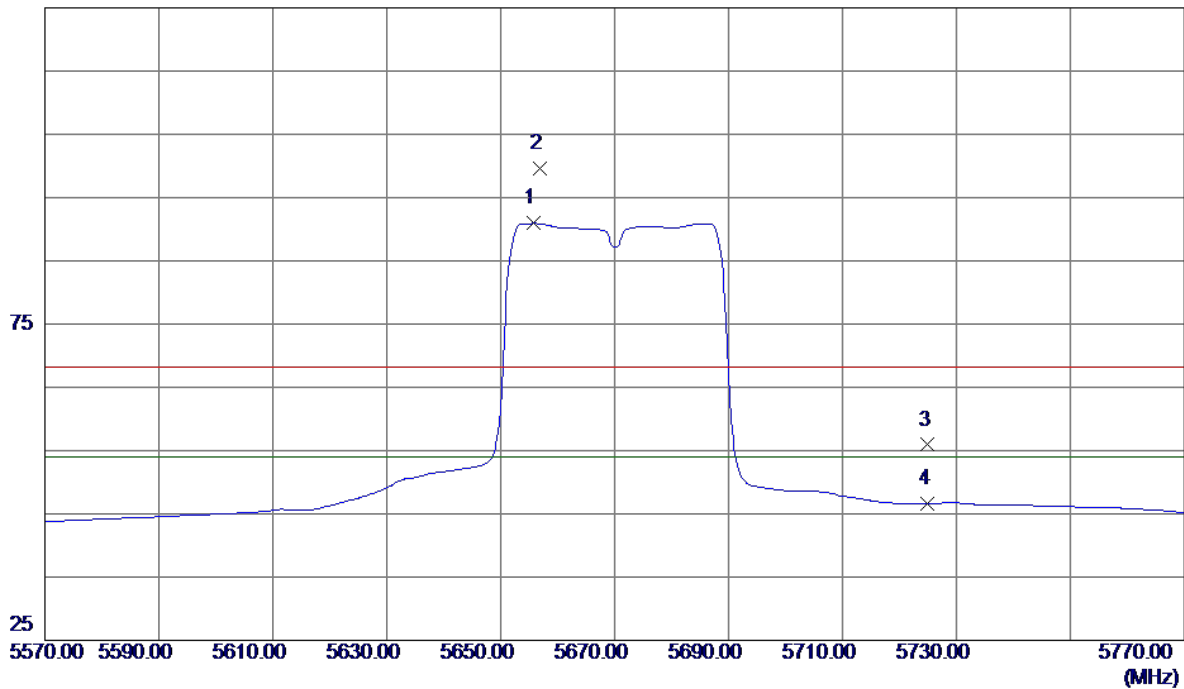


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5655.8000	47.57	43.35	90.92	54.00	36.92	AVG	No Limit
2	5656.8000	56.28	43.35	99.63	68.30	31.33	Peak	No Limit
3	5725.0000	12.34	43.56	55.90	68.30	-12.40	Peak	
4	5725.0000	3.06	43.56	46.62	54.00	-7.38	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

115 dBuV/m

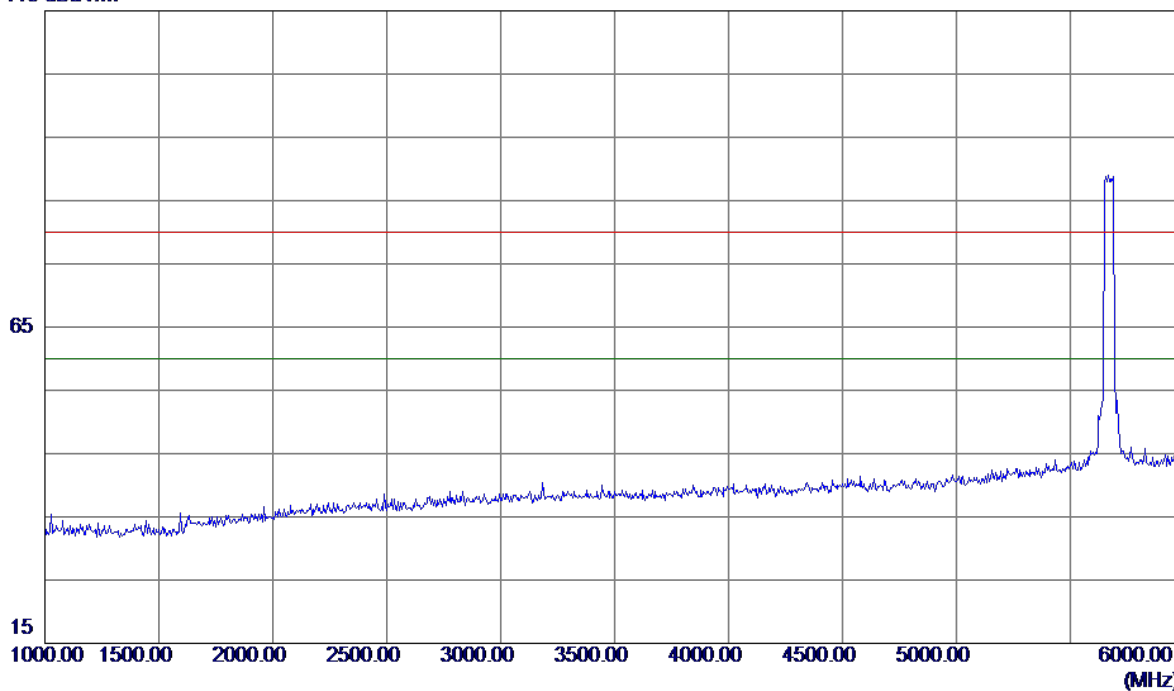


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

115 dBuV/m

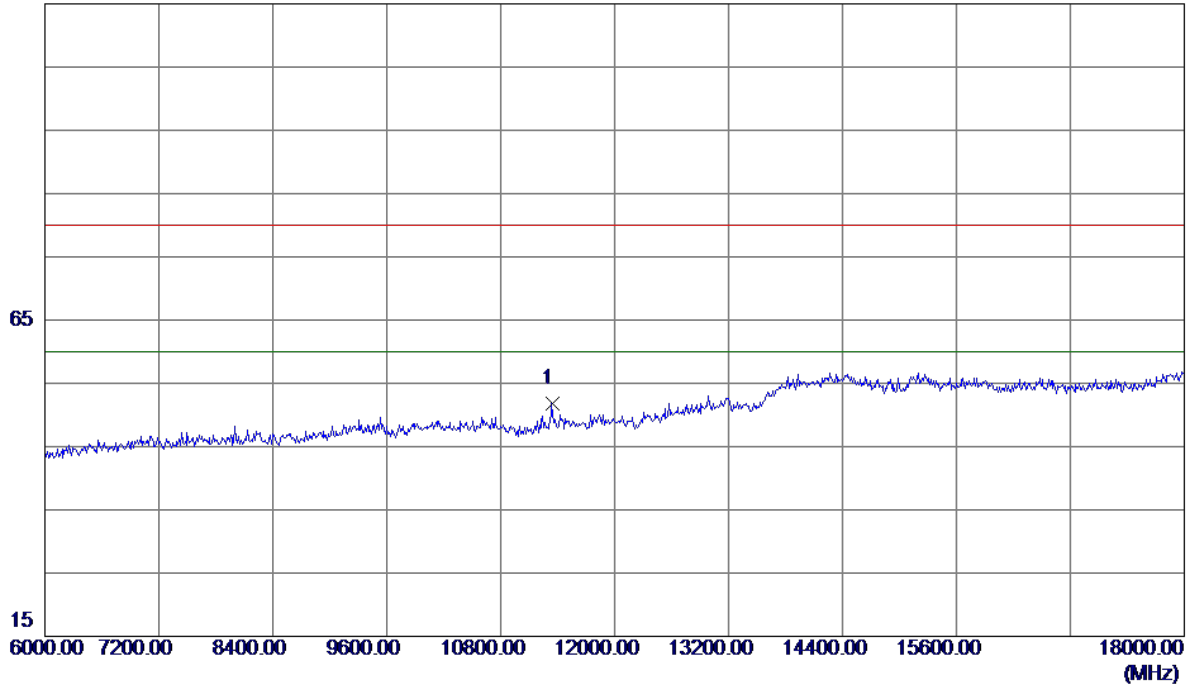


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	33.96	17.80	51.76	80.00	-28.24	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

100 dBuV/m

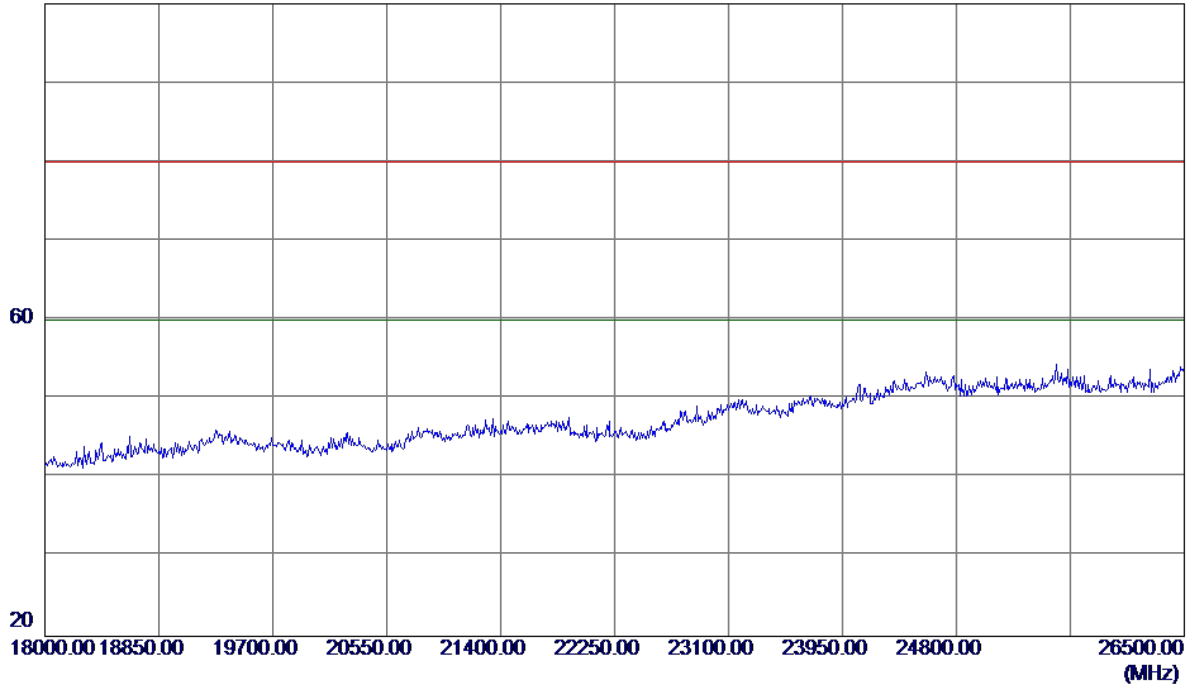


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

115 dBuV/m

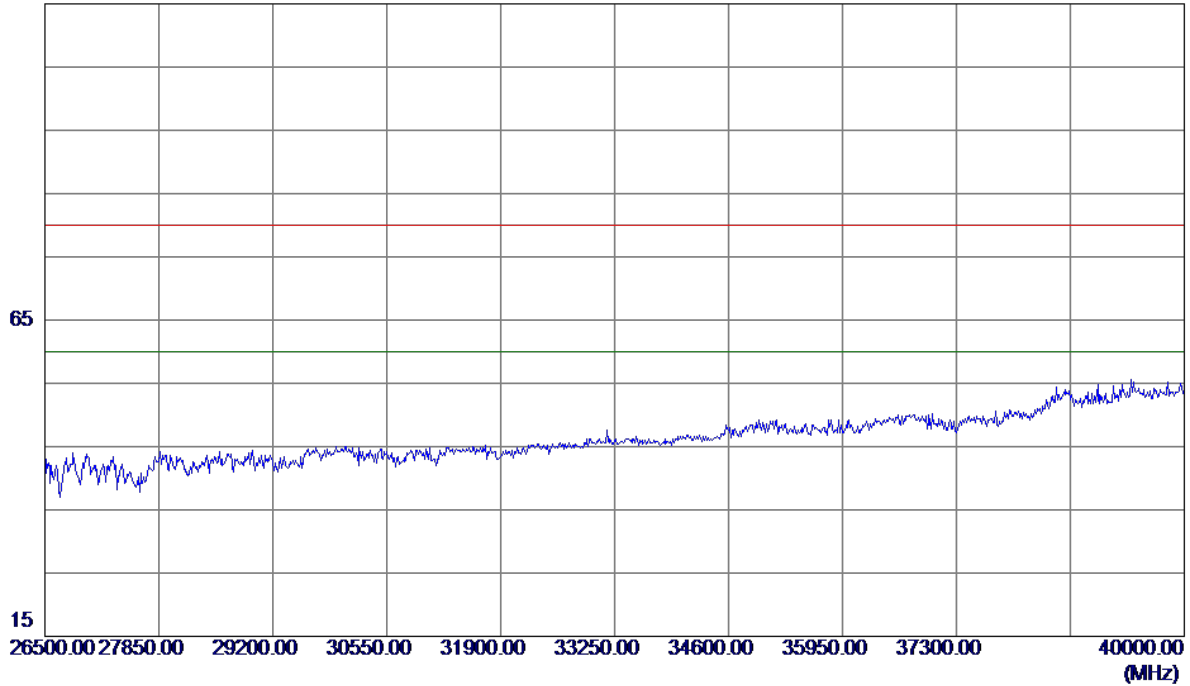


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

125 dBuV/m

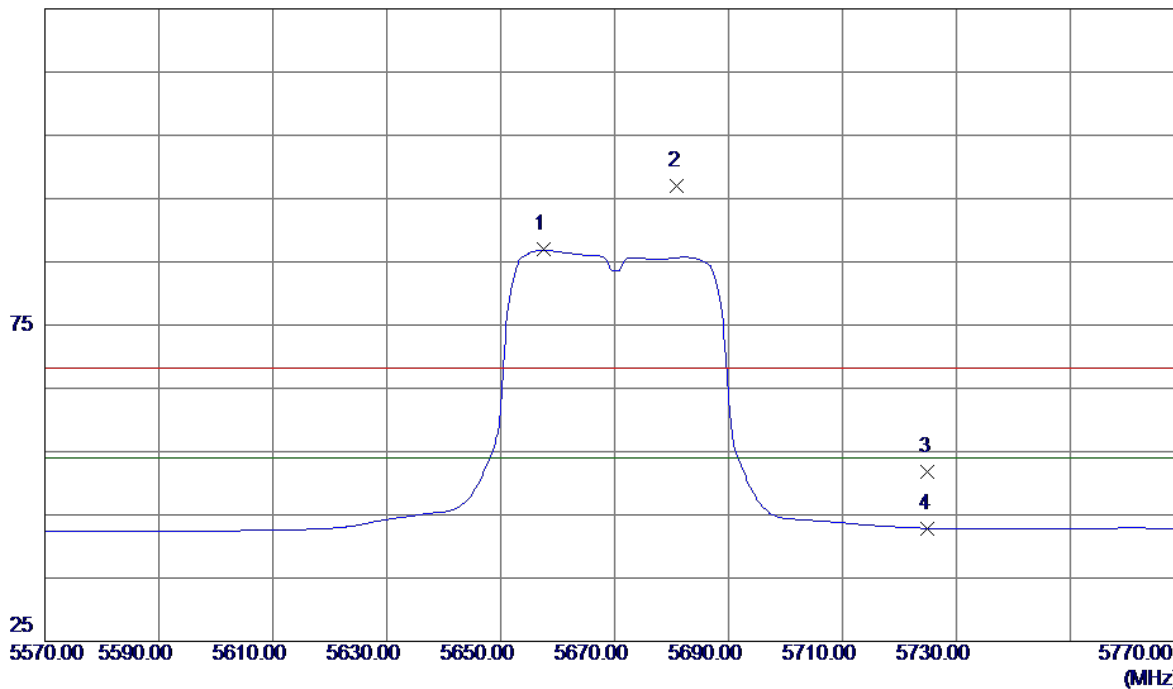


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5657.6000	44.19	42.71	86.90	54.00	32.90	AVG	No Limit
2	5681.0000	54.30	42.79	97.09	68.30	28.79	Peak	No Limit
3	5725.0000	8.89	42.94	51.83	68.30	-16.47	Peak	
4	5725.0000	-0.06	42.94	42.88	54.00	-11.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

115 dBuV/m

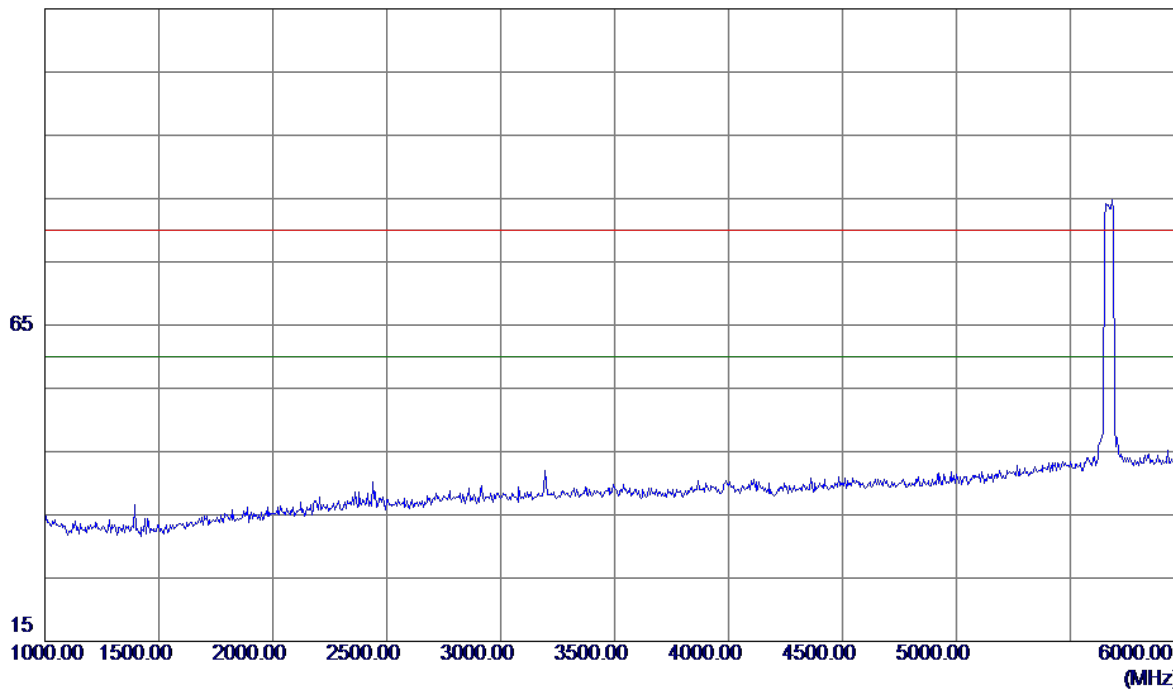


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

115 dBuV/m

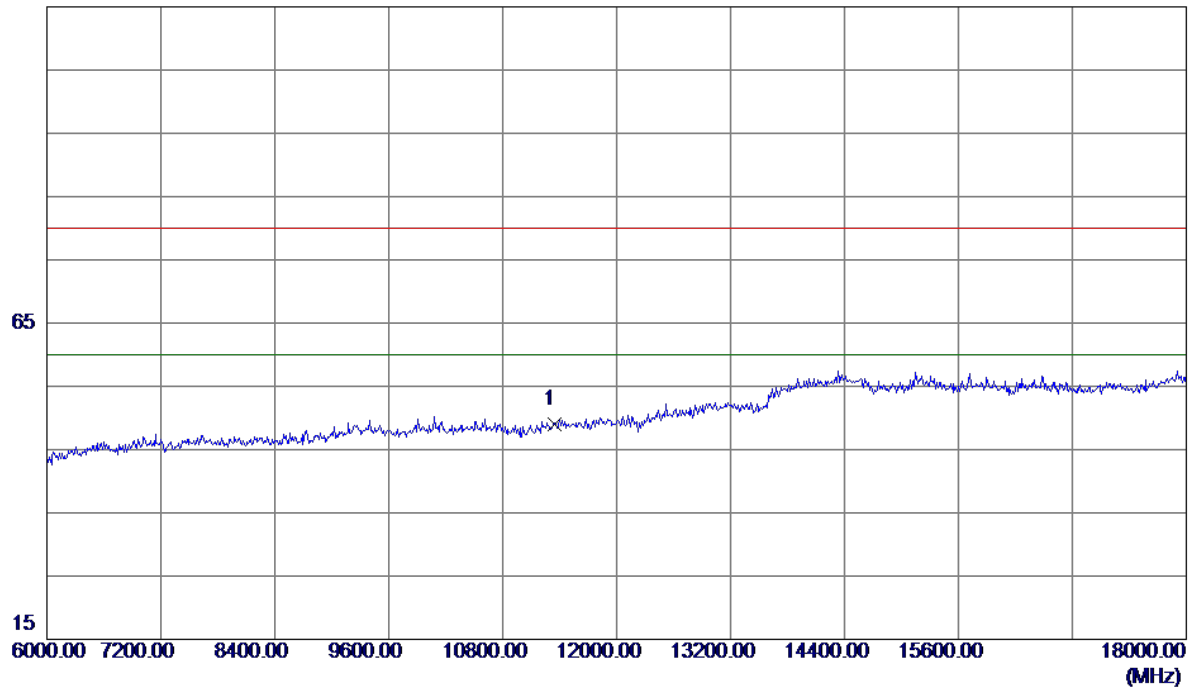


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	11340.0000	31.19	17.80	48.99	80.00	-31.01	Peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

100 dBuV/m

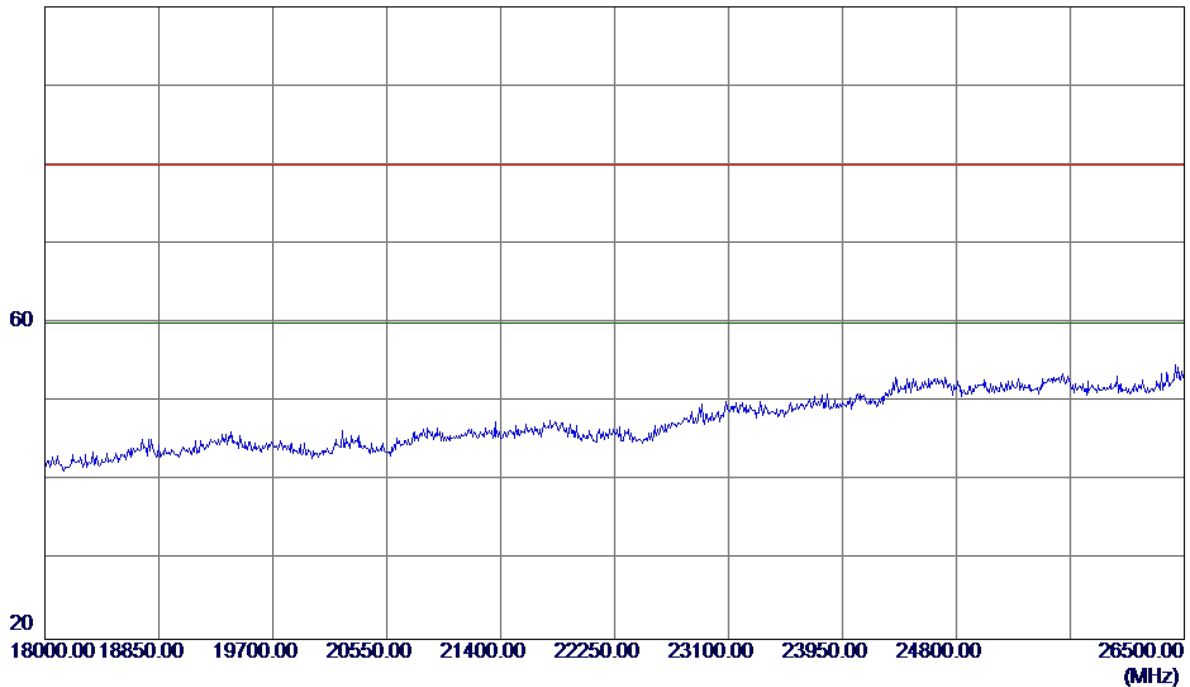


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

115 dBuV/m

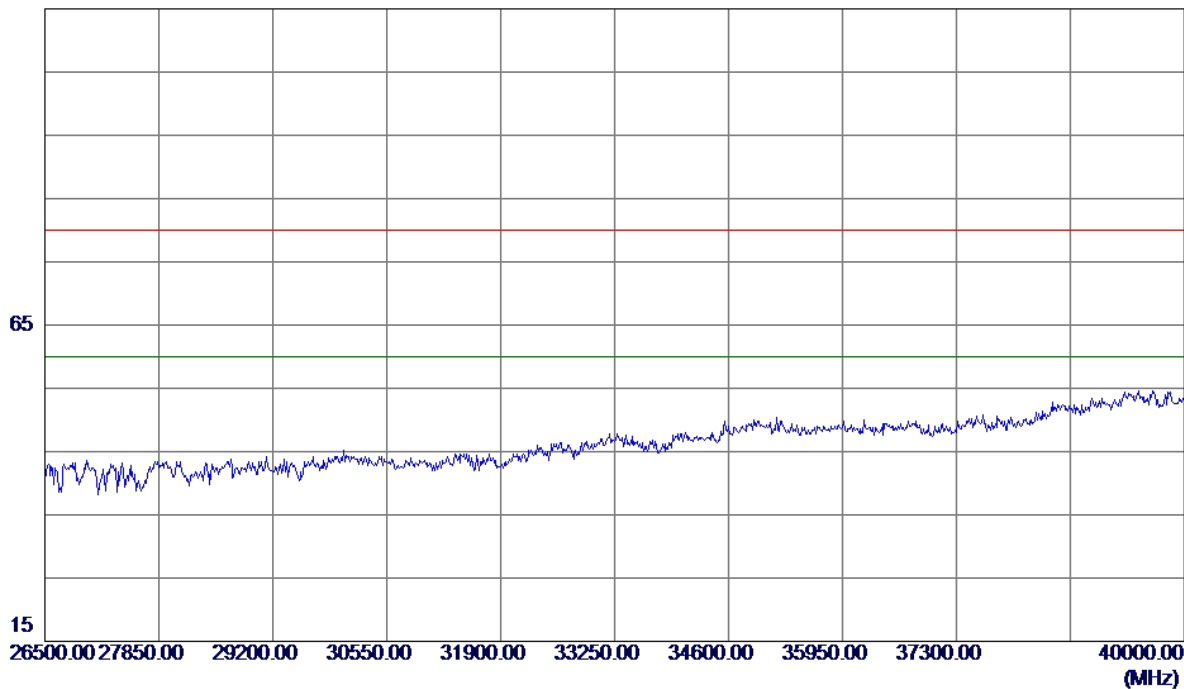


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

125 dBuV/m

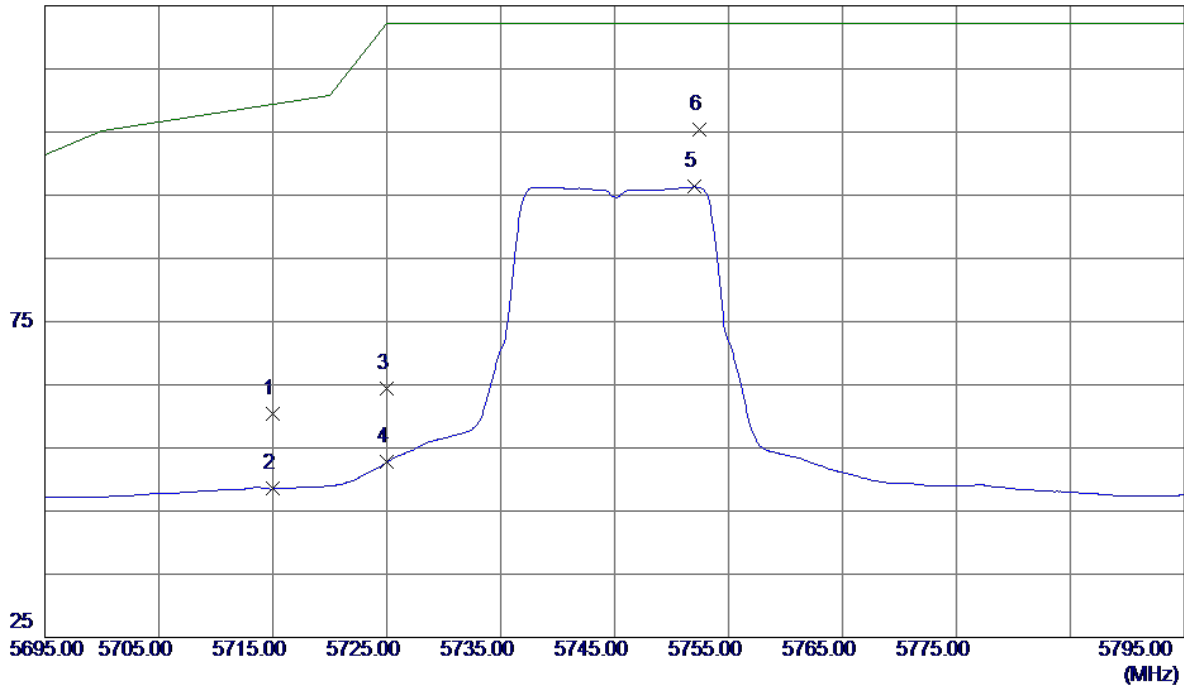


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	16.88	43.53	60.41	109.40	-48.99	Peak	
2	5715.0000	4.98	43.53	48.51	109.40	-60.89	AVG	
3	5725.0000	20.93	43.56	64.49	122.20	-57.71	Peak	
4	5725.0000	9.15	43.56	52.71	122.20	-69.49	AVG	
5	5752.0000	52.67	43.64	96.31	122.20	-25.89	AVG	
6 *	5752.4000	61.75	43.64	105.39	122.20	-16.81	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

115 dBuV/m

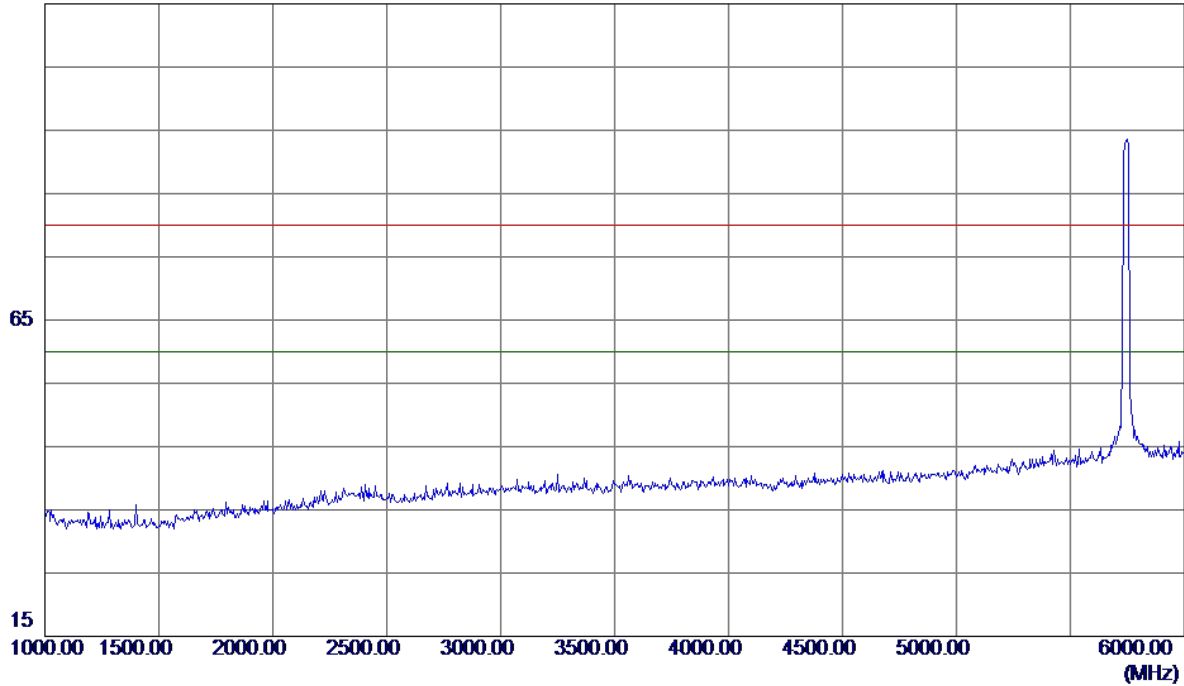


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

115 dBuV/m

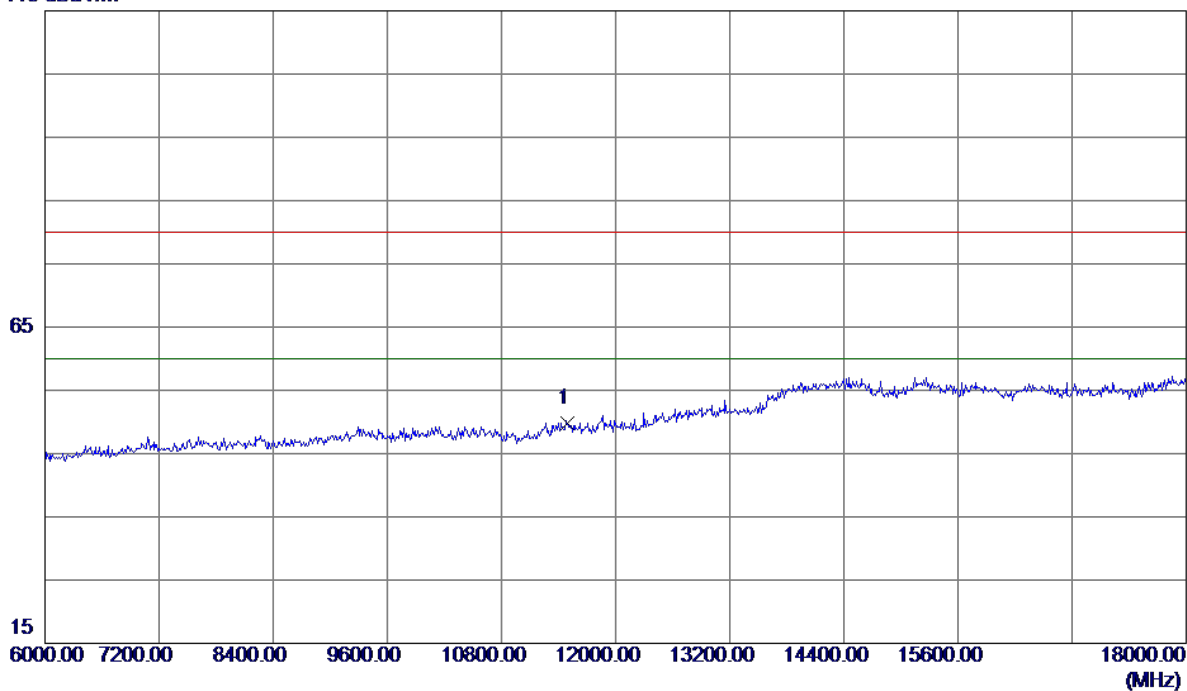


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	31.58	18.20	49.78	80.00	-30.22	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

100 dBuV/m

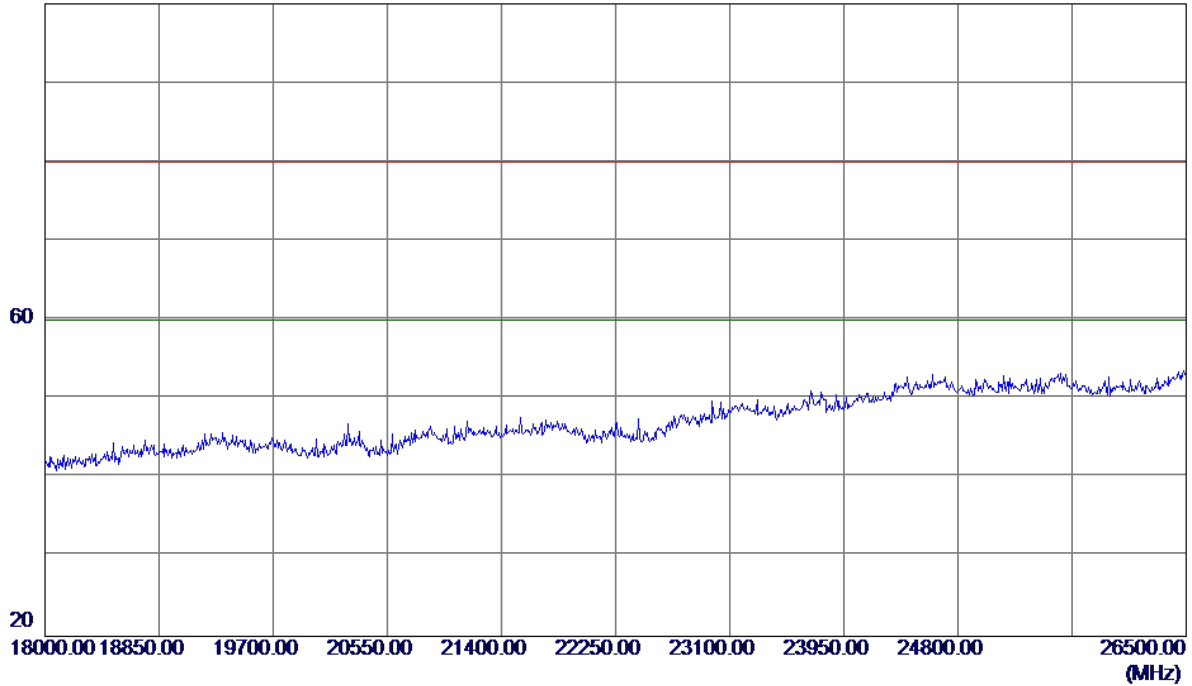


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical


115 dBuV/m

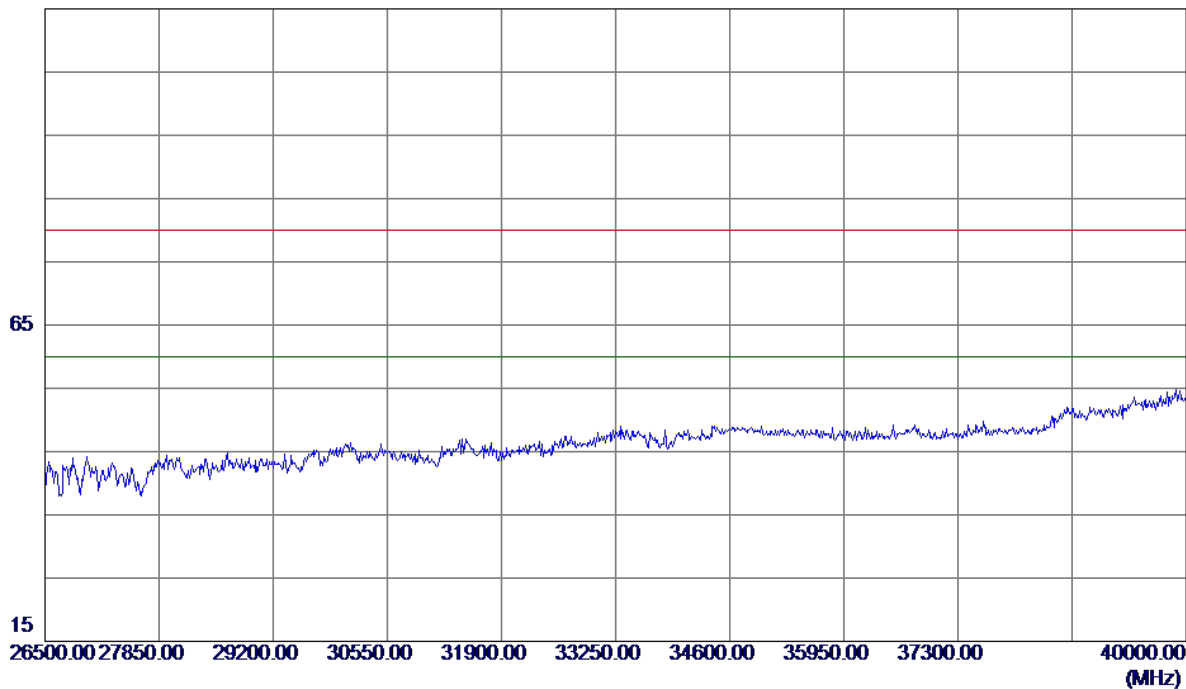

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

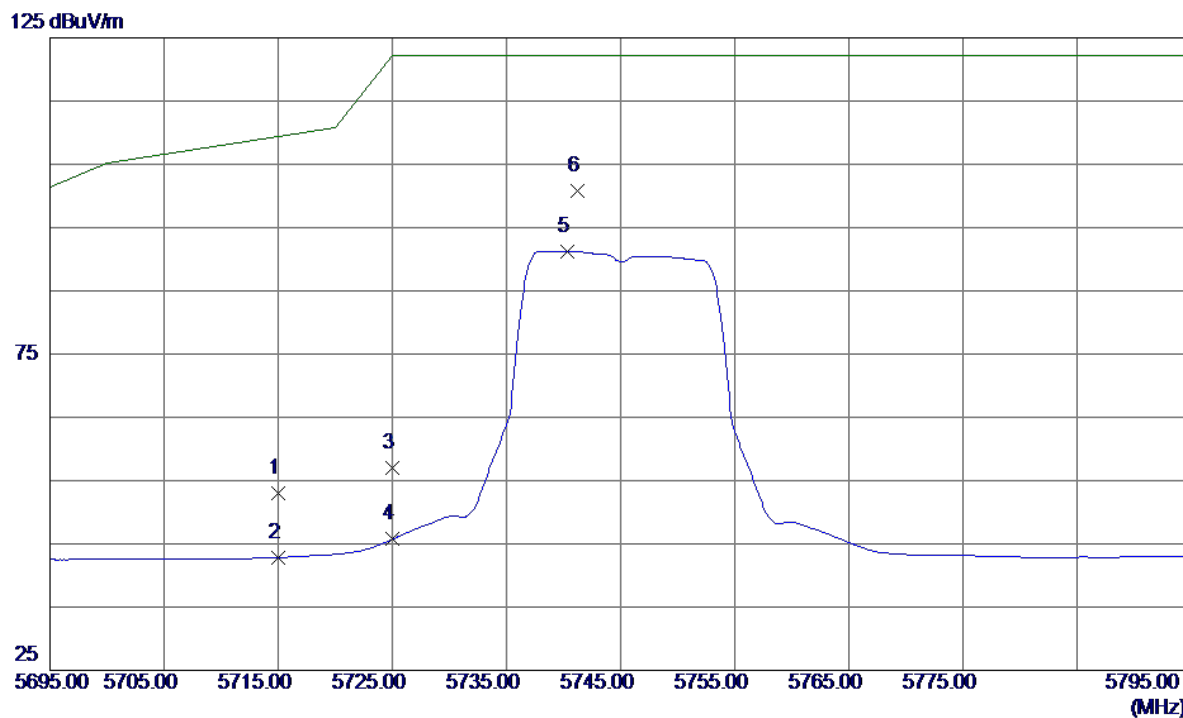


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	10.03	42.90	52.93	109.40	-56.47	Peak	
2	5715.0000	-0.06	42.90	42.84	109.40	-66.56	AVG	
3	5725.0000	14.02	42.94	56.96	122.20	-65.24	Peak	
4	5725.0000	2.78	42.94	45.72	122.20	-76.48	AVG	
5	5740.3000	48.29	42.99	91.28	122.20	-30.92	AVG	
6 *	5741.2000	57.81	42.99	100.80	122.20	-21.40	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

115 dBuV/m

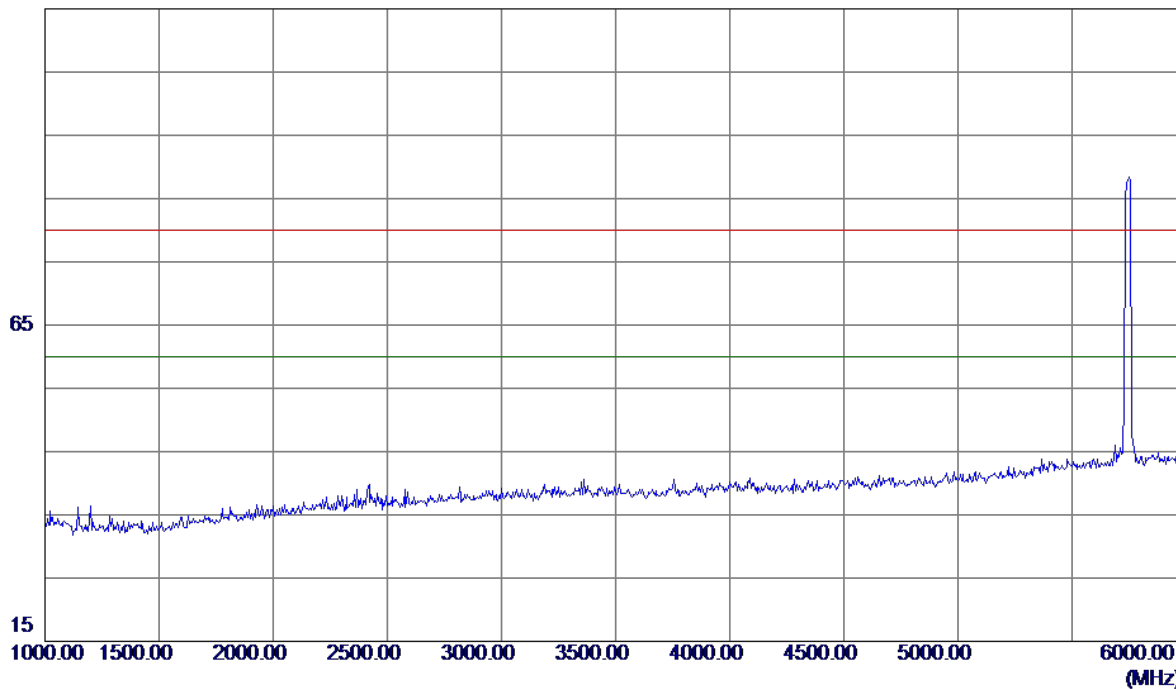


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

115 dBuV/m

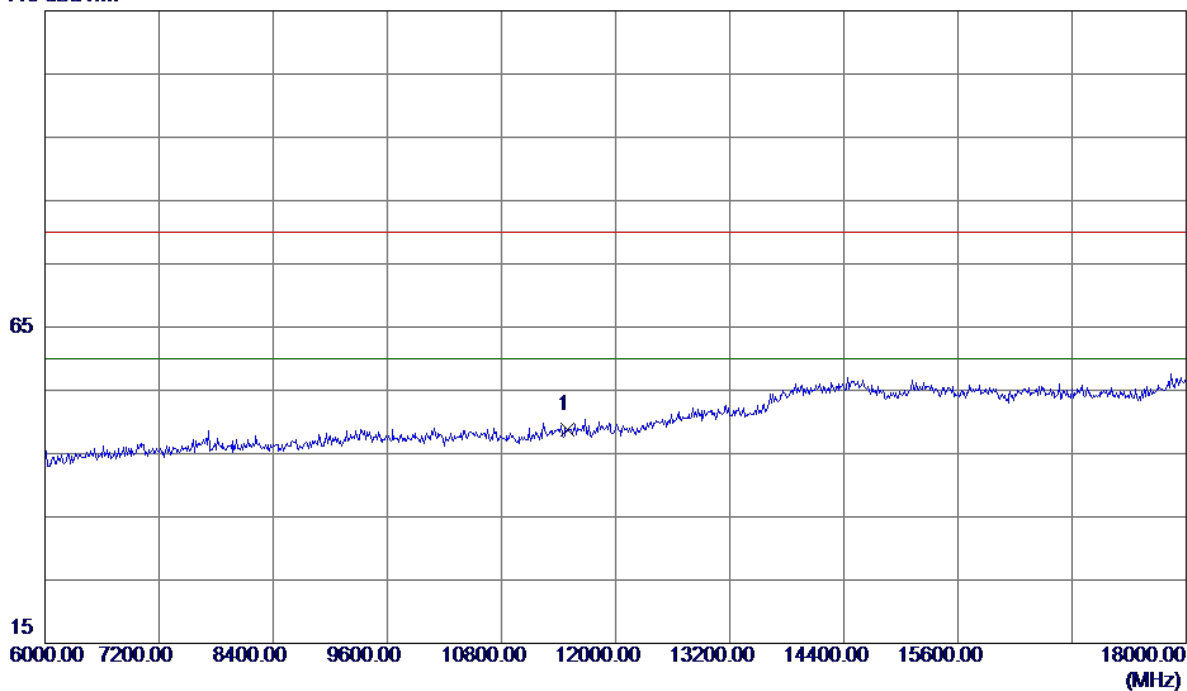


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	30.60	18.20	48.80	80.00	-31.20	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

100 dBuV/m

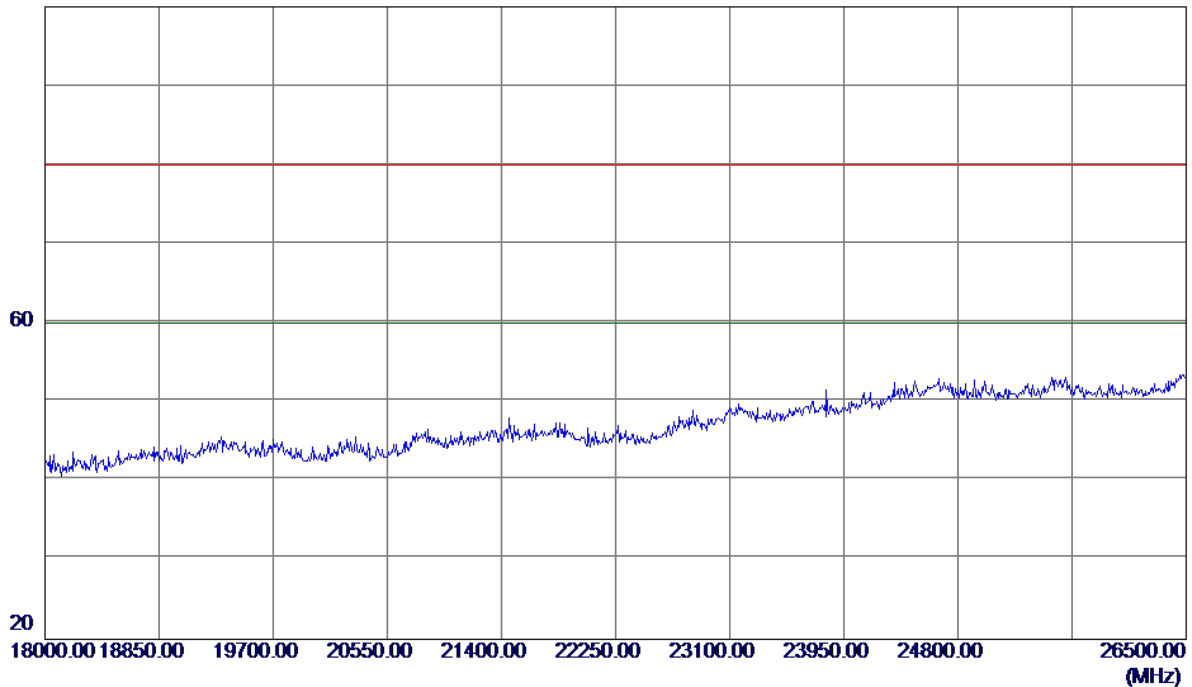


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

115 dBuV/m

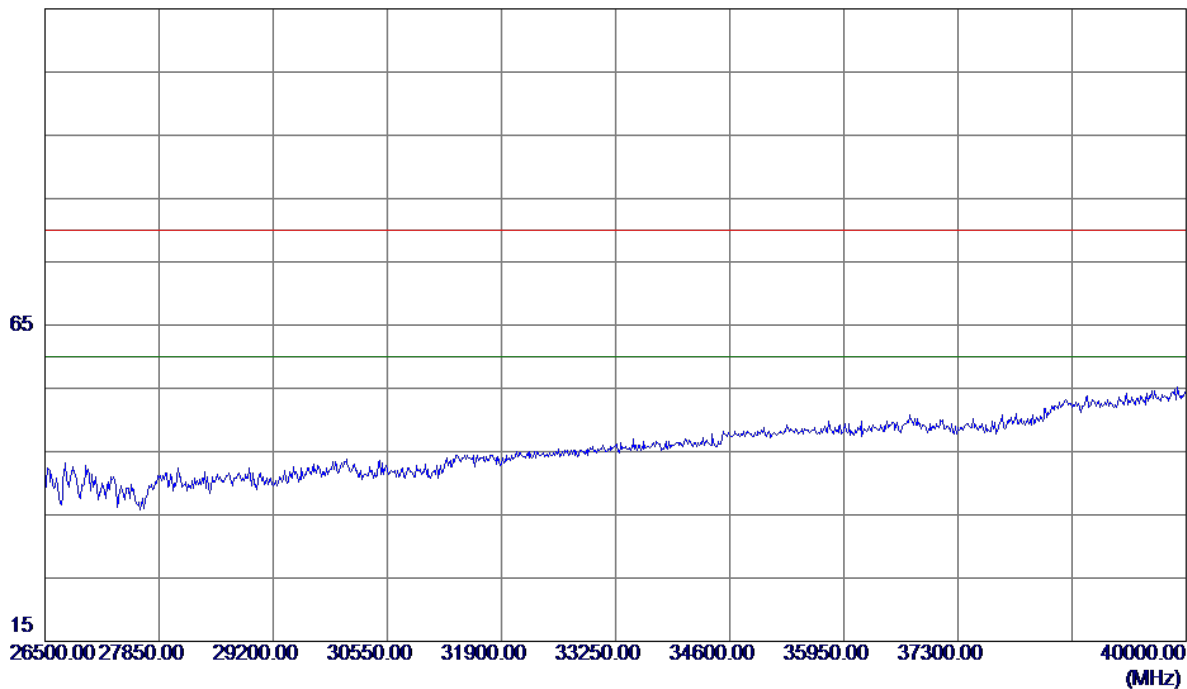


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

125 dBuV/m

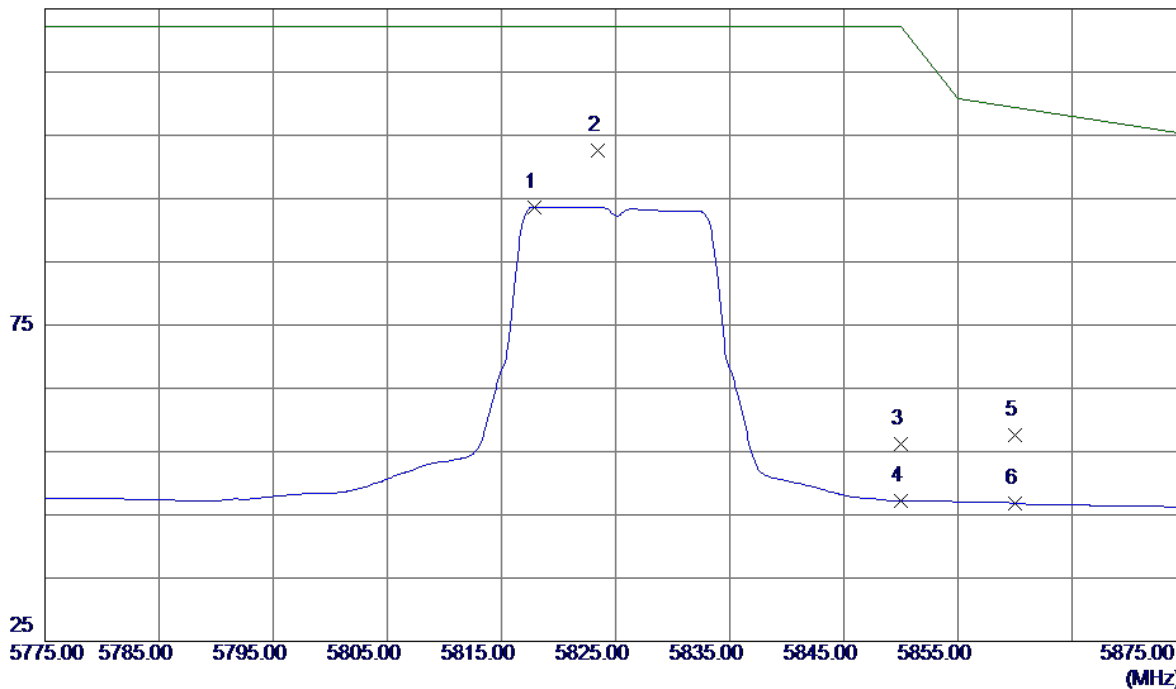


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5817.9000	49.85	43.84	93.69	122.20	-28.51	AVG	
2 *	5823.4000	58.65	43.86	102.51	122.20	-19.69	Peak	
3	5850.0000	12.24	43.94	56.18	122.20	-66.02	Peak	
4	5850.0000	3.32	43.94	47.26	122.20	-74.94	AVG	
5	5860.0000	13.68	43.97	57.65	109.40	-51.75	Peak	
6	5860.0000	2.87	43.97	46.84	109.40	-62.56	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

115 dBuV/m

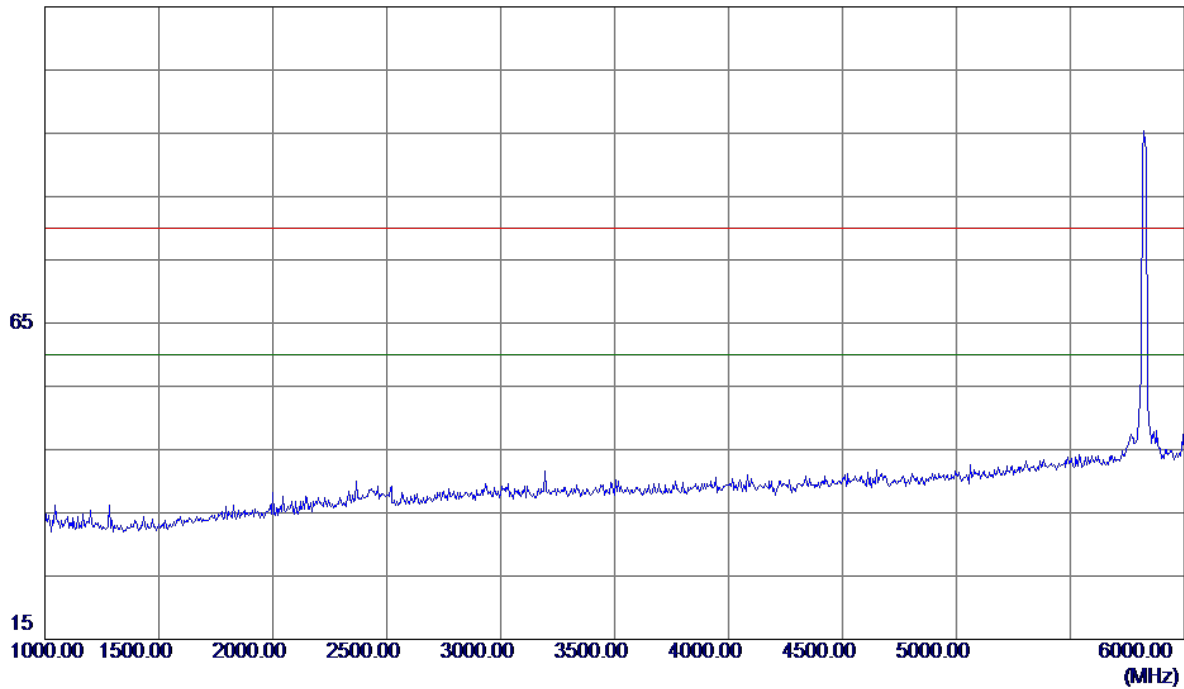


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

115 dBuV/m

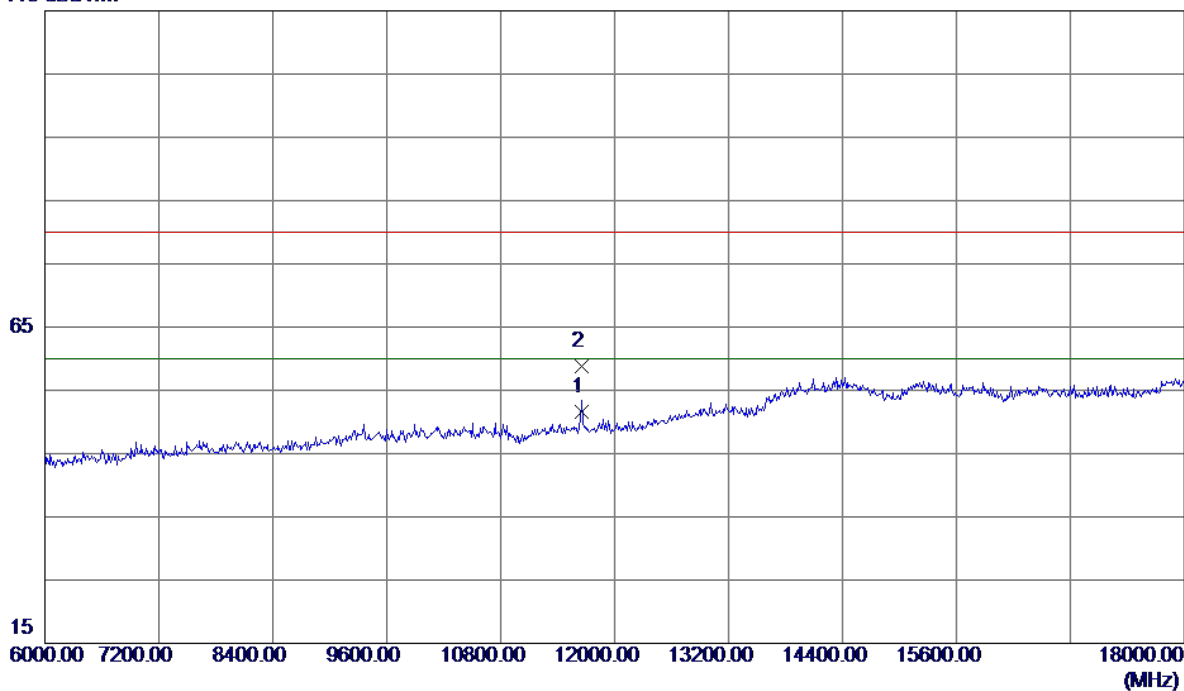


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0400	33.41	18.17	51.58	60.00	-8.42	AVG	
2	11650.2100	40.65	18.17	58.82	80.00	-21.18	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

100 dBuV/m

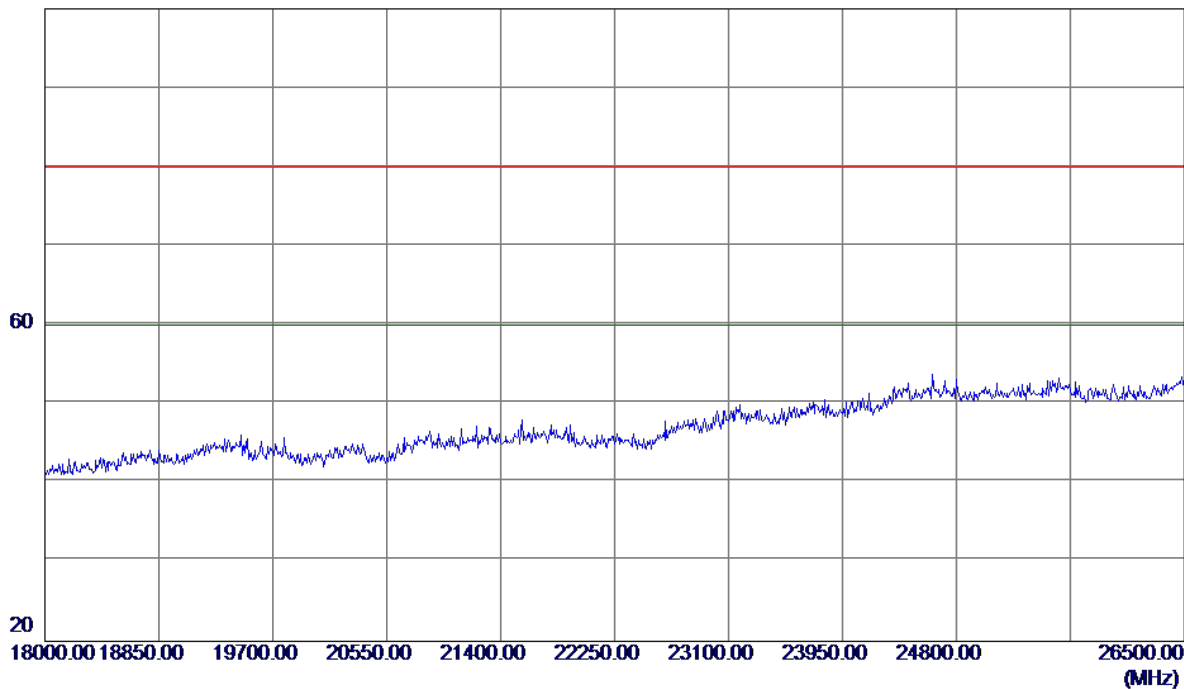


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical


115 dBuV/m

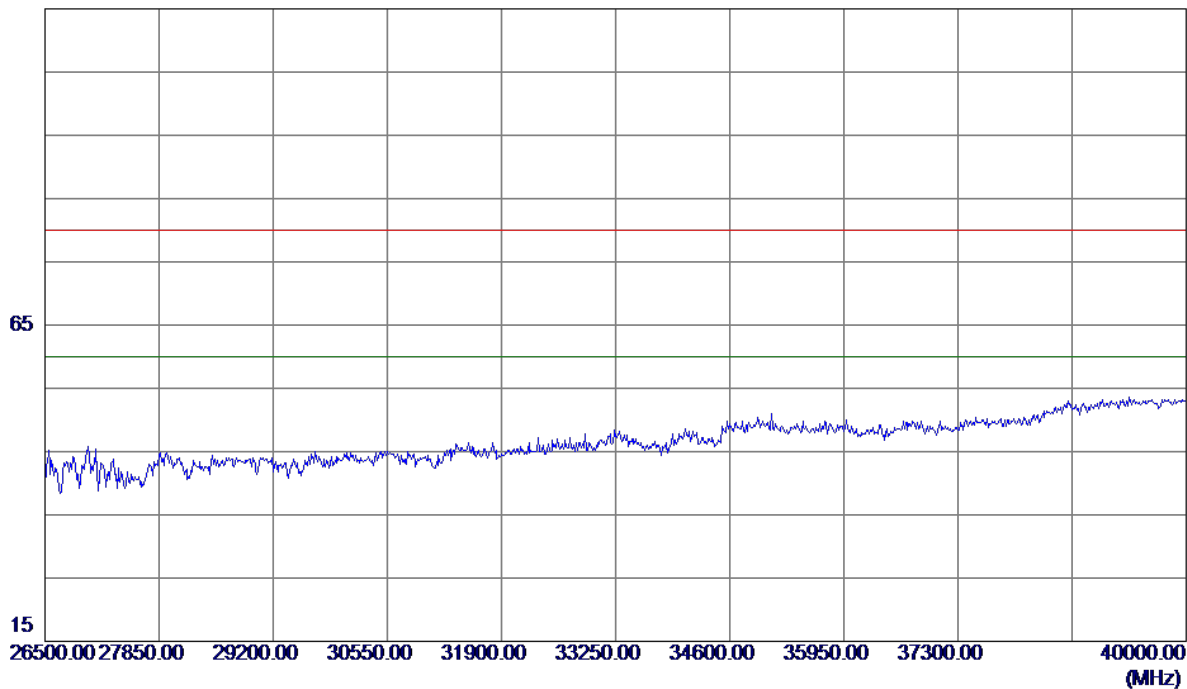

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

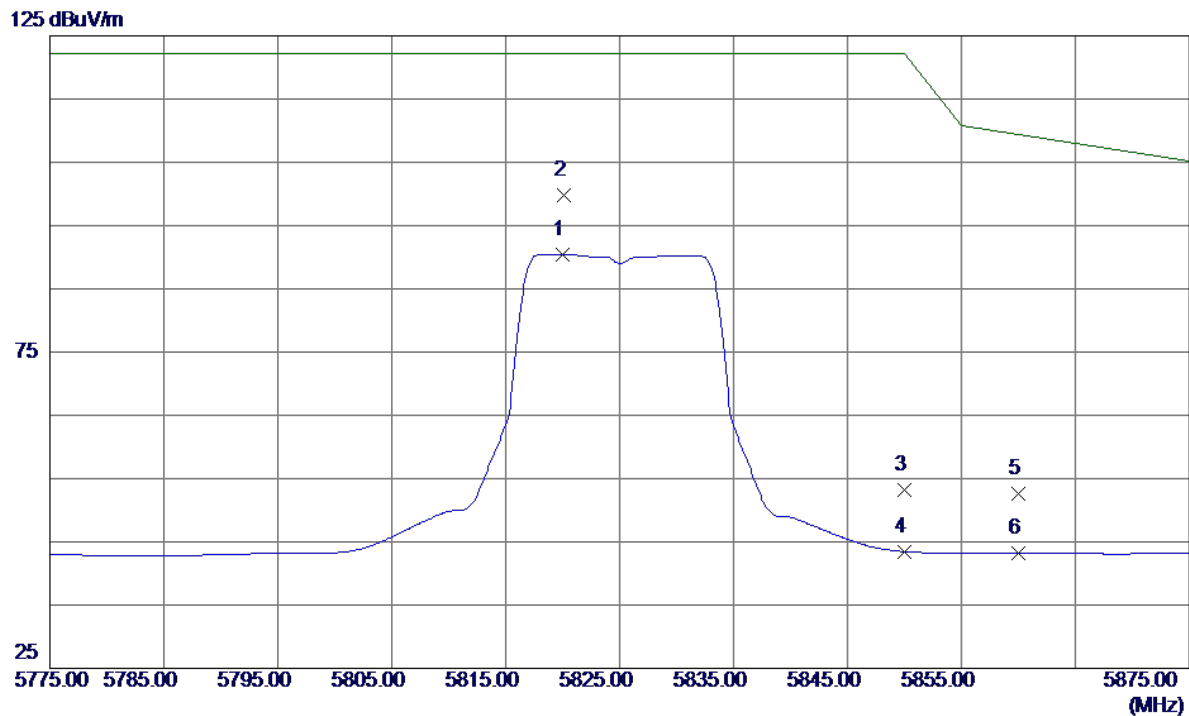


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5820.0000	47.14	43.26	90.40	122.20	-31.80	AVG	
2 *	5820.1000	56.56	43.26	99.82	122.20	-22.38	Peak	
3	5850.0000	9.88	43.36	53.24	122.20	-68.96	Peak	
4	5850.0000	0.09	43.36	43.45	122.20	-78.75	AVG	
5	5860.0000	9.17	43.39	52.56	109.40	-56.84	Peak	
6	5860.0000	-0.20	43.39	43.19	109.40	-66.21	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

115 dBuV/m

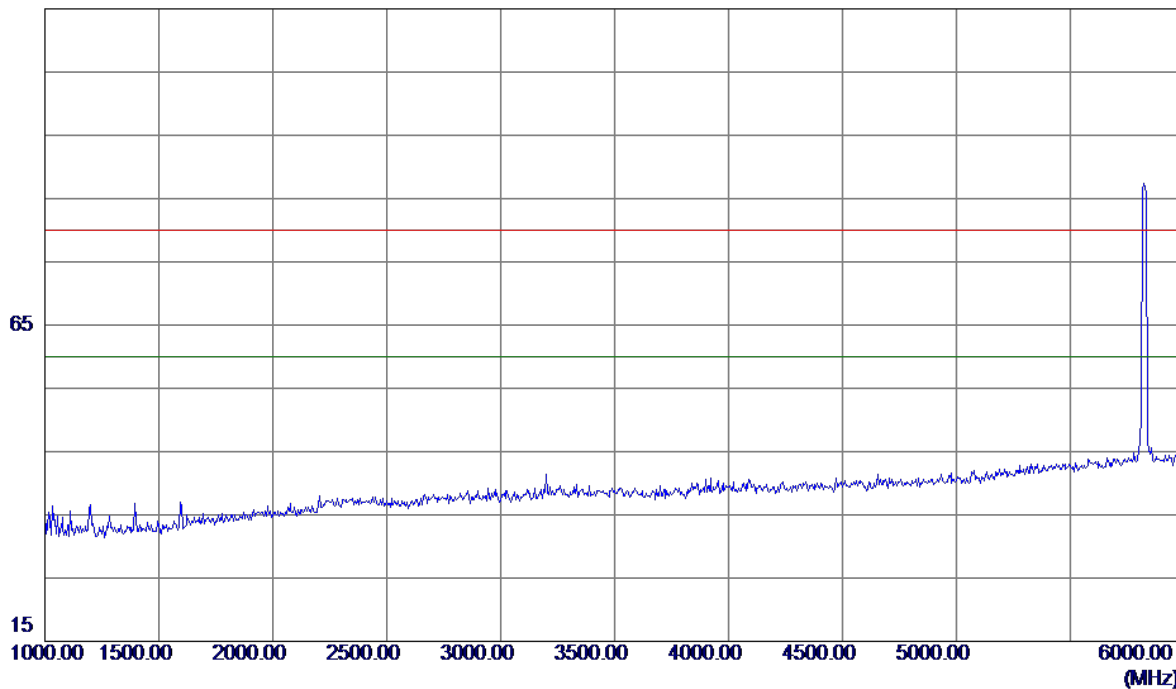


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

115 dBuV/m

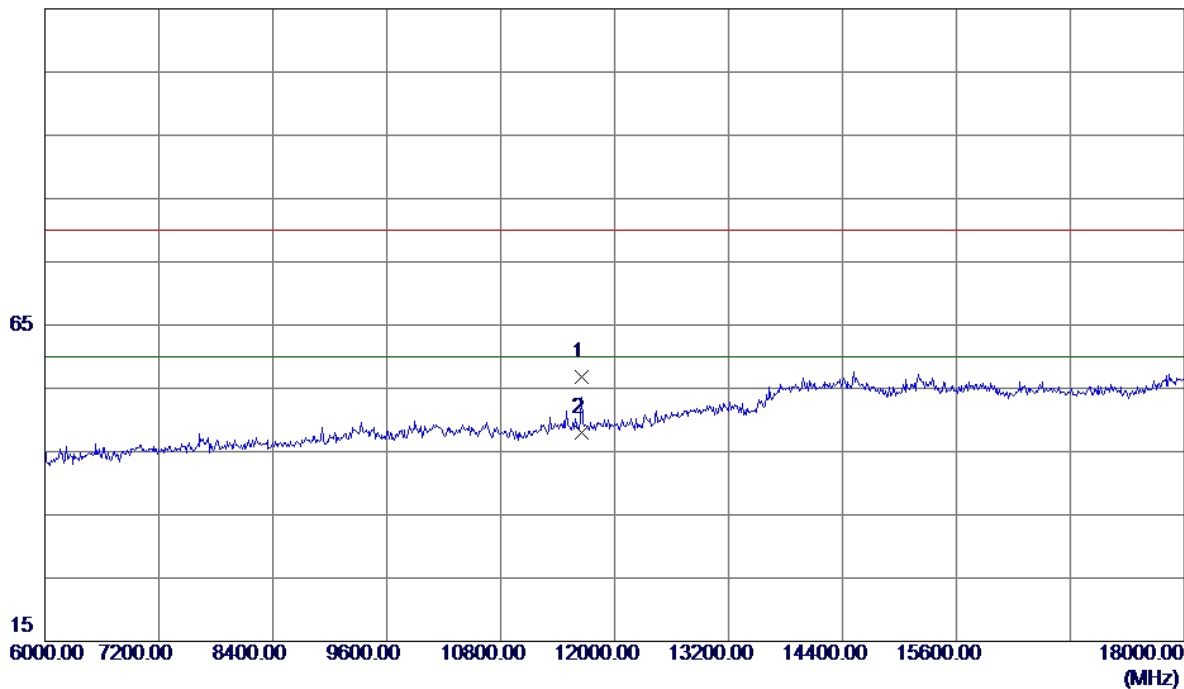


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0650	38.58	18.17	56.75	80.00	-23.25	Peak	
2 *	11650.1900	29.91	18.17	48.08	60.00	-11.92	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

100 dBuV/m

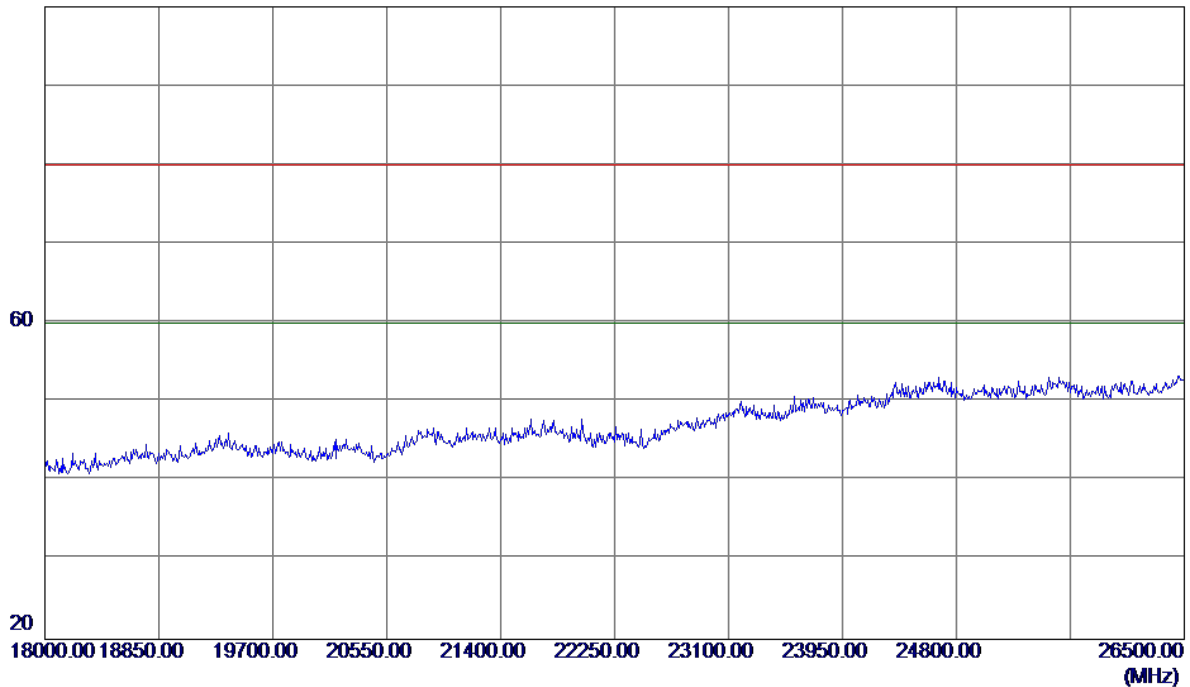


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

115 dBuV/m

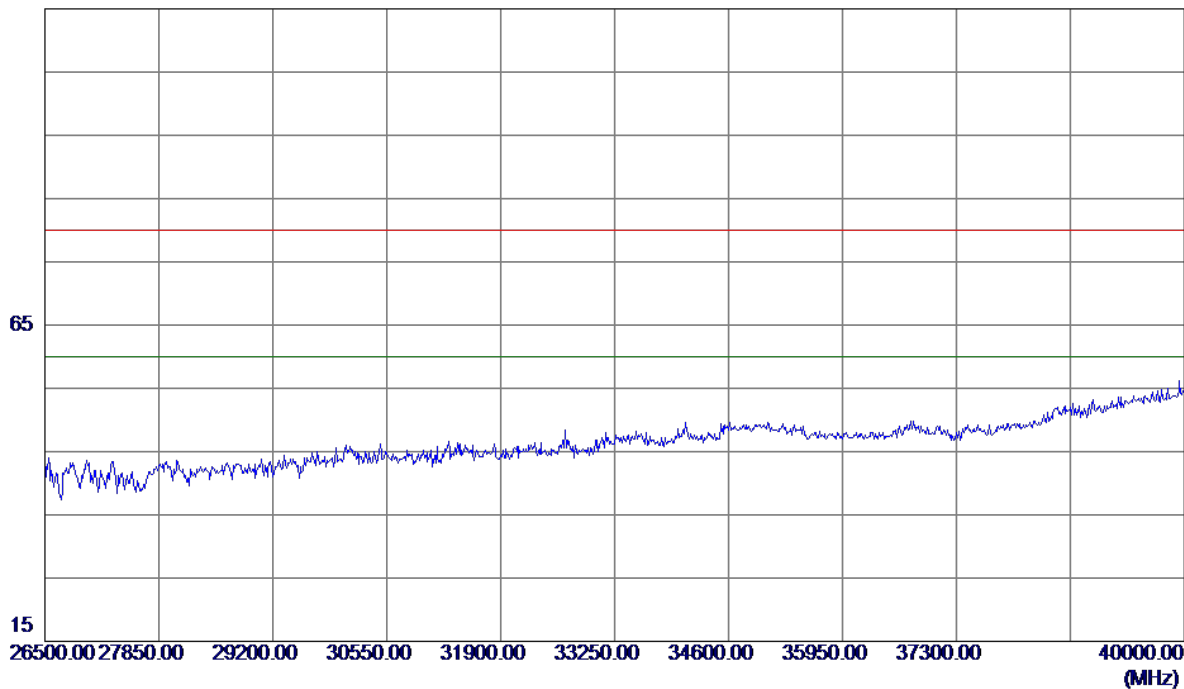


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

125 dBuV/m

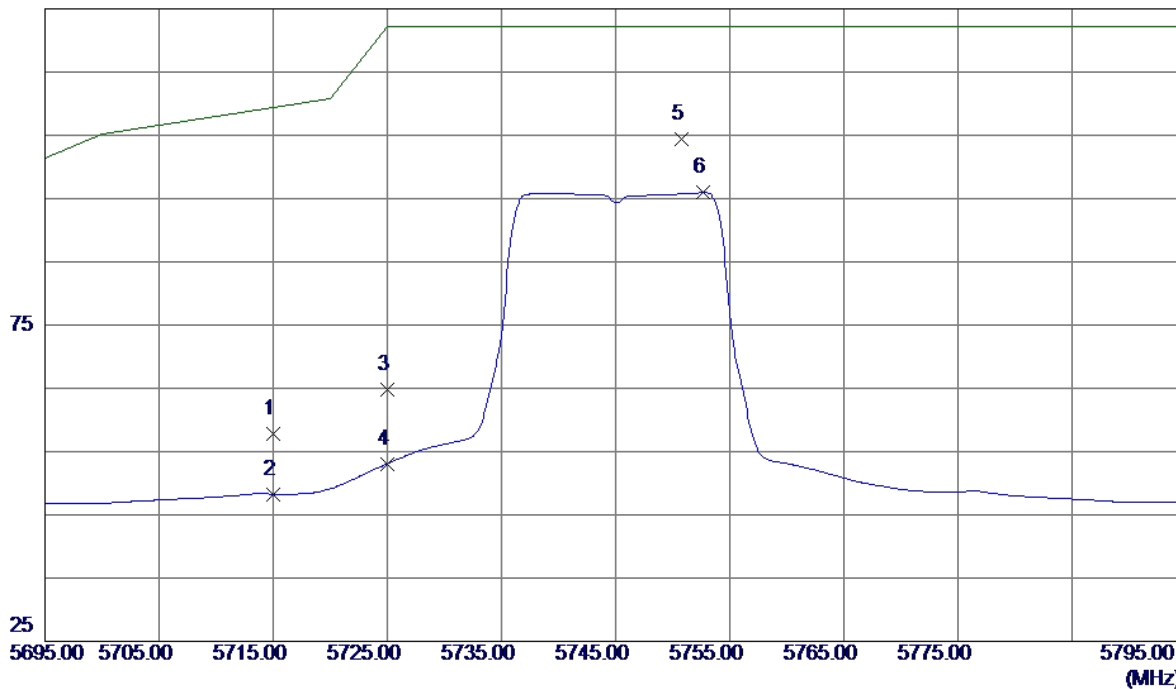


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	14.27	43.53	57.80	109.40	-51.60	Peak	
2	5715.0000	4.70	43.53	48.23	109.40	-61.17	AVG	
3	5725.0000	21.22	43.56	64.78	122.20	-57.42	Peak	
4	5725.0000	9.52	43.56	53.08	122.20	-69.12	AVG	
5 *	5750.8000	60.67	43.64	104.31	122.20	-17.89	Peak	
6	5752.7000	52.31	43.64	95.95	122.20	-26.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

115 dBuV/m

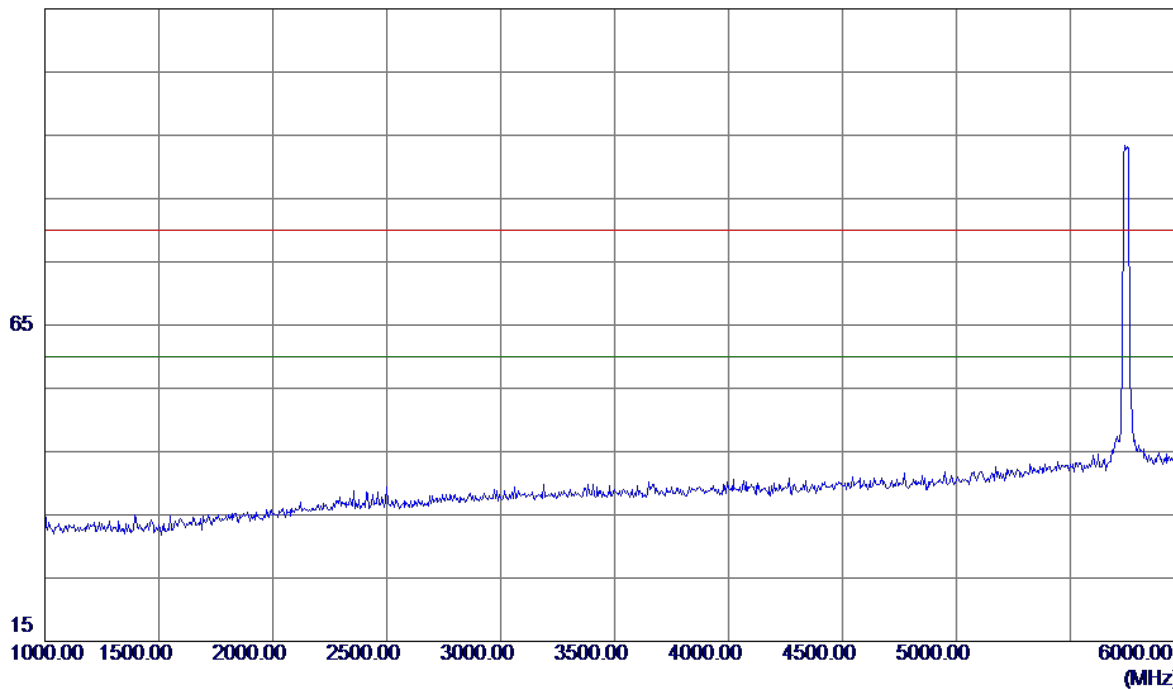


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

115 dBuV/m

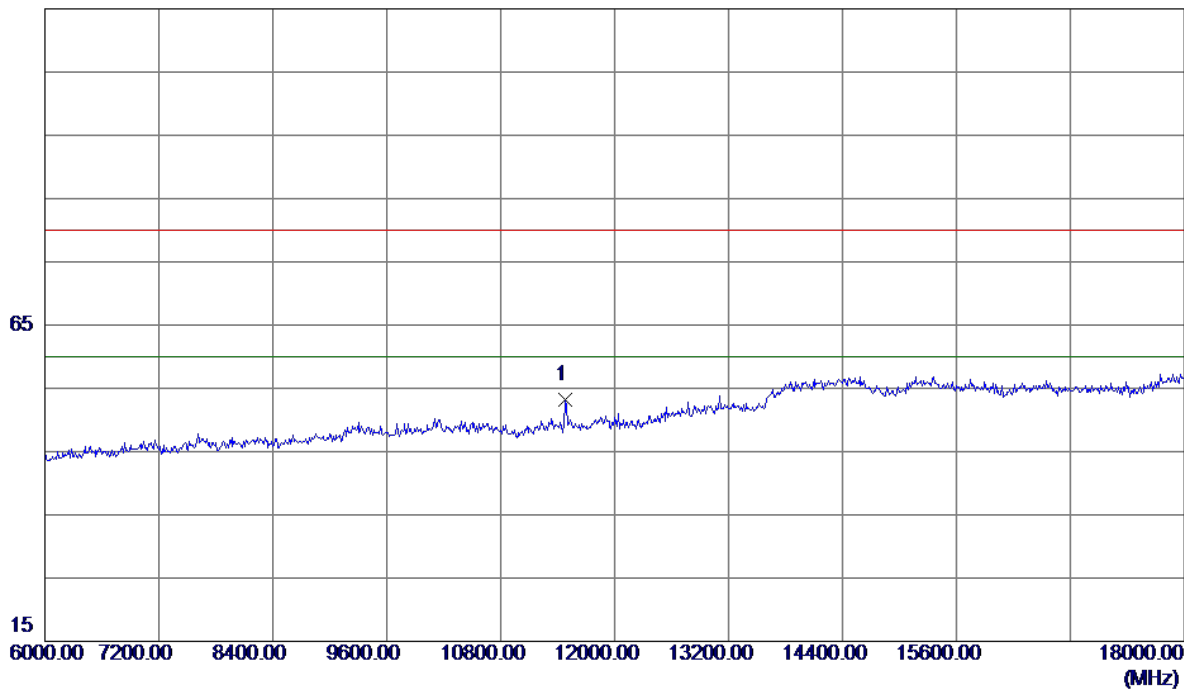


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11484.0000	35.07	18.18	53.25	80.00	-26.75	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

100 dBuV/m

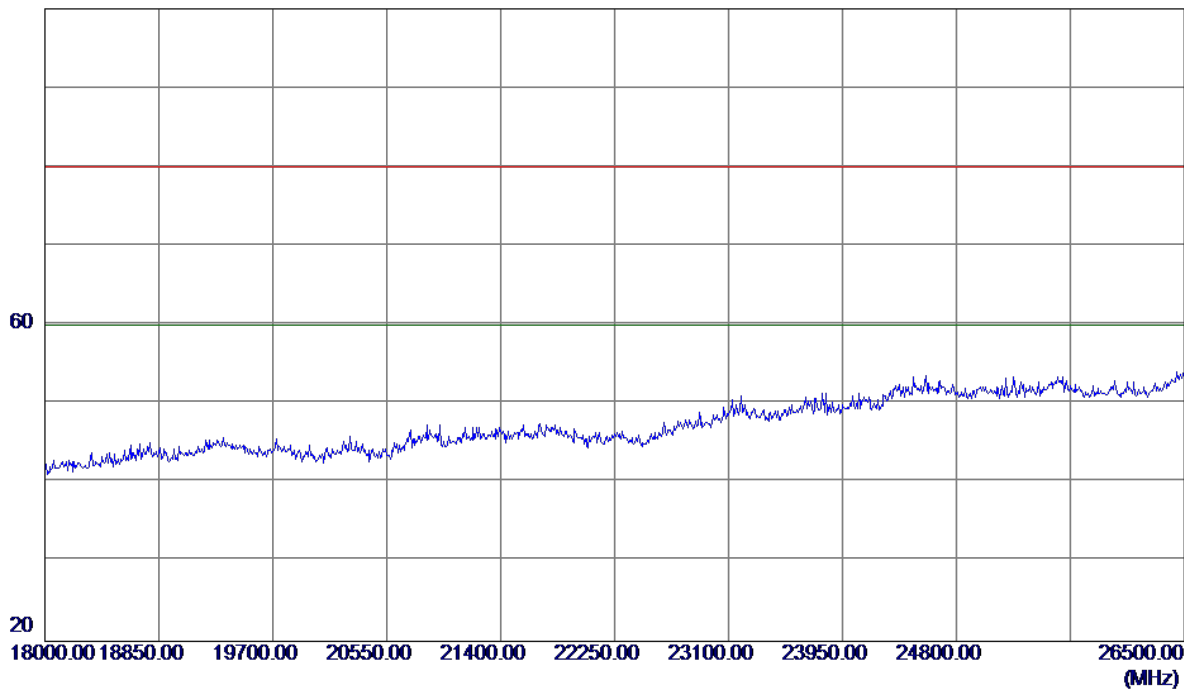


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical


115 dBuV/m

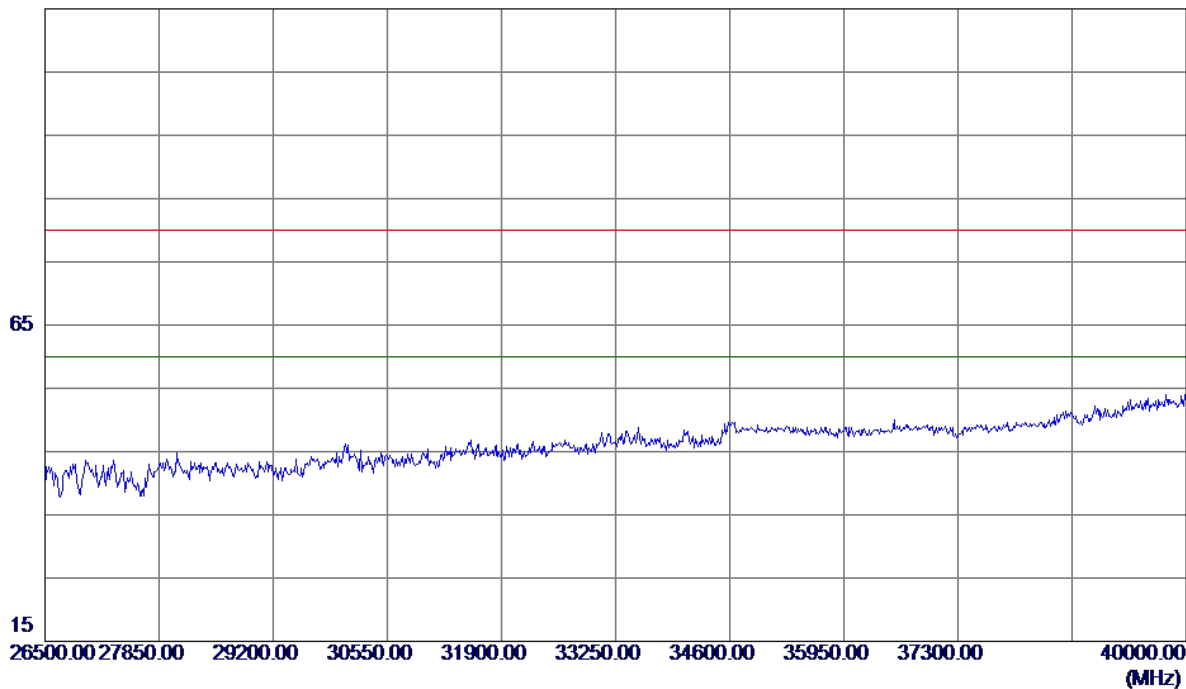

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

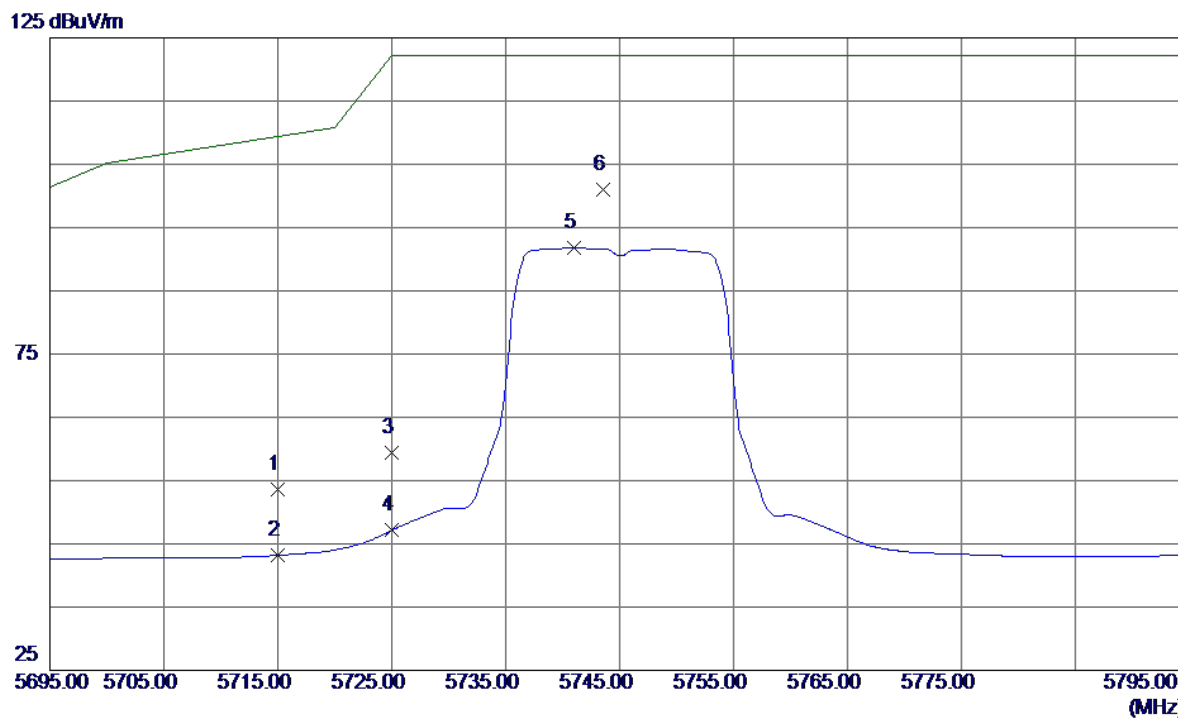


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	10.76	42.90	53.66	109.40	-55.74	Peak	
2	5715.0000	0.29	42.90	43.19	109.40	-66.21	AVG	
3	5725.0000	16.51	42.94	59.45	122.20	-62.75	Peak	
4	5725.0000	4.19	42.94	47.13	122.20	-75.07	AVG	
5	5741.0000	48.82	42.99	91.81	122.20	-30.39	AVG	
6 *	5743.6000	58.08	43.00	101.08	122.20	-21.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

115 dBuV/m

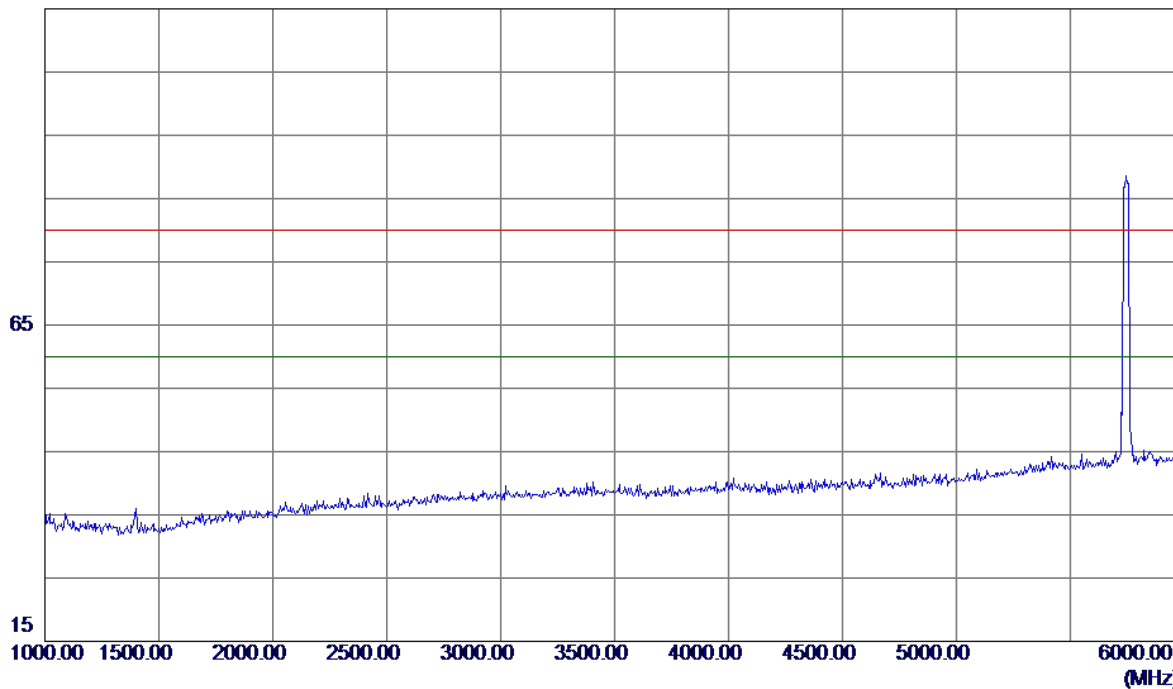


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

115 dBuV/m

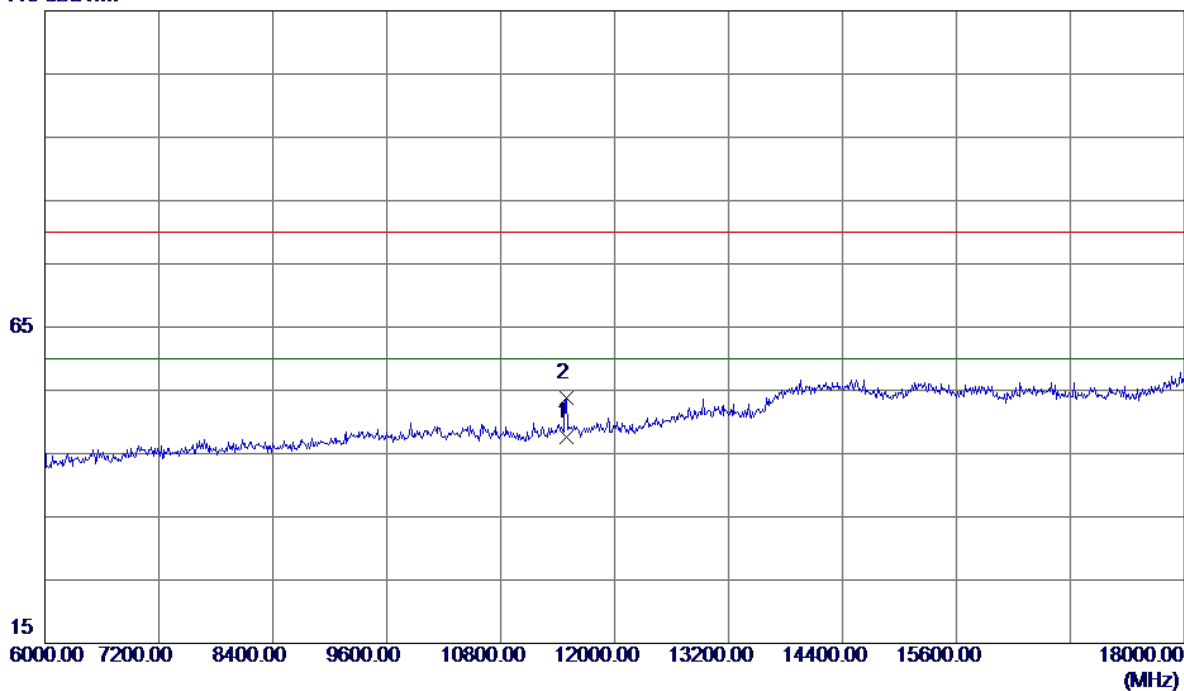


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.1250	29.41	18.20	47.61	60.00	-12.39	AVG	
2	11496.0000	35.68	18.21	53.89	80.00	-26.11	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

100 dBuV/m

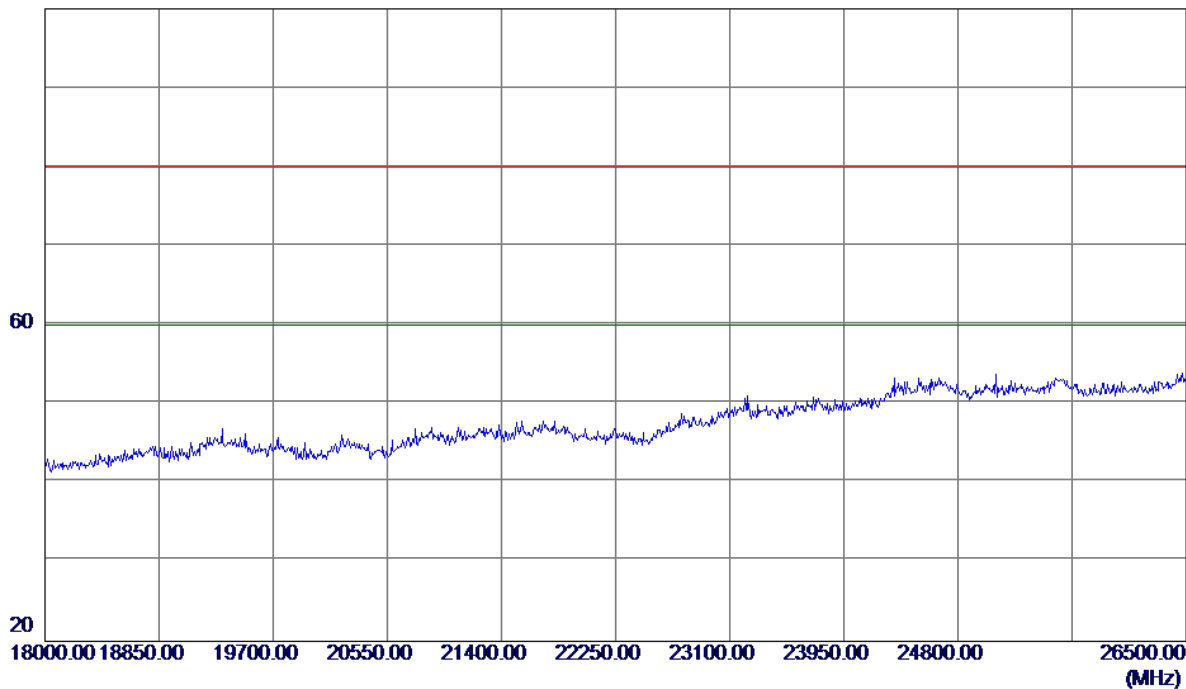


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

115 dBuV/m

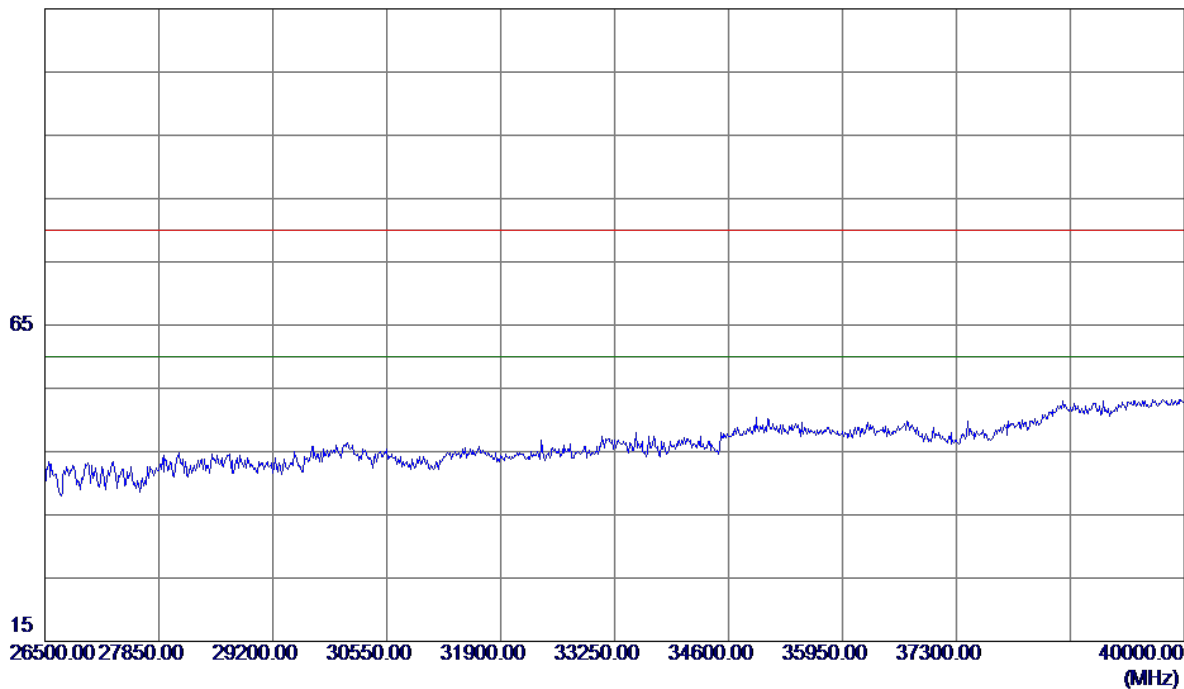

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment