



## TEST REPORT

### PART 27 MEASUREMENT REPORT

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

10/10/2024 - 10/18/2024

**Test Site/Location:**

Element Lab., Suwon,  
Yongin-si, Gyeonggi-do, Korea

**Test Report Serial No.:**

8K24082001-00.A3L

**FCC ID:**

**A3LRF4450T-71A**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Class II Permissive Change

**Model:**

RF4450t-71A

**EUT Type:**

RRU(RF4450t)

**FCC Classification:**

Licensed Non-Broadcast Station Transmitter

**FCC Rule Part(s):**

§27

**Test Procedure(s):**

ANSI C63.26-2015, KDB 971168 D01 v03r01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by Jonathan Jang  
Test Engineer




Reviewed by Jayden Kwak  
Technical Manager

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 1 of 55

## T A B L E O F C O N T E N T S


1.0	REVISION RECORD .....	4
2.0	INTRODUCTION .....	5
2.1	Scope .....	5
2.2	Element Test Location.....	5
2.3	Test Facility / Accreditation .....	5
3.0	PRODUCT INFORMATION.....	6
3.1	Equipment Description .....	6
3.2	Device Capabilities.....	6
3.3	Test Configuration .....	7
3.4	EMI Suppression Device(s)/Modifications .....	7
4.0	DESCRIPTION OF TESTS .....	8
4.1	Measurement Procedure.....	8
4.2	Measurement Software .....	8
5.0	MEASUREMENT UNCERTAINTY .....	9
6.0	TEST EQUIPMENT CALIBRATION DATA .....	10
7.0	SAMPLE CALCULATIONS .....	11
8.0	TEST RESULTS.....	12
8.1	Summary.....	12
8.2	Occupied Bandwidth .....	13
8.3	Equivalent Isotropic Radiated Power (Power Spectral Density) .....	16
8.4	Peak To Average Power Ratio .....	20
8.5	Band Edge Emissions and Emission Mask at Antenna Terminal .....	22
8.6	Spurious and Harmonic Emissions at Antenna Terminal .....	27
8.7	Radiated spurious emission .....	43
9.0	CONCLUSION.....	52
10.0	APPENDIX. A .....	53
10.1	Conducted Average Output Power.....	53

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 2 of 55



# MEASUREMENT REPORT

## FCC Part 27



Mode	Tx Frequency (MHz)	Total Conducted output power		Max Emission Designator	Modulation
		Max. Power (dBm)	Max. Power (W)		
n71_2C_5M+5M	617 to 652	51.54	142.56	9M46G7D	QPSK
		51.36	136.84	9M46W7D	QAM
n71_2C_5M+10M		53.19	208.59	14M3G7D	QPSK
		53.16	206.87	14M3W7D	QAM

EUT Overview

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 3 of 55

# 1.0 REVISION RECORD

Issue Number	Issued Date	Revision History
8K24082001-00.A3L	10/18/2024	Initial Issue

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 4 of 55

## 2.0 INTRODUCTION

### 2.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 2.2 Element Test Location

These measurement tests were conducted at the Element Materials Technology Suwon. Ltd. facility located at (P143) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do 16954, Korea.

### 2.3 Test Facility / Accreditation

**Measurements were performed at Element Materials Technology Suwon Lab located in Yongin-si, Gyeonggi, Korea.**

- Element Materials Technology Suwon is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
  - Designation Number / CABID: KR0169
  - Test Firm Registration Number of FCC: 417945
  - Test Firm Registration Number of IC: 26168

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 5 of 55

## 3.0 PRODUCT INFORMATION

### 3.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung RRU(RF4450t) FCC ID: A3LRF4450T-71A**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

### 3.2 Device Capabilities

This device supports the following conditional features and filter information:

EUT Type	RRU (RF4450t)		
Model Name	RF4450t-71A		
Test Device Serial No	S618614969		
Device Capabilities:	5G NR		
Operating Band/Frequency Range:	Band	Tx (Downlink)	Rx (Uplink)
	n26:	864 MHz to 869 MHz	819 MHz to 824 MHz
	n29:	718 MHz to 728 MHz	N/A
	n71:	617 MHz to 652 MHz	663 MHz to 698 MHz
Supported Modulation	QPSK, 16QAM, 64QAM, 256QAM		
n26 Supported Number of Carriers and Channel Bandwidth	5 MHz 1CC for NR n26		
n29 Supported Number of Carriers and Channel Bandwidth	5 MHz 1CC for NR n29		
n71 Supported Number of Carriers and Channel Bandwidth	5/10/15/20 MHz 1CC for NR n71 and 5/10 MHz up to 2CC aggregation of Max. Bandwidth 15 MHz		
Multi-Band Supported Number of Carriers and Channel Bandwidth	n26, n29 and n71 with up to 4CC aggregated of Max. Bandwidth 25 MHz		
Maximum Output Power	n26	Max 40 W/Unit	
	n29	Max 160 W/Unit	
	n71	Max 240 W/Unit	
	Multi-Band n26&n29&n71	Max 280 W/Unit	
Number of Antenna ports	4TX Configuration		
Supported Configurations	Single carrier, Multi-carriers, Multi-Band		
Input Voltage:	-48 VDC		
Antenna:	Antenna is not provided by manufacture		

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 6 of 55

### 3.3 Test Configuration

The setup is as follows:

- The EUT ("RRU(RF4450t)") and a Data Unit (DU) are each powered by -48V DC power supply.
- The DU is connected to a test laptop via an ethernet cable acting as backhaul.
- DU connects to the EUT through a fiber optic cable.
- An RF cable connects the signal analyzer and the EUT Ports for respective measurement.

The EUT was tested per the guidance of ANSI C63.26-2015 and KDB 971168 D01 v03r01. See Section 8.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

Distribution unit (DU) which were used in test, that authorized under the SDoC procedure.

The n29 duplex mode is SDL (Supplemental Downlink ) designed exclusively for downlink. It cannot operate n29 alone, and operate with uplink of other bands.

The following information is about configurations of carrier frequency and output power per port declared by the manufacturer.

\* Abbreviations:

- 2C: Contiguous 2 carriers in multi-carrier operation
- 2NC: Non-Contiguous 2 carriers in multi-carrier operation

Configuration	No. of Carriers	Carrier Bandwidth (MHz)	Carrier Frequency Configuration (MHz)			Rated Power (W/unit)
			Lowest	Middle	Highest	
n71_2C_5M+5M	2	10	622	634.5	647	160
n71_2NC_5M+5M			622 + 647			
n71_2C_5M+10M	2	15	624.5	634.5	644.5	240
n71_2NC_5M+10M			619.5 + 647			
Multi band operation n71_2C_5M+5M+ n29_1C_5M+n26_1C_5M	4	20	622 + 720.5 + 866.5			280
Multi band operation n71_2C_5M+10M+ n29_1C_5M+ n26_1C_5M	4	25	624.5 + 720.5 + 866.5			280

#### Notes:

- To add multi-carrier operational up to 2CC on n71 as described in this Class II Permissive Change test report.
- For Class II Permissive Change test, multi-carrier was tested each worst modulation based on the Single carrier results on original report.

### 3.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 7 of 55

## 4.0 DESCRIPTION OF TESTS

### 4.1 Measurement Procedure

The measurement procedures described in the document titled “American National Standard for Compliance Testing of Transmitter Used in Licensed Radio Service” (ANSI C63.26-2015) and the guidance provided in KDB 842590 D01 v01r01 were used in the measurement of the EUT.

Occupied Bandwidth:

KDB 971168 D01 v03r01 – Section 4.3  
ANSI C63.26-2015 – Section 5.4.4

Conducted Power Measurement and EIRP and PSD

KDB 971168 D01 v03r01 – Section 5.3  
KDB 971168 D01 v03r01 – Section 5.4  
KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements  
ANSI C63.26-2015 – Section 5.2.5  
ANSI C63.26-2015 – Section 5.2.4

Peak-to-Average Power Ratio:

KDB 971168 D01 v03r01 – Section 5.7  
ANSI C63.26-2015 – Section 5.2.3.4

Channel Edge Emissions at Antenna Terminal

KDB 971168 D01 v03r01 – Section 6  
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements  
a) Absolute Emission Limits  
iii) Measure and add  $10 \log(N_{ANT})$  dB  
ANSI C63.26-2015 – Section 5.7

Spurious and Harmonic Emissions at Antenna Terminal

KDB 971168 D01 v03r01 – Section 6  
KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements  
a) Absolute Emission Limits  
iii) Measure and add  $10 \log(N_{ANT})$  dB  
ANSI C63.26-2015 – Section 5.7

Radiated unwanted emission

KDB 971168 D01 v03r01 – Section 7  
ANSI C63.26-2015 – Section 5.8

Frequency Stability / Temperature Variation

KDB 971168 D01 v03r01 – Section 9  
ANSI C63.26-2015 – Section 5.6

### 4.2 Measurement Software

Test item	Name	Version
Conducted Measurement	Node B automation	1.0

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 8 of 55



## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.37
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	4.84

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 9 of 55

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacture	Model	Description	Cal Date	Cal interval	Cal Due	Serial Number
Rohde & Schwarz	FSW43	Signal Analyzer	04/08/2024	Annual	04/07/2025	101250
Rohde & Schwarz	ESW	EMI Test Receiver	07/09/2024	Annual	07/08/2025	101761
AC POWER KOREA	ACPD-60150	DC Power Supply	01/10/2024	Annual	01/09/2025	DC-1
Rohde & Schwarz	TS-SFUNIT-Rx	Shielded Filter Unit	01/11/2024	Annual	01/10/2025	102131
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	06/01/2023	Biennial	05/31/2025	9162-217
Sunol sciences	DRH-118	Horn Antenna	07/16/2024	Biennial	07/15/2025	A102416-1
Schwarzbeck	BBHA 9170	Horn Antenna	01/16/2024	Biennial	01/15/2026	1037
Reachline	250W18NN-40	Attenuator	01/10/2024	Annual	01/09/2025	PK0289
Reachline	250W18NN-40	Attenuator	01/10/2024	Annual	01/09/2025	PK0290
Reachline	250W18NN-40	Attenuator	01/10/2024	Annual	01/09/2025	PK0292
Reachline	250W18NN-40	Attenuator	01/10/2024	Annual	01/09/2025	PK0293

**Table 6-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. All testing was performed before the calibration due date.

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 10 of 55

## 7.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 9M46G7D**

Occupied Bandwidth = 9.46 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

**Emission Designator = 9M46W7D**

Occupied Bandwidth = 9.46 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 11 of 55

## 8.0 TEST RESULTS

### 8.1 Summary

Company Name: SAMSUNG Electronics Co., Ltd.  
 FCC ID: A3LRF4450T-71A  
 FCC Classification: Licensed Non-Broadcast Station Transmitter  
 Mode(s): 5G NR

FCC Part Section(s)	Test Description	Limit	Test Condition	Test Result	Reference
§ 2.1046	Conducted Average Output Power	N/A	CONDUCTED	PASS	Annex 1
§ 2.1049	Occupied Bandwidth	N/A		PASS	Section 8.2
§ 2.1046, § 27.50(c)	Equivalent Isotropic Radiated Power (Power Spectral Density)	< 1000 W/MHz		PASS	Section 8.3 (Note 4)
§ 2.1046,	Peak-to-average ratio	N/A		PASS	Section 8.4
§ 2.1051, § 27.53(g)	Band Edge Emissions and Emission Mask at Antenna Terminal	> 43 + log10(P[Watts]) at Band Edge and all out-of-band emissions		PASS	Section 8.5
§ 2.1051, § 27.53(g)	Spurious and Harmonic Emissions at Antenna Terminal			PASS	Section 8.6
§ 2.1055 § 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 8.7
§ 2.1055, § 27.53(g)	Radiated unwanted emission	> 43 + log10(P[Watts]) at Band Edge and all out-of-band emissions	RADIATED	PASS	Section 8.8

**Table 8-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) The maximum antenna gain is determined at the time of licensing depending on the geographical location of the base station

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 12 of 55

## 8.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 4.3

ANSI C63.26-2015 – Section 5.4.4


### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-1. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 13 of 55


Channel	Port	OBW (MHz)	
		QPSK	16QAM
Low	0	9.43	9.45
	1	9.43	<b>9.46</b>
	2	9.42	9.44
	3	9.45	9.44
Middle	0	<b>9.46</b>	9.46
	1	9.43	9.46
	2	9.43	9.45
	3	9.44	9.46
High	0	9.43	9.44
	1	9.43	9.44
	2	9.43	9.45
	3	9.43	9.45

**Table 8-2. Occupied Bandwidth Summary Data (n71\_2C\_5M+5M)**

Channel	Port	OBW (MHz)	
		QPSK	16QAM
Low	0	<b>14.32</b>	14.16
	1	14.32	14.29
	2	14.31	14.24
	3	14.30	14.18
Middle	0	14.32	14.26
	1	14.30	14.23
	2	14.32	14.25
	3	14.28	14.23
High	0	14.29	14.20
	1	14.26	14.19
	2	14.30	<b>14.30</b>
	3	14.29	14.22

**Table 8-3. Occupied Bandwidth Summary Data (n71\_2C\_5M+10M)**

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 14 of 55

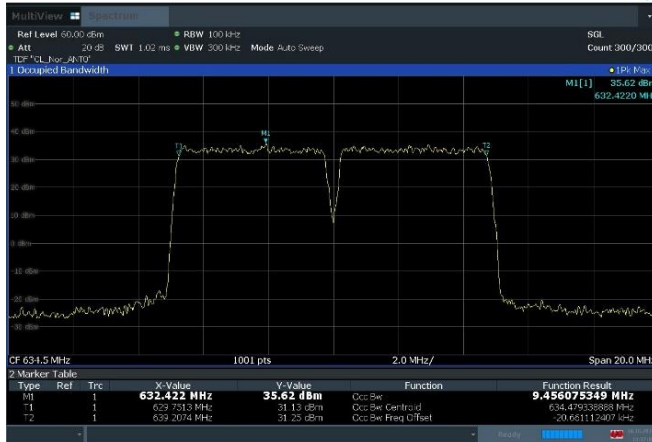

Plot 8-1. Occupied Bandwidth Plot  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 0)



Plot 8-2. Occupied Bandwidth Plot  
(n71\_2C\_5M+5M\_16QAM - Low Channel, Port 1)



Plot 8-3. Occupied Bandwidth Plot  
(n71\_2C\_5M+10M\_QPSK - Low Channel, Port 0)



Plot 8-4. Occupied Bandwidth Plot  
(n71\_2C\_5M+10M\_16QAM - High Channel, Port 2)

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 15 of 55

## 8.3 Equivalent Isotropic Radiated Power (Power Spectral Density)

### Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.2

KDB 662911 D01 v02r01 – Section E1) In-Band Power Measurements

ANSI C63.26-2015 – Section 5.2.4


### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. Conducted average output power measurements are performed using the signal analyzer's "channel power mode" measurement capability for signals with continuous operation.
2. Set span to  $2 \times$  to  $3 \times$  the OBW.
3. Set RBW = set to reference bandwidth specified by the applicable regulatory requirement
4. Set VBW  $\geq 3 \times$  RBW.
5. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
6. Sweep time: auto-couple
7. Detector = power averaging (rms).
8. Set sweep trigger to "free run."
9. The integration bandwidth was set equal to transmission bandwidth i.e. 20MHz for 2CC and 40MHz for 1CC measurements.
10. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
11. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-2. Test Instrument & Measurement Setup**

### Limit

N/A

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 16 of 55



## Test Notes

1. Consider the following factors for MIMO:  
The output power per each port is measured as dBm/MHz or dBm, the output powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01 - Section E) 2).
2. The EIRP Limit is determined at the time of licensing depending on the geographical location of the base station.
3. The output power per port (dBm/MHz or dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO Conducted Power (mW). We convert this back to logarithmic scale for further output power calculations.
4. All transmit signals from different antennas are completely uncorrelated with each other. So the maximum output power shall be calculated based on the aggregate power conducted across all antennas.
5. Sample Calculation:  
Let us assume the following numbers:
  - a) Total MIMO Conducted Power as 18007.42 milliWatts
  - b)

	Factors	Value	Unit
Summed MIMO Conducted Power (linear sum)		18007.42	mW/MHz
Summed MIMO Conducted Power (dBm)	$= 10 * \log (18007.42) =$	42.55	dBm/MHz

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 17 of 55


Channel	Port	PSD Power (dBm/MHz)	
		QPSK	16QAM
Low	0	<b>36.64</b>	36.48
	1	36.60	<b>36.83</b>
	2	36.35	36.57
	3	36.54	36.59
Total MIMO PSD Power (mW)		18007.42	18365.58
Total MIMO PSD Power (dBm)		42.55	42.64
Middle	0	36.39	36.34
	1	36.28	36.66
	2	36.42	36.56
	3	36.38	36.51
Total MIMO PSD Power (mW/MHz)		17331.72	17945.84
Total MIMO PSD Power (dBm/MHz)		42.39	42.54
High	0	36.17	36.32
	1	36.44	36.63
	2	36.31	36.44
	3	36.38	36.53
Total MIMO PSD Power (mW/MHz)		17166.28	17791.40
Total MIMO PSD Power (dBm/MHz)		42.35	42.50

**Table 8-4. Peak Power Spectral Density Table (n71\_2C\_5M+5M)**


Channel	Port	PSD Power (dBm/MHz)	
		QPSK	16QAM
Low	0	36.64	37.04
	1	36.51	37.08
	2	36.26	36.89
	3	<b>36.77</b>	<b>37.22</b>
Total MIMO PSD Power (mW)		18070.35	20322.12
Total MIMO PSD Power (dBm)		42.57	43.08
Middle	0	36.11	36.81
	1	36.57	37.01
	2	36.43	36.94
	3	36.69	37.06
Total MIMO PSD Power (mW/MHz)		17684.62	19845.46
Total MIMO PSD Power (dBm/MHz)		42.48	42.98
High	0	36.11	36.93
	1	36.44	37.04
	2	36.23	37.04
	3	36.39	37.15
Total MIMO PSD Power (mW/MHz)		17041.45	20236.23
Total MIMO PSD Power (dBm/MHz)		42.32	43.06

**Table 8-5. Peak Power Spectral Density Table (n71\_2C\_5M+10M)**


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 18 of 55

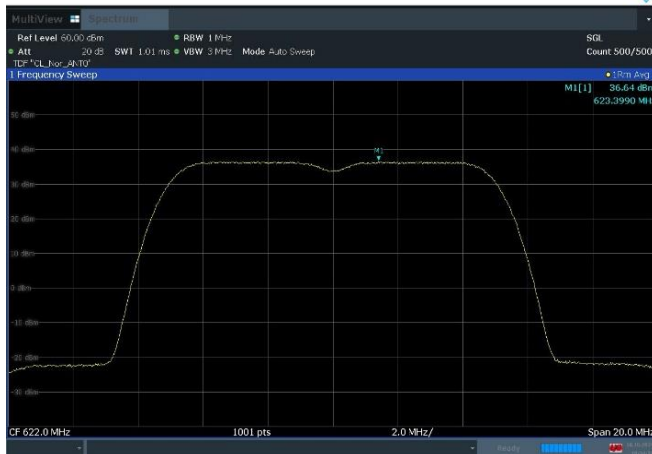


Plot 8-5. Power Spectral Density Plot  
(n71\_2C\_5M+5M\_QPSK - Low Channel, Port 0)

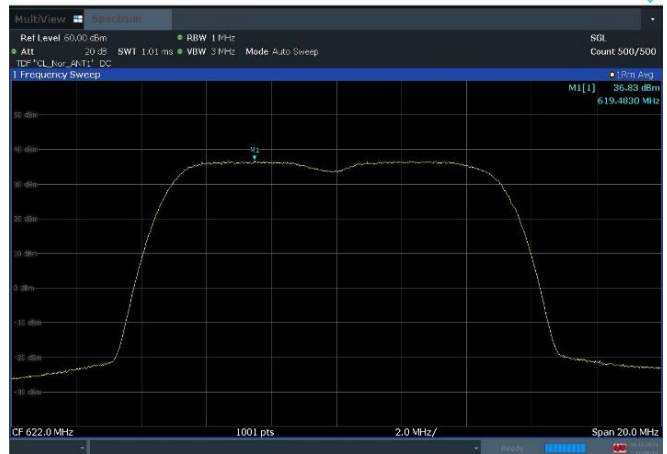

Plot 8-6. Power Spectral Density Plot  
(n71\_2C\_5M+5M\_16QAM - Low Channel, Port 1)

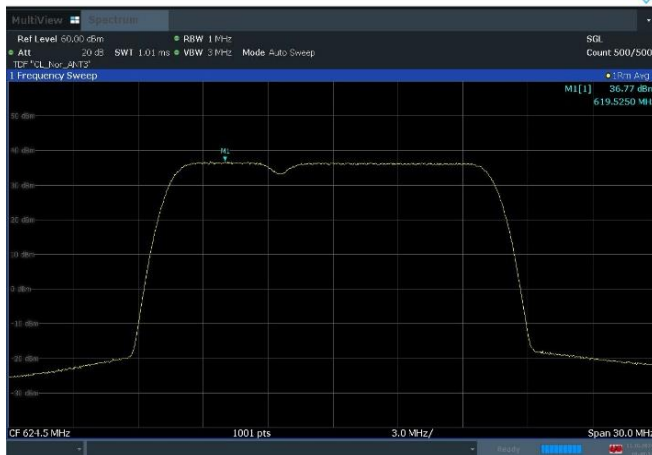

Plot 8-7. Power Spectral Density Plot  
(n71\_2C\_5M+10M\_QPSK - Low Channel, Port 3)

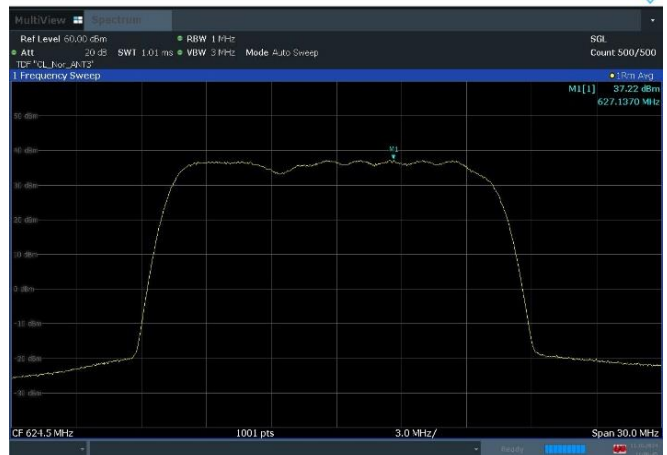

Plot 8-8. Power Spectral Density Plot  
(n71\_2C\_5M+10M\_16QAM - Low Channel, Port 3)

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 19 of 55

## 8.4 Peak To Average Power Ratio

### Test Overview

The peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7

ANSI C63.26-2015 – Section 5.2.3.4


### Test Setting

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. The signal analyzer's CCDF function is enabled.
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-3. Test Instrument & Measurement Setup**

### Limit

N/A

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 20 of 55

Channel	Port	PAPR (dB)	Limit (dB)
		QPSK	
Low	0	9.16	N/A
	1	9.14	
	2	9.16	
	3	9.14	
Middle	0	9.06	
	1	9.06	
	2	9.04	
	3	9.06	
High	0	9.24	
	1	9.24	
	2	9.24	
	3	9.26	


**Table 8-6. Peak To Average Power Ratio Summary Data (n71\_2C\_5M+5M)**

Channel	Port	PAPR (dB)	Limit (dB)
		QPSK	
Low	0	8.06	N/A
	1	8.02	
	2	8.00	
	3	7.98	
Middle	0	7.96	
	1	7.98	
	2	7.98	
	3	7.92	
High	0	8.14	
	1	8.10	
	2	8.12	
	3	8.12	

**Table 8-7. Peak To Average Power Ratio Summary Data (n71\_2C\_5M+10M)**



**Plot 8-9. Peak To Average Power Ratio Plot (n71\_2C\_5M+5M\_QPSK - High Channel, Port 3)**

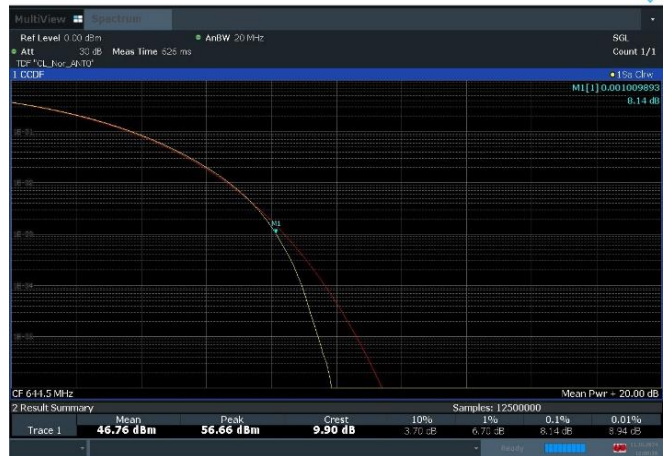

**Plot 8-10. Peak To Average Power Ratio Plot (n71\_2C\_5M+10M\_QPSK - High Channel, Port 0)**

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 21 of 55

## 8.5 Band Edge Emissions and Emission Mask at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

iii) Measure and add  $10 \log(N_{\text{ANT}})$  dB

ANSI C63.26-2015 – Section 5.7.3

### Test Setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW: Please see test notes below.
4.  $\text{VBW} \geq 3 \times \text{RBW}$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


### Limit

#### **n71 operation under Part 27.53**

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{\text{[Watts]}})$ , where P is the transmitter power in Watts.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-4. Test Instrument & Measurement Setup**

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 22 of 55

## Test Notes

1. Per Part 27.53(g), Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least 30 kilohertz may be employed.
2. All the measurement has been tested but test plots are referred from the highest of value of each of modulation of each antenna ports.
3. When the channel edge detect with a margin of under 1dB to Limit, That used to integration method was performed using the spectrum analyzer's band power functions according to ANSI C63.26-2015 – Section 5.7. The spectrum analyzer marker was placed at one-half of the RBW away from the band edge. The integration value was set to a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter.
4. The limits were adjusted by a factor of  $[-10 \cdot \log(4)]$  dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911. MIMO Factor calculation as below:  
MIMO Factor =  $10 \cdot \log(4) = 6.02$  dB

Frequency range	Basic Limit (dBm)	4Tx MIMO Factor (dB)	RBW Factor (dB)	Adjusted limit (dBm)
Low Frequency block – 100kHz	-13	6.02	0	-19.02
High Frequency block + 100kHz	-13	6.02	0	-19.02
Note: Adjusted limit (dBm) = Basic limit (dBm) - MIMO Factor - RBW Factor				

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 23 of 55

Edge	Port	Measured Range (MHz)	Max. Value (dBm)	Limit (dBm)
			QPSK	
Low	0	616.9 to 617	-24.06	-19.02
	1	616.9 to 617	-24.15	
	2	616.9 to 617	<b>-23.97</b>	
	3	616.9 to 617	-25.30	
High	0	652 to 652.1	-25.36	
	1	652 to 652.1	-24.53	
	2	652 to 652.1	<b>-24.12</b>	
	3	652 to 652.1	-25.30	

**Table 8-8. Band Edge Emission Summary Data (n71\_2C\_5M+5M)**

Edge	Port	Measured Range (MHz)	Max. Value (dBm)	Limit (dBm)
			QPSK	
Low	0	616.9 to 617	-23.80	-19.02
	1	616.9 to 617	<b>-23.44</b>	
	2	616.9 to 617	-23.78	
	3	616.9 to 617	-23.82	
High	0	652 to 652.1	-25.73	
	1	652 to 652.1	-26.06	
	2	652 to 652.1	-26.27	
	3	652 to 652.1	<b>-25.35</b>	

**Table 8-9. Band Edge Emission Summary Data (n71\_2C\_5M+10M)**

Edge	Port	Measured Range (MHz)	Max. Value (dBm)	Limit (dBm)
			QPSK	
Low	0	616.9 to 617	-24.15	-19.02
	1	616.9 to 617	-23.98	
	2	616.9 to 617	<b>-22.81</b>	
	3	616.9 to 617	-23.59	
High	0	652 to 652.1	-25.83	
	1	652 to 652.1	-25.44	
	2	652 to 652.1	-26.41	
	3	652 to 652.1	<b>-24.70</b>	


**Table 8-10. Band Edge Emission Summary Data (n71\_2NC\_5M+5M)**

Edge	Port	Measured Range (MHz)	Max. Value (dBm)	Limit (dBm)
			QPSK	
Low	0	616.9 to 617	-22.76	-19.02
	1	616.9 to 617	-21.45	
	2	616.9 to 617	<b>-20.98</b>	
	3	616.9 to 617	-21.25	
High	0	652 to 652.1	-24.25	
	1	652 to 652.1	-23.61	
	2	652 to 652.1	-23.78	
	3	652 to 652.1	<b>-22.64</b>	


**Table 8-11. Band Edge Emission Summary Data (n71\_2NC\_5M+10M)**

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 24 of 55




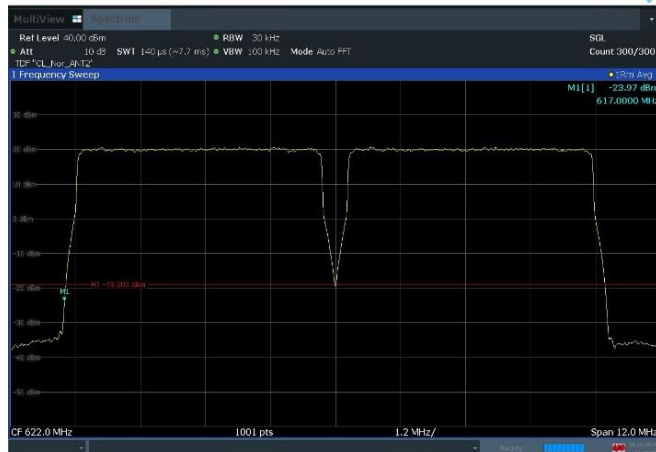


Plot 8-11 Band Edge Emission Plot  
(n71\_2C\_5M+5M\_QPSK - Low Edge, Port 2)

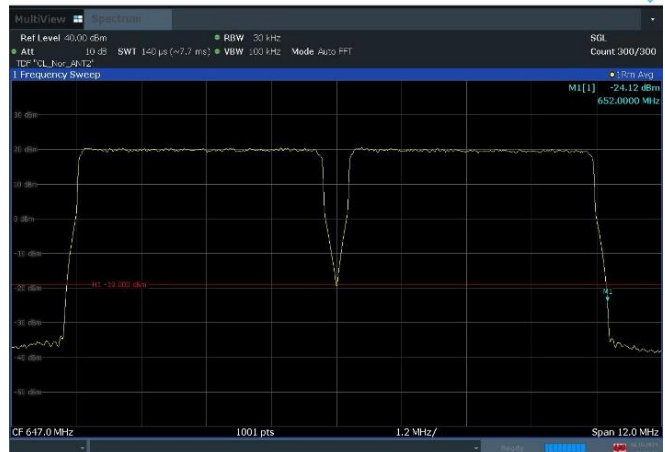


Plot 8-12. Band Edge Emission Plot  
(n71\_2C\_5M+5M\_QPSK - High Edge, Port 2)

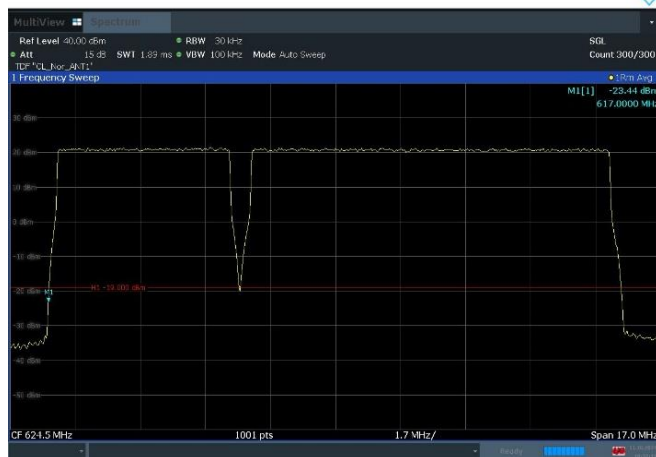


Plot 8-13 Band Edge Emission Plot  
(n71\_2C\_5M+10M\_QPSK - Low Edge, Port 1)

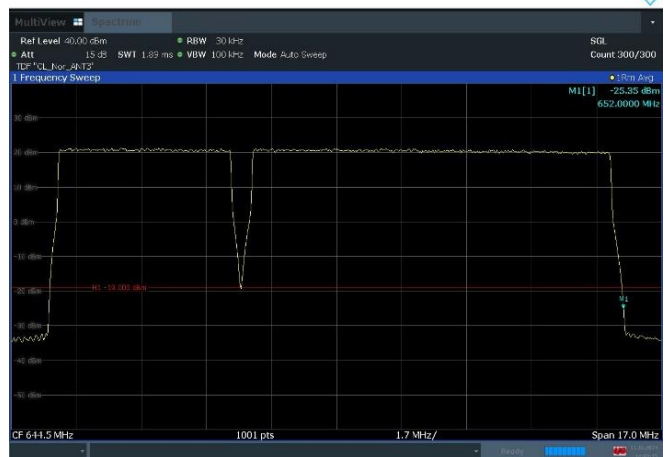

Plot 8-14. Band Edge Emission Plot  
(n71\_2C\_5M+10M\_QPSK - High Edge, Port 3)

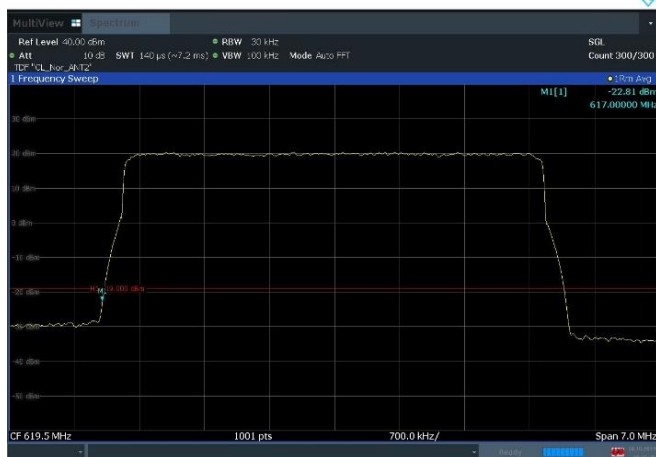


Plot 8-15 Band Edge Emission Plot  
(n71\_2NC\_5M+5M\_QPSK - Low Edge, Port 2)

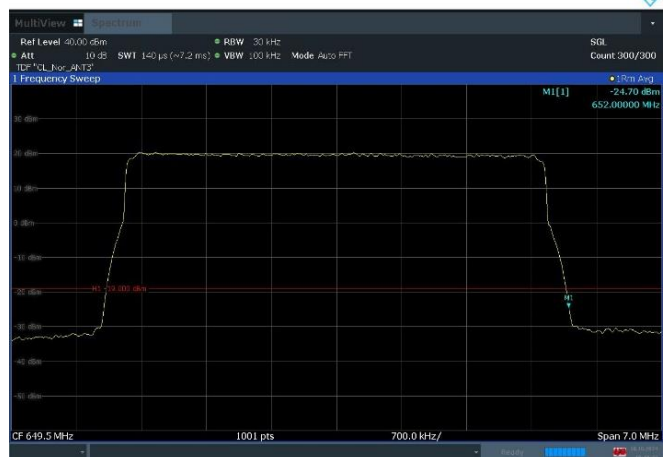


Plot 8-16. Band Edge Emission Plot  
(n71\_2NC\_5M+5M\_QPSK - High Edge, Port 3)

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 25 of 55

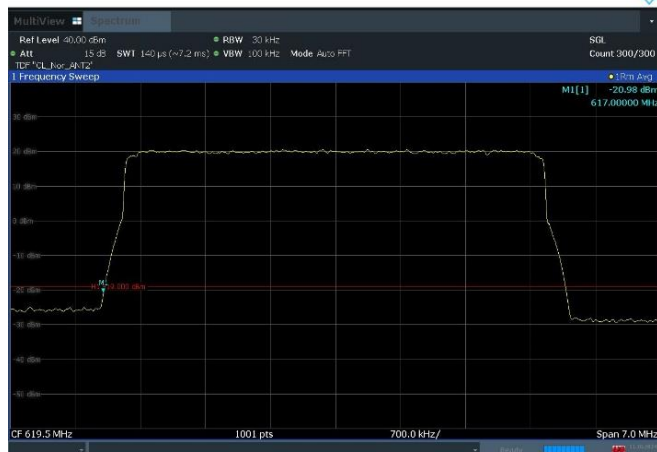

Plot 8-17 Band Edge Emission Plot  
(n71\_2NC\_5M+10M\_QPSK – Low Edge, Port 2)

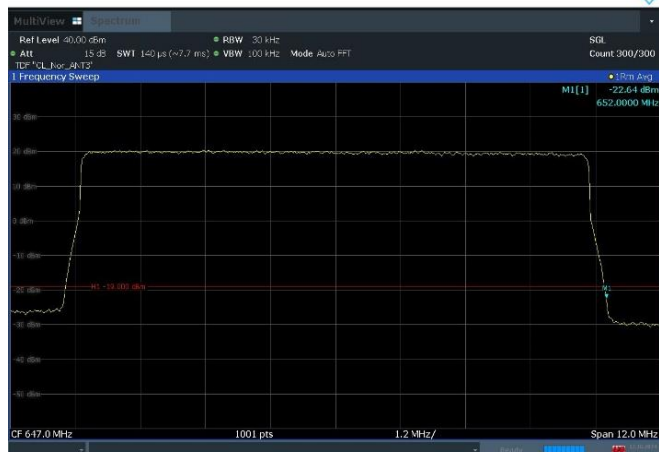

Plot 8-18. Band Edge Emission Plot  
(n71\_2NC\_5M+10M\_QPSK – High Edge, Port 3)

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 26 of 55

## 8.6 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 6

KDB 662911 D01 v02r01 – Section E)3) Out-of-Band and Spurious Emission Measurements

a) Absolute Emission Limits

iii) Measure and add  $10 \log(N_{ANT})$  dB

ANSI C63.26-2015 – Section 5.7

### Test Setting

1. Start frequency was set to 9 kHz and stop frequency was set to at least  $10 \times$  the fundamental frequency excluding the frequency range of the band edge measurement.
2. RBW: Please see test notes below.
3.  $VBW \geq 3 \times RBW$
4. Detector = RMS
5. Number of sweep points  $\geq 2 \times \text{Span}/RBW$
6. Trace mode = trace average
7. Sweep time = auto couple
8. The trace was allowed to stabilize

### Limit

#### **n29 and n71 operation under Part 27.53**

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.

#### **n26 operation under Part 90.691**


For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 27 of 55

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 8-5. Test Instrument & Measurement Setup**

## Test Notes

- Per Part 27.53(g), Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least 30 kilohertz may be employed.
- Per Part 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz.
- The n29 is an SDL( Supplemental Downlink ) designed exclusively for downlink. Therefore, the n29 cannot operate alone, it was tested by simultaneously operating n29 and n71.
- All the measurement has been tested but test plots are referred from the highest of value of each of modulation of each antenna ports.
- The limits were adjusted by a factor of  $[-10 \cdot \log(4)]$  dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911. MIMO Factor calculation as below:  
MIMO Factor =  $10 \cdot \log(4) = 6.02$  dB
- Narrower RBW parameter is applied according to Section 5.7 of ANSI C63.26-2015 for some edge channels due to improving measurement accuracy. RBW Factor calculation as below:
  - RBW Factor =  $10 \cdot \log(1/0.01) = 20$  dB for the measurement range from 9 kHz to 150 kHz.
  - RBW Factor =  $10 \cdot \log(1/0.1) = 10$  dB for the measurement range from 150 kHz to 30 MHz.

### Single band operation for part 27 only

Frequency range	Basic Limit (dBm)	4 TX MIMO Factor (dB)	RBW Factor (dB)	Adjusted limit (dBm)
9 kHz to 150 kHz	-13	6.02	20	-39.02
150 kHz to 30 MHz	-13	6.02	10	-29.02
30 MHz to 616.9 MHz	-13	6.02	0	-19.02
652.1 MHz to 1 GHz	-13	6.02	0	-19.02
1 GHz to 10 GHz	-13	6.02	0	-19.02

Note: Adjusted limit (dBm) = Basic limit (dBm) - MIMO Factor - RBW Factor  
Adjusted limit (dBm/MHz) = Basic limit (dBm/MHz) - MIMO Factor - RBW Factor

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 28 of 55

**Multi Band operation for part 27 with part 90.**

Frequency range	Basic Limit (dBm)	4 TX MIMO Factor(dB)	RBW Factor (dB)	Adjusted limit (dBm)
9 kHz to 150 kHz	-13	6.02	20	-39.02
150 kHz to 30 MHz	-13	6.02	10	-29.02
30 MHz to 616.9 MHz	-13	6.02	0	-19.02
616.9 MHz to 617 MHz	-13	6.02	0	-19.02
652 MHz to 652.1 MHz	-13	6.02	0	-19.02
652.1 MHz to 717.9 MHz	-13	6.02	0	-19.02
717.9 MHz to 718 MHz	-13	6.02	0	-19.02
728 MHz to 728.1 MHz	-13	6.02	0	-19.02
728.1 MHz to 863.9625 MHz	-13	6.02	0	-19.02
863.9625 MHz to 864 MHz	-20	6.02	0	-26.02
869 MHz to 869.0375 MHz	-20	6.02	0	-26.02
869.0375 MHz to 1 GHz	-13	6.02	0	-19.02
1 GHz to 10 GHz	-13	6.02	0	-19.02
Note: Adjusted limit (dBm) = Basic limit (dBm) - MIMO Factor - RBW Factor Adjusted limit (dBm/MHz) = Basic limit (dBm/MHz) - MIMO Factor - RBW Factor				

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> <b>(Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 29 of 55

Channel	Port	Measurement Range	Level (dBm)	Limit (dBm)	Margin (dB)
			QPSK		
Low	0	9 kHz to 150 kHz	-65.42	-39.02	-26.40
		150 kHz to 30 MHz	-45.64	-29.02	-16.62
		30 MHz to 616.9 MHz	-29.72	-19.02	-10.70
		652.1 MHz to 1 GHz	-36.48	-19.02	-17.46
		1 GHz to 3 GHz	-34.18	-19.02	-15.16
	1	3 GHz to 10 GHz	-26.98	-19.02	-7.96
		9 kHz to 150 kHz	-66.93	-39.02	-27.91
		150 kHz to 30 MHz	-45.98	-29.02	-16.96
		30 MHz to 616.9 MHz	-27.50	-19.02	-8.48
		652.1 MHz to 1 GHz	-36.33	-19.02	-17.31
	2	1 GHz to 3 GHz	-33.44	-19.02	-14.42
		3 GHz to 10 GHz	-24.15	-19.02	-5.13
		9 kHz to 150 kHz	-66.22	-39.02	-27.20
		150 kHz to 30 MHz	-46.44	-29.02	-17.42
		30 MHz to 616.9 MHz	-28.21	-19.02	-9.19
	3	652.1 MHz to 1 GHz	-36.45	-19.02	-17.43
		1 GHz to 3 GHz	-34.11	-19.02	-15.09
		3 GHz to 10 GHz	-26.03	-19.02	-7.01
		9 kHz to 150 kHz	-68.68	-39.02	-29.66
		150 kHz to 30 MHz	-48.83	-29.02	-19.81
Middle	0	30 MHz to 616.9 MHz	-28.07	-19.02	-9.05
		652.1 MHz to 1 GHz	-36.03	-19.02	-17.01
		1 GHz to 3 GHz	-33.91	-19.02	-14.89
		3 GHz to 10 GHz	-25.29	-19.02	-6.27
		9 kHz to 150 kHz	-66.00	-39.02	-26.98
	1	150 kHz to 30 MHz	-45.05	-29.02	-16.03
		30 MHz to 616.9 MHz	-35.97	-19.02	-16.95
		652.1 MHz to 1 GHz	-36.08	-19.02	-17.06
		1 GHz to 3 GHz	-34.47	-19.02	-15.45
		3 GHz to 10 GHz	-27.19	-19.02	-8.17
	2	9 kHz to 150 kHz	-65.83	-39.02	-26.81
		150 kHz to 30 MHz	-45.94	-29.02	-16.92
		30 MHz to 616.9 MHz	-34.98	-19.02	-15.96
		652.1 MHz to 1 GHz	-35.28	-19.02	-16.26
		1 GHz to 3 GHz	-33.50	-19.02	-14.48
	3	3 GHz to 10 GHz	-24.07	-19.02	-5.05
		9 kHz to 150 kHz	-65.83	-39.02	-26.81
		150 kHz to 30 MHz	-46.81	-29.02	-17.79
		30 MHz to 616.9 MHz	-35.63	-19.02	-16.61
		652.1 MHz to 1 GHz	-35.93	-19.02	-16.91
High	0	1 GHz to 3 GHz	-34.10	-19.02	-15.08
		3 GHz to 10 GHz	-26.11	-19.02	-7.09
		9 kHz to 150 kHz	-69.35	-39.02	-30.33
		150 kHz to 30 MHz	-48.73	-29.02	-19.71
		30 MHz to 616.9 MHz	-35.63	-19.02	-16.61
	1	652.1 MHz to 1 GHz	-35.87	-19.02	-16.85
		1 GHz to 3 GHz	-33.91	-19.02	-14.89
		3 GHz to 10 GHz	-25.43	-19.02	-6.41
		9 kHz to 150 kHz	-65.32	-39.02	-26.30
		150 kHz to 30 MHz	-45.61	-29.02	-16.59

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 30 of 55

	2	3 GHz to 10 GHz	-24.13	-19.02	-5.11
		9 kHz to 150 kHz	-65.86	-39.02	-26.84
		150 kHz to 30 MHz	-45.98	-29.02	-16.96
		30 MHz to 616.9 MHz	-36.05	-19.02	-17.03
		652.1 MHz to 1 GHz	-29.07	-19.02	-10.05
		1 GHz to 3 GHz	-33.65	-19.02	-14.63
	3	3 GHz to 10 GHz	-26.13	-19.02	-7.11
		9 kHz to 150 kHz	-67.82	-39.02	-28.80
		150 kHz to 30 MHz	-48.96	-29.02	-19.94
		30 MHz to 616.9 MHz	-36.71	-19.02	-17.69
		652.1 MHz to 1 GHz	-28.77	-19.02	-9.75
		1 GHz to 3 GHz	-33.79	-19.02	-14.77
		3 GHz to 10 GHz	-25.26	-19.02	-6.24

**Table 8-12. Conducted Spurious Emission Summary Data (n71\_2C\_5M+5M)**

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 31 of 55

Channel	Port	Measurement Range	Level (dBm)	Limit (dBm)	Margin (dB)
			QPSK		
Low	0	9 kHz to 150 kHz	-66.11	-39.02	-27.09
		150 kHz to 30 MHz	-46.05	-29.02	-17.03
		30 MHz to 616.9 MHz	-27.93	-19.02	-8.91
		652.1 MHz to 1 GHz	-35.68	-19.02	-16.66
		1 GHz to 3 GHz	-34.26	-19.02	-15.24
	1	3 GHz to 10 GHz	-27.17	-19.02	-8.15
		9 kHz to 150 kHz	-66.75	-39.02	-27.73
		150 kHz to 30 MHz	-46.15	-29.02	-17.13
		30 MHz to 616.9 MHz	-28.82	-19.02	-9.80
		652.1 MHz to 1 GHz	-34.42	-19.02	-15.40
	2	1 GHz to 3 GHz	-33.66	-19.02	-14.64
		3 GHz to 10 GHz	-24.08	-19.02	-5.06
		9 kHz to 150 kHz	-67.48	-39.02	-28.46
		150 kHz to 30 MHz	-46.70	-29.02	-17.68
		30 MHz to 616.9 MHz	-29.44	-19.02	-10.42
	3	652.1 MHz to 1 GHz	-34.81	-19.02	-15.79
		1 GHz to 3 GHz	-33.41	-19.02	-14.39
		3 GHz to 10 GHz	-26.15	-19.02	-7.13
		9 kHz to 150 kHz	-69.59	-39.02	-30.57
		150 kHz to 30 MHz	-49.00	-29.02	-19.98
Middle	0	30 MHz to 616.9 MHz	-27.68	-19.02	-8.66
		652.1 MHz to 1 GHz	-34.87	-19.02	-15.85
		1 GHz to 3 GHz	-33.92	-19.02	-14.90
		3 GHz to 10 GHz	-25.30	-19.02	-6.28
		9 kHz to 150 kHz	-66.13	-39.02	-27.11
	1	150 kHz to 30 MHz	-46.05	-29.02	-17.03
		30 MHz to 616.9 MHz	-33.08	-19.02	-14.06
		652.1 MHz to 1 GHz	-33.53	-19.02	-14.51
		1 GHz to 3 GHz	-33.79	-19.02	-14.77
		3 GHz to 10 GHz	-27.11	-19.02	-8.09
	2	9 kHz to 150 kHz	<b>-66.94</b>	-39.02	-27.92
		150 kHz to 30 MHz	<b>-45.69</b>	-29.02	-16.67
		30 MHz to 616.9 MHz	<b>-31.92</b>	-19.02	-12.90
		652.1 MHz to 1 GHz	<b>-33.02</b>	-19.02	-14.00
		1 GHz to 3 GHz	<b>-33.61</b>	-19.02	-14.59
	3	3 GHz to 10 GHz	<b>-24.08</b>	-19.02	<b>-5.06</b>
		9 kHz to 150 kHz	-66.45	-39.02	-27.43
		150 kHz to 30 MHz	-47.10	-29.02	-18.08
		30 MHz to 616.9 MHz	-32.01	-19.02	-12.99
		652.1 MHz to 1 GHz	-32.27	-19.02	-13.25
High	0	1 GHz to 3 GHz	-34.03	-19.02	-15.01
		3 GHz to 10 GHz	-26.04	-19.02	-7.02
		9 kHz to 150 kHz	-69.70	-39.02	-30.68
		150 kHz to 30 MHz	-48.92	-29.02	-19.90
		30 MHz to 616.9 MHz	-30.61	-19.02	-11.59
	1	652.1 MHz to 1 GHz	-33.34	-19.02	-14.32
		1 GHz to 3 GHz	-33.98	-19.02	-14.96
		3 GHz to 10 GHz	-25.41	-19.02	-6.39
		9 kHz to 150 kHz	-66.28	-39.02	-27.26
		150 kHz to 30 MHz	-45.65	-29.02	-16.63

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 32 of 55



	2	3 GHz to 10 GHz	-24.29	-19.02	-5.27
		9 kHz to 150 kHz	-66.81	-39.02	-27.79
		150 kHz to 30 MHz	-47.10	-29.02	-18.08
		30 MHz to 616.9 MHz	-34.13	-19.02	-15.11
		652.1 MHz to 1 GHz	-27.03	-19.02	-8.01
		1 GHz to 3 GHz	-34.00	-19.02	-14.98
	3	3 GHz to 10 GHz	-26.03	-19.02	-7.01
		9 kHz to 150 kHz	-69.35	-39.02	-30.33
		150 kHz to 30 MHz	-48.76	-29.02	-19.74
		30 MHz to 616.9 MHz	-34.65	-19.02	-15.63
		652.1 MHz to 1 GHz	-27.01	-19.02	-7.99
		1 GHz to 3 GHz	-33.92	-19.02	-14.90
		3 GHz to 10 GHz	-25.29	-19.02	-6.27

**Table 8-13. Conducted Spurious Emission Summary Data (n71\_2C\_5M+10M)**

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 33 of 55

Channel	Port	Measurement Range	Level (dBm)	Limit (dBm)	Margin (dB)
			QPSK		
Mid	0	9 kHz to 150 kHz	-65.81	-39.02	-26.79
		150 kHz to 30 MHz	-45.63	-29.02	-16.61
		30 MHz to 616.9 MHz	-23.46	-19.02	-4.44
		652.1 MHz to 1 GHz	-27.27	-19.02	-8.25
		1 GHz to 3 GHz	-34.45	-19.02	-15.43
	1	3 GHz to 10 GHz	-27.16	-19.02	-8.14
		9 kHz to 150 kHz	-66.66	-39.02	-27.64
		150 kHz to 30 MHz	-45.93	-29.02	-16.91
		30 MHz to 616.9 MHz	-22.84	-19.02	-3.82
		652.1 MHz to 1 GHz	-24.91	-19.02	-5.89
	2	1 GHz to 3 GHz	-33.60	-19.02	-14.58
		3 GHz to 10 GHz	-24.13	-19.02	-5.11
		9 kHz to 150 kHz	<b>-66.27</b>	-39.02	-27.25
		150 kHz to 30 MHz	<b>-46.77</b>	-29.02	-17.75
		30 MHz to 616.9 MHz	<b>-21.83</b>	-19.02	<b>-2.81</b>
	3	652.1 MHz to 1 GHz	<b>-25.41</b>	-19.02	-6.39
		1 GHz to 3 GHz	<b>-34.07</b>	-19.02	-15.05
		3 GHz to 10 GHz	<b>-26.11</b>	-19.02	-7.09
		9 kHz to 150 kHz	-68.94	-39.02	-29.92
		150 kHz to 30 MHz	-48.43	-29.02	-19.41
		30 MHz to 616.9 MHz	-22.92	-19.02	-3.90
		652.1 MHz to 1 GHz	-24.32	-19.02	-5.30
		1 GHz to 3 GHz	-33.84	-19.02	-14.82
		3 GHz to 10 GHz	-25.38	-19.02	-6.36

**Table 8-14. Conducted Spurious Emission Summary Data (n71\_2NC\_5M+5M)**

Channel	Port	Measurement Range	Level (dBm)	Limit (dBm)	Margin (dB)
			QPSK		
Mid	0	9 kHz to 150 kHz	<b>-66.72</b>	-39.02	-27.70
		150 kHz to 30 MHz	<b>-45.71</b>	-29.02	-16.69
		30 MHz to 600 MHz	<b>-36.45</b>	-19.02	-17.43
		600 MHz to 616.9 MHz	<b>-30.64</b>	-19.02	-11.62
		652.1 MHz to 1 GHz	<b>-20.32</b>	-19.02	<b>-1.30</b>
		1 GHz to 3 GHz	<b>-34.21</b>	-19.02	-15.19
		3 GHz to 10 GHz	<b>-27.24</b>	-19.02	-8.22
	1	9 kHz to 150 kHz	-66.20	-39.02	-27.18
		150 kHz to 30 MHz	-45.83	-29.02	-16.81
		30 MHz to 600 MHz	-38.77	-19.02	-19.75
		600 MHz to 616.9 MHz	-29.55	-19.02	-10.53
		652.1 MHz to 1 GHz	-22.86	-19.02	-3.84
		1 GHz to 3 GHz	-33.33	-19.02	-14.31
		3 GHz to 10 GHz	-24.28	-19.02	-5.26
	2	9 kHz to 150 kHz	-67.39	-39.02	-28.37
		150 kHz to 30 MHz	-47.22	-29.02	-18.20
		30 MHz to 600 MHz	-39.24	-19.02	-20.22
		600 MHz to 616.9 MHz	-29.40	-19.02	-10.38
		652.1 MHz to 1 GHz	-20.76	-19.02	-1.74
		1 GHz to 3 GHz	-33.90	-19.02	-14.88
		3 GHz to 10 GHz	-26.21	-19.02	-7.19
	3	9 kHz to 150 kHz	-68.92	-39.02	-29.90
		150 kHz to 30 MHz	-48.22	-29.02	-19.20
		30 MHz to 600 MHz	-38.99	-19.02	-19.97
		600 MHz to 616.9 MHz	-29.37	-19.02	-10.35
		652.1 MHz to 1 GHz	-22.30	-19.02	-3.28
		1 GHz to 3 GHz	-34.03	-19.02	-15.01
		3 GHz to 10 GHz	-25.37	-19.02	-6.35

**Table 8-15. Conducted Spurious Emission Summary Data (n71\_2NC\_5M+10M)**

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 34 of 55


Channel	Port	Measurement Range	Level (dBm)		Limit (dBm)
			n71_2C_5M+5M + n29_1C_5M + n26_1C_5M	n71_2C_5M + 10M + n29_1C_5M + n26_1C_5M	
Mid	0	9 kHz to 150 kHz	-62.54	-65.30	-39.02
		150 kHz to 30 MHz	-45.84	-46.02	-29.02
		30 MHz to 616.9 MHz	-28.26	-28.96	-19.02
		616.9 MHz to 617 MHz	-22.90	-22.66	-19.02
		652 MHz to 652.1 MHz	-41.85	-43.50	-19.02
		652.1 MHz to 717.9 MHz	-28.51	-28.43	-19.02
		717.9 MHz to 718 MHz	-26.26	-26.61	-19.02
		728 MHz to 728.1 MHz	-37.66	-35.37	-19.02
		728.1 MHz to 863.9625 MHz	-23.77	-24.60	-19.02
		863.9625 MHz to 864 MHz	-44.35	-44.71	-26.02
		869 MHz to 869.0375 MHz	-45.51	-45.74	-26.02
		869.0375 MHz to 1 GHz	-24.34	-22.92	-19.02
	1	1 GHz to 3 GHz	-34.36	-34.19	-19.02
		3 GHz to 10 GHz	-27.04	-27.39	-19.02
		9 kHz to 150 kHz	-62.81	-65.44	-39.02
		150 kHz to 30 MHz	-45.63	-45.66	-29.02
		30 MHz to 616.9 MHz	-25.98	-25.71	-19.02
		616.9 MHz to 617 MHz	-24.75	-23.03	-19.02
		652 MHz to 652.1 MHz	-39.79	-41.91	-19.02
		652.1 MHz to 717.9 MHz	-26.94	-27.94	-19.02
		717.9 MHz to 718 MHz	-25.10	-26.40	-19.02
		728 MHz to 728.1 MHz	-38.96	-36.31	-19.02
		728.1 MHz to 863.9625 MHz	-24.66	-22.54	-19.02
		863.9625 MHz to 864 MHz	-44.95	-44.75	-26.02
	2	869 MHz to 869.0375 MHz	-45.32	-44.93	-26.02
		869.0375 MHz to 1 GHz	-22.79	-22.20	-19.02
		1 GHz to 3 GHz	-33.67	-33.54	-19.02
		3 GHz to 10 GHz	-24.09	-24.29	-19.02
		9 kHz to 150 kHz	-62.65	<b>-65.92</b>	-39.02
		150 kHz to 30 MHz	-46.56	<b>-46.90</b>	-29.02
		30 MHz to 616.9 MHz	-27.04	<b>-27.48</b>	-19.02
		616.9 MHz to 617 MHz	-25.00	<b>-22.39</b>	-19.02
		652 MHz to 652.1 MHz	-40.89	<b>-42.36</b>	-19.02
		652.1 MHz to 717.9 MHz	-25.30	<b>-29.32</b>	-19.02
		717.9 MHz to 718 MHz	-26.14	<b>-26.53</b>	-19.02
		728 MHz to 728.1 MHz	-37.36	<b>-36.17</b>	-19.02
	3	728.1 MHz to 863.9625 MHz	-24.47	<b>-24.53</b>	-19.02
		863.9625 MHz to 864 MHz	-45.08	<b>-45.12</b>	-26.02
		869 MHz to 869.0375 MHz	-45.12	<b>-45.26</b>	-26.02
		869.0375 MHz to 1 GHz	-23.66	<b>-21.45</b>	-19.02
		1 GHz to 3 GHz	-34.12	<b>-33.70</b>	-19.02
		3 GHz to 10 GHz	-26.22	<b>-26.14</b>	-19.02
		9 kHz to 150 kHz	-64.30	-67.39	-39.02
		150 kHz to 30 MHz	-49.16	-49.02	-29.02
		30 MHz to 616.9 MHz	-27.01	-26.33	-19.02
		616.9 MHz to 617 MHz	-23.86	-22.38	-19.02
		652 MHz to 652.1 MHz	-41.08	-41.62	-19.02
		652.1 MHz to 717.9 MHz	-27.72	-27.31	-19.02
		717.9 MHz to 718 MHz	-24.85	-26.80	-19.02
		728 MHz to 728.1 MHz	-37.81	-35.62	-19.02
		728.1 MHz to 863.9625 MHz	-23.41	-23.35	-19.02
		863.9625 MHz to 864 MHz	-44.29	-43.97	-26.02
		869 MHz to 869.0375 MHz	-44.40	-44.75	-26.02
		869.0375 MHz to 1 GHz	-22.49	-25.68	-19.02
		1 GHz to 3 GHz	-33.92	-34.18	-19.02
		3 GHz to 10 GHz	-25.29	-25.33	-19.02

**Table 8-16. Conducted Spurious Emission Summary Data  
(Multi band operation)**


FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 35 of 55




Plot 8-19. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 1)

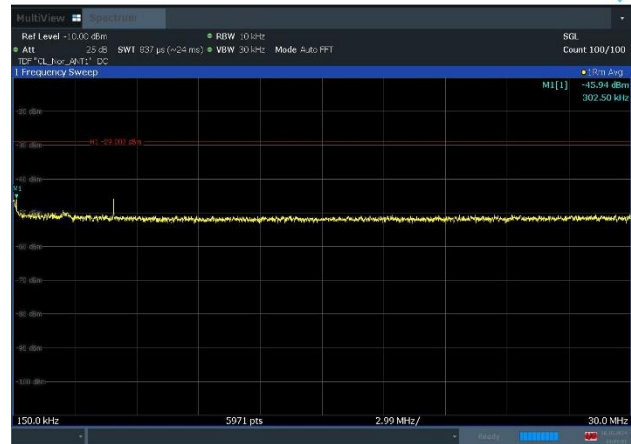


Plot 8-20. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 1)

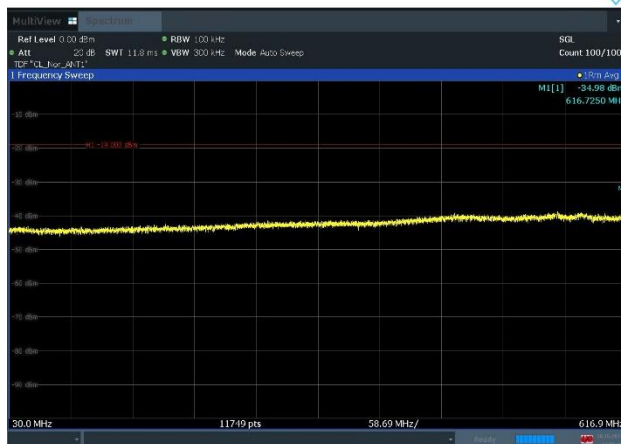

Plot 8-21. Conducted Spurious Emission Plot  
30 MHz to 616.9 MHz  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 1)

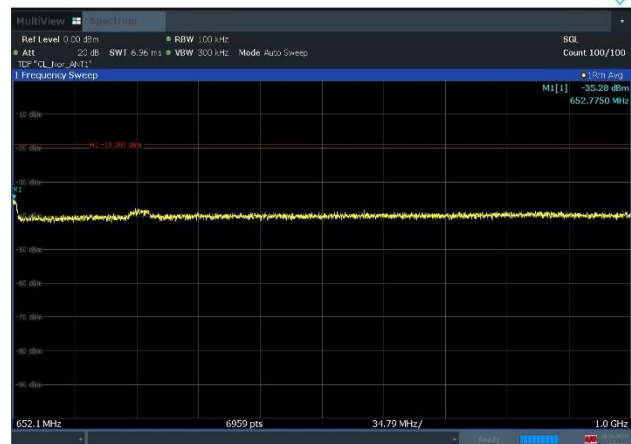

Plot 8-22. Conducted Spurious Emission Plot  
652.1 MHz to 1 GHz  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 1)

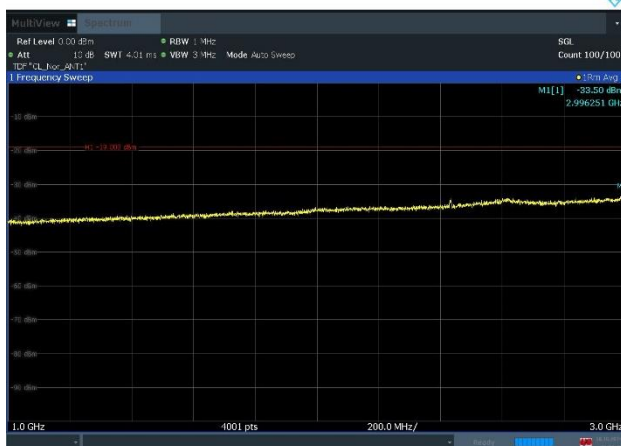


Plot 8-23. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 1)




Plot 8-24. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n71\_2C\_5M+5M\_QPSK - Mid Channel, Port 1)


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 36 of 55

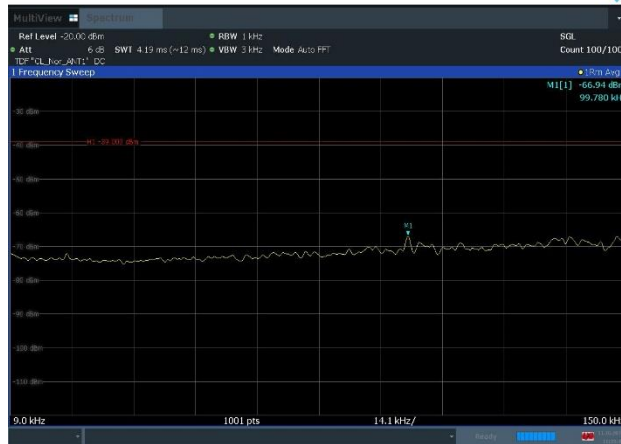


Plot 8-25. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n71\_2C\_5M+10M\_QPSK - Mid Channel, Port 1)

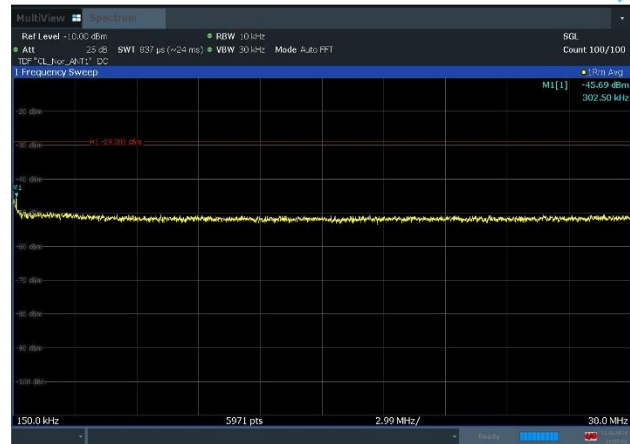


Plot 8-26. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n71\_2C\_5M+10M\_QPSK - Mid Channel, Port 1)

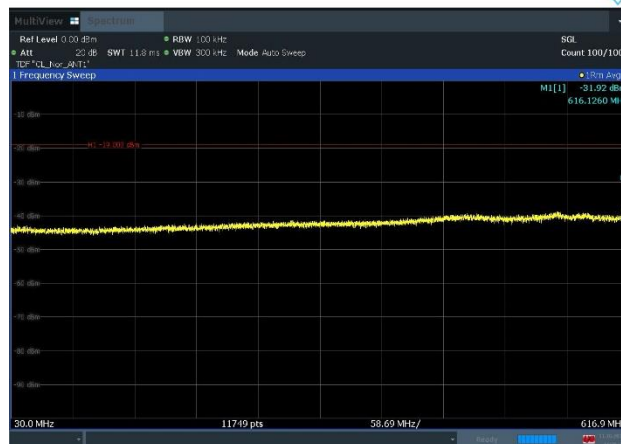

Plot 8-27. Conducted Spurious Emission Plot  
30 MHz to 616.9 MHz  
(n71\_2C\_5M+10M\_QPSK - Mid Channel, Port 1)

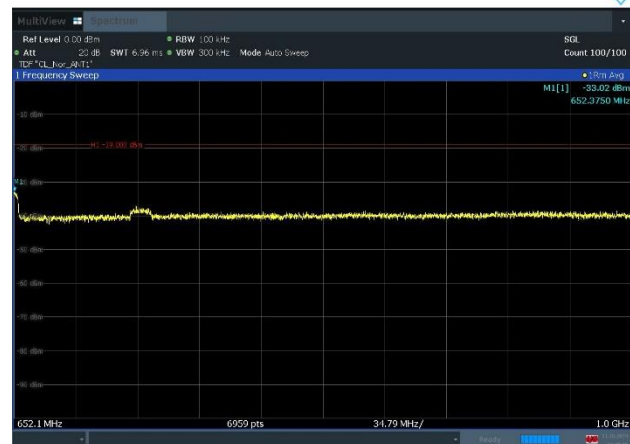

Plot 8-28. Conducted Spurious Emission Plot  
652.1 MHz to 1 GHz  
(n71\_2C\_5M+10M\_QPSK - Mid Channel, Port 1)

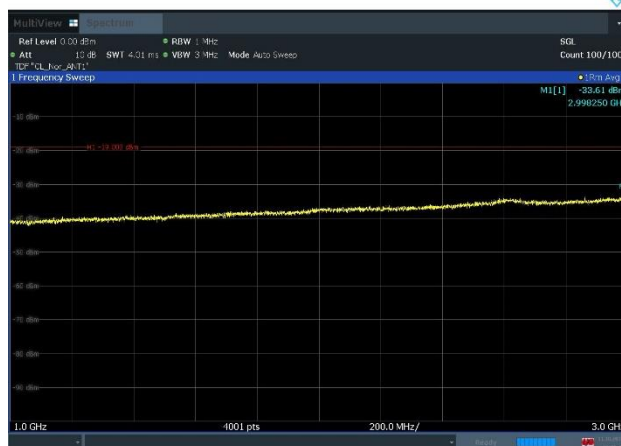

Plot 8-29. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n71\_2C\_5M+10M\_QPSK - Mid Channel, Port 1)




Plot 8-30. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n71\_2C\_5M+10M\_QPSK - Mid Channel, Port 1)


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 37 of 55




Plot 8-31. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n71\_2NC\_5M+5M\_QPSK – Mid Channel, Port 2)

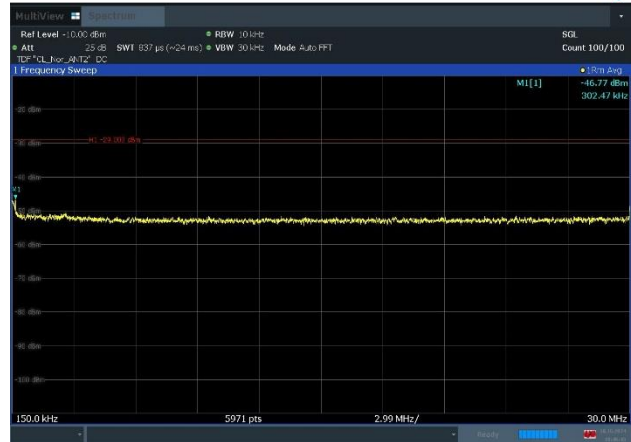


Plot 8-32. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n71\_2NC\_5M+5M\_QPSK – Mid Channel, Port 2)

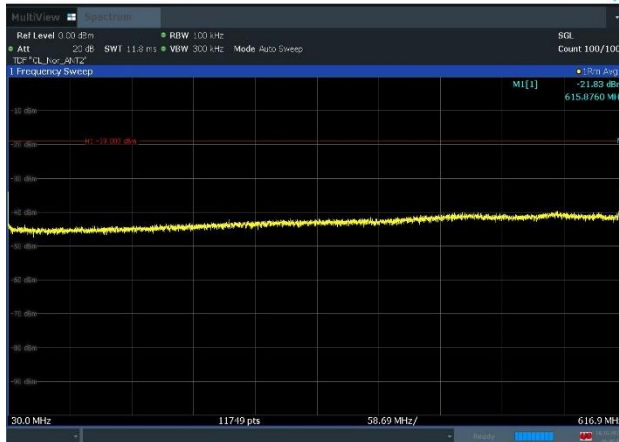

Plot 8-33. Conducted Spurious Emission Plot  
30 MHz to 616.9 MHz  
(n71\_2NC\_5M+5M\_QPSK – Mid Channel, Port 2)

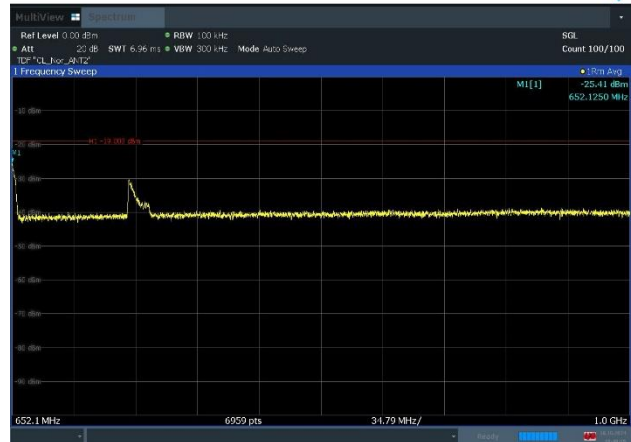

Plot 8-34. Conducted Spurious Emission Plot  
652.1 MHz to 1 GHz  
(n71\_2NC\_5M+5M\_QPSK – Mid Channel, Port 2)

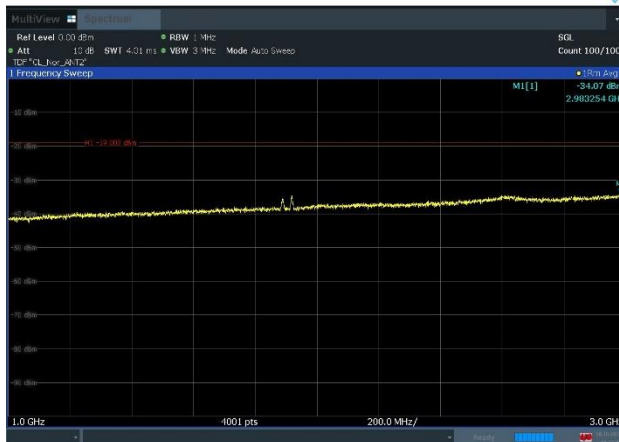


Plot 8-35. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n71\_2NC\_5M+5M\_QPSK – Mid Channel, Port 2)




Plot 8-36. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n71\_2NC\_5M+5M\_QPSK – Mid Channel, Port 2)


FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 38 of 55

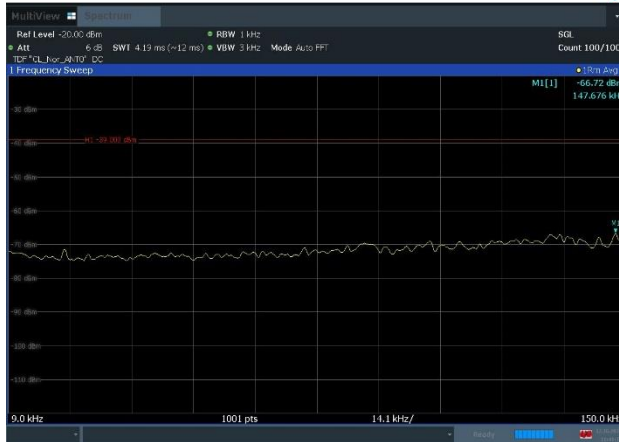


Plot 8-37. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)

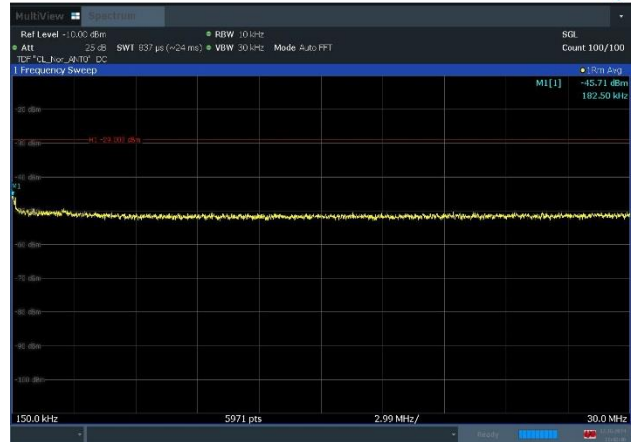


Plot 8-38. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)

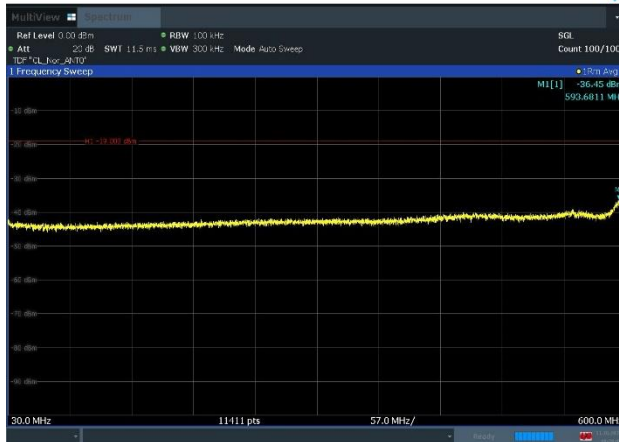


Plot 8-39. Conducted Spurious Emission Plot  
30 MHz to 600 MHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)

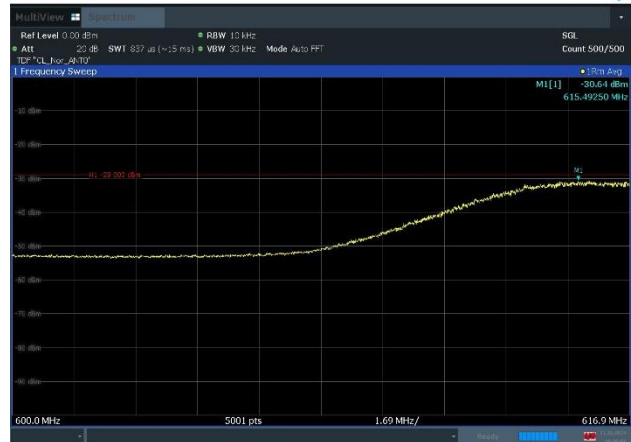

Plot 8-40. Conducted Spurious Emission Plot  
600 MHz to 616.9 MHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)

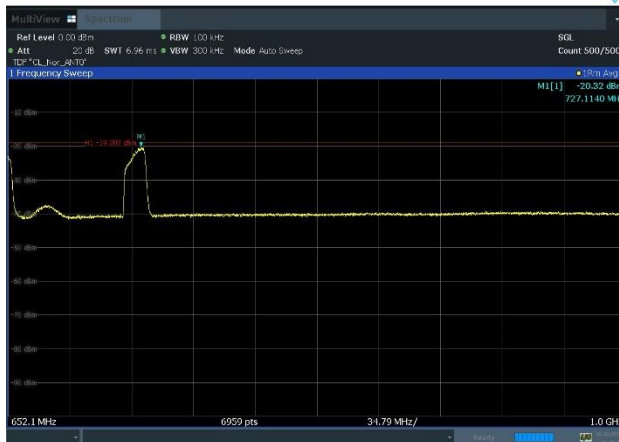

Plot 8-41. Conducted Spurious Emission Plot  
652.1 MHz to 1 GHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)

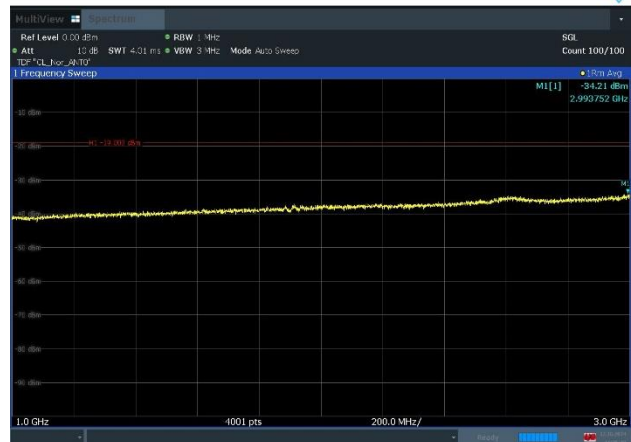

Plot 8-42. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 39 of 55







Plot 8-43. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(n71\_2NC\_5M+10M\_QPSK – Mid Channel, Port 0)




Plot 8-44. Conducted Spurious Emission Plot  
9 kHz to 150 kHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

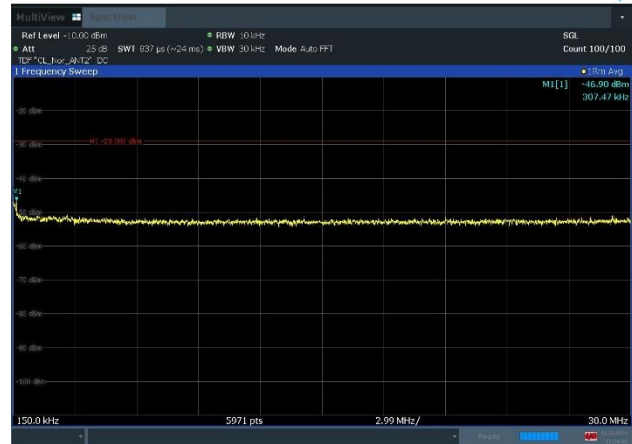

Plot 8-45. Conducted Spurious Emission Plot  
150 kHz to 30 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

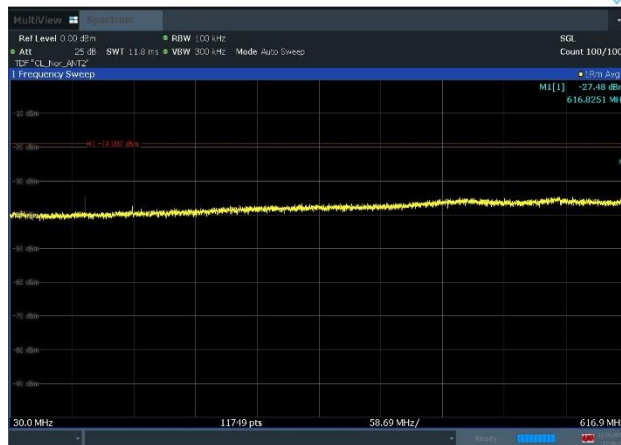


Plot 8-46. Conducted Spurious Emission Plot  
30 MHz to 616.9 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

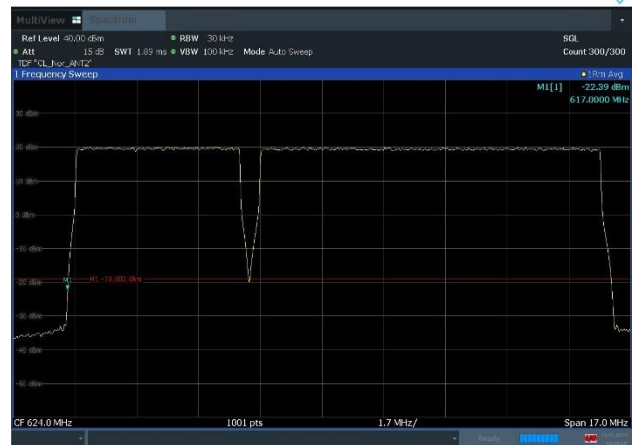


Plot 8-47. Conducted Spurious Emission Plot  
616.9 MHz to 617 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 40 of 55




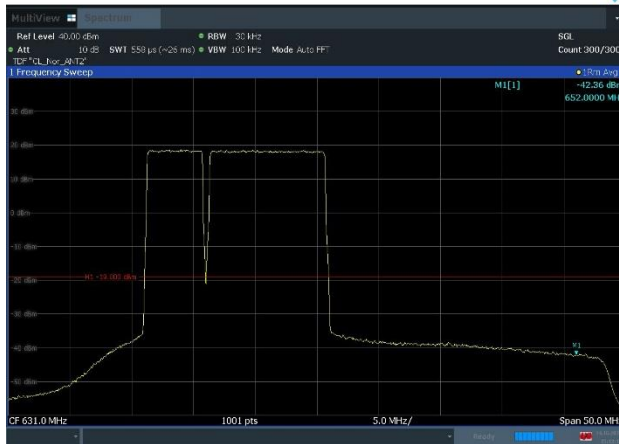


Plot 8-48. Conducted Spurious Emission Plot  
652 MHz to 652.1 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

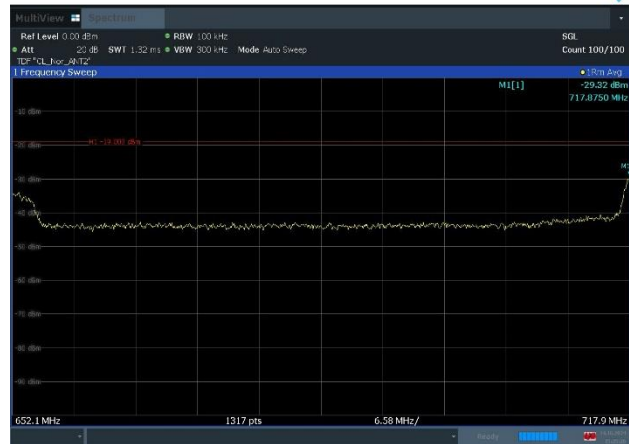


Plot 8-49. Conducted Spurious Emission Plot  
652.1 MHz to 717.9 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

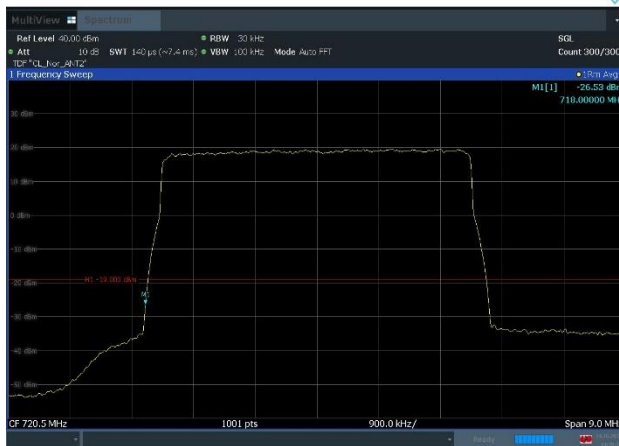


Plot 8-50. Conducted Spurious Emission Plot  
717.9 MHz to 718 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

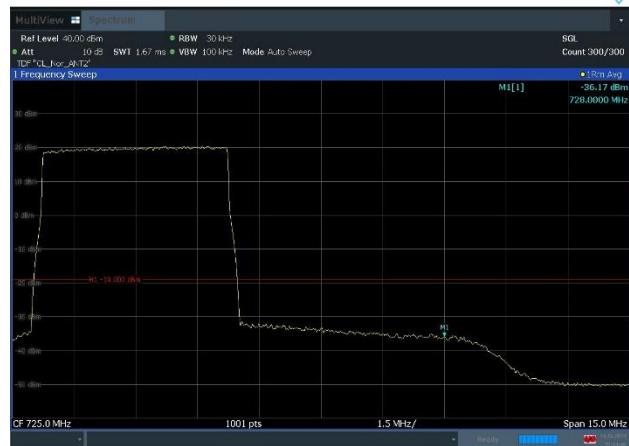

Plot 8-51. Conducted Spurious Emission Plot  
728 MHz to 728.1 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

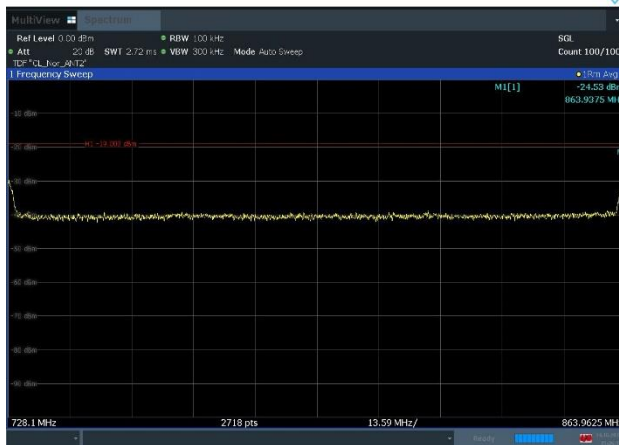


Plot 8-52. Conducted Spurious Emission Plot  
728.1 MHz to 863.9625 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

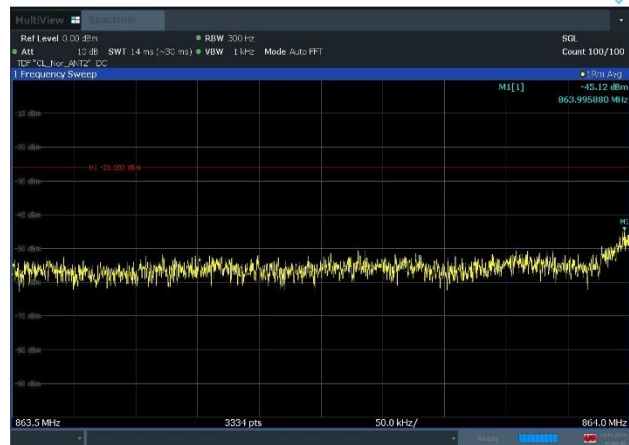


Plot 8-53. Conducted Spurious Emission Plot  
863.9625 MHz to 864 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 41 of 55

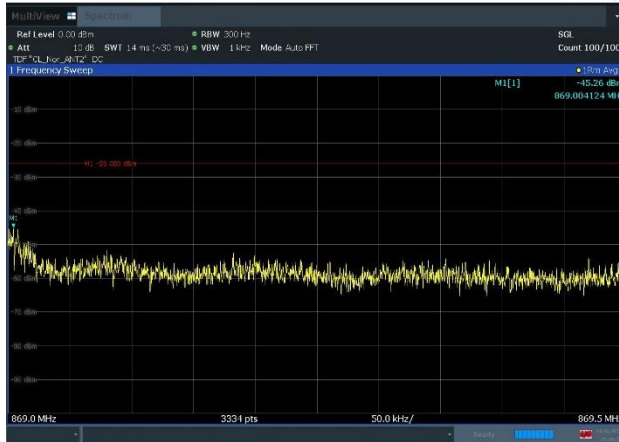


Plot 8-54. Conducted Spurious Emission Plot  
869 MHz to 869.0375 MHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

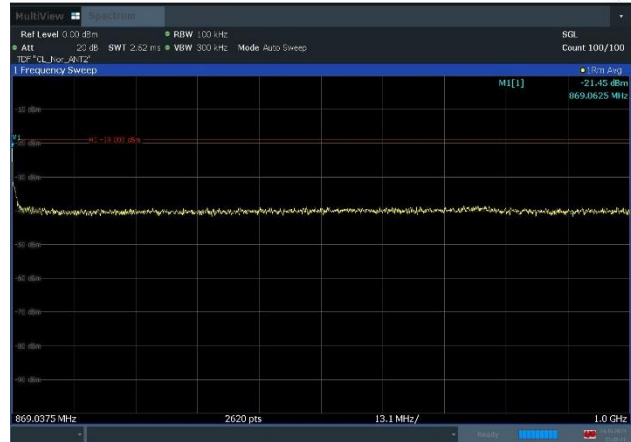

Plot 8-55. Conducted Spurious Emission Plot  
869.0375 MHz to 1 GHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

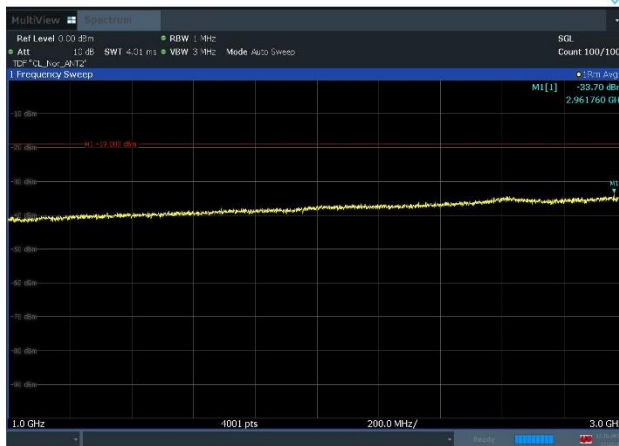

Plot 8-56. Conducted Spurious Emission Plot  
1 GHz to 3 GHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

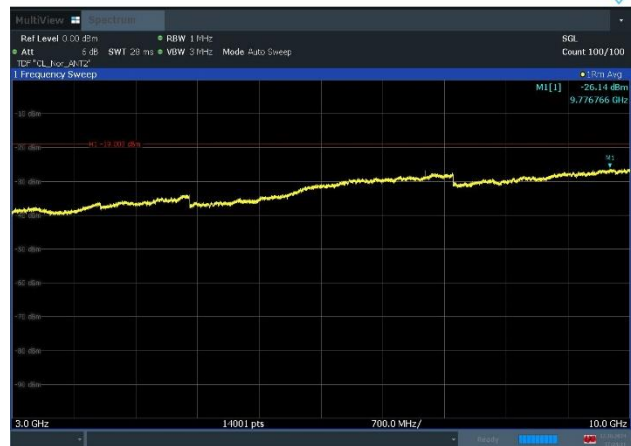

Plot 8-57. Conducted Spurious Emission Plot  
3 GHz to 10 GHz  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M  
+ n26\_1C\_5M\_QPSK, Port 2)

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 42 of 55

## 8.7 Radiated spurious emission

### Test Overview

Radiated spurious emissions measurements are performed using the field strength method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized broadband tri-log antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

### Test Procedure Used

ANSI C63.26 - Section 5.5.3.2

### Test Setting

1. Start frequency was set to 30 MHz and stop frequency was set to at least 10 \* the fundamental frequency
2. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = Peak for the pre-scan, (In cases where the level is within 2 dB of the limit, the final measurement is taken using RMS detector.)
6. Trace mode = Max Hold (In cases where the level is within 2 dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize.

### Limit

#### **NR n29 and n71 operation under Part 27.53**

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{\text{[Watts]}})$ , where P is the transmitter power in Watts.

#### **NR n26 operation under Part 90.691**


For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 43 of 55

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

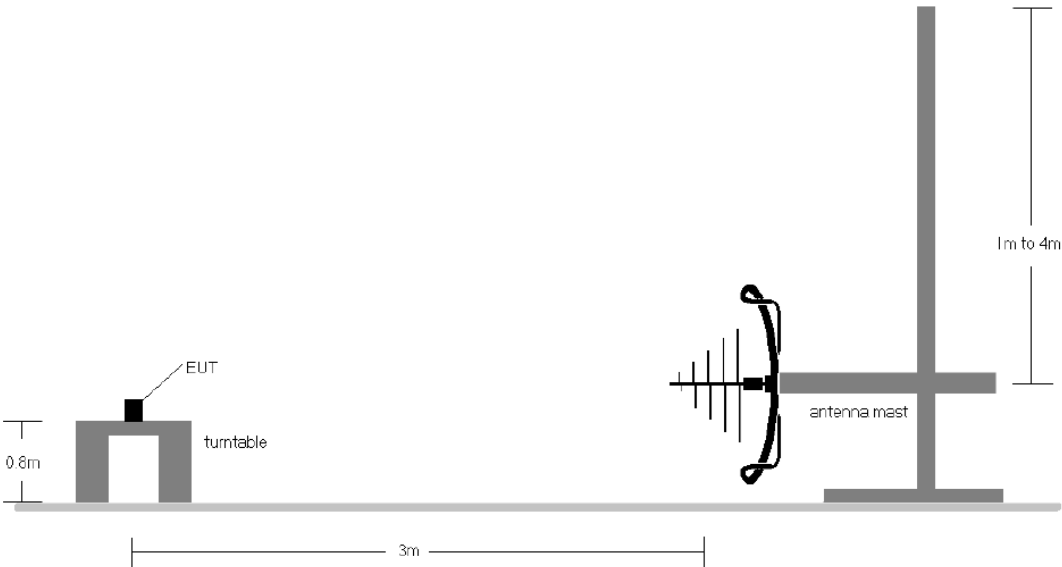

**Figure 8-6. Test Instrument & Measurement Setup < 1 GHz**

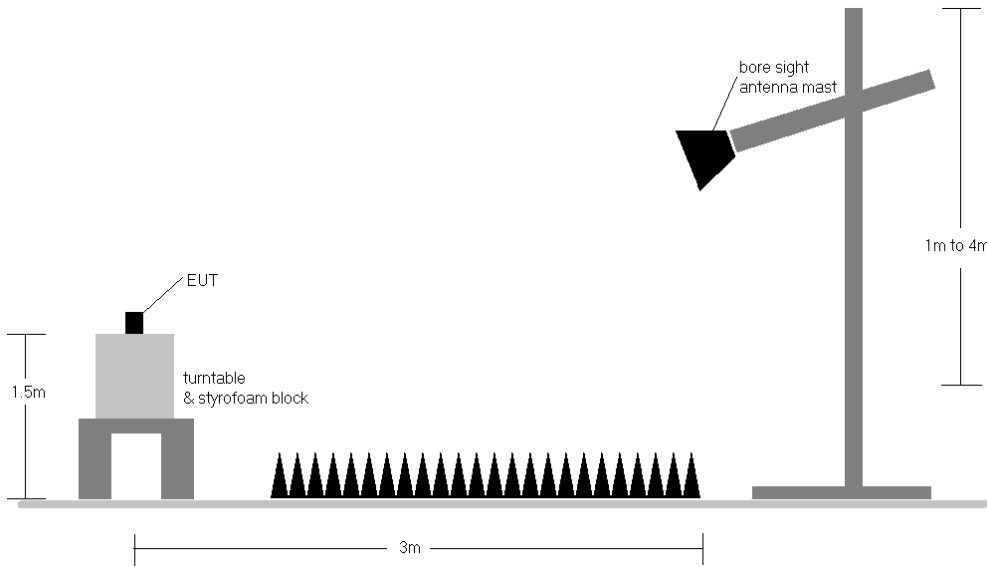

**Figure 8-7. Test Instrument & Measurement Setup > 1 GHz**

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 44 of 55

## Test Notes

1. The average EIRP reported below is calculated per 5.2.7 of ANSI C63.26-2015 which states:

The measured e.i.r.p is converted to E-field in V/m. Then the distance correction is applied before converted back to calculated e.i.r.p.as explained in KDB 971168 D01 D01 v03r01.

### Effective Isotropic Radiated Power Sample Calculation

$$\begin{aligned}\text{Field Strength [dB}\mu\text{V/m]} &= \text{Measured Value [dBm]} + 107 + \text{AFCL [dB/m]} \\ &= -71.89 \text{ [dBm]} + 107 + 7.82 \text{ [dB/m]} = 42.93 \text{ dB}\mu\text{V/m}\end{aligned}$$

$$\begin{aligned}\text{e.i.r.p. [dBm]} &= E[\text{dB } \mu\text{V/m}] + 20 \log_{10}(d[\text{m}]) - 104.8 \\ &= 42.93 \text{ dB}[\mu\text{V/m}] + (20 * \log(3)) - 104.8 \\ &= -52.33 \text{ dBm}\end{aligned}$$


\*AFCL (dB/m) contains measurement antenna factor(dB/m) and cable loss(dB) as below:

Frequency [MHz]	Antenna Factor (dB/m)	Chamber measurement cable loss + amplifier [dB]	AFCL (dB/m)
37.85	18.33	0.46	18.78
7995.84	36.90	-29.08	7.82


**Table 8-17. Adopted AFCL value in the calculation**

2. The EUT was tested in both horizontal and vertical antenna polarizations and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, channel bandwidth configurations shown in the tables below.
3. The spectrum is measured from 30 MHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
4. All emissions were measured at a 3-meter test distance.
5. Spurious emissions were measured with all EUT antennas transmitting simultaneously and all antenna ports terminated.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
7. All modes of operation were investigated and the worst case configuration results are reported in this section.


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 45 of 55

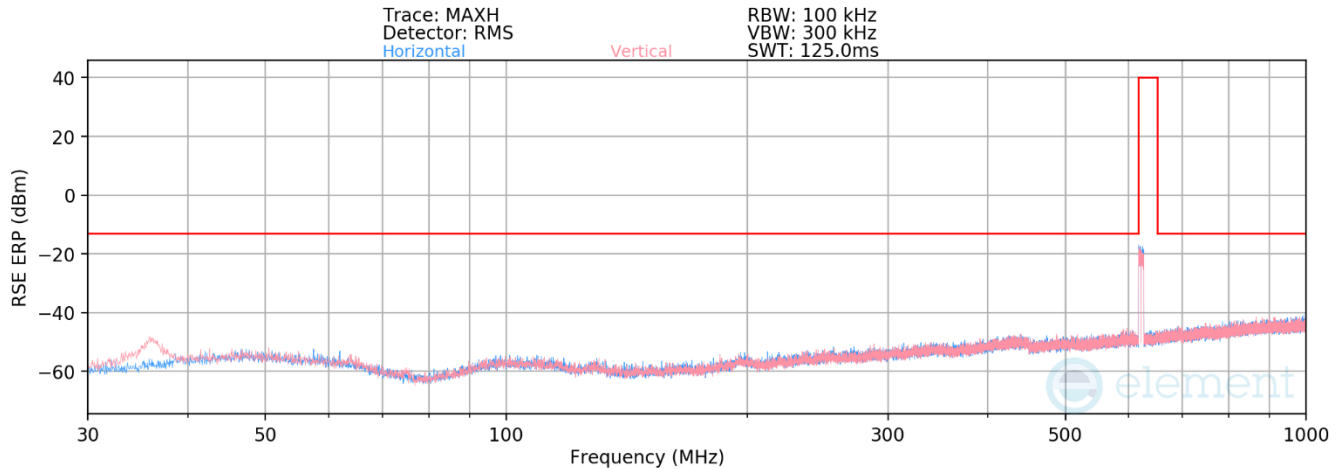

**Plot 8-58. Radiated spurious emission\_30 MHz to 1000 MHz  
(n71\_2C\_5M+5M\_Low Channel)**

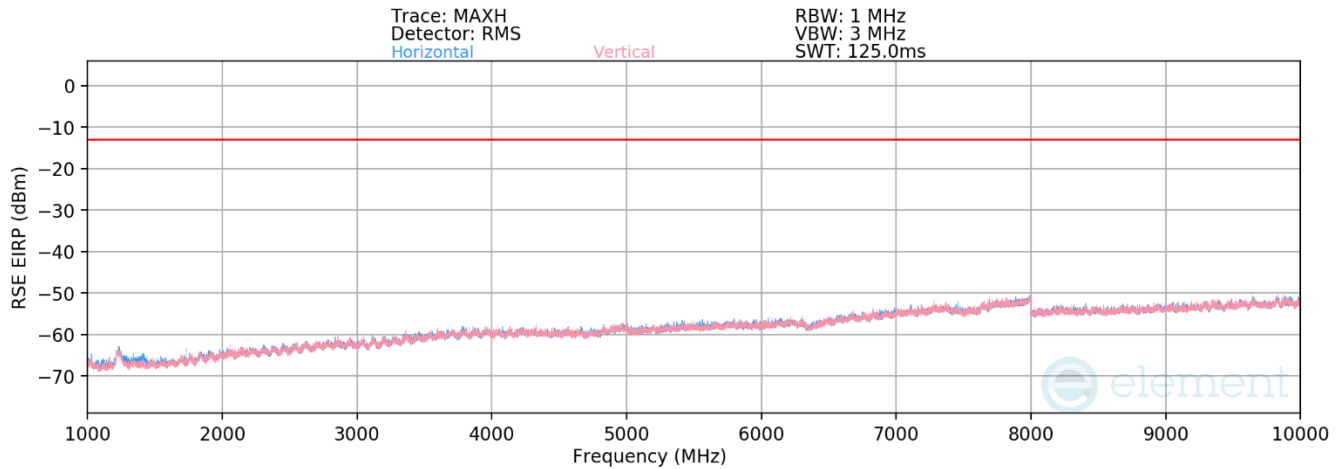


**Plot 8-59. Radiated spurious emission\_1 GHz to 10 GHz  
(n71\_2C\_5M+5M\_Low Channel)**

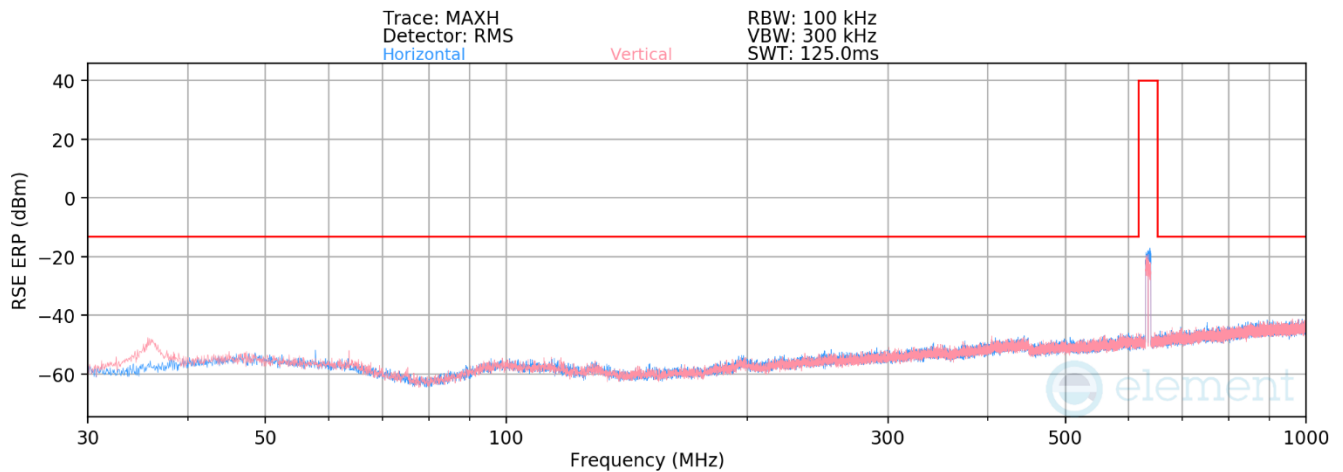


**Plot 8-60. Radiated spurious emission\_30 MHz to 1000 MHz  
(n71\_2C\_5M+5M\_Mid Channel)**


FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 46 of 55

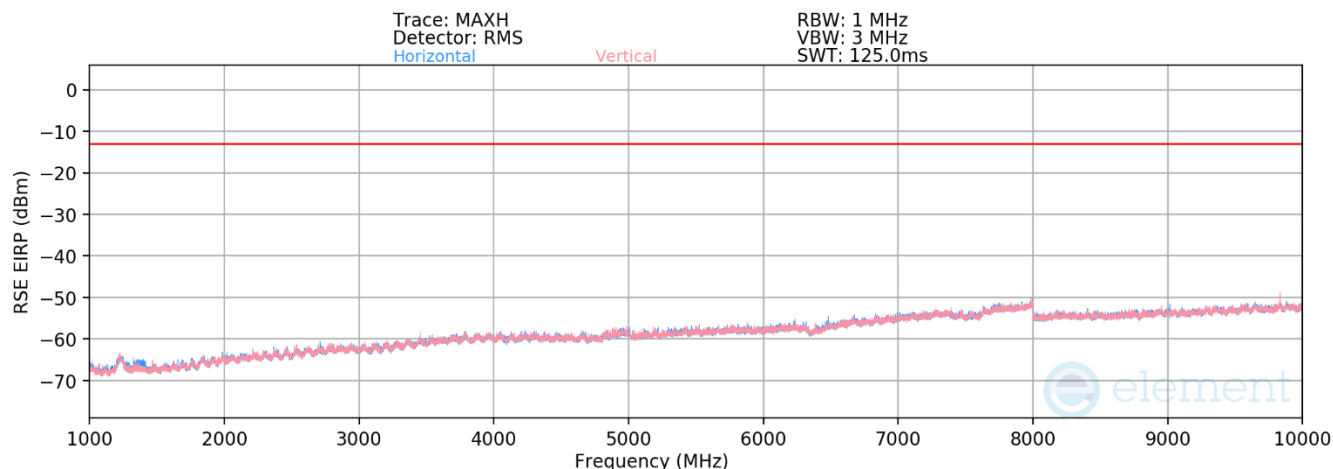

**Plot 8-61. Radiated spurious emission\_1 GHz to 10 GHz  
(n71\_2C\_5M+5M\_Mid Channel)**

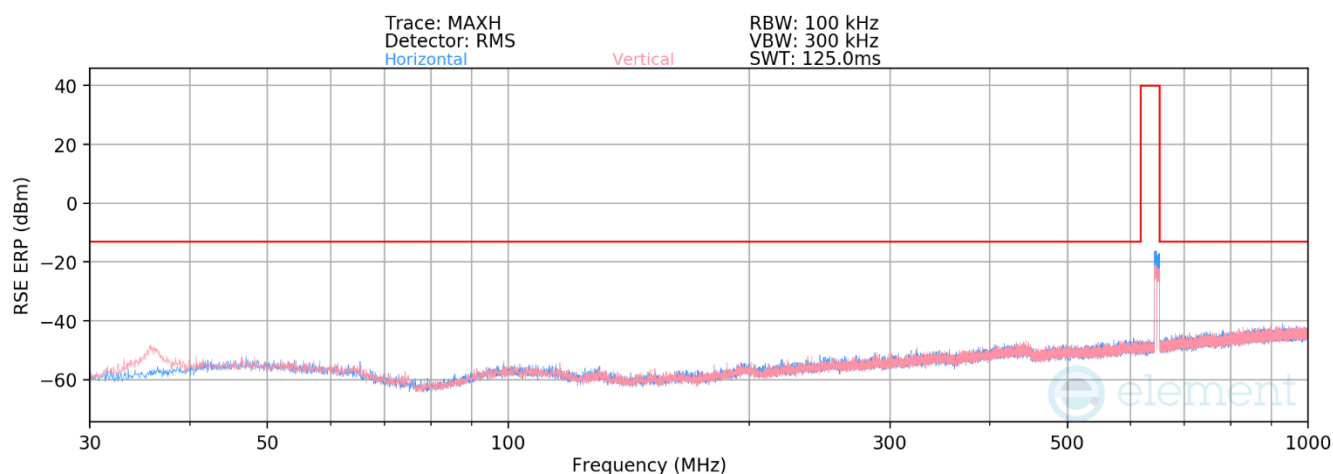


**Plot 8-62. Radiated spurious emission\_30 MHz to 1000 MHz  
(n71\_2C\_5M+5M\_High Channel)**

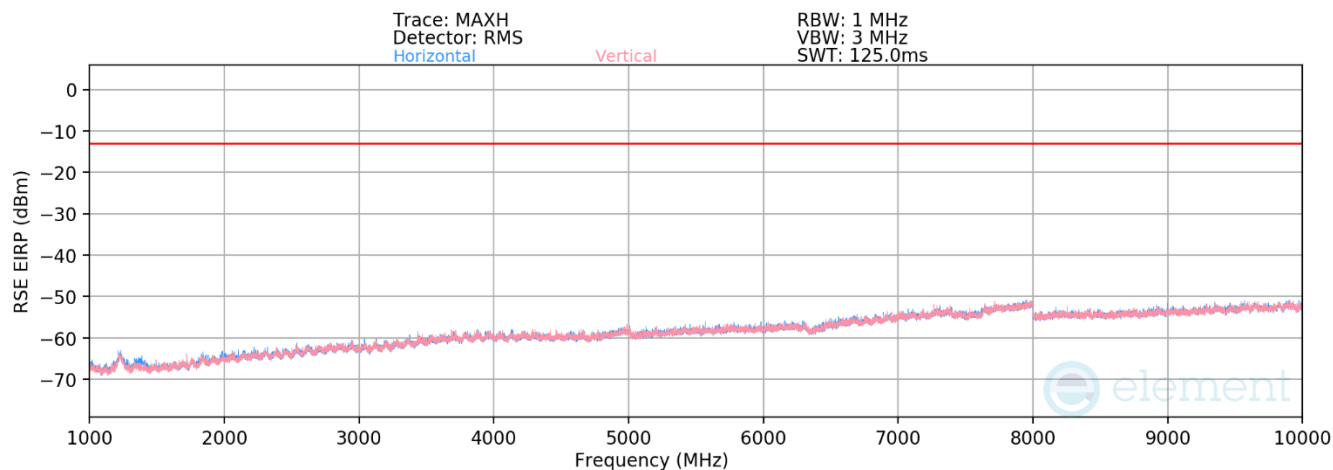


**Plot 8-63. Radiated spurious emission\_1 GHz to 10 GHz  
(n71\_2C\_5M+5M\_High Channel)**


FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 47 of 55

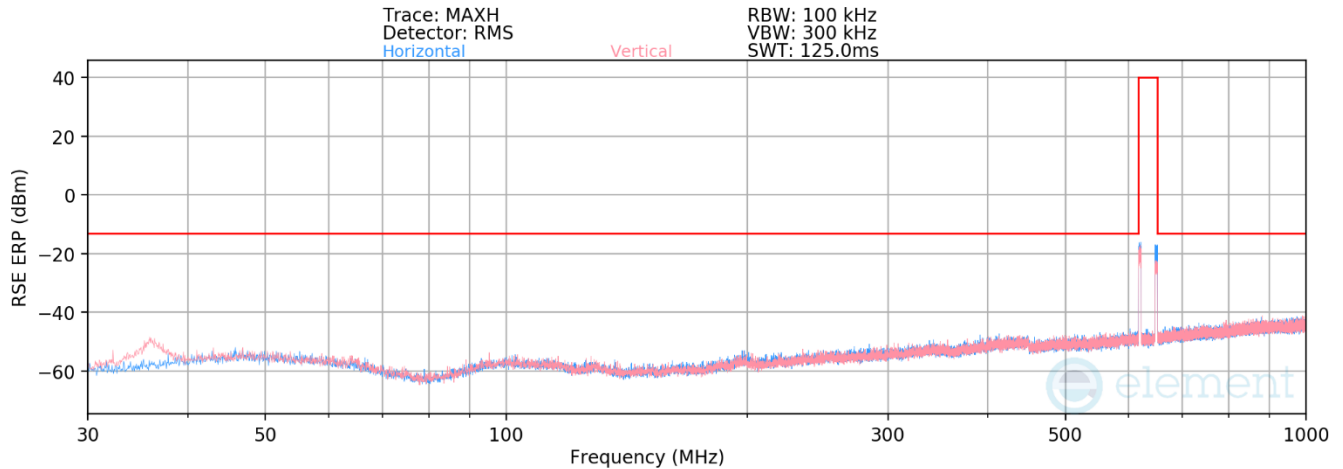

**Plot 8-64. Radiated spurious emission\_30 MHz to 1000 MHz  
(n71\_2NC\_5M+5M\_Mid Channel)**

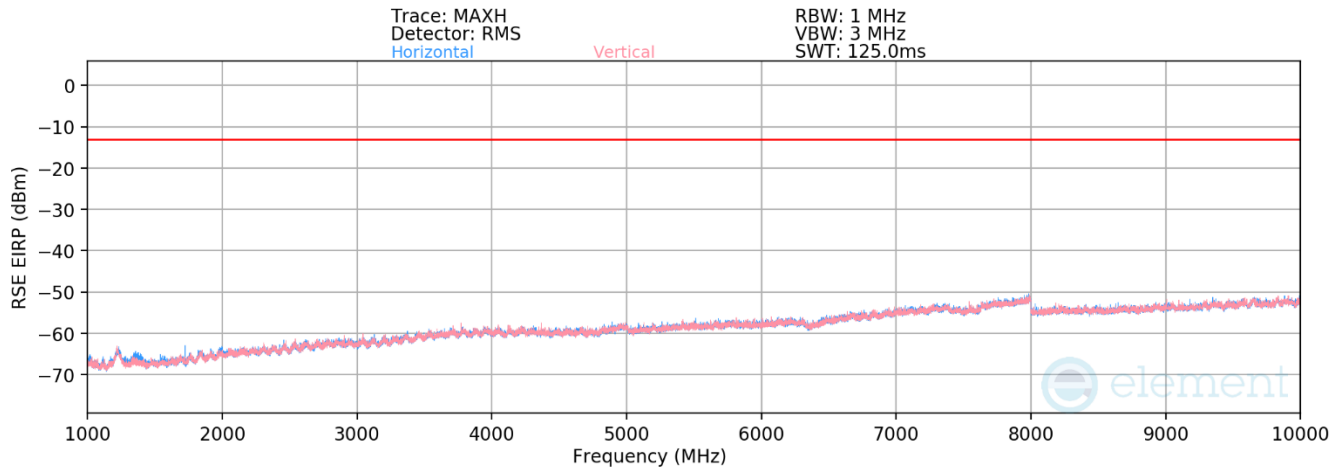


**Plot 8-65. Radiated spurious emission\_1 GHz to 10 GHz  
(n71\_2NC\_5M+5M\_Mid Channel)**

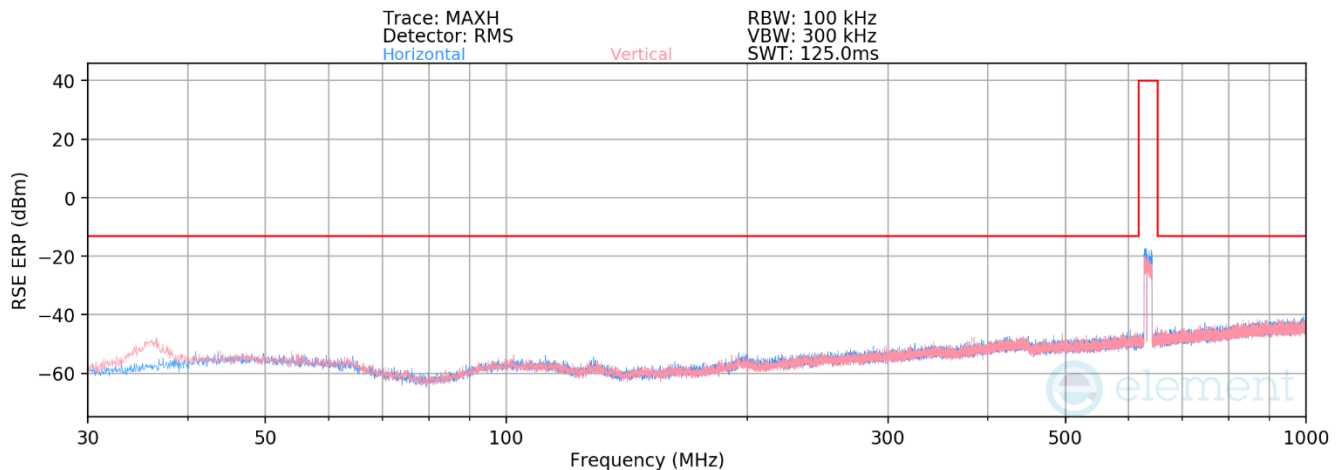


**Plot 8-66. Radiated spurious emission\_30 MHz to 1000 MHz  
(n71\_2C\_5M+5M\_Mid Channel)**

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 48 of 55




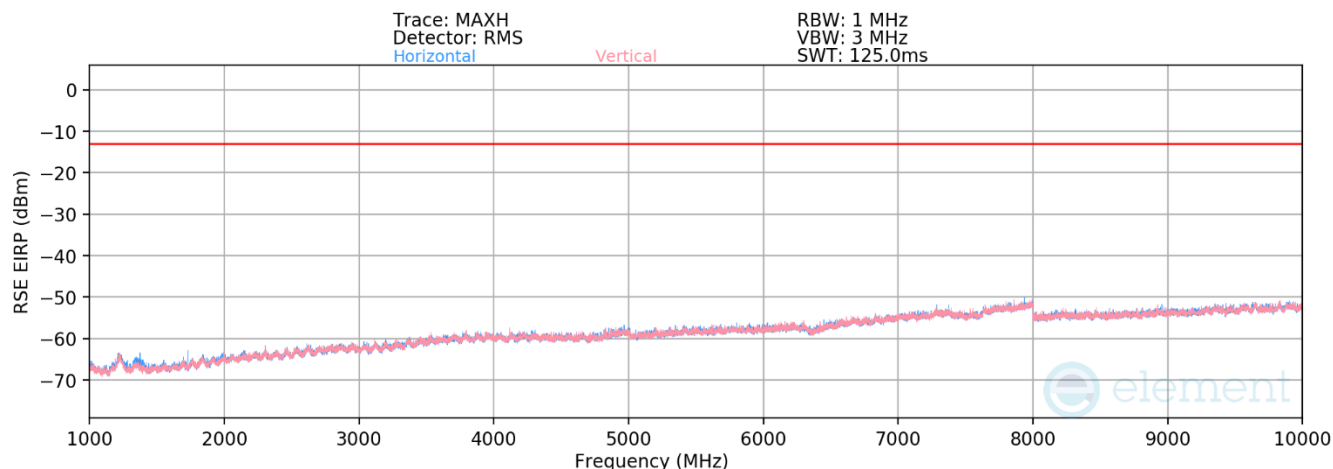

**Plot 8-67. Radiated spurious emission\_1 GHz to 10 GHz  
(n71\_2C\_5M+10M\_Mid Channel)**

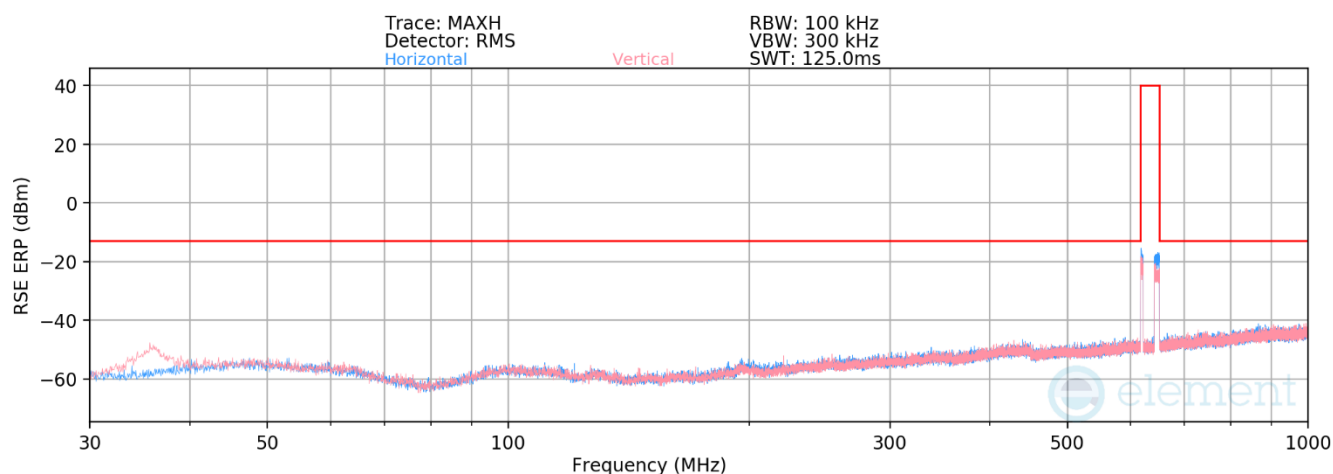


**Plot 8-68. Radiated spurious emission\_30 MHz to 1000 MHz  
(n71\_2NC\_5M+10M\_Mid Channel)**

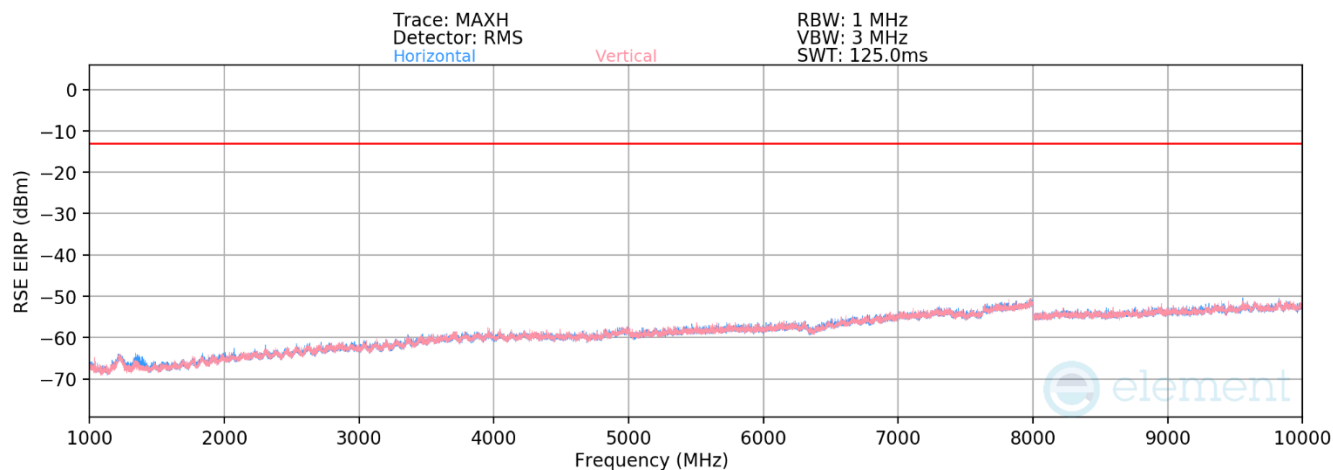


**Plot 8-69. Radiated spurious emission\_1 GHz to 10 GHz  
(n71\_2NC\_5M+10M\_Mid Channel)**


FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 49 of 55

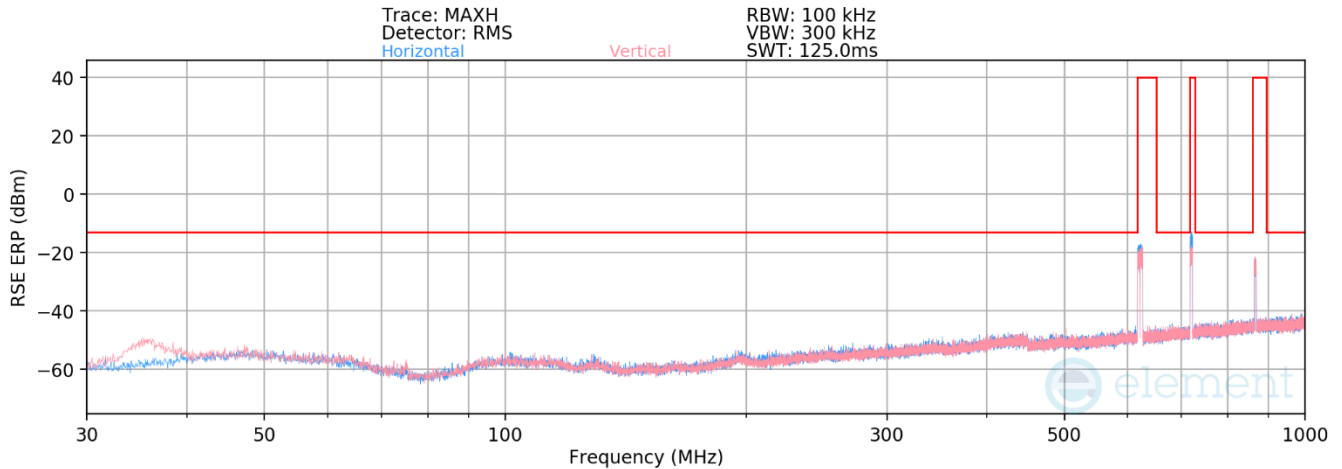

**Plot 8-70. Radiated spurious emission\_30 MHz to 1000 MHz**  
(Multi band operation n71\_2C\_5M+5M + n29\_1C\_5M + n26\_1C\_5M)

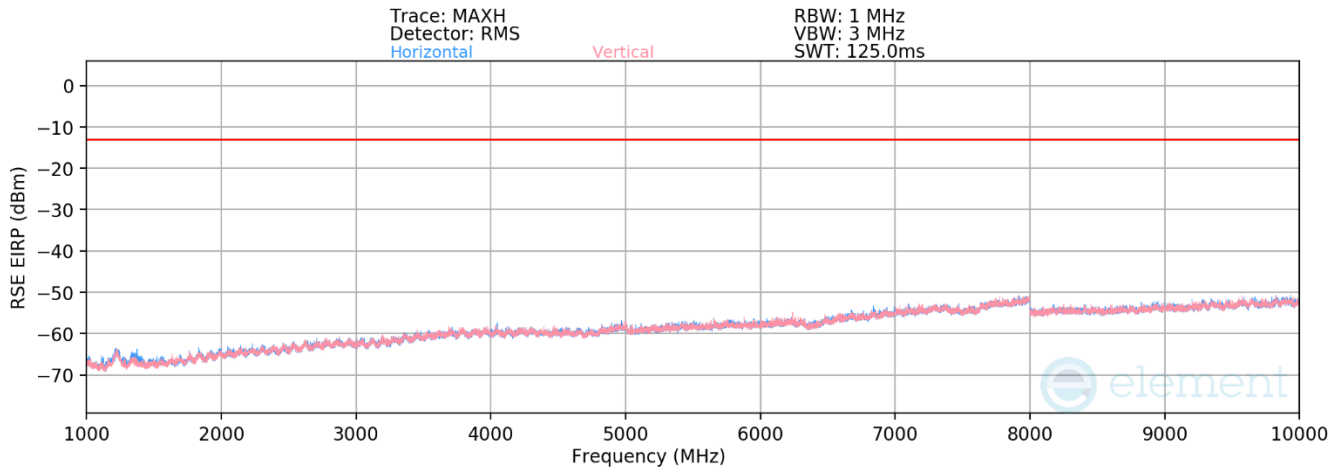


**Plot 8-71. Radiated spurious emission\_1 GHz to 10 GHz**  
(Multi band operation n71\_2C\_5M+5M + n29\_1C\_5M + n26\_1C\_5M)

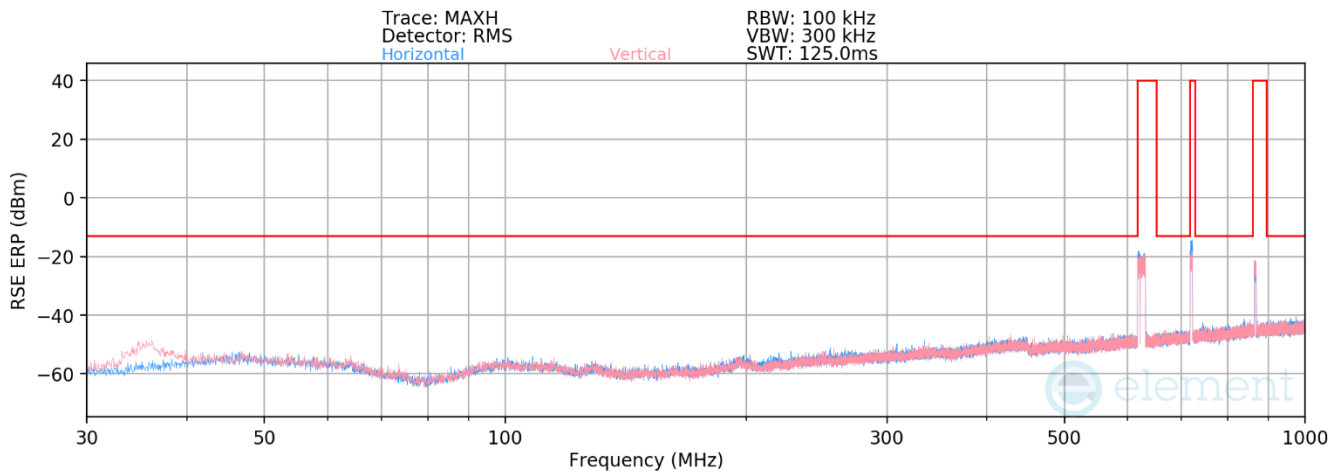

**Plot 8-72. Radiated spurious emission\_30 MHz to 1000 MHz**  
(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M + n26\_1C\_5M)

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 50 of 55

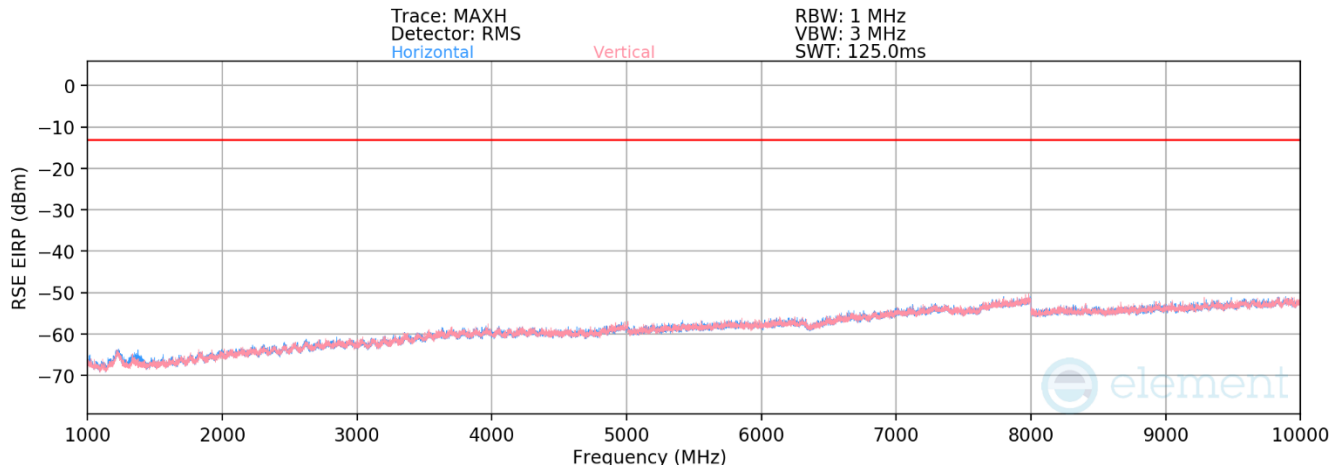

**Plot 8-73. Radiated spurious emission\_1 GHz to 10 GHz**  
**(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M + n26\_1C\_5M)**

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Heigh [cm]	Turntable azimuth [degree]	Analyzer Level [dBm/MHz]	AFCL [dBm]	Field Strength [dBμV/m]	RSE EIRP [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
37.85	V	100	160	-82.13	18.78	43.65	-51.61	-13	-38.61
996.75	H	100	40	-84.12	31.36	54.24	-41.02	-13	-28.02
7992.35	H	150	80	-73.26	7.84	41.58	-53.68	-13	-40.68
7995.84	V	150	100	-71.89	7.82	42.93	-52.33	-13	-39.33

**Table 8-18. Radiated spurious emission Worst case Summary Data**  
**(Multi band operation n71\_2C\_5M+10M + n29\_1C\_5M + n26\_1C\_5M)**

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> <b>(Class II Permissive Change)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 51 of 55

## 9.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung RRU(RF4450t) FCC ID: A3LRF4450T-71A** complies with all of the requirements of Part 27 FCC Rules.

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 52 of 55

## 10.0 APPENDIX. A

### 10.1 Conducted Average Output Power

#### Test Overview

A transmitter port of EUT is connected to the input of a signal analyzer. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Description

KDB 971168 D01 v03r01 – Section 5

KDB 662911 D01 v02r01 – Section E)1) In-Band Power Measurements


ANSI C63.26-2015 – Section 5.2.4.4.1

The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The spectrum analyzer settings were as follows:

1. Conducted power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 ~ 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Span = 2 ~ 3 x OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. Trigger Settings is set to "RF Power" for signals with non-continuous operation with the sweep times set to "auto". Refer test note 3 for details.
8. Trace mode = Trace-Averaging (RMS) set to average over 100 sweeps
9. The trace was allowed to stabilize

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 10-1. Test Instrument & Measurement Setup**

#### Limit

N/A

FCC ID: A3LRF4450T-71A	<b>MEASUREMENT REPORT</b> (Class II Permissive Change)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 8K24082001-00.A3L	<b>Test Dates:</b> 10/10/2024 - 10/18/2024	<b>EUT Type:</b> RRU(RF4450t)	Page 53 of 55

## Note

1. Result for reference maximum average power level of n71 is under section 8.3.
2. MIMO Calculations are done considering output channel power for all ports and respective margins are calculated according to procedures in section 6.4 of ANSI C63.26 and section D of KDB 971168 D01 v03r01.
3. Consider the following factors for MIMO Power:  
 Conducted power for each port is measured in dBm.  
 Powers are summed up in linear using the measure-and-sum technique defined in KDB 971168 D01 v03r01- Section D. Conducted power per port (dBm) is converted to a linear value (mW). A summation of linear powers for all ports gives us the total MIMO conducted power in milliWatts (mW).
4. Sample Calculation:  
 Let us assume the following numbers:
  - a) Total MIMO Conducted Power as 142558.66 mW
  - b)

Factors		Value	Unit
Summed MIMO Conducted Power (linear sum)		142558.66	mW
Summed MIMO Conducted Power (dBm)	$= 10 * \log (142558.66)$	51.54	dBm

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 54 of 55

Channel	Port	QPSK	16QAM
Low	0	45.57	45.16
	1	45.58	45.45
	2	45.30	45.34
	3	45.62	45.41
	Total Conducted Power (mW)	142558.66	136836.28
	Total Conducted Power(dBm)	51.54	51.36
Mid	0	45.08	45.08
	1	45.24	45.34
	2	45.19	45.31
	3	45.22	45.25
	Total Conducted Power (mW)	131933.10	133867.70
	Total Conducted Power(dBm)	51.20	51.27
High	0	45.07	45.04
	1	45.38	45.28
	2	45.19	45.21
	3	45.20	45.15
	Total Conducted Power (mW)	132801.05	131567.62
	Total Conducted Power(dBm)	51.23	51.19

**Table 10-1. Conducted Average Output Power Table (n71\_2C\_5M+5M)**

Channel	Port	QPSK	16QAM
Low	0	47.16	46.89
	1	47.19	47.25
	2	46.96	47.03
	3	47.37	47.36
	Total Conducted Power (mW)	208594.66	206870.08
	Total Conducted Power(dBm)	53.19	53.16
Mid	0	46.84	46.85
	1	47.14	47.14
	2	47.06	47.05
	3	47.26	47.19
	Total Conducted Power (mW)	204093.33	203237.03
	Total Conducted Power(dBm)	53.10	53.08
High	0	46.77	46.95
	1	46.98	47.19
	2	46.86	46.99
	3	46.94	47.17
	Total Conducted Power (mW)	195381.89	204027.99
	Total Conducted Power(dBm)	52.91	53.10

**Table 10-2. Conducted Average Output Power Table (n71\_2C\_5M+10M)**

FCC ID: A3LRF4450T-71A	MEASUREMENT REPORT (Class II Permissive Change)		Approved by: Technical Manager
Test Report S/N: 8K24082001-00.A3L	Test Dates: 10/10/2024 - 10/18/2024	EUT Type: RRU(RF4450t)	Page 55 of 55