










◆Combination button function

	
[Channel Selection]+[Stop/50%] : reversing, only after the controller or motor enters the code learning state and receives the matched reversing function code will it be processed.	[Stop/50%]+[Up/Open] : Long press for 5 seconds to start, and then press the [channel setting] button to confirm.
	
[Stop/50%]+[Down/Close] : Long press for 5 seconds to enter the ready to disable manual start, then short press [Channel settings] button to confirm.	[Channel Setting]+[Up/Open] : Press long for 5 seconds at the same time to make the motor enter the state of setting on limit point.
	
[Channel Setting]+[Down/Close] : Press for 5 seconds at the same time to make the motor enter the limit point state of down setting.	[Up/Open]+[Down/Close]: external control mode switching. The controller or motor will only process after receiving the paired mode switching function code after entering the code learning state.
	
[Channel setting]+[75%]:Short press at the same time,set IP1 limit position.	[Channel setting]+[25%]:Short press at the same time,set IP2 limit position.
	[Channel setting]+[Stop/50%]:Long press at the same time,clear limit position.




YR5302

Hand-held remote control instruction manual


product information

1.Product size



Note: The length L of the remote control depend on product specifications (unit: mm)

2.Button function

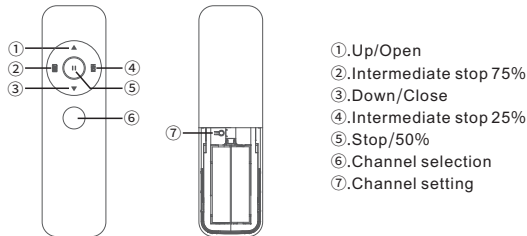

3. Product Specifications

Motor model	YR5302		
Emission frequency	7±1dBm	Communication protocol	BLE 5.0
Use battery	AAA BATTERY X 2pcs	Transmission channel	4

LED indicator function

◆Two channels modes



LED 1 is channel 1, and flashing LED indicates the signal is transmitting.



LED 4 is channel 2, and flashing LED indicates the signal is transmitting.

◆Four channels modes



LED 1 is channel 1, and flashing LED indicates the signal is transmitting



LED 2 is channel 2, and flashing LED indicates the signal is transmitting




LED 3 is channel 3, and flashing LED indicates the signal is transmitting



LED 4 is channel 4, and flashing LED indicates the signal is transmitting.


Channel setting

◆The way to switch two channels and four channels modes




The current maximum number of channels in use is set to two or four channel switch.

◆Two channel mode



Press the [Channel Selection] when the remote control LED is off, and the indicator light of the current channel will light up. Press the [Channel Selection] again within 3 seconds, and select the channel in the sequence of channel 1→ Channel 2→ group control channel → Channel 1.


◆Four channel mode




Press the [Channel Selection] when the LED of the remote control is off, and the indicator light of the current channel will light up. Press the [Channel Selection] again within 3 seconds, and select the channel in the sequence of channel 1→ Channel 2→ Channel 3 Channel 4→ group control channel → Channel 1.

Button function


◆Single button function




[Up/Open]: Open the curtain.




[Down/Close]: Close the curtain.




[Intermediate Stop 75%]: Short press to up tilting; long press 1.5s to run to the IP1 limit position, the default is 75%.



[Intermediate stop 50%]:Short press,stop.If long press 4 seconds,run to default 50% limit.



[Intermediate Stop 25%]: short press, turn the leaf down; Hold for 1.5 seconds to run to the IP3 limit, 25% by default.



[Channel Setting]: used for code learning. The controller or motor will receive and process unpaired channel setting button only after entering the code learning state.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.