


EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11g_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

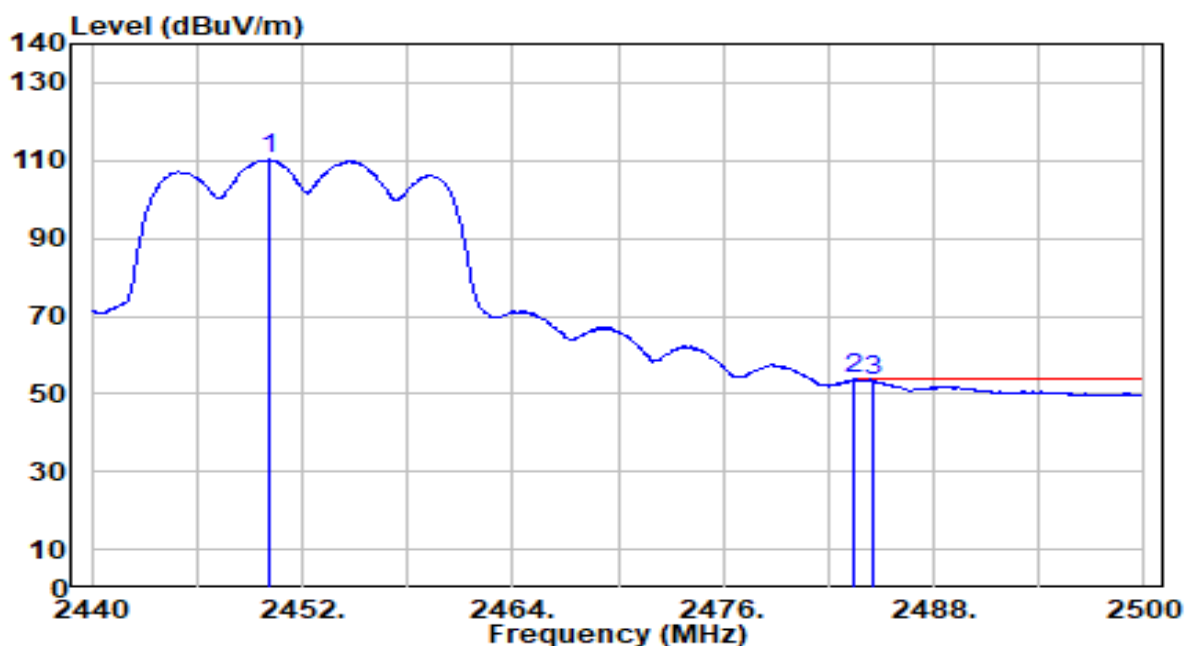


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.140	79.38	30.80	110.18	N/A	N/A	315	15	Average
2	*	2483.500	22.78	30.91	53.70	-0.30	54.00	315	15	Average
3		2484.580	22.49	30.92	53.41	-0.59	54.00	315	15	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

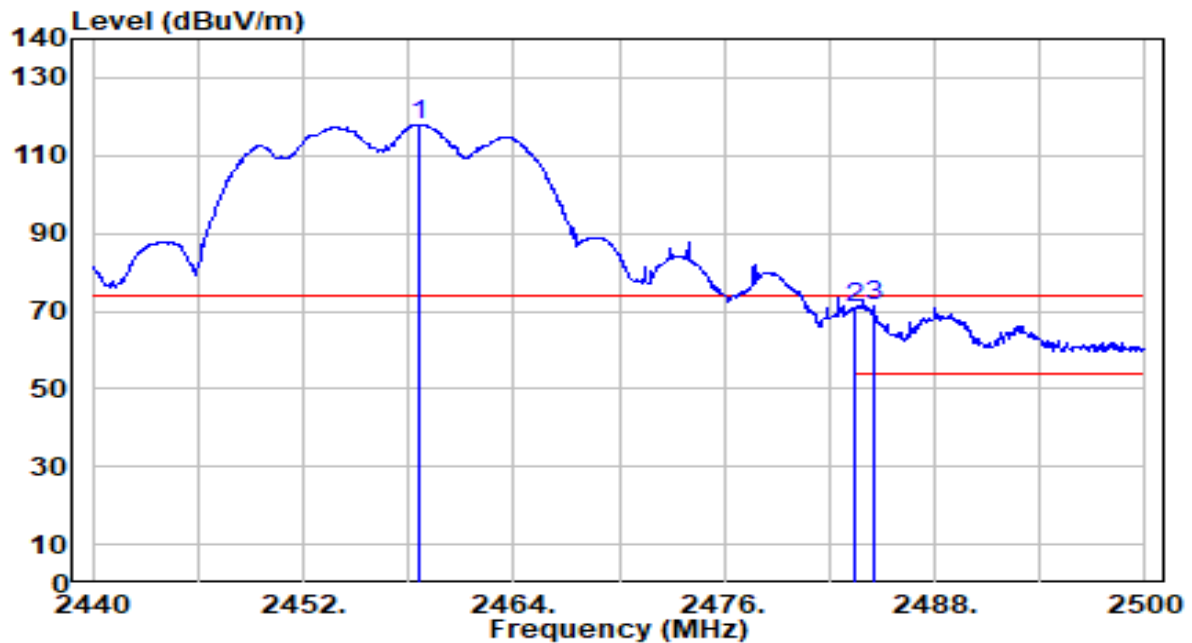


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.540	87.11	30.83	117.94	N/A	N/A	355	170	Peak
2	2483.500	39.88	30.91	70.79	-3.21	74.00	355	170	Peak
3	* 2484.520	40.42	30.92	71.33	-2.67	74.00	355	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

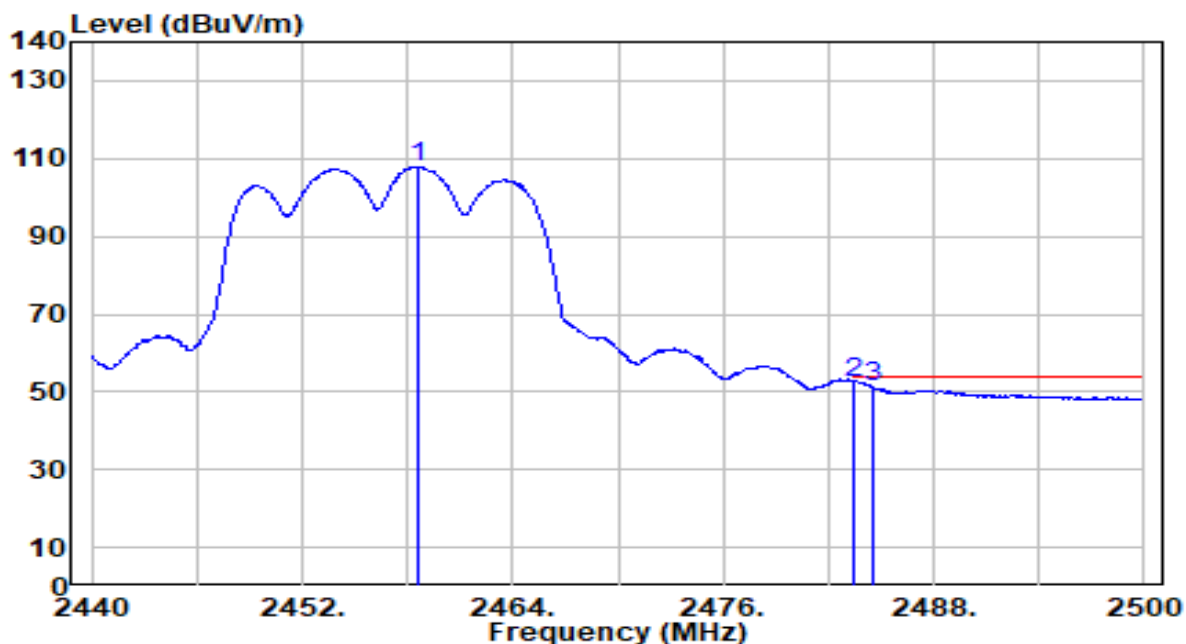


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.660	77.00	30.83	107.82	N/A	N/A	355	170	Average
2	*	2483.500	21.62	30.91	52.53	-1.47	54.00	355	170	Average
3		2484.520	20.30	30.92	51.22	-2.78	54.00	355	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

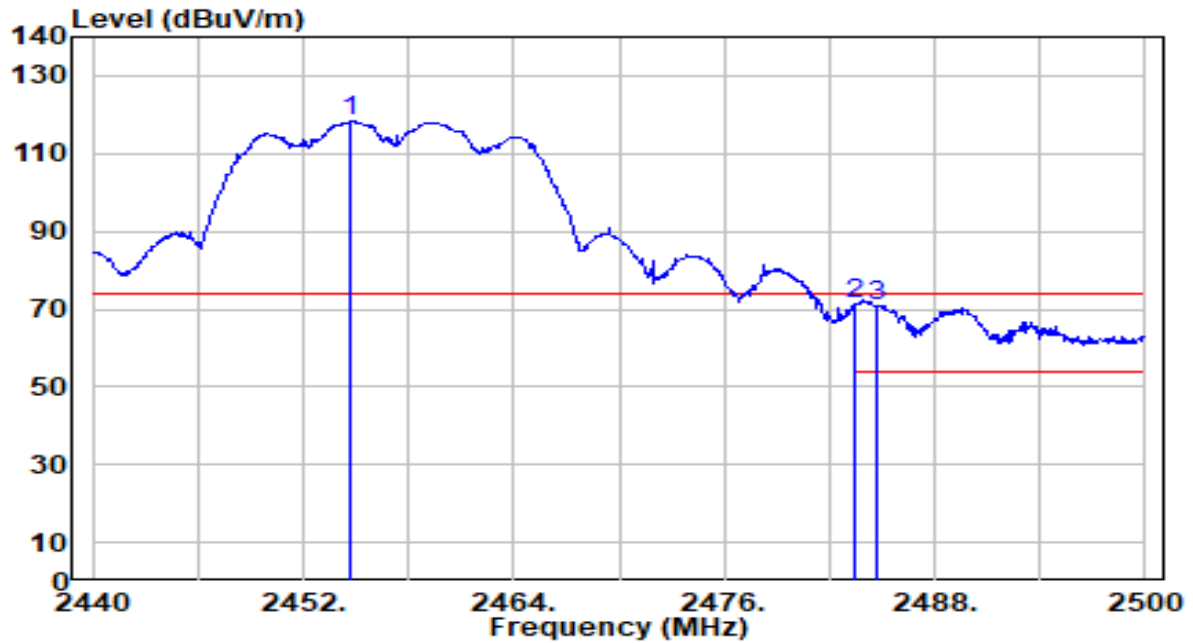


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.700	87.36	30.82	118.18	N/A	N/A	300	5	Peak
2	*	2483.500	40.24	30.91	71.15	-2.85	74.00	300	5	Peak
3		2484.640	40.08	30.92	71.00	-3.00	74.00	300	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

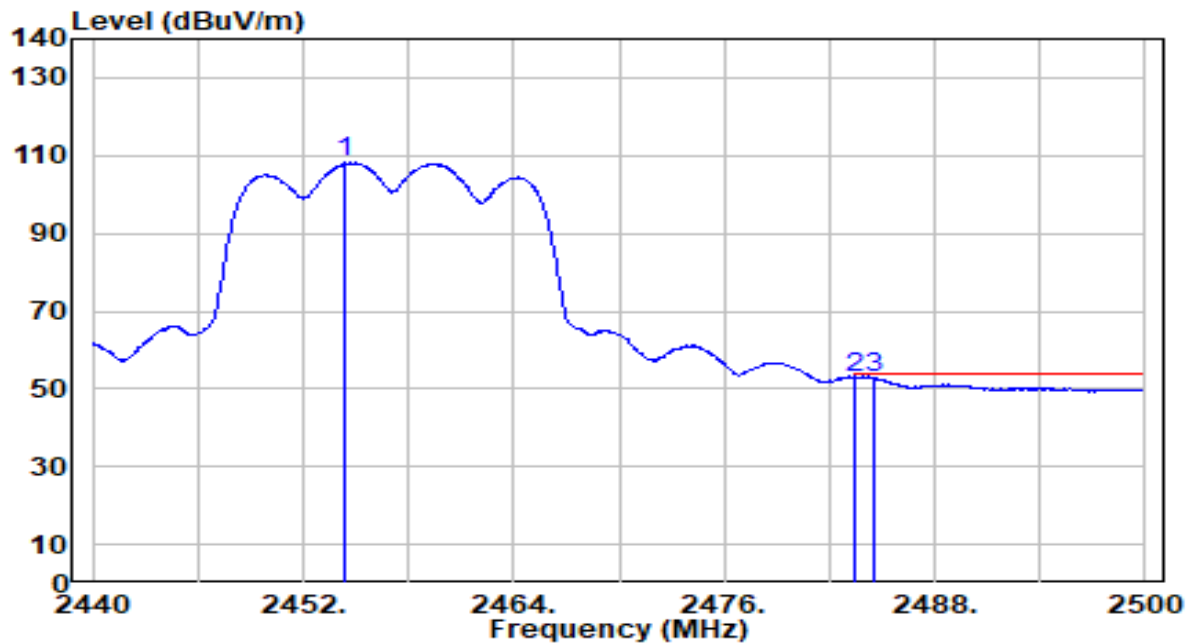


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.400	77.24	30.81	108.06	N/A	N/A	300	5	Average
2	*	2483.500	22.16	30.91	53.07	-0.93	54.00	300	5	Average
3		2484.580	21.87	30.92	52.79	-1.21	54.00	300	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

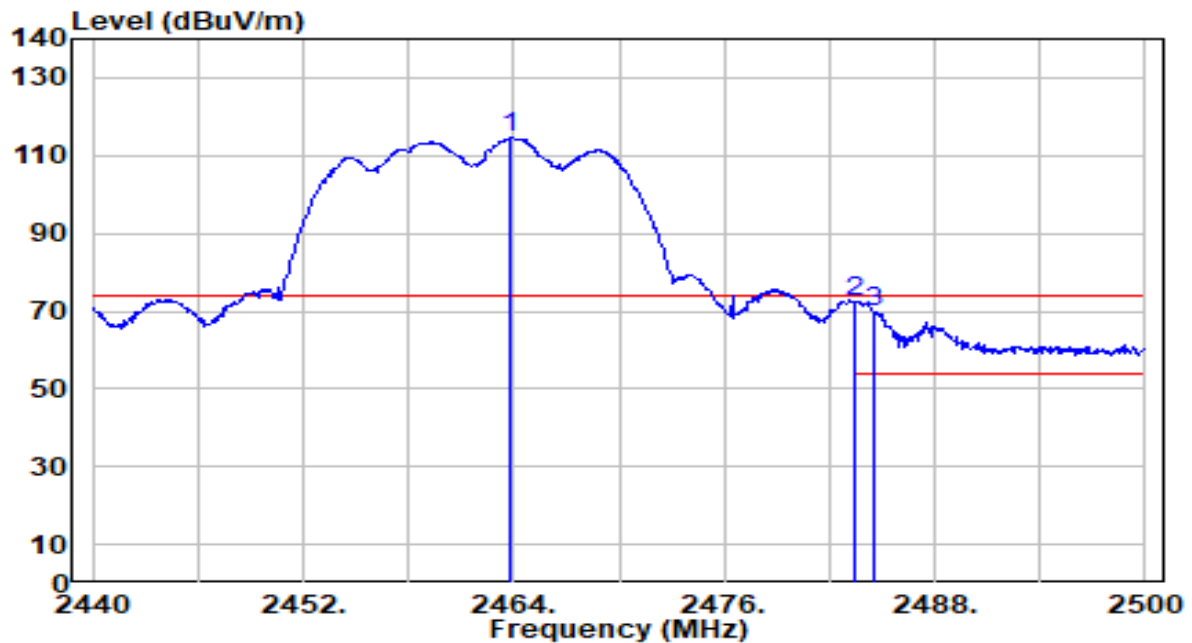


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.820	83.56	30.85	114.41	N/A	N/A	300	175	Peak
2	*	2483.500	41.34	30.91	72.26	-1.74	74.00	300	175	Peak
3		2484.520	38.77	30.92	69.69	-4.31	74.00	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

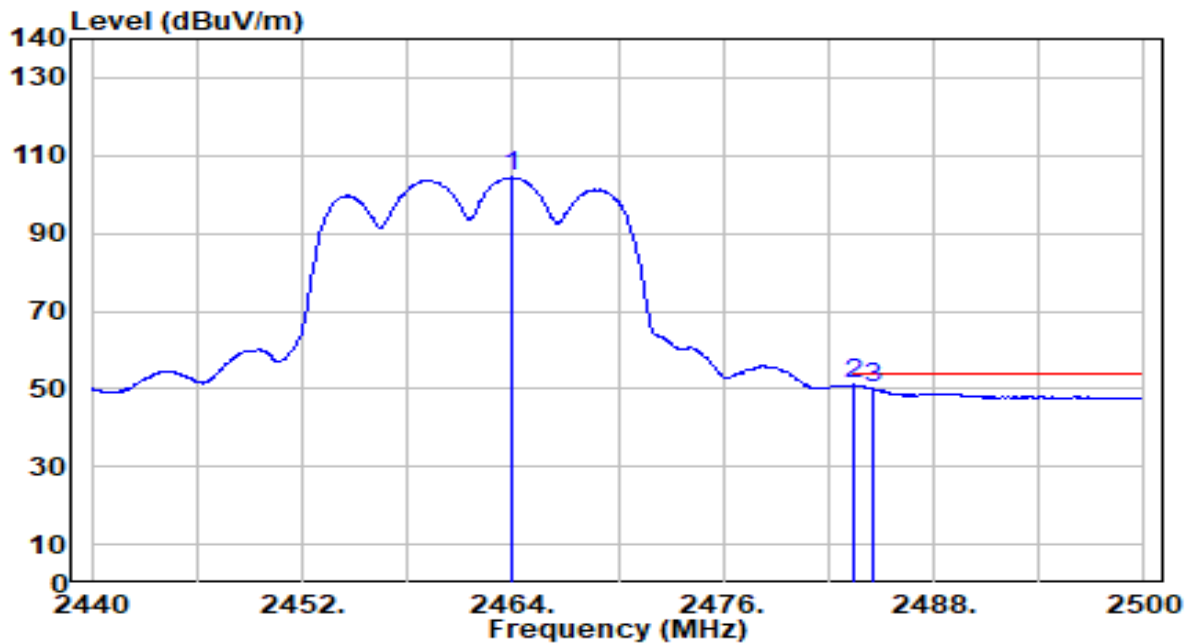


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.940	73.55	30.85	104.40	N/A	N/A	300	175	Average
2	*	2483.500	20.08	30.91	51.00	-3.00	54.00	300	175	Average
3		2484.520	19.01	30.92	49.93	-4.07	54.00	300	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

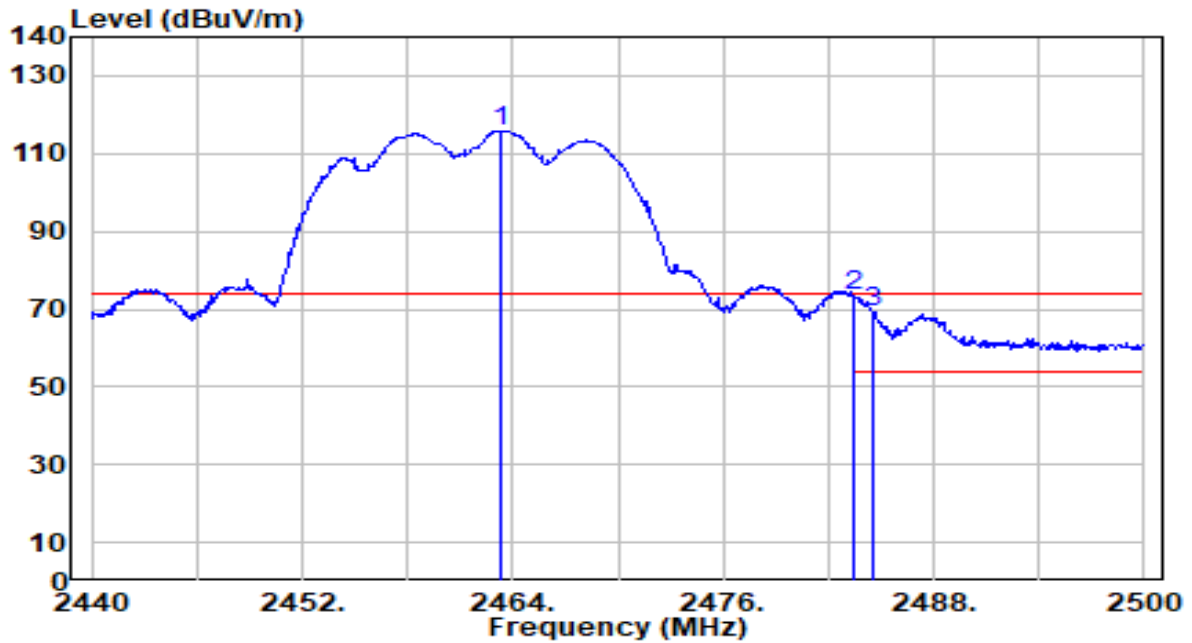


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.280	85.09	30.84	115.94	N/A	N/A	250	85	Peak
2	* 2483.500	42.38	30.91	73.29	-0.71	74.00	250	85	Peak
3	2484.520	38.46	30.92	69.37	-4.63	74.00	250	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

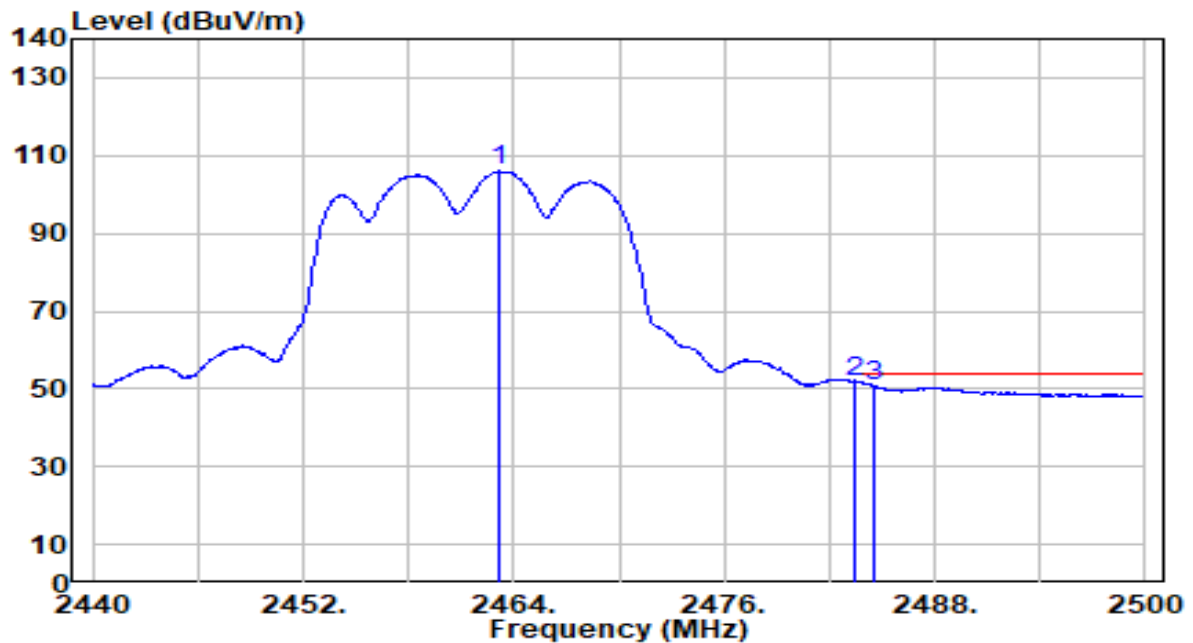


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.100	75.10	30.84	105.95	N/A	N/A	250	85	Average
2	*	2483.500	20.92	30.91	51.84	-2.16	54.00	250	85	Average
3		2484.520	19.86	30.92	50.77	-3.23	54.00	250	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

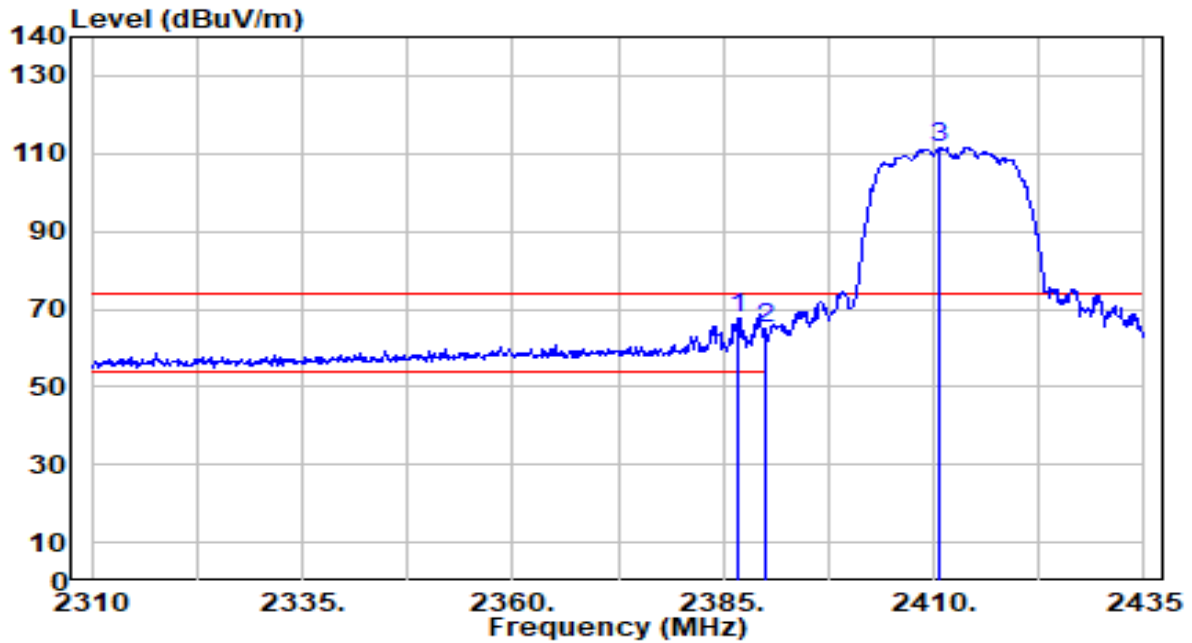


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.750	37.05	30.61	67.66	-6.34	74.00	295	75	Peak
2		2390.000	34.52	30.61	65.14	-8.86	74.00	295	75	Peak
3		2410.750	81.02	30.66	111.69	N/A	N/A	295	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

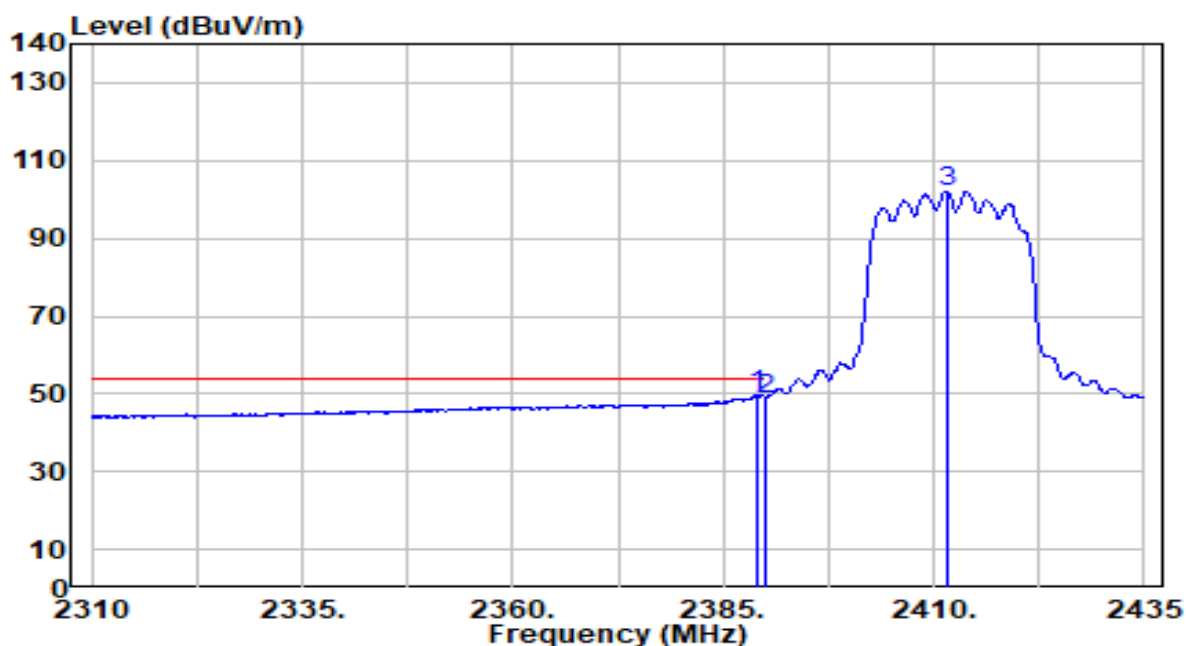


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	19.01	30.61	49.62	-4.38	54.00	295	75	Average
2		2390.000	18.22	30.61	48.84	-5.16	54.00	295	75	Average
3		2411.500	71.51	30.67	102.18	N/A	N/A	295	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

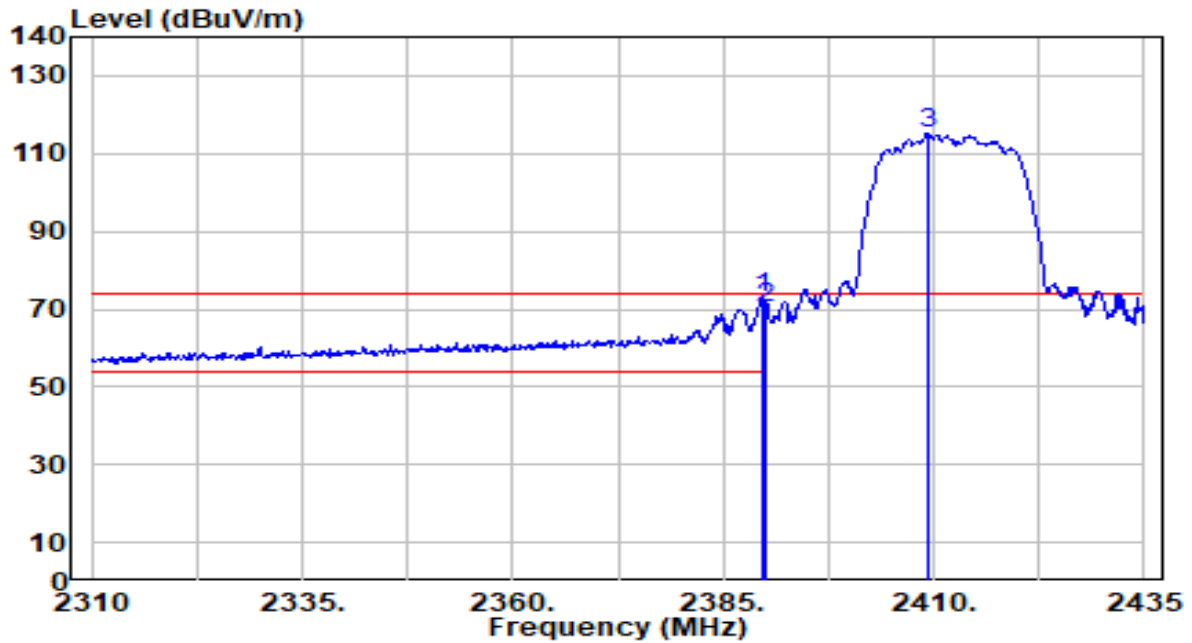


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.625	42.45	30.61	73.06	-0.94	74.00	245	60	Peak
2		2390.000	39.90	30.61	70.52	-3.48	74.00	245	60	Peak
3		2409.500	84.69	30.66	115.35	N/A	N/A	245	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

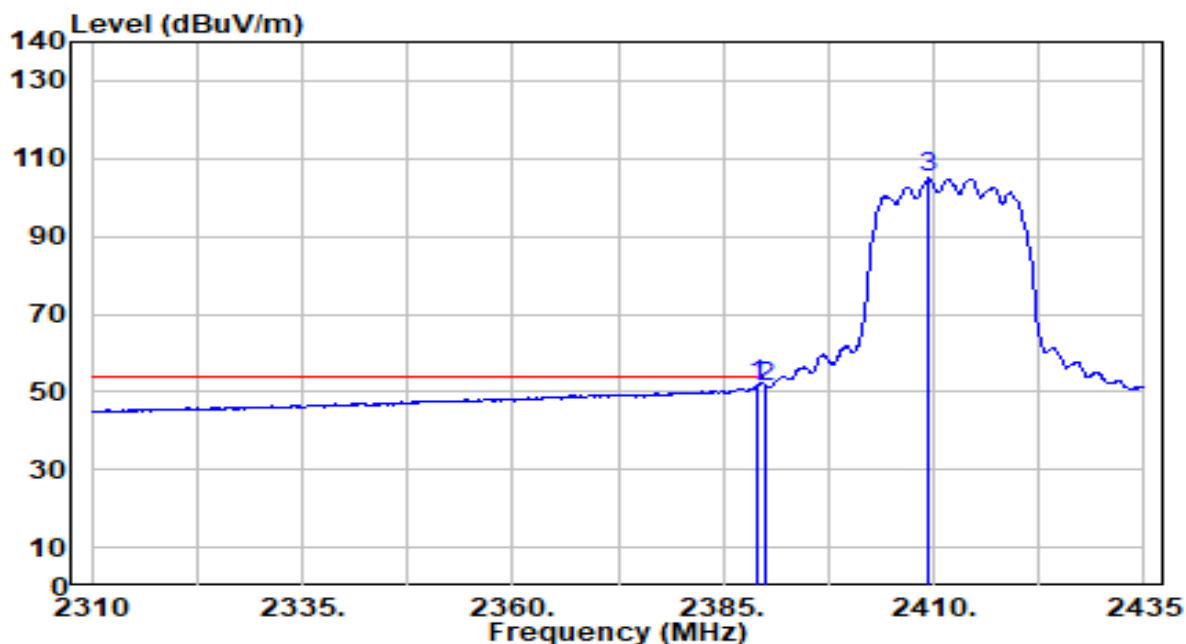


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	21.24	30.61	51.85	-2.15	54.00	245	60	Average
2		2390.000	20.82	30.61	51.44	-2.56	54.00	245	60	Average
3		2409.375	74.36	30.66	105.02	N/A	N/A	245	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

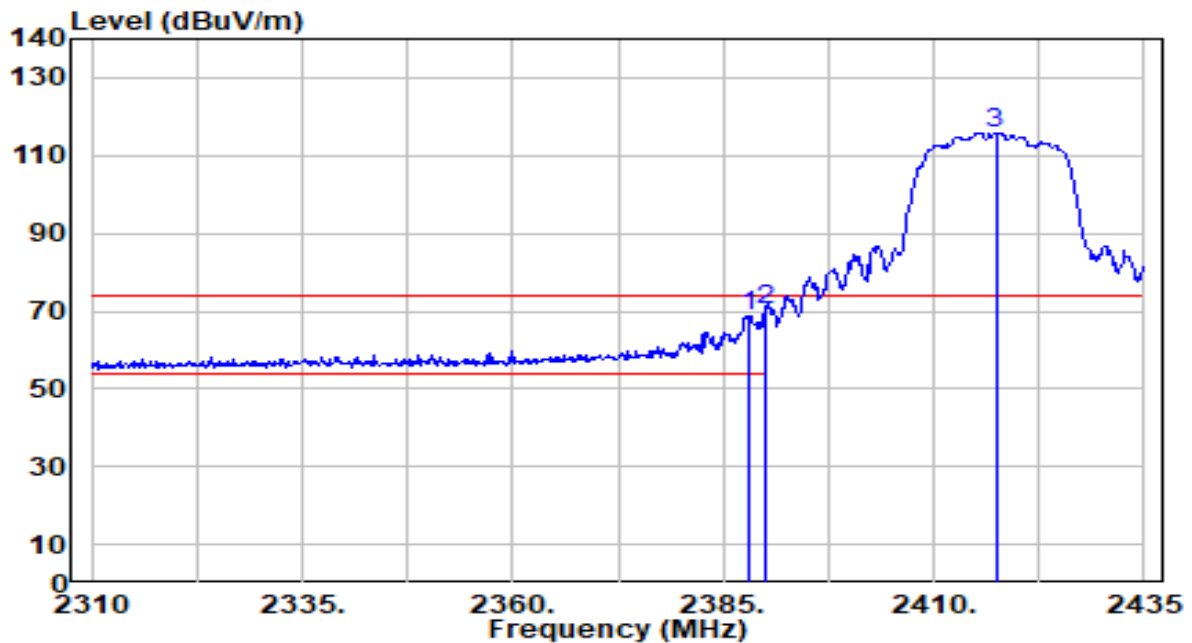


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.125	38.26	30.61	68.87	-5.13	74.00	370	170	Peak
2	*	2390.000	39.68	30.61	70.30	-3.70	74.00	370	170	Peak
3		2417.375	85.20	30.69	115.88	N/A	N/A	370	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

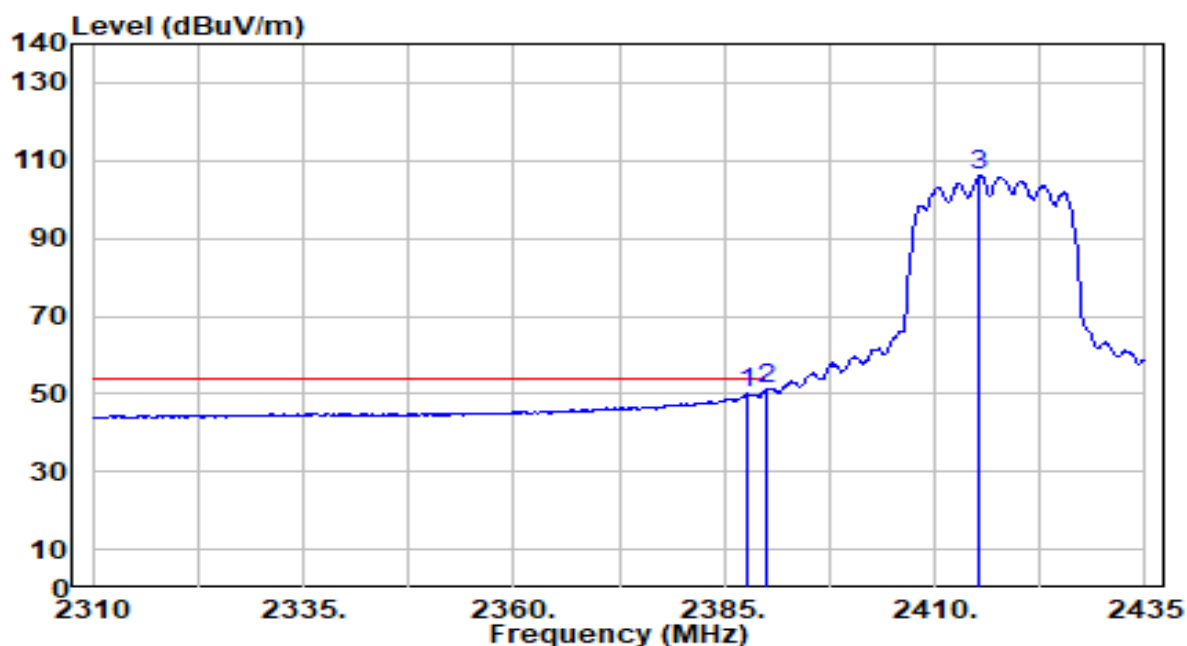


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.750	19.39	30.61	50.00	-4.00	54.00	370	170	Average
2	*	2390.000	20.37	30.61	50.99	-3.01	54.00	370	170	Average
3		2415.375	75.46	30.68	106.14	N/A	N/A	370	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

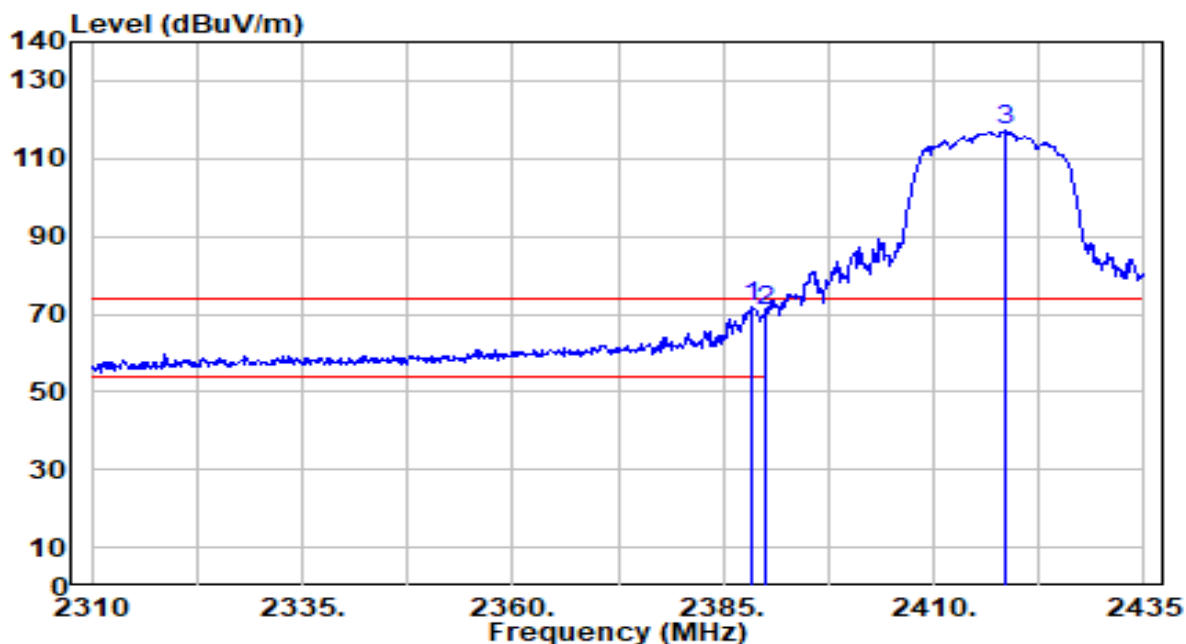


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.375	41.21	30.61	71.82	-2.18	74.00	330	0	Peak
2		2390.000	40.25	30.61	70.86	-3.14	74.00	330	0	Peak
3		2418.375	86.48	30.69	117.18	N/A	N/A	330	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

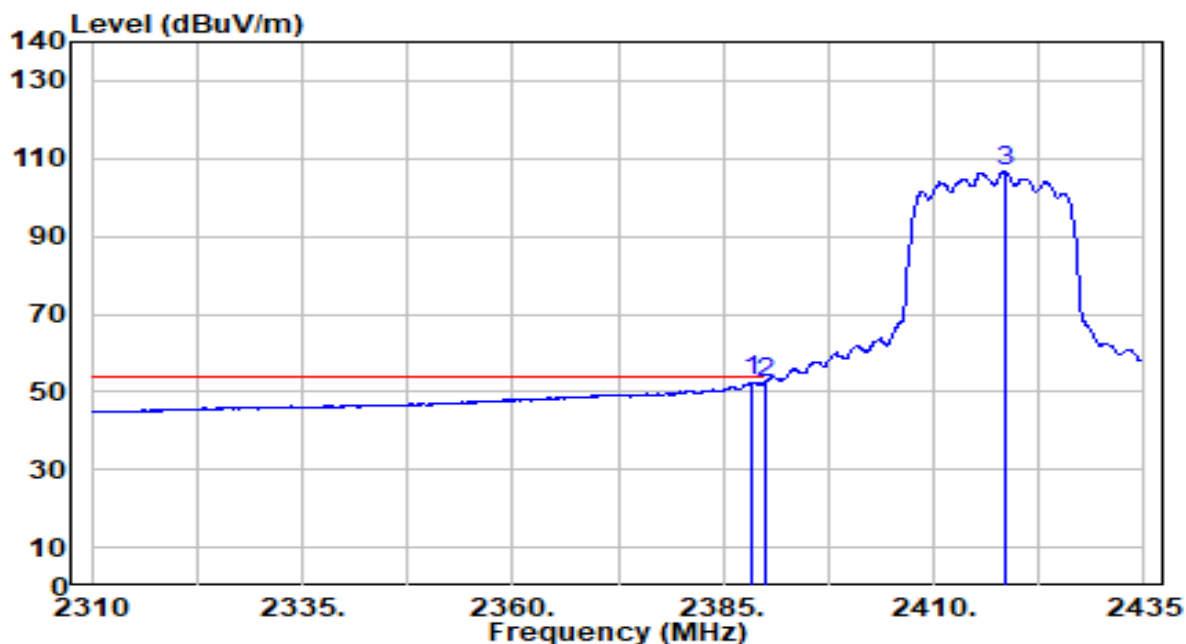


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.375	22.41	30.61	53.02	-0.98	54.00	330	0	Average
2		2390.000	21.62	30.61	52.23	-1.77	54.00	330	0	Average
3		2418.375	75.94	30.69	106.64	N/A	N/A	330	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

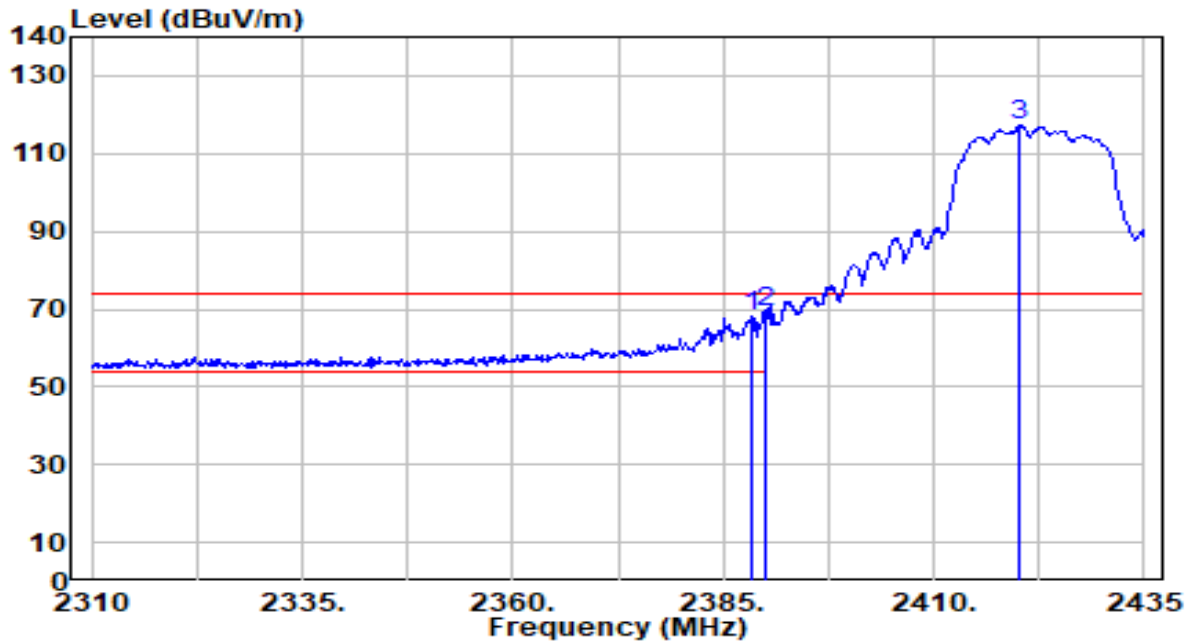


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.250	37.75	30.61	68.36	-5.64	74.00	370	160	Peak
2	*	2390.000	38.56	30.61	69.18	-4.82	74.00	370	160	Peak
3		2420.125	86.41	30.70	117.11	N/A	N/A	370	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

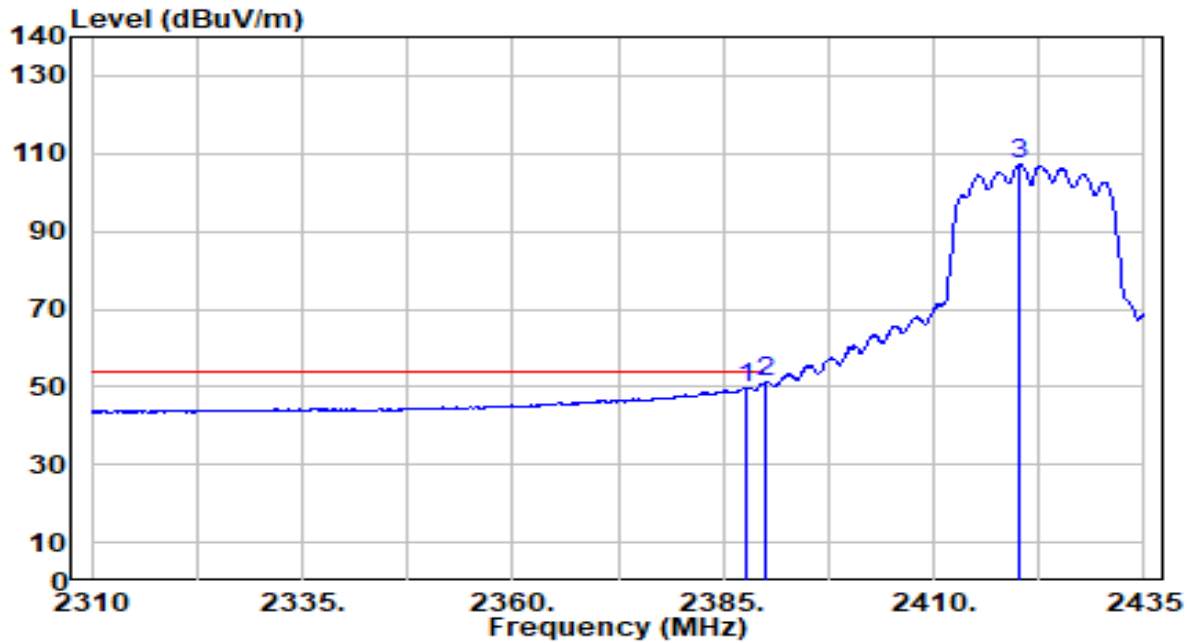


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.750	19.28	30.61	49.89	-4.11	54.00	370	160	Average
2	* 2390.000	20.81	30.61	51.43	-2.57	54.00	370	160	Average
3	2420.250	76.56	30.70	107.26	N/A	N/A	370	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

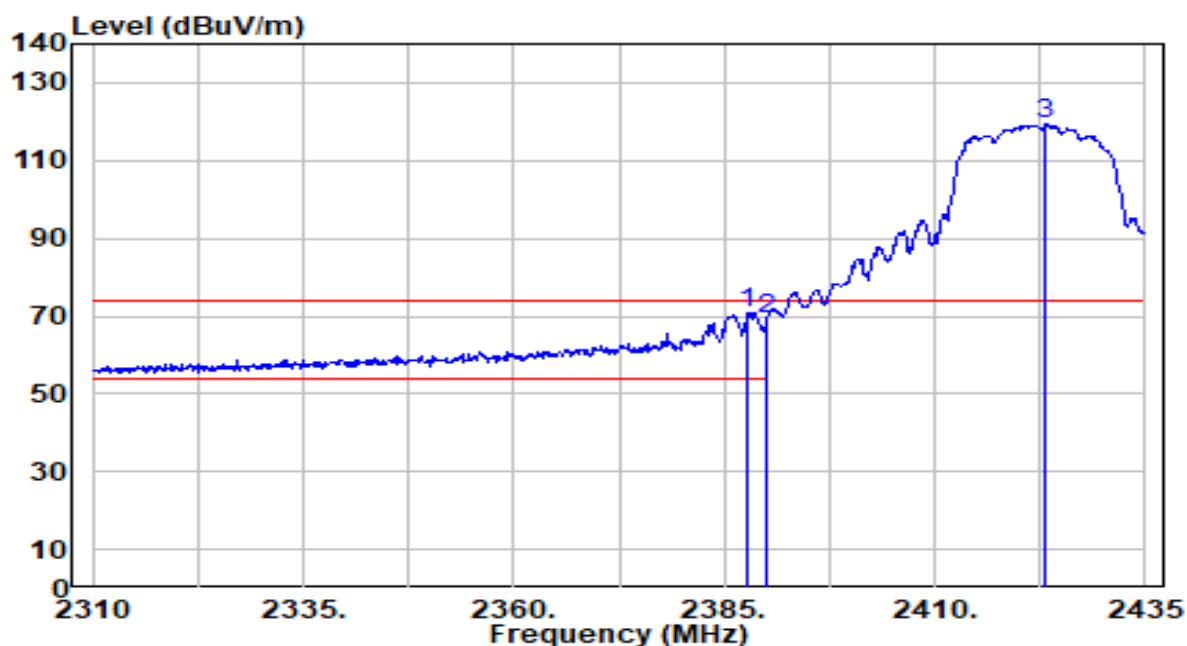


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	40.07	30.61	70.68	-3.32	74.00	255	20	Peak
2		2390.000	38.73	30.61	69.35	-4.65	74.00	255	20	Peak
3		2423.250	88.62	30.71	119.33	N/A	N/A	255	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

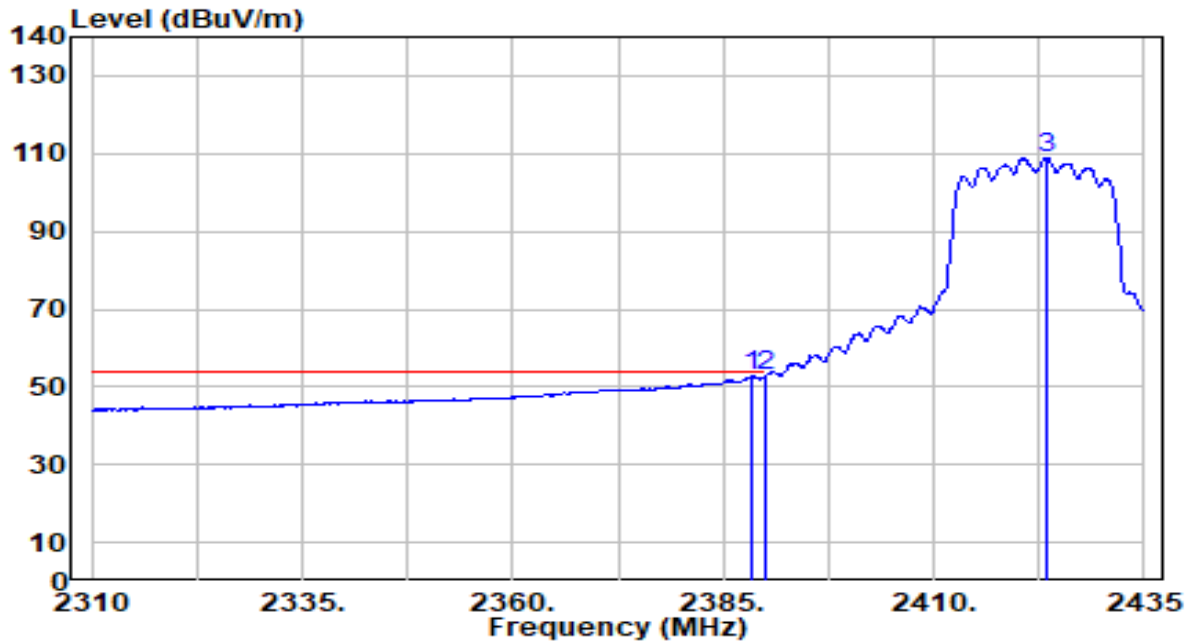


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.375	22.41	30.61	53.02	-0.98	54.00	255	20	Average
2		2390.000	22.17	30.61	52.78	-1.22	54.00	255	20	Average
3		2423.375	78.29	30.71	109.00	N/A	N/A	255	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n20-MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

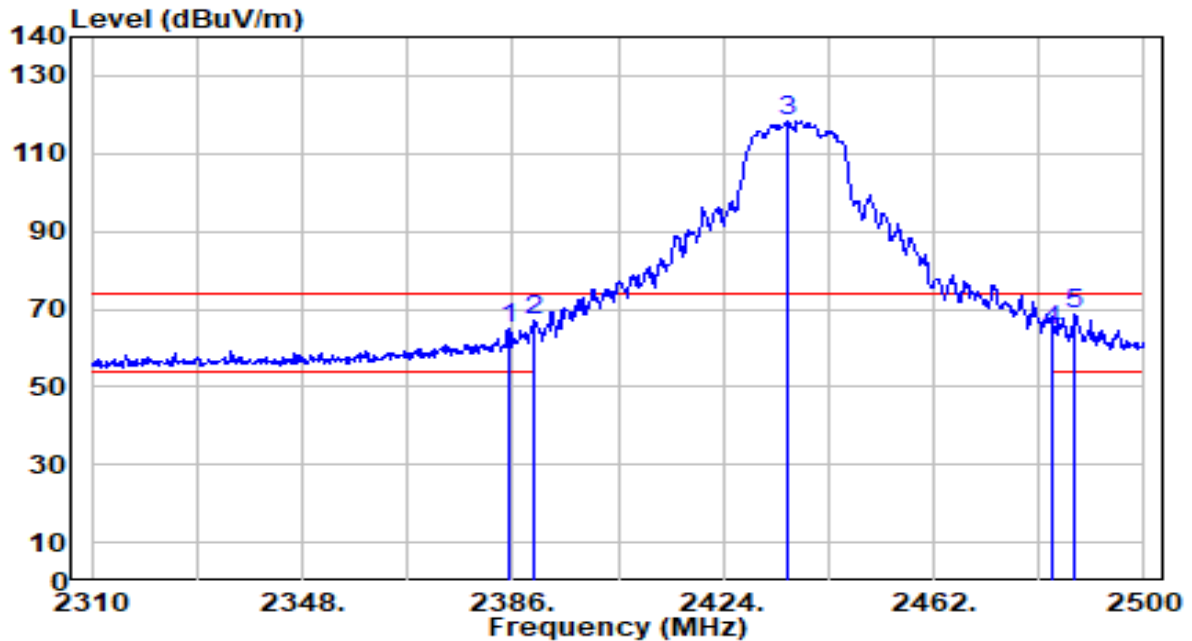


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	34.47	30.61	65.07	-8.93	74.00	370	175	Peak
2	2390.000	36.63	30.61	67.25	-6.75	74.00	370	175	Peak
3	2435.400	87.79	30.75	118.54	N/A	N/A	370	175	Peak
4	2483.500	33.46	30.91	64.38	-9.62	74.00	370	175	Peak
5	* 2487.460	37.71	30.93	68.64	-5.36	74.00	370	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n20-MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

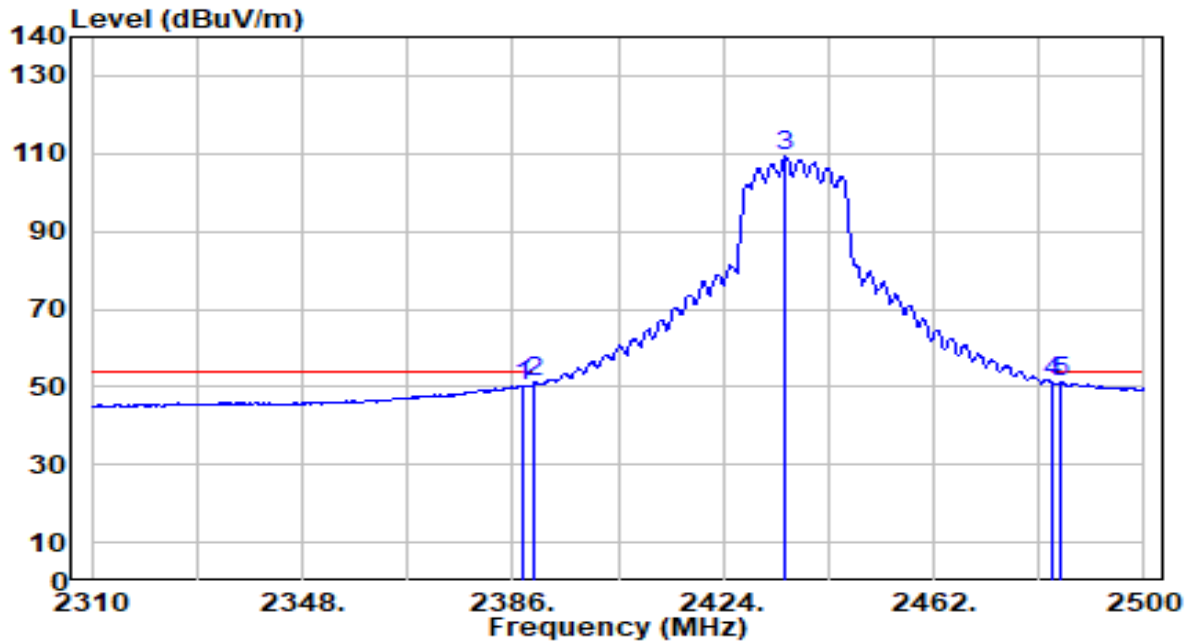


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	19.75	30.61	50.36	-3.64	54.00	370	175	Average
2	2390.000	20.49	30.61	51.11	-2.89	54.00	370	175	Average
3	2435.210	78.40	30.75	109.14	N/A	N/A	370	175	Average
4	2483.500	20.09	30.91	51.00	-3.00	54.00	370	175	Average
5	* 2484.800	20.28	30.92	51.20	-2.80	54.00	370	175	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n20-MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

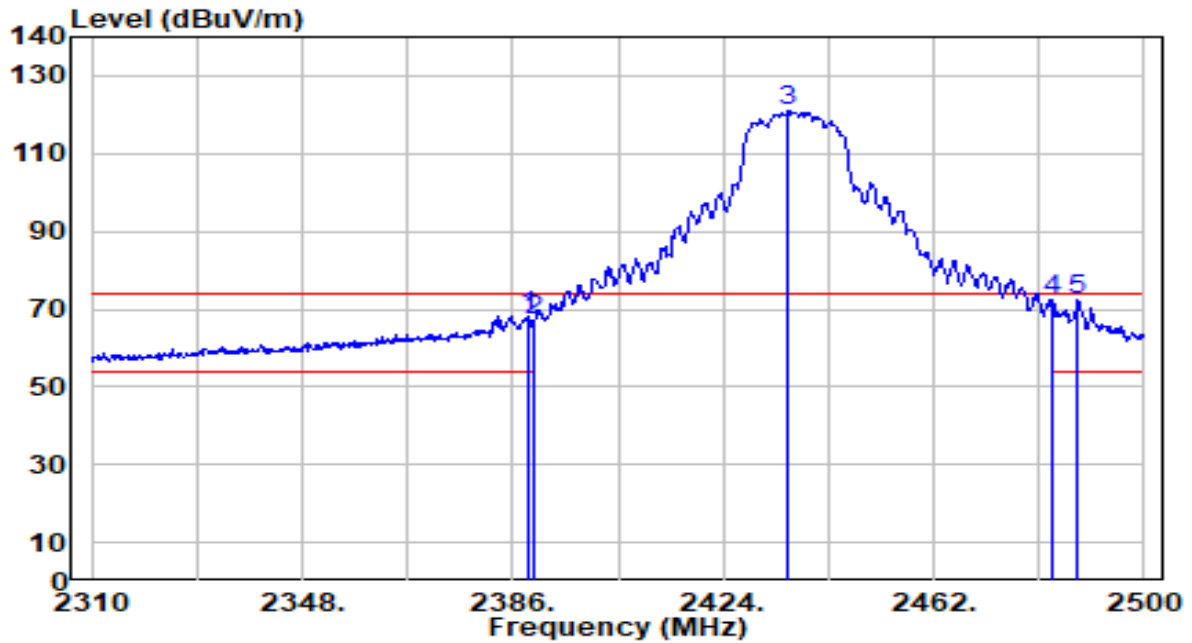


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.850	37.50	30.61	68.11	-5.89	74.00	240	15	Peak
2	2390.000	36.57	30.61	67.18	-6.82	74.00	240	15	Peak
3	2435.780	90.07	30.75	120.82	N/A	N/A	240	15	Peak
4	* 2483.500	41.65	30.91	72.56	-1.44	74.00	240	15	Peak
5	2488.030	41.23	30.93	72.16	-1.84	74.00	240	15	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n20-MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

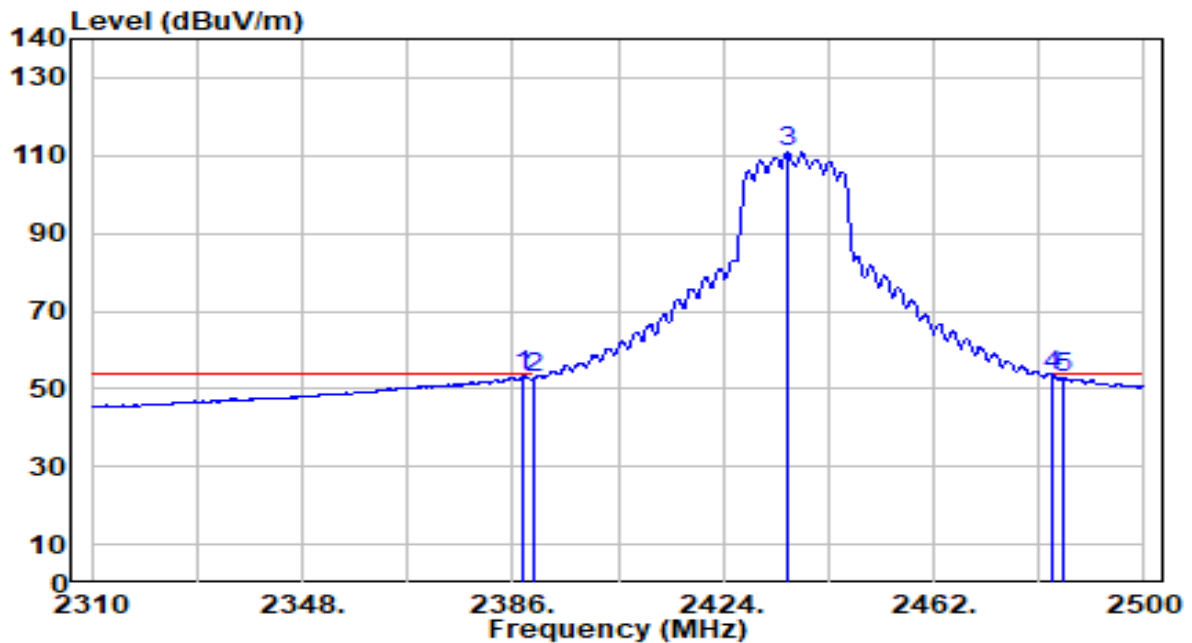


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	22.58	30.61	53.19	-0.81	54.00	240	15	Average
2	2390.000	22.44	30.61	53.05	-0.95	54.00	240	15	Average
3	2435.590	80.13	30.75	110.88	N/A	N/A	240	15	Average
4	* 2483.500	22.50	30.91	53.41	-0.59	54.00	240	15	Average
5	2485.180	22.11	30.92	53.03	-0.97	54.00	240	15	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

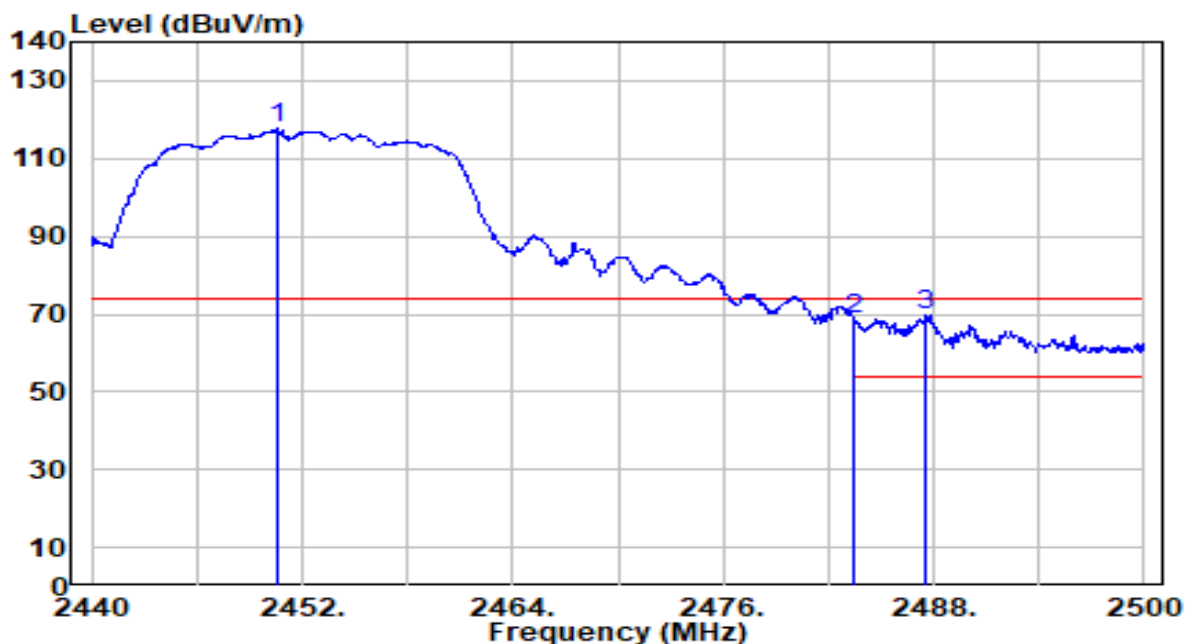


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.560	86.77	30.80	117.57	N/A	N/A	355	175	Peak
2	2483.500	38.02	30.91	68.93	-5.07	74.00	355	175	Peak
3	* 2487.580	38.82	30.93	69.75	-4.25	74.00	355	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

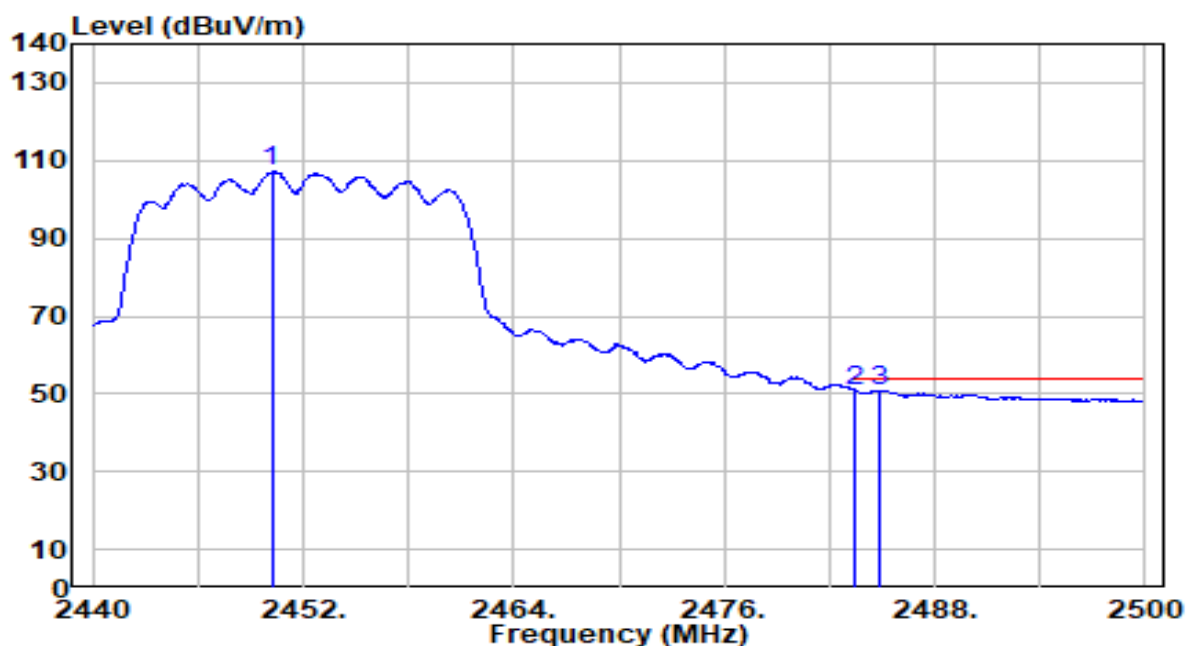


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.200	76.38	30.80	107.18	N/A	N/A	355	175	Average
2	2483.500	19.80	30.91	50.71	-3.29	54.00	355	175	Average
3	* 2484.880	19.98	30.92	50.90	-3.10	54.00	355	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

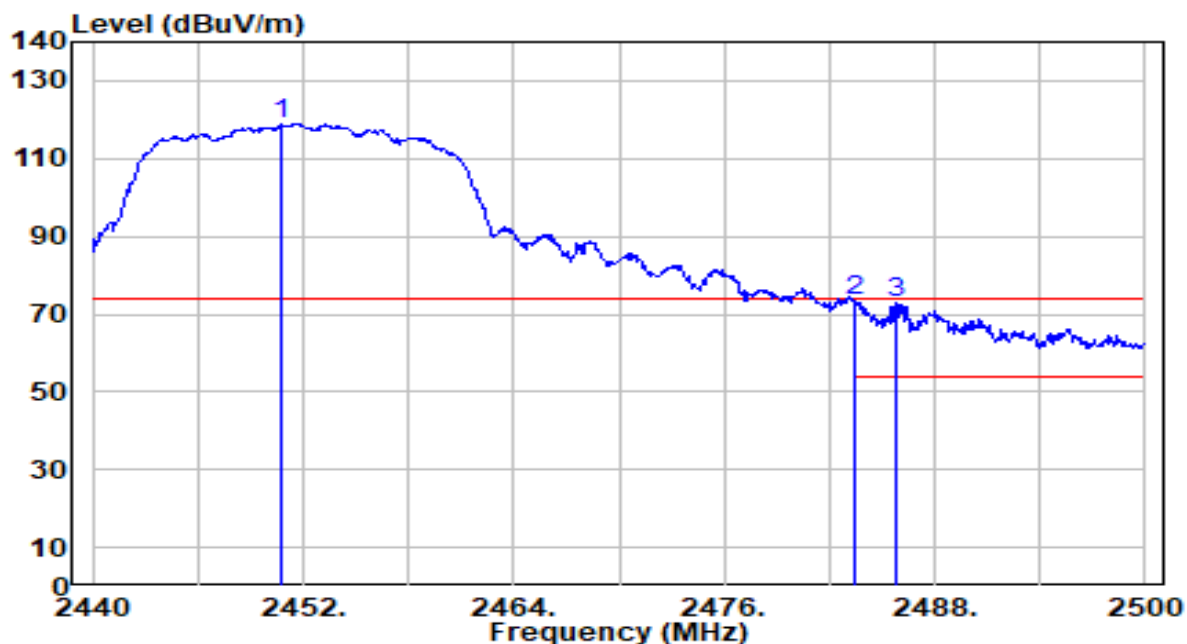


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.680	88.01	30.80	118.82	N/A	N/A	315	10	Peak
2	*	2483.500	42.63	30.91	73.55	-0.45	74.00	315	10	Peak
3		2485.840	41.98	30.92	72.90	-1.10	74.00	315	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

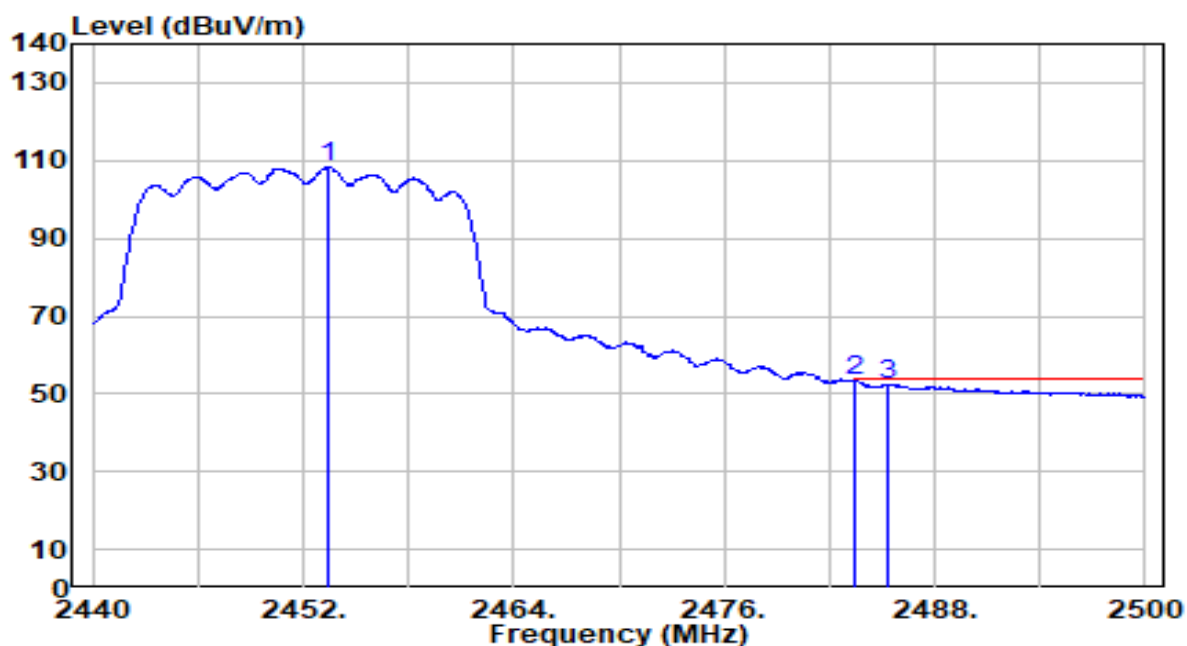


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.380	77.65	30.81	108.46	N/A	N/A	315	10	Average
2	*	2483.500	22.27	30.91	53.18	-0.82	54.00	315	10	Average
3		2485.360	21.44	30.92	52.36	-1.64	54.00	315	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

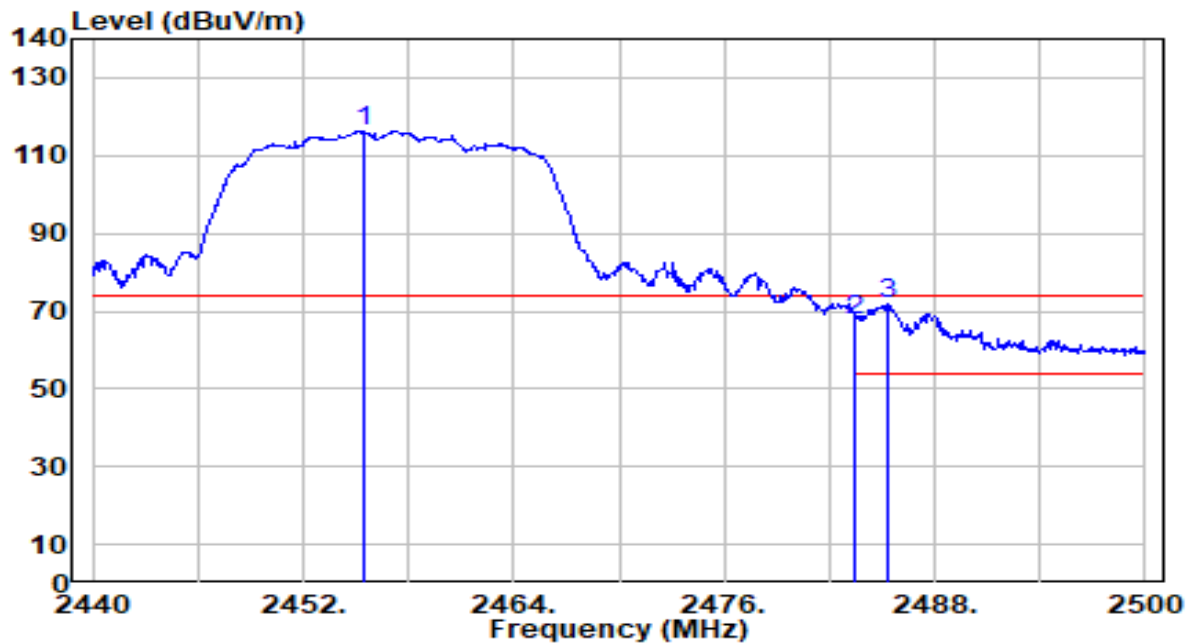


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.420	85.28	30.82	116.10	N/A	N/A	355	170	Peak
2	2483.500	36.52	30.91	67.43	-6.57	74.00	355	170	Peak
3	* 2485.300	40.95	30.92	71.87	-2.13	74.00	355	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

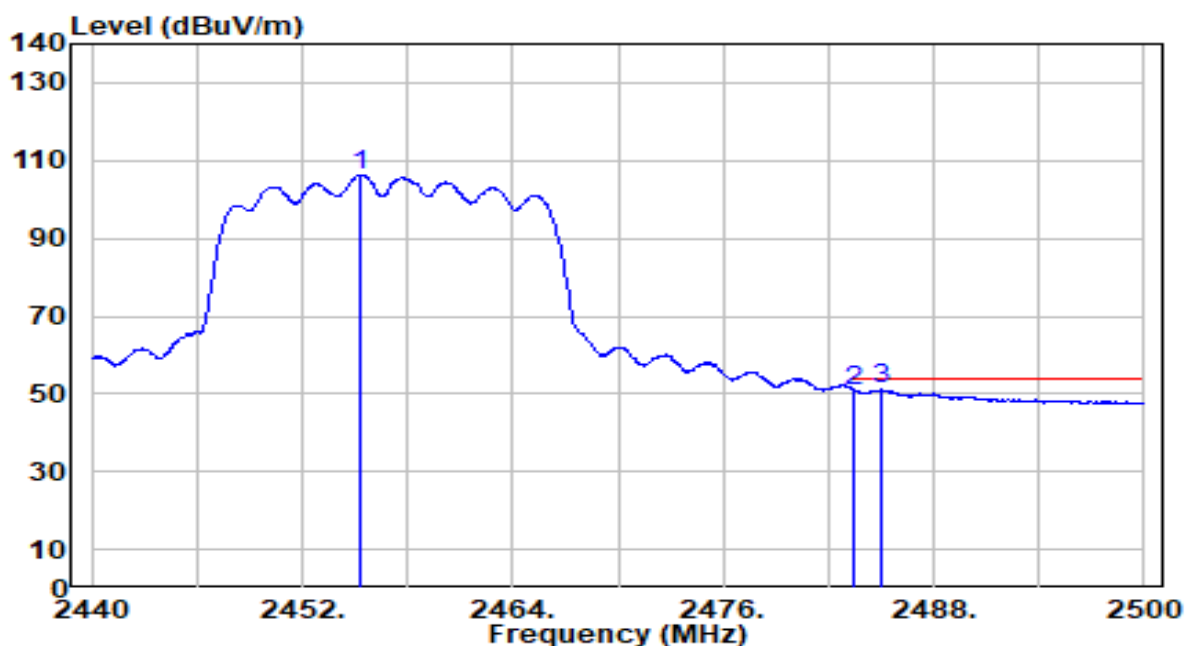


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.360	75.40	30.82	106.22	N/A	N/A	355	170	Average
2	2483.500	19.77	30.91	50.68	-3.32	54.00	355	170	Average
3	* 2485.060	20.15	30.92	51.06	-2.94	54.00	355	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

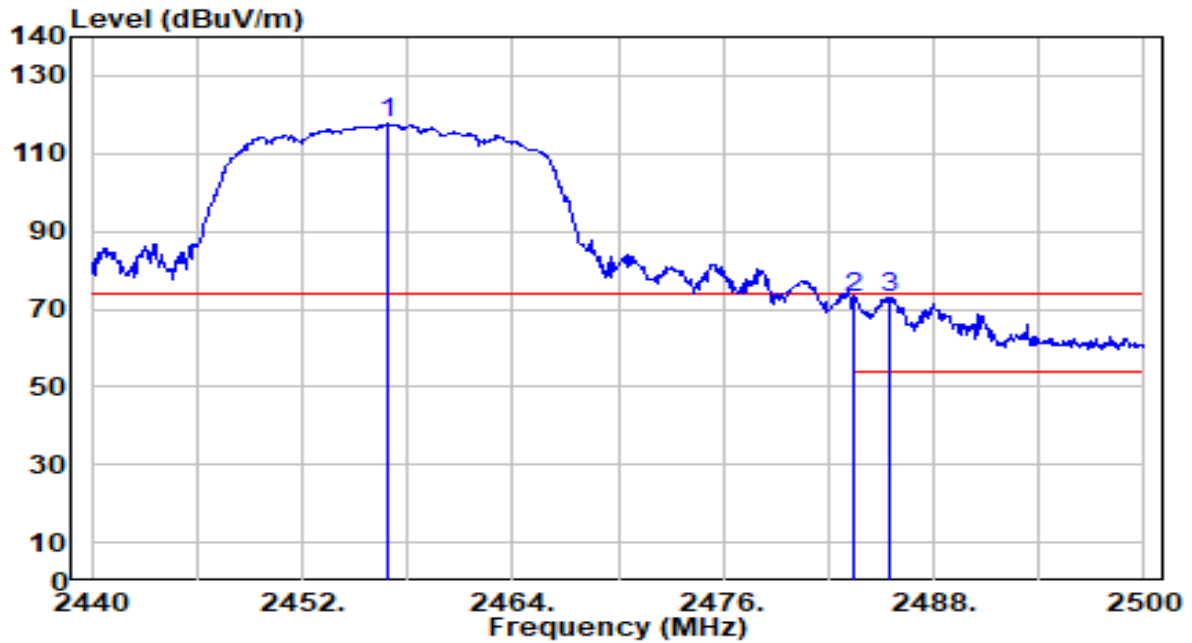


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2456.860	86.76	30.82	117.58	N/A	N/A	245	5	Peak
2	2483.500	41.87	30.91	72.78	-1.22	74.00	245	5	Peak
3	* 2485.420	42.25	30.92	73.17	-0.83	74.00	245	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

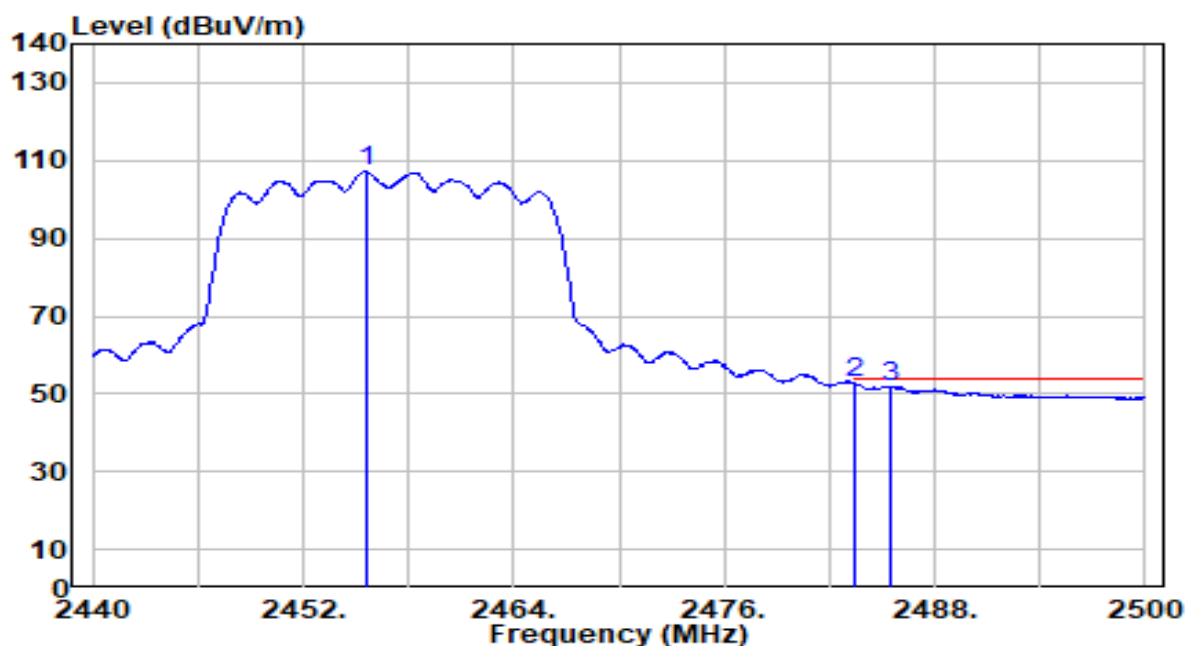


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.600	76.38	30.82	107.20	N/A	N/A	245	5	Average
2	*	2483.500	21.67	30.91	52.58	-1.42	54.00	245	5	Average
3		2485.420	21.04	30.92	51.96	-2.04	54.00	245	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

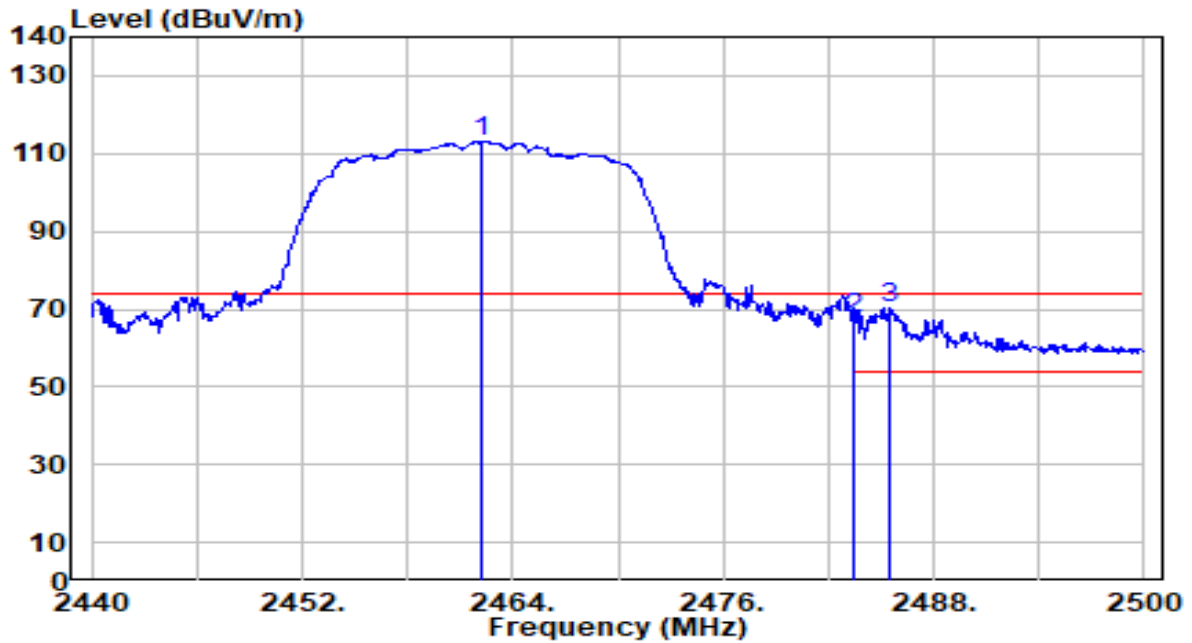


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.200	82.44	30.84	113.28	N/A	N/A	300	170	Peak
2	2483.500	36.64	30.91	67.56	-6.44	74.00	300	170	Peak
3	* 2485.420	39.32	30.92	70.24	-3.76	74.00	300	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

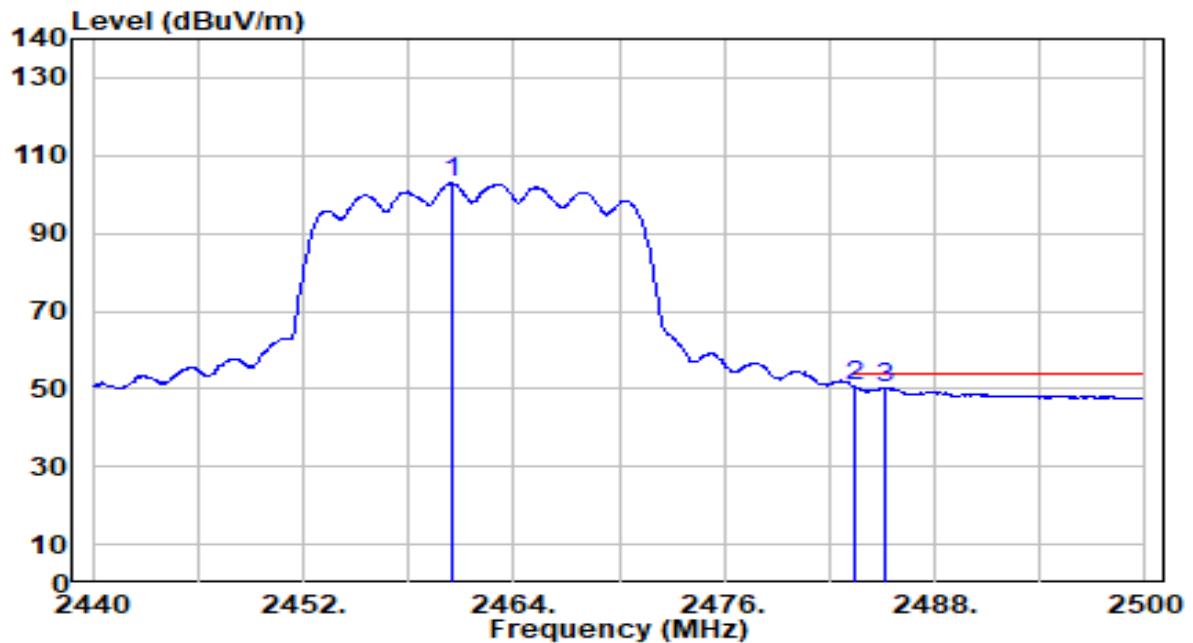


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.520	72.27	30.83	103.11	N/A	N/A	300	170	Average
2	*	2483.500	19.58	30.91	50.49	-3.51	54.00	300	170	Average
3		2485.120	19.26	30.92	50.17	-3.83	54.00	300	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

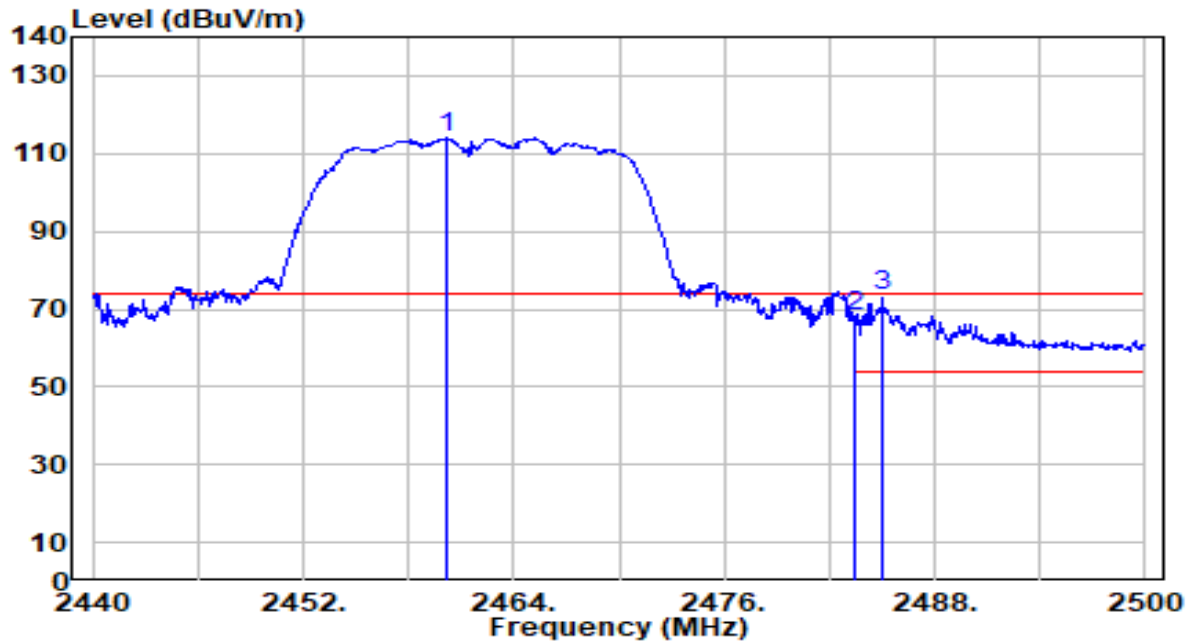


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.160	83.13	30.83	113.96	N/A	N/A	250	80	Peak
2	2483.500	37.35	30.91	68.26	-5.74	74.00	250	80	Peak
3	* 2485.000	42.36	30.92	73.28	-0.72	74.00	250	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

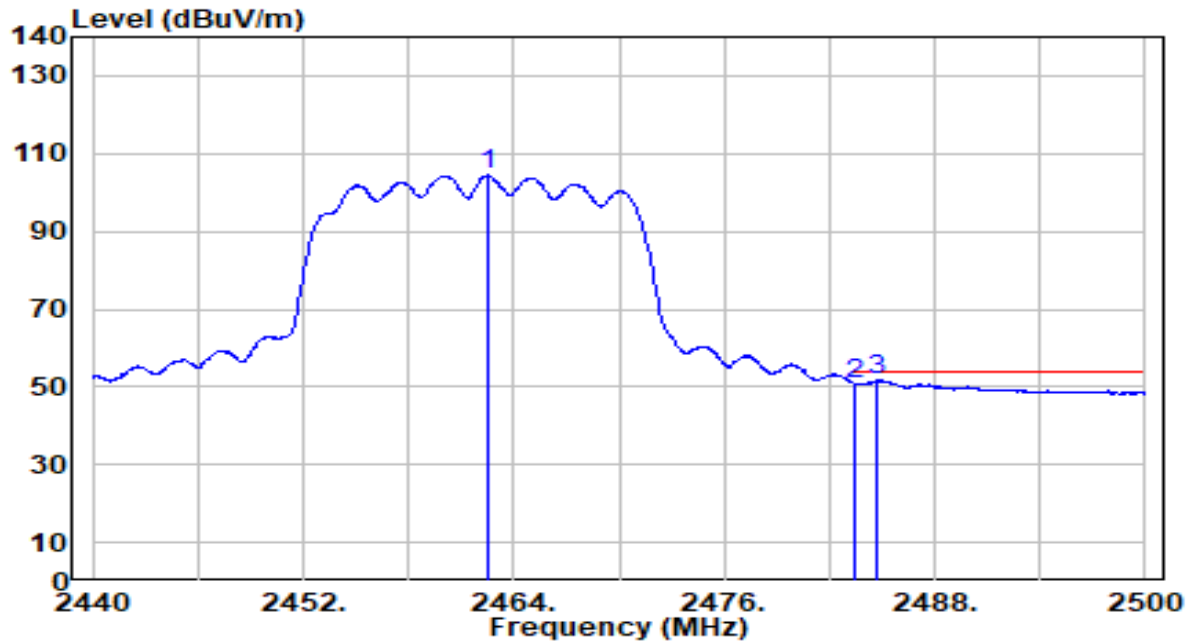


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.500	73.53	30.84	104.37	N/A	N/A	250	80	Average
2	2483.500	20.01	30.91	50.92	-3.08	54.00	250	80	Average
3	* 2484.760	20.88	30.92	51.80	-2.20	54.00	250	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

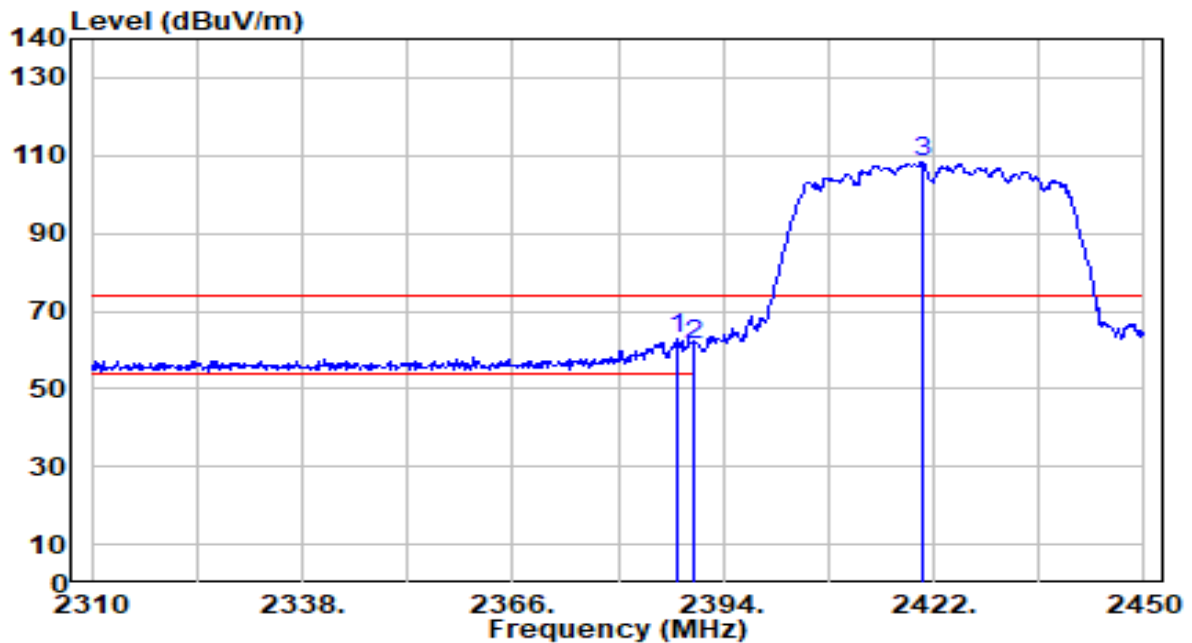


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.840	32.37	30.61	62.98	-11.02	74.00	365	170	Peak
2		2390.000	30.88	30.61	61.50	-12.50	74.00	365	170	Peak
3		2420.460	77.48	30.70	108.18	N/A	N/A	365	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

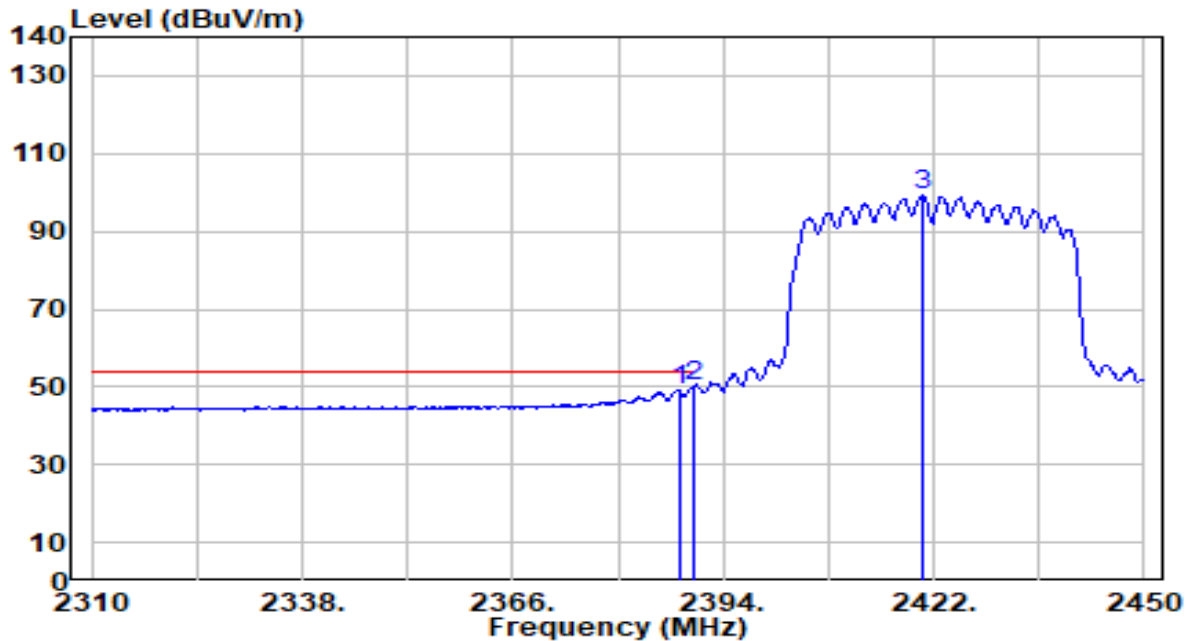


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.120	18.46	30.61	49.07	-4.93	54.00	365	170	Average
2	*	2390.000	19.54	30.61	50.15	-3.85	54.00	365	170	Average
3		2420.460	68.37	30.70	99.06	N/A	N/A	365	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

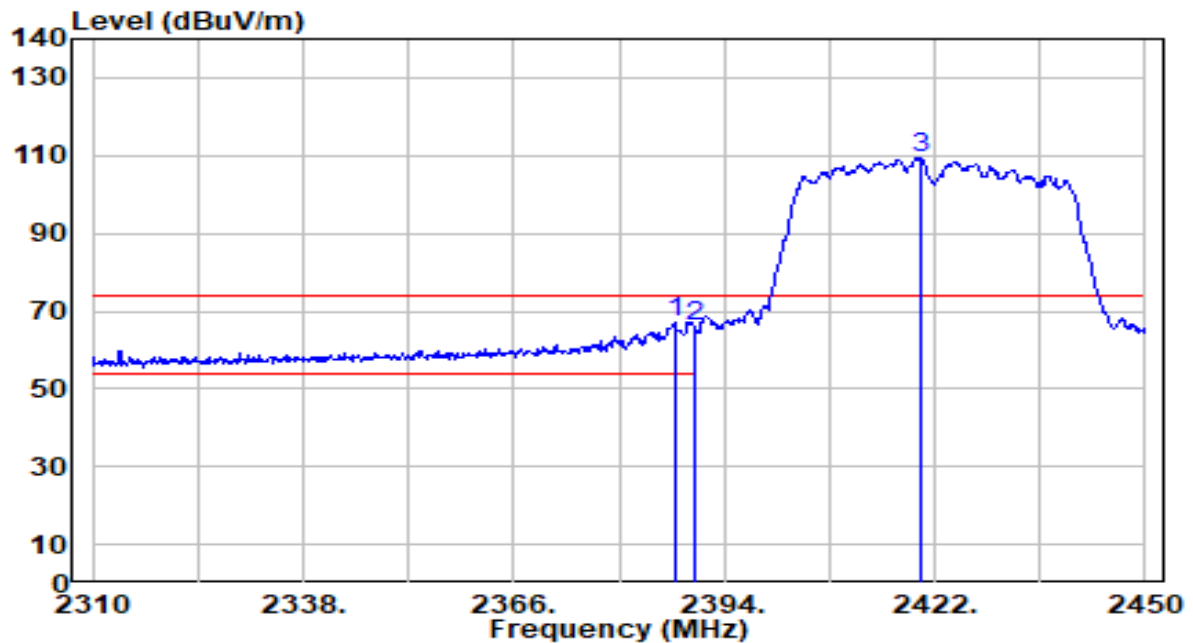


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.420	36.30	30.61	66.92	-7.08	74.00	245	65	Peak
2		2390.000	35.62	30.61	66.24	-7.76	74.00	245	65	Peak
3		2420.180	78.71	30.70	109.40	N/A	N/A	245	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

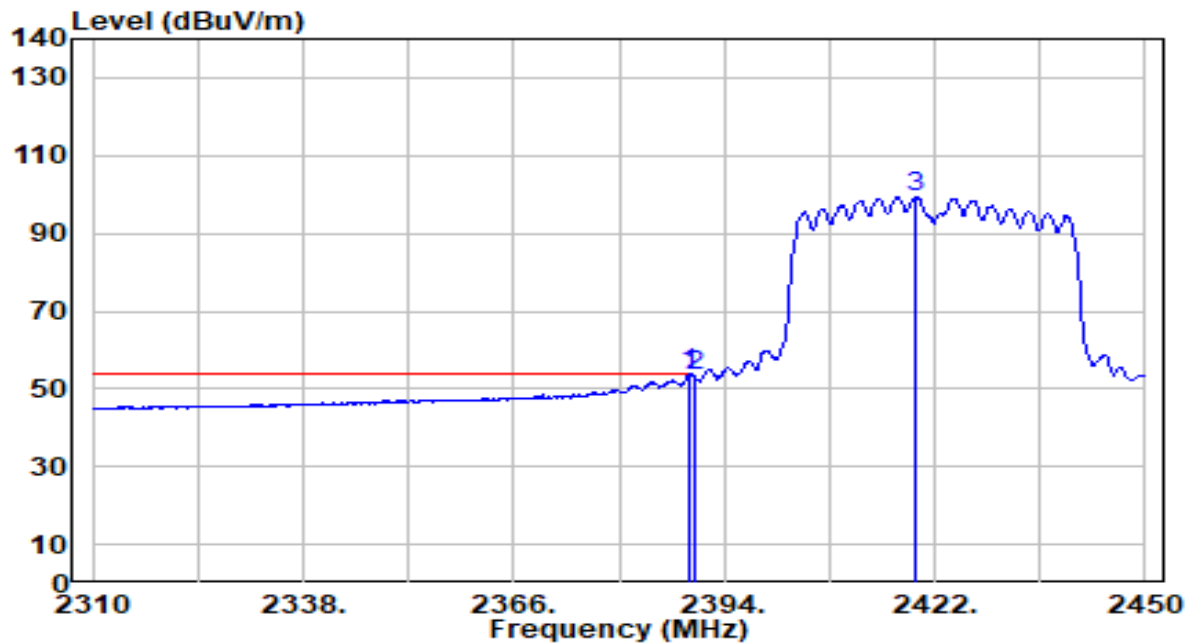


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.380	23.23	30.61	53.84	-0.16	54.00	245	65	Average
2		2390.000	22.91	30.61	53.52	-0.48	54.00	245	65	Average
3		2419.480	68.60	30.69	99.30	N/A	N/A	245	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

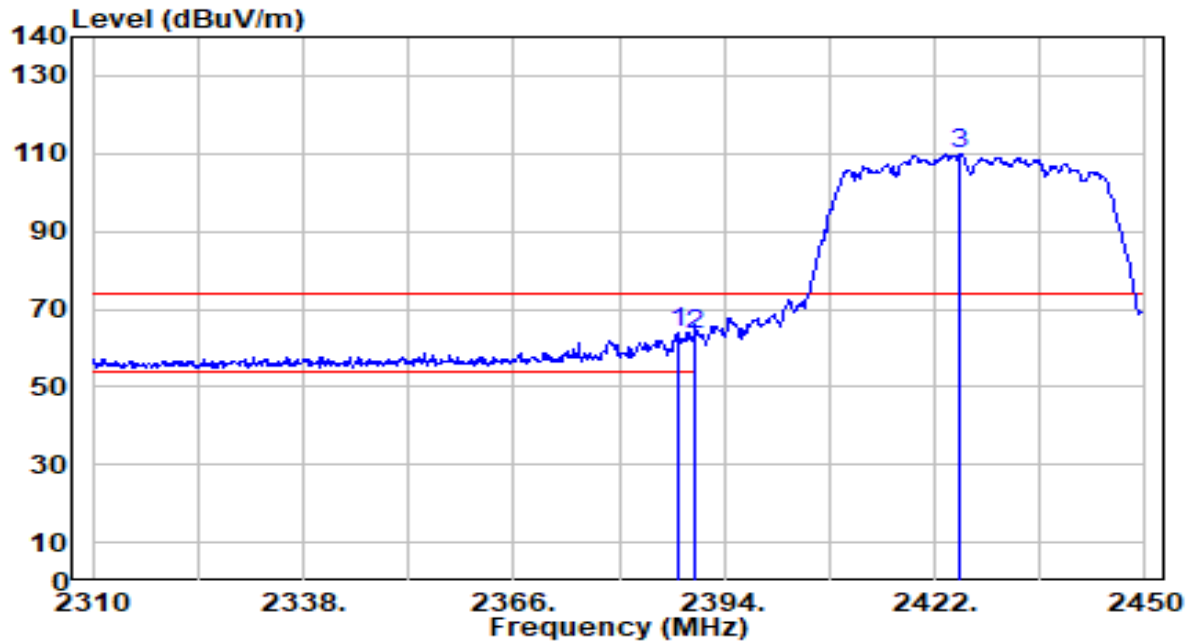


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.980	33.05	30.61	63.67	-10.33	74.00	365	170	Peak
2		2390.000	32.62	30.61	63.23	-10.77	74.00	365	170	Peak
3		2425.360	79.18	30.71	109.89	N/A	N/A	365	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

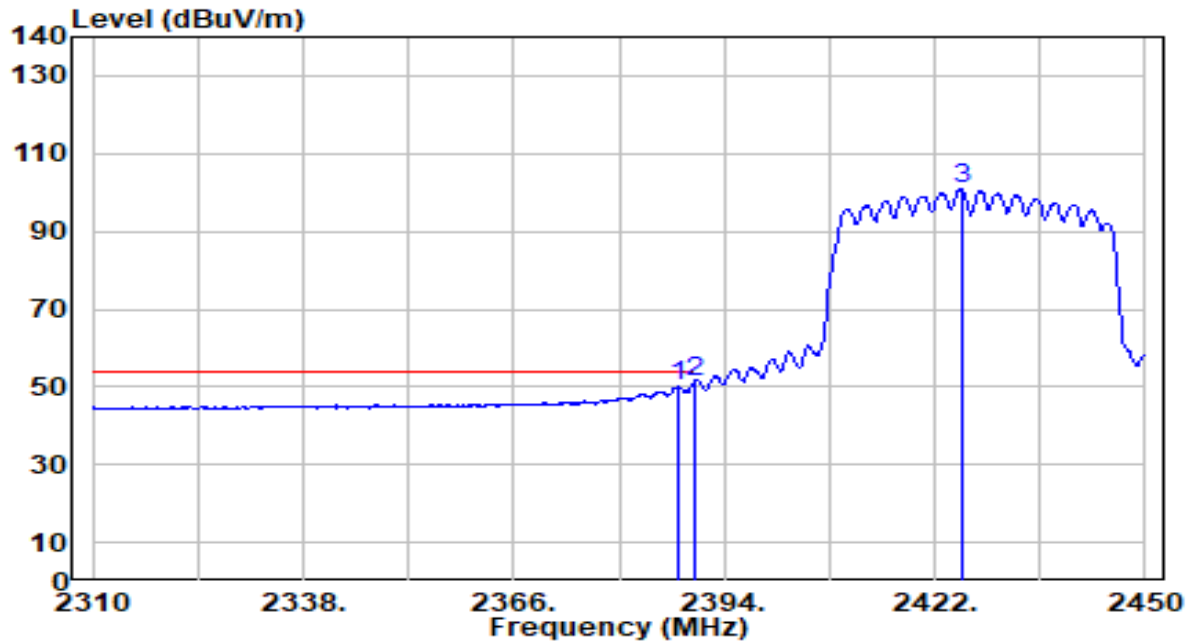


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.980	19.59	30.61	50.20	-3.80	54.00	365	170	Average
2	*	2390.000	20.50	30.61	51.12	-2.88	54.00	365	170	Average
3		2425.500	70.08	30.72	100.79	N/A	N/A	365	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

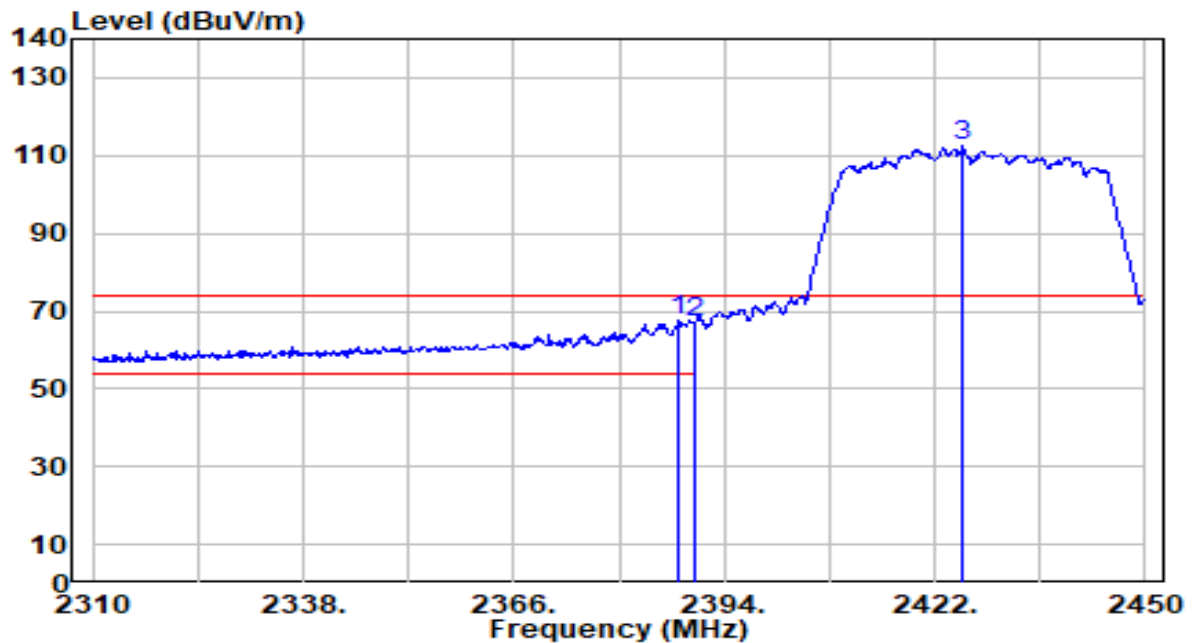


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.980	37.16	30.61	67.77	-6.23	74.00	245	10	Peak
2		2390.000	36.41	30.61	67.02	-6.98	74.00	245	10	Peak
3		2425.780	81.75	30.72	112.47	N/A	N/A	245	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 4_ANT 0+1	Test Voltage	AC 120V/60Hz

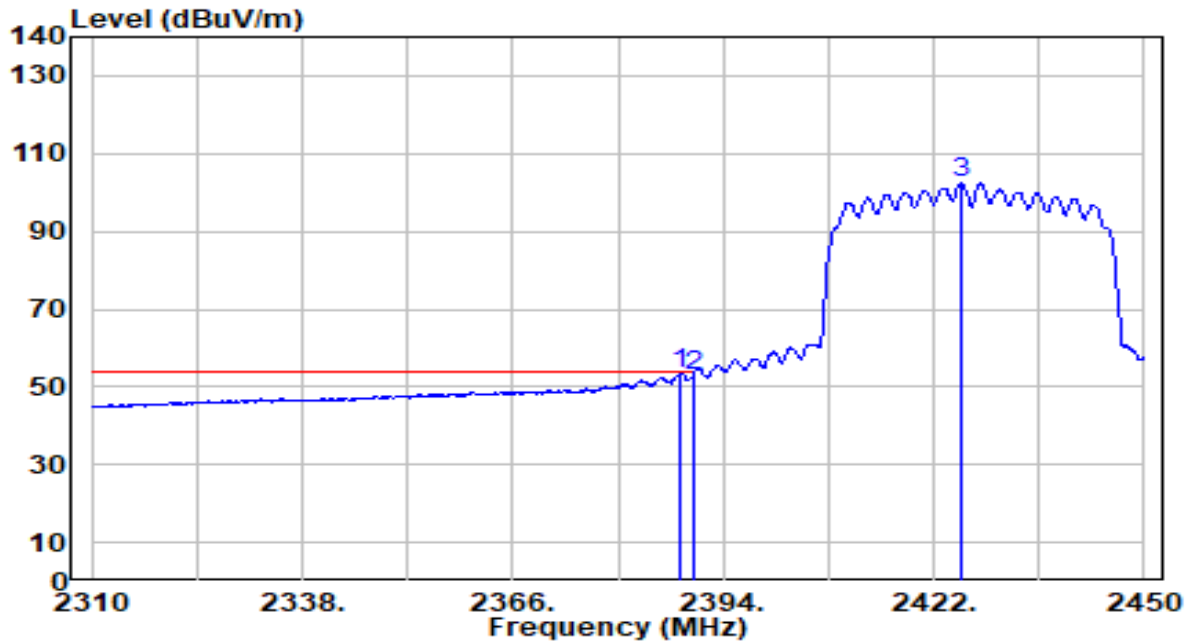


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.400	22.90	30.61	53.51	-0.49	54.00	245	10	Average
2		2390.000	22.46	30.61	53.07	-0.93	54.00	245	10	Average
3		2425.640	71.67	30.72	102.38	N/A	N/A	245	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

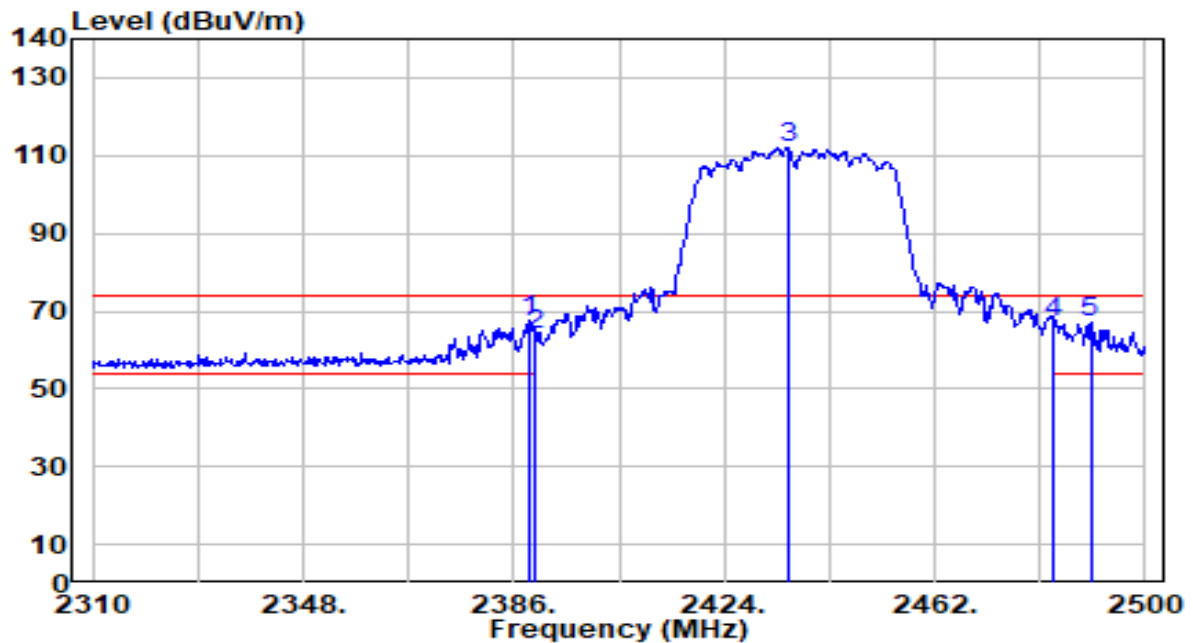


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	36.75	30.61	67.37	-6.63	74.00	365	170	Peak
2		2390.000	33.50	30.61	64.12	-9.88	74.00	365	170	Peak
3		2435.400	81.25	30.75	111.99	N/A	N/A	365	170	Peak
4		2483.500	36.05	30.91	66.96	-7.04	74.00	365	170	Peak
5		2490.120	36.28	30.94	67.22	-6.78	74.00	365	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

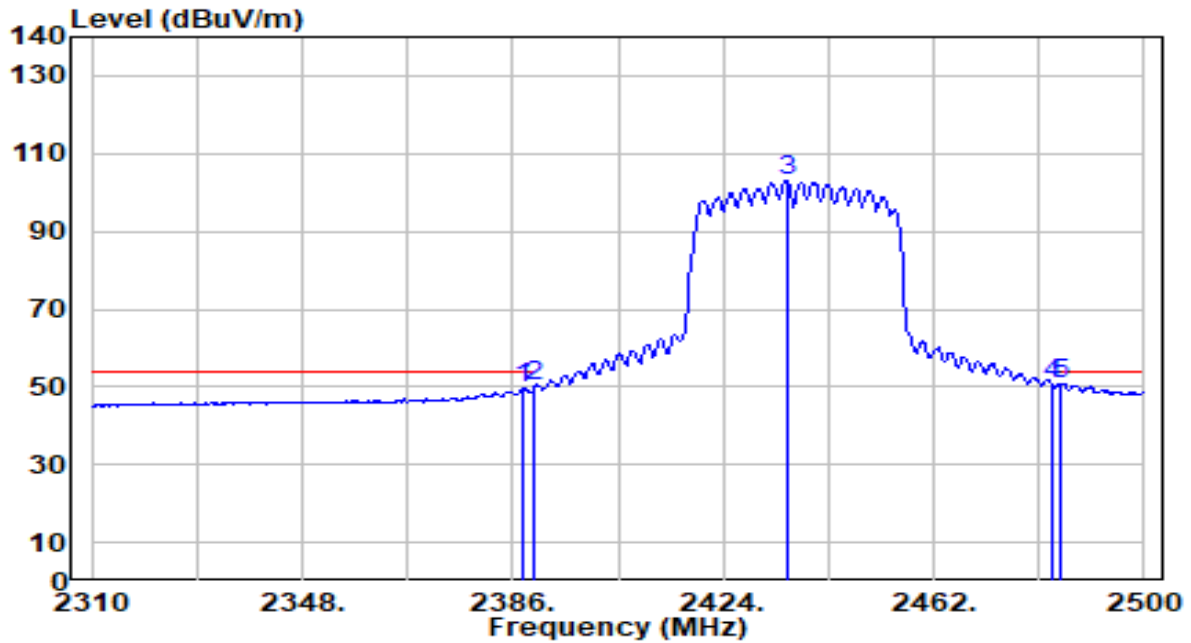


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	18.99	30.61	49.60	-4.40	54.00	365	170	Average
2	2390.000	19.49	30.61	50.10	-3.90	54.00	365	170	Average
3	2435.400	72.27	30.75	103.02	N/A	N/A	365	170	Average
4	2483.500	19.60	30.91	50.51	-3.49	54.00	365	170	Average
5	* 2484.800	20.03	30.92	50.95	-3.05	54.00	365	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

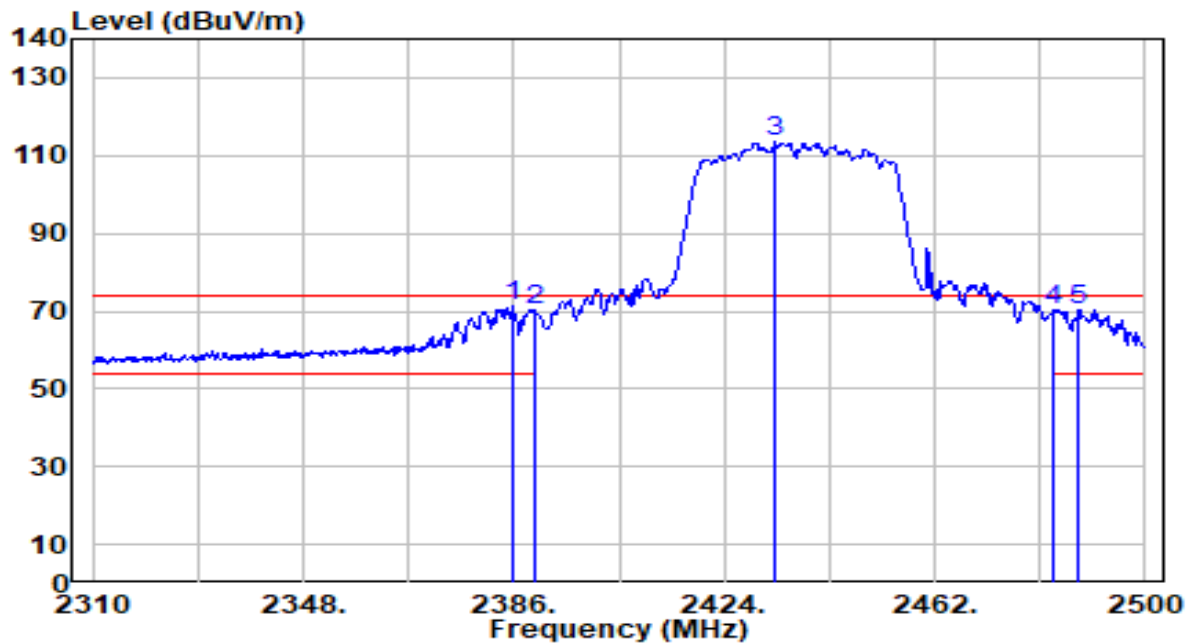


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.620	40.53	30.61	71.13	-2.87	74.00	295	5	Peak
2		2390.000	39.65	30.61	70.26	-3.74	74.00	295	5	Peak
3		2433.310	82.85	30.74	113.59	N/A	N/A	295	5	Peak
4		2483.500	39.40	30.91	70.31	-3.69	74.00	295	5	Peak
5		2488.030	39.41	30.93	70.33	-3.67	74.00	295	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

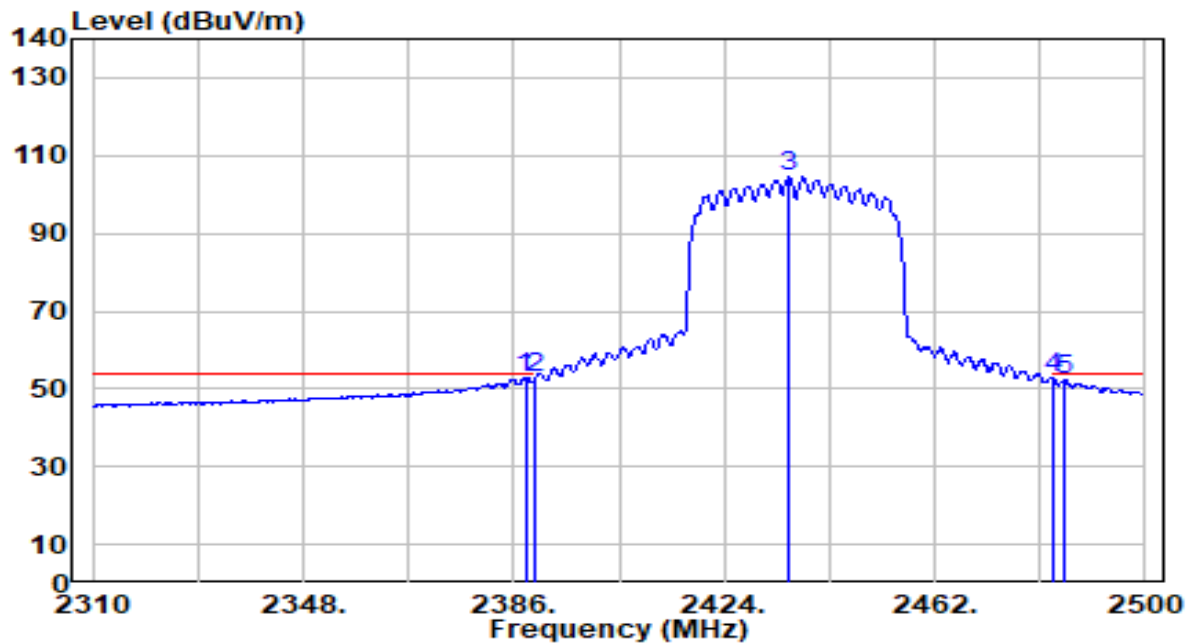


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.090	22.44	30.61	53.05	-0.95	54.00	295	5	Average
2		2390.000	22.41	30.61	53.03	-0.97	54.00	295	5	Average
3		2435.590	73.63	30.75	104.38	N/A	N/A	295	5	Average
4		2483.500	21.72	30.91	52.63	-1.37	54.00	295	5	Average
5		2485.370	21.50	30.92	52.42	-1.58	54.00	295	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

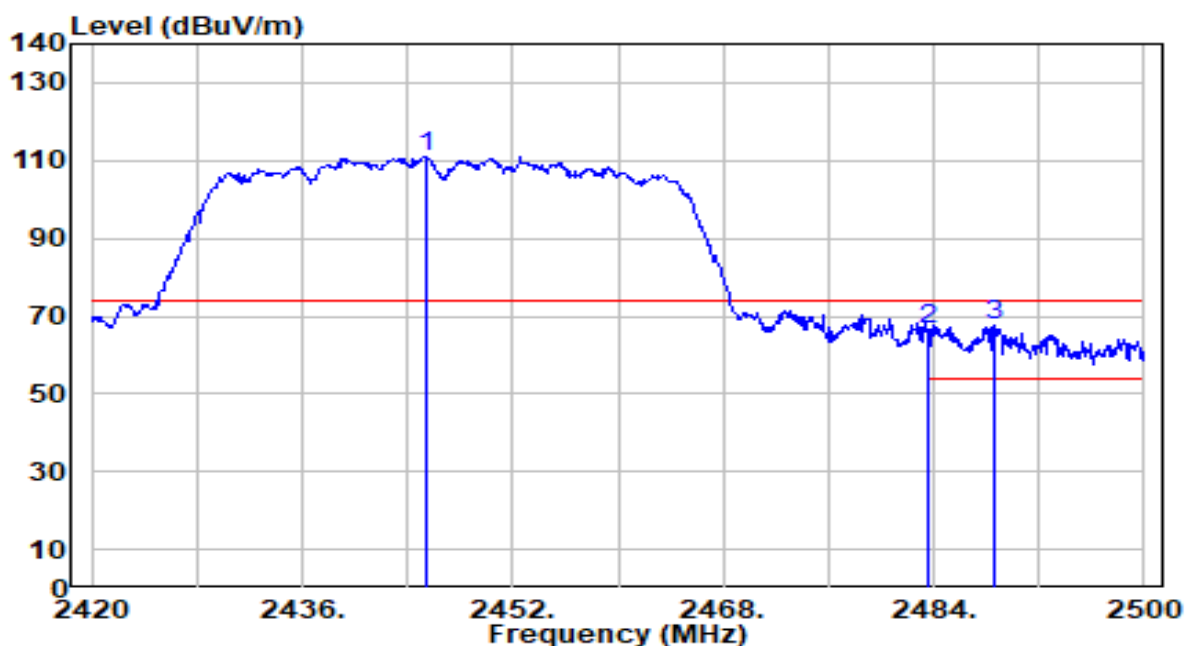


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.360	79.99	30.78	110.78	N/A	N/A	360	175	Peak
2	2483.500	35.85	30.91	66.77	-7.23	74.00	360	175	Peak
3	* 2488.640	36.53	30.93	67.46	-6.54	74.00	360	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

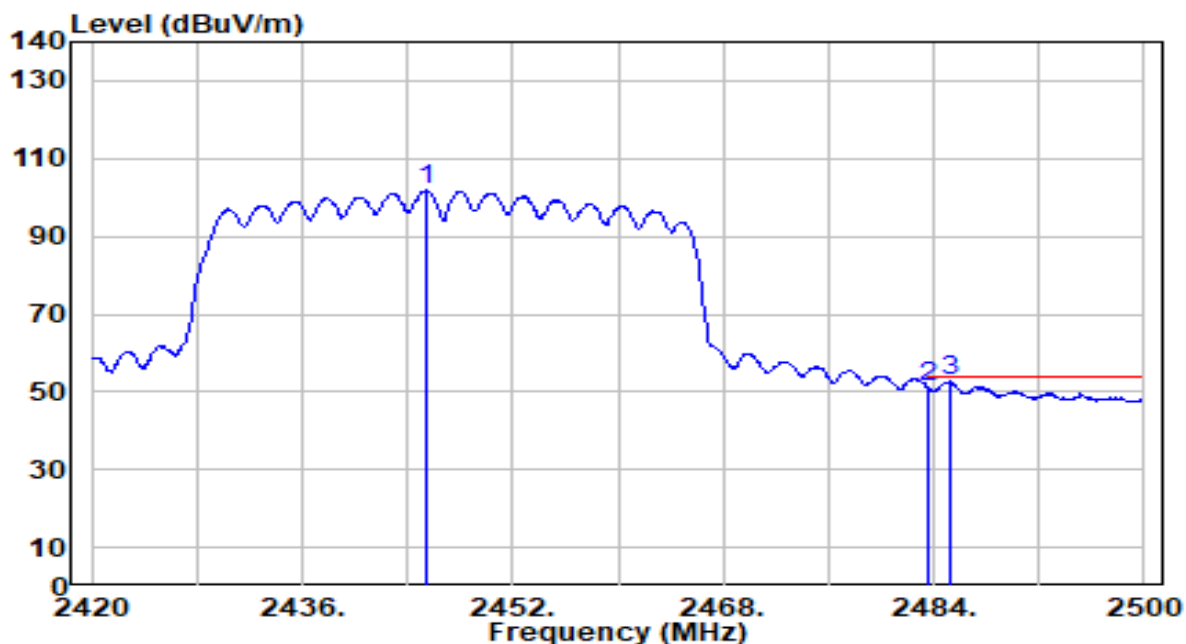


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.360	70.92	30.78	101.70	N/A	N/A	360	175	Average
2	2483.500	20.19	30.91	51.10	-2.90	54.00	360	175	Average
3	* 2485.200	21.96	30.92	52.88	-1.12	54.00	360	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

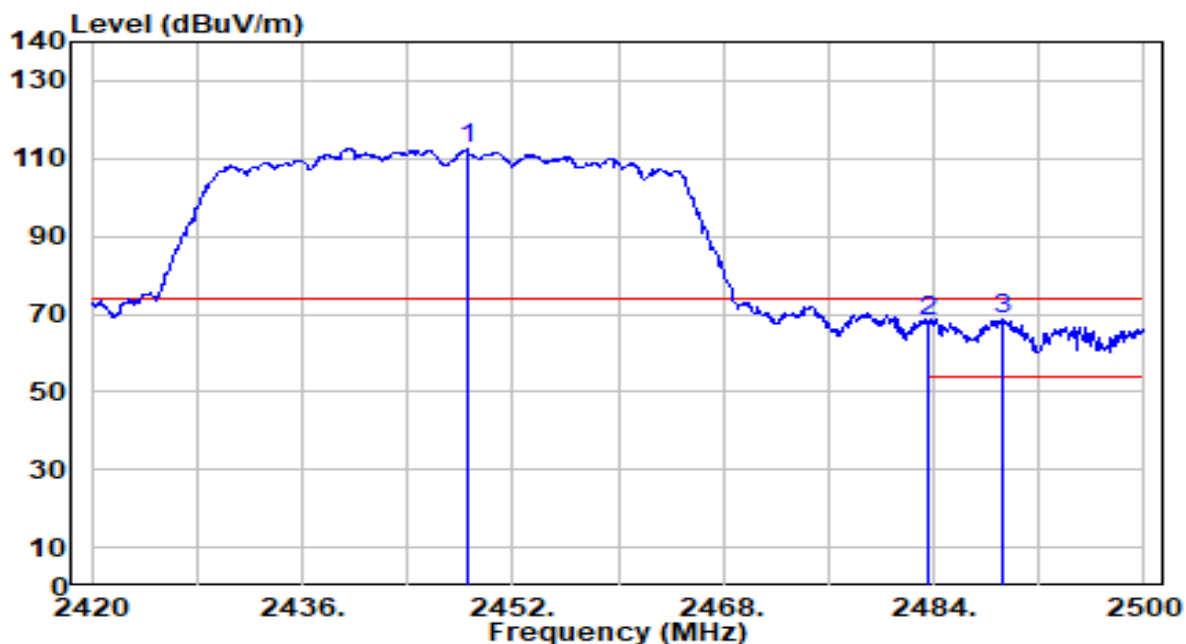


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.560	81.66	30.79	112.46	N/A	N/A	290	5	Peak
2	2483.500	37.03	30.91	67.95	-6.05	74.00	290	5	Peak
3	* 2489.280	37.90	30.93	68.83	-5.17	74.00	290	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

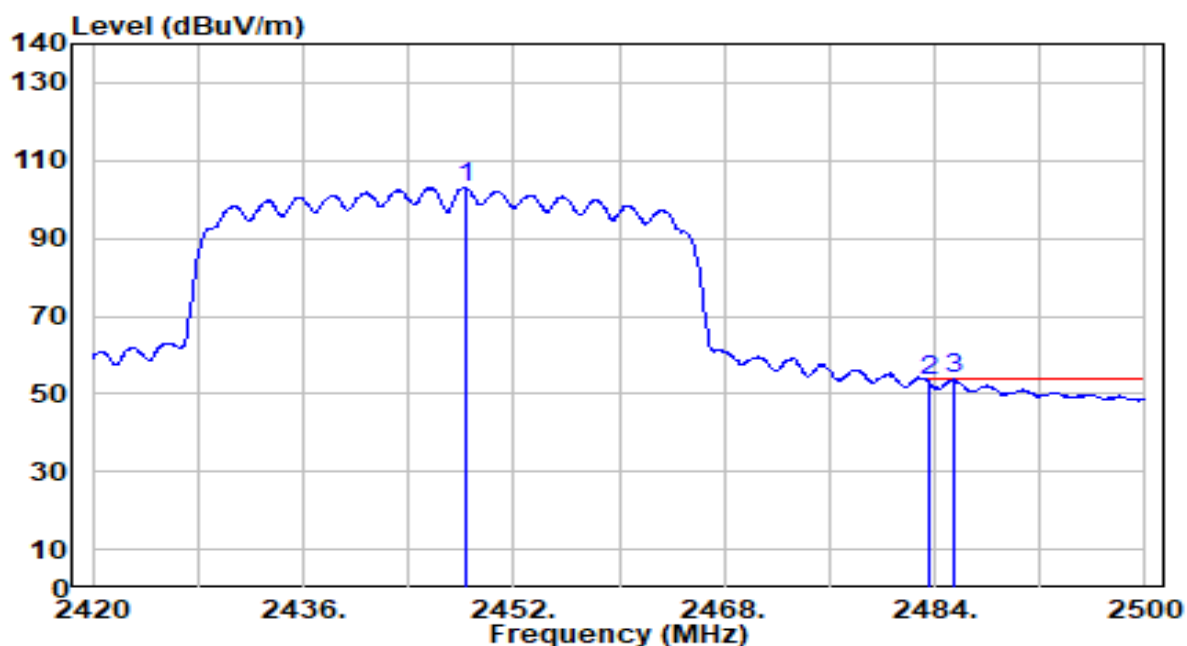


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.320	72.24	30.79	103.03	N/A	N/A	290	5	Average
2	2483.500	22.20	30.91	53.11	-0.89	54.00	290	5	Average
3	* 2485.440	22.73	30.92	53.65	-0.35	54.00	290	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

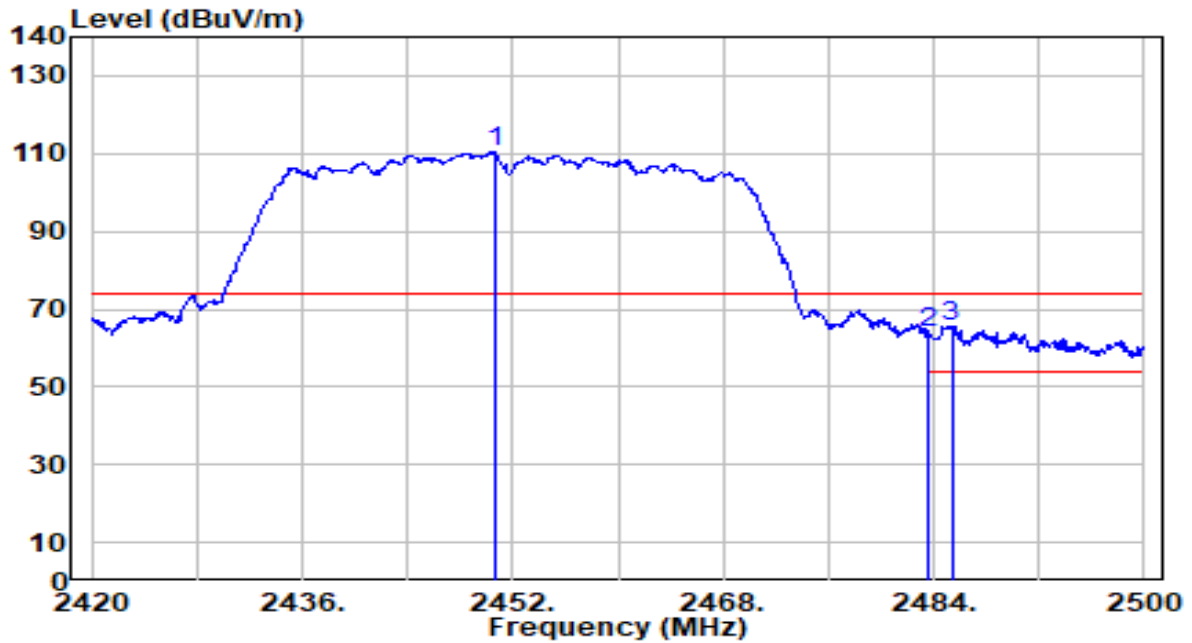


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.720	79.74	30.80	110.54	N/A	N/A	360	165	Peak
2	2483.500	33.09	30.91	64.01	-9.99	74.00	360	165	Peak
3	* 2485.360	34.82	30.92	65.74	-8.26	74.00	360	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

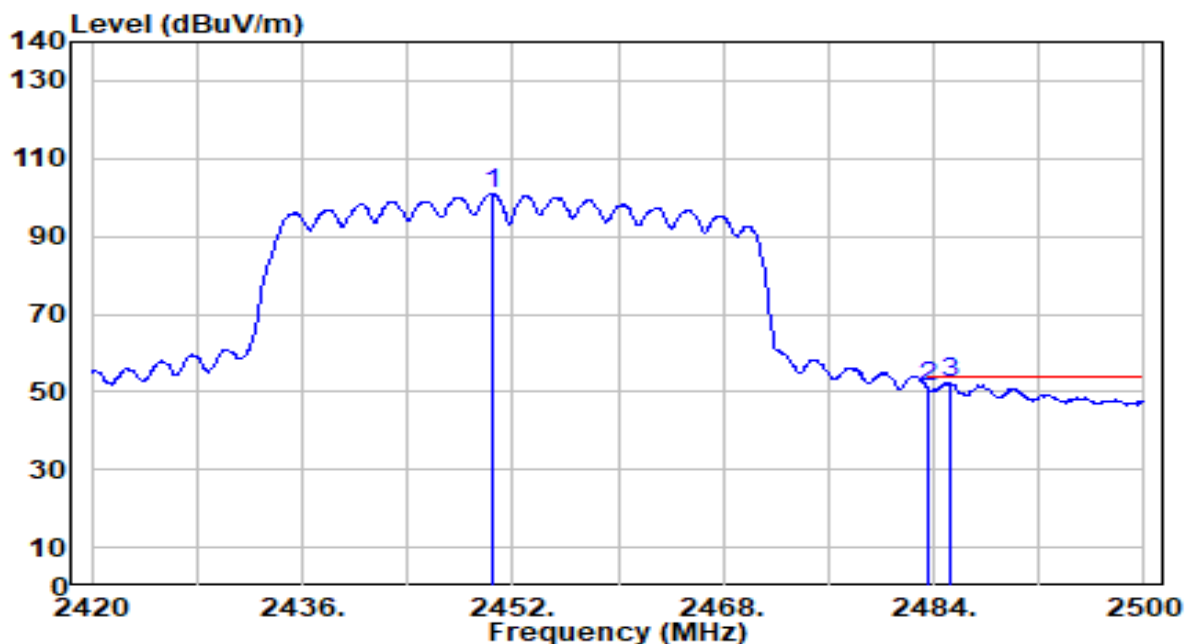


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.480	70.23	30.80	101.03	N/A	N/A	360	165	Average
2	2483.500	20.14	30.91	51.05	-2.95	54.00	360	165	Average
3	* 2485.200	21.33	30.92	52.25	-1.75	54.00	360	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

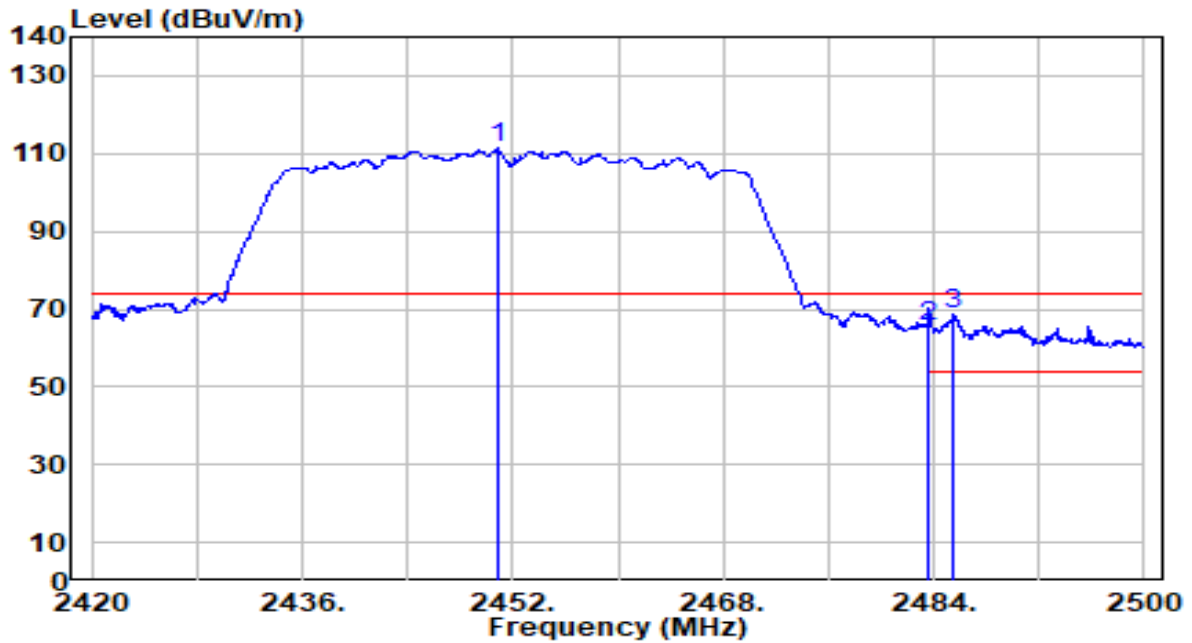


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.880	80.57	30.80	111.37	N/A	N/A	295	10	Peak
2	2483.500	34.68	30.91	65.60	-8.40	74.00	295	10	Peak
3	* 2485.440	37.78	30.92	68.70	-5.30	74.00	295	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Dual Band ONT	Date of Test	2022-11-21
Factor	DRH18-E	Temp. / Humidity	22°C /58%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

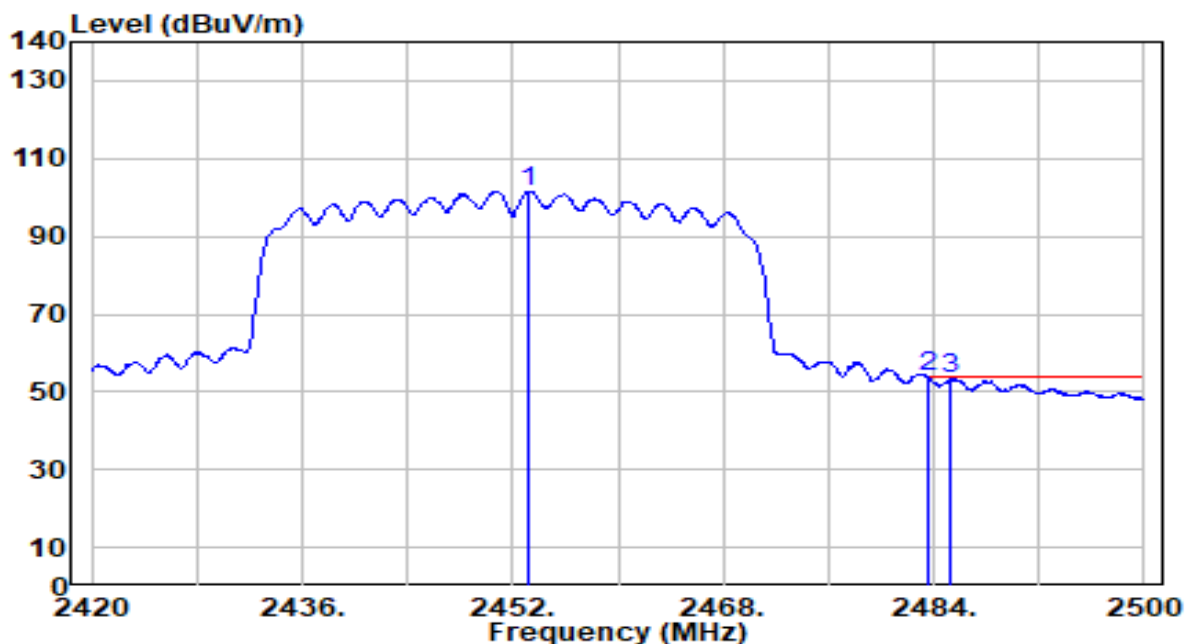

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.280	70.86	30.81	101.67	N/A	N/A	295	10	Average
2	*	2483.500	22.97	30.91	53.88	-0.12	54.00	295	10	Average
3		2485.280	22.24	30.92	53.16	-0.84	54.00	295	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

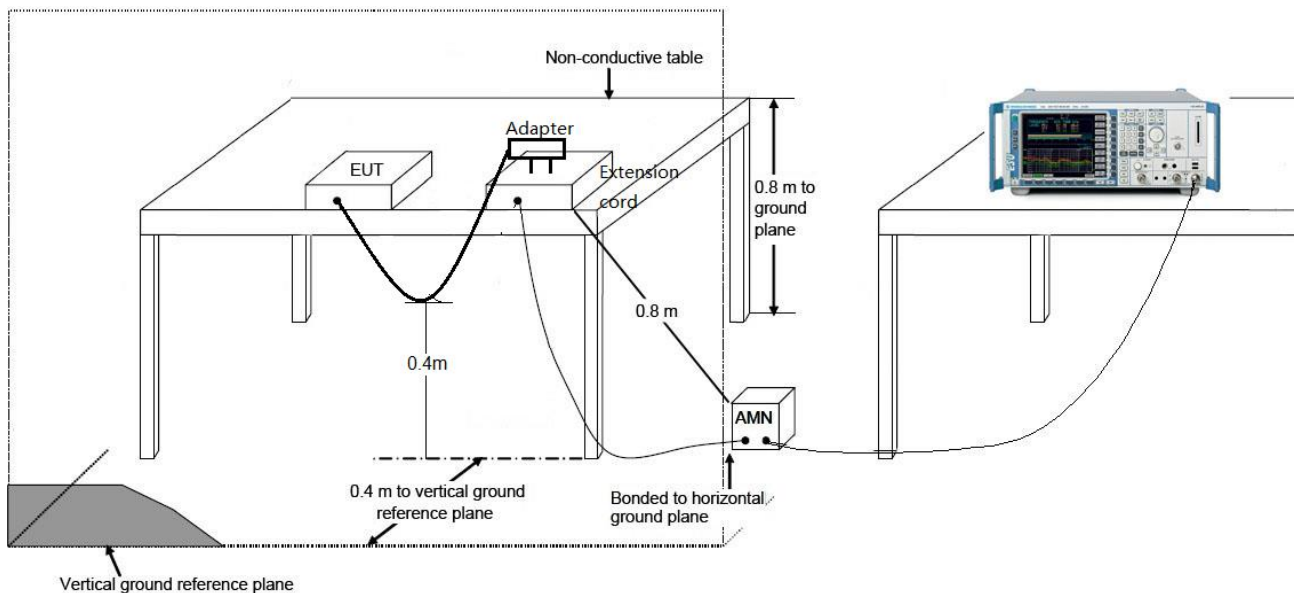

7.8.3.Test Result

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

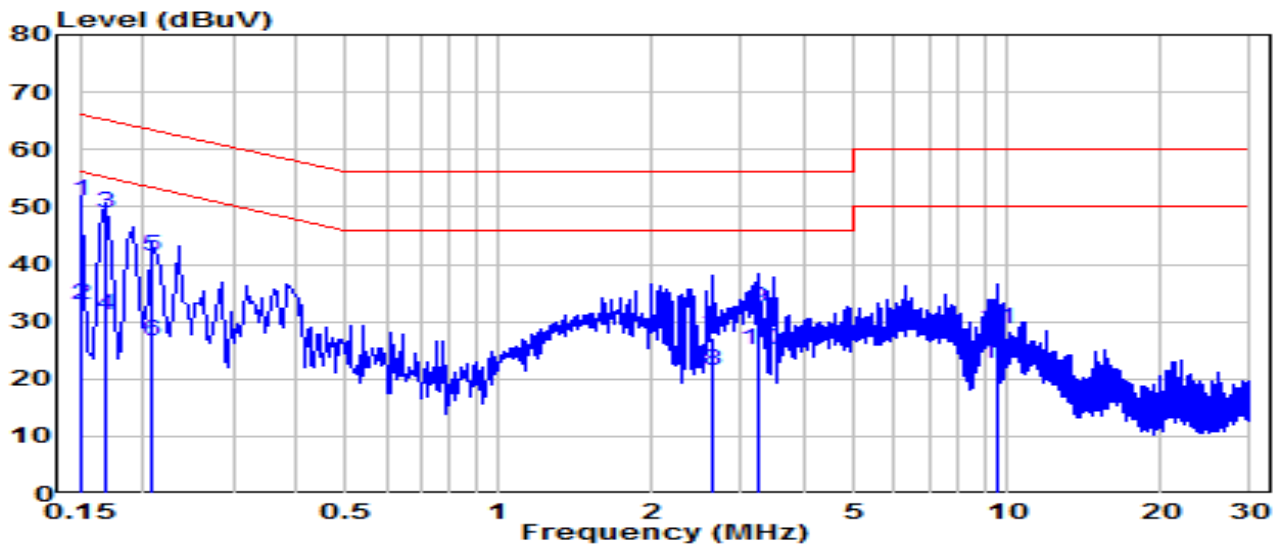


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.150	41.27	9.62	50.89	-15.11	66.00	QP
2	*	0.150	23.36	9.62	32.98	-23.02	56.00	Average
3		0.168	39.31	9.62	48.93	-16.13	65.06	QP
4		0.168	21.34	9.62	30.96	-24.10	55.06	Average
5		0.208	31.65	9.62	41.27	-21.99	63.27	QP
6		0.208	16.89	9.62	26.51	-26.75	53.27	Average
7		2.647	17.52	9.70	27.22	-28.78	56.00	QP
8		2.647	11.73	9.70	21.44	-24.56	46.00	Average
9		3.237	22.74	9.71	32.45	-23.55	56.00	QP
10		3.237	15.44	9.71	25.15	-20.85	46.00	Average
11		9.577	18.78	9.85	28.63	-31.37	60.00	QP
12		9.577	12.74	9.85	22.59	-27.41	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

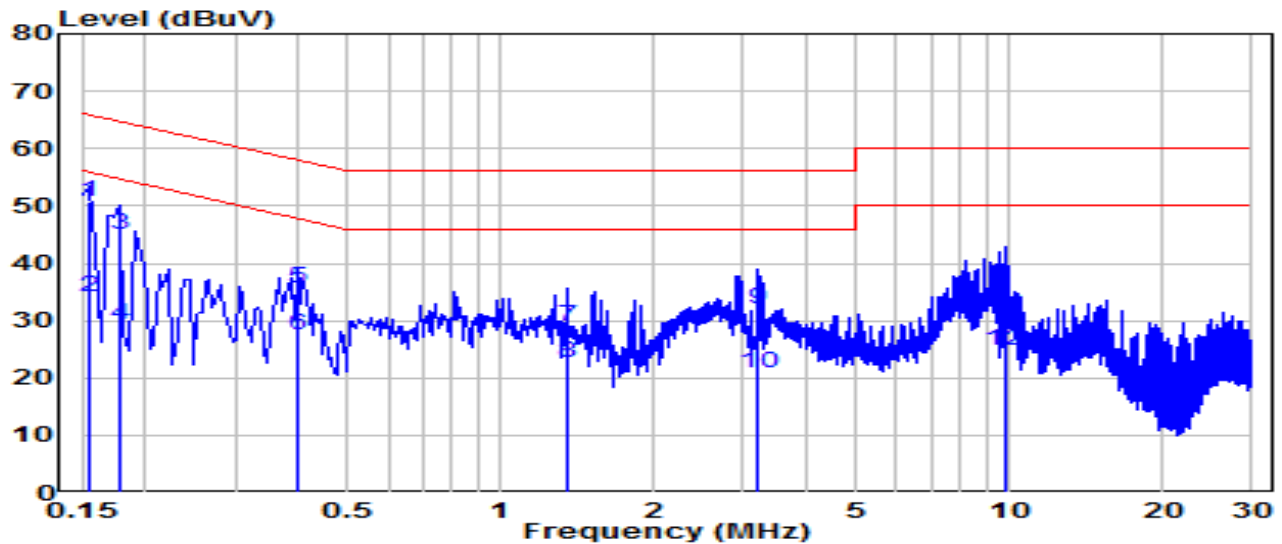


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.154	41.07	9.62	50.69	-15.06	65.75	QP
2	*	0.154	24.51	9.62	34.13	-21.63	55.75	Average
3		0.177	35.40	9.62	45.02	-19.60	64.63	QP
4		0.177	19.68	9.62	29.31	-25.32	54.63	Average
5		0.397	26.04	9.63	35.68	-22.23	57.91	QP
6		0.397	17.70	9.63	27.33	-20.57	47.91	Average
7		1.356	19.40	9.68	29.08	-26.92	56.00	QP
8		1.356	13.01	9.68	22.69	-23.31	46.00	Average
9		3.214	22.44	9.71	32.15	-23.85	56.00	QP
10		3.214	11.20	9.71	20.91	-25.09	46.00	Average
11		9.775	20.95	9.86	30.81	-29.19	60.00	QP
12		9.775	15.02	9.86	24.89	-25.11	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

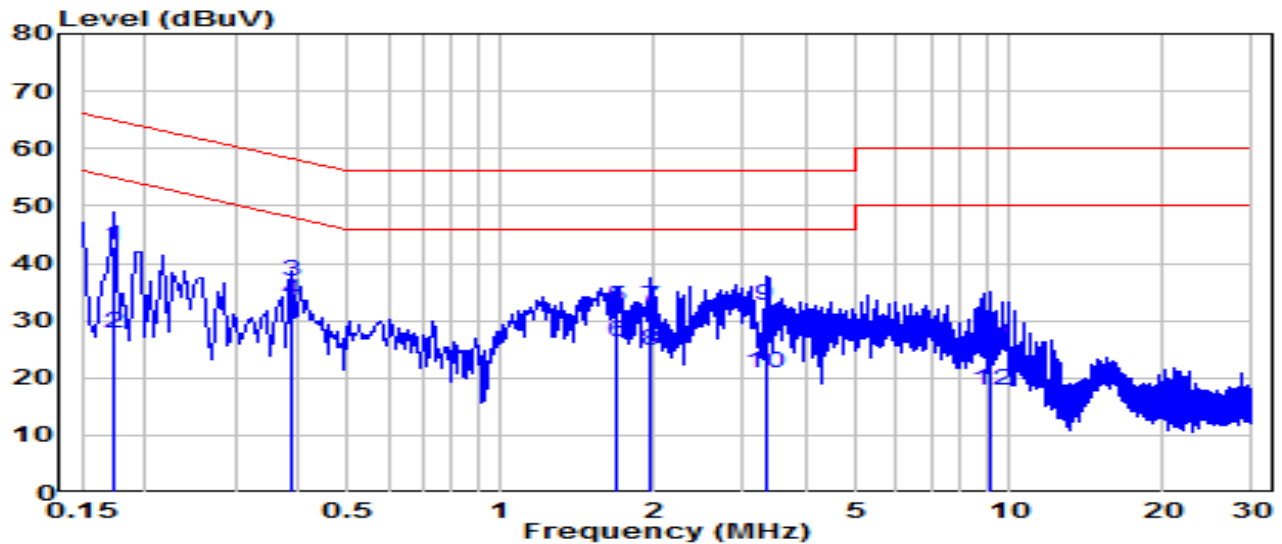


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	33.25	9.62	42.87	-21.97	64.84	QP
2	0.172	18.22	9.62	27.84	-27.00	54.84	Average
3	* 0.388	27.27	9.63	36.90	-21.19	58.10	QP
4	* 0.388	23.94	9.63	33.57	-14.52	48.10	Average
5	1.693	22.74	9.68	32.43	-23.57	56.00	QP
6	1.693	16.72	9.68	26.41	-19.59	46.00	Average
7	1.968	22.59	9.69	32.28	-23.72	56.00	QP
8	1.968	15.18	9.69	24.87	-21.13	46.00	Average
9	3.309	22.74	9.72	32.45	-23.55	56.00	QP
10	3.309	11.01	9.72	20.73	-25.27	46.00	Average
11	9.212	15.76	9.84	25.60	-34.40	60.00	QP
12	9.212	8.03	9.84	17.87	-32.13	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Dual Band ONT	Date of Test	2022-11-22
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.9°C /60%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 240V/60Hz

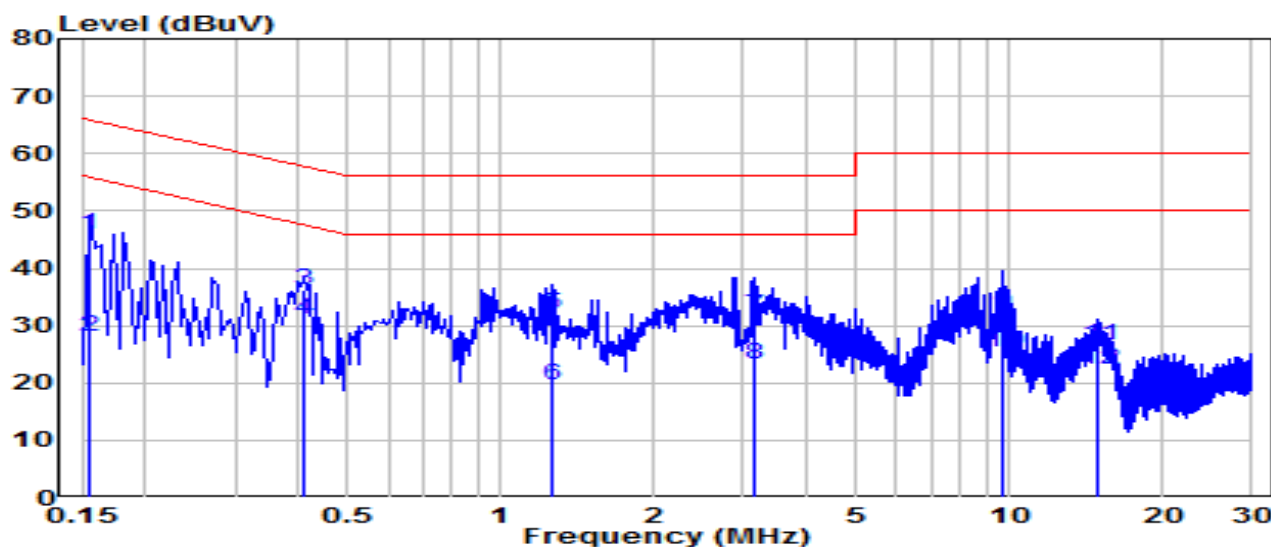

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.154	36.14	9.62	45.76	-19.99	65.75	QP
2	0.154	18.60	9.62	28.22	-27.53	55.75	Average
3	* 0.411	26.61	9.64	36.25	-21.38	57.63	QP
4	* 0.411	21.56	9.64	31.19	-16.44	47.63	Average
5	1.266	22.32	9.68	31.99	-24.01	56.00	QP
6	1.266	10.03	9.68	19.71	-26.29	46.00	Average
7	3.160	21.95	9.71	31.66	-24.34	56.00	QP
8	3.160	13.66	9.71	23.37	-22.63	46.00	Average
9	9.721	22.04	9.86	31.90	-28.10	60.00	QP
10	9.721	15.57	9.86	25.43	-24.57	50.00	Average
11	14.999	16.73	9.93	26.66	-33.34	60.00	QP
12	14.999	12.26	9.93	22.19	-27.81	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

The End