



## RF TEST REPORT

|                   |                   |
|-------------------|-------------------|
| <b>Applicant</b>  | LANDLOG Ltd.      |
| <b>FCC ID</b>     | 2AXNO-SCFD1US     |
| <b>Product</b>    | Tracker           |
| <b>Brand</b>      | LANDLOG           |
| <b>Model</b>      | SCFD-1US          |
| <b>Report No.</b> | R2008A0578-R1V1   |
| <b>Issue Date</b> | December 21, 2020 |

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Prepared by: Peng Tao*

*Approved by: Kai Xu*

### TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

|   |    |
|---|----|
| 1. Test Laboratory .....                                | 5  |
| 1.1. Notes of the Test Report .....                     | 5  |
| 1.2. Test facility .....                                | 5  |
| 1.3. Testing Location .....                             | 5  |
| 2. General Description of Equipment under Test .....    | 6  |
| 2.3. Applicant and Manufacturer Information .....       | 6  |
| 2.4. General Information .....                          | 6  |
| 3. Applied Standards .....                              | 7  |
| 4. Test Configuration .....                             | 8  |
| 5. Test Case Results .....                              | 9  |
| 5.1. RF Power Output and Effective Radiated Power ..... | 9  |
| 5.2. Occupied Bandwidth .....                           | 11 |
| 5.3. Radiates Spurious Emission .....                   | 13 |
| 6. Main Test Instruments .....                          | 17 |



| Version  | Revision description   | Issue Date         |
|--|--|--------------------|
| Rev.0  | /  | September 25, 2020 |
| Rev.1  | Add RF Power Output and Effective Radiated Power and Occupied Bandwidth items. | December 21, 2020  |
| Note This revised report (Report No. R2008A0578-R1V1) supersedes and replaces the previously issued report (Report No. R2008A0578-R1). Please discard or destroy the previously issued report and dispose of it accordingly. |  |                    |



### Summary of measurement results

| No.   | Test Case                                    | Clause in FCC rules    | Verdict |
|---|--|------------------------|---------|
| 1   | RF Power Output and Effective Radiated Power | 2.1046<br>22.913(a)(5) | PASS    |
| 2   | Occupied Bandwidth                           | 2.1049                 | PASS    |
| 3   | Radiates Spurious Emission                   | 2.1053 / 22.917 (a)    | PASS    |
| Date of Testing: August 26, 2020 ~September 17, 2020 and November 25, 2020 ~ December 7, 2020   |  |                        |         |
| Date of Sample Receiving: August 25, 2020   |  |                        |         |
| <p>Note: PASS: The EUT complies with the essential requirements in the standard.</p> <p>FAIL: The EUT does not comply with the essential requirements in the standard.</p> <p>All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p> |  |                        |         |

**There is only tested RF Power Output and Effective Radiated Power, Occupied Bandwidth and Radiates Spurious Emission in this report, other test items please refer to the module report (Report No.: |16D00113-RFA)**



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.3. Applicant and Manufacturer Information

|                      |  |
|----------------------|--|
| Applicant            | LANDLOG Ltd.   |
| Applicant address    | 12F Sumitomofudosan Shibadaimon 2chome Building,2-11-8 Shibadaimon, Minato-ku,Tokyo 105-0012 Japan |
| Manufacturer         | LANDLOG Ltd.   |
| Manufacturer address | 12F Sumitomofudosan Shibadaimon 2chome Building,2-11-8 Shibadaimon, Minato-ku,Tokyo 105-0012 Japan |

### 2.4. General Information

| EUT Description  |                           |                |           |
|--|---------------------------|----------------|-----------|
| Model  | SCFD-1US                  |                |           |
| IMEI   | 861475030939526           |                |           |
| Hardware Version   | Ver 1.0                   |                |           |
| Software Version   | 01000                     |                |           |
| Power Supply   | External Power Supply     |                |           |
| Antenna Type   | PIFA Antenna              |                |           |
| Antenna Gain   | -0.76dBi                  |                |           |
| Test Mode(s)   | WCDMA Band V;             |                |           |
| Test Modulation  | (WCDMA) BPSK, QPSK,16QAM; |                |           |
| HSDPA UE Category  | 24                        |                |           |
| HSUPA UE Category  | 7                         |                |           |
| DC-HSDPA UE Category   | 24                        |                |           |
| HSPA+ UE Category  | 7                         |                |           |
| Maximum E.R.P.   | WCDMA Band V:             | 21.50 dBm      |           |
| Rated Power Supply Voltage   | 5V                        |                |           |
| Extreme Voltage  | Minimum: 4.25V            | Maximum:5.75V  |           |
| Extreme Temperature  | Lowest:-30°C              | Highest: +50°C |           |
| Operating Voltage  | Minimum: 4.8V             | Maximum:5.5V   |           |
| Operating Temperature  | Lowest:-10°C              | Highest: +60°C |           |
| Operating Frequency Range(s)   | Band                      | Tx (MHz)       | Rx (MHz)  |
|  | WCDMA Band V              | 824 ~ 849      | 869 ~ 894 |
| Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. |                           |                |           |



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 22H (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in WCDMA is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

| Test items                                   | Modes/Modulation                     |
|--|--------------------------------------|
|  | WCDMA Band V                         |
| RF Power Output and Effective Radiated power | RMC<br>HSDPA/HSUPA<br>DC-HSDPA/HSPA+ |
| Occupied Bandwidth                           | RMC                                  |
| Radiates Spurious Emission                   | RMC                                  |



## 5. Test Case Results

### 5.1. RF Power Output and Effective Radiated Power

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$

where:dBd refers to gain relative to an ideal dipole.

$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$ .

#### Test Setup

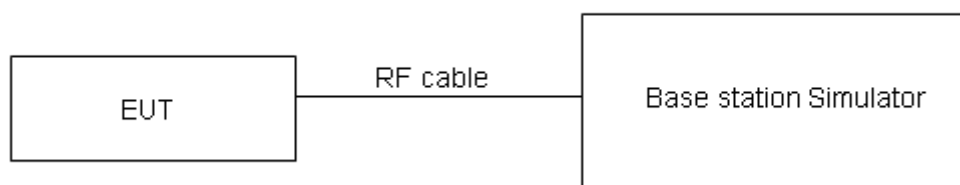

#### Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

| Limit | $\leq 7 \text{ W}$ (38.45 dBm) |
|-------|--------------------------------|
|-------|--------------------------------|

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4 \text{ dB}$  for RF power output,  $k = 2$ ,  $U = 1.19 \text{ dB}$  for ERP.

## Test Results

| WCDMA Band V |              | Maximum Output Power (dBm) |              |              | ERP (dBm)    |              |              |
|--------------|--------------|----------------------------|--------------|--------------|--------------|--------------|--------------|
|              |              | Channel 4132               | Channel 4183 | Channel 4233 | Channel 4132 | Channel 4183 | Channel 4233 |
|              |              | 826.4 (MHz)                | 836.6 (MHz)  | 846.6 (MHz)  | 826.4 (MHz)  | 836.6 (MHz)  | 846.6 (MHz)  |
| RMC          |              | 24.37                      | 24.41        | 24.39        | 21.46        | 21.50        | 21.48        |
| HSDPA        | Sub - Test 1 | 23.83                      | 23.83        | 23.83        | 20.92        | 20.92        | 20.92        |
|              | Sub - Test 2 | 23.82                      | 23.85        | 23.80        | 20.91        | 20.94        | 20.89        |
|              | Sub - Test 3 | 23.29                      | 23.35        | 23.32        | 20.38        | 20.44        | 20.41        |
|              | Sub - Test 4 | 23.30                      | 23.36        | 23.30        | 20.39        | 20.45        | 20.39        |
| HSUPA        | Sub - Test 1 | 23.79                      | 23.82        | 23.78        | 20.88        | 20.91        | 20.87        |
|              | Sub - Test 2 | 22.78                      | 22.80        | 22.77        | 19.87        | 19.89        | 19.86        |
|              | Sub - Test 3 | 23.25                      | 23.28        | 23.26        | 20.34        | 20.37        | 20.35        |
|              | Sub - Test 4 | 22.71                      | 22.77        | 22.74        | 19.80        | 19.86        | 19.83        |
|              | Sub - Test 5 | 23.72                      | 23.75        | 23.72        | 20.81        | 20.84        | 20.81        |
| DC-HSDPA     | Sub - Test 1 | 23.71                      | 23.77        | 23.73        | 20.80        | 20.86        | 20.82        |
|              | Sub - Test 2 | 23.70                      | 23.76        | 23.72        | 20.79        | 20.85        | 20.81        |
|              | Sub - Test 3 | 23.28                      | 23.25        | 23.23        | 20.37        | 20.34        | 20.32        |
|              | Sub - Test 4 | 23.27                      | 23.24        | 23.22        | 20.36        | 20.33        | 20.31        |
| HSPA+        | 16QAM        | 23.26                      | 23.32        | 23.29        | 20.35        | 20.41        | 20.38        |

## 5.2. Occupied Bandwidth

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |


### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

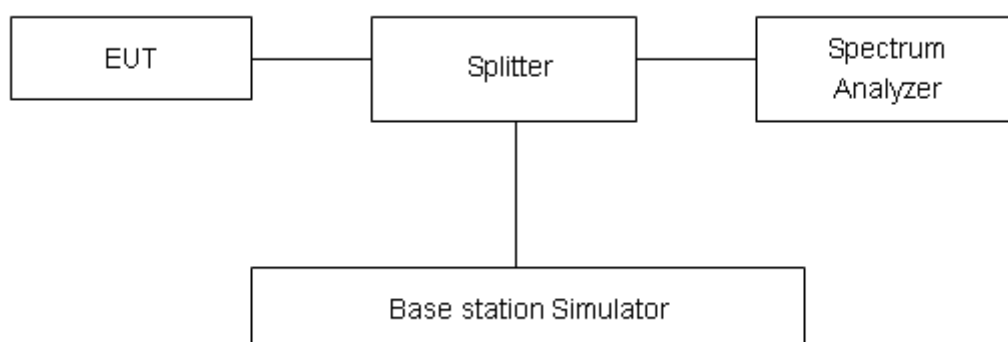

### Limits

No specific occupied bandwidth requirements in part 2.1049.

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .




## Test Result

| Mode                     | Channel | Frequency (MHz) | 99% Power Bandwidth (MHz) | -26dBc Bandwidth(MHz) |
|--------------------------|---------|-----------------|---------------------------|-----------------------|
| WCDMA<br>Band V<br>(RMC) | 4132    | 826.4           | 4.1293                    | 4.683                 |
|                          | 4183    | 836.6           | 4.1299                    | 4.708                 |
|                          | 4233    | 846.6           | 4.1247                    | 4.700                 |

WCDMA Band V CH-Low

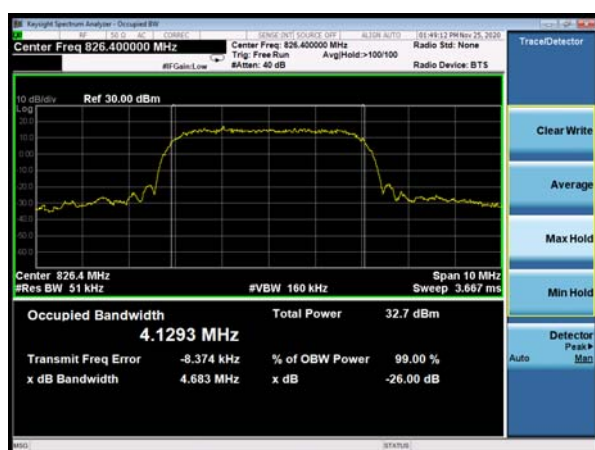

WCDMA Band V CH-Middle

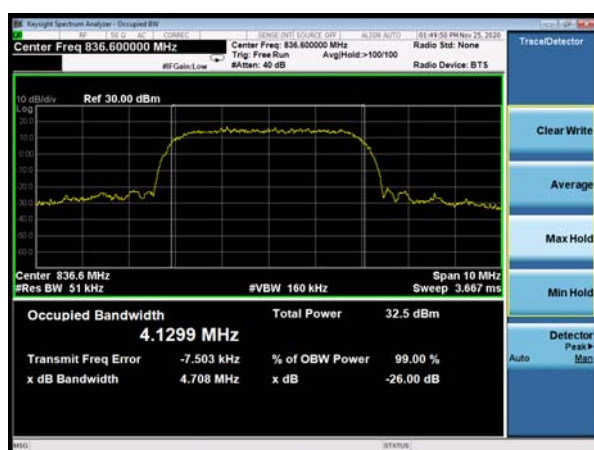

WCDMA Band V CH-High



### 5.3. Radiates Spurious Emission

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz-150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:  
$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$
  
The measurement results are amend as described below:  
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

## Test setup


### 9KHz ~ 30MHz

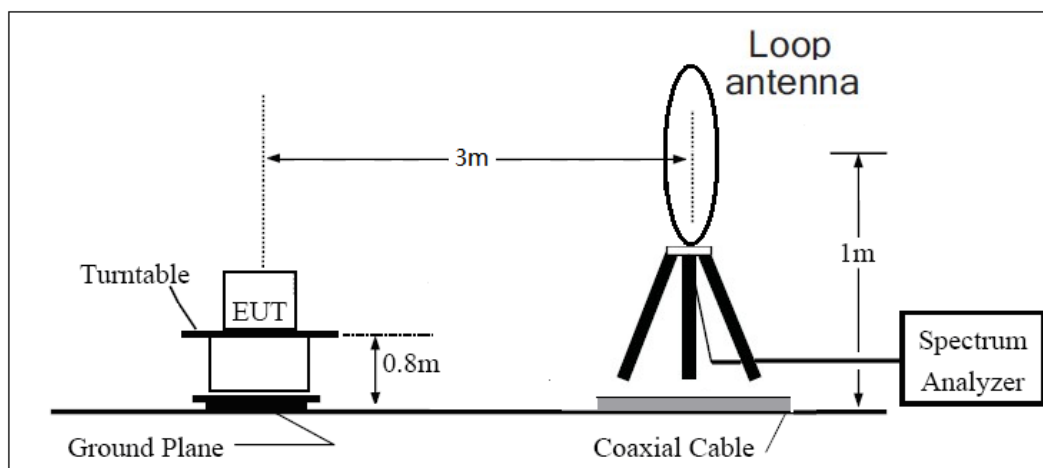

### 30MHz ~ 1GHz

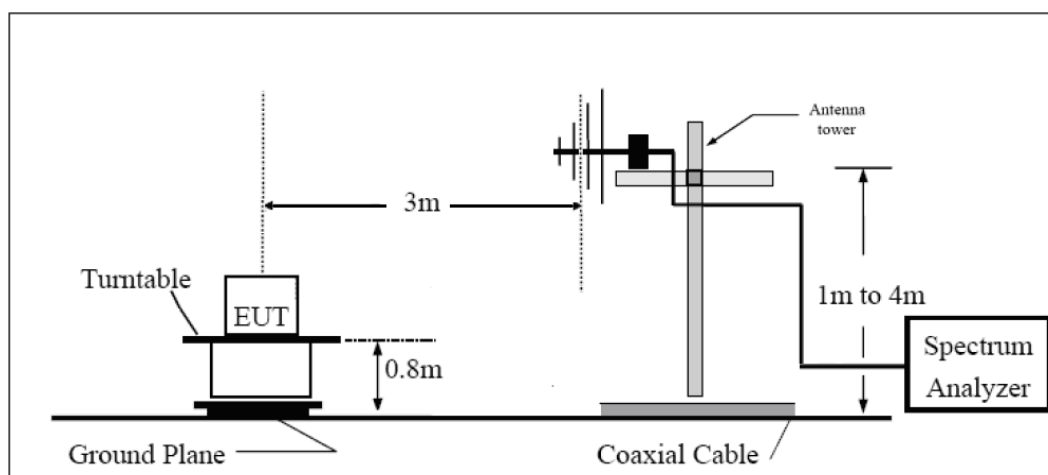

### Above 1GHz

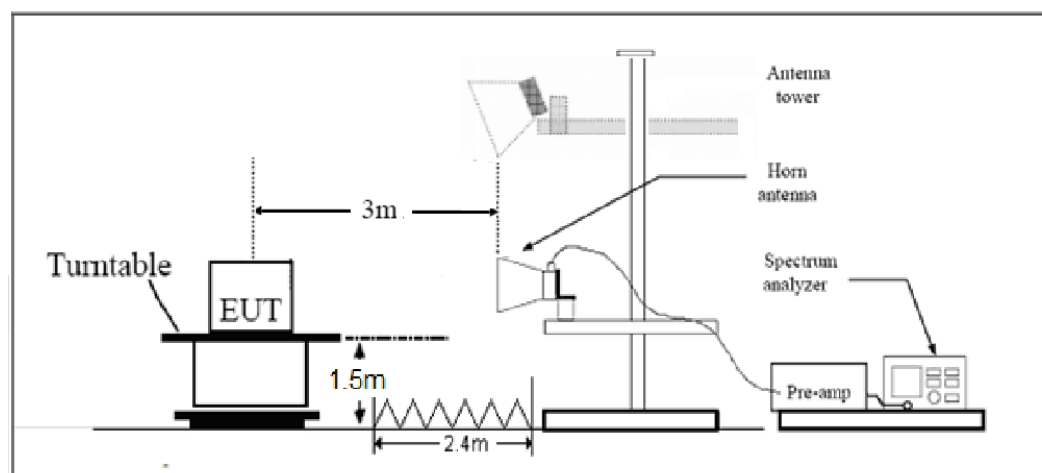



Note: Area side:2.4mX3.6m

### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.”

|       |         |
|-------|---------|
| Limit | -13 dBm |
|-------|---------|

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.



## Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

WCDMA Band V CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | ERP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|-----------------|-------------|-------------|---------------|
| 2        | 1673.2          | -60.33   | 2.00            | 10.75      | Horizontal           | -53.73          | -13.00      | 40.73       | 315           |
| 3        | 2506.9          | -24.45   | 2.51            | 11.05      | Horizontal           | -18.06          | -13.00      | 5.06        | 270           |
| 4        | 3348.8          | -54.05   | 4.20            | 11.15      | Horizontal           | -49.25          | -13.00      | 36.25       | 90            |
| 5        | 4183.0          | -54.88   | 5.20            | 11.15      | Horizontal           | -51.08          | -13.00      | 38.08       | 315           |
| 6        | 5019.6          | -53.93   | 5.50            | 11.95      | Horizontal           | -49.63          | -13.00      | 36.63       | 45            |
| 7        | 5856.2          | -54.85   | 5.70            | 13.55      | Horizontal           | -49.15          | -13.00      | 36.15       | 180           |
| 8        | 6692.8          | -56.34   | 6.30            | 13.75      | Horizontal           | -51.04          | -13.00      | 38.04       | 135           |
| 9        | 7529.4          | -53.43   | 6.80            | 13.85      | Horizontal           | -48.53          | -13.00      | 35.53       | 90            |
| 10       | 8366.0          | -53.82   | 6.90            | 14.25      | Horizontal           | -48.62          | -13.00      | 35.62       | 315           |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



## 6. Main Test Instruments

| Name                                 | Manufacturer | Type         | Serial Number | Calibration Date | Expiration Date |
|--------------------------------------|--------------|--------------|---------------|------------------|-----------------|
| Base Station Simulator               | R&S          | CMW500       | 113824        | 2020-05-18       | 2021-05-17      |
| Power Splitter                       | Hua Xiang    | SHX-GF2-2-13 | 10120101      | /                | /               |
| Spectrum Analyzer                    | Key sight    | N9010A       | MY50210259    | 2020-05-18       | 2021-05-17      |
| Universal Radio Communication Tester | Key sight    | E5515C       | MY48367192    | 2020-05-27       | 2021-05-26      |
| Signal Analyzer                      | R&S          | FSV30        | 100815        | 2019-12-15       | 2020-12-14      |
| Loop Antenna                         | SCHWARZBECK  | FMZB1519     | 1519-047      | 2020-04-02       | 2023-04-01      |
| Trilog Antenna                       | SCHWARZBECK  | VUBL 9163    | 391           | 2019-12-16       | 2021-12-15      |
| Horn Antenna                         | R&S          | HF907        | 102723        | 2018-08-11       | 2021-08-10      |
| Horn Antenna                         | ETS-Lindgren | 3160-09      | 00102643      | 2018-06-20       | 2021-06-19      |
| Signal generator                     | R&S          | SMB 100A     | 102594        | 2020-05-18       | 2021-05-17      |
| Climatic Chamber                     | ESPEC        | SU-242       | 93000506      | 2017-12-17       | 2020-12-16      |
| Preamplifier                         | R&S          | SCU18        | 102327        | 2020-05-18       | 2021-05-17      |
| MOB COMMS DC SUPPLY                  | Keysight     | 66319D       | MY43004105    | 2020-05-18       | 2021-05-17      |
| RF Cable                             | Agilent      | SMA 15cm     | 0001          | 2020-06-12       | 2020-12-11      |
| Software                             | R&S          | EMC32        | 9.26.0        | /                | /               |

\*\*\*\*\*END OF REPORT\*\*\*\*\*