



Appendix B

RF Test Data for BT LE (Conducted Measurement)

Product Name: Laptop

Test Model: HPPLP10

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.1 -6dB Bandwidth

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant0	2402	0.636	2401.676	2402.312	0.5	PASS
		2440	0.636	2439.672	2440.308	0.5	PASS
		2480	0.644	2479.668	2480.312	0.5	PASS
BLE_2M	Ant0	2402	1.124	2401.444	2402.568	0.5	PASS
		2440	1.128	2439.436	2440.564	0.5	PASS
		2480	1.132	2479.436	2480.568	0.5	PASS




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

BLE_1M_Ant0_2402

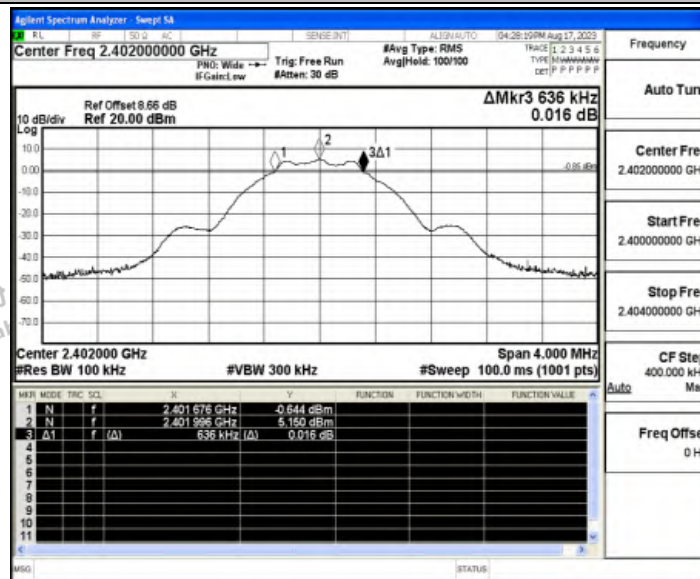


BLE_1M_Ant0_2440

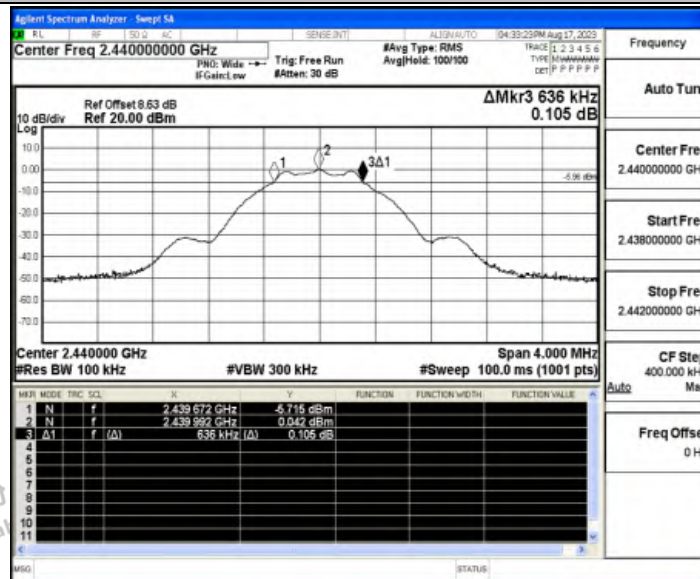


BLE_1M_Ant0_2480



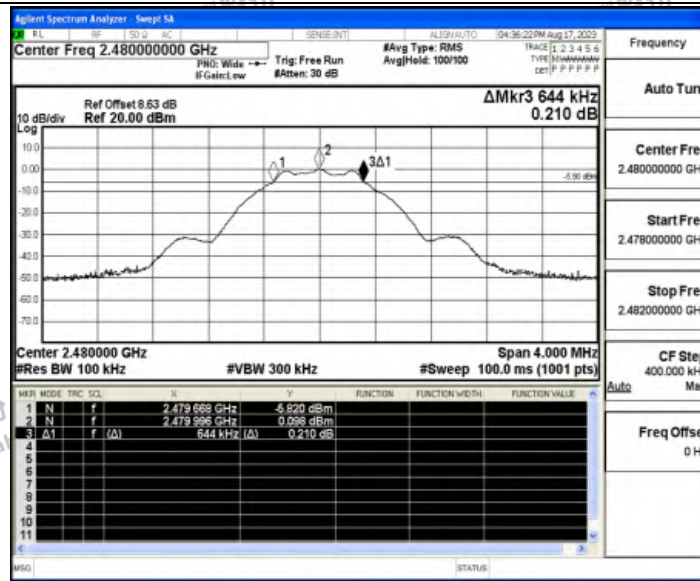


BLE_2M_Ant0_2402

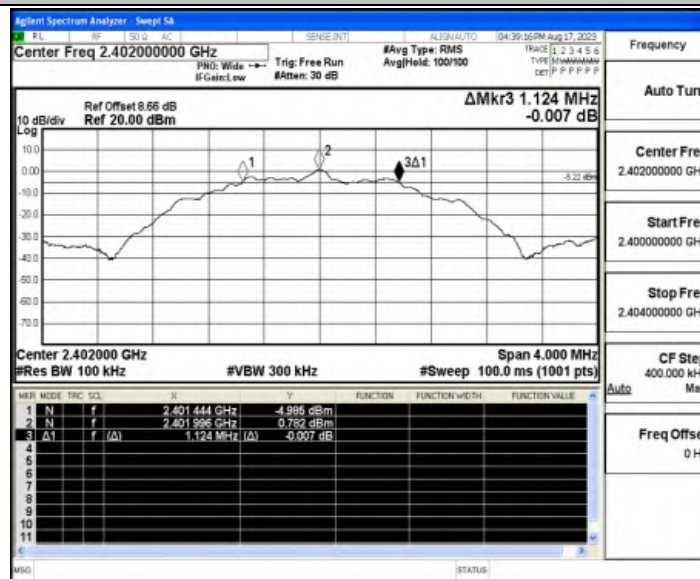


BLE_2M_Ant0_2440



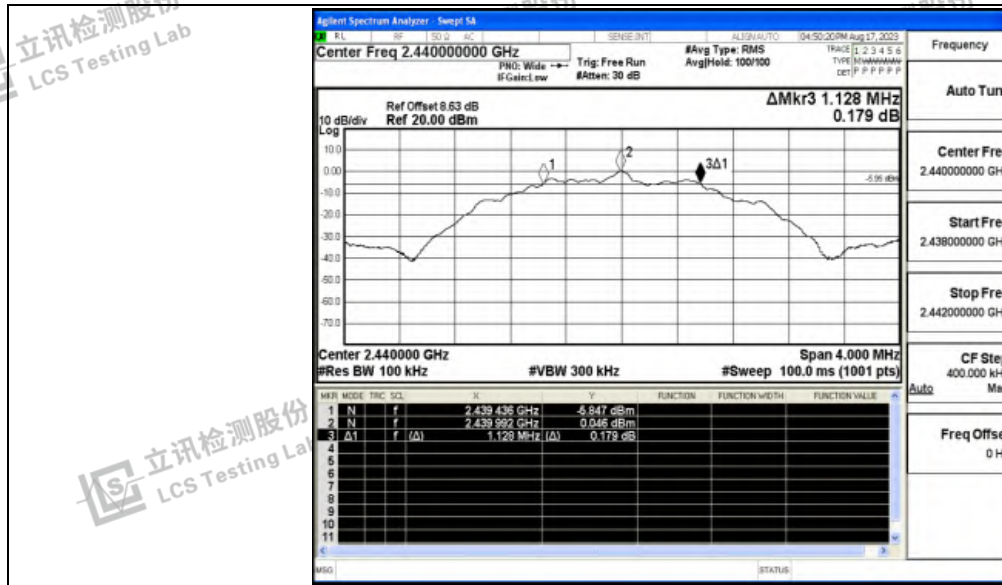

BLE_2M_Ant0_2480

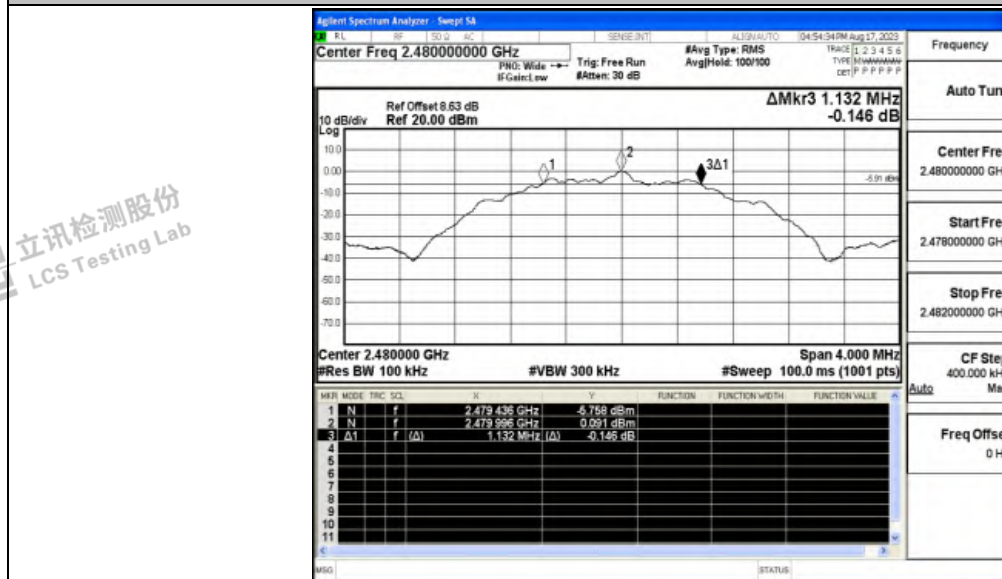




B.2 Maximum Conducted Output Power

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant0	2402	0.95	≤30	PASS
		2440	0.19	≤30	PASS
		2480	0.26	≤30	PASS
BLE_2M	Ant0	2402	0.99	≤30	PASS
		2440	0.25	≤30	PASS
		2480	0.27	≤30	PASS






BLE_1M_Ant0_2402

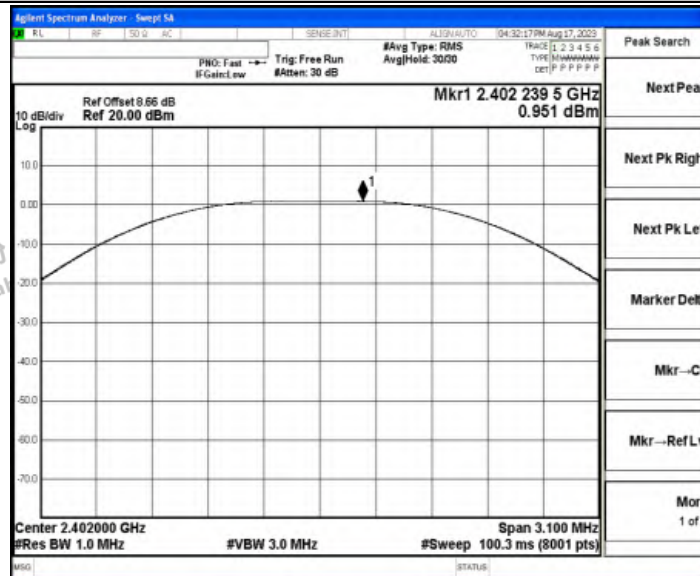


BLE_1M_Ant0_2440

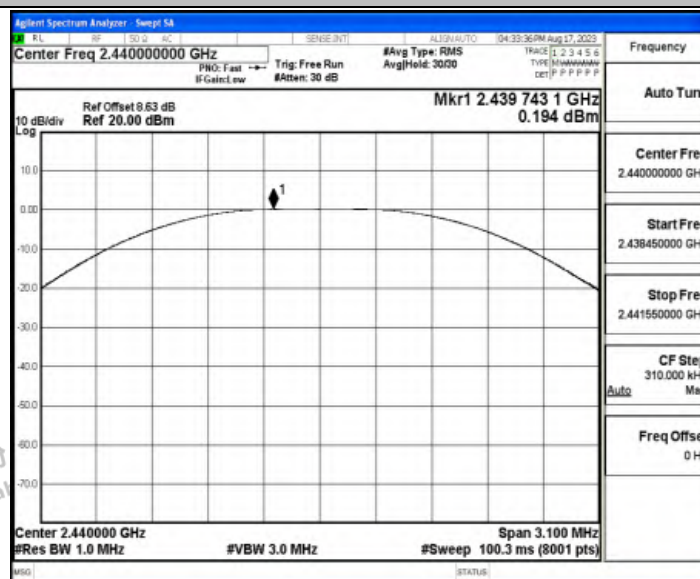


BLE_1M_Ant0_2480



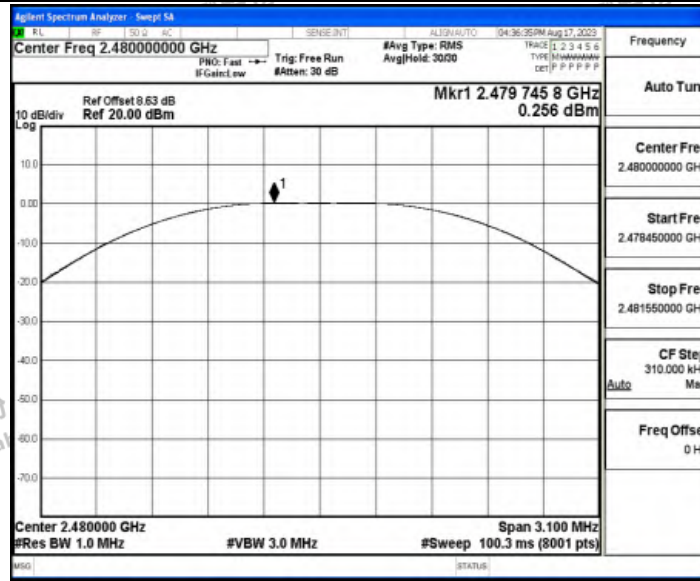


BLE_2M_Ant0_2402

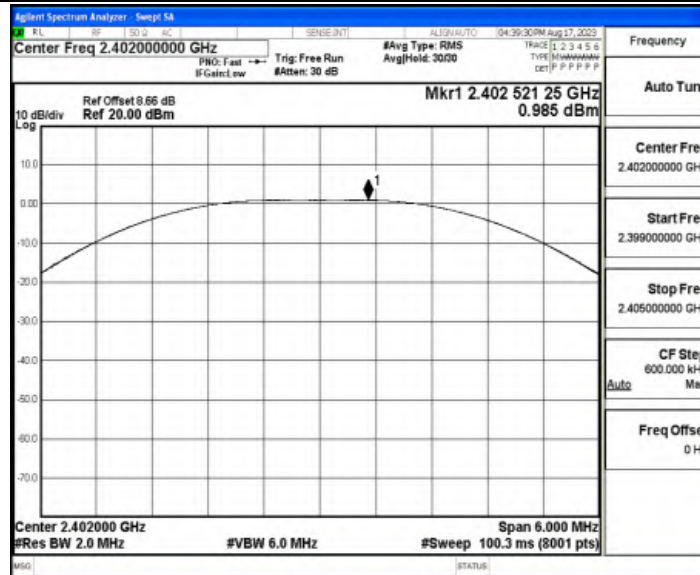


BLE_2M_Ant0_2440



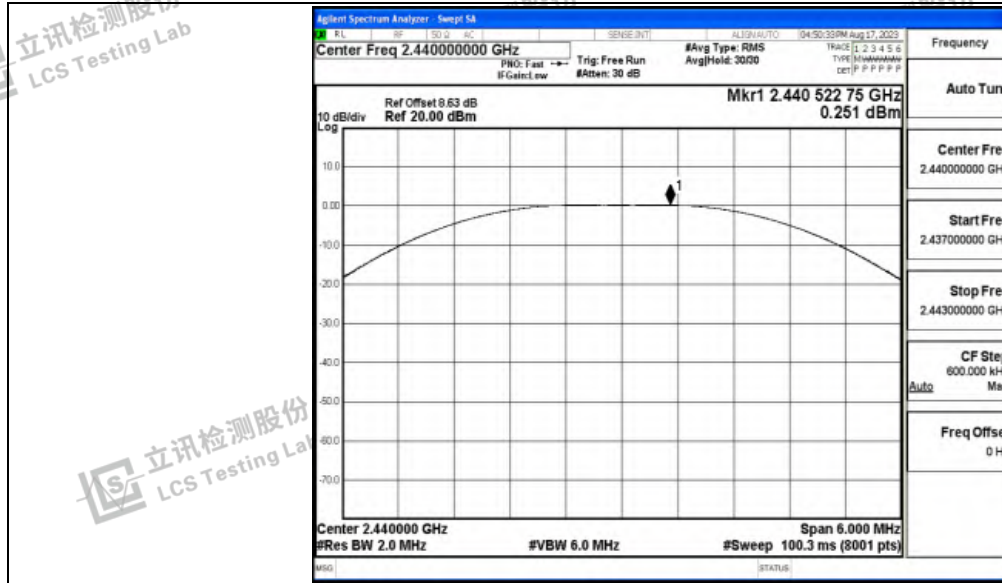

BLE_2M_Ant0_2480

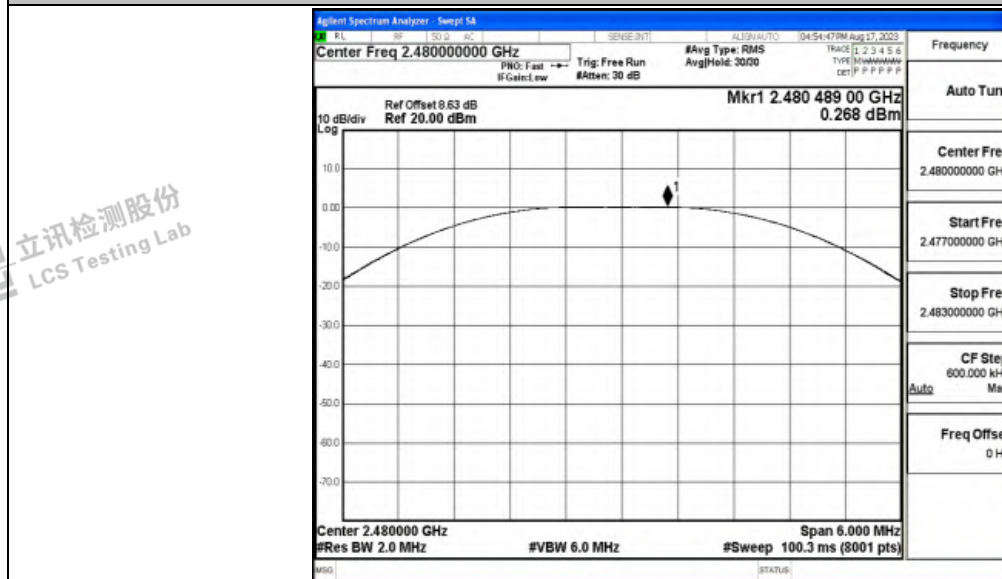



B.3 Maximum Power Spectral Density Level


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant0	2402	-14.5	≤8.00	PASS
		2440	-15.01	≤8.00	PASS
		2480	-14.93	≤8.00	PASS
BLE_2M	Ant0	2402	-16.79	≤8.00	PASS
		2440	-17.69	≤8.00	PASS
		2480	-17.78	≤8.00	PASS




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



BLE_1M_Ant0_2402

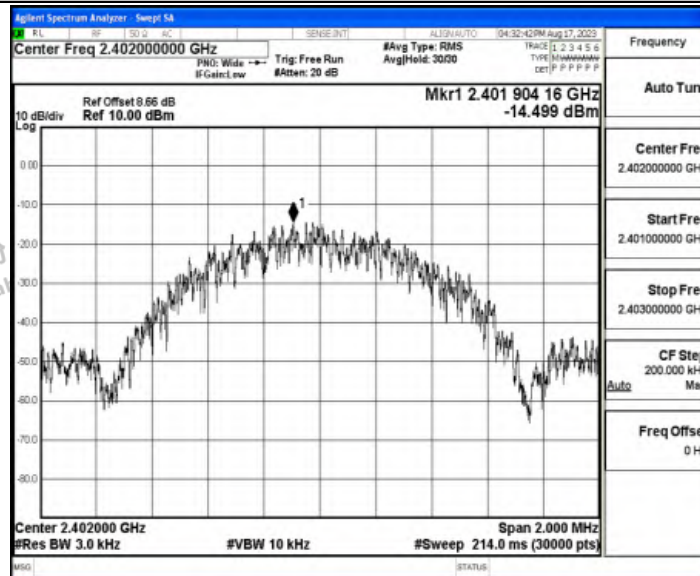


BLE_1M_Ant0_2440

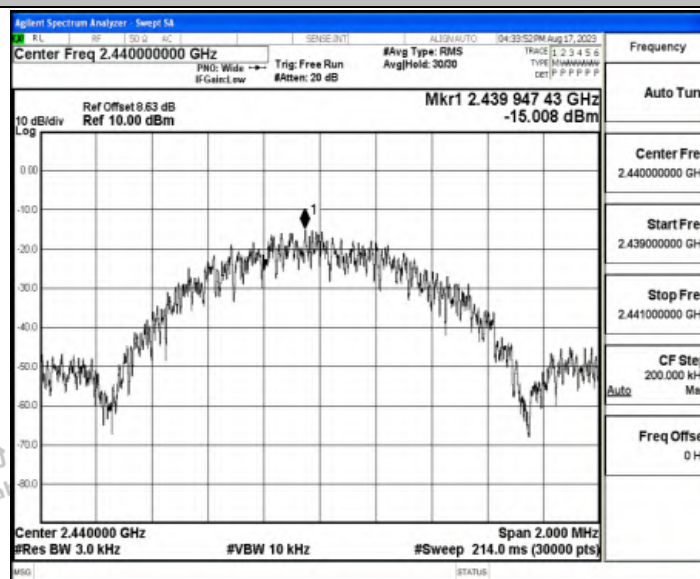


BLE_1M_Ant0_2480



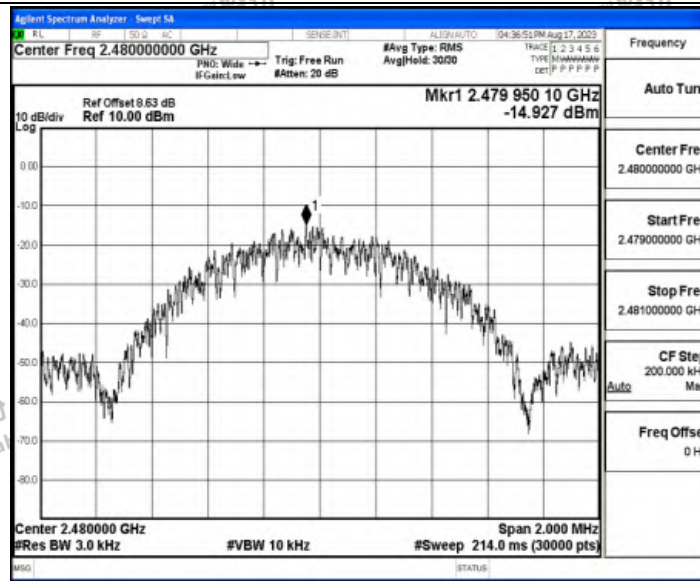


BLE_2M_Ant0_2402

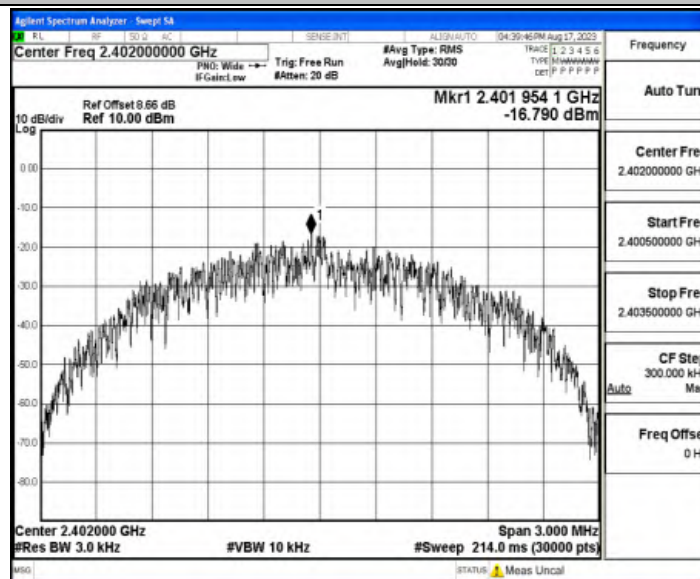


BLE_2M_Ant0_2440



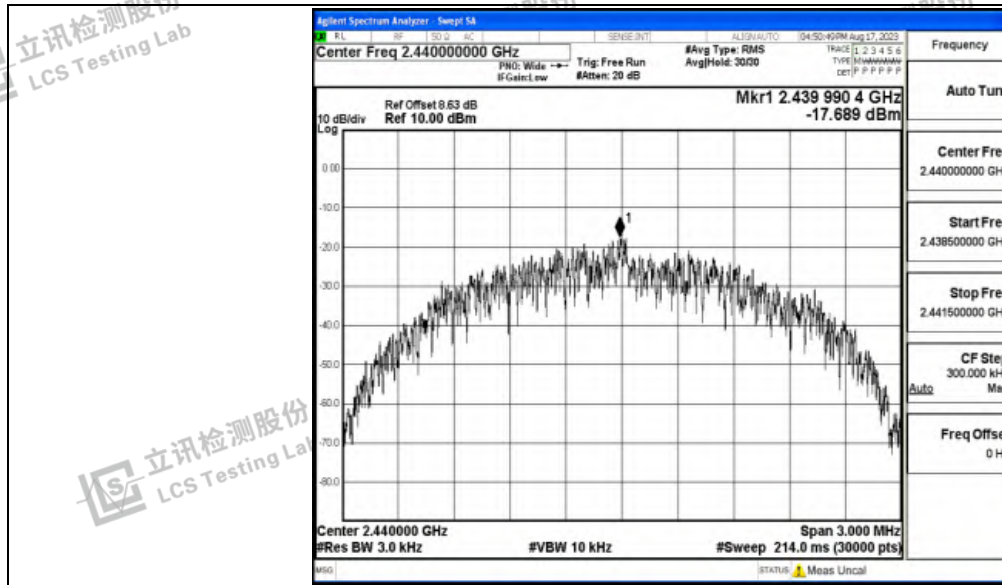

BLE_2M_Ant0_2480

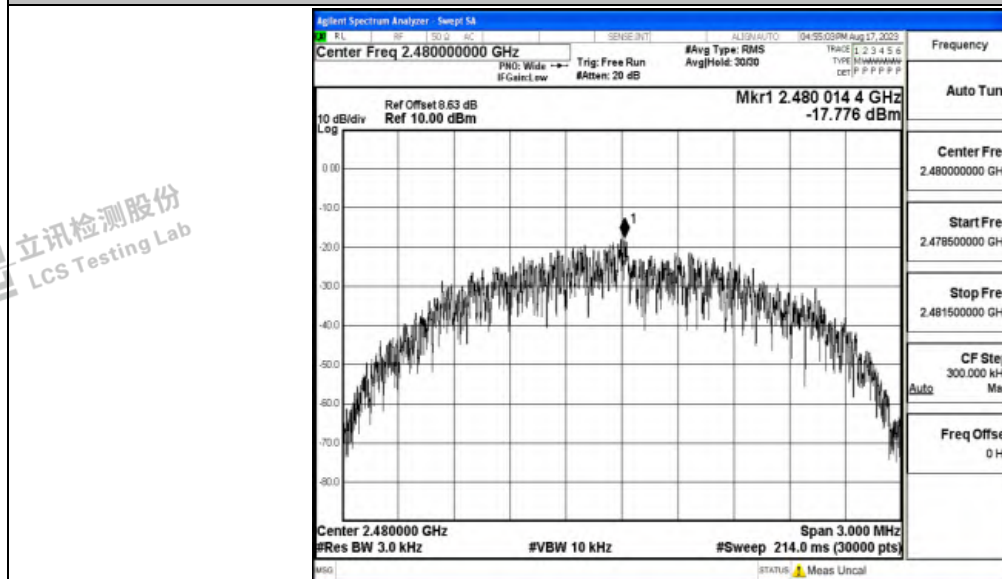



B.4 Band Edge


TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant0	Low	2402	5.31	-46.57	≤-14.69	PASS
		High	2480	-0.44	-43.76	≤-20.44	PASS
BLE_2M	Ant0	Low	2402	-0.24	-34.27	≤-20.24	PASS
		High	2480	-3.10	-45.56	≤-23.1	PASS






Test Graphs

BLE_1M_Ant0_Low_2402

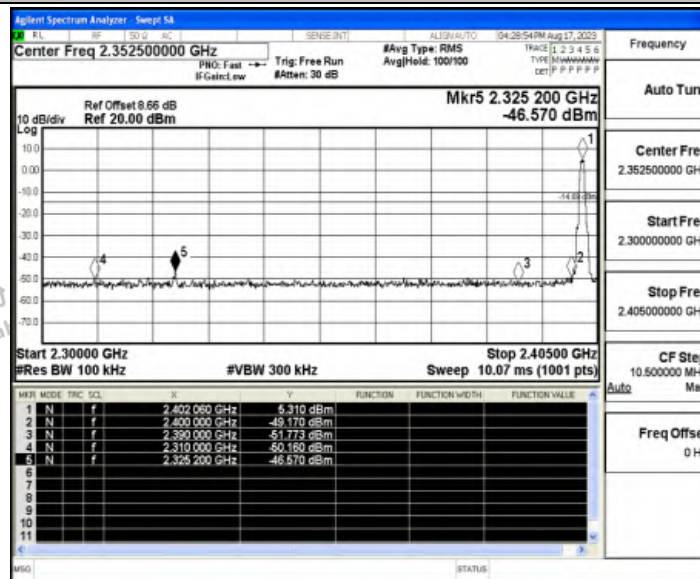


BLE_1M_Ant0_High_2480

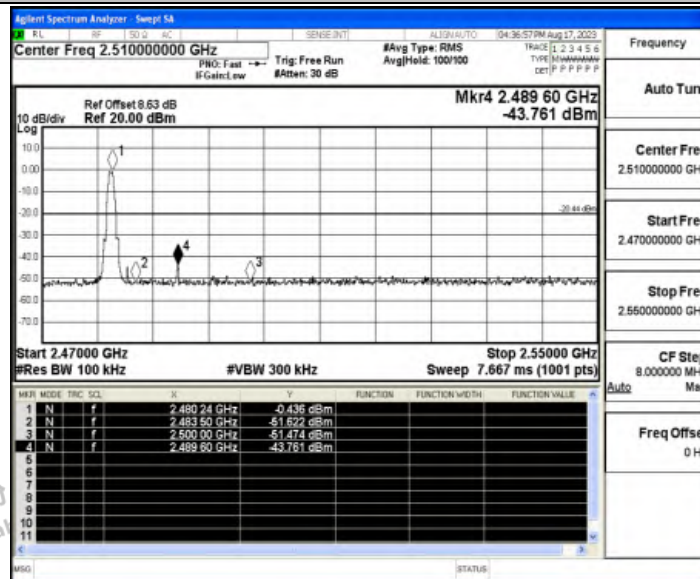


BLE_2M_Ant0_Low_2402



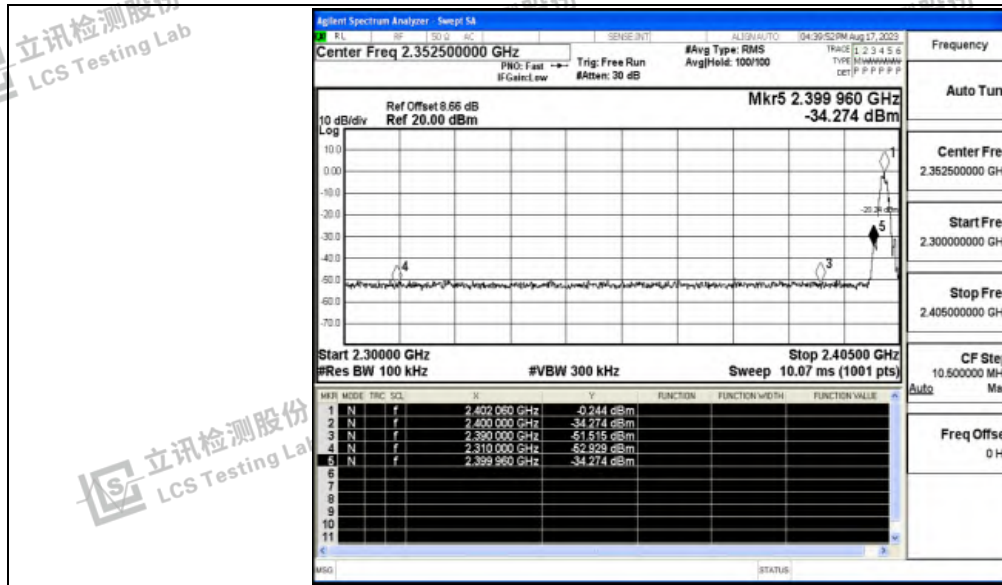

BLE_2M_Ant0_High_2480

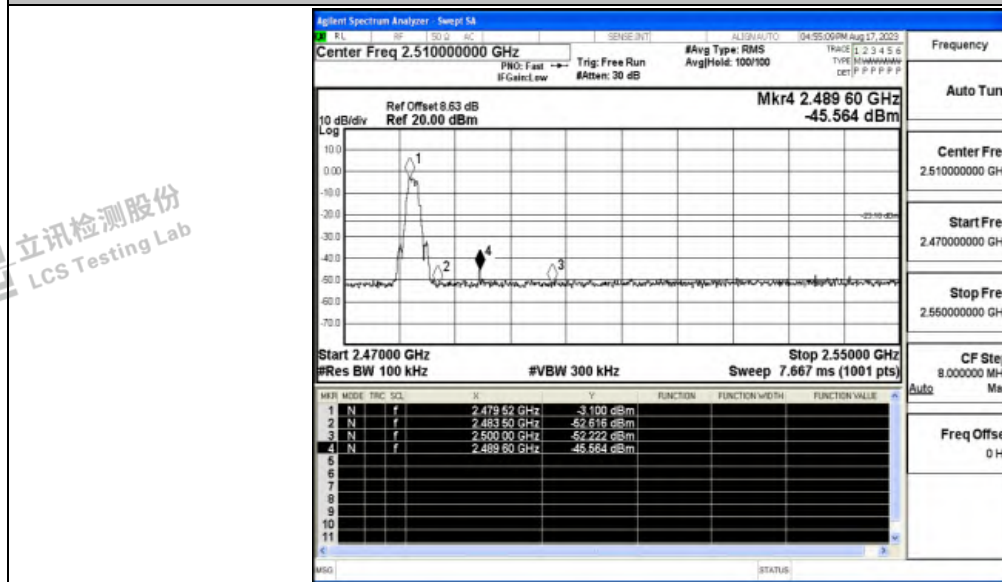



B.5 Conducted RF Spurious Emission


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant0	2402	Reference	4.99	4.99	---	PASS
			30~1000	4.99	-60.99	≤-15.01	PASS
			1000~26500	4.99	-46.05	≤-15.01	PASS
		2440	Reference	0.05	0.05	---	PASS
			30~1000	0.05	-60.47	≤-19.95	PASS
			1000~26500	0.05	-47.32	≤-19.95	PASS
		2480	Reference	0.11	0.11	---	PASS
			30~1000	0.11	-61.21	≤-19.89	PASS
			1000~26500	0.11	-46.2	≤-19.89	PASS
BLE_2M	Ant0	2402	Reference	0.84	0.84	---	PASS
			30~1000	0.84	-60.81	≤-19.16	PASS
			1000~26500	0.84	-46.13	≤-19.16	PASS
		2440	Reference	0.06	0.06	---	PASS
			30~1000	0.06	-61.41	≤-19.94	PASS
			1000~26500	0.06	-47.01	≤-19.94	PASS
		2480	Reference	0.05	0.05	---	PASS
			30~1000	0.05	-61.59	≤-19.95	PASS
			1000~26500	0.05	-46.77	≤-19.95	PASS






Test Graphs

BLE_1M_Ant0_2402_0~Reference

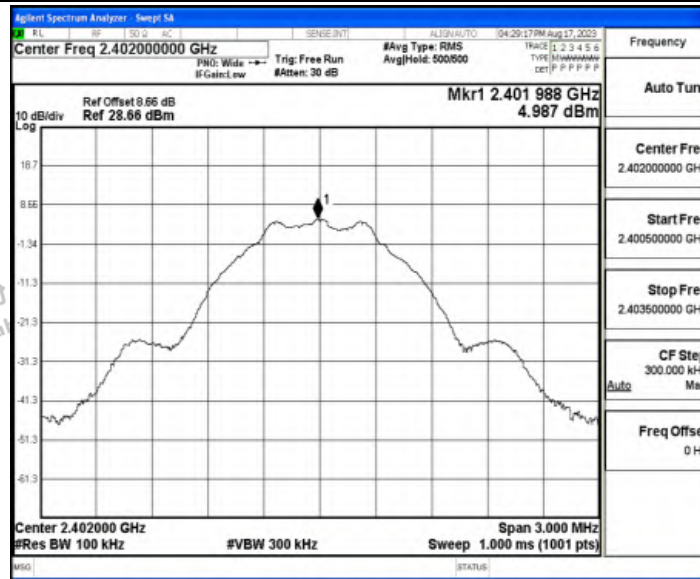


BLE_1M_Ant0_2402_30~1000

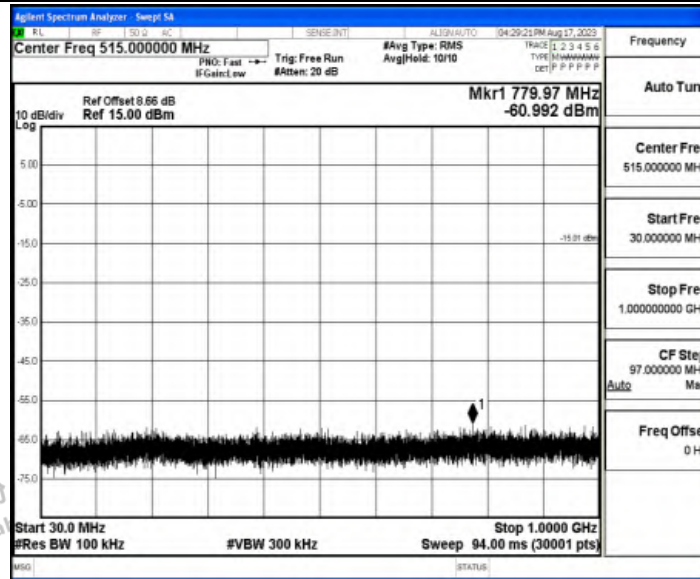


BLE_1M_Ant0_2402_1000~26500



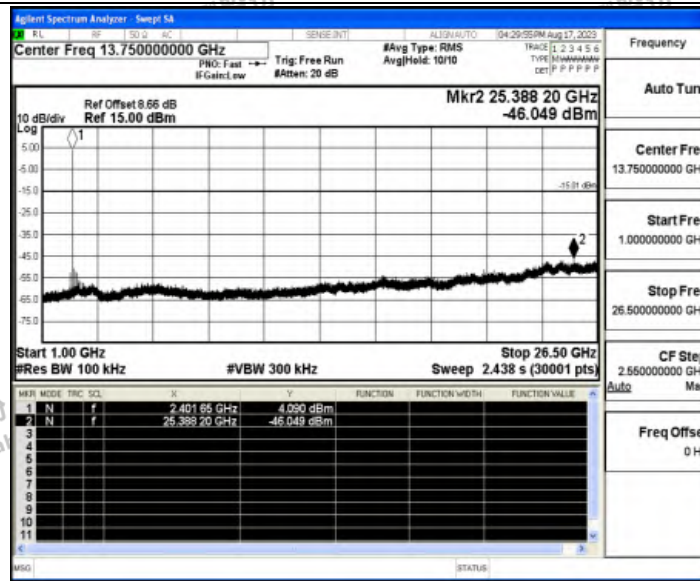


BLE_1M_Ant0_2440_0~Reference

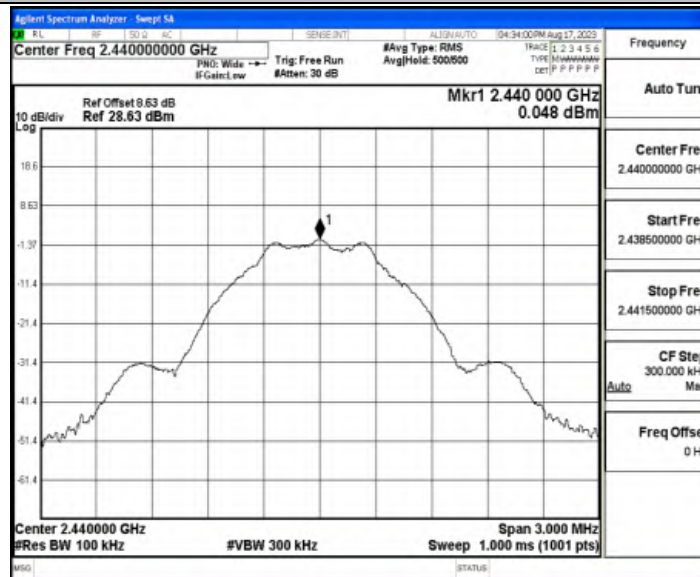


BLE_1M_Ant0_2440_30~1000



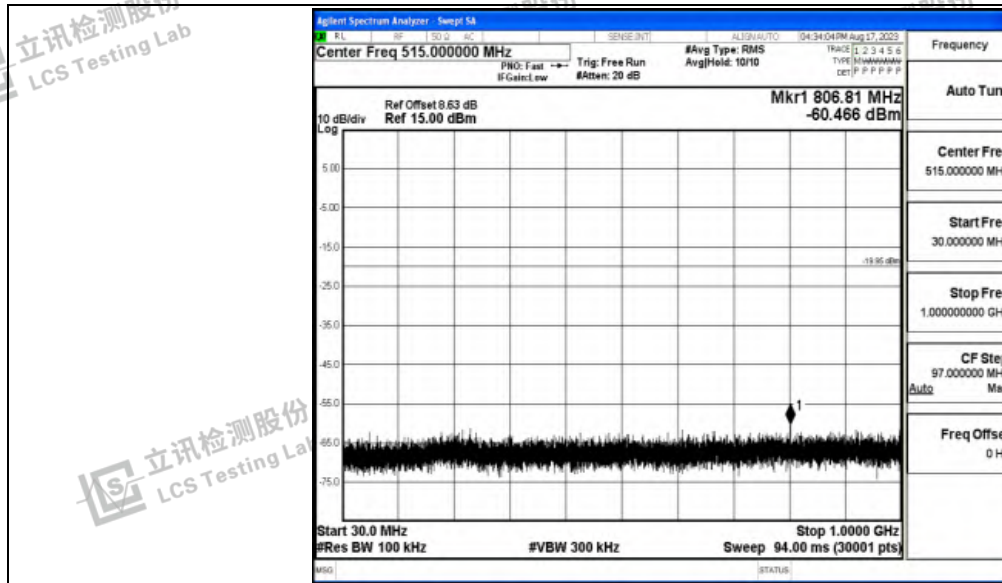


BLE_1M_Ant0_2440_1000~26500

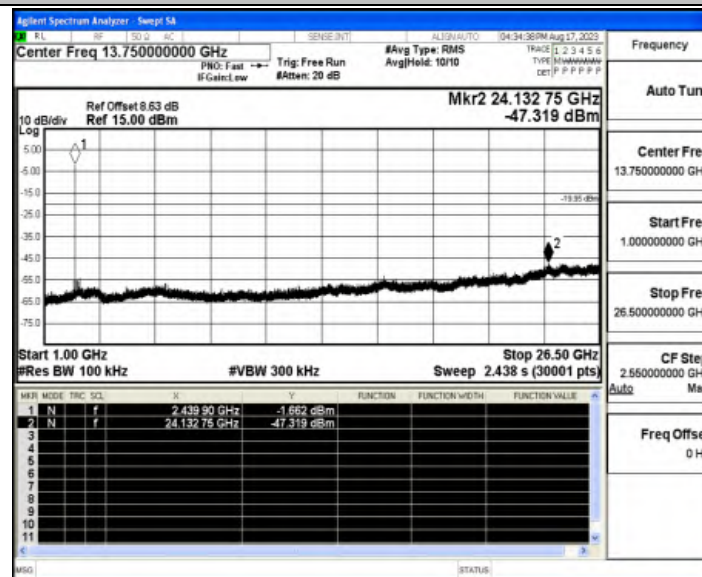


BLE_1M_Ant0_2480_0~Reference



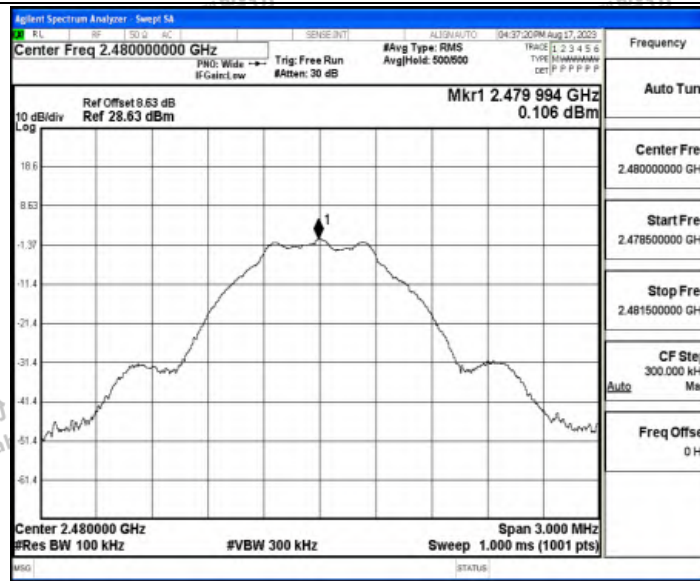


BLE_1M_Ant0_2480_30~1000

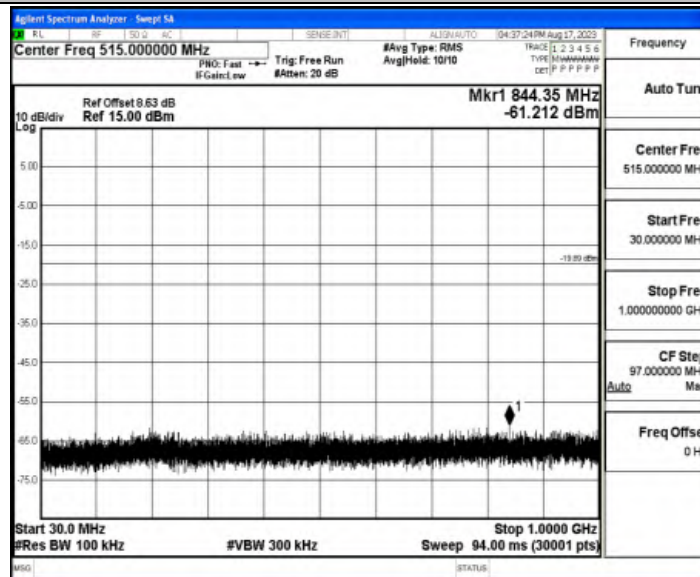


BLE_1M_Ant0_2480_1000~26500



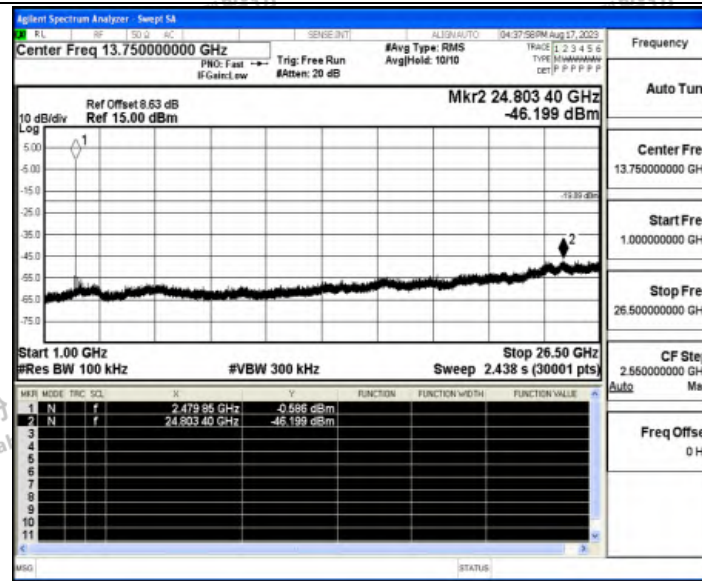


BLE_2M_Ant0_2402_0~Reference

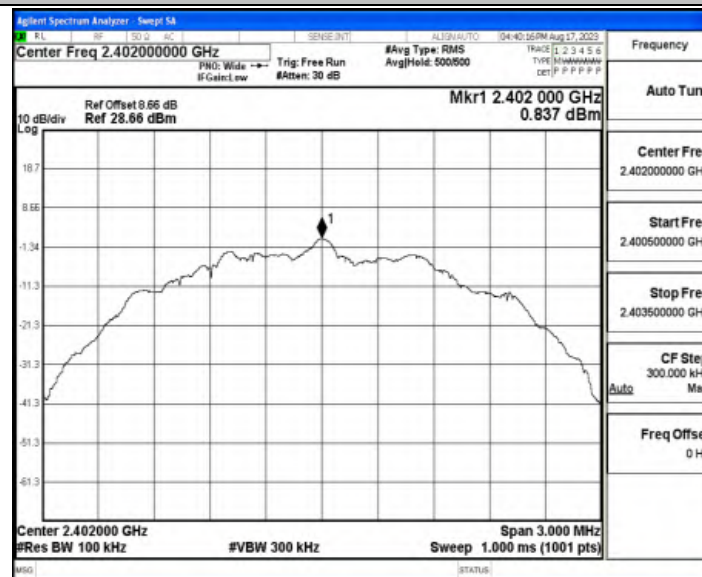


BLE_2M_Ant0_2402_30~1000



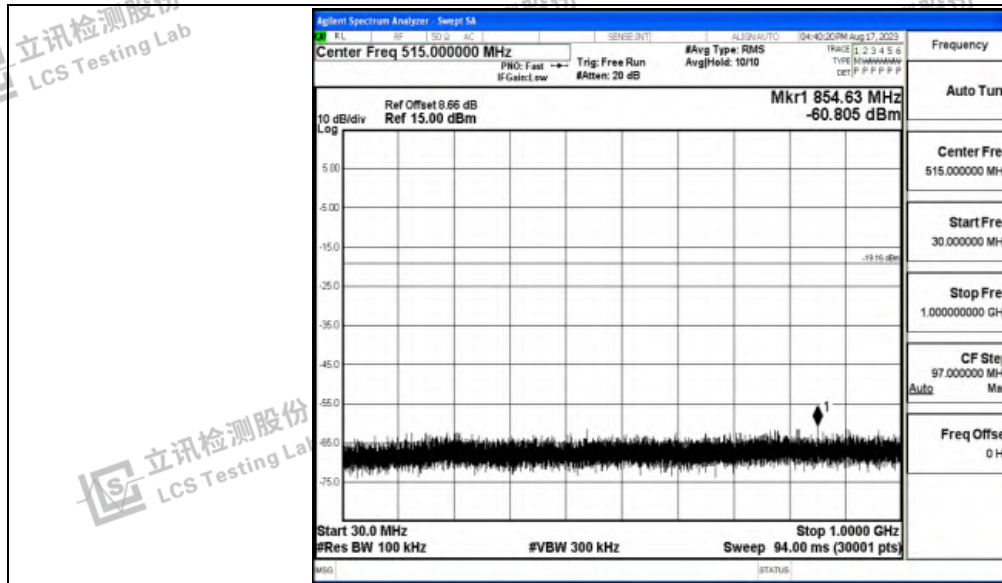


BLE_2M_Ant0_2402_1000-26500

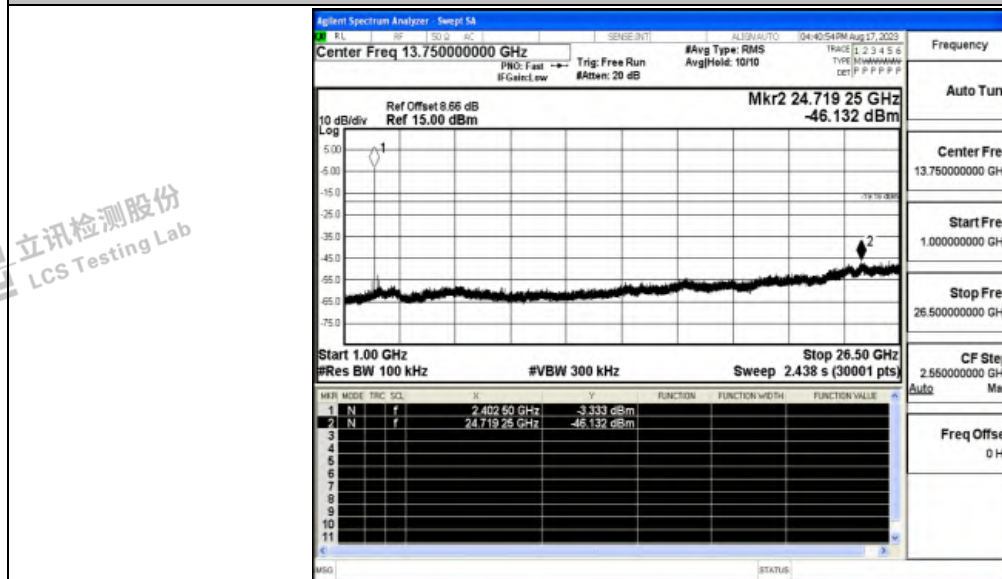


BLE_2M_Ant0_2440_0-Reference



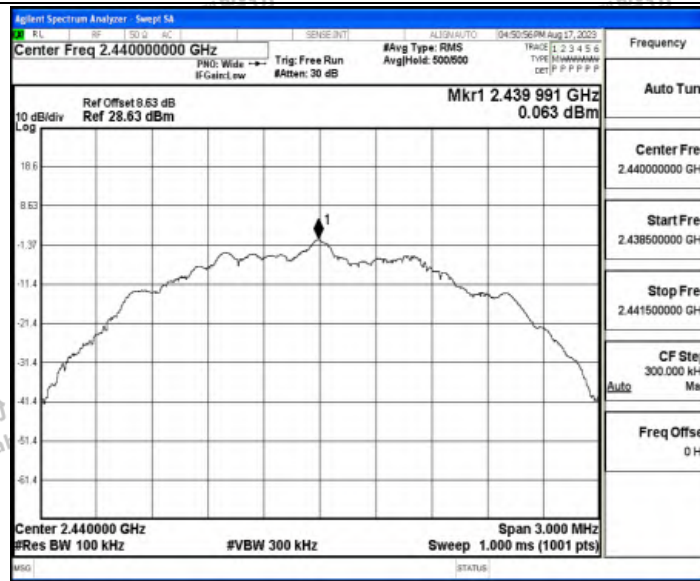


BLE_2M_Ant0_2440_30~1000

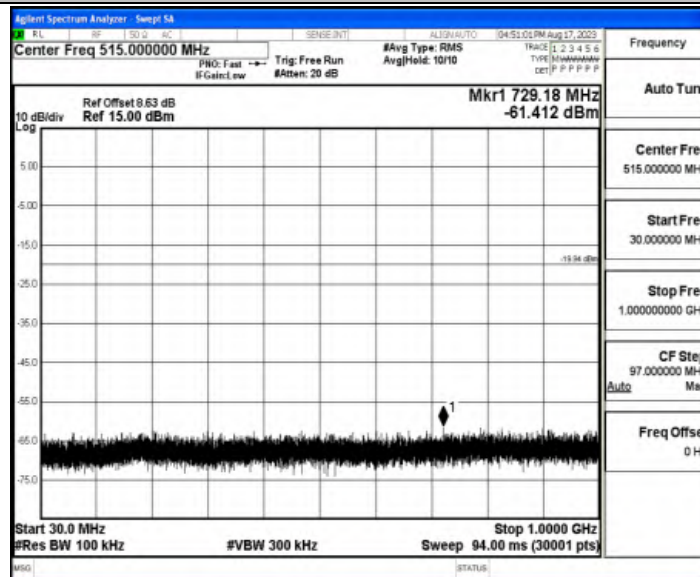


BLE_2M_Ant0_2440_1000~26500



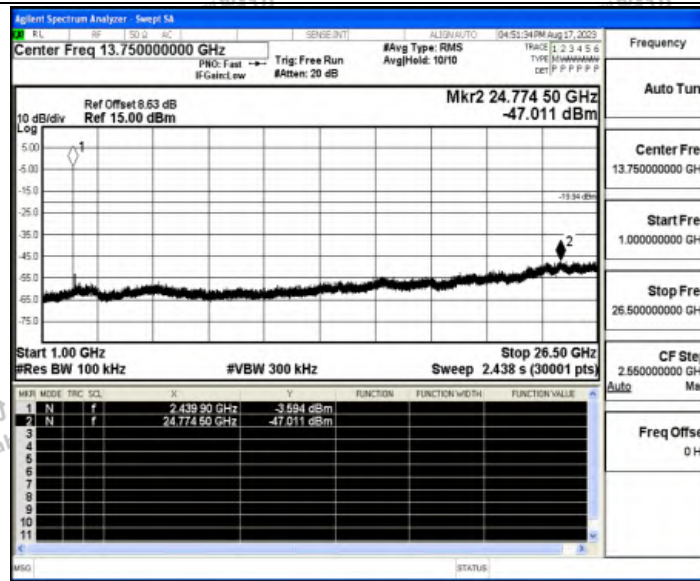


BLE_2M_Ant0_2480_0~Reference

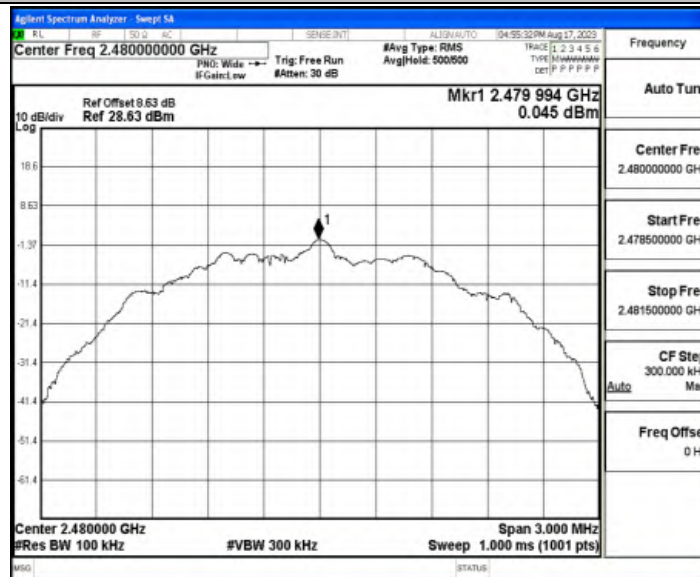


BLE_2M_Ant0_2480_30~1000



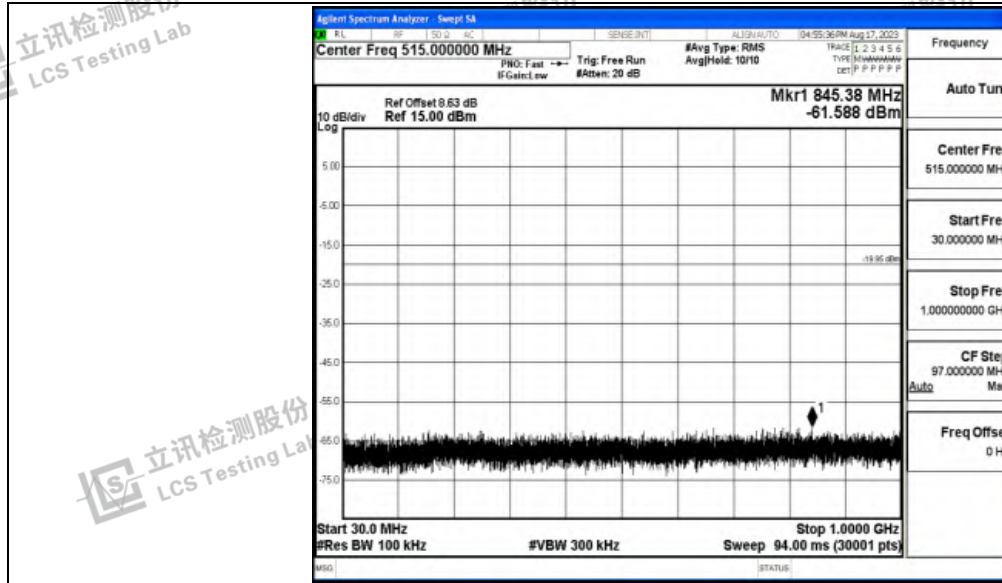

BLE_2M_Ant0_2480_1000-26500

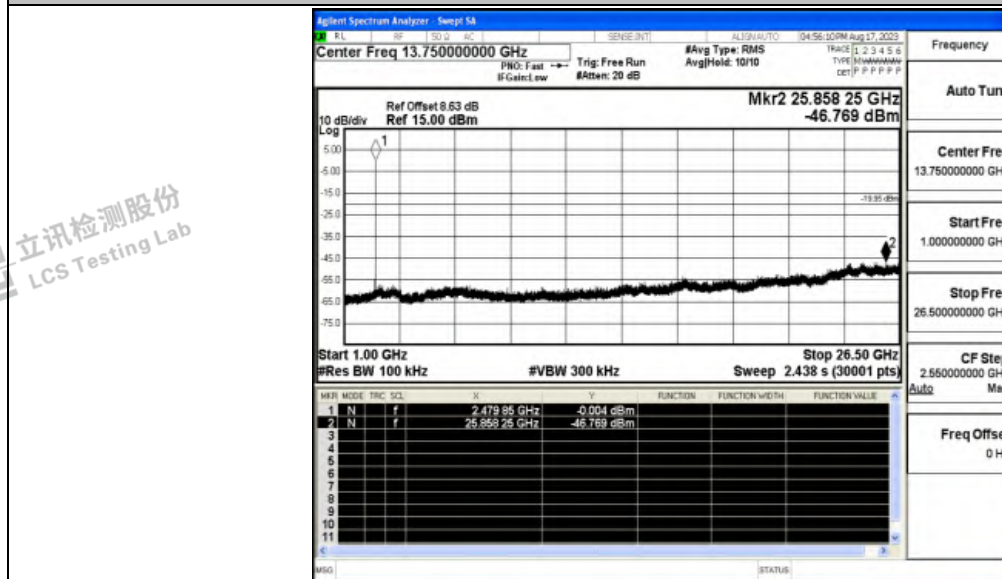



B.6 Duty Cycle

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	1/T	Limit	Verdict
BLE_1M	Ant0	2402	0.39	0.63	0.6190	61.90	2.08	2.56	---	---
		2440	0.39	0.63	0.6190	61.90	2.08	2.56	---	---
		2480	0.39	0.63	0.6190	61.90	2.08	2.56	---	---
BLE_2M	Ant0	2402	0.21	0.63	0.3333	33.33	4.77	4.76	---	---
		2440	0.21	0.63	0.3333	33.33	4.77	4.76	---	---
		2480	0.21	0.63	0.3333	33.33	4.77	4.76	---	---




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

BLE_1M_Ant0_2402

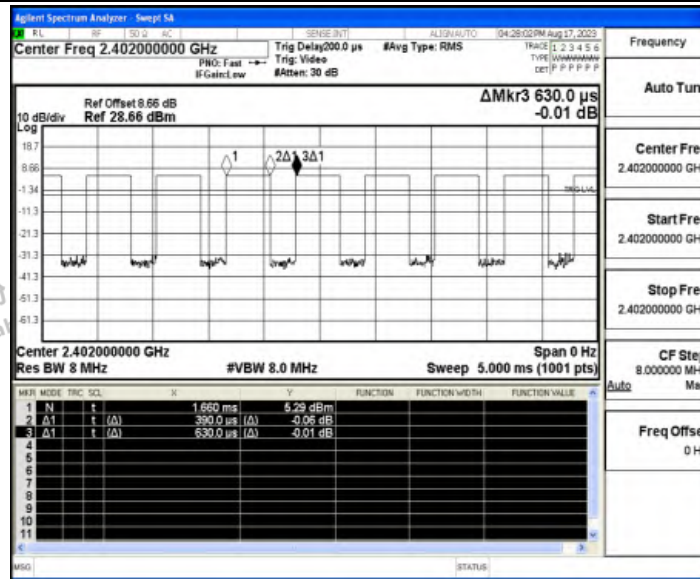


BLE_1M_Ant0_2440

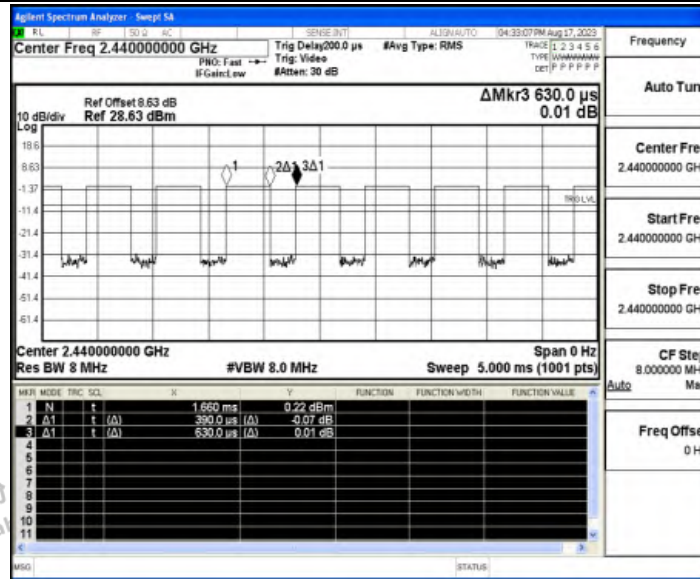


BLE_1M_Ant0_2480



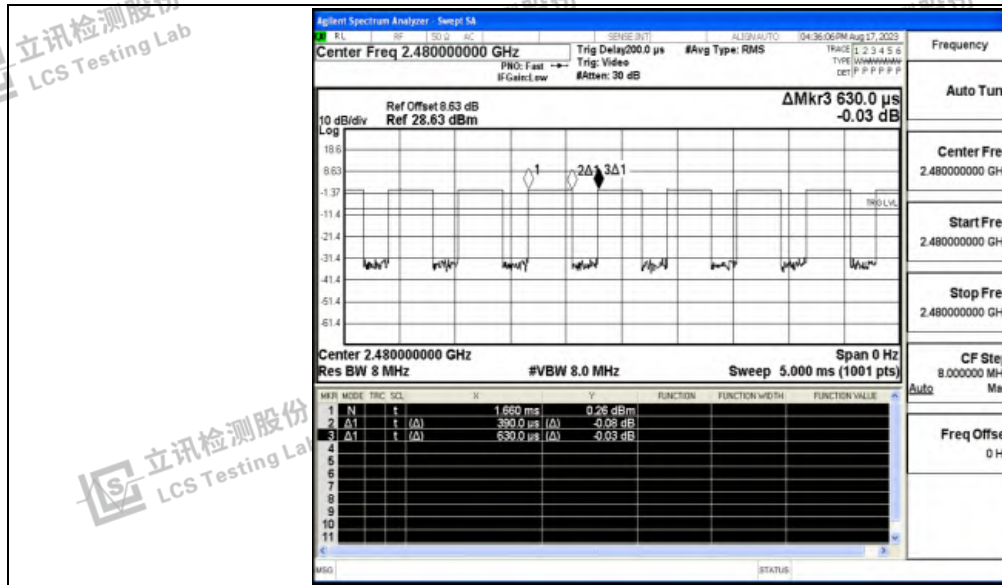


BLE_2M_Ant0_2402

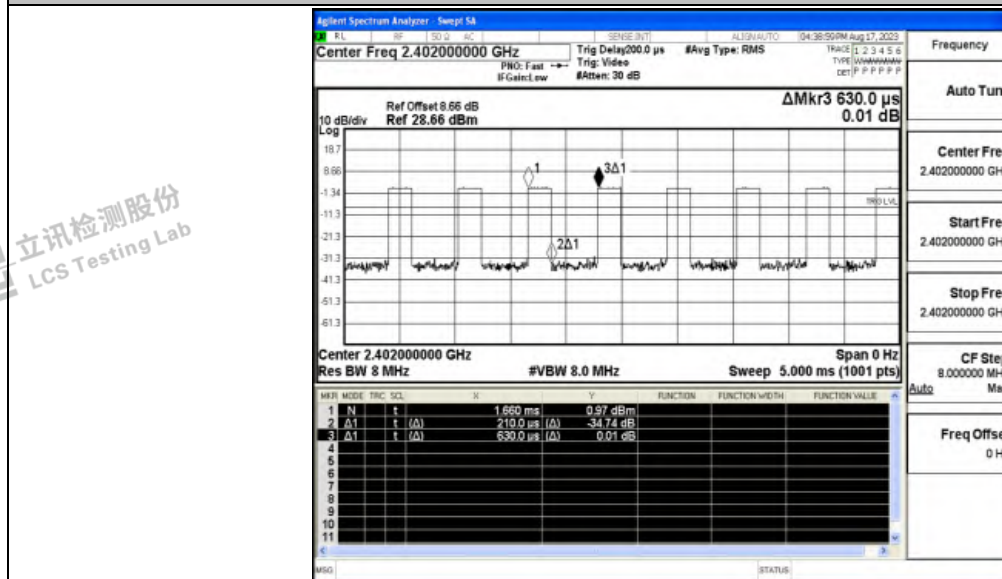


BLE_2M_Ant0_2440



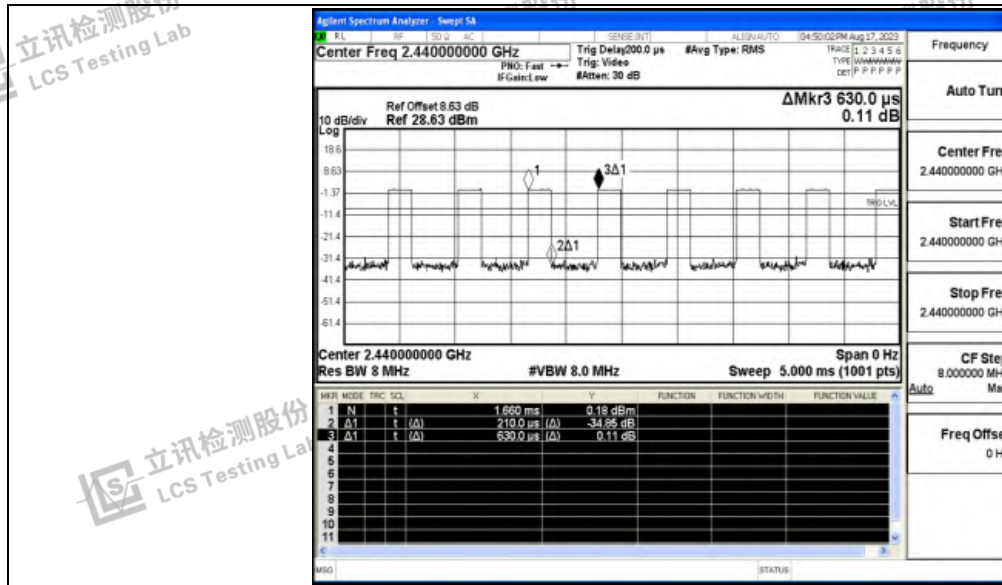

BLE_2M_Ant0_2480

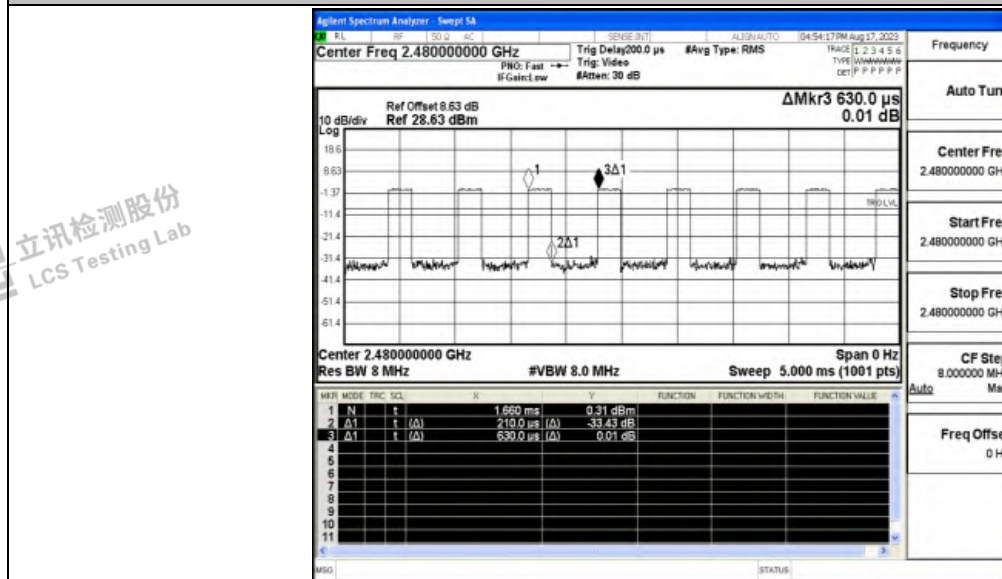



B.7 Restrict Band

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant0	Low	2402	AV	2310.000	-47.68	≤-41.20	47.52	≤54	PASS
				AV	2325.095	-45.14	≤-41.20	50.06	≤54	PASS
				AV	2390.000	-47.17	≤-41.20	48.03	≤54	PASS
				Peak	2310.000	-40.48	≤-21.20	54.72	≤74	PASS
				Peak	2347.670	-37.84	≤-21.20	57.36	≤74	PASS
				Peak	2390.000	-41	≤-21.20	54.20	≤74	PASS
		High	2480	AV	2483.500	-46.46	≤-41.20	48.74	≤54	PASS
				AV	2489.200	-44.86	≤-41.20	50.34	≤54	PASS
				AV	2500.000	-46.8	≤-41.20	48.40	≤54	PASS
				Peak	2483.500	-37.69	≤-21.20	57.51	≤74	PASS
				Peak	2489.760	-36.51	≤-21.20	58.69	≤74	PASS
				Peak	2500.000	-41.2	≤-21.20	54.00	≤74	PASS
BLE_2M	Ant0	Low	2402	AV	2310.000	-47.23	≤-41.20	47.97	≤54	PASS
				AV	2388.725	-46.43	≤-41.20	48.77	≤54	PASS
				AV	2390.000	-46.86	≤-41.20	48.34	≤54	PASS
				Peak	2310.000	-41.23	≤-21.20	53.97	≤74	PASS
				Peak	2375.600	-37.53	≤-21.20	57.67	≤74	PASS
				Peak	2390.000	-39.36	≤-21.20	55.84	≤74	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



		High	2480	AV	2483.500	-45.42	≤-41.20	49.78	≤54	PASS
				AV	2489.200	-43.27	≤-41.20	51.93	≤54	PASS
				AV	2500.000	-46.24	≤-41.20	48.96	≤54	PASS
				Peak	2483.500	-39.36	≤-21.20	55.84	≤74	PASS
				Peak	2495.600	-36.94	≤-21.20	58.26	≤74	PASS
				Peak	2500.000	-40.1	≤-21.20	55.10	≤74	PASS

Note:


- 1. The Antenna Gain is compensated in the graph.
- 2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.






Test Graphs

BLE_1M_Ant0_Low_2402_AV

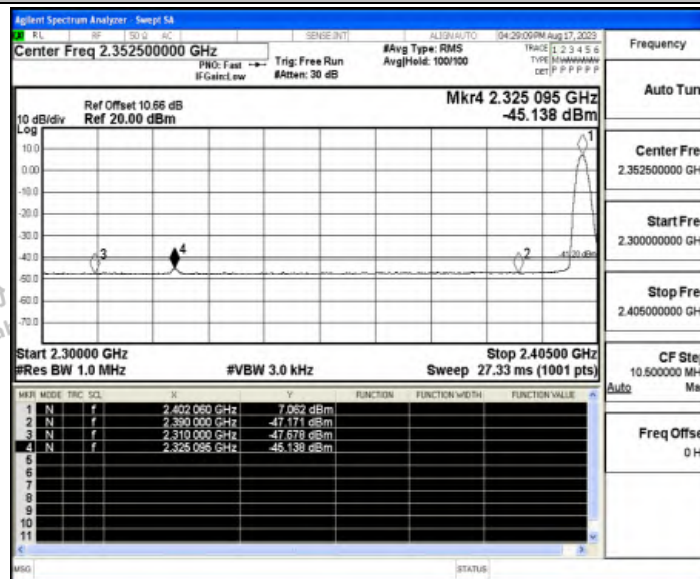


BLE_1M_Ant0_Low_2402_Peak

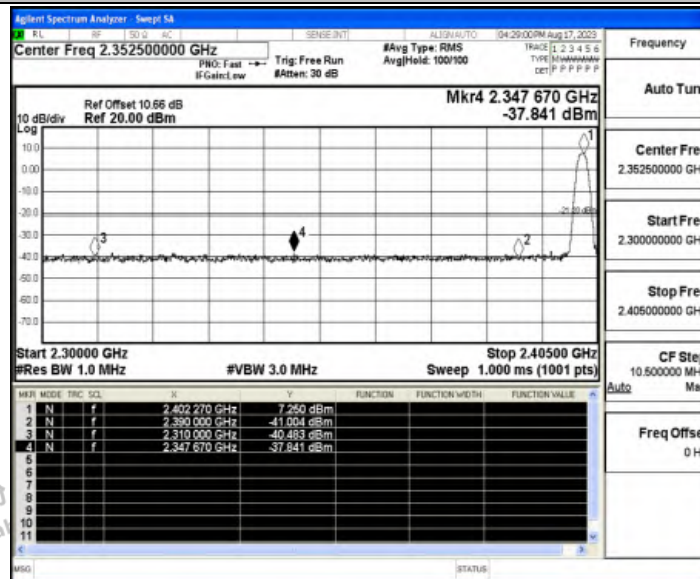


BLE_1M_Ant0_High_2480_AV



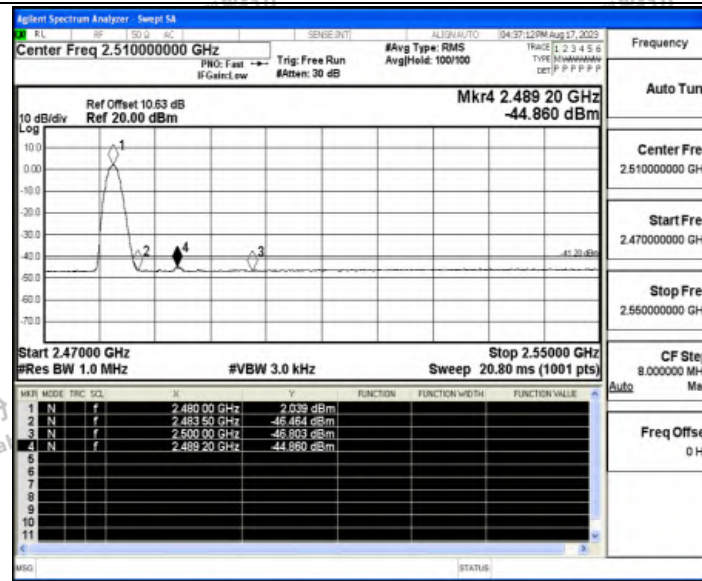


BLE_1M_Ant0_High_2480_Peak

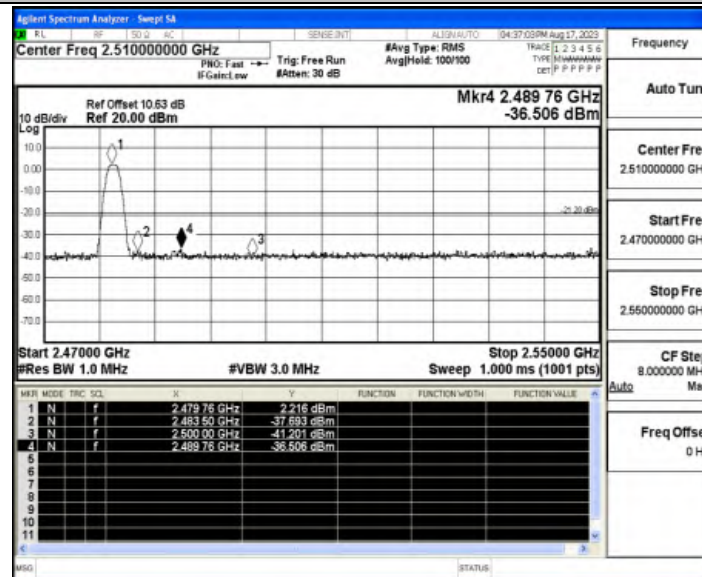


BLE_2M_Ant0_Low_2402_AV



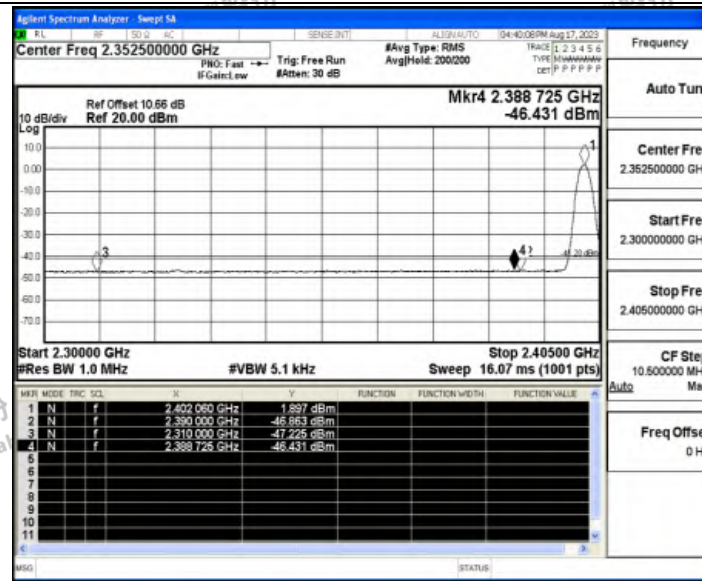


BLE_2M_Ant0_Low_2402_Peak

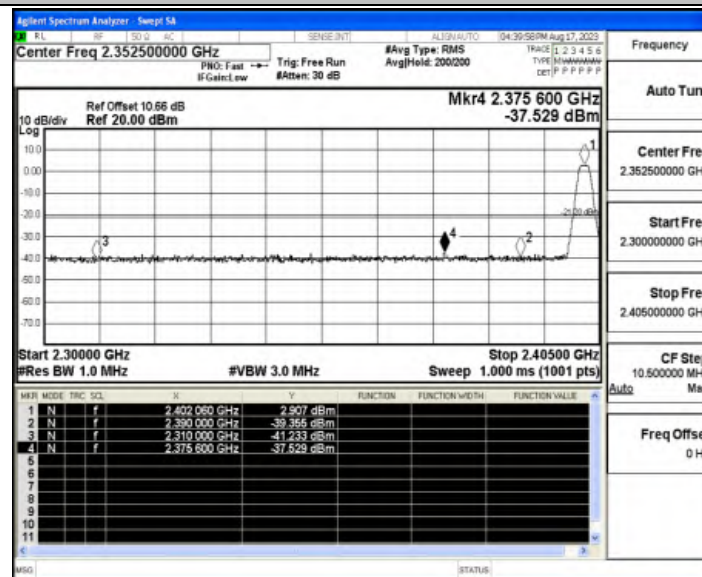

BLE_2M_Ant0_High_2480_AV



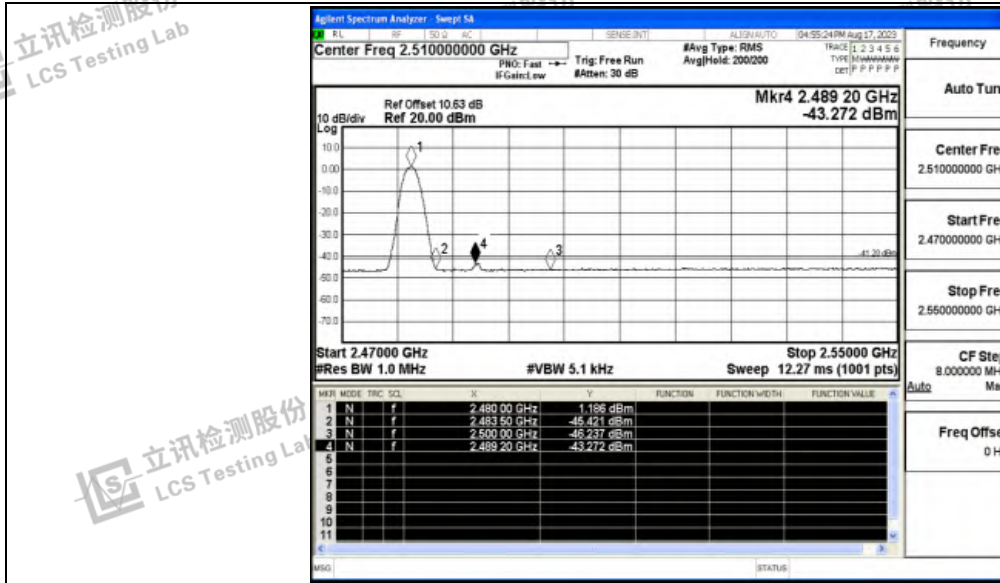

BLE_2M_Ant0_High_2480_Peak

