



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.64

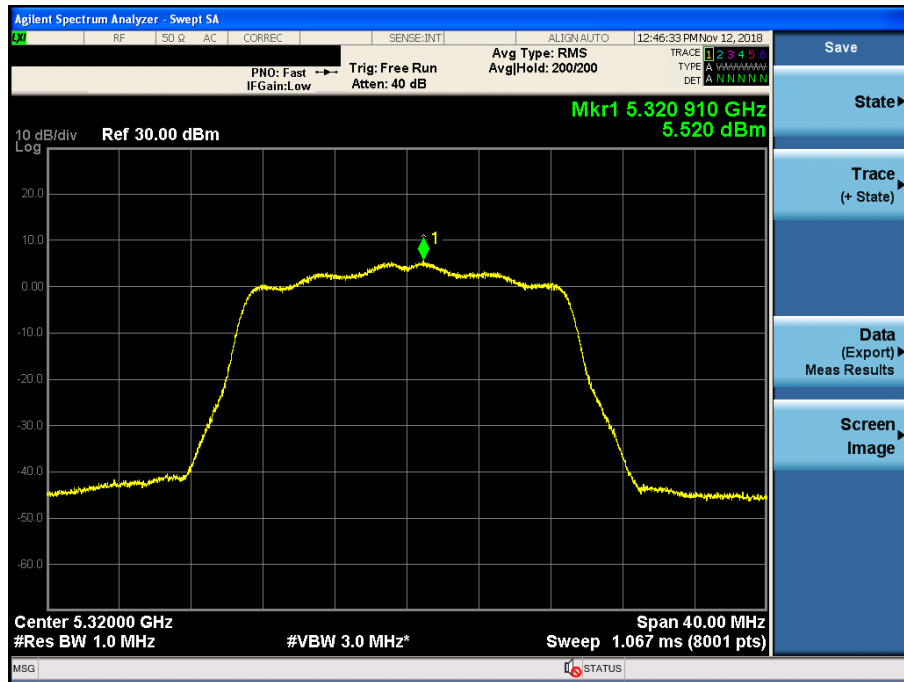


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.100

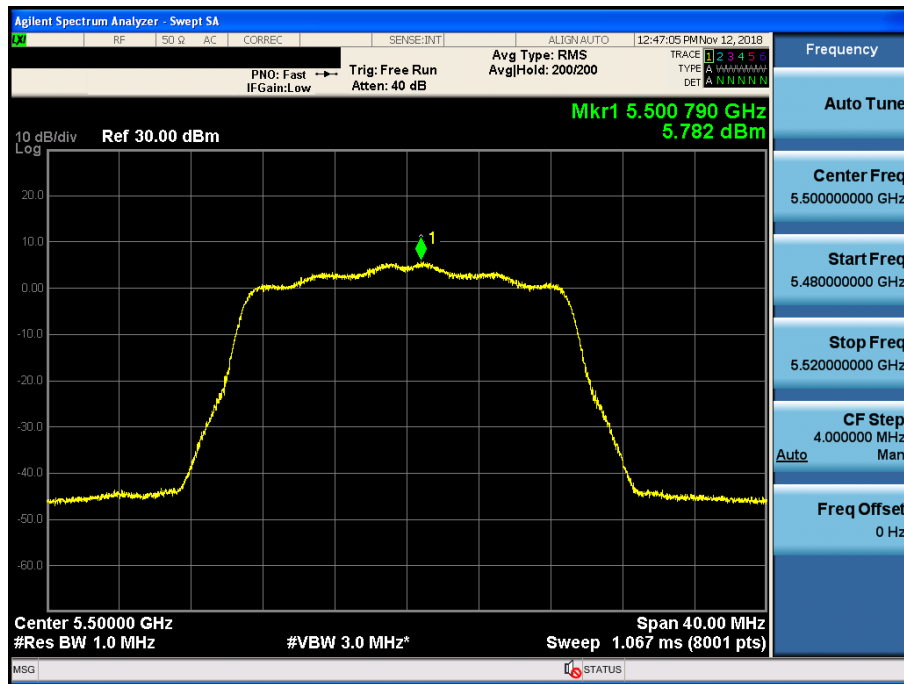


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.120

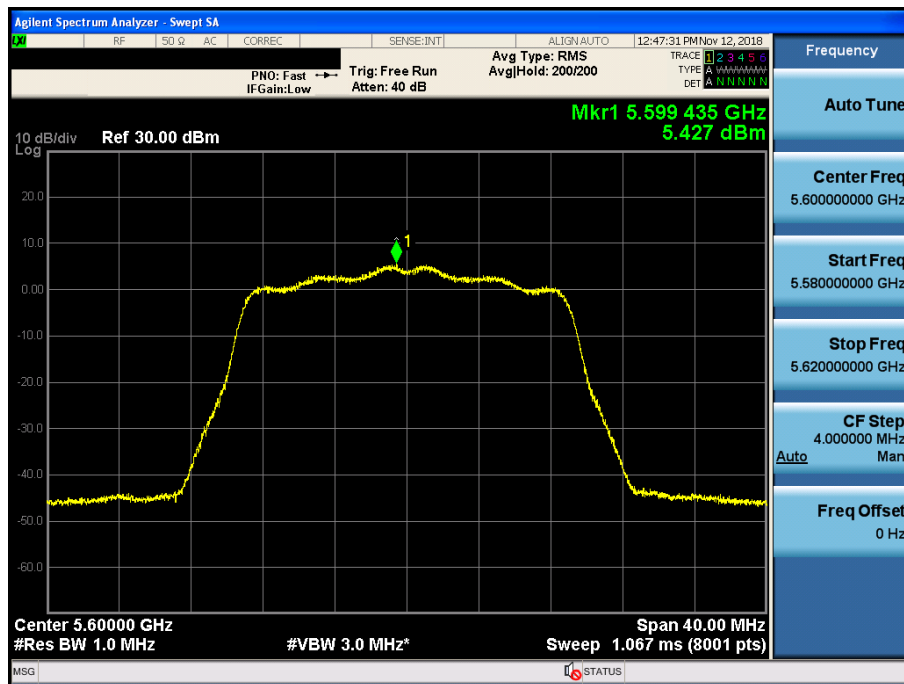


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.144

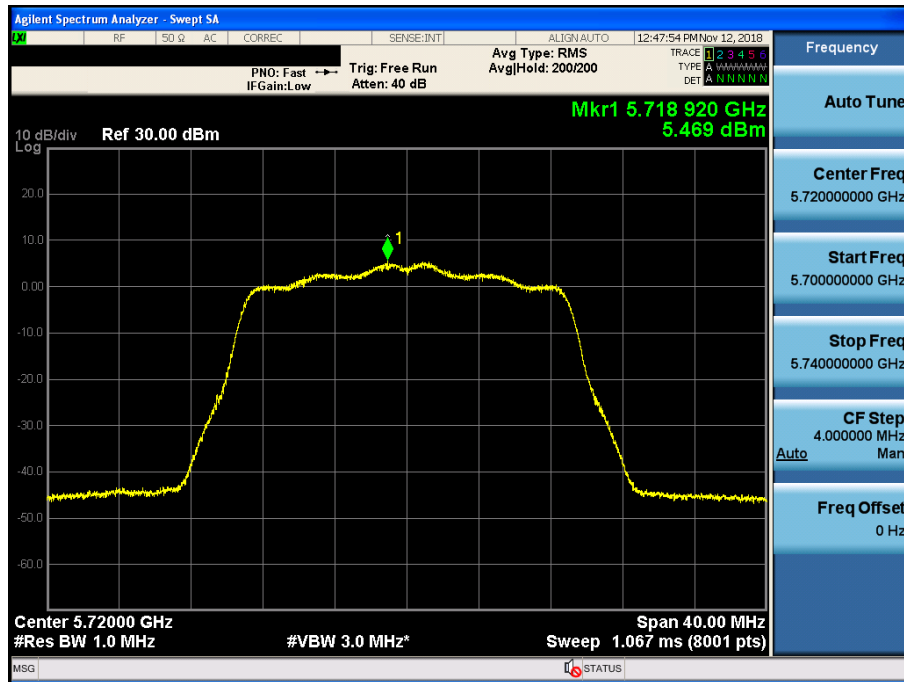


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.149

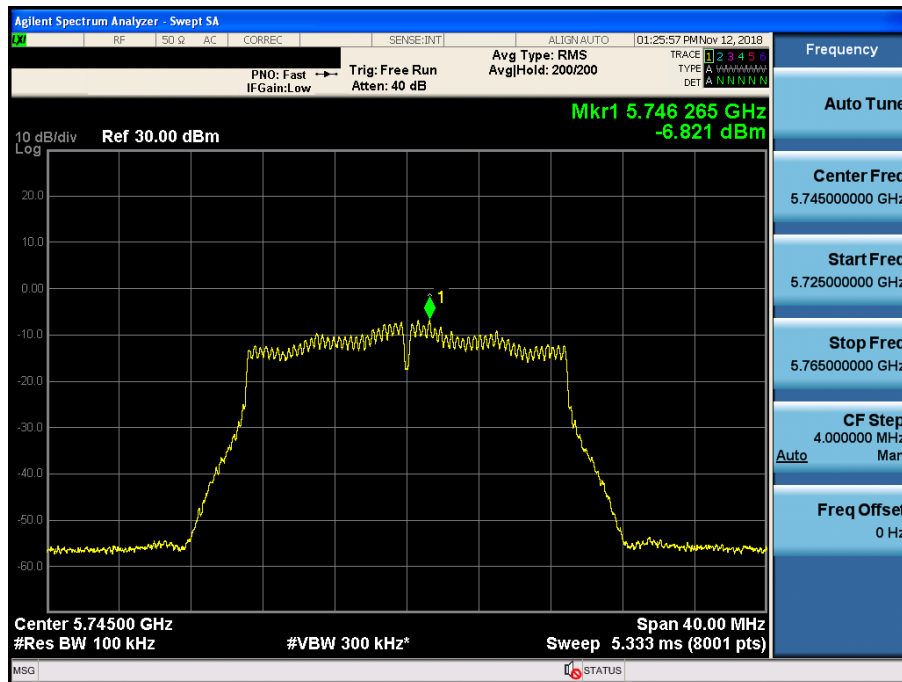


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.157

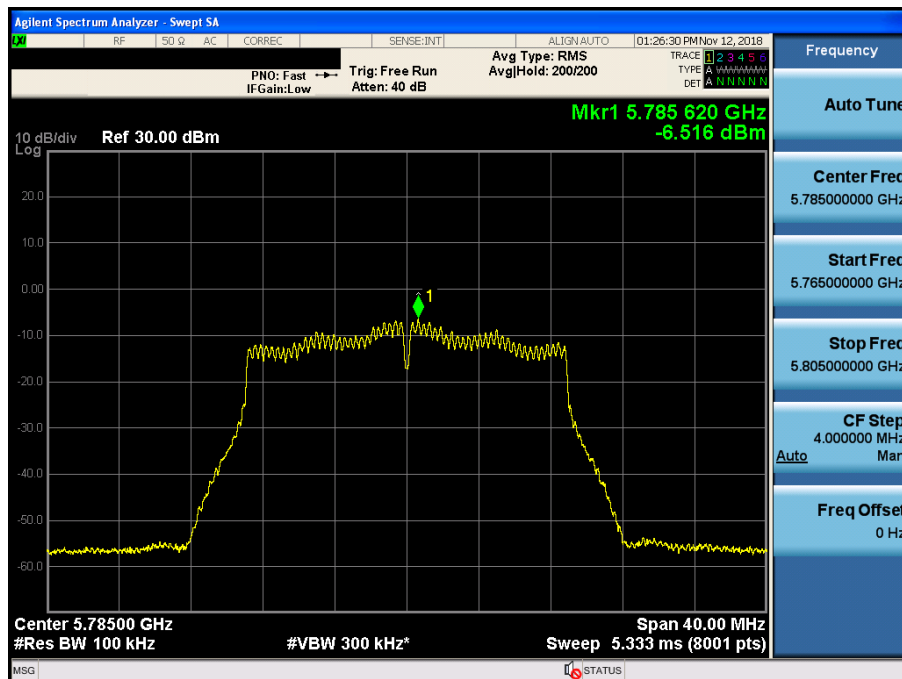


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.165

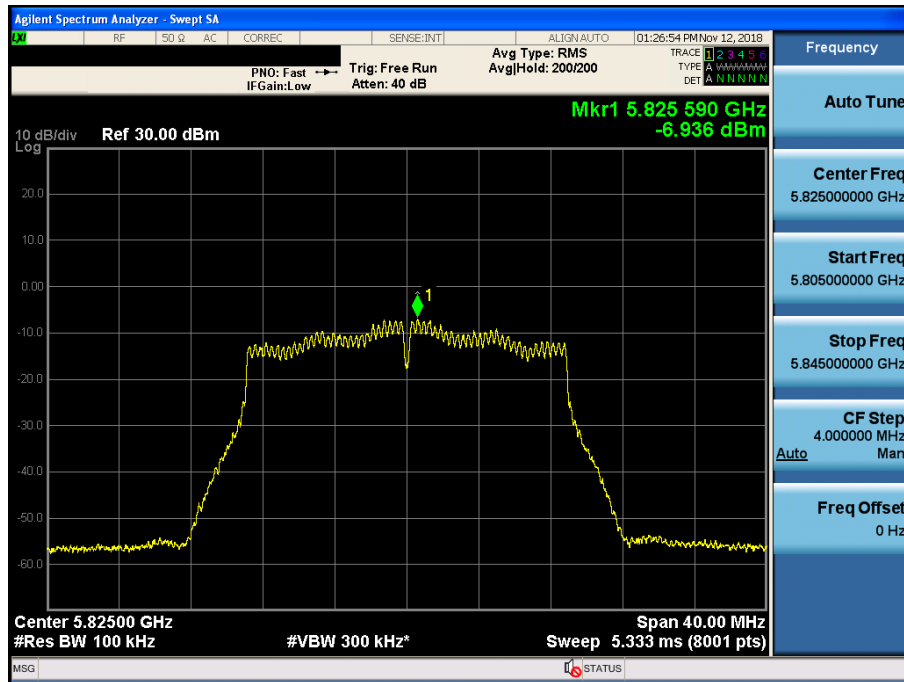


Maximum Power Spectral Density

Test Mode: 802.11ac VHT40 & ANT 2 & Ch.38

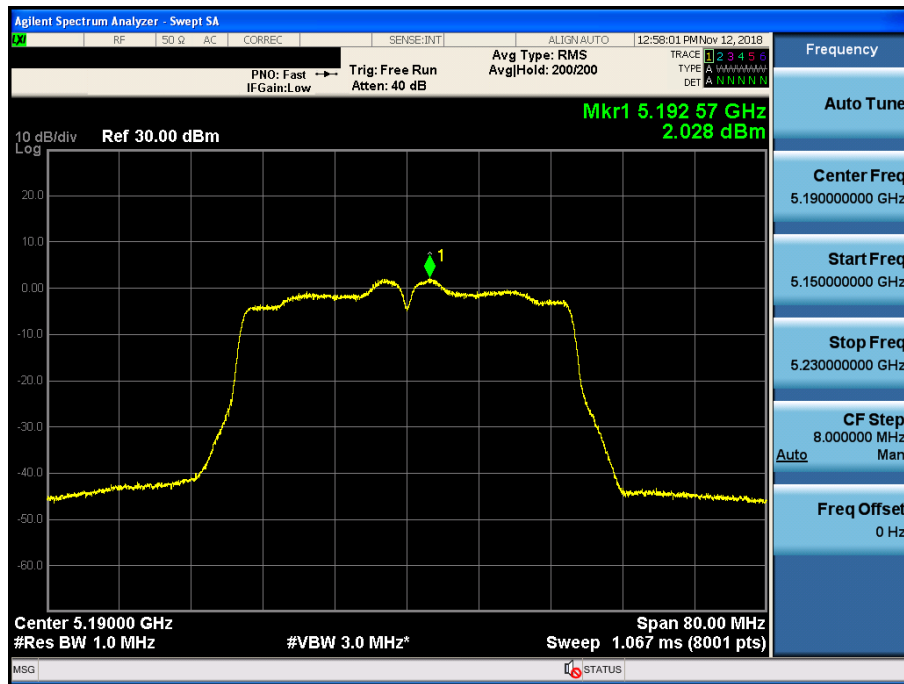


Maximum Power Spectral Density

Test Mode: 802.11ac VHT40 & ANT 2 & Ch.46

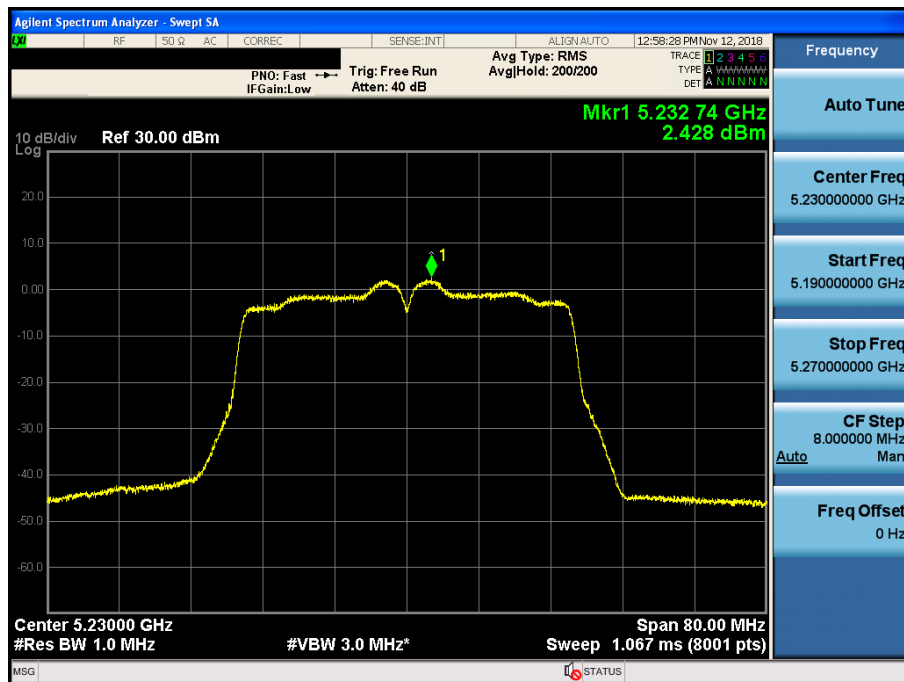

Maximum Power Spectral Density

Test Mode: 802.11ac VHT40 & ANT 2 & Ch.142

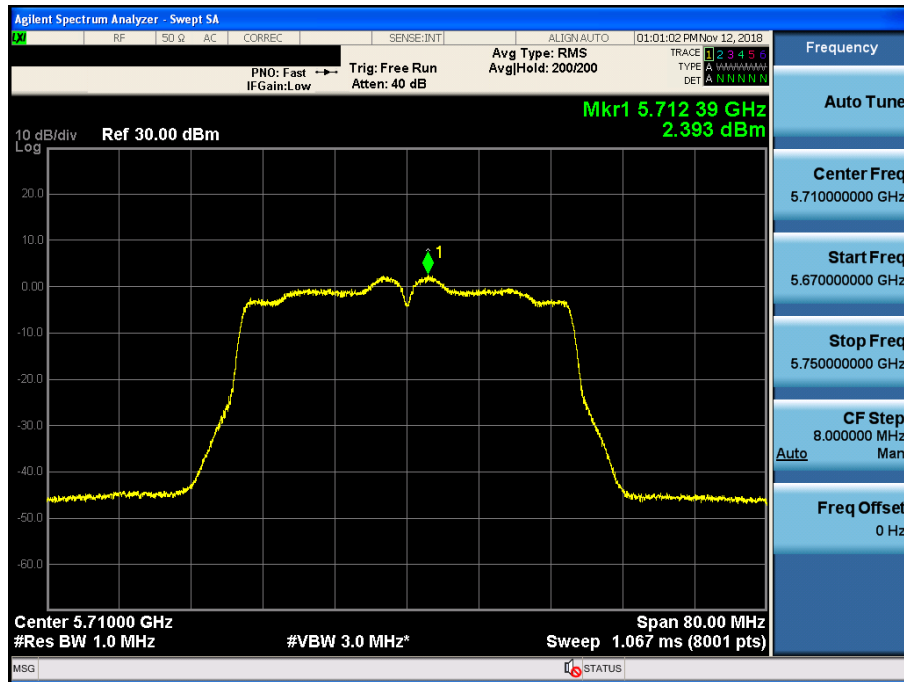

8.5 Frequency Stability

■ Test requirements

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

■ Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -20°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. And the edge point of EBW (26dB or 6dB bandwidth) was reported.

■ Test Results: **Comply**

U-NII 1 & U-NII 2A : (5150 MHz ~ 5350 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5190 MHz	5310 MHz
		26dBc low edge (Hz)	26dBc High edge(Hz)
3.85	+20(Ref)	5,170,220,000	5,330,227,500
	+50	5,170,267,500	5,330,272,500
	+40	5,170,230,000	5,330,257,500
	+30	5,170,225,000	5,330,245,000
	+20	5,170,220,000	5,330,227,500
	+10	5,170,197,500	5,330,165,000
	0	5,170,187,500	5,330,160,000
	-10	5,170,172,500	5,330,152,500
	-20	5,170,147,500	5,330,145,000
4.43	+20	5,170,182,500	5,330,180,000
3.40	+20	5,170,192,500	5,330,210,000

U-NII 2C : (5470 MHz ~ 5725 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5510 MHz	5720 MHz ^{Note1}
		26dBc low edge (Hz)	26dBc High edge(Hz)
3.85	+20(Ref)	5,490,085,000	-
	+50	5,490,115,000	-
	+40	5,490,107,500	-
	+30	5,490,097,500	-
	+20	5,490,085,000	-
	+10	5,490,040,000	-
	0	5,490,010,000	-
	-10	5,489,997,500	-
	-20	5,489,985,000	-
4.43	+20	5,490,022,500	-
3.40	+20	5,490,032,500	-

Note 1: This channel was not performed because operate in cross-band(U-NII 2C & 3).

U-NII 3 : (5725 MHz ~ 5850 MHz)

Supply Voltage (V DC)	TEMP (°C)	Operating Frequency	
		5755 MHz	5795 MHz
		6dBc low edge (Hz)	6dBc High edge(Hz)
3.85	+20(Ref)	5,737,167,500	5,812,640,000
	+50	5,737,182,500	5,812,667,500
	+40	5,737,177,500	5,812,660,000
	+30	5,737,172,500	5,812,647,500
	+20	5,737,167,500	5,812,640,000
	+10	5,737,155,000	5,812,625,000
	0	5,737,127,500	5,812,610,000
	-10	5,737,112,500	5,812,602,500
	-20	5,737,105,000	5,812,597,500
4.43	+20	5,737,130,000	5,812,632,500
3.40	+20	5,737,142,500	5,812,645,000

8.6 Radiated Spurious Emission Measurements

■ Test Procedure

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	160.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	160.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	160.7 ~ 160.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4000		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

• **FCC Part 15.407 (b):** Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the **5.15-5.25 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (2) For transmitters operating in the **5.25-5.35 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (3) For transmitters operating in the **5.47-5.725 GHz band**: all emissions outside of the **5.47-5.725 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (4) For transmitters operating in the **5.725-5.85 GHz band**: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions **below 1 GHz** must comply with the general field strength limits set forth in **Section 15.209**. Further, any U-NII devices using an **AC power line** are required to comply also with the conducted limits set forth in **Section 15.207**.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

■ Test Procedure

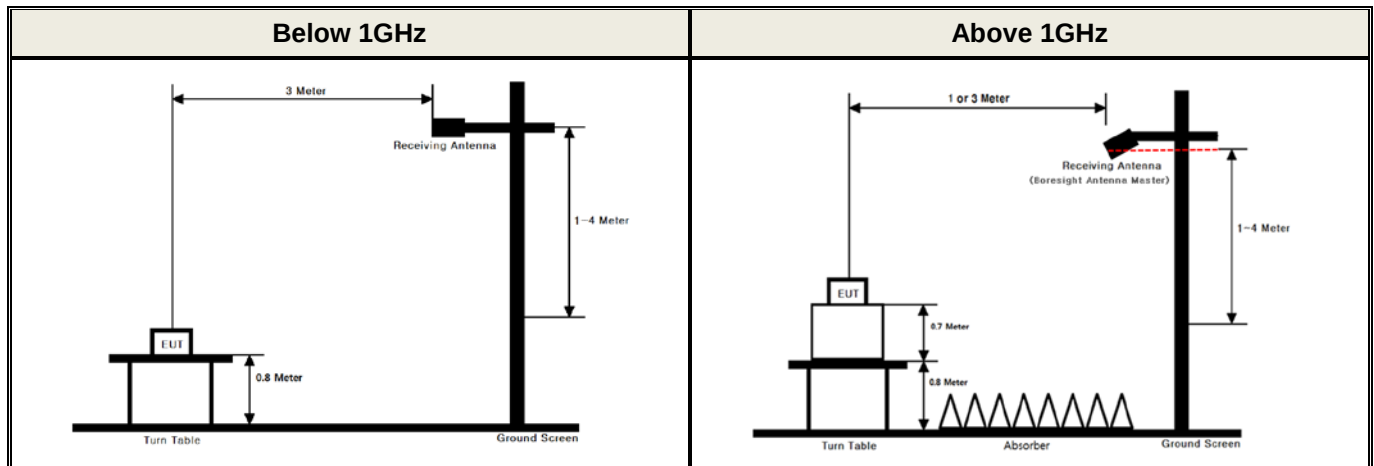

■ Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1m or 3 m away from the receiving antenna, which is varied from 1m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of KDB789033 D02v02r01

► General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

▪ EUT Duty Cycle

- (1) The EUT shall be configured or modified to **transmit continuously** except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (**to no lower than 98 percent**) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- (2) If **continuous transmission (or at least 98 percent duty cycle) cannot be achieved** due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
- (3) Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

► **Measurements below 1000 MHz**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using **CISPR quasi-peak detection**; however, **peak detection** is permitted as an alternative to quasi-peak detection.

► **Measurements Above 1000 MHz (Peak)**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Peak emission levels are measured by setting the analyzer as follows:
 - (i) **RBW = 1 MHz.**
 - (ii) **VBW ≥ 3 MHz.**
 - (iii) **Detector = Peak.**
 - (iv) Sweep time = Auto.
 - (v) Trace mode = Max hold.
 - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► **Measurements Above 1000 MHz (Method AD)**

- (i) **RBW = 1 MHz.**
- (ii) **VBW ≥ 3 MHz.**
- (iii) **Detector = RMS**, if $\text{span} / (\# \text{ of points in sweep}) \leq \text{RBW} / 2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (iv) Averaging type = power (i.e., RMS)
 - As an alternative, the detector and averaging type may be set for linear voltage averaging. Some analyzers require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- (v) Sweep time = Auto.
- (vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces shall be averaged.
- (vii) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - **If power averaging (RMS) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle.** For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Please refer to Appendix II for the duty correction factor

Measurement Data:

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : **MIMO(CDD) & 802.11a Normal**

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.99	V	Z	PK	53.17	2.25	N/A	N/A	55.42	74.00	18.58
		5149.93	V	Z	AV	42.14	2.25	N/A	N/A	44.39	54.00	9.61
		10359.61	V	X	PK	47.03	6.04	N/A	N/A	53.07	68.20	15.13
	40 (5200 MHz)	10399.69	V	X	PK	47.74	6.05	N/A	N/A	53.79	68.20	14.41
	48 (5240 MHz)	10480.46	V	X	PK	46.90	6.08	N/A	N/A	52.98	68.20	15.22
U-NII 2A	52 (5260 MHz)	10519.50	V	X	PK	46.27	6.11	N/A	N/A	52.38	68.20	15.82
	60 (5300 MHz)	10600.00	V	X	PK	45.51	6.22	N/A	N/A	51.73	74.00	22.27
		10600.07	V	X	AV	34.57	6.22	N/A	N/A	40.79	54.00	13.21
	64 (5320 MHz)	5350.95	V	Z	PK	52.89	3.04	N/A	N/A	55.93	74.00	18.07
		5350.79	V	Z	AV	42.33	3.04	N/A	N/A	45.37	54.00	8.63
		10639.55	V	X	PK	45.70	6.27	N/A	N/A	51.97	74.00	22.03
		10640.39	V	X	AV	35.29	6.27	N/A	N/A	41.56	54.00	12.44
U-NII 2C	100 (5500 MHz)	5459.32	V	Z	PK	51.58	3.45	N/A	N/A	55.03	74.00	18.97
		5459.27	V	Z	AV	41.78	3.45	N/A	N/A	45.23	54.00	8.77
		5469.24	V	Z	PK	53.51	3.48	N/A	N/A	56.99	68.20	11.21
		11000.50	V	X	PK	46.46	6.74	N/A	N/A	53.20	74.00	20.80
		10999.85	V	X	AV	36.40	6.74	N/A	N/A	43.14	54.00	10.86
	120 (5600 MHz)	11200.03	V	X	PK	46.06	7.36	N/A	N/A	53.42	74.00	20.58
		11199.81	V	X	AV	35.16	7.36	N/A	N/A	42.52	54.00	11.48
	144 (5720 MHz)	11440.23	V	X	PK	45.49	8.10	N/A	N/A	53.59	74.00	20.41
		11439.97	V	X	AV	35.06	8.10	N/A	N/A	43.16	54.00	10.84
U-NII 3	149 (5745 MHz)	5713.52	V	Z	PK	51.83	3.30	N/A	N/A	55.13	68.20	13.07
		5720.46	V	Z	PK	52.99	3.23	N/A	N/A	56.22	78.20	21.98
		11489.80	V	X	PK	45.80	8.26	N/A	N/A	54.06	74.00	19.94
		11489.72	V	X	AV	35.05	8.26	N/A	N/A	43.31	54.00	10.69
	157 (5785 MHz)	11570.02	V	X	PK	45.77	8.34	N/A	N/A	54.11	74.00	19.89
		11570.10	V	X	AV	35.00	8.34	N/A	N/A	43.34	54.00	10.66
	165 (5825 MHz)	5850.97	V	Z	PK	51.71	3.66	N/A	N/A	55.37	78.20	22.83
		5864.23	V	Z	PK	51.74	3.67	N/A	N/A	55.41	68.20	12.79
		11650.09	V	X	PK	46.24	8.40	N/A	N/A	54.64	74.00	19.36
		11650.12	V	X	AV	35.87	8.40	N/A	N/A	44.27	54.00	9.73

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT20) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5148.79	V	Z	PK	53.18	2.25	N/A	N/A	55.43	74.00	18.57
		5148.80	V	Z	AV	42.64	2.25	N/A	N/A	44.89	54.00	9.11
		10360.13	V	X	PK	46.01	6.04	N/A	N/A	52.05	68.20	16.15
	40 (5200 MHz)	10399.58	V	X	PK	47.06	6.05	N/A	N/A	53.11	68.20	15.09
	48 (5240 MHz)	10480.45	V	X	PK	46.74	6.08	N/A	N/A	52.82	68.20	15.38
U-NII 2A	52 (5260 MHz)	10520.21	V	X	PK	46.94	6.11	N/A	N/A	53.05	68.20	15.15
	60 (5300 MHz)	10600.21	V	X	PK	46.45	6.22	N/A	N/A	52.67	74.00	21.33
		10600.13	V	X	AV	35.07	6.22	N/A	N/A	41.29	54.00	12.71
	64 (5320 MHz)	5351.37	V	Z	PK	52.24	3.05	N/A	N/A	55.29	74.00	18.71
		5351.50	V	Z	AV	42.05	3.05	N/A	N/A	45.10	54.00	8.90
		10639.62	V	X	PK	46.17	6.27	N/A	N/A	52.44	74.00	21.56
		10639.67	V	X	AV	34.88	6.27	N/A	N/A	41.15	54.00	12.85
U-NII 2C	100 (5500 MHz)	5459.01	V	Z	PK	52.33	3.45	N/A	N/A	55.78	74.00	18.22
		5459.12	V	Z	AV	41.62	3.45	N/A	N/A	45.07	54.00	8.93
		5466.63	V	Z	PK	52.98	3.48	N/A	N/A	56.46	68.20	11.74
		11000.36	V	X	PK	46.68	6.74	N/A	N/A	53.42	74.00	20.58
		10999.53	V	X	AV	36.09	6.74	N/A	N/A	42.83	54.00	11.17
	120 (5600 MHz)	11200.43	V	X	PK	47.07	7.36	N/A	N/A	54.43	74.00	19.57
		11199.63	V	X	AV	35.70	7.36	N/A	N/A	43.06	54.00	10.94
	144 (5720 MHz)	11439.57	V	X	PK	47.10	8.11	N/A	N/A	55.21	74.00	18.79
		11440.04	V	X	AV	35.89	8.11	N/A	N/A	44.00	54.00	10.00
U-NII 3	149 (5745 MHz)	5712.23	V	Z	PK	52.15	3.30	N/A	N/A	55.45	68.20	12.75
		5724.39	V	Z	PK	52.76	3.18	N/A	N/A	55.94	78.20	22.26
		11490.00	V	Z	PK	45.72	8.26	N/A	N/A	53.98	74.00	20.02
		11489.50	V	Z	AV	35.05	8.26	N/A	N/A	43.31	54.00	10.69
	157 (5785 MHz)	11569.70	V	X	PK	46.58	8.34	N/A	N/A	54.92	74.00	19.08
		11569.79	V	X	AV	35.58	8.34	N/A	N/A	43.92	54.00	10.08
	165 (5825 MHz)	5853.55	V	Z	PK	51.98	3.67	N/A	N/A	55.65	78.20	22.55
		5869.97	V	Z	PK	52.49	3.63	N/A	N/A	56.12	68.20	12.08
		11649.82	V	X	PK	46.74	8.40	N/A	N/A	55.14	74.00	18.86
		11649.73	V	X	AV	35.54	8.40	N/A	N/A	43.94	54.00	10.06

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT40) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.74	H	Y	PK	55.56	2.25	N/A	N/A	57.81	74.00	16.19
		5149.86	H	Y	AV	45.44	2.25	0.13	N/A	47.82	54.00	6.18
		10379.68	V	X	PK	46.08	6.05	N/A	N/A	52.13	68.20	16.07
	46 (5230 MHz)	10460.35	V	X	PK	46.52	6.07	N/A	N/A	52.59	68.20	15.61
U-NII 2A	54 (5270 MHz)	10540.17	V	X	PK	47.38	6.14	N/A	N/A	53.52	68.20	14.68
	62 (5310 MHz)	5353.01	V	Z	PK	58.57	3.05	N/A	N/A	61.62	74.00	12.38
		5352.91	V	Z	AV	46.13	3.05	0.13	N/A	49.31	54.00	4.69
		10620.04	V	X	PK	45.84	6.24	N/A	N/A	52.08	74.00	21.92
		10620.41	V	X	AV	35.26	6.24	0.13	N/A	41.63	54.00	12.37
U-NII 2C	102 (5510 MHz)	5457.90	V	Z	PK	53.04	3.45	N/A	N/A	56.49	74.00	17.51
		5457.42	V	Z	AV	41.94	3.45	0.13	N/A	45.52	54.00	8.48
		5468.73	V	Z	PK	54.38	3.49	N/A	N/A	57.87	68.20	10.33
		11020.11	V	X	PK	46.61	6.80	N/A	N/A	53.41	74.00	20.59
		11019.71	V	X	AV	35.88	6.80	0.13	N/A	42.81	54.00	11.19
	118 (5590 MHz)	11180.41	V	X	PK	45.94	7.30	N/A	N/A	53.24	74.00	20.76
		11180.37	V	X	AV	35.42	7.30	0.13	N/A	42.85	54.00	11.15
	142 (5710 MHz)	11419.51	V	X	PK	45.56	8.04	N/A	N/A	53.60	74.00	20.40
		11420.49	V	X	AV	35.40	8.04	0.13	N/A	43.57	54.00	10.43
U-NII 3	151 (5755 MHz)	5714.04	V	Z	PK	52.77	3.30	N/A	N/A	56.07	68.20	12.13
		5723.97	V	Z	PK	52.83	3.19	N/A	N/A	56.02	78.20	22.18
		11510.11	V	X	PK	45.81	8.30	N/A	N/A	54.11	74.00	19.89
		11509.66	V	X	AV	34.95	8.30	0.13	N/A	43.38	54.00	10.62
	159 (5795 MHz)	5854.00	V	Z	PK	51.53	3.67	N/A	N/A	55.20	78.20	23.00
		5870.27	V	Z	PK	51.74	3.63	N/A	N/A	55.37	68.20	12.83
		11510.03	V	X	PK	45.07	8.30	N/A	N/A	53.37	74.00	20.63
		11509.54	V	X	AV	35.14	8.30	0.13	N/A	43.57	54.00	10.43

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT80) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5149.46	V	Z	PK	52.86	2.25	N/A	N/A	55.11	74.00	18.89
		5149.84	V	Z	AV	42.87	2.25	0.14	N/A	45.26	54.00	8.74
		10420.39	V	X	PK	47.15	6.06	N/A	N/A	53.21	68.20	14.99
U-NII 2A	58 (5290 MHz)	5350.26	V	Z	PK	56.97	3.07	N/A	N/A	60.04	74.00	13.96
		5350.03	V	Z	AV	46.00	3.07	0.14	N/A	49.21	54.00	4.79
		10580.42	V	X	PK	45.80	6.19	N/A	N/A	51.99	68.20	16.21
U-NII 2C	106 (5530 MHz)	5458.98	V	Z	PK	52.60	3.45	N/A	N/A	56.05	74.00	17.95
		5459.01	V	Z	AV	42.10	3.45	0.14	N/A	45.69	54.00	8.31
		5467.33	V	Z	PK	52.20	3.48	N/A	N/A	55.68	68.20	12.52
		11060.21	V	X	PK	47.11	6.93	N/A	N/A	54.04	74.00	19.96
		11059.71	V	X	AV	35.95	6.93	0.14	N/A	43.02	54.00	10.98
	122 (5610 MHz)	11219.87	V	X	PK	46.09	7.42	N/A	N/A	53.51	74.00	20.49
		11220.36	V	X	AV	34.92	7.42	0.14	N/A	42.48	54.00	11.52
	138 (5690 MHz)	11379.65	V	X	PK	44.82	7.92	N/A	N/A	52.74	74.00	21.26
		11379.68	V	X	AV	34.60	7.92	0.14	N/A	42.66	54.00	11.34
U-NII 3	155 (5775 MHz)	5714.18	V	Z	PK	51.13	3.30	N/A	N/A	54.43	68.20	13.77
		5723.87	V	Z	AV	51.60	3.19	0.14	N/A	54.93	78.20	23.27
		5852.64	V	Z	PK	51.21	3.67	N/A	N/A	54.88	78.20	23.32
		5861.18	V	Z	AV	50.49	3.69	0.14	N/A	54.32	68.20	13.88
		11549.91	V	X	PK	45.97	8.33	N/A	N/A	54.30	74.00	19.70
		11550.28	V	X	AV	35.17	8.33	0.14	N/A	43.64	54.00	10.36

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.22	V	X	PK	50.97	2.25	N/A	N/A	53.22	74.00	20.78
		5149.60	V	X	AV	40.00	2.25	N/A	N/A	42.25	54.00	11.75
		10360.01	V	X	PK	46.23	6.04	N/A	N/A	52.27	68.20	15.93
	40 (5200 MHz)	10399.49	V	X	PK	47.26	6.05	N/A	N/A	53.31	68.20	14.89
	48 (5240 MHz)	10479.62	V	X	PK	46.36	6.08	N/A	N/A	52.44	68.20	15.76
U-NII 2A	52 (5260 MHz)	10519.77	V	X	PK	46.50	6.11	N/A	N/A	52.61	68.20	15.59
	60 (5300 MHz)	10600.09	V	X	PK	46.14	6.22	N/A	N/A	52.36	74.00	21.64
		10600.06	V	X	AV	35.51	6.22	N/A	N/A	41.73	54.00	12.27
	64 (5320 MHz)	5351.26	V	X	PK	52.16	3.05	N/A	N/A	55.21	74.00	18.79
		5351.13	V	X	AV	41.11	3.05	N/A	N/A	44.16	54.00	9.84
		10640.09	V	X	PK	45.99	6.27	N/A	N/A	52.26	74.00	21.74
		10640.12	V	X	AV	35.18	6.27	N/A	N/A	41.45	54.00	12.55
U-NII 2C	100 (5500 MHz)	5452.75	V	X	PK	50.48	3.43	N/A	N/A	53.91	74.00	20.09
		5452.77	V	X	AV	39.48	3.43	N/A	N/A	42.91	54.00	11.09
		5466.51	V	X	PK	50.55	3.43	N/A	N/A	53.98	68.20	14.22
		11000.37	V	X	PK	47.53	6.74	N/A	N/A	54.27	74.00	19.73
		10999.85	V	X	AV	35.78	6.74	N/A	N/A	42.52	54.00	11.48
	120 (5600 MHz)	11200.04	V	X	PK	46.27	7.36	N/A	N/A	53.63	74.00	20.37
		11200.12	V	X	AV	35.65	7.36	N/A	N/A	43.01	54.00	10.99
	144 (5720 MHz)	11440.25	V	X	PK	46.26	8.10	N/A	N/A	54.36	74.00	19.64
		11440.17	V	X	AV	35.33	8.10	N/A	N/A	43.43	54.00	10.57
U-NII 3	149 (5745 MHz)	5714.48	V	X	PK	50.04	3.30	N/A	N/A	53.34	68.20	14.86
		5723.31	V	X	PK	52.20	3.20	N/A	N/A	55.40	78.20	22.80
		11490.27	V	X	PK	45.63	8.26	N/A	N/A	53.89	74.00	20.11
		11490.53	V	X	AV	35.08	8.26	N/A	N/A	43.34	54.00	10.66
	157 (5785 MHz)	11569.85	V	X	PK	45.14	8.34	N/A	N/A	53.48	74.00	20.52
		11570.49	V	X	AV	34.99	8.34	N/A	N/A	43.33	54.00	10.67
	165 (5825 MHz)	5855.70	V	X	PK	50.18	3.68	N/A	N/A	53.86	78.20	24.34
		5870.03	V	X	AV	49.65	3.63	N/A	N/A	53.28	68.20	14.92
		11650.09	V	X	PK	46.82	8.40	N/A	N/A	55.22	74.00	18.78
		11650.03	V	X	AV	35.48	8.40	N/A	N/A	43.88	54.00	10.12

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT20) Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.07	V	X	PK	49.42	2.25	N/A	N/A	51.67	74.00	22.33
		5149.12	V	X	AV	39.94	2.25	N/A	N/A	42.19	54.00	11.81
		10359.87	V	X	PK	45.70	6.04	N/A	N/A	51.74	68.20	16.46
	40 (5200 MHz)	10400.08	V	X	PK	46.57	6.05	N/A	N/A	52.62	68.20	15.58
	48 (5240 MHz)	10480.57	V	X	PK	46.58	6.08	N/A	N/A	52.66	68.20	15.54
U-NII 2A	52 (5260 MHz)	10519.85	V	X	PK	46.39	6.11	N/A	N/A	52.50	68.20	15.70
	60 (5300 MHz)	10600.05	V	X	PK	45.53	6.22	N/A	N/A	51.75	74.00	22.25
		10600.09	V	X	AV	35.12	6.22	N/A	N/A	41.34	54.00	12.66
	64 (5320 MHz)	5351.47	V	X	PK	51.68	3.05	N/A	N/A	54.73	74.00	19.27
		5351.17	V	X	AV	41.26	3.05	N/A	N/A	44.31	54.00	9.69
		10640.03	V	X	PK	45.43	6.27	N/A	N/A	51.70	74.00	22.30
		10640.27	V	X	AV	34.92	6.27	N/A	N/A	41.19	54.00	12.81
U-NII 2C	100 (5500 MHz)	5456.27	V	X	PK	50.19	3.44	N/A	N/A	53.63	74.00	20.37
		5456.30	V	X	AV	39.09	3.44	N/A	N/A	42.53	54.00	11.47
		5467.58	V	X	PK	50.10	3.48	N/A	N/A	53.58	68.20	14.62
		10999.87	V	X	PK	46.96	6.74	N/A	N/A	53.70	74.00	20.30
		11000.17	V	X	AV	35.82	6.74	N/A	N/A	42.56	54.00	11.44
	120 (5600 MHz)	11199.68	V	X	PK	46.27	7.36	N/A	N/A	53.63	74.00	20.37
		11200.20	V	X	AV	35.52	7.36	N/A	N/A	42.88	54.00	11.12
	144 (5720 MHz)	11440.00	V	X	PK	46.73	8.10	N/A	N/A	54.83	74.00	19.17
		11439.82	V	X	AV	35.30	8.10	N/A	N/A	43.40	54.00	10.60
U-NII 3	149 (5745 MHz)	5714.90	V	X	PK	50.10	3.30	N/A	N/A	53.40	68.20	14.80
		5724.18	V	X	PK	50.33	3.19	N/A	N/A	53.52	78.20	24.68
		11490.00	V	X	PK	45.72	8.26	N/A	N/A	53.98	74.00	20.02
		11489.50	V	X	AV	35.05	8.26	N/A	N/A	43.31	54.00	10.69
	157 (5785 MHz)	11569.91	V	X	PK	45.12	8.34	N/A	N/A	53.46	74.00	20.54
		11570.01	V	X	AV	34.97	8.34	N/A	N/A	43.31	54.00	10.69
	165 (5825 MHz)	5856.65	V	X	PK	49.09	3.69	N/A	N/A	52.78	78.20	25.42
		5869.49	V	X	PK	49.28	3.63	N/A	N/A	52.91	68.20	15.29
		11650.55	V	X	PK	46.19	8.40	N/A	N/A	54.59	74.00	19.41
		11649.87	V	X	AV	35.20	8.40	N/A	N/A	43.60	54.00	10.40

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT40) Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.98	V	X	PK	54.67	2.25	N/A	N/A	56.92	74.00	17.08
		5149.96	V	X	AV	44.77	2.25	0.13	N/A	47.15	54.00	6.85
		10379.82	V	X	PK	46.13	6.05	N/A	N/A	52.18	68.20	16.02
	46 (5230 MHz)	10459.94	V	X	PK	47.01	6.07	N/A	N/A	53.08	68.20	15.12
U-NII 2A	54 (5270 MHz)	10540.27	V	X	PK	46.61	6.14	N/A	N/A	52.75	68.20	15.45
	62 (5310 MHz)	5352.67	H	X	PK	52.93	3.05	N/A	N/A	55.98	74.00	18.02
		5352.46	H	X	AV	42.96	3.05	0.13	N/A	46.14	54.00	7.86
		10620.62	V	X	PK	45.68	6.24	N/A	N/A	51.92	74.00	22.08
		10620.13	V	X	AV	35.57	6.24	0.13	N/A	41.94	54.00	12.06
U-NII 2C	102 (5510 MHz)	5459.02	V	X	PK	51.85	3.45	N/A	N/A	55.30	74.00	18.70
		5459.02	V	X	AV	40.03	3.45	0.13	N/A	43.61	54.00	10.39
		5463.36	V	X	PK	53.25	3.47	N/A	N/A	56.72	68.20	11.48
		11019.89	V	X	PK	46.56	6.80	N/A	N/A	53.36	74.00	20.64
		11020.32	V	X	AV	36.03	6.80	0.13	N/A	42.96	54.00	11.04
	118 (5590 MHz)	11179.82	V	X	PK	46.46	7.30	N/A	N/A	53.76	74.00	20.24
		11180.38	V	X	AV	35.38	7.30	0.13	N/A	42.81	54.00	11.19
	142 (5710 MHz)	11419.73	V	X	PK	45.89	8.04	N/A	N/A	53.93	74.00	20.07
		11419.73	V	X	AV	35.54	8.04	0.13	N/A	43.71	54.00	10.29
U-NII 3	151 (5755 MHz)	5711.02	V	X	PK	51.64	3.30	N/A	N/A	54.94	68.20	13.26
		5724.07	V	X	PK	57.15	3.19	N/A	N/A	60.34	78.20	17.86
		11510.64	V	X	PK	46.40	8.30	N/A	N/A	54.70	74.00	19.30
		11510.10	V	X	AV	35.01	8.30	0.13	N/A	43.44	54.00	10.56
	159 (5795 MHz)	5854.14	V	X	PK	49.76	3.67	N/A	N/A	53.43	78.20	24.77
		5867.56	V	X	PK	49.09	3.65	N/A	N/A	52.74	68.20	15.46
		11589.87	V	X	PK	46.35	8.36	N/A	N/A	54.71	74.00	19.29
		11589.58	V	X	AV	35.36	8.36	0.13	N/A	43.85	54.00	10.15

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT80) Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5149.95	V	X	PK	57.28	2.25	N/A	N/A	59.53	74.00	14.47
		5149.99	V	X	AV	45.67	2.25	0.14	N/A	48.06	54.00	5.94
		10420.02	V	X	PK	47.75	6.06	N/A	N/A	53.81	68.20	14.39
U-NII 2A	58 (5290 MHz)	5350.29	H	X	PK	52.89	3.04	N/A	N/A	55.93	74.00	18.07
		5350.27	H	X	AV	42.20	3.04	0.14	N/A	45.38	54.00	8.62
		10580.06	V	X	PK	46.27	6.19	N/A	N/A	52.46	68.20	15.74
U-NII 2C	106 (5530 MHz)	5458.93	V	X	PK	50.05	3.45	N/A	N/A	53.50	74.00	20.50
		5459.15	V	X	AV	39.38	3.45	0.14	N/A	42.97	54.00	11.03
		5465.70	V	X	PK	49.77	3.48	N/A	N/A	53.25	68.20	14.95
		11060.34	V	X	PK	47.17	6.93	N/A	N/A	54.10	74.00	19.90
		11059.89	V	X	AV	36.56	6.93	0.14	N/A	43.63	54.00	10.37
	122 (5610 MHz)	11220.00	V	X	PK	46.33	7.42	N/A	N/A	53.75	74.00	20.25
		11220.12	V	X	AV	35.26	7.42	0.14	N/A	42.82	54.00	11.18
	138 (5690 MHz)	11379.99	V	X	PK	46.48	7.92	N/A	N/A	54.40	74.00	19.60
		11379.84	V	X	AV	35.51	7.92	0.14	N/A	43.57	54.00	10.43
U-NII 3	155 (5775 MHz)	5712.39	V	X	PK	53.48	3.30	N/A	N/A	56.78	68.20	11.42
		5720.59	V	X	PK	56.67	3.23	N/A	N/A	59.90	78.20	18.30
		5851.16	V	X	PK	52.14	3.66	N/A	N/A	55.80	78.20	22.40
		5860.94	V	X	PK	50.02	3.69	N/A	N/A	53.71	68.20	14.49
		11550.08	V	X	PK	45.71	8.33	N/A	N/A	54.04	74.00	19.96
		11550.36	V	X	AV	35.78	8.33	0.14	N/A	44.25	54.00	9.75

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11n(HT20)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.39	V	Z	PK	52.08	2.25	N/A	N/A	54.33	74.00	19.67
		5149.44	V	Z	AV	42.05	2.25	0.19	N/A	44.49	54.00	9.51
		10360.17	V	X	PK	46.76	6.04	N/A	N/A	52.80	68.20	15.40
	40 (5200 MHz)	10400.31	V	X	PK	46.80	6.05	N/A	N/A	52.85	68.20	15.35
	48 (5240 MHz)	10480.21	V	X	PK	46.30	6.08	N/A	N/A	52.38	68.20	15.82
U-NII 2A	52 (5260 MHz)	10519.82	V	X	PK	46.31	6.11	N/A	N/A	52.42	68.20	15.78
	60 (5300 MHz)	10600.33	V	X	PK	45.82	6.22	N/A	N/A	52.04	74.00	21.96
		10600.20	V	X	AV	35.45	6.22	0.19	N/A	41.86	54.00	12.14
	64 (5320 MHz)	5351.01	V	Z	PK	52.37	3.04	N/A	N/A	55.41	74.00	18.59
		5351.22	V	Z	AV	42.28	3.04	0.19	N/A	45.51	54.00	8.49
		10639.74	V	X	PK	45.44	6.27	N/A	N/A	51.71	74.00	22.29
		10640.20	V	X	AV	35.00	6.27	0.19	N/A	41.46	54.00	12.54
U-NII 2C	100 (5500 MHz)	5457.93	V	Z	PK	52.34	3.45	N/A	N/A	55.79	74.00	18.21
		5458.24	V	Z	AV	42.13	3.45	0.19	N/A	45.77	54.00	8.23
		5467.08	V	Z	PK	52.85	3.48	N/A	N/A	56.33	68.20	11.87
		11000.57	V	X	PK	45.60	6.74	N/A	N/A	52.34	74.00	21.66
		10999.91	V	X	AV	36.07	6.74	0.19	N/A	43.00	54.00	11.00
	120 (5600 MHz)	11200.11	V	X	PK	45.70	7.36	N/A	N/A	53.06	74.00	20.94
		11199.83	V	X	AV	35.18	7.36	0.19	N/A	42.73	54.00	11.27
	144 (5720 MHz)	11439.60	V	X	PK	45.70	8.11	N/A	N/A	53.81	74.00	20.19
		11439.86	V	X	AV	35.21	8.11	0.19	N/A	43.51	54.00	10.49
U-NII 3	149 (5745 MHz)	5713.40	V	Z	PK	51.67	3.30	N/A	N/A	54.97	68.20	13.23
		5724.69	V	Z	PK	52.46	3.23	N/A	N/A	55.69	78.20	22.51
		11489.97	V	X	PK	46.15	8.26	N/A	N/A	54.41	74.00	19.59
		11489.63	V	X	AV	35.20	8.26	0.19	N/A	43.65	54.00	10.35
	157 (5785 MHz)	11569.72	V	X	PK	45.71	8.34	N/A	N/A	54.05	74.00	19.95
		11569.69	V	X	AV	35.28	8.34	0.19	N/A	43.81	54.00	10.19
	165 (5825 MHz)	5850.37	V	Z	PK	49.42	3.66	N/A	N/A	53.08	78.20	25.12
		5860.76	V	Z	PK	48.88	3.67	N/A	N/A	52.55	68.20	15.65
		11649.55	V	X	PK	46.16	8.40	N/A	N/A	54.56	74.00	19.44
		11650.53	V	X	AV	35.28	8.40	0.19	N/A	43.87	54.00	10.13

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \text{-9.54 dB}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT40)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5148.83	V	Z	PK	58.61	2.25	N/A	N/A	60.86	74.00	13.14
		5149.15	V	Z	AV	47.81	2.25	0.24	N/A	50.30	54.00	3.70
		10379.62	V	X	PK	46.80	6.05	N/A	N/A	52.85	68.20	15.35
	46 (5230 MHz)	10459.77	V	X	PK	46.85	6.07	N/A	N/A	52.92	68.20	15.28
U-NII 2A	54 (5270 MHz)	10540.10	V	X	PK	46.48	6.14	N/A	N/A	52.62	68.20	15.58
	62 (5310 MHz)	5350.82	V	Z	PK	57.40	3.04	N/A	N/A	60.44	74.00	13.56
		5350.70	V	Z	AV	45.52	3.04	0.24	N/A	48.80	54.00	5.20
		10620.46	V	X	PK	46.17	6.24	N/A	N/A	52.41	74.00	21.59
		10620.41	V	X	AV	35.57	6.24	0.24	N/A	42.05	54.00	11.95
U-NII 2C	102 (5510 MHz)	5458.91	V	Z	PK	54.14	3.45	N/A	N/A	57.59	74.00	16.41
		5458.90	V	Z	AV	42.14	3.45	0.24	N/A	45.83	54.00	8.17
		5469.57	V	Z	PK	56.22	3.49	N/A	N/A	59.71	68.20	8.49
		11019.91	V	X	PK	46.51	6.80	N/A	N/A	53.31	74.00	20.69
		11019.59	V	X	AV	35.93	6.80	0.24	N/A	42.97	54.00	11.03
	118 (5590 MHz)	11180.48	V	X	PK	47.14	7.30	N/A	N/A	54.44	74.00	19.56
		11179.71	V	X	AV	35.54	7.30	0.24	N/A	43.08	54.00	10.92
	142 (5710 MHz)	11419.93	V	X	PK	46.06	8.04	N/A	N/A	54.10	74.00	19.90
		11419.95	V	X	AV	35.43	8.04	0.24	N/A	43.71	54.00	10.29
	U-NII 3	151 (5755 MHz)	5714.17	V	Z	PK	52.06	3.30	N/A	N/A	55.36	68.20
5724.48			V	Z	PK	52.97	3.18	N/A	N/A	56.15	78.20	22.05
11510.22			V	X	PK	45.35	8.30	N/A	N/A	53.65	74.00	20.35
11509.59			V	X	AV	34.75	8.30	0.24	N/A	43.29	54.00	10.71
159 (5795 MHz)		5856.10	V	Z	PK	51.02	3.68	N/A	N/A	54.70	78.20	23.50
		5865.25	V	Z	PK	53.07	3.66	N/A	N/A	56.73	68.20	11.47
		11509.54	V	X	PK	45.40	8.30	N/A	N/A	53.70	74.00	20.30
		11510.19	V	X	AV	34.80	8.30	0.24	N/A	43.34	54.00	10.66

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \text{-9.54 dB}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT80)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5148.78	V	Z	PK	53.69	2.25	N/A	N/A	55.94	74.00	18.06
		5149.66	V	Z	AV	44.11	2.25	0.26	N/A	46.62	54.00	7.38
		10419.52	V	X	PK	47.51	6.06	N/A	N/A	53.57	68.20	14.63
U-NII 2A	58 (5290 MHz)	5350.43	V	Z	PK	55.75	3.07	N/A	N/A	58.82	74.00	15.18
		5350.53	V	Z	AV	44.99	3.07	0.26	N/A	48.32	54.00	5.68
		10580.27	V	X	PK	46.07	6.19	N/A	N/A	52.26	68.20	15.94
U-NII 2C	106 (5530 MHz)	5459.92	V	Z	PK	52.21	3.46	N/A	N/A	55.67	74.00	18.33
		5459.90	V	Z	AV	42.23	3.46	0.26	N/A	45.95	54.00	8.05
		5467.68	V	Z	PK	52.25	3.48	N/A	N/A	55.73	68.20	12.47
		11059.66	V	X	PK	46.51	6.92	N/A	N/A	53.43	74.00	20.57
		11059.81	V	X	AV	35.73	6.93	0.26	N/A	42.92	54.00	11.08
	122 (5610 MHz)	11219.59	V	X	PK	45.66	7.42	N/A	N/A	53.08	74.00	20.92
		11219.67	V	X	AV	35.17	7.42	0.26	N/A	42.85	54.00	11.15
	138 (5690 MHz)	11379.53	V	X	PK	45.20	7.92	N/A	N/A	53.12	74.00	20.88
		11380.01	V	X	AV	34.43	7.92	0.26	N/A	42.61	54.00	11.39
U-NII 3	155 (5775 MHz)	5712.47	V	Z	PK	51.70	3.30	N/A	N/A	55.00	68.20	13.20
		5722.91	V	Z	PK	52.46	3.20	N/A	N/A	55.66	78.20	22.54
		5850.56	V	Z	PK	51.75	3.66	N/A	N/A	55.41	78.20	22.79
		5863.90	V	Z	PK	50.68	3.67	N/A	N/A	54.35	68.20	13.85
		11549.75	V	X	PK	45.74	8.33	N/A	N/A	54.07	74.00	19.93
		11550.12	V	X	AV	35.11	8.33	0.26	N/A	43.70	54.00	10.30

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11n(HT20) Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.12	V	X	PK	51.15	2.25	N/A	N/A	53.40	74.00	20.60
		5149.44	V	X	AV	41.67	2.25	0.19	N/A	44.11	54.00	9.89
		10359.93	V	X	PK	46.20	6.04	N/A	N/A	52.24	68.20	15.96
	40 (5200 MHz)	10400.45	V	X	PK	47.30	6.05	N/A	N/A	53.35	68.20	14.85
	48 (5240 MHz)	10480.02	V	X	PK	47.19	6.08	N/A	N/A	53.27	68.20	14.93
U-NII 2A	52 (5260 MHz)	10519.95	V	X	PK	46.74	6.11	N/A	N/A	52.85	68.20	15.35
	60 (5300 MHz)	10600.27	V	X	PK	46.51	6.22	N/A	N/A	52.73	74.00	21.27
		10600.15	V	X	AV	35.14	6.22	0.19	N/A	41.55	54.00	12.45
	64 (5320 MHz)	5353.71	V	X	PK	51.86	3.05	N/A	N/A	54.91	74.00	19.09
		5353.35	V	X	AV	41.27	3.05	0.19	N/A	44.51	54.00	9.49
		10639.96	V	X	PK	45.32	6.27	N/A	N/A	51.59	74.00	22.41
		10640.45	V	X	AV	35.01	6.27	0.19	N/A	41.47	54.00	12.53
U-NII 2C	100 (5500 MHz)	5455.70	V	X	PK	50.04	3.44	N/A	N/A	53.48	74.00	20.52
		5455.90	V	X	AV	39.38	3.44	0.19	N/A	43.01	54.00	10.99
		5468.50	V	X	PK	50.63	3.48	N/A	N/A	54.11	68.20	14.09
		10999.59	V	X	PK	46.58	6.74	N/A	N/A	53.32	74.00	20.68
		10999.64	V	X	AV	36.14	6.74	0.19	N/A	43.07	54.00	10.93
	120 (5600 MHz)	11199.50	V	X	PK	46.54	7.36	N/A	N/A	53.90	74.00	20.10
		11199.53	V	X	AV	35.17	7.36	0.19	N/A	42.72	54.00	11.28
	144 (5720 MHz)	11440.22	V	X	PK	46.09	8.11	N/A	N/A	54.20	74.00	19.80
		11439.77	V	X	AV	35.26	8.11	0.19	N/A	43.56	54.00	10.44
U-NII 3	149 (5745 MHz)	5713.51	V	X	PK	50.23	3.30	N/A	N/A	53.53	68.20	14.67
		5724.58	V	X	PK	51.11	3.18	N/A	N/A	54.29	78.20	23.91
		11490.08	V	X	PK	46.30	8.26	N/A	N/A	54.56	74.00	19.44
		11489.74	V	X	AV	35.23	8.26	0.19	N/A	43.68	54.00	10.32
	157 (5785 MHz)	11569.91	V	X	PK	45.12	8.34	N/A	N/A	53.46	74.00	20.54
		11570.01	V	X	AV	34.97	8.34	0.19	N/A	43.50	54.00	10.50
	165 (5825 MHz)	5854.36	V	X	PK	49.76	3.68	N/A	N/A	53.44	78.20	24.76
		5865.11	V	X	PK	49.99	3.66	N/A	N/A	53.65	68.20	14.55
		11649.98	V	X	PK	46.04	8.40	N/A	N/A	54.44	74.00	19.56
		11649.69	V	X	AV	35.44	8.40	0.19	N/A	44.03	54.00	9.97

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{- Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \text{-9.54 dB}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT40) Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.70	V	X	PK	56.84	2.25	N/A	N/A	59.09	74.00	14.91
		5149.96	V	X	AV	45.50	2.25	0.24	N/A	47.99	54.00	6.01
		10379.83	V	X	PK	46.34	6.05	N/A	N/A	52.39	68.20	15.81
	46 (5230 MHz)	10459.97	V	X	PK	46.56	6.07	N/A	N/A	52.63	68.20	15.57
U-NII 2A	54 (5270 MHz)	10539.56	V	X	PK	47.14	6.14	N/A	N/A	53.28	68.20	14.92
	62 (5310 MHz)	5350.81	H	X	PK	52.01	3.05	N/A	N/A	55.06	74.00	18.94
		5350.60	H	X	AV	41.98	3.05	0.24	N/A	45.27	54.00	8.73
		10620.03	V	X	PK	46.32	6.24	N/A	N/A	52.56	74.00	21.44
		10620.52	V	X	AV	35.35	6.24	0.24	N/A	41.83	54.00	12.17
U-NII 2C	102 (5510 MHz)	5459.65	V	X	PK	52.97	3.46	N/A	N/A	56.43	74.00	17.57
		5459.90	V	X	AV	40.43	3.46	0.24	N/A	44.13	54.00	9.87
		5467.84	V	X	PK	51.83	3.48	N/A	N/A	55.31	68.20	12.89
		11020.60	V	X	PK	46.89	6.80	N/A	N/A	53.69	74.00	20.31
		11020.19	V	X	AV	35.83	6.80	0.24	N/A	42.87	54.00	11.13
	118 (5590 MHz)	11180.30	V	X	PK	45.99	7.30	N/A	N/A	53.29	74.00	20.71
		11180.28	V	X	AV	35.43	7.30	0.24	N/A	42.97	54.00	11.03
	142 (5710 MHz)	11419.71	V	X	PK	46.05	8.04	N/A	N/A	54.09	74.00	19.91
		11420.03	V	X	AV	35.36	8.04	0.24	N/A	43.64	54.00	10.36
U-NII 3	151 (5755 MHz)	5712.79	V	X	PK	51.20	3.30	N/A	N/A	54.50	68.20	13.70
		5723.57	V	X	PK	54.31	3.19	N/A	N/A	57.50	78.20	20.70
		11510.39	V	X	PK	46.69	8.30	N/A	N/A	54.99	74.00	19.01
		11509.91	V	X	AV	35.33	8.30	0.24	N/A	43.87	54.00	10.13
	159 (5795 MHz)	5855.34	V	X	PK	49.26	3.68	N/A	N/A	52.94	78.20	25.26
		5869.75	V	X	PK	50.24	3.63	N/A	N/A	53.87	68.20	14.33
		11590.06	V	X	PK	45.62	8.36	N/A	N/A	53.98	74.00	20.02
		11589.97	V	X	AV	35.18	8.36	0.24	N/A	43.78	54.00	10.22

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT80) Wireless Charging

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5149.15	V	X	PK	51.84	2.25	N/A	N/A	54.09	74.00	19.91
		5149.59	V	X	AV	42.32	2.25	0.26	N/A	44.83	54.00	9.17
		10420.19	V	X	PK	47.02	6.06	N/A	N/A	53.08	68.20	15.12
U-NII 2A	58 (5290 MHz)	5350.90	V	X	PK	51.48	3.04	N/A	N/A	54.52	74.00	19.48
		5351.46	V	X	AV	41.69	3.04	0.26	N/A	44.99	54.00	9.01
		10580.11	V	X	PK	45.95	6.19	N/A	N/A	52.14	68.20	16.06
U-NII 2C	106 (5530 MHz)	5456.99	V	X	PK	50.17	3.45	N/A	N/A	53.62	74.00	20.38
		5456.86	V	X	AV	40.32	3.45	0.26	N/A	44.03	54.00	9.97
		5463.38	V	X	PK	51.10	3.47	N/A	N/A	54.57	68.20	13.63
		11059.91	V	X	PK	47.01	6.93	N/A	N/A	53.94	74.00	20.06
		11060.33	V	X	AV	36.43	6.93	0.26	N/A	43.62	54.00	10.38
	122 (5610 MHz)	11219.63	V	X	PK	45.83	7.42	N/A	N/A	53.25	74.00	20.75
		11220.10	V	X	AV	35.25	7.42	0.26	N/A	42.93	54.00	11.07
	138 (5690 MHz)	11380.31	V	X	PK	45.26	7.92	N/A	N/A	53.18	74.00	20.82
		11379.69	V	X	AV	35.11	7.92	0.26	N/A	43.29	54.00	10.71
U-NII 3	155 (5775 MHz)	5710.35	V	X	PK	51.74	3.30	N/A	N/A	55.04	68.20	13.16
		5720.61	V	X	PK	56.50	3.23	N/A	N/A	59.73	78.20	18.47
		5852.95	V	X	PK	52.23	3.67	N/A	N/A	55.90	78.20	22.30
		5862.64	V	X	PK	49.62	3.68	N/A	N/A	53.30	68.20	14.90
		11549.51	V	X	PK	46.32	8.33	N/A	N/A	54.65	74.00	19.35
		11549.96	V	X	AV	35.91	8.33	0.26	N/A	44.50	54.00	9.50

Note.

1. The radiated emissions were investigated 9kHz to the 10th harmonic of highest fundamental frequency. And no other spurious and harmonic emissions were found above listed frequencies.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor (-9.54 dB) is applied to the result.

$$\text{Calculation of distance factor} = 20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = \underline{\underline{-9.54 \text{ dB}}}$$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 1	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBUV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2483.89	H	Y	PK	52.31	3.10	N/A	N/A	55.41	74.00	18.59
2483.83	H	Y	AV	42.45	3.10	0.75	N/A	46.30	54.00	7.70
4923.59	H	Y	PK	50.06	1.78	N/A	N/A	51.84	74.00	22.16
4924.51	H	Y	AV	39.44	1.78	0.75	N/A	41.97	54.00	12.03
5149.70	H	Y	PK	57.39	2.25	N/A	N/A	59.64	74.00	14.36
5149.71	H	Y	AV	44.29	2.25	0.13	N/A	46.67	54.00	7.33
10379.83	V	X	PK	46.82	6.05	N/A	N/A	52.87	68.20	15.33

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 2A	802.11ac(VHT40)	5310 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBUV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2483.75	H	Y	PK	53.15	3.10	N/A	N/A	56.25	74.00	17.75
2483.50	H	Y	AV	41.95	3.10	0.75	N/A	45.80	54.00	8.20
4923.89	H	Y	PK	49.62	1.78	N/A	N/A	51.40	74.00	22.60
4924.03	H	Y	AV	39.17	1.78	0.75	N/A	41.70	54.00	12.30
5350.02	V	Z	PK	55.58	3.04	N/A	N/A	58.62	74.00	15.38
5350.03	V	Z	AV	42.97	3.04	0.13	N/A	46.14	54.00	7.86
10619.94	V	X	PK	45.43	6.24	N/A	N/A	51.67	74.00	22.33
10619.91	V	X	AV	35.63	6.24	0.13	N/A	42.00	54.00	12.00

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$E[\text{dBUV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBUV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 2C	802.11ac(VHT40)	5510 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.47	H	Y	PK	53.27	3.10	N/A	N/A	56.37	74.00	17.63
2483.92	H	Y	AV	42.58	3.10	0.75	N/A	46.43	54.00	7.57
4923.58	H	Y	PK	50.30	1.78	N/A	N/A	52.08	74.00	21.92
4924.06	H	Y	AV	39.01	1.78	0.75	N/A	41.54	54.00	12.46
5458.88	V	Z	PK	49.28	3.45	N/A	N/A	52.73	74.00	21.27
5458.89	V	Z	AV	39.16	3.45	0.13	N/A	42.74	54.00	11.26
5468.16	V	Z	PK	50.17	3.48	N/A	N/A	53.65	68.20	14.55
11020.17	V	X	PK	46.59	6.80	N/A	N/A	53.39	74.00	20.61
11019.87	V	X	AV	35.77	6.80	0.13	N/A	42.70	54.00	11.30

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 3	802.11ac(VHT40)	5755 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.14	H	Y	PK	53.89	3.10	N/A	N/A	56.99	74.00	17.01
2483.98	H	Y	AV	42.45	3.10	0.75	N/A	46.30	54.00	7.70
4923.90	H	Y	PK	50.73	1.78	N/A	N/A	52.51	74.00	21.49
4924.50	H	Y	AV	39.70	1.78	0.75	N/A	42.23	54.00	11.77
5711.16	V	Z	PK	49.02	3.30	N/A	N/A	52.32	68.20	15.88
5721.65	V	Z	PK	49.00	3.22	N/A	N/A	52.22	78.20	25.98
11510.31	V	X	PK	45.85	8.30	N/A	N/A	54.15	74.00	19.85
11509.83	V	X	AV	34.97	8.30	0.13	N/A	43.40	54.00	10.60

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$\text{E[dBuV/m]} = \text{EIRP[dBm]} + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11n(HT20)	2472 MHz
	2	U-NII 1	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.63	Y	H	PK	54.44	3.10	N/A	N/A	57.54	74.00	16.46
2483.51	Y	H	AV	44.59	3.10	0.68	N/A	48.37	54.00	5.63
4945.25	Y	H	PK	49.18	1.83	N/A	N/A	51.01	74.00	22.99
4945.40	Y	H	AV	38.79	1.83	0.68	N/A	41.30	54.00	12.70
5149.66	Z	V	PK	57.27	2.25	N/A	N/A	59.52	74.00	14.48
5149.88	Z	V	AV	46.61	2.25	0.13	N/A	48.99	54.00	5.01
10379.91	Z	V	PK	45.71	6.05	N/A	N/A	51.76	68.20	16.44

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11n(HT20)	2472 MHz
	2	U-NII 2A	802.11ac(VHT40)	5310 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.51	Y	H	PK	53.63	3.10	N/A	N/A	56.73	74.00	17.27
2483.54	Y	H	AV	44.17	3.10	0.68	N/A	47.95	54.00	6.05
4945.15	Y	H	PK	50.07	1.83	N/A	N/A	51.90	74.00	22.10
4944.15	Y	H	AV	38.94	1.83	0.68	N/A	41.45	54.00	12.55
5350.22	Z	V	PK	54.01	3.04	N/A	N/A	57.05	74.00	16.95
5350.44	Z	V	AV	43.52	3.04	0.13	N/A	46.69	54.00	7.31
10619.40	Z	V	PK	45.37	6.24	N/A	N/A	51.61	74.00	22.39
10619.53	Z	V	AV	34.83	6.24	0.13	N/A	41.20	54.00	12.80

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11n(HT20)	2472 MHz
	2	U-NII 2C	802.11ac(VHT40)	5510 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.77	Y	H	PK	54.12	3.10	N/A	N/A	57.22	74.00	16.78
2483.50	Y	H	AV	44.02	3.10	0.68	N/A	47.80	54.00	6.20
4945.15	Y	H	PK	50.07	1.83	N/A	N/A	51.90	74.00	22.10
4944.15	Y	H	AV	38.94	1.83	0.68	N/A	41.45	54.00	12.55
5460.00	Z	V	PK	50.86	3.46	N/A	N/A	54.32	74.00	19.68
5459.32	Z	V	AV	40.01	3.46	0.13	N/A	43.60	54.00	10.40
5466.54	Z	V	PK	53.05	3.49	N/A	N/A	56.54	68.20	11.66
11019.65	Z	V	PK	46.42	6.80	N/A	N/A	53.22	74.00	20.78
11019.47	Z	V	AV	35.90	6.80	0.13	N/A	42.83	54.00	11.17

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :

Simultaneously transmission

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11n(HT20)	2472 MHz
	2	U-NII 3	802.11ac(VHT40)	5755 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.77	Y	H	PK	54.12	3.10	N/A	N/A	57.22	74.00	16.78
2483.50	Y	H	AV	44.02	3.10	0.68	N/A	47.80	54.00	6.20
4944.71	Y	H	PK	49.18	1.83	N/A	N/A	51.01	74.00	22.99
4944.30	Y	H	AV	38.71	1.83	0.68	N/A	41.22	54.00	12.78
5714.14	Z	V	PK	48.97	3.30	N/A	N/A	52.27	68.20	15.93
5723.80	Z	V	PK	50.12	3.20	N/A	N/A	53.32	78.20	24.88
11511.58	Z	V	PK	44.97	8.30	N/A	N/A	53.27	74.00	20.73
11511.34	Z	V	AV	34.80	8.30	0.13	N/A	43.23	54.00	10.77

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

Margin = Limit - Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL - AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$E[\text{dBuV/m}] = EIRP[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 1	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.71	X	H	PK	52.46	3.10	N/A	N/A	55.56	74.00	18.44
2483.68	X	H	AV	42.17	3.10	0.75	N/A	46.02	54.00	7.98
4924.25	X	H	PK	50.14	1.78	N/A	N/A	51.92	74.00	22.08
4924.45	X	H	AV	39.35	1.78	0.75	N/A	41.88	54.00	12.12
5149.34	X	V	PK	55.86	2.25	N/A	N/A	58.11	74.00	15.89
5149.60	X	V	AV	44.81	2.25	0.13	N/A	47.19	54.00	6.81
10380.24	X	V	PK	46.72	6.05	N/A	N/A	52.77	68.20	15.43

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 2A	802.11ac(VHT40)	5310 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.60	X	H	PK	53.17	3.10	N/A	N/A	56.27	74.00	17.73
2483.58	X	H	AV	42.30	3.10	0.75	N/A	46.15	54.00	7.85
4923.93	X	H	PK	50.56	1.78	N/A	N/A	52.34	74.00	21.66
4923.93	X	H	AV	39.40	1.78	0.75	N/A	41.93	54.00	12.07
5351.39	X	V	PK	50.79	3.04	N/A	N/A	53.83	74.00	20.17
5350.90	X	V	AV	40.76	3.04	0.13	N/A	43.93	54.00	10.07
10620.48	X	V	PK	48.14	6.24	N/A	N/A	54.38	74.00	19.62
10620.17	X	V	AV	35.69	6.24	0.13	N/A	42.06	54.00	11.94

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$\text{E}[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 2C	802.11ac(VHT40)	5510 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.88	X	H	PK	52.22	3.10	N/A	N/A	55.32	74.00	18.68
2483.86	X	H	AV	42.24	3.10	0.75	N/A	46.09	54.00	7.91
4923.99	X	H	PK	49.62	1.78	N/A	N/A	51.40	74.00	22.60
4923.83	X	H	AV	39.51	1.78	0.75	N/A	42.04	54.00	11.96
5458.46	X	V	PK	50.38	3.45	N/A	N/A	53.83	74.00	20.17
5458.43	X	V	AV	39.08	3.45	0.13	N/A	42.66	54.00	11.34
5469.06	X	V	PK	49.96	3.48	N/A	N/A	53.44	68.20	14.76
11019.87	X	V	PK	46.55	6.80	N/A	N/A	53.35	74.00	20.65
11020.38	X	V	AV	36.09	6.80	0.13	N/A	43.02	54.00	10.98

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2462 MHz
	2	U-NII 3	802.11ac(VHT40)	5755 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.78	X	H	PK	52.12	3.10	N/A	N/A	55.22	74.00	18.78
2483.72	X	H	AV	42.63	3.10	0.75	N/A	46.48	54.00	7.52
4924.34	X	H	PK	49.49	1.78	N/A	N/A	51.27	74.00	22.73
4924.07	X	H	AV	39.32	1.78	0.75	N/A	41.85	54.00	12.15
5714.32	X	V	PK	49.04	3.30	N/A	N/A	52.34	68.20	15.86
5722.13	X	V	PK	49.78	3.22	N/A	N/A	53.00	78.20	25.20
11510.43	X	V	PK	45.87	8.30	N/A	N/A	54.17	74.00	19.83
11510.09	X	V	AV	35.56	8.30	0.13	N/A	43.99	54.00	10.01

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$\text{E[dBuV/m]} = \text{EIRP[dBm]} + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2472 MHz
	2	U-NII 1	802.11ac(VHT40)	5190 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.52	X	H	PK	52.94	3.10	N/A	N/A	56.04	74.00	17.96
2483.50	X	H	AV	43.55	3.10	0.75	N/A	47.40	54.00	6.60
4943.00	X	H	PK	49.17	1.83	N/A	N/A	51.00	74.00	23.00
4943.12	X	H	AV	38.59	1.83	0.75	N/A	41.17	54.00	12.83
5149.80	X	V	PK	54.73	2.25	N/A	N/A	56.98	74.00	17.02
5149.88	X	V	AV	44.50	2.25	0.13	N/A	46.88	54.00	7.12
10378.48	X	V	PK	46.14	6.05	N/A	N/A	52.19	68.20	16.01

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2472 MHz
	2	U-NII 2A	802.11ac(VHT40)	5310 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.50	X	H	PK	52.85	3.10	N/A	N/A	55.95	74.00	18.05
2483.51	X	H	AV	43.24	3.10	0.75	N/A	47.09	54.00	6.91
4943.46	X	H	PK	49.10	1.83	N/A	N/A	50.93	74.00	23.07
4943.52	X	H	AV	38.73	1.83	0.75	N/A	41.31	54.00	12.69
5350.52	X	V	PK	50.09	3.04	N/A	N/A	53.13	74.00	20.87
5350.98	X	V	AV	40.34	3.04	0.13	N/A	43.51	54.00	10.49
10621.34	X	V	PK	45.73	6.24	N/A	N/A	51.97	74.00	22.03
10621.20	X	V	AV	34.99	6.24	0.13	N/A	41.36	54.00	12.64

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$\text{E}[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2472 MHz
	2	U-NII 2C	802.11ac(VHT40)	5510 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.60	X	H	PK	53.55	3.10	N/A	N/A	56.65	74.00	17.35
2483.50	X	H	AV	43.35	3.10	0.75	N/A	47.20	54.00	6.80
4942.77	X	H	PK	49.66	1.83	N/A	N/A	51.49	74.00	22.51
4943.48	X	H	AV	38.95	1.83	0.75	N/A	41.53	54.00	12.47
5457.42	X	V	PK	49.09	3.46	N/A	N/A	52.55	74.00	21.45
5458.68	X	V	AV	39.18	3.46	0.13	N/A	42.77	54.00	11.23
5469.18	X	V	PK	49.29	3.49	N/A	N/A	52.78	68.20	15.42
11020.03	X	V	PK	46.06	6.80	N/A	N/A	52.86	74.00	21.14
11020.03	X	V	AV	35.76	6.80	0.13	N/A	42.69	54.00	11.31

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : Simultaneously transmission With Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	1	2.4GHz	802.11ac(VHT20)	2472 MHz
	2	U-NII 3	802.11ac(VHT40)	5755 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.51	X	H	PK	52.37	3.10	N/A	N/A	55.47	74.00	18.53
2483.51	X	H	AV	43.23	3.10	0.75	N/A	47.08	54.00	6.92
4943.28	X	H	PK	49.45	1.83	N/A	N/A	51.28	74.00	22.72
4943.97	X	H	AV	38.86	1.83	0.75	N/A	41.44	54.00	12.56
5710.50	X	V	PK	49.19	3.30	N/A	N/A	52.49	68.20	15.71
5722.14	X	V	PK	49.52	3.20	N/A	N/A	52.72	78.20	25.48
11509.73	X	V	PK	45.59	8.30	N/A	N/A	53.89	74.00	20.11
11509.94	X	V	AV	34.77	8.30	0.13	N/A	43.20	54.00	10.80

- No other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
Margin = Limit - Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL - AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

8.7 AC Conducted Emissions

■ Test Requirements and limit, §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ Test Configuration

See test photographs for the actual connections between EUT and support equipment.

■ Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m $\times$ 3.5 m $\times$ 3.5 m (L $\times$ W $\times$ H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) $\times$ 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

■ Measurement Data: **Comply**

Note 1: See next pages for actual measured spectrum plots and data for worst case result.

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 1 & 802.11ac VHT20 & MIMO(CDD) & 5180 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.

LM-V405EBW

Reference No.

120 V / 60Hz

Model No.

Power Supply

23 °C / 44 %

Serial No.

Temp/Humi.

S.G.LEE

Test Condition



5.1G WLAN

Operator

Memo

LIMIT : FCC P15.207 QP

FCC P15.207 AV

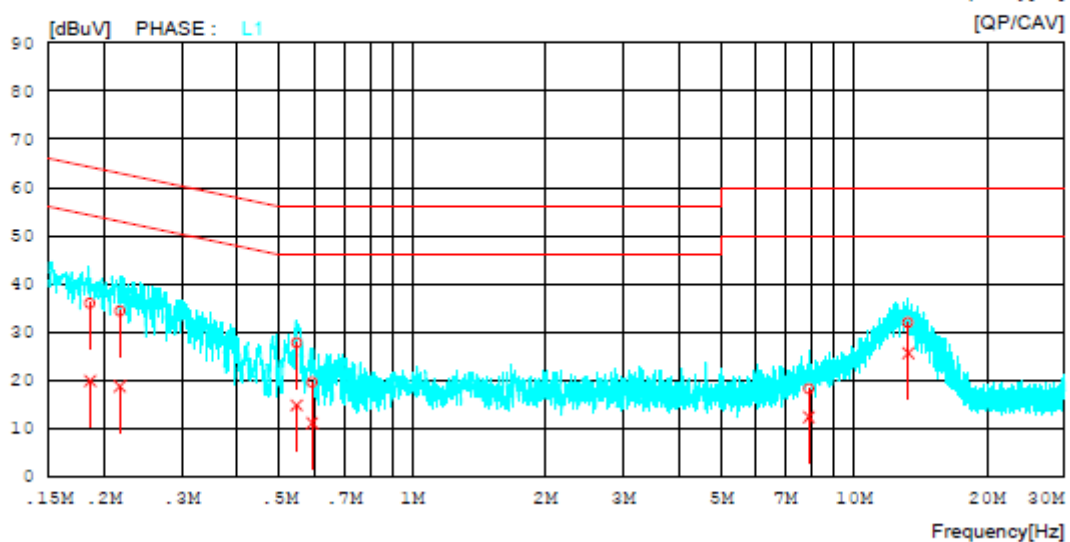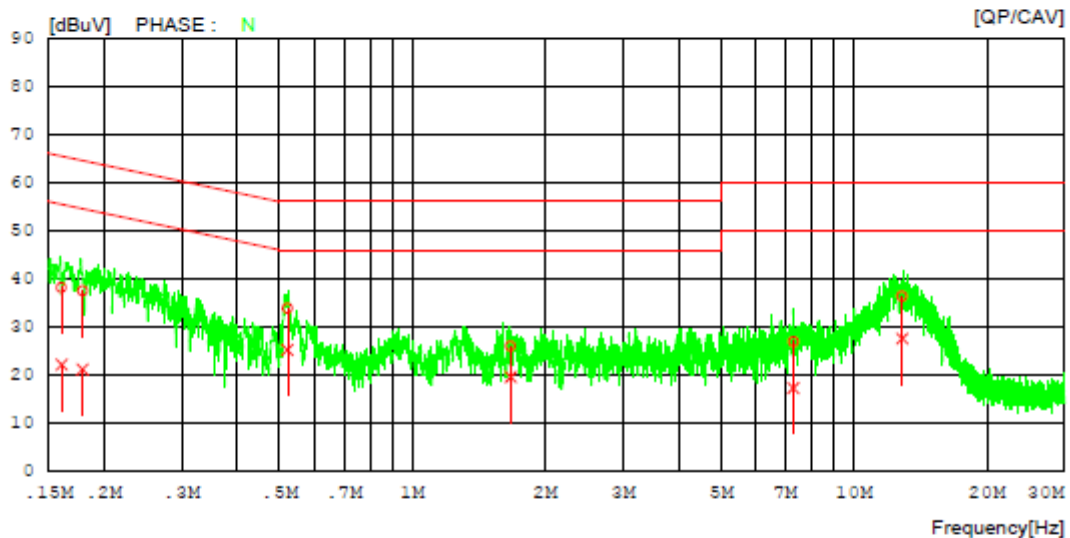

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 1 & 802.11ac VHT20 & MIMO(CDD) & 5180 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.

Model No.

Serial No.

Test Condition

LM-V405EBW

5.1G WLAN

Reference No.

Power Supply

Temp/Humi.

Operator

120 V / 60Hz

23 °C / 44 %

S.G.LEE

Memo

LIMIT : FCC P15.207 QP

FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.16028	27.92	12.02	10.23	38.15	22.25	65.45	55.45	27.30	33.20	N
2	0.17904	27.43	11.03	10.13	37.56	21.16	64.53	54.53	26.97	33.37	N
3	0.52097	23.82	15.26	10.02	33.84	25.28	56.00	46.00	22.16	20.72	N
4	1.66800	15.92	9.49	10.09	26.01	19.58	56.00	46.00	29.99	26.42	N
5	7.28780	16.67	7.07	10.29	26.96	17.36	60.00	50.00	33.04	32.64	N
6	12.85000	25.94	17.17	10.45	36.39	27.62	60.00	50.00	23.61	22.38	N
7	0.18593	25.82	9.77	10.06	35.88	19.83	64.22	54.22	28.34	34.39	L1
8	0.21736	24.28	8.66	9.98	34.26	18.64	62.92	52.92	28.66	34.28	L1
9	0.54610	17.66	4.72	10.00	27.66	14.72	56.00	46.00	28.34	31.28	L1
10	0.59256	9.53	0.98	10.01	19.54	10.99	56.00	46.00	36.46	35.01	L1
11	7.89960	7.83	1.97	10.27	18.10	12.24	60.00	50.00	41.90	37.76	L1
12	13.26640	21.50	15.20	10.42	31.92	25.62	60.00	50.00	28.08	24.38	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2A & 802.11ac VHT20 & MIMO(CDD) & 5320 MHz


Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.
Model No.
Serial No.
Test ConditionLM-V405EBW
5.3G WLANReference No.
Power Supply
Temp/Humi.
Operator120 V / 60Hz
23 °C / 44 %
S.G.LEE

Memo

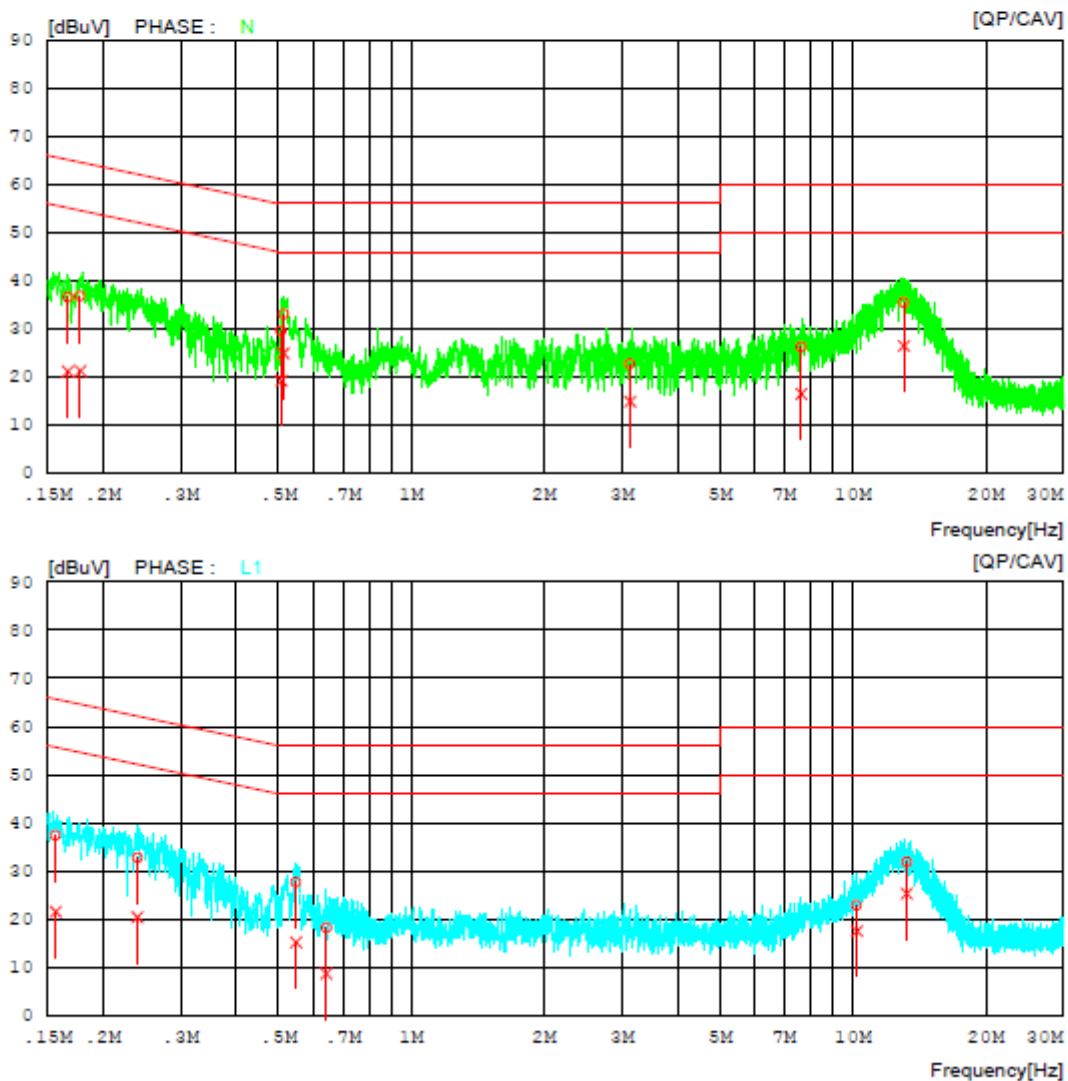LIMIT : FCC P15.207 QP
FCC P15.207 AV

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2A & 802.11ac20 VHT & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.		Reference No.	
Model No.	LM-V405EBW	Power Supply	120 V / 60Hz
Serial No.		Temp/Humi.	23 °C / 44 %
Test Condition	5.3G WLAN	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.16664	26.44	11.01	10.20	36.64	21.21	65.13	55.13	28.49	33.92	N
2	0.17773	26.66	11.18	10.13	36.79	21.31	64.59	54.59	27.80	33.28	N
3	0.50687	19.58	9.29	10.02	29.60	19.31	56.00	46.00	26.40	26.69	N
4	0.51336	23.03	14.90	10.02	33.05	24.92	56.00	46.00	22.95	21.08	N
5	3.12720	12.55	4.76	10.15	22.70	14.91	56.00	46.00	33.30	31.09	N
6	7.63980	15.90	6.21	10.31	26.21	16.52	60.00	50.00	33.79	33.48	N
7	13.03840	24.95	16.03	10.45	35.40	26.48	60.00	50.00	24.60	23.52	N
8	0.15627	27.10	11.25	10.22	37.32	21.47	65.66	55.66	28.34	34.19	L1
9	0.23947	22.70	10.39	9.97	32.67	20.36	62.11	52.11	29.44	31.75	L1
10	0.54738	17.63	5.14	10.00	27.63	15.14	56.00	46.00	28.37	30.86	L1
11	0.64106	8.09	-1.38	10.01	18.10	8.63	56.00	46.00	37.90	37.37	L1
12	10.19360	12.48	7.14	10.32	22.80	17.46	60.00	50.00	37.20	32.54	L1
13	13.23460	21.40	14.85	10.42	31.82	25.27	60.00	50.00	28.18	24.73	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.

LM-V405EBW

Reference No.

120 V / 60Hz

Model No.

Power Supply

23 °C / 44 %

Serial No.

Temp/Humi.

S.G.LEE

Test Condition


5.5G WLAN

Operator

Memo

LIMIT : FCC P15.207 QP

FCC P15.207 AV

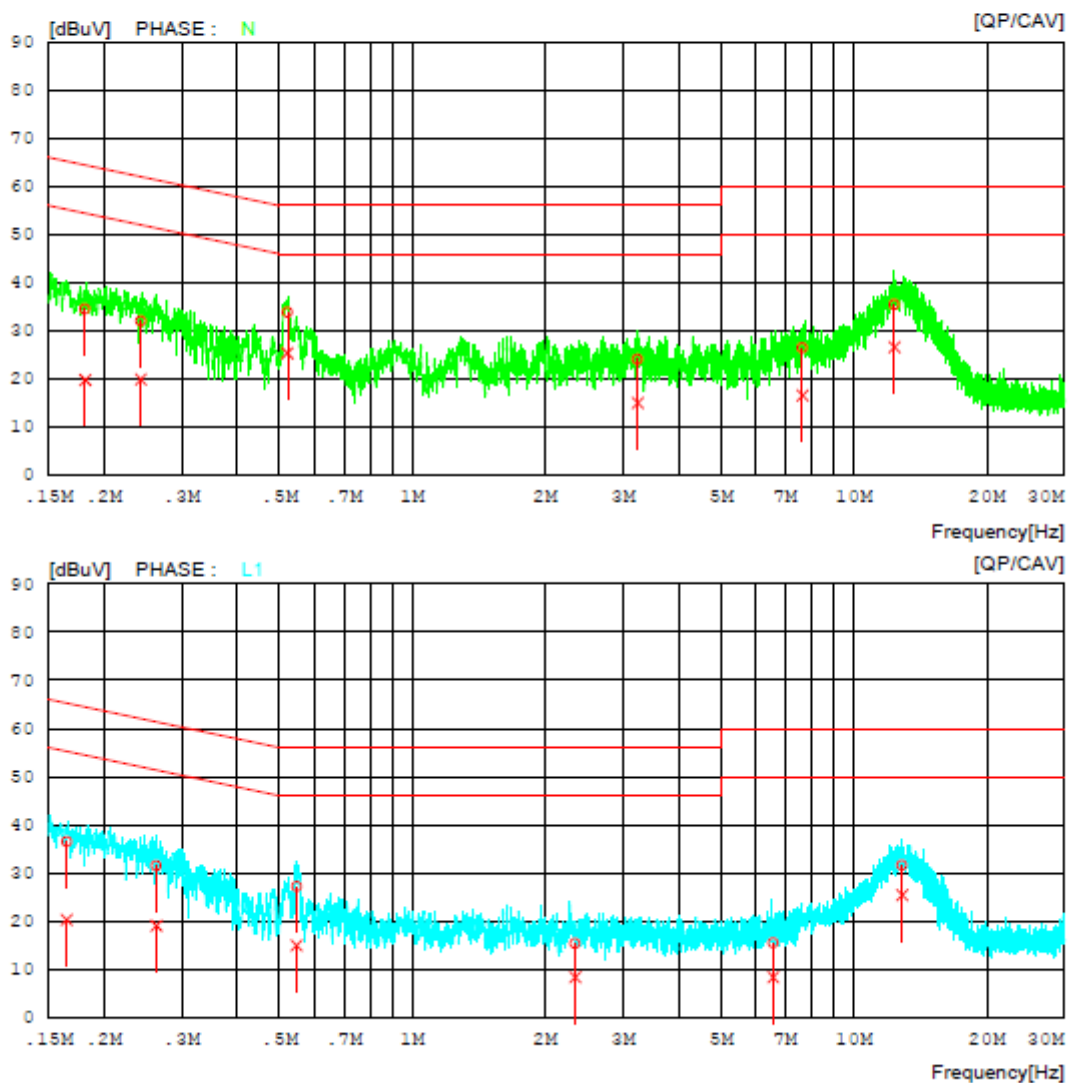

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.		Reference No.	
Model No.	LM-V405EBW	Power Supply	120 V / 60Hz
Serial No.		Temp/Humi.	23 °C / 44 %
Test Condition	5.5G WLAN	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.18136	24.42	9.77	10.11	34.53	19.88	64.42	54.42	29.89	34.54	N
2	0.24230	22.04	9.95	10.00	32.04	19.95	62.02	52.02	29.98	32.07	N
3	0.52055	23.88	15.37	10.02	33.90	25.39	56.00	46.00	22.10	20.61	N
4	3.23640	13.91	4.93	10.15	24.06	15.08	56.00	46.00	31.94	30.92	N
5	7.64180	16.15	6.31	10.31	26.46	16.62	60.00	50.00	33.54	33.38	N
6	12.34380	25.03	16.27	10.42	35.45	26.69	60.00	50.00	24.55	23.31	N
7	0.16460	26.22	10.07	10.18	36.40	20.25	65.23	55.23	28.83	34.98	L1
8	0.26281	21.39	9.05	9.98	31.37	19.03	61.34	51.34	29.97	32.31	L1
9	0.54674	17.13	4.91	10.00	27.13	14.91	56.00	46.00	28.87	31.09	L1
10	2.33800	5.22	-1.81	10.09	15.31	8.28	56.00	46.00	40.69	37.72	L1
11	6.56180	5.14	-1.89	10.23	15.37	8.34	60.00	50.00	44.63	41.66	L1
12	12.85680	21.16	14.99	10.41	31.57	25.40	60.00	50.00	28.43	24.60	L1

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5745 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.

LM-V405EBW

Reference No.

Power Supply

120 V / 60Hz

Model No.

Serial No.

Test Condition

5.7G WLAN

Temp/Humi.

23 °C / 44 %



Operator

S.G.LEE

Memo

LIMIT : FCC P15.207 QP

FCC P15.207 AV

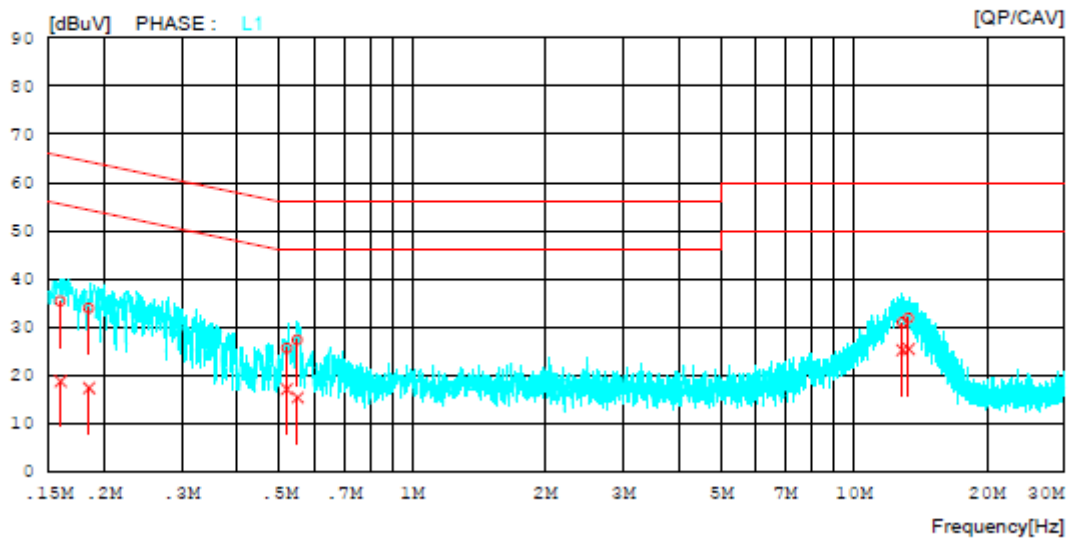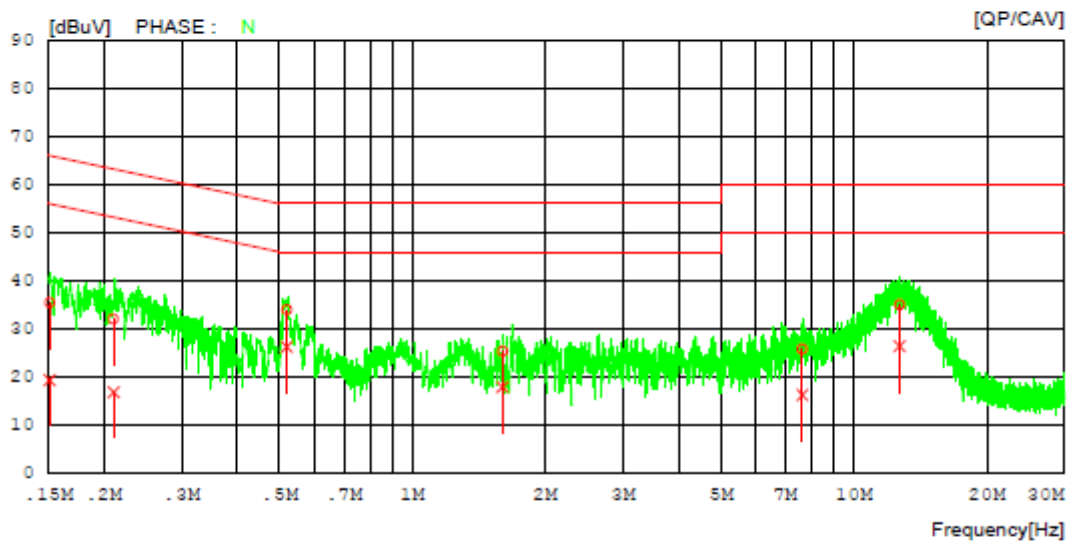

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11ac VHT20 & MIMO(CDD) & 5745 MHz

Results of Conducted Emission

DTNC

Date 2018-11-02

Order No.
Model No. LM-V405EBW
Serial No.
Test Condition 5.7G WLAN

Reference No.
Power Supply 120 V / 60Hz
Temp/Humi. 23 °C / 44 %
Operator S.G.LEE

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15074	25.17	9.10	10.29	35.46	19.29	65.96	55.96	30.50	36.57	N
2	0.21032	22.06	6.90	10.00	32.06	16.90	63.19	53.19	31.13	36.29	N
3	0.51908	23.95	16.26	10.02	33.97	26.28	56.00	46.00	22.03	19.72	N
4	1.59980	15.20	7.87	10.09	25.29	17.96	56.00	46.00	30.71	28.04	N
5	7.63980	15.42	5.96	10.31	25.73	16.27	60.00	50.00	34.27	33.73	N
6	12.68780	24.61	15.97	10.45	35.06	26.42	60.00	50.00	24.94	23.58	N
7	0.15950	25.13	8.48	10.21	35.34	18.69	65.49	55.49	30.15	36.80	L1
8	0.18485	23.73	7.21	10.06	33.79	17.27	64.26	54.26	30.47	36.99	L1
9	0.51925	15.56	7.10	10.00	25.56	17.10	56.00	46.00	30.44	28.90	L1
10	0.54910	17.22	5.30	10.00	27.22	15.30	56.00	46.00	28.78	30.70	L1
11	12.86440	20.48	14.67	10.41	30.89	25.08	60.00	50.00	29.11	24.92	L1
12	13.30360	21.37	14.90	10.42	31.79	25.32	60.00	50.00	28.21	24.68	L1

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	17/12/28	18/12/28	MY49060056
Spectrum Analyzer	Agilent Technologies	N9020A	18/01/03	19/01/03	MY48011700
Multimeter	FLUKE	17B	17/12/26	18/12/26	26030065WS
DC Power Supply	Agilent Technologies	66332A	17/12/27	18/12/27	US37473833
Signal Generator	Rohde Schwarz	SMBV100A	17/12/27	18/12/27	255571
Signal Generator	ANRITSU	MG3695C	18/02/12	19/02/12	173501
IN/OUT Thermohygrometer	SATO	PC-5000TRH-II	18/07/18	19/07/18	N/A
Thermohygrometer	BODYCOM	BJ5478	18/07/09	19/07/09	N/A
Thermohygrometer	BODYCOM	BJ5478	18/01/03	19/01/03	120612-1
HYGROMETER	TESTO	608-H1	18/02/10	19/02/10	34862883
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
Horn Antenna	ETS-Lindgren	3115	17/01/13	19/01/13	9202-3820
Horn Antenna	Schwarzbeck	BBHA 9120C	17/12/04	19/12/04	9120C-561
Horn Antenna	A.H.Systems Inc.	SAS-574	17/07/31	19/07/31	155
PreAmplifier	tsj	MLA-0118-J01-45	18/02/08	19/02/08	17138
PreAmplifier	tsj	MLA-1840-J02-45	18/07/06	19/07/06	16966-10728
Attenuator	SMAJK	SMAJK-2-3	18/07/04	19/07/04	4
Attenuator	SMAJK	SMAJK-50-10	18/07/03	19/07/03	3-50-10
Attenuator	SMAJK	SMAJK-2-3	18/07/02	19/07/02	3
Attenuator	Aeroflex/Weinschel	56-3	18/07/02	19/07/02	Y2370
Attenuator	SRTechnology	F01-B0606-01	18/07/02	19/07/02	13092403
Attenuator	Hefei Shunze	SS5T2.92-10-40	18/07/03	19/07/03	16012202
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	18/07/02	19/07/02	3
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	18/07/02	19/07/02	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	18/07/02	19/07/02	1
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A MA2411B	17/12/27	18/12/27	1338004 1249303
EMI Test Receiver	Rohde Schwarz	ESW44	18/08/06	19/08/06	101645
PreAmplifier	Tsj	MLA-10K01-B01-27	18/01/11	19/01/11	2005354
EMI Test Receiver	Rohde Schwarz	ESCI7	18/02/12	19/02/12	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	18/09/27	19/09/27	101333
LISN	SCHWARZBECK	NNLK 8121	18/03/20	19/03/20	06183
Cable	DT&C	Cable	18/07/05	19/07/05	RF-82
Cable	DT&C	Cable	18/07/05	19/07/05	RF-55
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-1
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-2
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-3
Cable	HUBER+SUHNER	SUCOFLEX	17/12/22	18/12/22	C-4
Cable	Junkosha	MWX241	18/06/25	19/06/25	G-04
Cable	Junkosha	MWX241	18/06/25	19/06/25	G-07
Cable	DT&C	CABLE	18/07/06	19/07/06	G-13
Cable	DT&C	CABLE	18/07/06	19/07/06	G-14
Cable	HUBER+SUHNER	SUCOFLEX104	17/12/22	18/12/22	G-15


Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

APPENDIX I

Conducted Test set up Diagram

- Conducted Measurement

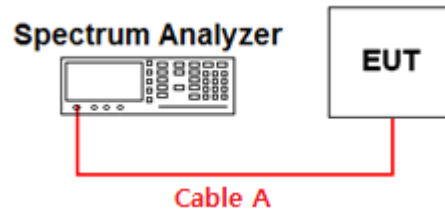

APPENDIX II

Duty Cycle Information

■ Test Procedure

Duty Cycle [$X = \text{On Time} / (\text{On} + \text{Off time})$] is measured using Measurement Procedure of **KDB789033 D02v02r01**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW $\geq$ RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section II.B.1.a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

($T = \text{On time}$ of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

■ Test Results:

Duty cycle: Single

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/ T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11a	6Mbps	5180	2.03	2.07	98.16	0.09	24.63
802.11ac (VHT20)	MCS0	5180	1.90	1.94	98.09	0.09	26.32
802.11ac (VHT40)	MCS0	5190	1.27	1.31	97.18	0.13	39.37
802.11ac (VHT80)	MCS0	5210	1.17	1.21	96.94	0.14	42.74


Duty cycle: SDM

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/ T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11ac (VHT20)	MCS0	5180	0.97	1.01	95.93	0.19	51.55
802.11n (HT40)	MCS8	5190	0.66	0.70	94.69	0.24	75.76
802.11ac (VHT80)	MCS0	5210	0.61	0.65	94.26	0.26	81.97

Single Transmit


Duty Cycle

Test Mode: 802.11a & Ch.36

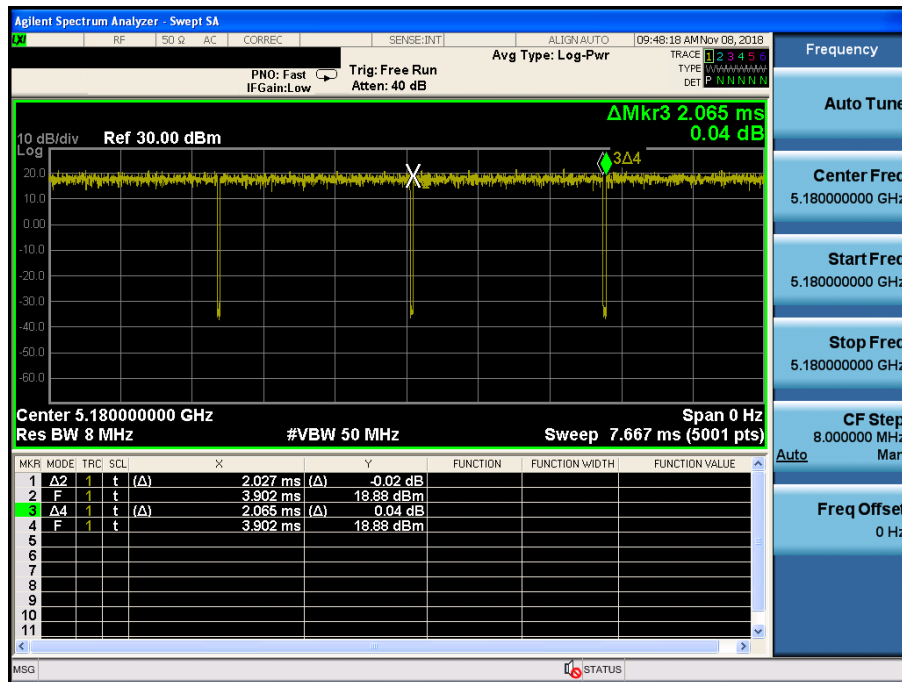


Duty Cycle

Test Mode: 802.11ac VHT20 & Ch.36

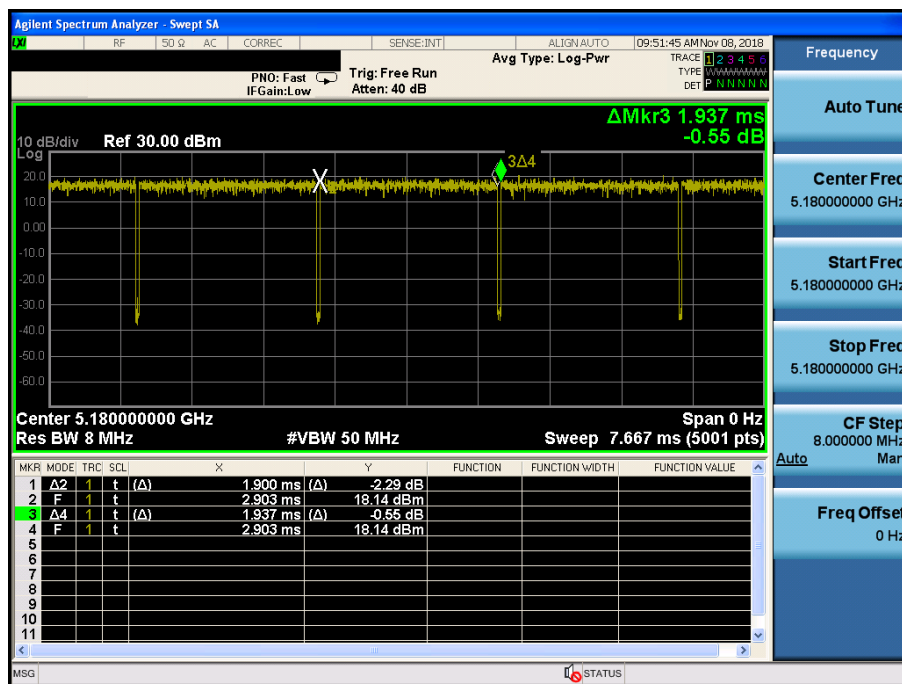


Duty Cycle

Test Mode: 802.11ac VHT40 & Ch.38

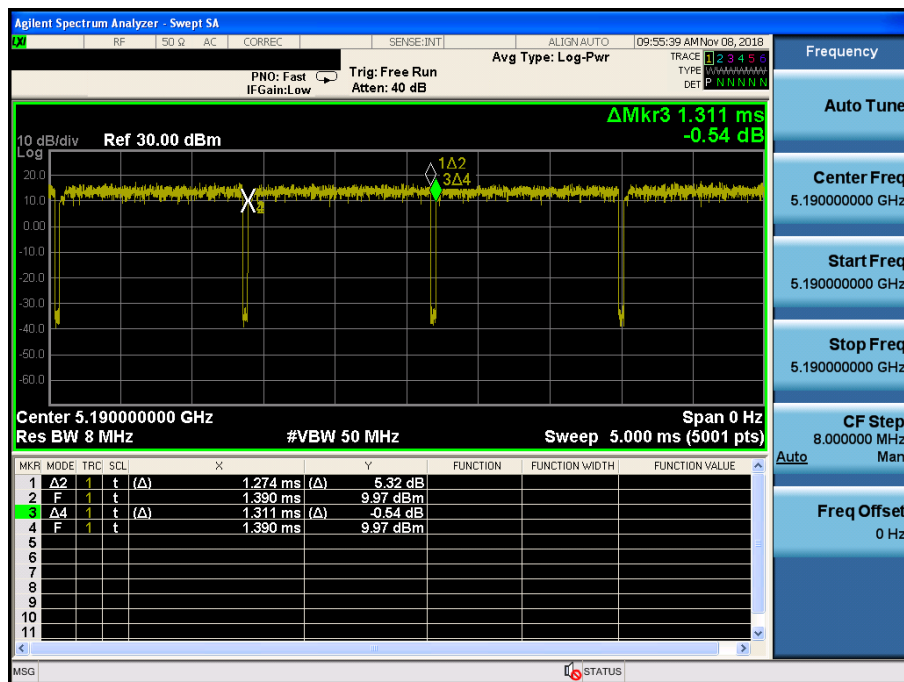

Duty Cycle


Test Mode: 802.11ac VHT80 & Ch.42

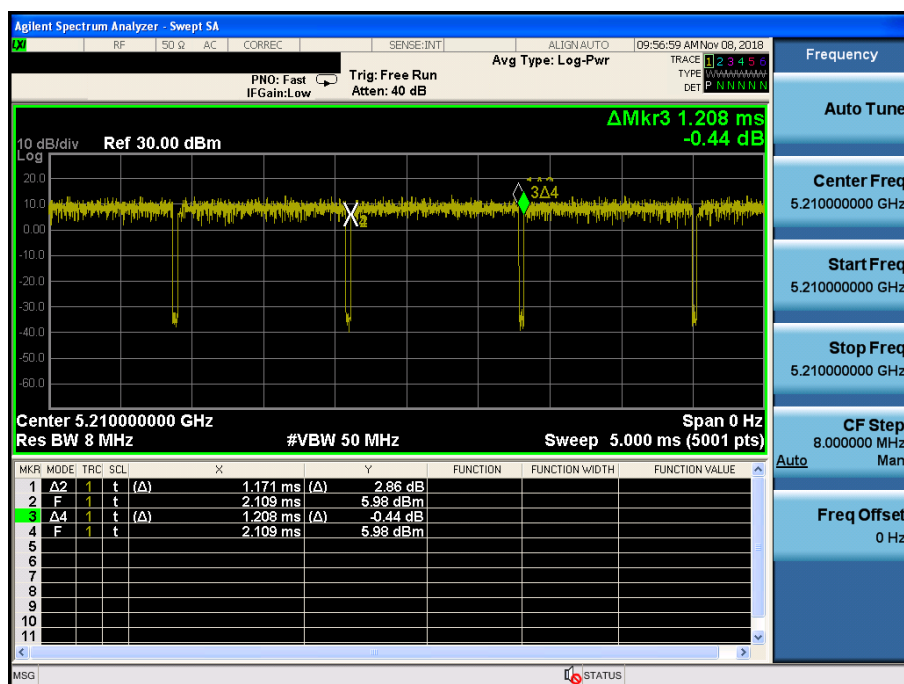

Multiple Transmit _ SDM


Duty Cycle

Test Mode: 802.11n HT20 & Ch.36

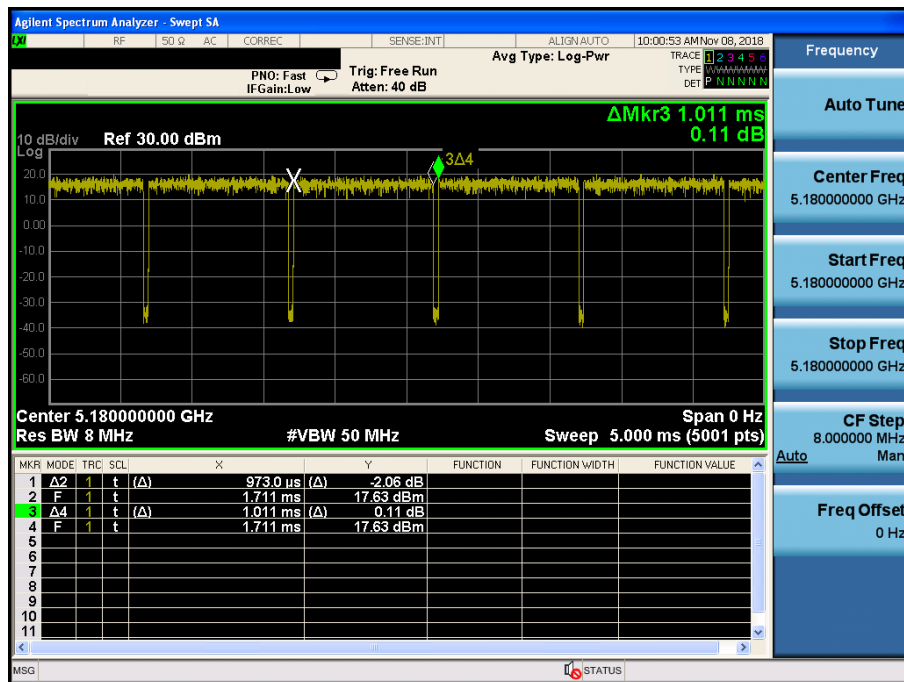


Duty Cycle

Test Mode: 802.11ac VHT40 & Ch.38

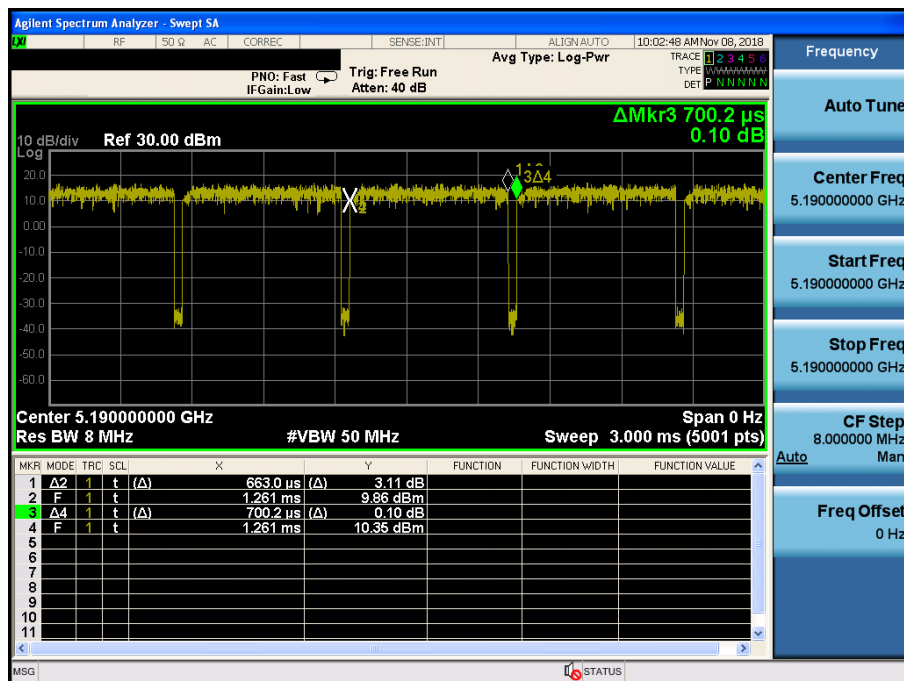

Duty Cycle

Test Mode: 802.11ac VHT80 & Ch.42

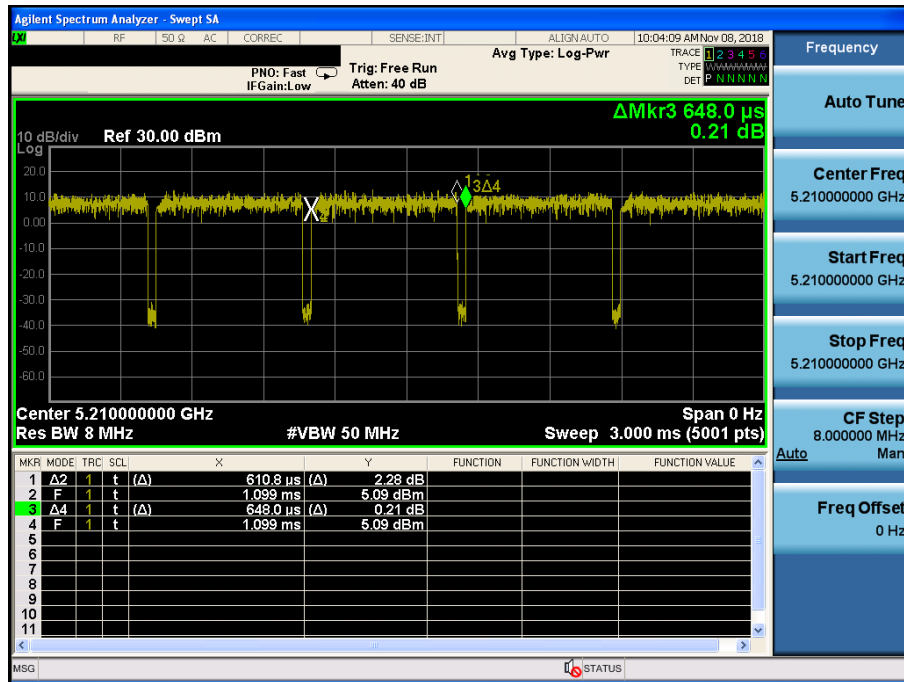


APPENDIX III

Unwanted Emissions (Radiated) Test Plot: MIMO(CDD)


802.11a & U-NII 1 & Ch.36 & Z axis & Ver

Detector Mode : PK

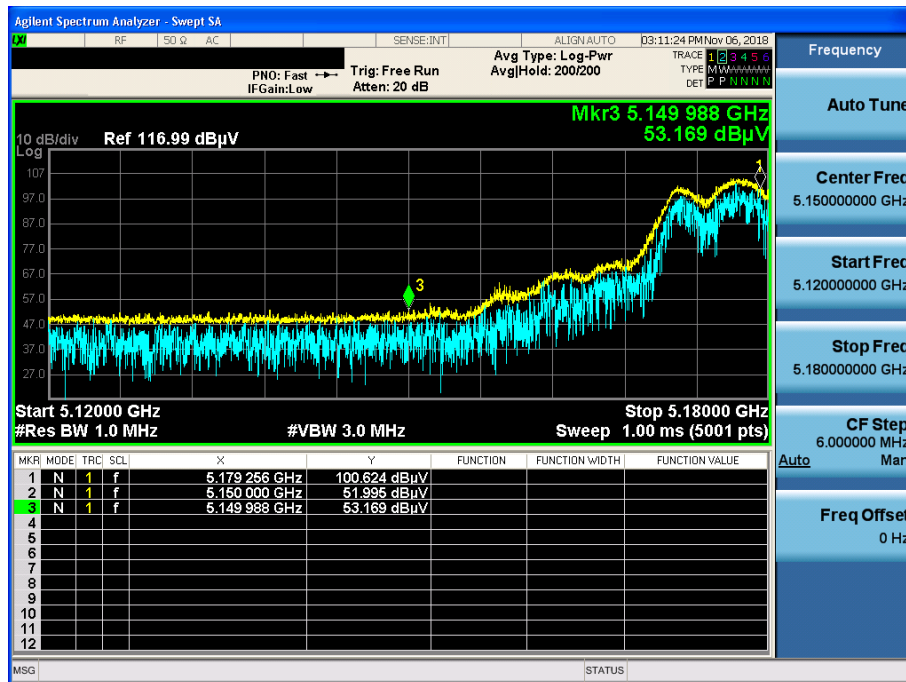


802.11a & U-NII 1 & Ch.36 & Z axis & Ver

Detector Mode : AV

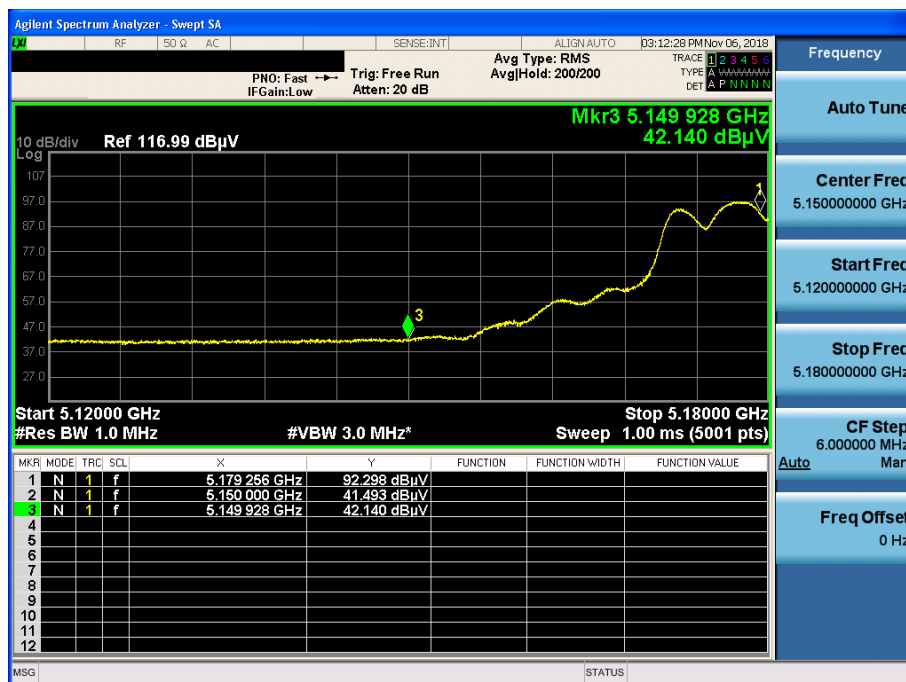


802.11a & U-NII 1 & Ch.40 & X axis & Ver

Detector Mode : PK

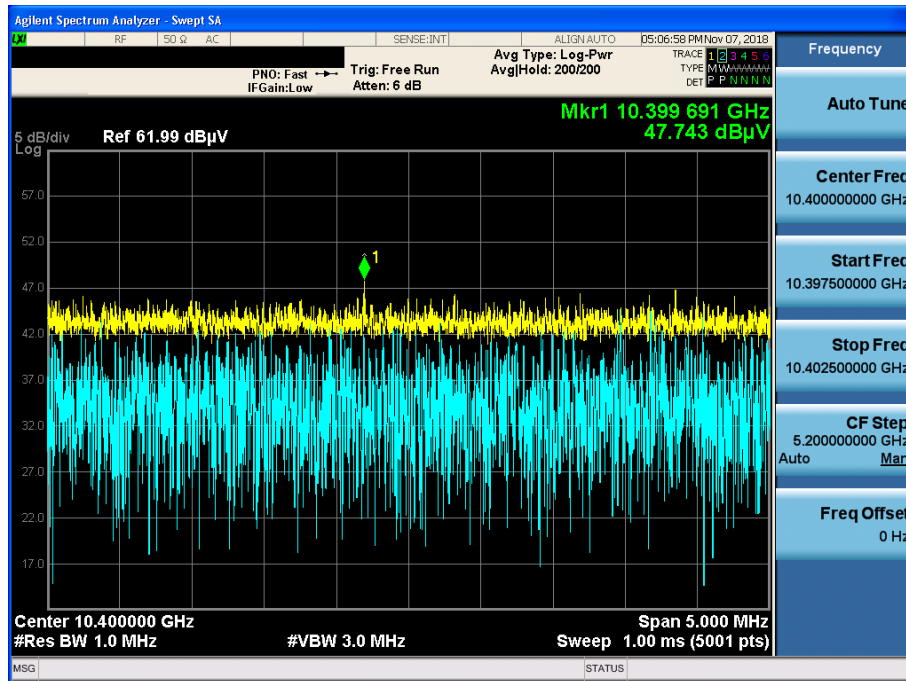

802.11a & U-NII 2A & Ch.64 & Z axis & Ver

Detector Mode : PK

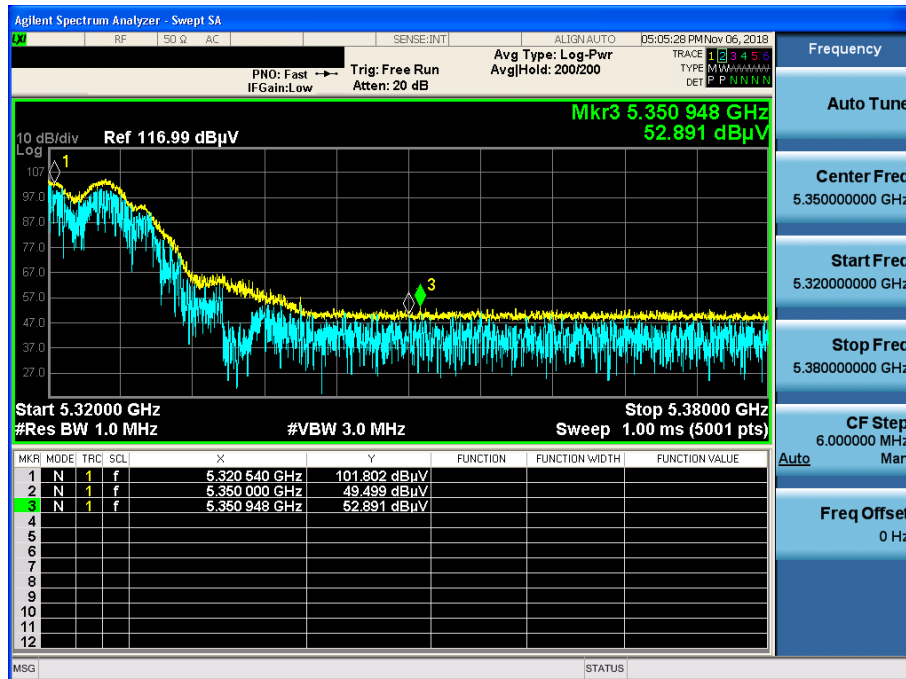

802.11a & U-NII 2A & Ch.64 & Z axis & Ver

Detector Mode : AV



802.11a & U-NII 2A & Ch.64 & X axis & Ver

Detector Mode : AV

