



Full

TEST REPORT

No. I17D00184-SRD06

For

Client : Gemalto M2M GmbH

Production : LTE Data-Only SMT World-Module

Model Name : PLS62-W

FCC ID: QIPPLS62-W

IC ID 7830A-PLS62W

Hardware Version: B2.1

Software Version: 01.000

Issued date: 2017-07-09

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I17D00184-SRD06	00	2017-07-09	Initial creation of test report
I17D00184-SRD06	01	2017-07-09	Second creation of test report

CONTENTS

1.	TEST LABORATORY	5
1.1.	TESTING LOCATION	5
1.2.	TESTING ENVIRONMENT	5
1.3.	PROJECT DATA	5
1.4.	SIGNATURE	5
2.	CLIENT INFORMATION	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4.	STATEMENTS.....	8
4.	REFERENCE DOCUMENTS.....	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
5.	SUMMARY OF TEST RESULTS.....	10
6.	TEST EQUIPMENT UTILIZED	12
7.	TEST ENVIRONMENT	14
ANNEX A.	MEASUREMENT RESULTS.....	15
ANNEX A.1.	OUTPUT POWER	15
ANNEX A.2.	EMISSION LIMIT	38
ANNEX A.3.	FREQUENCY STABILITY	50
ANNEX A.4.	OCCUPIED BANDWIDTH	54
ANNEX A.5.	EMISSION BANDWIDTH.....	79
ANNEX A.6.	BAND EDGE COMPLIANCE.....	104

ANNEX A.7.	CONDUCTED SPURIOUS EMISSION	120
ANNEX A.8.	PEAK-TO-AVERAGE POWER RATIO	123
ANNEX B.	DEVIATIONS FROM PRESCRIBED TEST METHODS.....	125

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
FCC Registration NO.:	489729

1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	25-75%


1.3. Project data

Project Leader:	Yu Anlu
Testing Start Date:	2017-06-26
Testing End Date:	2017-07-05


1.4. Signature



Yang Dejun
(Prepared this test report)



Ding Li
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Gemalto M2M GmbH
Address: Gemalto M2M GmbH, Siemensdamm 50, 13629 Berlin, Germany
Tel: +861059378342
Postcode: 13629

2.2. Manufacturer Information

Company Name: Gemalto M2M GmbH
Address: Gemalto M2M GmbH, Siemensdamm 50, 13629 Berlin, Germany
Tel: +861059378342
Postcode: 13629

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	LTE Data-Only SMT World-Module
Model name	PLS62-W
FCC ID	QIPPLS62-W
IC ID	7830A-PLS62W
Frequency	GSM850/900/1800/1900; WCDMA BandII/IV/V LTE FDD2/4/5/7/12
Extreme Temperature	-10/+55℃
Nominal Voltage	3.8V
Extreme High Voltage	4.5V
Extreme Low Voltage	3.0V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N05	N/A	B2.1	01.000	2017-06-24

Antenna model	Antenna manufacturer	Frequency band	Antenna gain(dBi)
taoglas	Dipole Swivel Terminal Antenna	LTE band2	2.15
taoglas	Dipole Swivel Terminal Antenna	LTE band4	2.15
taoglas	Dipole Swivel Terminal Antenna	LTE band5	5.15
taoglas	Dipole Swivel Terminal Antenna	LTE band7	4.2
taoglas	Dipole Swivel Terminal Antenna	LTE band12	2
taoglas	Dipole Swivel Terminal Antenna	LTE band18	5.15
taoglas	Dipole Swivel Terminal Antenna	LTE band19	5.15
MiniMag	SmarteQ Wireless AB	GSM850	5.15
MiniMag	SmarteQ Wireless AB	GSM1900	2.15
MiniMag	SmarteQ Wireless AB	UMTS band2	2.15
MiniMag	SmarteQ Wireless AB	UMTS band4	2.15
MiniMag	SmarteQ Wireless AB	UMTS band5	5.15

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---

*AE ID: is used to identify the test sample in the lab internally.

3.4. Statements

The product name PLS62-W, supporting GPRS/EDGE/WCDMA/HSDPA/HSUPA/HSPA+/LTE, manufactured by Gemalto M2M GmbH, is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	2014
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2014
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	2014
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r02
RSS-Gen	RSS-Gen —General Requirements for Compliance of Radio Apparatus	Issue 4
RSS-130	Mobile Broadband Services (MBS) Equipment Operating in the Frequency Bands 698-756 MHz and 777-787 MHz	Issue 1
RSS-132	Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz	Issue 3
RSS-133	2 GHz Personal Communications Services	Issue 6
RSS-139	Advanced Wireless Services Equipment Operating in the Bands 1710-1755 MHz and 2110-2155 MHz	Issue 3
RSS-199	Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz	Issue 2

5. SUMMARY OF TEST RESULTS

LTE Band 2

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS-133	Section in this report	Verdict
1	Output Power	24.232(c)	6.4	A.1	P
2	Emission Limit	24.238(a), 2.1051	6.5	A.2	P
3	Frequency Stability	24.235, 2.1055	6.3	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	6.6	A.4	P
5	Emission Bandwidth	24.238(a)	6.6	A.5	P
6	Band Edge Compliance	24.238(a)	6.5	A.6	P
7	Conducted Spurious Emission	24.238, 2.1057	6.13/6.5	A.7	P
8	Peak to Average Power Ratio	24.232 (d)	6.4	A.8	P

LTE Band 4

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS-139	Section in this report	Verdict
1	Output Power	27.50(d)(4)	6.5	A.1	P
2	Emission Limit	27.53(h), 2.1051	6.6	A.2	P
3	Frequency Stability	27.54, 2.1055	6.4	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	6.6	A.4	P
5	Emission Bandwidth	27.53(h)	6.6	A.5	P
6	Band Edge Compliance	27.53(h)	6.6	A.6	P
7	Conducted Spurious Emission	27.53(h), 2.1057	6.6	A.7	P
8	Peak to Average Power Ratio	27.50(a)	6.5	A.8	P

LTE Band 5

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS-132	Section in this report	Verdict
1	Output Power	§2.1046(a), 22.913(a)	5.4	A.1	P
2	Emission Limit	22.917, 2.1051	5.5	A.2	P

3	Frequency Stability	22.235, 2.1055	5.3	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	6.6	A.4	P
5	Emission Bandwidth	22.917(b)	6.6	A.5	P
6	Band Edge Compliance	22.917(b)	5.5	A.6	P
7	Conducted Spurious Emission	22.917, 2.1057	6.13/5.5	A.7	P
			5.4		

LTE Band 7

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS-199	Section in this report	Verdict
1	Output Power	27.50(h)(2)	4.4	A.1	P
2	Emission Limit	27.53(m), 2.1051	4.6	A.2	P
3	Frequency Stability	27.54, 2.1055	4.3	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	4.2	A.4	P
5	Emission Bandwidth	27.53(m)	4.2	A.5	P
6	Band Edge Compliance	27.53(m)	4.6	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	4.6	A.7	P
8	Peak to Average Power Ratio	27.50(a)	4.4	A.8	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS-130	Section in this report	Verdict
1	Output Power	27.50(c)(10)	4.4	A.1	P
2	Emission Limit	27.53(g), 2.1051	4.6	A.2	P
3	Frequency Stability	27.54, 2.1055	4.3	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	6.6	A.4	P
5	Emission Bandwidth	27.53(g)	6.6	A.5	P
6	Band Edge Compliance	27.53(g)	4.6	A.6	P
7	Conducted Spurious Emission	27.53(g), 2.1057	4.6	A.7	P
8	Peak to Average Power Ratio	27.50(a)	4.4	A.8	P

6. Test Equipment Utilized

Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Climate chamber	SH-641	92012011	ESPEC	2016-01-07	2 Year

Radiated emission test system

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMW500	104178	R&S	2017-05-11	1 Year
2	Test Receiver	ESU40	100307	R&S	2017-05-11	1 Year
3	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2014-11-05	3 Year
4	Double Ridged Guide Antenna	ETS-3117	135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2017-05-11	1 Year
6	Substitution Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
7	RF Signal Generator	SMF100A	102314	R&S	2017-05-11	1 Year
8	Substitution Antenna	VUBA9117	9117-266	Schwarzbeck	2014-08-19	3 Year
9	Amplifier	SCU03	10009	R&S	2017-01-05	1 Year

10	Amplifier	NTWPA -008610 F	12023024	Rflight	2017-01-05	1 Year
11	Attenuators	BW-N3 W5+	/	MCL	2017-01-05	1 Year

Conducted test system

No.	Name	Type	SN	Manufacture	Calibration date	Cal.interval
1	Vector Signal Analyser	FSQ26	101096	Rohde&Schwarz	2017-05-11	1 Year
2	Wireless communication comprehensive tester	CMW500	115828	Rohde&Schwarz	2016-11-17	1 Year
3	DC Power Supply	ZUP60-14	LOC-220Z 006 -0007	TDL-Lambda	2017-05-11	1 Year

Software

Name	Version
Eagle FCC LTE auto test system	V3.0
EMC32	V9.15

7. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20%, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. =75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. MEASUREMENT RESULTS

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

A.1.2. Conducted

A.1.2.1. Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1850.7	21.28	20.36
		1880.0	21.51	20.56
		1909.3	21.33	20.39
	1 RB low	1850.7	21.31	20.4
		1880.0	21.52	20.56
		1909.3	21.38	20.46
	50% RB mid	1850.7	21.3	21.3
		1880.0	21.44	21.45
		1909.3	21.34	21.33
	100% RB	1850.7	20.27	19.33
		1880.0	20.42	19.54
		1909.3	20.27	19.36
3MHz	1 RB high	1851.5	21.16	20.3
		1880.0	21.35	20.78
		1908.5	21.3	20.4
	1 RB low	1851.5	21.24	20.38
		1880.0	21.46	20.95
		1908.5	21.38	20.54
	50% RB mid	1851.5	20.18	19.28
		1880.0	20.38	19.56
		1908.5	20.27	19.39

	100% RB	1851.5	20.14	19.24
		1880.0	20.44	19.54
		1908.5	20.32	19.38
5MHz	1 RB high	1852.5	21.16	20.31
		1880.0	21.41	20.18
		1907.5	21.23	20.48
	1 RB low	1852.5	21.25	20.37
		1880.0	21.55	20.33
		1907.5	21.46	20.6
	50% RB mid	1852.5	20.11	20.1
		1880.0	20.42	20.43
		1907.5	20.27	20.28
	100% RB	1852.5	20.12	19.24
		1880.0	20.46	19.52
		1907.5	20.28	19.44
10MHz	1 RB high	1855.0	21.2	20.35
		1880.0	21.45	20.95
		1905.0	21.39	20.52
	1 RB low	1855.0	21.46	20.58
		1880.0	21.82	21.3
		1905.0	21.74	20.97
	50% RB mid	1855.0	20.12	20.12
		1880.0	20.44	20.45
		1905.0	20.33	20.35
	100% RB	1855.0	20.2	19.28
		1880.0	20.58	19.67
		1905.0	20.45	19.55
15MHz	1 RB high	1857.5	21.27	20.52
		1880.0	21.5	21.05
		1902.5	21.43	20.6
	1 RB low	1857.5	21.74	20.91
		1880.0	22	21.57
		1902.5	22.16	21.27
	50% RB mid	1857.5	20.35	20.34
		1880.0	20.56	20.55
		1902.5	20.45	20.48
	100% RB	1857.5	20.44	19.48
		1880.0	20.68	19.74
		1902.5	20.58	19.65

20MHz	1 RB high	1860.0	21.2	20.37
		1880.0	21.43	20.66
		1900.0	21.07	20.45
	1 RB low	1860.0	21.65	20.85
		1880.0	22.11	21.27
		1900.0	21.98	21.35
	50% RB mid	1860.0	20.22	20.24
		1880.0	20.48	20.46
		1900.0	20.35	20.35
	100% RB	1860.0	20.39	19.47
		1880.0	20.64	19.72
		1900.0	20.58	19.68

LTE band 4

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1754.3	21.32	20.53
		1732.5	21.55	20.62
		1710.7	21.78	20.88
	1 RB low	1754.3	21.38	20.55
		1732.5	21.63	20.64
		1710.7	21.83	20.9
	50% RB mid	1754.3	21.44	21.42
		1732.5	21.55	21.55
		1710.7	21.77	21.76
	100% RB	1754.3	20.36	19.42
		1732.5	20.51	19.56
		1710.7	20.73	19.73
3MHz	1 RB high	1753.5	21.39	20.55
		1732.5	21.44	20.87
		1711.5	21.69	20.86
	1 RB low	1753.5	21.45	20.65
		1732.5	21.56	21.02
		1711.5	21.79	20.93
	50% RB mid	1753.5	20.4	19.42
		1732.5	20.47	19.53
		1711.5	20.72	19.78
	100% RB	1753.5	20.44	19.44
		1732.5	20.49	19.58
		1711.5	20.74	19.77
5MHz	1 RB high	1752.5	21.3	20.54
		1732.5	21.42	20.29
		1712.5	21.59	20.86
	1 RB low	1752.5	21.53	20.67
		1732.5	21.59	20.45
		1712.5	21.82	20.96
	50% RB mid	1752.5	20.4	20.4
		1732.5	20.44	20.48
		1712.5	20.7	20.7
	100% RB	1752.5	20.36	19.43
		1732.5	20.54	19.58
		1712.5	20.72	19.77
10MHz	1 RB high	1750	21.43	20.6

		1732.5	21.24	20.81
		1715	21.71	20.88
		1750	21.76	20.88
	1 RB low	1732.5	21.69	21.2
		1715	22.02	21.2
		1750	20.38	20.38
	50% RB mid	1732.5	20.39	20.39
		1715	20.69	20.69
		1750	20.47	19.48
	100% RB	1732.5	20.54	19.56
		1715	20.79	19.84
15MHz	1 RB high	1747.5	21.53	20.7
		1732.5	21.46	21.08
		1717.5	21.78	20.94
	1 RB low	1747.5	22.02	21.18
		1732.5	22.09	21.65
		1717.5	22.33	21.48
	50% RB mid	1747.5	20.51	20.52
		1732.5	20.51	20.51
		1717.5	20.78	20.79
	100% RB	1747.5	20.61	19.61
		1732.5	20.67	19.69
		1717.5	20.85	19.91
20MHz	1 RB high	1745	21.22	20.47
		1732.5	21.33	20.47
		1720	21.47	20.76
	1 RB low	1745	21.86	21.17
		1732.5	22.2	21.33
		1720	22.23	21.47
	50% RB mid	1745	20.39	20.4
		1732.5	20.48	20.49
		1720	20.68	20.69
	100% RB	1745	20.57	19.58
		1732.5	20.68	19.7
		1720	20.87	19.82

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	22.12	21.28
		836.5	22.17	21.17
		824.7	23.01	22.17
	1 RB low	848.3	22.3	21.34
		836.5	22.28	21.21
		824.7	23.06	22.14
	50% RB mid	848.3	22.19	22.18
		836.5	22.21	22.2
		824.7	23.05	23.08
	100% RB	848.3	21.17	20.1
		836.5	21.04	20.13
		824.7	21.96	20.91
3MHz	1 RB high	847.5	22.11	21.3
		836.5	22.01	21.38
		825.5	22.18	21.38
	1 RB low	847.5	22.22	21.44
		836.5	22.25	21.47
		825.5	22.3	21.51
	50% RB mid	847.5	21.04	20.2
		836.5	20.99	20.12
		825.5	21.28	20.31
	100% RB	847.5	21.19	20.23
		836.5	21.03	20.1
		825.5	21.19	20.28
5MHz	1 RB high	846.5	22.07	21.22
		836.5	22.08	20.78
		826.5	22.17	21.24
	1 RB low	846.5	22.3	21.27
		836.5	22.17	20.75
		826.5	22.35	21.41
	50% RB mid	846.5	21.12	21.12
		836.5	21.02	21.02
		826.5	21.17	21.21
	100% RB	846.5	21.13	20.22
		836.5	21.05	20.08
		826.5	21.04	20.38

10MHz	1 RB high	844.0	22.02	21.12
		836.5	21.89	21.33
		829.0	21.88	21.07
	1 RB low	844.0	22.03	21.26
		836.5	21.99	21.48
		829.0	22.19	21.39
	50% RB mid	844.0	21.08	21.07
		836.5	20.93	20.92
		829.0	20.99	20.97
	100% RB	844.0	21.08	20.14
		836.5	20.99	20.09
		829.0	21.18	20.13

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2502.5	20.51	19.56
		2535	20.51	19.29
		2567.5	20.43	19.61
	1 RB low	2502.5	20.63	19.77
		2535	20.65	19.46
		2567.5	20.64	19.83
	50% RB mid	2502.5	19.49	19.49
		2535	19.47	19.47
		2567.5	19.48	19.47
	100% RB	2502.5	19.51	18.63
		2535	19.56	18.62
		2567.5	19.45	18.63
10MHz	1 RB high	2505	20.45	19.72
		2535	20.47	19.97
		2565	20.59	19.76
	1 RB low	2505	20.91	20.14
		2535	20.84	20.41
		2565	20.86	20.09
	50% RB mid	2505	19.48	19.47
		2535	19.52	19.53
		2565	19.47	19.48
	100% RB	2505	19.59	18.72
		2535	19.61	18.69
		2565	19.57	18.68
15MHz	1 RB high	2507.5	20.53	19.83
		2535	20.47	20.11
		2562.5	20.51	19.74
	1 RB low	2507.5	21.27	20.5
		2535	21.07	20.73
		2562.5	21.19	20.38
	50% RB mid	2507.5	19.57	19.61
		2535	19.59	19.57
		2562.5	19.57	19.58
	100% RB	2507.5	19.72	18.78
		2535	19.75	18.81

		2562.5	19.7	18.75
20MHz	1 RB high	2510	20.29	19.55
		2535	20.38	19.62
		2560	20.38	19.69
	1 RB low	2510	21.18	20.42
		2535	21.22	20.47
		2560	21.28	20.56
	50% RB mid	2510	19.44	19.47
		2535	19.57	19.58
		2560	19.52	19.52
	100% RB	2510	19.64	18.69
		2535	19.77	18.85
		2560	19.73	18.82

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	715.3	22.04	21.3
		707.5	22.17	21.27
		699.7	22.13	21.29
	1 RB low	715.3	22.13	21.31
		707.5	22.24	21.32
		699.7	22.16	21.25
	50% RB mid	715.3	22.1	22.15
		707.5	22.22	22.17
		699.7	22.12	22.15
	100% RB	715.3	21.04	20.09
		707.5	21.13	20.21
		699.7	21.09	20.12
3MHz	1 RB high	714.5	22.03	21.24
		707.5	22.01	21.47
		700.5	22.06	21.3
	1 RB low	714.5	22.06	21.22
		707.5	22.1	21.52
		700.5	22.09	21.28
	50% RB mid	714.5	21.03	20.13
		707.5	21.1	20.21
		700.5	21.1	20.18
	100% RB	714.5	21.06	20.08
		707.5	21.08	20.19
		700.5	21.09	20.13
5MHz	1 RB high	713.5	22.02	21.16
		707.5	22.03	20.83
		701.5	22.05	21.21
	1 RB low	713.5	22.08	21.3
		707.5	22.2	20.91
		701.5	22.11	21.25
	50% RB mid	713.5	21.05	21.04
		707.5	21.1	21.11
		701.5	21.08	21.07
	100% RB	713.5	21.04	20.15
		707.5	21.14	20.19
		701.5	21.03	20.15

10MHz	1 RB high	711.0	22	21.22
		707.5	21.93	21.47
		704.0	22.08	21.32
	1 RB low	711.0	22.16	21.41
		707.5	22.11	21.65
		704.0	22.13	21.35
	50% RB mid	711.0	21.03	21.03
		707.5	21.12	21.1
		704.0	21.11	21.09
	100% RB	711.0	21.12	20.18
		707.5	21.12	20.18
		704.0	21.05	20.14

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

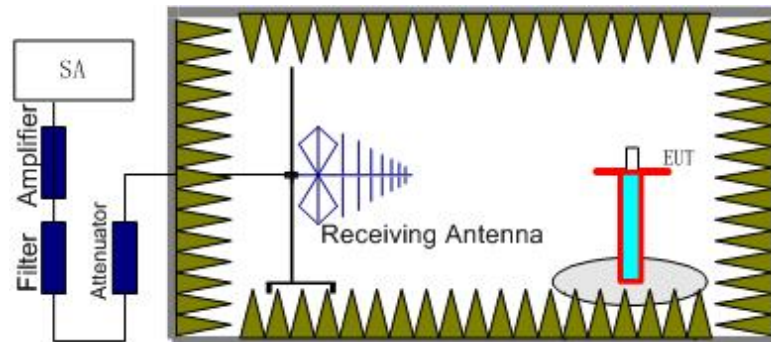

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

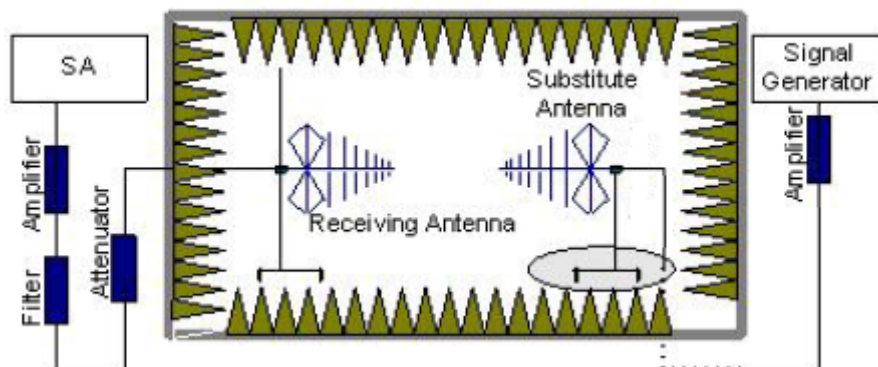

In the chamber, a substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
Power (EIRP) = $P_{Mea} - P_{Ag} - P_{cl} - G_a$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15.

A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2_1.4MHz_QPSK

Frequency(MHz)	$P_{Mea}(\text{dBm})$	$P_{cl}(\text{dB})$	$P_{Ag}(\text{dB})$	G_a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-13.54	4.6	36	4.7	22.56	33	10.44	H
1880.00	-13.29	4.6	35.6	4.7	22.41	33	10.59	H
1909.30	-15.05	4.7	35.9	4.5	20.65	33	12.35	H

LTE Band 2_3MHz_QPSK

Frequency(MHz)	$P_{Mea}(\text{dBm})$	$P_{cl}(\text{dB})$	$P_{Ag}(\text{dB})$	G_a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-13.43	4.6	36	4.7	22.67	33	10.33	H
1880.00	-11.56	4.6	35.6	4.7	24.14	33	8.86	H
1908.50	-13.99	4.7	35.9	4.5	21.71	33	11.29	H

LTE Band 2_5MHz_QPSK

Frequency(MHz)	$P_{Mea}(\text{dBm})$	$P_{cl}(\text{dB})$	$P_{Ag}(\text{dB})$	G_a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-15.68	4.6	36	4.7	20.42	33	12.58	H
1880.00	-13.84	4.6	35.6	4.7	21.86	33	11.14	H
1907.50	-14.43	4.7	35.9	4.5	21.27	33	11.73	H

LTE Band 2_10MHz_QPSK

Frequency(MHz)	$P_{Mea}(\text{dBm})$	$P_{cl}(\text{dB})$	$P_{Ag}(\text{dB})$	G_a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-14.73	4.6	36	4.7	21.37	33	11.63	H
1880.00	-13.82	4.6	35.6	4.7	21.88	33	11.12	H
1905.00	-14.8	4.7	35.9	4.5	20.9	33	12.1	H

LTE Band 2_15MHz_QPSK

Frequency(MHz)	$P_{Mea}(\text{dBm})$	$P_{cl}(\text{dB})$	$P_{Ag}(\text{dB})$	G_a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
----------------	-----------------------	---------------------	---------------------	------------------------	-----------	------------	------------	--------------

1857.50	-14.21	4.6	36	4.7	21.89	33	11.11	H
1880.00	-13.64	4.6	35.6	4.7	22.06	33	10.94	H
1902.50	-15.35	4.7	35.9	4.5	20.35	33	12.65	H

LTE Band 2 20 MHz QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-13.83	4.6	36	4.7	22.27	33	10.73	H
1880.00	-12.55	4.6	35.6	4.7	23.15	33	9.85	H
1900.00	-14.61	4.7	35.9	4.5	21.09	33	11.91	H

LTE Band 2 1.4MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-13.16	4.6	36	4.7	22.94	33	10.06	H
1880.00	-13.07	4.6	35.6	4.7	22.63	33	10.37	H
1909.30	-15.19	4.7	35.9	4.5	20.51	33	12.49	H

LTE Band 2 3MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-14.94	4.6	36	4.7	21.16	33	11.84	H
1880.00	-14.72	4.6	35.6	4.7	20.98	33	12.02	H
1908.50	-14.36	4.7	35.9	4.5	21.34	33	11.66	H

LTE Band 2 5MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-15.1	4.6	36	4.7	21	33	12	H
1880.00	-14.21	4.6	35.6	4.7	21.49	33	11.51	V
1907.50	-14.12	4.7	35.9	4.5	21.58	33	11.42	V

LTE Band 2 10MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-15.2	4.6	36	4.7	20.9	33	12.1	H
1880.00	-13.86	4.6	35.6	4.7	21.84	33	11.16	H
1905.00	-14.88	4.7	35.9	4.5	20.82	33	12.18	H

LTE Band 2 15MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-13.85	4.6	36	4.7	22.25	33	10.75	H
1880.00	-13.4	4.6	35.6	4.7	22.3	33	10.7	H
1902.50	-15.27	4.7	35.9	4.5	20.43	33	12.57	H

LTE Band 2 20 MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-14.17	4.6	36	4.7	21.93	33	11.07	H
1880.00	-11.9	4.6	35.6	4.7	23.8	33	9.2	H
1900.00	-14.52	4.7	35.9	4.5	21.18	33	11.82	H

Peak EIRP(dBm) = P_{Mea}(-14.17dBm) - G_a (4.7dBi) - P_{Ag} (36dB) - P_{cl} (4.6dB) = 21.93dBm

LTE Band 4- EIRP 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 4_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-13.16	4.6	36	4.7	22.94	30	7.06	H
1732.50	-14.02	4.6	35.6	4.7	21.68	30	8.32	H
1754.30	-13.02	4.7	35.9	4.5	22.68	30	7.32	V

LTE Band 4_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-13.43	4.6	36	4.7	22.67	30	7.33	H
1732.50	-13.17	4.6	35.6	4.7	22.53	30	7.47	H
1753.50	-13.69	4.7	35.9	4.5	22.01	30	7.99	H

LTE Band 4_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-12.68	4.6	36	4.7	23.42	30	6.58	H
1732.50	-12.84	4.6	35.6	4.7	22.86	30	7.14	H
1752.50	-13.13	4.7	35.9	4.5	22.57	30	7.43	H

LTE Band 4_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-14.42	4.6	36	4.7	21.68	30	8.32	H
1732.50	-13.09	4.6	35.6	4.7	22.61	30	7.39	H
1750.50	-13.14	4.7	35.9	4.5	22.56	30	7.44	V

LTE Band 4_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-13.94	4.6	36	4.7	22.16	30	7.84	H
1732.50	-14.01	4.6	35.6	4.7	21.69	30	8.31	H
1747.50	-13.96	4.7	35.9	4.5	21.74	30	8.26	H

LTE Band 4_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-15.09	4.6	36	4.7	21.01	30	8.99	H
1732.50	-14.63	4.6	35.6	4.7	21.07	30	8.93	H
1745.00	-15.34	4.7	35.9	4.5	20.36	30	9.64	H

LTE Band 4 1.4MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-13.85	4.6	36	4.7	22.25	30	7.75	H
1732.50	-13.72	4.6	35.6	4.7	21.98	30	8.02	H
1754.30	-14.17	4.7	35.9	4.5	21.53	30	8.47	V

LTE Band 4 3MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-13.66	4.6	36	4.7	22.44	30	7.56	H
1732.50	-13.59	4.6	35.6	4.7	22.11	30	7.89	H
1753.50	-14.31	4.7	35.9	4.5	21.39	30	8.61	H

LTE Band 4 5MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-14.67	4.6	36	4.7	21.43	30	8.57	H
1732.50	-14.93	4.6	35.6	4.7	20.77	30	9.23	H
1752.50	-15.03	4.7	35.9	4.5	20.67	30	9.33	H

LTE Band 4 10MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-15.27	4.6	36	4.7	20.83	30	9.17	H
1732.50	-14.13	4.6	35.6	4.7	21.57	30	8.43	H
1750.50	-14.67	4.7	35.9	4.5	21.03	30	8.97	V

LTE Band 4 15MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-15.54	4.6	36	4.7	20.56	30	9.44	H
1732.50	-15.23	4.6	35.6	4.7	20.47	30	9.53	H
1747.50	-14.13	4.7	35.9	4.5	21.57	30	8.43	H

LTE Band 4 20MHz 16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-14.61	4.6	36	4.7	21.49	30	8.51	H
1732.50	-14.96	4.6	35.6	4.7	20.74	30	9.26	H
1745.00	-14.05	4.7	35.9	4.5	21.65	30	8.35	H

Peak EIRP(dBm) = P_{Mea}(-14.05dBm) - G_a (4.5dBi) - P_{Ag} (35.9dB) - P_{cl} (4.7dB) = 21.65dBm

LTE Band 5- ERP 22.913(a)

Limits: ≤38.45dBm (7W)

LTE Band 5_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-8.76	4.6	36	4.7	27.34	38.45	11.11	V
836.50	-8.58	4.6	35.6	4.7	27.12	38.45	11.33	H
848.30	-9.37	4.7	35.9	4.5	26.33	38.45	12.12	H

LTE Band 5_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-9.12	4.6	36	4.7	26.98	38.45	11.47	V
836.50	-8.58	4.6	35.6	4.7	27.12	38.45	11.33	H
847.50	-9.81	4.7	35.9	4.5	25.89	38.45	12.56	V

LTE Band 5_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-9.73	4.6	36	4.7	26.37	38.45	12.08	V
836.50	-8.67	4.6	35.6	4.7	27.03	38.45	11.42	V
846.50	-8.48	4.7	35.9	4.5	27.22	38.45	11.23	H

LTE Band 5_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-9.53	4.6	36	4.7	26.57	38.45	11.88	V
836.50	-10.35	4.6	35.6	4.7	25.35	38.45	13.1	V
844.00	-10.45	4.7	35.9	4.5	25.25	38.45	13.2	H

LTE Band 5_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-8.7	4.6	36	4.7	27.40	38.45	11.05	V
836.50	-9.12	4.6	35.6	4.7	26.58	38.45	11.87	V
848.30	-8.78	4.7	35.9	4.5	26.92	38.45	11.53	H

LTE Band 5_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-9.74	4.6	36	4.7	26.36	38.45	12.09	V
836.50	-9.47	4.6	35.6	4.7	26.23	38.45	12.22	V
847.50	-9.47	4.7	35.9	4.5	26.23	38.45	12.22	H

LTE Band 5_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-8.76	4.6	36	4.7	27.34	38.45	11.11	H
836.50	-8.88	4.6	35.6	4.7	26.82	38.45	11.63	H
846.50	-9.69	4.7	35.9	4.5	26.01	38.45	12.44	H

LTE Band 5_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-11.08	4.6	36	4.7	25.02	38.45	13.43	V
836.50	-10.62	4.6	35.6	4.7	25.08	38.45	13.37	V
844.00	-9.98	4.7	35.9	4.5	25.72	38.45	12.73	H

Peak ERP(dBm)=P_{Mea}(-9.98dBm)-G_a(4.5dBi)-P_{Ag}(35.9dB)-P_{cl}(4.7dB) = 12.73dBm

LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤ 33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-11.65	4.6	36	4.7	24.45	33	8.55	V
2535.00	-12.48	4.6	35.6	4.7	23.22	33	9.78	V
2567.50	-12.63	4.7	35.9	4.5	23.07	33	9.93	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-12.12	4.6	36	4.7	23.98	33	9.02	H
2535.00	-12.28	4.6	35.6	4.7	23.42	33	9.58	V
2565.00	-12.81	4.7	35.9	4.5	22.89	33	10.11	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-11.99	4.6	36	4.7	24.11	33	8.89	H
2535.00	-11.96	4.6	35.6	4.7	23.74	33	9.26	V
2562.50	-12.43	4.7	35.9	4.5	23.27	33	9.73	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-13.43	4.6	36	4.7	22.67	33	10.33	H
2535.00	-12.85	4.6	35.6	4.7	22.85	33	10.15	V
2560.00	-12.73	4.7	35.9	4.5	22.97	33	10.03	H

LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-13.43	4.6	36	4.7	22.67	33	10.33	H
2535.00	-12.97	4.6	35.6	4.7	22.73	33	10.27	V
2567.50	-13.92	4.7	35.9	4.5	21.78	33	11.22	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-13.56	4.6	36	4.7	22.54	33	10.46	H
2535.00	-12.96	4.6	35.6	4.7	22.74	33	10.26	V
2565.00	-12.89	4.7	35.9	4.5	22.81	33	10.19	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-14.21	4.6	36	4.7	21.89	33	11.11	H
2535.00	-13.66	4.6	35.6	4.7	22.04	33	10.96	H
2562.50	-12.97	4.7	35.9	4.5	22.73	33	10.27	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-14.47	4.6	36	4.7	21.63	33	11.37	H
2535.00	-14.14	4.6	35.6	4.7	21.56	33	11.44	V
2560.00	-14.32	4.7	35.9	4.5	21.38	33	11.62	H

Peak EIRP(dBm) = P_{Mea}(-14.32dBm) - G_a (4.5dBi) - P_{Ag} (35.9dB) - P_{cl} (4.7dB) = 21.38dBm

LTE Band 12 - ERP 27.50(c)(10)

Limits: $\leq 34.77\text{dBm}$ (3W)

LTE Band 12 1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
699.70	-11.99	4.6	36	4.7	24.11	34.77	10.66	H
707.50	-11.69	4.6	35.6	4.7	24.01	34.77	10.76	V
715.30	-12.23	4.7	35.9	4.5	23.47	34.77	11.3	H

LTE Band 12 3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
700.50	-12.09	4.6	36	4.7	24.01	34.77	10.76	V
707.50	-12.13	4.6	35.6	4.7	23.57	34.77	11.2	V
714.50	-12.27	4.7	35.9	4.5	23.43	34.77	11.34	V

LTE Band 12 5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
701.50	-13.52	4.6	36	4.7	22.58	34.77	12.19	V
707.50	-12.55	4.6	35.6	4.7	23.15	34.77	11.62	H
713.50	-12.48	4.7	35.9	4.5	23.22	34.77	11.55	V

LTE Band 12 10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
704.00	-13.34	4.6	36	4.7	22.76	34.77	12.01	H
707.50	-12.55	4.6	35.6	4.7	23.15	34.77	11.62	H
711.00	-12.17	4.7	35.9	4.5	23.53	34.77	11.24	H

LTE Band 12_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
699.70	-12.97	4.6	36	4.7	23.13	34.77	11.64	H
707.50	-11.47	4.6	35.6	4.7	24.23	34.77	10.54	H
715.30	-12.24	4.7	35.9	4.5	23.46	34.77	11.31	V

LTE Band 12_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
700.50	-12.83	4.6	36	4.7	23.27	34.77	11.5	V
707.50	-11.88	4.6	35.6	4.7	23.82	34.77	10.95	V
714.50	-12.69	4.7	35.9	4.5	23.01	34.77	11.76	V

LTE Band 12_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
701.50	-13.53	4.6	36	4.7	22.57	34.77	12.2	V
707.50	-12.49	4.6	35.6	4.7	23.21	34.77	11.56	V
713.50	-12.57	4.7	35.9	4.5	23.13	34.77	11.64	V

LTE Band 12_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
704.00	-13.21	4.6	36	4.7	22.89	34.77	11.88	H
707.50	-12.69	4.6	35.6	4.7	23.01	34.77	11.76	H
711.00	-12.92	4.7	35.9	4.5	22.78	34.77	11.99	H

Peak ERP(dBm)=P_{Mea}(-12.92dBm)-G_a(4.5dBi)-P_{Ag}(35.9dB)-P_{cl}(4.7dB)= 22.78dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

ANNEX A.2. EMISSION LIMIT

Reference

FCC: CFR 2.1051, 22.917,24.238(a), 27.53(g), 27.53(h) , 27.53(m).


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917,Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2,4,5,7,12,17,41.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

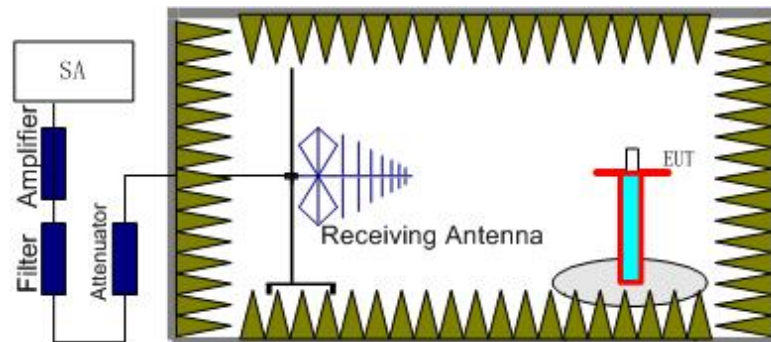

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

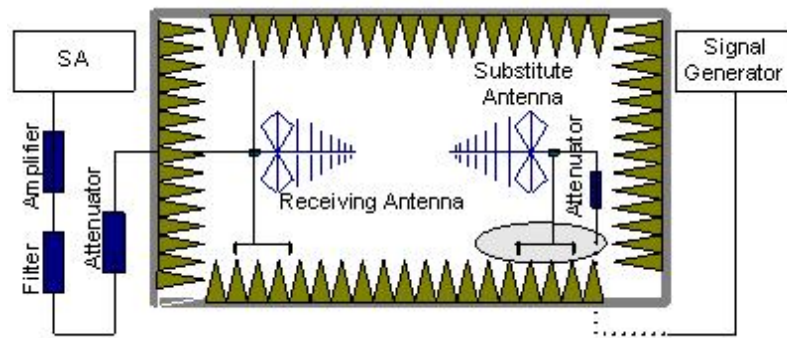

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

7. Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2, 4, 5, 7, 12. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2, 4, 5, 7, 12, into any of the other

blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

LTE Band 2, 3MHz, QPSK, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3578.4	-51.2	6.5	6	-51.7	-13	38.7	H
4340.4	-53.96	7.2	7.5	-53.66	-13	40.66	H
5146.4	-52.96	7.9	8.9	-51.96	-13	38.96	H
5995.2	-52.6	8.6	10.4	-50.8	-13	37.8	H
7109.6	-53.25	9.4	13.3	-49.35	-13	36.35	V
9165.2	-55.36	10.5	18.4	-47.46	-13	34.46	H

LTE Band 2, 3MHz, QPSK, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
4016.8	-52.89	6.9	7.2	-52.59	-13	39.59	H
4636.4	-51.47	7.5	7.6	-51.37	-13	38.37	V
5494.4	-51.21	8.2	9.5	-49.91	-13	36.91	H
7514.4	-53.04	9.7	14.6	-48.14	-13	35.14	H
9058.8	-54.72	10.5	18.3	-46.92	-13	33.92	V
12309	-46.4	12.7	18	-41.1	-13	28.1	H

LTE Band 2, 3MHz, QPSK, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
4349.2	-53.38	7.2	7.5	-53.08	-13	40.08	H
5248.4	-51.91	8	8.7	-51.21	-13	38.21	H
6284.4	-53.08	8.8	10.9	-50.98	-13	37.98	V
7392.4	-54.44	9.7	14.1	-50.04	-13	37.04	H
8792	-56.13	10.4	18.5	-48.03	-13	35.03	V
11428.4	-50.57	12.1	18.2	-44.47	-13	31.47	V

LTE Band 2, 3MHz, 16QAM, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
11554.4	-47.95	12.2	18.1	-42.05	-13	29.05	V
12202.6	-46.42	12.6	17.4	-41.62	-13	28.62	V
13192.4	-47.5	13	20.9	-39.6	-13	26.6	H
14642.8	-47.45	14	23	-38.45	-13	25.45	H
15604.6	-45.3	14.6	23.2	-36.7	-13	23.7	V
17211.8	-38.62	16	19.6	-35.02	-13	22.02	V

LTE Band 2, 3MHz, 16QAM, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5636.4	-50.34	8.3	10	-48.64	-13	35.64	V
7248.4	-52.19	9.6	13.7	-48.09	-13	35.09	H
10850.4	-49.4	11.7	17.9	-43.2	-13	30.2	H
12540	-46.52	12.7	18.8	-40.42	-13	27.42	V
13797.2	-49.39	13.8	24.8	-38.39	-13	25.39	V
15842.6	-40.92	14.9	20.9	-34.92	-13	21.92	H

LTE Band 2, 3MHz, 16QAM, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
10911.6	-49.43	11.8	18	-43.23	-13	30.23	V
12145.2	-45.97	12.6	17.3	-41.27	-13	28.27	H
13392.6	-48.66	13.7	22.8	-39.56	-13	26.56	H
14851.4	-47.2	14.3	23.9	-37.6	-13	24.6	V
15827.2	-41.9	14.9	21.4	-35.4	-13	22.4	V
17203.4	-38.37	16	19.7	-34.67	-13	21.67	H

LTE Band 4, 20MHz QPSK, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422	-47.82	6.3	5.7	-48.42	-13	35.42	H
5133.2	-43.07	7.9	8.8	-42.17	-13	29.17	V
6844.8	-50.99	9.2	12.6	-47.59	-13	34.59	V
8290.4	-54.85	10.1	17.4	-47.55	-13	34.55	H
10068	-51.55	11.3	17.6	-45.25	-13	32.25	V
12685.6	-46.99	12.7	19	-40.69	-13	27.69	H

LTE Band 4, 20MHz, QPSK, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3447.2	-43.25	6.4	6	-43.65	-13	30.65	H
5170.8	-48.46	7.9	8.8	-47.56	-13	34.56	V
6894.4	-51.64	9.3	12.6	-48.34	-13	35.34	V
10506.8	-49.58	11.6	17.1	-44.08	-13	31.08	H
12909.6	-47.33	13	19.8	-40.53	-13	27.53	H
14836	-46.72	14.3	23.8	-37.22	-13	24.22	V

LTE Band 4, 20MHz, QPSK, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3472	-43.53	6.4	5.9	-44.03	-13	31.03	H
5208.4	-44.53	8	8.8	-43.73	-13	30.73	V
8285.2	-54.11	10.1	17.4	-46.81	-13	33.81	V
9813.6	-51.43	11	17.9	-44.53	-13	31.53	H
12736	-46.62	12.7	19.2	-40.12	-13	27.12	V
16534.2	-39.39	14.7	20.1	-33.99	-13	20.99	H

LTE Band 4, 20MHz, 16QAM, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422	-47.36	6.3	5.9	-47.76	-13	34.76	H
5133.2	-43.68	7.9	8.9	-42.68	-13	29.68	V
6880.8	-52.45	9.3	12.5	-49.25	-13	36.25	H
8613.6	-56.32	10.3	18.3	-48.32	-13	35.32	V
10264.8	-51.26	11.4	17.4	-45.26	-13	32.26	V
12513.4	-46.17	12.7	18.7	-40.17	-13	27.17	H

LTE Band 4, 20MHz, 16QAM, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3446.8	-40.54	6.4	5.8	-41.14	-13	28.14	H
5170.8	-46.74	7.9	8.8	-45.84	-13	32.84	H
6894.8	-50.44	9.3	12.7	-47.04	-13	34.04	V
8575.6	-55.26	10.3	18.2	-47.36	-13	34.36	V
10449.2	-49.9	11.6	17.1	-44.4	-13	31.4	V
12650.6	-45.37	12.8	18.9	-39.27	-13	26.27	V

LTE Band 4, 20MHz, 16QAM, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3472	-44.81	6.4	5.9	-45.31	-13	32.31	H
5208	-44.1	8	8.7	-43.4	-13	30.4	V
6906	-53.29	9.3	12.8	-49.79	-13	36.79	H
8588.8	-55.22	10.3	18.2	-47.32	-13	34.32	H
10169.2	-51.87	11.3	17.4	-45.77	-13	32.77	H
12580.6	-46.51	12.8	18.8	-40.51	-13	27.51	H

LTE Band 5, 5MHz, QPSK, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1842.846154	-46.61	4.6	2.9	-48.31	-13	35.31	H
2382.307692	-42.82	5.2	3.4	-44.62	-13	31.62	H
3297.2	-51.25	6.2	5	-52.45	-13	39.45	H
4759.2	-51.19	7.5	7.9	-50.79	-13	37.79	V
6574.4	-51.56	9	11.6	-48.96	-13	35.96	H
8299	-55.87	10.1	17.3	-48.67	-13	35.67	H

LTE Band 5, 5MHz, QPSK, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1686.730769	-50.67	4.4	3	-52.07	-13	39.07	V
2568.461539	-41.31	5.4	3.7	-43.01	-13	30.01	V
3580	-51.55	6.5	6	-52.05	-13	39.05	V
4972.4	-52.76	7.7	9	-51.46	-13	38.46	H
6500.4	-51.88	9	11.5	-49.38	-13	36.38	V
8290	-54.84	10.1	17.4	-47.54	-13	34.54	H

LTE Band 5, 5MHz, QPSK, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1729.307692	-50.56	4.5	3	-52.06	-13	39.06	H
2465	-41.78	5.3	3.6	-43.48	-13	30.48	H
3377.6	-51.64	6.3	5.6	-52.34	-13	39.34	V
4156.8	-53.55	7	7.5	-53.05	-13	40.05	V
5086.8	-52.5	7.9	9	-51.4	-13	38.4	V
6600.4	-51.93	9.1	11.8	-49.23	-13	36.23	V

LTE Band 5, 5MHz, 16QAM, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1677.384615	-49.84	4.4	3	-51.24	-13	38.24	H
2504.230769	-41.87	5.4	3.7	-43.57	-13	30.57	V
3297.2	-52.03	6.2	5	-53.23	-13	40.23	H
4222.8	-52.64	7	7.7	-51.94	-13	38.94	V
5794.8	-52.29	8.4	10.5	-50.19	-13	37.19	V
8419	-55.31	10.2	18	-47.51	-13	34.51	H

LTE Band 5, 5MHz, 16QAM, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1644.5	-51.42	4.3	3.1	-52.62	-13	39.62	H
2470.769231	-42.15	5.3	3.6	-43.85	-13	30.85	H
3452.4	-52.08	6.4	5.9	-52.58	-13	39.58	H
4954.8	-52.66	7.7	8.9	-51.46	-13	38.46	H
6074.8	-51.48	8.6	10.5	-49.58	-13	36.58	H
8319.4	-55.61	10.1	17.7	-48.01	-13	35.01	H

LTE Band 5, 5MHz, 16QAM, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1700.576923	-50.72	4.4	3	-52.12	-13	39.12	V
2505.384615	-42.44	5.4	3.7	-44.14	-13	31.14	H
3482	-52.92	6.4	6	-53.32	-13	40.32	H
4253.6	-53.15	7.1	7.7	-52.55	-13	39.55	V
5299.6	-51.39	8	8.8	-50.59	-13	37.59	V
8396.2	-55.11	10.2	17.9	-47.41	-13	34.41	V

LTE Band 7, 20 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5002	-46.41	7.8	9	-45.21	-13	32.21	V
7503.2	-36.81	9.7	14.6	-31.91	-13	18.91	V
10004.8	-39.79	11.2	17.6	-33.39	-13	20.39	V
13523.5	-40.1	13.7	23.4	-30.4	-13	17.4	V
15245.5	-39.34	14.5	25.1	-28.74	-13	15.74	V
16488	-31.45	14.6	20.1	-25.95	-13	12.95	H

LTE Band 7, 20 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5052.4	-44.67	7.8	9	-43.47	-13	30.47	V
7578	-38.94	9.7	14.7	-33.94	-13	20.94	V
10104.8	-38.16	11.3	17.6	-31.86	-13	18.86	V
14414.25	-39.25	13.9	22.8	-30.35	-13	17.35	H
15894.75	-32.5	15	20.7	-26.8	-13	13.8	H
16510.75	-31.87	14.6	20.1	-26.37	-13	13.37	V

LTE Band 7, 20 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5102	-44.26	7.9	8.8	-43.36	-13	30.36	V
7653.2	-38.73	9.7	15	-33.43	-13	20.43	V
10204.8	-37.61	11.3	17.4	-31.51	-13	18.51	V
14395	-39.63	13.9	23	-30.53	-13	17.53	H
15812.5	-33.93	14.9	21.5	-27.33	-13	14.33	H
17202	-29.72	16	19.7	-26.02	-13	13.02	H

LTE Band 7, 20 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7502.8	-37.59	9.7	14.6	-32.69	-13	19.69	V
10004.4	-39.33	11.2	17.6	-32.93	-13	19.93	V
14375.75	-40.08	13.8	23.1	-30.78	-13	17.78	V
15172	-39.7	14.5	24.8	-29.4	-13	16.4	V
16173	-32.01	14.9	20.6	-26.31	-13	13.31	V
17377	-29.49	15.7	19.8	-25.39	-13	12.39	V

LTE Band 7, 20 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
7578	-39.23	9.7	14.7	-34.23	-13	21.23	V
10104.4	-40.24	11.3	17.5	-34.04	-13	21.04	H
12291.5	-39.36	12.7	17.6	-34.46	-13	21.46	V
13418.5	-40.76	13.7	23.1	-31.36	-13	18.36	V
15555.25	-38	14.6	24.1	-28.5	-13	15.5	V
16300.75	-32.3	14.7	20.5	-26.5	-13	13.5	H

LTE Band 7, 20 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5102	-43.6	7.9	8.9	-42.6	-13	29.6	V
7653.2	-39.02	9.7	15	-33.72	-13	20.72	V
10204	-38.87	11.3	17.4	-32.77	-13	19.77	V
12286.25	-38.77	12.7	17.6	-33.87	-13	20.87	H
13380	-40.46	13.7	22.5	-31.66	-13	18.66	V
15915.75	-32.36	15	20.6	-26.76	-13	13.76	V

LTE Band 12, 3MHz, QPSK, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1398.730769	-35.62	4	2.8	-36.82	-13	23.82	V
2181.923077	-44.53	5	3	-46.53	-13	33.53	V
3572.8	-51.46	6.4	6	-51.86	-13	38.86	V
4897.6	-51.23	7.7	8.6	-50.33	-13	37.33	V
7255	-52.59	9.6	13.7	-48.49	-13	35.49	H
9353.2	-54.57	10.7	18.6	-46.67	-13	33.67	V

LTE Band 12, 3MHz, QPSK, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1412.230769	-38.93	4	3	-39.93	-13	26.93	V
2960.769231	-39.16	5.8	4.6	-40.36	-13	27.36	V
5705.2	-51.75	8.5	10.4	-49.85	-13	36.85	V
7268.2	-53.03	9.6	13.7	-48.93	-13	35.93	H
8264.2	-54.6	10.1	17.3	-47.4	-13	34.4	V
9120.1	-54.7	10.5	18.4	-46.8	-13	33.8	V

LTE Band 12, 3MHz, QPSK, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1426.076923	-40.52	4.1	3.3	-41.32	-13	28.32	V
2975.769231	-39.21	5.9	4.7	-40.41	-13	27.41	V
5094.4	-52.08	7.9	8.9	-51.08	-13	38.08	H
7138.3	-52.54	9.4	13.3	-48.64	-13	35.64	H
8581	-55.46	10.3	18.1	-47.66	-13	34.66	H
9781.9	-53	11	18.3	-45.7	-13	32.7	V

LTE Band 12, 3MHz, 16QAM, Channel 23017

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1398.384615	-35.86	4	3.2	-36.66	-13	23.66	V
2115.769231	-45.55	4.9	3	-47.45	-13	34.45	H
3544	-52.14	6.4	6	-52.54	-13	39.54	H
4266.4	-52.86	7.1	7.7	-52.26	-13	39.26	V
5378.8	-51.36	8.1	9	-50.46	-13	37.46	V
7062.1	-52.39	9.4	13	-48.79	-13	35.79	V

LTE Band 12, 3MHz 16QAM, Channel 23095

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1412.230769	-40.16	4	3	-41.16	-13	28.16	V
2902.307692	-38.57	5.8	4.6	-39.77	-13	26.77	V
7135.3	-52.73	9.4	13.4	-48.73	-13	35.73	V
7647.4	-53.04	9.7	15.1	-47.64	-13	34.64	H
8598.1	-54.96	10.3	18.2	-47.06	-13	34.06	V
9406.9	-53.91	10.7	18.6	-46.01	-13	33.01	V

LTE Band 12, 3MHz, 16QAM, Channel 23173

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1426.423077	-40.37	4.1	3.3	-41.17	-13	28.17	V
2914.615385	-39.32	5.8	4.6	-40.52	-13	27.52	V
4958	-51.37	7.8	8.9	-50.27	-13	37.27	V
6006	-52.05	8.6	10.4	-50.25	-13	37.25	V
7082.5	-52.14	9.4	13	-48.54	-13	35.54	V
8296.3	-54.5	10.1	17.4	-47.2	-13	34.2	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

ANNEX A.3. FREQUENCY STABILITY**Reference**

FCC: CFR Part 2.1055, 22.235, 24.235, 27.54.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2/4/5/7/12, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1V increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.0VDC and 4.5VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.0	11.03	10.59	0.001	0.007
3.8	7.81	8.3	0.001	0.008
4.5	-7.24	11.34	0.000	0.007

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	8.9	7.91	0.002	0.007
40°	11.24	-11.87	0.002	0.008
30°	11.1	-9.03	0.002	0.007
20°	-10.46	-8.6	0.001	0.006
10°	-10.16	12.12	0.001	0.008
0°	7.91	6.48	0.002	0.008
- 10°	7.11	7.7	0.001	0.009
- 20°	9.6	5.71	0.005	0.008
- 30°	9.64	-10.61	0.003	0.009

LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.0	11.26	17.31	0.001	0.011
3.8	-10.47	18.57	0.002	0.012
4.5	-9.06	19.38	0.003	0.010

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-7.93	12.66	0.001	0.012
40°	-5.99	18.81	0.001	0.009
30°	-11.72	16.45	0.001	0.012
20°	-12.13	19.81	0.001	0.012
10°	10.3	20.87	0.000	0.011
0°	-7.81	25.01	0.001	0.011
- 10°	-8.13	16.85	0.001	0.010
- 20°	-8.57	15.84	0.002	0.010
- 30°	8.24	14.48	0.000	0.012

LTE Band 5, 3MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.0	6.08	-9.33	0.002	0.010
3.8	4.95	-8.84	0.001	0.011
4.5	-4.38	-8.87	0.000	0.008

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	6.05	-11.47	0.000	0.010
40°	5.19	-10.73	0.001	0.010
30°	4.63	-10.53	0.003	0.008
20°	-4.65	-10.8	0.000	0.011
10°	4.88	-9.44	0.002	0.009
0°	4.81	-10.34	0.002	0.011
- 10°	-4.72	-12.53	0.001	0.010
- 20°	4.05	-10.73	0.002	0.012
- 30°	6.67	-13.85	0.000	0.011

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)
Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.0	22.95	20.67	0.001	0.004
3.8	17.18	22.49	0.001	0.004
4.5	20.16	19	0.002	0.002

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	15.79	21.8	0.003	0.002
40°	-10.46	19.38	0.000	0.004
30°	-16.41	19.67	0.000	0.003
20°	11.03	25.01	0.002	0.001
10°	-16.26	29.14	0.000	0.000
0°	-12.59	22.86	0.001	0.004
- 10°	-16.06	22.07	0.003	0.002
- 20°	-13.09	-19.08	0.002	0.003
- 30°	22.7	17.78	0.001	0.001

LTE Band 12, 3MHz bandwidth (worst case of all bandwidths)**Frequency Error vs Voltage**

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.0	6.48	-9.2	0.002	0.025
3.8	7.81	-12.22	0.003	0.026
4.5	-5.62	-11.89	0.001	0.025

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	6.95	-9.46	0.002	0.027
40°	-4.21	-10.7	0.003	0.026
30°	6.85	-11.29	0.001	0.026
20°	4.76	-11.17	0.001	0.028
10°	-5.61	-9.3	0.001	0.027
0°	-3.73	-11.57	0.002	0.025
- 10°	3.36	-10.37	0.002	0.026
- 20°	3.93	-10.06	0.002	0.025
- 30°	4.98	-10.1	0.001	0.025

ANNEX A.4. OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)

A.4.1 Occupied Bandwidth Results


Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 4.2:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- Set the detection mode to peak, and the trace mode to max hold.
- Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.


LTE band 2, 1.4MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	1090	1098

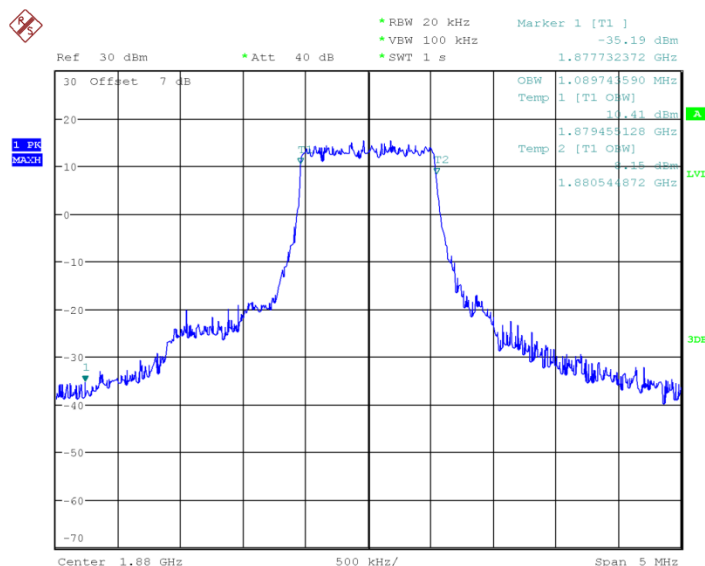

Date: 20.JAN.2003 06:30:04

LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)

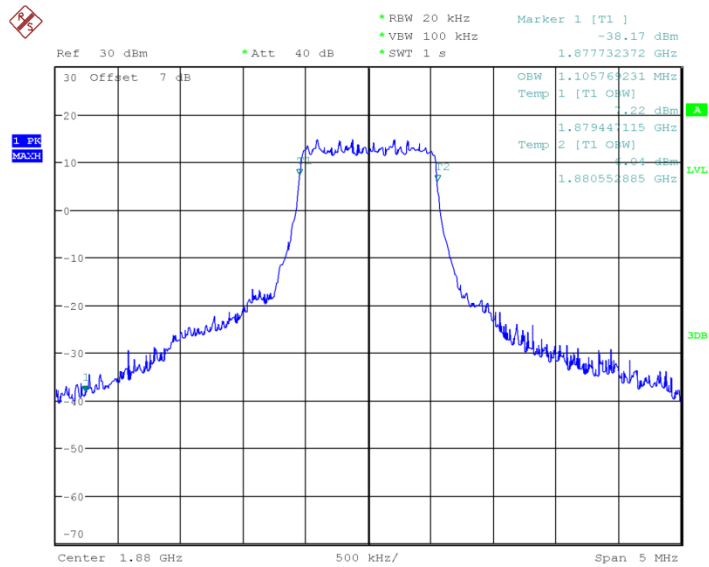


Date: 20.JAN.2003 06:30:20

LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)


LTE band 2, 3MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	2692	2692

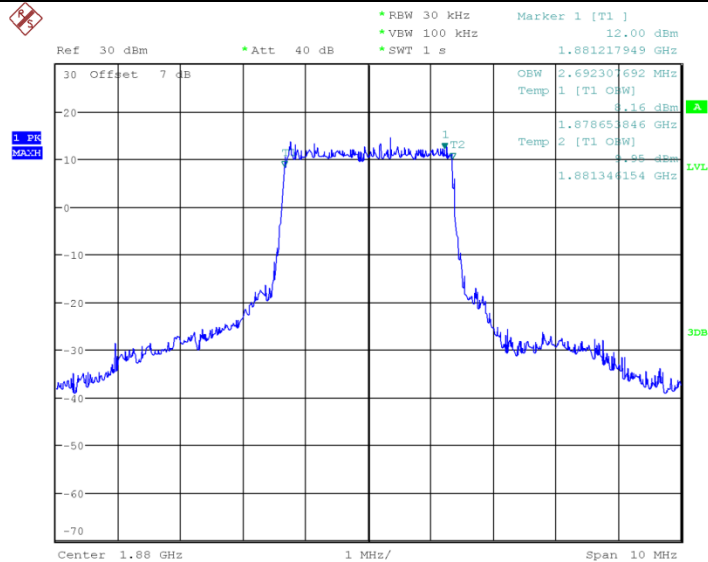

Date: 20.JAN.2003 05:48:22

LTE band 2, 3MHz Bandwidth, QPSK (99% BW)

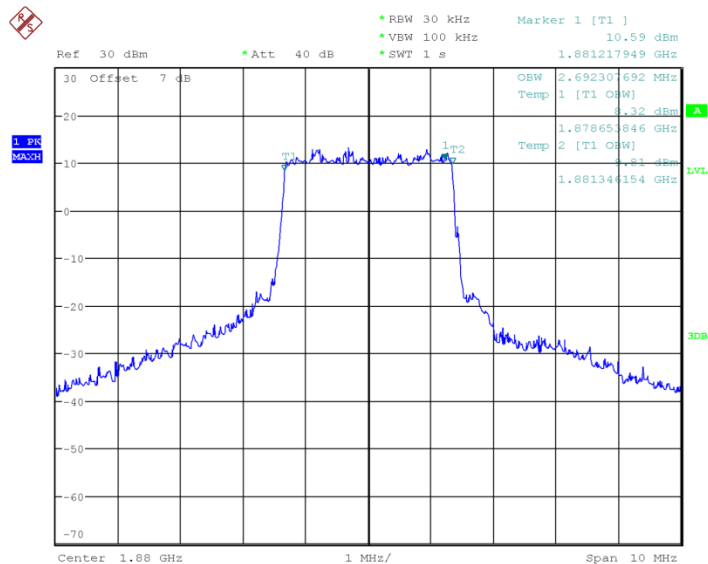


Date: 20.JAN.2003 05:48:38

LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)


LTE band 2, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	4519	4471

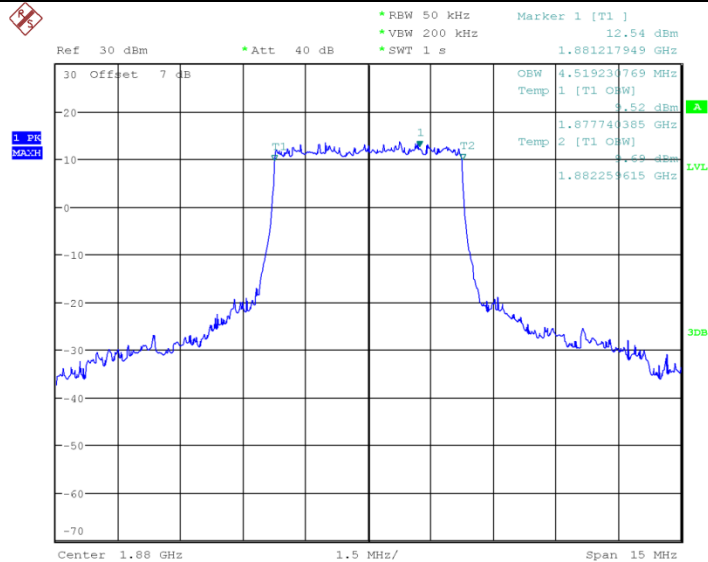

Date: 20.JAN.2003 05:49:05

LTE band 2, 5MHz Bandwidth, QPSK (99% BW)

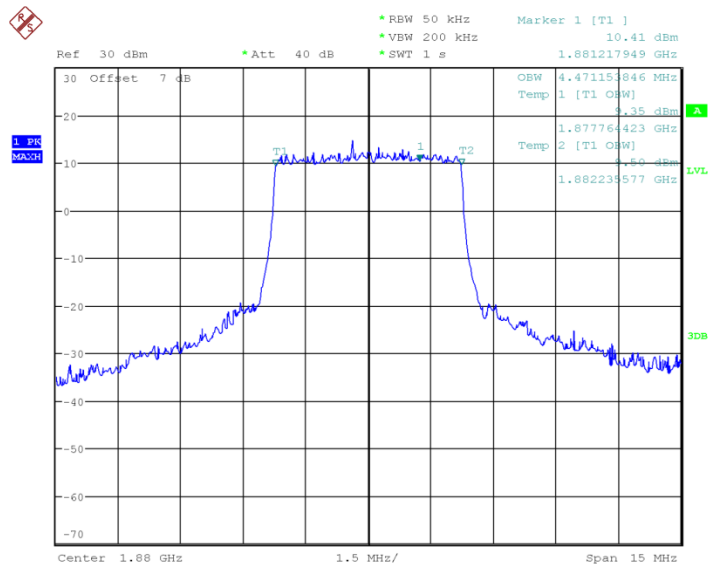


Date: 20.JAN.2003 05:51:21

LTE band 2, 5MHz Bandwidth,16QAM (99% BW)


LTE band 2, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	8942	8942

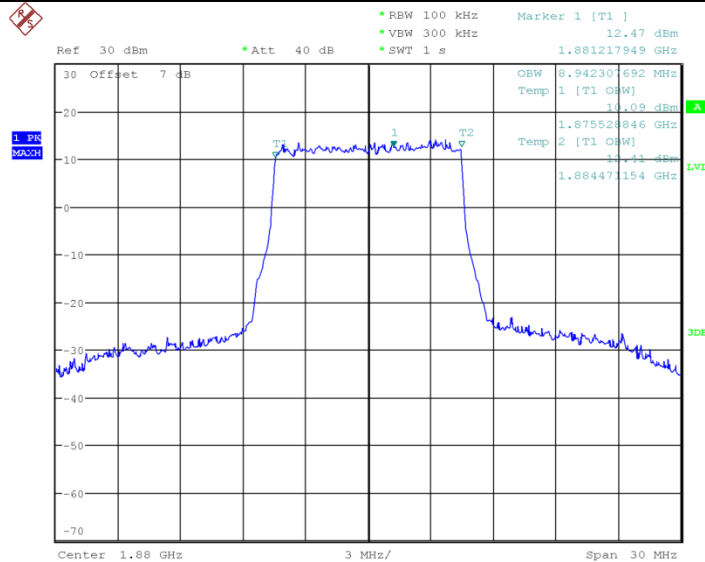

Date: 20.JAN.2003 05:51:43

LTE band 2, 10MHz Bandwidth, QPSK (99% BW)

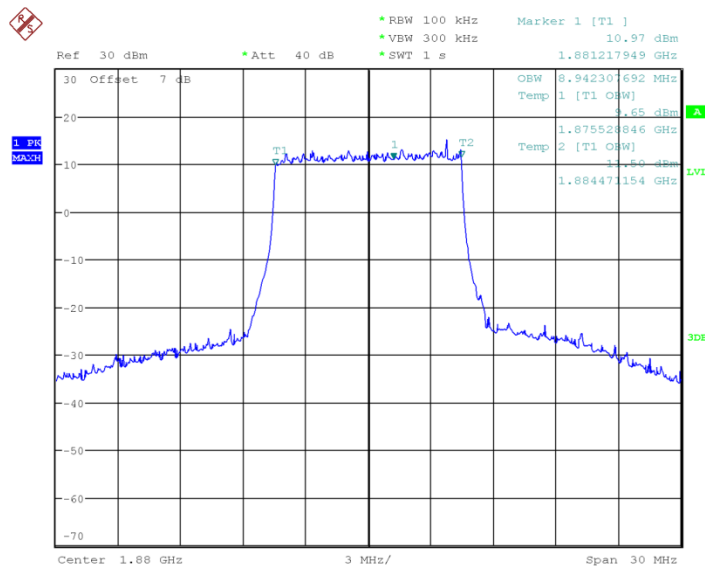


Date: 20.JAN.2003 05:51:59

LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)


LTE band 2, 15MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	13558	13558

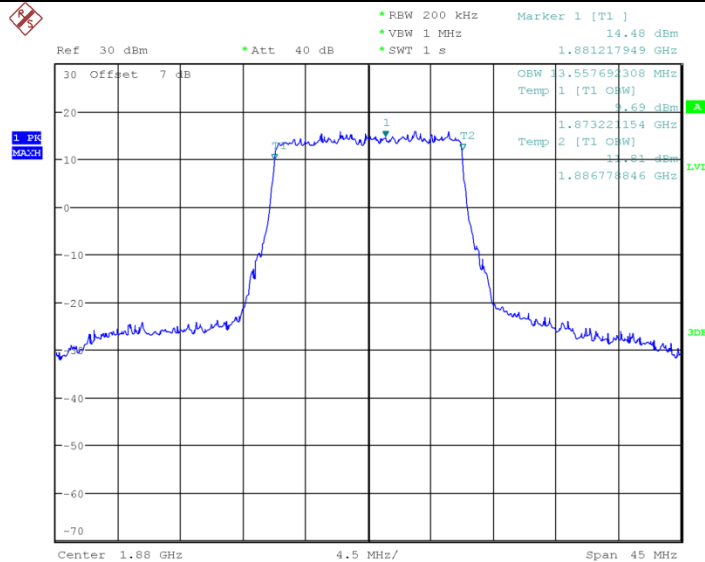

Date: 20.JAN.2003 05:52:22

LTE band 2, 15MHz Bandwidth, QPSK (99% BW)

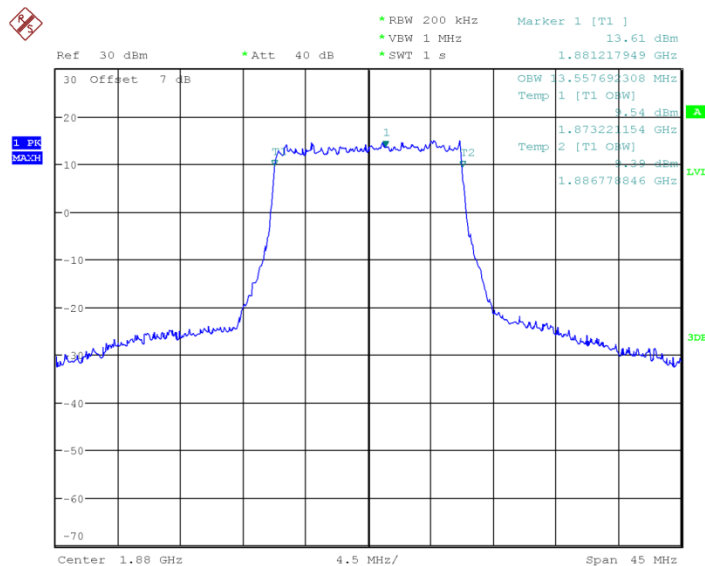


Date: 20.JAN.2003 05:52:38

LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)


LTE band 2, 20MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	17981	17981

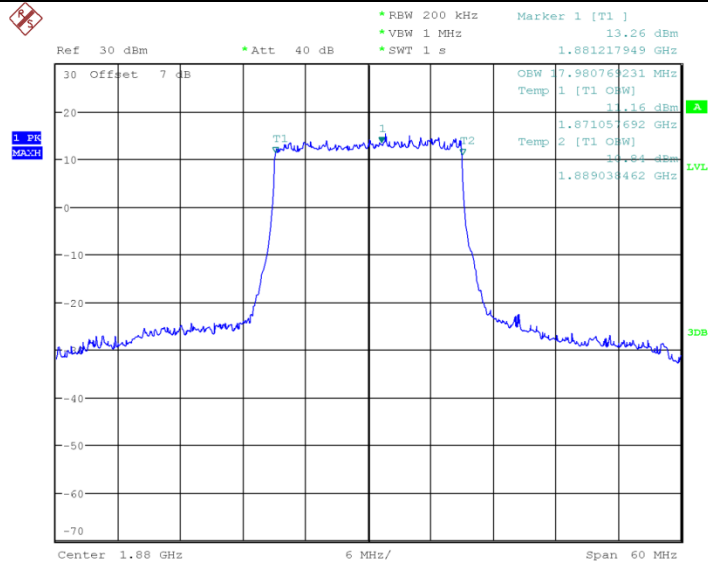

Date: 20.JAN.2003 05:53:00

LTE band 2, 20MHz Bandwidth, QPSK (99% BW)

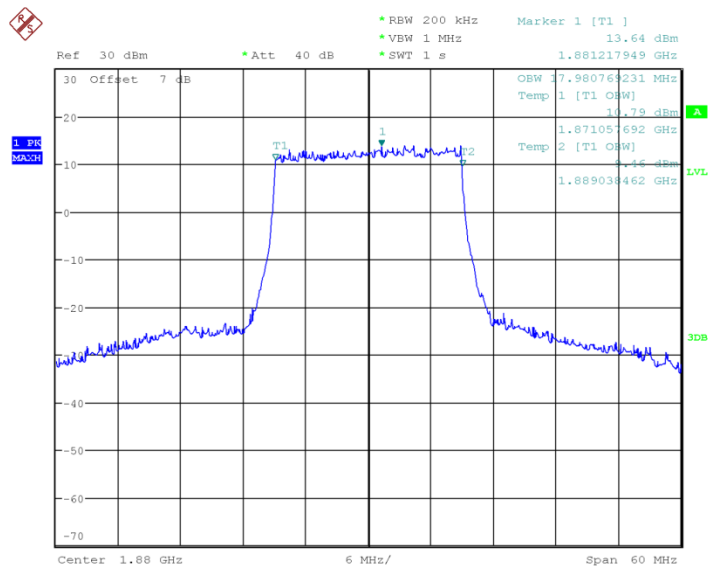


Date: 20.JAN.2003 05:53:16

LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)


LTE band 4, 1.4MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	1098	1098

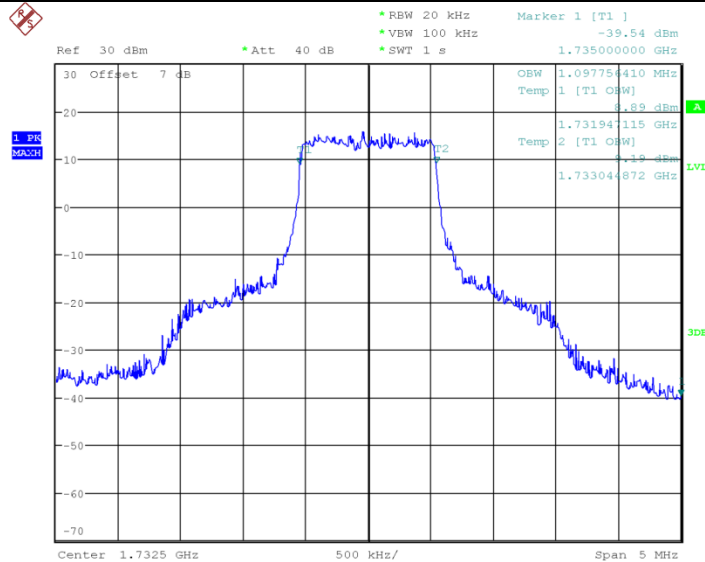

Date: 20.JAN.2003 05:53:40

LTE band 4, 1.4MHz Bandwidth, QPSK (99% BW)

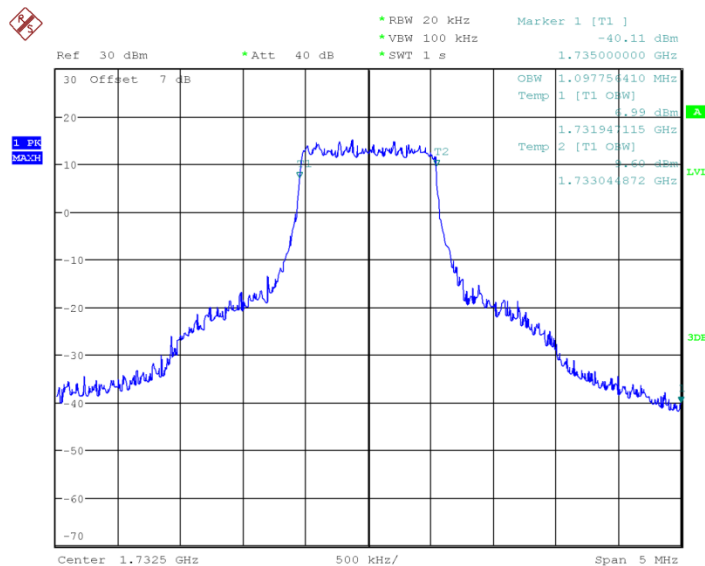


Date: 20.JAN.2003 05:53:56

LTE band 4, 1.4MHz Bandwidth, 16QAM (99% BW)


LTE band 4, 3MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	2692	2692

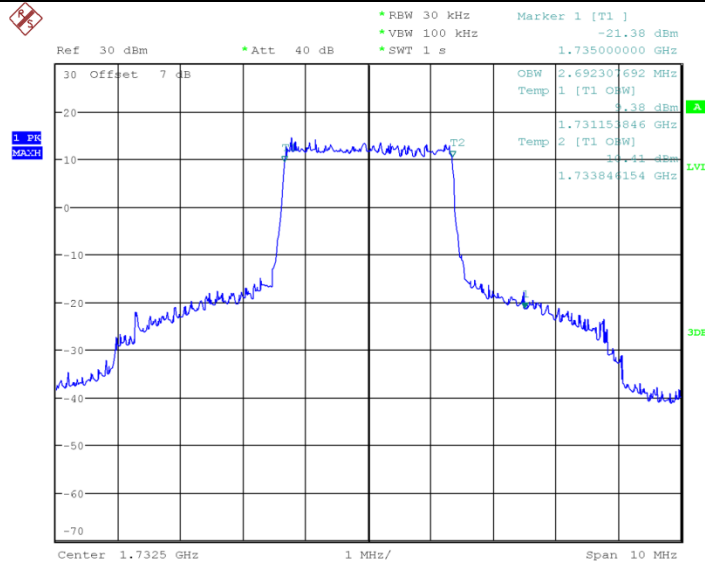

Date: 20.JAN.2003 05:54:18

LTE band 4, 3MHz Bandwidth, QPSK (99% BW)

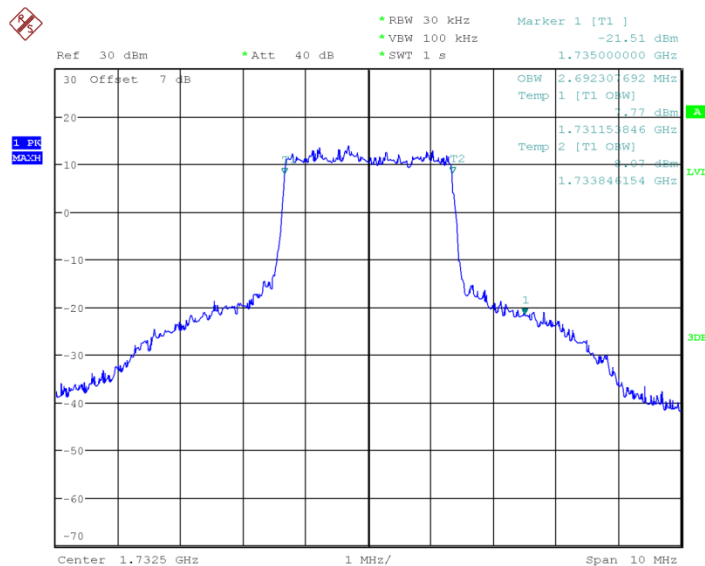


Date: 20.JAN.2003 05:54:34

LTE band 4, 3MHz Bandwidth, 16QAM (99% BW)


LTE band 4, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	4495	4495

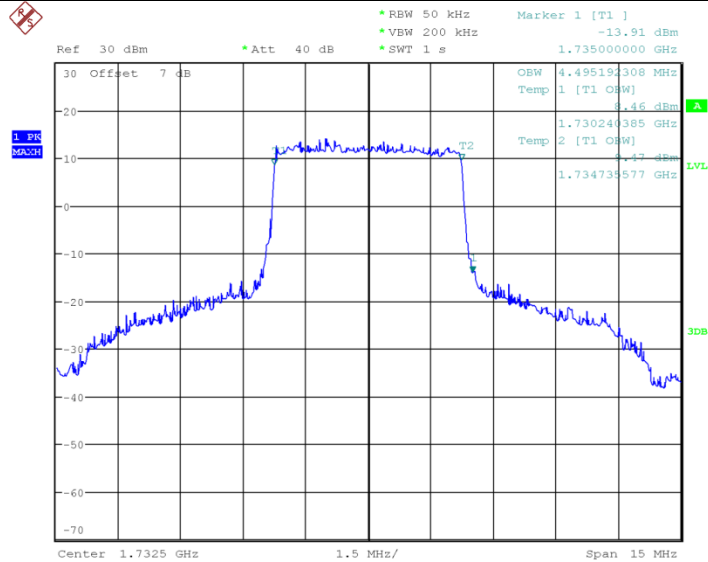

Date: 20.JAN.2003 05:55:24

LTE band 4, 5MHz Bandwidth, QPSK (99% BW)

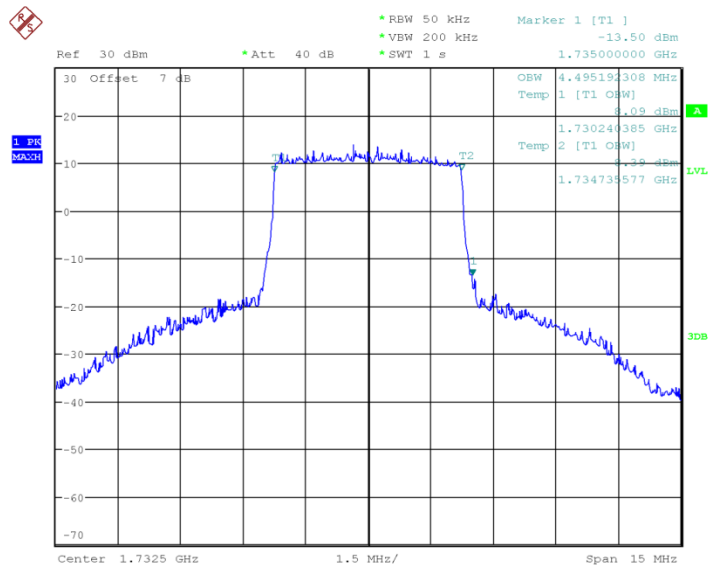


Date: 20.JAN.2003 05:55:44

LTE band 4, 5MHz Bandwidth, 16QAM (99% BW)


LTE band 4, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	8942	8942

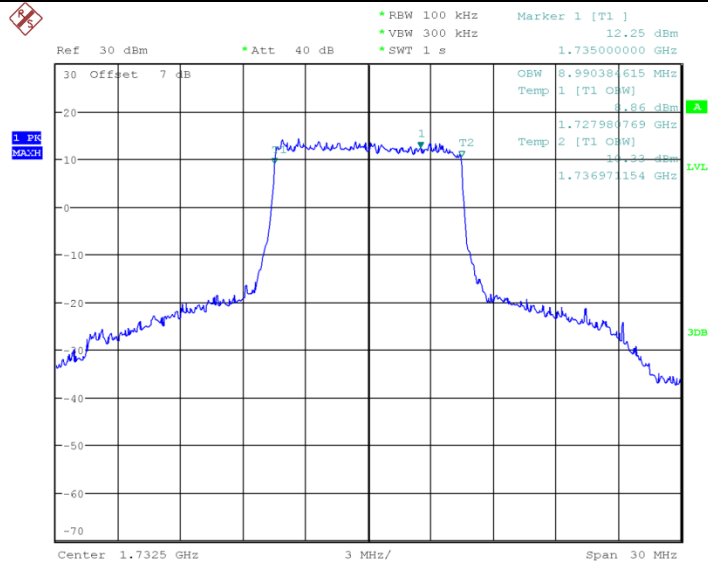

Date: 20.JAN.2003 05:56:05

LTE band 4, 10MHz Bandwidth, QPSK (99% BW)

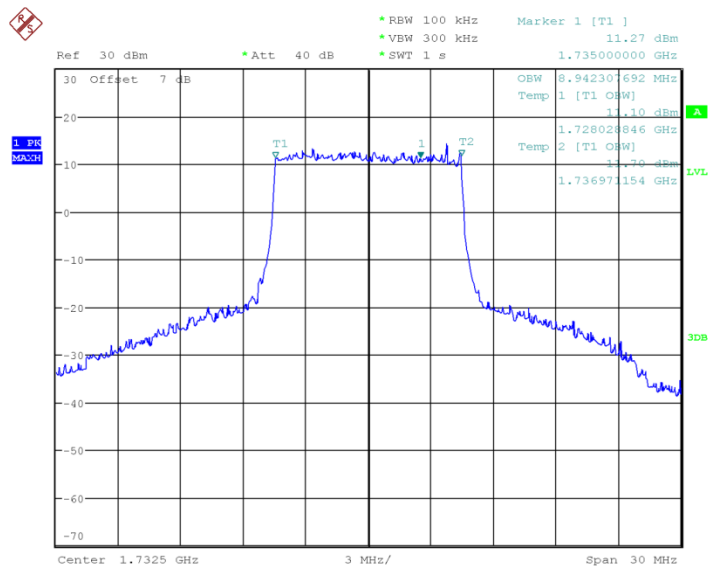


Date: 20.JAN.2003 05:56:21

LTE band 4, 10MHz Bandwidth, 16QAM (99% BW)


LTE band 4, 15MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	13558	13486

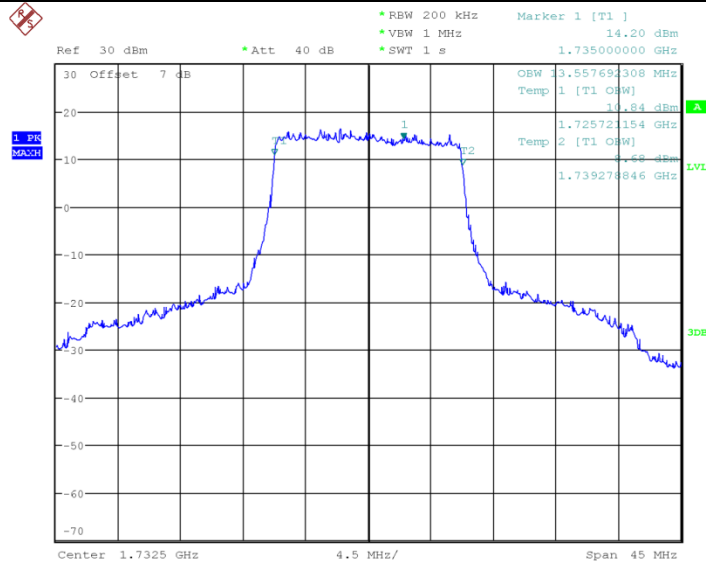

Date: 20.JAN.2003 05:56:43

LTE band 4, 15MHz Bandwidth, QPSK (99% BW)

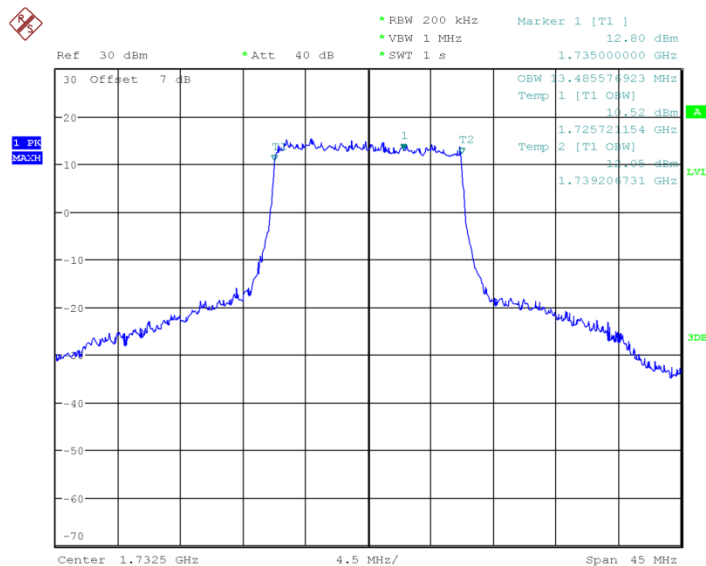


Date: 20.JAN.2003 05:56:59

LTE band 4, 15MHz Bandwidth, 16QAM (99% BW)


LTE band 4, 20MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	17885	17885

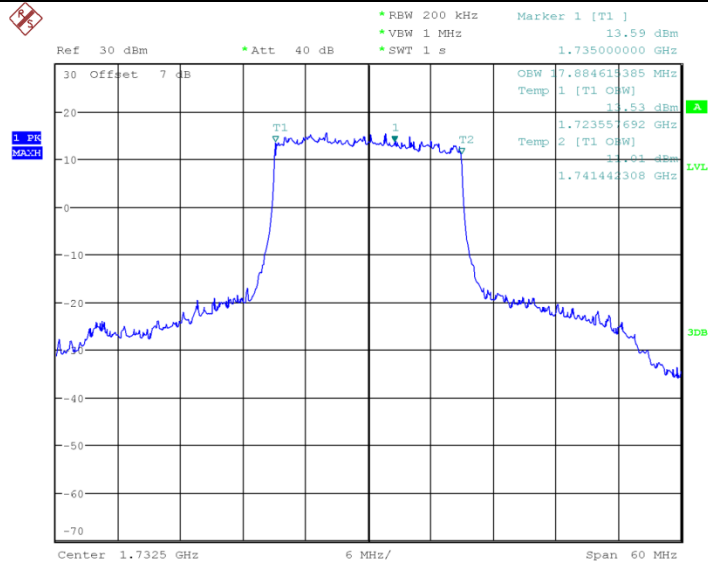

Date: 20.JAN.2003 05:57:22

LTE band 4, 20MHz Bandwidth, QPSK (99% BW)

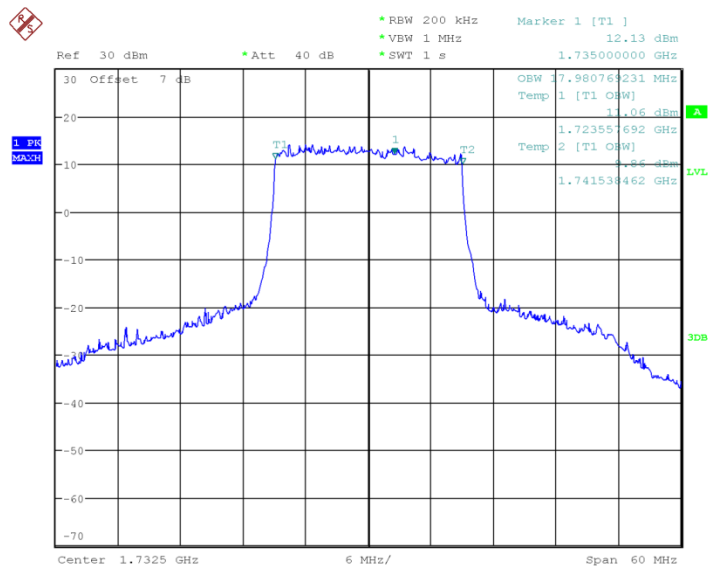


Date: 20.JAN.2003 05:57:38

LTE band 4, 20MHz Bandwidth, 16QAM (99% BW)


LTE band 5, 1.4MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	1090	1090

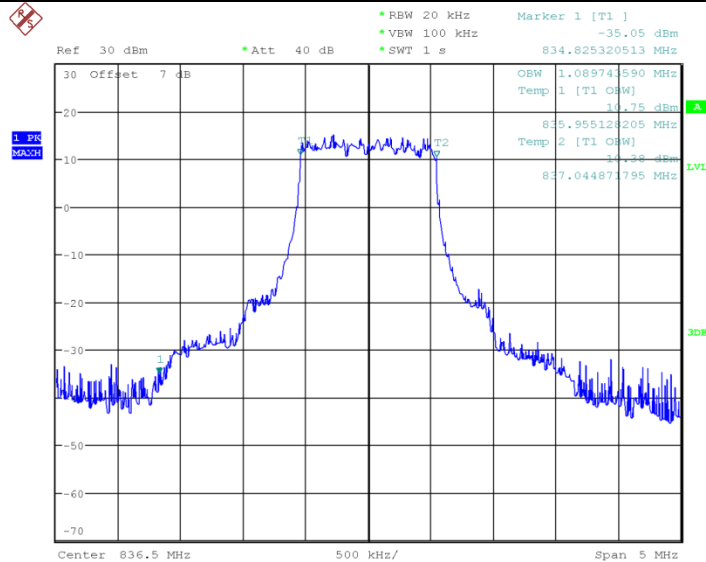

Date: 20.JAN.2003 06:16:54

LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

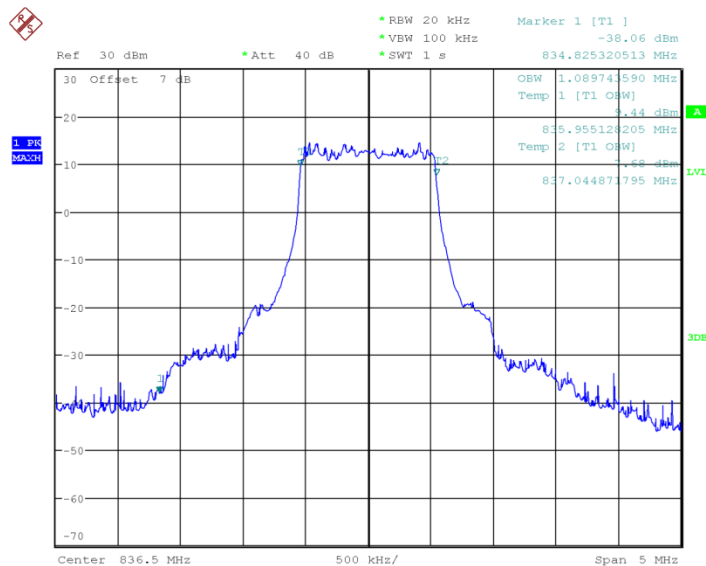


Date: 20.JAN.2003 06:17:10

LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)


LTE band 5, 3MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
	2692	2692

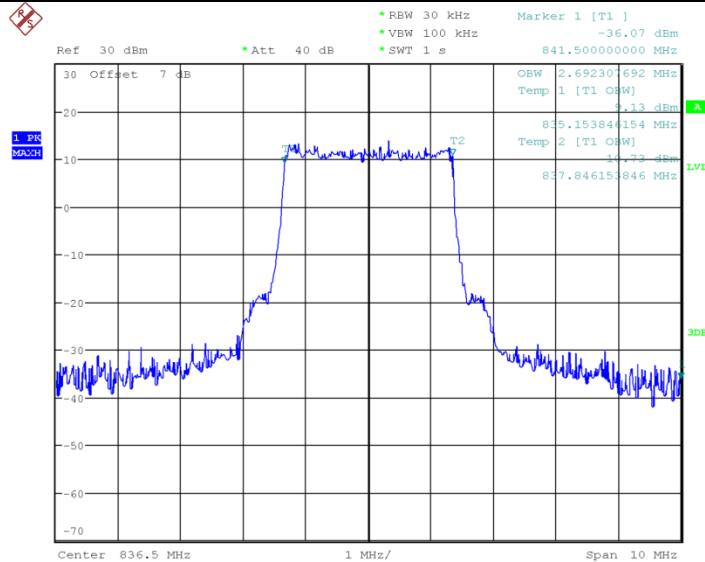

Date: 20.JAN.2003 05:59:52

LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

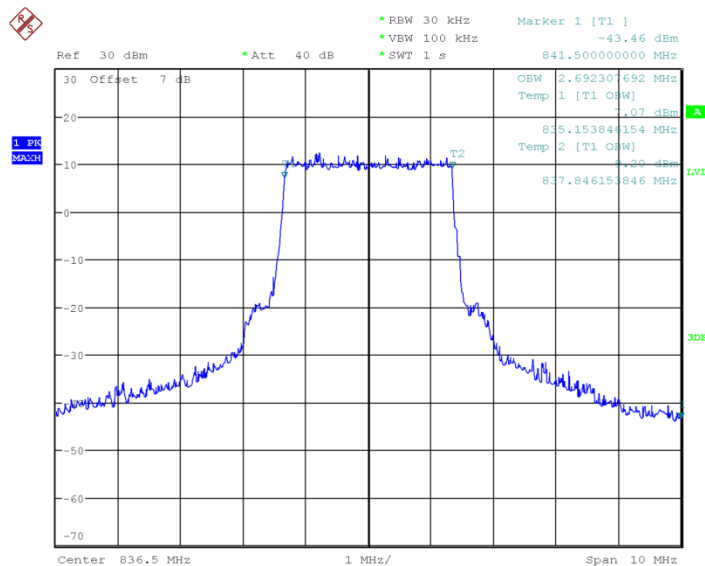


Date: 20.JAN.2003 06:00:08

LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)


LTE band 5, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
836.5	4471	4471

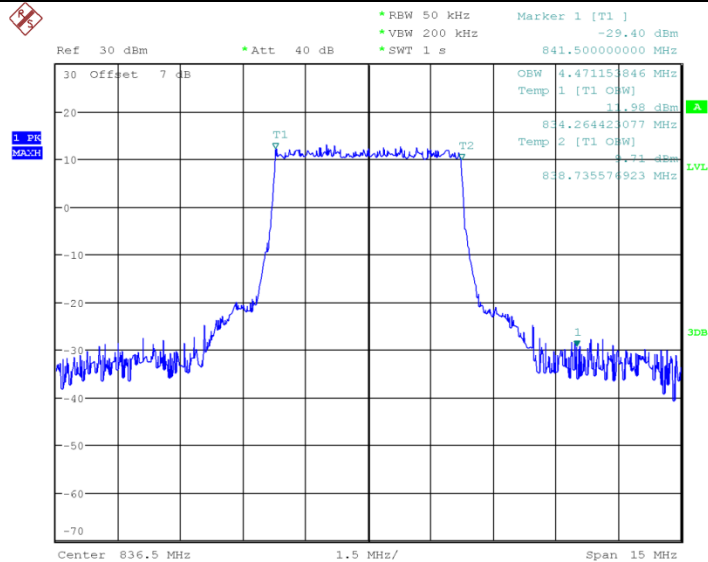

Date: 20.JAN.2003 06:00:35

LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

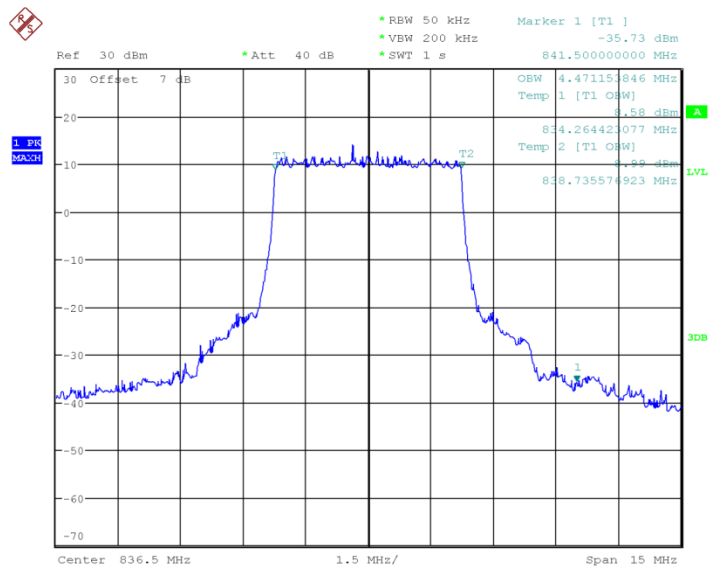


Date: 20.JAN.2003 06:00:56

LTE band 5, 5MHz Bandwidth,16QAM (99% BW)


LTE band 5, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	9038	8942

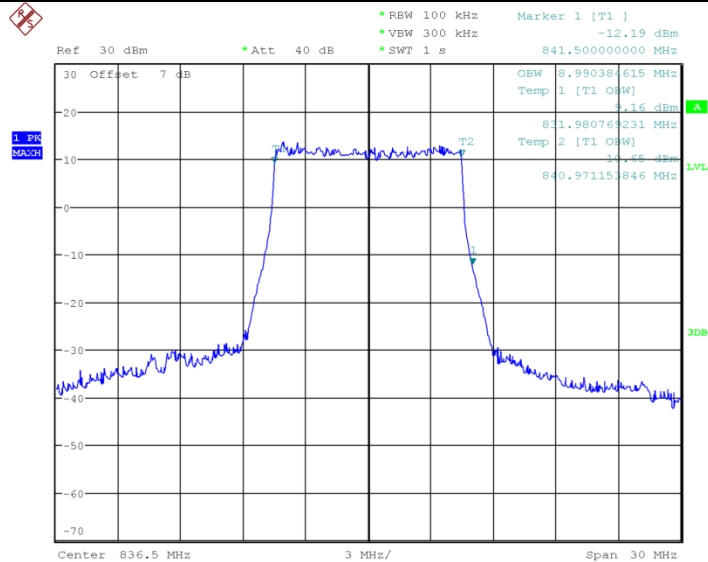

Date: 20.JAN.2003 06:01:17

LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

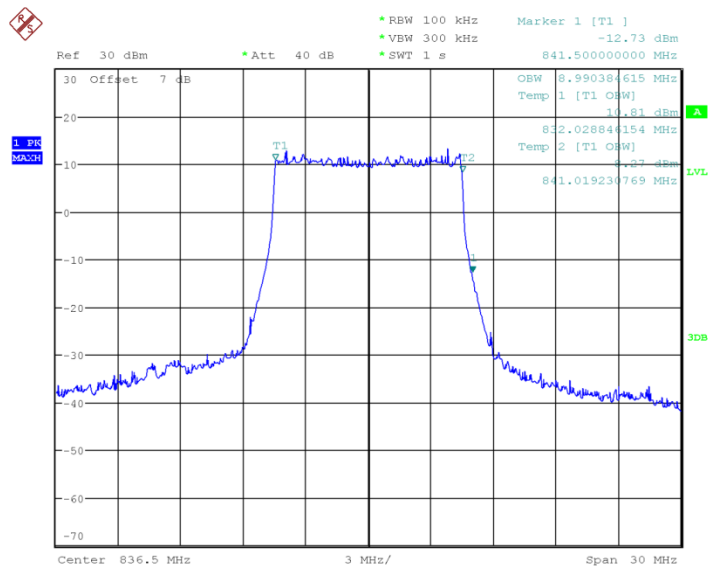


Date: 20.JAN.2003 06:01:33

LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)


LTE band 7, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	4495	4471

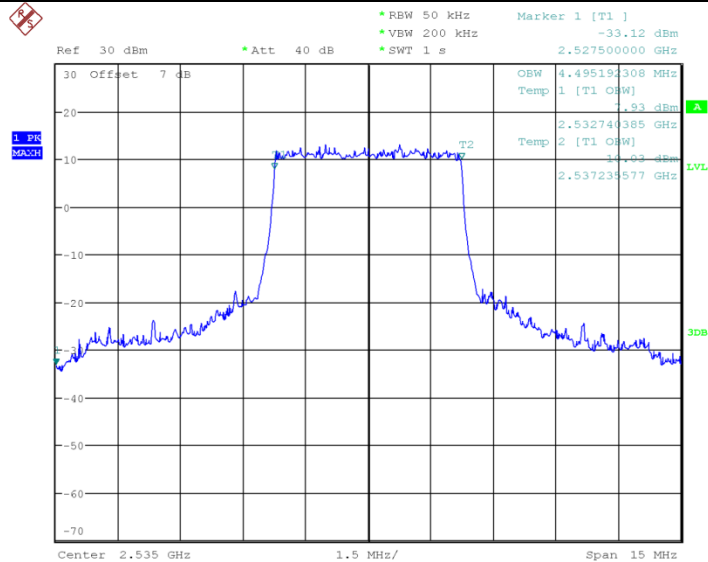

Date: 20.JAN.2003 06:02:06

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

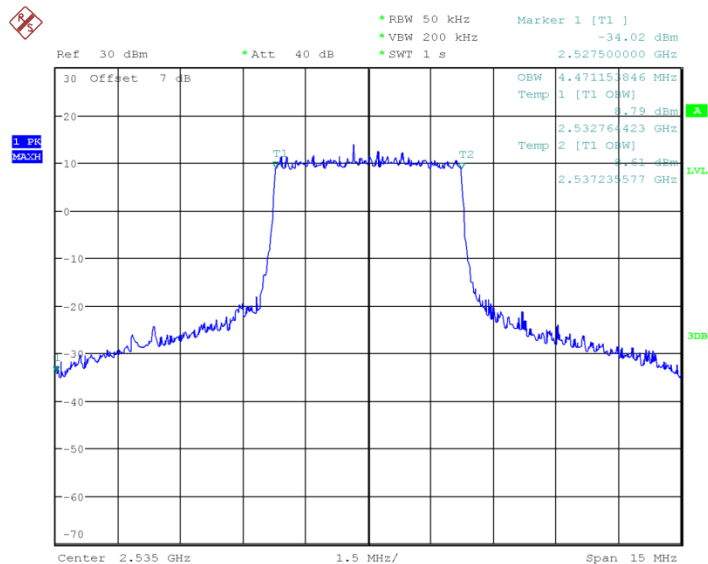


Date: 20.JAN.2003 06:02:26

LTE band 7, 5MHz Bandwidth,16QAM (99% BW)


LTE band 7, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
	QPSK	16QAM
2535.0	8990	8990

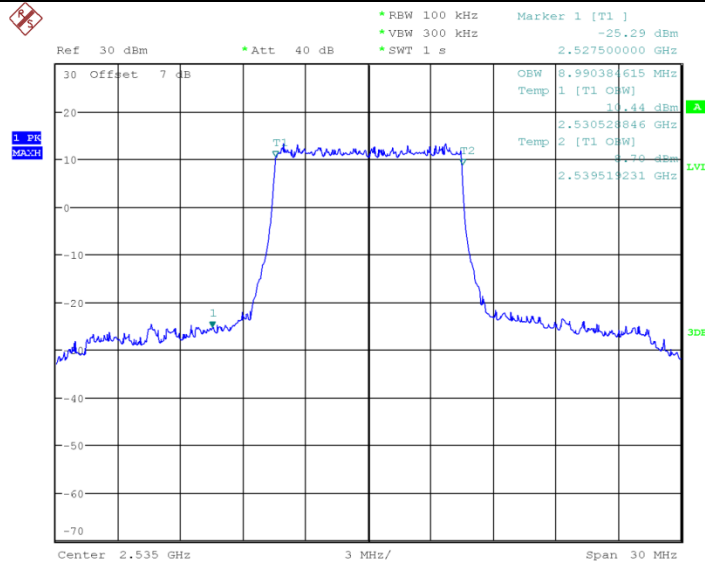

Date: 20.JAN.2003 06:02:48

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

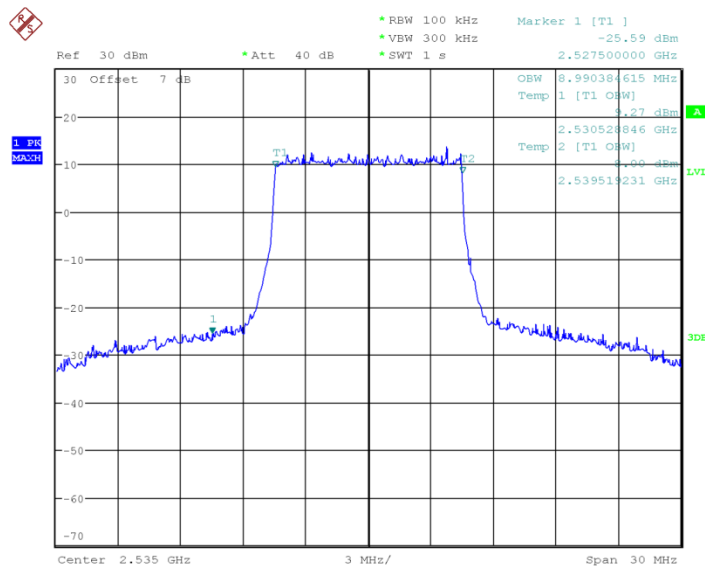


Date: 20.JAN.2003 06:03:04

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)


LTE band 7, 15MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	13558	13558

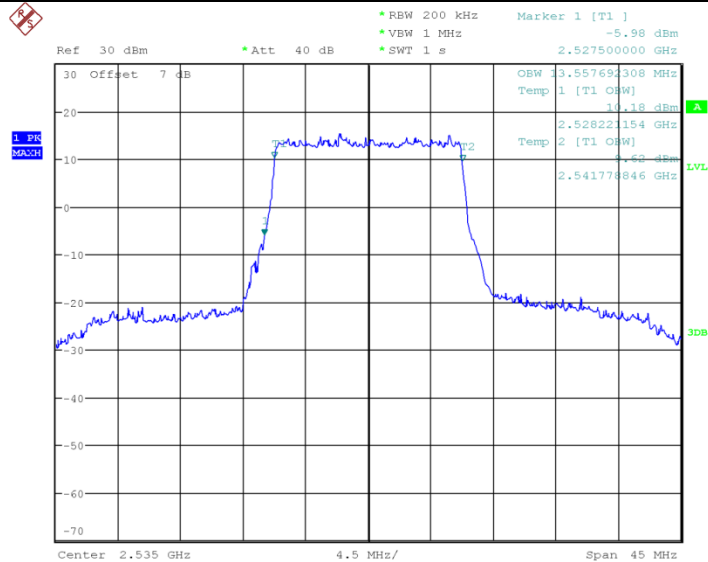

Date: 20.JAN.2003 06:03:25

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

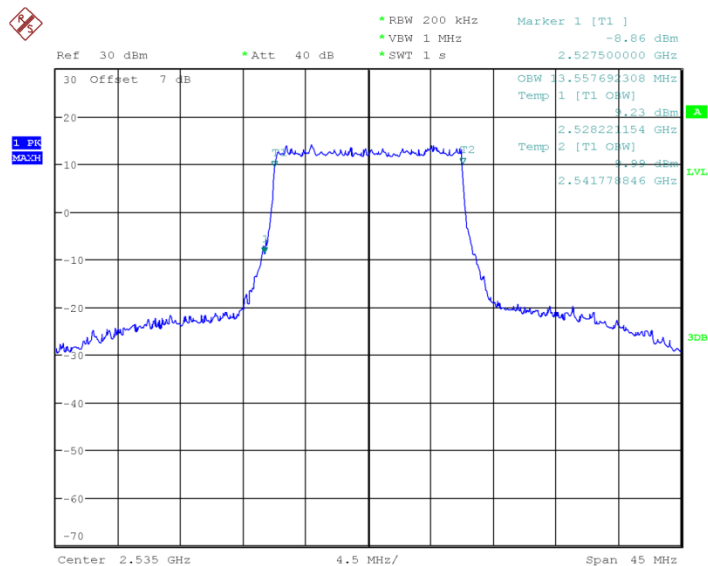


Date: 20.JAN.2003 06:03:41

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)


LTE band 7, 20MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	18077	18077

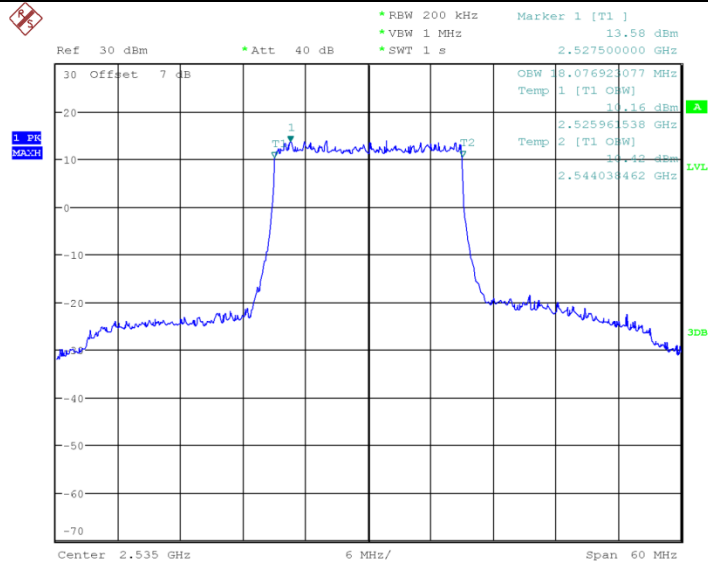

Date: 20.JAN.2003 06:04:02

LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

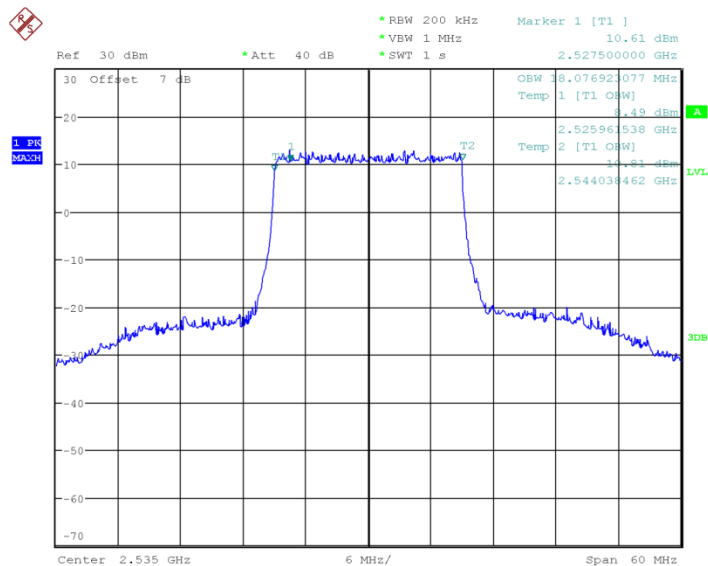


Date: 20.JAN.2003 06:04:18

LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)


LTE band 12, 1.4MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	1098	1098

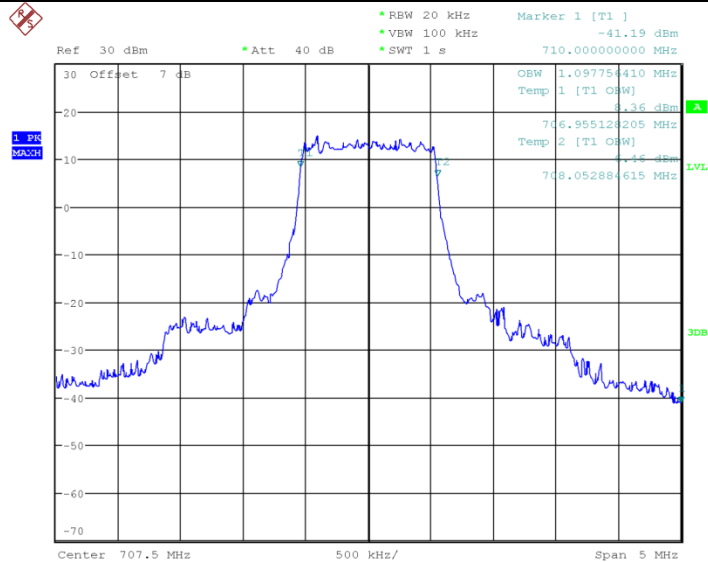

Date: 20.JAN.2003 06:17:43

LTE band 12, 1.4MHz Bandwidth, QPSK (99% BW)

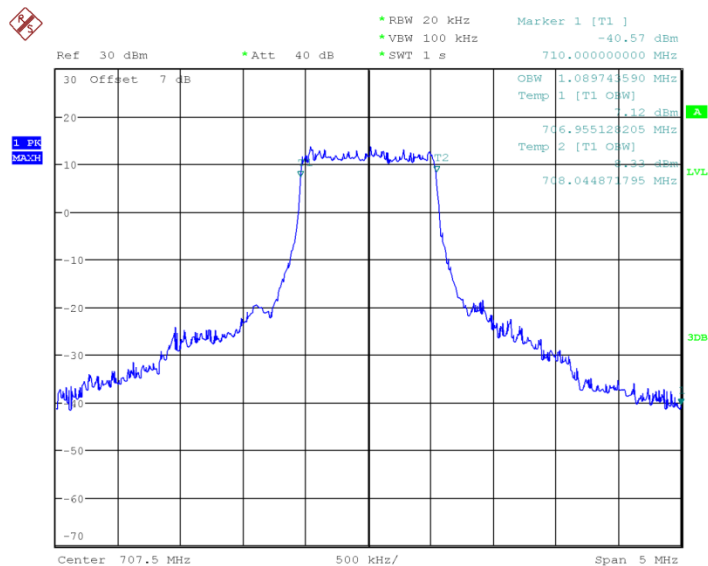


Date: 20.JAN.2003 06:17:59

LTE band 12, 1.4MHz Bandwidth, 16QAM (99% BW)


LTE band 12, 3MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	2692	2692

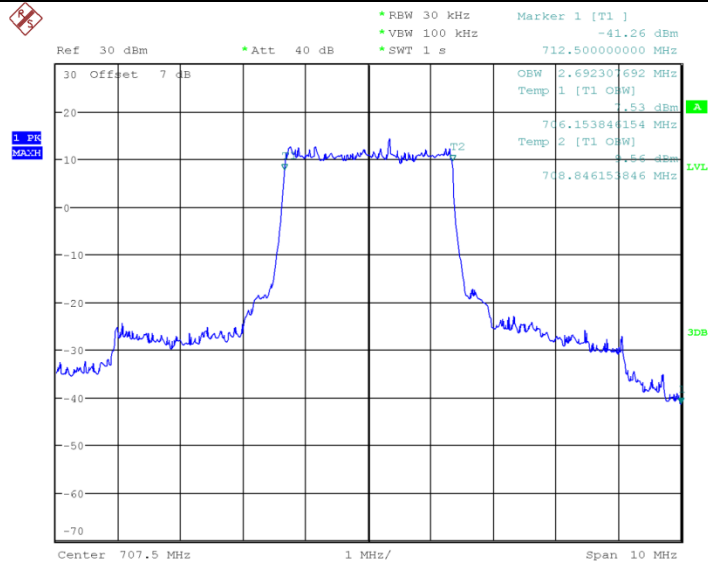

Date: 20.JAN.2003 06:06:39

LTE band 12, 3MHz Bandwidth, QPSK (99% BW)

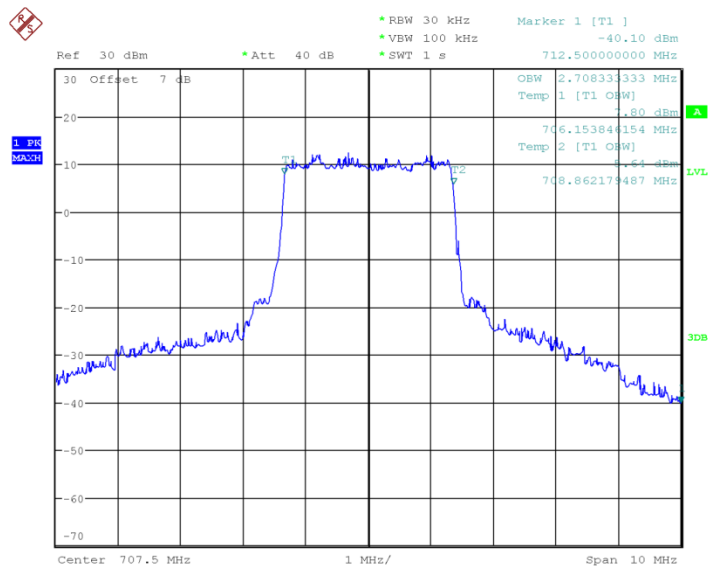


Date: 20.JAN.2003 06:06:55

LTE band 12, 3MHz Bandwidth, 16QAM (99% BW)


LTE band 12, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	4495	4471

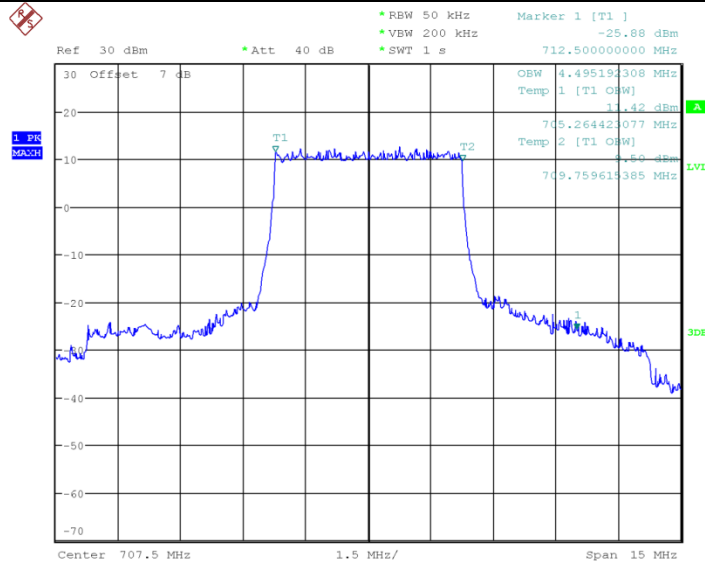

Date: 20.JAN.2003 06:07:20

LTE band 12, 5MHz Bandwidth, QPSK (99% BW)

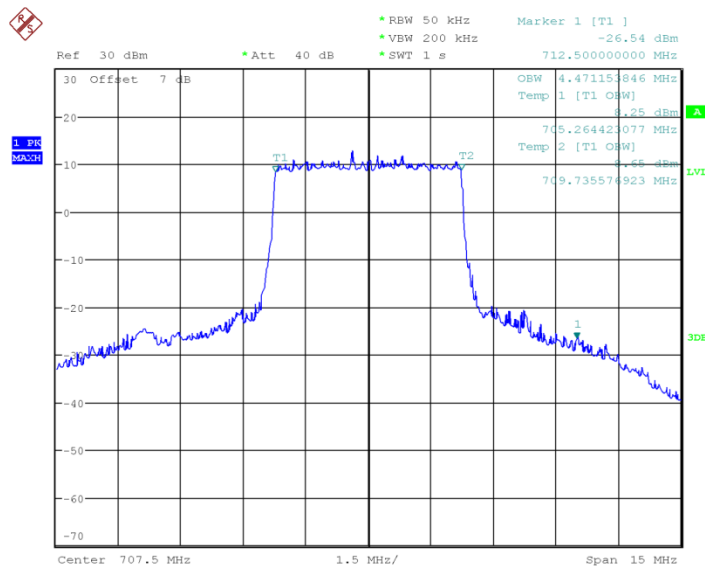


Date: 20.JAN.2003 06:07:38

LTE band 12, 5MHz Bandwidth,16QAM (99% BW)


LTE band 12, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	9038	9038

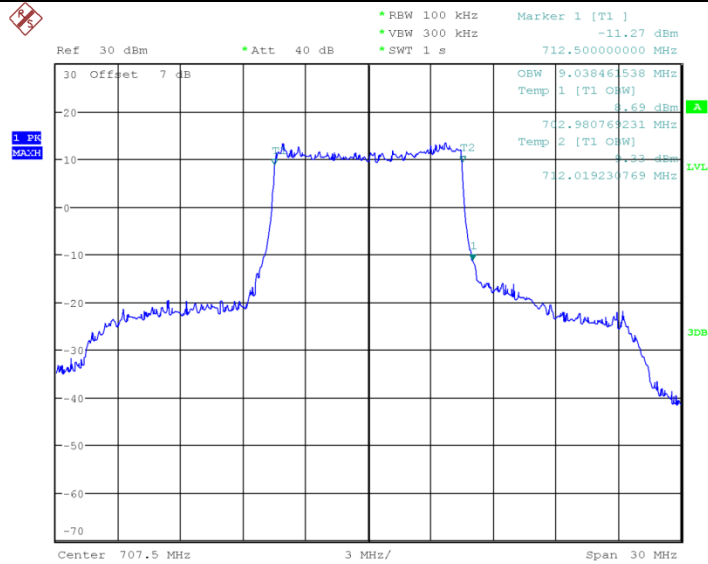

Date: 20.JAN.2003 06:07:59

LTE band 12, 10MHz Bandwidth, QPSK (99% BW)

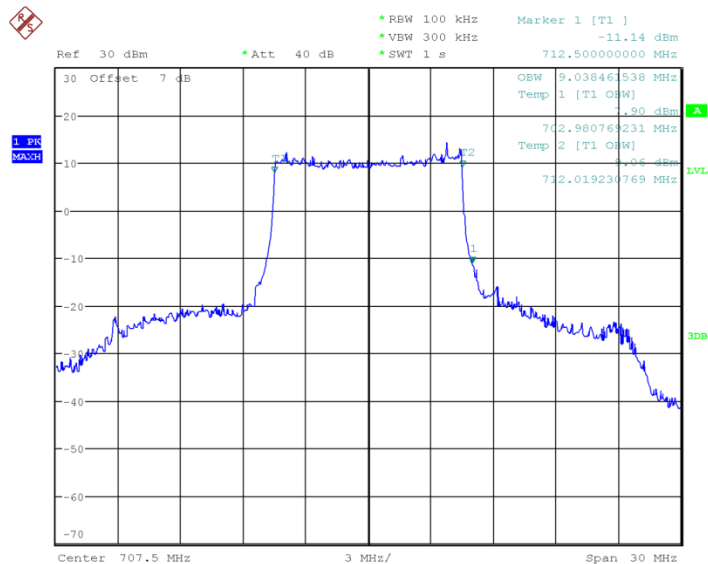

Date: 20.JAN.2003 06:08:15

LTE band 12, 10MHz Bandwidth, 16QAM (99% BW)

ANNEX A.5. EMISSION BANDWIDTH

Reference


FCC: CFR Part 22.917(b),24.238(a), 27.53(g),27.53(h), 27.53(m)

A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


LTE band 2, 1.4MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	1386	1346

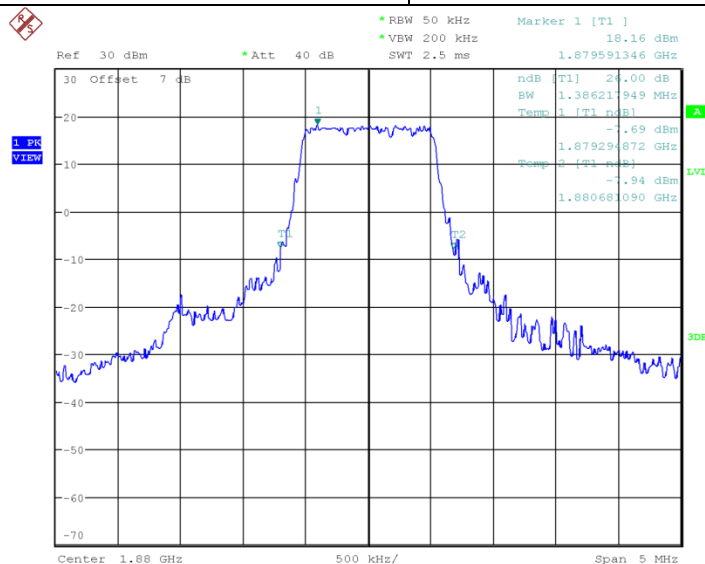

Date: 20.JAN.2003 06:35:03

LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)

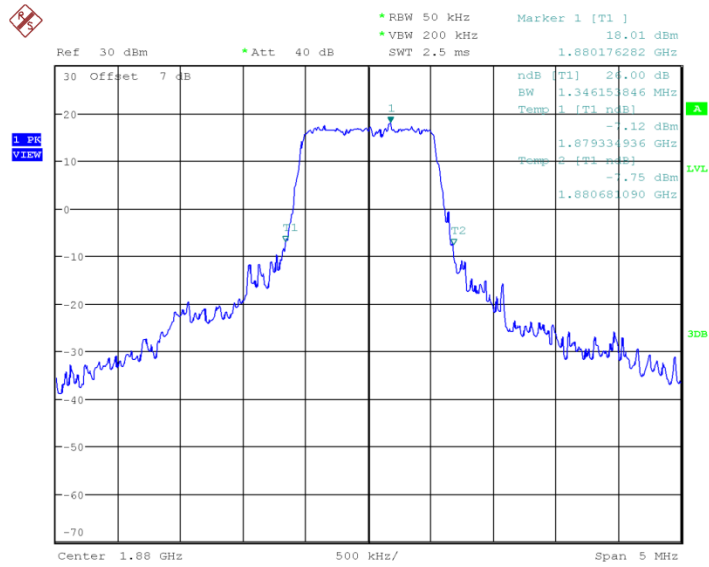


Date: 20.JAN.2003 06:35:19

LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)


LTE band 2, 3MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
	QPSK	16QAM
1880.0	2981	2997

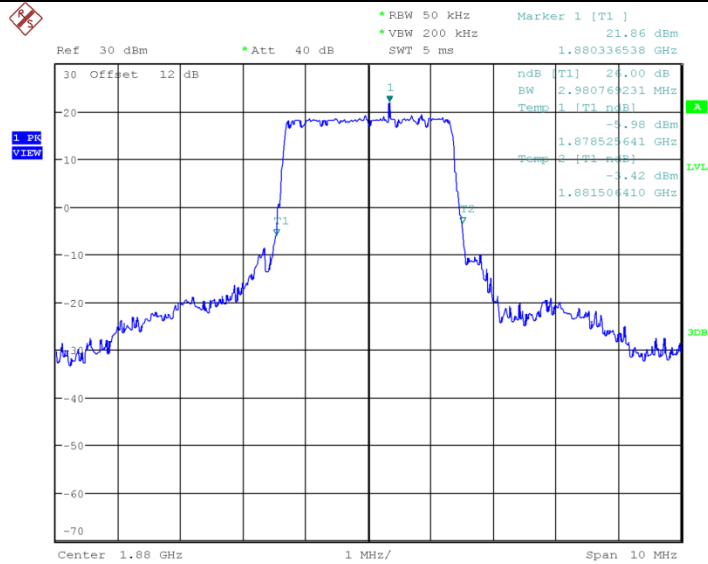

Date: 20.JAN.2003 05:10:14

LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)

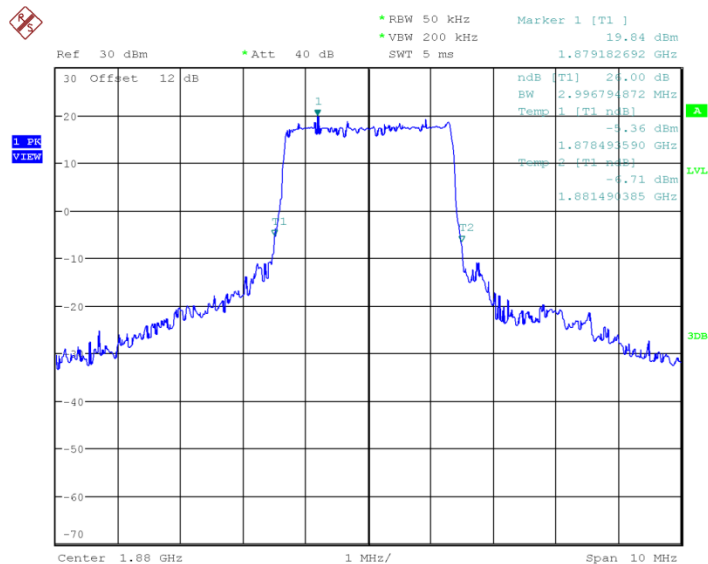


Date: 20.JAN.2003 05:10:30

LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)


LTE band 2, 5MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	4976	4904

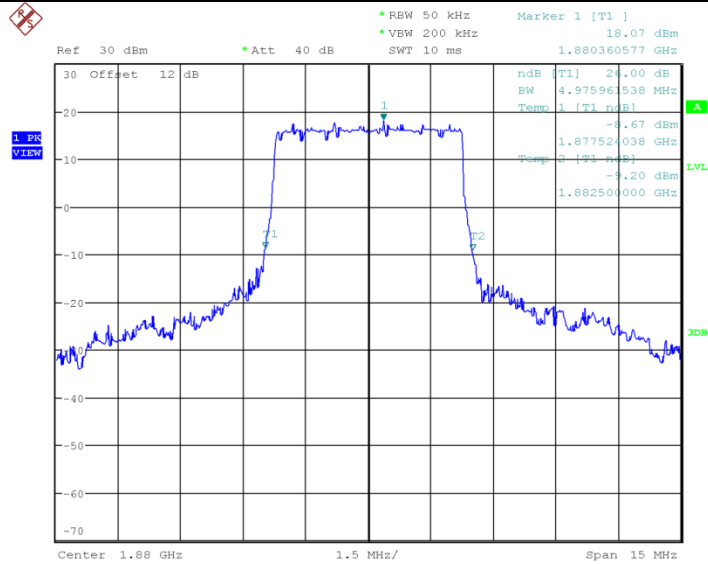

Date: 20.JAN.2003 05:10:57

LTE band 2, 5MHz Bandwidth, QPSK (-26dBc BW)

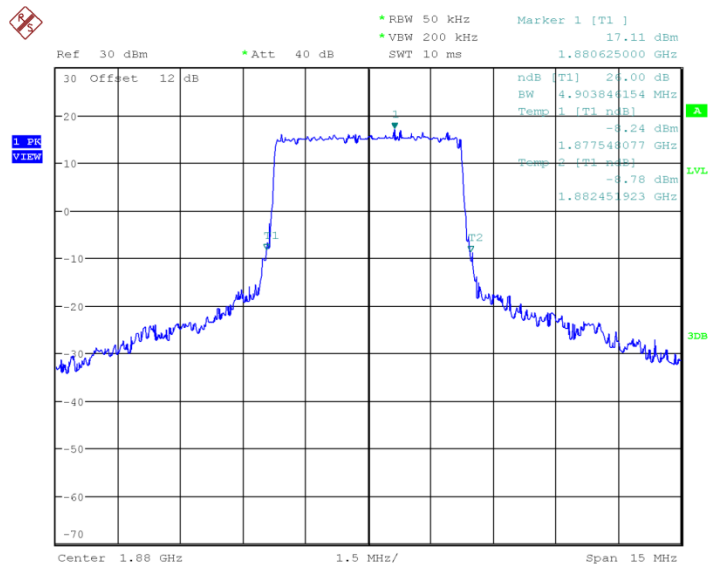


Date: 20.JAN.2003 05:11:17

LTE band 2, 5MHz Bandwidth,16QAM (-26dBc BW)


LTE band 2, 10MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	9904	9904

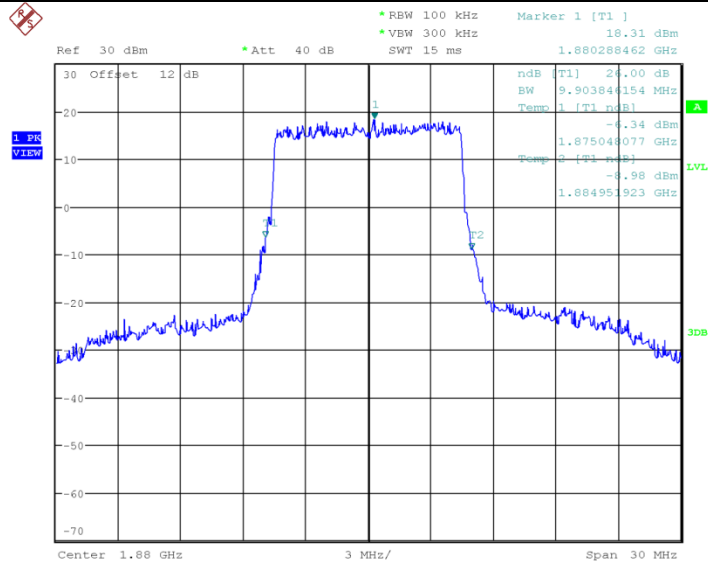

Date: 20.JAN.2003 05:11:36

LTE band 2, 10MHz Bandwidth, QPSK (-26dBc BW)

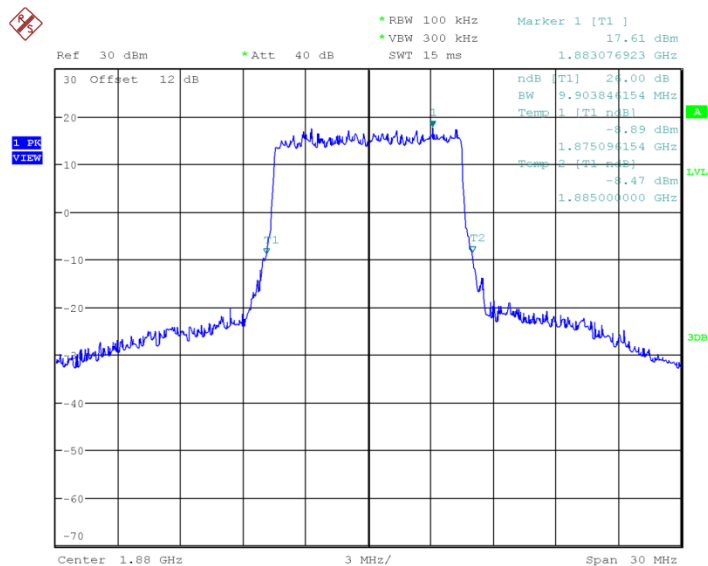


Date: 20.JAN.2003 05:11:49

LTE band 2, 10MHz Bandwidth, 16QAM (-26dBc BW)


LTE band 2, 15MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	14639	14639

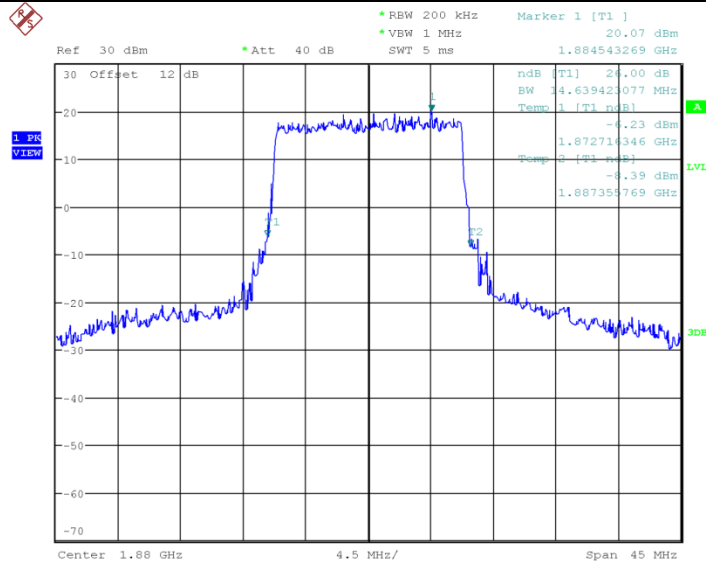

Date: 20.JAN.2003 05:12:08

LTE band 2, 15MHz Bandwidth, QPSK (-26dBc BW)

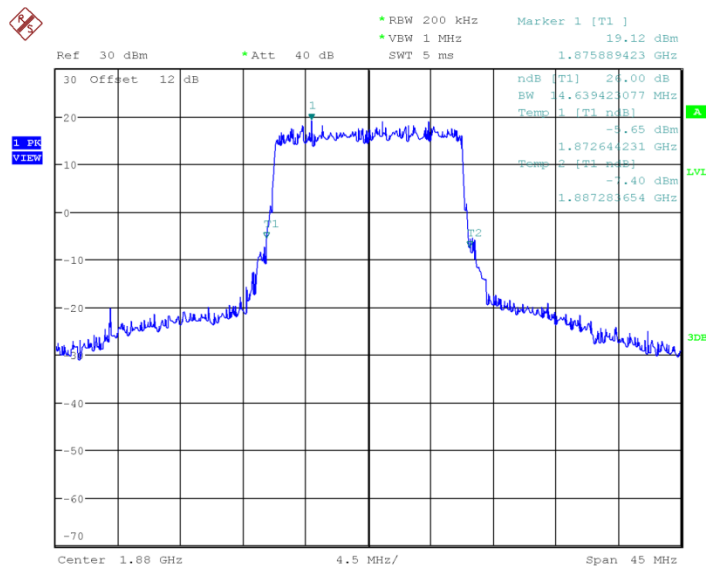


Date: 20.JAN.2003 05:12:21

LTE band 2, 15MHz Bandwidth, 16QAM (-26dBc BW)


LTE band 2, 20MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	19808	19423

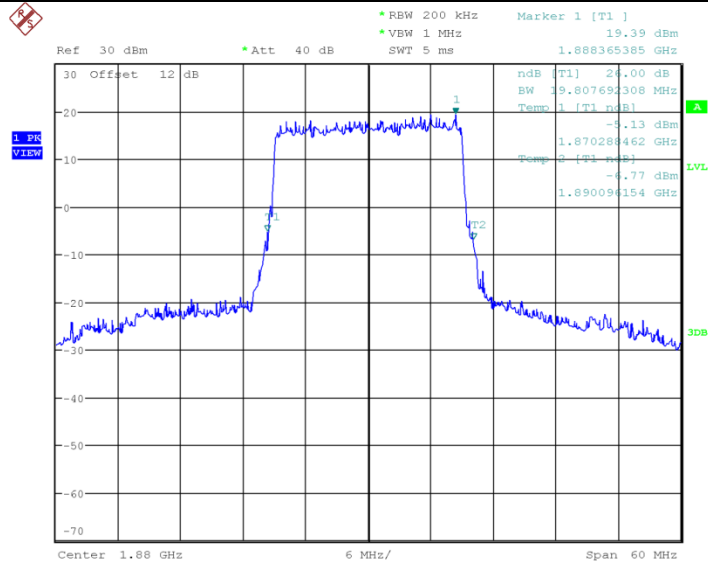

Date: 20.JAN.2003 05:12:41

LTE band 2, 20MHz Bandwidth, QPSK (-26dBc BW)

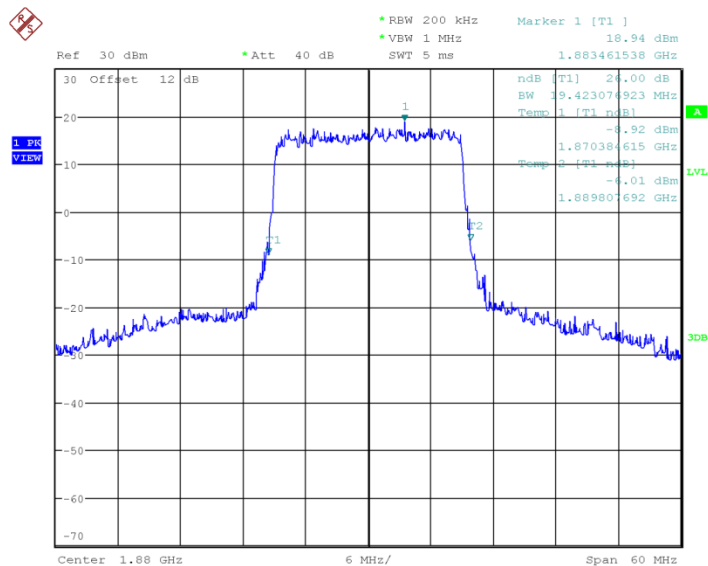

Date: 20.JAN.2003 05:12:54

LTE band 2, 20MHz Bandwidth, 16QAM (-26dBc BW)