


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	50%
Test Engineer	Brian Sun	Configurations	2.4GHz + 5GHz

### Horizontal

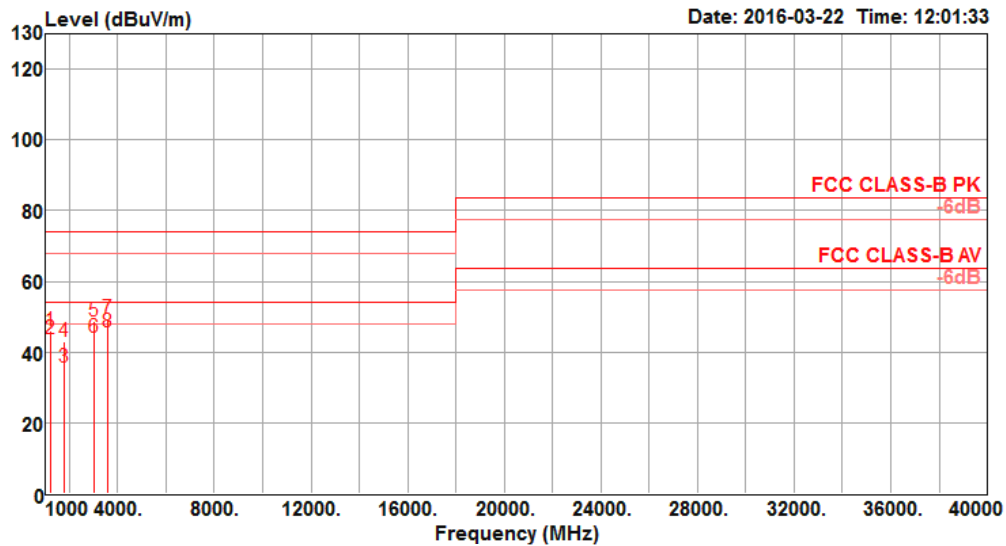

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1199.96	45.99	74.00	-28.01	52.47	3.34	24.47	34.29	127	155 Peak	HORIZONTAL
2	1200.00	43.87	54.00	-10.13	50.35	3.34	24.47	34.29	127	155 Average	HORIZONTAL
3	1799.96	35.82	54.00	-18.18	39.40	4.17	26.81	34.56	267	303 Average	HORIZONTAL
4	1800.08	42.96	74.00	-31.04	46.54	4.17	26.81	34.56	267	303 Peak	HORIZONTAL
5	2999.94	48.65	74.00	-25.35	47.38	5.48	30.80	35.01	102	164 Peak	HORIZONTAL
6	3000.03	44.22	54.00	-9.78	42.95	5.48	30.80	35.01	102	164 Average	HORIZONTAL
7	3600.02	49.48	74.00	-24.52	46.17	6.08	32.18	34.95	163	161 Peak	HORIZONTAL
8	3602.36	45.64	54.00	-8.36	42.33	6.08	32.18	34.95	163	161 Average	HORIZONTAL

# Vertical

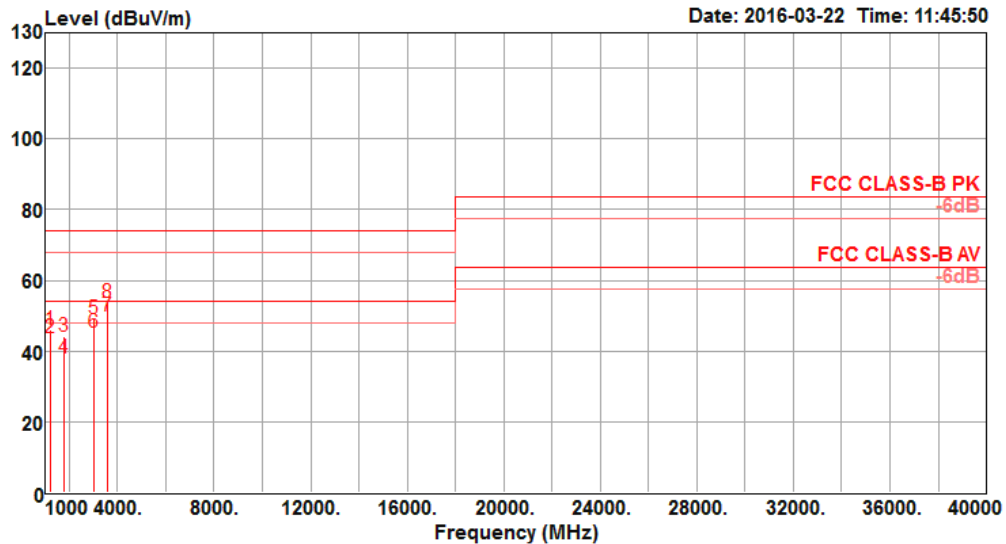

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1199.99	45.92	74.00	-28.08	52.40	3.34	24.47	34.29	130	269 Peak	VERTICAL
2	1200.00	43.62	54.00	-10.38	50.10	3.34	24.47	34.29	130	269 Average	VERTICAL
3	1799.80	44.09	74.00	-29.91	47.67	4.17	26.81	34.56	117	205 Peak	VERTICAL
4	1799.97	38.15	54.00	-15.85	41.73	4.17	26.81	34.56	117	205 Average	VERTICAL
5	2999.82	49.13	74.00	-24.87	47.86	5.48	30.80	35.01	100	156 Peak	VERTICAL
6	2999.98	45.09	54.00	-8.91	43.82	5.48	30.80	35.01	100	156 Average	VERTICAL
7	3599.98	49.68	54.00	-4.32	46.37	6.08	32.18	34.95	250	334 Average	VERTICAL
8	3600.12	53.75	74.00	-20.25	50.44	6.08	32.18	34.95	250	334 Peak	VERTICAL