

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 1(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Annex A: Probe sensitivity and reference signal measurement plots

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 2(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

T-Coil Probe

General Mechanical Surface Detection

Name: AM1DV3 - 3062

Type: AM1DV3

Serial number: 3062

Calibrated: ☒ 1/14/2014

Notes: Sensitivity: 0.00741 V/(A/m)

OK

	Coil	Probe
Internal calibration...	2.3887 V	1.1484 V
Probe sensitivity a...		0.007417 V/(A/m)

Figure A1: Probe calibration data for coil and probe

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 3(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

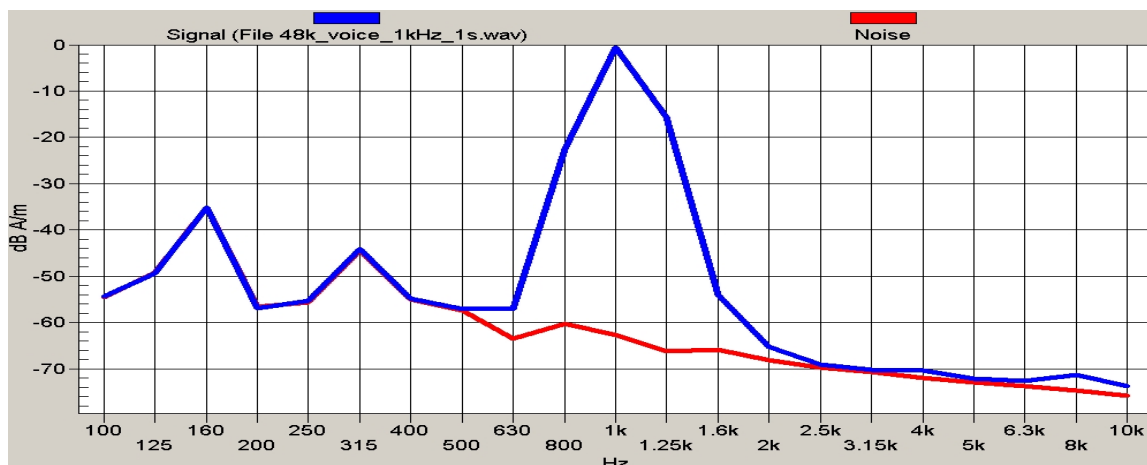


Figure A2: Reference voice 1 kHz signal and noise

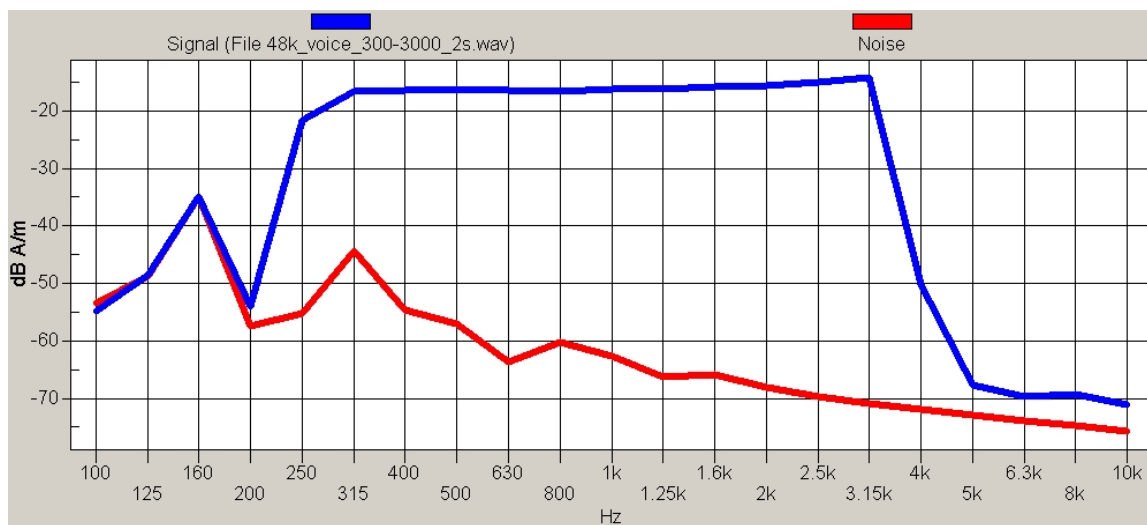


Figure A3: Reference voice simulated signal and noise

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 4(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Annex B: TMFS system validation and ambient data/plots

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 5(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Date/Time: 11/6/2014 6:58:12 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil TMFS_validation_11_06_14

DUT: TMFS; Type: TMFS-1; Serial: 1003

Communication System: UID 0, CW; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC T-Coil Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan/Background Noise/z (axial) noise/ABM Noise Spectrum(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Off

Output Gain: 0

Measure Window Start: 2000ms

Measure Window Length: 5000ms

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 6(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Cursor:

ABM = -55.99 dBA/m

Location: 0, 0, 13 mm

T-Coil scan/Background Noise/y (transversal) noise/ABM Noise Spectrum(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Off

Output Gain: 0

Measure Window Start: 2000ms

Measure Window Length: 5000ms

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM = -55.98 dBA/m

Location: 0, 0, 13 mm

T-Coil scan/TMFS Validation/z (axial) 8 x 8 step 2/ABM Interpolated Signal(x,y,z)

(41x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: 1 kHz Sine

Output Gain: 34.95

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.0023 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 7(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

Cursor:

ABM1 = -20.46 dBA/m

BWC Factor = 0.0023 dB

Location: -0.6, 1.2, 3.7 mm

T-Coil scan/TMFS Validation/y (transversal) 16 x 52 step 4/ABM Interpolated

Signal(x,y,z) (41x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: 1 kHz Sine

Output Gain: 34.95

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.0023 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1 = -25.83 dBA/m

BWC Factor = 0.0023 dB

Location: -2, -17.6, 3.7 mm

T-Coil scan/TMFS Validation/z (axial) wideband multisine at best S/N/ABM Freq

Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_multisine_50_10k_10s.wav

Output Gain: 87.87

Measure Window Start: 2000ms

Measure Window Length: 5000ms

BWC applied: 13.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
----------	---

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 8(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.98 dB

BWC Factor = 13.16 dB

Location: -0.7, 1.3, 4.4 mm

T-Coil scan/TMFS Validation/z (axial) wideband multisine at best S/N 2/ABM Freq

Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_multisine_50_10k_10s.wav

Output Gain: 86.87

Measure Window Start: 300ms

Measure Window Length: 4000ms

BWC applied: 13.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


Cursor:


Diff = 1.99 dB


BWC Factor = 13.16 dB


Location: -0.7, 1.3, 5.1 mm


	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 9(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

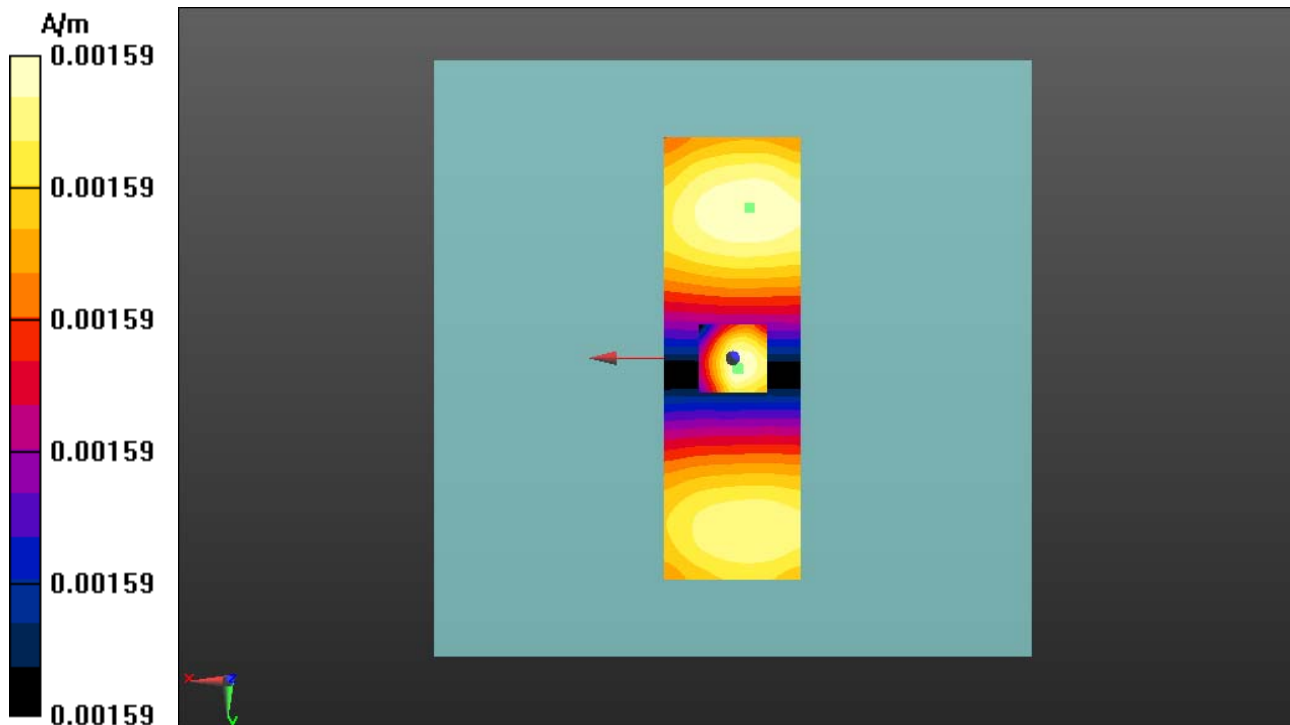


	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 10(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

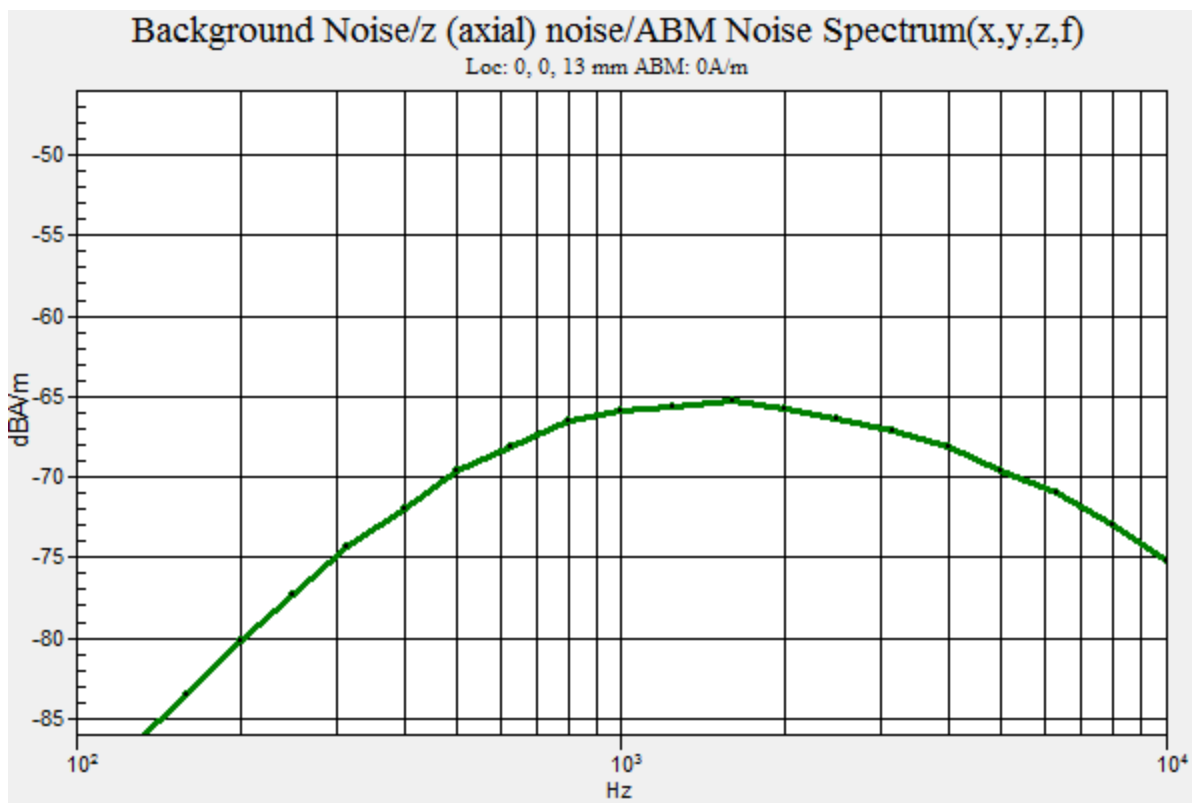


	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 11(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

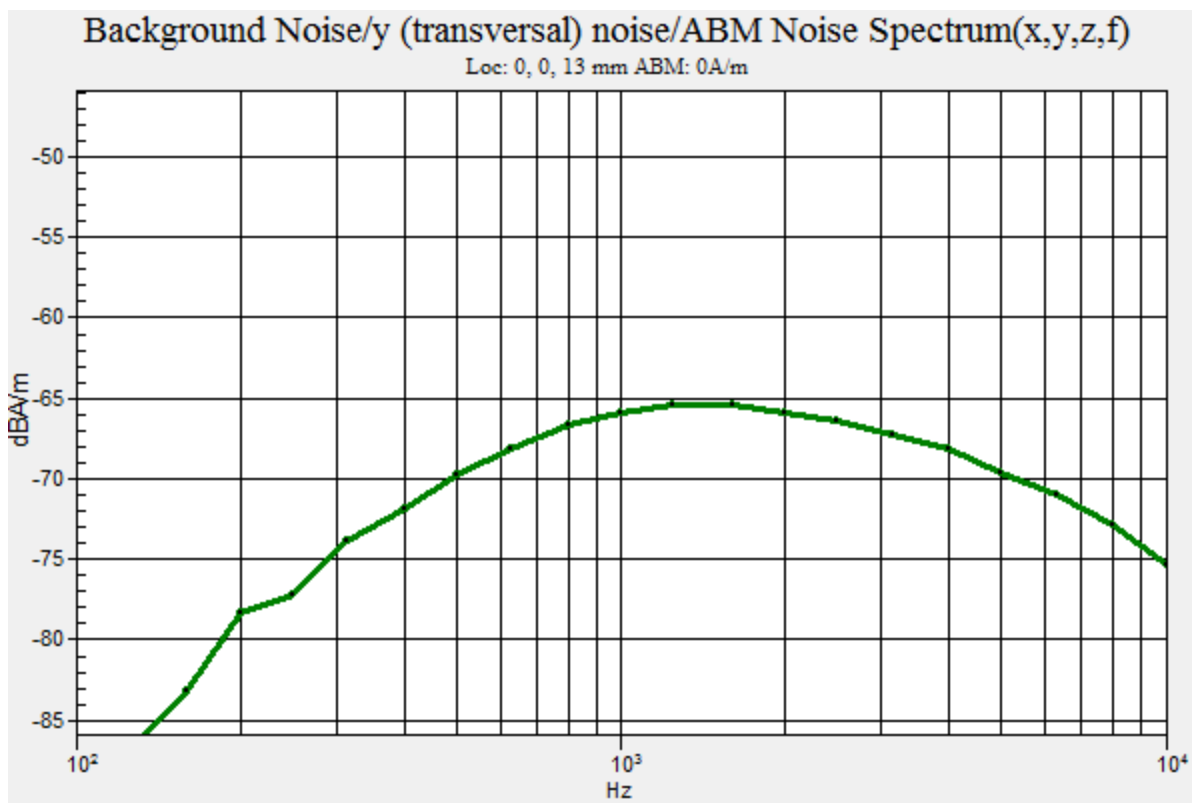

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 12(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

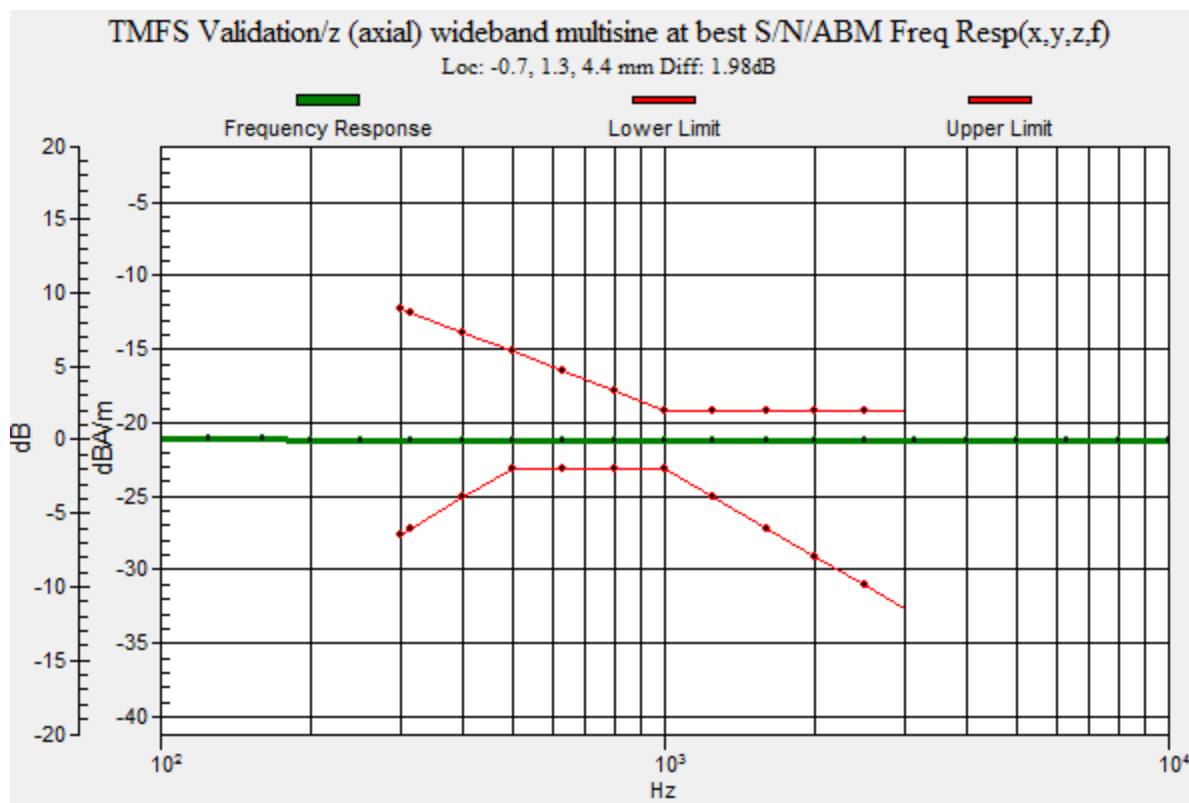

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 13(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

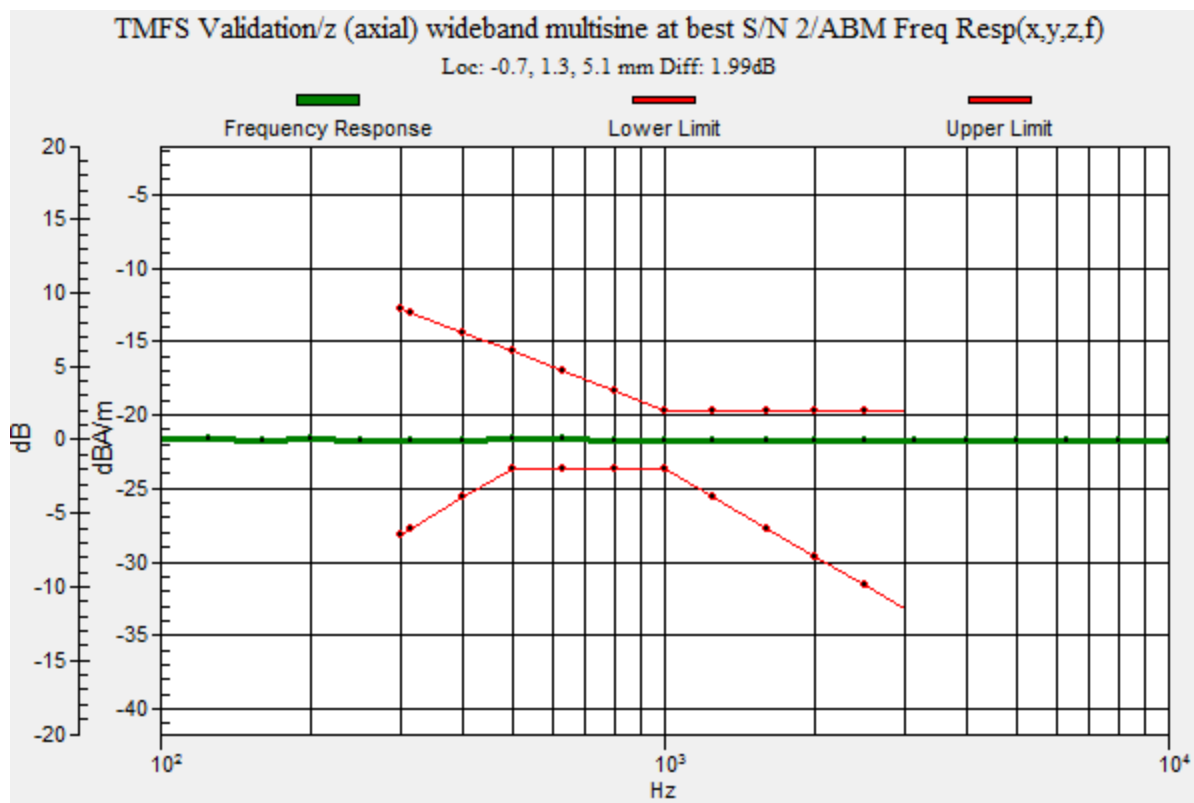

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 14(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Annex C: Audio Band Magnetic measurement data and plots

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 15(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

GSM Bands

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 16(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 9:18:05 AM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_GSM 850_axial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, GSM 850; Frequency: 824.2 MHz, Frequency: 836.8 MHz, Frequency: 848.8 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_GSM850/General Scan - Low channel/z (axial) 5.0mm 50 x 50/ABM

SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 17(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_GSM850/General Scan - Low channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.21 dB

ABM1 comp = 12.28 dBA/m

BWC Factor = 0.16 dB

Location: 0, 15, 4.4 mm

T-Coil scan_GSM850/General Scan - Low channel/z (axial) wideband at best S/N/ABM

Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 18(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.22 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_GSM850/8x8 Scan - Mid channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.30 dB

ABM1 comp = 12.25 dBA/m

BWC Factor = 0.16 dB

Location: 0, 15, 4.4 mm

T-Coil scan_GSM850/8x8 Scan - Mid channel/z (axial) wideband at best S/N/ABM Freq

Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 19(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.19 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_GSM850/8x8 Scan - High channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.20 dB

ABM1 comp = 12.25 dBA/m

BWC Factor = 0.16 dB

Location: 0, 15, 4.4 mm

T-Coil scan_GSM850/8x8 Scan - High channel/z (axial) wideband at best S/N/ABM Freq

Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm


Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 20(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW


Output Gain: 69.12
Measure Window Start: 300ms
Measure Window Length: 6000ms
BWC applied: 10.80 dB
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:
Diff = 1.24 dB
BWC Factor = 10.80 dB
Location: 0, 15, 3.7 mm

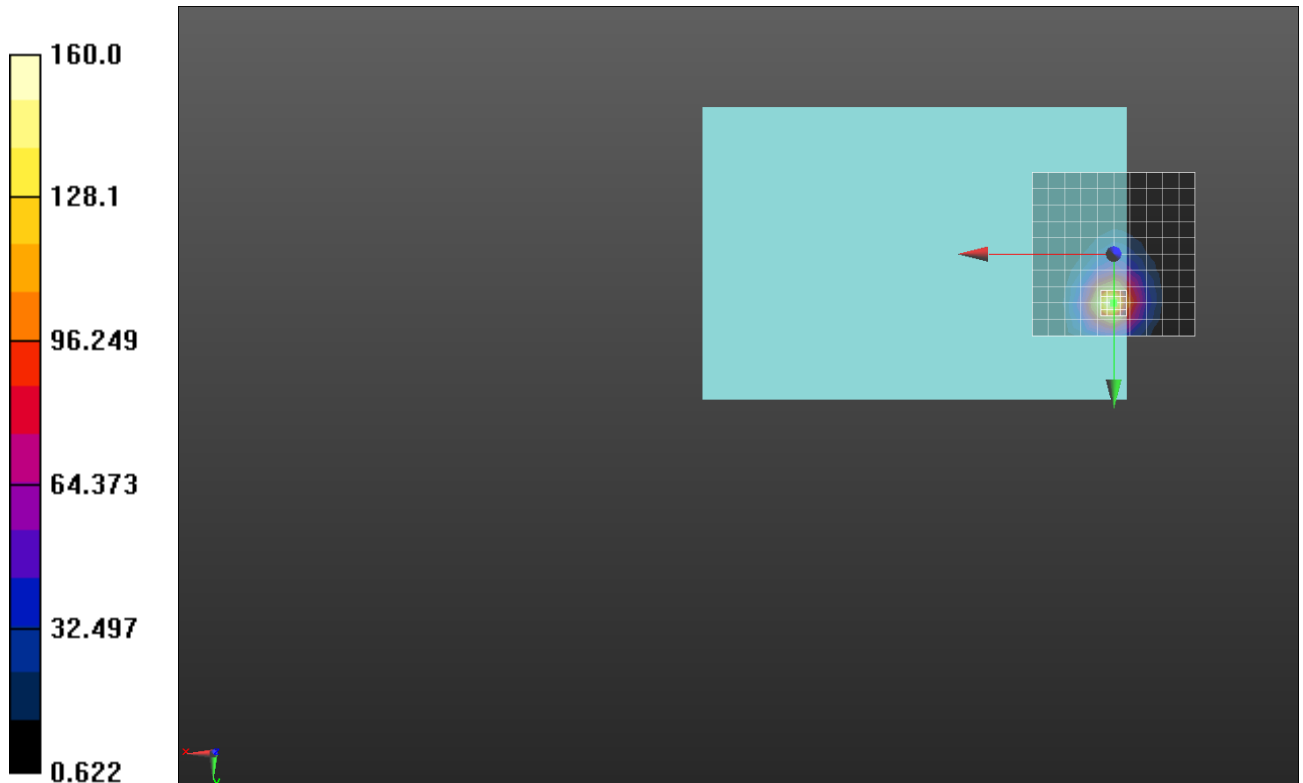

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 21(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

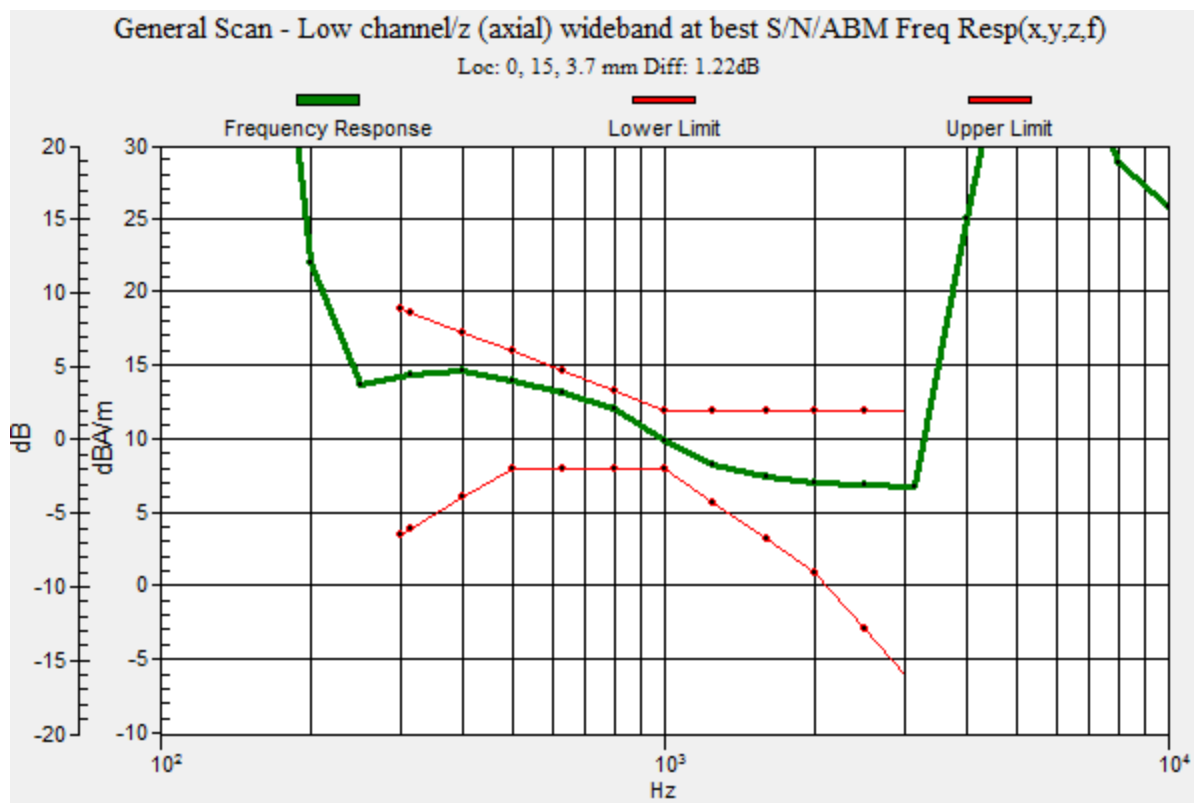



Document

Appendix A-D to Hearing Aid Compatibility Audio Band
Magnetic (ABM) T-Coil Test Report for BlackBerry®
Smartphone RGV161LW (SQW100-3)

Page

22(90)

Author Data

Daoud Attayi

Dates of Test


Nov. 06-07, 2014

Report No


RTS-6057-1411-19

FCC ID

L6ARGV160LW

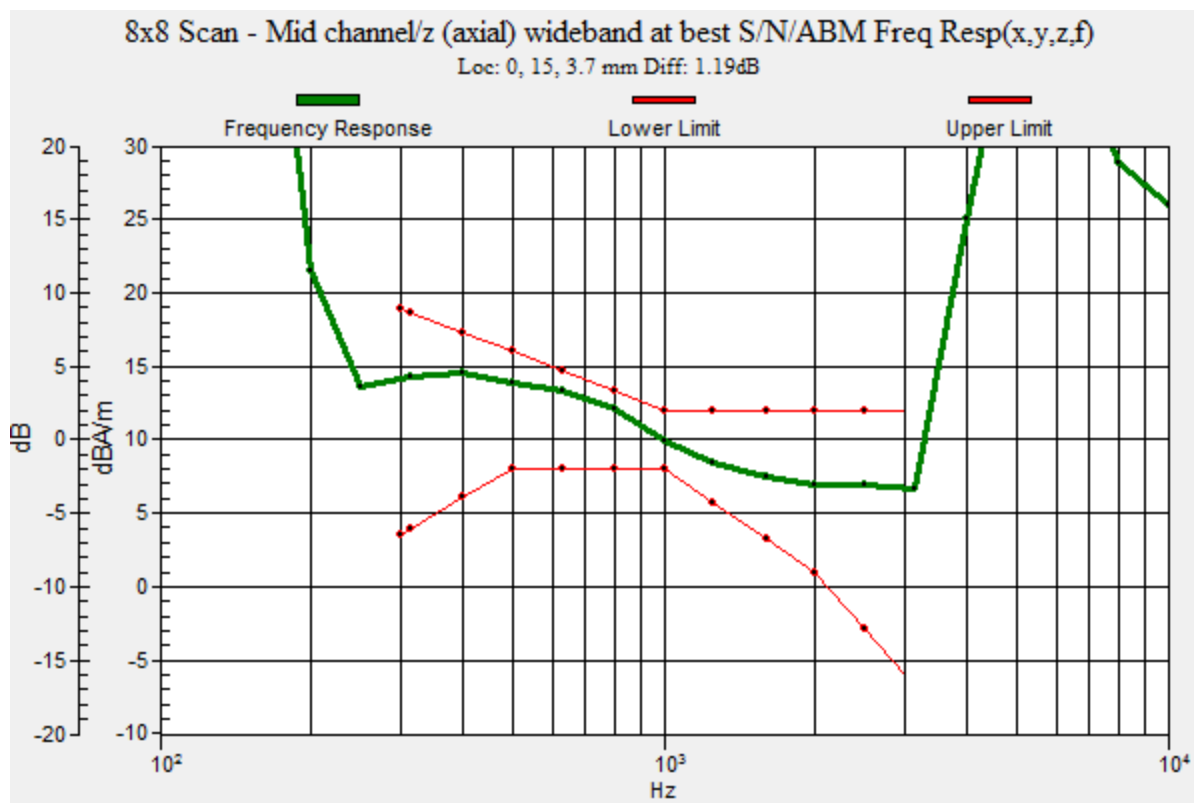

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 23(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

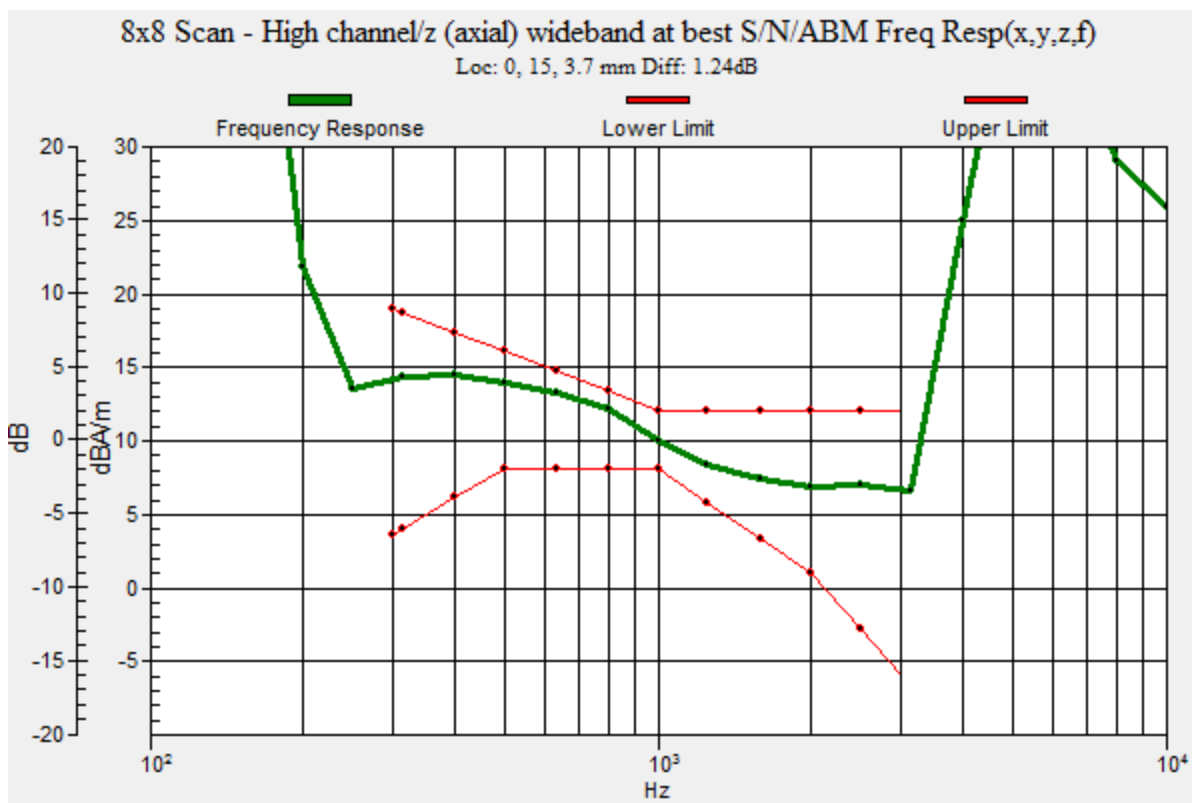

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 24(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 9:30:41 AM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_GSM 850_radial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, GSM 850; Frequency: 824.2 MHz, Frequency: 836.8 MHz, Frequency: 848.8 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_GSM850/General Scan - Low channel/y (transversal) 5.0mm 50 x 50/ABM

SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 25(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_GSM850/General Scan - Low channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.49 dB

ABM1 comp = -1.83 dBA/m

BWC Factor = 0.16 dB

Location: -3, -5, 4.4 mm

T-Coil scan_GSM850/8x8 Scan - Mid channel/y (transversal) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 26(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.79 dB

ABM1 comp = -1.86 dBA/m

BWC Factor = 0.16 dB

Location: -3, -5, 4.4 mm

T-Coil scan_GSM850/8x8 Scan - High channel/y (transversal) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


Cursor:



ABM1/ABM2 = 48.50 dB

ABM1 comp = -1.91 dBA/m

BWC Factor = 0.16 dB

Location: -3, -5, 4.4 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 27(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

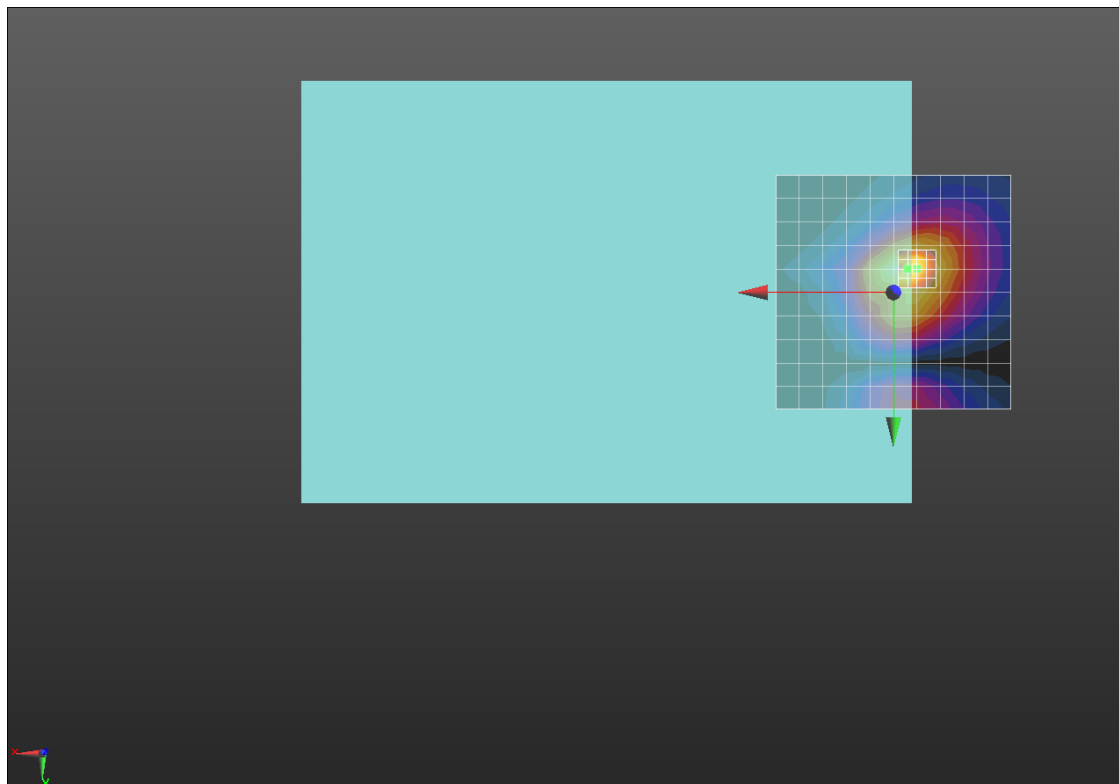

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 28(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 10:33:51 AM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_GSM 1900_axial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, GSM 1900; Frequency: 1850.2 MHz, Frequency: 1880 MHz, Frequency: 1909.8 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_GSM1900/General Scan - Low channel/z (axial) 5.0mm 50 x 50/ABM

SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 29(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_GSM1900/General Scan - Low channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 47.86 dB

ABM1 comp = 12.80 dBA/m

BWC Factor = 0.16 dB

Location: 2, 15, 4.4 mm

T-Coil scan_GSM1900/General Scan - Low channel/z (axial) wideband at best S/N/ABM

Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 30(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.23 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_GSM1900/8x8 Scan - Mid channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 48.66 dB

ABM1 comp = 12.70 dBA/m

BWC Factor = 0.16 dB

Location: 2, 15, 4.4 mm

T-Coil scan_GSM1900/8x8 Scan - Mid channel/z (axial) wideband at best S/N/ABM Freq

Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 31(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.35 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_GSM1900/8x8 Scan - High channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 49.47 dB

ABM1 comp = 12.62 dBA/m

BWC Factor = 0.16 dB

Location: 2, 15, 4.4 mm

T-Coil scan_GSM1900/8x8 Scan - High channel/z (axial) wideband at best S/N/ABM Freq

Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 32(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm



Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


Cursor:


Diff = 1.15 dB

BWC Factor = 10.81 dB


Location: 0, 15, 3.7 mm

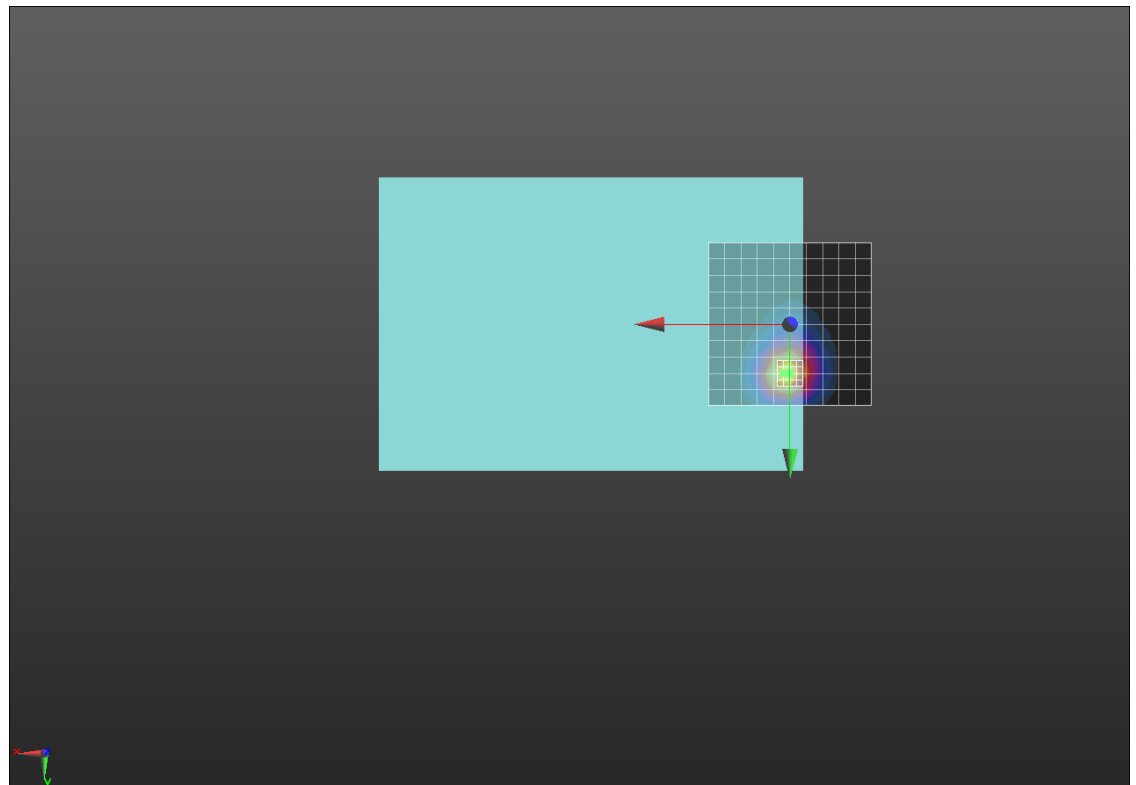

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 33(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

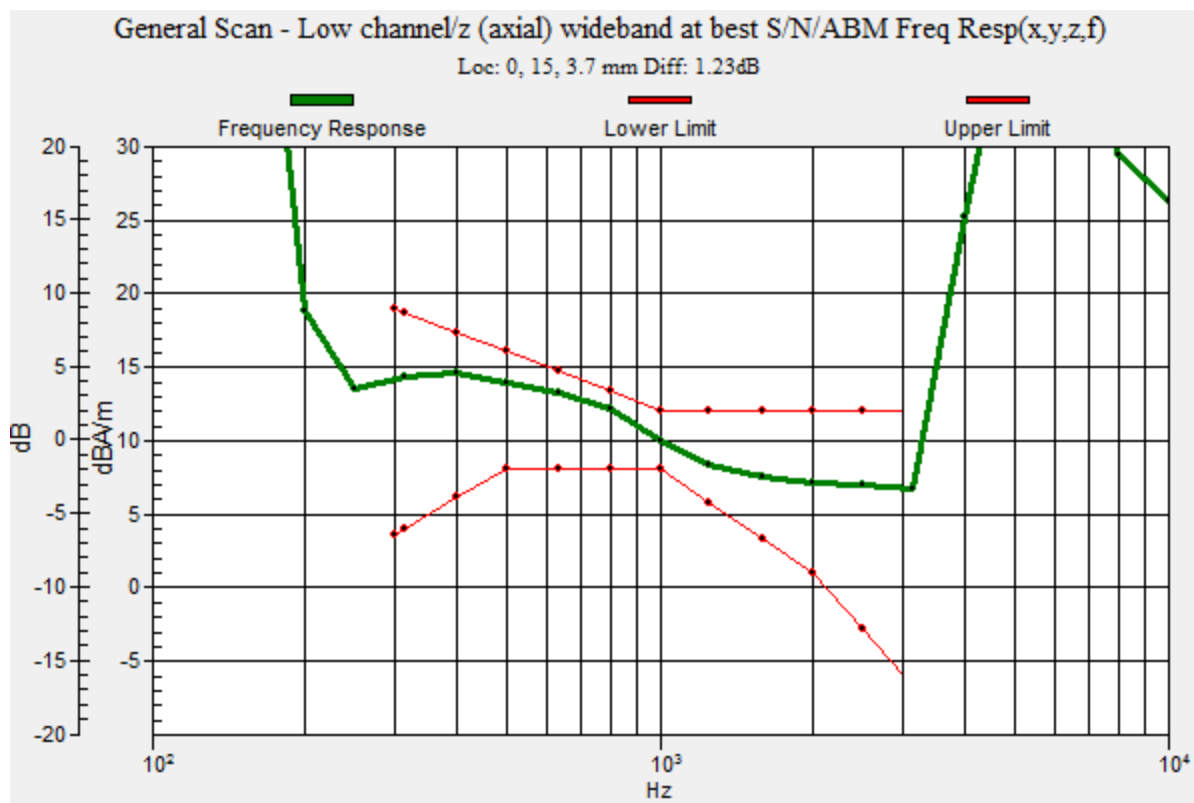

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 34(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

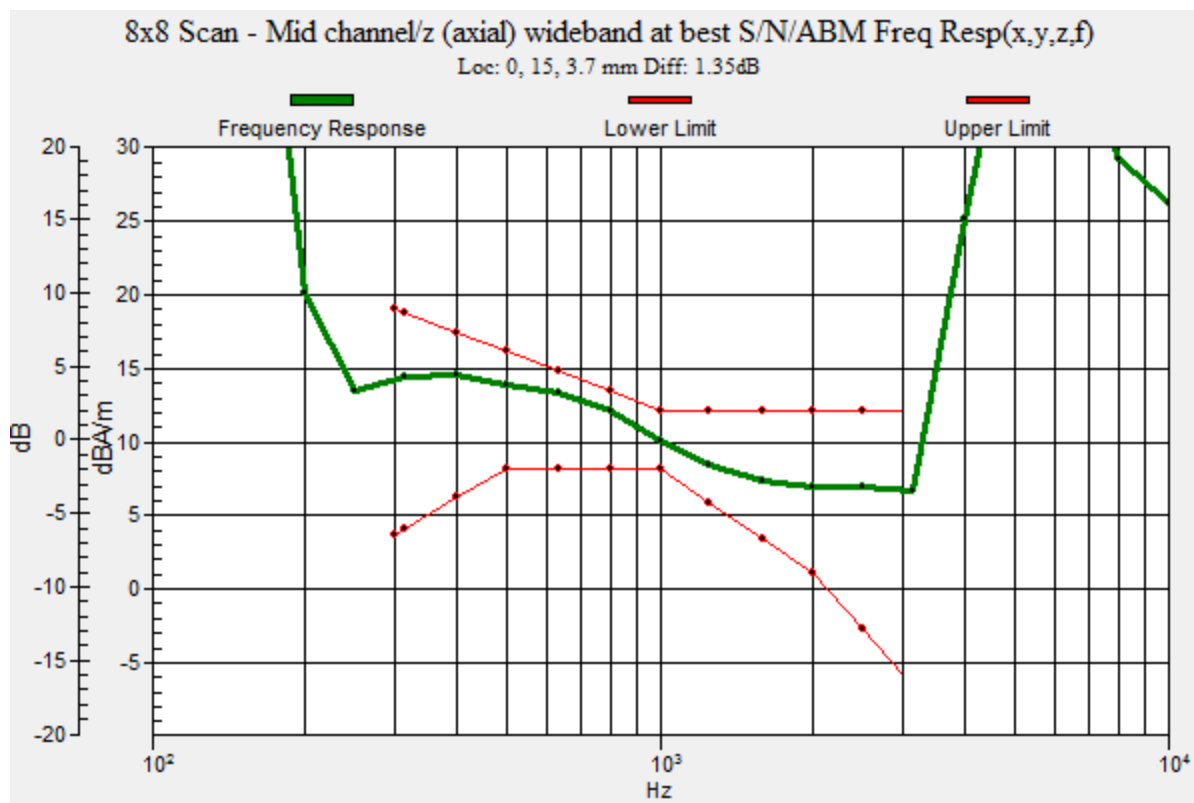



Document

Appendix A-D to Hearing Aid Compatibility Audio Band
Magnetic (ABM) T-Coil Test Report for BlackBerry®
Smartphone RGV161LW (SQW100-3)

Page

35(90)

Author Data

Daoud Attayi

Dates of Test


Nov. 06-07, 2014

Report No

RTS-6057-1411-19

FCC ID

L6ARGV160LW

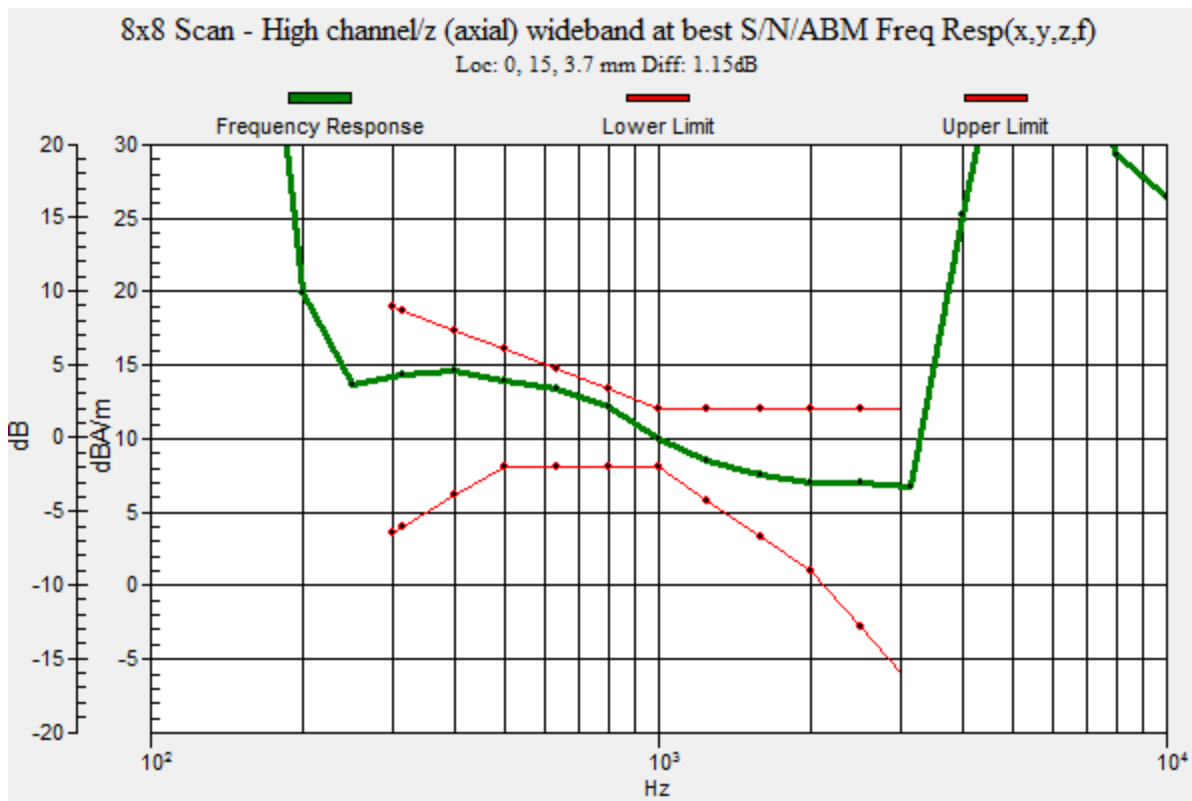

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 36(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 10:46:29 AM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_GSM1900_radial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, GSM 1900; Frequency: 1850.2 MHz, Frequency: 1880 MHz, Frequency: 1909.8 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_GSM1900/General Scan - Low channel/y (transversal) 5.0mm 50 x 50/ABM

SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 37(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Category T4	> 30 dB
-------------	---------

T-Coil scan_GSM1900/General Scan - Low channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 50.42 dB

ABM1 comp = -0.40 dBA/m

BWC Factor = 0.16 dB

Location: -2, -2, 4.4 mm

T-Coil scan_GSM1900/8x8 Scan - Mid channel/y (transversal) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 38(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 50.46 dB
ABM1 comp = -0.50 dBA/m
BWC Factor = 0.16 dB
Location: -2, -2, 4.4 mm

T-Coil scan_GSM1900/8x8 Scan - High channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB


Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 50.73 dB
ABM1 comp = -0.44 dBA/m
BWC Factor = 0.16 dB
Location: -2, -2, 4.4 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 39(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

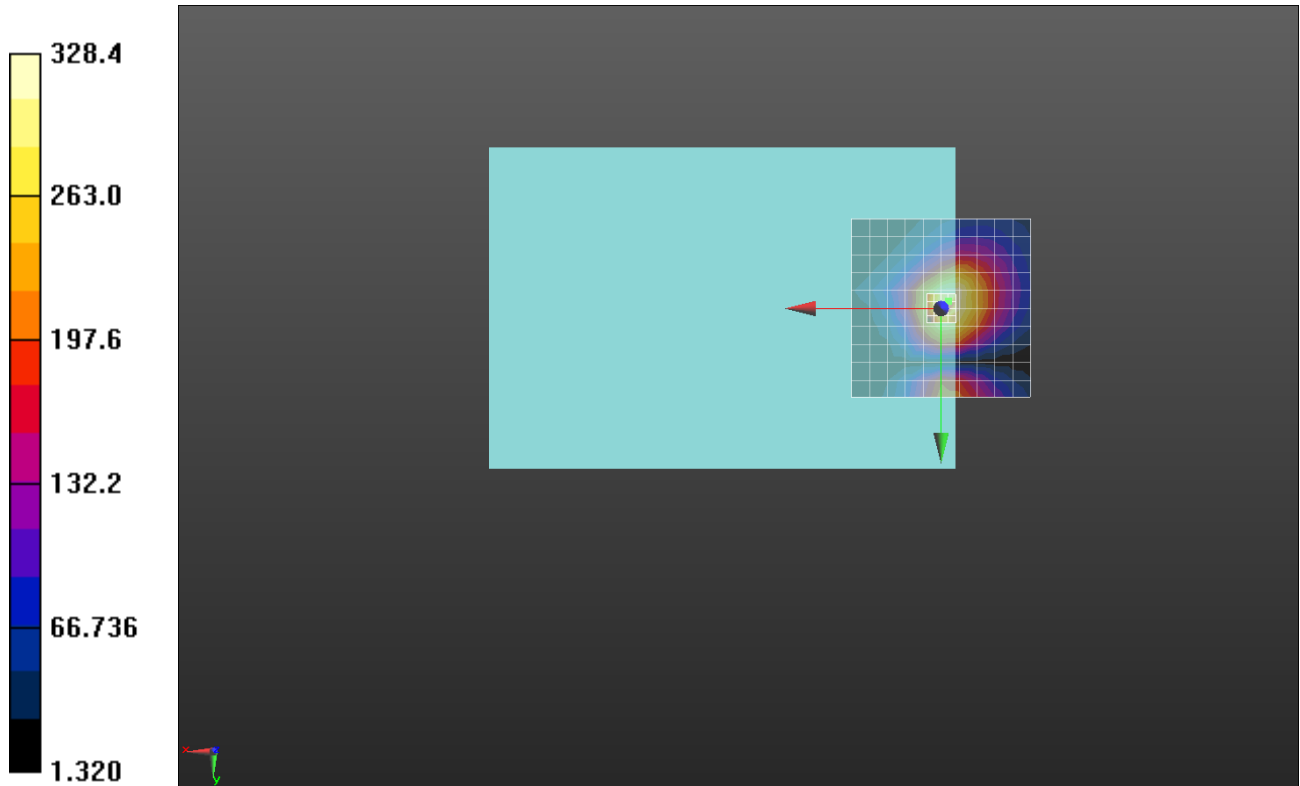

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 40(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

UMTS/WCDMA bands

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 41(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Date/Time: 11/7/2014 5:01:05 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_UMTS_V_Axial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, WCDMA FDD V; Frequency: 826.4 MHz, Frequency: 836.4 MHz, Frequency: 846.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_UMTS_Band_V/General Scan - Low channel/z (axial) 5.0mm 50 x 50/ABM SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 42(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_UMTS_Band_V/General Scan - Low channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 64.43 dB

ABM1 comp = 12.12 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_V/General Scan - Low channel/z (axial) wideband at best

S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12


Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 43(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.36 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_UMTS_Band_V/8x8 Scan - Mid channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 64.25 dB

ABM1 comp = 12.11 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_V/8x8 Scan - Mid channel/z (axial) wideband at best S/N/ABM

Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 44(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.16 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_UMTS_Band_V/8x8 Scan - High channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 63.92 dB

ABM1 comp = 12.13 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_V/8x8 Scan - High channel/z (axial) wideband at best S/N

2/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 45(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


Cursor:

Diff = 1.28 dB


BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm


	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 46(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

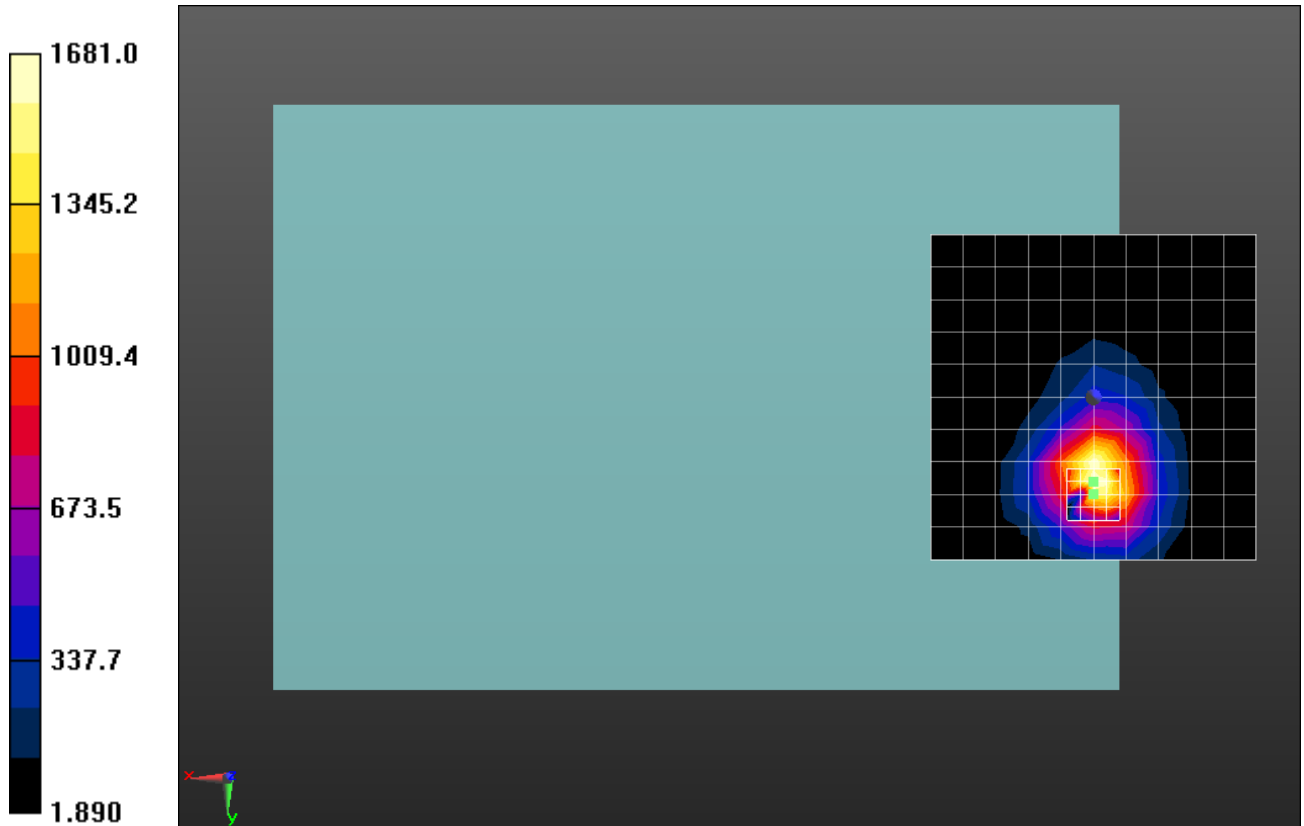


	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 47(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

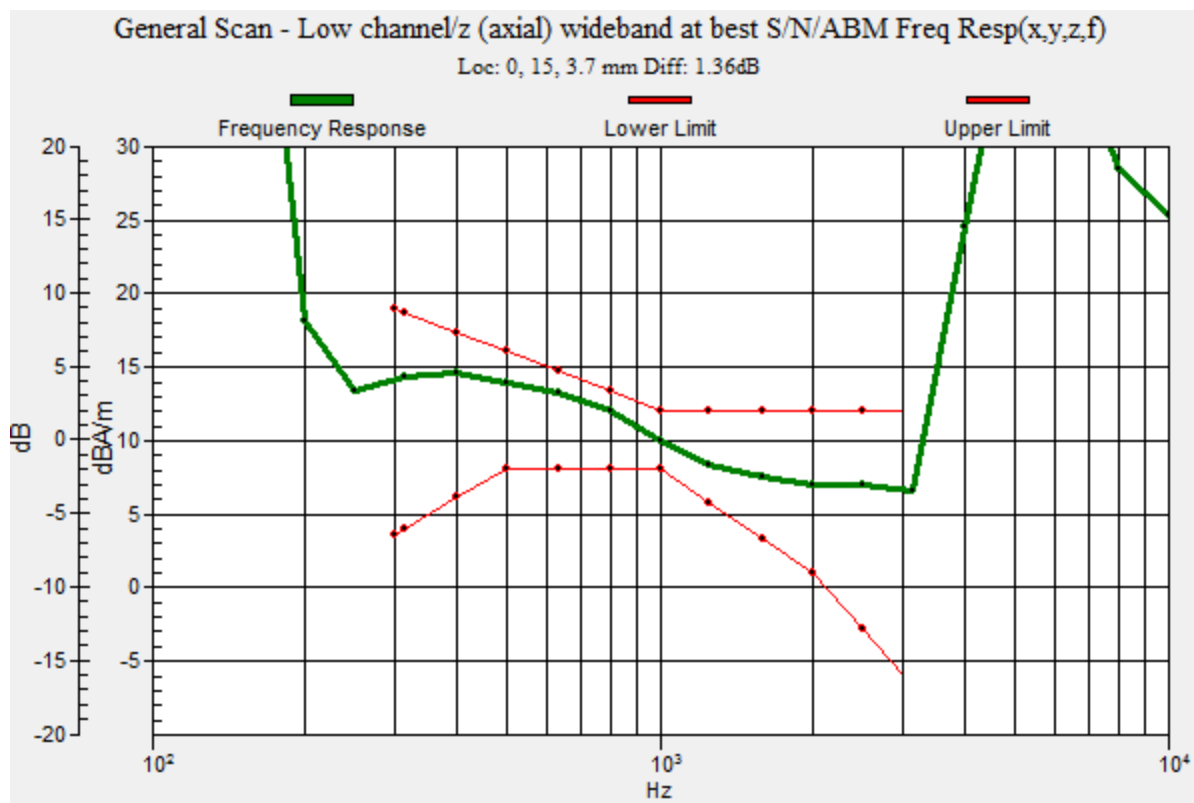

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 48(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

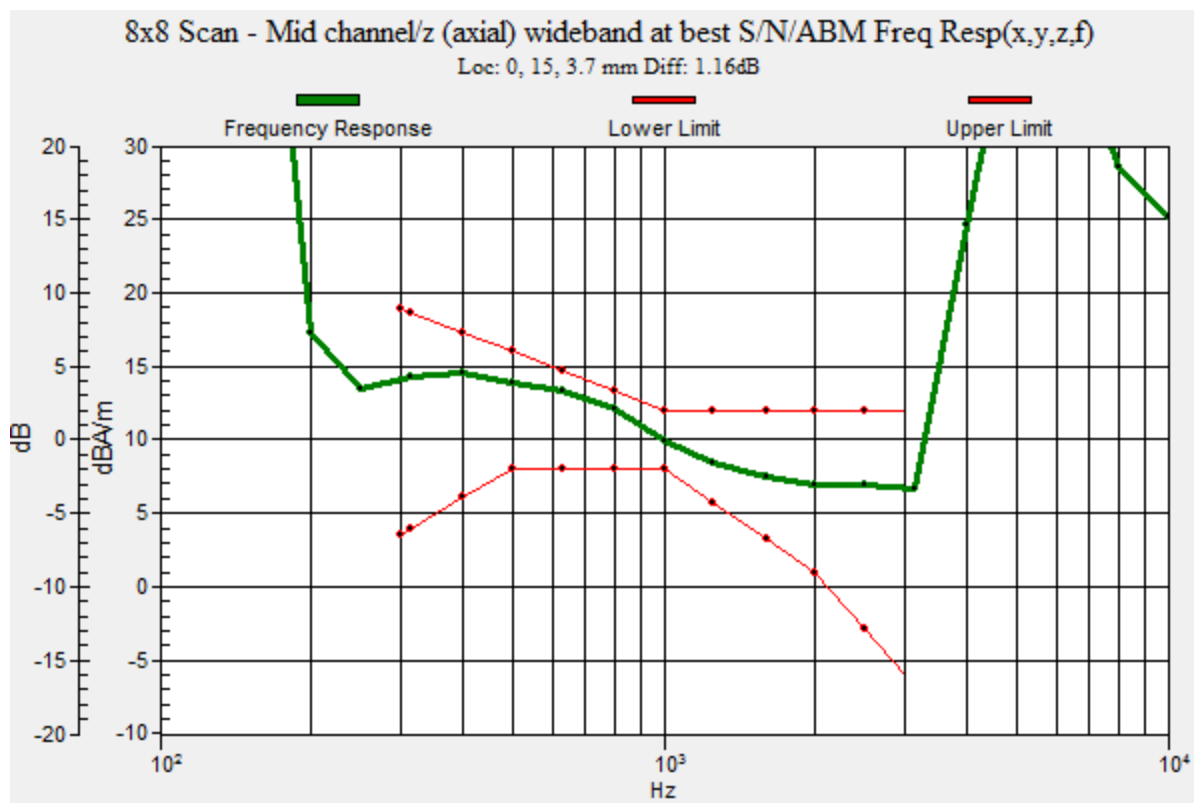

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 49(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

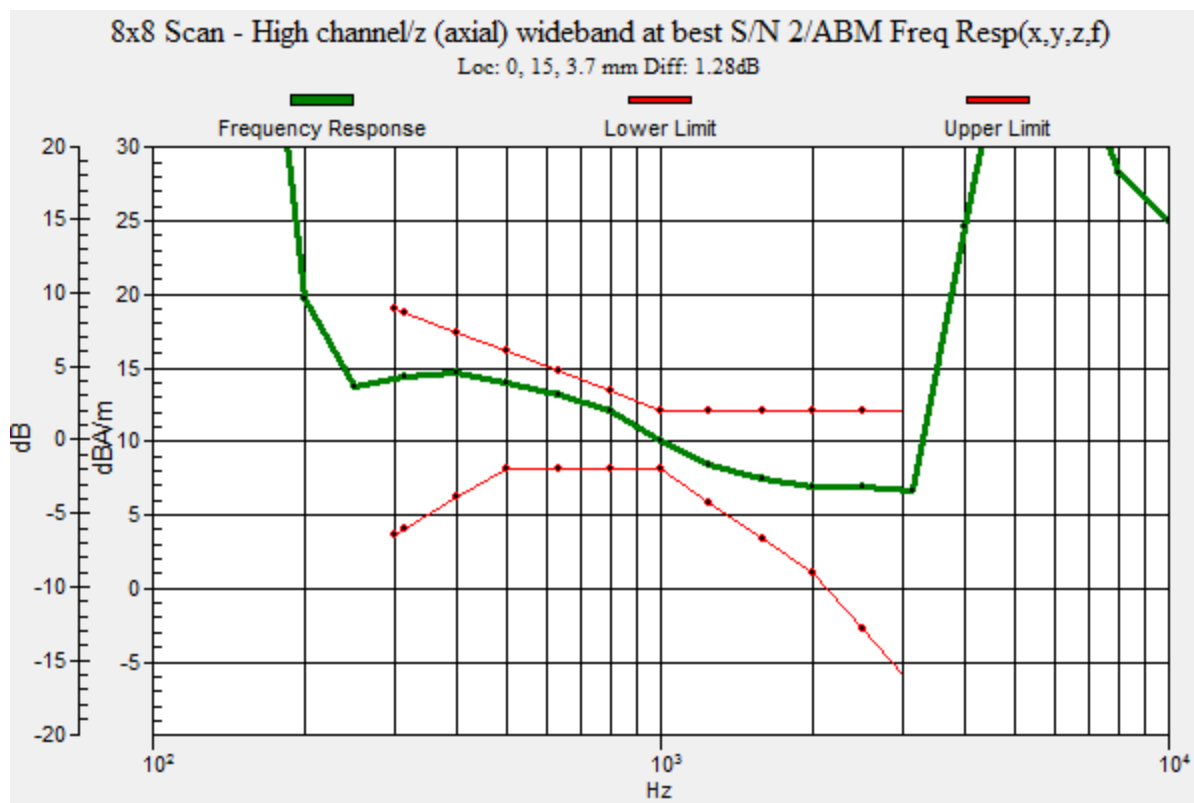

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 50(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 5:13:43 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_UMTS_V_Radial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, WCDMA FDD V; Frequency: 826.4 MHz, Frequency: 836.4 MHz, Frequency: 846.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_UMTS_Band_V/General Scan - Low channel/y (transversal) 5.0mm 50 x 50/ABM SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 51(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_UMTS_Band_V/General Scan - Low channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 53.29 dB

ABM1 comp = 1.68 dBA/m

BWC Factor = 0.16 dB

Location: -3, 27, 4.4 mm

T-Coil scan_UMTS_Band_V/8x8 Scan - Mid channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 52(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 53.18 dB

ABM1 comp = 0.55 dBA/m

BWC Factor = 0.16 dB

Location: -5, 27, 4.4 mm

T-Coil scan_UMTS_Band_V/8x8 Scan - High channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:


ABM1/ABM2 = 53.27 dB

ABM1 comp = 2.64 dBA/m

BWC Factor = 0.16 dB

Location: -3, 25, 4.4 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 53(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

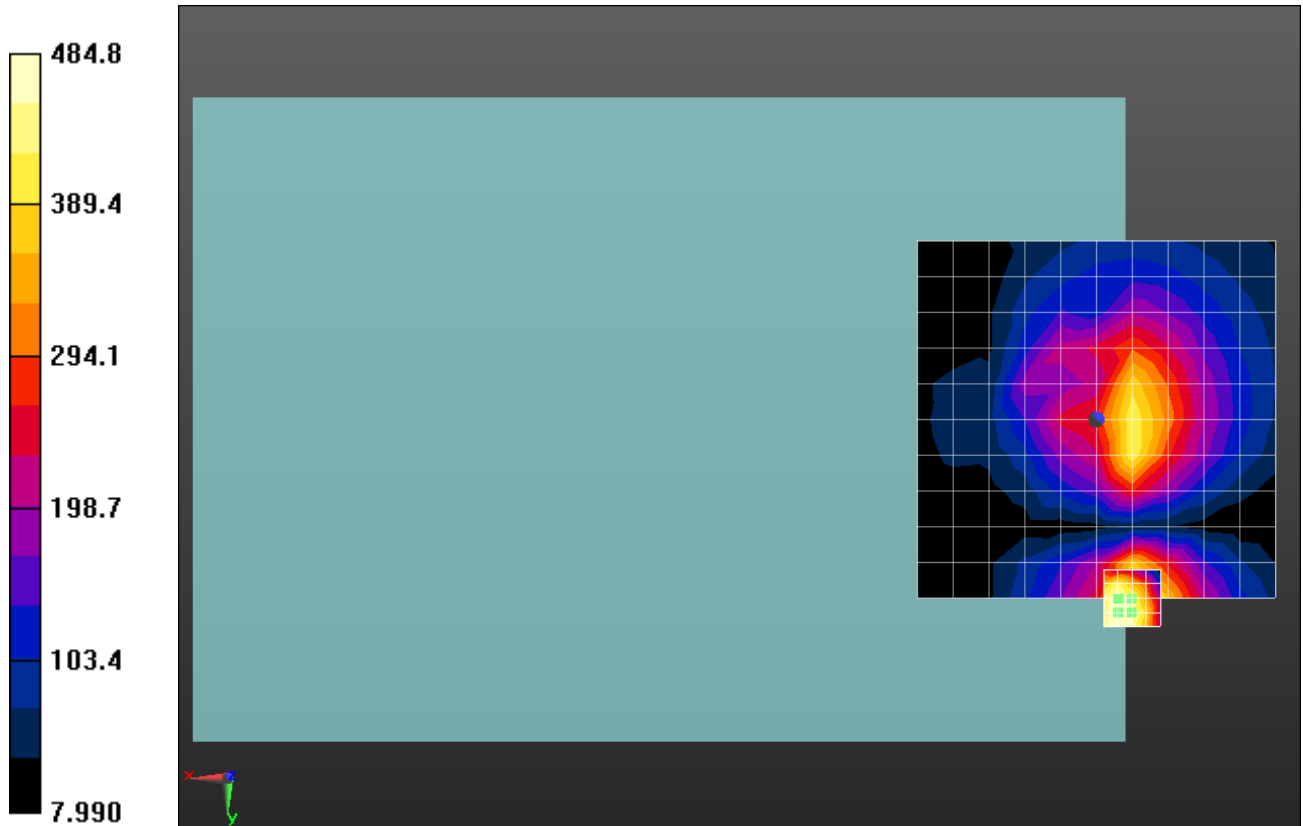

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 54(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Date/Time: 11/7/2014 6:25:25 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_UMTS_IV_Axial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, WCDMA FDD IV; Frequency: 1712.4 MHz, Frequency: 1732.6 MHz, Frequency: 1752.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_UMTS_Band_IV/General Scan - Low channel/z (axial) 5.0mm 50 x 50/ABM

SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 55(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_UMTS_Band_IV/General Scan - Low channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 63.90 dB

ABM1 comp = 10.77 dBA/m

BWC Factor = 0.16 dB

Location: -2, 13, 4.4 mm

T-Coil scan_UMTS_Band_IV/General Scan - Low channel/z (axial) wideband at best S/N

probe AM1DV2/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12


Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 56(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.28 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_UMTS_Band_IV/8x8 Scan - Mid channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 64.17 dB

ABM1 comp = 12.06 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_IV/8x8 Scan - Mid channel/z (axial) wideband at best S/N/ABM


Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 57(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.19 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_UMTS_Band_IV/8x8 Scan - High channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 64.04 dB

ABM1 comp = 12.00 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_IV/8x8 Scan - High channel/z (axial) wideband at best S/N

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 58(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

2/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


Cursor:


Diff = 1.12 dB


BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 59(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

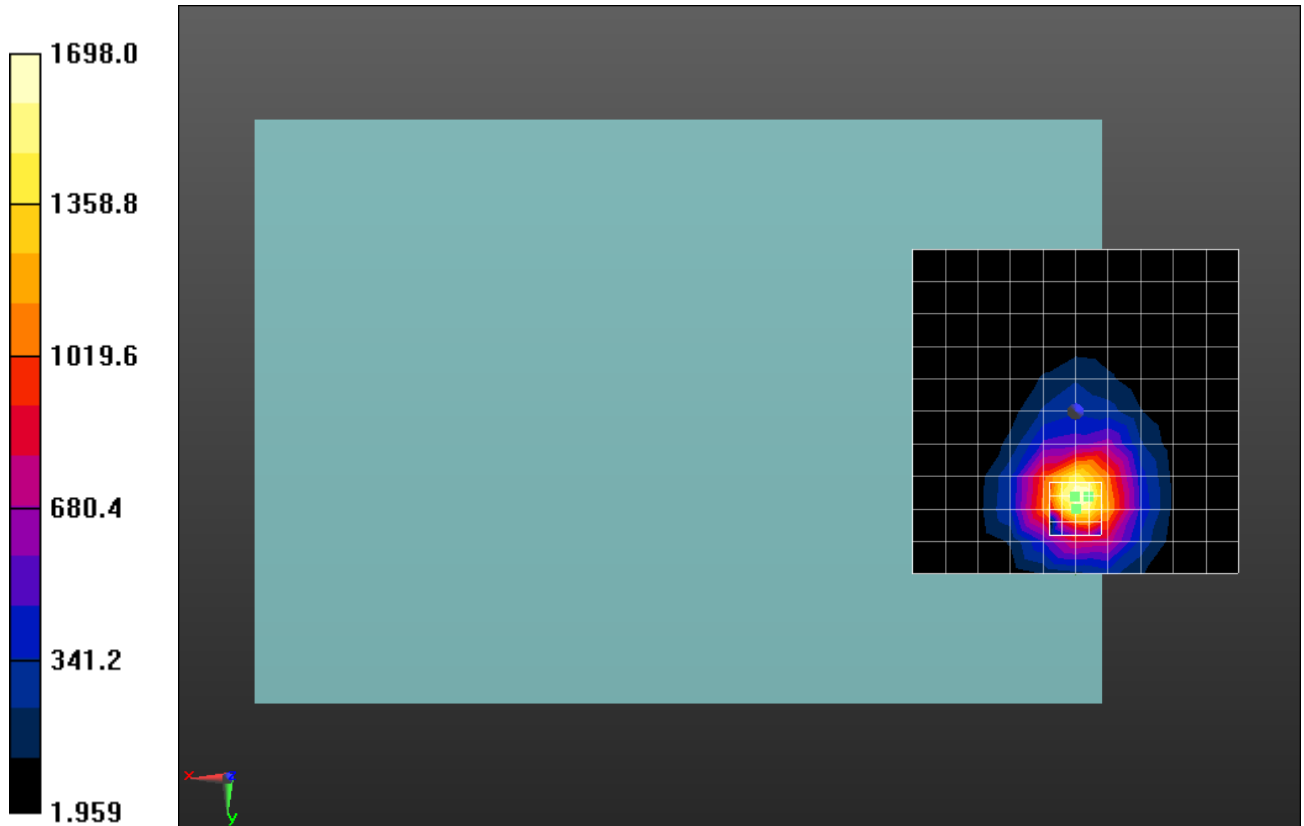

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 60(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

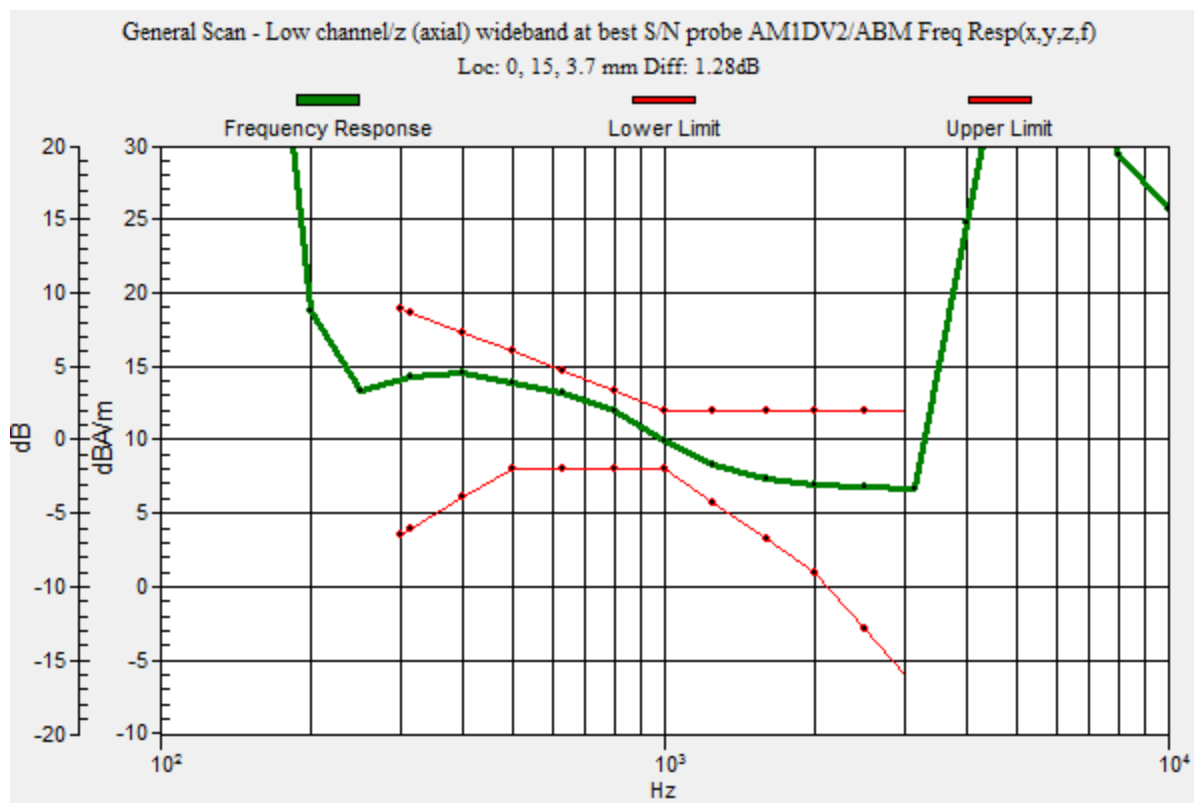



Document

Appendix A-D to Hearing Aid Compatibility Audio Band
Magnetic (ABM) T-Coil Test Report for BlackBerry®
Smartphone RGV161LW (SQW100-3)

Page

61(90)

Author Data

Daoud Attayi

Dates of Test


Nov. 06-07, 2014

Report No

RTS-6057-1411-19

FCC ID

L6ARGV160LW

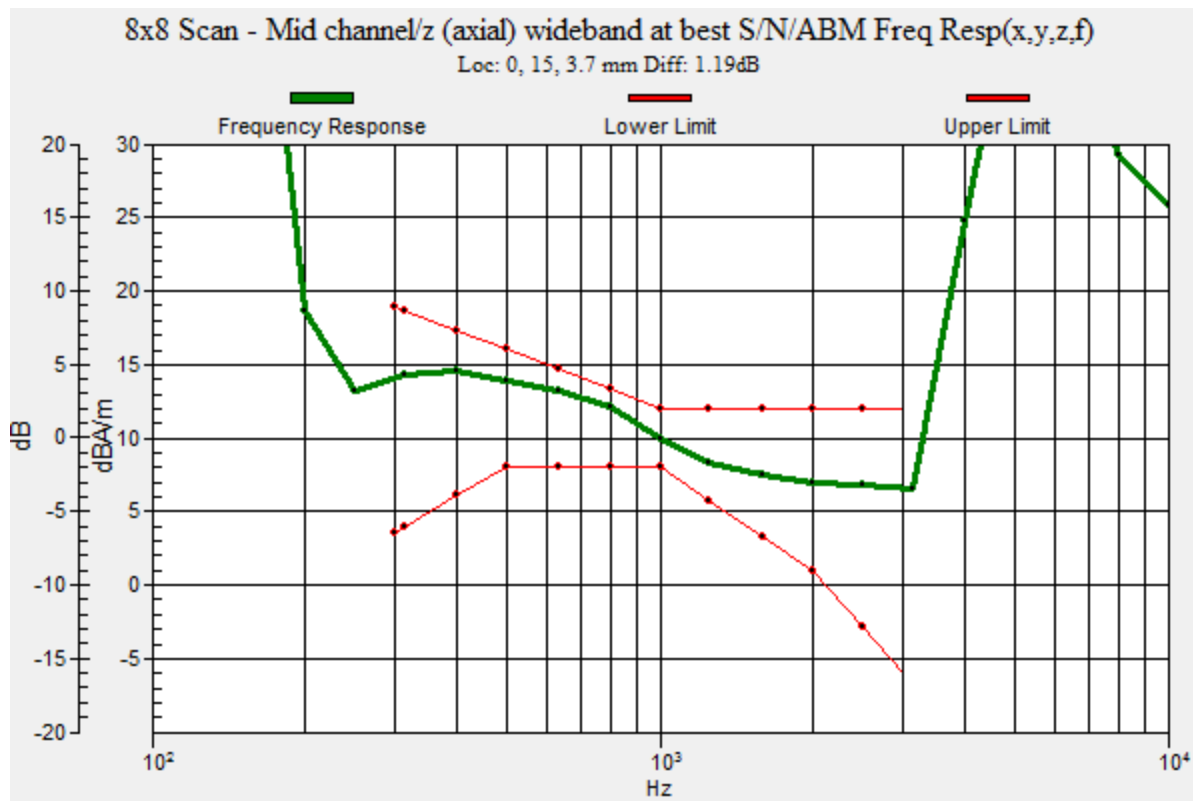

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 62(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW



	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 63(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 6:38:04 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_UMTS_IV_Radial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, WCDMA FDD IV; Frequency: 1712.4 MHz, Frequency: 1732.6 MHz, Frequency: 1752.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASYS2 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_UMTS_Band_IV/General Scan - Low channel/y (transversal) 5.0mm 50 x 50/ABM SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 64(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Category T4	> 30 dB
-------------	---------

T-Coil scan_UMTS_Band_IV/General Scan - Low channel/y (transversal) 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 53.41 dB

ABM1 comp = 1.82 dBA/m

BWC Factor = 0.16 dB

Location: -3, 27, 4.4 mm

T-Coil scan_UMTS_Band_IV/8x8 Scan - Mid channel/y (transversal) 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 65(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 53.37 dB

ABM1 comp = 0.62 dBA/m

BWC Factor = 0.16 dB

Location: -3, 29, 4.4 mm

T-Coil scan_UMTS_Band_IV/8x8 Scan - High channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


Cursor:


ABM1/ABM2 = 53.38 dB

ABM1 comp = 1.67 dBA/m

BWC Factor = 0.16 dB

Location: -3, 27, 4.4 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 66(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

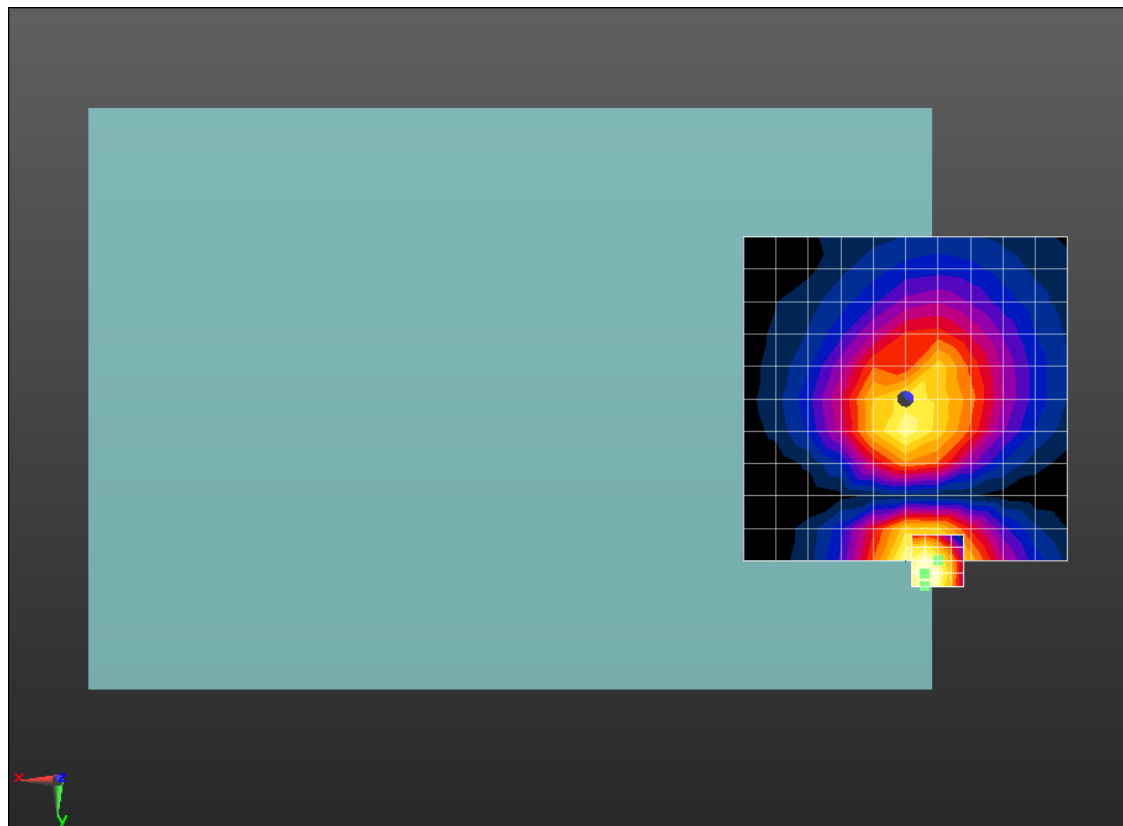

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 67(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 7:16:23 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_UMTS_II_Axial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, WCDMA FDD II; Frequency: 1852.4 MHz, Frequency: 1880 MHz, Frequency: 1907.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

T-Coil scan_UMTS_Band_II/General Scan - Low channel/z (axial) 5.0mm 50 x 50/ABM

SNR(x,y,z) (11x11x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 68(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_UMTS_Band_II/General Scan - Low channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 64.35 dB

ABM1 comp = 12.07 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_II/General Scan - Low channel/z (axial) wideband at best

S/N_probe AM1DV2/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12


Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 69(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.22 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_UMTS_Band_II/8x8 Scan - Mid channel/z (axial) 2mm 8 x 8/ABM SNR(x,y,z)

(5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 63.98 dB

ABM1 comp = 10.76 dBA/m

BWC Factor = 0.16 dB

Location: -2, 13, 4.4 mm

T-Coil scan_UMTS_Band_II/8x8 Scan - Mid channel/z (axial) wideband at best S/N/ABM

Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 70(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

Diff = 1.27 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

T-Coil scan_UMTS_Band_II/8x8 Scan - High channel/z (axial) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 64.31 dB

ABM1 comp = 12.11 dBA/m

BWC Factor = 0.16 dB

Location: 0, 13, 4.4 mm

T-Coil scan_UMTS_Band_II/8x8 Scan - High channel/z (axial) wideband at best S/N

2/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 71(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Output Gain: 69.12

Measure Window Start: 300ms

Measure Window Length: 6000ms

BWC applied: 10.80 dB

Device Reference Point: 0, 0, -6.3 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB



Cursor:

Diff = 1.26 dB

BWC Factor = 10.80 dB

Location: 0, 15, 3.7 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 72(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

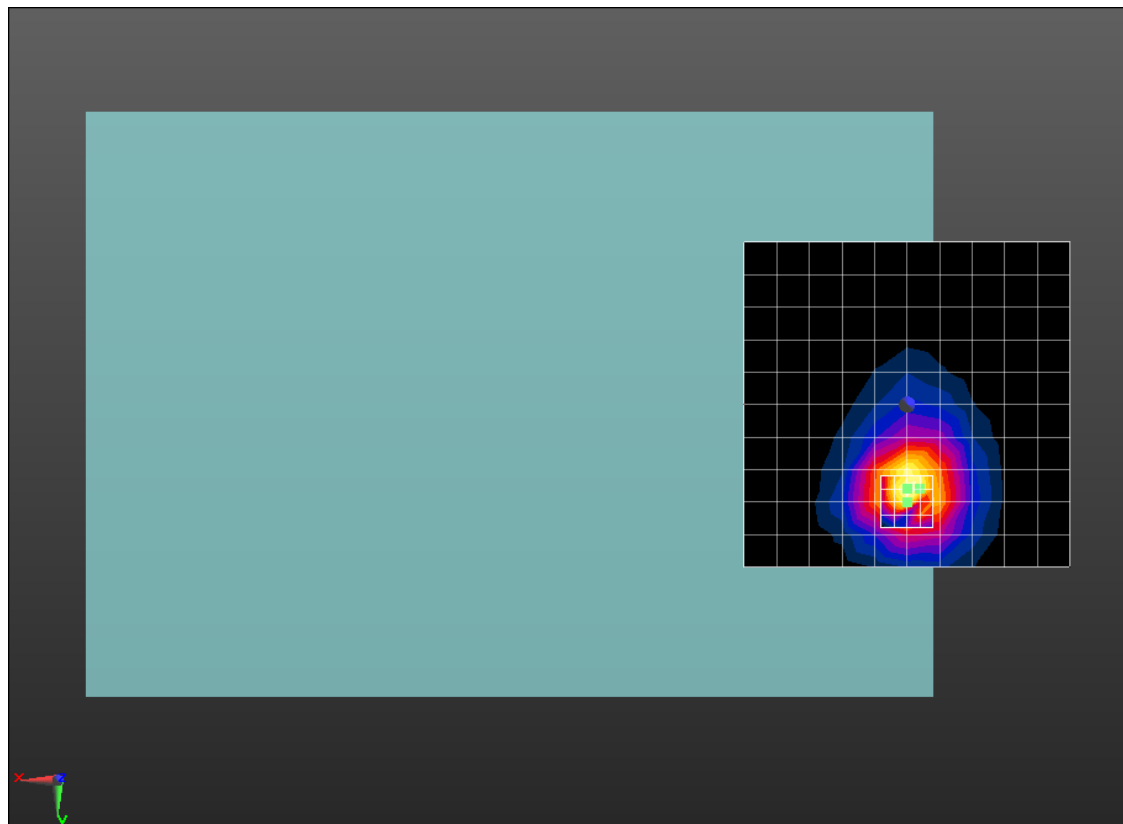



Document
**Appendix A-D to Hearing Aid Compatibility Audio Band
Magnetic (ABM) T-Coil Test Report for BlackBerry®
Smartphone RGV161LW (SQW100-3)**


Page
73(90)

Author Data
Daoud Attayi


Dates of Test
Nov. 06-07, 2014

Report No
RTS-6057-1411-19


FCC ID
L6ARGV160LW

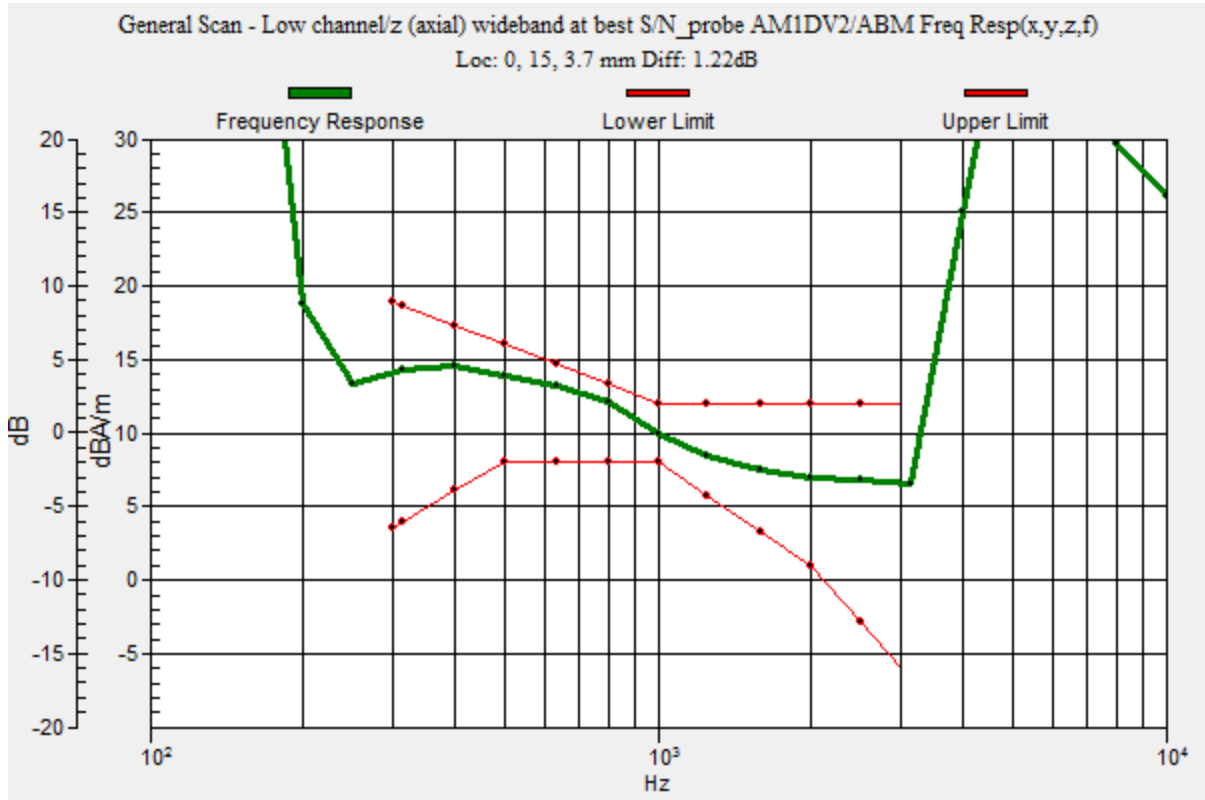

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 74(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

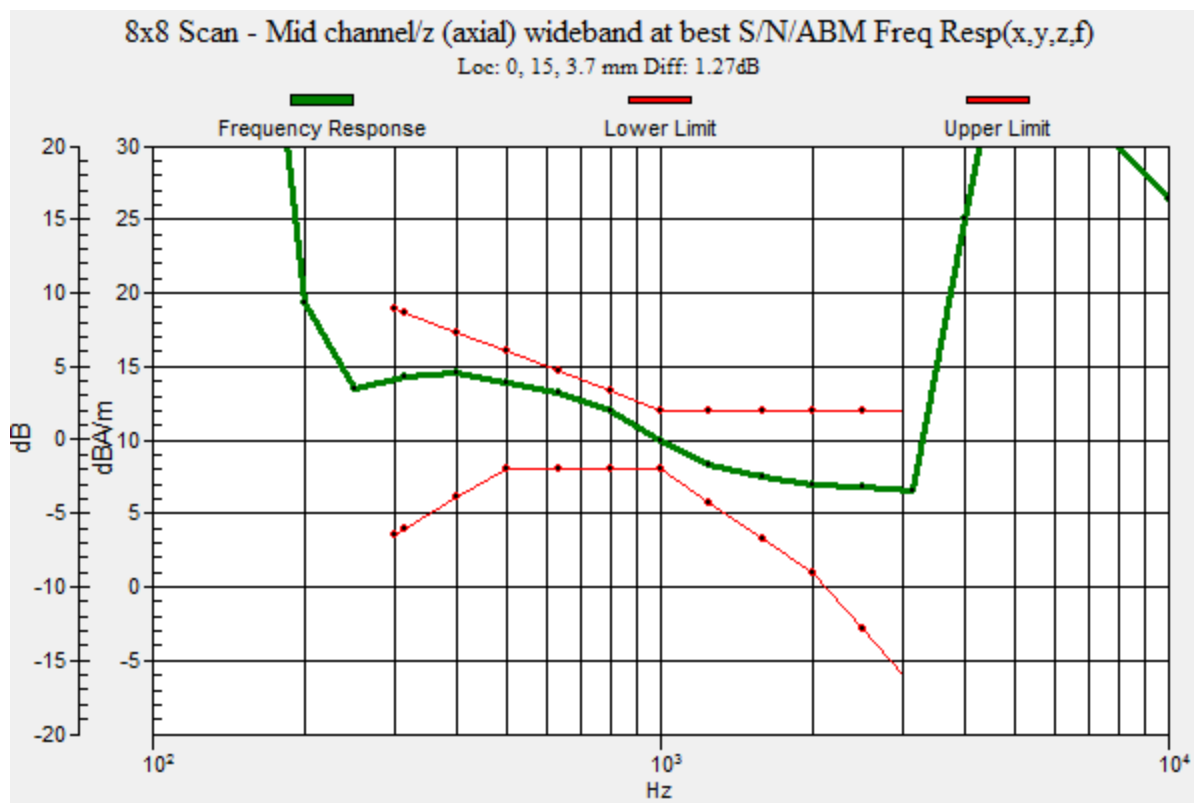

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 75(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

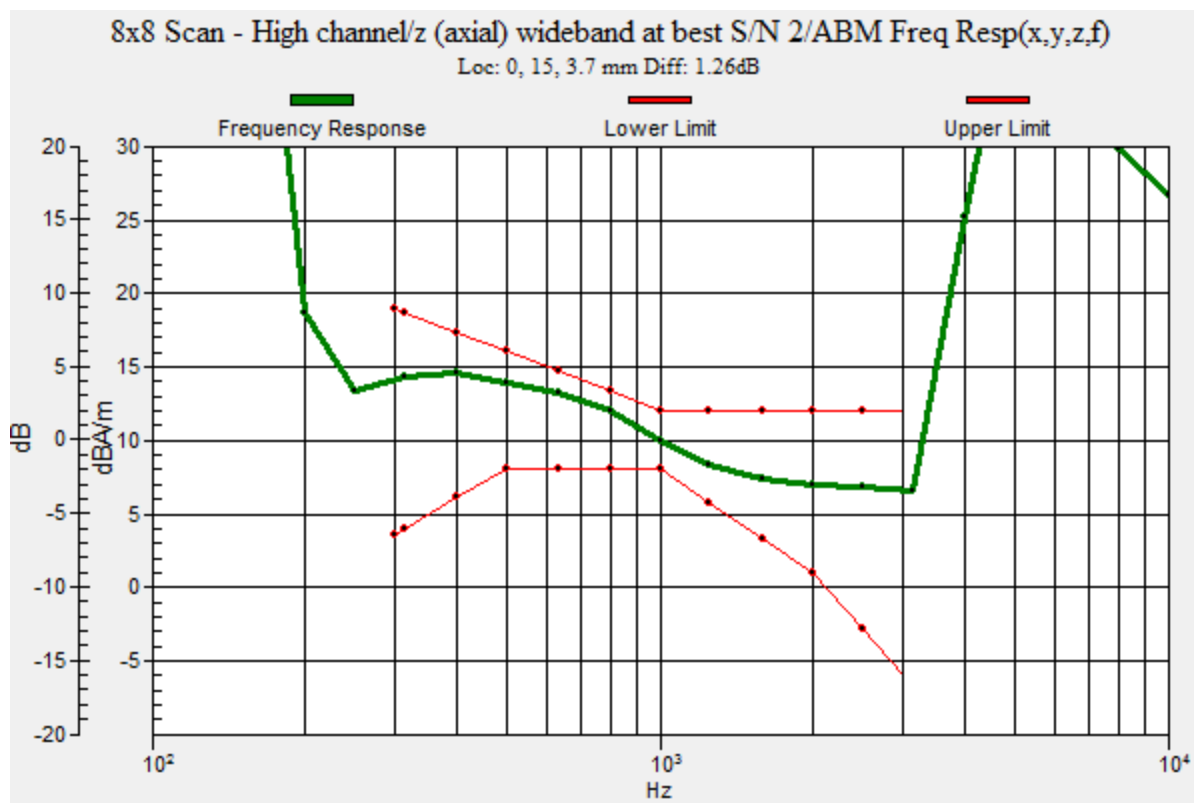

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 76(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19
		FCC ID L6ARGV160LW	

Date/Time: 11/7/2014 7:29:05 PM

Test Laboratory: BlackBerry RTS

HAC T-Coil_ABM_UMTS_II_Radial

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEDD07

Communication System: UID 0, WCDMA FDD II; Frequency: 1852.4 MHz, Frequency: 1880 MHz,
Frequency: 1907.6 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: AM1DV3 - 3062; ; Calibrated: 1/14/2014
- Sensor-Surface: 0mm (Fix Surface), $z = 3.0$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**T-Coil scan_UMTS_Band_II/General Scan - Low channel/y (transversal) 5.0mm 50 x
50/ABM SNR(x,y,z) (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 77(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T4	> 30 dB
-------------	---------

T-Coil scan_UMTS_Band_II/General Scan - Low channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 53.34 dB

ABM1 comp = 3.18 dBA/m

BWC Factor = 0.16 dB

Location: -2, 25, 4.4 mm

T-Coil scan_UMTS_Band_II/8x8 Scan - Mid channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 78(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 53.26 dB

ABM1 comp = 2.19 dBA/m

BWC Factor = 0.16 dB

Location: -2, 27, 4.4 mm

T-Coil scan_UMTS_Band_II/8x8 Scan - High channel/y (transversal) 2mm 8 x 8/ABM

SNR(x,y,z) (5x5x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 35.28

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:



ABM1/ABM2 = 53.24 dB

ABM1 comp = 0.14 dBA/m

BWC Factor = 0.16 dB

Location: -4, 29, 4.4 mm

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 79(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

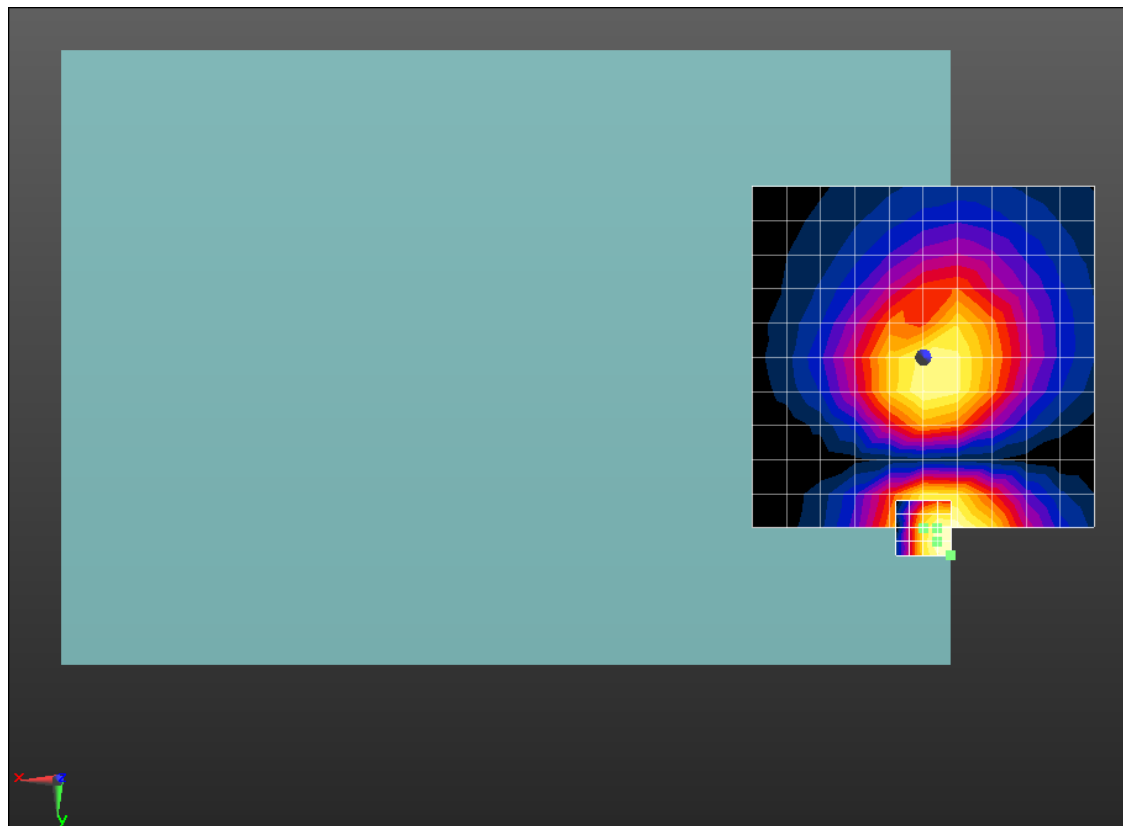

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 80(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Annex D: Probe/TMFS calibration certificate

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 81(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 82(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Blackberry Waterloo**

Certificate No: **AM1DV3-3062_Jan14**

CALIBRATION CERTIFICATE

Object: **AM1DV3 - SN: 3062**

Calibration procedure(s): **QA CAL-24.v3**
Calibration procedure for AM1D magnetic field probes and TMFS in the
audio range


Calibration date: **January 14, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	01-Oct-13 (No. 13976)	Oct-14
Reference Probe AM1DV3	SN: 3000	15-Aug-13 (No. AM1D-3000_Aug13)	Aug-14
DAE4	SN: 781	13-Sep-13 (No. DAE4-781_Sep13)	Sep-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	1050	01-Oct-13 (in house check Oct-13)	Oct-15
AMMI Audio Measuring Instrument	1062	26-Sep-12 (in house check Sep-12)	Sep-14

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Fin Bornholt	Deputy Technical Manager	

Issued: January 15, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 83(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

[References]

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of
Noise level
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected.
Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.

Sensitivity: With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 84(90)
	Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

AM1D probe identification and configuration data

Item	AM1DV3 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BA
Serial No	3062

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	20 dB


Manufacturer / Origin	Schmid & Partner Engineering AG, Zürich, Switzerland
Manufacturing date	October 30, 2008
Last calibration date	January 10, 2013

Calibration data

Connector rotation angle	(in DASY system)	61.5 °	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	0.34 °	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	0.00741 V / (A/m)	+/- 2.2 % (k=2)

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 85(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 86(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **BlackBerry Waterloo**

Certificate No: TMFS_1003_Nov13

CALIBRATION CERTIFICATE

Object / Identification **TMFS – SN: 1003**

Calibration procedure(s)
QA CAL-24.v3
 Calibration procedure for AM1D magnetic field probes and TMFS in the
 audio range

Calibration date **November 14, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The calibrations have been conducted in the R&D laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	01-Oct-13 (No.13978)	Oct-14
Secondary Standards	ID #	Cal / Check Date	Scheduled Calibration Check
AMCC	1050	01-Oct-13 (in house check Oct-13)	Oct-15
Reference Probe AM1DV2	SN: 1008	10-Jan-13 (No. AM1D-1008_Jan13)	Jan-14
AMMI Audio Measuring Instrument	1062	26-Sep-12 (in house check Sep-12)	Sep-14
Agilent WF Generator 33120A	MY40005266	03-Oct-13 (in house check Oct-13)	Oct-15

Calibrated by:
Name **Claudio Leubler** **Function** **Laboratory Technician**

Signature

Approved by:
Name **Fin Bomholt** **Function** **Deputy Technical Manager**

Issued: November 15, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: TMFS_1003_Nov13

Page 1 of 5

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS
 Copyright 2005-2014, BlackBerry RTS, a division of BlackBerry Limited

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)		Page 87(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW

References

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Methods Applied and Interpretation of Parameters

- **Coordinate System:** The TMFS is mounted underneath the HAC Test Arch touching equivalently to a wireless device according to [2] 29.2.2.: In "North" orientation, the TMFS signal connector is directed to the north, with x and y axes of TMFS and Test arch coinciding (see fig. 1). The rotational symmetry axis of the TMFS is aligned to the center of the HAC test Arch. For East, South and West configuration, the TMFS has been rotated clockwise in steps of 90°, so the connector looks into the specified direction. The evaluation of the radial direction is referenced to the device orientation (x equivalent to South direction).

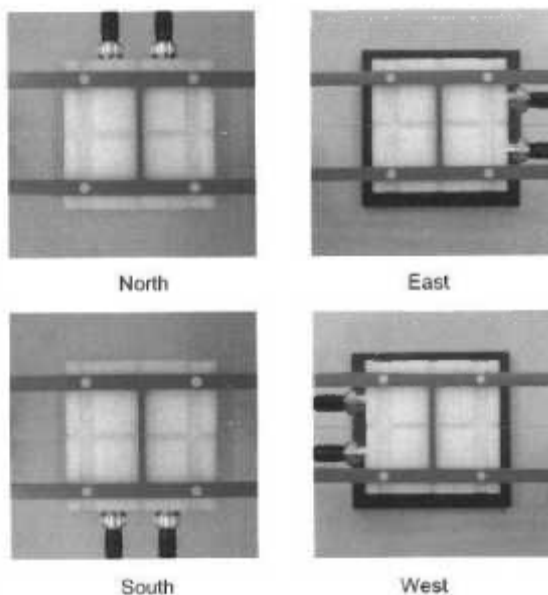



Fig. 1 TMFS scanning measurement configurations

- **Measurement Plane:** In coincidence with standard [1], the measurement plane (probe sensor center) is selected to be at a distance of 10 mm above the surface of the TMFS touching the frame. The 50 x 50 mm scan area is aligned to the center of the unit. The scanning plane is verified to be parallel to the phantom frame before the measurements using the predefined "Geometry and signal check" procedure according to the predefined procedures described in [2].
- **Measurement Conditions:** Calibration of AM1D probe and AMMI are according to [2]. The 1 kHz sine signal for the level measurement is supplied from an external, independent generator via a BNC cable to TMFS IN and monitored at TMFS OUT with an independent RMS voltmeter or Audio Analyzer. The level is set to 0.5 Vrms and monitored during the scans.
- **For the frequency response,** a higher suppression of the background ambient magnetic field over the full frequency range was achieved by placing the TMFS in a magnetically shielded box. The AM1D probe was fixed without robot positioner near the axial maximum for this measurement. The background noise suppression was typ. 30 dB at 100 Hz (minimum) and 42 dB at 1 kHz. The predefined multisine signal (48k_multisine_50-10000_10s.wav) was used and evaluated in the third-octave bands from 100 Hz to 10000 Hz.

	Document Appendix A-D to Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone RGV161LW (SQW100-3)			Page 88(90)
Author Data Daoud Attayi	Dates of Test Nov. 06-07, 2014	Report No RTS-6057-1411-19	FCC ID L6ARGV160LW	

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52 8.7 (1137)
DASY PP Version	SEMCAD	V14.6.10 (7164)
Phantom	HAC Test Arch	SD HAC P01 BA, #1002
Distance TMFS Top - Probe Centre	10 mm	
Scan resolution	dx, dy = 5 mm	area = 50 x 50 mm
Frequency	for field scans	1 kHz
Signal level to TMFS	for field scans	500 mV RMS
Signal	for frequency response	multisine signal 50-10000 Hz, each third-octave band

Table 1: System configuration

2 Axial Maximum Field

Configuration	East	South	West	North	Subset Average	Average
Axial Max	-20.35	-20.35	-20.36	-20.36		-20.36
TMFS Y Axis 1st Max	-26.00	-25.95	-25.94	-25.99		
TMFS Y Axis 2nd Max	-25.93	-25.95	-26.00	-25.96		
Longitudinal Max Avg	-25.97	-25.95	-25.97	-25.98	-25.97	
TMFS X Axis 1st Max	-25.99	-26.04	-25.99	-25.99		
TMFS X Axis 2nd Max	-25.94	-25.91	-25.95	-26.00		
Transversal Max Avg	-25.97	-25.98	-25.97	-26.00	-25.98	
Radial Max						-25.98

Table 2: Axial and radial field maxima measured with probe center at 10mm distance in dB A/m

The maximum was calculated as the average from the values measured in the 4 orientations listed in table 2.

Axial Maximum -20.36 dB A/m (+/- 0.33dB, k=2)

3 Radial Maximum Field

In addition, the average from the 16 maxima of the radial field listed in table 2 (measured at 10mm) was calculated:

Radial Maximum -25.98 dB A/m

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Document

**Appendix A-D to Hearing Aid Compatibility Audio Band
Magnetic (ABM) T-Coil Test Report for BlackBerry®
Smartphone RGV161LW (SQW100-3)**

Page

89(90)

Author Data

Daoud Attayi

Dates of Test

Nov. 06-07, 2014

Report No

RTS-6057-1411-19

FCC ID

L6ARGV160LW**4 Appendix****4.1 Frequency response**

Max. deviation measured, relative to 1 kHz: min. -0.03, max. 0.02 dB

Frequency [Hz]	Response [dB]
100	0.02
125	-0.02
160	-0.02
200	0.00
250	-0.02
315	0.00
400	0.00
500	0.00
630	0.00
800	0.00
1000	0.00
1250	-0.01
1600	-0.01
2000	-0.01
2500	-0.01
3150	-0.01
4000	-0.02
5000	-0.02
6300	-0.02
8000	-0.03
10000	-0.03

Table 3: Frequency response

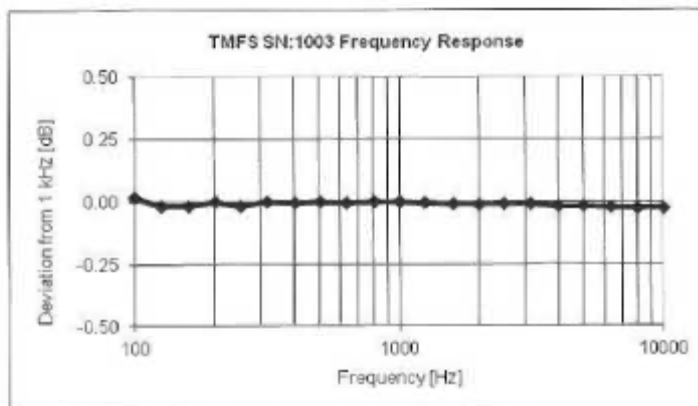


Fig. 2 Frequency response 100 to 10'000 Hz

4.2 Field plots

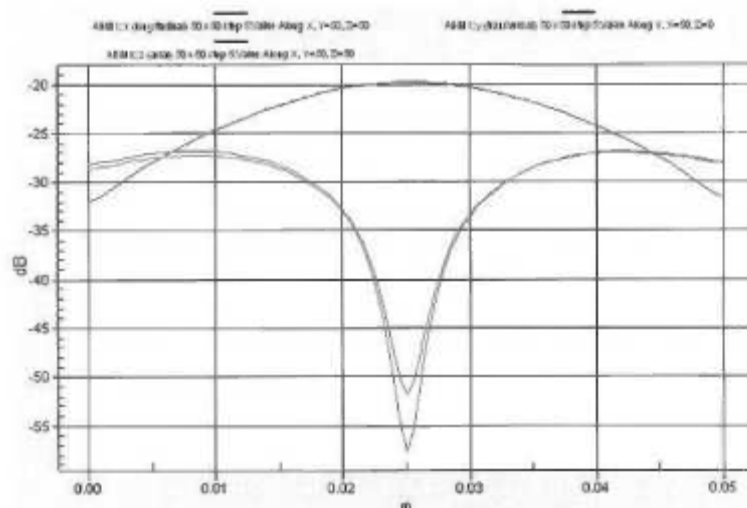


Fig. 3: Typical 2D field plots for x (red), y (green) and z (blue) components

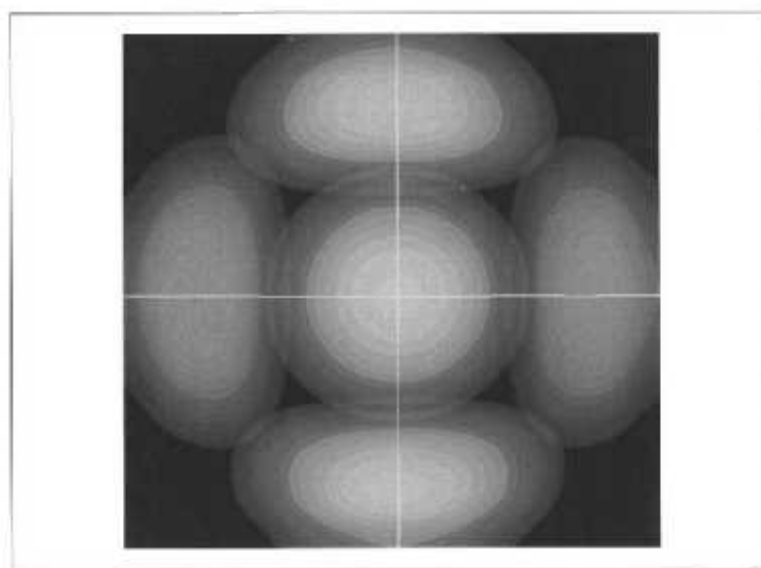


Fig. 4: Superposed field plots of z (axial), x and y radial magnetic field, 50 x 50 mm, individual scaling: white = max. field level, black = -4dB below max. The lines show the position of the 2D field plot of figure 3.