

FCC Radio Test Report

For

Product Name: WLAN and BT Combo Dongle

Brand Name: CC&C

Model No.: CL-8723BU

Series Model: N/A

FCC ID: PANCL8723BU

Test Report Number:
C151023R01-RPW

Issued for

CC&C Technologies, Inc.

8F, No.150, Jian Yi Rd, Zhonghe District, New Taipei City, 235, Taiwan

Issued by

Compliance Certification Services Inc.

Kunshan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	January 6, 2016	C151023R01-RPW	ALL	N/A

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION.....	4
2.	EUT DESCRIPTION.....	5
3.	TEST METHODOLOGY	6
3.1.	EUT CONFIGURATION	6
3.2.	EUT EXERCISE	6
3.3.	GENERAL TEST PROCEDURES.....	6
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5.	DESCRIPTION OF TEST MODES.....	8
3.6.	ANTENNA DESCRIPTION	9
4.	INSTRUMENT CALIBRATION.....	10
4.1.	MEASURING INSTRUMENT CALIBRATION	10
5.	FACILITIES AND ACCREDITATIONS	12
5.1.	FACILITIES	12
5.2.	EQUIPMENT.....	12
5.3.	LABORATORY ACCREDITATIONS AND LISTING	12
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS	13
6.	SETUP OF EQUIPMENT UNDER TEST.....	14
6.1.	SETUP CONFIGURATION OF EUT.....	14
6.2.	SUPPORT EQUIPMENT.....	14
7.	FCC PART 15.247 REQUIREMENTS.....	15
7.1.	6DB BANDWIDTH MEASUREMENT.....	15
7.2.	PEAK POWER	22
7.3.	PEAK POWER SPECTRAL DENSITY	24
7.4.	SPURIOUS EMISSIONS	32
7.5.	RADIATED EMISSIONS	55
7.6.	POWERLINE CONDUCTED EMISSIONS	73

1. TEST RESULT CERTIFICATION

Product Name:	WLAN and BT Combo Dongle
Trade Name:	CC&C
Model Name.:	CL-8723BU
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	Portable Device
Date of Test:	October 29, 2015~November 2, 2015 and January 3, 2016 ~January 6, 2016
Applicant:	CC&C Technologies, Inc. 8F, No.150, Jian Yi Rd, Zhonghe District, New Taipei City, 235, Taiwan
Manufacturer:	Kunshan CC&C Technologies, Co., Ltd. No.9 Building, 3rd Main Street, Kunshan Free Trade Zone, Jiangsu Province, P.R.China
Application Type:	Certification

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted


We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:


Jeff.Fang
RF Manager
Compliance Certification Service Inc.

Tested by:


James.Yan
Test Engineer
Compliance Certification Service Inc.

2. EUT DESCRIPTION

Product Name:	WLAN and BT Combo Dongle
Brand Name:	CC&C
Model Name:	CL-8723BU
Series Model:	N/A
Model Discrepancy:	N/A
Power Adapter Power Rating :	DC 5.0V
Frequency Range:	IEEE 802.11b/g: 2412MHz to 2462 MHz IEEE 802.11n HT20: 2412MHz to 2462 MHz IEEE 802.11n HT40: 2422MHz to 2452 MHz
Transmit Power:	IEEE 802.11b mode: 17.14 dBm IEEE 802.11g mode: 21.10 dBm IEEE 802.11n HT20 mode: 20.14 dBm IEEE 802.11n HT40 mode: 18.78 dBm
Modulation Technique:	IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0~MCS7) IEEE802.11n HT40 mode: OFDM (MCS0~MCS7)
Number of Channels:	IEEE 802.11b/g/n HT20 mode: 11 Channels IEEE 802.11n HT40 mode: 9 Channels
Antenna Specification:	chip Antenna Gain 0.5 dBi

Remark:

1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2.This submittal(s) (test report) is intended for **FCC ID: PANCL8723BU** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1.EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2.EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3.GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10:2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5.DESCRPTION OF TEST MODES

The EUT transmitting and receiving with one antenna simultaneously working at b/g/n mode, so 1x1 configuration was used for all testing in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11 HT20 Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS0 data rate was chosen for full testing.

IEEE 802.11 HT40 Channel mode:

Channel Low (2422MHz)

Channel Mid (2437MHz)

Channel High (2452MHz) with MCS0 data rate was chosen for full testing.


3.6.ANTENNA DESCRIPTION

According to FCC 47 CFR 15.203

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

* the antenna of this EUT is a unique(chip Antenna).

* the EUT complies with the requirement of 15.203.

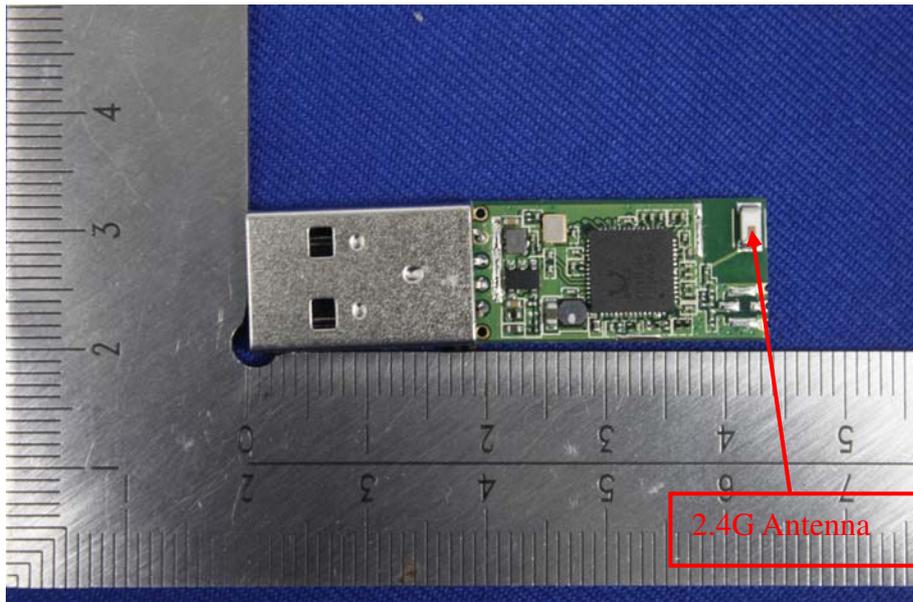

4. INSTRUMENT CALIBRATION

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2015-5-11	2016-5-10
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2015-3-16	2016-3-15
Power meter	Anritsu	ML2495A	1445010	2015-04-24	2016-04-23
Power sensor	Anritsu	MA2411B	1339220	2015-04-24	2016-04-23
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2015-1-22	2016-1-21
Test Software			EZ-EMC		

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
EMI Test Receiver	R&S	ESCI	101378	2015-1-22	2016-1-21
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2015-1-22	2016-1-21
Pre-Amplifier	Miteq	JS41-00101800-32-10P	1675713	2015-1-22	2016-1-21
Bilog Antenna	Sunol	JB1	A062604	2015-3-6	2016-3-5
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2015-3-7	2016-3-6
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT100	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2015-3-16	2016-3-15
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R	N.C.R
LISN (EUT)	FCC	FCC-LISN-50/ 250-50-2-02	05012	2015-3-16	2016-3-15
Pulse LIMITER	R&S	ESH3-Z2	100524	2015-9-24	2016-9-23
Test Software			EZ-EMC		

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

5. FACILITIES AND ACCREDITATIONS

5.1.FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10:2013 and CISPR Publication 22.

5.2.EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3.LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.

5.4.TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	Notebook	DELL	E5430	CN8YYW1	N/A

Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


7. FCC PART 15.247 REQUIREMENTS

7.1. 6DB BANDWIDTH MEASUREMENT

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration



TEST PROCEDURE

1. The transmitter output is connected to the spectrum analyzer. Set RBW = 100 kHz. Set the video bandwidth (VBW) ≥ 3 × RBW, Sweep = auto couple.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2412	10.086	0.5
Mid	2437	10.117	0.5
High	2462	10.116	0.5

IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2412	16.599	0.5
Mid	2437	16.587	0.5
High	2462	16.598	0.5

IEEE 802.11 HT20 Channel mode

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2412	17.861	0.5
Mid	2437	17.860	0.5
High	2462	17.869	0.5

IEEE 802.11 HT40 Channel mode

Channel	Frequency (MHz)	Bandwidth(B) (MHz)	6dB Bandwidth Min. Limit(MHz)
Low	2422	36.492	0.5
Mid	2437	36.525	0.5
High	2452	36.516	0.5


Test Plot

IEEE 802.11b MODE

6dB Bandwidth (CH Low)

Agilent

R T

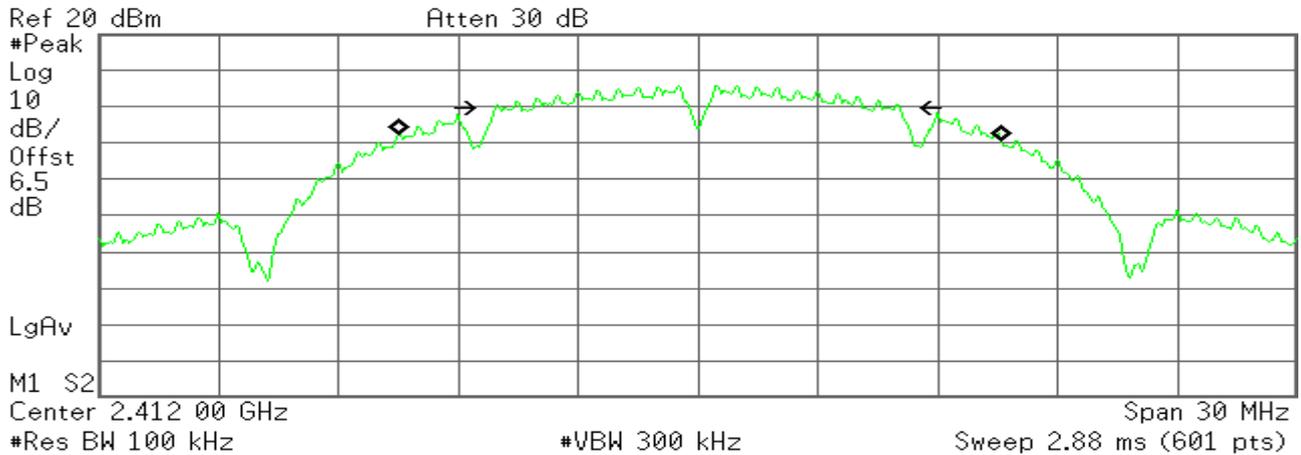

Occupied Bandwidth
15.0988 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 38.078 kHz
x dB Bandwidth 10.086 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

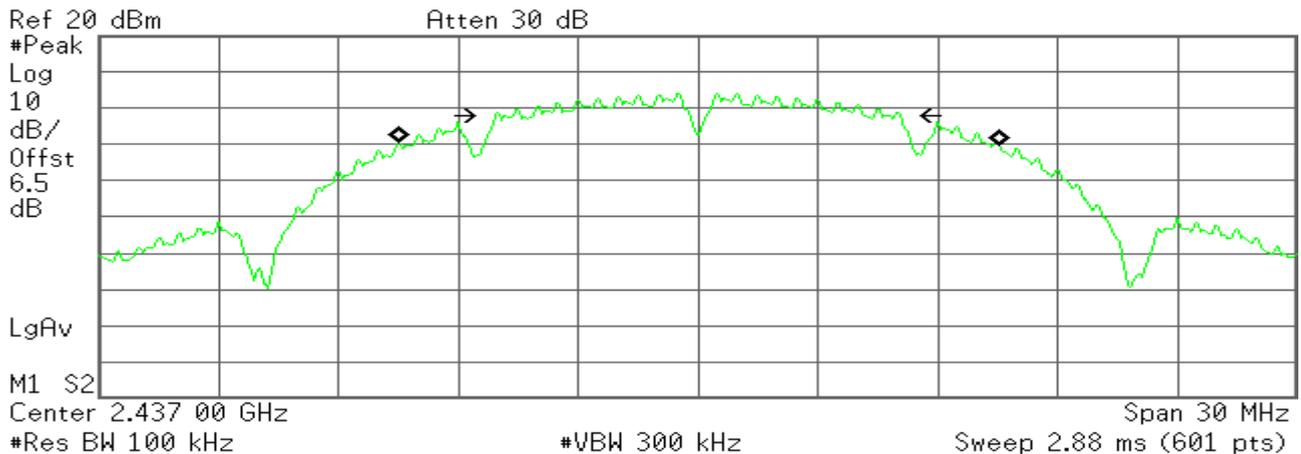

Occupied Bandwidth
15.0636 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 33.909 kHz
x dB Bandwidth 10.117 MHz

6dB Bandwidth (CH High)

Agilent

R T

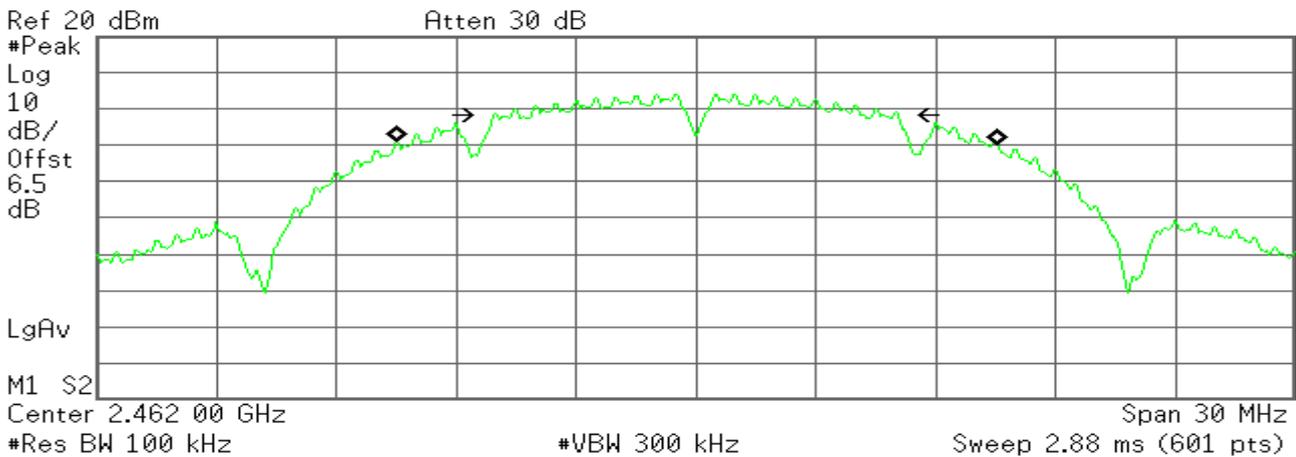

Occupied Bandwidth
15.0656 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 39.054 kHz
x dB Bandwidth 10.116 MHz

IEEE 802.11g MODE

6dB Bandwidth (CH Low)

Agilent

R T

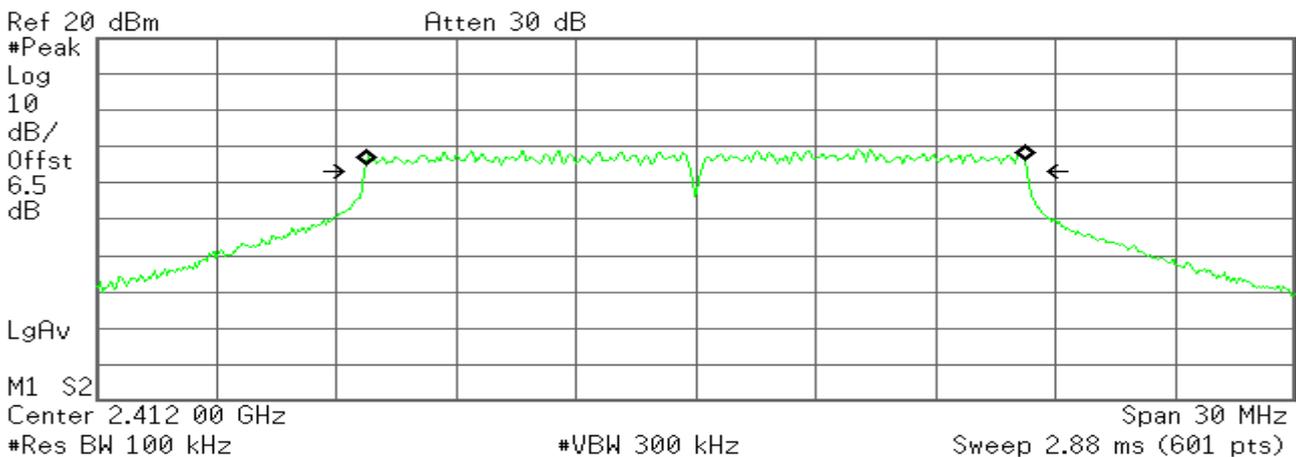

Occupied Bandwidth
16.5142 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -9.822 kHz
x dB Bandwidth 16.599 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

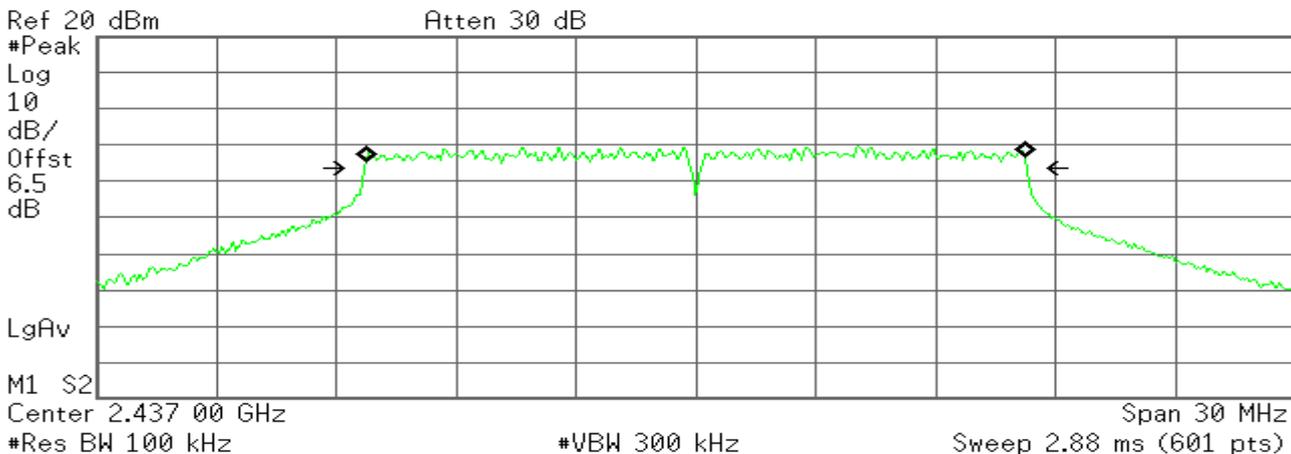

Occupied Bandwidth
16.5075 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -12.459 kHz
x dB Bandwidth 16.587 MHz

6dB Bandwidth (CH High)

Agilent

R T

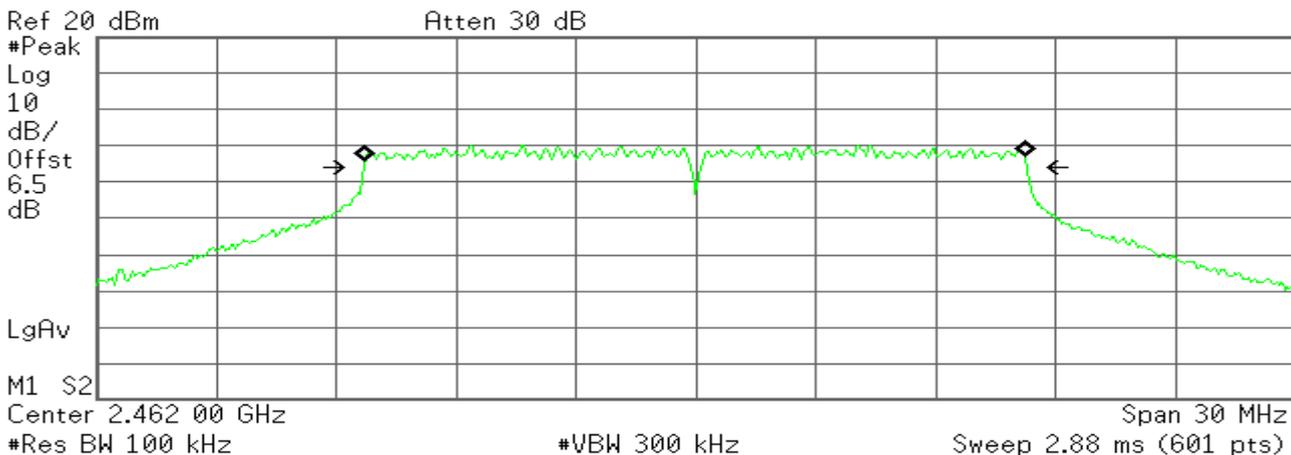

Occupied Bandwidth
16.5148 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -18.805 kHz
x dB Bandwidth 16.598 MHz

IEEE802.11n HT20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent

R T

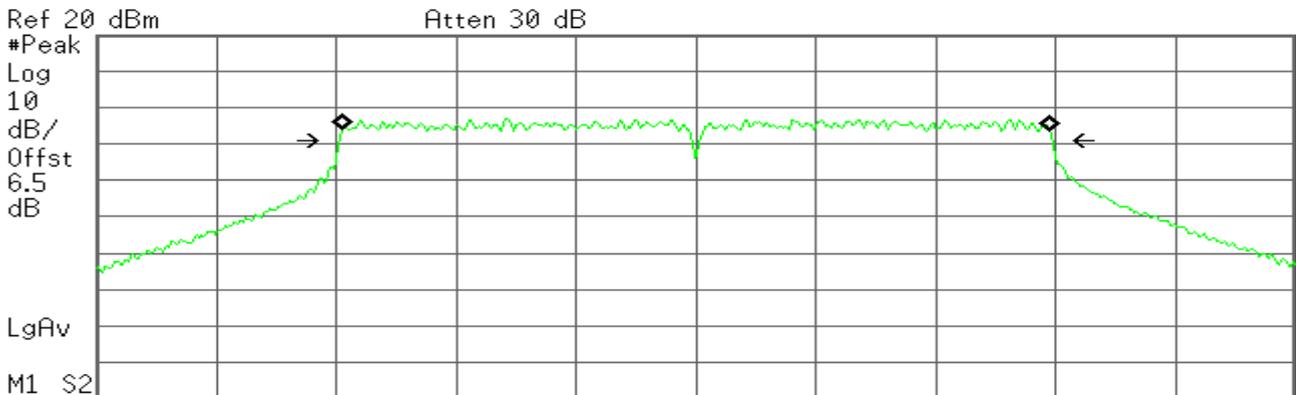

M1 S2 Center 2.412 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
17.7243 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 12.461 kHz
x dB Bandwidth 17.861 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

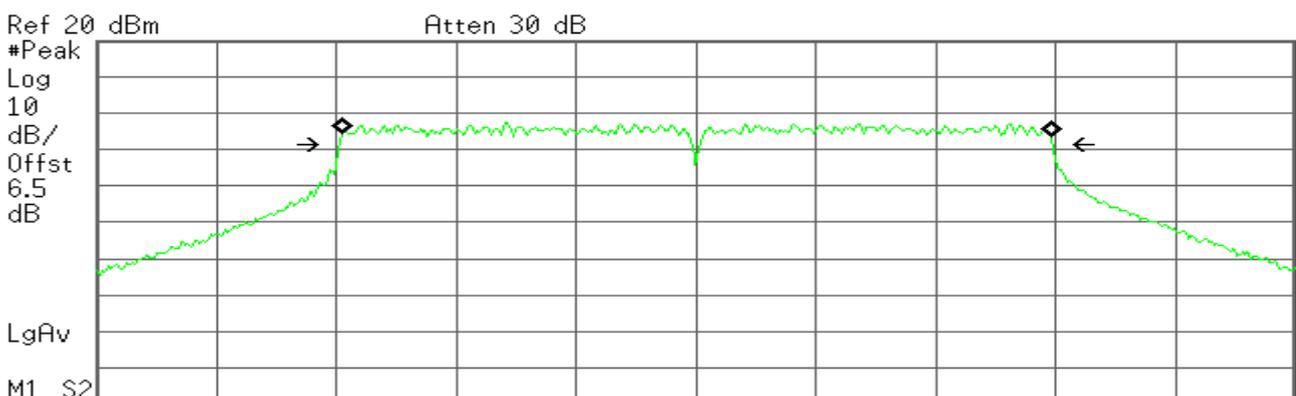

M1 S2 Center 2.437 00 GHz Span 30 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts)

Occupied Bandwidth
17.7283 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 10.890 kHz
x dB Bandwidth 17.860 MHz

6dB Bandwidth (CH High)

Agilent

R T

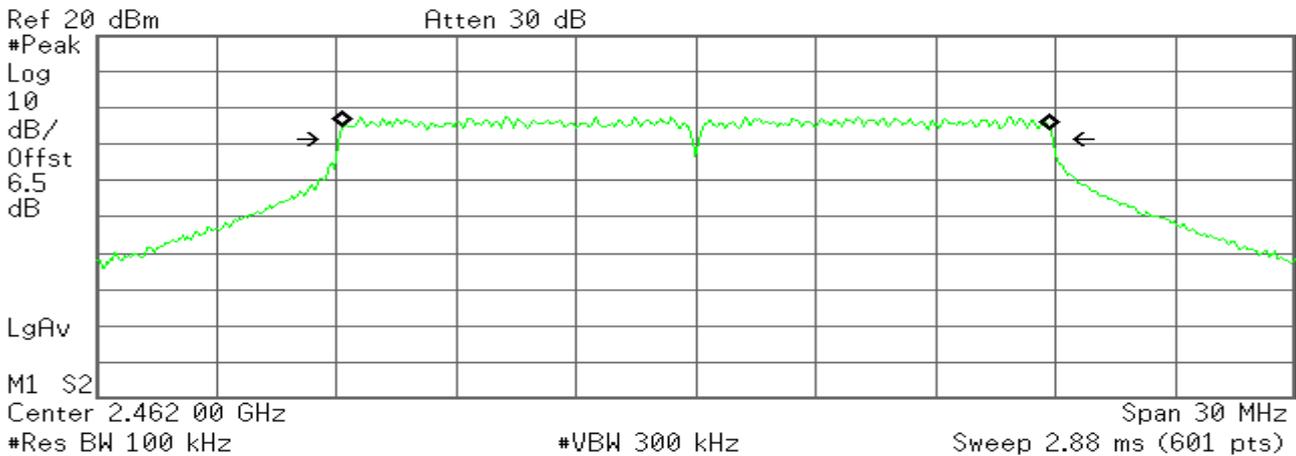

Occupied Bandwidth
17.7254 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 11.491 kHz
x dB Bandwidth 17.869 MHz

IEEE802.11n HT40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent

R T

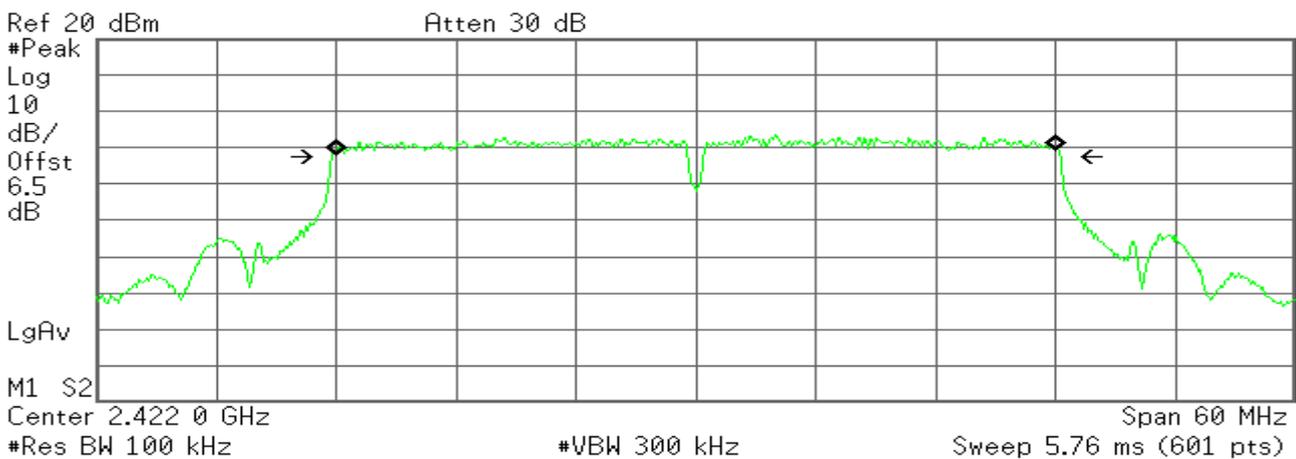

Occupied Bandwidth
36.0414 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 24.208 kHz
x dB Bandwidth 36.492 MHz

6dB Bandwidth (CH Mid)

Agilent

R T

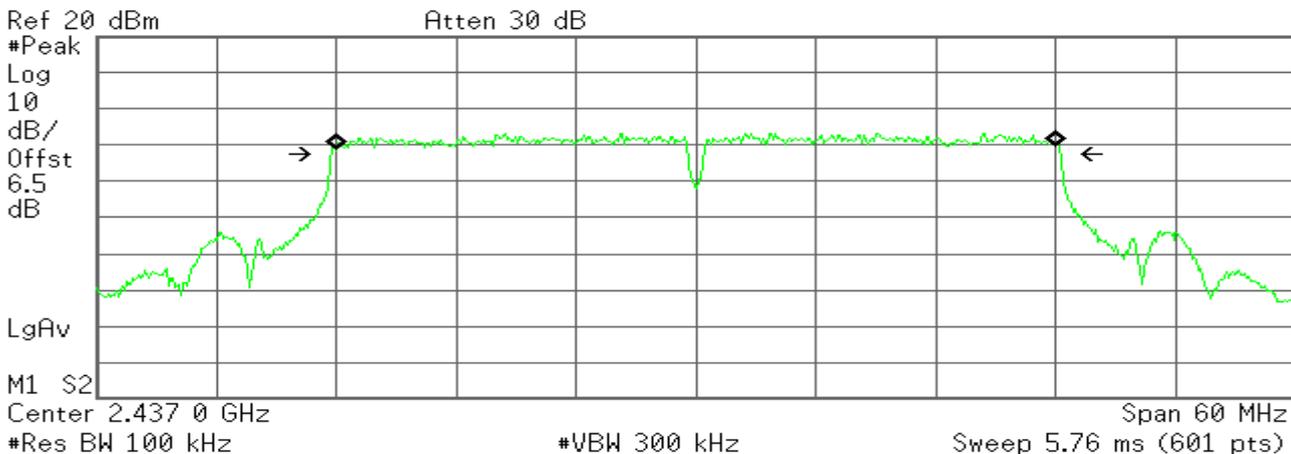

Occupied Bandwidth
36.0696 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 12.685 kHz
x dB Bandwidth 36.525 MHz

6dB Bandwidth (CH High)

Agilent

R T

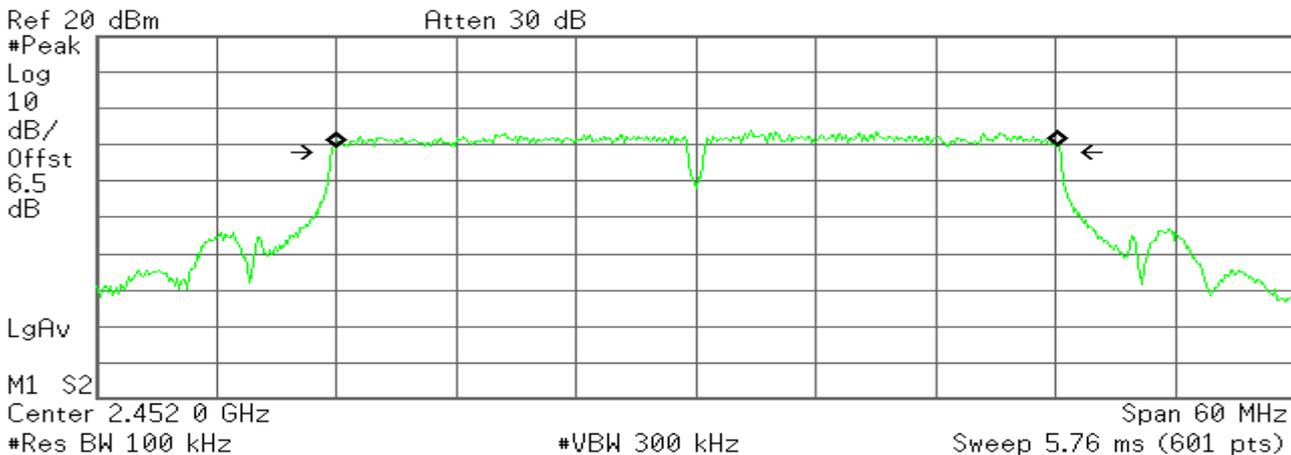

Occupied Bandwidth
36.0774 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 11.776 kHz
x dB Bandwidth 36.516 MHz

7.2. PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.

2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

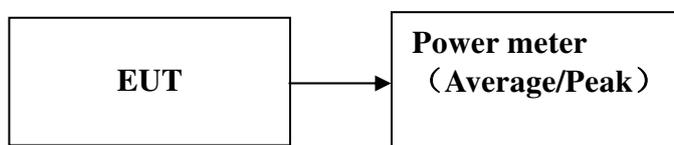

TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter. The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v03r02. 9.1.2 PKPM1 Peak power meter method.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	17.07	30
Mid	2437	16.82	30
High	2462	17.14	30

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	20.32	30
Mid	2437	20.65	30
High	2462	21.10	30

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	19.12	30
Mid	2437	19.54	30
High	2462	20.14	30

Test mode: IEEE 802.11n HT40 mode


Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2422	18.16	30
Mid	2437	18.53	30
High	2452	18.78	30

7.3. PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.95	8.00	PASS
Mid	2437	-14.88	8.00	PASS
High	2462	-14.06	8.00	PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-21.42	8.00	PASS
Mid	2437	-20.59	8.00	PASS
High	2462	-22.59	8.00	PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-23.16	8.00	PASS
Mid	2437	-22.99	8.00	PASS
High	2462	-22.75	8.00	PASS

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-25.16	8.00	PASS
Mid	2437	-25.07	8.00	PASS
High	2452	-23.84	8.00	PASS

Test Plot

IEEE 802.11b mode

PPSD (CH Low)

Agilent

R T

Mkr1 2.411 292 GHz
-15.95 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

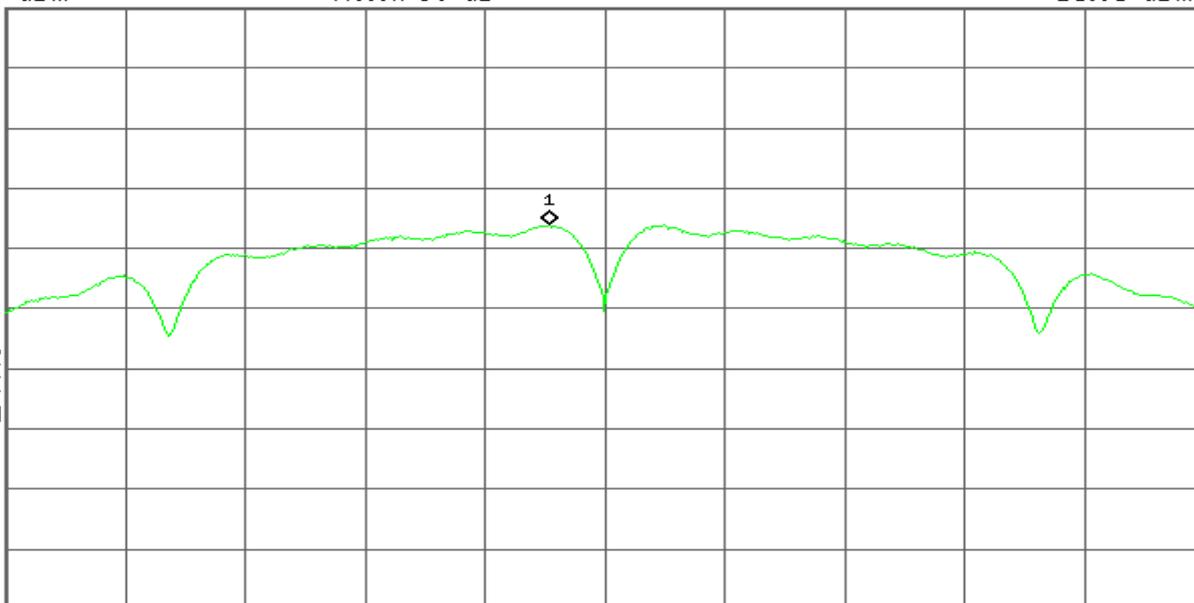

Center 2.412 000 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 15.18 MHz
Sweep 1.6 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.437 683 GHz
-14.88 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

f(f):
FTun
Swp

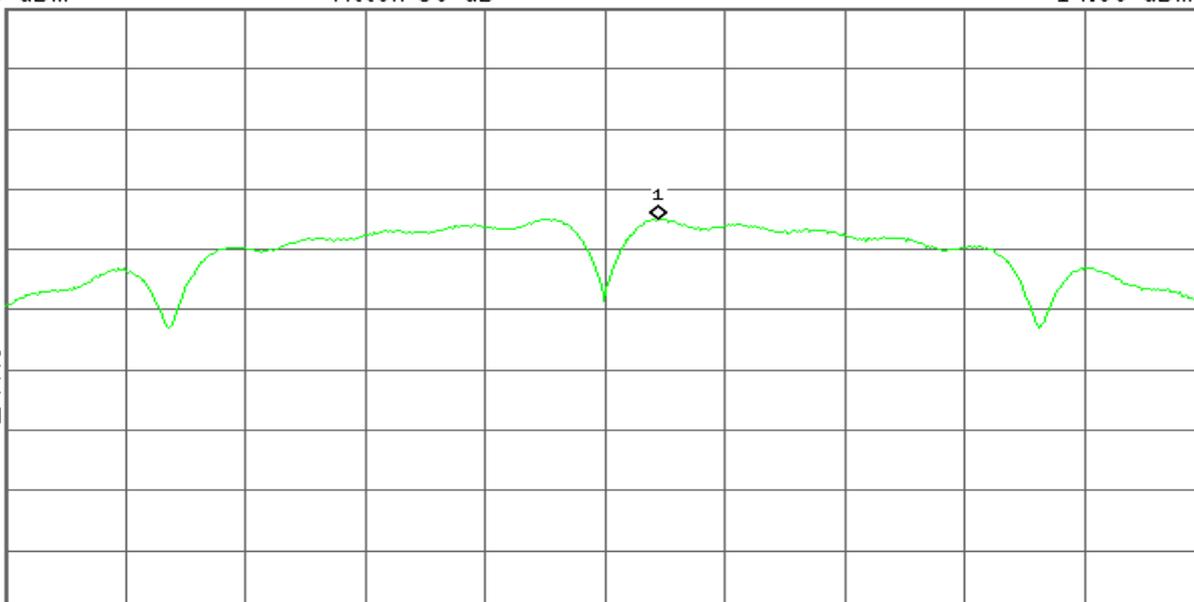

Center 2.437 000 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 15.18 MHz
Sweep 1.6 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.461 292 GHz
-14.06 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

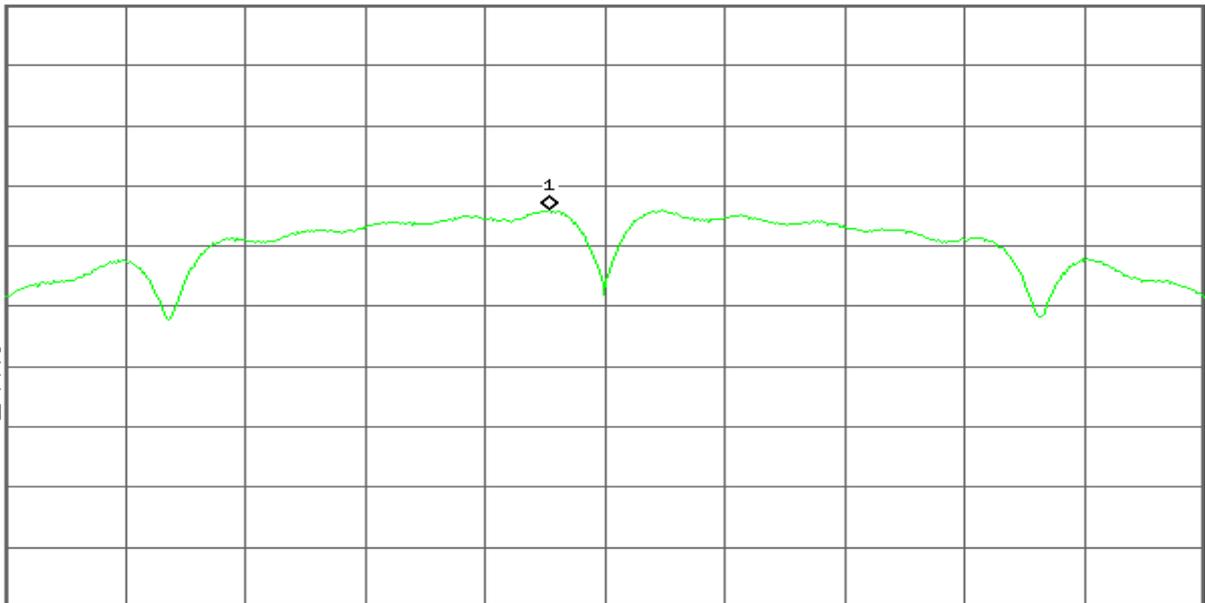

Center 2.462 000 GHz

Span 15.18 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 1.6 s (601 pts)

IEEE 802.11g mode

PPSD (CH Low)

Agilent

R T

Mkr1 2.415 11 GHz
-21.42 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

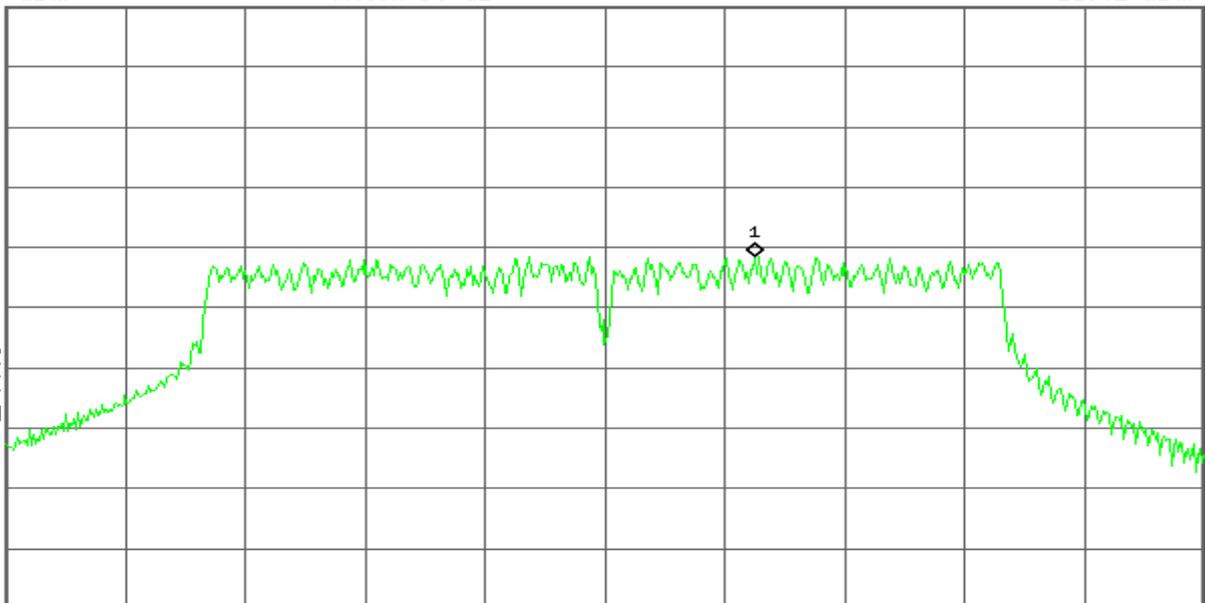

Center 2.412 00 GHz

Span 24.89 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 2.624 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.440 19 GHz
-20.59 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

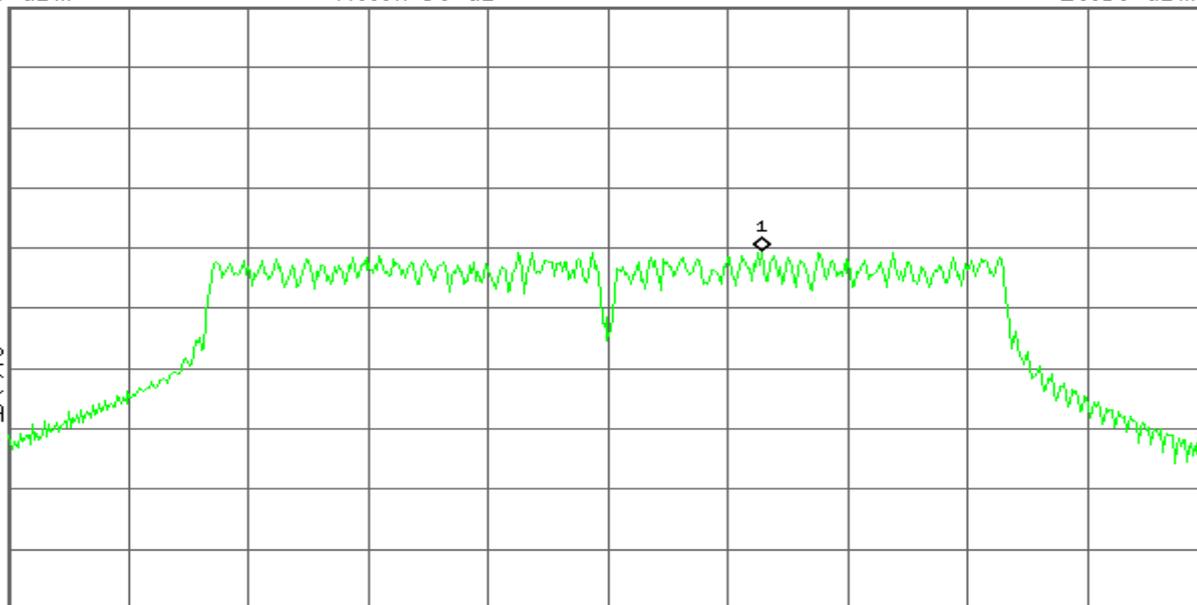

Center 2.437 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.89 MHz
Sweep 2.624 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.467 93 GHz
-22.59 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

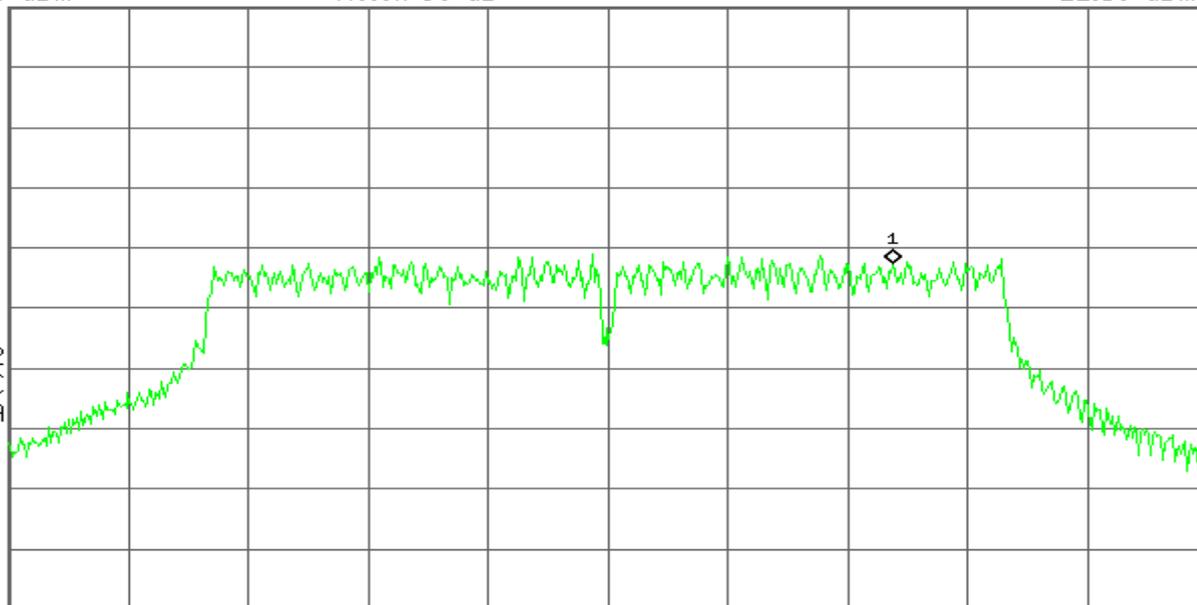

Center 2.462 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 24.89 MHz
Sweep 2.624 s (601 pts)


IEEE 802.11n HT20 mode

PPSD (CH Low)

Agilent

R T

Mkr1 2.410 44 GHz
-23.16 dBm

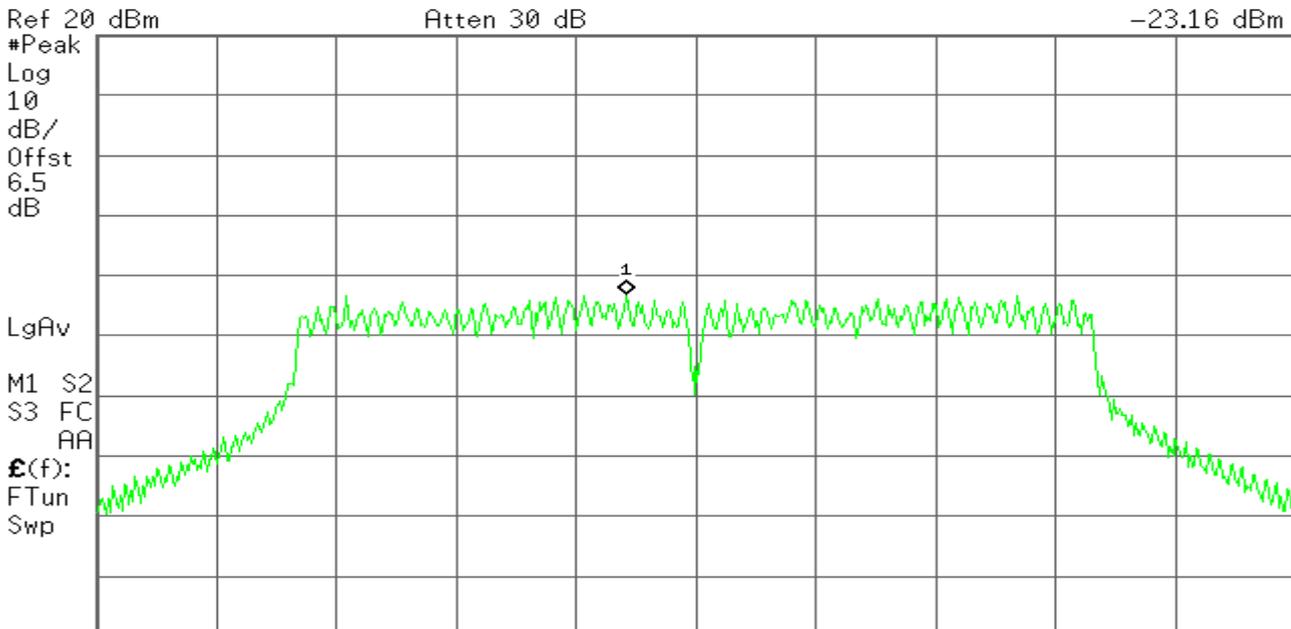


Center 2.412 00 GHz Span 26.79 MHz
#Res BW 3 kHz #VBW 10 kHz Sweep 2.825 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.429 19 GHz
-22.99 dBm

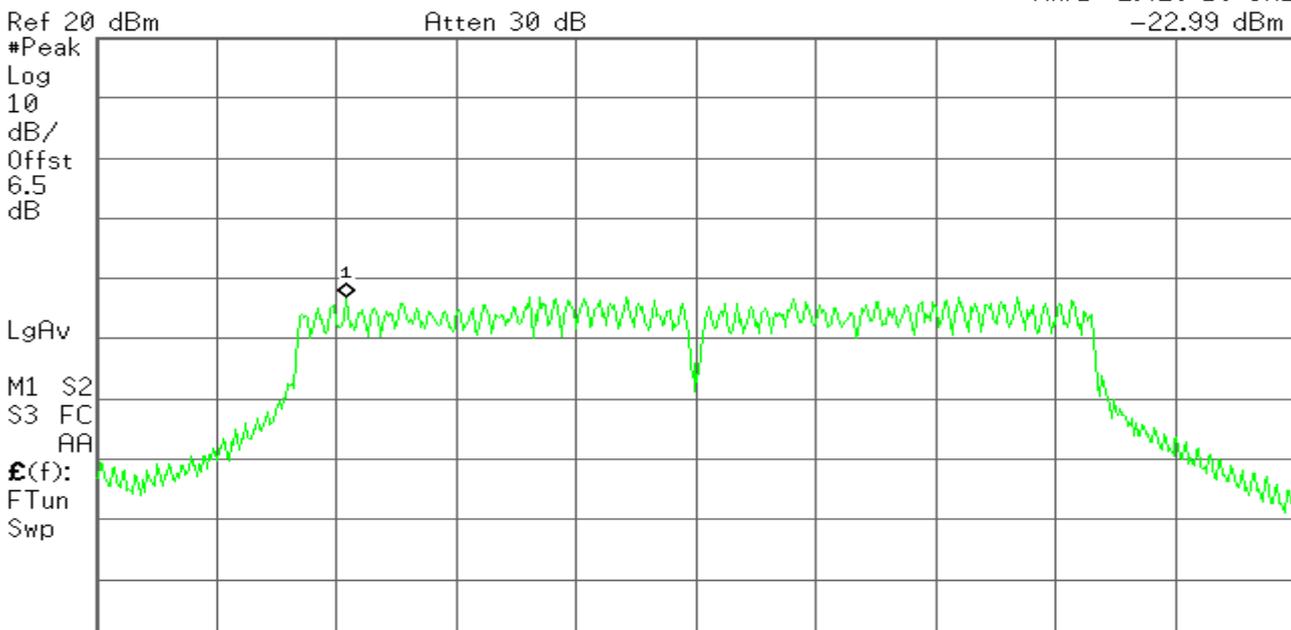

Center 2.437 00 GHz Span 26.79 MHz
#Res BW 3 kHz #VBW 10 kHz Sweep 2.825 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.460 44 GHz
-22.75 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

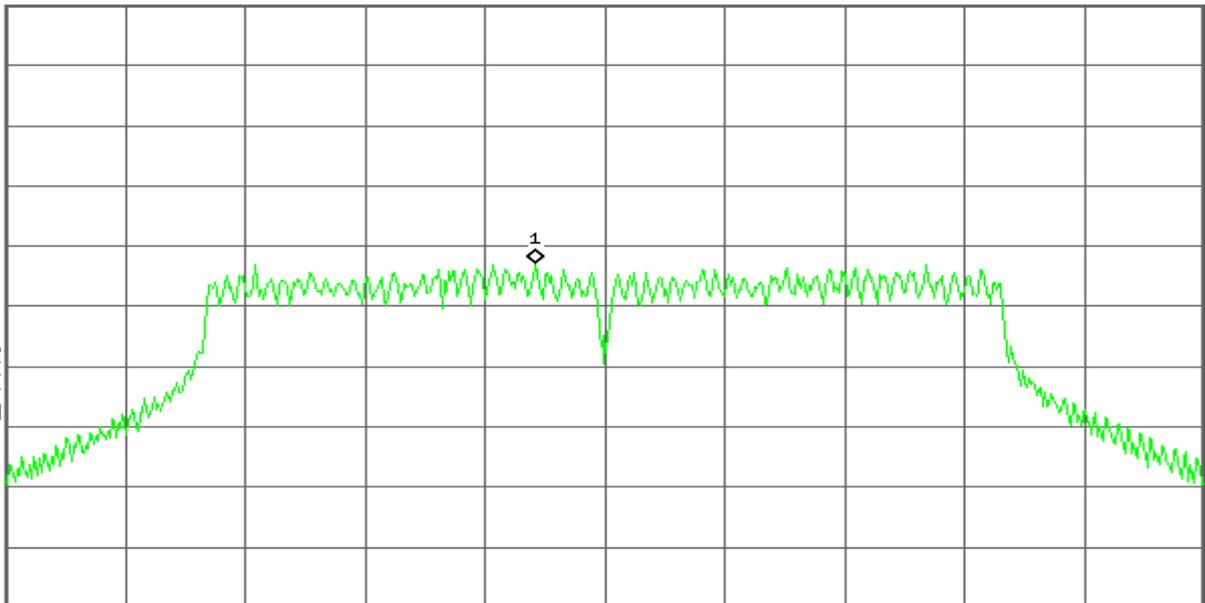

Center 2.462 00 GHz

Span 26.79 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 2.825 s (601 pts)

IEEE 802.11n HT40 mode

PPSD (CH Low)

Agilent

R T

Mkr1 2.418 90 GHz
-25.16 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

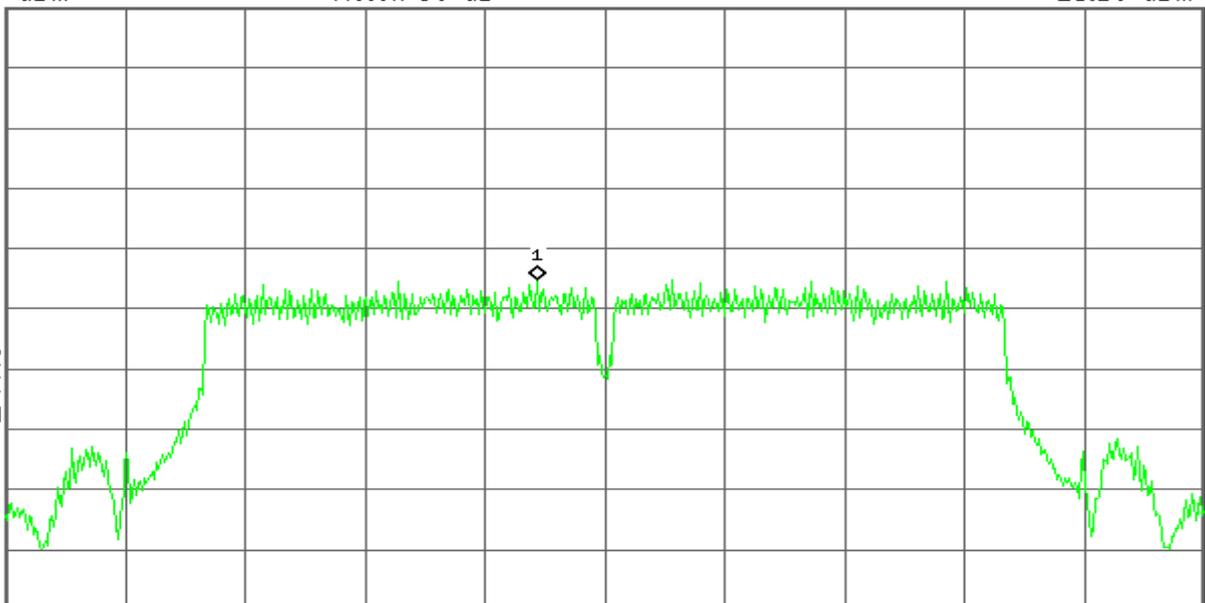

Center 2.422 00 GHz

Span 54.78 MHz

#Res BW 3 kHz

#VBW 10 kHz

Sweep 5.776 s (601 pts)

PPSD (CH Mid)

Agilent

R T

Mkr1 2.440 10 GHz
-25.07 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

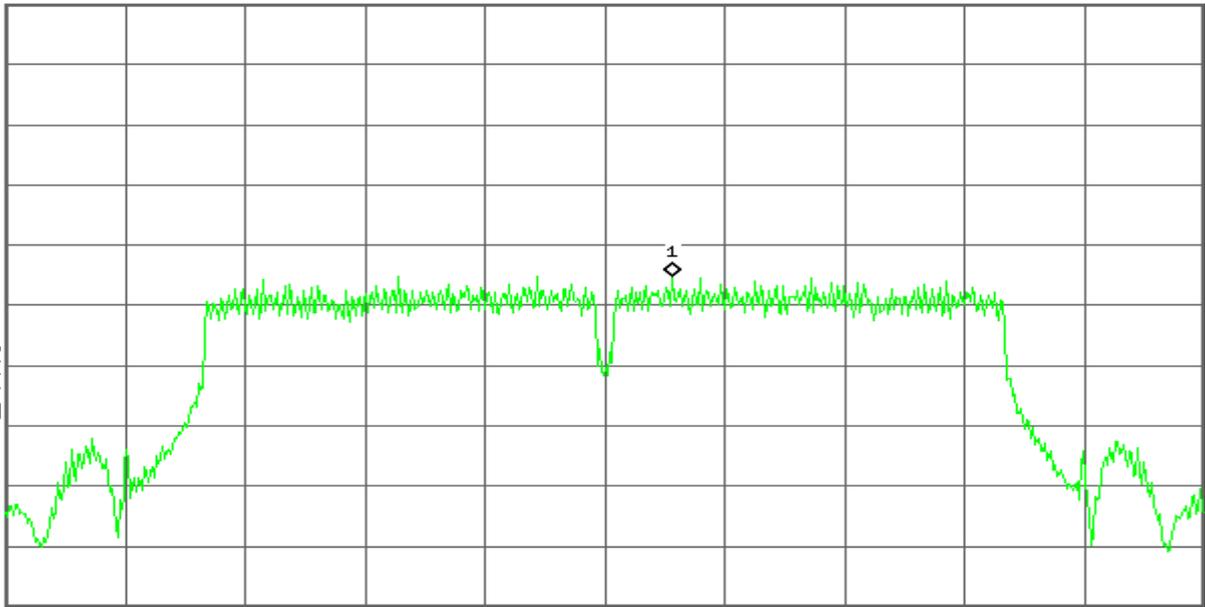

Center 2.437 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 54.78 MHz
Sweep 5.776 s (601 pts)

PPSD (CH High)

Agilent

R T

Mkr1 2.442 60 GHz
-23.84 dBm

Ref 20 dBm


Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB

LgAv

M1 S2
S3 FC
AA

£(f):
FTun
Swp

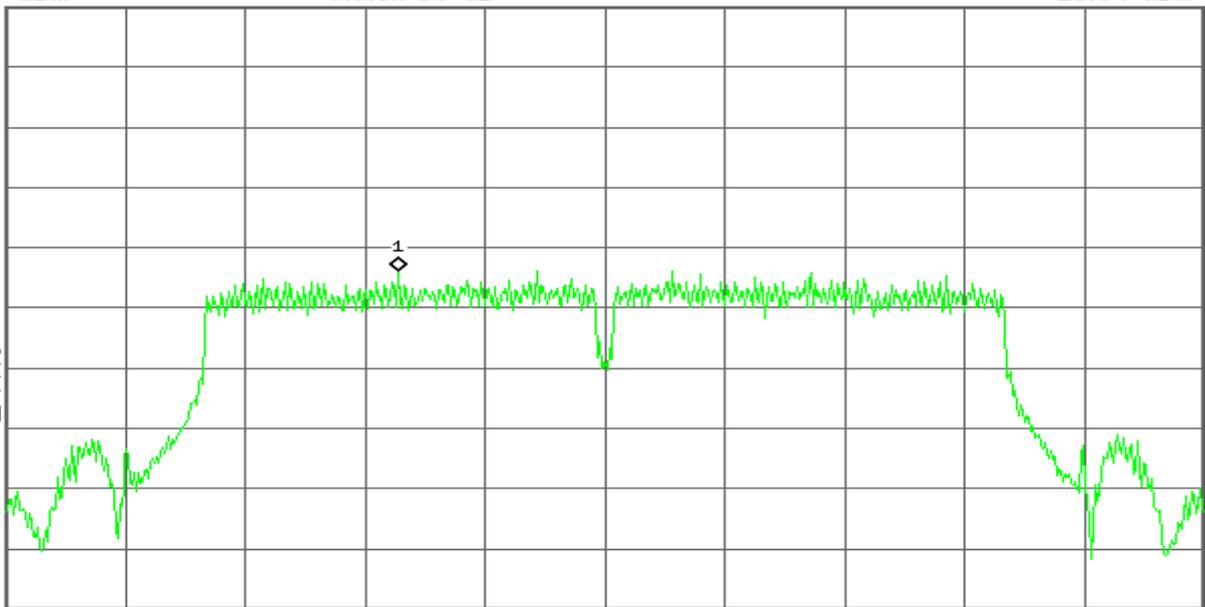

Center 2.452 00 GHz

#Res BW 3 kHz

#VBW 10 kHz

Span 54.78 MHz
Sweep 5.776 s (601 pts)


7.4.SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

Test Plot

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

IEEE 802.11b mode

CH Low

Agilent


R T

Mkr1 2.411 494 GHz
5.11 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB
DI
-14.9
dBm
LgAv
M1 S2
S3 FC
AA
f(f):
FTun
Swp

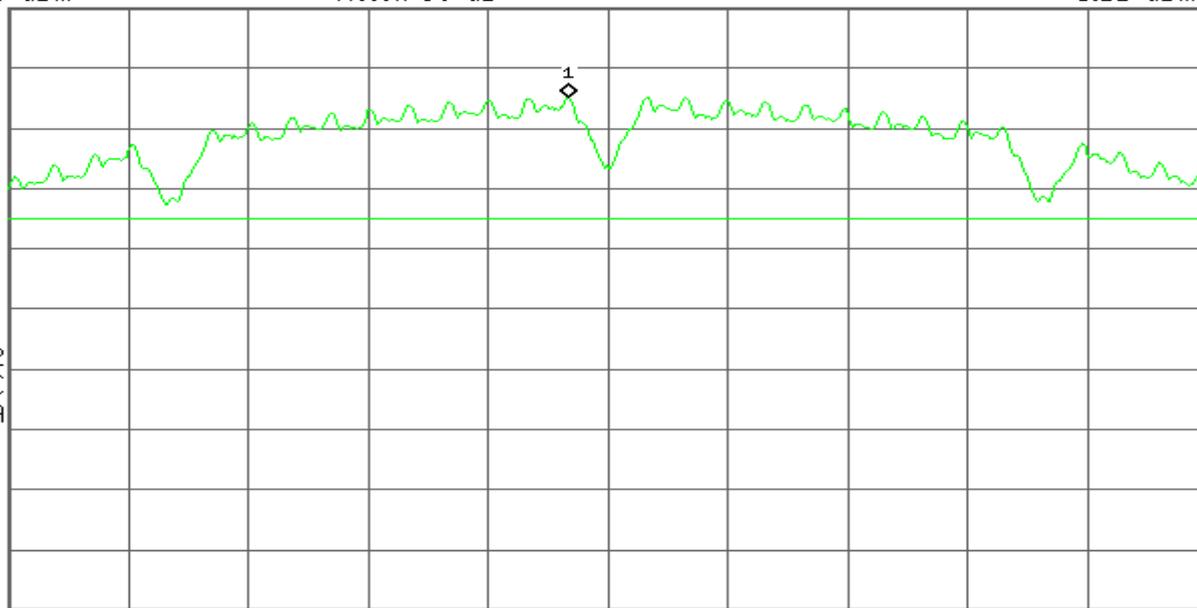

Center 2.412 000 GHz

Span 15.18 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1.48 ms (601 pts)

Agilent


R T

Mkr1 2.400 000 GHz
-31.12 dBm

Ref 20 dBm

Atten 30 dB

Peak
Log
10
dB/
Offst
6.5
dB
DI
-14.9
dBm
LgAv
M1 S2
S3 FC
AA
f(f):
FTun
Swp

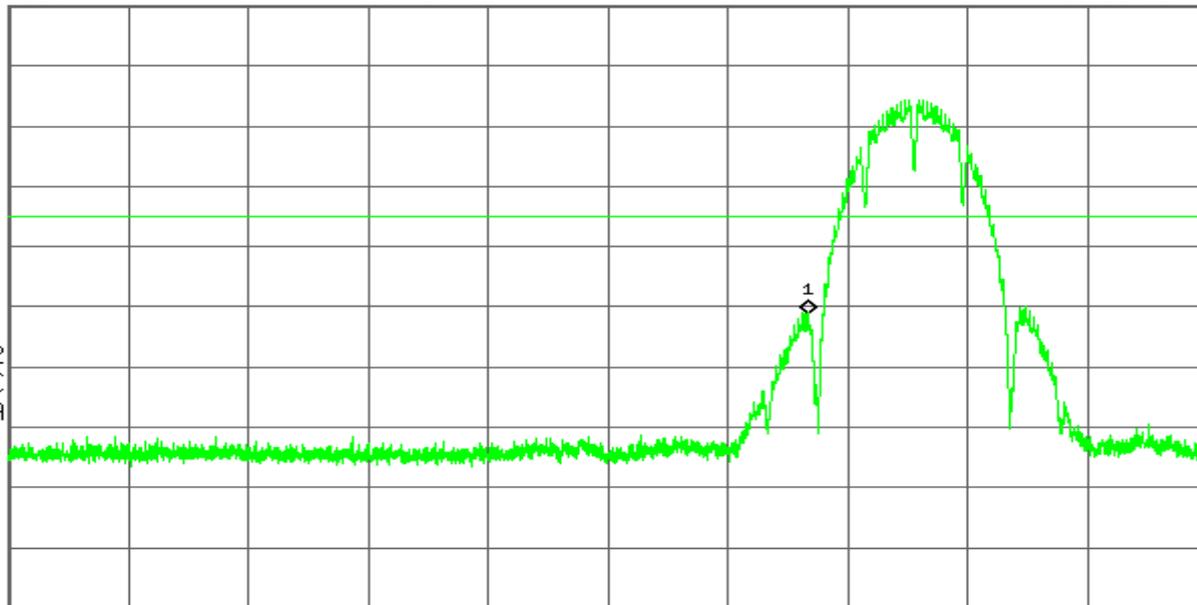

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent

R T


Mkr1 697.6 MHz
-54.12 dBm

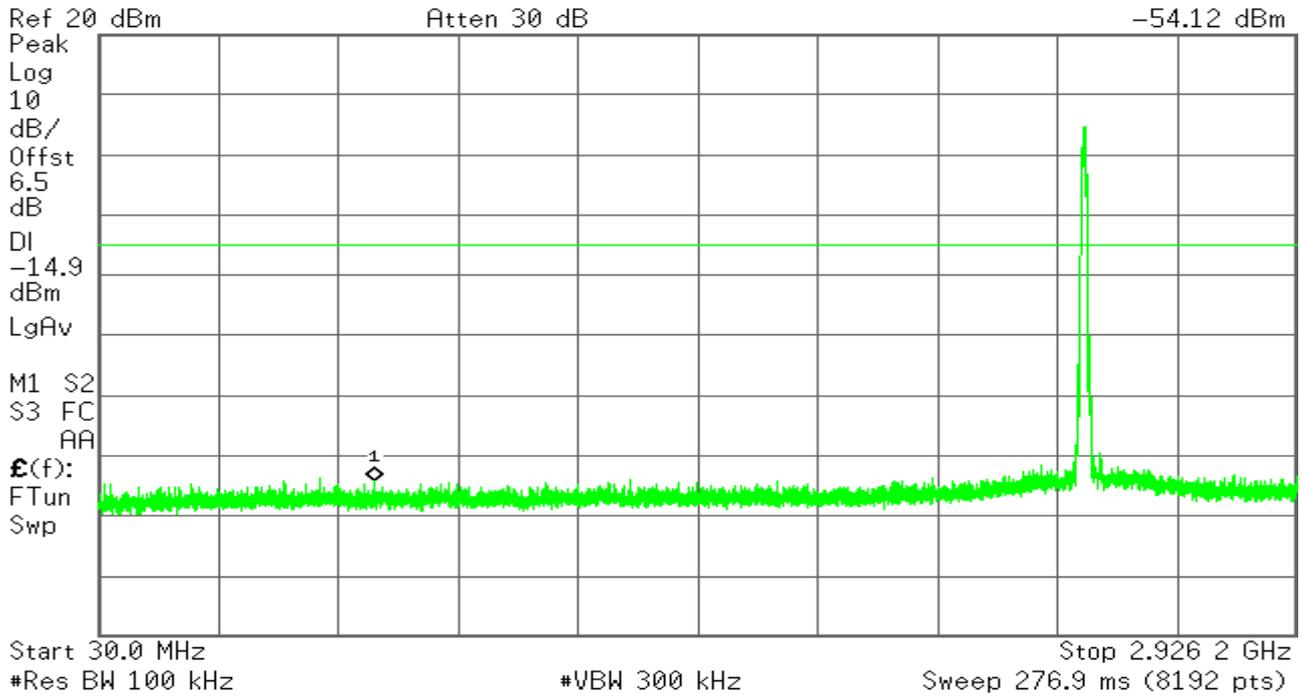

Agilent

R T

Mkr1 4.824 8 GHz
-26.63 dBm

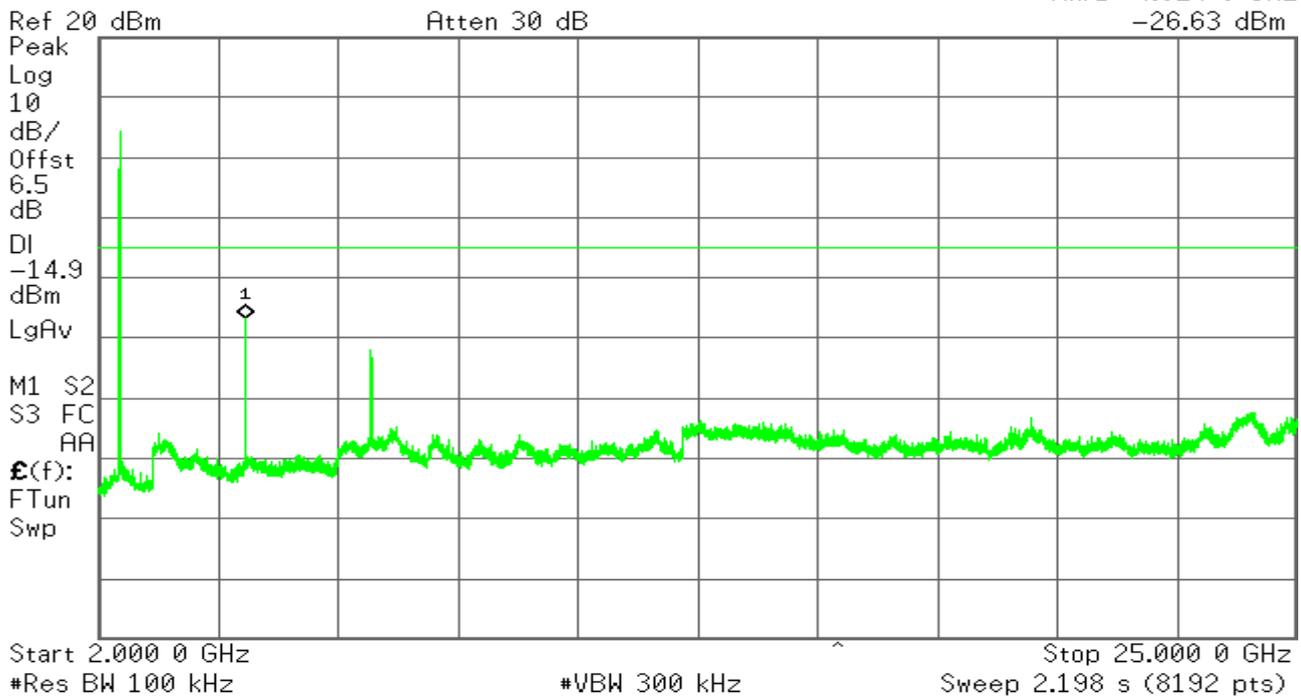

CH Mid

Agilent


R T

Mkr1 2.436 494 GHz
4.87 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB
DI
-15.1
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

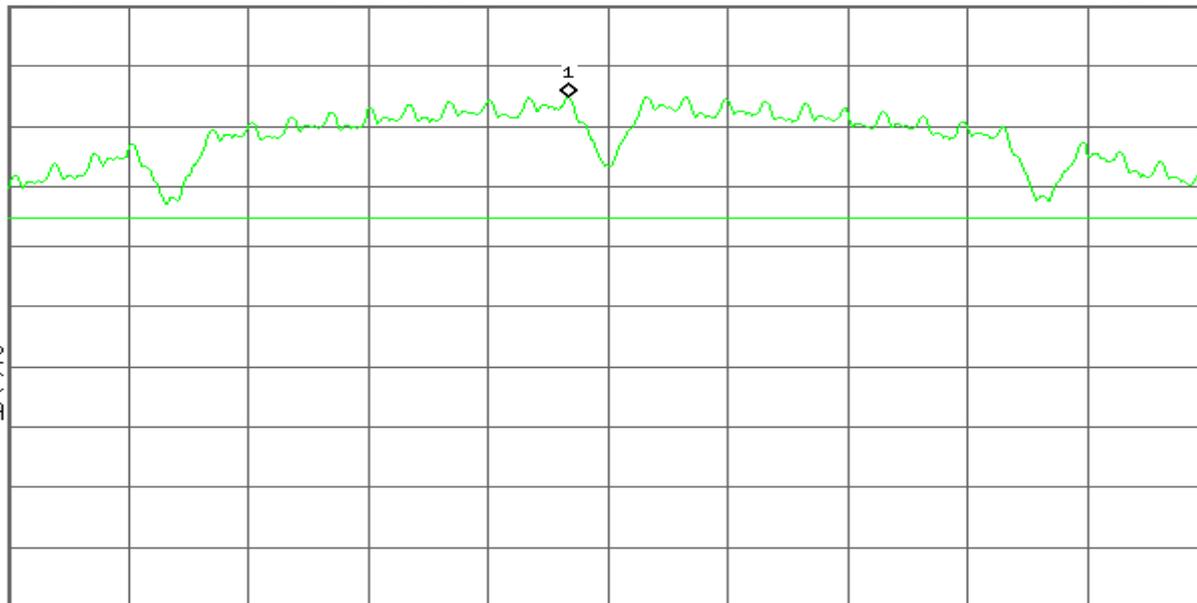

Center 2.437 000 GHz

Span 15.18 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1.48 ms (601 pts)

Agilent


R T

Mkr1 1.563 8 GHz
-53.40 dBm

Ref 20 dBm

Atten 30 dB

Peak
Log
10
dB/
Offst
6.5
dB
DI
-15.1
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

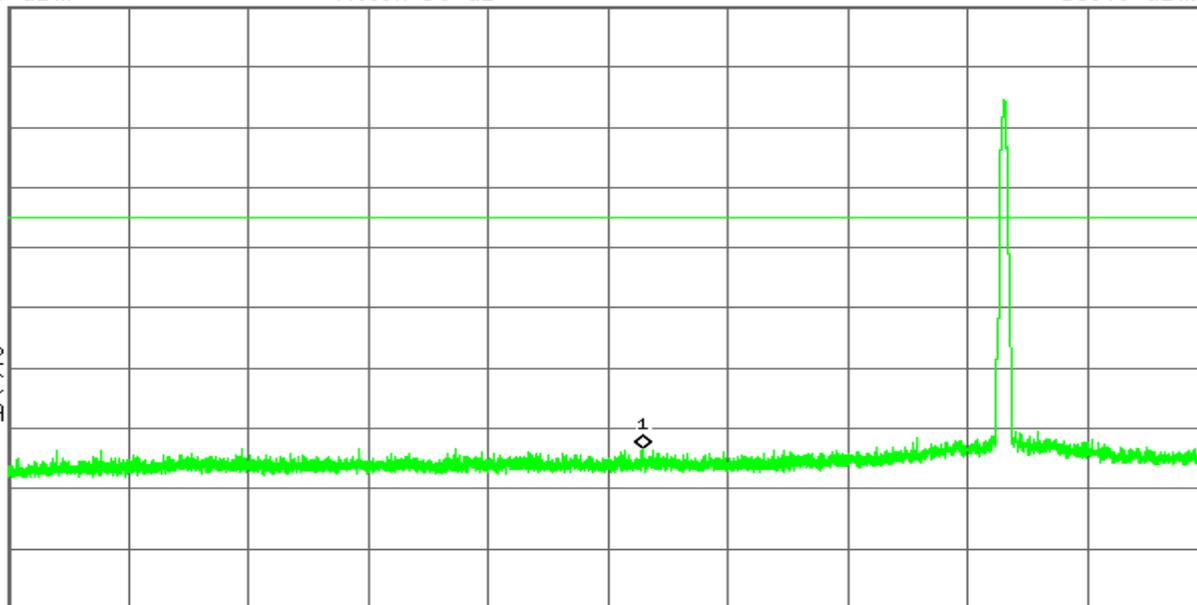

Start 30.0 MHz

Stop 2.926 2 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 276.9 ms (8192 pts)

Agilent

R T

Mkr1 4.875 4 GHz
-26.05 dBm

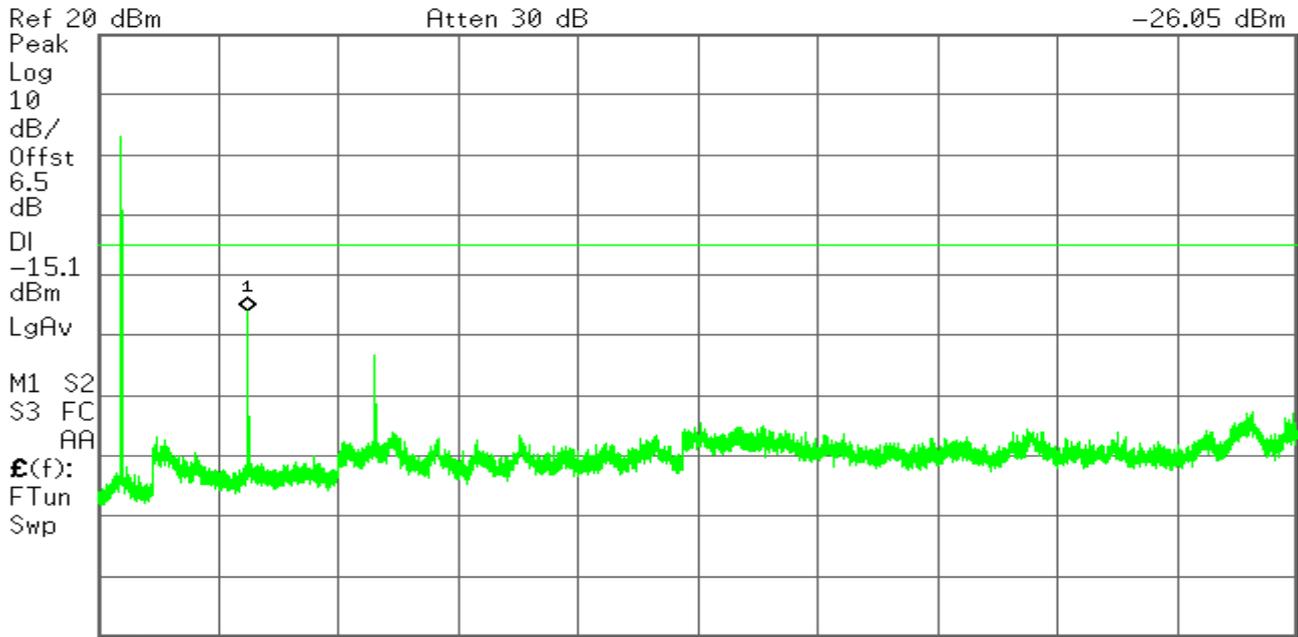


Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)

CH High

Agilent

R T

Mkr1 2.461 494 GHz
5.62 dBm

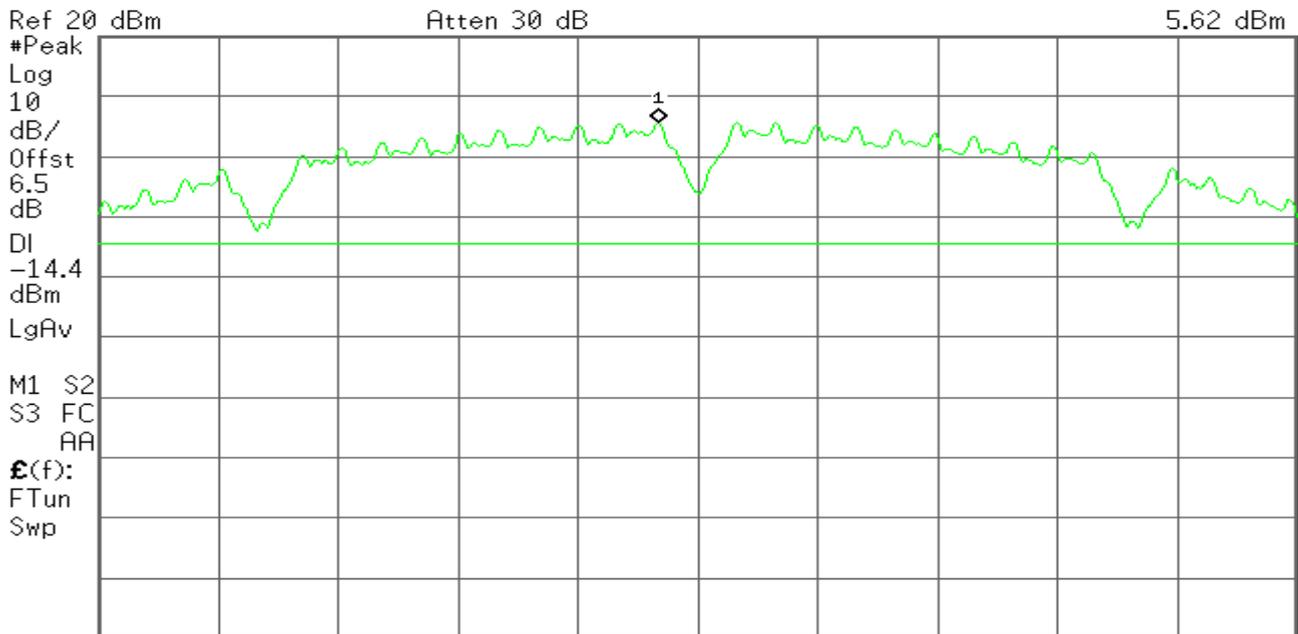


Center 2.462 000 GHz Span 15.18 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 1.48 ms (601 pts)

Agilent

R T

Mkr1 2.483 500 GHz
-51.90 dBm

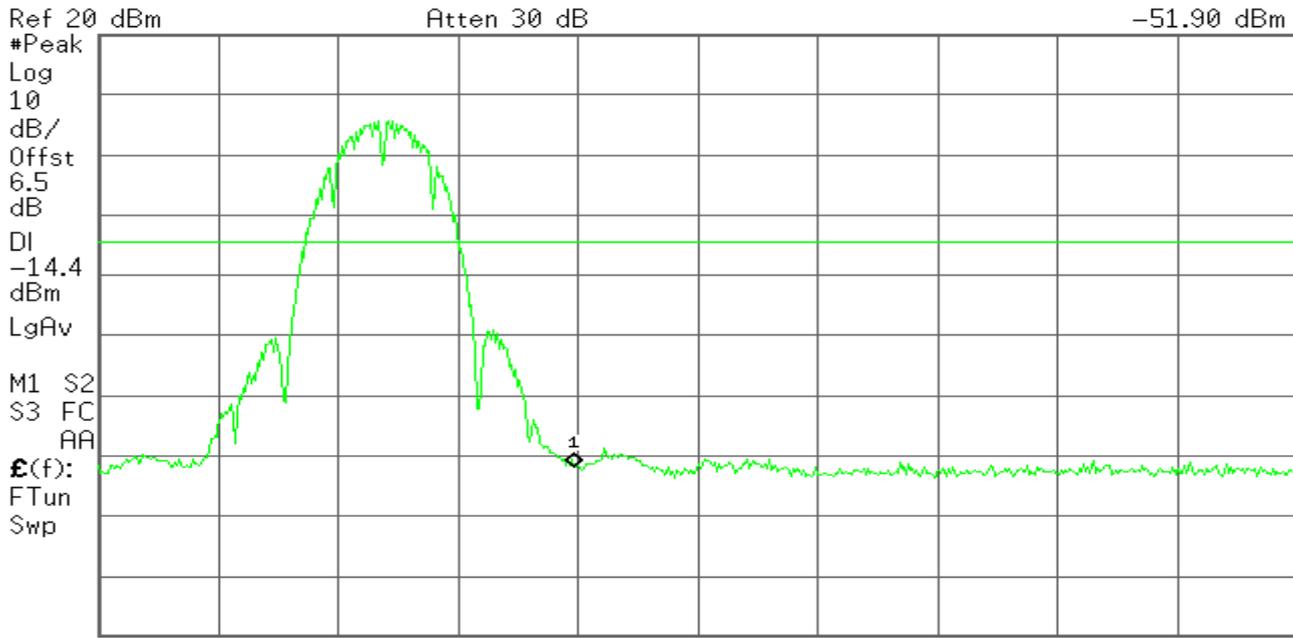


Start 2.430 000 GHz Stop 2.565 000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 12.92 ms (601 pts)

Agilent

R T

Mkr1 1.886 1 GHz
-49.36 dBm

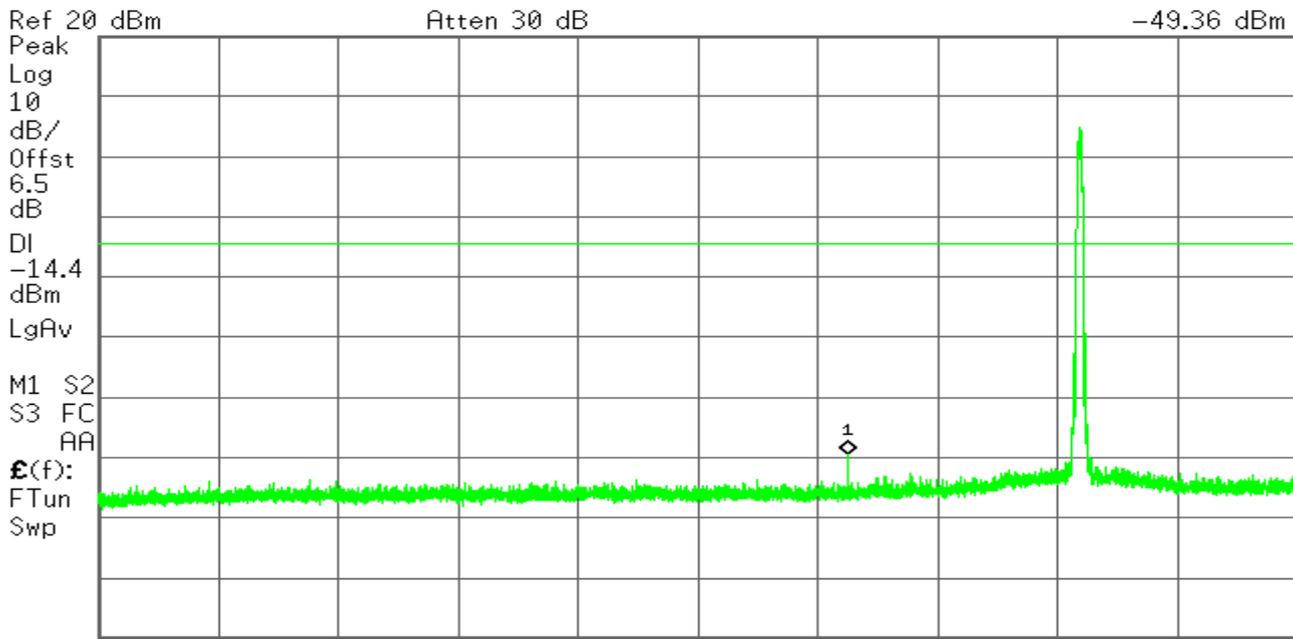


Start 30.00 MHz Stop 3.000 00 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 4.923 1 GHz
-26.00 dBm

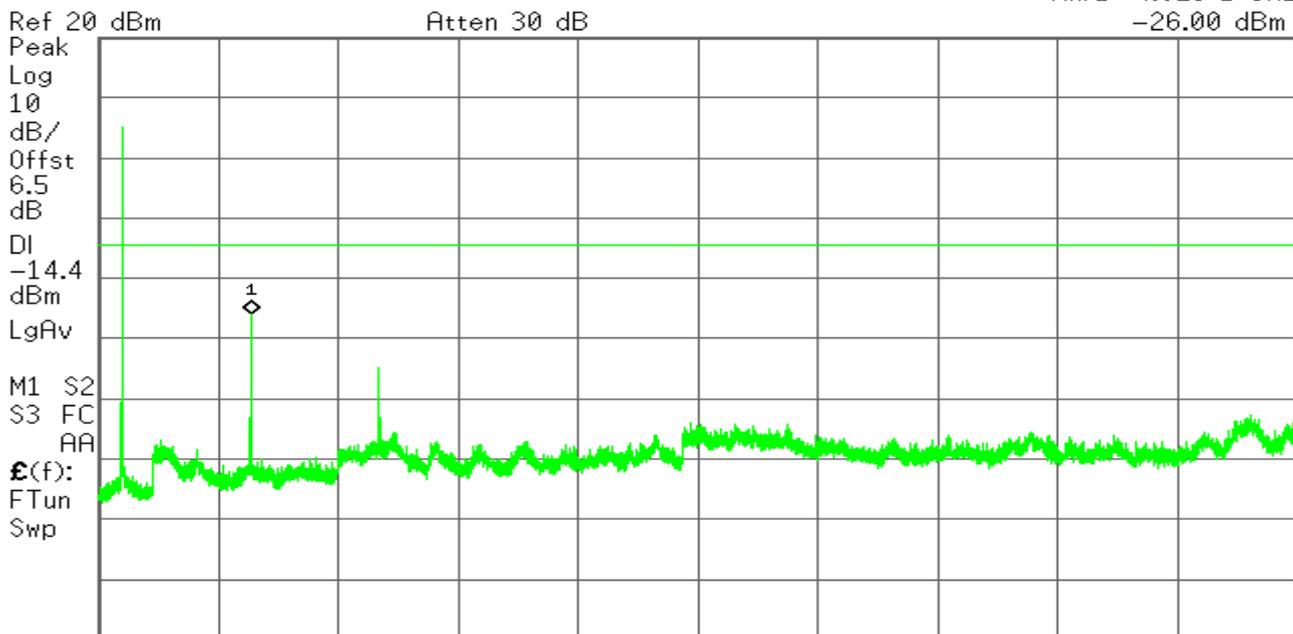

Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)


IEEE 802.11g mode

CH Low

Agilent

R T

Mkr1 2.406 40 GHz
-7.34 dBm

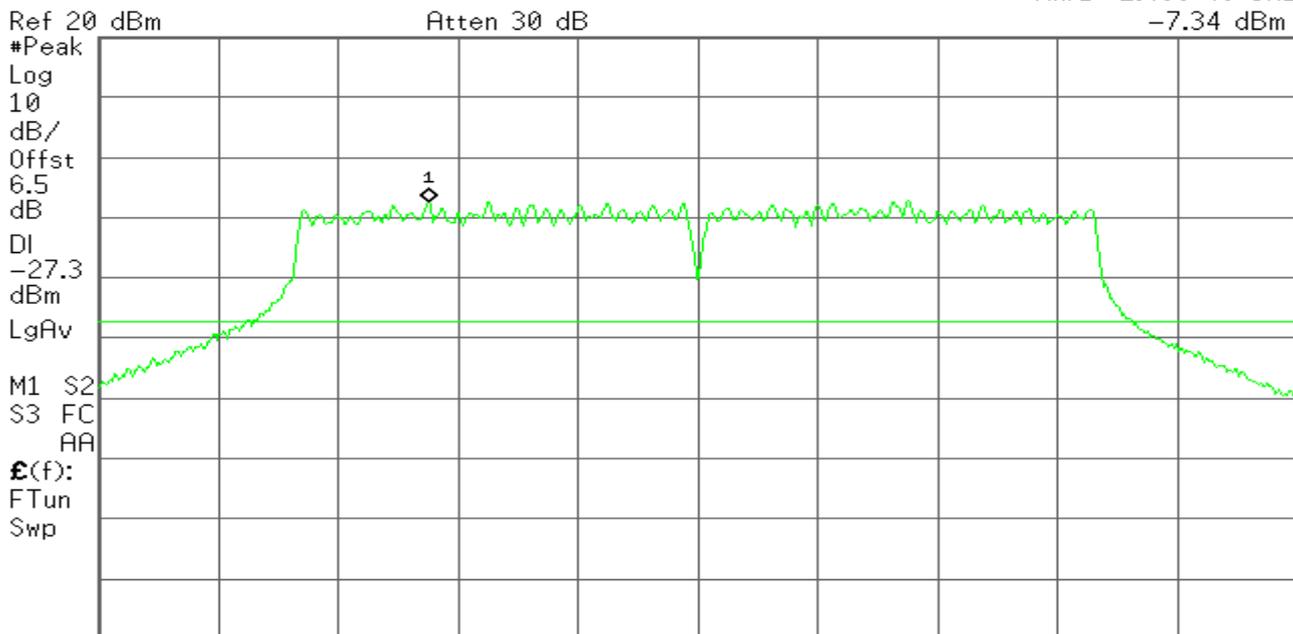

Center 2.412 00 GHz Span 24.89 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.4 ms (601 pts)

Agilent


R T

Mkr1 2.400 000 GHz
-37.64 dBm

Ref 20 dBm

Atten 30 dB

Peak
Log
10
dB/
Offst
6.5
dB
DI
-27.3
dBm
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
Swp

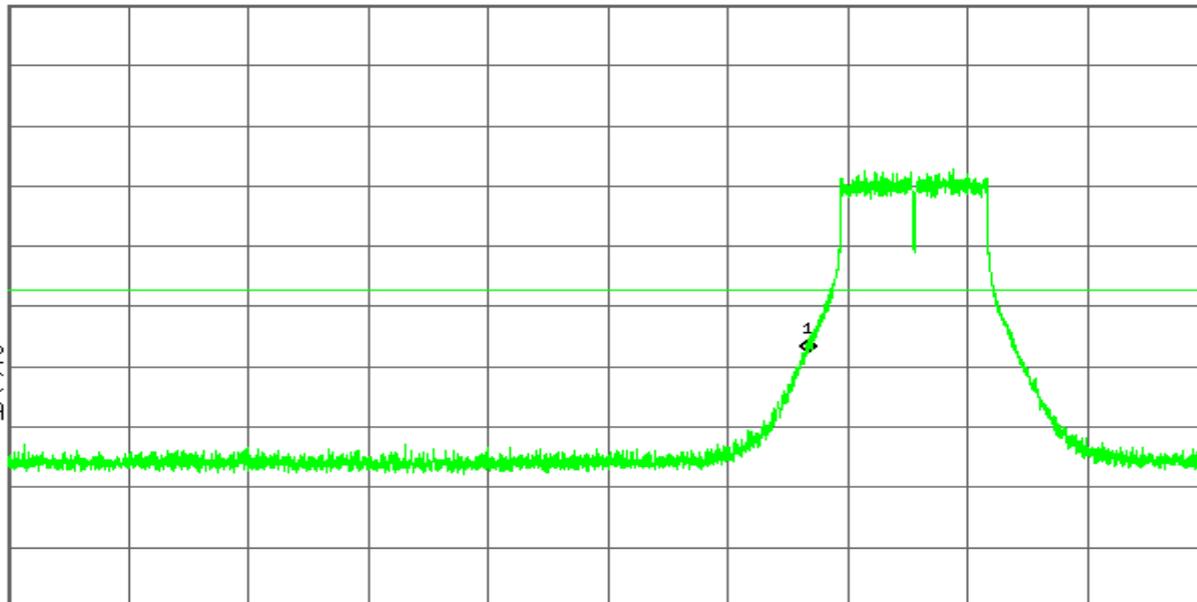

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent


R T

Mkr1 1.572 5 GHz
-53.23 dBm

Ref 20 dBm

Atten 30 dB

Peak
Log
10
dB/
Offst
6.5
dB
DI
-27.3
dBm
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
Swp

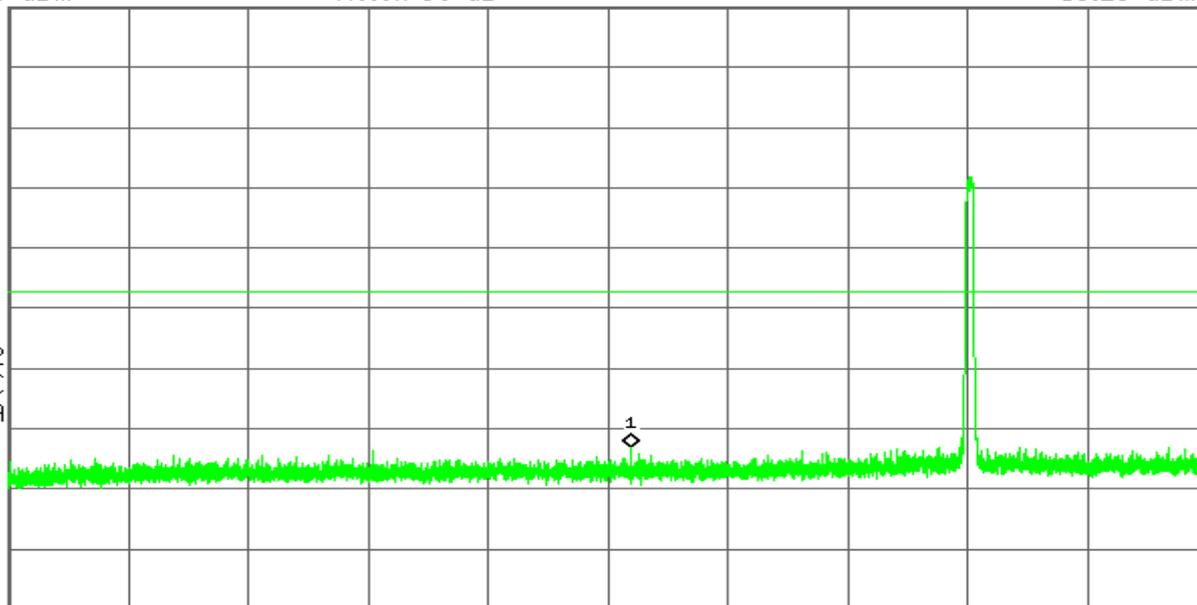

Start 30.0 MHz

Stop 3.000 0 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 4.824 8 GHz
-42.42 dBm

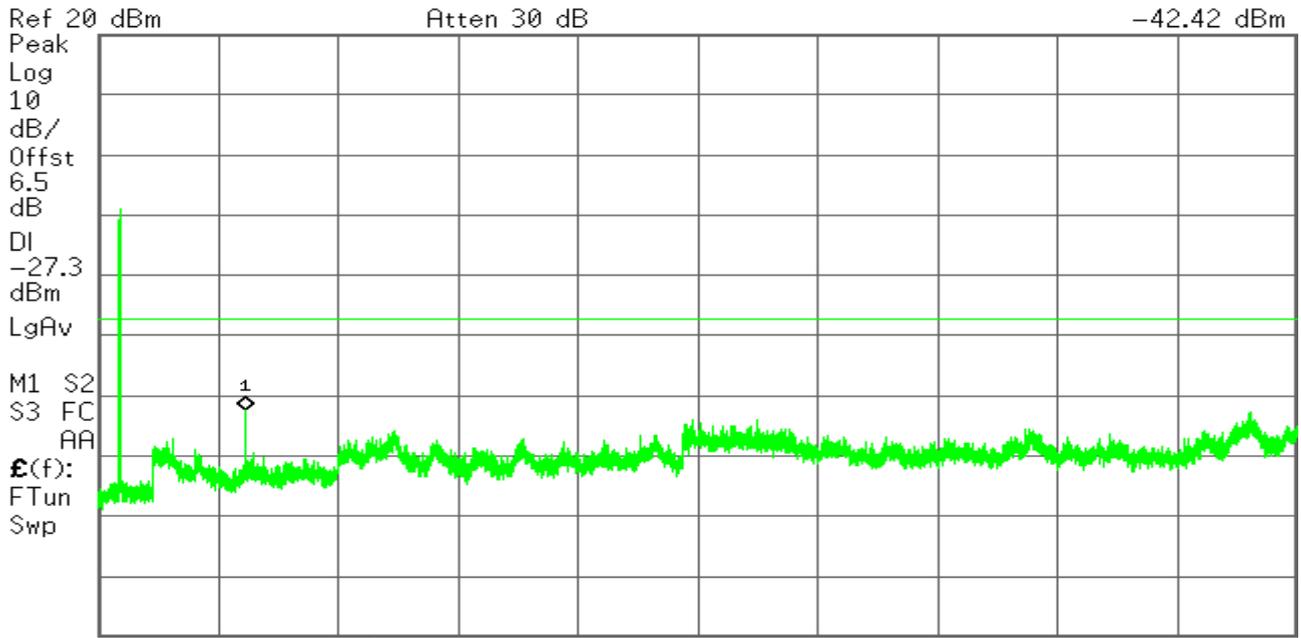


Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)

CH Mid

Agilent

R T

Mkr1 2.431 40 GHz
-7.03 dBm

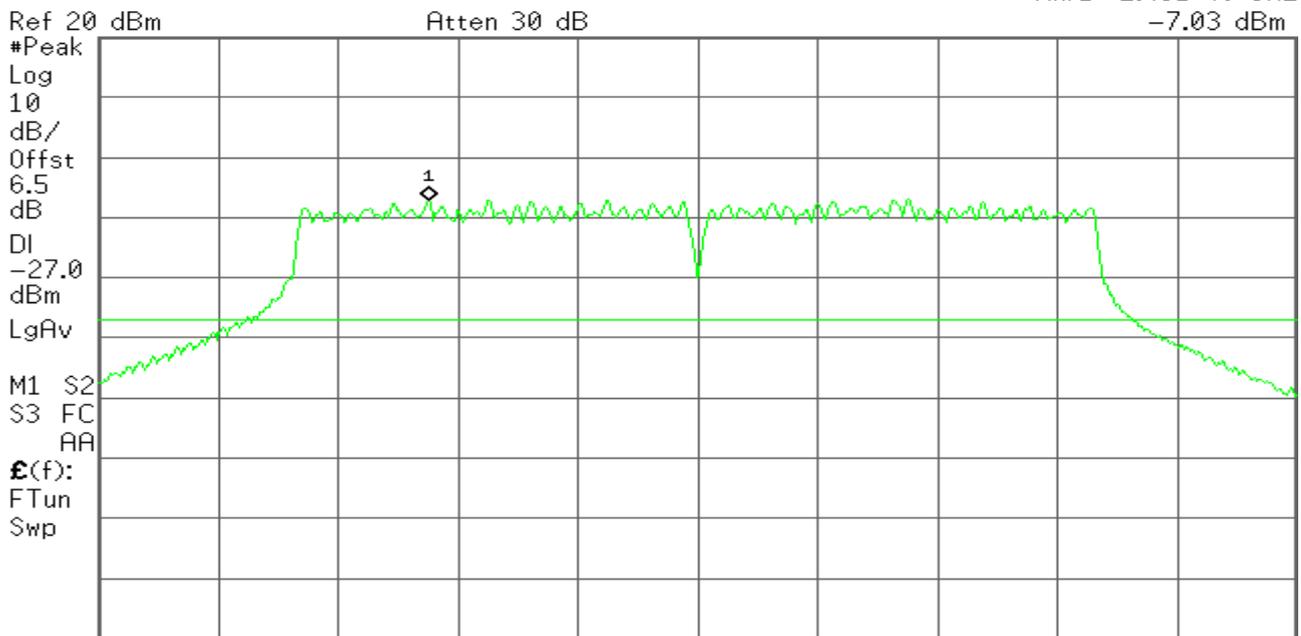


Center 2.437 00 GHz Span 24.89 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.4 ms (601 pts)

Agilent

R T

Mkr1 2.114 2 GHz
-53.36 dBm

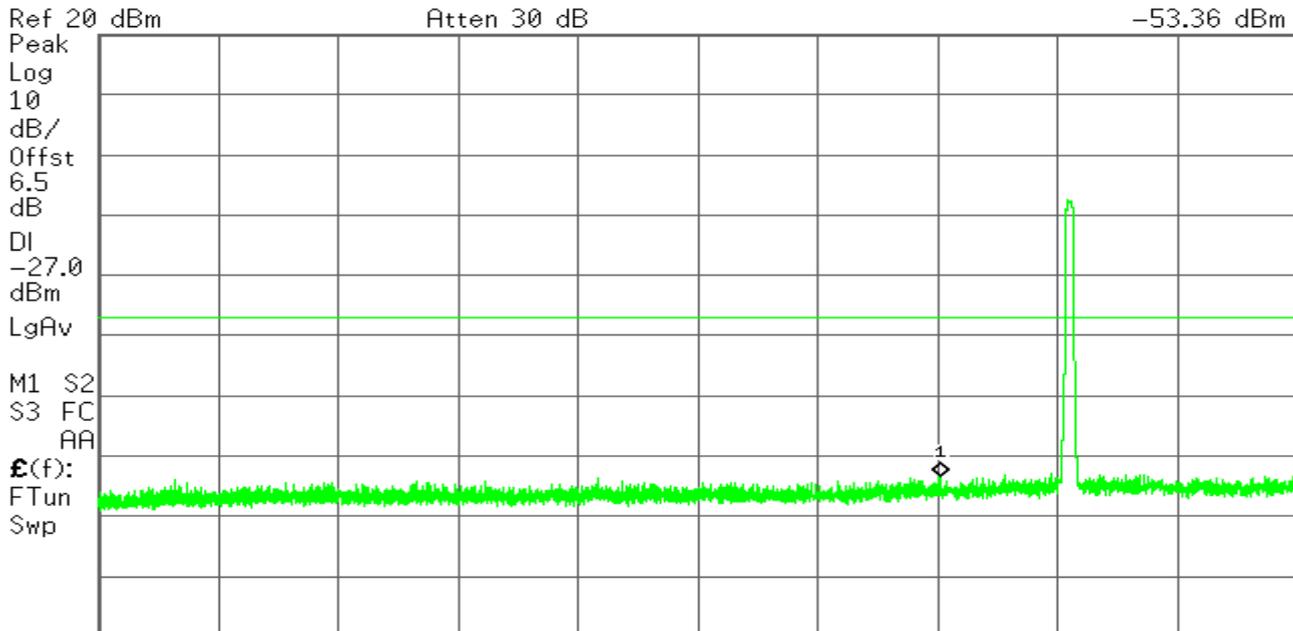


Start 30.0 MHz Stop 3.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 4.875 4 GHz
-40.68 dBm

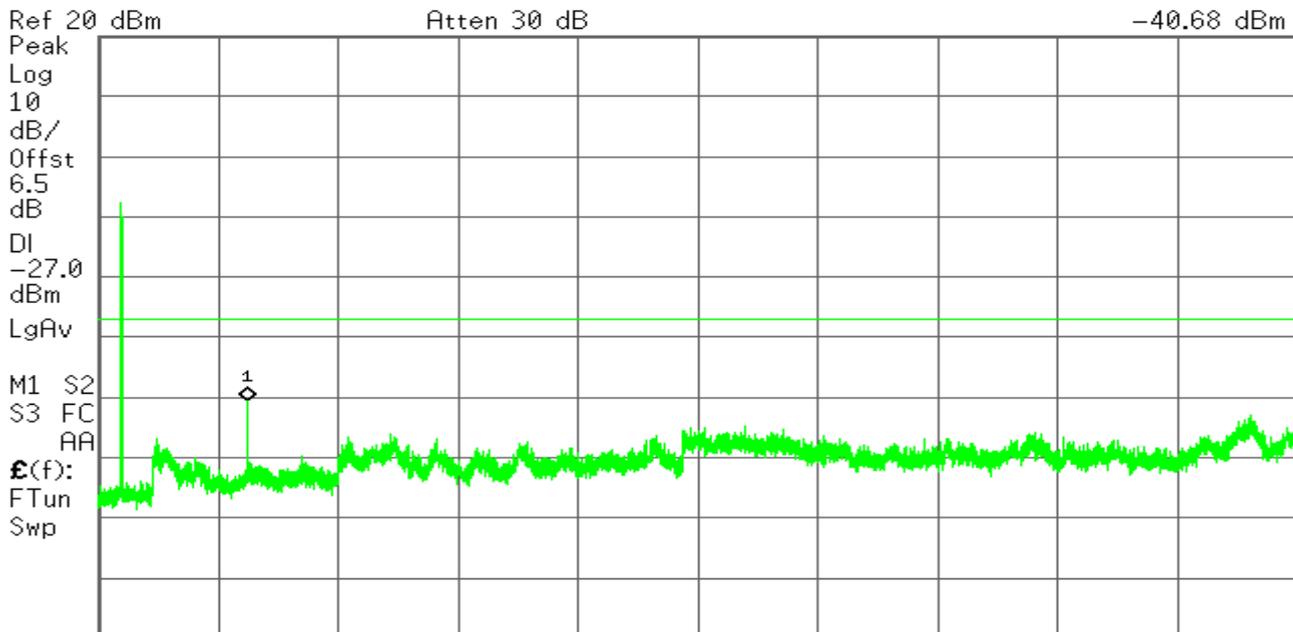


Start 2.000 0 GHz Stop 25.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts)

CH High

Agilent

R T

Mkr1 2.466 36 GHz
-6.60 dBm

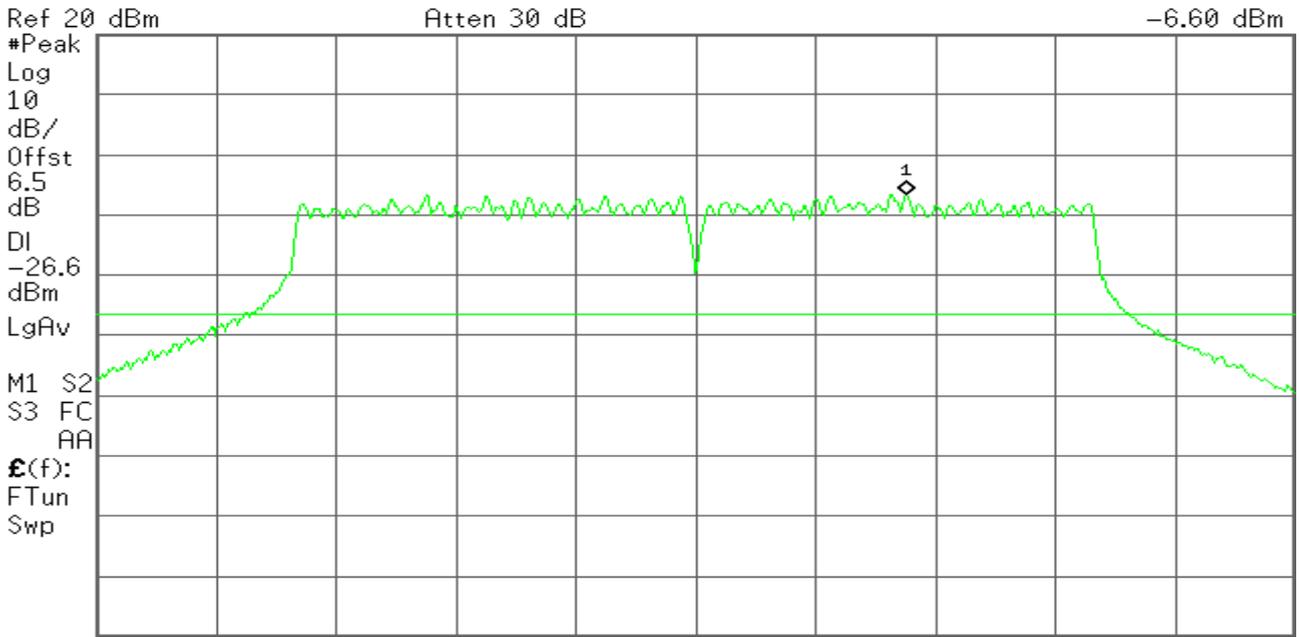


Center 2.462 00 GHz Span 24.89 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.4 ms (601 pts)

Agilent

R T

Mkr1 2.483 500 GHz
-53.86 dBm

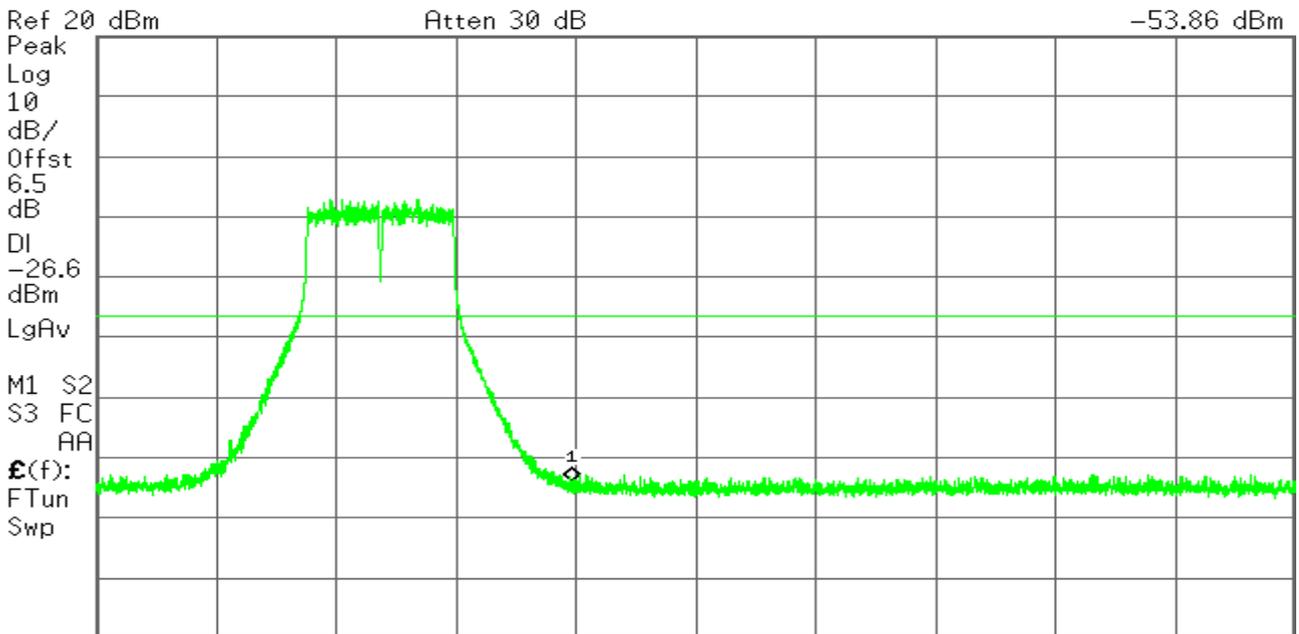


Start 2.430 000 GHz Stop 2.565 000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 1.625 8 GHz
-53.31 dBm

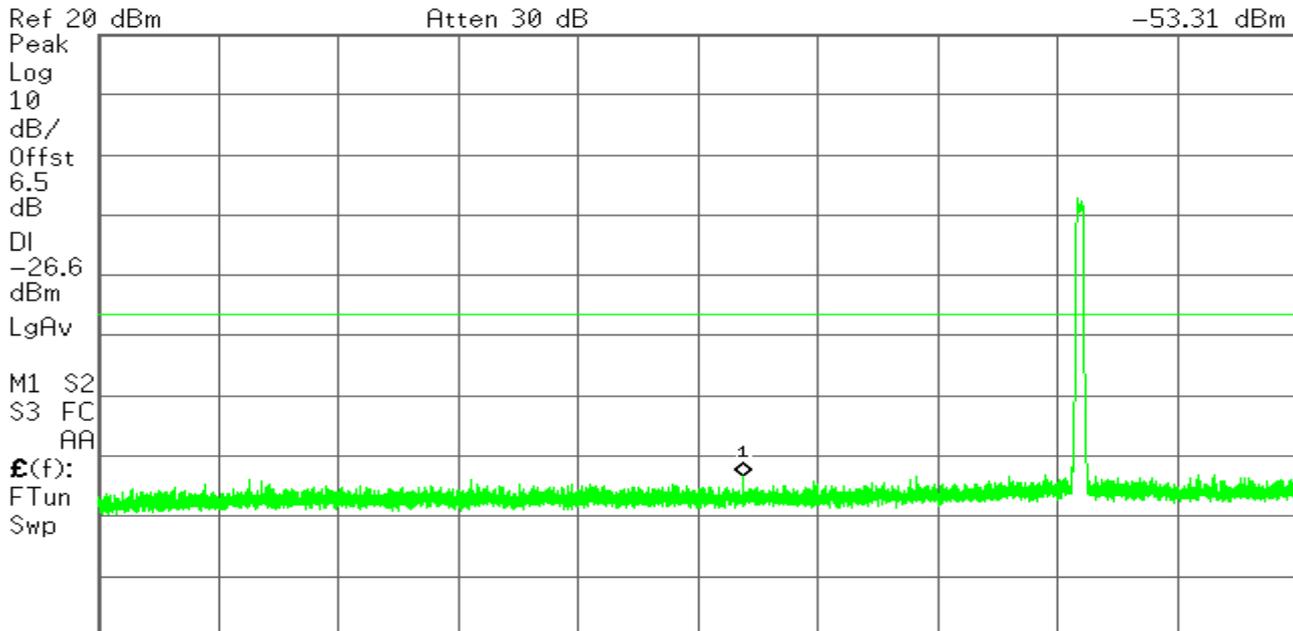


Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts) Stop 3.000 0 GHz

Agilent

R T

Mkr1 4.923 1 GHz
-41.83 dBm

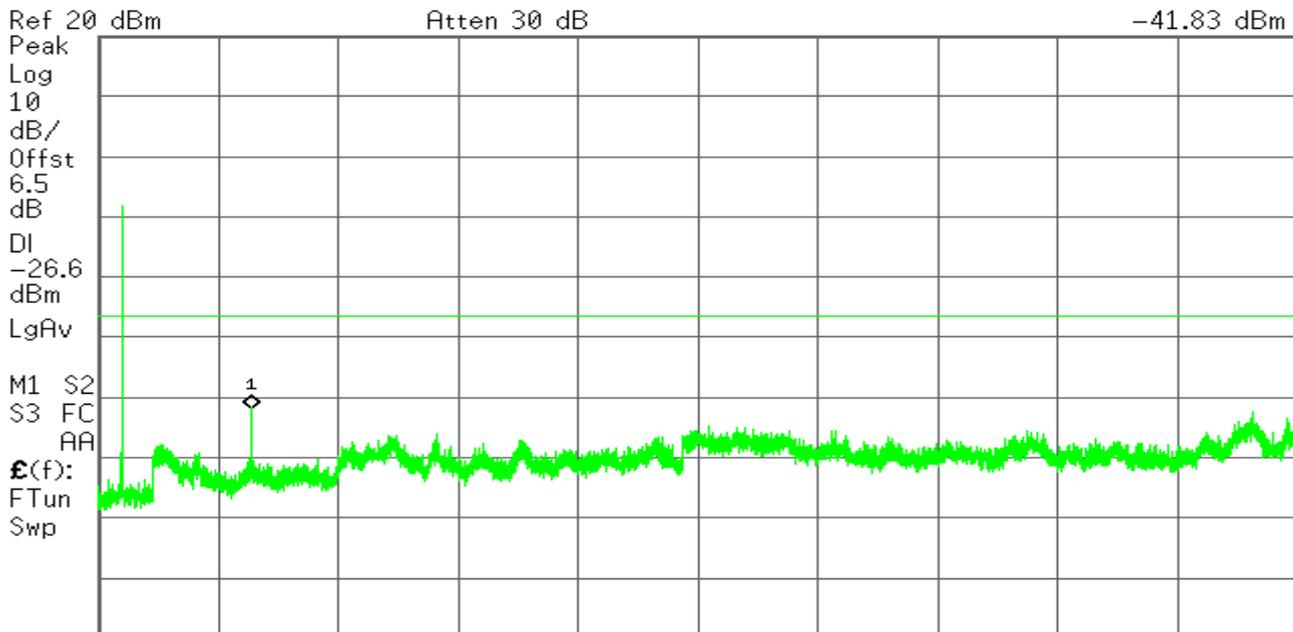

Start 2.000 0 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (8192 pts) Stop 25.000 0 GHz


IEEE 802.11n HT20 mode

CH Low

Agilent

R T

Mkr1 2.407 27 GHz
-9.61 dBm

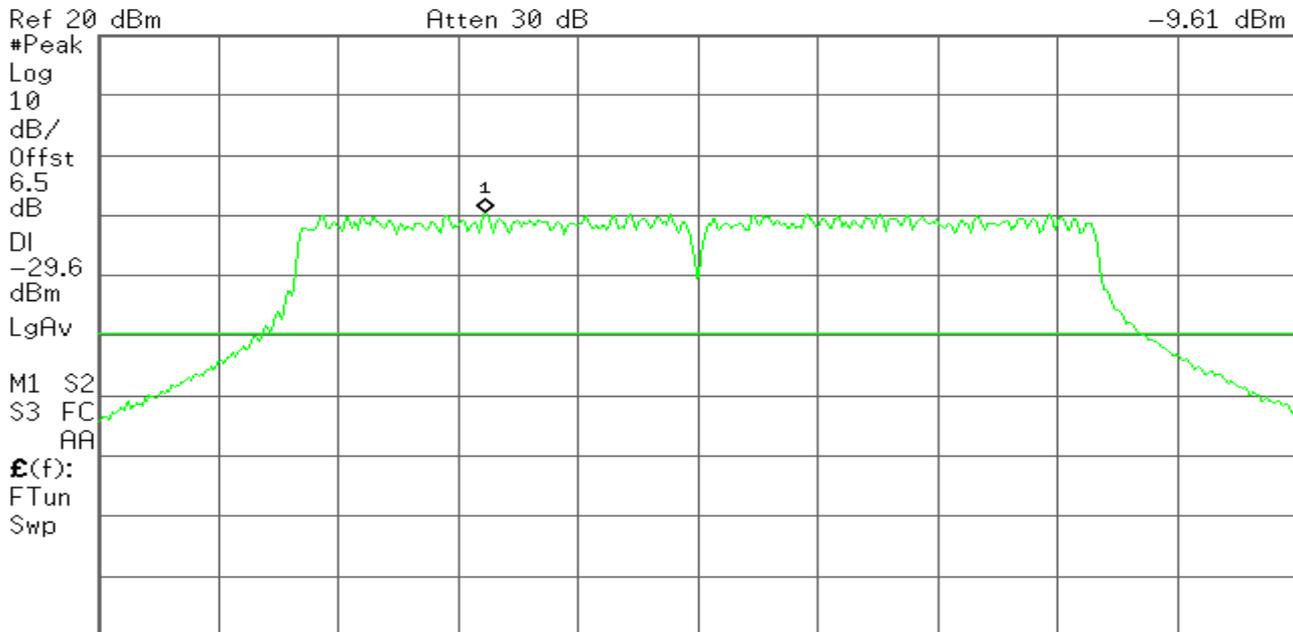

Center 2.412 00 GHz

Span 26.79 MHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 2.56 ms (601 pts)

Agilent

R T

Mkr1 2.400 000 GHz
-39.98 dBm

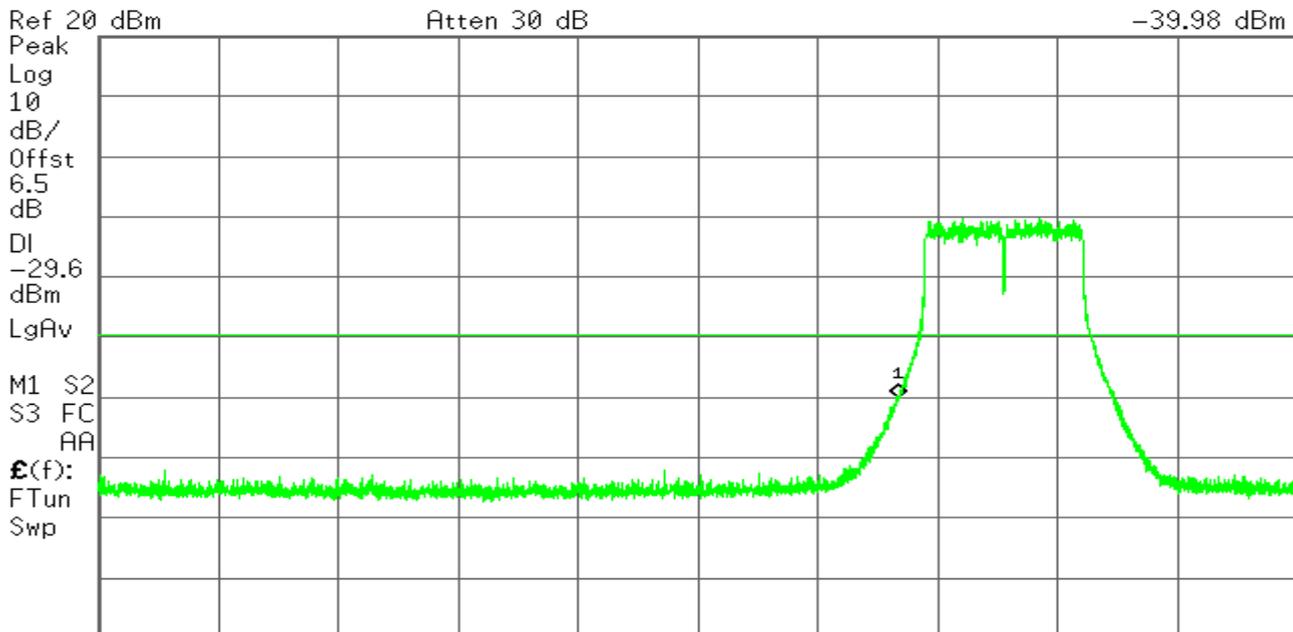

Start 2.310 000 GHz

Stop 2.445 000 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 2.216 4 GHz
-54.13 dBm

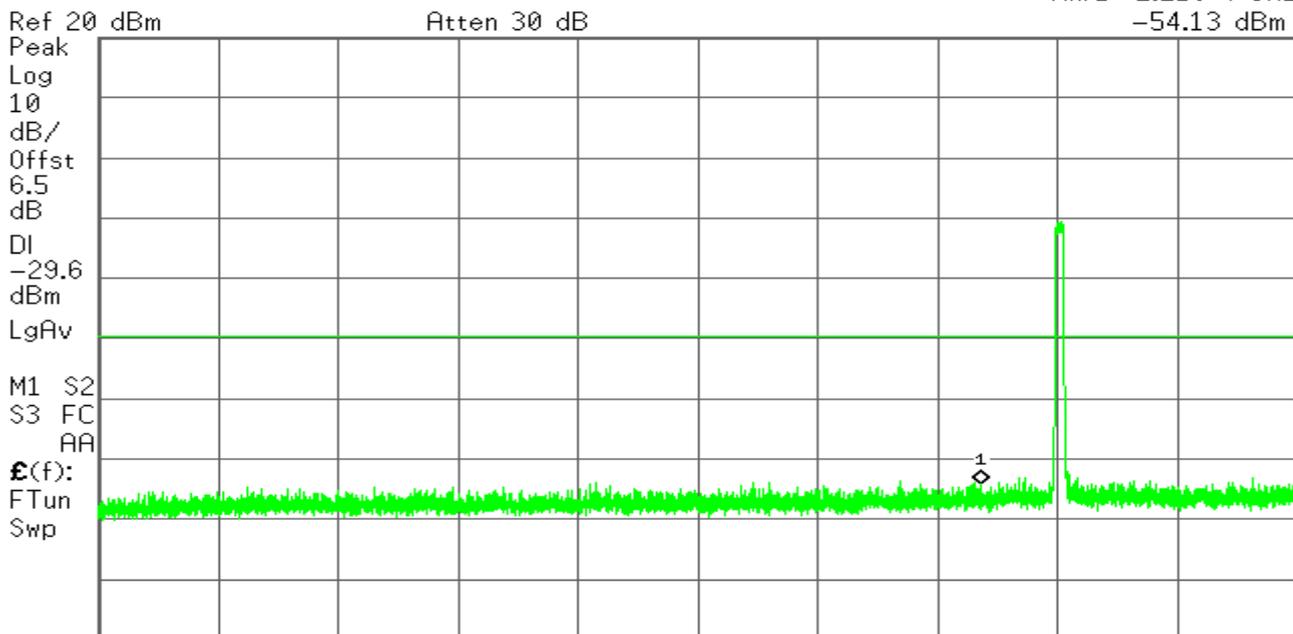

Center 1.515 0 GHz

Span 2.97 GHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 4.824 8 GHz
-41.43 dBm

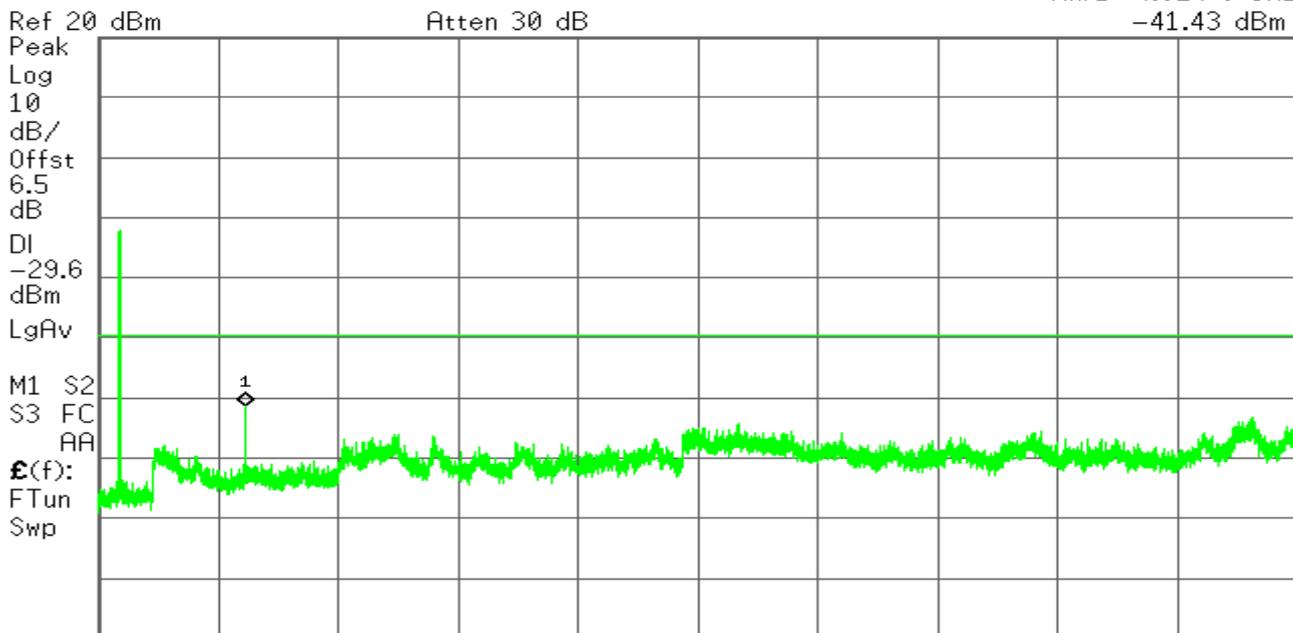

Start 2.000 0 GHz

Stop 25.000 0 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.198 s (8192 pts)

CH Mid

Agilent


R T

Mkr1 2.432 27 GHz
-9.52 dBm

Ref 20 dBm

Atten 30 dB

#Peak
Log
10
dB/
Offst
6.5
dB
DI
-29.5
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

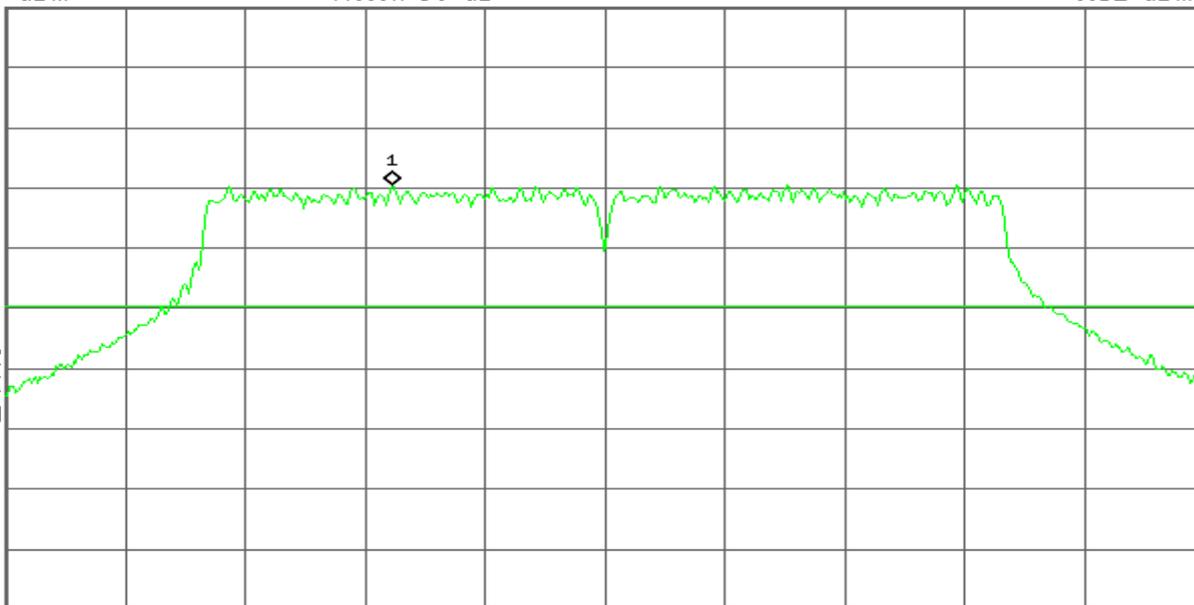

Center 2.437 00 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 26.79 MHz
Sweep 2.56 ms (601 pts)

Agilent


R T

Mkr1 1.733 8 GHz
-54.50 dBm

Ref 20 dBm

Atten 30 dB

Peak
Log
10
dB/
Offst
6.5
dB
DI
-29.5
dBm
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

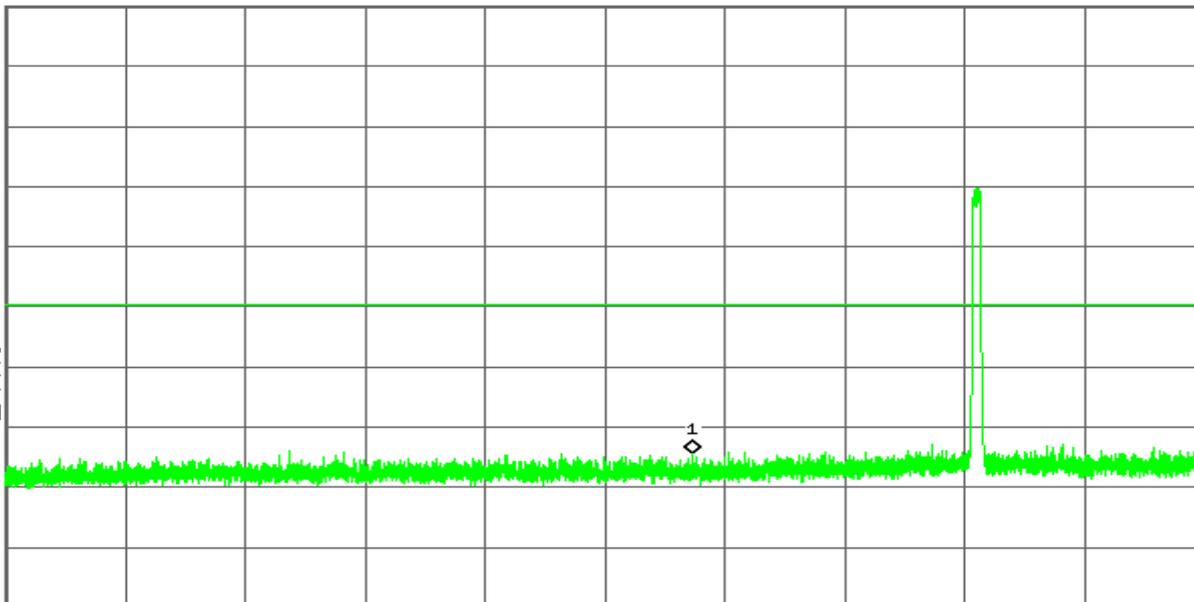

Start 30.0 MHz

#Res BW 100 kHz


#VBW 300 kHz

Stop 3.000 0 GHz
Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 4.875 4 GHz
-41.15 dBm

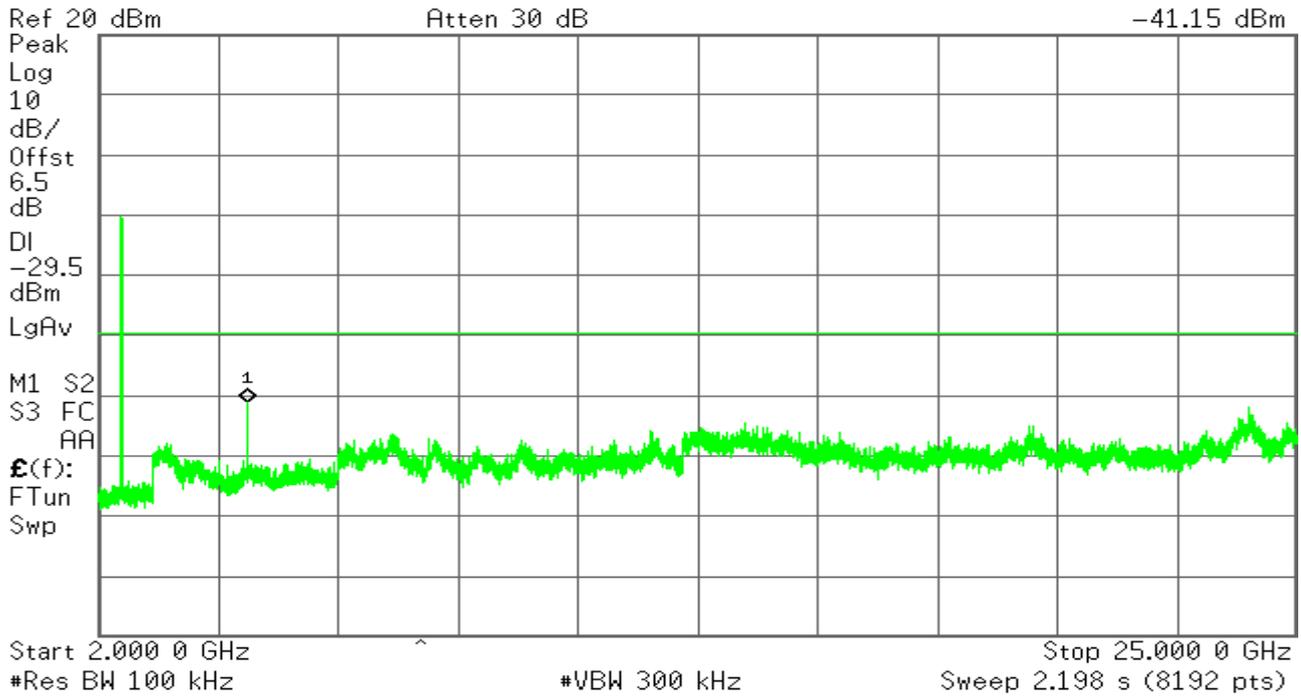


CH High

Agilent

R T


Mkr1 2.466 06 GHz
-9.12 dBm

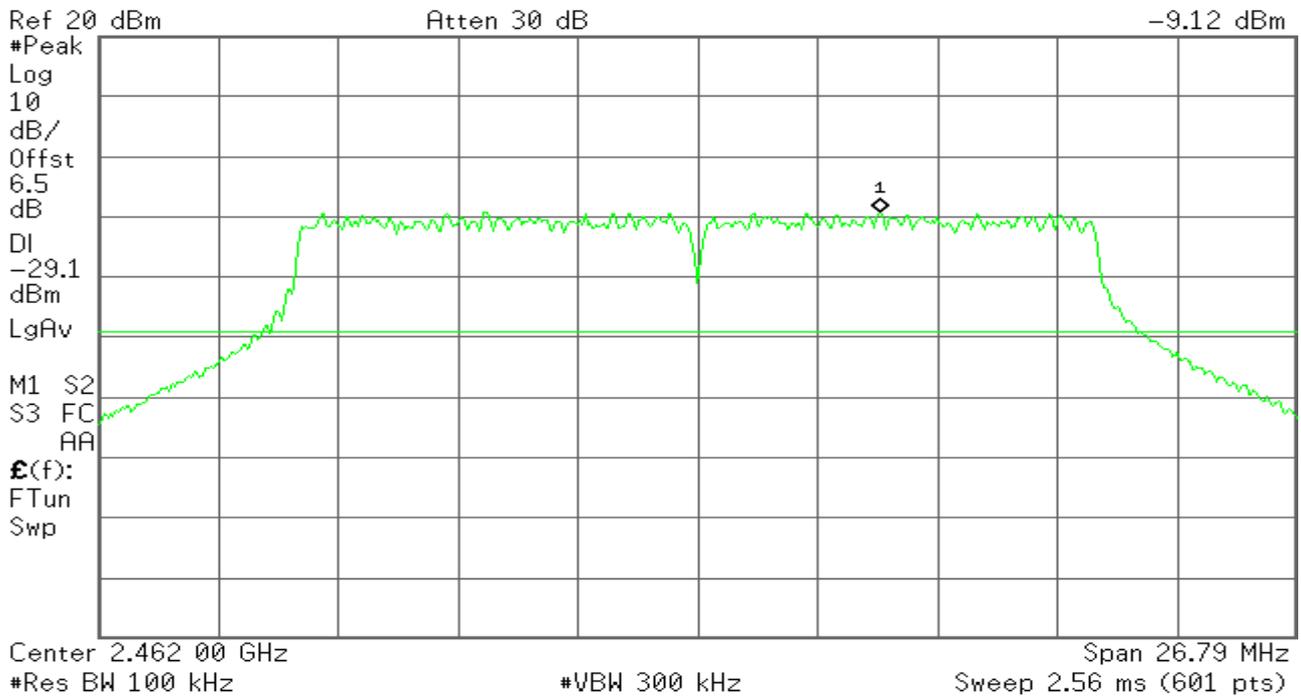

Agilent

R T

Mkr1 4.923 1 GHz
-40.65 dBm

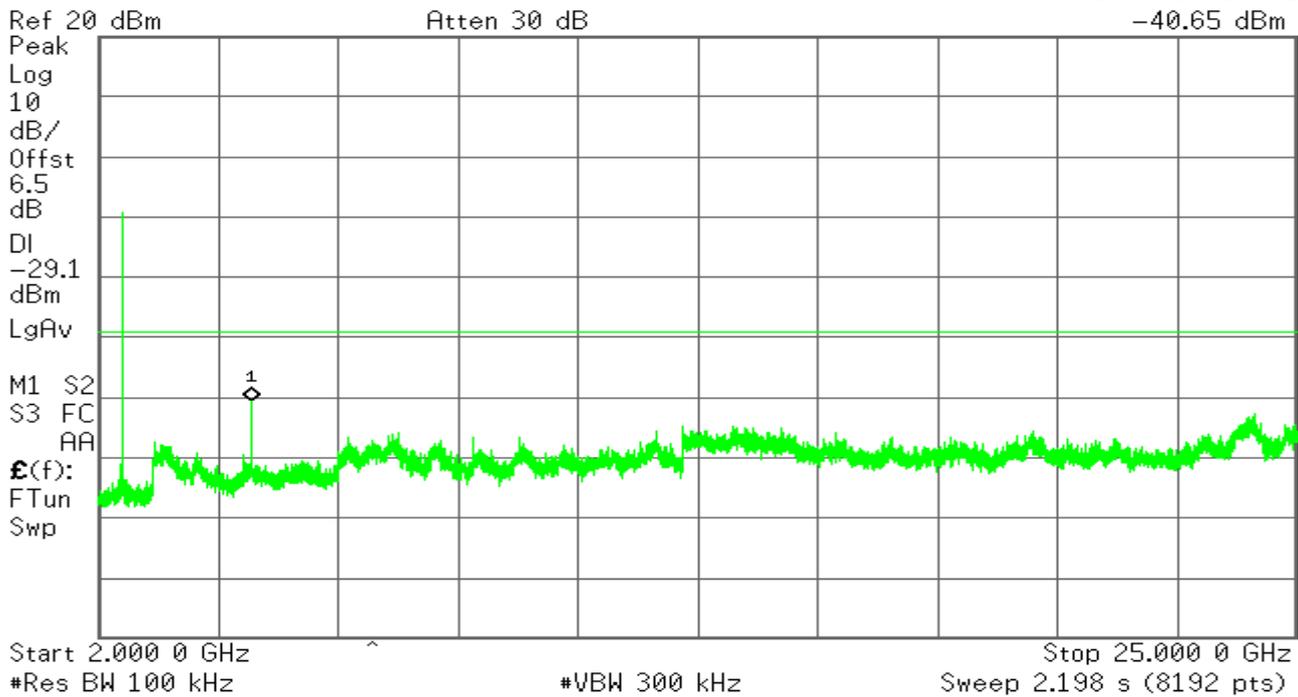


IEEE 802.11n HT40 mode

CH Low

Agilent

R T


Mkr1 2.426 02 GHz
-11.97 dBm

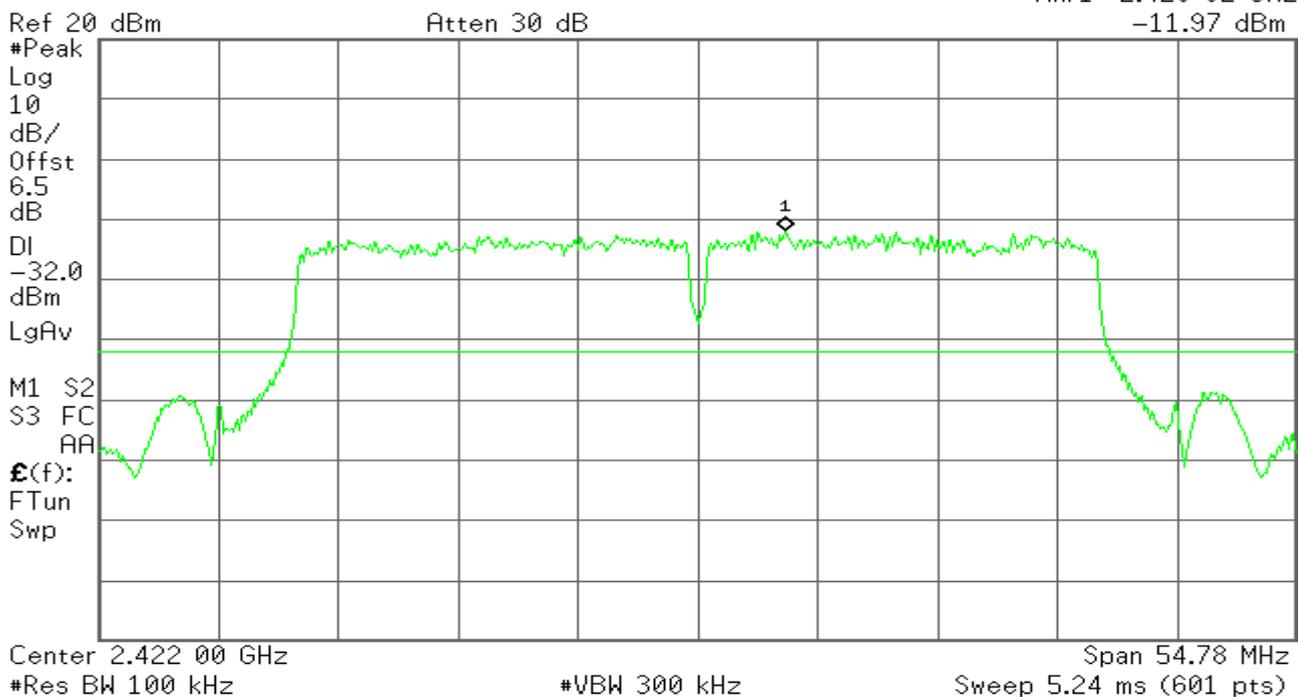

Agilent

R T

Mkr1 2.400 000 GHz
-45.74 dBm

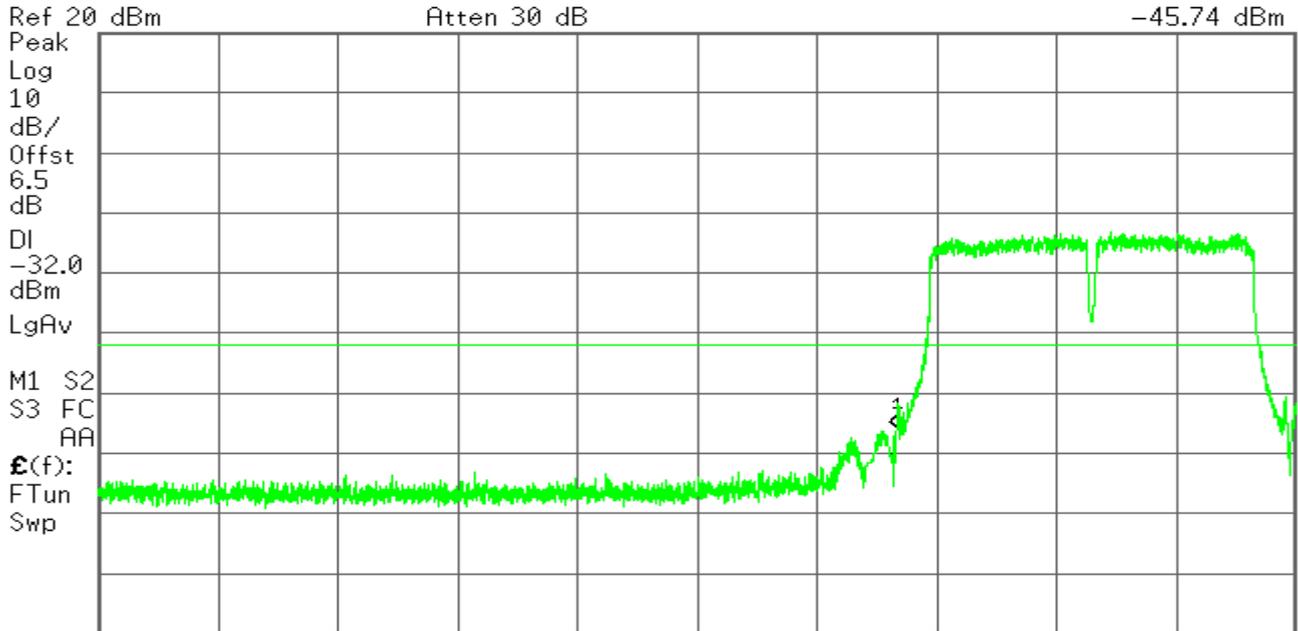


Start 2.310 000 GHz Stop 2.445 000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 13.11 ms (8192 pts)

Agilent

R T

Mkr1 1.593 9 GHz
-53.58 dBm

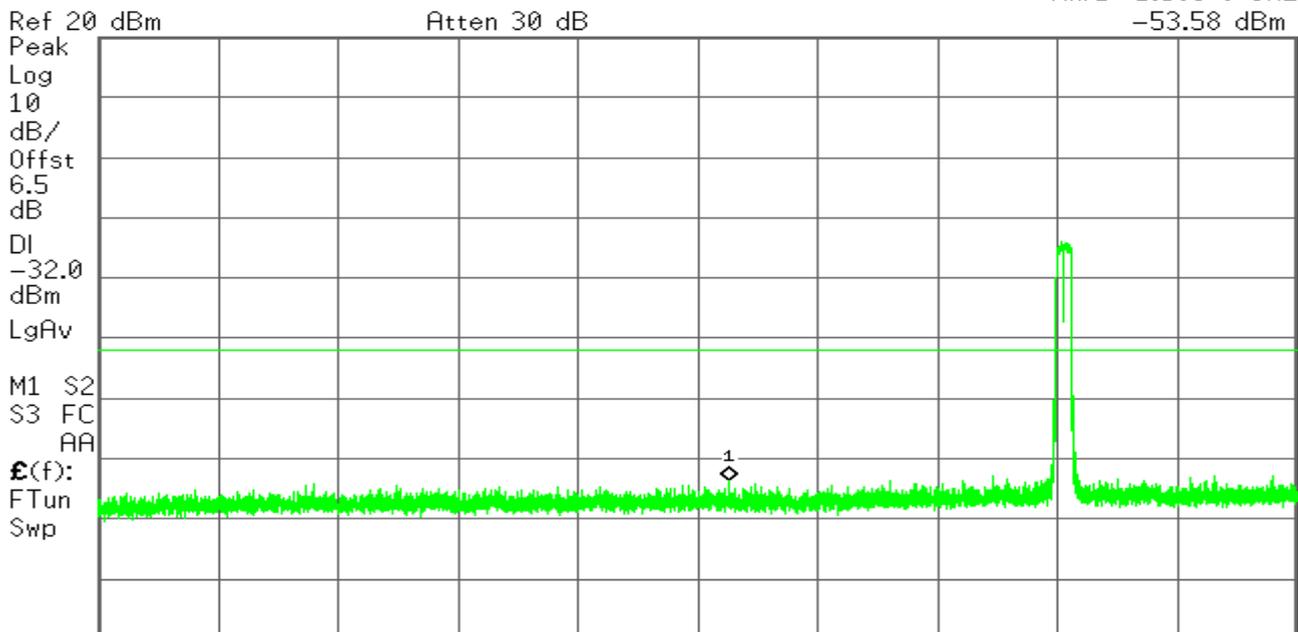


Start 30.0 MHz Stop 3.000 0 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 284 ms (8192 pts)

Agilent

R T

Mkr1 4.844 5 GHz
-42.09 dBm

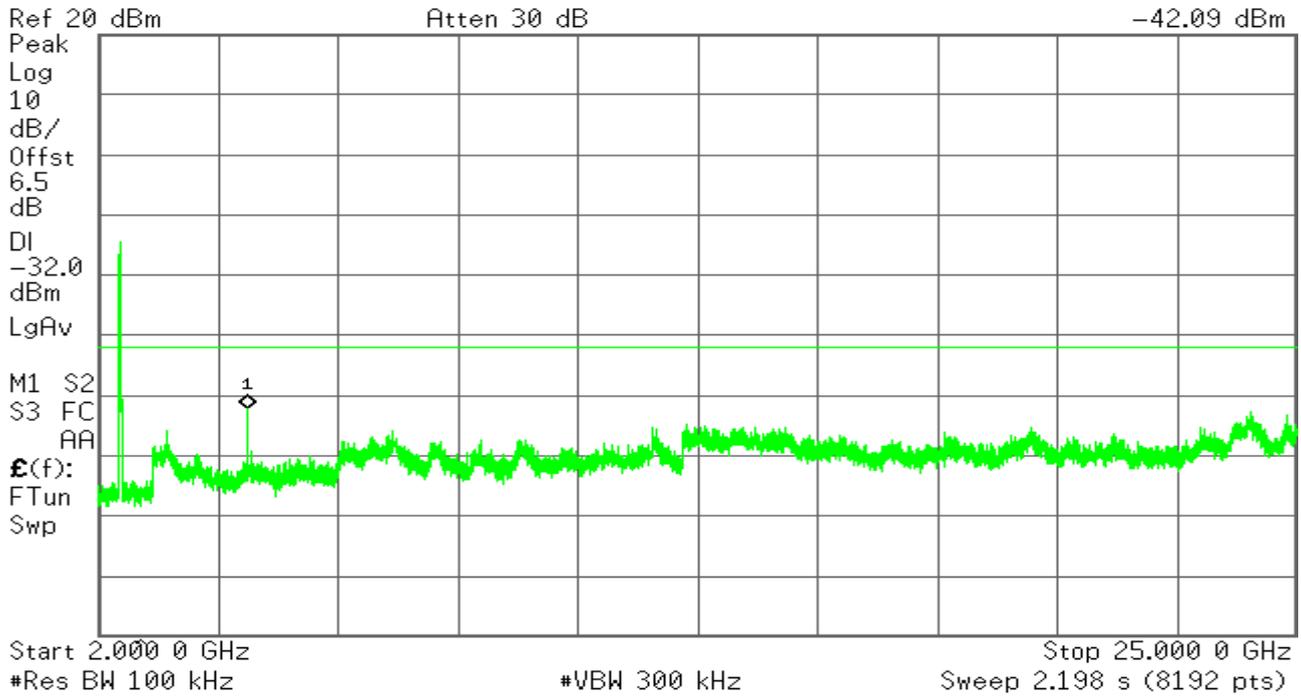


CH Mid

Agilent

R T


Mkr1 2.441 02 GHz
-11.82 dBm

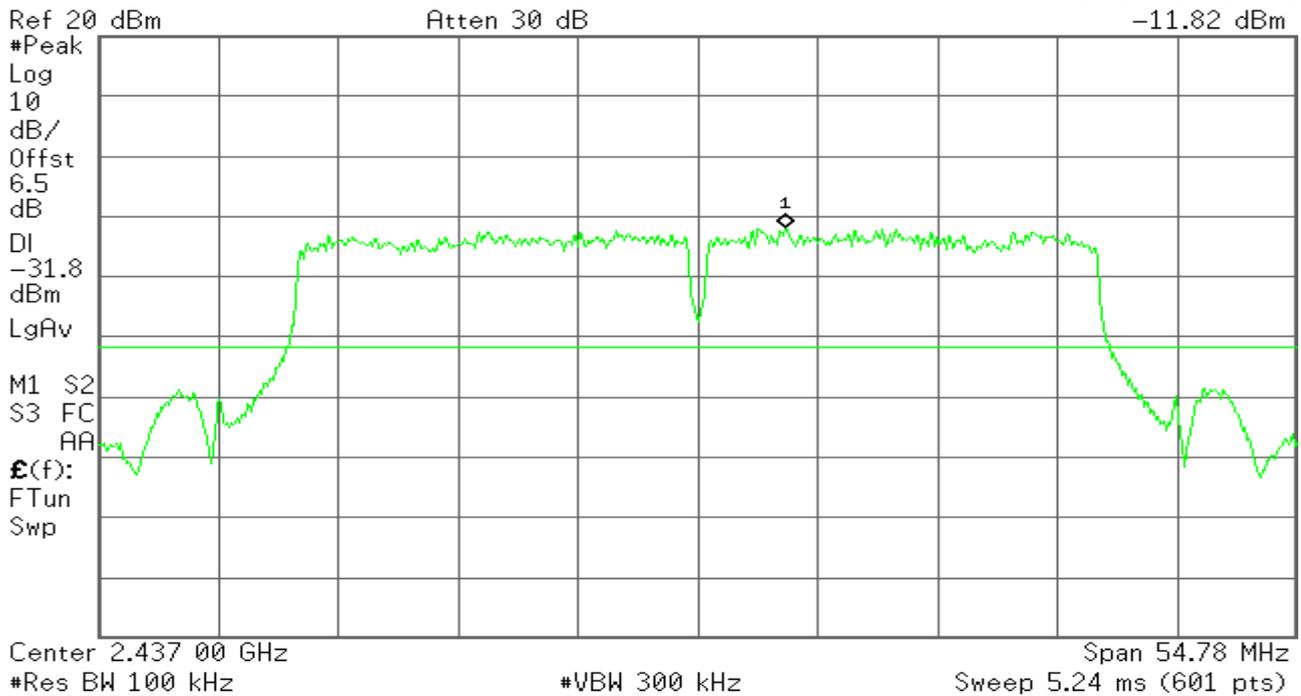

Agilent

R T


Mkr1 2.210 6 GHz
-54.50 dBm

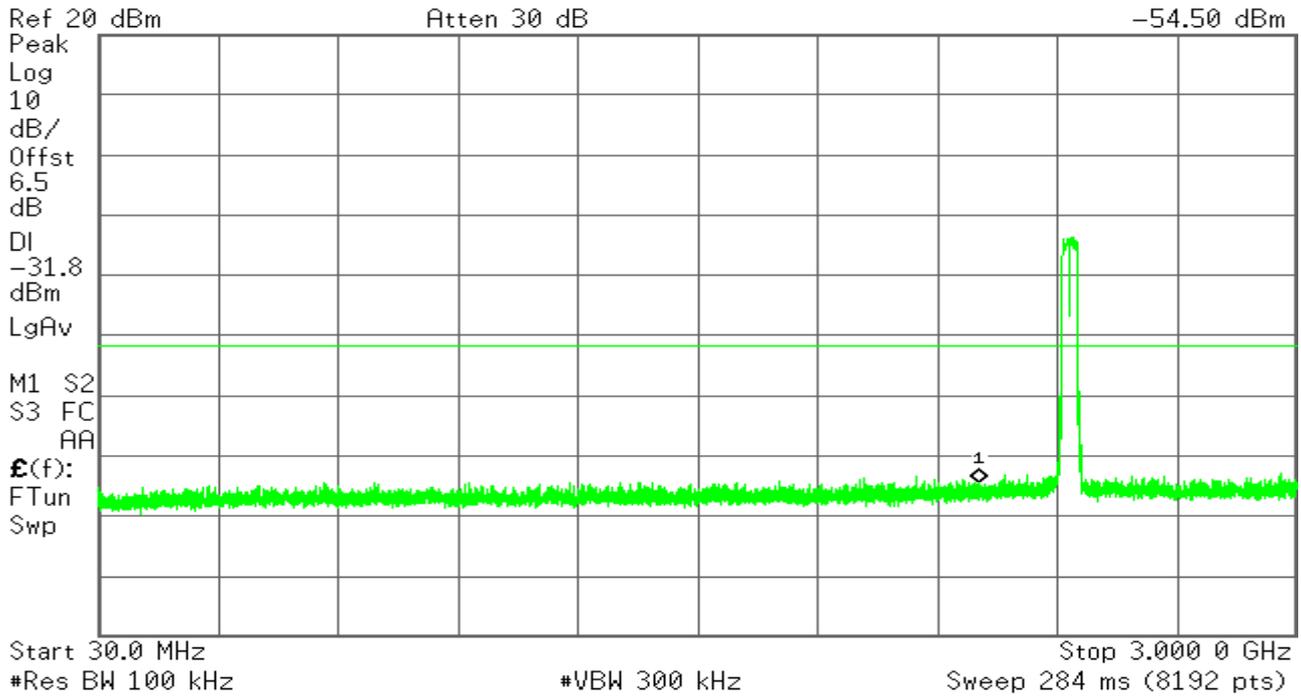

Agilent

R T

Mkr1 4.875 4 GHz
-42.48 dBm

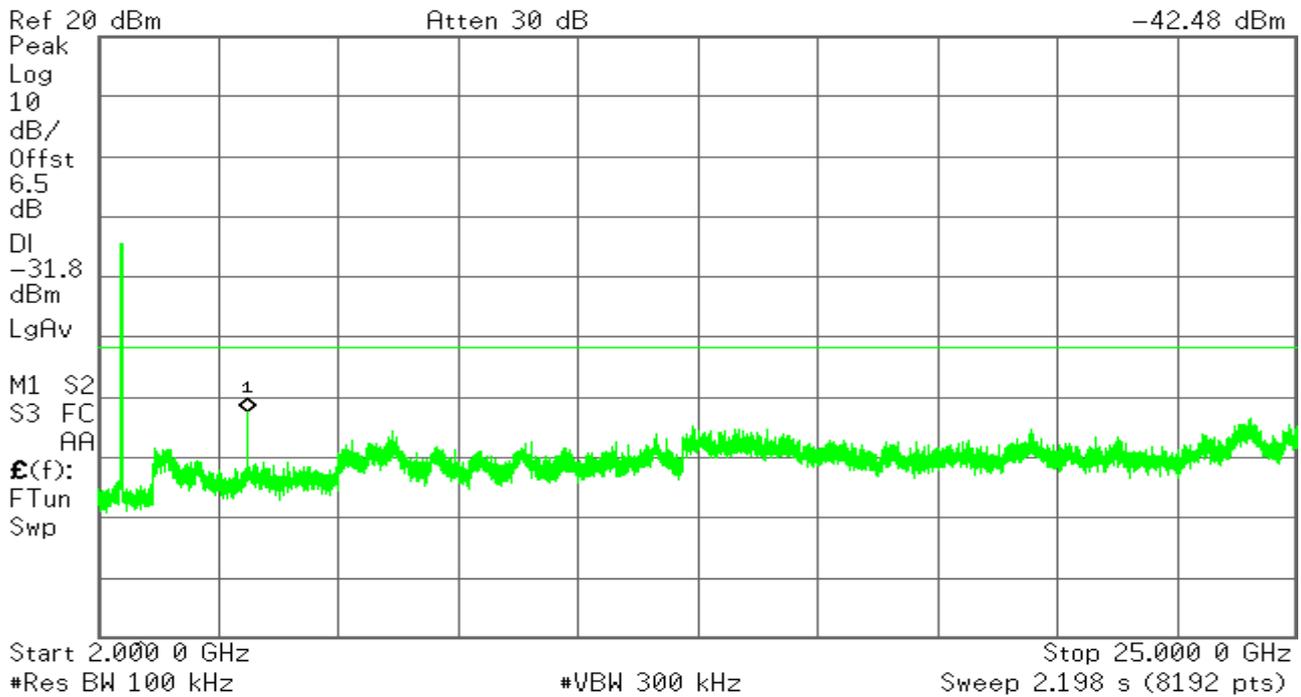


CH High

Agilent

R T

Mkr1 2.456 02 GHz
-11.80 dBm

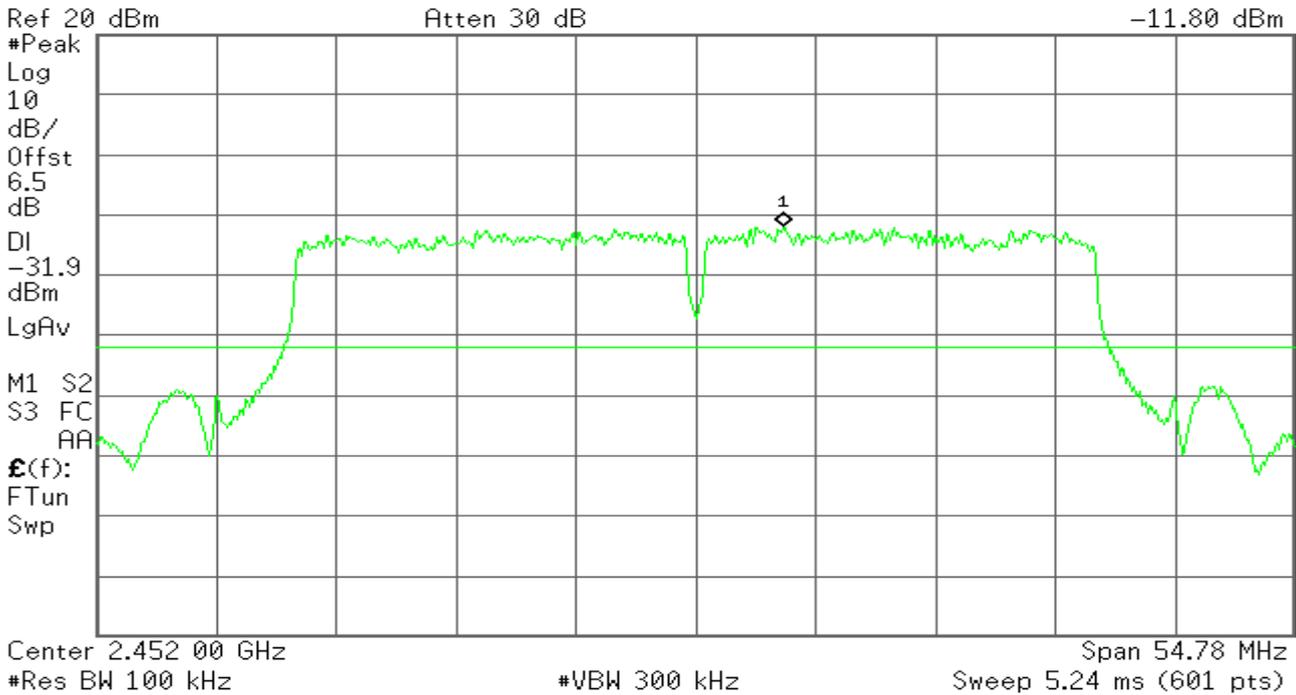

Agilent

R T


Mkr1 2.483 500 GHz
-55.65 dBm



Agilent

R T


Mkr1 1.546 0 GHz
-53.69 dBm

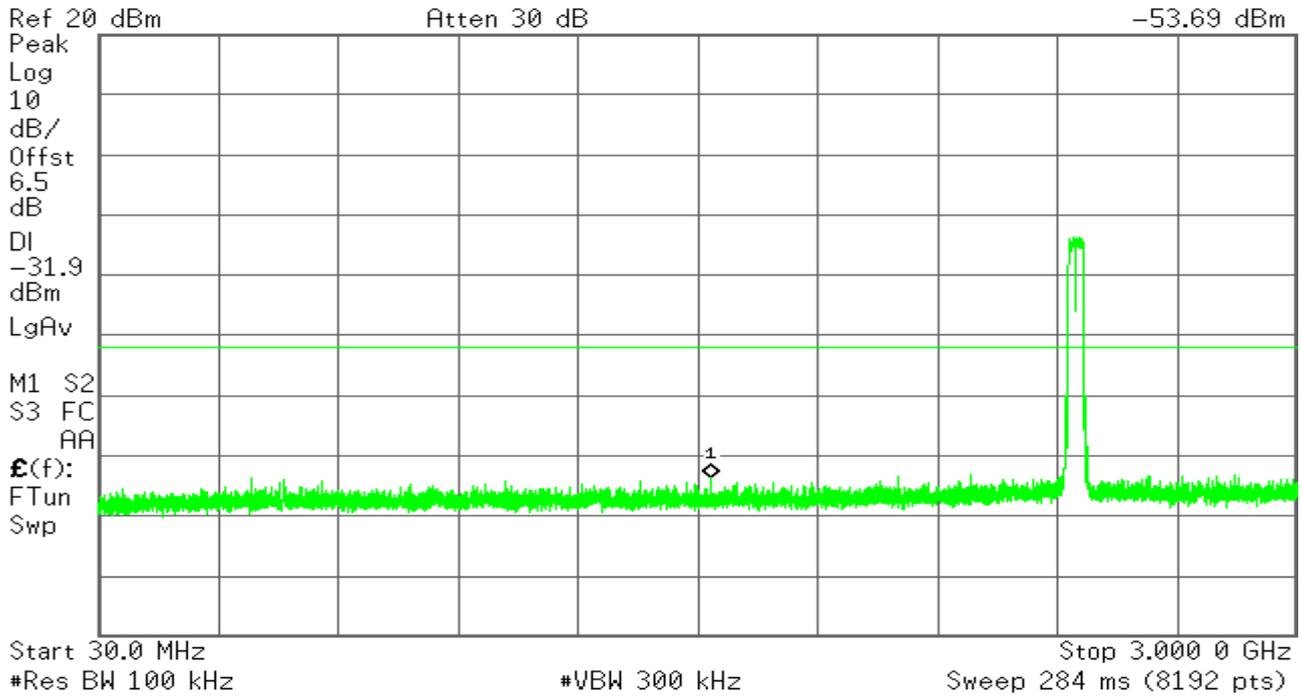

Agilent

R T

Mkr1 4.903 4 GHz
-41.55 dBm

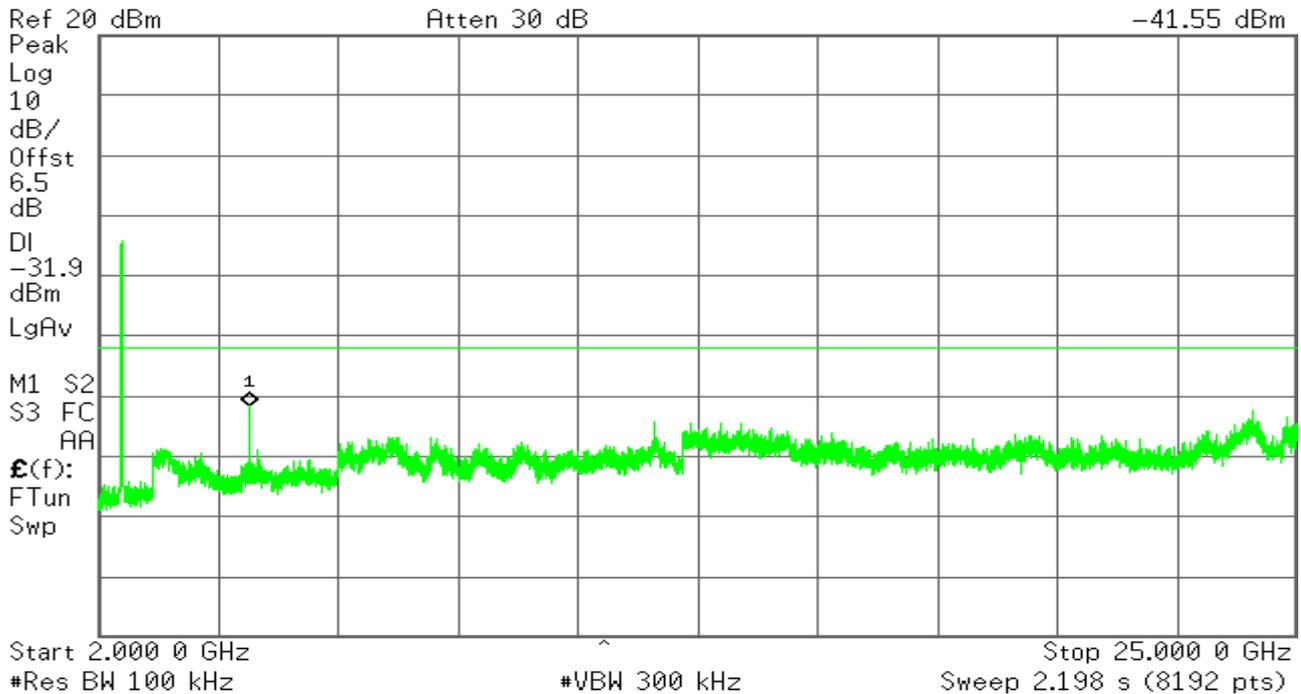

7.5.RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

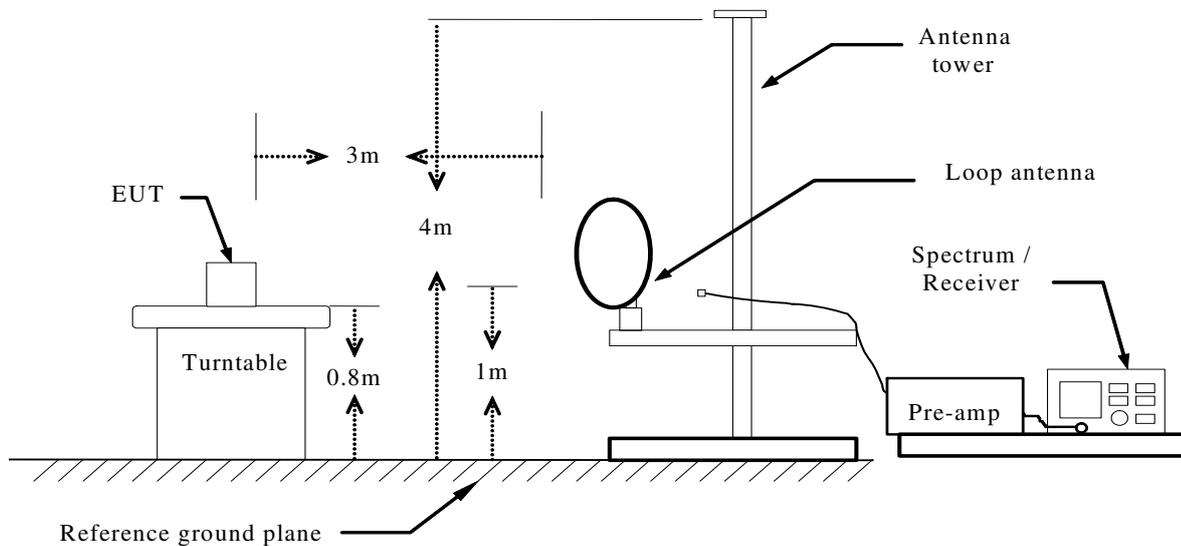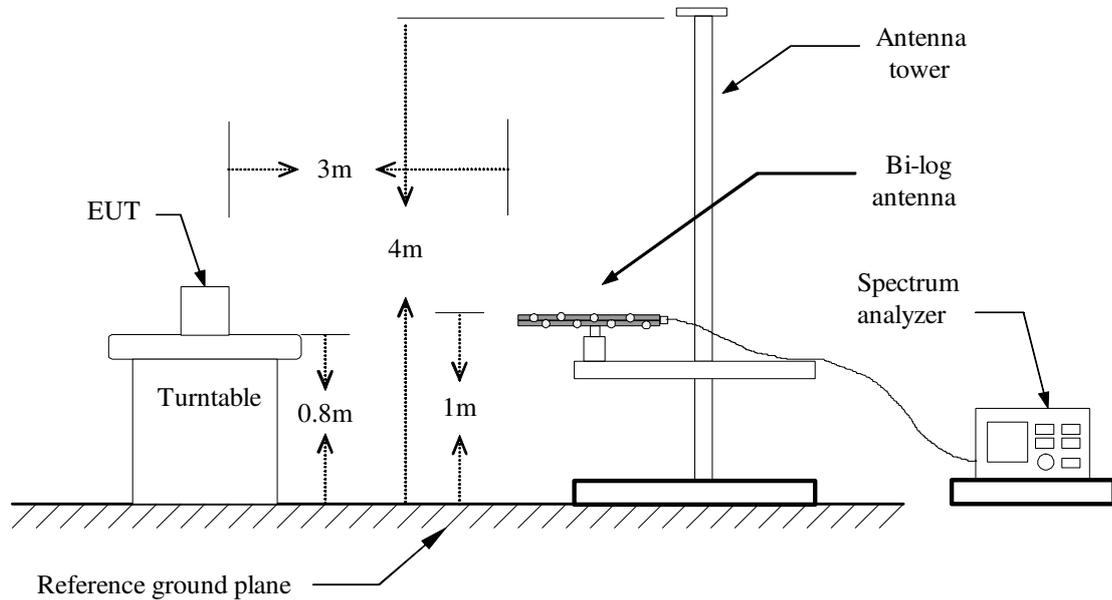Below 30MHz**Below 1 GHz**

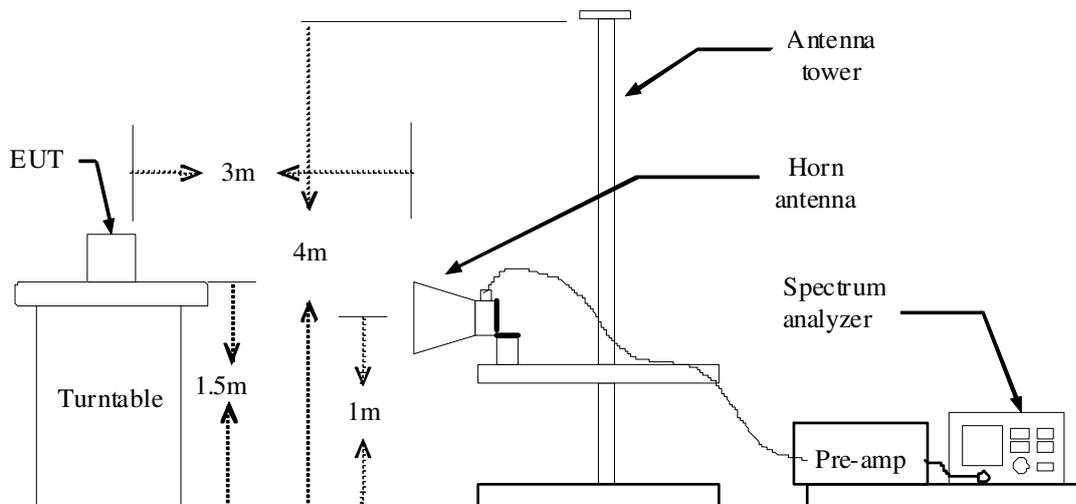Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


PEAK: RBW=VBW=1MHz / Sweep=AUTO, PEAK DETECTOR

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO, PEAK DETECTOR

7. Repeat above procedures until the measurements for all frequencies are complete.


TEST RESULTS

RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)

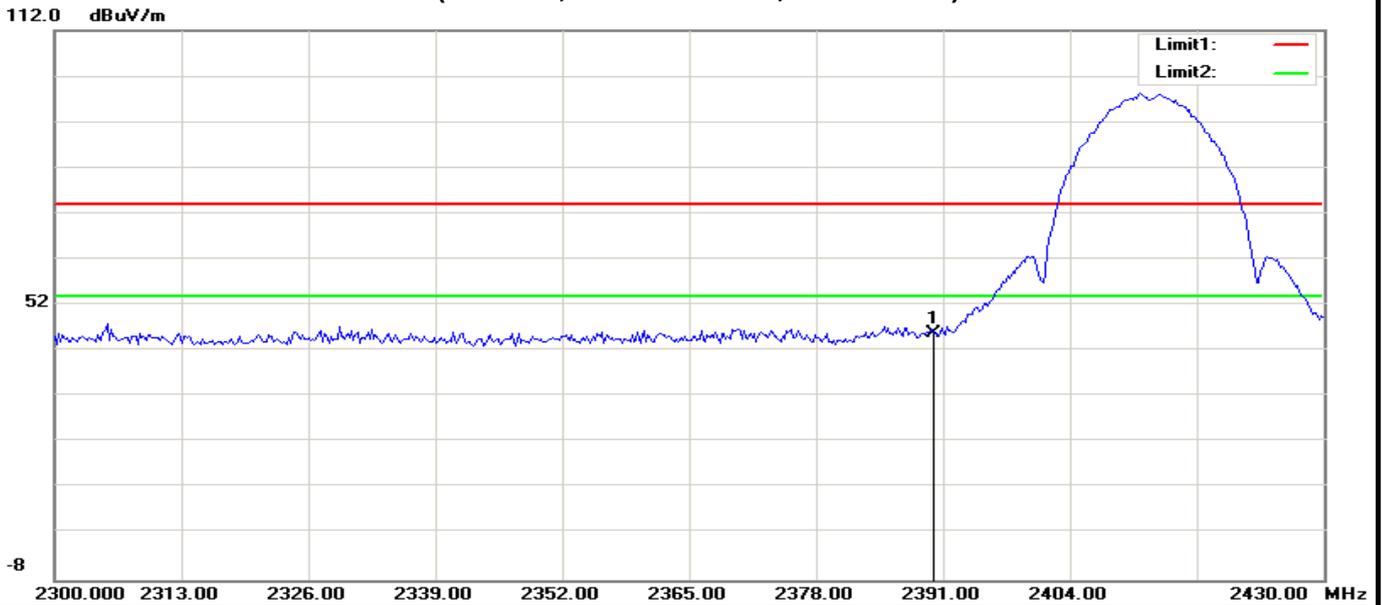


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	49.48	-3.78	45.70	74.00	-28.30	100	341	peak

RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)

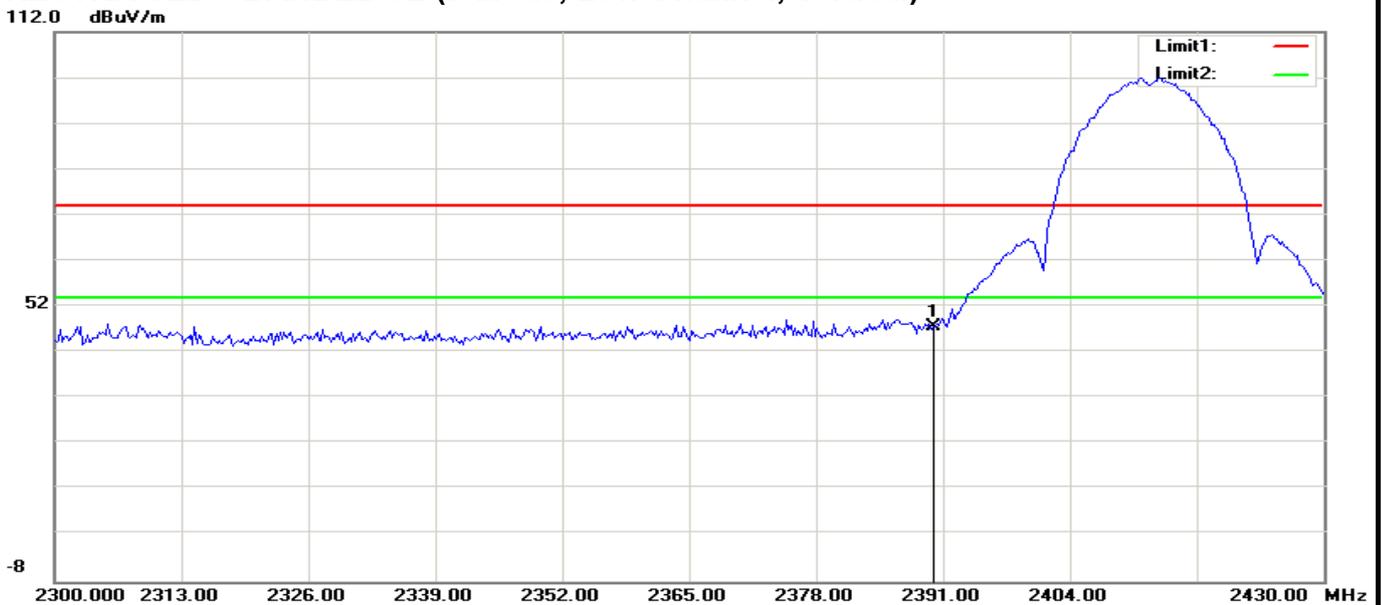


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	51.54	-3.78	47.76	74.00	-26.24	100	270	peak

RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

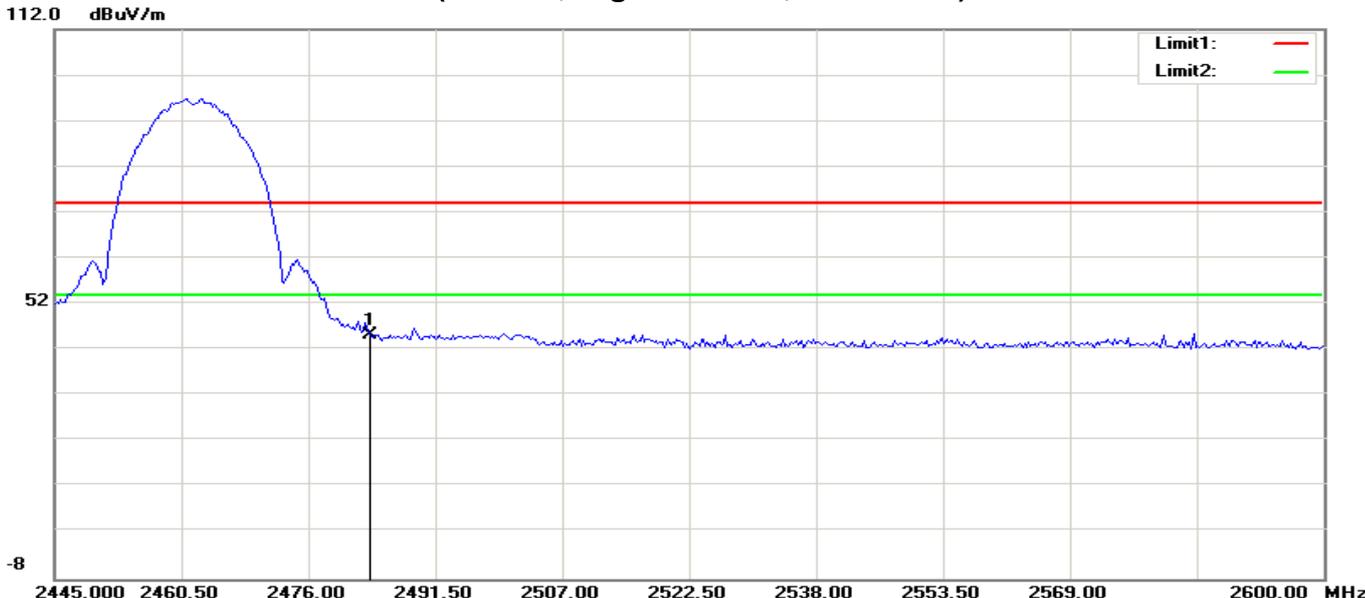

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.87	-3.56	45.31	74.00	-28.69	100	224	peak


RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

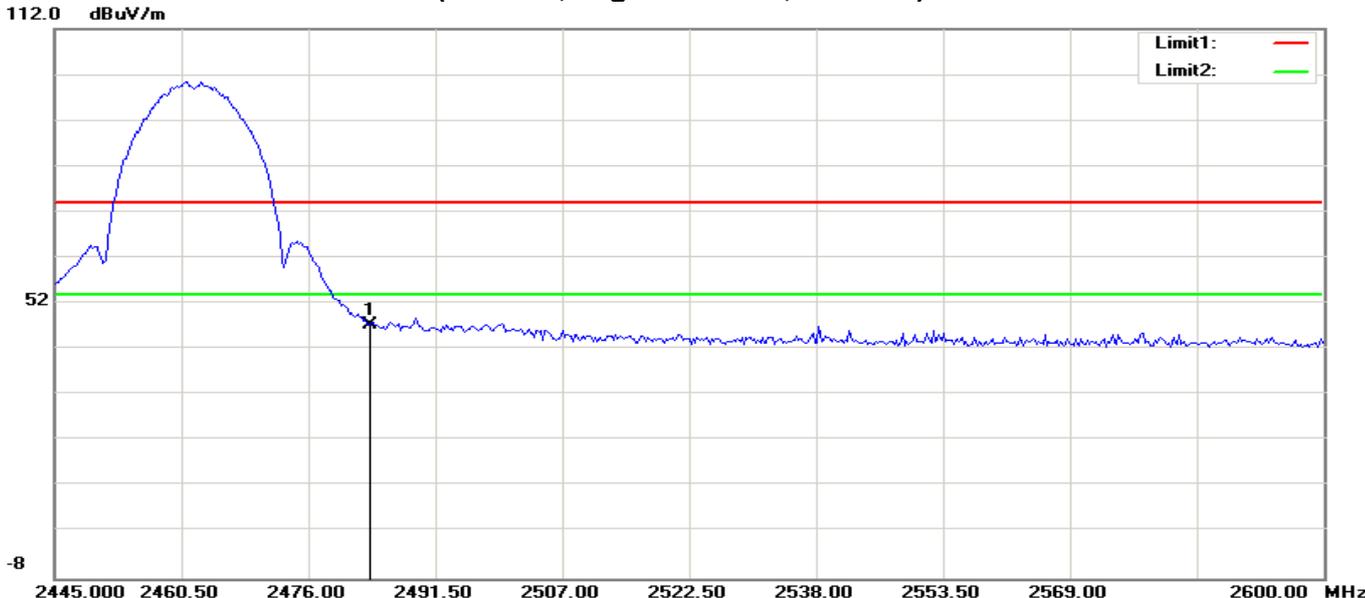

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	50.88	-3.56	47.32	74.00	-26.68	100	275	peak

RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)


112.0 dBuV/m

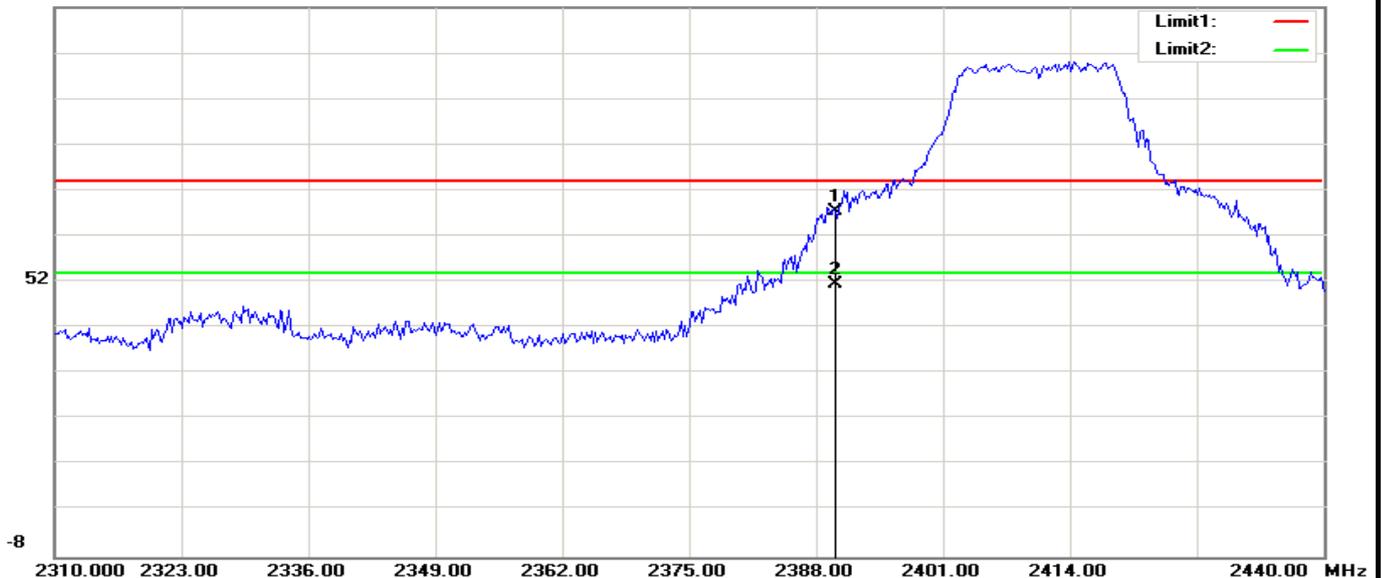

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	71.29	-3.78	67.51	74.00	-6.49	100	91	peak
2	2390.000	55.22	-3.78	51.44	54.00	-2.56	100	91	AVG


RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)

112.0 dBuV/m

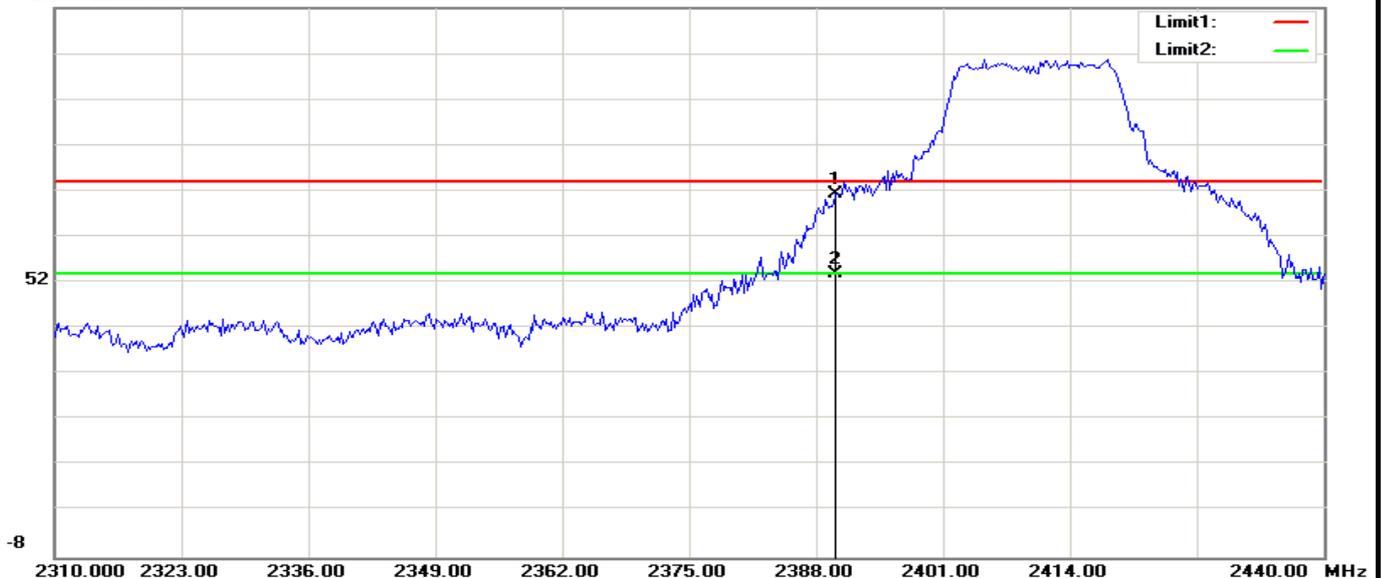


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	75.23	-3.78	71.45	74.00	-2.55	100	102	peak
2	2390.000	57.70	-3.78	53.92	54.00	-0.08	100	102	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)

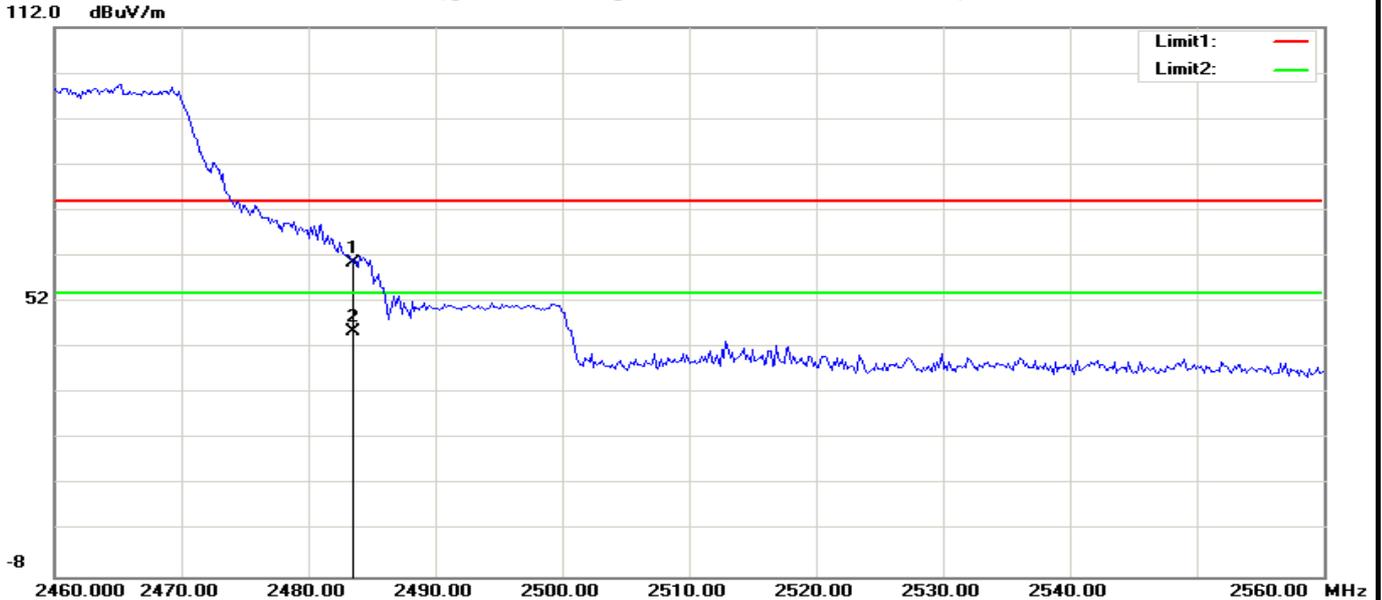


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	64.08	-3.56	60.52	74.00	-13.48	100	89	peak
2	2483.500	49.05	-3.56	45.49	54.00	-8.51	100	89	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

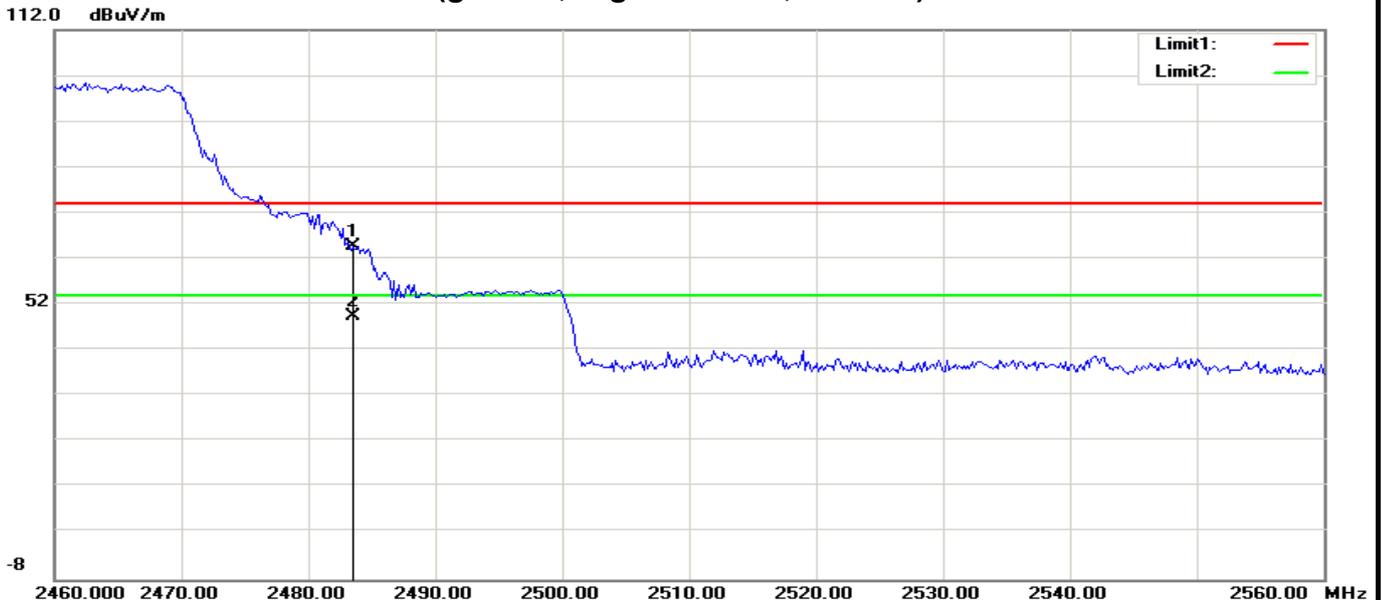


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	68.45	-3.56	64.89	74.00	-9.11	100	104	peak
2	2483.500	53.07	-3.56	49.51	54.00	-4.49	100	104	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)

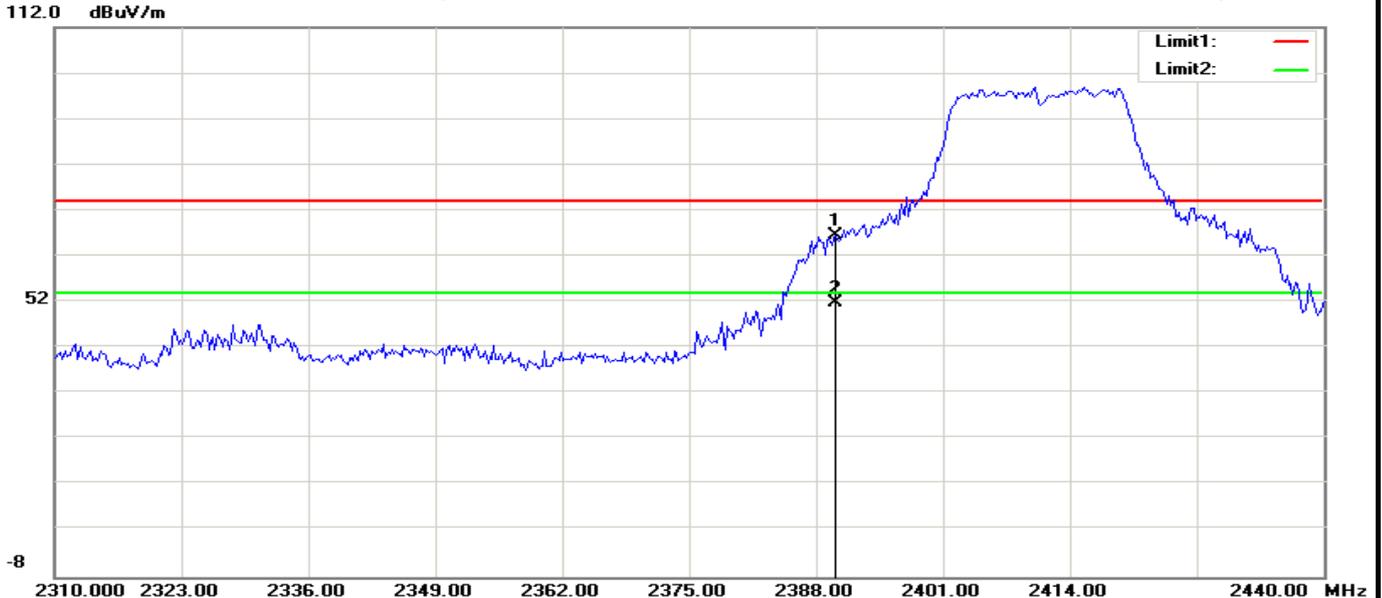


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	70.31	-3.78	66.53	74.00	-7.47	100	205	peak
2	2390.000	55.53	-3.78	51.75	54.00	-2.25	100	205	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)

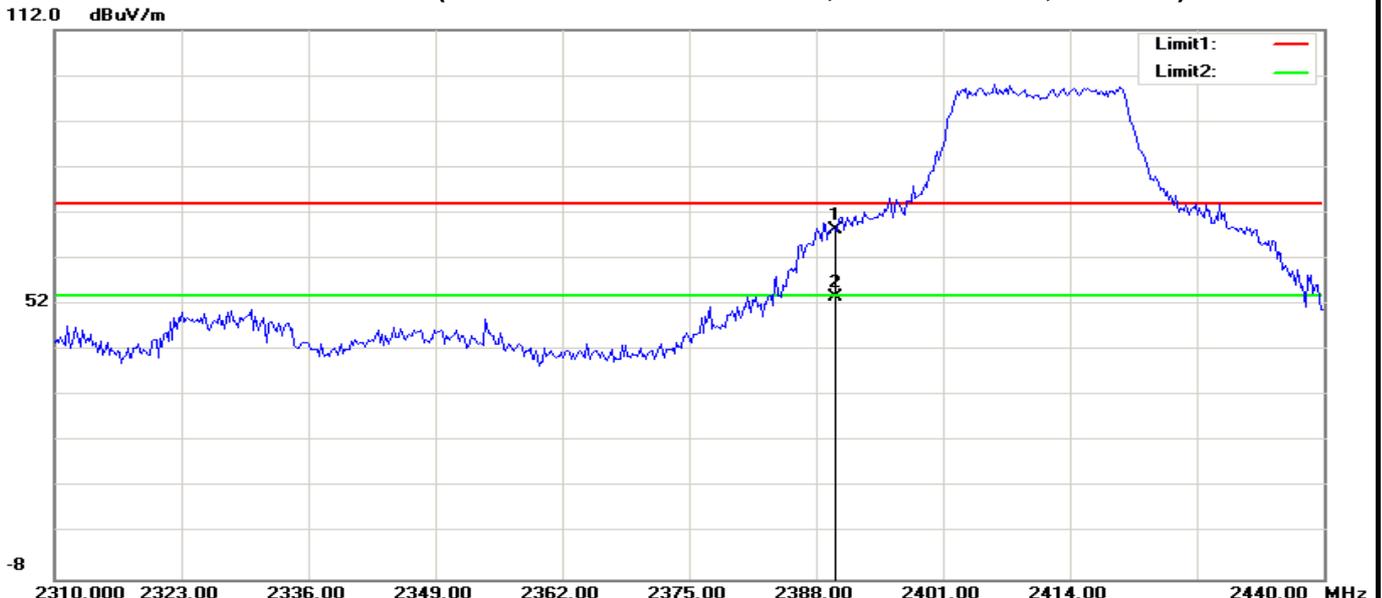


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	72.16	-3.78	68.38	74.00	-5.62	100	119	peak
2	2390.000	57.37	-3.78	53.59	54.00	-0.41	100	119	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)

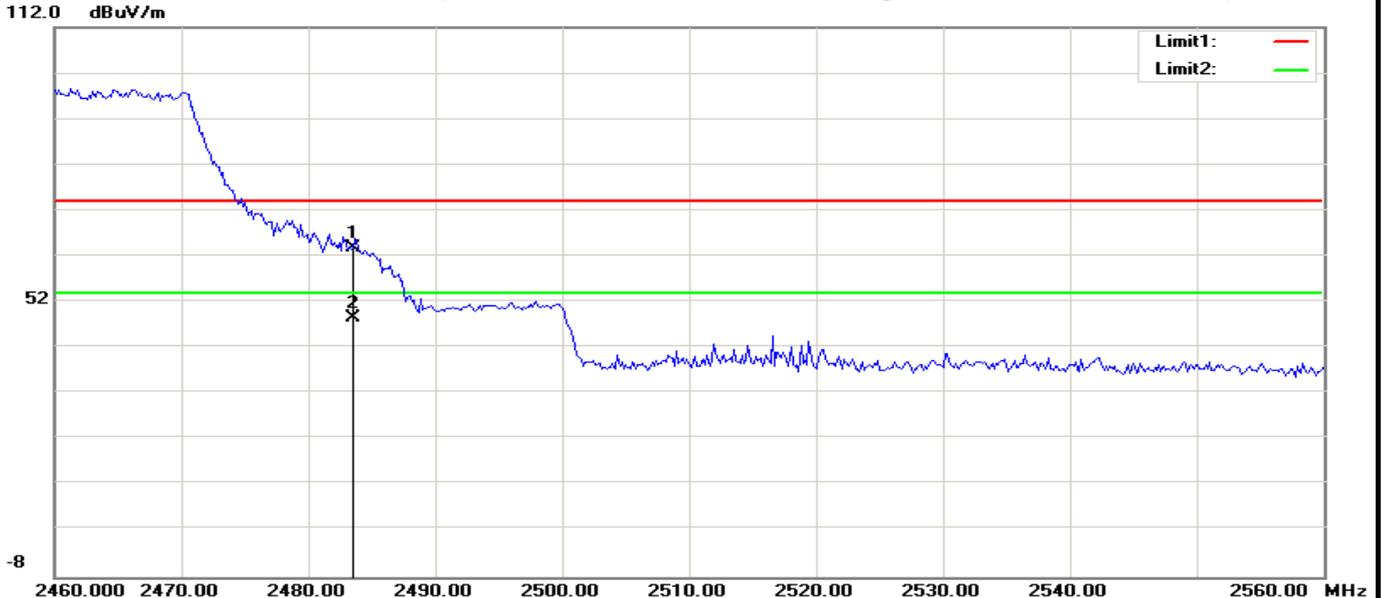

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	67.51	-3.56	63.95	74.00	-10.05	100	85	peak
2	2483.500	52.21	-3.56	48.65	54.00	-5.35	100	85	AVG


RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)

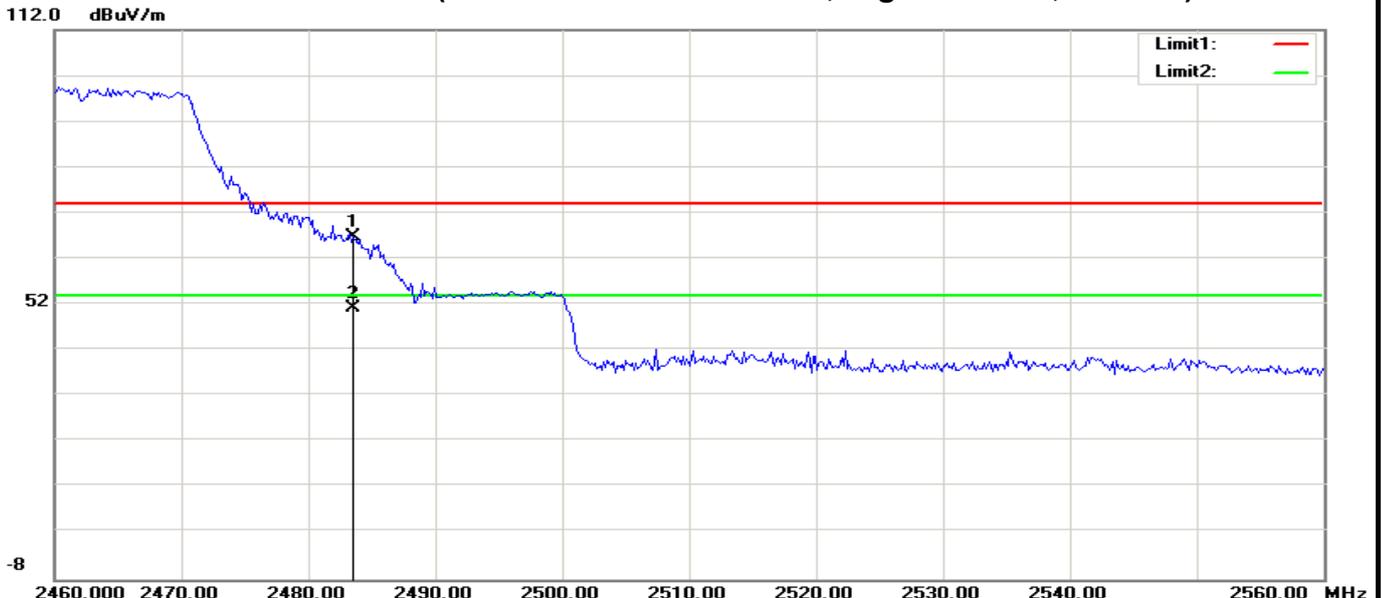

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	70.33	-3.56	66.77	74.00	-7.23	100	344	peak
2	2483.500	54.72	-3.56	51.16	54.00	-2.84	100	344	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Horizontal)

112.0 dBuV/m

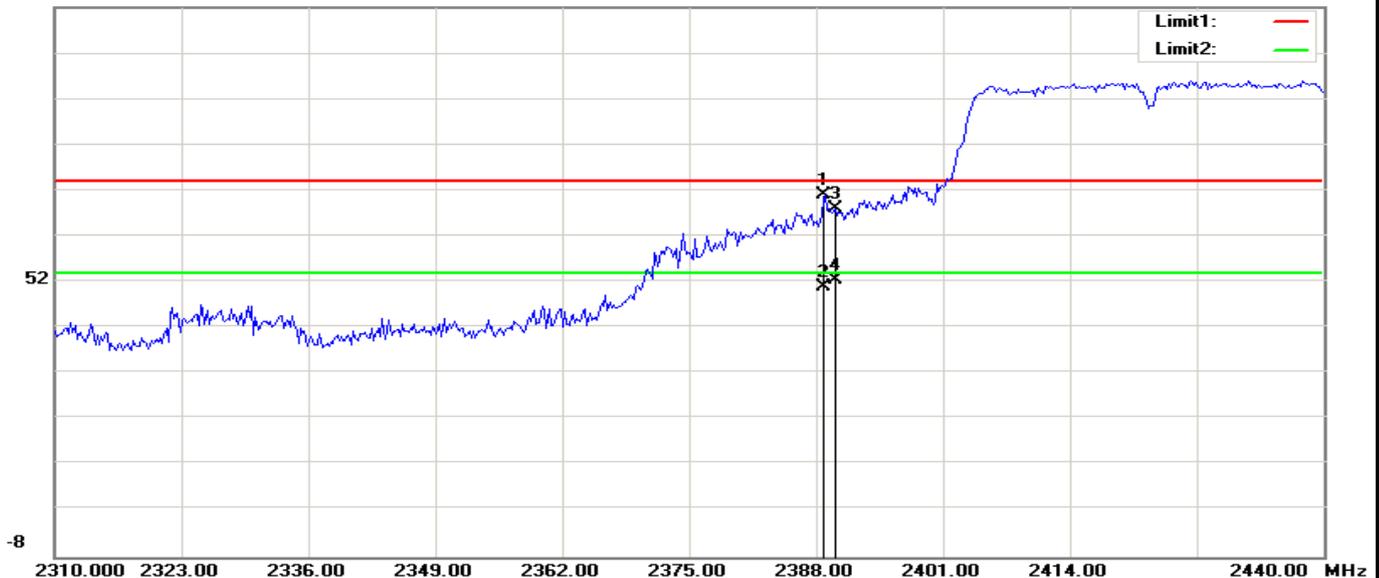

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2388.830	74.78	-3.78	71.00	74.00	-3.00	100	92	peak
2	2388.830	54.82	-3.78	51.04	54.00	-2.96	100	92	AVG
3	2390.000	71.93	-3.78	68.15	74.00	-5.85	100	81	peak
4	2390.000	56.19	-3.78	52.41	54.00	-1.59	100	81	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Vertical)

112.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.27	-3.78	64.49	74.00	-9.51	100	116	peak
2	2390.000	56.79	-3.78	53.01	54.00	-0.99	100	116	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Horizontal)

112.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	65.33	-3.56	61.77	74.00	-12.23	100	256	peak
2	2483.500	53.60	-3.56	50.04	54.00	-3.96	100	256	AVG
3	2485.256	66.87	-3.56	63.31	74.00	-10.69	100	90	peak
4	2485.256	46.10	-3.56	42.54	54.00	-11.46	100	90	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Vertical)

112.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	67.46	-3.56	63.90	74.00	-10.10	100	98	peak
2	2483.500	56.01	-3.56	52.45	54.00	-1.55	100	98	AVG
3	2488.077	68.86	-3.55	65.31	74.00	-8.69	100	141	peak
4	2488.077	46.98	-3.55	43.43	54.00	-10.57	100	141	AVG

Below 1GHz

Operation Mode: Keeping TX

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.0000	V	15.72	19.61	35.33	40.00	-4.67	Peak
139.6100	V	18.72	13.85	32.57	43.50	-10.93	Peak
243.4000	V	21.78	12.92	34.70	46.00	-11.30	Peak
278.3200	V	22.10	14.35	36.45	46.00	-9.55	Peak
385.0200	V	19.52	18.90	38.42	46.00	-7.58	Peak
419.9400	V	17.05	19.05	36.10	46.00	-9.90	Peak
174.5300	H	20.31	12.81	33.12	43.50	-10.38	Peak
209.4500	H	23.55	12.04	35.59	43.50	-7.91	Peak
243.4000	H	26.99	12.92	39.91	46.00	-6.09	Peak
278.3200	H	26.86	14.35	41.21	46.00	-4.79	Peak
385.0200	H	18.09	18.90	36.99	46.00	-9.01	Peak
697.3600	H	15.18	24.09	39.27	46.00	-6.73	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MH).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	47.26	3.72	50.98	74.00	-23.02	100	157	peak
2	7456.731	42.27	9.82	52.09	74.00	-21.91	100	240	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	48.63	3.72	52.35	74.00	-21.65	100	253	peak
2	7483.974	42.95	9.89	52.84	74.00	-21.16	100	144	peak
N/A									

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	45.56	4.38	49.94	74.00	-24.06	100	286	peak
2	7129.808	43.04	9.01	52.05	74.00	-21.95	100	95	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	45.29	3.94	49.23	74.00	-24.77	100	294	peak
2	7429.487	40.90	9.76	50.66	74.00	-23.34	100	260	peak
N/A									



Compliance Certification Services Inc.

Date of Issue :January 6, 2016

Report No: C151023R01-RPW

FCC ID: PANCL8723BU

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4841.346	43.43	3.83	47.26	74.00	-26.74	100	118	peak
2	7293.269	42.01	9.42	51.43	74.00	-22.57	100	273	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	46.65	4.48	51.13	74.00	-22.87	100	21	peak
2	7102.564	43.27	8.94	52.21	74.00	-21.79	100	101	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4786.859	44.85	3.61	48.46	74.00	-25.54	100	354	peak
2	7157.051	42.07	9.08	51.15	74.00	-22.85	100	273	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	44.04	4.48	48.52	74.00	-25.48	100	256	peak
2	7483.974	43.81	9.89	53.70	74.00	-20.30	100	167	peak
N/A									



Compliance Certification Services Inc.

Date of Issue : January 6, 2016

Report No: C151023R01-RPW

FCC ID: PANCL8723BU

Operation Mode: TX / IEEE 802.11g / CH Mid
Temperature: 24°C
Humidity: 48 % RH

Test Date: 2015-10-30
Tested by: James.Yan
Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4950.320	42.54	4.27	46.81	74.00	-27.19	100	158	peak
2	7184.295	42.79	9.15	51.94	74.00	-22.06	100	137	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	47.28	4.38	51.66	74.00	-22.34	100	255	peak
2	7293.269	40.81	9.42	50.23	74.00	-23.77	100	178	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH High
Temperature: 24°C
Humidity: 48 % RH

Test Date: 2015-10-30
Tested by: James.Yan
Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	44.98	3.72	48.70	74.00	-25.30	100	186	peak
2	7293.269	42.31	9.42	51.73	74.00	-22.27	100	119	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	45.92	4.38	50.30	74.00	-23.70	100	329	peak
2	7483.974	41.59	9.89	51.48	74.00	-22.52	100	141	peak
N/A									



Compliance Certification Services Inc.

Date of Issue :January 6, 2016

Report No: C151023R01-RPW

FCC ID: PANCL8723BU

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	45.87	4.38	50.25	74.00	-23.75	100	246	peak
2	7538.462	41.03	9.95	50.98	74.00	-23.02	100	168	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	46.81	4.38	51.19	74.00	-22.81	100	255	peak
2	7211.538	41.34	9.21	50.55	74.00	-23.45	100	124	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4786.859	43.42	3.61	47.03	74.00	-26.97	100	324	peak
2	7129.808	43.43	9.01	52.44	74.00	-21.56	100	102	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	46.21	4.38	50.59	74.00	-23.41	100	254	peak
2	7347.756	40.97	9.55	50.52	74.00	-23.48	100	25	peak
N/A									



Compliance Certification Services Inc.

Date of Issue :January 6, 2016

Report No: C151023R01-RPW

FCC ID: PANCL8723BU

Operation Mode: TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2015-10-30

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4895.833	45.26	4.05	49.31	74.00	-24.69	100	224	peak
2	7320.513	40.94	9.48	50.42	74.00	-23.58	100	90	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	47.12	4.48	51.60	74.00	-22.40	100	255	peak
2	7483.974	43.23	9.89	53.12	74.00	-20.88	100	32	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Low

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James. Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4759.615	44.44	3.50	47.94	74.00	-26.06	100	132	peak
2	7157.051	42.22	9.08	51.30	74.00	-22.70	100	332	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	45.83	4.38	50.21	74.00	-23.79	100	257	peak
2	7483.974	43.36	9.89	53.25	74.00	-20.75	100	168	peak
N/A									



Compliance Certification Services Inc.

Date of Issue :January 6, 2016

Report No: C151023R01-RPW

FCC ID: PANCL8723BU

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Mid

Test Date: 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	43.31	4.48	47.79	74.00	-26.21	100	301	peak
2	7347.756	41.23	9.55	50.78	74.00	-23.22	100	5	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	48.28	4.38	52.66	74.00	-21.34	100	255	peak
2	7129.808	42.05	9.01	51.06	74.00	-22.94	100	66	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH High **Test Date:** 2015-10-30

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4759.615	43.31	3.50	46.81	74.00	-27.19	100	197	peak
2	7075.320	41.47	8.88	50.35	74.00	-23.65	100	239	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4977.564	46.28	4.38	50.66	74.00	-23.34	100	258	peak
2	7456.731	44.12	9.82	53.94	74.00	-20.06	100	140	peak
N/A									

7.6.POWERLINE CONDUCTED EMISSIONS**LIMIT**

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data


Job No.:	C151023R01-RPW	Date:	2015-11-01
Model:	CL-8723BU	Time:	PM 01:40:22
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James.Yan
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

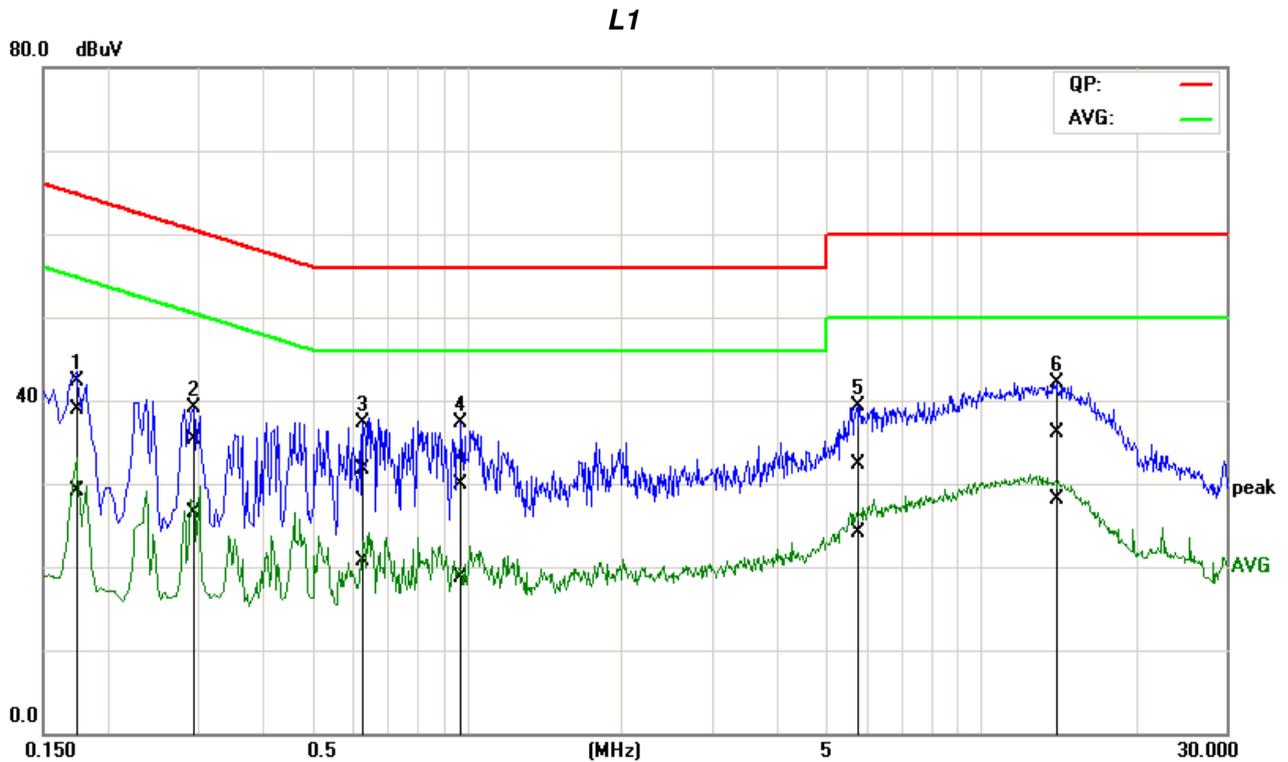

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1765	19.16	9.35	19.70	38.86	29.05	64.64	54.65	-25.78	-25.60	Pass
2	0.2902	15.65	6.88	19.67	35.32	26.55	60.52	50.52	-25.20	-23.97	Pass
3	0.6332	11.87	0.88	19.83	31.70	20.71	56.00	46.00	-24.30	-25.29	Pass
4	0.9771	10.08	-1.18	19.84	29.92	18.66	56.00	46.00	-26.08	-27.34	Pass
5	5.6936	11.95	3.80	20.37	32.32	24.17	60.00	50.00	-27.68	-25.83	Pass
6*	14.0870	15.21	7.24	20.83	36.04	28.07	60.00	50.00	-23.96	-21.93	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C151023R01-RPW	Date:	2015-11-01
Model:	CL-8723BU	Time:	PM 01:46:25
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James Yan
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

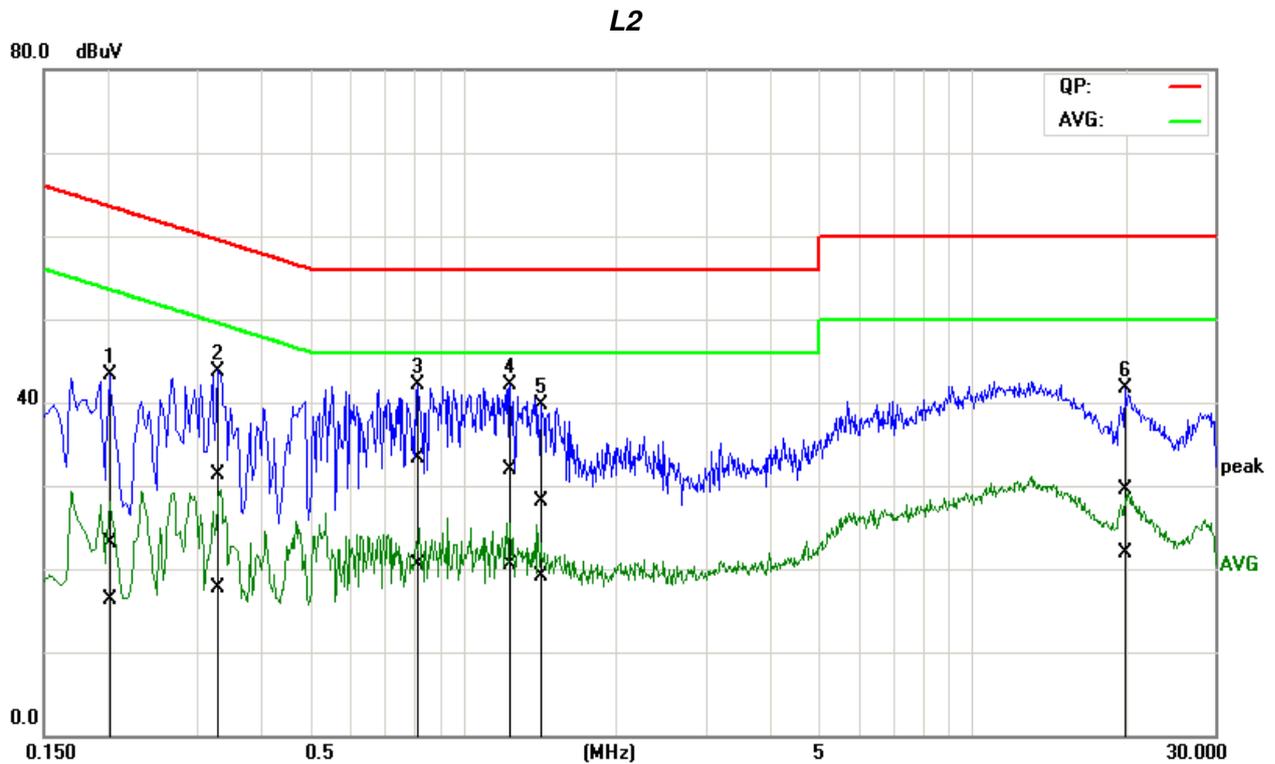

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.2004	3.56	-3.27	19.64	23.20	16.37	63.59	53.59	-40.39	-37.22	Pass
2	0.3338	11.52	-1.98	19.73	31.25	17.75	59.35	49.36	-28.10	-31.61	Pass
3*	0.8106	13.57	0.60	19.83	33.40	20.43	56.00	46.00	-22.60	-25.57	Pass
4	1.2397	12.10	0.71	19.86	31.96	20.57	56.00	46.00	-24.04	-25.43	Pass
5	1.4077	8.15	-0.74	19.88	28.03	19.14	56.00	46.00	-27.97	-26.86	Pass
6	20.0384	8.33	0.79	21.09	29.42	21.88	60.00	50.00	-30.58	-28.12	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “—” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

END OF REPORT