

1-4F, Huafeng Science Park, Xin'an Sixth Road, 82<sup>th</sup> District, Bao'an,

Shenzhen, China.

Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: EBO1409120-E367

Page 1 of 57

# FCC Report (WIFI)

Applicant: EKEN GROUP LIMITED

Address of Applicant: 3A21-3A22, Block B-4, Baoyuan Huanfeng Economy

Headquarters Building, Xixiang, Baoan District, Shenzhen,

China

### **Equipment Under Test (EUT)**

Product Name: SPORTS CAM

Model No.: A3, S3, W3, A5, S5, W5, A6, S6, W6, A7, S7, W7, A8, S8,

W8, A9, S9, W9, A10, S10, W10

FCC ID: 2ADDG-W8

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Date of sample receipt: September 24, 2014

Date of Test: September 24, 2014 To October 14, 2014

Date of report issued: October 14, 2014

Test Result: PASS \*

Authorized Signature:

Kevin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: EBO1409120-E367 Page 2 of 57

### 2 Version

Version No.	Date	Description
00	October 14, 2014	Original

Prepared By:	Jason	Date:	October 14, 2014
	Project Engineer		
Check By:	Ceury	Date:	October 14, 2014



Report No.: EBO1409120-E367 Page 3 of 57

### 3 Contents

			Page
1	COV	ER PAGE	1
2	VER	SION	2
3	CON	TENTS	3
4	TES	T SUMMARY	4
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
		TEST MODE.	
	5.4	DESCRIPTION OF SUPPORT UNITS	6
		TEST FACILITY	
	5.6	TEST LOCATION	7
6	TEST	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	ANTENNA REQUIREMENT	9
		CONDUCTED EMISSIONS	
	7.3	CONDUCTED OUTPUT POWER	13
	7.4	CHANNEL BANDWIDTH	14
	7.5	POWER SPECTRAL DENSITY	19
	7.6	BAND EDGES	24
	7.6.1		
	7.6.2	Radiated Emission Method	26
	7.7	Spurious Emission	36
	7.7.1	Conducted Emission Method	36
	7.7.2	Radiated Emission Method	41
8	TEST	T SETUP PHOTO	56
9	EUT	CONSTRUCTIONAL DETAILS	57



Report No.: EBO1409120-E367

Page 4 of 57

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.



Report No.: EBO1409120-E367

Page 5 of 57

### 5 General Information

### 5.1 Client Information

Applicant:	EKEN GROUP LIMITED
Address of Applicant:	3A21-3A22, Block B-4, Baoyuan Huanfeng Economy Headquarters
	Building, Xixiang, Baoan District, Shenzhen, China
Manufacturer:	EKEN GROUP LIMITED
Address of Manufacturer:	3A21-3A22, Block B-4, Baoyuan Huanfeng Economy Headquarters
	Building, Xixiang, Baoan District, Shenzhen, China

### 5.2 General Description of EUT

Product Name:	SPORTS CAM	
Model No.:	A3, S3, W3, A5, S5, W5, A6, S6, W6, A7, S7, W7, A8, S8, W8, A9, S9, W9, A10, S10, W10	
Test Model No.:	W8	
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz	
	802.11n(HT40): 2422MHz~2452MHz	
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11	
	802.11(HT40): 7	
Channel separation:	5MHz	
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS)	
	802.11g/802.11n(H20)/802.11n(H40):	
	Orthogonal Frequency Division Multiplexing (OFDM)	
Antenna Type:	Integral Antenna	
Antenna gain:	2dBi (declare by Applicant)	
Power supply:	Input: DC 5V, 1000mA from adapter	
	Or	
	DC 3.7V, 900mAh Li-ion Battery	



Report No.: EBO1409120-E367

Page 6 of 57

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Toot channel	Frequency (MHz)				
Test channel	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)			
Lowest channel	2412MHz	2422MHz			
Middle channel	2437MHz	2437MHz			
Highest channel	2462MHz	2452MHz			

### 5.3 Test mode

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

### 5.4 Description of Support Units

None



Report No.: EBO1409120-E367

Page 7 of 57

### 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

### • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

#### 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China



Report No.: EBO1409120-E367

Page 8 of 57

### 6 Test Instruments list

Radi	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2014	Mar. 28 2015	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jul. 01 2014	Jun 30 2015	
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	July 01 2014	June 30 2015	
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	July 01 2014	June 30 2015	
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015	
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015	
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015	
11	Coaxial Cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015	
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015	
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	July 01 2014	June 30 2015	
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	July 01 2014	June 30 2015	
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015	
16	Band filter	Amindeon	82346	GTS219	Mar. 29 2014	Mar. 28 2015	
17	Power Meter	Anritsu	ML2495A	GTS540	July 01 2014	June 30 2015	
18	Power Sensor	Anritsu	MA2411B	GTS541	July 01 2014	June 30 2015	

Con	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Jul. 01 2014	Jun. 30, 2015	
2	<b>EMI Test Receiver</b>	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015	
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015	
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015	
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	

General used equipment:											
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)					
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015					



Report No.: EBO1409120-E367

Page 9 of 57

### 7 Test results and Measurement Data

### 7.1 Antenna requirement

**Standard requirement:** FCC Part15 C Section 15.203 /247(c)

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### **E.U.T Antenna:**

The antenna is integral antenna, the best case gain of the antenna is 2dBi



Report No.: EBO1409120-E367

Page 10 of 57

### 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207	,					
Test Method:	ANSI C63.4:2003						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto					
Limit:		Limit (c	dBuV)				
Zirriic.	Frequency range (MHz)	Quasi-peak	Average				
	0.15-0.5	66 to 56*	56 to 46*				
	0.5-5	56	46				
	5-30	60	50				
	* Decreases with the logarithm	n of the frequency.					
Test setup:	Reference Plane						
	AUX Equipment  E.U.T  Filter  AC power  EMI Receiver  Remark  E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table height=0.8m						
Test procedure:	<ol> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 500hm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>						
Test Instruments:	Refer to section 6.0 for details	3					
Test mode:	Refer to section 5.3 for details	<b>3</b>					
Test results:	Pass						




Report No.: EBO1409120-E367

Page 11 of 57

#### Measurement data

Line:

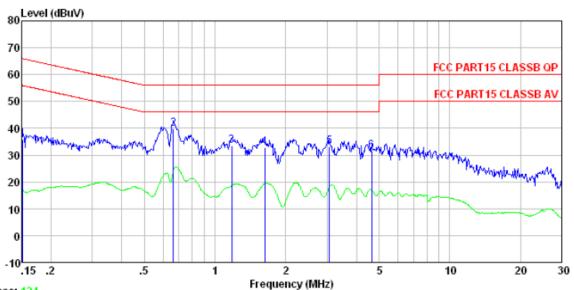

Trace: 124

Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Test mode : WiFi mode

Test Engineer: Qing


	Freq	Read Level	Cable Loss		Limit Line	Over Limit	Remark
	MHz	dBuV	₫B	dBuV	dBuV	dB	
1	0.152	35.59		35.86			
2 3		39.63 33.19		39. 90			
4 5		32.57		32.83			
6		32.70 31.13		33.01 31.49			-



Report No.: EBO1409120-E367

Page 12 of 57

#### Neutral:

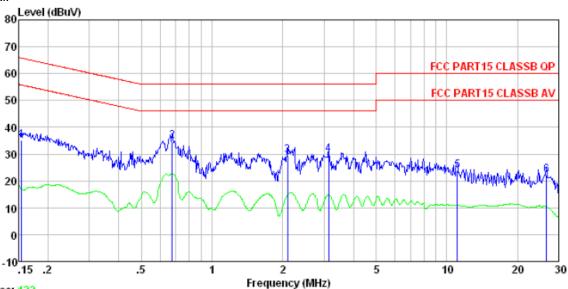

Trace: 122

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Test mode : WiFi mode

Test Engineer: Qing

	Freq	Read Level	Cable Loss		Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBu√	dBuV	dB	
1	0.154	35.03	0.12	35.22	65.78	-30.56	QP
2	0.675	34.68	0.13	34.88	56.00	-21.12	QP
2 3 4	2.099	29.41	0.15	29.65	56.00	-26.35	QP
4	3.140	29.61	0.15	29.88	56.00	-26.12	QP
5	11.080	23.43		23.92			
6	26.558	20.92	0.23	22.10	60.00	-37.90	QP

### Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Report No.: EBO1409120-E367

Page 13 of 57

### 7.3 Conducted Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	Power Meter  E.U.T  Non-Conducted Table  Ground Reference Plane
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

#### **Measurement Data**


Test CH		PEAK Conducte	Limit(dBm)	Result			
1031 011	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Limit(abin)	Nosun	
Lowest	8.46	8.13	8.26	7.74		Pass	
Middle	8.13	8.05	8.08	7.58	30.00		
Highest	8.55	8.21	8.20	7.62			



Report No.: EBO1409120-E367

Page 14 of 57

### 7.4 Channel Bandwidth

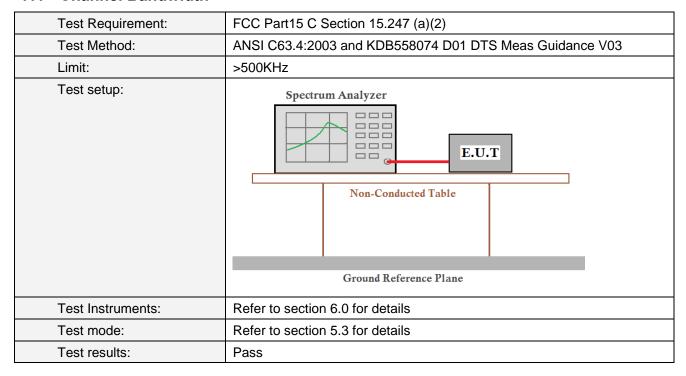

#### **Measurement Data**


		Channel Ba					
Test CH	802.11b	802.11g	802.11n(HT20 )	802.11n(HT40 )	Limit(KHz)	Result	
Lowest	10.097	16.500	17.639	35.680		Pass	
Middle	9.586	16.480	17.666	35.342	>500		
Highest	10.034	16.420	17.660	35.776			

### Test plot as follows:




Report No.: EBO1409120-E367 Page 15 of 57


Test mode: 802.11b

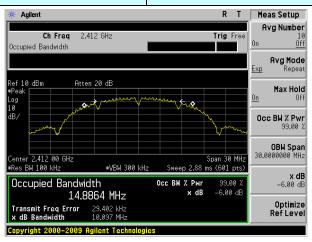

#### Lowest channel

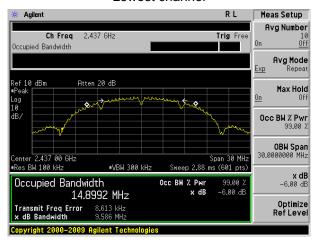

#### Middle channel

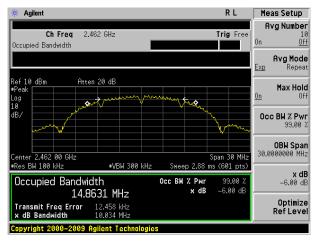


Highest channel




Report No.: EBO1409120-E367 Page 16 of 57


Test mode: 802.11g

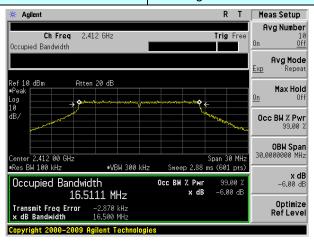

#### Lowest channel

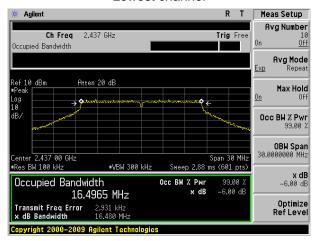

#### Middle channel

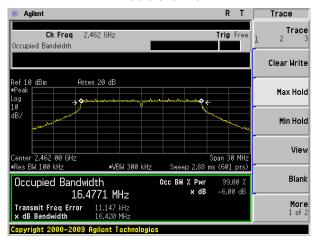


## Highest channel




Report No.: EBO1409120-E367 Page 17 of 57


Test mode: 802.11n(HT20)

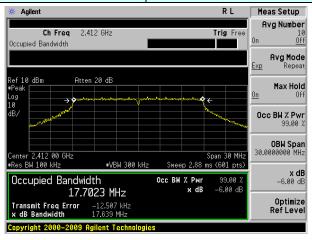

#### Lowest channel

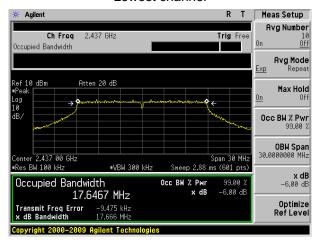

#### Middle channel

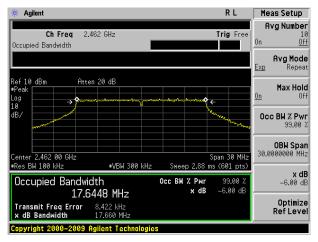


Highest channel




Report No.: EBO1409120-E367 Page 18 of 57


Test mode: 802.11n(HT40)

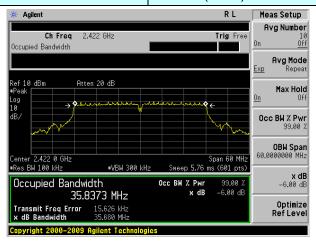

#### Lowest channel

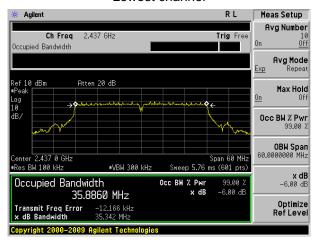

#### Middle channel

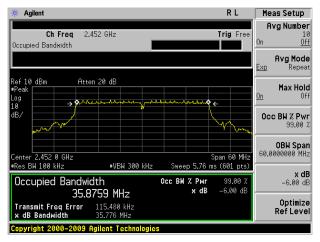

Highest channel



Report No.: EBO1409120-E367

Page 19 of 57

### 7.5 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)			
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	8dBm			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Pass			

#### **Measurement Data**


		Power Spect	Limit(dBm/3kHz				
Test CH	802.11b	802.11g	802.11n(HT20 )	802.11n(HT40 )	)	Result	
Lowest	-5.06	-8.34	-7.87	-10.55			
Middle	-5.01	-8.18	-7.89	-10.08	8.00	Pass	
Highest	-5.44	-7.77	-7.60	-10.72			




Report No.: EBO1409120-E367 Page 20 of 57

#### Test plot as follows:


Test mode: 802.11b

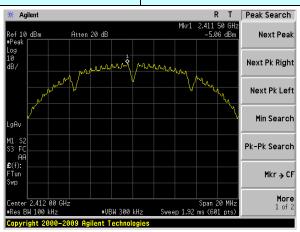

#### Lowest channel

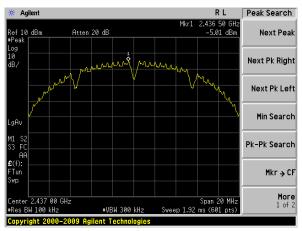

### Middle channel

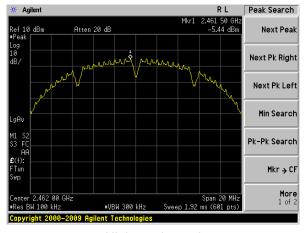


Highest channel




Report No.: EBO1409120-E367 Page 21 of 57


Test mode: 802.11g

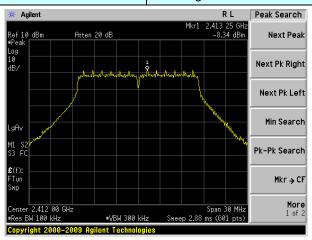

#### Lowest channel

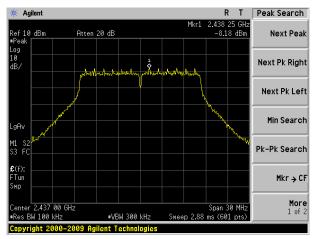

#### Middle channel

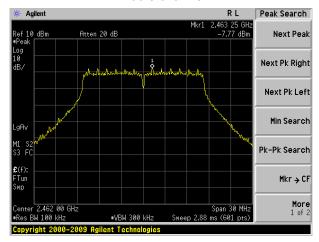


### Highest channel




Report No.: EBO1409120-E367 Page 22 of 57


Test mode: 802.11n(HT20)

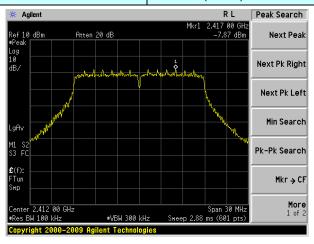

#### Lowest channel

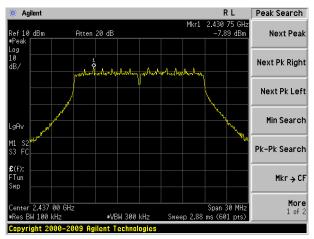

#### Middle channel

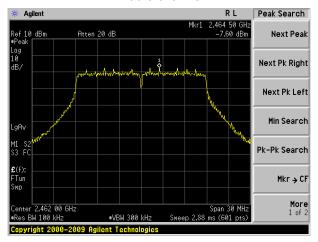


### Highest channel




Report No.: EBO1409120-E367 Page 23 of 57


Test mode: 802.11n(HT40)

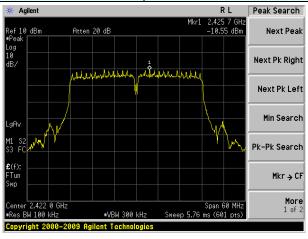

### Lowest channel

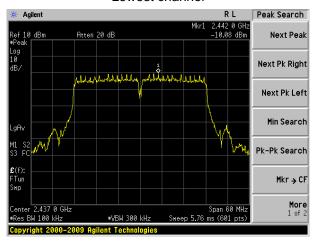

#### Middle channel

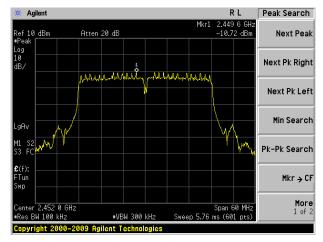

#### Highest channel



Report No.: EBO1409120-E367

Page 24 of 57

### 7.6 Band edges

### 7.6.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					




Report No.: EBO1409120-E367 Page 25 of 57

### Test plot as follows:


#### Test mode: 802.11b Peak Search R L RL Agilent Peak Search 2.464 00 GH Next Peak Next Peak Next Pk Right Next Pk Right Next Pk Left Next Pk Left Min Search Min Search Stop 2.430 0 GH: Stop 2.500 00 GH: Sweep 4.8 ms (601 pts) .310 0 GHz 450 00 GHz Start Sweep 11.48 ms (601 pts) Pk-Pk Search Pk-Pk Search Mkr → CF Mkr → CF More 1 of 2 More 1 of 2 Copyright 2000-2009 Agilent Technologies Copyright 2000-2009 Agilent Technologies

Lowest channel

Highest channel 802.11g

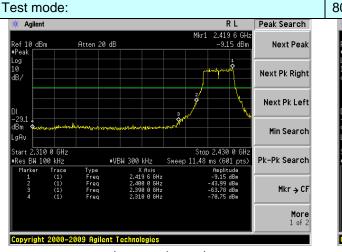


Lowest channel

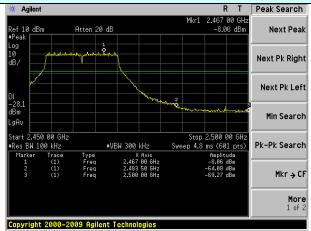

Highest channel




Report No.: EBO1409120-E367 Page 26 of 57

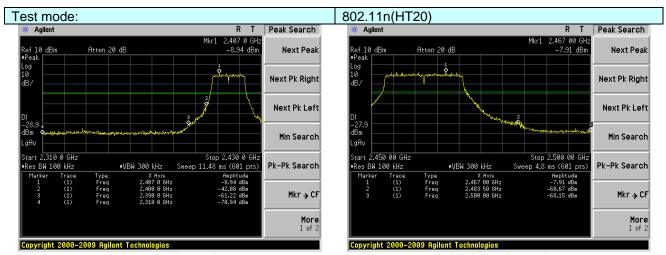

Lowest channel

Highest channel

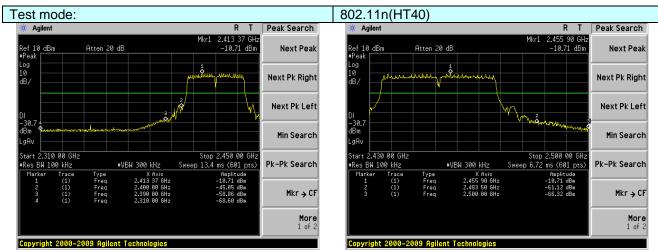

Lowest channel

Highest channel

### 7.6.2 Radiated Emission Method

Test Requirement: FCC Part15 C Section 15.209 and 15.205



Report No.: EBO1409120-E367 Page 27 of 57

Test Method:	ANSI C63.4: 20	03						
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed.							
Test site:	,	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value			
receiver setup.		Peak	1MHz	3MHz	Peak			
	Above 1GHz	RMS	1MHz	3MHz	Average			
Limit:	Freque	1	Limit (dBuV		Value			
Ellint.			54.0	,	Average			
	Above 1	GHz -	74.0		Peak			
Test setup:	EUT Turn Table 0.3	4m Spectrum Analyzer Turn 0.8m lm						
Test Procedure:	the ground at determine the 2. The EUT was antenna, white tower.  3. The antenna ground to det horizontal an measuremen 4. For each sus and then the and the rotal the maximum 5. The test-rece Specified Bar 6. If the emission the limit spec of the EUT whave 10dB mpeak or avera sheet.  7. The radiation And found the worst case met.	a 3 meter can be position of the set 3 meters of was mount the ight is varied ermine the mid vertical polar to pected emission and was turn a reading. If the ified, then tespond be reported argin would be age method as measurement of y axis position of the position of the ignormal would be age method as measurement of y axis position of the position of the ignormal would be age method as measurement of y axis position of the position would be age method as measurement of the position would be age method as measurement of the position would be age method as measurement of the position would be age method as measurement of the position would be age method as measurement of the position would be age method as measurement of the position would be age method as measurement of the position would be age method as measurement of the position would be age to be a position would be age to be a position would be agent the p	mber. The taine highest race away from the ed on the tope of from one maximum value inizations of the ed from 0 de f	ble was rotadiation. The interferer of a variable of the field the antennal was arrange has from 1 ragrees to 360 ak Detect Full discounting the emission on the emission of the med in X, Y, it is worse of the interference of the emission	r meters above the distrength. Both are set to make the ed to its worst case meter to 4 meters 0 degrees to find unction and			
Test Instruments:	Refer to section	6.0 for details	3	•				
Test mode:	Refer to section	5.3 for details	3					
Test results:	Pass							



Report No.: EBO1409120-E367

Page 28 of 57

#### Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test mode: 802.			802.1	02.11b Test channel:				Lowest		
Peak value:								<u>'</u>		
Frequency (MHz)	Read Level (dBuV)	Fac	enna ctor s/m)	Cable Loss (dB)	Facto	Preamp Factor (dB) (d		Limit Line	I I imit	Polarization
2390.00	51.66	27.	.59	5.38	34.0	1	50.62	74.00	-23.38	Horizontal
2400.00	60.67	27.	.58	5.39	34.0	1	59.63	74.00	-14.37	Horizontal
2390.00	53.34	27.	.59	5.38	34.0	1	52.30	74.00	-21.70	Vertical
2400.00	62.47	27.	.58	5.39	34.0	1	61.43	74.00	-12.57	Vertical
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Fac	enna ctor e/m)	Cable Loss (dB)	Prear Facto (dB	or	Level (dBuV/m)	Limit Line		Polarization
2390.00	38.41	27.	.59	5.38	34.0	1	37.37	54.00	-16.63	Horizontal
2400.00	46.71	27.	.58	5.39	34.0	1	45.67	54.00	-8.33	Horizontal
2390.00	40.24	27.	.59	5.38	34.0	1	39.20	54.00	-14.80	Vertical
2400.00	47.84	27.	.58	5.39	34.0	1	46.80	54.00	-7.20	Vertical
Test mode:			802.11b			Test channel:			Highest	
Peak value:	•				,					
Frequency (MHz)	Read Level (dBuV)	Fac	enna ctor //m)	Cable Loss (dB)	Prear Facto (dB	or	Level (dBuV/m)	Limit Line	I I imit	Polarization
2483.50	52.32	27.	.53	5.47	33.9	2	51.40	74.00	-22.60	Horizontal
2500.00	48.14	27.	.55	5.49	29.9	3	51.25	74.00	-22.75	Horizontal
2483.50	54.58	27.	.53	5.47	33.9	2	53.66	74.00	-20.34	Vertical
2500.00	50.65	27.	.55	5.49	29.9	3	53.76	74.00	-20.24	Vertical
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Fac	enna ctor //m)	Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2483.50	38.78	27.	.53	5.47	33.9	2	37.86	54.00	-16.14	Horizontal
2500.00	34.88	27.	.55	5.49	29.9	3	37.99	54.00	-16.01	Horizontal

# 2500.00

2483.50

40.73

36.76

27.53

27.55

5.47

5.49

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

33.92

29.93

39.81

39.87

54.00

54.00

-14.19

-14.13

Vertical

Vertical



Report No.: EBO1409120-E367 Page 29 of 57

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1409120-E367 Page 30 of 57

Test mode:	802.11g			Te	Test channel:			Lowest		
Peak value:	•			<u>'</u>		<u> </u>				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization		
2390.00	50.25	27.59	5.38	34.01	49.21	74.00	-24.79	Horizontal		
2400.00	58.79	27.58	5.39	34.01	57.75	74.00	-16.25	Horizontal		
2390.00	51.83	27.59	5.38	34.01	50.79	74.00	-23.21	Vertical		
2400.00	60.21	27.58	5.39 34.01		59.17	74.00	-14.83	Vertical		
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Limit	Polarization		
2390.00	37.41	27.59	5.38	34.01	36.37	54.00	-17.63	Horizontal		
2400.00	45.55	27.58	5.39	34.01	44.51	54.00	-9.49	Horizontal		
2390.00	39.12	27.59	5.38	34.01	38.08	54.00	-15.92	Vertical		
2400.00	46.57	27.58	5.39	34.01	45.53	54.00	-8.47	Vertical		
Test mode:		802.1	1g	Te	st channel:	Highest				
Peak value:					•		_	,		
Frequency (MHz)	Read Level (dBuV)	Antenna Cable Factor Loss (dB/m) (dB)		Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization		
2483.50	50.30	27.53	5.47	33.92	49.38	74.00	-24.62	Horizontal		
2500.00	46.58	27.55	5.49	29.93	49.69	74.00	-24.31	Horizontal		
2483.50	52.27	27.53 5.47		33.92	51.35	74.00	-22.65	Vertical		
2500.00	48.82	27.55	5.49	29.93	51.93	74.00	-22.07	Vertical		
Average va	lue:	1		T	T	ı	1			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization		
2483.50	37.56	27.53	5.47	33.92	36.64	54.00	-17.36	Horizontal		
2500.00	33.93	27.55	5.49	29.93	37.04	54.00	-16.96	Horizontal		
2483.50	39.38	27.53	5.47	33.92	38.46	54.00	-15.54	Vertical		
2500.00	35.76	27.55	5.49	29.93	38.87	54.00	-15.13	Vertical		

#### Remark:



Report No.: EBO1409120-E367 Page 31 of 57

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1409120-E367 Page 32 of 57

Test mode:	node: 802.11n(HT20)				Tes	st channel:	Lowest			
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)		Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit Line	I I imit	Polarization
2390.00	50.76	27.59		5.38	34.0	1	49.72	74.00	-24.28	Horizontal
2400.00	59.47	27	'.58	5.39	34.0	1	58.43	74.00	-15.57	Horizontal
2390.00	52.37	27.59		5.38	34.0	1	51.33	74.00	-22.67	Vertical
2400.00	61.02	27.58		5.39	34.01		59.98	74.00	-14.02	Vertical
Average value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Cable Factor Loss (dB/m) (dB)		Preamp Factor (dB)		Level (dBuV/m)	Limit Line	I I imit	Polarization	
2390.00	37.77	27	'.59	5.38	34.0	1	36.73	54.00	-17.27	Horizontal
2400.00	45.97	27	'.58	5.39	34.0	1	44.93	54.00	-9.07	Horizontal
2390.00	39.52	27	'.59	5.38	34.01		38.48	54.00	-15.52	Vertical
2400.00	47.03	27	'.58	5.39	34.0	1	45.99	54.00	-8.01	Vertical
Test mode: 80			802.1	1n(HT20)		Tes	st channel:		Highest	
Peak value:	•		ı				,			
Frequency (MHz)	Read Level (dBuV)	Fa	enna .ctor 3/m)	Cable Loss (dB)	Loss Factor		Level (dBuV/m)	Limit Line	I I imit	Polarization
2483.50	51.03	27	'.53	5.47	33.92		50.11	74.00	-23.89	Horizontal
2500.00	47.14	27	'.55	5.49	29.93		50.25	74.00	-23.75	Horizontal
2483.50	53.10	27	7.53	5.47	33.92		52.18	74.00	-21.82	Vertical
2500.00	49.48	27	'.55	5.49	5.49 29.93		52.59	74.00	-21.41	Vertical
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Fa	enna .ctor 3/m)	Cable Loss (dB)			Level (dBuV/m)	Limit Line	Limit	Polarization
2483.50	38.00	27	'.53	5.47	33.9	2	37.08	54.00	-16.92	Horizontal
2500.00	34.28	27	'.55	5.49	5.49 29.93		37.39	54.00	-16.61	Horizontal

### 2500.00 Remark:

2483.50

39.87

36.12

27.53

27.55

5.47

5.49

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.ebotek.cn">http://www.ebotek.cn</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.ebotek.cn">http://www.ebotek.cn</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

33.92

29.93

38.95

39.23

54.00

54.00

-15.05

-14.77

Vertical

Vertical



Report No.: EBO1409120-E367 Page 33 of 57

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1409120-E367 Page 34 of 57

Test mode: 802		802.1	11n(HT40)		Tes	st channel:		Lowest		
Peak value:								·		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)		Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2390.00	49.42	27.59		5.38	34.01		48.38	74.00	-25.62	Horizontal
2400.00	57.68	27	7.58	5.39	34.01		56.64	74.00	-17.36	Horizontal
2390.00	50.95	27	7.59	5.38	34.01		49.91	74.00	-24.09	Vertical
2400.00	58.88	27.58		5.39	34.01		57.84	74.00	-16.16	Vertical
Average va	lue:									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)		Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2390.00	36.82	27.59		5.38	34.0	1	35.78	54.00	-18.22	Horizontal
2400.00	44.88	27.58		5.39	34.01		43.84	54.00	-10.16	Horizontal
2390.00	38.46	27.59		5.38	34.01		37.42	54.00	-16.58	Vertical
2400.00	45.83	27.58		5.39	34.01		44.79	54.00	-9.21	Vertical
Test mode:		802.1	11n(HT40) Te			st channel:		Highest		
Peak value:	•	T	,				,		_	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)		Cable Loss (dB)	Prear Fact (dB	or	Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2483.50	49.12	27.53 5.47		5.47	33.92		48.20	74.00	-25.80	Horizontal
2500.00	45.66	27.55 5.49		29.93		48.77	74.00	-25.23	Horizontal	
2483.50	50.92	27.53 5.47		33.92		50.00	74.00	-24.00	Vertical	
2500.00	47.75	27.55 5.49		5.49	29.93		50.86	74.00	-23.14	Vertical
Average va	lue:		,							
Frequency (MHz)	Read Level (dBuV)	Fa	enna actor B/m)	Cable Loss (dB)	Loss Fact		Level (dBuV/m)	Limit Line (dBuV/m)	I I imit	Polarization
2483.50	36.85	27	7.53	5.47	33.92		35.93	54.00	-18.07	Horizontal
2500.00	33.38	27.55 5.49		29.9	3	36.49	54.00	-17.51	Horizontal	
2483.50	38.60	27.53 5.47		5.47	33.92		37.68	54.00	-16.32	Vertical

### 2500.00 Remark:

35.17

27.55

5.49

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.ebotek.cn">http://www.ebotek.cn</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.ebotek.cn">http://www.ebotek.cn</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

29.93

38.28

54.00

-15.72

Vertical



Report No.: EBO1409120-E367 Page 35 of 57

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.



Report No.: EBO1409120-E367 Page 36 of 57

### 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement.					
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					



Report No.: EBO1409120-E367


Page 37 of 57

## Test plot as follows:

Test mode: 802.11b


## 

30MHz~10GHz

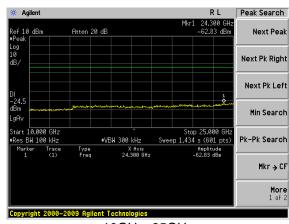


10GHz~25GHz




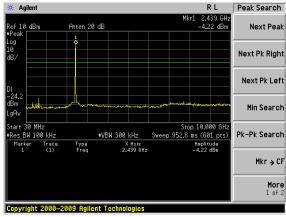


30MHz~10GHz

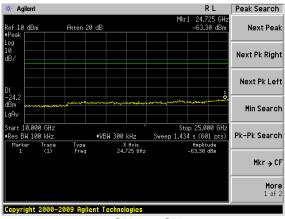


10GHz~25GHz



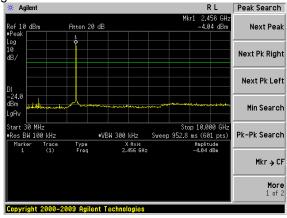

30MHz~10GHz

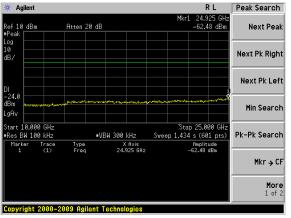

10GHz~25GHz




Report No.: EBO1409120-E367 Page 38 of 57

#### Test mode:

#### 802.11g

## Lowest channel

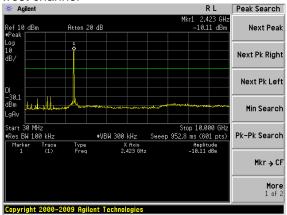


30MHz~10GHz


## 

10GHz~25GHz

## Middle channel

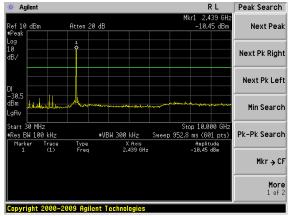


30MHz~10GHz

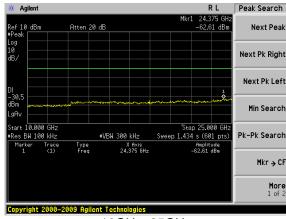


10GHz~25GHz



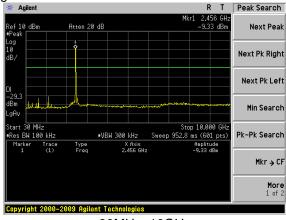

30MHz~10GHz

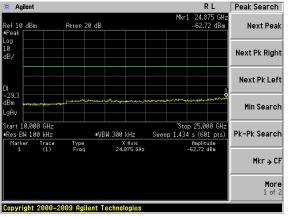

10GHz~25GHz



Atten 20 dB

Copyright 2000-2009 Agilent Technologies

Report No.: EBO1409120-E367 Page 39 of 57


Next Peak

#### Test mode:

## 802.11n(HT20)

Ref 10 dBm

#### Lowest channel

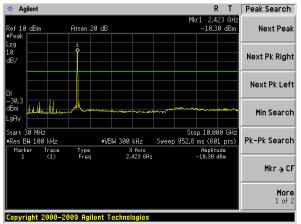


30MHz~10GHz


# 10 dB/ DI -30.3 dBm LgRv Start 10.000 GHz \*Res BH 100 kHz \*Res BH 100 kHz Min Search Sweep 1.434 s (601 prs) Marker Trace Type X fixs Freq 24.575 GHz ARS CHIEF Trace Type CA.575 GHz Min Search Pk-Pk Search Mkr → CF

10GHz~25GHz


## Middle channel

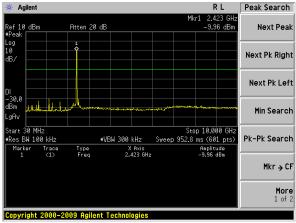


30MHz~10GHz

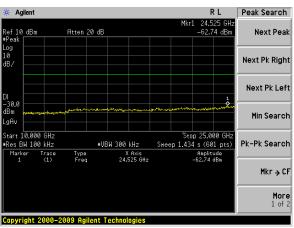


10GHz~25GHz



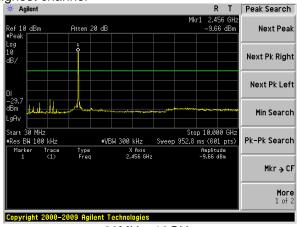

30MHz~10GHz

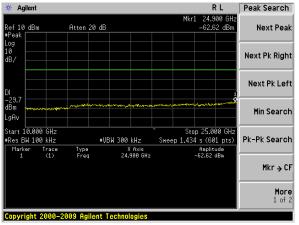

10GHz~25GHz




Report No.: EBO1409120-E367 Page 40 of 57

#### Test mode:

## 802.11n(HT40)

#### Lowest channel

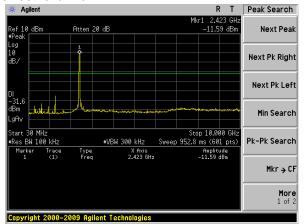


30MHz~10GHz


## 

10GHz~25GHz


#### Middle channel

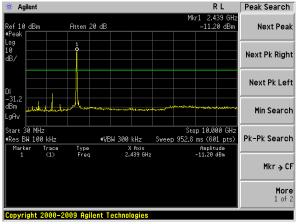


30MHz~10GHz

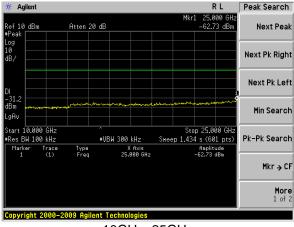


10GHz~25GHz



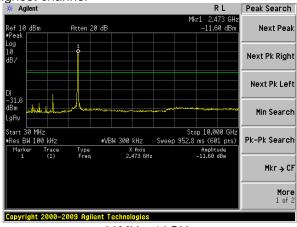

30MHz~10GHz

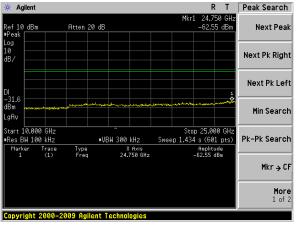

10GHz~25GHz



Report No.: EBO1409120-E367

Page 41 of 57

## 7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209									
Test Method:	ANSI C63.4: 2003									
Test Frequency Range:	30MHz to 25GHz	<u>'</u>								
Test site:	Measurement Di	stance: 3m								
Receiver setup:	Frequency Detector RBW VBW Value									
	30MHz-1GHz Quasi-peak 120KHz 300KHz Quasi-peak									
	Above 1GHz Peak 1MHz 3MHz Peak									
	RMS 1MHz 3MHz Average									
Limit:	Frequer	Frequency Limit (dBuV/m @3m) Value								
	30MHz-88	MHz	40.0	0	Quasi-peak					
	88MHz-216	88MHz-216MHz 43.50 Quasi-peak								
	216MHz-96	0MHz	46.0	0	Quasi-peak					
	960MHz-1	GHz	54.0	0	Quasi-peak					
	Above 10	2H-7	54.0	0	Average					
	Above it	JI 12	74.0	0	Peak					
Test setup:	Below 1GHz  Antenna Tower  Search Antenna  RF Test Receiver  Ground Plane									



Report No.: EBO1409120-E367 Page 42 of 57

	Antenna Tower  Horn Antenna  Spectrum Analyzer  Turn Table  Amplifier
Test Procedure:	The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

#### Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.



Report No.: EBO1409120-E367

Page 43 of 57

#### **Measurement Data**

#### ■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
40.56	38.15	15.58	0.67	32.05	22.35	40.00	-17.65	Vertical
88.65	40.22	13.47	1.10	31.72	23.07	43.50	-20.43	Vertical
167.82	38.33	10.90	1.67	32.04	18.86	43.50	-24.64	Vertical
333.69	37.90	15.92	2.54	32.07	24.29	46.00	-21.71	Vertical
545.18	37.49	19.46	3.50	31.32	29.13	46.00	-16.87	Vertical
897.00	37.11	23.05	4.83	31.19	33.80	46.00	-12.20	Vertical
45.70	36.97	15.51	0.73	32.00	21.21	40.00	-18.79	Horizontal
89.28	40.32	13.76	1.10	31.72	23.46	43.50	-20.04	Horizontal
147.92	39.33	10.24	1.56	31.97	19.16	43.50	-24.34	Horizontal
279.04	37.89	14.63	2.27	32.17	22.62	46.00	-23.38	Horizontal
473.84	37.93	17.95	3.20	31.64	27.44	46.00	-18.56	Horizontal
916.07	37.53	23.21	4.91	31.19	34.46	46.00	-11.54	Horizontal



802.11b

# Shenzhen EBO Technology Co., Ltd.

Test channel:

Report No.: EBO1409120-E367

Lowest

Page 44 of 57

54.00

54.00

54.00

Horizontal

Horizontal

Horizontal

#### ■ Above 1GHz

Test mode:

Peak value:

reak value.								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	40.02	31.79	8.62	32.10	48.33	74.00	-25.67	Vertical
7236.00	34.05	36.19	11.68	31.97	49.95	74.00	-24.05	Vertical
9648.00	32.59	38.07	14.16	31.56	53.26	74.00	-20.74	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.73	31.79	8.62	32.10	47.04	74.00	-26.96	Horizontal
7236.00	33.82	36.19	11.68	31.97	49.72	74.00	-24.28	Horizontal
9648.00	32.18	38.07	14.16	31.56	52.85	74.00	-21.15	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val	ue:		•				•	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.13	31.79	8.62	32.10	37.44	54.00	-16.56	Vertical
7236.00	22.92	36.19	11.68	31.97	38.82	54.00	-15.18	Vertical
9648.00	22.94	38.07	14.16	31.56	43.61	54.00	-10.39	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	28.28	31.79	8.62	32.10	36.59	54.00	-17.41	Horizontal
7236.00	22.40	36.19	11.68	31.97	38.30	54.00	-15.70	Horizontal
9648.00	21.93	38.07	14.16	31.56	42.60	54.00	-11.40	Horizontal
i		1		i	1			

#### Remark:

12060.00

14472.00

16884.00

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 45 of 57

Test mode:		802.11b			Test	channel:		Midd	le	
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prea Fac (d		Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4874.00	39.12	31.85	8.66	32.	12	47.51	74.	00	-26.49	Vertical
7311.00	34.15	36.37	11.71	31.	91	50.32	74.	00	-23.68	Vertical
9748.00	33.63	38.27	14.25	31.	56	54.59	74.	00	-19.41	Vertical
12185.00	*						74.	00		Vertical
14622.00	*						74.	00		Vertical
17059.00	*						74.	00		Vertical
4874.00	39.64	31.85	8.66	32.	12	48.03	74.	00	-25.97	Horizontal
7311.00	32.81	36.37	11.71	31.	91	48.98	74.	00	-25.02	Horizontal
9748.00	33.53	38.27	14.25	31.	56	54.49	74.	00	-19.51	Horizontal
12185.00	*						74.	00		Horizontal
14622.00	*						74.	00		Horizontal
17059.00	*						74.	00		Horizontal
Average val				ı		1				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prea Fac (d	ctor	Level (dBuV/m)	Limit (dBu)		Over Limit (dB)	polarization
4874.00	29.99	31.85	8.66	32.	12	38.38	54.	00	-15.62	Vertical
7311.00	22.47	36.37	11.71	31.	91	38.64	54.	00	-15.36	Vertical
9748.00	22.89	38.27	14.25	31.	56	43.85	54.	00	-10.15	Vertical
12185.00	*						54.	00		Vertical
14622.00	*						54.	00		Vertical
17059.00	*						54.	00		Vertical
4874.00	29.76	31.85	8.66	32.	12	38.15	54.	00	-15.85	Horizontal
7311.00	21.90	36.37	11.71	31.	91	38.07	54.	00	-15.93	Horizontal
9748.00	23.25	38.27	14.25	31.	56	44.21	54.	00	-9.79	Horizontal
12185.00	*						54.	00		Horizontal
14622.00	*						54.	00		Horizontal
17059.00	*						54.	00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 46 of 57

Test mode:		802.11b			Test o	channel:		High	est	
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prea Fac (dE	tor	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4924.00	44.49	31.90	8.70	32.	15	52.94	74.	00	-21.06	Vertical
7386.00	34.72	36.49	11.76	31.8	33	51.14	74.	00	-22.86	Vertical
9848.00	36.85	38.62	14.31	31.7	77	58.01	74.	00	-15.99	Vertical
12310.00	*						74.	00		Vertical
14772.00	*						74.	00		Vertical
17234.00	*						74.	00		Vertical
4924.00	43.86	31.90	8.70	32.	15	52.31	74.	00	-21.69	Horizontal
7386.00	33.65	36.49	11.76	31.8	33	50.07	74.	00	-23.93	Horizontal
9848.00	33.04	38.62	14.31	31.7	77	54.20	74.	00	-19.80	Horizontal
12310.00	*						74.	00		Horizontal
14772.00	*						74.	00		Horizontal
17234.00	*						74.	00		Horizontal
Average val			T	1					T	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Prea Fac (dE	tor	Level (dBuV/m)	Limit (dBu		Over Limit (dB)	polarization
4924.00	35.44	31.90	8.70	32.	15	43.89	54.	00	-10.11	Vertical
7386.00	24.64	36.49	11.76	31.8	33	41.06	54.	00	-12.94	Vertical
9848.00	25.36	38.62	14.31	31.7	77	46.52	54.	00	-7.48	Vertical
12310.00	*						54.	00		Vertical
14772.00	*						54.	00		Vertical
17234.00	*						54.	00		Vertical
4924.00	34.24	31.90	8.70	32.	15	42.69	54.	00	-11.31	Horizontal
7386.00	23.05	36.49	11.76	31.8	33	39.47	54.	00	-14.53	Horizontal
9848.00	22.30	38.62	14.31	31.7	77	43.46	54.	00	-10.54	Horizontal
12310.00	*						54.	00		Horizontal
14772.00	*						54.	00		Horizontal
17234.00	*						54.	00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 47 of 57

Test mode:		802.11g		Test	channel:	lowe	st	
Peak value:					_			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.09	31.79	8.62	32.10	47.40	74.00	-26.60	Vertical
7236.00	33.46	36.19	11.68	31.97	49.36	74.00	-24.64	Vertical
9648.00	32.17	38.07	14.16	31.56	52.84	74.00	-21.16	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	37.95	31.79	8.62	32.10	46.26	74.00	-27.74	Horizontal
7236.00	33.30	36.19	11.68	31.97	49.20	74.00	-24.80	Horizontal
9648.00	31.79	38.07	14.16	31.56	52.46	74.00	-21.54	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val			T	T			•	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.27	31.79	8.62	32.10	36.58	54.00	-17.42	Vertical
7236.00	22.35	36.19	11.68	31.97	38.25	54.00	-15.75	Vertical
9648.00	22.54	38.07	14.16	31.56	43.21	54.00	-10.79	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertica
4824.00	27.55	31.79	8.62	32.10	35.86	54.00	-18.14	Horizontal
7236.00	21.91	36.19	11.68	31.97	37.81	54.00	-16.19	Horizontal
9648.00	21.56	38.07	14.16	31.56	42.23	54.00	-11.77	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 48 of 57

Test mode:		802.11g		Test	channel:	Midd	le	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.36	31.85	8.66	32.12	46.75	74.00	-27.25	Vertical
7311.00	33.66	36.37	11.71	31.91	49.83	74.00	-24.17	Vertical
9748.00	33.28	38.27	14.25	31.56	54.24	74.00	-19.76	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	38.99	31.85	8.66	32.12	47.38	74.00	-26.62	Horizontal
7311.00	32.38	36.37	11.71	31.91	48.55	74.00	-25.45	Horizontal
9748.00	33.21	38.27	14.25	31.56	54.17	74.00	-19.83	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val					1			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.29	31.85	8.66	32.12	37.68	54.00	-16.32	Vertical
7311.00	22.00	36.37	11.71	31.91	38.17	54.00	-15.83	Vertical
9748.00	22.56	38.27	14.25	31.56	43.52	54.00	-10.48	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.16	31.85	8.66	32.12	37.55	54.00	-16.45	Horizontal
7311.00	21.49	36.37	11.71	31.91	37.66	54.00	-16.34	Horizontal
9748.00	22.94	38.27	14.25	31.56	43.90	54.00	-10.10	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 49 of 57

Test mode:		802.11g		Test	channel:	High	est	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	43.17	31.90	8.70	32.15	51.62	74.00	-22.38	Vertical
7386.00	33.88	36.49	11.76	31.83	50.30	74.00	-23.70	Vertical
9848.00	36.26	38.62	14.31	31.77	57.42	74.00	-16.58	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	42.74	31.90	8.70	32.15	51.19	74.00	-22.81	Horizontal
7386.00	32.92	36.49	11.76	31.83	49.34	74.00	-24.66	Horizontal
9848.00	32.49	38.62	14.31	31.77	53.65	74.00	-20.35	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val					1			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	34.22	31.90	8.70	32.15	42.67	54.00	-11.33	Vertical
7386.00	23.84	36.49	11.76	31.83	40.26	54.00	-13.74	Vertical
9848.00	24.79	38.62	14.31	31.77	45.95	54.00	-8.05	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.19	31.90	8.70	32.15	41.64	54.00	-12.36	Horizontal
7386.00	22.34	36.49	11.76	31.83	38.76	54.00	-15.24	Horizontal
9848.00	21.77	38.62	14.31	31.77	42.93	54.00	-11.07	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*		-			54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 50 of 57

Test mode:		802.11n(H	IT20)	Test	channel:	Low	est	
Peak value:					_		_	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.46	31.79	8.62	32.10	47.77	74.00	-26.23	Vertical
7236.00	33.69	36.19	11.68	31.97	49.59	74.00	-24.41	Vertical
9648.00	32.34	38.07	14.16	31.56	53.01	74.00	-20.99	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.26	31.79	8.62	32.10	46.57	74.00	-27.43	Horizontal
7236.00	33.51	36.19	11.68	31.97	49.41	74.00	-24.59	Horizontal
9648.00	31.95	38.07	14.16	31.56	52.62	74.00	-21.38	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal
Average val								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.61	31.79	8.62	32.10	36.92	54.00	-17.08	Vertical
7236.00	22.58	36.19	11.68	31.97	38.48	54.00	-15.52	Vertical
9648.00	22.70	38.07	14.16	31.56	43.37	54.00	-10.63	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	27.84	31.79	8.62	32.10	36.15	54.00	-17.85	Horizontal
7236.00	22.11	36.19	11.68	31.97	38.01	54.00	-15.99	Horizontal
9648.00	21.71	38.07	14.16	31.56	42.38	54.00	-11.62	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 51 of 57

Test mode:		802.11n(H	IT20)	Test	channel:	Midd	le	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.66	31.85	8.66	32.12	47.05	74.00	-26.95	Vertical
7311.00	33.86	36.37	11.71	31.91	50.03	74.00	-23.97	Vertical
9748.00	33.42	38.27	14.25	31.56	54.38	74.00	-19.62	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.25	31.85	8.66	32.12	47.64	74.00	-26.36	Horizontal
7311.00	32.55	36.37	11.71	31.91	48.72	74.00	-25.28	Horizontal
9748.00	33.34	38.27	14.25	31.56	54.30	74.00	-19.70	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val					_			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.57	31.85	8.66	32.12	37.96	54.00	-16.04	Vertical
7311.00	22.19	36.37	11.71	31.91	38.36	54.00	-15.64	Vertical
9748.00	22.69	38.27	14.25	31.56	43.65	54.00	-10.35	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.40	31.85	8.66	32.12	37.79	54.00	-16.21	Horizontal
7311.00	21.65	36.37	11.71	31.91	37.82	54.00	-16.18	Horizontal
9748.00	23.06	38.27	14.25	31.56	44.02	54.00	-9.98	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 52 of 57

Test mode:		802.11n(H	T20)	Test	channel:	High	est	
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	43.70	31.90	8.70	32.15	52.15	74.00	-21.85	Vertical
7386.00	34.22	36.49	11.76	31.83	50.64	74.00	-23.36	Vertical
9848.00	36.49	38.62	14.31	31.77	57.65	74.00	-16.35	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.19	31.90	8.70	32.15	51.64	74.00	-22.36	Horizontal
7386.00	33.21	36.49	11.76	31.83	49.63	74.00	-24.37	Horizontal
9848.00	32.71	38.62	14.31	31.77	53.87	74.00	-20.13	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val				1				T
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	34.71	31.90	8.70	32.15	43.16	54.00	-10.84	Vertical
7386.00	24.16	36.49	11.76	31.83	40.58	54.00	-13.42	Vertical
9848.00	25.02	38.62	14.31	31.77	46.18	54.00	-7.82	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.61	31.90	8.70	32.15	42.06	54.00	-11.94	Horizontal
7386.00	22.62	36.49	11.76	31.83	39.04	54.00	-14.96	Horizontal
9848.00	21.98	38.62	14.31	31.77	43.14	54.00	-10.86	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

## Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367

Page 53 of 57

Test mode:		802.11n(HT40)			Test channel:		Lowe	st		
Peak value:										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)		Level (dBuV/m)	Limit Line (dBuV/m)		Over Limit (dB)	polarization
4844.00	37.61	31.81	8.63	32	.11	45.94	74.00		-28.06	Vertical
7266.00	32.52	36.28	11.69	31	.94	48.55	74.	00	-25.45	Vertical
9688.00	31.50	38.13	14.21	31	.52	52.32	74.	00	-21.68	Vertical
12060.00	*						74.	00		Vertical
14472.00	*						74.	00		Vertical
16884.00	*						74.	00		Vertical
4844.00	36.70	31.81	8.63	32	.11	45.03	74.	00	-28.97	Horizontal
7266.00	32.48	36.28	11.69	31	.94	48.51	74.	00	-25.49	Horizontal
9688.00	31.17	38.13	14.21	31	.52	51.99	74.	00	-22.01	Horizontal
12060.00	*						74.	00		Horizontal
14472.00	*						74.	00		Horizontal
16884.00	*						74.	00		Horizontal

#### Average value:

7170rugo var								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	26.91	31.81	8.63	32.11	35.24	54.00	-18.76	Vertical
7266.00	21.45	36.28	11.69	31.94	37.48	54.00	-16.52	Vertical
9688.00	21.90	38.13	14.21	31.52	42.72	54.00	-11.28	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	26.38	31.81	8.63	32.11	34.71	54.00	-19.29	Horizontal
7266.00	21.11	36.28	11.69	31.94	37.14	54.00	-16.86	Horizontal
9688.00	20.96	38.13	14.21	31.52	41.78	54.00	-12.22	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 54 of 57

Test mode:		802.11n(HT40)		Test channel:		Middle		
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)			polarization
4874.00	37.13	31.85	8.66	32.12	45.52	74.00	-28.48	Vertical
7311.00	32.89	36.37	11.71	31.91	31.91 49.06		-24.94	Vertical
9748.00	32.73	38.27	14.25	31.56	53.69	74.00	-20.31	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	37.96	31.85	8.66	32.12	46.35	74.00	-27.65	Horizontal
7311.00	31.70	36.37	11.71	31.91	47.87	74.00	-26.13	Horizontal
9748.00	32.70	38.27	14.25	31.56	53.66	74.00	-20.34	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal
Average val	ue:		1					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	28.16	31.85	8.66	32.12	36.55	54.00	-17.45	Vertical
7311.00	21.25	36.37	11.71	31.91	37.42	54.00	-16.58	Vertical
9748.00	22.02	38.27	14.25	31.56	42.98	54.00	-11.02	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	28.18	31.85	8.66	32.12	36.57	54.00	-17.43	Horizontal
7311.00	20.83	36.37	11.71	31.91	37.00	54.00	-17.00	Horizontal
9748.00	22.45	38.27	14.25	31.56	43.41	54.00	-10.59	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

## Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. "\*", means this data is the too weak instrument of signal is unable to test.



Report No.: EBO1409120-E367 Page 55 of 57

Test mode:		802.11n(HT40)		Test channel:		Highest		
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	41.06	31.88	8.68	32.13	49.49	74.00	-24.51	Vertical
7356.00	32.55	36.45	11.75	31.86	48.89	74.00	-25.11	Vertical
9808.00	35.30	38.43	14.29	31.68	56.34	74.00	-17.66	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	40.96	31.88	8.68	32.13	49.39	74.00	-24.61	Horizontal
7356.00	31.75	36.45	11.75	31.86	48.09	74.00	-25.91	Horizontal
9808.00	31.60	38.43	14.29	31.68	52.64	74.00	-21.36	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average val			ı	Ī	T		ı	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	32.27	31.88	8.68	32.13	40.70	54.00	-13.30	Vertical
7356.00	22.55	36.45	11.75	31.86	38.89	54.00	-15.11	Vertical
9808.00	23.87	38.43	14.29	31.68	44.91	54.00	-9.09	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	31.52	31.88	8.68	32.13	39.95	54.00	-14.05	Horizontal
7356.00	21.21	36.45	11.75	31.86	37.55	54.00	-16.45	Horizontal
9808.00	20.92	38.43	14.29	31.68	41.96	54.00	-12.04	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

## Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2 "\*", means this data is the too weak instrument of signal is unable to test.





Report No.: EBO1409120-E367

Page 56 of 57

# 8 Test Setup Photo

Radiated Emission

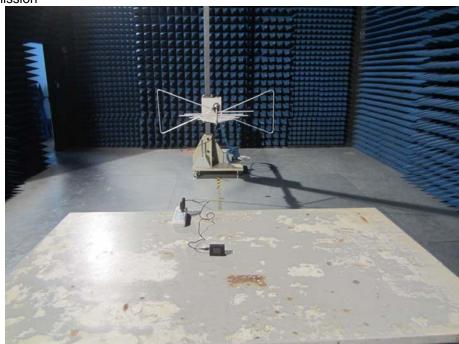

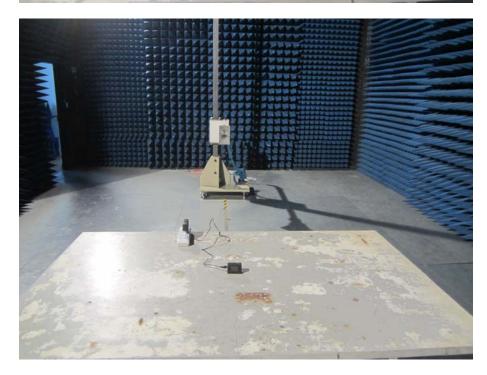



Report No.: EBO1409120-E367

Page 57 of 57

## 9 EUT Constructional Details

Reference to the test reprot NO.: EBO1409120-E366

-----End-----