

Test Report Prepared By:

Electronics Test Centre
27 East Lake Hill
Airdrie, Alberta
Canada
T4A 2K3

airdrie@etc-mpbtech.com
<http://www.etc-mpb.com/>
Telephone: (403) 912-0037
Facsimile: (403) 912-0083

MPBT Report No.: m06e3214-1 Release 1

Date: 15 December 2004

Emissions Testing of the MDC in accordance with FCC Part 90 (2003)
Private Land Mobile Radio Services

Test Personnel: Trung Nguyen, Jianming Zhang, David Raynes

Prepared for: Mentor Engineering Inc.

2891 Sunridge Way N.E.
Suite 230
Calgary, Alberta
Canada
T1Y 7K7

Telephone: 1-403-777-3760
Facsimile: 1-403-777-3769



David Raynes
draynes@etc-mpbtech.com
Senior EMC Technologist
Electronics Test Centre (Airdrie)
Authorized Signatory

TABLE OF CONTENTS

1.0	INTRODUCTION
1.1	SCOPE
1.2	APPLICANT
1.3	APPLICABILITY
1.4	TEST SAMPLE DESCRIPTION
1.5	GENERAL TEST CONDITIONS AND ASSUMPTIONS
1.6	SCOPE OF TESTING
1.6.1	VARIATIONS IN TEST METHODS
1.6.2	TEST SAMPLE MODIFICATIONS
2.0	ABBREVIATIONS
3.0	MEASUREMENT UNCERTAINTY
4.0	TEST CONCLUSION
4.1	CONDUCTED EMISSIONS AT AC LINES
4.2	CONDUCTED EMISSIONS MEASURED AT ANTENNA PORT
4.3	RADIATED EMISSIONS INCLUDING RESTRICTED BANDS OF OPERATION
4.3A	RECEIVE MODE
4.3B	TRANSMIT MODE
4.4	FREQUENCY STABILITY
5.0	TEST FACILITY
5.1	LOCATION
5.2	GROUNDING PLAN
5.3	POWER
5.4	TEST CONFIGURATION
5.4.1	TABLETOP EQUIPMENT
5.4.2	RACK MOUNT
6.0	TEST EQUIPMENT
6.1	RADIATED EMISSIONS
6.2	CONDUCTED EMISSIONS
6.3	CALIBRATION

APPENDIX A: Test Sample Description: MDC

1.0 INTRODUCTION

1.1 SCOPE

The purpose of this report is to present the findings and results of compliance testing performed in accordance with CFR Title 47 FCC Part 90 (2003), Private Land Mobile Radio Services.

1.2 APPLICANT

This test report has been prepared for Mentor Engineering Inc., located in Calgary, Alberta, Canada.

1.3 APPLICABILITY

All test procedures, limits, and results defined in this document apply to the Mentor Engineering Inc. MDC unit, referred to herein as the Equipment Under Test (EUT).

The results contained in this report relate only to the item tested.

This report does not imply product endorsement by NVLAP or the Canadian or US governments.

1.4 TEST SAMPLE DESCRIPTION

The test sample provided for testing was a MDC:

Product Type:	mobile dispatch
Model Number:	MDC
Serial Number:	n/a
Power	12 VDC
Requirements:	
Peripheral Equipment:	roof-mount antenna

More detailed information is provided by Mentor Engineering Inc. in Appendix A.

1.5 GENERAL TEST CONDITIONS AND ASSUMPTIONS

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated.

Where relevant, the EUT was only tested using the monitoring methods and test criteria defined in this report.

Environmental conditions are recorded for each test.

1.6 SCOPE OF TESTING

Testing was performed in accordance with FCC Part 90 (2003), and ANSI C63.4 (2003).

1.6.1 VARIATIONS IN TEST METHODS

There were no variations from the test procedures outlined above.

1.6.2 TEST SAMPLE CONFIGURATION & MODIFICATIONS

The EUT met the requirements without modification.

2.0 ACRONYMS

AP	-Average Peak
CE	-Conducted Emissions
E	-Field - Electric Field
H	-Field - Magnetic Field
N/T	-Not Tested
N/A	-Not Applicable
PK	-Peak
QP	-Quasi Peak
RE	-Radiated Emissions

3.0 MEASUREMENT UNCERTAINTY

For Radiated E-Field Emissions and Conducted Emissions, the uncertainties in the measurements were calculated using the methods outlined in the NAMAS document, NIS81: May 1984.

Frequency	= ± 1 kHz
Amplitude (RE)	= ± 4.01 dB
Amplitude (CE)	= ± 3.25 dB

4.0 TEST CONCLUSION

STATEMENT OF COMPLIANCE

The client equipment referred to in this report was found to comply with the requirements as stated below.

The EUT was subjected to the following tests. Compliance status is reported as a **PASS** or **FAIL**. Test conditions that are not applicable to the EUT are marked **n/a**. If testing was not performed at this time, the appropriate field is marked **n/t**.

The following table summarizes the test results in terms of the specification and class or level applied, the unique test sample identification, the EUT modification state, and configuration as applicable.

TEST CASE	TEST TYPE	SPECIFICATION	TEST SAMPLE	MOD. STATE	CONFIGURATION	RESULT
§4.1	Conducted Emissions at AC lines	FCC Part 15.107 and 15.207	MDC	nil	See § 1.6.2	n/a
§4.2	Conducted Emissions at Antenna Port	FCC Part 90	MDC	nil	See § 1.6.2	PASS
§4.3a	Radiated Emissions (Rx Mode)	FCC Part 15.109	MDC	nil	See § 1.6.2	PASS
§4.3b	Radiated Emissions (Tx Mode)	FCC Parts 2.1053, 15.205, 15.209 and 90	MDC	nil	See § 1.6.2	PASS
§4.4	Frequency Stability	FCC Part 2.1055	MDC	nil	See § 1.6.2	n/a


4.1 CONDUCTED EMISSIONS ON AC POWER LINES

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: Test Date: n/a	Product: MDC
Test Result, MDC: Not Applicable	
The MDC was not tested for Conducted Emissions. This is a DC powered device. The power source is provided by the end user, not Mentor Engineering Inc. There is no direct connection to the AC mains.	


4.2 CONDUCTED EMISSIONS MEASURED AT ANTENNA PORT

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: David Raynes Test Date: 16 November 2004			Product: MDC		
Test Result, MDC: PASS					
90.209: BW ≤ 20 kHz			90.210 Emission mask G		
Carrier Frequency [MHz]	99% Bandwidth [kHz]	Delta from limit [kHz]	Carrier Frequency [MHz]	Low RF Power	High RF power
806	17.5	-2.5	806	n/a	PASS
813	17.6	-2.4	813	n/a	PASS
821	18.3	-1.7	821	n/a	PASS
Measurements were performed while the MDC was transmitting continuous pulses. The RF output power is not user-adjustable. Testing was only conducted at the default power level. The RF section is an OEM module, pre-approved under FCC ID # AZ492FT5826. Refer to the test data and plots for more detail.					


Spectrum Analyzer Plot: Emission Mask G: Tx @ 806 MHz
Attenuation = 22.9 dB

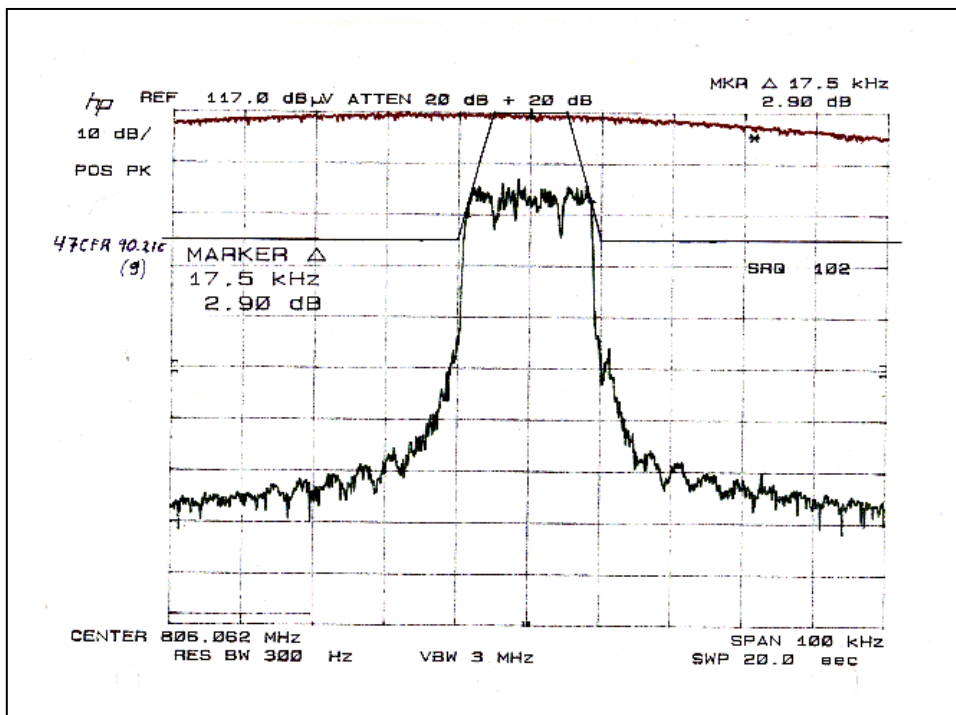


Spectrum Analyzer Plot: Emission Mask G: Tx @ 813 MHz
Attenuation = 22.9 dB

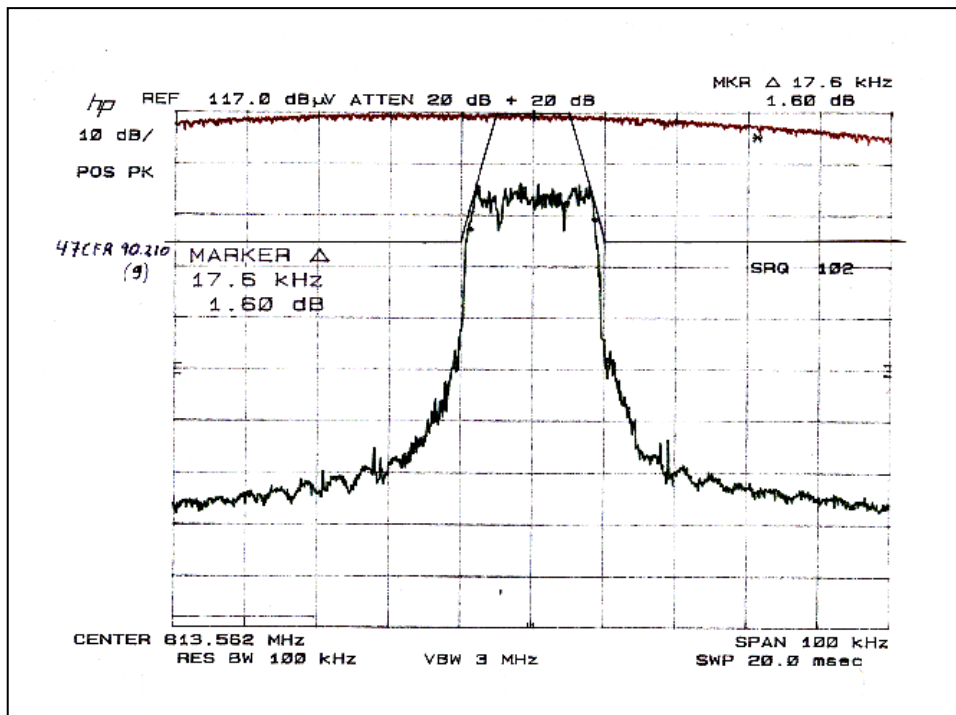


Spectrum Analyzer Plot: Emission Mask G: Tx @ 821 MHz
Attenuation = 22.9 dB

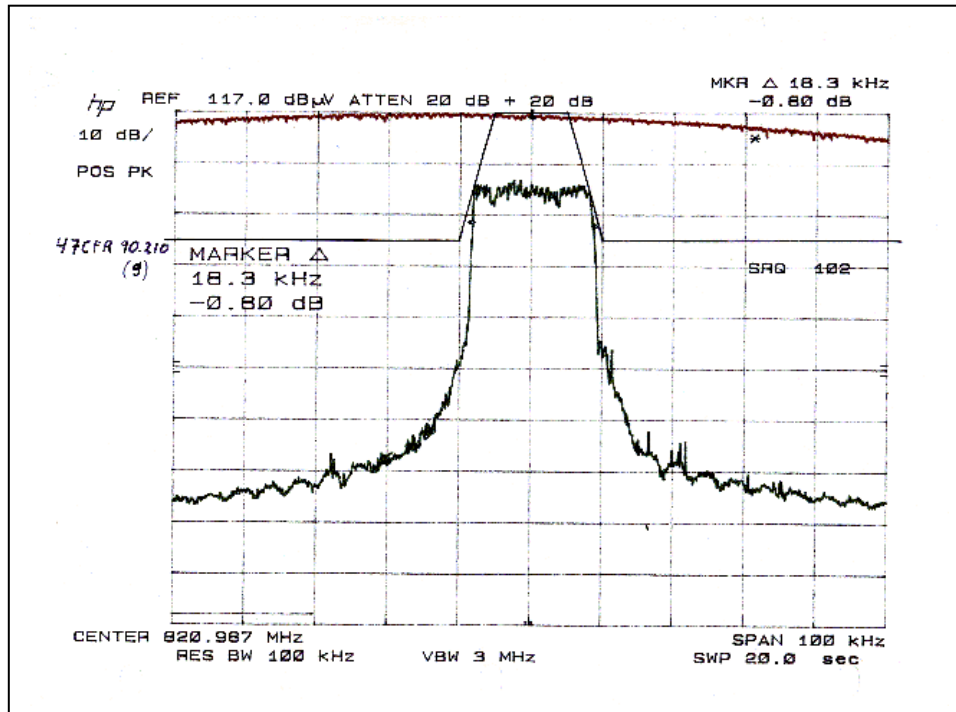


Plot of Conducted Emissions: -13 dBm = 94 dB μ V

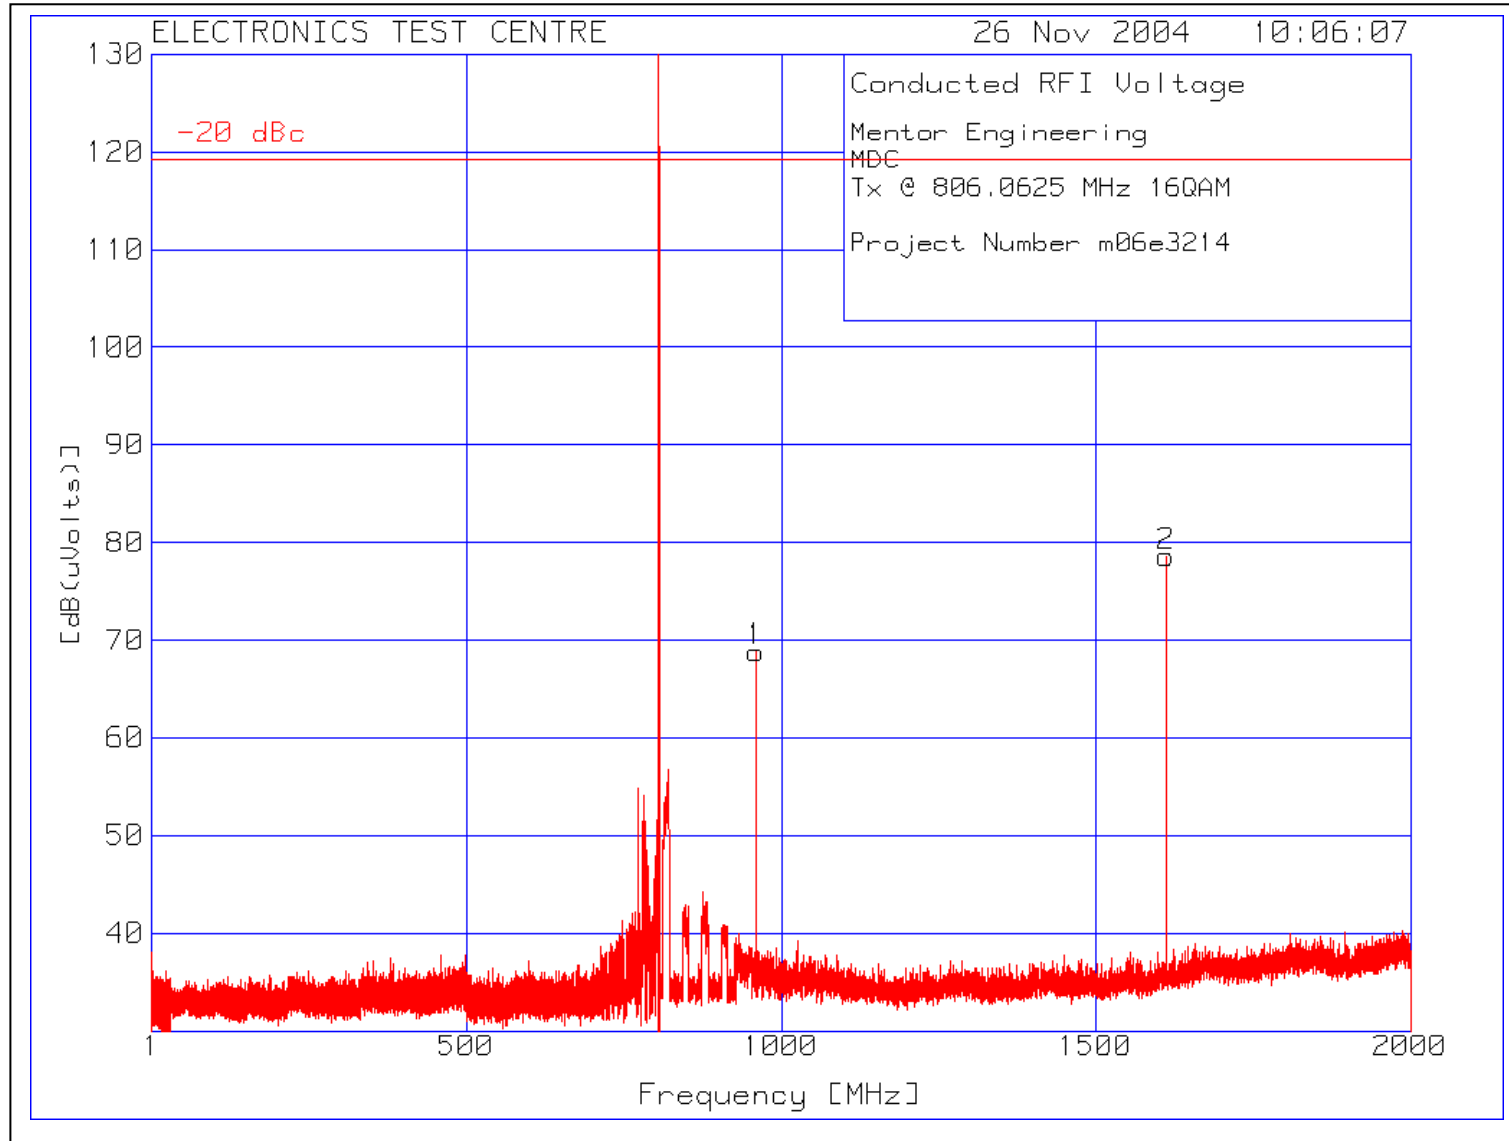


Plot of Conducted Emissions: -13 dBm = 94 dB μ V

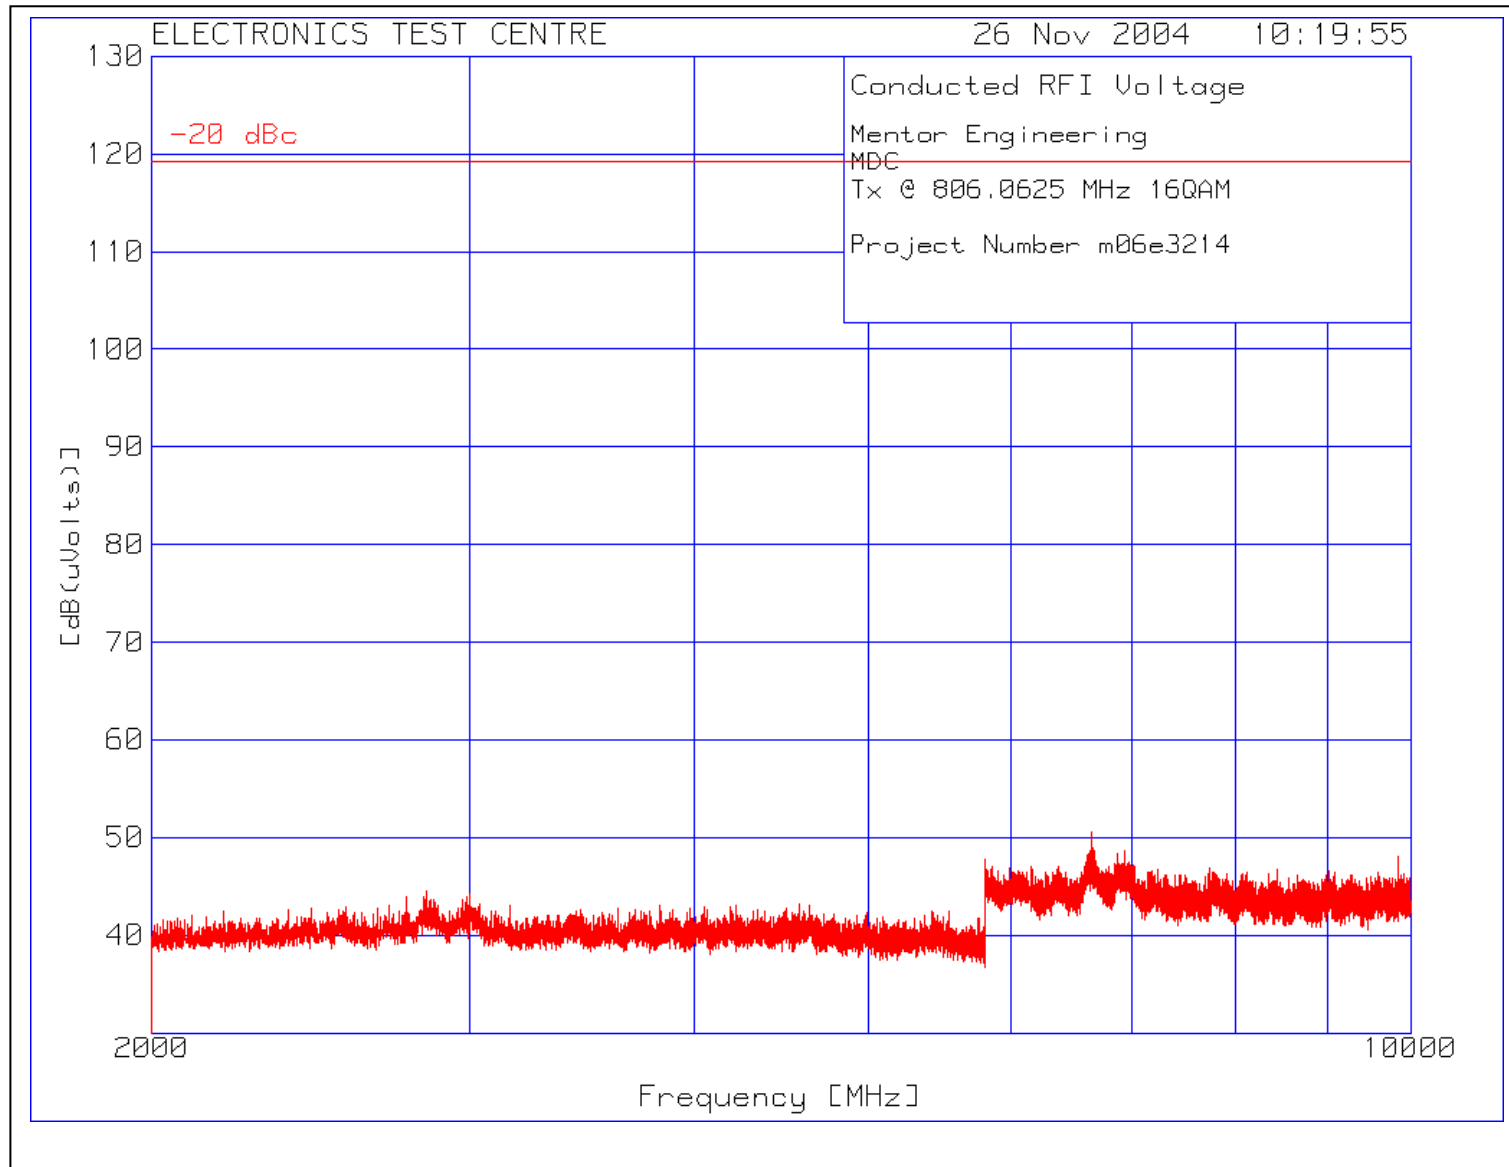


Plot of Conducted Emissions: -13 dBm = 94 dB μ V

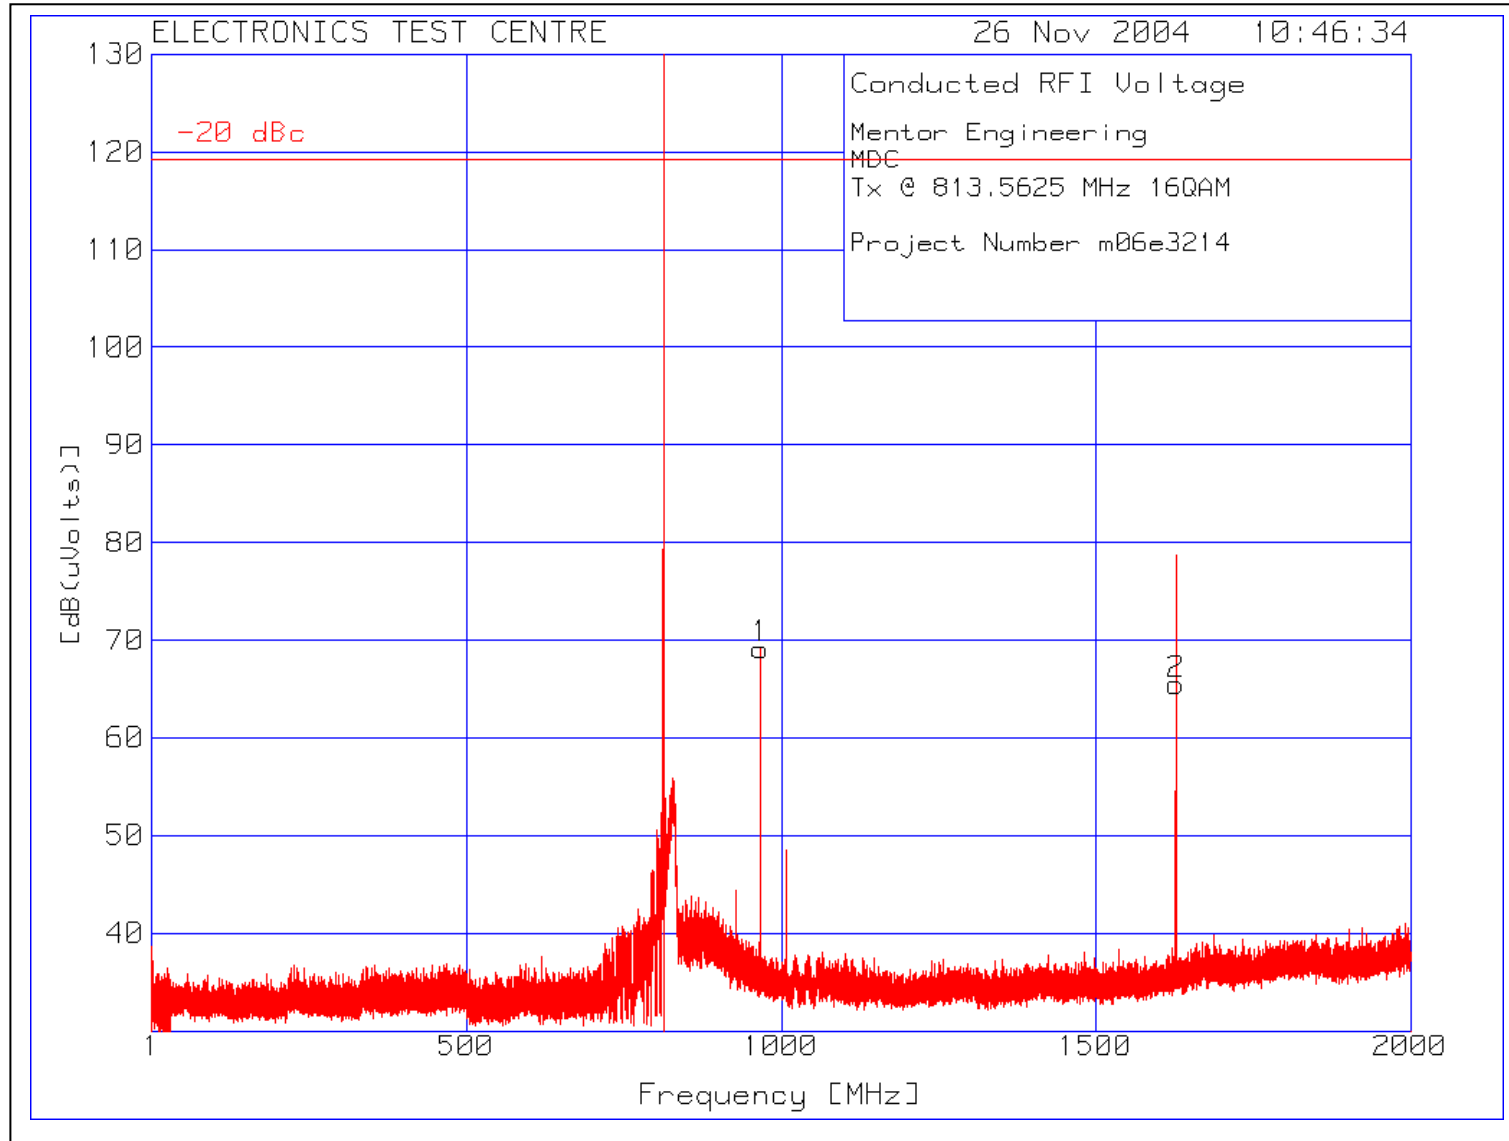


Plot of Conducted Emissions: -13 dBm = 94 dB μ V

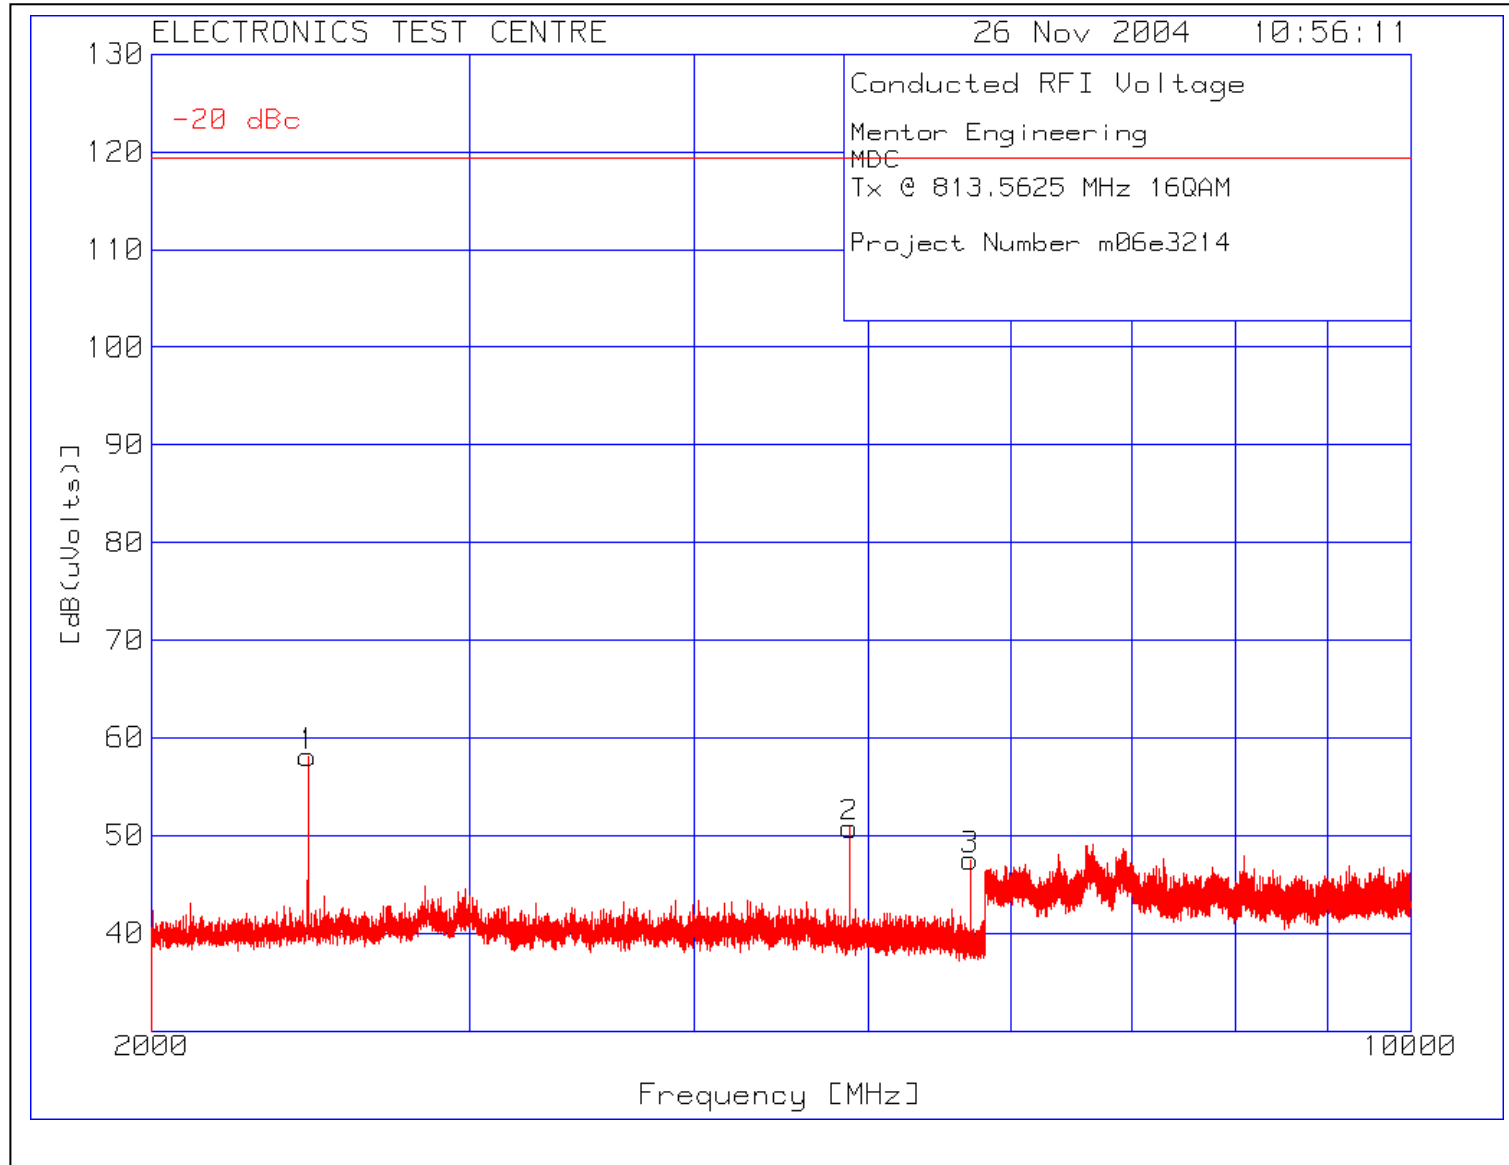

Plot of Conducted Emissions: -13 dBm = 94 dB μ V

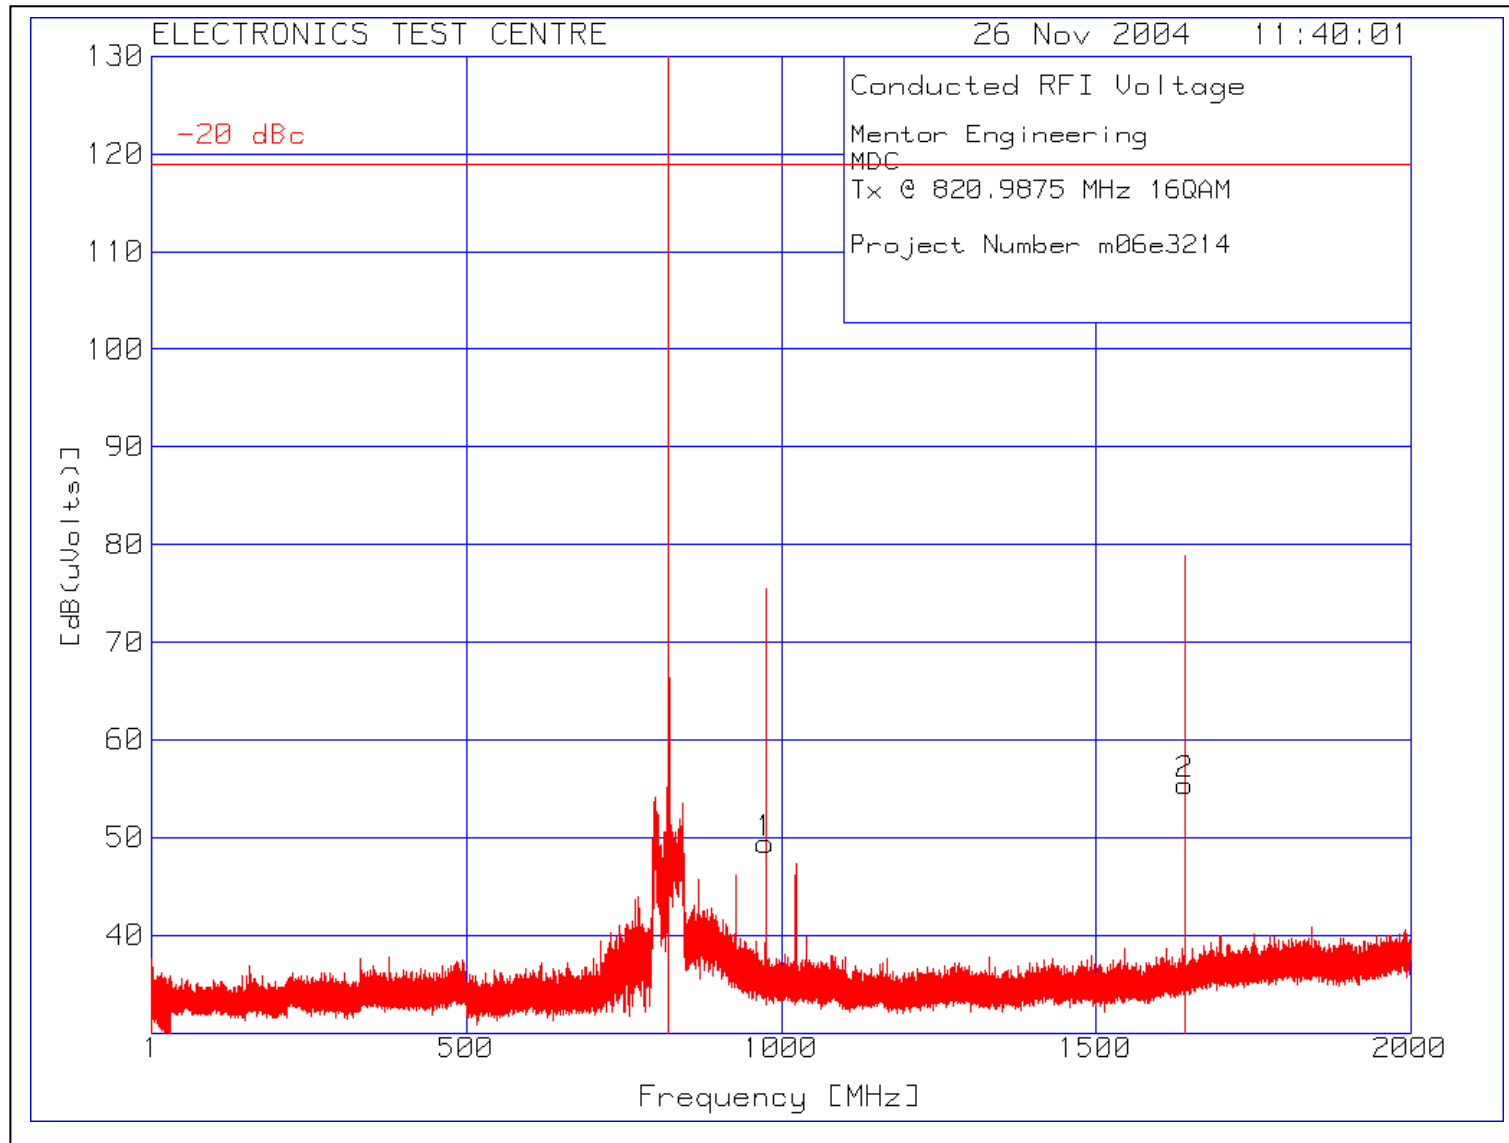

Plot of Conducted Emissions: -13 dBm = 94 dB μ V

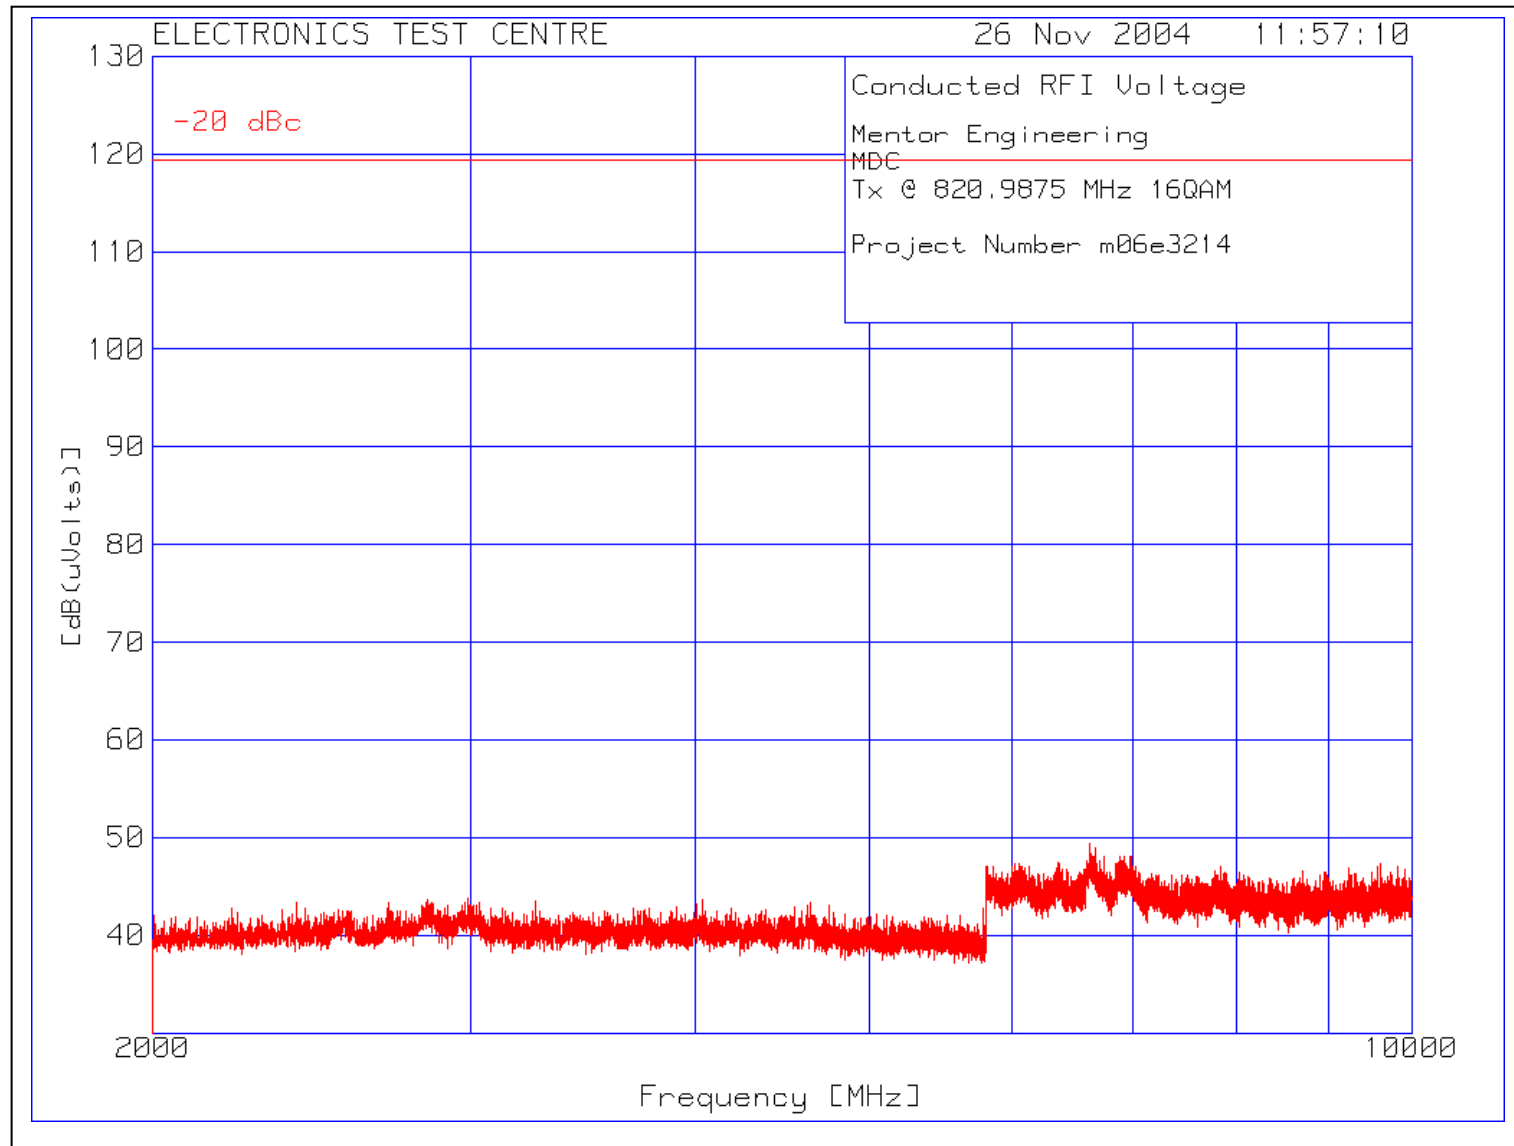

4.3 RADIATED EMISSIONS INCLUDING RESTRICTED BANDS OF OPERATION

4.3a Receive Mode

Test Lab: MPB Technologies Inc. Airdrie Test Personnel: Jianming Zhang Test Date: 23 November 2004			Product: MDC		
Test Result, MDC: PASS					
<p>Objectives/Criteria</p> <p>The Radiated E-Field emissions produced by a system or sub-system, measured at a distance of 3m from the EUT, shall not exceed the limits for the specifications as stated.</p> <p>Emission levels should meet the requirements with a margin of 6dB.</p> <p>The EUT was assessed against the requirements of Class B.</p> <p>Temperature = 19 °C Humidity = 29 %</p>			Specification: FCC Part 15 Subpart C		
			Frequency	Class A	Class B
			[MHz]	QP @ 3m	QP @ 3m
			30 – 88	49.54	40.00
			88 – 216	53.98	43.52
			216 – 960	56.90	46.02
			above 960	60.00	53.98
Horizontal:			Vertical:		
Frequency [MHz]	Field Strength [dBµV/m]	Delta [dB from limit]	Frequency [MHz]	Field Strength [dBµV/m]	Delta [dB from limit]
704.8629	42.84	-3.18	65.9632	33.99	-6.01
637.8730	42.03	-3.99	66.1374	33.97	-6.03
604.3240	41.55	-4.47	69.9640	33.99	-6.01
Refer to the test data and plots for more detail.					

Radiated Emissions Data:

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value(s) of up to 4 limits at the frequency measured, and the margin between the result and the limit(s).

For example:

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB(uVolts)]	Limit:1	2	3	4
94.0036	37.1 qp	2.2	8.5	47.8	54	43.5	50.5	40.5
Azimuth: 156	Height:113	Vert	Margin [dB]	-6.2	4.3	-2.7	7.3	



The applicable Limit

Test Frequency [MHz]	94.0036	Test Frequency f = 94.0036 MHz
Meter Reading [dB (uV)]	37.1 qp	The reading with Quasi-Peak detector
Gain/Loss Factor [dB]	2.2	Net correction for preamp gain & cable loss
Transducer Factor [dB]	8.5	Correction for antenna loss
Level [dB (uVolts)]	47.8	Corrected value for field strength
Azimuth:	156	The turntable was 156 degrees CW from facing the antenna
Height:	113	The antenna was 113 cm above the ground
Limit: 1	54	The value of Limit 1 at 94.0036 MHz
Margin [dB]	-6.2	The field strength is 6.2 dB below Limit 1
Limit: 2	43.5	The value of Limit 2 at 94.0036 MHz
Margin [dB]	4.3	The field strength is 4.3 dB above Limit 2
Limit: 3	50.5	The value of Limit 3 at 94.0036 MHz
Margin [dB]	-2.7	The field strength is 2.7 dB below Limit 3
Limit: 4	40.5	The value of Limit 4 at 94.0036 MHz
Margin [dB]	7.3	The field strength is 7.3 dB above Limit 4

Meter Reading in dBuV + Gain/Loss Factor in dB + Transducer Factor in dB = Corrected Field Strength

Note: When a preamp is used, the resulting gain is compensated.

Company: Mentor Engineering
Product: MDC
Rx mode
Project Number: M06e3212

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
=====								
Range: 1 30 - 1000MHz								
201.3383	18.71 qp	3.85	9.54	32.1	53.98	50	43.52	40.46
Azimuth: 252	Height:147	Horz	Margin [dB]:		-21.88	-17.9	-11.42	-8.36
218.1156	21.06 qp	4.11	10.51	35.68	56.9	50	46.02	40.46
Azimuth: 264	Height:117	Horz	Margin [dB]:		-21.22	-14.32	-10.34	-4.78
604.324	16.49 qp	6.74	18.32	41.55	56.9	57	46.02	47.46
Azimuth: 132	Height:128	Horz	Margin [dB]:		-15.35	-15.45	-4.47	-5.91
637.873	16.52 qp	6.88	18.63	42.03	56.9	57	46.02	47.46
Azimuth: 125	Height:138	Horz	Margin [dB]:		-14.87	-14.97	-3.99	-5.43
670.23	10.87 qp	7.08	19.96	37.91	56.9	57	46.02	47.46
Azimuth: 109	Height:126	Horz	Margin [dB]:		-18.99	-19.09	-8.11	-9.55
704.8629	16.03 qp	7.27	19.54	42.84	56.9	57	46.02	47.46
Azimuth: 105	Height:101	Horz	Margin [dB]:		-14.06	-14.16	-3.18	-4.62
738.4515	10.31 qp	7.46	19.8	37.57	56.9	57	46.02	47.46
Azimuth: 89	Height:101	Horz	Margin [dB]:		-19.33	-19.43	-8.45	-9.89
Range: 1 30 - 1000MHz								
66.1374	25.02 qp	2.25	6.7	33.97	49.54	50	40	40.46
Azimuth: 42	Height:101	Vert	Margin [dB]:		-15.57	-16.03	-6.03	-6.49
65.9632	25.04 qp	2.25	6.7	33.99	49.54	50	40	40.46
Azimuth: 48	Height:100	Vert	Margin [dB]:		-15.55	-16.01	-6.01	-6.47
69.964	24.58 qp	2.34	6.7	33.62	49.54	50	40	40.46
Azimuth: 83	Height:110	Vert	Margin [dB]:		-15.92	-16.38	-6.38	-6.84
73.9503	24.85 qp	2.44	6.7	33.99	49.54	50	40	40.46
Azimuth: 0	Height:119	Vert	Margin [dB]:		-15.55	-16.01	-6.01	-6.47
184.5504	19.35 qp	3.89	8.64	31.88	53.98	50	43.52	40.46
Azimuth: 270	Height:101	Vert	Margin [dB]:		-22.1	-18.12	-11.64	-8.58
201.0151	20.66 qp	3.85	8.95	33.46	53.98	50	43.52	40.46
Azimuth: 258	Height:101	Vert	Margin [dB]:		-20.52	-16.54	-10.06	-7
217.9792	22.24 qp	4.11	10.62	36.97	56.9	50	46.02	40.46
Azimuth: 92	Height:240	Vert	Margin [dB]:		-19.93	-13.03	-9.05	-3.49
LIMIT 1: FCC Part 15 Class A 3m								
LIMIT 2: ICES-003 Class A 3m								
LIMIT 3: FCC Part 15 Class B 3m ←								
LIMIT 4: ICES-003 Class B 3m								

qp - Quasi-Peak detector

4.3b Transmit Mode

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: Trung Nguyen, Jianming Zhang Test Date: 17 November – 1 December 2004	Product: MDC																
Test Result, MDC: PASS																	
The Radiated E-Field emissions produced by EUT, measured at a distance of 3m, shall not exceed these limits within the restricted bands of operation. Any emissions lying outside these bands shall be at least 20 dB down from the level of the fundamental. Attenuation below the limits of 15.209 is not required. ERP for harmonics and spurious must be less than -13 dBm,	<table> <tr> <th>Frequency [MHz]</th><th>Limit (QP @ 3m) [dBμV/m]</th></tr> <tr> <td>.009 – 0.490</td><td>88.5 – 53.8</td></tr> <tr> <td>.490 – 1.7</td><td>53.8 – 43</td></tr> <tr> <td>1.7 – 30</td><td>49.50</td></tr> <tr> <td>30 – 88</td><td>40.00</td></tr> <tr> <td>88 – 216</td><td>43.52</td></tr> <tr> <td>216 – 960</td><td>46.02</td></tr> <tr> <td>above 960</td><td>53.98</td></tr> </table>	Frequency [MHz]	Limit (QP @ 3m) [dBμV/m]	.009 – 0.490	88.5 – 53.8	.490 – 1.7	53.8 – 43	1.7 – 30	49.50	30 – 88	40.00	88 – 216	43.52	216 – 960	46.02	above 960	53.98
Frequency [MHz]	Limit (QP @ 3m) [dBμV/m]																
.009 – 0.490	88.5 – 53.8																
.490 – 1.7	53.8 – 43																
1.7 – 30	49.50																
30 – 88	40.00																
88 – 216	43.52																
216 – 960	46.02																
above 960	53.98																

Restricted Bands of Operation per Part 15.205:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.0900000 – 0.1100000	8.2910000 - 8.2940000	16.804250 - 16.804750	162.01250 - 167.17000	1660.0000 – 1710.0000	3.6000000 – 4.4000000	14.470000 – 14.500000
0.4950000 - 0.5050000	8.3620000 - 8.3660000	25.500000 - 25.670000	167.72000 - 173.20000	1718.8000 – 1722.2000	4.5000000 – 5.1500000	15.350000 – 16.200000
2.1735000 - 2.1905000	8.3762500 - 8.3867500	37.500000 - 38.250000	240.00000 – 285.00000	2200.0000 – 2300.0000	5.3500000 – 5.4600000	17.700000 – 21.400000
4.1250000 - 4.1280000	8.4142500 - 8.4147500	73.000000 - 74.600000	322.00000 - 335.40000	2310.0000 – 2390.0000	7.2500000 – 7.7500000	22.010000 – 23.120000
4.1772500 - 4.1777500	12.290000 - 12.293000	74.800000 - 75.200000	399.90000 – 410.00000	2483.5000 – 2500.0000	8.0250000 – 8.5000000	23.600000 – 24.000000
4.2072500 - 4.2077500	12.519750 - 12.520250	108.00000 - 121.94000	608.00000 – 614.00000	2655.0000 – 2900.0000	9.0000000 – 9.2000000	31.200000 – 31.800000
5.6770000 - 5.6830000	12.576750 - 12.577250	123.00000 - 138.00000	960.00000 – 1240.0000	3260.0000 – 3267.0000	9.3000000 – 9.5000000	36.430000 – 36.500000
6.2150000 - 6.2180000	13.360000 - 13.410000	149.90000 - 150.05000	1300.0000 – 1427.0000	3332.0000 – 3339.0000	10.600000 – 12.700000	Above 38.600000
6.2677500 - 6.2682500	16.420000 - 16.423000	156.52475 - 156.52525	1435.0000 – 1626.5000	3345.8000 – 3358.0000	13.250000 – 13.400000	
6.3117500 - 6.3122500	16.694750 - 16.695250	156.70000 - 156.90000	1645.5000 – 1646.5000	3500.0000 – 3600.0000		

US only

** Canada 108 – 138 MHz

*** Canada 960 – 1427 MHz

**** Canada only

Radiated Emissions Data:

Operation in Restricted Bands:

nominal f_c (MHz)	f (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Delta (dB)	Antenna Polarization	Antenna Height (cm)	Azimuth (Degrees)
806	1612.1250	≤ 34	54	≥ 20			
806	4030.3125	≤ 34	54	≥ 20			
806	4836.3750	≤ 34	54	≥ 20			
806	7254.5625	≤ 34	54	≥ 20			
806	8060.6250	≤ 34	54	≥ 20			
813	4067.8125	≤ 34	54	≥ 20			
813	4881.3750	≤ 34	54	≥ 20			
813	7322.0625	≤ 34	54	≥ 20			
813	8135.6250	≤ 34	54	≥ 20			
821	4104.9375	≤ 34	54	≥ 20			
821	4925.9250	≤ 34	54	≥ 20			
821	7388.8875	≤ 34	54	≥ 20			
821	8209.8750	≤ 34	54	≥ 20			

Carrier and spurious emissions: nominal $f_c = 806 \text{ MHz}$

Frequency (MHz)	EUT Spectrum Analyzer Reading (dBuV)	Substitute Tx Spectrum Analyzer Reading (dBuV)	Power Delivered To Tx Antenna After Cable Loss (dBm)	Corrected Tx Antenna Power (dBm)	Tx Antenna Gain (dBi)	EIRP (isotropic) (dBm)	ERP (dipole) (dBm)	ERP Limit (dBm)	Delta (dB)	ERP (Watts)
806.0625	74.60	75.45	17.75	16.90	6.3	23.20	21.05			0.13
806.0625	76.30	75.60	17.75	18.45	6.6	25.05	22.90			0.19
960							≤ 33	-13	≥ 20	
$2 f_c$							≤ 33	-13	≥ 20	
$3 f_c$							≤ 33	-13	≥ 20	
$4 f_c$							≤ 33	-13	≥ 20	
$5 f_c$							≤ 33	-13	≥ 20	
$6 f_c$							≤ 33	-13	≥ 20	
$7 f_c$							≤ 33	-13	≥ 20	
$8 f_c$							≤ 33	-13	≥ 20	
$9 f_c$							≤ 33	-13	≥ 20	
$10 f_c$							≤ 33	-13	≥ 20	

Carrier and spurious emissions: nominal $f_c = 813 \text{ MHz}$

Frequency (MHz)	EUT Spectrum Analyzer Reading (dBuV)	Substitute Tx Spectrum Analyzer Reading (dBuV)	Power Delivered To Tx Antenna After Cable Loss (dBm)	Corrected Tx Antenna Power (dBm)	Tx Antenna Gain (dBi)	EIRP (isotropic) (dBm)	ERP (dipole) (dBm)	ERP Limit (dBm)	Delta (dB)	ERP (Watts)
813.5625	75.40	74.15	16.00	17.25	6.5	23.75	21.60			0.14
813.5625	76.40	76.00	18.15	18.55	6.6	25.15	23.00			0.20
960							≤ 33	-13	≥ 20	
$2 f_c$							≤ 33	-13	≥ 20	
$3 f_c$							≤ 33	-13	≥ 20	
$4 f_c$							≤ 33	-13	≥ 20	
$5 f_c$							≤ 33	-13	≥ 20	
$6 f_c$							≤ 33	-13	≥ 20	
$7 f_c$							≤ 33	-13	≥ 20	
$8 f_c$							≤ 33	-13	≥ 20	
$9 f_c$							≤ 33	-13	≥ 20	
$10 f_c$							≤ 33	-13	≥ 20	

Carrier and spurious emissions: nominal $f_c = 821$ MHz

Frequency (MHz)	EUT Spectrum Analyzer Reading (dBuV)	Substitute Tx Spectrum Analyzer Reading (dBuV)	Power Delivered To Tx Antenna After Cable Loss (dBm)	Corrected Tx Antenna Power (dBm)	Tx Antenna Gain (dBi)	EIRP (isotropic) (dBm)	ERP (dipole) (dBm)	ERP Limit (dBm)	Delta (dB)	ERP (Watts)
820.9875	74.20	73.50	15.85	16.55	6.4	22.95	20.80			0.12
820.9875	76.10	75.05	17.50	18.55	6.5	25.05	22.90			0.19
960							≤ 33	-13	≥ 20	
$2 f_c$							≤ 33	-13	≥ 20	
$3 f_c$							≤ 33	-13	≥ 20	
$4 f_c$							≤ 33	-13	≥ 20	
$5 f_c$							≤ 33	-13	≥ 20	
$6 f_c$							≤ 33	-13	≥ 20	
$7 f_c$							≤ 33	-13	≥ 20	
$8 f_c$							≤ 33	-13	≥ 20	
$9 f_c$							≤ 33	-13	≥ 20	
$10 f_c$							≤ 33	-13	≥ 20	

4.4 FREQUENCY STABILITY (§ 2.1055)

Test Lab: Electronics Test Centre (Airdrie) Test Personnel: n/a Test Date: n/a	Product: MDC
Test Result, MDC: Not Tested	
The MDC was not tested for frequency stability. The RF section is an OEM module, pre-approved under FCC ID # AZ492FT5826.	

5.0 TEST FACILITY

5.1 LOCATION

The EUT was tested for Electromagnetic Compatibility at the Electronics Test Centre, located in Airdrie, Alberta, Canada.

The RF Anechoic Chamber (RFAC) is identified as Chamber 1, located in the main building complex at the Electronics Test Centre. Its usable working space measures 10.6 m long x 7.3 m wide x 6.5 m high.

This test site is listed with the FCC under Registration Number 99541. Measurements taken at this site are accepted by Industry Canada per file number IC 2046-1.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in two shielded vestibules located at the side of the main room. Cables are routed through bulkhead panels between the rooms as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

5.2 GROUNDING PLAN

The EUT was located on a wooden table 80 cm above the ground plane.

The EUT was grounded in accordance with Mentor Engineering Inc. specifications.

5.3 POWER


AC power was supplied via an Underwriter's Laboratories ULW100-69, 100 dB, 100 Ampere wall mounted filter. Bonding to ground is implemented at the chamber wall.

5.4 TEST CONFIGURATION


5.4.1 Tabletop Equipment

The following diagrams illustrate the configuration of the EUT test and measurement equipment for Radiated and Conducted Emissions Testing of tabletop equipment.

Radiated

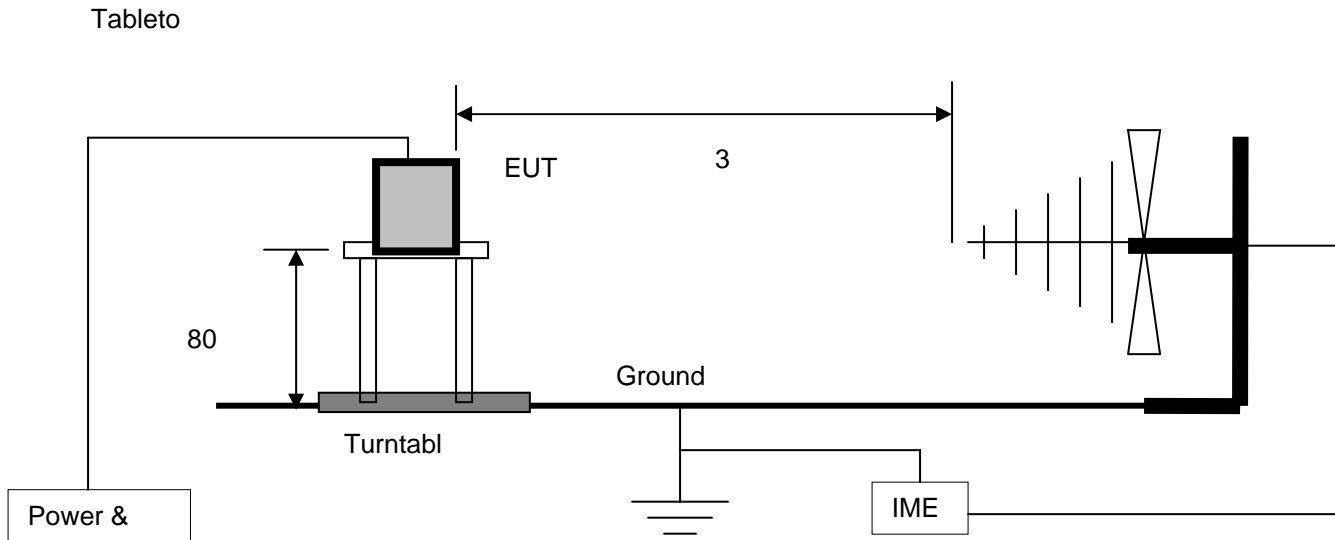


Conducted

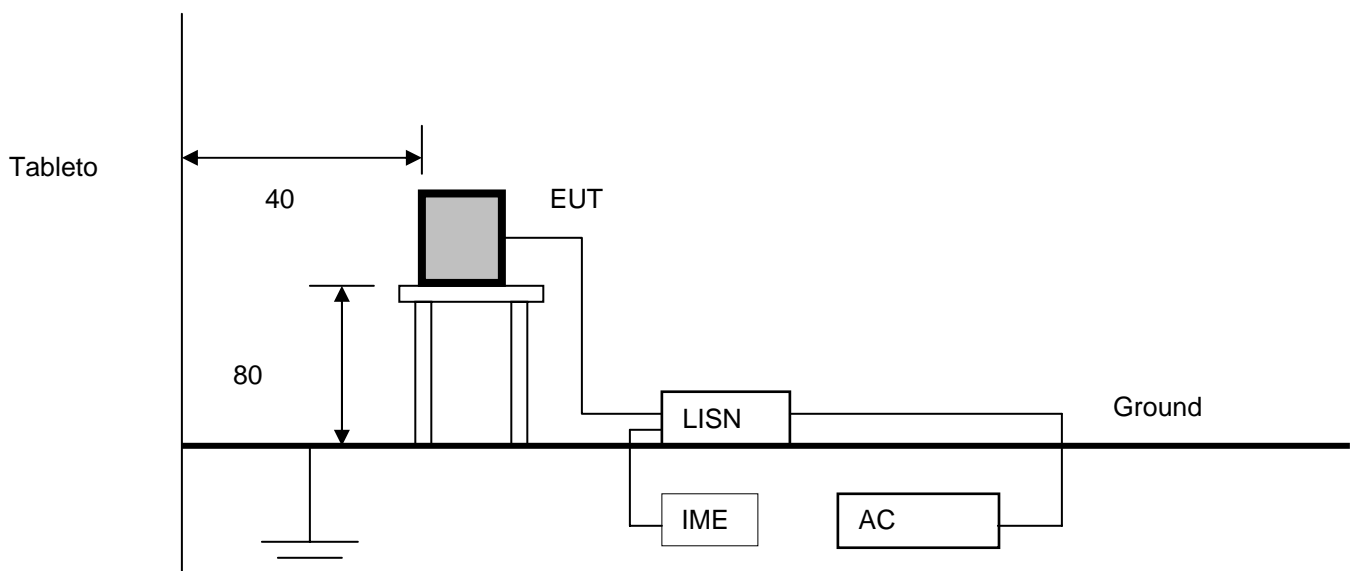


5.4.2 Rack Mount

The following diagrams illustrate the configuration of the EUT test and measurement equipment for Radiated and Conducted Emissions Testing of rack mounted equipment.

Radiated

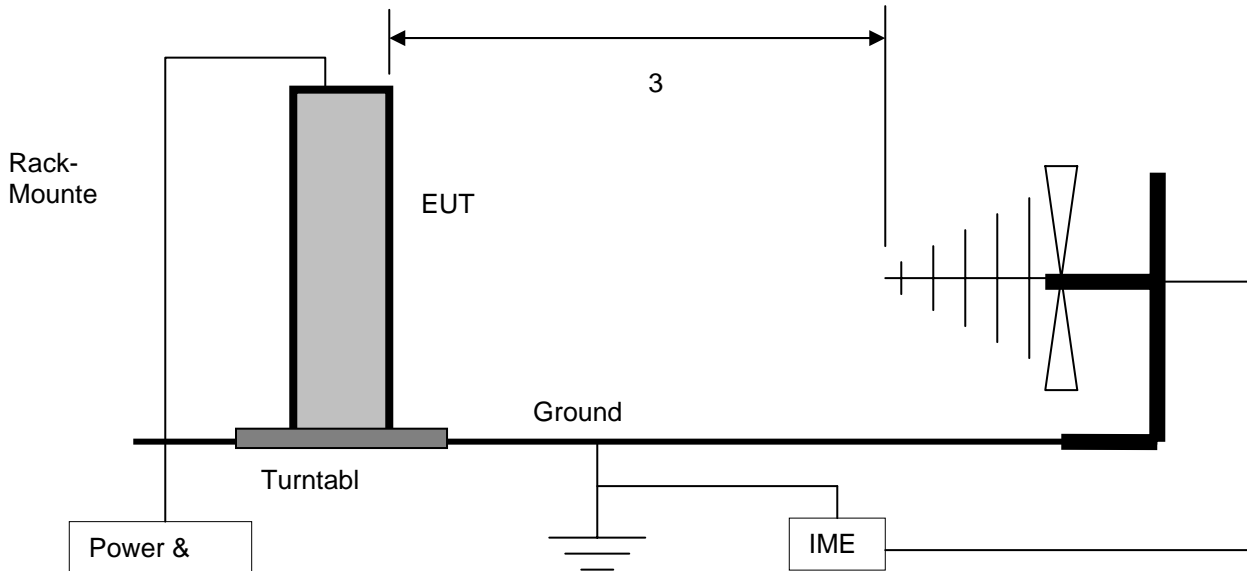

Conducted

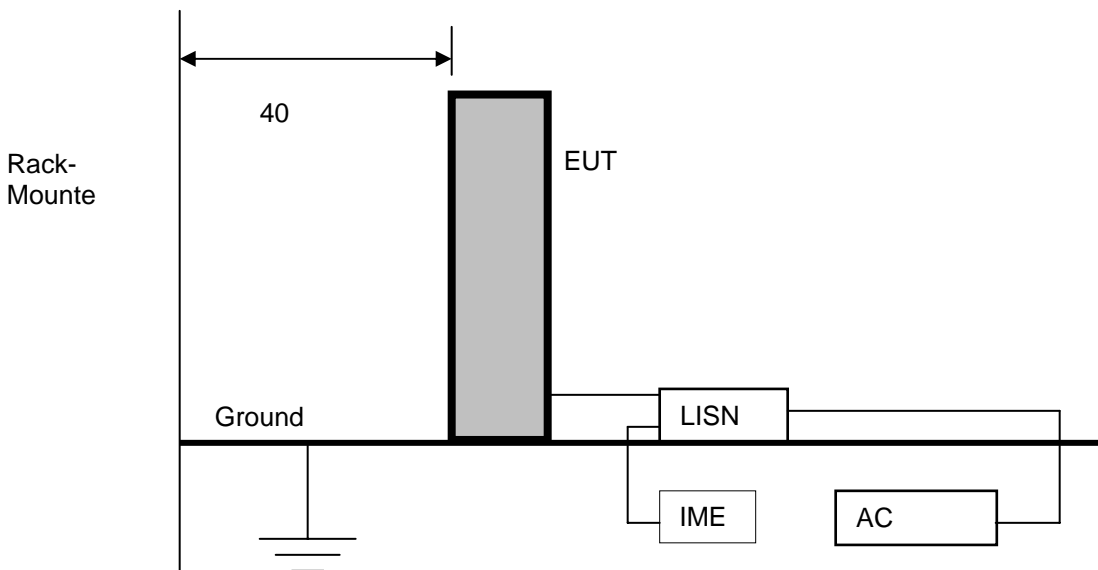

6.0 TEST EQUIPMENT

The following equipment was used for this procedure. All measurement devices are calibrated annually, traceable to NIST.

6.1 RADIATED EMISSIONS

- a) Spectrum Analyzer with RF Preselector
- b) CISPR Quasi-peak Adapter
- c) Power Isolation Transformers
- d) Biconilog antenna (20 MHz to 2 GHz)
- e) DRG horn antenna (1 – 18 GHz)
- f) Antenna mast positioner and controller
- g) Flush-mounted turntable and controller
- h) Personal Computer and EMC software

6.2 CONDUCTED EMISSIONS

- a) Spectrum Analyzer with RF Preselector
- b) Line Impedance Stabilization Network, 50 μ H
- c) CISPR Quasi-peak Adapter
- d) Power Isolation Transformers
- e) Personal Computer and EMC software

6.3 CALIBRATION

All measurement instrumentation conforms to ANSI C63.2. Calibration is maintained in accordance with manufacturer recommendations. Each measurement device is labeled with its ETC asset number and calibration due date.

6.3.1 CALIBRATION ACCURACY

Test equipment used to provide quantitative measurements are calibrated with standards traceable to the National Research Council, National Institute of Standards and Technology or other national standards. Instrumentation systems for emissions measurements have the following accuracies:

Frequency = ± 1 kHz
Amplitude (RE) = ± 4.01 dB
Amplitude (CE) = ± 3.25 dB

6.3.2 TEST EQUIPMENT DESCRIPTION

The equipment used in the tests was selected from the following list.

Instrument	Manufacturer	Model No.	Asset No.	Calibration Due
Spectrum Analyzer & Display	Hewlett Packard	8566B & 85662	9565	20 April 2005
Spectrum Analyzer & Display	Hewlett Packard	8566B & 85662	9168	17 August 2005
RF Preselector	Hewlett Packard	85685A	9728	19 August 2005
Quasi-Peak Adapter	Hewlett Packard	85650A	4411	20 August 2005
Measurement System Software	Underwriters Laboratories	Version 6.0	4443	n/a
Line Impedance Stabilization Network	EMCO	3825/2r	9331	2 November 2005
Line Impedance Stabilization Network	EMCO	3825/2r	9259	2 November 2005
Biconilog Antenna	ARA	Lpb-2520/A	4318	2 August 2005
Dual Ridged Guide Antenna	EMCO	3115	9588	2 August 2005
Low Noise Amplifier	MITEQ	JS43-01001800-21-5P	4354	3 November 2005

Appendix A

MDC

Test Sample Description (from data provided by Mentor Engineering Inc.)

CLIENT SAMPLE DESCRIPTION

Company Name : Mentor Engineering Inc.		Contact Name : Stephen Hickle
Address : Suite 230, 2891 Sunridge Way NE		Phone : (403) 777-3760
Calgary, Alberta T1Y7K7		Fax : (403) 777-3769
		E-mail : shickle@mentoreng.com
Product Name: MDC		# of units to be tested : One
Product Application Commercial <input checked="" type="checkbox"/> Military <input type="checkbox"/>	Designated Marketplaces <div style="display: flex; justify-content: space-between;"> <div> Canada <input checked="" type="checkbox"/> United States of America <input checked="" type="checkbox"/> European Union <input type="checkbox"/> </div> <div> Other <input type="checkbox"/> _____<input type="checkbox"/> _____<input type="checkbox"/> </div> </div>	

GENERAL INFORMATION REQUIRED FOR ALL PRODUCTS

Dimensions (L x W x H) 2"x8.5"x4"	Weight: __1.5 lbs	
Power Requirements: AC <input type="checkbox"/> DC <input checked="" type="checkbox"/>	Voltage: ____VAC Voltage: __12_VDC	# of AC phases: ____ current: ____Amps frequency: ____Hz current: __>5 Amps
Product Intended Application	Mobile Dispatching Applications	
Product Deployment Environments	Automotive with antenna mounted on the roof of the vehicle	

Type of Radio Device (check all applicable Equipment Configurations)

Intentional transmitter <input checked="" type="checkbox"/>	Receiver <input type="checkbox"/>	Transceiver <input type="checkbox"/>
---	-----------------------------------	--------------------------------------

Type of Radio Operating License

Unlicensed Personal Communication <input type="checkbox"/>	Unlicensed National Information Infrastructure <input type="checkbox"/>	Ultra-Wideband Operation <input type="checkbox"/>	Licensed <input checked="" type="checkbox"/>
--	---	---	--

Type of Modulation of Radio Device : Quad-64 QAM, Quad-16 QAM and QPSK;

CDMA <input type="checkbox"/>	TDMA <input type="checkbox"/>	Other <input checked="" type="checkbox"/>
Spread Spectrum Technology <input type="checkbox"/>	Direct sequencer <input type="checkbox"/>	Frequency hopper <input type="checkbox"/>
Transmitter Power Output : Average 0.6W (1.5W ERP)		Emission Designator : 18K3D7W

Information on Radio Frequencies

Transmitter Operating Frequency(s) & Bandwidth	806.0 – 821.0 MHZ This device also operates at 821 - 825 MHz which are not operational in U.S. territories.
Transmitter Channel Frequencies & separations (If required, attach a separate sheet)	
Receiver Operating Frequency(s) & Bandwidth	851-866 MHz
Receiver Channel Frequencies & separations (If required, attach a separate sheet)	

Information on Antenna(s)

Is the antenna removable? YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	Antenna Connector Type : SMA	Number of Antennas : One
Gain of Each Antenna (and tolerance)	Maximum of 4.9dBi	

Radio Transmission Type

Continuous <input type="checkbox"/>	Intermittent <input checked="" type="checkbox"/>	ON Time/ OFF Time :
Pre-Approved Radio Systems & Sub-Assemblies		
FCC ID: 92FT5826	Grantee Code: AZ4	Approval Agency /TCB: PCTEST Engineering Laboratory, Inc.
Hardware additions to the Pre-Approved Equipment?	Integration into Mentor product	
Prepared By: Stephen Hickie	Title: Director	Date: Oct 22, 2004