

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1804-0042(4)
2. Customer
 - Name : LG Electronics MobileComm USA, Inc.
 - Address : 1000 Sylvan Ave., Englewood Cliffs, New Jersey, United States, 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-G710EM
FCC ID : ZNFG710EM
5. Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)
Test Specification : CFR §2.1093
6. Date of Test : 2018.03.06 ~ 2018.03.21, 2018.03.30, 2018.04.27, 2018.05.01
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to attached test report.

Affirmation	Tested by	 (Signature)	Reviewed by	 (Signature)
	Name : HoSik Sim			

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 05 . 01 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRRFCC1804-0042	Apr. 23, 2018	Initial issue
DRRFCC1804-0042(1)	Apr. 25, 2018	Add Attachment 4
DRRFCC1804-0042(2)	Apr. 26, 2018	Revise Section 1, Attachment 4
DRRFCC1804-0042(3)	Apr. 27, 2018	Add LTE DL CA powers etc.
DRRFCC1804-0042(4)	May. 01, 2018	Add LTE DL CA powers

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 Guidance Applied	7
1.2 DUT Antenna Locations	7
1.3 Near Field Communications (NFC) Antenna	7
1.4 SAR Test Exclusions Applied	8
1.5 Power Reduction for SAR	8
1.6 Device Serial Numbers	8
1.7 LTE Information	9
2. INTROCUCTION	10
3. DESCRIPTION OF TEST EQUIPMENT	11
3.1 SAR MEASUREMENT SETUP	11
3.2 Probe Specification	12
3.3 Probe Calibration Process	13
3.3.1 E-Probe Calibration	13
3.4 Data Extrapolation	14
3.5 SAM Twin PHANTOM	15
3.6 Device Holder for Transmitters	15
3.7 Brain & Muscle Simulation Mixture Characterization	16
3.8 SAR TEST EQUIPMENT	18
4. TEST SYSTEM SPECIFICATIONS	19
5. SAR MEASUREMENT PROCEDURE	20
5.1 Measurement Procedure	20
6. DEFINITION OF REFERENCE POINTS	22
6.1 Ear Reference Point	22
6.2 Handset Reference Points	22
7. TEST CONFIGURATION POSITIONS FOR HANDSETS	23
7.1 Device Holder	23
7.2 Positioning for Cheek/Touch	23
7.3 Positioning for Ear / 15 ° Tilt	23
7.4 Body-Worn Accessory Configurations	24
7.5 Extremity Exposure Configurations	24
7.6 Wireless Router Configurations	25
8. RF EXPOSURE LIMITS	26
9. FCC MEASUREMENT PROCEDURES	27
9.1 Measured and Reported SAR	27
9.2 Procedures Used to Establish RF Signal for SAR	27
9.3 SAR Measurement Conditions for WCDMA (UMTS)	27
9.3.1 Output Power Verification	27
9.3.2 Head SAR Measurements for Handsets	27
9.3.3 Body SAR Measurements	28
9.3.4 Release 5 HSDPA Data Devices	28
9.3.5 Release 6 HSUPA Data Devices	28
9.3.6 SAR Measurement Conditions for DC-HSDPA	29
9.4 SAR Measurement Conditions for LTE	29
9.4.1 Spectrum Plots for RB Configurations	29
9.4.2 MPR	29
9.4.3 A-MPR	29
9.4.4 Required RB Size and RB Offsets for SAR Testing	30
9.4.5 LTE TDD Consideration setup for SAR measurement	31
9.4.6 Downlink Only Carrier Aggregation	32
9.4.6.1 May 2017 TCB Workshop notes (LTE 4x4 Downlink MIMO)	32

9.5 SAR Testing with 802.11 Transmitters	32
9.5.1 General Device Setup.....	32
9.5.2 U-NII and U-NII-2A	33
9.5.3 U-NII-2C and U-NII-3	33
9.5.4 Initial Test Position Procedure.....	33
9.5.5 2.4 GHz SAR Test Requirements	33
9.5.6 OFDM Transmission Mode and SAR Test Channel Selection	34
9.5.7 Initial Test Configuration Procedure	34
9.5.8 Subsequent Test Configuration Procedures	34
9.5.9 MIMO SAR Considerations.....	34
10. RF CONDUCTED POWERS	35
10.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers.....	35
10.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	36
10.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers.....	37
10.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers.....	58
10.5 Bluetooth Conducted Powers	61
11. SYSTEM VERIFICATION	63
11.1 Tissue Verification	63
11.2 Test System Verification	66
12. SAR TEST RESULTS	67
12.1 Head SAR Results.....	67
12.2 Standalone Body-Worn SAR Worn SAR Results.....	76
12.3 Standalone Hotspot SAR Results.....	82
12.4 Standalone Phablet SAR Results	90
12.5 SAR Test Notes	92
13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	95
13.1 Introduction.....	95
13.2 Simultaneous Transmission Procedures.....	95
13.3 Simultaneous Transmission Capabilities	95
13.4 Head SAR Simultaneous Transmission Analysis.....	97
13.5 Body-Worn Simultaneous Transmission Analysis.....	114
13.6 Hotspot SAR Simultaneous Transmission Analysis	123
13.7 Phablet SAR Simultaneous Transmission Analysis	136
13.8 Simultaneous Transmission Conclusion	136
14. SAR MEASUREMENT VARIABILITY	137
14.1 Measurement Variability	137
15. MEASUREMENT UNCERTAINTIES.....	138
16. CONCLUSION	160
17. REFERENCES	161
Attachment 1. – Probe Calibration Data	163
Attachment 2. – Dipole Calibration Data.....	197
Attachment 3. – SAR SYSTEM VALIDATION	261
Attachment 4. – LTE Band 7 Phablet SAR Evaluation with proximity sensor enabled.....	263
1. Reduced LTE Band 7 Nominal and Maximum Output Power Spec and Conducted Powers	264
2. Reduced LTE Band 7 DL Carrier Aggregation Conducted Powers	266
3. Reduced LTE Band 7 4x4 DL MIMO, LTE 4x4 DL MIMO with DL CA Conducted Powers.....	268
4. LTE Band 7 Cap Sensor (proximity sensor) Power Measurement, Triggering Distance	270
5. Tissue Verification.....	273
6. Test System Verification.....	274
7. Standalone Phablet SAR Results	275
8. Phablet SAR Simultaneous Transmission Analysis with proximity sensor enabled	276
8.1 Simultaneous Transmission Conclusion	277

1. DESCRIPTION OF DEVICE

General Information

EUT type	Mobile Phone				
FCC ID	ZNFG710EM				
Equipment model name	LM-G710EM				
Equipment add model name	LMG710EM, G710EM, LM-G710EA, LMG710EA, G710EA, LM-G710EMW, LMG710EMW, G710EMW, LM-G710EAW, LMG710EAW, G710EAW				
Equipment serial no.	Identical prototype				
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 13, 5, 4, 2, 7, 41, 46(RX Only), 2.4 G W-LAN (802.11b/g/n-HT20/ac-VHT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth				
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1850.2 ~ 1909.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	1712.4 ~ 1752.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1852.4 ~ 1907.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	779.5 ~ 784.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1754.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2502.5 ~ 2567.5 MHz
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2498.5 ~ 2687.5 MHz
	LTE Band 46	LTE	Voice/Data	RX Only	RX Only
	2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/VHT20	2412 ~ 2472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz
RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 ~ 893.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1930.2 ~ 1989.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	2112.4 ~ 2152.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1932.4 ~ 1987.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz
	LTE Band 13	LTE	Voice/Data	5/10MHz	748.5 ~ 753.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2154.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2622.5 ~ 2687.5 MHz
	LTE Band 41	LTE	Voice/Data	5/10/15/20MHz	2498.5 ~ 2687.5 MHz
	LTE Band 46	LTE	Voice/Data	10/20MHz	5155.0 ~ 5920.0 MHz
	2.4 GHz W-LAN	802.11b/g/n/ac	Voice/Data	HT20/VHT20	2412 ~ 2472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT200	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	< 0.1	0.44	-	-
PCE	GPRS 850	0.11	0.50	0.50	-
PCE	GSM 1900	< 0.1	0.27	-	-
PCE	GPRS 1900	0.12	0.40	0.47	-
PCE	WCDMA 850	0.12	0.64	0.64	-
PCE	WCDMA 1700	0.19	0.55	0.73	-
PCE	WCDMA 1900	0.18	0.48	0.59	-
PCE	LTE Band 12	< 0.1	0.15	0.15	-
PCE	LTE Band 17	-	-	-	-
PCE	LTE Band 13	< 0.1	0.24	0.24	-
PCE	LTE Band 5	0.12	0.68	0.68	-
PCE	LTE Band 4	0.17	0.54	0.60	-
PCE	LTE Band 2	0.14	0.45	0.57	-
PCE	LTE Band 7	< 0.1	0.63	0.63	1.50
PCE	LTE Band 41	< 0.1	0.37	0.37	-
DTS	2.4 GHz W-LAN	0.28	0.24	0.24	-
U-NII-1	5.2 GHz W-LAN	-	-	0.65	-
U-NII-2A	5.3 GHz W-LAN	0.26	0.76	-	1.77
U-NII-2C	5.6 GHz W-LAN	0.23	0.68	-	1.94
U-NII-3	5.8 GHz W-LAN	0.21	0.62	0.63	1.35
DSS	Bluetooth	0.15	< 0.1	< 0.1	-
Simultaneous SAR per KDB 690783 D01v01r03		0.53	1.48	1.44	3.44
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2018.03.06 ~ 2018.03.21, 2018.03.30, 2018.04 27				
Antenna Type	Internal Antenna				
Functions	● GSM/GPRS/EDGE (GPRS/EDGE Class: 33) supported. * DTM not supported. ● No simultaneous transmission between BT & 2.4GHz WLAN ● Simultaneous transmission between GSM, WCDMA voice & WLAN / GPRS, WCDMA & WLAN / LTE & WLAN. ● VoIP is supported. ● W-LAN 2.4GHz is supported Hotspot. ● W-LAN 5 GHz is supported Hotspot in UNII B1, B3.				

1.1 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01(Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.2 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFG710EM_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	O
GSM/GPRS/EDGE 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	O	O
WCDMA 1700	X	O	O	O	X	O
WCDMA 1900	X	O	O	O	X	O
LTE Band 12	X	O	O	O	O	O
LTE Band 17	X	O	O	O	O	O
LTE Band 13	X	O	O	O	O	O
LTE Band 5	X	O	O	O	O	O
LTE Band 4	X	O	O	O	X	O
LTE Band 2	X	O	O	O	X	O
LTE Band 7	X	O	O	O	O	O
LTE Band 41	X	O	O	O	O	O
2.4G W-LAN Ant.1	O	X	O	O	X	O
2.4G W-LAN Ant.2	O	X	O	O	X	O
2.4G W-LAN MIMO	O	X	O	O	X	O
5G W-LAN Ant.1	O	X	O	O	X	O
5G W-LAN Ant.2	O	X	O	O	X	O
5G W-LAN MIMO	O	X	O	O	X	O
Bluetooth	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O means test and X means no testing.

1.3 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the back side. The SAR tests were performed with NFC antenna already incorporated. A diagram showing the location of the device antenna can be found in ZNFG710EM_Antenna Location.

1.4 SAR Test Exclusions Applied

(A) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

This device supports both LTE Band 12 and LTE Band 17. Since the supported frequency span for LTE Band 17 falls completely within the supported frequency span for LTE Band 12, LTE Band 17 target power is equal to LTE Band 12 target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE Band 12.

1.5 Power Reduction for SAR

This device utilizes a power reduction mechanism for LTE Band 7 under some conditions when the device is being used in close proximity to the user's hand. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

However in case of this device, the LTE B7 hotspot SAR with maximum output power including tolerance is less than 1.2 W/Kg, so phablet SAR and proximity sensor evaluation for LTE B7 is not required.

Although LTE B7 phablet SAR evaluation is not required, the LTE B7 phablet SAR evaluation with the proximity sensor enabled is reported on the Attachment 4 by applicant's request. [See Attachment 4]

1.6 Device Serial Numbers

Band & Mode	Head Serial Number	Body Serial Number	Hotspot Serial Number	Phablet Serial Number
GSM/GPRS/EDGE 850	FCC #1	FCC #1	FCC #1	-
GSM/GPRS/EDGE 1900	FCC #1	FCC #1	FCC #1	-
WCDMA 850	FCC #1	FCC #1	FCC #1	-
WCDMA 1700	FCC #1	FCC #1	FCC #1	-
WCDMA 1900	FCC #1	FCC #1	FCC #1	-
LTE Band 12	FCC #1	FCC #1	FCC #1	-
LTE Band 17	FCC #1	FCC #1	FCC #1	-
LTE Band 13	FCC #1	FCC #1	FCC #1	-
LTE Band 5	FCC #1	FCC #1	FCC #1	-
LTE Band 4	FCC #1	FCC #1	FCC #1	-
LTE Band 2	FCC #1	FCC #1	FCC #1	-
LTE Band 7	FCC #1	FCC #1	FCC #1	FCC #1
LTE Band 41	FCC #1	FCC #1	FCC #1	-
2.4 GHz WLAN	FCC #2	FCC #2	FCC #2	-
5 GHz WLAN	FCC #2	FCC #2	FCC #2	FCC #2
Bluetooth	FCC #2	FCC #2	FCC #2	-

1.7 LTE Information

LTE Information					
FCC ID	ZNFG710EM				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 13 (779.5 ~ 784.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz) LTE Band 41 (2498.5 ~ 2687.5 MHz) LTE Band 46 (5155.0 ~ 5920.0 MHz) / RX Only				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 13 : 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 46: 10 MHz, 20 MHz / RX Only				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{NOTE1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 13: 5 MHz	779.5(23205)	N/A	782.0(23230) ^{NOTE2}	N/A	784.5(23255)
LTE Band 13: 10 MHz	N/A	N/A	782.0(23230)	N/A	N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{NOTE3}	N/A	844.0 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175) ^{NOTE4}	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	N/A	2535.0 (21100)	N/A	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	N/A	2535.0 (21100)	N/A	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	N/A	2535.0 (21100)	N/A	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	N/A	2535.0 (21100)	N/A	2560.0 (21350)
LTE Band 41: 5 MHz	2498.5 (39675)	2545.8 (40148)	2593.0 (40620)	2640.3 (41093)	2687.5 (41565)
LTE Band 41: 10 MHz	2501.0 (39700)	2547.0 (40160)	2593.0 (40620)	2639.0 (41080)	2685.0 (41540)
LTE Band 41: 15 MHz	2503.5 (39725)	2548.3 (40173)	2593.0 (40620)	2637.8 (41068)	2682.5 (41515)
LTE Band 41: 20 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 46: 10 MHz / RX Only	5155.0 (46840)	N/A	5535.0 (50640)	N/A	5920.0 (54490)
LTE Band 46: 20 MHz / RX Only	5160.0 (46890)	N/A	5535.0 (50640)	N/A	5915.0 (54440)
UE Category	LTE Rel.12 DL UE Cat 18 (QPSK, 16QAM, 64QAM, 256QAM) UL UE Cat 5 (QPSK, 16QAM, 64QAM) with only downlink carrier aggregation (not support uplink MIMO and uplink carrier aggregation)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 12. It supports only downlink carrier aggregation. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 12 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)

- LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller each pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-3770 3.40 GHz desktop computer with Windows 7 system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

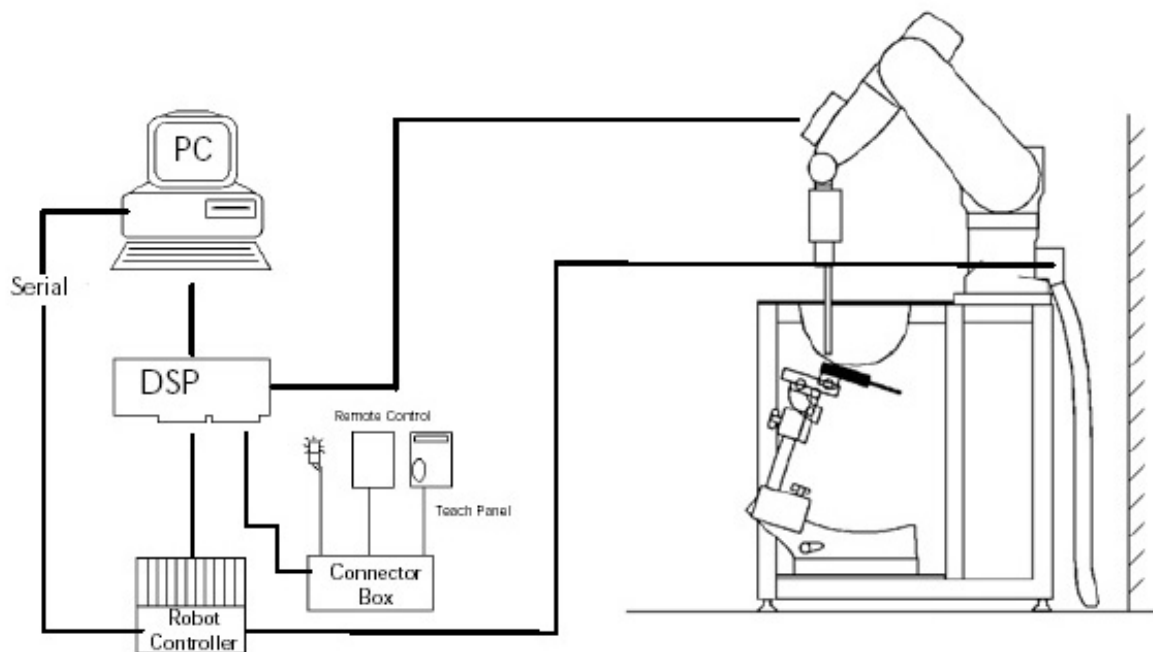


Figure 3.1 SAR Measurement System Setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

3.2 Probe Specification

Calibration	In air from 10 MHz to 4 GHz/10 MHz to 6 GHz In brain and muscle simulating tissue at Frequencies of 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz / 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2300 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz
Frequency	10 MHz to 4 GHz/10 MHz to 6 GHz
Linearity	± 0.2 dB(30 MHz to 4 GHz/30 MHz to 6 GHz)
Dynamic	10 μ W/g to > 100 mW/g
Range	Linearity : ± 0.2 dB
Dimensions	Overall length : 337 mm
Tip length	20 mm
Body diameter	12 mm
Tip diameter	3.9 mm/2.5 mm
Distance from probe tip to sensor center	2.0 mm/1.0 mm
Application	SAR Dosimetry Testing Compliance tests of mobile phones




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



DAE System

The SAR measurements were conducted with the dosimetric probe ES3DV3 and EX3DV4, designed in the classical triangular configuration(see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 Probe Calibration Process

3.3.1 E-Probe Calibration

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

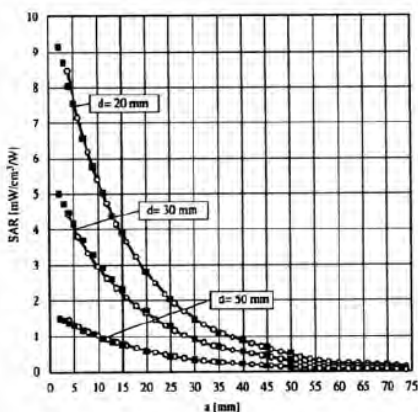


Figure 3.4 E-Field and Temperature Measurements at 900MHz

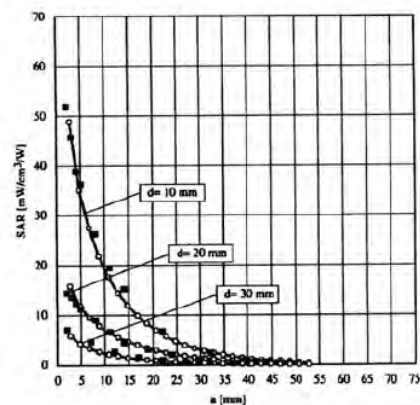


Figure 3.5 E-Field and Temperature Measurements at 1800MHz

3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{free} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 SAM Twin Phantom

SAM Twin Phantom Specification:

Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet

Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.

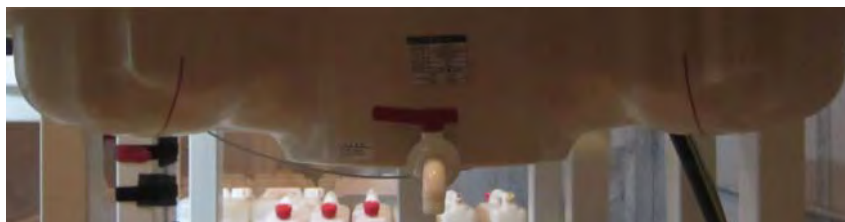


Figure 3.7 Sam Twin Phantom shell

3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.8 Mounting Device

3.7 Brain & Muscle Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.



Figure 3.9 Simulated Tissue

Table 3.1 Composition of the Tissue Equivalent Matter

Ingredients (% by weight)	Frequency (MHz)							
	835		1900		2450		5200 ~ 5800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.19	50.75	55.24	70.23	71.88	73.40	65.52	80.00
Salt (NaCl)	1.480	0.940	0.310	0.290	0.160	0.060	-	-
Sugar	57.90	48.21	-	-	-	-	-	-
HEC	0.250	-	-	-	-	-	-	-
Bactericide	0.180	0.100	-	-	-	-	-	-
Triton X-100	-	-	-	-	19.97	-	17.24	-
DGBE	-	-	44.45	29.48	7.990	26.54	-	-
Diethylene glycol hexyl ether	-	-	-	-	-	-	17.24	-
Polysorbate (Tween) 80	-	-	-	-	-	-		20.00
Target for Dielectric Constant	41.5	55.2	40.0	53.3	39.2	52.7	-	-
Target for Conductivity (S/m)	0.90	0.97	1.40	1.52	1.80	1.95	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Table 3.2 HSL/MSL750 (Head and Body liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750
	Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075, SL AAM 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ² O	Water, 35 – 58%
Sucrose	Sucrose, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), < 0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.6%

Table 3.3 HSL/MSL1750 (Head and Body liquids for 1700 – 1800 MHz)

Item	Head Tissue Simulation Liquids HSL1750
	Muscle (body) Tissue Simulation Liquids MSL1750
Type No	SL AAH 175, SL AAM 175
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ² O	Water, 52 – 75%
C ₈ H ₁₈ O ₃	Diethylene glycol monobutyl ether (DGBE), 25 – 48%
NaCl	Sodium Chloride, < 1.0%

3.8 SAR TEST EQUIPMENT

Table 3.4 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒	Robot	SCHMID	TX90XL	N/A	N/A	F13/5P9GA1/A/01
☒	Robot	SCHMID	TX90XL	N/A	N/A	F13/5RR2A1/A/01
☒	Robot Controller	SCHMID	CS8C	N/A	N/A	F13/5P9GA1/C/01
☒	Robot Controller	SCHMID	CS8C	N/A	N/A	F13/5RR2A1/C/01
☒	Joystick	SCHMID	N/A	N/A	N/A	S-12450905
☒	Joystick	SCHMID	N/A	N/A	N/A	S-13200990
☒	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒	Device Holder	SCHMID	Holder	N/A	N/A	SD000H01HA
☒	Device Holder	SCHMID	Holder	N/A	N/A	SD000H01HA
☒	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1783
☒	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1782
☒	Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1786
☒	Data Acquisition Electronics	SCHMID	DAE4V1	2017-08-16	2018-08-16	1396
☒	Data Acquisition Electronics	SCHMID	DAE4V1	2017-03-16	2018-03-16	1394(Used only within cal. due date)
☒	Data Acquisition Electronics	SCHMID	DAE4V1	2017-07-24	2018-07-24	1335
☒	Dosimetric E-Field Probe	SCHMID	EX3DV4	2017-09-28	2018-09-28	3933
☒	Dosimetric E-Field Probe	SCHMID	ES3DV3	2017-03-21	2018-03-21	3328(Used only within cal. due date)
☒	Dosimetric E-Field Probe	SCHMID	EX3DV4	2017-11-28	2018-11-28	7337
☒	750MHz SAR Dipole	SCHMID	D750V3	2018-01-18	2020-01-18	1049
☒	835MHz SAR Dipole	SCHMID	D835V2	2017-09-21	2019-09-21	464
☒	1800MHz SAR Dipole	SCHMID	D1800V2	2017-05-23	2019-05-23	2d047
☒	1900MHz SAR Dipole	SCHMID	D1800V2	2017-09-20	2019-09-20	5d029
☒	2450MHz SAR Dipole	SCHMID	D2450V2	2017-09-19	2019-09-19	726
☒	2600MHz SAR Dipole	SCHMID	D2600V2	2018-02-16	2020-02-16	1103
☒	5GHz SAR Dipole	SCHMID	D5GHZV2	2018-02-15	2020-02-15	1212
☒	Network Analyzer	Agilent	E5071C	2018-02-02	2019-02-02	MY46111534
☒	Signal Generator	Agilent	E4438C	2017-09-05	2018-09-05	US41461520
☒	Amplifier	RFBAY.Inc	MPA-40-40	2017-12-28	2018-12-28	21151801
☒	Amplifier	EMPOWER	BBS3Q7ELU	2017-09-06	2018-09-06	1020
☒	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2017-09-05	2018-09-05	1005
☒	Power Meter	HP	EPM-442A	2017-12-27	2018-12-27	GB37170267
☒	Power Meter	HP	EPM-442A	2017-12-27	2018-12-27	GB37170413
☒	Power Sensor	HP	8481A	2017-12-27	2018-12-27	US37294267
☒	Power Sensor	HP	8481A	2017-12-27	2018-12-27	3318A96566
☒	Power Sensor	HP	8481A	2017-12-27	2018-12-27	2702A65976
☒	Dual Directional Coupler	Agilent	778D-012	2017-12-27	2018-12-27	50228
☒	Directional Coupler	HP	772D	2017-07-13	2018-07-13	2889A01064
☒	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2017-09-05	2018-09-05	165
☒	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2017-12-27	2018-12-27	N/A
☒	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2017-09-05	2018-09-05	N/A
☒	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2017-12-27	2018-12-27	03942
☒	Attenuators(3 dB)	Agilent	8491B	2017-12-27	2018-12-27	MY39260700
☒	Attenuators(10 dB)	WEINSCHTEL	23-10-34	2017-12-27	2018-12-27	BP4387
☒	Dielectric Probe kit	SCHMID	DAK-3.5	2017-11-21	2018-11-21	1092
☒	Dielectric Probe kit	SCHMID	DAK-3.5	2017-07-18	2018-07-18	1046
☒	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2017-09-05	2018-09-05	GB41321164
☒	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-03-07	2019-03-07	162709
☒	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-02-05	2019-02-05	101414
☒	Radio Communication Analyzer	KEYSIGHT	E7515A	2017-09-07	2018-09-07	MY55210201
☒	Radio Communication Analyzer	KEYSIGHT	E7515A	2017-12-27	2018-12-27	MY57270113
☒	Power Splitter	Anritsu	K241B	2017-12-27	2018-12-27	1301183
☒	Bluetooth Tester	TESCOM	TC-3000B	2017-12-26	2018-12-26	3000B770243

NOTE: The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.

4. TEST SYSTEM SPECIFICATIONS

Automated TEST SYSTEM SPECIFICATIONS:

Positioner

Robot	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	0.02 mm
No. of axis	6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor	Intel Core i7-3770
Clock Speed	3.40 GHz
Operating System	Windows 7 Professional
Data Card	DASY5 PC-Board

Data Converter

Features	Signal, multiplexer, A/D converter. & control logic
Software	DASY5
Connecting Lines	Optical downlink for data and status info Optical uplink for commands and clock

PC Interface Card

Function	24 bit (64 MHz) DSP for real time processing Link to DAE 4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot
----------	--

E-Field Probes

Model	ES3DV3 S/N: 3328/ EX3DV4 S/N: 3933, 7337
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 4 GHz/10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 4 GHz/30 MHz to 6 GHz)

Phantom

Phantom	SAM Twin Phantom (V5.0)
Shell Material	Composite
Thickness	2.0 ± 0.2 mm



Figure 4.1 DASY5 Test System

5. SAR MEASUREMENT PROCEDURE

5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 5.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 5.1
Sample SAR Area Scan

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

6. DEFINITION OF REFERENCE POINTS

6.1 Ear Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 6.1
Close-up side view
of ERP

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at it’s top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 6.2 Front, back and side view SAM Twin Phantom

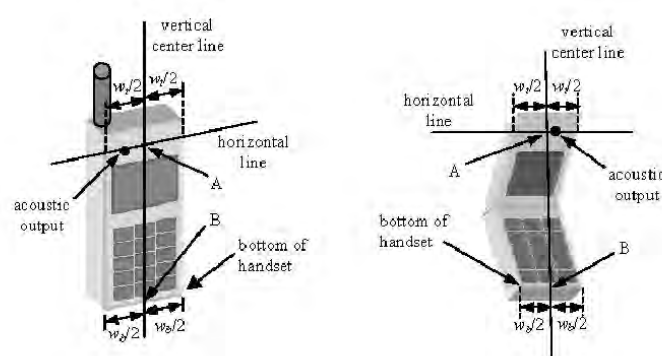


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

7. TEST CONFIGURATION POSITIONS FOR HANDSETS

7.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

7.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 7.2)

7.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 7.3).




Figure 7.2 Side view w/relevant markings



Figure 7.3 Front, Side and Top View of Ear/15° Position

7.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

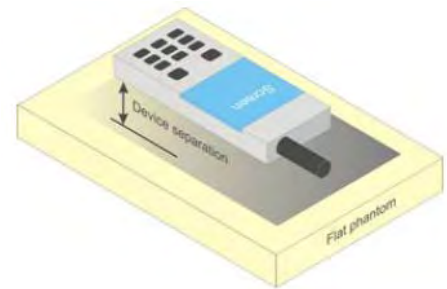


Figure 7.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

7.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498D01v06 should be applied to determine SAR test requirements.

7.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

8. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

9. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

9.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

9.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

9.3 SAR Measurement Conditions for WCDMA (UMTS)

9.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

9.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

9.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

9.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

Figure 9.1 Table 1

9.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_a (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

9.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

9.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The R&S CMW500 was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

9.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

9.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

9.4.3 A-MPR

A-MPR (Addition MPR) has been disable for all SAR tests by setting NS=01 on the base station simulator.

9.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

9.4.5 LTE TDD Consideration setup for SAR measurement

According to KDB 941225 D05 SAR for LTE Devices v02r05 for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configuration and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-	-	-
8	$24144 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U

$T_s = 1/(15000 * 2048)$ seconds

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 * [1/(15000 * 2048)] * 2 + 6$ ms = 63.33 %

9.4.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02, April 2018 TCB Workshop notes (LTE Carrier Aggregation) and May 2017 TCB Workshop (LTE 4x4 Downlink MIMO). The RCC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

9.4.6.1 May 2017 TCB Workshop notes (LTE 4x4 Downlink MIMO)

- 1) SAR test exclusion for LTE DL 4x4 MIMO should be determined by
 - i) UL power measurements with and without DL MIMO
 - ii) using the highest UL output power configuration without DL MIMO to confirm that UL output with DL MIMO is < ¼ dB higher
 - iii) for DL MIMO with carrier aggregation, the same SAR test exclusion procedure should be considered

9.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

9.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

9.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

9.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

9.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

9.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

9.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

9.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

9.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

9.5.9 MIMO SAR Considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

10. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

10.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	34.7	34.7	32.2	30.7	29.2	27.2	26.7	25.7	24.7
	Nominal	34.2	34.2	31.7	30.2	28.7	26.7	26.2	25.2	24.2
GSM/GPRS/EDGE 1900	Maximum	31.7	31.7	30.2	27.7	26.2	26.7	25.7	24.7	23.7
	Nominal	31.2	31.2	29.7	27.2	25.7	26.2	25.2	24.2	23.2

Table 10.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	34.2	34.2	31.8	30.4	28.9	27.2	26.4	25.3	24.4
	190	34.4	34.4	31.8	30.3	28.8	27.1	26.3	25.2	24.3
	251	34.4	34.4	32.0	30.3	28.8	27.2	26.2	25.2	24.3
PCS 1900	512	31.6	31.6	30.2	27.3	25.8	26.7	25.5	24.2	23.4
	661	31.4	31.4	30.1	27.2	25.7	26.6	25.2	24.1	23.2
	810	31.7	31.7	30.2	27.4	25.7	26.7	25.4	24.2	23.3
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	25.17	25.17	25.78	26.14	25.89	18.17	20.38	21.04	21.39
	190	25.37	25.37	25.78	26.04	25.79	18.07	20.28	20.94	21.29
	251	25.37	25.37	25.98	26.04	25.79	18.17	20.18	20.94	21.29
PCS 1900	512	22.57	22.57	24.18	23.04	22.79	17.67	19.48	19.94	20.39
	661	22.37	22.37	24.08	22.94	22.69	17.57	19.18	19.84	20.19
	810	22.67	22.67	24.18	23.14	22.69	17.67	19.38	19.94	20.29
GSM850	Frame Avg. Targets:	25.17	25.17	25.68	25.94	25.69	17.67	20.18	20.94	21.19
PCS 1900		22.17	22.17	23.68	22.94	22.69	17.17	19.18	19.94	20.19

Table 10.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 33 (max 4 TX Uplink slots)
EDGE Multislot class: 33 (max 4 TX Uplink slots)
DTM Multislot Class: N/A




Figure 10.1 Power Measurement Setup

10.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Modulated Average [dBm]			
		3GPP WCDMA (Rel.99)	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
WCDMA 850 (Cell)	Maximum	25.5	25.5	25.5	25.5
	Nominal	25.0	25.0	25.0	25.0
WCDMA 1700 (AWS)	Maximum	24.2	24.2	24.2	24.2
	Nominal	23.7	23.7	23.7	23.7
WCDMA 1900 (PCS)	Maximum	24.2	24.2	24.2	24.2
	Nominal	23.7	23.7	23.7	23.7

Table 10.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.00	25.09	25.01	24.18	24.11	24.14	23.99	24.10	24.06	-
99		12.2 kbps AMR	24.95	25.05	25.00	24.15	24.07	24.11	23.97	24.05	24.02	-
5	HSDPA	Subtest 1	24.03	24.12	24.04	23.18	23.10	23.24	22.99	22.93	23.09	0
5		Subtest 2	24.17	24.13	24.07	23.19	23.12	23.26	23.01	22.96	23.09	0
5		Subtest 3	23.68	23.64	23.55	22.66	22.63	22.76	22.53	22.46	22.63	0.5
5		Subtest 4	23.67	23.62	23.56	22.68	22.61	22.76	22.53	22.46	22.62	0.5
6	HSUPA	Subtest 1	24.01	24.10	24.05	23.17	23.10	23.26	23.00	22.96	23.10	0
6		Subtest 2	22.14	22.11	22.07	21.17	21.12	21.26	21.02	20.95	21.10	2
6		Subtest 3	23.13	23.10	23.05	22.18	22.12	22.25	22.00	21.94	22.09	1
6		Subtest 4	22.16	22.11	22.03	21.17	21.11	21.26	21.01	20.95	21.08	2
6		Subtest 5	24.16	24.13	24.04	23.18	23.11	23.24	23.00	22.94	23.08	0
8	DC-HSDPA	Subtest 1	24.02	24.09	24.06	23.11	23.09	23.10	22.95	22.95	22.93	0
8		Subtest 2	24.03	24.07	24.07	23.10	23.08	23.11	22.94	22.96	22.92	0
8		Subtest 3	23.69	23.66	23.54	22.65	22.62	22.74	22.51	22.50	22.61	0.5
8		Subtest 4	23.68	23.65	23.52	22.65	22.63	22.75	22.50	22.48	22.58	0.5

Table 10.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.

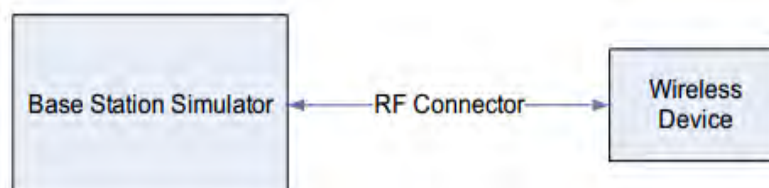


Figure 10.2 Power Measurement Setup

10.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Modulated Average[dBm]
LTE Band 12	Maximum	25.5
	Nominal	25.0

Table 10.3.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.28	0	0
	1	25	25.39		
	1	49	25.27		
	25	0	24.28	0-1	1
	25	12	24.24		
	25	25	24.23		
16QAM	50	0	24.36	0-1	1
	1	0	24.25		
	1	25	24.29		
	1	49	24.13	0-2	2
	25	0	23.38		
	25	12	23.32		
64QAM	25	25	23.35	0-2	2
	50	0	23.33		
	1	0	23.27		
	1	25	23.41	0-3	3
	1	49	23.22		
	25	0	22.32		
	25	12	22.34	0-3	3
	25	25	22.24		
	50	0	22.34	0-3	3

Table 10.3.2 LTE Conducted Power

Note 1: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	25.27	25.26	25.23	0	0	
	1	12	25.30	25.29	25.29			
	1	24	25.29	25.25	25.26			
	12	0	24.20	24.27	24.19	0-1	1	
	12	6	24.25	24.31	24.17			
	12	13	24.25	24.22	24.18			
16QAM	25	0	24.31	24.26	24.14	0-1	1	
	1	0	24.33	24.41	24.28			
	1	12	24.44	24.35	24.32			
	1	24	24.41	24.35	24.36	0-2	2	
	12	0	23.34	23.41	23.36			
	12	6	23.45	23.43	23.28			
64QAM	12	13	23.43	23.21	23.29	0-2	2	
	25	0	23.44	23.32	23.26			
	1	0	23.29	23.35	23.25			
	1	12	23.36	23.33	23.39	0-3	3	
	1	24	23.47	23.19	23.45			
	12	0	22.29	22.32	22.28			
64QAM	12	6	22.30	22.35	22.29	0-3	3	
	12	13	22.36	22.33	22.24			
	15	0	22.42	22.25	22.15			
	64QAM	15	0	22.42	22.25	22.15	0-3	3
				22.42	22.25	22.15		

Table 10.3.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.30	25.27	25.20	0	0
	1	7	25.13	25.25	25.06		
	1	14	25.25	25.26	25.16		
	8	0	24.30	24.29	24.03	0-1	1
	8	4	24.32	24.29	24.13		
	8	7	24.23	24.18	24.14		
	15	0	24.22	24.30	24.10	0-1	1
16QAM	1	0	24.43	24.38	24.30	0-1	1
	1	7	24.14	24.44	24.22		
	1	14	24.26	24.40	24.30		
	8	0	23.29	23.47	23.22	0-2	2
	8	4	23.45	23.47	23.31		
	8	7	23.23	23.28	23.25		
	15	0	23.38	23.40	23.28	0-2	2
64QAM	1	0	23.43	23.35	23.32	0-2	2
	1	7	23.23	23.41	23.12		
	1	14	23.44	23.38	23.21		
	8	0	22.42	22.42	22.20	0-3	3
	8	4	22.38	22.37	22.25		
	8	7	22.24	22.20	22.29		
	15	0	22.28	22.33	22.22	0-3	3

Table 10.3.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.08	25.04	25.05	0	0
	1	2	25.26	25.28	25.21		
	1	5	25.18	25.10	25.11		
	3	0	25.17	25.09	25.01	0	0
	3	2	25.21	25.24	25.10		
	3	3	25.15	25.11	25.20		
6	0	24.20	24.22	24.10	0-1	1	
16QAM	1	0	24.26	24.14	24.21	0-1	1
	1	2	24.36	24.42	24.33		
	1	5	24.34	24.25	24.29		
	3	0	24.31	24.22	24.15	0-1	1
	3	2	24.39	24.41	24.18		
	3	3	24.34	24.24	24.33		
6	0	23.19	23.23	23.28	0-2	2	
64QAM	1	0	23.18	23.10	23.12	0-2	2
	1	2	23.26	23.47	23.25		
	1	5	23.28	23.25	23.25		
	3	0	23.24	23.08	23.20	0-2	2
	3	2	23.32	23.28	23.17		
	3	3	23.27	23.15	23.18		
6	0	22.21	22.17	22.20	0-3	3	

Table 10.3.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 13	Maximum	25.5
	Nominal	25.0

Table 10.3.6 Nominal and Maximum Output Power Spec

2) LTE Band 13

LTE Band 13 Conducted Power– 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.28	0	0
	1	25	25.38		
	1	49	25.17		
	25	0	24.22	0-1	1
	25	12	24.30		
	25	25	24.18		
16QAM	50	0	24.28	0-1	1
	1	0	24.38	0-1	1
	1	25	24.35		
	1	49	24.29		
	25	0	23.34	0-2	2
	25	12	23.38		
64QAM	25	25	23.37		
	50	0	23.41	0-2	2
	1	0	23.47	0-2	2
	1	25	23.24		
	1	49	23.25		
	25	0	22.38	0-3	3
	25	12	22.31		
	25	25	22.19		
	50	0	22.30	0-3	3

Table 10.3.7 LTE Conducted Power

Note 1: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 13 Conducted Power– 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23230 (782.0 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.19	0	0
	1	12	25.24		
	1	24	25.20		
	12	0	24.25	0-1	1
	12	6	24.19		
	12	13	24.25		
16QAM	25	0	24.30	0-1	1
	1	0	24.10	0-1	1
	1	12	24.15		
	1	24	24.07		
	12	0	23.27	0-2	2
	12	6	23.24		
64QAM	12	13	23.30		
	25	0	23.30	0-2	2
	1	0	23.16	0-2	2
	1	12	23.22		
	1	24	23.13		
	12	0	22.35	0-3	3
	12	6	22.33		
	12	13	22.29		
	15	0	22.32	0-3	3

Table 10.3.8 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 5	Maximum	25.5
	Nominal	25.0

Table 10.3.9 Nominal and Maximum Output Power Spec

3) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power- 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20525 (836.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	25.22	0	0
	1	25	25.09		
	1	49	25.20		
	25	0	24.15	0-1	1
	25	12	24.14		
	25	25	23.99		
16QAM	50	0	24.06	0-1	1
	1	0	24.25	0-1	1
	1	25	24.21		
	1	49	24.14		
	25	0	23.18	0-2	2
	25	12	23.14		
64QAM	25	25	23.08		
	50	0	23.10	0-2	2
	1	0	23.37	0-2	2
	1	25	23.28		
	1	49	23.37		
	25	0	22.34	0-3	3
	25	12	22.30		
	25	25	22.08		
	50	0	22.20	0-3	3

Table 10.3.10 LTE Conducted Power

Note: LTE Band 5(Cell) at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.00	25.19	25.10	0	0
	1	12	25.17	25.18	25.06		
	1	24	25.03	25.12	25.10		
	12	0	24.22	24.20	24.11	0-1	1
	12	6	24.21	24.12	24.19		
	12	13	24.07	24.13	24.15		
	25	0	24.15	24.11	24.18	0-1	1
16QAM	1	0	24.13	24.15	24.10	0-1	1
	1	12	24.21	24.21	24.14		
	1	24	24.21	24.32	24.20		
	12	0	23.13	23.16	23.16	0-2	2
	12	6	23.19	23.22	23.20		
	12	13	23.09	23.11	23.17		
	25	0	23.19	23.21	23.21	0-2	2
64QAM	1	0	23.18	23.38	23.14	0-2	2
	1	12	23.30	23.33	23.12		
	1	24	23.15	23.24	23.26		
	12	0	22.40	22.21	22.15	0-3	3
	12	6	22.37	22.16	22.24		
	12	13	22.15	22.30	22.26		
	25	0	22.15	22.19	22.18	0-3	3

Table 10.3.11 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	25.06	25.22	25.17	0	0
	1	7	25.20	25.09	25.08		
	1	14	25.17	25.18	25.14		
	8	0	24.20	24.18	24.19	0-1	1
	8	4	24.19	24.17	24.15		
	8	7	24.19	24.16	24.18		
	15	0	24.11	24.19	24.15	0-1	1
16QAM	1	0	24.17	24.35	24.30	0-1	1
	1	7	24.14	24.27	24.11		
	1	14	24.18	24.17	24.13		
	8	0	23.26	23.17	23.19	0-2	2
	8	4	23.24	23.26	23.26		
	8	7	23.18	23.25	23.26		
	15	0	23.13	23.24	23.20	0-2	2
64QAM	1	0	23.17	23.35	23.21	0-2	2
	1	7	23.28	23.24	23.25		
	1	14	23.34	23.27	23.27		
	8	0	22.18	22.28	22.31	0-3	3
	8	4	22.26	22.30	22.25		
	8	7	22.26	22.17	22.22		
	15	0	22.15	22.35	22.28	0-3	3

Table 10.3.12 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power-- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.93	25.03	25.13	0	0
	1	2	25.01	25.10	25.13		
	1	5	25.04	25.11	25.06		
	3	0	24.92	24.97	25.04	0	0
	3	2	25.04	25.02	25.12		
	3	3	25.00	25.03	25.06		
	6	0	24.12	24.09	24.15	0-1	1
16QAM	1	0	24.12	24.20	24.32	0-1	1
	1	2	24.09	24.20	24.21		
	1	5	24.05	24.25	24.02		
	3	0	24.05	24.09	24.03	0-1	1
	3	2	24.09	24.11	24.13		
	3	3	24.04	24.02	24.04		
	6	0	23.18	23.19	23.16	0-2	2
64QAM	1	0	23.12	23.17	23.19	0-2	2
	1	2	23.14	23.29	23.22		
	1	5	23.05	23.21	23.17		
	3	0	22.96	23.12	23.19	0-2	2
	3	2	23.11	23.15	23.28		
	3	3	22.99	23.13	23.20		
	6	0	22.28	22.27	22.26	0-3	3

Table 10.3.13 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 4	Maximum	24.2
	Nominal	23.7

Table 10.3.14 Nominal and Maximum Output Power Spec

4) LTE Band 4

LTE Band 4 (AWS) Conducted Power– 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20175 (1732.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	24.13	0	0
	1	50	23.93		
	1	99	23.93		
	50	0	23.04	0-1	1
	50	25	23.03		
	50	50	23.06		
16QAM	100	0	23.09	0-1	1
	1	0	23.16		
	1	50	23.08		
	1	99	22.91	0-2	2
	50	0	21.88		
	50	25	21.91		
64QAM	50	50	21.88	0-2	2
	100	0	21.95		
	1	0	22.17	0-3	3
	1	50	22.08		
	1	99	22.10		
	50	0	20.91	0-3	3
	50	25	20.98		
	50	50	20.93		
	100	0	20.98		

Table 10.3.15 LTE Conducted Power

Note: LTE Band 4(AWS) at 20 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 4 (AWS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.13	24.08	24.11	0	0
	1	36	23.93	23.96	24.06		
	1	74	23.73	23.97	24.11		
	36	0	23.01	22.95	23.06	0-1	1
	36	18	23.03	22.99	23.13		
	36	37	22.96	22.95	23.07		
	75	0	22.94	22.98	23.05	0-1	1
16QAM	1	0	23.20	23.13	23.15	0-1	1
	1	36	22.96	23.10	23.13		
	1	74	22.89	23.00	23.13		
	36	0	21.85	21.83	21.88	0-2	2
	36	18	21.85	21.86	21.95		
	36	37	21.85	21.80	21.92		
	75	0	21.81	21.89	21.90	0-2	2
64QAM	1	0	22.15	22.13	22.17	0-2	2
	1	36	22.00	22.08	22.19		
	1	74	21.88	22.05	22.20		
	36	0	20.94	20.95	21.05	0-3	3
	36	18	20.84	20.96	21.03		
	36	37	20.80	20.90	20.97		
	75	0	20.95	21.02	21.10	0-3	3

Table 10.3.16 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.03	24.00	24.10	0	0
	1	25	23.88	23.92	24.13		
	1	49	23.90	23.89	24.15		
	25	0	22.99	22.98	23.14	0-1	1
	25	12	22.98	23.00	23.07		
	25	25	22.94	22.93	23.04		
50	0	22.94	22.97	23.15	0-1	1	
16QAM	1	0	23.05	23.06	23.17	0-1	1
	1	25	23.00	23.03	23.14		
	1	49	22.92	22.98	23.19		
	25	0	21.82	21.84	21.98	0-2	2
	25	12	21.89	21.94	21.92		
	25	25	21.82	21.76	21.93		
50	0	21.76	21.89	21.96	0-2	2	
64QAM	1	0	22.20	22.08	22.16	0-2	2
	1	25	22.02	22.07	22.13		
	1	49	22.00	22.01	22.19		
	25	0	21.00	20.91	21.06	0-3	3
	25	12	20.97	20.95	21.11		
	25	25	20.87	20.89	21.07		
50	0	20.88	21.00	21.07	0-3	3	

Table 10.3.17 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.87	23.91	24.15	0	0
	1	12	23.90	24.07	24.07		
	1	24	23.87	23.98	24.15		
	12	0	22.97	22.87	23.03	0-1	1
	12	6	22.95	23.04	22.95		
	12	13	22.97	23.04	22.94		
16QAM	25	0	22.91	23.03	22.94	0-1	1
	1	0	23.00	23.11	23.12	0-1	1
	1	12	23.03	23.09	23.11		
	1	24	23.01	23.00	23.04		
	12	0	21.83	21.73	21.90	0-2	2
	12	6	21.80	21.85	21.76		
12	13	21.84	21.87	21.77			
64QAM	25	0	21.86	21.89	21.78	0-2	2
	1	0	22.01	22.00	22.15	0-2	2
	1	12	22.09	22.09	22.11		
	1	24	21.95	22.12	22.20		
	12	0	20.96	20.87	21.08	0-3	3
	12	6	20.94	21.01	20.98		
12	13	20.94	20.99	20.87			
	25	0	20.85	21.02	21.04	0-3	3

Table 10.3.18 LTE Conducted Power

LTE Band 4 (AWS) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.94	23.71	23.87	0	0
	1	7	23.88	23.80	24.06		
	1	14	23.87	23.81	24.12		
	8	0	22.99	22.87	22.87	0-1	1
	8	4	22.99	22.95	22.97		
	8	7	22.86	22.84	22.97		
15	0	22.96	22.87	22.99	0-1	1	
16QAM	1	0	22.98	22.65	22.95	0-1	1
	1	7	22.99	22.99	23.14		
	1	14	23.01	23.00	23.15		
	8	0	21.81	21.90	21.97	0-2	2
	8	4	21.85	21.80	21.87		
	8	7	21.84	21.84	21.91		
15	0	21.77	21.76	21.91	0-2	2	
64QAM	1	0	22.01	21.78	21.99	0-2	2
	1	7	22.01	21.85	22.09		
	1	14	22.00	21.93	22.17		
	8	0	20.98	21.06	20.93	0-3	3
	8	4	21.03	21.07	21.01		
	8	7	20.88	20.95	21.13		
15	0	20.92	20.81	20.96	0-3	3	

Table 10.3.19 LTE Conducted Power

TE Band 4 (AWS) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.81	23.67	23.97	0	0
	1	2	23.85	23.92	24.12		
	1	5	23.74	23.82	23.95		
	3	0	23.83	23.67	23.94	0	0
	3	2	23.89	23.91	24.02		
	3	3	23.82	23.84	24.02		
6	0	22.90	22.79	23.04	0-1	1	
16QAM	1	0	22.87	22.85	23.05	0-1	1
	1	2	23.05	23.07	23.13		
	1	5	22.90	22.91	23.15		
	3	0	22.79	22.73	22.97	0-1	1
	3	2	22.78	22.85	23.03		
	3	3	22.79	22.82	22.96		
6	0	21.86	21.80	21.95	0-2	2	
64QAM	1	0	21.94	21.82	22.15	0-2	2
	1	2	22.02	22.02	22.10		
	1	5	21.86	21.88	21.98		
	3	0	21.97	21.78	22.05	0-2	2
	3	2	21.96	21.90	22.16		
	3	3	21.96	21.88	22.13		
6	0	20.77	20.78	20.95	0-3	3	

Table 10.3.20 LTE Conducted Power

Band & Mode		Modulated Average [dBm]
LTE Band 2(PCS)	Maximum	24.2
	Nominal	23.7

Table 10.3.21 Nominal and Maximum Output Power Spec

5) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power-- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.93	24.00	24.14	0	0
	1	50	23.95	23.87	24.07		
	1	99	23.65	23.76	24.02		
	50	0	22.91	23.03	23.11	0-1	1
	50	25	22.85	22.93	23.01		
	50	50	22.79	22.86	23.07		
	100	0	22.88	22.85	23.06	0-1	1
16QAM	1	0	23.03	23.10	23.20	0-1	1
	1	50	23.07	23.02	23.19		
	1	99	22.72	22.94	23.04		
	50	0	21.82	21.93	22.00	0-2	2
	50	25	21.76	21.89	21.96		
	50	50	21.68	21.74	22.04		
	100	0	21.74	21.82	21.97	0-2	2
64QAM	1	0	21.96	22.03	22.17	0-2	2
	1	50	21.92	21.95	22.10		
	1	99	21.68	21.73	22.19		
	50	0	20.90	20.99	21.12	0-3	3
	50	25	20.89	20.92	21.01		
	50	50	20.78	20.88	21.10		
	100	0	20.86	21.01	21.07	0-3	3

Table 10.3.22 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.94	23.95	24.08	0	0
	1	36	23.89	23.86	24.03		
	1	74	23.78	23.78	24.08		
	36	0	22.85	22.86	23.20	0-1	1
	36	18	22.79	22.78	23.15		
	36	37	22.80	22.73	23.17		
75	0	22.89	22.88	23.12	0-1	1	
16QAM	1	0	23.12	22.96	23.14	0-1	1
	1	36	22.98	22.78	23.11		
	1	74	22.91	22.77	23.12		
	36	0	21.83	21.86	22.15	0-2	2
	36	18	21.73	21.68	22.15		
	36	37	21.67	21.65	22.19		
75	0	21.70	21.88	22.15	0-2	2	
64QAM	1	0	22.12	22.01	22.14	0-2	2
	1	36	22.08	22.04	22.17		
	1	74	21.90	21.91	22.18		
	36	0	20.91	20.96	21.02	0-3	3
	36	18	20.84	20.85	21.15		
	36	37	20.82	20.73	21.12		
75	0	20.85	20.79	21.16	0-3	3	

Table 10.3.23 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.85	23.85	24.09	0	0
	1	25	23.80	23.73	24.12		
	1	49	23.82	23.66	24.06		
	25	0	22.86	22.83	23.13	0-1	1
	25	12	22.85	22.82	23.15		
	25	25	22.76	22.74	23.20		
50	0	22.89	22.84	23.15	0-1	1	
16QAM	1	0	23.04	22.95	23.16	0-1	1
	1	25	22.93	22.92	23.18		
	1	49	22.89	22.78	23.10		
	25	0	21.77	21.71	22.14	0-2	2
	25	12	21.76	21.76	22.19		
	25	25	21.73	21.68	22.14		
50	0	21.79	21.75	22.13	0-2	2	
64QAM	1	0	22.02	21.85	22.11	0-2	2
	1	25	21.96	21.92	22.13		
	1	49	22.01	21.74	22.19		
	25	0	20.92	20.88	21.16	0-3	3
	25	12	20.89	20.87	21.10		
	25	25	20.74	20.77	21.20		
50	0	20.80	20.76	21.17	0-3	3	

Table 10.3.24 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.80	23.77	24.06	0	0
	1	12	23.91	23.88	24.07		
	1	24	23.72	23.81	24.08		
	12	0	22.83	22.76	23.19	0-1	1
	12	6	22.82	22.73	23.08		
	12	13	22.71	22.73	23.15		
16QAM	25	0	22.87	22.78	23.14	0-1	1
	1	0	22.93	22.95	23.14		
	1	12	22.98	22.93	23.14		
	1	24	22.83	22.86	23.20	0-2	2
	12	0	21.74	21.71	22.02		
	12	6	21.75	21.73	22.02		
64QAM	12	13	21.75	21.72	22.03	0-2	2
	25	0	21.74	21.73	22.02		
	1	0	21.98	21.83	22.20	0-2	2
	1	12	21.87	21.86	22.17		
	1	24	21.70	21.99	22.12		
	12	0	20.91	20.85	21.17	0-3	3
12	6	20.93	20.84	21.20			
12	13	20.84	20.82	21.20			
	25	0	20.80	20.78	21.19	0-3	3

Table 10.3.25 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.83	23.77	24.11	0	0
	1	7	23.71	23.72	24.09		
	1	14	23.76	23.74	24.12		
	8	0	22.83	22.78	23.17	0-1	1
	8	4	22.86	22.73	23.18		
	8	7	22.79	22.77	23.15		
15	0	22.76	22.73	23.10	0-1	1	
16QAM	1	0	22.84	22.80	23.15	0-1	1
	1	7	22.91	22.82	23.14		
	1	14	22.89	22.81	23.11		
	8	0	21.77	21.84	22.15	0-2	2
	8	4	21.91	21.73	22.11		
	8	7	21.86	21.74	22.13		
15	0	21.70	21.65	22.20	0-2	2	
64QAM	1	0	21.98	21.87	22.12	0-2	2
	1	7	21.81	21.69	22.14		
	1	14	21.75	21.89	22.16		
	8	0	20.92	20.90	21.11	0-3	3
	8	4	20.97	20.87	21.13		
	8	7	20.80	20.87	21.13		
15	0	20.79	20.79	21.18	0-3	3	

Table 10.3.26 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.72	23.58	24.04	0	0
	1	2	23.76	23.63	24.10		
	1	5	23.60	23.66	24.10		
	3	0	23.63	23.51	24.05	0	0
	3	2	23.65	23.60	24.11		
	3	3	23.53	23.58	24.09		
6	0	22.56	22.59	23.10	0-1	1	
16QAM	1	0	22.85	22.63	23.11	0-1	1
	1	2	22.95	22.72	23.18		
	1	5	22.58	22.78	23.13		
	3	0	22.60	22.60	23.10	0-1	1
	3	2	22.72	22.72	23.17		
	3	3	22.65	22.61	23.12		
6	0	21.73	21.75	22.19	0-2	2	
64QAM	1	0	21.87	21.72	22.14	0-2	2
	1	2	21.74	21.72	22.11		
	1	5	21.56	21.74	22.14		
	3	0	21.73	21.70	22.12	0-2	2
	3	2	21.72	21.76	22.17		
	3	3	21.67	21.73	22.15		
6	0	20.75	20.64	21.03	0-3	3	

Table 10.3.27 LTE Conducted Power

Band & Mode		Modulated Average [dBm]
LTE Band 7	Maximum	25.2
	Nominal	24.7

Table 10.3.28 Nominal and Maximum Output Power Spec

6) LTE Band 7

LTE Band 7 Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.95	24.76	24.96	0	0
	1	50	24.78	24.77	24.79		
	1	99	24.70	24.75	24.74		
	50	0	23.80	23.78	23.84	0-1	1
	50	25	23.80	23.80	23.81		
	50	50	23.75	23.77	23.78		
	100	0	23.82	23.81	23.86	0-1	1
16QAM	1	0	23.91	23.79	23.95	0-1	1
	1	50	23.94	23.95	23.82		
	1	99	23.77	23.95	23.78		
	50	0	22.91	22.90	22.92	0-2	2
	50	25	22.94	22.89	22.88		
	50	50	22.77	22.88	22.82		
	100	0	22.87	22.88	22.87	0-2	2
64QAM	1	0	22.93	22.78	22.98	0-2	2
	1	50	22.91	22.92	22.91		
	1	99	22.71	22.88	22.77		
	50	0	21.83	21.79	21.77	0-3	3
	50	25	21.77	21.90	21.79		
	50	50	21.81	21.86	21.80		
	100	0	21.89	21.94	22.00	0-3	3

Table 10.3.29 LTE Conducted Power

LTE Band 7 Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.93	24.70	24.87	0	0
	1	36	24.76	24.92	24.78		
	1	74	24.83	24.83	24.69		
	36	0	23.84	23.84	23.85	0-1	1
	36	18	23.81	23.86	23.76		
	36	37	23.74	23.82	23.77		
	75	0	23.83	23.90	23.79	0-1	1
16QAM	1	0	23.94	23.72	24.05	0-1	1
	1	36	23.90	23.91	23.89		
	1	74	23.86	23.97	23.80		
	36	0	22.93	22.96	22.90	0-2	2
	36	18	22.86	22.90	22.85		
	36	37	22.82	22.91	22.80		
	75	0	22.85	22.86	22.82	0-2	2
64QAM	1	0	22.95	22.83	22.92	0-2	2
	1	36	22.81	22.88	22.86		
	1	74	22.81	22.82	22.80		
	36	0	21.98	21.89	21.86	0-3	3
	36	18	21.86	21.98	21.85		
	36	37	21.80	21.85	21.80		
	75	0	21.91	22.03	21.80	0-3	3

Table 10.3.30 LTE Conducted Power

LTE Band 7 Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.83	24.72	24.82	0	0
	1	25	24.66	24.92	24.71		
	1	49	24.74	24.82	24.72		
	25	0	23.78	23.88	23.81	0-1	1
	25	12	23.92	23.85	23.71		
	25	25	23.80	23.88	23.71		
50	0	23.79	23.83	23.71	0-1	1	
16QAM	1	0	23.91	23.86	24.00	0-1	1
	1	25	23.83	23.92	23.80		
	1	49	23.78	23.92	23.82		
	25	0	22.83	22.95	22.82	0-2	2
	25	12	22.91	22.98	22.84		
	25	25	22.83	22.83	22.72		
50	0	22.91	22.91	22.80	0-2	2	
64QAM	1	0	22.88	22.82	22.93	0-2	2
	1	25	22.74	22.89	22.75		
	1	49	22.82	22.84	22.70		
	25	0	21.95	21.96	21.89	0-3	3
	25	12	21.93	21.91	21.88		
	25	25	21.85	21.91	21.83		
50	0	21.82	21.94	21.74	0-3	3	

Table 10.3.31 LTE Conducted Power

LTE Band 7 Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.82	24.72	24.76	0	0
	1	12	24.70	24.83	24.79		
	1	24	24.63	24.78	24.61		
	12	0	23.87	23.82	23.68	0-1	1
	12	6	23.84	23.91	23.76		
	12	13	23.70	23.89	23.66		
	25	0	23.81	23.85	23.67	0-1	1
16QAM	1	0	23.92	23.82	23.80	0-1	1
	1	12	23.79	23.99	23.88		
	1	24	23.75	23.95	23.74		
	12	0	22.83	22.88	22.76	0-2	2
	12	6	22.93	22.95	22.86		
	12	13	22.70	22.90	22.76		
	25	0	22.86	22.92	22.79	0-2	2
64QAM	1	0	22.88	22.78	22.82	0-2	2
	1	12	22.79	22.97	22.85		
	1	24	22.68	22.79	22.66		
	12	0	21.88	22.00	21.82	0-3	3
	12	6	21.95	22.05	21.90		
	12	13	21.82	21.93	21.80		
	25	0	21.90	21.95	21.85	0-3	3

Table 10.3.32 LTE Conducted Power

Band & Mode		Modulated Average [dBm]
LTE Band 41	Maximum	25.2
	Nominal	24.7

Table 10.3.33 Nominal and Maximum Output Power Spec

7) LTE Band 41

LTE Band 41 Conducted Power– 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	24.95	24.61	24.69	24.66	24.69	0	0
	1	50	24.79	24.66	24.72	24.68	24.46		
	1	99	24.59	24.61	24.64	24.61	24.39		
	50	0	23.91	23.71	23.82	23.77	23.69	0-1	1
	50	25	23.89	23.65	23.66	23.68	23.66		
	50	50	23.68	23.71	23.78	23.81	23.68		
16QAM	100	0	23.78	23.65	23.71	23.75	23.65	0-1	1
	1	0	23.93	23.77	23.79	23.77	23.69	0-1	1
	1	50	23.78	23.62	23.68	23.66	23.54		
	1	99	23.63	23.60	23.70	23.62	23.31		
	50	0	22.81	22.61	22.67	22.66	22.52	0-2	2
	50	25	22.78	22.51	22.53	22.55	22.63		
50	50	22.64	22.64	22.68	22.71	22.63			
64QAM	100	0	22.70	22.62	22.68	22.66	22.65	0-2	2
	1	0	22.92	22.71	22.75	22.72	22.72	0-2	2
	1	50	22.76	22.70	22.71	22.66	22.54		
	1	99	22.53	22.62	22.63	22.51	22.38		
	50	0	21.72	21.68	21.69	21.63	21.59	0-3	3
	50	25	21.70	21.51	21.59	21.61	21.50		
50	50	21.59	21.55	21.71	21.72	21.58			
	100	0	21.84	21.64	21.72	21.58	21.56	0-3	3

Table 10.3.34 LTE Conducted Power

LTE Band 41 Conducted Power– 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39725 (2503.5 MHz)	40173 (2548.3 MHz)	40620 (2593.0 MHz)	41068 (2637.8 MHz)	41515 (2682.5 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	24.92	24.58	24.68	24.63	24.64	0	0
	1	36	24.72	24.66	24.61	24.71	24.50		
	1	74	24.56	24.66	24.65	24.62	24.49		
	36	0	23.80	23.85	23.80	23.75	23.76	0-1	1
	36	18	23.84	23.71	23.69	23.61	23.74		
	36	37	23.79	23.77	23.74	23.74	23.69		
	75	0	23.77	23.64	23.69	23.68	23.75	0-1	1
16QAM	1	0	23.94	23.61	23.73	23.72	23.71	0-1	1
	1	36	23.72	23.58	23.67	23.66	23.58		
	1	74	23.58	23.75	23.67	23.60	23.64		
	36	0	22.65	22.72	22.69	22.65	22.66	0-2	2
	36	18	22.68	22.55	22.56	22.51	22.63		
	36	37	22.63	22.66	22.58	22.66	22.56		
	75	0	22.70	22.62	22.56	22.62	22.60	0-2	2
64QAM	1	0	22.90	22.65	22.69	22.71	22.63	0-2	2
	1	36	22.76	22.66	22.65	22.66	22.45		
	1	74	22.60	22.66	22.64	22.61	22.53		
	36	0	21.76	21.72	21.71	21.64	21.75	0-3	3
	36	18	21.70	21.61	21.65	21.55	21.66		
	36	37	21.66	21.70	21.71	21.68	21.64		
	75	0	21.64	21.65	21.65	21.68	21.67	0-3	3

Table 10.3.35 LTE Conducted Power

LTE Band 41 Conducted Power- 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39700 (2501.0 MHz)	40160 (2547.0 MHz)	40620 (2593.0 MHz)	41080 (2639.0 MHz)	41540 (2685.0 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	24.77	24.58	24.64	24.66	24.75	0	0
	1	25	24.79	24.58	24.61	24.77	24.63		
	1	49	24.62	24.54	24.67	24.66	24.52		
	25	0	23.88	23.74	23.72	23.78	23.72	0-1	1
	25	12	23.84	23.62	23.69	23.69	23.68		
	25	25	23.77	23.77	23.74	23.72	23.56		
	50	0	23.77	23.70	23.75	23.74	23.76	0-1	1
16QAM	1	0	23.82	23.71	23.64	23.77	23.74	0-1	1
	1	25	23.83	23.58	23.74	23.66	23.69		
	1	49	23.67	23.60	23.68	23.81	23.58		
	25	0	22.76	22.57	22.66	22.69	22.58	0-2	2
	25	12	22.67	22.51	22.61	22.59	22.60		
	25	25	22.63	22.66	22.61	22.61	22.56		
	50	0	22.67	22.60	22.56	22.72	22.58	0-2	2
64QAM	1	0	22.81	22.65	22.65	22.77	22.79	0-2	2
	1	25	22.75	22.61	22.68	22.71	22.63		
	1	49	22.65	22.53	22.72	22.58	22.58		
	25	0	21.78	21.66	21.68	21.59	21.62	0-3	3
	25	12	21.73	21.55	21.60	21.61	21.64		
	25	25	21.62	21.70	21.69	21.66	21.55		
	50	0	21.72	21.75	21.60	21.74	21.59	0-3	3

Table 10.3.36 LTE Conducted Power

LTE Band 41 Conducted Power- 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			39675 (2498.5 MHz)	40148 (2545.8 MHz)	40620 (2593.0 MHz)	41093 (2640.3 MHz)	41565 (2687.5 MHz)		
			Conducted Power (dBm)						
QPSK	1	0	24.82	24.77	24.66	24.62	24.62	0	0
	1	12	24.82	24.75	24.72	24.66	24.61		
	1	24	24.71	24.65	24.58	24.63	24.50		
	12	0	23.83	23.78	23.76	23.81	23.72	0-1	1
	12	6	23.81	23.67	23.72	23.69	23.72		
	12	13	23.81	23.77	23.60	23.81	23.55		
	25	0	23.83	23.65	23.71	23.75	23.66	0-1	1
16QAM	1	0	23.77	23.78	23.71	23.61	23.64	0-1	1
	1	12	23.89	23.64	23.72	23.69	23.74		
	1	24	23.78	23.71	23.63	23.69	23.53		
	12	0	22.68	22.66	22.57	22.62	22.55	0-2	2
	12	6	22.63	22.51	22.66	22.55	22.54		
	12	13	22.65	22.65	22.50	22.71	22.46		
	25	0	22.65	22.65	22.57	22.70	22.55	0-2	2
64QAM	1	0	22.79	22.72	22.69	22.65	22.59	0-2	2
	1	12	22.86	22.65	22.72	22.72	22.68		
	1	24	22.79	22.58	22.62	22.61	22.58		
	12	0	21.65	21.65	21.66	21.63	21.57	0-3	3
	12	6	21.72	21.58	21.68	21.63	21.67		
	12	13	21.77	21.65	21.63	21.70	21.50		
	25	0	21.75	21.71	21.54	21.70	21.62	0-3	3

Table 10.3.37 LTE Conducted Power

8) LTE DL Carrier Aggregation Conducted Powers

- Below downlink CA configurations were determined based on Manufacturer's information.

CA BW Class			
Class	ATBC		Maximum number of CC
	N _{RB,agg}	MHz	
A	N ≤ 100	20	1
B	25 < N ≤ 100	20	2
C	100 < N ≤ 200	40	2
D	200 < N ≤ 300	60	3
E	300 < N ≤ 400	80	4
F	400 < N ≤ 500	100	5
I	700 < N ≤ 800	160	8

Table 10.3.38 Inter-band DL CA Configuration

2 bands / 2CC	2 bands / 3CC	2 bands / 4CC
CA_2A-7A (0) Table 10.3.39	CA_2A-7C (0) Table 10.3.40	N/A
CA_4A-12A (0)(3)(5) Table 10.3.41	N/A	N/A
CA_4A-12A (1)(2)(4) Table 10.3.41	N/A	N/A
CA_4A-17A (0) Table 10.3.41	N/A	N/A
CA_5A-7A (0)(1) Table 10.3.41	N/A	N/A
CA_7A-46A (0)(1) Table 10.3.42	CA_7A-46C (0)(1) Table 10.3.43	CA_7A-46D (0)(1) Table 10.3.44

Table 10.3.39 LTE DL Carrier Aggregation Conducted Power for Inter-band DL CA Configuration [CA_2A-7A (0)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	20	3100	2655	24.11<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	15	3100	2655	24.09<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	10	3100	2655	24.07<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	5	3100	2655	24.05<	24.14

Table 10.3.40 LTE DL Carrier Aggregation Conducted Power for Inter-band DL CA Configuration [CA_2A-7C (0)]

PCC									SCC1				SCC2				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	20	3100	2655	LTE B7	20	3298	2674.8	24.13<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	20	3100	2655	LTE B7	15	3271	2672.1	24.11<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	20	3100	2655	LTE B7	10	3244	2669.4	24.09<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	15	3100	2655	LTE B7	20	3271	2672.1	24.08<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	15	3100	2655	LTE B7	15	3250	2670.0	24.07<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	15	3100	2655	LTE B7	10	3220	2667.0	24.06<	24.14
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B7	10	3100	2655	LTE B7	20	3244	2669.4	24.05<	24.14

Table 10.3.41 LTE DL Carrier Aggregation Conducted Power for Inter-band DL CA Configuration [CA_4A-12A (0)(1)(2)(3)(4)(5) / CA_4A-17A (0) / CA_5A-7A (0)(1)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B12	10	5095	737.5	24.11<	24.13
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B12	5	5095	737.5	24.10<	24.13
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B12	3	5095	737.5	24.09<	24.13
LTE B4	10	20350	1750	QPSK	1	74	2350	2150	LTE B17	10	5790	740.0	24.10<	24.15
LTE B4	10	20350	1750	QPSK	1	74	2350	2150	LTE B17	5	5790	740.0	24.01<	24.15
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B7	20	3100	2655	25.20<	25.22
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B7	15	3100	2655	25.19<	25.22
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B7	10	3100	2655	25.18<	25.22

Table 10.3.42 LTE DL Carrier Aggregation Conducted Power for Inter-band DL CA Configuration [CA_7A-46A (0)(1)]

PCC									SCC1				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	24.92<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	10	47290	5200	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	10	48290	5300	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	10	51290	5600	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	10	53140	5785	24.87<	24.96

Table 10.3.43 LTE DL Carrier Aggregation Conducted Power for Inter-band DL CA Configuration [CA_7A-46C (0)(1)]

PCC									SCC1				SCC2				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	LTE B46 _A	20	47488	5219.8	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	LTE B46 _B	20	48488	5319.8	24.92<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	LTE B46 _C	20	51488	5619.8	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	LTE B46 _D	20	53338	5804.8	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	LTE B46 _A	10	47434	5214.4	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	LTE B46 _B	10	48434	5314.4	24.86<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	LTE B46 _C	10	51434	5614.4	24.84<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	LTE B46 _D	10	53284	5799.4	24.82<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	10	47290	5200	LTE B46 _A	20	47434	5214.4	24.92<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	10	48290	5300	LTE B46 _B	20	48434	5314.4	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	10	51290	5600	LTE B46 _C	20	51434	5614.4	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	10	53140	5785	LTE B46 _D	20	53284	5799.4	24.88<	24.96

Table 10.3.44 LTE DL Carrier Aggregation Conducted Power for Inter-band DL CA Configuration [CA_7A-46D (0)(1)]

PCC									SCC1				SCC2				SCC3				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	LTE B46 _A	20	47488	5219.8	LTE B46 _A	20	47686	5239.6	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	LTE B46 _B	20	48488	5319.8	LTE B46 _B	20	48686	5339.6	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	LTE B46 _C	20	51488	5619.8	LTE B46 _C	20	51686	5639.6	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	LTE B46 _D	20	53338	5804.8	LTE B46 _D	20	53536	5824.6	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	LTE B46 _A	20	47488	5219.8	LTE B46 _A	10	47632	5234.2	24.92<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	LTE B46 _B	20	48488	5319.8	LTE B46 _B	10	48632	5334.2	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	LTE B46 _C	20	51488	5619.8	LTE B46 _C	10	51632	5634.2	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	LTE B46 _D	20	53338	5804.8	LTE B46 _D	10	53482	5819.2	24.86<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	10	47290	5200	LTE B46 _A	20	47434	5214.4	LTE B46 _A	20	47632	5234.2	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	10	48290	5300	LTE B46 _B	20	48434	5314.4	LTE B46 _B	20	48632	5334.2	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	10	51290	5600	LTE B46 _C	20	51434	5614.4	LTE B46 _C	20	51632	5634.2	24.85<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	10	53140	5785	LTE B46 _D	20	53284	5799.4	LTE B46 _D	20	53482	5819.2	24.82<	24.96

Table 10.3.45 Intra-band (contiguous) DL CA Configuration

1 bands / 2CC	1 bands / 3CC	1 bands / 4CC
CA 5B (0) Table 10.3.46	N/A	N/A
CA 7B (0) Table 10.3.46	N/A	N/A
CA 7C (0)(1)(2) Table 10.3.46	N/A	N/A
CA 41C (0)(1)(2)(3) Table 10.3.47	CA 41D (0) Table 10.3.48	N/A

Table 10.3.46 LTE DL Carrier Aggregation Conducted Power for Intra-band (contiguous) DL CA Configuration [CA 5B (0) / CA 7B (0) / CA 7C (0)(1)(2)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL# RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B5	10	20490	833.0 ^{Note}	QPSK	1	0	2490	878.0	LTE B5	10	2589	887.9	25.20<	25.22
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B5	5	2597	888.7	25.16<	25.22
LTE B7	15	20825	2507.5	QPSK	1	0	2825	2627.5	LTE B7	5	2918	2636.8	24.87<	24.93
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	3152	2660.2	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	15	3179	2662.9	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	10	3206	2665.6	24.88<	24.96

Note: In case of uplink PCC=836.5 MHz, the 20 MHz (PCC + SCC) downlink bandwidth overs the band 5 frequency range at any case. Thus we measured LTE single power and DL CA power at uplink PCC= 833.0 MHz instead of PCC=836.5 MHz to compare between two powers.

Table 10.3.47 LTE DL Carrier Aggregation Conducted Power for Intra-band (contiguous) DL CA Configuration [CA 41C (0)(1)(2)(3)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL# RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	24.88<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	15	39922	2523.1	24.83<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	10	39894	2520.4	24.81<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	5	39867	2517.7	24.80<	24.95

Table 10.3.48 LTE DL Carrier Aggregation Conducted Power for Intra-band (contiguous) DL CA Configuration [CA 41D (0)]

PCC									SCC1				SCC2				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL# RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	LTE B41	20	40146	2545.6	24.88<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	LTE B41	15	40119	2542.9	24.85<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	LTE B41	10	40092	2540.2	24.81<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	15	39922	2523.1	LTE B41	20	40092	2540.2	24.91<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	15	39922	2523.1	LTE B41	15	40071	2538.1	24.86<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	15	39922	2523.1	LTE B41	10	40041	2535.1	24.90<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	10	39894	2520.4	LTE B41	20	40038	2534.8	24.79<	24.95
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	10	39894	2520.4	LTE B41	15	40014	2532.4	24.80<	24.95

Table 10.3.49 Intra-band (non-contiguous) DL CA Configuration

1 bands / 2CC	1 bands / 3CC	1 bands / 4CC
CA 7A-7A (2) Table 10.3.50	N/A	N/A
CA 7A-7A (0)(1)(3) Table 10.3.50	N/A	N/A

Table 10.3.50 LTE DL Carrier Aggregation Conducted Power for Intra-band (non-contiguous) DL CA Configuration [CA 7A-7A (2) / CA 7A-7A (0)(1)(3)]

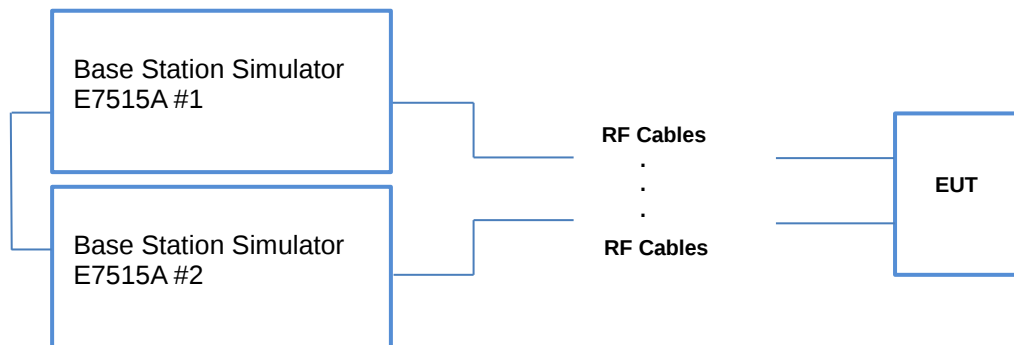
PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL# RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	2850	2630.0	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	15	2825	2627.5	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	10	2800	2625.0	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	5	2775	2622.5	24.85<	24.96

Table 10.3.51 LTE DL Carrier Aggregation Conducted Powers for comparing B7 DL 4X4 MIMO and B7 DL Intra-band CA

LTE Band	Maximum DL 4X4 MIMO Power (dBm)	Maximum DL Intra-band Contiguous DL CA Power (dBm)	Maximum DL Intra-band Non-Contiguous DL CA Power (dBm)
B7	24.78 <	24.93	24.93

Note(s):

- The device only supports downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. The DL carrier aggregation powers were measured according to the April 2018 TCB Workshop Notes (LTE Carrier Aggregation). Per Fall 2017 TCB Workshop Notes (LTE Carrier Aggregation) and FCC KDB Publication 941225 D05Av01r02, no further power measurements and SAR measurements are required for DL carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.
- For downlink carrier aggregation combinations, PCC uplink channel was selected based on section C.3b)i) of KDB 941225 D05Av01r02.


Figure 10.3.1 DL 4CA Power Measurement Setup

9) LTE 4x4 DL MIMO , LTE 4x4 DL MIMO with DL Carrier Aggregation Conducted Powers

- Below DL MIMO and DL CA configurations were determined based on Manufacturer's information.

Table 10.352 DL 4X4 MIMO Configuration

LTE B7
7A[4x4]

Table 10.353 LTE DL 4X4 MIMO Conducted Power

PCC / DL 4X4 MIMO									Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	LTE Tx. Power with DL 4x4 MIMO Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560.0	QPSK	1	0	3350	2680.0	24.78<	24.96
LTE B7	15	20825	2507.5	QPSK	1	0	2825	2627.5	24.77<	24.93
LTE B7	10	21100	2535.0	QPSK	1	25	3100	2655.0	24.76<	24.92
LTE B7	5	21100	2535.0	QPSK	1	12	3100	2655.0	24.75<	24.83

Note(s):

- The device supports downlink 4X4 MIMO. The 4X4 MIMO powers were measured applying the May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO). Per May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO) and FCC KDB Publication 941225 D05Av01r02, no further power measurements and SAR measurements are required for DL MIMO configurations when the average output power with downlink MIMO active is not more than 0.25 dB higher than the average output power with downlink MIMO inactive.
- PCC uplink channel was selected based on section C.3(b)ii) of KDB 941225 D05Av01r02.

Table 10.354 DL 4x4 MIMO with Inter-band DL CA Configuration

2 bands / 2CC	2 bands / 3CC	2 bands / 4CC
CA 7A[4x4]-46A (0)(1)	CA 7A[4x4]-46C (0)(1)	CA 7A[4x4]-46D (0)(1)

Table 10.355 DL 4X4 MIMO with Inter-band DL CA Configuration Powers [CA 7A[4x4]-46A (0)(1)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _E	10	47290	5200	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _F	10	48290	5300	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _G	10	51290	5600	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _H	10	53140	5785	24.86<	24.96

Table 10.356 DL 4X4 MIMO with Inter-band DL CA Configuration Powers [CA 7A[4x4]-46C (0)(1)]

PCC									SCC1				SCC2				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	LTE B46 _A	20	47488	5219.8	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	LTE B46 _B	20	48488	5319.8	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	LTE B46 _C	20	51488	5619.8	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	LTE B46 _D	20	53388	5804.8	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _E	20	47290	5200	LTE B46 _E	10	47434	5214.4	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _F	20	48290	5300	LTE B46 _F	10	48434	5314.4	24.86<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _G	20	51290	5600	LTE B46 _G	10	51434	5614.4	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _H	20	53140	5785	LTE B46 _H	10	53284	5799.4	24.85<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	10	47290	5200	LTE B46 _A	20	47434	5214.4	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	10	48290	5300	LTE B46 _B	20	48434	5314.4	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	10	51290	5600	LTE B46 _C	20	51434	5614.4	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	10	53140	5785	LTE B46 _D	20	53284	5799.4	24.89<	24.96

Table 10.357 DL 4X4 MIMO with Inter-band DL CA Configuration Powers [CA 7A[4x4]-46D (0)(1)]

PCC									SCC1				SCC2				SCC3				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	20	47290	5200	LTE B46 _A	20	47488	5219.8	LTE B46 _A	20	47686	5239.6	24.93<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	20	48290	5300	LTE B46 _B	20	48488	5319.8	LTE B46 _B	20	48686	5339.6	24.92<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	20	51290	5600	LTE B46 _C	20	51488	5619.8	LTE B46 _C	20	51686	5639.6	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	20	53140	5785	LTE B46 _D	20	53388	5804.8	LTE B46 _D	20	53586	5824.6	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _E	20	47290	5200	LTE B46 _E	20	47488	5219.8	LTE B46 _E	10	47686	5234.2	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _F	20	48290	5300	LTE B46 _F	20	48488	5319.8	LTE B46 _F	10	48686	5334.2	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _G	20	51290	5600	LTE B46 _G	20	51488	5619.8	LTE B46 _G	10	51686	5634.2	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _H	20	53140	5785	LTE B46 _H	20	53388	5804.8	LTE B46 _H	10	53486	5819.2	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _A	10	47290	5200	LTE B46 _A	20	47434	5214.4	LTE B46 _A	20	47632	5234.2	24.89<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _B	10	48290	5300	LTE B46 _B	20	48434	5314.4	LTE B46 _B	20	48632	5334.2	24.90<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _C	10	51290	5600	LTE B46 _C	20	51434	5614.4	LTE B46 _C	20	51632	5634.2	24.92<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B46 _D	10	53140	5785	LTE B46 _D	20	53284	5799.4	LTE B46 _D	20	53482	5819.2	24.90<	24.96

Note(s):

- The device supports DL 4X4 MIMO with DL Carrier Aggregation. Uplink MIMO and Carrier Aggregation is not supported. The 4X4 MIMO with DL carrier aggregation powers were measured applying the May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO). Per May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO) and FCC KDB Publication 941225 D05Av01r02, **no further power measurements and SAR measurements are required for DL 4X4 MIMO with DL carrier aggregation configurations** when the average output power with DL 4X4 MIMO with DL CA active is **not more than 0.25 dB higher than** the average output power with DL 4X4 MIMO with DL CA inactive.
- For downlink carrier aggregation combinations, PCC uplink channel was selected based on section C.3(b)ii) of KDB 941225 D05Av01r02.

Table 10.3.58 DL 4x4 MIMO with Intra-band (contiguous) DL CA Configuration

1 bands / 2CC	1 bands / 3CC	1 bands / 4CC
CA_7B[4x4] (0) Table 10.3.59	N/A	N/A
CA_7C[4x4] (0)(1)(2) Table 10.3.59	N/A	N/A

Table 10.3.59 DL 4x4 MIMO with Intra-band (contiguous) DL CA Configuration Powers [CA_7B[4x4] (0) / CA_7C[4x4] (0)(1)(2)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	15	20825	2507.5	QPSK	1	0	2825	2627.5	LTE B7	5	2918	2636.8	24.77<	24.93
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	3152	2660.2	24.88<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	15	3179	2662.9	24.85<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	10	3206	2665.6	24.79<	24.96

Table 10.3.60 DL 4x4 MIMO with Intra-band (non-contiguous) DL CA Configuration

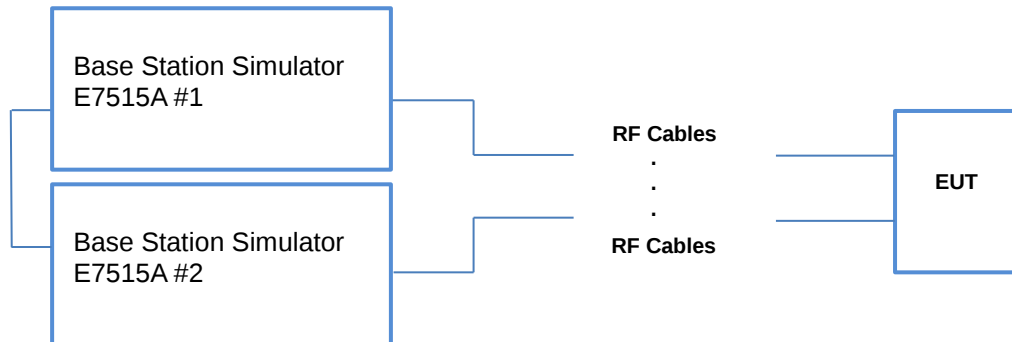
1 bands / 2CC	1 bands / 3CC	1 bands / 4CC
CA_7A[4x4]-7A (2) Table 10.3.61	N/A	N/A
CA_7A[4x4]-7A (0)(1)(3) Table 10.3.61	N/A	N/A

Table 10.3.61 DL 4x4 MIMO with Intra-band (non-contiguous) DL CA Configuration Powers [CA_7A[4x4]-7A (0)(1)(2)(3)]

PCC									SCC				Power	
PCC Band	PCC BW (MHz)	PCC (UL) CH.	PCC (UL) Freq. (MHz)	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) CH.	PCC (DL) Freq. (MHz)	SCC Band	SCC BW (MHz)	SCC (DL) CH.	SCC (DL) Freq. (MHz)	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx. Power (dBm)
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	2850	2630.0	24.91<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	15	2825	2627.5	24.87<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	10	2800	2625.0	24.85<	24.96
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	5	2775	2622.5	24.83<	24.96

Note(s):

- The device supports downlink 4x4 MIMO. The 4x4 MIMO powers were measured applying the May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO). And Per May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO) and FCC KDB Publication 941225 D05Av01r02, **no further power measurements and SAR measurements are required for DL MIMO configurations** when the average output power with downlink MIMO active is **not more than 0.25 dB higher than** the average output power with downlink MIMO inactive.
- PCC uplink channel was selected based on section C.3)b)ii) of KDB 941225 D05Av01r02.


Figure 10.3.2 DL 4x4 MIMO, DL 4x4 MIMO with DL 4CA Power Measurement Setup

10) 64QAM uplink : Applying KDB inquiry # 331653

According to the Response to Inquiry to FCC (KDB Inquiry Tracking Number: 331653), the SAR Power Measurement Plan is as follows.

(1) Per KDB 941225 D05 V02r05, we'll measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we will apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

11) LAA downlink only : Applying KDB inquiry # 331653

According to the Response to Inquiry to FCC (KDB Inquiry Tracking Number: 331653), the SAR Power Measurement Plan is as follows.

(1) We propose to apply the test procedure in KDB 941225 D05A v01r02 for devices with downlink carrier aggregation only. Per C.3)b), the uplink maximum output power is measured with downlink carrier aggregation active, only for the channel with highest measured maximum output power when downlink carrier aggregation is in active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than 1/4 dB higher than the maximum output power measured when downlink carrier aggregation is inactive.

10.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
2.4	802.11b	1~2	16.5	15.5	16.5	15.5	-	-
		3~9	16.5	15.5	16.5	15.5	-	-
		10~11	16.5	15.5	16.5	15.5	-	-
		12~13	1.0	0.0	1.0	0.0	-	-
	802.11g	1~2	16.0	15.0	16.0	15.0	19.0	18.0
		3~9	16.0	15.0	16.0	15.0	19.0	18.0
		10~11	16.0	15.0	16.0	15.0	19.0	18.0
		12~13	1.0	0.0	1.0	0.0	4.0	3.0
	802.11n	1~2	15.0	14.0	15.0	14.0	18.0	17.0
		3~9	15.0	14.0	15.0	14.0	18.0	17.0
		10~11	15.0	14.0	15.0	14.0	18.0	17.0
		12~13	1.0	0.0	1.0	0.0	4.0	3.0
	802.11ac	1~2	15.0	14.0	15.0	14.0	18.0	17.0
		3~9	15.0	14.0	15.0	14.0	18.0	17.0
		10~11	15.0	14.0	15.0	14.0	18.0	17.0
		12~13	1.0	0.0	1.0	0.0	4.0	3.0

Table 10.4.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11b	2412	1	15.58	15.62	-	-
	2437	6	15.88	15.57	-	-
	2462	11	15.45	15.48	-	-
	2472	13	0.85	-0.23	-	-
802.11g	2412	1	14.53	14.54	17.55	-
	2437	6	14.43	14.47	17.46	-
	2462	11	14.43	14.27	17.36	-
	2472	13	-0.13	-0.73	2.59	-
802.11n (HT-20)	2412	1	13.51	13.36	16.45	16.36
	2437	6	13.52	13.30	16.42	16.50
	2462	11	13.44	13.23	16.35	16.40
	2472	13	-0.16	-0.89	2.50	2.56
802.11ac (VHT-20)	2412	1	13.56	13.40	16.49	16.49
	2437	6	13.56	13.33	16.46	16.57
	2462	11	13.40	13.39	16.41	16.39
	2472	13	-0.11	-0.13	2.89	2.47

Table 10.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
5	802.11a	36	16.0	15.0	16.0	15.0	19.0	18.0
		40-48	16.0	15.0	16.0	15.0	19.0	18.0
		52-60	16.0	15.0	16.0	15.0	19.0	18.0
		64	16.0	15.0	16.0	15.0	19.0	18.0
		100	16.0	15.0	16.0	15.0	19.0	18.0
		104-136	16.0	15.0	16.0	15.0	19.0	18.0
		140-144	16.0	15.0	16.0	15.0	19.0	18.0
		149-161	16.0	15.0	16.0	15.0	19.0	18.0
		165	16.0	15.0	16.0	15.0	19.0	18.0
	802.11n/ac (20MHz)	36	15.0	14.0	15.0	14.0	18.0	17.0
		40-48	15.0	14.0	15.0	14.0	18.0	17.0
		52-60	15.0	14.0	15.0	14.0	18.0	17.0
		64	15.0	14.0	15.0	14.0	18.0	17.0
		100	15.0	14.0	15.0	14.0	18.0	17.0
		104-136	15.0	14.0	15.0	14.0	18.0	17.0
		140-144	15.0	14.0	15.0	14.0	18.0	17.0
		149-161	15.0	14.0	15.0	14.0	18.0	17.0
		165	15.0	14.0	15.0	14.0	18.0	17.0
	802.11n/ac (40MHz)	38	13.0	12.0	13.0	12.0	16.0	15.0
		46	15.0	14.0	15.0	14.0	18.0	17.0
		54	15.0	14.0	15.0	14.0	18.0	17.0
		62	12.5	11.5	12.5	11.5	15.5	14.5
		102	12.5	11.5	12.5	11.5	15.5	14.5
		110	15.0	14.0	15.0	14.0	18.0	17.0
		118	15.0	14.0	15.0	14.0	18.0	17.0
		126	15.0	14.0	15.0	14.0	18.0	17.0
		134-142	15.0	14.0	15.0	14.0	18.0	17.0
		151	15.0	14.0	15.0	14.0	18.0	17.0
		159	15.0	14.0	15.0	14.0	18.0	17.0
	802.11ac (80MHz)	42	15.0	14.0	15.0	14.0	18.0	17.0
		58	10.5	9.5	10.5	9.5	13.5	12.5
		106	15.0	14.0	15.0	14.0	18.0	17.0
		122-138	15.0	14.0	15.0	14.0	18.0	17.0
		155	15.0	14.0	15.0	14.0	18.0	17.0

Table 10.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11a	5180	36	15.10	14.93	18.03	-
	5200	40	15.03	15.07	18.06	-
	5220	44	15.14	15.03	18.10	-
	5240	48	15.04	15.00	18.03	-
	5260	52	14.94	15.01	17.99	-
	5280	56	15.08	14.95	18.03	-
	5300	60	15.05	14.87	17.97	-
	5320	64	14.90	14.88	17.90	-
	5500	100	15.12	14.85	18.00	-
	5600	120	15.05	14.88	17.98	-
	5660	132	15.10	14.81	17.97	-
	5720	144	14.94	14.71	17.84	-
	5745	149	14.98	14.76	17.88	-
	5785	157	15.04	14.58	17.83	-
	5825	165	15.24	14.92	18.09	-

Table 10.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-20)	5180	36	13.92	13.76	16.85	17.04
	5200	40	13.86	13.82	16.85	17.03
	5220	44	13.87	13.89	16.89	17.13
	5240	48	13.85	13.81	16.84	17.09
	5260	52	13.77	13.83	16.81	17.04
	5280	56	13.88	13.76	16.83	17.05
	5300	60	13.84	13.74	16.80	16.93
	5320	64	13.74	13.66	16.71	16.87
	5500	100	13.91	13.64	16.79	17.17
	5600	120	13.96	13.67	16.83	17.10
	5660	132	13.85	13.75	16.81	17.07
	5720	144	13.78	13.47	16.64	16.88
	5745	149	13.68	13.46	16.58	16.86
	5785	157	13.98	13.43	16.72	16.98
	5825	165	14.10	13.81	16.97	17.14

Table 10.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-20)	5180	36	13.90	13.91	16.92	17.19
	5200	40	13.90	13.97	16.95	17.11
	5220	44	13.90	13.90	16.91	17.21
	5240	48	13.81	13.89	16.86	17.20
	5260	52	13.86	13.97	16.93	17.04
	5280	56	13.89	13.89	16.90	17.10
	5300	60	13.87	13.71	16.80	16.97
	5320	64	13.74	13.67	16.72	16.92
	5500	100	13.94	13.74	16.85	17.18
	5600	120	13.91	13.74	16.84	17.08
	5660	132	13.84	13.70	16.78	17.05
	5720	144	13.76	13.52	16.65	16.86
	5745	149	13.73	13.59	16.67	16.85
	5785	157	13.87	13.58	16.74	16.93
	5825	165	14.16	13.82	17.00	17.15

Table 10.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11n (HT-40)	5190	38	12.19	12.10	15.16	15.27
	5230	46	14.17	14.00	17.10	17.30
	5270	54	14.06	13.99	17.04	17.24
	5310	62	11.71	11.42	14.58	14.73
	5510	102	11.66	11.49	14.59	14.80
	5590	118	14.10	13.88	17.00	17.14
	5670	134	14.19	13.84	17.03	17.16
	5710	142	14.05	13.81	16.94	17.09
	5755	151	13.95	13.73	16.85	17.00
	5795	159	14.07	13.70	16.90	17.11

Table 10.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-40)	5190	38	12.20	12.12	15.17	15.17
	5230	46	14.14	13.94	17.05	17.34
	5270	54	14.22	14.08	17.16	17.22
	5310	62	11.68	11.44	14.57	14.57
	5510	102	11.78	11.45	14.63	14.78
	5590	118	14.17	13.90	17.05	17.15
	5670	134	14.14	13.85	17.01	17.10
	5710	142	14.14	13.82	16.99	17.02
	5755	151	14.09	13.72	16.92	16.90
	5795	159	14.15	13.73	16.96	17.02

Table 10.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]			
			Ant.1	Ant.2	MIMO(CDD)	MIMO(SDM)
802.11ac (VHT-80)	5210	42	13.70	13.55	16.64	16.78
	5290	58	9.62	9.41	12.53	12.61
	5530	106	13.60	13.36	16.49	16.71
	5610	122	13.55	13.46	16.52	16.79
	5690	138	13.47	13.36	16.43	16.55
	5775	155	13.37	13.16	16.28	16.32

Table 10.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 10.4 Power Measurement Setup

10.5 Bluetooth Conducted Powers

Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	12.0
	Nominal	11.0
Bluetooth 2 Mbps	Maximum	12.0
	Nominal	11.0
Bluetooth 3 Mbps	Maximum	12.0
	Nominal	11.0
Bluetooth LE	Maximum	5.5
	Nominal	4.5

Table 10.5.1 Nominal and Maximum Output Power Spec

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	11.13	9.98	10.57	9.42	10.57	9.42
Mid	2441	11.20	10.05	10.66	9.51	10.66	9.51
High	2480	10.64	9.49	10.10	8.95	10.10	8.95

Table 10.5.2 Bluetooth Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	4.00	1.96	3.98	1.94
Mid	2440	4.26	2.22	4.23	2.19
High	2480	3.75	1.71	3.73	1.69

Table 10.5.3 Bluetooth LE Frame Average RF Power

● Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 10.5.1(A).
- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
- 4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- 1) Enter LE mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 10.5.1(B).
- 3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.
- 4) Power levels were measured by a Power Meter.

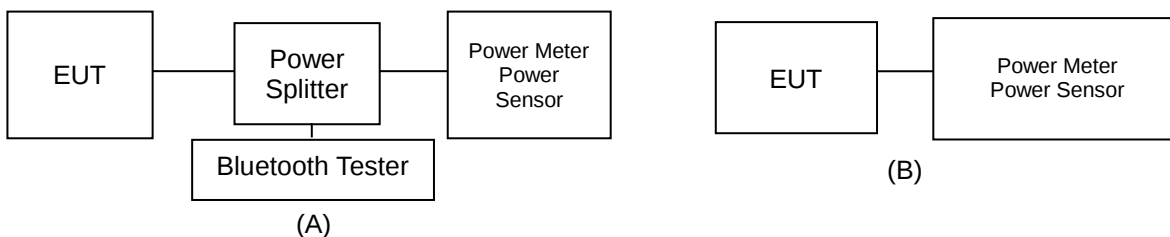


Figure 10.5.1 Average Power Measurement Setup

The average conducted output powers of Bluetooth were measured using above test setup and a wideband gated RF power meter when the EUT is transmitting at its maximum power level.

- Bluetooth Transmission Plot

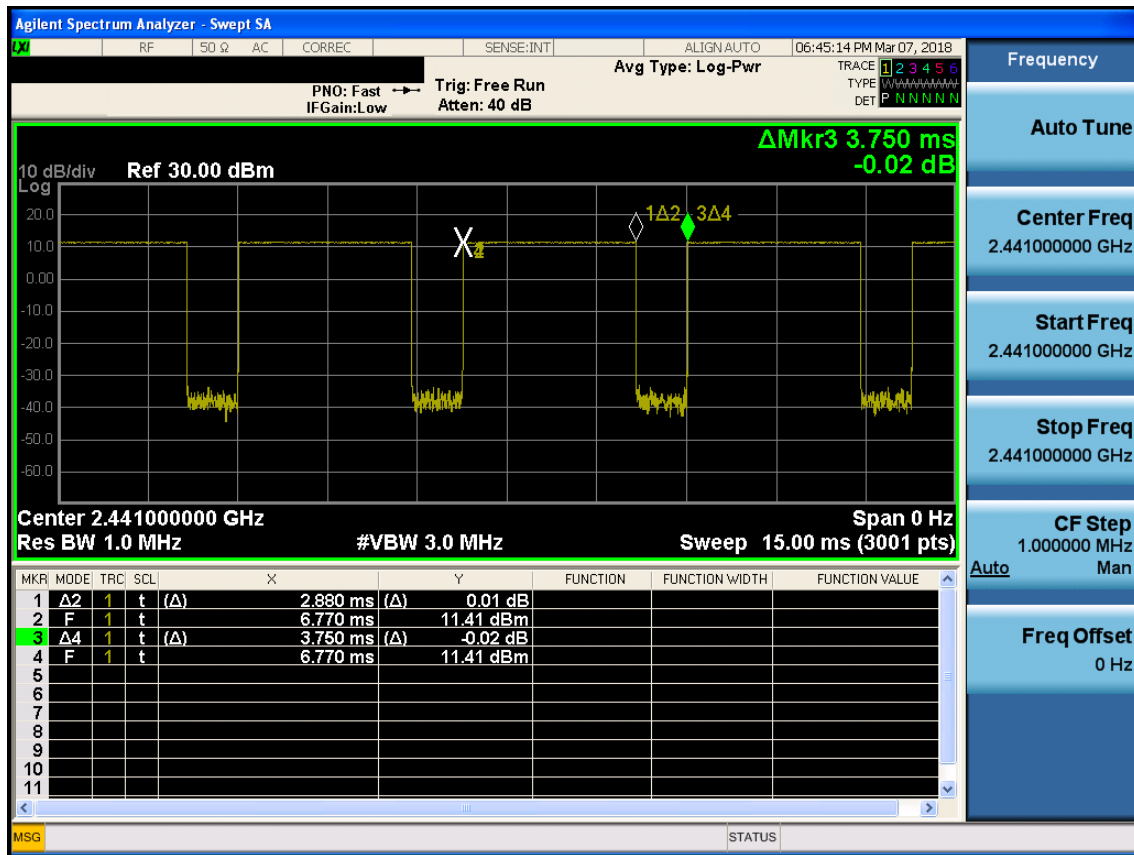


Figure 10.5.2 Bluetooth Transmission Plot

- Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

11. SYSTEM VERIFICATION

11.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 14. 2018	750 Head	21.3	21.2	707.5	42.129	0.887	42.730	0.863	1.43	-2.71
				750.0	41.900	0.890	42.117	0.898	0.52	0.90
				782.0	41.749	0.894	41.652	0.929	-0.23	3.91
Mar. 15. 2018	750 Body	21.5	21.3	707.5	55.699	0.960	57.035	0.927	2.40	-3.44
				750.0	55.531	0.963	56.596	0.967	1.92	0.42
				782.0	55.406	0.966	56.253	0.999	1.53	3.42
Mar. 16. 2018	835 Head	22.5	22.3	824.2	41.552	0.899	40.304	0.878	-3.00	-2.34
				826.4	41.542	0.899	40.271	0.880	-3.06	-2.11
				835.0	41.500	0.900	40.160	0.887	-3.23	-1.44
				836.5	41.500	0.901	40.142	0.888	-3.27	-1.44
				836.6	41.500	0.901	40.142	0.888	-3.27	-1.44
				846.6	41.500	0.912	40.018	0.895	-3.57	-1.86
				848.8	41.500	0.914	39.986	0.897	-3.65	-1.86
Mar. 19. 2018	835 Body	20.9	20.8	824.2	55.243	0.969	55.676	0.998	0.78	2.99
				826.4	55.235	0.969	55.645	1.000	0.74	3.20
				835.0	55.200	0.970	55.553	1.007	0.64	3.81
				836.5	55.197	0.971	55.539	1.008	0.62	3.81
				836.6	55.197	0.971	55.536	1.008	0.61	3.81
				846.6	55.166	0.984	55.423	1.015	0.47	3.15
				848.8	55.160	0.986	55.403	1.017	0.44	3.14
Mar. 12. 2018	1800 Head	21.8	21.6	1712.4	40.126	1.350	40.437	1.319	0.78	-2.30
				1720.0	40.114	1.354	40.388	1.325	0.68	-2.14
				1732.4	40.097	1.361	40.311	1.335	0.53	-1.91
				1732.5	40.097	1.361	40.310	1.335	0.53	-1.91
				1745.0	40.079	1.369	40.242	1.345	0.41	-1.75
				1752.6	40.069	1.373	40.200	1.351	0.33	-1.60
				1800.0	40.000	1.400	39.982	1.395	-0.05	-0.36
Mar. 13. 2018	1800 Body	22.0	21.7	1712.4	53.596	1.464	52.234	1.471	-2.54	0.48
				1720.0	53.580	1.469	52.205	1.477	-2.57	0.54
				1732.4	53.556	1.477	52.150	1.487	-2.63	0.68
				1732.5	53.556	1.477	52.150	1.487	-2.63	0.68
				1745.0	53.530	1.485	52.096	1.498	-2.68	0.88
				1752.6	53.516	1.489	52.066	1.505	-2.71	1.07
				1800.0	53.300	1.520	51.934	1.547	-2.56	1.78
Mar. 08. 2018	1900 Head	21.8	21.5	1850.2	40.000	1.400	39.037	1.387	-2.41	-0.93
				1852.4	40.000	1.400	39.036	1.389	-2.41	-0.79
				1860.0	40.000	1.400	39.008	1.396	-2.48	-0.29
				1880.0	40.000	1.400	38.909	1.412	-2.73	0.86
				1900.0	40.000	1.400	38.811	1.428	-2.97	2.00
				1907.6	40.000	1.400	38.775	1.435	-3.06	2.50
				1909.8	40.000	1.400	38.766	1.437	-3.09	2.64
Mar. 07. 2018	1900 Body	20.6	20.4	1850.2	53.300	1.520	53.113	1.468	-0.35	-3.42
				1852.4	53.300	1.520	53.111	1.470	-0.35	-3.29
				1860.0	53.300	1.520	53.105	1.476	-0.37	-2.89
				1880.0	53.300	1.520	53.056	1.489	-0.46	-2.04
				1900.0	53.300	1.520	52.969	1.504	-0.62	-1.05
				1907.6	53.300	1.520	52.943	1.510	-0.67	-0.66
				1909.8	53.300	1.520	52.938	1.512	-0.68	-0.53
Mar. 06. 2018	2450 Head	20.8	21.8	2402.0	39.282	1.757	39.697	1.776	1.06	1.08
				2412.0	39.265	1.766	39.661	1.787	1.01	1.19
				2437.0	39.222	1.788	39.579	1.815	0.91	1.51
				2441.0	39.215	1.792	39.564	1.820	0.89	1.56
				2450.0	39.200	1.800	39.532	1.830	0.85	1.67
				2462.0	39.184	1.813	39.500	1.843	0.81	1.65
				2472.0	39.171	1.823	39.469	1.853	0.76	1.65
Mar. 07. 2018	2450 Body	21.1	22.2	2480.0	39.160	1.832	39.437	1.861	0.71	1.58
				2402.0	52.764	1.904	51.290	1.924	-2.79	1.05
				2412.0	52.751	1.914	51.273	1.935	-2.80	1.10
				2437.0	52.717	1.938	51.218	1.964	-2.84	1.34
				2441.0	52.712	1.941	51.208	1.969	-2.85	1.44
				2450.0	52.700	1.950	51.182	1.980	-2.88	1.54
				2462.0	52.685	1.967	51.163	1.995	-2.89	1.42
Mar. 07. 2018	2450 Body	21.1	22.2	2472.0	52.672	1.981	51.140	2.007	-2.91	1.31
				2480.0	52.662	1.993	51.116	2.017	-2.94	1.20

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 09. 2018	2600 Head	21.2	21.0	2506.0	39.125	1.860	38.751	1.878	-0.96	0.97
				2510.0	39.120	1.864	38.740	1.882	-0.97	0.97
				2535.0	39.087	1.891	38.658	1.910	-1.10	1.00
				2549.5	39.068	1.906	38.610	1.925	-1.17	1.00
				2560.0	39.053	1.917	38.570	1.937	-1.24	1.04
				2593.0	39.009	1.953	38.461	1.973	-1.40	1.02
				2600.0	39.000	1.960	38.435	1.981	-1.45	1.07
				2636.5	38.955	2.000	38.315	2.023	-1.64	1.15
Mar. 21. 2018	2600 Body	20.9	20.7	2680.0	38.900	2.048	38.174	2.072	-1.87	1.17
				2506.0	52.629	2.029	51.652	2.031	-1.86	0.10
				2510.0	52.624	2.035	51.641	2.036	-1.87	0.05
				2535.0	52.592	2.071	51.578	2.068	-1.93	-0.14
				2549.5	52.574	2.090	51.540	2.086	-1.97	-0.19
				2560.0	52.560	2.106	51.514	2.101	-1.99	-0.24
				2593.0	52.518	2.153	51.421	2.140	-2.09	-0.60
				2600.0	52.509	2.163	51.397	2.149	-2.12	-0.65
Mar. 08. 2018	5200 Body	20.7	21.6	2636.5	52.463	2.214	51.285	2.196	-2.25	-0.81
				2680.0	52.407	2.276	51.169	2.254	-2.36	-0.97
				5180.0	49.041	5.276	50.113	5.363	2.19	1.65
				5190.0	49.028	5.288	50.090	5.374	2.17	1.63
				5200.0	49.014	5.299	50.062	5.387	2.14	1.66
				5210.0	49.001	5.311	50.040	5.402	2.12	1.71
				5220.0	48.987	5.323	50.020	5.417	2.11	1.77
				5230.0	48.974	5.334	50.002	5.430	2.10	1.80
Mar. 09. 2018	5300 Head	20.9	22.0	5240.0	48.960	5.346	49.978	5.442	2.08	1.80
				5260.0	35.940	4.720	36.194	4.783	0.71	1.33
				5270.0	35.930	4.730	36.165	4.793	0.65	1.33
				5280.0	35.920	4.740	36.135	4.802	0.60	1.31
				5290.0	35.910	4.750	36.114	4.810	0.57	1.26
				5300.0	35.900	4.760	36.082	4.815	0.51	1.16
				5310.0	35.890	4.770	36.045	4.822	0.43	1.09
				5320.0	35.880	4.780	36.006	4.834	0.35	1.13
Mar. 12. 2018	5300 Body	21.1	22.3	5260.0	48.933	5.369	48.526	5.524	-0.83	2.89
				5270.0	48.919	5.381	48.491	5.534	-0.87	2.84
				5280.0	48.906	5.393	48.438	5.544	-0.96	2.80
				5290.0	48.892	5.404	48.390	5.555	-1.03	2.79
				5300.0	48.879	5.416	48.336	5.570	-1.11	2.84
				5310.0	48.865	5.428	48.290	5.589	-1.18	2.97
				5320.0	48.851	5.439	48.261	5.611	-1.21	3.16

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 13. 2018	5600 Head	20.7	21.6	5500.0	35.650	4.965	34.580	4.869	-3.00	-1.93
				5510.0	35.635	4.976	34.568	4.878	-2.99	-1.97
				5530.0	35.605	4.997	34.507	4.902	-3.08	-1.90
				5550.0	35.575	5.018	34.474	4.928	-3.09	-1.79
				5580.0	35.530	5.049	34.412	4.957	-3.15	-1.82
				5600.0	35.500	5.070	34.363	4.984	-3.20	-1.70
				5660.0	35.440	5.130	34.236	5.056	-3.40	-1.44
				5670.0	35.430	5.140	34.222	5.065	-3.41	-1.46
				5690.0	35.410	5.160	34.180	5.087	-3.47	-1.41
				5710.0	35.390	5.180	34.139	5.113	-3.53	-1.29
Mar. 14. 2018	5600 Body	21.5	22.5	5720.0	35.380	5.190	34.133	5.125	-3.52	-1.25
				5500.0	48.607	5.650	50.492	5.814	3.88	2.90
				5510.0	48.594	5.661	50.486	5.824	3.89	2.88
				5530.0	48.566	5.685	50.435	5.852	3.85	2.94
				5550.0	48.539	5.708	50.401	5.886	3.84	3.12
				5580.0	48.499	5.743	50.344	5.931	3.80	3.27
				5600.0	48.471	5.766	50.309	5.964	3.79	3.43
				5660.0	48.390	5.836	50.192	6.050	3.72	3.67
				5670.0	48.376	5.848	50.170	6.063	3.71	3.68
				5690.0	48.349	5.872	50.117	6.090	3.66	3.71
Mar. 15. 2018	5800 Head	21.0	20.7	5710.0	48.322	5.895	50.061	6.121	3.60	3.83
				5720.0	48.309	5.907	50.039	6.133	3.58	3.83
				5745.0	35.355	5.215	35.158	5.382	-0.56	3.20
				5755.0	35.345	5.225	35.126	5.396	-0.62	3.27
				5775.0	35.325	5.245	35.084	5.419	-0.68	3.32
				5785.0	35.315	5.255	35.055	5.428	-0.74	3.29
Mar. 16. 2018	5800 Body	21.4	22.0	5795.0	35.305	5.265	35.023	5.438	-0.80	3.29
				5800.0	35.300	5.270	35.007	5.444	-0.83	3.30
				5825.0	35.275	5.296	34.944	5.474	-0.94	3.36
				5745.0	48.275	5.936	49.831	6.135	3.22	3.35
				5755.0	48.261	5.947	49.813	6.153	3.22	3.46
				5775.0	48.234	5.971	49.783	6.183	3.21	3.55
				5785.0	48.220	5.982	49.766	6.196	3.21	3.58
				5795.0	48.207	5.994	49.748	6.211	3.20	3.62
				5800.0	48.200	6.000	49.737	6.219	3.19	3.65
				5825.0	48.166	6.029	49.700	6.258	3.18	3.80

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Apr. 27. 2018	2450 Head	20.7	21.2	2412.0	39.265	1.766	40.637	1.704	3.49	-3.51
				2437.0	39.222	1.788	40.568	1.731	3.43	-3.19
				2450.0	39.200	1.800	40.527	1.745	3.39	-3.06
				2462.0	39.184	1.813	40.496	1.758	3.35	-3.03
				2472.0	39.171	1.823	40.470	1.769	3.32	-2.96
Apr. 27. 2018	2450 Body	20.7	21.4	2412.0	52.751	1.914	51.459	1.868	-2.45	-2.40
				2437.0	52.717	1.938	51.389	1.896	-2.52	-2.17
				2450.0	52.700	1.950	51.352	1.911	-2.56	-2.00
				2462.0	52.685	1.967	51.325	1.925	-2.58	-2.14
				2472.0	52.672	1.981	51.299	1.936	-2.61	-2.27

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
 - 2) The probe was immersed in the sample which was placed in a nonmetallic container. Tissues at different locations the tissue were measured by placing the probe at a right angle.
 - 3) The complex admittance with respect to the probe aperture was measured.
 - 4) The complex relative permittivity, for example from the Debye equation (Polarization and Memory).
- $$\hat{Y} = \frac{f^2 \epsilon_0 \epsilon_r}{[a(h/a)]^2} \int_0^1 \int_0^1 \frac{\exp\left[-\frac{f \epsilon_0 \epsilon_r}{r} \sqrt{1 - \epsilon_r} \sqrt{1 - \epsilon_r}\right]}{r} d\phi_1 d\phi_2$$
- where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi$, ϕ is the angular frequency, and $\rho = r/\sqrt{\epsilon_r}$.

11.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 750 MHz, 835 MHz, 1800 MHz, 1900 MHz, 2450 MHz, 2600 MHz and 5GHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 11.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
C	750	D750V3, SN:1049	Mar. 14. 2018	Head	21.3	21.2	3933	250	8.32	1.98	7.92	-4.81
C	750	D750V3, SN:1049	Mar. 15. 2018	Body	21.5	21.3	3933	250	8.70	2.17	8.68	-0.23
C	835	D835V2, SN:464	Mar. 16. 2018	Head	22.5	22.3	3933	250	9.38	2.30	9.20	-1.92
C	835	D835V2, SN:464	Mar. 19. 2018	Body	20.9	20.8	3933	250	9.45	2.40	9.60	1.59
C	1800	D1800V2, SN:2d047	Mar. 12. 2018	Head	21.8	21.6	3933	250	39.9	9.71	38.84	-2.66
C	1800	D1800V2, SN:2d047	Mar. 13. 2018	Body	22.0	21.7	3933	250	39.2	9.64	38.56	-1.63
C	1900	D1900V2, SN:5d029	Mar. 08. 2018	Head	21.8	21.5	3993	250	39.2	9.66	38.64	-1.43
C	1900	D1900V2, SN:5d029	Mar. 07. 2018	Body	20.6	20.4	3993	250	39.6	9.78	39.12	-1.21
D	2450	D2450V2, SN: 726	Mar. 06. 2018	Head	20.8	21.8	7337	100	51.9	5.28	52.80	1.73
D	2450	D2450V2, SN: 726	Mar. 07. 2018	Body	21.1	22.2	7337	100	50.3	5.12	51.20	1.79
D	2450	D2450V2, SN: 726	Apr. 27. 2018	Head	20.7	21.2	7337	100	51.9	5.04	50.40	-2.89
D	2450	D2450V2, SN: 726	Apr. 27. 2018	Body	20.7	21.4	7337	100	50.3	4.94	49.40	-1.79
C	2600	D2600V2, SN: 1103	Mar. 09. 2018	Head	21.2	21.0	3328	100	56.4	5.46	54.60	-3.19
C	2600	D2600V2, SN: 1103	Mar. 21. 2018	Body	20.9	20.7	3933	100	55.7	5.57	55.70	0.00
D	5200	D5GHzV2, SN:1212	Mar. 08. 2018	Body	20.7	21.6	7337	100	72.7	7.29	72.90	0.28
D	5300	D5GHzV2, SN:1212	Mar. 09. 2018	Head	20.9	22.0	7337	100	81.1	8.66	86.60	6.78
D	5300	D5GHzV2, SN:1212	Mar. 12. 2018	Body	21.1	22.3	7337	100	75.2	7.52	75.20	0.00
D	5500	D5GHzV2, SN:1212	Mar. 13. 2018	Head	20.7	21.6	7337	100	85.4	8.80	88.0	3.04
D	5500	D5GHzV2, SN:1212	Mar. 14. 2018	Body	21.5	22.5	7337	100	79.9	8.39	83.9	5.01
D	5600	D5GHzV2, SN:1212	Mar. 13. 2018	Head	20.7	21.6	7337	100	83.6	8.76	87.60	4.78
D	5600	D5GHzV2, SN:1212	Mar. 14. 2018	Body	21.5	22.5	7337	100	78.9	7.93	79.30	0.51
D	5800	D5GHzV2, SN:1212	Mar. 15. 2018	Head	21.0	20.7	7337	100	79.5	8.22	82.20	3.40
D	5800	D5GHzV2, SN:1212	Mar. 16. 2018	Body	21.4	22.0	7337	100	75.7	7.74	77.40	2.25

Table 11.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
D	5300	D5GHzV2, SN:1212	Mar. 12. 2018	Body	21.1	22.3	7337	100	20.9	2.09	20.90	0.00
D	5500	D5GHzV2, SN:1212	Mar. 14. 2018	Body	21.5	22.5	7337	100	22.0	2.34	23.40	6.36
D	5600	D5GHzV2, SN:1212	Mar. 14. 2018	Body	21.5	22.5	7337	100	21.8	2.20	22.00	0.92
D	5800	D5GHzV2, SN:1212	Mar. 16. 2018	Body	21.4	22.0	7337	100	20.8	2.15	21.50	3.37

Note1 : System Verification was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : Full system validation status and results can be found in Attachment 3.




Figure 11.1 Dipole Verification Test Setup Diagram & Photo

12. SAR TEST RESULTS

12.1 Head SAR Results

Table 12.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	34.70	34.40	0.050	Left Touch	FCC #1	1	1:8.3	0.060	1.072	0.064	
836.6	190	GSM850	GSM	34.70	34.40	0.020	Right Touch	FCC #1	1	1:8.3	0.083	1.072	0.089	A1
836.6	190	GSM850	GSM	34.70	34.40	0.090	Left Tilt	FCC #1	1	1:8.3	0.030	1.072	0.032	
836.6	190	GSM850	GSM	34.70	34.40	0.050	Right Tilt	FCC #1	1	1:8.3	0.024	1.072	0.026	
836.6	190	GSM850	GPRS	29.20	28.80	-0.070	Left Touch	FCC #1	4	1:2.075	0.077	1.096	0.084	
836.6	190	GSM850	GPRS	29.20	28.80	0.120	Right Touch	FCC #1	4	1:2.075	0.097	1.096	0.106	A2
836.6	190	GSM850	GPRS	29.20	28.80	0.040	Left Tilt	FCC #1	4	1:2.075	0.039	1.096	0.043	
836.6	190	GSM850	GPRS	29.20	28.80	0.140	Right Tilt	FCC #1	4	1:2.075	0.033	1.096	0.036	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots. #
MHz	Ch													
1880.0	661	PCS1900	PCS	31.70	31.40	0.160	Left Touch	FCC #1	1	1:8.3	0.031	1.072	0.033	
1880.0	661	PCS1900	PCS	31.70	31.40	0.020	Right Touch	FCC #1	1	1:8.3	0.072	1.072	0.077	
1880.0	661	PCS1900	PCS	31.70	31.40	0.130	Left Tilt	FCC #1	1	1:8.3	0.051	1.072	0.055	
1880.0	661	PCS1900	PCS	31.70	31.40	0.150	Right Tilt	FCC #1	1	1:8.3	0.073	1.072	0.078	A3
1880.0	661	PCS1900	GPRS	30.20	30.10	-0.050	Left Touch	FCC #1	2	1:4.15	0.051	1.023	0.052	
1880.0	661	PCS1900	GPRS	30.20	30.10	-0.170	Right Touch	FCC #1	2	1:4.15	0.116	1.023	0.119	A4
1880.0	661	PCS1900	GPRS	30.20	30.10	-0.050	Left Tilt	FCC #1	2	1:4.15	0.069	1.023	0.071	
1880.0	661	PCS1900	GPRS	30.20	30.10	0.090	Right Tilt	FCC #1	2	1:4.15	0.113	1.023	0.116	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.050	Left Touch	FCC #1	1:1	0.089	1.099	0.098	
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.020	Right Touch	FCC #1	1:1	0.111	1.099	0.122	A5
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.070	Left Tilt	FCC #1	1:1	0.044	1.099	0.048	
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.130	Right Tilt	FCC #1	1:1	0.041	1.099	0.045	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.1.4 WCDMA 1700 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	-0.030	Left Touch	FCC #1	1:1	0.122	1.021	0.125	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	-0.050	Right Touch	FCC #1	1:1	0.137	1.021	0.140	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	0.140	Left Tilt	FCC #1	1:1	0.167	1.021	0.171	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	-0.130	Right Tilt	FCC #1	1:1	0.185	1.021	0.189	A6
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.1.5 WCDMA 1900 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	0.070	Left Touch	FCC #1	1:1	0.066	1.023	0.068	
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	-0.040	Right Touch	FCC #1	1:1	0.173	1.023	0.177	A7
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	0.090	Left Tilt	FCC #1	1:1	0.078	1.023	0.080	
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	0.030	Right Tilt	FCC #1	1:1	0.167	1.023	0.171	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.1.6 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.39	0.110	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.025	1.026	0.026	
707.5	23095	LTE B12	10	24.50	24.28	-0.120	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.022	1.052	0.023	
707.5	23095	LTE B12	10	25.50	25.39	0.180	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.032	1.026	0.033	A8
707.5	23095	LTE B12	10	24.50	24.28	0.190	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.023	1.052	0.024	
707.5	23095	LTE B12	10	25.50	25.39	0.110	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.010	1.026	0.010	
707.5	23095	LTE B12	10	24.50	24.28	0.150	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.004	1.052	0.004	
707.5	23095	LTE B12	10	25.50	25.39	0.020	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.004	1.026	0.004	
707.5	23095	LTE B12	10	24.50	24.28	0.090	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.003	1.052	0.003	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.7 LTE Band 13 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
782.0	23230	LTE B13	10	25.50	25.38	0.000	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.033	1.028	0.034	
782.0	23230	LTE B13	10	24.50	24.30	0.000	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.026	1.047	0.027	
782.0	23230	LTE B13	10	25.50	25.38	0.080	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.049	1.028	0.050	A9
782.0	23230	LTE B13	10	24.50	24.30	0.160	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.033	1.047	0.035	
782.0	23230	LTE B13	10	25.50	25.38	0.070	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.015	1.028	0.015	
782.0	23230	LTE B13	10	24.50	24.30	0.050	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.013	1.047	0.014	
782.0	23230	LTE B13	10	25.50	25.38	-0.100	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.020	1.028	0.021	
782.0	23230	LTE B13	10	24.50	24.30	0.160	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.014	1.047	0.015	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.8 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	25.50	25.22	-0.170	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.093	1.067	0.099	
836.5	20525	LTE B5	10	24.50	24.15	0.190	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.079	1.084	0.086	
836.5	20525	LTE B5	10	25.50	25.22	0.100	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.116	1.067	0.124	A10
836.5	20525	LTE B5	10	24.50	24.15	0.110	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.097	1.084	0.105	
836.5	20525	LTE B5	10	25.50	25.22	0.140	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.051	1.067	0.054	
836.5	20525	LTE B5	10	24.50	24.15	0.010	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.040	1.084	0.043	
836.5	20525	LTE B5	10	25.50	25.22	0.150	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.043	1.067	0.046	
836.5	20525	LTE B5	10	24.50	24.15	0.180	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.036	1.084	0.039	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.9 LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1732.5	20175	LTE B4	20	24.20	24.13	0.130	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.102	1.016	0.104	
1732.5	20175	LTE B4	20	23.20	23.06	0.120	1	Left Touch	FCC #1	QPSK	50	50	1:1	0.090	1.033	0.093	
1732.5	20175	LTE B4	20	24.20	24.13	0.080	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.125	1.016	0.127	
1732.5	20175	LTE B4	20	23.20	23.06	-0.050	1	Right Touch	FCC #1	QPSK	50	50	1:1	0.109	1.033	0.113	
1732.5	20175	LTE B4	20	24.20	24.13	0.030	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.151	1.016	0.153	
1732.5	20175	LTE B4	20	23.20	23.06	0.120	1	Left Tilt	FCC #1	QPSK	50	50	1:1	0.126	1.033	0.130	
1732.5	20175	LTE B4	20	24.20	24.13	-0.020	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.164	1.016	0.167	A11
1732.5	20175	LTE B4	20	23.20	23.06	0.020	1	Right Tilt	FCC #1	QPSK	50	50	1:1	0.156	1.033	0.161	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.10 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1900.0	19100	LTE B2	20	24.20	24.14	0.160	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.083	1.014	0.084	
1900.0	19100	LTE B2	20	23.20	23.11	0.140	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.071	1.021	0.072	
1900.0	19100	LTE B2	20	24.20	24.14	-0.170	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.133	1.014	0.135	A12
1900.0	19100	LTE B2	20	23.20	23.11	0.120	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.113	1.021	0.115	
1900.0	19100	LTE B2	20	24.20	24.14	0.030	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.131	1.014	0.133	
1900.0	19100	LTE B2	20	23.20	23.11	0.110	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.111	1.021	0.113	
1900.0	19100	LTE B2	20	24.20	24.14	0.020	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.116	1.014	0.118	
1900.0	19100	LTE B2	20	23.20	23.11	-0.130	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.110	1.021	0.112	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.11 LTE Band 7 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2560.0	21350	LTE B7	20	25.20	24.96	0.010	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.021	1.057	0.022	A13
2560.0	21350	LTE B7	20	24.20	23.84	0.040	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.015	1.086	0.016	
2560.0	21350	LTE B7	20	25.20	24.96	0.050	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.011	1.057	0.012	
2560.0	21350	LTE B7	20	24.20	23.84	-0.000	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.008	1.086	0.008	
2560.0	21350	LTE B7	20	25.20	24.96	0.050	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.021	1.057	0.022	
2560.0	21350	LTE B7	20	24.20	23.84	-0.040	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.015	1.086	0.016	
2560.0	21350	LTE B7	20	25.20	24.96	-0.140	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.018	1.057	0.019	
2560.0	21350	LTE B7	20	24.20	23.84	0.010	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.013	1.086	0.014	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.12 LTE Band 41 Head SAR

MEASUREMENT RESULTS

FREQUENCY		Model/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2506.0	39750	LTE B41	20	25.20	24.95	0.000	0	Left Touch	FCC #1	QPSK	1	0	1:1.58	0.010	1.059	0.011	A14
2506.0	39750	LTE B41	20	24.20	23.91	-0.080	1	Left Touch	FCC #1	QPSK	50	0	1:1.58	0.009	1.069	0.009	
2506.0	39750	LTE B41	20	25.20	24.95	-0.090	0	Right Touch	FCC #1	QPSK	1	0	1:1.58	0.007	1.059	0.007	
2506.0	39750	LTE B41	20	24.20	23.91	0.120	1	Right Touch	FCC #1	QPSK	50	0	1:1.58	0.005	1.069	0.006	
2506.0	39750	LTE B41	20	25.20	24.95	0.060	0	Left Tilt	FCC #1	QPSK	1	0	1:1.58	0.008	1.059	0.009	
2506.0	39750	LTE B41	20	24.20	23.91	-0.030	1	Left Tilt	FCC #1	QPSK	50	0	1:1.58	0.006	1.069	0.007	
2506.0	39750	LTE B41	20	25.20	24.95	-0.000	0	Right Tilt	FCC #1	QPSK	1	0	1:1.58	0.006	1.059	0.006	
2506.0	39750	LTE B41	20	24.20	23.91	-0.010	1	Right Tilt	FCC #1	QPSK	50	0	1:1.58	0.004	1.069	0.005	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.13 DTS Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #
MHz	Ch														
2437.0	6	802.11b (Ant.1)	16.50	15.88	0.140	Left Touch	FCC #2	0.134	1	97.3	0.135	1.153	1.028	0.160	
2437.0	6	802.11b (Ant.1)	16.50	15.88	-0.030	Right Touch	FCC #2	0.269	1	97.3	0.232	1.153	1.028	0.275	A15
2437.0	6	802.11b (Ant.1)	16.50	15.88	0.060	Left Tilt	FCC #2	0.203	1	97.3	0.193	1.153	1.028	0.229	
2437.0	6	802.11b (Ant.1)	16.50	15.88	0.120	Right Tilt	FCC #2	0.242	1	97.3	0.232	1.153	1.028	0.275	
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.150	Left Touch	FCC #2	0.021	1	97.3	0.016	1.225	1.028	0.020	
2412.0	1	802.11b (Ant.2)	16.50	15.62	0.190	Right Touch	FCC #2	0.046	1	97.3	0.044	1.225	1.028	0.055	A16
2412.0	1	802.11b (Ant.2)	16.50	15.62	0.060	Left Tilt	FCC #2	0.013	1	97.3	0.001	1.225	1.028	0.002	
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.160	Right Tilt	FCC #2	0.020	1	97.3	0.018	1.225	1.028	0.023	
2412.0	1	802.11g (MIMO)	19.00	17.55	-0.140	Left Touch	FCC #2	0.039	1	98.1	0.041	1.396	1.019	0.058	
2412.0	1	802.11g (MIMO)	19.00	17.55	0.140	Right Touch	FCC #2	0.204	1	98.1	0.198	1.396	1.019	0.282	A17
2412.0	1	802.11g (MIMO)	19.00	17.55	-0.010	Left Tilt	FCC #2	0.076	1	98.1	0.084	1.396	1.019	0.120	
2412.0	1	802.11g (MIMO)	19.00	17.55	-0.130	Right Tilt	FCC #2	0.109	1	98.1	0.105	1.396	1.019	0.149	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.275	2437	802.11g	OFDM	16.0	0.891	0.245	X
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.275	2437	802.11n	OFDM	15.0	0.708	0.195	X
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.275	2437	802.11ac	OFDM	15.0	0.708	0.195	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.055	2437	802.11g	OFDM	16.0	0.891	0.049	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.055	2437	802.11n	OFDM	15.0	0.708	0.039	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.055	2437	802.11ac	OFDM	15.0	0.708	0.039	X
2412.0	1	802.11g (MIMO)	OFDM	19.0	0.282	2437	802.11n	OFDM	18.0	0.794	0.224	X
2412.0	1	802.11g (MIMO)	OFDM	19.0	0.282	2437	802.11ac	OFDM	18.0	0.794	0.224	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.1.14 UNII Head SAR

MEASUREMENT RESULTS

FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.050	Left Touch	FCC #2	0.053	1	98.1	0.035	1.236	1.019	0.044	
5280.0	56	802.11a (Ant.1)	16.00	15.08	0.150	Right Touch	FCC #2	0.182	1	98.1	0.173	1.236	1.019	0.218	A18
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.050	Left Tilt	FCC #2	0.035	1	98.1	0.024	1.236	1.019	0.030	
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.080	Right Tilt	FCC #2	0.117	1	98.1	0.097	1.236	1.019	0.122	
5260.0	52	802.11a (Ant.2)	16.00	15.01	0.000	Left Touch	FCC #2	0.027	1	98.1	0.044	1.256	1.019	0.056	A19
5260.0	52	802.11a (Ant.2)	16.00	15.01	-0.040	Right Touch	FCC #2	0.037	1	98.1	0.023	1.256	1.019	0.029	
5260.0	52	802.11a (Ant.2)	16.00	15.01	0.000	Left Tilt	FCC #2	0.041	1	98.1	0.030	1.256	1.019	0.038	
5260.0	52	802.11a (Ant.2)	16.00	15.01	0.000	Right Tilt	FCC #2	0.013	1	98.1	0.006	1.256	1.019	0.008	
5280.0	56	802.11a (MIMO)	19.00	18.03	0.100	Left Touch	FCC #2	0.047	1	98.1	0.031	1.256	1.019	0.040	
5280.0	56	802.11a (MIMO)	19.00	18.03	0.170	Right Touch	FCC #2	0.217	1	98.1	0.199	1.256	1.019	0.255	A20
5280.0	56	802.11a (MIMO)	19.00	18.03	0.040	Left Tilt	FCC #2	0.030	1	98.1	0.022	1.256	1.019	0.028	
5280.0	56	802.11a (MIMO)	19.00	18.03	0.160	Right Tilt	FCC #2	0.113	1	98.1	0.123	1.256	1.019	0.157	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5280.0	56	802.11a (Ant.1)	OFDM	16.0	0.218	5300	802.11a	OFDM	16.0	1.000	0.218	X
5260.0	52	802.11a (Ant.2)	OFDM	16.0	0.056	5300	802.11a	OFDM	16.0	1.000	0.056	X
5280.0	56	802.11a (MIMO)	OFDM	19.0	0.255	5300	802.11a	OFDM	19.0	1.000	0.255	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 12.1.15 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5500.0	100	802.11a (Ant.1)	16.00	15.12	0.060	Left Touch	FCC #2	0.068	1	98.1	0.043	1.225	1.019	0.054	
5500.0	100	802.11a (Ant.1)	16.00	15.12	-0.020	Right Touch	FCC #2	0.194	1	98.1	0.183	1.225	1.019	0.229	A21
5500.0	100	802.11a (Ant.1)	16.00	15.12	0.020	Left Tilt	FCC #2	0.043	1	98.1	0.032	1.225	1.019	0.040	
5500.0	100	802.11a (Ant.1)	16.00	15.12	-0.180	Right Tilt	FCC #2	0.112	1	98.1	0.128	1.225	1.019	0.160	
5600.0	120	802.11a (Ant.2)	16.00	14.88	0.000	Left Touch	FCC #2	0.026	1	98.1	0.033	1.294	1.019	0.044	A22
5600.0	120	802.11a (Ant.2)	16.00	14.88	-0.100	Right Touch	FCC #2	0.041	1	98.1	0.025	1.294	1.019	0.033	
5600.0	120	802.11a (Ant.2)	16.00	14.88	0.130	Left Tilt	FCC #2	0.027	1	98.1	0.015	1.294	1.019	0.020	
5600.0	120	802.11a (Ant.2)	16.00	14.88	0.000	Right Tilt	FCC #2	0.016	1	98.1	0.007	1.294	1.019	0.010	
5500.0	100	802.11a (MIMO)	19.00	18.00	0.160	Left Touch	FCC #2	0.068	1	98.1	0.046	1.294	1.019	0.061	
5500.0	100	802.11a (MIMO)	19.00	18.00	0.020	Right Touch	FCC #2	0.177	1	98.1	0.165	1.294	1.019	0.218	A23
5500.0	100	802.11a (MIMO)	19.00	18.00	0.030	Left Tilt	FCC #2	0.044	1	98.1	0.035	1.294	1.019	0.046	
5500.0	100	802.11a (MIMO)	19.00	18.00	0.070	Right Tilt	FCC #2	0.125	1	98.1	0.113	1.294	1.019	0.149	
5825.0	165	802.11a (Ant.1)	16.00	15.24	-0.010	Left Touch	FCC #2	0.072	1	98.1	0.046	1.191	1.019	0.056	
5825.0	165	802.11a (Ant.1)	16.00	15.24	-0.020	Right Touch	FCC #2	0.135	1	98.1	0.171	1.191	1.019	0.208	A24
5825.0	165	802.11a (Ant.1)	16.00	15.24	0.130	Left Tilt	FCC #2	0.037	1	98.1	0.028	1.191	1.019	0.034	
5825.0	165	802.11a (Ant.1)	16.00	15.24	-0.040	Right Tilt	FCC #2	0.088	1	98.1	0.081	1.191	1.019	0.098	
5825.0	165	802.11a (Ant.2)	16.00	14.92	0.000	Left Touch	FCC #2	0.033	1	98.1	0.058	1.282	1.019	0.076	
5825.0	165	802.11a (Ant.2)	16.00	14.92	0.000	Right Touch	FCC #2	0.075	1	98.1	0.059	1.282	1.019	0.077	A25
5825.0	165	802.11a (Ant.2)	16.00	14.92	0.000	Left Tilt	FCC #2	0.027	1	98.1	0.014	1.282	1.019	0.018	
5825.0	165	802.11a (Ant.2)	16.00	14.92	0.000	Right Tilt	FCC #2	0.026	1	98.1	0.012	1.282	1.019	0.016	
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.090	Left Touch	FCC #2	0.059	1	98.1	0.041	1.282	1.019	0.054	
5825.0	165	802.11a (MIMO)	19.00	18.09	0.160	Right Touch	FCC #2	0.140	1	98.1	0.155	1.282	1.019	0.203	A26
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.040	Left Tilt	FCC #2	0.046	1	98.1	0.036	1.282	1.019	0.047	
5825.0	165	802.11a (MIMO)	19.00	18.09	0.040	Right Tilt	FCC #2	0.091	1	98.1	0.077	1.282	1.019	0.101	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 12.1.16 Bluetooth Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	12.00	10.05	0.110	Left Touch	FCC #2	1	76.8	0.044	1.567	1.302	0.090	
2441.0	39	Bluetooth	12.00	10.05	-0.040	Right Touch	FCC #2	1	76.8	0.071	1.567	1.302	0.145	
2441.0	39	Bluetooth	12.00	10.05	0.080	Left Tilt	FCC #2	1	76.8	0.064	1.567	1.302	0.131	
2441.0	39	Bluetooth	12.00	10.05	-0.040	Right Tilt	FCC #2	1	76.8	0.074	1.567	1.302	0.151	A27
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

12.2 Standalone Body-Worn SAR Worn SAR Results

Table 12.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	34.70	34.40	0.080	10 mm [Front]	FCC #1	1	1:8.3	0.257	1.072	0.276	
836.6	190	GSM850	GSM	34.70	34.40	-0.030	10 mm [Rear]	FCC #1	1	1:8.3	0.408	1.072	0.437	A28
836.6	190	GSM850	GPRS	29.20	28.80	0.030	10 mm [Front]	FCC #1	4	1:2.075	0.303	1.096	0.332	
836.6	190	GSM850	GPRS	29.20	28.80	-0.120	10 mm [Rear]	FCC #1	4	1:2.075	0.458	1.096	0.502	A29
1880.0	661	PCS1900	PCS	31.70	31.40	0.000	10 mm [Front]	FCC #1	1	1:8.3	0.220	1.072	0.236	
1880.0	661	PCS1900	PCS	31.70	31.40	0.050	10 mm [Rear]	FCC #1	1	1:8.3	0.249	1.072	0.267	A30
1880.0	661	PCS1900	GPRS	30.20	30.10	-0.070	10 mm [Front]	FCC #1	2	1:4.15	0.337	1.023	0.345	
1880.0	661	PCS1900	GPRS	30.20	30.10	0.110	10 mm [Rear]	FCC #1	2	1:4.15	0.386	1.023	0.395	A31
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.040	10 mm [Front]	FCC #1	N/A	1:1	0.355	1.099	0.390	
836.6	4183	WCDMA 850	RMC	25.50	25.09	-0.090	10 mm [Rear]	FCC #1	N/A	1:1	0.582	1.099	0.640	A32
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	-0.070	10 mm [Front]	FCC #1	N/A	1:1	0.451	1.021	0.460	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.540	1.021	0.551	A33
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	0.010	10 mm [Front]	FCC #1	N/A	1:1	0.354	1.023	0.362	
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.466	1.023	0.477	A34
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.2.2 LTE B12, B13, B5, B4 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Model/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.39	0.020	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.109	1.026	0.112	
707.5	23095	LTE B12	10	24.50	24.28	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.086	1.052	0.090	
707.5	23095	LTE B12	10	25.50	25.39	0.070	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.145	1.026	0.149	A35
707.5	23095	LTE B12	10	24.50	24.28	0.010	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.116	1.052	0.122	
782.0	23230	LTE B13	10	25.50	25.38	0.040	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.175	1.028	0.180	
782.0	23230	LTE B13	10	24.50	24.30	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.134	1.047	0.140	
782.0	23230	LTE B13	10	25.50	25.38	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.232	1.028	0.238	A36
782.0	23230	LTE B13	10	24.50	24.30	-0.070	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.176	1.047	0.184	
836.5	20525	LTE B5	10	25.50	25.22	0.030	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.402	1.067	0.429	
836.5	20525	LTE B5	10	24.50	24.15	0.050	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.322	1.084	0.349	
836.5	20525	LTE B5	10	25.50	25.22	-0.120	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.641	1.067	0.684	A37
836.5	20525	LTE B5	10	24.50	24.15	-0.070	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.526	1.084	0.570	
1732.5	20175	LTE B4	20	24.20	24.13	0.070	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.478	1.016	0.486	
1732.5	20175	LTE B4	20	23.20	23.06	-0.000	1	10 mm [Front]	FCC #1	QPSK	50	50	1:1	0.394	1.033	0.407	
1732.5	20175	LTE B4	20	24.20	24.13	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.531	1.016	0.539	A38
1732.5	20175	LTE B4	20	23.20	23.06	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	50	1:1	0.431	1.033	0.445	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.2.3 LTE B2/B7/B41 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1900.0	19100	LTE B2	20	24.20	24.14	-0.070	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.314	1.014	0.318	
1900.0	19100	LTE B2	20	23.20	23.11	-0.030	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.306	1.021	0.312	
1900.0	19100	LTE B2	20	24.20	24.14	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.442	1.014	0.448	A39
1900.0	19100	LTE B2	20	23.20	23.11	0.020	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.424	1.021	0.433	
2560.0	21350	LTE B7	20	25.20	24.96	0.050	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.214	1.057	0.226	
2560.0	21350	LTE B7	20	24.20	23.84	0.020	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.176	1.086	0.191	
2560.0	21350	LTE B7	20	25.20	24.96	0.050	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.597	1.057	0.631	A40
2560.0	21350	LTE B7	20	24.20	23.84	0.040	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.491	1.086	0.533	
2506.0	39750	LTE B41	20	25.20	24.95	0.080	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1.58	0.131	1.059	0.139	
2506.0	39750	LTE B41	20	24.20	23.91	0.100	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1.58	0.107	1.069	0.114	
2506.0	39750	LTE B41	20	25.20	24.95	0.040	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.348	1.059	0.369	A41
2506.0	39750	LTE B41	20	24.20	23.91	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1.58	0.273	1.069	0.292	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.2.4 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2437.0	6	802.11b (Ant.1)	16.50	15.88	-0.090	10 mm [Front]	FCC #2	0.046	1	97.3	0.050	1.153	1.028	0.059	
2437.0	6	802.11b (Ant.1)	16.50	15.88	-0.110	10 mm [Rear]	FCC #2	0.095	1	97.3	0.107	1.153	1.028	0.127	A42
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.160	10 mm [Front]	FCC #2	0.012	1	97.3	0.012	1.225	1.028	0.015	
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.060	10 mm [Rear]	FCC #2	0.126	1	97.3	0.148	1.225	1.028	0.186	A43
2412.0	1	802.11g (MIMO)	19.00	17.55	0.140	10 mm [Front]	FCC #2	0.039	1	98.1	0.030	1.396	1.019	0.043	
2412.0	1	802.11g (MIMO)	19.00	17.55	0.160	10 mm [Rear]	FCC #2	0.164	1	98.1	0.171	1.396	1.019	0.243	A44
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.127	2437	802.11g	OFDM	16.0	0.891	0.113	X
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.127	2437	802.11n	OFDM	15.0	0.708	0.090	X
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.127	2437	802.11ac	OFDM	15.0	0.708	0.090	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.186	2437	802.11g	OFDM	16.0	0.891	0.166	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.186	2437	802.11n	OFDM	15.0	0.708	0.132	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.186	2437	802.11ac	OFDM	15.0	0.708	0.132	X
2412.0	1	802.11g (MIMO)	OFDM	19.0	0.243	2437	802.11n	OFDM	18.0	0.794	0.193	X
2412.0	1	802.11g (MIMO)	OFDM	19.0	0.243	2437	802.11ac	OFDM	18.0	0.794	0.193	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5280.0	56	802.11a (Ant.1)	16.00	15.08	0.010	10 mm [Front]	FCC #2	0.023	1	98.1	0.016	1.236	1.019	0.020	
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.090	10 mm [Rear]	FCC #2	0.039	1	98.1	0.034	1.236	1.019	0.043	A45
5260.0	52	802.11a (Ant.2)	16.00	15.01	-0.110	10 mm [Front]	FCC #2	0.011	1	98.1	0.004	1.256	1.019	0.006	
5260.0	52	802.11a (Ant.2)	16.00	15.01	-0.120	10 mm [Rear]	FCC #2	0.474	1	98.1	0.523	1.256	1.019	0.670	A46
5280.0	56	802.11a (MIMO)	19.00	18.03	0.120	10 mm [Front]	FCC #2	0.035	1	98.1	0.029	1.256	1.019	0.037	
5280.0	56	802.11a (MIMO)	19.00	18.03	-0.090	10 mm [Rear]	FCC #2	0.520	1	98.1	0.592	1.256	1.019	0.758	A47
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5280.0	56	802.11a (Ant.1)	OFDM	16.0	0.043	5300	802.11a	OFDM	16.0	1.000	0.043	X
5260.0	52	802.11a (Ant.2)	OFDM	16.0	0.670	5300	802.11a	OFDM	16.0	1.000	0.670	X
5280.0	56	802.11a (MIMO)	OFDM	19.0	0.758	5300	802.11a	OFDM	19.0	1.000	0.758	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 12.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5500.0	100	802.11a (Ant.1)	16.00	15.12	0.060	10 mm [Front]	FCC #2	0.036	1	98.1	0.033	1.225	1.019	0.041	
5500.0	100	802.11a (Ant.1)	16.00	15.12	-0.040	10 mm [Rear]	FCC #2	0.044	1	98.1	0.048	1.225	1.019	0.060	A48
5600.0	120	802.11a (Ant.2)	16.00	14.88	0.100	10 mm [Front]	FCC #2	0.004	1	98.1	0.009	1.294	1.019	0.012	
5600.0	120	802.11a (Ant.2)	16.00	14.88	-0.110	10 mm [Rear]	FCC #2	0.477	1	98.1	0.510	1.294	1.019	0.673	A49
5500.0	100	802.11a (MIMO)	19.00	18.00	-0.100	10 mm [Front]	FCC #2	0.004	1	98.1	0.027	1.294	1.019	0.036	
5500.0	100	802.11a (MIMO)	19.00	18.00	-0.190	10 mm [Rear]	FCC #2	0.474	1	98.1	0.515	1.294	1.019	0.679	A50
5825.0	165	802.11a (Ant.1)	16.00	15.24	0.010	10 mm [Front]	FCC #2	0.031	1	98.1	0.022	1.191	1.019	0.027	
5825.0	165	802.11a (Ant.1)	16.00	15.24	-0.070	10 mm [Rear]	FCC #2	0.035	1	98.1	0.030	1.191	1.019	0.036	A51
5825.0	165	802.11a (Ant.2)	16.00	14.92	0.000	10 mm [Front]	FCC #2	0.011	1	98.1	0.010	1.282	1.019	0.013	
5825.0	165	802.11a (Ant.2)	16.00	14.92	-0.140	10 mm [Rear]	FCC #2	0.440	1	98.1	0.455	1.282	1.019	0.595	A52
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.160	10 mm [Front]	FCC #2	0.020	1	98.1	0.015	1.282	1.019	0.020	
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.170	10 mm [Rear]	FCC #2	0.434	1	98.1	0.471	1.282	1.019	0.616	A53
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 12.2.7 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	12.00	10.05	0.020	10 mm [Front]	FCC #2	1	76.8	0.018	1.567	1.302	0.037	
2441.0	39	Bluetooth	12.00	10.05	-0.020	10 mm [Rear]	FCC #2	1	76.8	0.034	1.567	1.302	0.069	A54
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

12.3 Standalone Hotspot SAR Results

Table 12.3.1 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	29.20	28.80	0.000	10 mm [Bottom]	FCC #1	4	1:2.075	0.138	1.096	0.151	
836.6	190	GSM850	GPRS	29.20	28.80	0.030	10 mm [Front]	FCC #1	4	1:2.075	0.303	1.096	0.332	
836.6	190	GSM850	GPRS	29.20	28.80	-0.120	10 mm [Rear]	FCC #1	4	1:2.075	0.458	1.096	0.502	A29
836.6	190	GSM850	GPRS	29.20	28.80	-0.080	10 mm [Right]	FCC #1	4	1:2.075	0.179	1.096	0.196	
836.6	190	GSM850	GPRS	29.20	28.80	-0.130	10 mm [Left]	FCC #1	4	1:2.075	0.054	1.096	0.059	
1880.0	661	PCS1900	GPRS	30.20	30.10	0.000	10 mm [Bottom]	FCC #1	2	1:4.15	0.463	1.023	0.474	A55
1880.0	661	PCS1900	GPRS	30.20	30.10	-0.070	10 mm [Front]	FCC #1	2	1:4.15	0.337	1.023	0.345	
1880.0	661	PCS1900	GPRS	30.20	30.10	0.110	10 mm [Rear]	FCC #1	2	1:4.15	0.386	1.023	0.395	
1880.0	661	PCS1900	GPRS	30.20	30.10	-0.160	10 mm [Left]	FCC #1	2	1:4.15	0.213	1.023	0.218	
836.6	4183	WCDMA 850	RMC	25.50	25.09	-0.010	10 mm [Bottom]	FCC #1	N/A	1:1	0.161	1.099	0.177	
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.040	10 mm [Front]	FCC #1	N/A	1:1	0.355	1.099	0.390	
836.6	4183	WCDMA 850	RMC	25.50	25.09	-0.090	10 mm [Rear]	FCC #1	N/A	1:1	0.582	1.099	0.640	A32
836.6	4183	WCDMA 850	RMC	25.50	25.09	-0.010	10 mm [Right]	FCC #1	N/A	1:1	0.233	1.099	0.256	
836.6	4183	WCDMA 850	RMC	25.50	25.09	0.050	10 mm [Left]	FCC #1	N/A	1:1	0.064	1.099	0.070	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	0.030	10 mm [Bottom]	FCC #1	N/A	1:1	0.719	1.021	0.734	A56
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	-0.070	10 mm [Front]	FCC #1	N/A	1:1	0.451	1.021	0.460	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.540	1.021	0.551	
1732.4	1412	WCDMA 1700	RMC	24.20	24.11	-0.190	10 mm [Left]	FCC #1	N/A	1:1	0.368	1.021	0.376	
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	0.040	10 mm [Bottom]	FCC #1	N/A	1:1	0.572	1.023	0.585	A57
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	0.010	10 mm [Front]	FCC #1	N/A	1:1	0.354	1.023	0.362	
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.466	1.023	0.477	
1880.0	9400	WCDMA 1900	RMC	24.20	24.10	-0.170	10 mm [Left]	FCC #1	N/A	1:1	0.325	1.023	0.332	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 12.3.2 LTE B12, B13, B5 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	25.50	25.39	0.030	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.035	1.026	0.036	
707.5	23095	LTE B12	10	24.50	24.28	-0.020	1	10 mm [Bottom]	FCC #1	QPSK	25	0	1:1	0.026	1.052	0.027	
707.5	23095	LTE B12	10	25.50	25.39	0.020	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.109	1.026	0.112	
707.5	23095	LTE B12	10	24.50	24.28	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.086	1.052	0.090	
707.5	23095	LTE B12	10	25.50	25.39	0.070	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.145	1.026	0.149	A35
707.5	23095	LTE B12	10	24.50	24.28	0.010	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.116	1.052	0.122	
707.5	23095	LTE B12	10	25.50	25.39	-0.050	1	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.040	1.026	0.041	
707.5	23095	LTE B12	10	24.50	24.28	-0.150	0	10 mm [Right]	FCC #1	QPSK	25	0	1:1	0.029	1.052	0.031	
707.5	23095	LTE B12	10	25.50	25.39	-0.040	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.042	1.026	0.043	
707.5	23095	LTE B12	10	24.50	24.28	-0.050	1	10 mm [Left]	FCC #1	QPSK	25	0	1:1	0.033	1.052	0.035	
782.0	23230	LTE B13	10	25.50	25.38	0.020	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.069	1.028	0.071	
782.0	23230	LTE B13	10	24.50	24.30	-0.040	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.052	1.047	0.054	
782.0	23230	LTE B13	10	25.50	25.38	0.040	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.175	1.028	0.180	
782.0	23230	LTE B13	10	24.50	24.30	-0.010	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.134	1.047	0.140	
782.0	23230	LTE B13	10	25.50	25.38	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.232	1.028	0.238	A36
782.0	23230	LTE B13	10	24.50	24.30	-0.070	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.176	1.047	0.184	
782.0	23230	LTE B13	10	25.50	25.38	0.030	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.117	1.028	0.120	
782.0	23230	LTE B13	10	24.50	24.30	-0.050	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.091	1.047	0.095	
782.0	23230	LTE B13	10	25.50	25.38	-0.040	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.093	1.028	0.096	
782.0	23230	LTE B13	10	24.50	24.30	-0.020	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.069	1.047	0.072	
836.5	20525	LTE B5	10	25.50	25.22	0.030	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.187	1.067	0.200	
836.5	20525	LTE B5	10	24.50	24.15	0.010	1	10 mm [Bottom]	FCC #1	QPSK	25	0	1:1	0.150	1.084	0.163	
836.5	20525	LTE B5	10	25.50	25.22	0.030	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.402	1.067	0.429	
836.5	20525	LTE B5	10	24.50	24.15	0.050	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.322	1.084	0.349	
836.5	20525	LTE B5	10	25.50	25.22	-0.120	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.641	1.067	0.684	A37
836.5	20525	LTE B5	10	24.50	24.15	-0.070	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.526	1.084	0.570	
836.5	20525	LTE B5	10	25.50	25.22	-0.150	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1	0.266	1.067	0.284	
836.5	20525	LTE B5	10	24.50	24.15	-0.070	1	10 mm [Right]	FCC #1	QPSK	25	0	1:1	0.205	1.084	0.222	
836.5	20525	LTE B5	10	25.50	25.22	0.040	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.096	1.067	0.102	
836.5	20525	LTE B5	10	24.50	24.15	0.050	1	10 mm [Left]	FCC #1	QPSK	25	0	1:1	0.070	1.084	0.076	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.3.3 LTE B4 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1732.5	20175	LTE B4	20	24.20	24.13	-0.080	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.593	1.016	0.602	A58
1732.5	20175	LTE B4	20	23.20	23.06	0.050	1	10 mm [Bottom]	FCC #1	QPSK	50	50	1:1	0.491	1.033	0.507	
1732.5	20175	LTE B4	20	24.20	24.13	0.070	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.478	1.016	0.486	
1732.5	20175	LTE B4	20	23.20	23.06	-0.000	1	10 mm [Front]	FCC #1	QPSK	50	50	1:1	0.394	1.033	0.407	
1732.5	20175	LTE B4	20	24.20	24.13	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.531	1.016	0.539	
1732.5	20175	LTE B4	20	23.20	23.06	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	50	1:1	0.431	1.033	0.445	
1732.5	20175	LTE B4	20	24.20	24.13	-0.140	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.168	1.016	0.171	
1732.5	20175	LTE B4	20	23.20	23.06	-0.070	1	10 mm [Left]	FCC #1	QPSK	50	50	1:1	0.155	1.033	0.160	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.3.4 LTE B2 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1900.0	19100	LTE B2	20	24.20	24.14	0.120	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.565	1.014	0.573	A59
1900.0	19100	LTE B2	20	23.20	23.11	0.100	1	10 mm [Bottom]	FCC #1	QPSK	50	0	1:1	0.546	1.021	0.557	
1900.0	19100	LTE B2	20	24.20	24.14	-0.070	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.314	1.014	0.318	
1900.0	19100	LTE B2	20	23.20	23.11	-0.030	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.306	1.021	0.312	
1900.0	19100	LTE B2	20	24.20	24.14	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.442	1.014	0.448	
1900.0	19100	LTE B2	20	23.20	23.11	0.020	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.424	1.021	0.433	
1900.0	19100	LTE B2	20	24.20	24.14	0.180	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.267	1.014	0.271	
1900.0	19100	LTE B2	20	23.20	23.11	0.180	1	10 mm [Left]	FCC #1	QPSK	50	0	1:1	0.226	1.021	0.231	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.3.5 LTE B7 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2560.0	21350	LTE B7	20	25.20	24.96	-0.120	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.533	1.057	0.563	
2560.0	21350	LTE B7	20	24.20	23.84	-0.080	1	10 mm [Bottom]	FCC #1	QPSK	50	0	1:1	0.442	1.086	0.480	
2560.0	21350	LTE B7	20	25.20	24.96	0.050	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.214	1.057	0.226	
2560.0	21350	LTE B7	20	24.20	23.84	0.020	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1	0.176	1.086	0.191	
2560.0	21350	LTE B7	20	25.20	24.96	0.050	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.597	1.057	0.631	A40
2560.0	21350	LTE B7	20	24.20	23.84	0.040	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.491	1.086	0.533	
2560.0	21350	LTE B7	20	25.20	24.96	0.120	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1	0.037	1.057	0.039	
2560.0	21350	LTE B7	20	24.20	23.84	-0.060	1	10 mm [Right]	FCC #1	QPSK	50	0	1:1	0.027	1.086	0.029	
2560.0	21350	LTE B7	20	25.20	24.96	-0.010	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.044	1.057	0.047	
2560.0	21350	LTE B7	20	24.20	23.84	0.170	1	10 mm [Left]	FCC #1	QPSK	50	0	1:1	0.032	1.086	0.035	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.3.6 LTE B41 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2506.0	39750	LTE B41	20	25.20	24.95	0.050	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1.58	0.312	1.059	0.330	
2506.0	39750	LTE B41	20	24.20	23.91	0.070	1	10 mm [Bottom]	FCC #1	QPSK	50	0	1:1.58	0.240	1.069	0.257	
2506.0	39750	LTE B41	20	25.20	24.95	0.080	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1.58	0.131	1.059	0.139	
2506.0	39750	LTE B41	20	24.20	23.91	0.100	1	10 mm [Front]	FCC #1	QPSK	50	0	1:1.58	0.107	1.069	0.114	
2506.0	39750	LTE B41	20	25.20	24.95	0.040	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1.58	0.348	1.059	0.369	A41
2506.0	39750	LTE B41	20	24.20	23.91	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	0	1:1.58	0.273	1.069	0.292	
2506.0	39750	LTE B41	20	25.20	24.95	0.100	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1.58	0.010	1.059	0.011	
2506.0	39750	LTE B41	20	24.20	23.91	0.010	1	10 mm [Right]	FCC #1	QPSK	50	0	1:1.58	0.006	1.069	0.006	
2506.0	39750	LTE B41	20	25.20	24.95	0.010	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1.58	0.024	1.059	0.025	
2506.0	39750	LTE B41	20	24.20	23.91	0.020	1	10 mm [Left]	FCC #1	QPSK	50	0	1:1.58	0.019	1.069	0.020	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.3.7 DTS Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2437.0	6	802.11b (Ant.1)	16.50	15.88	0.000	10 mm [Top]	FCC #2	0.081	1	97.3	0.079	1.153	1.028	0.094	
2437.0	6	802.11b (Ant.1)	16.50	15.88	-0.090	10 mm [Front]	FCC #2	0.046	1	97.3	0.050	1.153	1.028	0.059	
2437.0	6	802.11b (Ant.1)	16.50	15.88	-0.110	10 mm [Rear]	FCC #2	0.095	1	97.3	0.107	1.153	1.028	0.127	A42
2437.0	6	802.11b (Ant.1)	16.50	15.88	-0.130	10 mm [Left]	FCC #2	0.040	1	97.3	0.045	1.153	1.028	0.053	
2412.0	1	802.11b (Ant.2)	16.50	15.62	0.050	10 mm [Top]	FCC #2	0.011	1	97.3	0.009	1.225	1.028	0.012	
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.160	10 mm [Front]	FCC #2	0.012	1	97.3	0.012	1.225	1.028	0.015	
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.060	10 mm [Rear]	FCC #2	0.126	1	97.3	0.148	1.225	1.028	0.186	A43
2412.0	1	802.11b (Ant.2)	16.50	15.62	-0.130	10 mm [Left]	FCC #2	0.055	1	97.3	0.054	1.225	1.028	0.068	
2412.0	1	802.11g (MIMO)	19.00	17.55	-0.030	10 mm [Top]	FCC #2	0.047	1	98.1	0.046	1.396	1.019	0.065	
2412.0	1	802.11g (MIMO)	19.00	17.55	0.140	10 mm [Front]	FCC #2	0.039	1	98.1	0.030	1.396	1.019	0.043	
2412.0	1	802.11g (MIMO)	19.00	17.55	0.160	10 mm [Rear]	FCC #2	0.164	1	98.1	0.171	1.396	1.019	0.243	A44
2412.0	1	802.11g (MIMO)	19.00	17.55	-0.030	10 mm [Left]	FCC #2	0.061	1	98.1	0.062	1.396	1.019	0.088	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.127	2437	802.11g	OFDM	16.0	0.891	0.113	X
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.127	2437	802.11n	OFDM	15.0	0.708	0.090	X
2437.0	6	802.11b (Ant.1)	DSSS	16.5	0.127	2437	802.11ac	OFDM	15.0	0.708	0.090	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.186	2437	802.11g	OFDM	16.0	0.891	0.166	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.186	2437	802.11n	OFDM	15.0	0.708	0.132	X
2412.0	1	802.11b (Ant.2)	DSSS	16.5	0.186	2437	802.11ac	OFDM	15.0	0.708	0.132	X
2412.0	1	802.11g (MIMO)	OFDM	19.0	0.243	2437	802.11n	OFDM	18.0	0.794	0.193	X
2412.0	1	802.11g (MIMO)	OFDM	19.0	0.243	2437	802.11ac	OFDM	18.0	0.794	0.193	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.3.8 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5220.0	44	802.11a (Ant.1)	16.00	15.14	0.000	10 mm [Top]	FCC #2	0.010	1	98.1	0.005	1.219	1.019	0.007	
5220.0	44	802.11a (Ant.1)	16.00	15.14	-0.170	10 mm [Front]	FCC #2	0.014	1	98.1	0.013	1.219	1.019	0.016	
5220.0	44	802.11a (Ant.1)	16.00	15.14	-0.140	10 mm [Rear]	FCC #2	0.038	1	98.1	0.035	1.219	1.019	0.043	A60
5220.0	44	802.11a (Ant.1)	16.00	15.14	0.160	10 mm [Left]	FCC #2	0.018	1	98.1	0.013	1.219	1.019	0.016	
5200.0	40	802.11a (Ant.2)	16.00	15.07	0.000	10 mm [Top]	FCC #2	0.010	1	98.1	0.007	1.239	1.019	0.009	
5200.0	40	802.11a (Ant.2)	16.00	15.07	0.190	10 mm [Front]	FCC #2	0.009	1	98.1	0.003	1.239	1.019	0.003	
5200.0	40	802.11a (Ant.2)	16.00	15.07	0.070	10 mm [Rear]	FCC #2	0.408	1	98.1	0.455	1.239	1.019	0.575	A61
5200.0	40	802.11a (Ant.2)	16.00	15.07	0.010	10 mm [Left]	FCC #2	0.141	1	98.1	0.133	1.239	1.019	0.168	
5220.0	44	802.11a (MIMO)	19.00	18.10	-0.090	10 mm [Top]	FCC #2	0.018	1	98.1	0.014	1.239	1.019	0.018	
5220.0	44	802.11a (MIMO)	19.00	18.10	-0.110	10 mm [Front]	FCC #2	0.022	1	98.1	0.015	1.239	1.019	0.019	
5220.0	44	802.11a (MIMO)	19.00	18.10	0.040	10 mm [Rear]	FCC #2	0.461	1	98.1	0.512	1.239	1.019	0.647	A62
5220.0	44	802.11a (MIMO)	19.00	18.10	-0.140	10 mm [Left]	FCC #2	0.125	1	98.1	0.118	1.239	1.019	0.149	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 12.3.9 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5785.0	157	802.11a (Ant.1)	16.00	15.04	0.130	10 mm [Top]	FCC #2	0.014	1	98.1	0.010	1.247	1.019	0.012	
5785.0	157	802.11a (Ant.1)	16.00	15.04	-0.170	10 mm [Front]	FCC #2	0.024	1	98.1	0.020	1.247	1.019	0.025	
5785.0	157	802.11a (Ant.1)	16.00	15.04	-0.120	10 mm [Rear]	FCC #2	0.032	1	98.1	0.030	1.247	1.019	0.038	A63
5785.0	157	802.11a (Ant.1)	16.00	15.04	-0.180	10 mm [Left]	FCC #2	0.033	1	98.1	0.028	1.247	1.019	0.036	
5745.0	149	802.11a (Ant.2)	16.00	14.76	-0.190	10 mm [Top]	FCC #2	0.010	1	98.1	0.008	1.330	1.019	0.011	
5745.0	149	802.11a (Ant.2)	16.00	14.76	-0.030	10 mm [Front]	FCC #2	0.016	1	98.1	0.014	1.330	1.019	0.019	
5745.0	149	802.11a (Ant.2)	16.00	14.76	0.090	10 mm [Rear]	FCC #2	0.426	1	98.1	0.461	1.330	1.019	0.625	A64
5745.0	149	802.11a (Ant.2)	16.00	14.76	-0.140	10 mm [Left]	FCC #2	0.124	1	98.1	0.118	1.330	1.019	0.160	
5745.0	149	802.11a (MIMO)	19.00	17.88	-0.070	10 mm [Top]	FCC #2	0.007	1	98.1	0.011	1.330	1.019	0.015	
5745.0	149	802.11a (MIMO)	19.00	17.88	0.140	10 mm [Front]	FCC #2	0.025	1	98.1	0.017	1.330	1.019	0.023	
5745.0	149	802.11a (MIMO)	19.00	17.88	0.090	10 mm [Rear]	FCC #2	0.437	1	98.1	0.464	1.330	1.019	0.629	A65
5745.0	149	802.11a (MIMO)	19.00	17.88	0.040	10 mm [Left]	FCC #2	0.114	1	98.1	0.112	1.330	1.019	0.152	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note : UNII-3 Band CH 165(5825 MHz) is not support Hotspot mode as described on operational description, so other required CHs are tested.

Table 12.3.10 Bluetooth Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	12.00	10.05	0.010	10 mm [Top]	FCC #2	1	76.8	0.026	1.567	1.302	0.053	
2441.0	39	Bluetooth	12.00	10.05	0.020	10 mm [Front]	FCC #2	1	76.8	0.018	1.567	1.302	0.037	
2441.0	39	Bluetooth	12.00	10.05	-0.020	10 mm [Rear]	FCC #2	1	76.8	0.034	1.567	1.302	0.069	A54
2441.0	39	Bluetooth	12.00	10.05	0.110	10 mm [Left]	FCC #2	1	76.8	0.016	1.567	1.302	0.033	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

12.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Table 12.4.1 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.020	0 mm [Top]	FCC #2	0.011	1	98.1	0.008	1.236	1.019	0.011	
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.070	0 mm [Front]	FCC #2	0.172	1	98.1	0.167	1.236	1.019	0.210	
5280.0	56	802.11a (Ant.1)	16.00	15.08	-0.050	0 mm [Rear]	FCC #2	0.192	1	98.1	0.179	1.236	1.019	0.226	A66
5280.0	56	802.11a (Ant.1)	16.00	15.08	0.050	0 mm [Left]	FCC #2	0.046	1	98.1	0.036	1.236	1.019	0.045	
5260.0	52	802.11a (Ant.2)	16.00	15.01	-0.120	0 mm [Top]	FCC #2	0.009	1	98.1	0.007	1.256	1.019	0.008	
5260.0	52	802.11a (Ant.2)	16.00	15.01	0.180	0 mm [Front]	FCC #2	0.023	1	98.1	0.029	1.256	1.019	0.037	
5260.0	52	802.11a (Ant.2)	16.00	15.01	-0.190	0 mm [Rear]	FCC #2	0.627	1	98.1	1.130	1.256	1.019	1.447	A67
5260.0	52	802.11a (Ant.2)	16.00	15.01	0.020	0 mm [Left]	FCC #2	0.219	1	98.1	0.247	1.256	1.019	0.316	
5280.0	56	802.11a (MIMO)	19.00	18.03	-0.180	0 mm [Top]	FCC #2	0.018	1	98.1	0.015	1.256	1.019	0.019	
5280.0	56	802.11a (MIMO)	19.00	18.03	-0.090	0 mm [Front]	FCC #2	0.113	1	98.1	0.120	1.256	1.019	0.154	
5280.0	56	802.11a (MIMO)	19.00	18.03	-0.150	0 mm [Rear]	FCC #2	0.812	1	98.1	1.380	1.256	1.019	1.767	A68
5280.0	56	802.11a (MIMO)	19.00	18.03	0.150	0 mm [Left]	FCC #2	0.266	1	98.1	0.260	1.256	1.019	0.333	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Table 12.4.2 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5500.0	100	802.11a (Ant.1)	16.00	15.12	0.110	0 mm [Top]	FCC #2	0.018	1	98.1	0.018	1.225	1.019	0.022	
5500.0	100	802.11a (Ant.1)	16.00	15.12	0.080	0 mm [Front]	FCC #2	0.128	1	98.1	0.168	1.225	1.019	0.210	
5500.0	100	802.11a (Ant.1)	16.00	15.12	0.020	0 mm [Rear]	FCC #2	0.167	1	98.1	0.172	1.225	1.019	0.215	A69
5500.0	100	802.11a (Ant.1)	16.00	15.12	-0.160	0 mm [Left]	FCC #2	0.060	1	98.1	0.048	1.225	1.019	0.060	
5600.0	120	802.11a (Ant.2)	16.00	14.88	-0.090	0 mm [Top]	FCC #2	0.007	1	98.1	0.005	1.294	1.019	0.006	
5600.0	120	802.11a (Ant.2)	16.00	14.88	-0.180	0 mm [Front]	FCC #2	0.027	1	98.1	0.034	1.294	1.019	0.045	
5600.0	120	802.11a (Ant.2)	16.00	14.88	-0.170	0 mm [Rear]	FCC #2	0.636	1	98.1	1.090	1.294	1.019	1.438	A70
5600.0	120	802.11a (Ant.2)	16.00	14.88	0.110	0 mm [Left]	FCC #2	0.226	1	98.1	0.253	1.294	1.019	0.334	
5500.0	100	802.11a (MIMO)	19.00	18.00	0.190	0 mm [Top]	FCC #2	0.020	1	98.1	0.017	1.294	1.019	0.022	
5500.0	100	802.11a (MIMO)	19.00	18.00	-0.190	0 mm [Front]	FCC #2	0.127	1	98.1	0.134	1.294	1.019	0.177	
5500.0	100	802.11a (MIMO)	19.00	18.00	-0.180	0 mm [Rear]	FCC #2	1.060	1	98.1	1.470	1.294	1.019	1.939	A71
5500.0	100	802.11a (MIMO)	19.00	18.00	0.150	0 mm [Left]	FCC #2	0.266	1	98.1	0.259	1.294	1.019	0.342	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Table 12.4.3 UNII Phablet SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5825.0	165	802.11a (Ant.1)	16.00	15.24	-0.070	0 mm [Top]	FCC #2	0.030	1	98.1	0.032	1.191	1.019	0.039	
5825.0	165	802.11a (Ant.1)	16.00	15.24	0.030	0 mm [Front]	FCC #2	0.153	1	98.1	0.172	1.191	1.019	0.209	
5825.0	165	802.11a (Ant.1)	16.00	15.24	0.070	0 mm [Rear]	FCC #2	0.153	1	98.1	0.227	1.191	1.019	0.276	A72
5825.0	165	802.11a (Ant.1)	16.00	15.24	-0.160	0 mm [Left]	FCC #2	0.057	1	98.1	0.046	1.191	1.019	0.056	
5825.0	165	802.11a (Ant.2)	16.00	14.92	-0.040	0 mm [Top]	FCC #2	0.008	1	98.1	0.005	1.282	1.019	0.007	
5825.0	165	802.11a (Ant.2)	16.00	14.92	0.120	0 mm [Front]	FCC #2	0.071	1	98.1	0.061	1.282	1.019	0.080	
5825.0	165	802.11a (Ant.2)	16.00	14.92	-0.150	0 mm [Rear]	FCC #2	0.684	1	98.1	1.030	1.282	1.019	1.346	A73
5825.0	165	802.11a (Ant.2)	16.00	14.92	-0.060	0 mm [Left]	FCC #2	0.202	1	98.1	0.226	1.282	1.019	0.295	
5825.0	165	802.11a (MIMO)	19.00	18.09	0.040	0 mm [Top]	FCC #2	0.020	1	98.1	0.023	1.282	1.019	0.030	
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.050	0 mm [Front]	FCC #2	0.182	1	98.1	0.178	1.282	1.019	0.233	
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.040	0 mm [Rear]	FCC #2	0.620	1	98.1	0.980	1.282	1.019	1.281	A74
5825.0	165	802.11a (MIMO)	19.00	18.09	-0.010	0 mm [Left]	FCC #2	0.235	1	98.1	0.225	1.282	1.019	0.294	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Note : UNII-3 Band CH 165 (5825 MHz) is not support Hotspot mode as described on operational description of this device, so phablet SAR is tested on this CH..

12.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > $\frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 5.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per KDB Publication 941225 D05Av01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
6. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was not > 0.6 W/kg for 1g evaluations, testing at the other channels was not required for such test configurations.
7. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r05. Testing was performed using UL-DL configuration 0 with 6 UL sub frames and 2S sub frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633 (cf=1.58).
8. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by making a SAR measurement with both antennas transmitting simultaneously.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 10.5 for the time-domain plot and calculation for the duty factor of the device.

13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

13.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

13.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test positon in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

13.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 13.1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

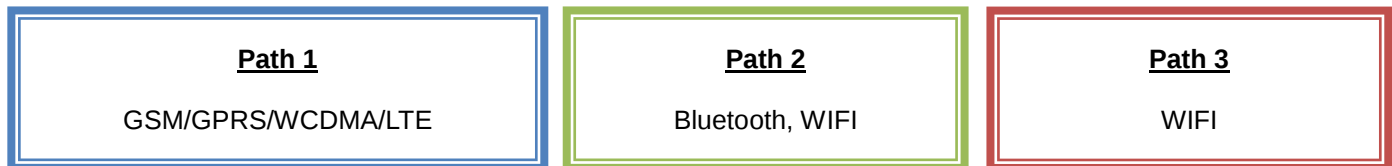


Figure 13.1 Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 13.3.1 Simultaneous Transmission Scenarios

No.	Capable TX Configuration	GSM 850/1900 (Voice)	GPRS 850/1900 (Data)	WCDMA B5/B4/B2 (Voice)	WCDMA B5/B4/B2 (Data)	LTE B12/B17/B13/B5/B4/B2/B7/B41	WiFi 2.4GHz 802.11b/g/n/ac	WiFi 5GHz 802.11a/n/ac	Bluetooth 2.4GHz
1	GSM 850/1900 (Voice)		No	No	No	No	Yes	Yes	Yes
2	GPRS 850/1900 (Data)	No		No	No	No	Yes	Yes	Yes
3	WCDMA B5/B4/B2 (Voice)	No	No		No	No	Yes	Yes	Yes
4	WCDMA B5/B4/B2 (Data)	No	No	No		No	Yes	Yes	Yes
5	LTE B12/B17/B13/B5/B4/B2/B7/B41	No	No	No	No		Yes	Yes	Yes
6	WiFi 2.4GHz 802.11b/g/n/ac	Yes	Yes	Yes	Yes	Yes		Yes	No
7	WiFi 5GHz 802.11a/n/ac	Yes	Yes	Yes	Yes	Yes	Yes		No
8	Bluetooth 2.4GHz	Yes	Yes	Yes	Yes	Yes	No	No	

Table 13.3.2 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	
3	GSM Voice + Bluetooth 2.4 GHz	Yes	Yes	N/A	
4	GSM Voice + Wi-Fi 2.4 GHz MIMO	Yes	Yes	N/A	
5	GSM Voice + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	
6	GSM Voice + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	N/A	
7	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	
8	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes	
9	WCDMA + Bluetooth 2.4 GHz	Yes	Yes	Yes	
10	WCDMA + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	
11	WCDMA + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes	
12	WCDMA + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	Yes	
13	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	
14	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes	
15	LTE + Bluetooth 2.4 GHz	Yes	Yes	Yes	
16	LTE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	
17	LTE + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes	
18	LTE + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	Yes	
19	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	
20	GPRS/EDGE + Wi-Fi 5 GHz	Yes	Yes	Yes	
21	GPRS/EDGE + Bluetooth 2.4 GHz	Yes	Yes	Yes	
22	GPRS/EDGE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	
23	GPRS/EDGE + Wi-Fi 5 GHz MIMO	Yes	Yes	Yes	
24	GPRS/EDGE + Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 5GHz Ant.2	Yes	Yes	Yes	

Notes:

- WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
- WiFi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3.
- WiFi 2.4GHz and 5GHz are supported in the same time(DBS)
- LTE, WCDMA, GPRS/EDGE is supported Hotspot.
- VoIP is supported in LTE, WCDMA, GSM
- Bluetooth and WiFi can not transmit simultaneously at 2.4G band.
- GSM, WCDMA and LTE can not transmit simultaneously since they share the same antenna path.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCC]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WiFi Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WiFi direct are included in the above table.

13.4 Head SAR Simultaneous Transmission Analysis

Table 13.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.064	0.160	0.056	0.224	0.121	0.281
		Right Touch	0.089	0.275	0.029	0.364	0.118	0.393
		Left Tilt	0.032	0.229	0.038	0.261	0.071	0.299
		Right Tilt	0.026	0.275	0.008	0.301	0.033	0.308
	GPRS 850	Left Touch	0.084	0.160	0.056	0.244	0.141	0.301
		Right Touch	0.106	0.275	0.029	0.381	0.136	0.411
		Left Tilt	0.043	0.229	0.038	0.271	0.081	0.310
		Right Tilt	0.036	0.275	0.008	0.311	0.044	0.319
	GSM 1900	Left Touch	0.033	0.160	0.056	0.193	0.090	0.250
		Right Touch	0.077	0.275	0.029	0.352	0.107	0.382
		Left Tilt	0.055	0.229	0.038	0.283	0.093	0.322
		Right Tilt	0.078	0.275	0.008	0.353	0.086	0.361
	GPRS 1900	Left Touch	0.052	0.160	0.056	0.212	0.109	0.268
		Right Touch	0.119	0.275	0.029	0.394	0.148	0.423
		Left Tilt	0.071	0.229	0.038	0.299	0.109	0.338
		Right Tilt	0.116	0.275	0.008	0.391	0.123	0.398
	WCDMA 850	Left Touch	0.098	0.160	0.056	0.258	0.154	0.314
		Right Touch	0.122	0.275	0.029	0.397	0.151	0.426
		Left Tilt	0.048	0.229	0.038	0.277	0.087	0.315
		Right Tilt	0.045	0.275	0.008	0.320	0.053	0.328
	WCDMA 1700	Left Touch	0.125	0.160	0.056	0.285	0.181	0.341
		Right Touch	0.140	0.275	0.029	0.415	0.169	0.444
		Left Tilt	0.171	0.229	0.038	0.399	0.209	0.438
		Right Tilt	0.189	0.275	0.008	0.464	0.197	0.471
	WCDMA 1900	Left Touch	0.068	0.160	0.056	0.227	0.124	0.284
		Right Touch	0.177	0.275	0.029	0.452	0.206	0.481
		Left Tilt	0.080	0.229	0.038	0.308	0.118	0.347
		Right Tilt	0.171	0.275	0.008	0.446	0.179	0.453
	LTE Band 12	Left Touch	0.026	0.160	0.056	0.186	0.082	0.242
		Right Touch	0.033	0.275	0.029	0.308	0.062	0.337
		Left Tilt	0.010	0.229	0.038	0.239	0.049	0.277
		Right Tilt	0.004	0.275	0.008	0.279	0.012	0.287
	LTE Band 13	Left Touch	0.034	0.160	0.056	0.194	0.090	0.250
		Right Touch	0.050	0.275	0.029	0.325	0.080	0.355
		Left Tilt	0.015	0.229	0.038	0.244	0.054	0.283
		Right Tilt	0.021	0.275	0.008	0.295	0.028	0.303
	LTE Band 5	Left Touch	0.099	0.160	0.056	0.259	0.156	0.316
		Right Touch	0.124	0.275	0.029	0.399	0.153	0.428
		Left Tilt	0.054	0.229	0.038	0.283	0.093	0.322
		Right Tilt	0.046	0.275	0.008	0.321	0.054	0.328
	LTE Band 4	Left Touch	0.104	0.160	0.056	0.264	0.160	0.320
		Right Touch	0.127	0.275	0.029	0.402	0.156	0.431
		Left Tilt	0.153	0.229	0.038	0.382	0.192	0.421
		Right Tilt	0.167	0.275	0.008	0.442	0.174	0.449
	LTE Band 2	Left Touch	0.084	0.160	0.056	0.244	0.140	0.300
		Right Touch	0.135	0.275	0.029	0.410	0.164	0.439
		Left Tilt	0.133	0.229	0.038	0.362	0.171	0.400
		Right Tilt	0.118	0.275	0.008	0.393	0.125	0.400
	LTE Band 7	Left Touch	0.022	0.160	0.056	0.182	0.079	0.239
		Right Touch	0.012	0.275	0.029	0.287	0.041	0.316
		Left Tilt	0.022	0.229	0.038	0.251	0.061	0.289
		Right Tilt	0.019	0.275	0.008	0.294	0.027	0.302
	LTE Band 41	Left Touch	0.011	0.160	0.056	0.171	0.067	0.227
		Right Touch	0.007	0.275	0.029	0.282	0.036	0.311
		Left Tilt	0.009	0.229	0.038	0.237	0.047	0.276
		Right Tilt	0.006	0.275	0.008	0.281	0.014	0.289

Table 13.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.064	0.160	0.044	0.224	0.108	0.268
		Right Touch	0.089	0.275	0.033	0.364	0.122	0.397
		Left Tilt	0.032	0.229	0.020	0.261	0.052	0.281
		Right Tilt	0.026	0.275	0.010	0.301	0.036	0.310
	GPRS 850	Left Touch	0.084	0.160	0.044	0.244	0.128	0.288
		Right Touch	0.106	0.275	0.033	0.381	0.139	0.414
		Left Tilt	0.043	0.229	0.020	0.271	0.063	0.291
		Right Tilt	0.036	0.275	0.010	0.311	0.046	0.321
	GSM 1900	Left Touch	0.033	0.160	0.044	0.193	0.077	0.237
		Right Touch	0.077	0.275	0.033	0.352	0.110	0.385
		Left Tilt	0.055	0.229	0.020	0.283	0.074	0.303
		Right Tilt	0.078	0.275	0.010	0.353	0.088	0.363
	GPRS 1900	Left Touch	0.052	0.160	0.044	0.212	0.096	0.256
		Right Touch	0.119	0.275	0.033	0.394	0.152	0.427
		Left Tilt	0.071	0.229	0.020	0.299	0.090	0.319
		Right Tilt	0.116	0.275	0.010	0.391	0.125	0.400
	WCDMA 850	Left Touch	0.098	0.160	0.044	0.258	0.141	0.301
		Right Touch	0.122	0.275	0.033	0.397	0.155	0.430
		Left Tilt	0.048	0.229	0.020	0.277	0.068	0.297
		Right Tilt	0.045	0.275	0.010	0.320	0.055	0.330
	WCDMA 1700	Left Touch	0.125	0.160	0.044	0.285	0.168	0.328
		Right Touch	0.140	0.275	0.033	0.415	0.173	0.448
		Left Tilt	0.171	0.229	0.020	0.399	0.190	0.419
		Right Tilt	0.189	0.275	0.010	0.464	0.199	0.474
	WCDMA 1900	Left Touch	0.068	0.160	0.044	0.227	0.111	0.271
		Right Touch	0.177	0.275	0.033	0.452	0.210	0.485
		Left Tilt	0.080	0.229	0.020	0.308	0.100	0.328
		Right Tilt	0.171	0.275	0.010	0.446	0.181	0.456
	LTE Band 12	Left Touch	0.026	0.160	0.044	0.186	0.069	0.229
		Right Touch	0.033	0.275	0.033	0.308	0.066	0.341
		Left Tilt	0.010	0.229	0.020	0.239	0.030	0.259
		Right Tilt	0.004	0.275	0.010	0.279	0.014	0.289
	LTE Band 13	Left Touch	0.034	0.160	0.044	0.194	0.077	0.237
		Right Touch	0.050	0.275	0.033	0.325	0.083	0.358
		Left Tilt	0.015	0.229	0.020	0.244	0.035	0.264
		Right Tilt	0.021	0.275	0.010	0.295	0.030	0.305
	LTE Band 5	Left Touch	0.099	0.160	0.044	0.259	0.143	0.303
		Right Touch	0.124	0.275	0.033	0.399	0.157	0.432
		Left Tilt	0.054	0.229	0.020	0.283	0.074	0.303
		Right Tilt	0.046	0.275	0.010	0.321	0.056	0.331
	LTE Band 4	Left Touch	0.104	0.160	0.044	0.264	0.147	0.307
		Right Touch	0.127	0.275	0.033	0.402	0.160	0.435
		Left Tilt	0.153	0.229	0.020	0.382	0.173	0.402
		Right Tilt	0.167	0.275	0.010	0.442	0.176	0.451
	LTE Band 2	Left Touch	0.084	0.160	0.044	0.244	0.128	0.288
		Right Touch	0.135	0.275	0.033	0.410	0.168	0.443
		Left Tilt	0.133	0.229	0.020	0.362	0.153	0.381
		Right Tilt	0.118	0.275	0.010	0.393	0.127	0.402
	LTE Band 7	Left Touch	0.022	0.160	0.044	0.182	0.066	0.226
		Right Touch	0.012	0.275	0.033	0.287	0.045	0.320
		Left Tilt	0.022	0.229	0.020	0.251	0.042	0.271
		Right Tilt	0.019	0.275	0.010	0.294	0.029	0.304
	LTE Band 41	Left Touch	0.011	0.160	0.044	0.171	0.054	0.214
		Right Touch	0.007	0.275	0.033	0.282	0.040	0.315
		Left Tilt	0.009	0.229	0.020	0.237	0.028	0.257
		Right Tilt	0.006	0.275	0.010	0.281	0.016	0.291

Table 13.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.8 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.064	0.160	0.076	0.224	0.140	0.300
		Right Touch	0.089	0.275	0.077	0.364	0.166	0.441
		Left Tilt	0.032	0.229	0.018	0.261	0.050	0.279
		Right Tilt	0.026	0.275	0.016	0.301	0.041	0.316
	GPRS 850	Left Touch	0.084	0.160	0.076	0.244	0.160	0.320
		Right Touch	0.106	0.275	0.077	0.381	0.183	0.458
		Left Tilt	0.043	0.229	0.018	0.271	0.061	0.290
		Right Tilt	0.036	0.275	0.016	0.311	0.052	0.327
	GSM 1900	Left Touch	0.033	0.160	0.076	0.193	0.109	0.269
		Right Touch	0.077	0.275	0.077	0.352	0.154	0.429
		Left Tilt	0.055	0.229	0.018	0.283	0.073	0.302
		Right Tilt	0.078	0.275	0.016	0.353	0.094	0.369
	GPRS 1900	Left Touch	0.052	0.160	0.076	0.212	0.128	0.288
		Right Touch	0.119	0.275	0.077	0.394	0.196	0.471
		Left Tilt	0.071	0.229	0.018	0.299	0.089	0.318
		Right Tilt	0.116	0.275	0.016	0.391	0.131	0.406
	WCDMA 850	Left Touch	0.098	0.160	0.076	0.258	0.174	0.334
		Right Touch	0.122	0.275	0.077	0.397	0.199	0.474
		Left Tilt	0.048	0.229	0.018	0.277	0.067	0.295
		Right Tilt	0.045	0.275	0.016	0.320	0.061	0.336
	WCDMA 1700	Left Touch	0.125	0.160	0.076	0.285	0.200	0.360
		Right Touch	0.140	0.275	0.077	0.415	0.217	0.492
		Left Tilt	0.171	0.229	0.018	0.399	0.189	0.418
		Right Tilt	0.189	0.275	0.016	0.464	0.205	0.479
	WCDMA 1900	Left Touch	0.068	0.160	0.076	0.227	0.143	0.303
		Right Touch	0.177	0.275	0.077	0.452	0.254	0.529
		Left Tilt	0.080	0.229	0.018	0.308	0.098	0.327
		Right Tilt	0.171	0.275	0.016	0.446	0.187	0.461
	LTE Band 12	Left Touch	0.026	0.160	0.076	0.186	0.101	0.261
		Right Touch	0.033	0.275	0.077	0.308	0.110	0.385
		Left Tilt	0.010	0.229	0.018	0.239	0.029	0.257
		Right Tilt	0.004	0.275	0.016	0.279	0.020	0.295
	LTE Band 13	Left Touch	0.034	0.160	0.076	0.194	0.110	0.270
		Right Touch	0.050	0.275	0.077	0.325	0.127	0.402
		Left Tilt	0.015	0.229	0.018	0.244	0.034	0.262
		Right Tilt	0.021	0.275	0.016	0.295	0.036	0.311
	LTE Band 5	Left Touch	0.099	0.160	0.076	0.259	0.175	0.335
		Right Touch	0.124	0.275	0.077	0.399	0.201	0.476
		Left Tilt	0.054	0.229	0.018	0.283	0.073	0.301
		Right Tilt	0.046	0.275	0.016	0.321	0.062	0.336
	LTE Band 4	Left Touch	0.104	0.160	0.076	0.264	0.179	0.339
		Right Touch	0.127	0.275	0.077	0.402	0.204	0.479
		Left Tilt	0.153	0.229	0.018	0.382	0.172	0.400
		Right Tilt	0.167	0.275	0.016	0.442	0.182	0.457
	LTE Band 2	Left Touch	0.084	0.160	0.076	0.244	0.160	0.320
		Right Touch	0.135	0.275	0.077	0.410	0.212	0.487
		Left Tilt	0.133	0.229	0.018	0.362	0.151	0.380
		Right Tilt	0.118	0.275	0.016	0.393	0.133	0.408
	LTE Band 7	Left Touch	0.022	0.160	0.076	0.182	0.098	0.258
		Right Touch	0.012	0.275	0.077	0.287	0.089	0.364
		Left Tilt	0.022	0.229	0.018	0.251	0.040	0.269
		Right Tilt	0.019	0.275	0.016	0.294	0.035	0.310
	LTE Band 41	Left Touch	0.011	0.160	0.076	0.171	0.086	0.246
		Right Touch	0.007	0.275	0.077	0.282	0.084	0.359
		Left Tilt	0.009	0.229	0.018	0.237	0.027	0.256
		Right Tilt	0.006	0.275	0.016	0.281	0.022	0.297

Table 13.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.160	0.224
		Right Touch	0.089	0.275	0.364
		Left Tilt	0.032	0.229	0.261
		Right Tilt	0.026	0.275	0.301
	GPRS 850	Left Touch	0.084	0.160	0.244
		Right Touch	0.106	0.275	0.381
		Left Tilt	0.043	0.229	0.271
		Right Tilt	0.036	0.275	0.311
	GSM 1900	Left Touch	0.033	0.160	0.193
		Right Touch	0.077	0.275	0.352
		Left Tilt	0.055	0.229	0.283
		Right Tilt	0.078	0.275	0.353
	GPRS 1900	Left Touch	0.052	0.160	0.212
		Right Touch	0.119	0.275	0.394
		Left Tilt	0.071	0.229	0.299
		Right Tilt	0.116	0.275	0.391
	WCDMA 850	Left Touch	0.098	0.160	0.258
		Right Touch	0.122	0.275	0.397
		Left Tilt	0.048	0.229	0.277
		Right Tilt	0.045	0.275	0.320
	WCDMA 1700	Left Touch	0.125	0.160	0.285
		Right Touch	0.140	0.275	0.415
		Left Tilt	0.171	0.229	0.399
		Right Tilt	0.189	0.275	0.464
	WCDMA 1900	Left Touch	0.068	0.160	0.227
		Right Touch	0.177	0.275	0.452
		Left Tilt	0.080	0.229	0.308
		Right Tilt	0.171	0.275	0.446
	LTE Band 12	Left Touch	0.026	0.160	0.186
		Right Touch	0.033	0.275	0.308
		Left Tilt	0.010	0.229	0.239
		Right Tilt	0.004	0.275	0.279
	LTE Band 13	Left Touch	0.034	0.160	0.194
		Right Touch	0.050	0.275	0.325
		Left Tilt	0.015	0.229	0.244
		Right Tilt	0.021	0.275	0.295
	LTE Band 5	Left Touch	0.099	0.160	0.259
		Right Touch	0.124	0.275	0.399
		Left Tilt	0.054	0.229	0.283
		Right Tilt	0.046	0.275	0.321
	LTE Band 4	Left Touch	0.104	0.160	0.264
		Right Touch	0.127	0.275	0.402
		Left Tilt	0.153	0.229	0.382
		Right Tilt	0.167	0.275	0.442
	LTE Band 2	Left Touch	0.084	0.160	0.244
		Right Touch	0.135	0.275	0.410
		Left Tilt	0.133	0.229	0.362
		Right Tilt	0.118	0.275	0.393
	LTE Band 7	Left Touch	0.022	0.160	0.182
		Right Touch	0.012	0.275	0.287
		Left Tilt	0.022	0.229	0.251
		Right Tilt	0.019	0.275	0.294
	LTE Band 41	Left Touch	0.011	0.160	0.171
		Right Touch	0.007	0.275	0.282
		Left Tilt	0.009	0.229	0.237
		Right Tilt	0.006	0.275	0.281

Table 13.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.020	0.084
		Right Touch	0.089	0.055	0.144
		Left Tilt	0.032	0.002	0.034
		Right Tilt	0.026	0.023	0.048
	GPRS 850	Left Touch	0.084	0.020	0.105
		Right Touch	0.106	0.055	0.162
		Left Tilt	0.043	0.002	0.044
		Right Tilt	0.036	0.023	0.059
	GSM 1900	Left Touch	0.033	0.020	0.053
		Right Touch	0.077	0.055	0.133
		Left Tilt	0.055	0.002	0.056
		Right Tilt	0.078	0.023	0.101
	GPRS 1900	Left Touch	0.052	0.020	0.072
		Right Touch	0.119	0.055	0.174
		Left Tilt	0.071	0.002	0.072
		Right Tilt	0.116	0.023	0.138
	WCDMA 850	Left Touch	0.098	0.020	0.118
		Right Touch	0.122	0.055	0.177
		Left Tilt	0.048	0.002	0.050
		Right Tilt	0.045	0.023	0.068
	WCDMA 1700	Left Touch	0.125	0.020	0.145
		Right Touch	0.140	0.055	0.195
		Left Tilt	0.171	0.002	0.172
		Right Tilt	0.189	0.023	0.212
	WCDMA 1900	Left Touch	0.068	0.020	0.088
		Right Touch	0.177	0.055	0.232
		Left Tilt	0.080	0.002	0.081
		Right Tilt	0.171	0.023	0.194
	LTE Band 12	Left Touch	0.026	0.020	0.046
		Right Touch	0.033	0.055	0.088
		Left Tilt	0.010	0.002	0.012
		Right Tilt	0.004	0.023	0.027
	LTE Band 13	Left Touch	0.034	0.020	0.054
		Right Touch	0.050	0.055	0.106
		Left Tilt	0.015	0.002	0.017
		Right Tilt	0.021	0.023	0.043
	LTE Band 5	Left Touch	0.099	0.020	0.119
		Right Touch	0.124	0.055	0.179
		Left Tilt	0.054	0.002	0.056
		Right Tilt	0.046	0.023	0.069
	LTE Band 4	Left Touch	0.104	0.020	0.124
		Right Touch	0.127	0.055	0.182
		Left Tilt	0.153	0.002	0.155
		Right Tilt	0.167	0.023	0.189
	LTE Band 2	Left Touch	0.084	0.020	0.104
		Right Touch	0.135	0.055	0.190
		Left Tilt	0.133	0.002	0.135
		Right Tilt	0.118	0.023	0.140
	LTE Band 7	Left Touch	0.022	0.020	0.042
		Right Touch	0.012	0.055	0.067
		Left Tilt	0.022	0.002	0.024
		Right Tilt	0.019	0.023	0.042
	LTE Band 41	Left Touch	0.011	0.020	0.031
		Right Touch	0.007	0.055	0.062
		Left Tilt	0.009	0.002	0.010
		Right Tilt	0.006	0.023	0.029

Table 13.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.058	0.122
		Right Touch	0.089	0.282	0.371
		Left Tilt	0.032	0.120	0.152
		Right Tilt	0.026	0.149	0.175
	GPRS 850	Left Touch	0.084	0.058	0.142
		Right Touch	0.106	0.282	0.388
		Left Tilt	0.043	0.120	0.163
		Right Tilt	0.036	0.149	0.185
	GSM 1900	Left Touch	0.033	0.058	0.091
		Right Touch	0.077	0.282	0.359
		Left Tilt	0.055	0.120	0.175
		Right Tilt	0.078	0.149	0.227
	GPRS 1900	Left Touch	0.052	0.058	0.110
		Right Touch	0.119	0.282	0.401
		Left Tilt	0.071	0.120	0.191
		Right Tilt	0.116	0.149	0.265
	WCDMA 850	Left Touch	0.098	0.058	0.156
		Right Touch	0.122	0.282	0.404
		Left Tilt	0.048	0.120	0.168
		Right Tilt	0.045	0.149	0.194
	WCDMA 1700	Left Touch	0.125	0.058	0.183
		Right Touch	0.140	0.282	0.422
		Left Tilt	0.171	0.120	0.291
		Right Tilt	0.189	0.149	0.338
	WCDMA 1900	Left Touch	0.068	0.058	0.126
		Right Touch	0.177	0.282	0.459
		Left Tilt	0.080	0.120	0.199
		Right Tilt	0.171	0.149	0.320
	LTE Band 12	Left Touch	0.026	0.058	0.084
		Right Touch	0.033	0.282	0.315
		Left Tilt	0.010	0.120	0.130
		Right Tilt	0.004	0.149	0.153
	LTE Band 13	Left Touch	0.034	0.058	0.092
		Right Touch	0.050	0.282	0.332
		Left Tilt	0.015	0.120	0.135
		Right Tilt	0.021	0.149	0.170
	LTE Band 5	Left Touch	0.099	0.058	0.157
		Right Touch	0.124	0.282	0.406
		Left Tilt	0.054	0.120	0.174
		Right Tilt	0.046	0.149	0.195
	LTE Band 4	Left Touch	0.104	0.058	0.162
		Right Touch	0.127	0.282	0.409
		Left Tilt	0.153	0.120	0.273
		Right Tilt	0.167	0.149	0.316
	LTE Band 2	Left Touch	0.084	0.058	0.142
		Right Touch	0.135	0.282	0.417
		Left Tilt	0.133	0.120	0.253
		Right Tilt	0.118	0.149	0.267
	LTE Band 7	Left Touch	0.022	0.058	0.080
		Right Touch	0.012	0.282	0.294
		Left Tilt	0.022	0.120	0.142
		Right Tilt	0.019	0.149	0.168
	LTE Band 41	Left Touch	0.011	0.058	0.069
		Right Touch	0.007	0.282	0.289
		Left Tilt	0.009	0.120	0.129
		Right Tilt	0.006	0.149	0.155

Table 13.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.044	0.108
		Right Touch	0.089	0.218	0.307
		Left Tilt	0.032	0.030	0.062
		Right Tilt	0.026	0.122	0.148
	GPRS 850	Left Touch	0.084	0.044	0.128
		Right Touch	0.106	0.218	0.324
		Left Tilt	0.043	0.030	0.073
		Right Tilt	0.036	0.122	0.158
	GSM 1900	Left Touch	0.033	0.044	0.077
		Right Touch	0.077	0.218	0.295
		Left Tilt	0.055	0.030	0.085
		Right Tilt	0.078	0.122	0.200
	GPRS 1900	Left Touch	0.052	0.044	0.096
		Right Touch	0.119	0.218	0.337
		Left Tilt	0.071	0.030	0.101
		Right Tilt	0.116	0.122	0.238
	WCDMA 850	Left Touch	0.098	0.044	0.142
		Right Touch	0.122	0.218	0.340
		Left Tilt	0.048	0.030	0.079
		Right Tilt	0.045	0.122	0.167
	WCDMA 1700	Left Touch	0.125	0.044	0.169
		Right Touch	0.140	0.218	0.358
		Left Tilt	0.171	0.030	0.201
		Right Tilt	0.189	0.122	0.311
	WCDMA 1900	Left Touch	0.068	0.044	0.112
		Right Touch	0.177	0.218	0.395
		Left Tilt	0.080	0.030	0.110
		Right Tilt	0.171	0.122	0.293
	LTE Band 12	Left Touch	0.026	0.044	0.070
		Right Touch	0.033	0.218	0.251
		Left Tilt	0.010	0.030	0.040
		Right Tilt	0.004	0.122	0.126
	LTE Band 13	Left Touch	0.034	0.044	0.078
		Right Touch	0.050	0.218	0.268
		Left Tilt	0.015	0.030	0.046
		Right Tilt	0.021	0.122	0.143
	LTE Band 5	Left Touch	0.099	0.044	0.143
		Right Touch	0.124	0.218	0.342
		Left Tilt	0.054	0.030	0.085
		Right Tilt	0.046	0.122	0.168
	LTE Band 4	Left Touch	0.104	0.044	0.148
		Right Touch	0.127	0.218	0.345
		Left Tilt	0.153	0.030	0.184
		Right Tilt	0.167	0.122	0.289
	LTE Band 2	Left Touch	0.084	0.044	0.128
		Right Touch	0.135	0.218	0.353
		Left Tilt	0.133	0.030	0.163
		Right Tilt	0.118	0.122	0.240
	LTE Band 7	Left Touch	0.022	0.044	0.066
		Right Touch	0.012	0.218	0.230
		Left Tilt	0.022	0.030	0.052
		Right Tilt	0.019	0.122	0.141
	LTE Band 41	Left Touch	0.011	0.044	0.055
		Right Touch	0.007	0.218	0.225
		Left Tilt	0.009	0.030	0.039
		Right Tilt	0.006	0.122	0.128

Table 13.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.056	0.121
		Right Touch	0.089	0.029	0.118
		Left Tilt	0.032	0.038	0.071
		Right Tilt	0.026	0.008	0.033
	GPRS 850	Left Touch	0.084	0.056	0.141
		Right Touch	0.106	0.029	0.136
		Left Tilt	0.043	0.038	0.081
		Right Tilt	0.036	0.008	0.044
	GSM 1900	Left Touch	0.033	0.056	0.090
		Right Touch	0.077	0.029	0.107
		Left Tilt	0.055	0.038	0.093
		Right Tilt	0.078	0.008	0.086
	GPRS 1900	Left Touch	0.052	0.056	0.109
		Right Touch	0.119	0.029	0.148
		Left Tilt	0.071	0.038	0.109
		Right Tilt	0.116	0.008	0.123
	WCDMA 850	Left Touch	0.098	0.056	0.154
		Right Touch	0.122	0.029	0.151
		Left Tilt	0.048	0.038	0.087
		Right Tilt	0.045	0.008	0.053
	WCDMA 1700	Left Touch	0.125	0.056	0.181
		Right Touch	0.140	0.029	0.169
		Left Tilt	0.171	0.038	0.209
		Right Tilt	0.189	0.008	0.197
	WCDMA 1900	Left Touch	0.068	0.056	0.124
		Right Touch	0.177	0.029	0.206
		Left Tilt	0.080	0.038	0.118
		Right Tilt	0.171	0.008	0.179
	LTE Band 12	Left Touch	0.026	0.056	0.082
		Right Touch	0.033	0.029	0.062
		Left Tilt	0.010	0.038	0.049
		Right Tilt	0.004	0.008	0.012
	LTE Band 13	Left Touch	0.034	0.056	0.090
		Right Touch	0.050	0.029	0.080
		Left Tilt	0.015	0.038	0.054
		Right Tilt	0.021	0.008	0.028
	LTE Band 5	Left Touch	0.099	0.056	0.156
		Right Touch	0.124	0.029	0.153
		Left Tilt	0.054	0.038	0.093
		Right Tilt	0.046	0.008	0.054
	LTE Band 4	Left Touch	0.104	0.056	0.160
		Right Touch	0.127	0.029	0.156
		Left Tilt	0.153	0.038	0.192
		Right Tilt	0.167	0.008	0.174
	LTE Band 2	Left Touch	0.084	0.056	0.140
		Right Touch	0.135	0.029	0.164
		Left Tilt	0.133	0.038	0.171
		Right Tilt	0.118	0.008	0.125
	LTE Band 7	Left Touch	0.022	0.056	0.079
		Right Touch	0.012	0.029	0.041
		Left Tilt	0.022	0.038	0.061
		Right Tilt	0.019	0.008	0.027
	LTE Band 41	Left Touch	0.011	0.056	0.067
		Right Touch	0.007	0.029	0.036
		Left Tilt	0.009	0.038	0.047
		Right Tilt	0.006	0.008	0.014

Table 13.4.9 Simultaneous Transmission Scenario: 2G/3G/4G + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.040	0.104
		Right Touch	0.089	0.255	0.344
		Left Tilt	0.032	0.028	0.060
		Right Tilt	0.026	0.157	0.183
	GPRS 850	Left Touch	0.084	0.040	0.124
		Right Touch	0.106	0.255	0.361
		Left Tilt	0.043	0.028	0.071
		Right Tilt	0.036	0.157	0.194
	GSM 1900	Left Touch	0.033	0.040	0.073
		Right Touch	0.077	0.255	0.332
		Left Tilt	0.055	0.028	0.083
		Right Tilt	0.078	0.157	0.236
	GPRS 1900	Left Touch	0.052	0.040	0.092
		Right Touch	0.119	0.255	0.373
		Left Tilt	0.071	0.028	0.099
		Right Tilt	0.116	0.157	0.273
	WCDMA 850	Left Touch	0.098	0.040	0.138
		Right Touch	0.122	0.255	0.377
		Left Tilt	0.048	0.028	0.077
		Right Tilt	0.045	0.157	0.203
	WCDMA 1700	Left Touch	0.125	0.040	0.164
		Right Touch	0.140	0.255	0.395
		Left Tilt	0.171	0.028	0.199
		Right Tilt	0.189	0.157	0.346
	WCDMA 1900	Left Touch	0.068	0.040	0.107
		Right Touch	0.177	0.255	0.432
		Left Tilt	0.080	0.028	0.108
		Right Tilt	0.171	0.157	0.328
	LTE Band 12	Left Touch	0.026	0.040	0.065
		Right Touch	0.033	0.255	0.288
		Left Tilt	0.010	0.028	0.038
		Right Tilt	0.004	0.157	0.162
	LTE Band 13	Left Touch	0.034	0.040	0.074
		Right Touch	0.050	0.255	0.305
		Left Tilt	0.015	0.028	0.044
		Right Tilt	0.021	0.157	0.178
	LTE Band 5	Left Touch	0.099	0.040	0.139
		Right Touch	0.124	0.255	0.379
		Left Tilt	0.054	0.028	0.083
		Right Tilt	0.046	0.157	0.203
	LTE Band 4	Left Touch	0.104	0.040	0.143
		Right Touch	0.127	0.255	0.382
		Left Tilt	0.153	0.028	0.182
		Right Tilt	0.167	0.157	0.324
	LTE Band 2	Left Touch	0.084	0.040	0.124
		Right Touch	0.135	0.255	0.390
		Left Tilt	0.133	0.028	0.161
		Right Tilt	0.118	0.157	0.275
	LTE Band 7	Left Touch	0.022	0.040	0.062
		Right Touch	0.012	0.255	0.266
		Left Tilt	0.022	0.028	0.050
		Right Tilt	0.019	0.157	0.177
	LTE Band 41	Left Touch	0.011	0.040	0.050
		Right Touch	0.007	0.255	0.262
		Left Tilt	0.009	0.028	0.037
		Right Tilt	0.006	0.157	0.164

Table 13.4.10 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.054	0.118
		Right Touch	0.089	0.229	0.317
		Left Tilt	0.032	0.040	0.072
		Right Tilt	0.026	0.160	0.186
	GPRS 850	Left Touch	0.084	0.054	0.138
		Right Touch	0.106	0.229	0.335
		Left Tilt	0.043	0.040	0.083
		Right Tilt	0.036	0.160	0.196
	GSM 1900	Left Touch	0.033	0.054	0.087
		Right Touch	0.077	0.229	0.306
		Left Tilt	0.055	0.040	0.095
		Right Tilt	0.078	0.160	0.238
	GPRS 1900	Left Touch	0.052	0.054	0.106
		Right Touch	0.119	0.229	0.347
		Left Tilt	0.071	0.040	0.111
		Right Tilt	0.116	0.160	0.275
	WCDMA 850	Left Touch	0.098	0.054	0.152
		Right Touch	0.122	0.229	0.351
		Left Tilt	0.048	0.040	0.088
		Right Tilt	0.045	0.160	0.205
	WCDMA 1700	Left Touch	0.125	0.054	0.178
		Right Touch	0.140	0.229	0.368
		Left Tilt	0.171	0.040	0.210
		Right Tilt	0.189	0.160	0.349
	WCDMA 1900	Left Touch	0.068	0.054	0.121
		Right Touch	0.177	0.229	0.405
		Left Tilt	0.080	0.040	0.120
		Right Tilt	0.171	0.160	0.331
	LTE Band 12	Left Touch	0.026	0.054	0.079
		Right Touch	0.033	0.229	0.261
		Left Tilt	0.010	0.040	0.050
		Right Tilt	0.004	0.160	0.164
	LTE Band 13	Left Touch	0.034	0.054	0.088
		Right Touch	0.050	0.229	0.279
		Left Tilt	0.015	0.040	0.055
		Right Tilt	0.021	0.160	0.180
	LTE Band 5	Left Touch	0.099	0.054	0.153
		Right Touch	0.124	0.229	0.352
		Left Tilt	0.054	0.040	0.094
		Right Tilt	0.046	0.160	0.206
	LTE Band 4	Left Touch	0.104	0.054	0.157
		Right Touch	0.127	0.229	0.356
		Left Tilt	0.153	0.040	0.193
		Right Tilt	0.167	0.160	0.326
	LTE Band 2	Left Touch	0.084	0.054	0.138
		Right Touch	0.135	0.229	0.363
		Left Tilt	0.133	0.040	0.173
		Right Tilt	0.118	0.160	0.277
	LTE Band 7	Left Touch	0.022	0.054	0.076
		Right Touch	0.012	0.229	0.240
		Left Tilt	0.022	0.040	0.062
		Right Tilt	0.019	0.160	0.179
	LTE Band 41	Left Touch	0.011	0.054	0.064
		Right Touch	0.007	0.229	0.236
		Left Tilt	0.009	0.040	0.049
		Right Tilt	0.006	0.160	0.166

Table 13.4.11 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.044	0.108
		Right Touch	0.089	0.033	0.122
		Left Tilt	0.032	0.020	0.052
		Right Tilt	0.026	0.010	0.036
	GPRS 850	Left Touch	0.084	0.044	0.128
		Right Touch	0.106	0.033	0.139
		Left Tilt	0.043	0.020	0.063
		Right Tilt	0.036	0.010	0.046
	GSM 1900	Left Touch	0.033	0.044	0.077
		Right Touch	0.077	0.033	0.110
		Left Tilt	0.055	0.020	0.074
		Right Tilt	0.078	0.010	0.088
	GPRS 1900	Left Touch	0.052	0.044	0.096
		Right Touch	0.119	0.033	0.152
		Left Tilt	0.071	0.020	0.090
		Right Tilt	0.116	0.010	0.125
	WCDMA 850	Left Touch	0.098	0.044	0.141
		Right Touch	0.122	0.033	0.155
		Left Tilt	0.048	0.020	0.068
		Right Tilt	0.045	0.010	0.055
	WCDMA 1700	Left Touch	0.125	0.044	0.168
		Right Touch	0.140	0.033	0.173
		Left Tilt	0.171	0.020	0.190
		Right Tilt	0.189	0.010	0.199
	WCDMA 1900	Left Touch	0.068	0.044	0.111
		Right Touch	0.177	0.033	0.210
		Left Tilt	0.080	0.020	0.100
		Right Tilt	0.171	0.010	0.181
	LTE Band 12	Left Touch	0.026	0.044	0.069
		Right Touch	0.033	0.033	0.066
		Left Tilt	0.010	0.020	0.030
		Right Tilt	0.004	0.010	0.014
	LTE Band 13	Left Touch	0.034	0.044	0.077
		Right Touch	0.050	0.033	0.083
		Left Tilt	0.015	0.020	0.035
		Right Tilt	0.021	0.010	0.030
	LTE Band 5	Left Touch	0.099	0.044	0.143
		Right Touch	0.124	0.033	0.157
		Left Tilt	0.054	0.020	0.074
		Right Tilt	0.046	0.010	0.056
	LTE Band 4	Left Touch	0.104	0.044	0.147
		Right Touch	0.127	0.033	0.160
		Left Tilt	0.153	0.020	0.173
		Right Tilt	0.167	0.010	0.176
	LTE Band 2	Left Touch	0.084	0.044	0.128
		Right Touch	0.135	0.033	0.168
		Left Tilt	0.133	0.020	0.153
		Right Tilt	0.118	0.010	0.127
	LTE Band 7	Left Touch	0.022	0.044	0.066
		Right Touch	0.012	0.033	0.045
		Left Tilt	0.022	0.020	0.042
		Right Tilt	0.019	0.010	0.029
	LTE Band 41	Left Touch	0.011	0.044	0.054
		Right Touch	0.007	0.033	0.040
		Left Tilt	0.009	0.020	0.028
		Right Tilt	0.006	0.010	0.016

Table 13.4.12 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.061	0.125
		Right Touch	0.089	0.218	0.307
		Left Tilt	0.032	0.046	0.078
		Right Tilt	0.026	0.149	0.175
	GPRS 850	Left Touch	0.084	0.061	0.145
		Right Touch	0.106	0.218	0.324
		Left Tilt	0.043	0.046	0.089
		Right Tilt	0.036	0.149	0.185
	GSM 1900	Left Touch	0.033	0.061	0.094
		Right Touch	0.077	0.218	0.295
		Left Tilt	0.055	0.046	0.101
		Right Tilt	0.078	0.149	0.227
	GPRS 1900	Left Touch	0.052	0.061	0.113
		Right Touch	0.119	0.218	0.336
		Left Tilt	0.071	0.046	0.117
		Right Tilt	0.116	0.149	0.265
	WCDMA 850	Left Touch	0.098	0.061	0.158
		Right Touch	0.122	0.218	0.340
		Left Tilt	0.048	0.046	0.095
		Right Tilt	0.045	0.149	0.194
	WCDMA 1700	Left Touch	0.125	0.061	0.185
		Right Touch	0.140	0.218	0.358
		Left Tilt	0.171	0.046	0.217
		Right Tilt	0.189	0.149	0.338
	WCDMA 1900	Left Touch	0.068	0.061	0.128
		Right Touch	0.177	0.218	0.395
		Left Tilt	0.080	0.046	0.126
		Right Tilt	0.171	0.149	0.320
	LTE Band 12	Left Touch	0.026	0.061	0.086
		Right Touch	0.033	0.218	0.250
		Left Tilt	0.010	0.046	0.056
		Right Tilt	0.004	0.149	0.153
	LTE Band 13	Left Touch	0.034	0.061	0.095
		Right Touch	0.050	0.218	0.268
		Left Tilt	0.015	0.046	0.062
		Right Tilt	0.021	0.149	0.170
	LTE Band 5	Left Touch	0.099	0.061	0.160
		Right Touch	0.124	0.218	0.341
		Left Tilt	0.054	0.046	0.101
		Right Tilt	0.046	0.149	0.195
	LTE Band 4	Left Touch	0.104	0.061	0.164
		Right Touch	0.127	0.218	0.345
		Left Tilt	0.153	0.046	0.200
		Right Tilt	0.167	0.149	0.316
	LTE Band 2	Left Touch	0.084	0.061	0.145
		Right Touch	0.135	0.218	0.353
		Left Tilt	0.133	0.046	0.179
		Right Tilt	0.118	0.149	0.267
	LTE Band 7	Left Touch	0.022	0.061	0.083
		Right Touch	0.012	0.218	0.229
		Left Tilt	0.022	0.046	0.068
		Right Tilt	0.019	0.149	0.168
	LTE Band 41	Left Touch	0.011	0.061	0.071
		Right Touch	0.007	0.218	0.225
		Left Tilt	0.009	0.046	0.055
		Right Tilt	0.006	0.149	0.155

Table 13.4.13 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.056	0.120
		Right Touch	0.089	0.208	0.297
		Left Tilt	0.032	0.034	0.066
		Right Tilt	0.026	0.098	0.124
	GPRS 850	Left Touch	0.084	0.056	0.140
		Right Touch	0.106	0.208	0.314
		Left Tilt	0.043	0.034	0.077
		Right Tilt	0.036	0.098	0.135
	GSM 1900	Left Touch	0.033	0.056	0.089
		Right Touch	0.077	0.208	0.285
		Left Tilt	0.055	0.034	0.089
		Right Tilt	0.078	0.098	0.177
	GPRS 1900	Left Touch	0.052	0.056	0.108
		Right Touch	0.119	0.208	0.326
		Left Tilt	0.071	0.034	0.105
		Right Tilt	0.116	0.098	0.214
	WCDMA 850	Left Touch	0.098	0.056	0.154
		Right Touch	0.122	0.208	0.330
		Left Tilt	0.048	0.034	0.082
		Right Tilt	0.045	0.098	0.143
	WCDMA 1700	Left Touch	0.125	0.056	0.180
		Right Touch	0.140	0.208	0.347
		Left Tilt	0.171	0.034	0.205
		Right Tilt	0.189	0.098	0.287
	WCDMA 1900	Left Touch	0.068	0.056	0.123
		Right Touch	0.177	0.208	0.385
		Left Tilt	0.080	0.034	0.114
		Right Tilt	0.171	0.098	0.269
	LTE Band 12	Left Touch	0.026	0.056	0.081
		Right Touch	0.033	0.208	0.240
		Left Tilt	0.010	0.034	0.044
		Right Tilt	0.004	0.098	0.102
	LTE Band 13	Left Touch	0.034	0.056	0.090
		Right Touch	0.050	0.208	0.258
		Left Tilt	0.015	0.034	0.049
		Right Tilt	0.021	0.098	0.119
	LTE Band 5	Left Touch	0.099	0.056	0.155
		Right Touch	0.124	0.208	0.331
		Left Tilt	0.054	0.034	0.088
		Right Tilt	0.046	0.098	0.144
	LTE Band 4	Left Touch	0.104	0.056	0.159
		Right Touch	0.127	0.208	0.335
		Left Tilt	0.153	0.034	0.187
		Right Tilt	0.167	0.098	0.265
	LTE Band 2	Left Touch	0.084	0.056	0.140
		Right Touch	0.135	0.208	0.342
		Left Tilt	0.133	0.034	0.167
		Right Tilt	0.118	0.098	0.216
	LTE Band 7	Left Touch	0.022	0.056	0.078
		Right Touch	0.012	0.208	0.219
		Left Tilt	0.022	0.034	0.056
		Right Tilt	0.019	0.098	0.117
	LTE Band 41	Left Touch	0.011	0.056	0.066
		Right Touch	0.007	0.208	0.215
		Left Tilt	0.009	0.034	0.043
		Right Tilt	0.006	0.098	0.105

Table 13.4.14 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.076	0.140
		Right Touch	0.089	0.077	0.166
		Left Tilt	0.032	0.018	0.050
		Right Tilt	0.026	0.016	0.041
	GPRS 850	Left Touch	0.084	0.076	0.160
		Right Touch	0.106	0.077	0.183
		Left Tilt	0.043	0.018	0.061
		Right Tilt	0.036	0.016	0.052
	GSM 1900	Left Touch	0.033	0.076	0.109
		Right Touch	0.077	0.077	0.154
		Left Tilt	0.055	0.018	0.073
		Right Tilt	0.078	0.016	0.094
	GPRS 1900	Left Touch	0.052	0.076	0.128
		Right Touch	0.119	0.077	0.196
		Left Tilt	0.071	0.018	0.089
		Right Tilt	0.116	0.016	0.131
	WCDMA 850	Left Touch	0.098	0.076	0.174
		Right Touch	0.122	0.077	0.199
		Left Tilt	0.048	0.018	0.067
		Right Tilt	0.045	0.016	0.061
	WCDMA 1700	Left Touch	0.125	0.076	0.200
		Right Touch	0.140	0.077	0.217
		Left Tilt	0.171	0.018	0.189
		Right Tilt	0.189	0.016	0.205
	WCDMA 1900	Left Touch	0.068	0.076	0.143
		Right Touch	0.177	0.077	0.254
		Left Tilt	0.080	0.018	0.098
		Right Tilt	0.171	0.016	0.187
	LTE Band 12	Left Touch	0.026	0.076	0.101
		Right Touch	0.033	0.077	0.110
		Left Tilt	0.010	0.018	0.029
		Right Tilt	0.004	0.016	0.020
	LTE Band 13	Left Touch	0.034	0.076	0.110
		Right Touch	0.050	0.077	0.127
		Left Tilt	0.015	0.018	0.034
		Right Tilt	0.021	0.016	0.036
	LTE Band 5	Left Touch	0.099	0.076	0.175
		Right Touch	0.124	0.077	0.201
		Left Tilt	0.054	0.018	0.073
		Right Tilt	0.046	0.016	0.062
	LTE Band 4	Left Touch	0.104	0.076	0.179
		Right Touch	0.127	0.077	0.204
		Left Tilt	0.153	0.018	0.172
		Right Tilt	0.167	0.016	0.182
	LTE Band 2	Left Touch	0.084	0.076	0.160
		Right Touch	0.135	0.077	0.212
		Left Tilt	0.133	0.018	0.151
		Right Tilt	0.118	0.016	0.133
	LTE Band 7	Left Touch	0.022	0.076	0.098
		Right Touch	0.012	0.077	0.089
		Left Tilt	0.022	0.018	0.040
		Right Tilt	0.019	0.016	0.035
	LTE Band 41	Left Touch	0.011	0.076	0.086
		Right Touch	0.007	0.077	0.084
		Left Tilt	0.009	0.018	0.027
		Right Tilt	0.006	0.016	0.022

Table 13.4.15 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.054	0.118
		Right Touch	0.089	0.203	0.292
		Left Tilt	0.032	0.047	0.079
		Right Tilt	0.026	0.101	0.126
	GPRS 850	Left Touch	0.084	0.054	0.138
		Right Touch	0.106	0.203	0.309
		Left Tilt	0.043	0.047	0.090
		Right Tilt	0.036	0.101	0.137
	GSM 1900	Left Touch	0.033	0.054	0.087
		Right Touch	0.077	0.203	0.280
		Left Tilt	0.055	0.047	0.102
		Right Tilt	0.078	0.101	0.179
	GPRS 1900	Left Touch	0.052	0.054	0.106
		Right Touch	0.119	0.203	0.321
		Left Tilt	0.071	0.047	0.118
		Right Tilt	0.116	0.101	0.216
	WCDMA 850	Left Touch	0.098	0.054	0.151
		Right Touch	0.122	0.203	0.325
		Left Tilt	0.048	0.047	0.095
		Right Tilt	0.045	0.101	0.146
	WCDMA 1700	Left Touch	0.125	0.054	0.178
		Right Touch	0.140	0.203	0.342
		Left Tilt	0.171	0.047	0.218
		Right Tilt	0.189	0.101	0.290
	WCDMA 1900	Left Touch	0.068	0.054	0.121
		Right Touch	0.177	0.203	0.380
		Left Tilt	0.080	0.047	0.127
		Right Tilt	0.171	0.101	0.271
	LTE Band 12	Left Touch	0.026	0.054	0.079
		Right Touch	0.033	0.203	0.235
		Left Tilt	0.010	0.047	0.057
		Right Tilt	0.004	0.101	0.105
	LTE Band 13	Left Touch	0.034	0.054	0.088
		Right Touch	0.050	0.203	0.253
		Left Tilt	0.015	0.047	0.062
		Right Tilt	0.021	0.101	0.121
	LTE Band 5	Left Touch	0.099	0.054	0.153
		Right Touch	0.124	0.203	0.326
		Left Tilt	0.054	0.047	0.101
		Right Tilt	0.046	0.101	0.147
	LTE Band 4	Left Touch	0.104	0.054	0.157
		Right Touch	0.127	0.203	0.330
		Left Tilt	0.153	0.047	0.200
		Right Tilt	0.167	0.101	0.267
	LTE Band 2	Left Touch	0.084	0.054	0.138
		Right Touch	0.135	0.203	0.337
		Left Tilt	0.133	0.047	0.180
		Right Tilt	0.118	0.101	0.218
	LTE Band 7	Left Touch	0.022	0.054	0.076
		Right Touch	0.012	0.203	0.214
		Left Tilt	0.022	0.047	0.069
		Right Tilt	0.019	0.101	0.120
	LTE Band 41	Left Touch	0.011	0.054	0.064
		Right Touch	0.007	0.203	0.210
		Left Tilt	0.009	0.047	0.056
		Right Tilt	0.006	0.101	0.107

Table 13.4.16 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.064	0.090	0.154
		Right Touch	0.089	0.145	0.234
		Left Tilt	0.032	0.131	0.163
		Right Tilt	0.026	0.151	0.177
	GPRS 850	Left Touch	0.084	0.090	0.174
		Right Touch	0.106	0.145	0.251
		Left Tilt	0.043	0.131	0.173
		Right Tilt	0.036	0.151	0.187
	GSM 1900	Left Touch	0.033	0.090	0.123
		Right Touch	0.077	0.145	0.222
		Left Tilt	0.055	0.131	0.185
		Right Tilt	0.078	0.151	0.229
	GPRS 1900	Left Touch	0.052	0.090	0.142
		Right Touch	0.119	0.145	0.264
		Left Tilt	0.071	0.131	0.201
		Right Tilt	0.116	0.151	0.267
	WCDMA 850	Left Touch	0.098	0.090	0.188
		Right Touch	0.122	0.145	0.267
		Left Tilt	0.048	0.131	0.179
		Right Tilt	0.045	0.151	0.196
	WCDMA 1700	Left Touch	0.125	0.090	0.214
		Right Touch	0.140	0.145	0.285
		Left Tilt	0.171	0.131	0.301
		Right Tilt	0.189	0.151	0.340
	WCDMA 1900	Left Touch	0.068	0.090	0.157
		Right Touch	0.177	0.145	0.322
		Left Tilt	0.080	0.131	0.210
		Right Tilt	0.171	0.151	0.322
	LTE Band 12	Left Touch	0.026	0.090	0.115
		Right Touch	0.033	0.145	0.178
		Left Tilt	0.010	0.131	0.141
		Right Tilt	0.004	0.151	0.155
	LTE Band 13	Left Touch	0.034	0.090	0.124
		Right Touch	0.050	0.145	0.195
		Left Tilt	0.015	0.131	0.146
		Right Tilt	0.021	0.151	0.172
	LTE Band 5	Left Touch	0.099	0.090	0.189
		Right Touch	0.124	0.145	0.269
		Left Tilt	0.054	0.131	0.185
		Right Tilt	0.046	0.151	0.197
	LTE Band 4	Left Touch	0.104	0.090	0.193
		Right Touch	0.127	0.145	0.272
		Left Tilt	0.153	0.131	0.284
		Right Tilt	0.167	0.151	0.318
	LTE Band 2	Left Touch	0.084	0.090	0.174
		Right Touch	0.135	0.145	0.280
		Left Tilt	0.133	0.131	0.263
		Right Tilt	0.118	0.151	0.269
	LTE Band 7	Left Touch	0.022	0.090	0.112
		Right Touch	0.012	0.145	0.156
		Left Tilt	0.022	0.131	0.153
		Right Tilt	0.019	0.151	0.170
	LTE Band 41	Left Touch	0.011	0.090	0.100
		Right Touch	0.007	0.145	0.152
		Left Tilt	0.009	0.131	0.139
		Right Tilt	0.006	0.151	0.157

Table 13.4.17 Simultaneous Transmission Scenario : 2.4 GHz W-LAN Ant.1 + 5 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN Ant.2	Left Touch	0.160	0.056	0.216
		Right Touch	0.275	0.029	0.304
		Left Tilt	0.229	0.038	0.267
		Right Tilt	0.275	0.008	0.283
	5.6G W-LAN Ant.2	Left Touch	0.160	0.044	0.204
		Right Touch	0.275	0.033	0.308
		Left Tilt	0.229	0.020	0.248
		Right Tilt	0.275	0.010	0.285
	5.8G W-LAN Ant.2	Left Touch	0.160	0.076	0.236
		Right Touch	0.275	0.077	0.352
		Left Tilt	0.229	0.018	0.247
		Right Tilt	0.275	0.016	0.291

13.5 Body-Worn Simultaneous Transmission Analysis

Table 13.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.276	0.059	0.006	0.335	0.281	0.340
		Rear	0.437	0.127	0.670	0.564	1.107	1.234
	GPRS 850	Front	0.332	0.059	0.006	0.391	0.338	0.397
		Rear	0.502	0.127	0.670	0.629	1.172	1.298
	GSM 1900	Front	0.236	0.059	0.006	0.295	0.241	0.301
		Rear	0.267	0.127	0.670	0.394	0.937	1.063
	GPRS 1900	Front	0.345	0.059	0.006	0.404	0.350	0.410
		Rear	0.395	0.127	0.670	0.522	1.064	1.191
	WCDMA 850	Front	0.390	0.059	0.006	0.449	0.396	0.455
		Rear	0.640	0.127	0.670	0.766	1.309	1.436
	WCDMA 1700	Front	0.460	0.059	0.006	0.520	0.466	0.525
		Rear	0.551	0.127	0.670	0.678	1.221	1.348
	WCDMA 1900	Front	0.362	0.059	0.006	0.421	0.368	0.427
		Rear	0.477	0.127	0.670	0.604	1.146	1.273
	LTE Band 12	Front	0.112	0.059	0.006	0.171	0.117	0.177
		Rear	0.149	0.127	0.670	0.276	0.818	0.945
	LTE Band 13	Front	0.180	0.059	0.006	0.239	0.185	0.245
		Rear	0.238	0.127	0.670	0.365	0.908	1.035
	LTE Band 5	Front	0.429	0.059	0.006	0.488	0.434	0.494
		Rear	0.684	0.127	0.670	0.811	1.354	1.480
	LTE Band 4	Front	0.486	0.059	0.006	0.545	0.491	0.550
		Rear	0.539	0.127	0.670	0.666	1.209	1.336
	LTE Band 2	Front	0.318	0.059	0.006	0.378	0.324	0.383
		Rear	0.448	0.127	0.670	0.575	1.118	1.245
	LTE Band 7	Front	0.226	0.059	0.006	0.285	0.232	0.291
		Rear	0.631	0.127	0.670	0.758	1.301	1.427
	LTE Band 41	Front	0.139	0.059	0.006	0.198	0.144	0.204
		Rear	0.369	0.127	0.670	0.495	1.038	1.165

Table 13.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.276	0.059	0.012	0.335	0.288	0.347
		Rear	0.437	0.127	0.673	0.564	1.110	1.237
	GPRS 850	Front	0.332	0.059	0.012	0.391	0.344	0.403
		Rear	0.502	0.127	0.673	0.629	1.175	1.301
	GSM 1900	Front	0.236	0.059	0.012	0.295	0.248	0.307
		Rear	0.267	0.127	0.673	0.394	0.940	1.066
	GPRS 1900	Front	0.345	0.059	0.012	0.404	0.357	0.416
		Rear	0.395	0.127	0.673	0.522	1.068	1.194
	WCDMA 850	Front	0.390	0.059	0.012	0.449	0.402	0.461
		Rear	0.640	0.127	0.673	0.766	1.312	1.439
	WCDMA 1700	Front	0.460	0.059	0.012	0.520	0.473	0.532
		Rear	0.551	0.127	0.673	0.678	1.224	1.351
	WCDMA 1900	Front	0.362	0.059	0.012	0.421	0.374	0.433
		Rear	0.477	0.127	0.673	0.604	1.149	1.276
	LTE Band 12	Front	0.112	0.059	0.012	0.171	0.124	0.183
		Rear	0.149	0.127	0.673	0.276	0.821	0.948
	LTE Band 13	Front	0.180	0.059	0.012	0.239	0.192	0.251
		Rear	0.238	0.127	0.673	0.365	0.911	1.038
	LTE Band 5	Front	0.429	0.059	0.012	0.488	0.441	0.500
		Rear	0.684	0.127	0.673	0.811	1.357	1.484
	LTE Band 4	Front	0.486	0.059	0.012	0.545	0.498	0.557
		Rear	0.539	0.127	0.673	0.666	1.212	1.339
	LTE Band 2	Front	0.318	0.059	0.012	0.378	0.330	0.390
		Rear	0.448	0.127	0.673	0.575	1.121	1.248
	LTE Band 7	Front	0.226	0.059	0.012	0.285	0.238	0.298
		Rear	0.631	0.127	0.673	0.758	1.304	1.431
	LTE Band 41	Front	0.139	0.059	0.012	0.198	0.151	0.210
		Rear	0.369	0.127	0.673	0.495	1.041	1.168

Table 13.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.8 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.276	0.059	0.013	0.335	0.288	0.347
		Rear	0.437	0.127	0.595	0.564	1.032	1.159
	GPRS 850	Front	0.332	0.059	0.013	0.391	0.345	0.404
		Rear	0.502	0.127	0.595	0.629	1.097	1.223
	GSM 1900	Front	0.236	0.059	0.013	0.295	0.248	0.308
		Rear	0.267	0.127	0.595	0.394	0.862	0.988
	GPRS 1900	Front	0.345	0.059	0.013	0.404	0.357	0.417
		Rear	0.395	0.127	0.595	0.522	0.989	1.116
	WCDMA 850	Front	0.390	0.059	0.013	0.449	0.403	0.462
		Rear	0.640	0.127	0.595	0.766	1.234	1.361
	WCDMA 1700	Front	0.460	0.059	0.013	0.520	0.473	0.532
		Rear	0.551	0.127	0.595	0.678	1.146	1.273
	WCDMA 1900	Front	0.362	0.059	0.013	0.421	0.375	0.434
		Rear	0.477	0.127	0.595	0.604	1.071	1.198
	LTE Band 12	Front	0.112	0.059	0.013	0.171	0.124	0.184
		Rear	0.149	0.127	0.595	0.276	0.743	0.870
	LTE Band 13	Front	0.180	0.059	0.013	0.239	0.193	0.252
		Rear	0.238	0.127	0.595	0.365	0.833	0.960
	LTE Band 5	Front	0.429	0.059	0.013	0.488	0.442	0.501
		Rear	0.684	0.127	0.595	0.811	1.279	1.405
	LTE Band 4	Front	0.486	0.059	0.013	0.545	0.498	0.558
		Rear	0.539	0.127	0.595	0.666	1.134	1.261
	LTE Band 2	Front	0.318	0.059	0.013	0.378	0.331	0.390
		Rear	0.448	0.127	0.595	0.575	1.043	1.170
	LTE Band 7	Front	0.226	0.059	0.013	0.285	0.239	0.298
		Rear	0.631	0.127	0.595	0.758	1.226	1.352
	LTE Band 41	Front	0.139	0.059	0.013	0.198	0.151	0.211
		Rear	0.369	0.127	0.595	0.495	0.963	1.090

Table 13.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.059	0.335
		Rear	0.437	0.127	0.564
	GPRS 850	Front	0.332	0.059	0.391
		Rear	0.502	0.127	0.629
	GSM 1900	Front	0.236	0.059	0.295
		Rear	0.267	0.127	0.394
	GPRS 1900	Front	0.345	0.059	0.404
		Rear	0.395	0.127	0.522
	WCDMA 850	Front	0.390	0.059	0.449
		Rear	0.640	0.127	0.766
	WCDMA 1700	Front	0.460	0.059	0.520
		Rear	0.551	0.127	0.678
	WCDMA 1900	Front	0.362	0.059	0.421
		Rear	0.477	0.127	0.604
	LTE Band 12	Front	0.112	0.059	0.171
		Rear	0.149	0.127	0.276
	LTE Band 13	Front	0.180	0.059	0.239
		Rear	0.238	0.127	0.365
	LTE Band 5	Front	0.429	0.059	0.488
		Rear	0.684	0.127	0.811
	LTE Band 4	Front	0.486	0.059	0.545
		Rear	0.539	0.127	0.666
	LTE Band 2	Front	0.318	0.059	0.378
		Rear	0.448	0.127	0.575
	LTE Band 7	Front	0.226	0.059	0.285
		Rear	0.631	0.127	0.758
	LTE Band 41	Front	0.139	0.059	0.198
		Rear	0.369	0.127	0.495

Table 13.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.015	0.291
		Rear	0.437	0.186	0.624
	GPRS 850	Front	0.332	0.015	0.347
		Rear	0.502	0.186	0.688
	GSM 1900	Front	0.236	0.015	0.251
		Rear	0.267	0.186	0.453
	GPRS 1900	Front	0.345	0.015	0.360
		Rear	0.395	0.186	0.581
	WCDMA 850	Front	0.390	0.015	0.405
		Rear	0.640	0.186	0.826
	WCDMA 1700	Front	0.460	0.015	0.476
		Rear	0.551	0.186	0.738
	WCDMA 1900	Front	0.362	0.015	0.377
		Rear	0.477	0.186	0.663
	LTE Band 12	Front	0.112	0.015	0.127
		Rear	0.149	0.186	0.335
	LTE Band 13	Front	0.180	0.015	0.195
		Rear	0.238	0.186	0.425
	LTE Band 5	Front	0.429	0.015	0.444
		Rear	0.684	0.186	0.870
	LTE Band 4	Front	0.486	0.015	0.501
		Rear	0.539	0.186	0.726
	LTE Band 2	Front	0.318	0.015	0.334
		Rear	0.448	0.186	0.635
	LTE Band 7	Front	0.226	0.015	0.241
		Rear	0.631	0.186	0.817
	LTE Band 41	Front	0.139	0.015	0.154
		Rear	0.369	0.186	0.555

Table 13.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.043	0.319
		Rear	0.437	0.243	0.680
	GPRS 850	Front	0.332	0.043	0.375
		Rear	0.502	0.243	0.745
	GSM 1900	Front	0.236	0.043	0.279
		Rear	0.267	0.243	0.510
	GPRS 1900	Front	0.345	0.043	0.388
		Rear	0.395	0.243	0.638
	WCDMA 850	Front	0.390	0.043	0.433
		Rear	0.640	0.243	0.883
	WCDMA 1700	Front	0.460	0.043	0.503
		Rear	0.551	0.243	0.794
	WCDMA 1900	Front	0.362	0.043	0.405
		Rear	0.477	0.243	0.720
	LTE Band 12	Front	0.112	0.043	0.155
		Rear	0.149	0.243	0.392
	LTE Band 13	Front	0.180	0.043	0.223
		Rear	0.238	0.243	0.481
	LTE Band 5	Front	0.429	0.043	0.472
		Rear	0.684	0.243	0.927
	LTE Band 4	Front	0.486	0.043	0.529
		Rear	0.539	0.243	0.782
	LTE Band 2	Front	0.318	0.043	0.361
		Rear	0.448	0.243	0.691
	LTE Band 7	Front	0.226	0.043	0.269
		Rear	0.631	0.243	0.874
	LTE Band 41	Front	0.139	0.043	0.182
		Rear	0.369	0.243	0.612

Table 13.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.020	0.296
		Rear	0.437	0.043	0.480
	GPRS 850	Front	0.332	0.020	0.352
		Rear	0.502	0.043	0.545
	GSM 1900	Front	0.236	0.020	0.256
		Rear	0.267	0.043	0.310
	GPRS 1900	Front	0.345	0.020	0.365
		Rear	0.395	0.043	0.438
	WCDMA 850	Front	0.390	0.020	0.410
		Rear	0.640	0.043	0.682
	WCDMA 1700	Front	0.460	0.020	0.481
		Rear	0.551	0.043	0.594
	WCDMA 1900	Front	0.362	0.020	0.382
		Rear	0.477	0.043	0.520
	LTE Band 12	Front	0.112	0.020	0.132
		Rear	0.149	0.043	0.192
	LTE Band 13	Front	0.180	0.020	0.200
		Rear	0.238	0.043	0.281
	LTE Band 5	Front	0.429	0.020	0.449
		Rear	0.684	0.043	0.727
	LTE Band 4	Front	0.486	0.020	0.506
		Rear	0.539	0.043	0.582
	LTE Band 2	Front	0.318	0.020	0.339
		Rear	0.448	0.043	0.491
	LTE Band 7	Front	0.226	0.020	0.246
		Rear	0.631	0.043	0.674
	LTE Band 41	Front	0.139	0.020	0.159
		Rear	0.369	0.043	0.411

Table 13.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.006	0.281
		Rear	0.437	0.670	1.107
	GPRS 850	Front	0.332	0.006	0.338
		Rear	0.502	0.670	1.172
	GSM 1900	Front	0.236	0.006	0.241
		Rear	0.267	0.670	0.937
	GPRS 1900	Front	0.345	0.006	0.350
		Rear	0.395	0.670	1.064
	WCDMA 850	Front	0.390	0.006	0.396
		Rear	0.640	0.670	1.309
	WCDMA 1700	Front	0.460	0.006	0.466
		Rear	0.551	0.670	1.221
	WCDMA 1900	Front	0.362	0.006	0.368
		Rear	0.477	0.670	1.146
	LTE Band 12	Front	0.112	0.006	0.117
		Rear	0.149	0.670	0.818
	LTE Band 13	Front	0.180	0.006	0.185
		Rear	0.238	0.670	0.908
	LTE Band 5	Front	0.429	0.006	0.434
		Rear	0.684	0.670	1.354
	LTE Band 4	Front	0.486	0.006	0.491
		Rear	0.539	0.670	1.209
	LTE Band 2	Front	0.318	0.006	0.324
		Rear	0.448	0.670	1.118
	LTE Band 7	Front	0.226	0.006	0.232
		Rear	0.631	0.670	1.301
	LTE Band 41	Front	0.139	0.006	0.144
		Rear	0.369	0.670	1.038

Table 13.5.9 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.037	0.313
		Rear	0.437	0.758	1.195
	GPRS 850	Front	0.332	0.037	0.369
		Rear	0.502	0.758	1.260
	GSM 1900	Front	0.236	0.037	0.273
		Rear	0.267	0.758	1.025
	GPRS 1900	Front	0.345	0.037	0.382
		Rear	0.395	0.758	1.153
	WCDMA 850	Front	0.390	0.037	0.427
		Rear	0.640	0.758	1.398
	WCDMA 1700	Front	0.460	0.037	0.498
		Rear	0.551	0.758	1.309
	WCDMA 1900	Front	0.362	0.037	0.399
		Rear	0.477	0.758	1.235
	LTE Band 12	Front	0.112	0.037	0.149
		Rear	0.149	0.758	0.907
	LTE Band 13	Front	0.180	0.037	0.217
		Rear	0.238	0.758	0.996
	LTE Band 5	Front	0.429	0.037	0.466
		Rear	0.684	0.758	1.442
	LTE Band 4	Front	0.486	0.037	0.523
		Rear	0.539	0.758	1.297
	LTE Band 2	Front	0.318	0.037	0.356
		Rear	0.448	0.758	1.206
	LTE Band 7	Front	0.226	0.037	0.263
		Rear	0.631	0.758	1.389
	LTE Band 41	Front	0.139	0.037	0.176
		Rear	0.369	0.758	1.126

Table 13.5.10 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.041	0.317
		Rear	0.437	0.060	0.497
	GPRS 850	Front	0.332	0.041	0.373
		Rear	0.502	0.060	0.562
	GSM 1900	Front	0.236	0.041	0.277
		Rear	0.267	0.060	0.327
	GPRS 1900	Front	0.345	0.041	0.386
		Rear	0.395	0.060	0.455
	WCDMA 850	Front	0.390	0.041	0.431
		Rear	0.640	0.060	0.700
	WCDMA 1700	Front	0.460	0.041	0.502
		Rear	0.551	0.060	0.611
	WCDMA 1900	Front	0.362	0.041	0.403
		Rear	0.477	0.060	0.537
	LTE Band 12	Front	0.112	0.041	0.153
		Rear	0.149	0.060	0.209
	LTE Band 13	Front	0.180	0.041	0.221
		Rear	0.238	0.060	0.298
	LTE Band 5	Front	0.429	0.041	0.470
		Rear	0.684	0.060	0.744
	LTE Band 4	Front	0.486	0.041	0.527
		Rear	0.539	0.060	0.599
	LTE Band 2	Front	0.318	0.041	0.360
		Rear	0.448	0.060	0.508
	LTE Band 7	Front	0.226	0.041	0.267
		Rear	0.631	0.060	0.691
	LTE Band 41	Front	0.139	0.041	0.180
		Rear	0.369	0.060	0.428

Table 13.5.11 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.012	0.288
		Rear	0.437	0.673	1.110
	GPRS 850	Front	0.332	0.012	0.344
		Rear	0.502	0.673	1.175
	GSM 1900	Front	0.236	0.012	0.248
		Rear	0.267	0.673	0.940
	GPRS 1900	Front	0.345	0.012	0.357
		Rear	0.395	0.673	1.068
	WCDMA 850	Front	0.390	0.012	0.402
		Rear	0.640	0.673	1.312
	WCDMA 1700	Front	0.460	0.012	0.473
		Rear	0.551	0.673	1.224
	WCDMA 1900	Front	0.362	0.012	0.374
		Rear	0.477	0.673	1.149
	LTE Band 12	Front	0.112	0.012	0.124
		Rear	0.149	0.673	0.821
	LTE Band 13	Front	0.180	0.012	0.192
		Rear	0.238	0.673	0.911
	LTE Band 5	Front	0.429	0.012	0.441
		Rear	0.684	0.673	1.357
	LTE Band 4	Front	0.486	0.012	0.498
		Rear	0.539	0.673	1.212
	LTE Band 2	Front	0.318	0.012	0.330
		Rear	0.448	0.673	1.121
	LTE Band 7	Front	0.226	0.012	0.238
		Rear	0.631	0.673	1.304
	LTE Band 41	Front	0.139	0.012	0.151
		Rear	0.369	0.673	1.041

Table 13.5.12 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.036	0.311
		Rear	0.437	0.679	1.117
	GPRS 850	Front	0.332	0.036	0.368
		Rear	0.502	0.679	1.181
	GSM 1900	Front	0.236	0.036	0.271
		Rear	0.267	0.679	0.946
	GPRS 1900	Front	0.345	0.036	0.380
		Rear	0.395	0.679	1.074
	WCDMA 850	Front	0.390	0.036	0.426
		Rear	0.640	0.679	1.319
	WCDMA 1700	Front	0.460	0.036	0.496
		Rear	0.551	0.679	1.231
	WCDMA 1900	Front	0.362	0.036	0.398
		Rear	0.477	0.679	1.156
	LTE Band 12	Front	0.112	0.036	0.147
		Rear	0.149	0.679	0.828
	LTE Band 13	Front	0.180	0.036	0.216
		Rear	0.238	0.679	0.918
	LTE Band 5	Front	0.429	0.036	0.465
		Rear	0.684	0.679	1.363
	LTE Band 4	Front	0.486	0.036	0.521
		Rear	0.539	0.679	1.219
	LTE Band 2	Front	0.318	0.036	0.354
		Rear	0.448	0.679	1.128
	LTE Band 7	Front	0.226	0.036	0.262
		Rear	0.631	0.679	1.310
	LTE Band 41	Front	0.139	0.036	0.174
		Rear	0.369	0.679	1.048

Table 13.5.13 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.027	0.302
		Rear	0.437	0.036	0.474
	GPRS 850	Front	0.332	0.027	0.359
		Rear	0.502	0.036	0.538
	GSM 1900	Front	0.236	0.027	0.263
		Rear	0.267	0.036	0.303
	GPRS 1900	Front	0.345	0.027	0.371
		Rear	0.395	0.036	0.431
	WCDMA 850	Front	0.390	0.027	0.417
		Rear	0.640	0.036	0.676
	WCDMA 1700	Front	0.460	0.027	0.487
		Rear	0.551	0.036	0.588
	WCDMA 1900	Front	0.362	0.027	0.389
		Rear	0.477	0.036	0.513
	LTE Band 12	Front	0.112	0.027	0.139
		Rear	0.149	0.036	0.185
	LTE Band 13	Front	0.180	0.027	0.207
		Rear	0.238	0.036	0.275
	LTE Band 5	Front	0.429	0.027	0.456
		Rear	0.684	0.036	0.720
	LTE Band 4	Front	0.486	0.027	0.512
		Rear	0.539	0.036	0.576
	LTE Band 2	Front	0.318	0.027	0.345
		Rear	0.448	0.036	0.485
	LTE Band 7	Front	0.226	0.027	0.253
		Rear	0.631	0.036	0.667
	LTE Band 41	Front	0.139	0.027	0.165
		Rear	0.369	0.036	0.405

Table 13.5.14 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.013	0.288
		Rear	0.437	0.595	1.032
	GPRS 850	Front	0.332	0.013	0.345
		Rear	0.502	0.595	1.097
	GSM 1900	Front	0.236	0.013	0.248
		Rear	0.267	0.595	0.862
	GPRS 1900	Front	0.345	0.013	0.357
		Rear	0.395	0.595	0.989
	WCDMA 850	Front	0.390	0.013	0.403
		Rear	0.640	0.595	1.234
	WCDMA 1700	Front	0.460	0.013	0.473
		Rear	0.551	0.595	1.146
	WCDMA 1900	Front	0.362	0.013	0.375
		Rear	0.477	0.595	1.071
	LTE Band 12	Front	0.112	0.013	0.124
		Rear	0.149	0.595	0.743
	LTE Band 13	Front	0.180	0.013	0.193
		Rear	0.238	0.595	0.833
	LTE Band 5	Front	0.429	0.013	0.442
		Rear	0.684	0.595	1.279
	LTE Band 4	Front	0.486	0.013	0.498
		Rear	0.539	0.595	1.134
	LTE Band 2	Front	0.318	0.013	0.331
		Rear	0.448	0.595	1.043
	LTE Band 7	Front	0.226	0.013	0.239
		Rear	0.631	0.595	1.226
	LTE Band 41	Front	0.139	0.013	0.151
		Rear	0.369	0.595	0.963

Table 13.5.15 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.020	0.295
		Rear	0.437	0.616	1.053
	GPRS 850	Front	0.332	0.020	0.352
		Rear	0.502	0.616	1.117
	GSM 1900	Front	0.236	0.020	0.255
		Rear	0.267	0.616	0.882
	GPRS 1900	Front	0.345	0.020	0.364
		Rear	0.395	0.616	1.010
	WCDMA 850	Front	0.390	0.020	0.410
		Rear	0.640	0.616	1.255
	WCDMA 1700	Front	0.460	0.020	0.480
		Rear	0.551	0.616	1.167
	WCDMA 1900	Front	0.362	0.020	0.382
		Rear	0.477	0.616	1.092
	LTE Band 12	Front	0.112	0.020	0.131
		Rear	0.149	0.616	0.764
	LTE Band 13	Front	0.180	0.020	0.200
		Rear	0.238	0.616	0.854
	LTE Band 5	Front	0.429	0.020	0.449
		Rear	0.684	0.616	1.299
	LTE Band 4	Front	0.486	0.020	0.505
		Rear	0.539	0.616	1.155
	LTE Band 2	Front	0.318	0.020	0.338
		Rear	0.448	0.616	1.064
	LTE Band 7	Front	0.226	0.020	0.246
		Rear	0.631	0.616	1.247
	LTE Band 41	Front	0.139	0.020	0.158
		Rear	0.369	0.616	0.984

Table 13.5.16 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.276	0.037	0.312
		Rear	0.437	0.069	0.507
	GPRS 850	Front	0.332	0.037	0.369
		Rear	0.502	0.069	0.571
	GSM 1900	Front	0.236	0.037	0.273
		Rear	0.267	0.069	0.336
	GPRS 1900	Front	0.345	0.037	0.381
		Rear	0.395	0.069	0.464
	WCDMA 850	Front	0.390	0.037	0.427
		Rear	0.640	0.069	0.709
	WCDMA 1700	Front	0.460	0.037	0.497
		Rear	0.551	0.069	0.621
	WCDMA 1900	Front	0.362	0.037	0.399
		Rear	0.477	0.069	0.546
	LTE Band 12	Front	0.112	0.037	0.149
		Rear	0.149	0.069	0.218
	LTE Band 13	Front	0.180	0.037	0.217
		Rear	0.238	0.069	0.308
	LTE Band 5	Front	0.429	0.037	0.466
		Rear	0.684	0.069	0.753
	LTE Band 4	Front	0.486	0.037	0.522
		Rear	0.539	0.069	0.609
	LTE Band 2	Front	0.318	0.037	0.355
		Rear	0.448	0.069	0.518
	LTE Band 7	Front	0.226	0.037	0.263
		Rear	0.631	0.069	0.700
	LTE Band 41	Front	0.139	0.037	0.175
		Rear	0.369	0.069	0.438

Table 13.5.17 Simultaneous Transmission Scenario : 2.4 GHz Ant.1 + 5 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN Ant.2	Front	0.059	0.006	0.065
		Rear	0.127	0.670	0.796
	5.6G W-LAN Ant.2	Front	0.059	0.012	0.071
		Rear	0.127	0.673	0.800
	5.8G W-LAN Ant.2	Front	0.059	0.013	0.072
		Rear	0.127	0.595	0.721

13.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

Table 13.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.2 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.151	-	-	0.151	0.151	0.151
		Front	0.332	0.059	0.003	0.391	0.335	0.395
		Rear	0.502	0.127	0.575	0.629	1.077	1.203
		Right	0.196	-	-	0.196	0.196	0.196
		Left	0.059	0.053	0.168	0.113	0.227	0.280
	GPRS 1900	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.474	-	-	0.474	0.474	0.474
		Front	0.345	0.059	0.003	0.404	0.348	0.407
		Rear	0.395	0.127	0.575	0.522	0.970	1.096
		Right	-	-	-	-	-	-
		Left	0.218	0.053	0.168	0.271	0.386	0.439
	WCDMA 850	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.177	-	-	0.177	0.177	0.177
		Front	0.390	0.059	0.003	0.449	0.393	0.453
		Rear	0.640	0.127	0.575	0.766	1.214	1.341
		Right	0.256	-	-	0.256	0.256	0.256
		Left	0.070	0.053	0.168	0.124	0.238	0.292
	WCDMA 1700	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.734	0.000	0.000	0.734	0.734	0.734
		Front	0.460	0.059	0.003	0.520	0.464	0.523
		Rear	0.551	0.127	0.575	0.678	1.126	1.253
		Right	-	0.000	0.000	-	-	-
		Left	0.376	0.053	0.168	0.429	0.544	0.597
	WCDMA 1900	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.585	-	-	0.585	0.585	0.585
		Front	0.362	0.059	0.003	0.421	0.365	0.425
		Rear	0.477	0.127	0.575	0.604	1.051	1.178
		Right	-	-	-	-	-	-
		Left	0.332	0.053	0.168	0.386	0.500	0.554
	LTE Band 12	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.036	-	-	0.036	0.036	0.036
		Front	0.112	0.059	0.003	0.171	0.115	0.174
		Rear	0.149	0.127	0.575	0.276	0.723	0.850
		Right	0.041	-	-	0.041	0.041	0.041
		Left	0.043	0.053	0.168	0.096	0.211	0.264
	LTE Band 13	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.071	-	-	0.071	0.071	0.071
		Front	0.180	0.059	0.003	0.239	0.183	0.242
		Rear	0.238	0.127	0.575	0.365	0.813	0.940
		Right	0.120	-	-	0.120	0.120	0.120
		Left	0.096	0.053	0.168	0.149	0.264	0.317
	LTE Band 5	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.200	0.000	0.000	0.200	0.200	0.200
		Front	0.429	0.059	0.003	0.488	0.432	0.492
		Rear	0.684	0.127	0.575	0.811	1.259	1.385
		Right	0.284	0.000	0.000	0.284	0.284	0.284
		Left	0.102	0.053	0.168	0.156	0.270	0.324
	LTE Band 4	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.602	-	-	0.602	0.602	0.602
		Front	0.486	0.059	0.003	0.545	0.489	0.548
		Rear	0.539	0.127	0.575	0.666	1.114	1.241
		Right	-	-	-	-	-	-
		Left	0.171	0.053	0.168	0.224	0.339	0.392
	LTE Band 2	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.573	-	-	0.573	0.573	0.573
		Front	0.318	0.059	0.003	0.378	0.322	0.381
		Rear	0.448	0.127	0.575	0.575	1.023	1.150
		Right	-	-	-	-	-	-
		Left	0.271	0.053	0.168	0.324	0.439	0.492
	LTE Band 7	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.563	-	-	0.563	0.563	0.563
		Front	0.226	0.059	0.003	0.285	0.230	0.289
		Rear	0.631	0.127	0.575	0.758	1.206	1.332
		Right	0.039	-	-	0.039	0.039	0.039
		Left	0.047	0.053	0.168	0.100	0.214	0.268
	LTE Band 41	Top	-	0.094	0.009	0.094	0.009	0.103
		Bottom	0.330	-	-	0.330	0.330	0.330
		Front	0.139	0.059	0.003	0.198	0.142	0.201
		Rear	0.369	0.127	0.575	0.495	0.943	1.070
		Right	0.011	-	-	0.011	0.011	0.011
		Left	0.025	0.053	0.168	0.079	0.193	0.247

Table 13.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 + 5.8 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.151	-	-	0.151	0.151	0.151
		Front	0.332	0.059	0.019	0.391	0.351	0.410
		Rear	0.502	0.127	0.625	0.629	1.127	1.254
		Right	0.196	-	-	0.196	0.196	0.196
		Left	0.059	0.053	0.160	0.113	0.219	0.272
	GPRS 1900	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.474	-	-	0.474	0.474	0.474
		Front	0.345	0.059	0.019	0.404	0.364	0.423
		Rear	0.395	0.127	0.625	0.522	1.020	1.147
		Right	-	-	-	-	-	-
		Left	0.218	0.053	0.160	0.271	0.378	0.431
	WCDMA 850	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.177	-	-	0.177	0.177	0.177
		Front	0.390	0.059	0.019	0.449	0.409	0.468
		Rear	0.640	0.127	0.625	0.766	1.265	1.391
		Right	0.256	-	-	0.256	0.256	0.256
		Left	0.070	0.053	0.160	0.124	0.230	0.284
	WCDMA 1700	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.734	-	-	0.734	0.734	0.734
		Front	0.460	0.059	0.019	0.520	0.479	0.539
		Rear	0.551	0.127	0.625	0.678	1.176	1.303
		Right	-	-	-	-	-	-
		Left	0.376	0.053	0.160	0.429	0.536	0.589
	WCDMA 1900	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.585	-	-	0.585	0.585	0.585
		Front	0.362	0.059	0.019	0.421	0.381	0.440
		Rear	0.477	0.127	0.625	0.604	1.102	1.229
		Right	-	-	-	-	-	-
		Left	0.332	0.053	0.160	0.386	0.492	0.546
	LTE Band 12	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.036	-	-	0.036	0.036	0.036
		Front	0.112	0.059	0.019	0.171	0.131	0.190
		Rear	0.149	0.127	0.625	0.276	0.774	0.901
		Right	0.041	-	-	0.041	0.041	0.041
		Left	0.043	0.053	0.160	0.096	0.203	0.256
	LTE Band 13	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.071	-	-	0.071	0.071	0.071
		Front	0.180	0.059	0.019	0.239	0.199	0.258
		Rear	0.238	0.127	0.625	0.365	0.864	0.990
		Right	0.120	-	-	0.120	0.120	0.120
		Left	0.096	0.053	0.160	0.149	0.256	0.309
	LTE Band 5	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.200	-	-	0.200	0.200	0.200
		Front	0.429	0.059	0.019	0.488	0.448	0.507
		Rear	0.684	0.127	0.625	0.811	1.309	1.436
		Right	0.284	-	-	0.284	0.284	0.284
		Left	0.102	0.053	0.160	0.156	0.262	0.316
	LTE Band 4	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.602	-	-	0.602	0.602	0.602
		Front	0.486	0.059	0.019	0.545	0.505	0.564
		Rear	0.539	0.127	0.625	0.666	1.165	1.291
		Right	-	-	-	-	-	-
		Left	0.171	0.053	0.160	0.224	0.331	0.384
	LTE Band 2	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.573	-	-	0.573	0.573	0.573
		Front	0.318	0.059	0.019	0.378	0.337	0.397
		Rear	0.448	0.127	0.625	0.575	1.073	1.200
		Right	-	-	-	-	-	-
		Left	0.271	0.053	0.160	0.324	0.431	0.484
	LTE Band 7	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.563	-	-	0.563	0.563	0.563
		Front	0.226	0.059	0.019	0.285	0.245	0.304
		Rear	0.631	0.127	0.625	0.758	1.256	1.383
		Right	0.039	-	-	0.039	0.039	0.039
		Left	0.047	0.053	0.160	0.100	0.206	0.260
	LTE Band 41	Top	-	0.094	0.011	0.094	0.011	0.105
		Bottom	0.330	-	-	0.330	0.330	0.330
		Front	0.139	0.059	0.019	0.198	0.158	0.217
		Rear	0.369	0.127	0.625	0.495	0.994	1.120
		Right	0.011	-	-	0.011	0.011	0.011
		Left	0.025	0.053	0.160	0.079	0.185	0.239

Table 13.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.094	0.094
		Bottom	0.151	-	0.151
		Front	0.332	0.059	0.391
		Rear	0.502	0.127	0.629
		Right	0.196	-	0.196
		Left	0.059	0.053	0.113
	GPRS 1900	Top	-	0.094	0.094
		Bottom	0.474	-	0.474
		Front	0.345	0.059	0.404
		Rear	0.395	0.127	0.522
		Right	-	-	-
		Left	0.218	0.053	0.271
	WCDMA 850	Top	-	0.094	0.094
		Bottom	0.177	-	0.177
		Front	0.390	0.059	0.449
		Rear	0.640	0.127	0.766
		Right	0.256	-	0.256
		Left	0.070	0.053	0.124
	WCDMA 1700	Top	-	0.094	0.094
		Bottom	0.734	-	0.734
		Front	0.460	0.059	0.520
		Rear	0.551	0.127	0.678
		Right	-	-	-
		Left	0.376	0.053	0.429
	WCDMA 1900	Top	-	0.094	0.094
		Bottom	0.585	-	0.585
		Front	0.362	0.059	0.421
		Rear	0.477	0.127	0.604
		Right	-	-	-
		Left	0.332	0.053	0.386
	LTE Band 12	Top	-	0.094	0.094
		Bottom	0.036	0.000	0.036
		Front	0.112	0.059	0.171
		Rear	0.149	0.127	0.276
		Right	0.041	-	0.041
		Left	0.043	0.053	0.096
	LTE Band 13	Top	-	0.094	0.094
		Bottom	0.071	-	0.071
		Front	0.180	0.059	0.239
		Rear	0.238	0.127	0.365
		Right	0.120	-	0.120
		Left	0.096	0.053	0.149
	LTE Band 5	Top	-	0.094	0.094
		Bottom	0.200	-	0.200
		Front	0.429	0.059	0.488
		Rear	0.684	0.127	0.811
		Right	0.284	-	0.284
		Left	0.102	0.053	0.156
	LTE Band 4	Top	-	0.094	0.094
		Bottom	0.602	-	0.602
		Front	0.486	0.059	0.545
		Rear	0.539	0.127	0.666
		Right	-	-	-
		Left	0.171	0.053	0.224
	LTE Band 2	Top	-	0.094	0.094
		Bottom	0.573	-	0.573
		Front	0.318	0.059	0.378
		Rear	0.448	0.127	0.575
		Right	-	-	-
		Left	0.271	0.053	0.324
	LTE Band 7	Top	-	0.094	0.094
		Bottom	0.563	-	0.563
		Front	0.226	0.059	0.285
		Rear	0.631	0.127	0.758
		Right	0.039	-	0.039
		Left	0.047	0.053	0.100
	LTE Band 41	Top	-	0.094	0.094
		Bottom	0.330	-	0.330
		Front	0.139	0.059	0.198
		Rear	0.369	0.127	0.495
		Right	0.011	-	0.011
		Left	0.025	0.053	0.079

Table 13.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.012	0.012
		Bottom	0.151	-	0.151
		Front	0.332	0.015	0.347
		Rear	0.502	0.186	0.688
		Right	0.196	-	0.196
		Left	0.059	0.068	0.127
	GPRS 1900	Top	-	0.012	0.012
		Bottom	0.474	-	0.474
		Front	0.345	0.015	0.360
		Rear	0.395	0.186	0.581
		Right	-	-	-
		Left	0.218	0.068	0.286
	WCDMA 850	Top	-	0.012	0.012
		Bottom	0.177	-	0.177
		Front	0.390	0.015	0.405
		Rear	0.640	0.186	0.826
		Right	0.256	-	0.256
		Left	0.070	0.068	0.138
	WCDMA 1700	Top	-	0.012	0.012
		Bottom	0.734	-	0.734
		Front	0.460	0.015	0.476
		Rear	0.551	0.186	0.738
		Right	-	-	-
		Left	0.376	0.068	0.444
	WCDMA 1900	Top	-	0.012	0.012
		Bottom	0.585	-	0.585
		Front	0.362	0.015	0.377
		Rear	0.477	0.186	0.663
		Right	-	-	-
		Left	0.332	0.068	0.400
	LTE Band 12	Top	-	0.012	0.012
		Bottom	0.036	-	0.036
		Front	0.112	0.015	0.127
		Rear	0.149	0.186	0.335
		Right	0.041	-	0.041
		Left	0.043	0.068	0.111
	LTE Band 13	Top	-	0.012	0.012
		Bottom	0.071	-	0.071
		Front	0.180	0.015	0.195
		Rear	0.238	0.186	0.425
		Right	0.120	-	0.120
		Left	0.096	0.068	0.164
	LTE Band 5	Top	-	0.012	0.012
		Bottom	0.200	-	0.200
		Front	0.429	0.015	0.444
		Rear	0.684	0.186	0.870
		Right	0.284	-	0.284
		Left	0.102	0.068	0.170
	LTE Band 4	Top	-	0.012	0.012
		Bottom	0.602	-	0.602
		Front	0.486	0.015	0.501
		Rear	0.539	0.186	0.726
		Right	-	-	-
		Left	0.171	0.068	0.239
	LTE Band 2	Top	-	0.012	0.012
		Bottom	0.573	-	0.573
		Front	0.318	0.015	0.334
		Rear	0.448	0.186	0.635
		Right	-	-	-
		Left	0.271	0.068	0.339
	LTE Band 7	Top	-	0.012	0.012
		Bottom	0.563	-	0.563
		Front	0.226	0.015	0.241
		Rear	0.631	0.186	0.817
		Right	0.039	-	0.039
		Left	0.047	0.068	0.114
	LTE Band 41	Top	-	0.012	0.012
		Bottom	0.330	-	0.330
		Front	0.139	0.015	0.154
		Rear	0.369	0.186	0.555
		Right	0.011	-	0.011
		Left	0.025	0.068	0.093

Table 13.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.065	0.065
		Bottom	0.151	-	0.151
		Front	0.332	0.043	0.375
		Rear	0.502	0.243	0.745
		Right	0.196	-	0.196
		Left	0.059	0.088	0.147
	GPRS 1900	Top	-	0.065	0.065
		Bottom	0.474	-	0.474
		Front	0.345	0.043	0.388
		Rear	0.395	0.243	0.638
		Right	-	-	-
		Left	0.218	0.088	0.306
	WCDMA 850	Top	-	0.065	0.065
		Bottom	0.177	-	0.177
		Front	0.390	0.043	0.433
		Rear	0.640	0.243	0.883
		Right	0.256	-	0.256
		Left	0.070	0.088	0.158
	WCDMA 1700	Top	-	0.065	0.065
		Bottom	0.734	-	0.734
		Front	0.460	0.043	0.503
		Rear	0.551	0.243	0.794
		Right	-	-	-
		Left	0.376	0.088	0.464
	WCDMA 1900	Top	-	0.065	0.065
		Bottom	0.585	-	0.585
		Front	0.362	0.043	0.405
		Rear	0.477	0.243	0.720
		Right	-	-	-
		Left	0.332	0.088	0.420
	LTE Band 12	Top	-	0.065	0.065
		Bottom	0.036	-	0.036
		Front	0.112	0.043	0.155
		Rear	0.149	0.243	0.392
		Right	0.041	-	0.041
		Left	0.043	0.088	0.131
	LTE Band 13	Top	-	0.065	0.065
		Bottom	0.071	-	0.071
		Front	0.180	0.043	0.223
		Rear	0.238	0.243	0.481
		Right	0.120	-	0.120
		Left	0.096	0.088	0.184
	LTE Band 5	Top	-	0.065	0.065
		Bottom	0.200	-	0.200
		Front	0.429	0.043	0.472
		Rear	0.684	0.243	0.927
		Right	0.284	-	0.284
		Left	0.102	0.088	0.190
	LTE Band 4	Top	-	0.065	0.065
		Bottom	0.602	-	0.602
		Front	0.486	0.043	0.529
		Rear	0.539	0.243	0.782
		Right	-	-	-
		Left	0.171	0.088	0.259
	LTE Band 2	Top	-	0.065	0.065
		Bottom	0.573	-	0.573
		Front	0.318	0.043	0.361
		Rear	0.448	0.243	0.691
		Right	-	-	-
		Left	0.271	0.088	0.359
	LTE Band 7	Top	-	0.065	0.065
		Bottom	0.563	-	0.563
		Front	0.226	0.043	0.269
		Rear	0.631	0.243	0.874
		Right	0.039	-	0.039
		Left	0.047	0.088	0.135
	LTE Band 41	Top	-	0.065	0.065
		Bottom	0.330	-	0.330
		Front	0.139	0.043	0.182
		Rear	0.369	0.243	0.612
		Right	0.011	-	0.011
		Left	0.025	0.088	0.113

Table 13.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.007	0.007
		Bottom	0.151	-	0.151
		Front	0.332	0.016	0.348
		Rear	0.502	0.043	0.545
		Right	0.196	-	0.196
		Left	0.059	0.016	0.075
	GPRS 1900	Top	-	0.007	0.007
		Bottom	0.474	-	0.474
		Front	0.345	0.016	0.361
		Rear	0.395	0.043	0.438
		Right	-	-	-
		Left	0.218	0.016	0.234
	WCDMA 850	Top	-	0.007	0.007
		Bottom	0.177	-	0.177
		Front	0.390	0.016	0.406
		Rear	0.640	0.043	0.683
		Right	0.256	-	0.256
		Left	0.070	0.016	0.086
	WCDMA 1700	Top	-	0.007	0.007
		Bottom	0.734	-	0.734
		Front	0.460	0.016	0.477
		Rear	0.551	0.043	0.595
		Right	-	-	-
		Left	0.376	0.016	0.392
	WCDMA 1900	Top	-	0.007	0.007
		Bottom	0.585	-	0.585
		Front	0.362	0.016	0.378
		Rear	0.477	0.043	0.520
		Right	-	-	-
		Left	0.332	0.016	0.349
	LTE Band 12	Top	-	0.007	0.007
		Bottom	0.036	-	0.036
		Front	0.112	0.016	0.128
		Rear	0.149	0.043	0.192
		Right	0.041	-	0.041
		Left	0.043	0.016	0.059
	LTE Band 13	Top	-	0.007	0.007
		Bottom	0.071	-	0.071
		Front	0.180	0.016	0.196
		Rear	0.238	0.043	0.282
		Right	0.120	-	0.120
		Left	0.096	0.016	0.112
	LTE Band 5	Top	-	0.007	0.007
		Bottom	0.200	-	0.200
		Front	0.429	0.016	0.445
		Rear	0.684	0.043	0.727
		Right	0.284	-	0.284
		Left	0.102	0.016	0.119
	LTE Band 4	Top	-	0.007	0.007
		Bottom	0.602	-	0.602
		Front	0.486	0.016	0.502
		Rear	0.539	0.043	0.583
		Right	-	-	-
		Left	0.171	0.016	0.187
	LTE Band 2	Top	-	0.007	0.007
		Bottom	0.573	-	0.573
		Front	0.318	0.016	0.335
		Rear	0.448	0.043	0.492
		Right	-	-	-
		Left	0.271	0.016	0.287
	LTE Band 7	Top	-	0.007	0.007
		Bottom	0.563	-	0.563
		Front	0.226	0.016	0.242
		Rear	0.631	0.043	0.675
		Right	0.039	-	0.039
		Left	0.047	0.016	0.063
	LTE Band 41	Top	-	0.007	0.007
		Bottom	0.330	-	0.330
		Front	0.139	0.016	0.155
		Rear	0.369	0.043	0.412
		Right	0.011	-	0.011
		Left	0.025	0.016	0.042

Table 13.6.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.009	0.009
		Bottom	0.151	-	0.151
		Front	0.332	0.003	0.335
		Rear	0.502	0.575	1.077
		Right	0.196	-	0.196
		Left	0.059	0.168	0.227
	GPRS 1900	Top	-	0.009	0.009
		Bottom	0.474	-	0.474
		Front	0.345	0.003	0.348
		Rear	0.395	0.575	0.970
		Right	-	-	-
		Left	0.218	0.168	0.386
	WCDMA 850	Top	-	0.009	0.009
		Bottom	0.177	-	0.177
		Front	0.390	0.003	0.393
		Rear	0.640	0.575	1.214
		Right	0.256	-	0.256
		Left	0.070	0.168	0.238
	WCDMA 1700	Top	-	0.009	0.009
		Bottom	0.734	-	0.734
		Front	0.460	0.003	0.464
		Rear	0.551	0.575	1.126
		Right	-	-	-
		Left	0.376	0.168	0.544
	WCDMA 1900	Top	-	0.009	0.009
		Bottom	0.585	-	0.585
		Front	0.362	0.003	0.365
		Rear	0.477	0.575	1.051
		Right	-	-	-
		Left	0.332	0.168	0.500
	LTE Band 12	Top	-	0.009	0.009
		Bottom	0.036	-	0.036
		Front	0.112	0.003	0.115
		Rear	0.149	0.575	0.723
		Right	0.041	-	0.041
		Left	0.043	0.168	0.211
	LTE Band 13	Top	-	0.009	0.009
		Bottom	0.071	-	0.071
		Front	0.180	0.003	0.183
		Rear	0.238	0.575	0.813
		Right	0.120	-	0.120
		Left	0.096	0.168	0.264
	LTE Band 5	Top	-	0.009	0.009
		Bottom	0.200	-	0.200
		Front	0.429	0.003	0.432
		Rear	0.684	0.575	1.259
		Right	0.284	-	0.284
		Left	0.102	0.168	0.270
	LTE Band 4	Top	-	0.009	0.009
		Bottom	0.602	-	0.602
		Front	0.486	0.003	0.489
		Rear	0.539	0.575	1.114
		Right	-	-	-
		Left	0.171	0.168	0.339
	LTE Band 2	Top	-	0.009	0.009
		Bottom	0.573	-	0.573
		Front	0.318	0.003	0.322
		Rear	0.448	0.575	1.023
		Right	-	-	-
		Left	0.271	0.168	0.439
	LTE Band 7	Top	-	0.009	0.009
		Bottom	0.563	-	0.563
		Front	0.226	0.003	0.230
		Rear	0.631	0.575	1.206
		Right	0.039	-	0.039
		Left	0.047	0.168	0.214
	LTE Band 41	Top	-	0.009	0.009
		Bottom	0.330	-	0.330
		Front	0.139	0.003	0.142
		Rear	0.369	0.575	0.943
		Right	0.011	-	0.011
		Left	0.025	0.168	0.193

Table 13.6.8 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.018	0.018
		Bottom	0.151	-	0.151
		Front	0.332	0.019	0.351
		Rear	0.502	0.647	1.149
		Right	0.196	-	0.196
		Left	0.059	0.149	0.208
	GPRS 1900	Top	-	0.018	0.018
		Bottom	0.474	-	0.474
		Front	0.345	0.019	0.364
		Rear	0.395	0.647	1.042
		Right	-	-	-
		Left	0.218	0.149	0.367
	WCDMA 850	Top	-	0.018	0.018
		Bottom	0.177	-	0.177
		Front	0.390	0.019	0.409
		Rear	0.640	0.647	1.286
		Right	0.256	-	0.256
		Left	0.070	0.149	0.219
	WCDMA 1700	Top	-	0.018	0.018
		Bottom	0.734	-	0.734
		Front	0.460	0.019	0.479
		Rear	0.551	0.647	1.198
		Right	-	-	-
		Left	0.376	0.149	0.525
	WCDMA 1900	Top	-	0.018	0.018
		Bottom	0.585	-	0.585
		Front	0.362	0.019	0.381
		Rear	0.477	0.647	1.123
		Right	-	-	-
		Left	0.332	0.149	0.482
	LTE Band 12	Top	-	0.018	0.018
		Bottom	0.036	-	0.036
		Front	0.112	0.019	0.131
		Rear	0.149	0.647	0.795
		Right	0.041	-	0.041
		Left	0.043	0.149	0.192
	LTE Band 13	Top	-	0.018	0.018
		Bottom	0.071	-	0.071
		Front	0.180	0.019	0.199
		Rear	0.238	0.647	0.885
		Right	0.120	-	0.120
		Left	0.096	0.149	0.245
	LTE Band 5	Top	-	0.018	0.018
		Bottom	0.200	-	0.200
		Front	0.429	0.019	0.448
		Rear	0.684	0.647	1.331
		Right	0.284	-	0.284
		Left	0.102	0.149	0.251
	LTE Band 4	Top	-	0.018	0.018
		Bottom	0.602	-	0.602
		Front	0.486	0.019	0.505
		Rear	0.539	0.647	1.186
		Right	-	-	-
		Left	0.171	0.149	0.320
	LTE Band 2	Top	-	0.018	0.018
		Bottom	0.573	-	0.573
		Front	0.318	0.019	0.337
		Rear	0.448	0.647	1.095
		Right	-	-	-
		Left	0.271	0.149	0.420
	LTE Band 7	Top	-	0.018	0.018
		Bottom	0.563	-	0.563
		Front	0.226	0.019	0.245
		Rear	0.631	0.647	1.278
		Right	0.039	-	0.039
		Left	0.047	0.149	0.196
	LTE Band 41	Top	-	0.018	0.018
		Bottom	0.330	-	0.330
		Front	0.139	0.019	0.158
		Rear	0.369	0.647	1.015
		Right	0.011	-	0.011
		Left	0.025	0.149	0.174

Table 13.6.9 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.1 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.012	0.012
		Bottom	0.151	-	0.151
		Front	0.332	0.025	0.358
		Rear	0.502	0.038	0.540
		Right	0.196	-	0.196
		Left	0.059	0.036	0.095
	GPRS 1900	Top	-	0.012	0.012
		Bottom	0.474	-	0.474
		Front	0.345	0.025	0.370
		Rear	0.395	0.038	0.433
		Right	-	-	-
		Left	0.218	0.036	0.253
	WCDMA 850	Top	-	0.012	0.012
		Bottom	0.177	-	0.177
		Front	0.390	0.025	0.416
		Rear	0.640	0.038	0.678
		Right	0.256	-	0.256
		Left	0.070	0.036	0.106
	WCDMA 1700	Top	-	0.012	0.012
		Bottom	0.734	-	0.734
		Front	0.460	0.025	0.486
		Rear	0.551	0.038	0.589
		Right	-	-	-
		Left	0.376	0.036	0.411
	WCDMA 1900	Top	-	0.012	0.012
		Bottom	0.585	-	0.585
		Front	0.362	0.025	0.388
		Rear	0.477	0.038	0.515
		Right	-	-	-
		Left	0.332	0.036	0.368
	LTE Band 12	Top	-	0.012	0.012
		Bottom	0.036	-	0.036
		Front	0.112	0.025	0.137
		Rear	0.149	0.038	0.187
		Right	0.041	-	0.041
		Left	0.043	0.036	0.079
	LTE Band 13	Top	-	0.012	0.012
		Bottom	0.071	-	0.071
		Front	0.180	0.025	0.205
		Rear	0.238	0.038	0.277
		Right	0.120	-	0.120
		Left	0.096	0.036	0.131
	LTE Band 5	Top	-	0.012	0.012
		Bottom	0.200	-	0.200
		Front	0.429	0.025	0.454
		Rear	0.684	0.038	0.722
		Right	0.284	-	0.284
		Left	0.102	0.036	0.138
	LTE Band 4	Top	-	0.012	0.012
		Bottom	0.602	-	0.602
		Front	0.486	0.025	0.511
		Rear	0.539	0.038	0.578
		Right	-	-	-
		Left	0.171	0.036	0.206
	LTE Band 2	Top	-	0.012	0.012
		Bottom	0.573	-	0.573
		Front	0.318	0.025	0.344
		Rear	0.448	0.038	0.486
		Right	-	-	-
		Left	0.271	0.036	0.306
	LTE Band 7	Top	-	0.012	0.012
		Bottom	0.563	-	0.563
		Front	0.226	0.025	0.252
		Rear	0.631	0.038	0.669
		Right	0.039	-	0.039
		Left	0.047	0.036	0.082
	LTE Band 41	Top	-	0.012	0.012
		Bottom	0.330	-	0.330
		Front	0.139	0.025	0.164
		Rear	0.369	0.038	0.407
		Right	0.011	-	0.011
		Left	0.025	0.036	0.061

Table 13.6.10 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.011	0.011
		Bottom	0.151	-	0.151
		Front	0.332	0.019	0.351
		Rear	0.502	0.625	1.127
		Right	0.196	-	0.196
		Left	0.059	0.160	0.219
	GPRS 1900	Top	-	0.011	0.011
		Bottom	0.474	-	0.474
		Front	0.345	0.019	0.364
		Rear	0.395	0.625	1.020
		Right	-	-	-
		Left	0.218	0.160	0.378
	WCDMA 850	Top	-	0.011	0.011
		Bottom	0.177	-	0.177
		Front	0.390	0.019	0.409
		Rear	0.640	0.625	1.265
		Right	0.256	-	0.256
		Left	0.070	0.160	0.230
	WCDMA 1700	Top	-	0.011	0.011
		Bottom	0.734	-	0.734
		Front	0.460	0.019	0.479
		Rear	0.551	0.625	1.176
		Right	-	-	-
		Left	0.376	0.160	0.536
	WCDMA 1900	Top	-	0.011	0.011
		Bottom	0.585	-	0.585
		Front	0.362	0.019	0.381
		Rear	0.477	0.625	1.102
		Right	-	-	-
		Left	0.332	0.160	0.492
	LTE Band 12	Top	-	0.011	0.011
		Bottom	0.036	-	0.036
		Front	0.112	0.019	0.131
		Rear	0.149	0.625	0.774
		Right	0.041	-	0.041
		Left	0.043	0.160	0.203
	LTE Band 13	Top	-	0.011	0.011
		Bottom	0.071	-	0.071
		Front	0.180	0.019	0.199
		Rear	0.238	0.625	0.864
		Right	0.120	-	0.120
		Left	0.096	0.160	0.256
	LTE Band 5	Top	-	0.011	0.011
		Bottom	0.200	-	0.200
		Front	0.429	0.019	0.448
		Rear	0.684	0.625	1.309
		Right	0.284	-	0.284
		Left	0.102	0.160	0.262
	LTE Band 4	Top	-	0.011	0.011
		Bottom	0.602	-	0.602
		Front	0.486	0.019	0.505
		Rear	0.539	0.625	1.165
		Right	-	-	-
		Left	0.171	0.160	0.331
	LTE Band 2	Top	-	0.011	0.011
		Bottom	0.573	-	0.573
		Front	0.318	0.019	0.337
		Rear	0.448	0.625	1.073
		Right	-	-	-
		Left	0.271	0.160	0.431
	LTE Band 7	Top	-	0.011	0.011
		Bottom	0.563	-	0.563
		Front	0.226	0.019	0.245
		Rear	0.631	0.625	1.256
		Right	0.039	-	0.039
		Left	0.047	0.160	0.206
	LTE Band 41	Top	-	0.011	0.011
		Bottom	0.330	-	0.330
		Front	0.139	0.019	0.158
		Rear	0.369	0.625	0.994
		Right	0.011	-	0.011
		Left	0.025	0.160	0.185

Table 13.6.11 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN MIMO SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.015	0.015
		Bottom	0.151	-	0.151
		Front	0.332	0.023	0.355
		Rear	0.502	0.629	1.131
		Right	0.196	-	0.196
		Left	0.059	0.152	0.211
	GPRS 1900	Top	-	0.015	0.015
		Bottom	0.474	-	0.474
		Front	0.345	0.023	0.368
		Rear	0.395	0.629	1.024
		Right	-	-	-
		Left	0.218	0.152	0.370
	WCDMA 850	Top	-	0.015	0.015
		Bottom	0.177	-	0.177
		Front	0.390	0.023	0.413
		Rear	0.640	0.629	1.269
		Right	0.256	-	0.256
		Left	0.070	0.152	0.222
	WCDMA 1700	Top	-	0.015	0.015
		Bottom	0.734	-	0.734
		Front	0.460	0.023	0.484
		Rear	0.551	0.629	1.180
		Right	-	-	-
		Left	0.376	0.152	0.528
	WCDMA 1900	Top	-	0.015	0.015
		Bottom	0.585	-	0.585
		Front	0.362	0.023	0.385
		Rear	0.477	0.629	1.106
		Right	-	-	-
		Left	0.332	0.152	0.484
	LTE Band 12	Top	-	0.015	0.015
		Bottom	0.036	-	0.036
		Front	0.112	0.023	0.135
		Rear	0.149	0.629	0.778
		Right	0.041	-	0.041
		Left	0.043	0.152	0.195
	LTE Band 13	Top	-	0.015	0.015
		Bottom	0.071	-	0.071
		Front	0.180	0.023	0.203
		Rear	0.238	0.629	0.868
		Right	0.120	-	0.120
		Left	0.096	0.152	0.247
	LTE Band 5	Top	-	0.015	0.015
		Bottom	0.200	-	0.200
		Front	0.429	0.023	0.452
		Rear	0.684	0.629	1.313
		Right	0.284	-	0.284
		Left	0.102	0.152	0.254
	LTE Band 4	Top	-	0.015	0.015
		Bottom	0.602	-	0.602
		Front	0.486	0.023	0.509
		Rear	0.539	0.629	1.169
		Right	-	-	-
		Left	0.171	0.152	0.323
	LTE Band 2	Top	-	0.015	0.015
		Bottom	0.573	-	0.573
		Front	0.318	0.023	0.341
		Rear	0.448	0.629	1.077
		Right	-	-	-
		Left	0.271	0.152	0.423
	LTE Band 7	Top	-	0.015	0.015
		Bottom	0.563	-	0.563
		Front	0.226	0.023	0.249
		Rear	0.631	0.629	1.260
		Right	0.039	-	0.039
		Left	0.047	0.152	0.198
	LTE Band 41	Top	-	0.015	0.015
		Bottom	0.330	-	0.330
		Front	0.139	0.023	0.162
		Rear	0.369	0.629	0.998
		Right	0.011	-	0.011
		Left	0.025	0.152	0.177

Table 13.6.12 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.053	0.053
		Bottom	0.151	-	0.151
		Front	0.332	0.037	0.369
		Rear	0.502	0.069	0.571
		Right	0.196	-	0.196
		Left	0.059	0.033	0.092
	GPRS 1900	Top	-	0.053	0.053
		Bottom	0.474	-	0.474
		Front	0.345	0.037	0.381
		Rear	0.395	0.069	0.464
		Right	-	-	-
		Left	0.218	0.033	0.251
	WCDMA 850	Top	-	0.053	0.053
		Bottom	0.177	-	0.177
		Front	0.390	0.037	0.427
		Rear	0.640	0.069	0.709
		Right	0.256	-	0.256
		Left	0.070	0.033	0.103
	WCDMA 1700	Top	-	0.053	0.053
		Bottom	0.734	-	0.734
		Front	0.460	0.037	0.497
		Rear	0.551	0.069	0.621
		Right	-	-	-
		Left	0.376	0.033	0.408
	WCDMA 1900	Top	-	0.053	0.053
		Bottom	0.585	-	0.585
		Front	0.362	0.037	0.399
		Rear	0.477	0.069	0.546
		Right	-	-	-
		Left	0.332	0.033	0.365
	LTE Band 12	Top	-	0.053	0.053
		Bottom	0.036	-	0.036
		Front	0.112	0.037	0.149
		Rear	0.149	0.069	0.218
		Right	0.041	-	0.041
		Left	0.043	0.033	0.076
	LTE Band 13	Top	-	0.053	0.053
		Bottom	0.071	-	0.071
		Front	0.180	0.037	0.217
		Rear	0.238	0.069	0.308
		Right	0.120	-	0.120
		Left	0.096	0.033	0.128
	LTE Band 5	Top	-	0.053	0.053
		Bottom	0.200	-	0.200
		Front	0.429	0.037	0.466
		Rear	0.684	0.069	0.753
		Right	0.284	-	0.284
		Left	0.102	0.033	0.135
	LTE Band 4	Top	-	0.053	0.053
		Bottom	0.602	-	0.602
		Front	0.486	0.037	0.522
		Rear	0.539	0.069	0.609
		Right	-	-	-
		Left	0.171	0.033	0.203
	LTE Band 2	Top	-	0.053	0.053
		Bottom	0.573	-	0.573
		Front	0.318	0.037	0.355
		Rear	0.448	0.069	0.518
		Right	-	-	-
		Left	0.271	0.033	0.303
	LTE Band 7	Top	-	0.053	0.053
		Bottom	0.563	-	0.563
		Front	0.226	0.037	0.263
		Rear	0.631	0.069	0.700
		Right	0.039	-	0.039
		Left	0.047	0.033	0.079
	LTE Band 41	Top	-	0.053	0.053
		Bottom	0.330	-	0.330
		Front	0.139	0.037	0.175
		Rear	0.369	0.069	0.438
		Right	0.011	-	0.011
		Left	0.025	0.033	0.058

Table 13.6.13 Simultaneous Transmission Scenario : 2.4 GHz W-LAN Ant.1 + 5 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2.4G W-LAN Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN Ant.2	Top	0.094	0.009	0.103
		Bottom	-	-	-
		Front	0.059	0.003	0.063
		Rear	0.127	0.575	0.701
		Right	-	-	-
		Left	0.053	0.168	0.221
	5.8G W-LAN Ant.2	Top	0.094	0.011	0.105
		Bottom	-	-	-
		Front	0.059	0.019	0.078
		Rear	0.127	0.625	0.752
		Right	-	-	-
		Left	0.053	0.160	0.213

13.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

13.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

14. SAR MEASUREMENT VARIABILITY

14.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.64	$\pm 4.2 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.6	$\pm 3.8 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.64	$\pm 3.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	$\pm 4.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.6	$\pm 4.3 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	$\pm 3.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	$\pm 3.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.6	Normal	1	0.6	$\pm 3.6 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.6	$\pm 3.8 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Head (SN: 3328)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.4	Normal	1	0.64	$\pm 4.4 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 2.1	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	$\pm 6.0 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.6	$\pm 3.7 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	$\pm 1.2 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 12 \%$	330
Expanded Uncertainty (k=2)					$\pm 24 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.64	$\pm 4.2 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.4	Normal	1	0.6	$\pm 4.4 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	$\pm 3.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	$\pm 3.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.64	$\pm 4.2 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	$\pm 4.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.6	$\pm 3.7 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	$\pm 4.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	10
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	$\pm 3.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.64	$\pm 4.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	$\pm 3.9 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	$\pm 1.1 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	$\pm 1.1 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.64	$\pm 3.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	$\pm 4.2 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	$\pm 1.2 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 7337)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	$\pm 6.6 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	$\pm 5.5 \%$	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	$\pm 1.4 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	$\pm 0.14 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.23 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.58 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	$\pm 1.2 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 2.9 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.64	$\pm 3.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 2.9 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.6	$\pm 4.3 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	$\pm 1.0 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	$\pm 1.0 \%$	∞
Combined Standard Uncertainty					$\pm 13 \%$	330
Expanded Uncertainty (k=2)					$\pm 26 \%$	

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.