



Total Quality. Assured.

Intertek
731 Enterprise Drive
Lexington, KY 40510

Tel 859 226 1000
Fax 859 226 1040

www.intertek.com

Ademco Inc. TEST REPORT

SCOPE OF WORK

EMC TESTING – ADT5AIO2 HOME SECURITY PANEL

REPORT NUMBER

104517828LEX-002.1

ISSUE DATE

2/3/2021

PAGES

45

DOCUMENT CONTROL NUMBER

Non-Specific EMC Report Shell Rev. December 2017
© 2017 INTERTEK



EMC TEST REPORT

(FULL COMPLIANCE)

Report Number: 104517828LEX-002.1

Project Number: G104517828

Report Issue Date: 2/3/2021

Product Name: ADT5AIO2 Home Security Panel

Model(s) Tested: ADT5AIO2

Standards: Title 47 CFR Part 15.247

RSS-247 Issue 2

RSS-Gen Issue 5

Tested by:
Intertek Testing Services NA, Inc.
731 Enterprise Dr.
Lexington, KY 40510
USA

Client:
Ademco Inc.
2 Corporate Center Drive
Suite 100
Melville, NY 11747
USA

Report prepared by



Bryan Taylor, Team Leader

Report reviewed by



Brian Lackey, Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





Table of Contents

| | | |
|-----------|--|------------------|
| 1 | <i>Introduction and Conclusion</i> | <i>4</i> |
| 2 | <i>Test Summary</i> | <i>4</i> |
| 3 | <i>Client Information</i> | <i>5</i> |
| 4 | <i>Description of Equipment under Test and Variant Models</i> | <i>6</i> |
| 5 | <i>System Setup and Method</i> | <i>7</i> |
| 6 | <i>Receiver Spurious Emissions</i> | <i>8</i> |
| 7 | <i>Transmitter Spurious Emissions</i> | <i>13</i> |
| 8 | <i>Output Power</i> | <i>22</i> |
| 9 | <i>Occupied Bandwidth</i> | <i>24</i> |
| 10 | <i>Power Spectral Density</i> | <i>35</i> |
| 11 | <i>Antenna Requirement</i> | <i>40</i> |
| 12 | <i>Conducted Emissions</i> | <i>41</i> |
| 13 | <i>Revision History</i> | <i>45</i> |



1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

| Section | Test full name | Result |
|---------|---|--------|
| 6 | Receiver Spurious Emissions (ANSI C63.4: 2014) | Pass |
| 7 | Transmitter Spurious Emissions (FCC Part 15.247(d), RSS-247 Issue 2 § 5.5) | Pass |
| 8 | Output Power (FCC Part 15.247(b)(3), RSS-247 Issue 2 § 5.4(d)) | Pass |
| 9 | Occupied Bandwidth (FCC Part 15.247, RSS-247 Issue 2 § 5.2(a)) | Pass |
| 10 | Power Spectral Density (FCC Part 15.247(e), RSS-247 Issue 2 § 5.2(b)) | Pass |
| 11 | Antenna Requirement (FCC Part 15.203, RSS-Gen Issue 5 § 6.8) | Pass |
| 12 | Conducted Emissions (ANSI C63.4: 2014) | Pass |



3 Client Information

This product was tested at the request of the following:

| Client Information | |
|------------------------------|--|
| Client Name: | Ademco Inc. |
| Address: | 2 Corporate Center Drive Suite 100 Melville, NY 11747 USA |
| Contact: | Divya Venkat |
| Email: | Divya.venkat@resideo.com |
| Manufacturer Information | |
| Manufacturer Name: | Ademco Inc. |
| Manufacturer Address: | 2 Corporate Center Drive Suite 100 Melville, NY 11747 USA |



4 Description of Equipment under Test and Variant Models

| Equipment Under Test | |
|--|--|
| Product Name | ADT5AIO2 Home Security Panel |
| Model Number | ADT5AIO2 |
| Supported Transmit Bands | Bluetooth Low Energy 2402 – 2480MHz |
| Receive Date | 12/15/2020 |
| Test Start Date | 12/23/2020 |
| Test End Date | 2/1/2021 |
| Device Received Condition | Good |
| Test Sample Type | Production |
| Rated Voltage | 100 – 240VAC, 50/60Hz, 0.7A |
| Antenna | 2.9dBi (this value was provided by client and may impact test results) |
| Description of Equipment Under Test (provided by client) | |
| The ADT5AIO2 Home Security Panel was a touch screen security panel with wireless connectivity. | |

4.1 Variant Models:

No variant models were included with this evaluation.



5 System Setup and Method

5.1 Method:


Configuration as required by ANSI C63.4: 2014 and ANSI C63.10:2013

| No. | Descriptions of EUT Exercising |
|-----|--|
| 1 | Test commands were used to force the ADT5AIO2 Home Security Panel to transmit a Bluetooth Low Energy (BLE) signal on low, middle, or high channel. |
| 2 | Idle, not transmitting. |

| Cables | | | | | |
|--------|----------------|------------|-----------|----------|---------------------|
| ID | Description | Length (m) | Shielding | Ferrites | Termination |
| 1 | DC Power Cable | 2m | None | None | AC/DC Power Adapter |

| Support Equipment | | | |
|-------------------|--------------|--------------|---------------|
| Description | Manufacturer | Model Number | Serial Number |
| None | | | |

5.2 EUT Block Diagram:

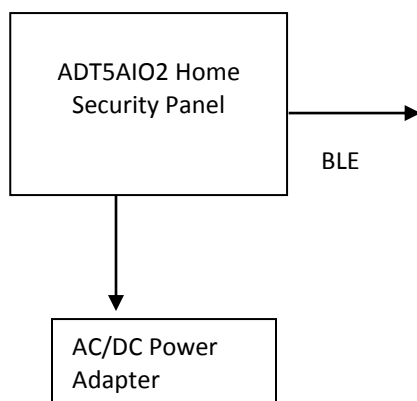



6 Receiver Spurious Emissions

6.1 Test Method

Tests are performed in accordance with ANSI C63.4: 2014

TEST SITE: 10m ALSE

Site Designation: 10m Chamber

Measurement Uncertainty

| Measurement | Frequency Range | Expanded Uncertainty (k=2) | U _{CISPR} |
|-------------------------|-----------------|-------------------------------|--------------------|
| Radiated Emissions, 10m | 30-1000 MHz | 3.9dB | 6.3 dB |
| Radiated Emissions, 3m | 30-1000 MHz | 4.0dB | 6.3 dB |
| Radiated Emissions, 3m | 1-6 GHz | 4.7dB | 5.2 dB |
| Radiated Emissions, 3m | 6-15 GHz | 4.7dB | 5.5 dB |
| Radiated Emissions, 3m | 15-18 GHz | 4.7dB | 5.5 dB |
| Radiated Emissions, 3m | 18-40 GHz | 4.7dB | 5.5 dB |

As shown in the table above our radiated emissions U_{lab} is less than the corresponding U_{CISPR} reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required.



6.2 Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
FS = 32 dB μ V/m

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

NF = Net Reading in dB μ V

Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$
$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$



6.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|----------------------------|-------|-----------------|---------|-----------------------|-----------------------|
| EMI Test Receiver | 3900 | Rohde & Schwarz | ESU40 | 10/5/2020 | 10/5/2021 |
| Bilog Antenna (30MHz-1GHz) | 7085 | SunAR | JB6 | 9/4/2020 | 9/4/2021 |
| Horn Antenna | 4001 | ETS | 3117 | 1/16/2020 | 1/16/2021 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| System Controller | 3957 | Sunol Sciences | SC99V | Verify at Time of Use | Verify at Time of Use |
| Coaxial cable | 3039 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 3074 | | | 12/21/2020 | 12/21/2021 |
| 3m Cable Preamplifier | 3918 | Rohde & Schwarz | TS-PR18 | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 2592 | | | 12/21/2020 | 12/21/2021 |

6.4 Software Utilized


| Name | Manufacturer | Version |
|-------|-----------------|-----------------|
| EMC32 | Rohde & Schwarz | Version 9.15.02 |

6.5 Test Results

The sample tested was found to be **compliant**.



6.6 Plots/Data: Radiated Emissions, 30MHz – 1GHz (Transmitters Idle)

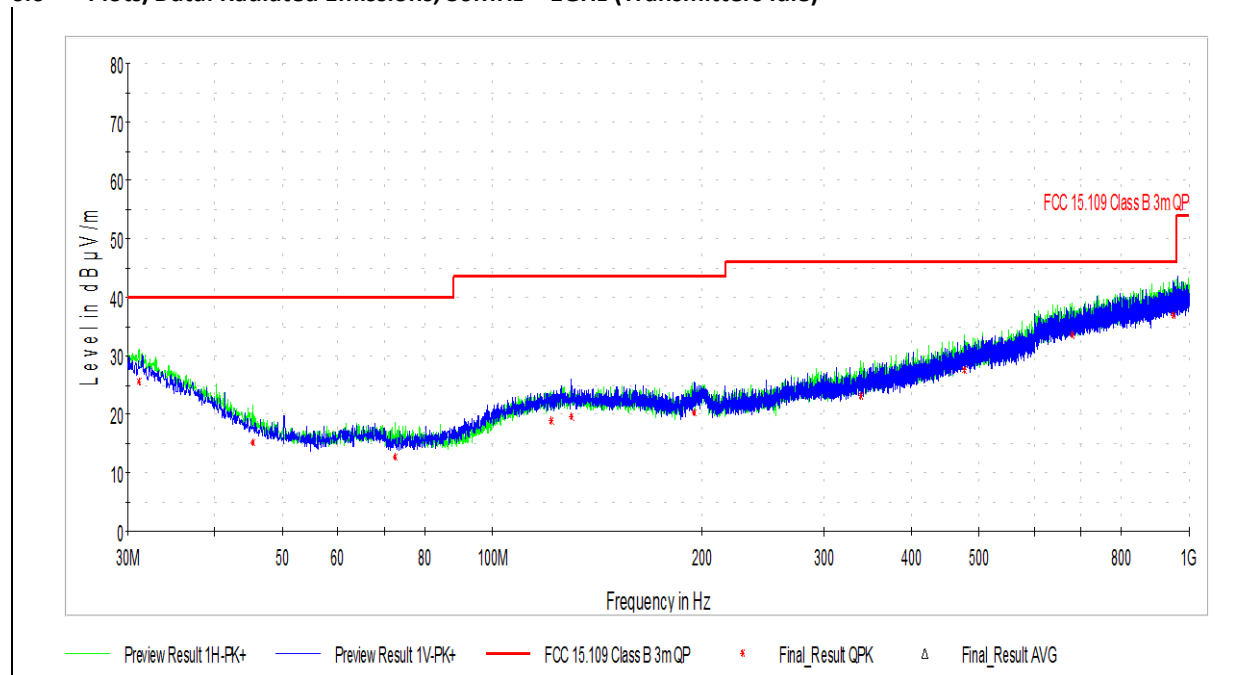

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 31.131667 | 25.60 | 40.00 | 14.40 | 120.000 | 201.7 | H | 108.0 | 28.0 |
| 45.358333 | 15.17 | 40.00 | 24.83 | 120.000 | 400.0 | H | 91.0 | 18.0 |
| 72.518333 | 12.72 | 40.00 | 27.28 | 120.000 | 400.0 | H | 155.0 | 15.7 |
| 121.611111 | 19.00 | 43.52 | 24.52 | 120.000 | 259.7 | H | 302.0 | 21.9 |
| 130.017778 | 19.47 | 43.52 | 24.05 | 120.000 | 131.4 | V | 108.0 | 22.2 |
| 195.007778 | 20.25 | 43.52 | 23.27 | 120.000 | 118.0 | V | 114.0 | 20.8 |
| 337.813333 | 23.21 | 46.02 | 22.81 | 120.000 | 129.6 | H | 128.0 | 25.2 |
| 475.984444 | 27.48 | 46.02 | 18.54 | 120.000 | 204.7 | H | 6.0 | 29.2 |
| 680.331111 | 33.58 | 46.02 | 12.44 | 120.000 | 399.9 | H | 349.0 | 33.8 |
| 949.775556 | 36.89 | 46.02 | 9.13 | 120.000 | 213.9 | V | 49.0 | 36.8 |


Test Personnel: Bryan Taylor
 Supervising/Reviewing Engineer: NA
 (Where Applicable) FCC Part 15B
 Product Standard: ICES-003 Issue 6
 Input Voltage: 120VAC / 60Hz
 Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 12/22/2020
 Limit Applied: Class B
 Ambient Temperature: 26.3 °C
 Relative Humidity: 40.5 %
 Atmospheric Pressure: 985.3 mbar

Deviations, Additions, or Exclusions: None



6.7 Plots/Data: Radiated Emissions, 1GHz – 18GHz (Transmitters Idle)

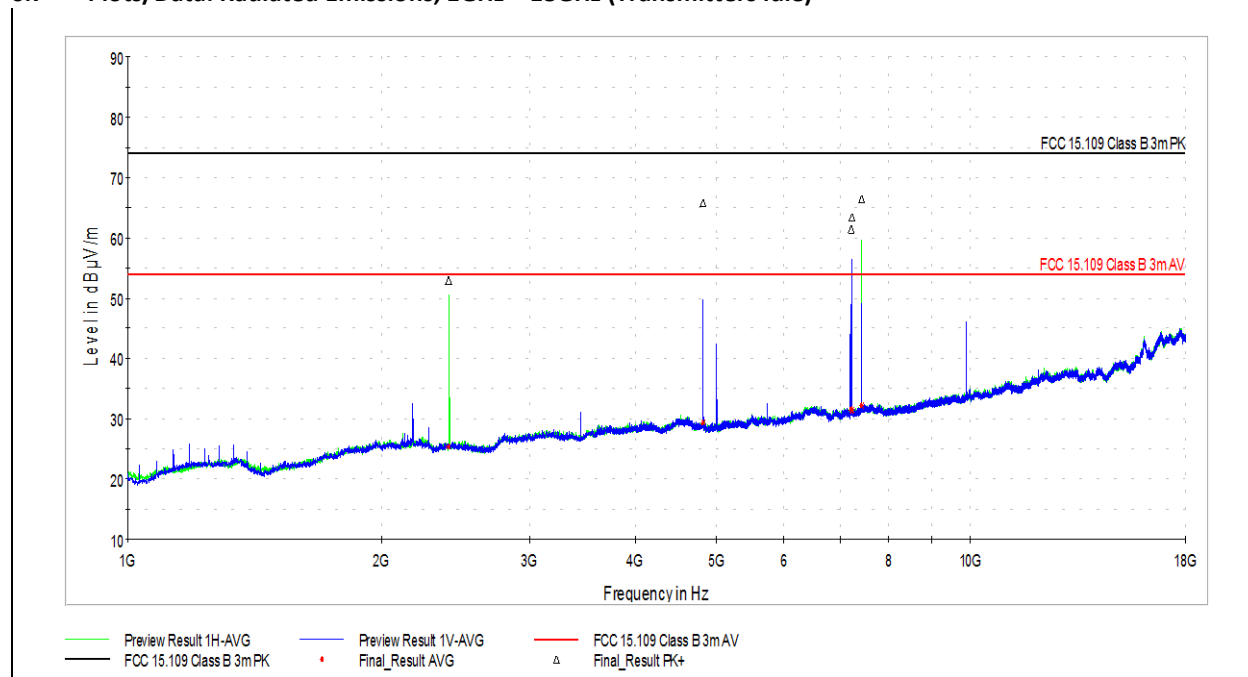

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2405.000000 | 52.92 | 73.98 | 21.06 | 1000.000 | 117.0 | H | -1.0 | 3.8 |
| 4819.000000 | 65.76 | 73.98 | 8.22 | 1000.000 | 100.0 | V | 70.0 | 8.2 |
| 7228.500000 | 61.45 | 73.98 | 12.53 | 1000.000 | 410.0 | V | 276.0 | 11.6 |
| 7231.500000 | 63.40 | 73.98 | 10.58 | 1000.000 | 342.0 | V | 234.0 | 11.6 |
| 7426.500000 | 66.44 | 73.98 | 7.54 | 1000.000 | 167.0 | H | 222.0 | 11.7 |

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2405.000000 | 25.30 | 53.98 | 28.68 | 1000.000 | 117.0 | H | -1.0 | 3.8 |
| 4819.000000 | 29.44 | 53.98 | 24.54 | 1000.000 | 100.0 | V | 70.0 | 8.2 |
| 7228.500000 | 31.38 | 53.98 | 22.60 | 1000.000 | 410.0 | V | 276.0 | 11.6 |
| 7231.500000 | 31.50 | 53.98 | 22.48 | 1000.000 | 342.0 | V | 234.0 | 11.6 |
| 7426.500000 | 32.20 | 53.98 | 21.78 | 1000.000 | 167.0 | H | 222.0 | 11.7 |

Test Personnel: Bryan Taylor

Supervising/Reviewing Engineer: NA

(Where Applicable) FCC Part 15B

Product Standard: ICES-003 Issue 6

Input Voltage: 120VAC / 60Hz

Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 12/22/2020

Limit Applied: Class B

Ambient Temperature: 26.3 °C

Relative Humidity: 40.5 %

Atmospheric Pressure: 985.3 mbar

Deviations, Additions, or Exclusions: None



7 Transmitter Spurious Emissions

7.1 Test Limits

FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Issue 2 § 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.12.1 Radiated emission measurements.



7.3 Test Equipment Used


| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|----------------------------|-------|-----------------|---------|-----------------------|-----------------------|
| EMI Test Receiver | 3900 | Rohde & Schwarz | ESU40 | 10/5/2020 | 10/5/2021 |
| Magnetic Loop Antenna | 2366 | ETS | 6502 | 7/17/2020 | 7/17/2021 |
| Bilog Antenna (30MHz-1GHz) | 7085 | SunAR | JB6 | 9/4/2020 | 9/4/2021 |
| Horn Antenna (18-40GHz) | 3779 | ETS | 3116c | 7/23/2020 | 7/23/2021 |
| Horn Antenna | 4001 | ETS | 3117 | 1/16/2020 | 1/16/2021 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| System Controller | 3957 | Sunol Sciences | SC99V | Verify at Time of Use | Verify at Time of Use |
| Preamplifier (18-40GHz) | 3921 | Rohde & Schwarz | TS-PR40 | 12/21/2020 | 12/21/2021 |
| Coaxial Cable (40GHz) | 7020 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable (40GHz) | 7021 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 3039 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 3074 | | | 12/21/2020 | 12/21/2021 |
| 3m Cable Preamplifier | 3918 | Rohde & Schwarz | TS-PR18 | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial cable | 2592 | | | 12/21/2020 | 12/21/2021 |

7.4 Software Utilized

| Name | Manufacturer | Version |
|-------|-----------------|-----------------|
| EMC32 | Rohde & Schwarz | Version 9.15.02 |

7.5 Test Results

The sample tested was found to be **compliant**. The data presented represents the worst case emissions with the device positioned in three orthogonal positions. All observed emissions outside of the band of operation were attenuated by at least 20dB. The frequency range from 18 – 26GHz was investigated at a 1m test distance and there were no observable spurious emissions detected.

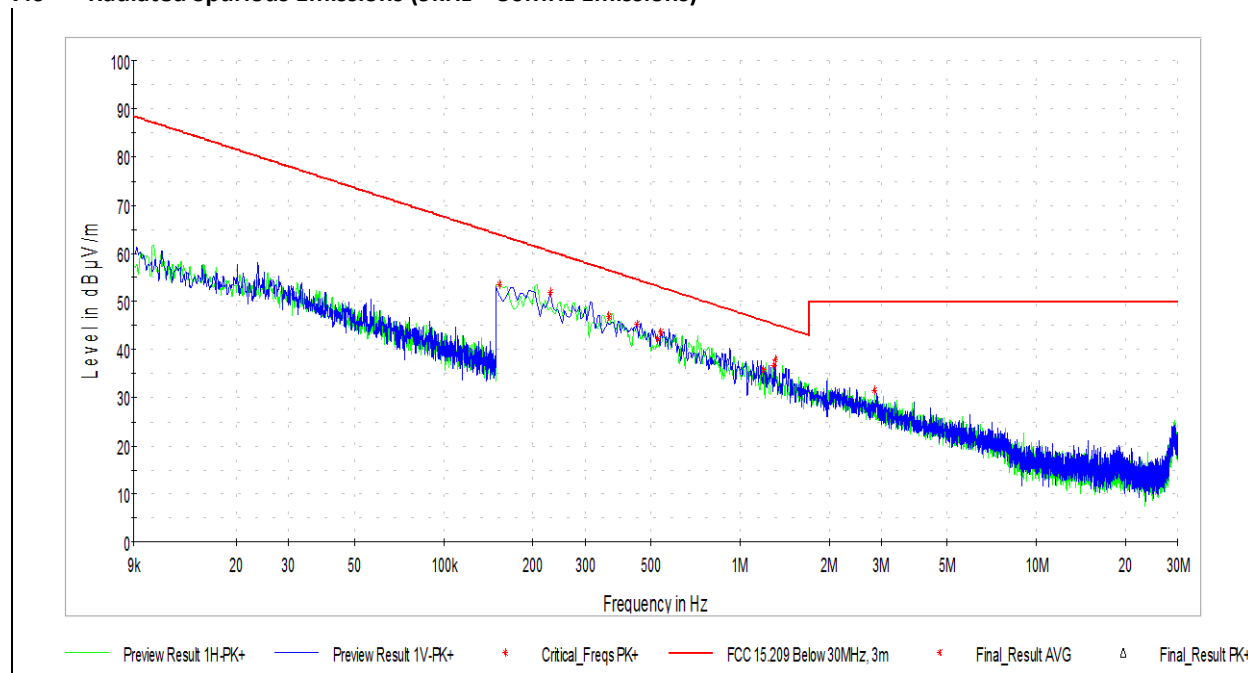**7.6 Radiated Spurious Emissions (9kHz – 30MHz Emissions)**

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|---------------|------------|
| 0.154390 | 53.65 | 63.83 | 10.18 | 0.0 | 12.1 |
| 1.300103 | 36.83 | 45.32 | 8.50 | 0.0 | 11.9 |
| 0.229015 | 51.88 | 60.41 | 8.53 | 0.0 | 12.0 |
| 0.527515 | 42.16 | 53.16 | 11.00 | 0.0 | 12.0 |
| 0.540684 | 43.71 | 52.95 | 9.23 | 0.0 | 12.0 |
| 1.199140 | 35.70 | 46.03 | 10.33 | 0.0 | 11.9 |
| 0.360706 | 46.89 | 56.46 | 9.57 | 180.0 | 11.9 |
| 2.840890 | 31.49 | 50.00 | 18.51 | 180.0 | 11.6 |
| 0.448500 | 45.28 | 54.57 | 9.29 | 180.0 | 11.9 |
| 1.317662 | 38.01 | 45.21 | 7.20 | 180.0 | 11.9 |


Test Personnel: Bryan Taylor
Supervising/Reviewing Engineer: N/A
(Where Applicable) FCC Part 15C, RSS-247
Product Standard: Issue2
Input Voltage: 120VAC/60Hz
Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 1/31/2021
Limit Applied: 15.205 Restricted Bands
Ambient Temperature: 24.3°C
Relative Humidity: 52.8%
Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: This measurement was performed at a 3m test distance in a semi-anechoic chamber that has been correlated to measurements performed in an open field.



7.7 Radiated Spurious Emissions (BLE, Low Band Edge)

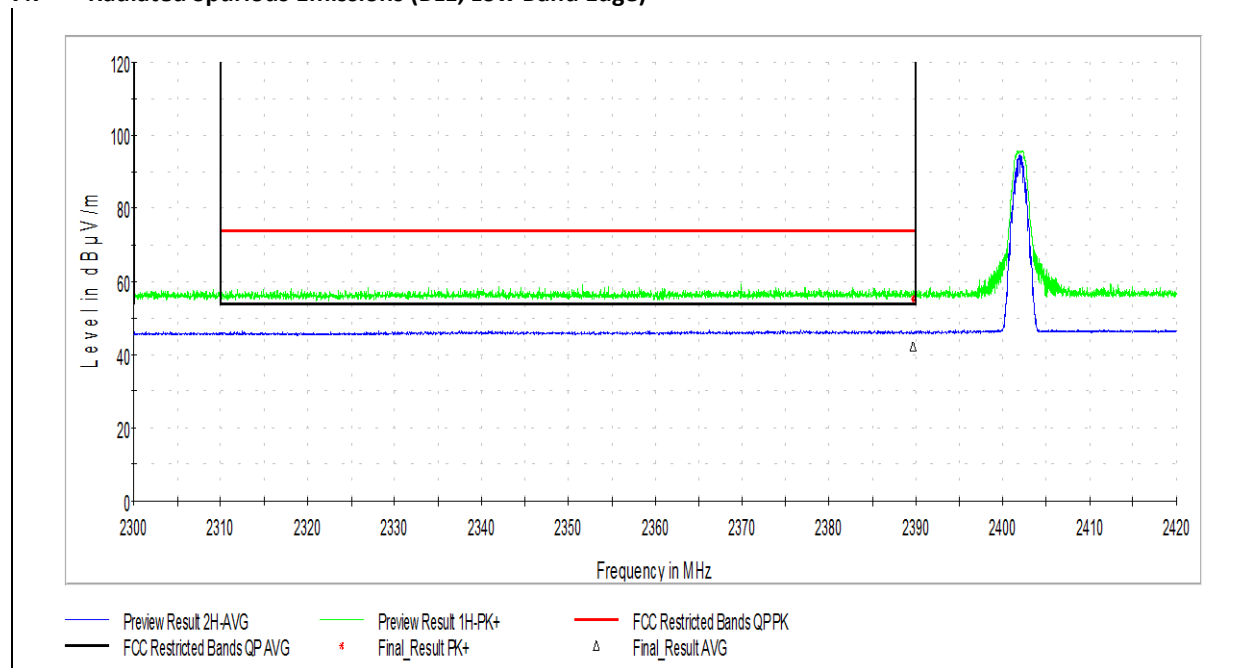

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2389.653846 | 55.23 | 73.98 | 18.75 | 1000.000 | 200.0 | H | 10.0 | 38.6 |

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2389.653846 | 42.22 | 53.98 | 11.76 | 1000.000 | 200.0 | H | 10.0 | 38.6 |


Test Personnel: Bryan Taylor
 Supervising/Reviewing Engineer: N/A
 (Where Applicable)
 Product Standard: FCC Part 15C, RSS-247
 Input Voltage: 120VC / 60Hz
 Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 2/1/2020
 Limit Applied: 15.205 Restricted Bands
 Ambient Temperature: 24.3°C
 Relative Humidity: 52.8%
 Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: None



7.8 Radiated Spurious Emissions (BLE, High Band Edge)

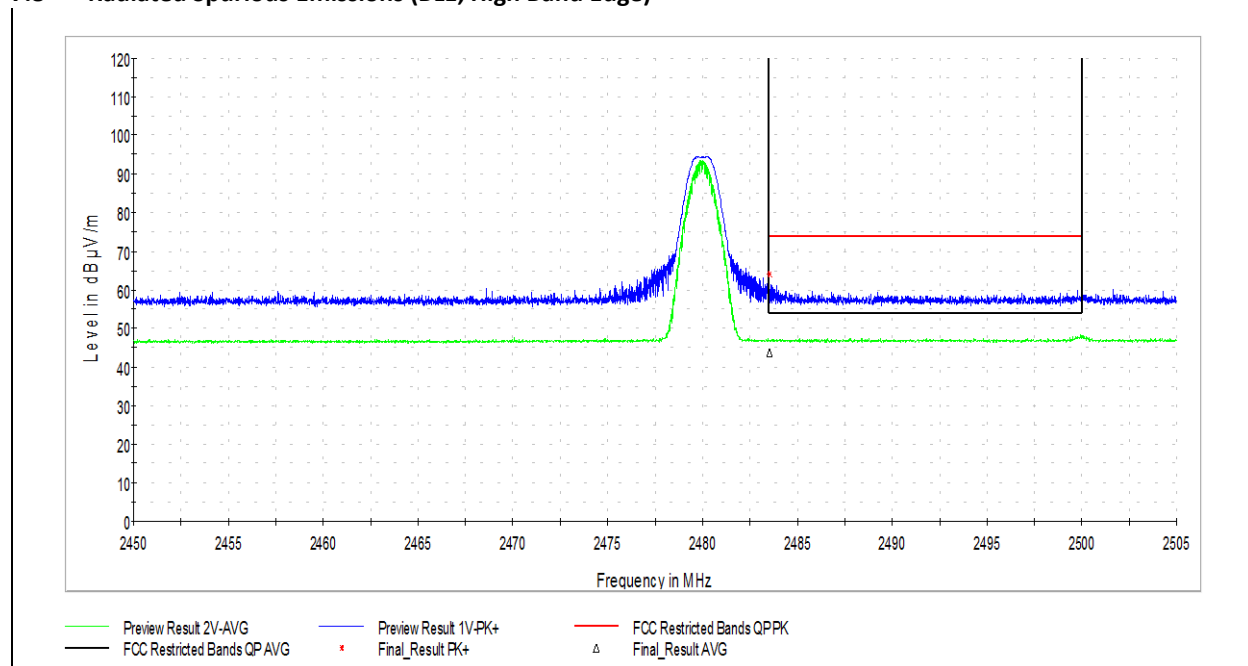

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2483.528846 | 64.02 | 73.98 | 9.96 | 1000.000 | 200.0 | V | 81.0 | 39.0 |

| Frequency (MHz) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 2483.528846 | 43.57 | 53.98 | 10.41 | 1000.000 | 200.0 | V | 81.0 | 39.0 |

Test Personnel: Bryan Taylor

Supervising/Reviewing Engineer: N/A

(Where Applicable)

Product Standard: FCC Part 15C, RSS-247

Input Voltage: 120VC / 60Hz

Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 2/1/2020

Limit Applied: 15.205 Restricted Bands

Ambient Temperature: 24.3°C


Relative Humidity: 52.8%

Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: None



7.9 Radiated Spurious Emissions (BLE, 30MHz – 1 GHz)

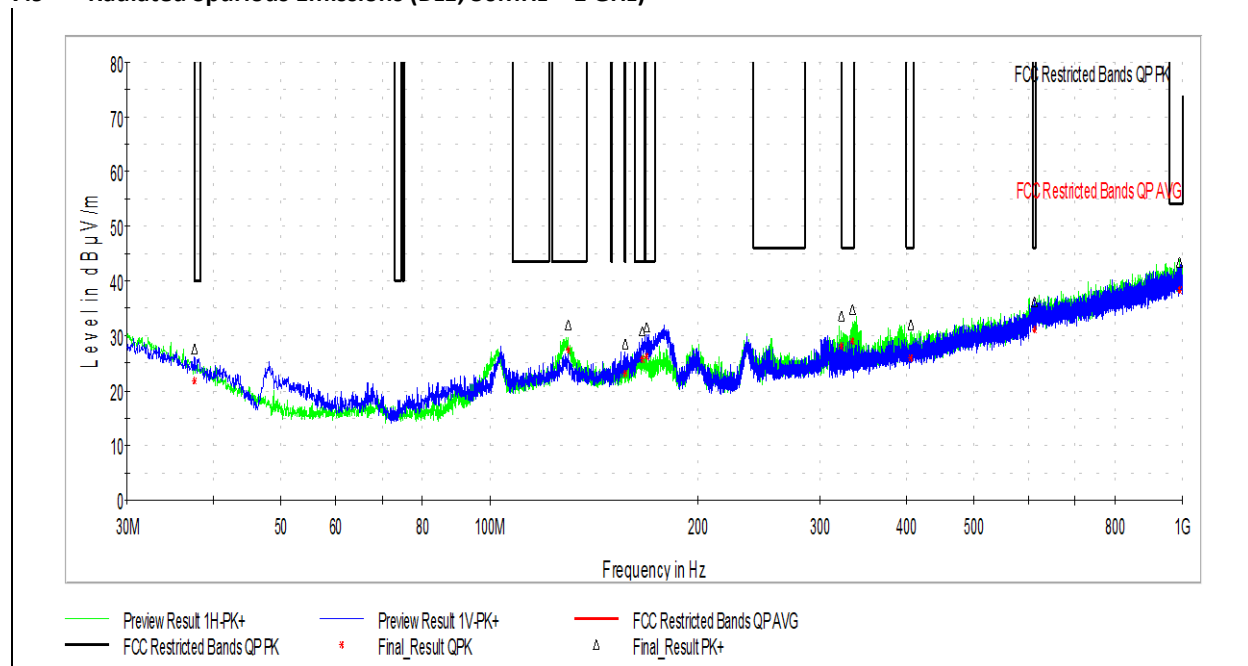

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 37.544445 | 21.73 | 40.00 | 18.27 | 120.000 | 104.4 | V | 341.0 | 22.0 |
| 129.910000 | 27.32 | 43.52 | 16.20 | 120.000 | 213.4 | H | 324.0 | 22.0 |
| 156.854445 | 23.26 | 43.52 | 20.26 | 120.000 | 101.1 | V | 141.0 | 21.7 |
| 166.285000 | 25.65 | 43.52 | 17.87 | 120.000 | 106.1 | V | 204.0 | 21.6 |
| 168.494445 | 26.16 | 43.52 | 17.36 | 120.000 | 101.6 | V | 210.0 | 21.4 |
| 322.077778 | 27.96 | 46.02 | 18.06 | 120.000 | 101.5 | H | 328.0 | 24.5 |
| 333.879445 | 29.11 | 46.02 | 16.91 | 120.000 | 101.1 | H | 339.0 | 24.8 |
| 405.713333 | 26.00 | 46.02 | 20.02 | 120.000 | 286.7 | H | 0.0 | 26.8 |
| 611.946111 | 31.15 | 46.02 | 14.87 | 120.000 | 359.5 | V | 10.0 | 31.1 |
| 989.222222 | 38.27 | 53.98 | 15.71 | 120.000 | 100.7 | H | 150.0 | 38.1 |

Test Personnel: Bryan Taylor

Supervising/Reviewing Engineer: _____

(Where Applicable) N/A

Product Standard: FCC Part 15C, RSS-247

Input Voltage: 120VC / 60Hz

Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 12/30/2020


Limit Applied: 15.205 Restricted Bands

Ambient Temperature: 24.3°C

Relative Humidity: 52.8%

Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: Results presented represent the worst case from low, mid, and high channels

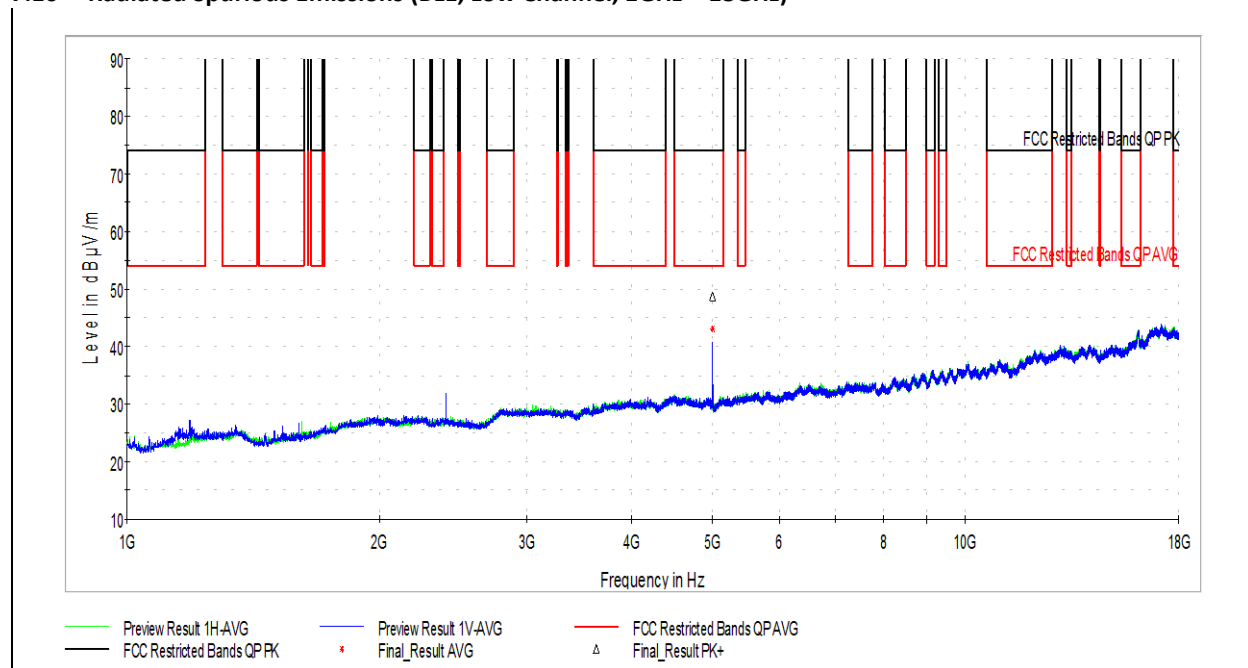**7.10 Radiated Spurious Emissions (BLE, Low Channel, 1GHz – 18GHz)**


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 5000.000000 | 48.80 | 73.98 | 25.18 | 1000.000 | 356.0 | V | 161.0 | 9.4 |

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 5000.000000 | 43.14 | 53.98 | 10.84 | 1000.000 | 356.0 | V | 161.0 | 9.4 |

Test Personnel: Bryan Taylor
 Supervising/Reviewing Engineer: N/A
 (Where Applicable)
 Product Standard: FCC Part 15C, RSS-247
 Input Voltage: 120VC / 60Hz
 Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 1/31/2020
 Limit Applied: 15.205 Restricted Bands
 Ambient Temperature: 24.3°C
 Relative Humidity: 52.8%
 Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: None

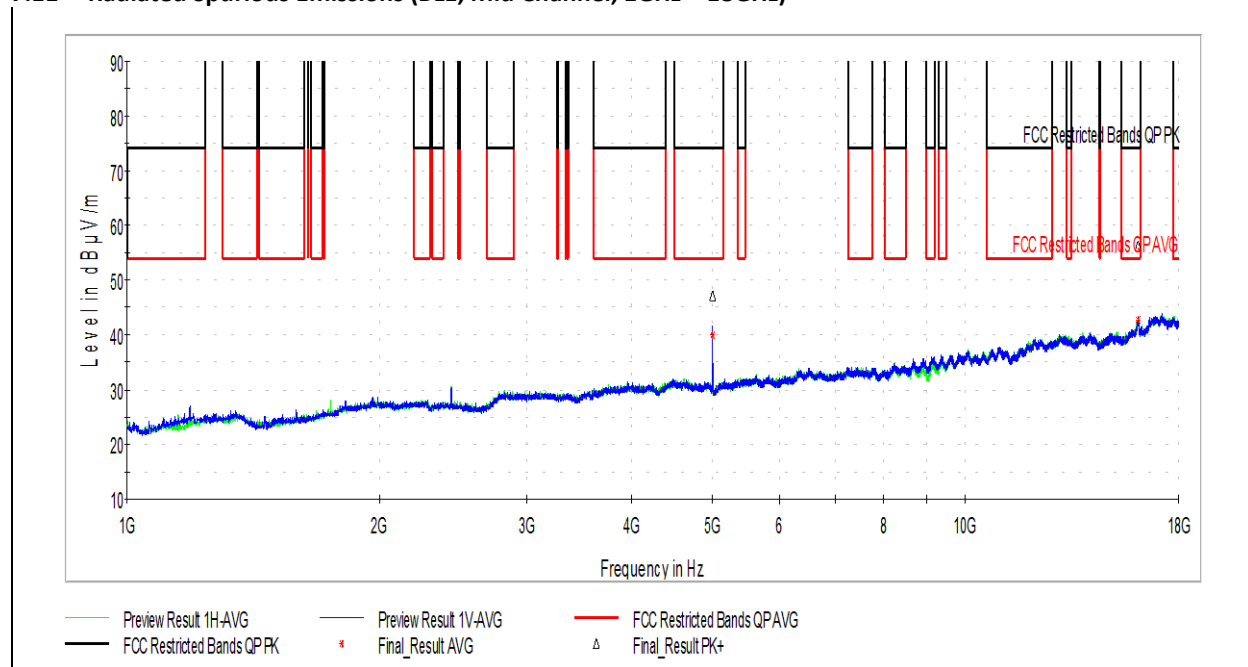**7.11 Radiated Spurious Emissions (BLE, Mid Channel, 1GHz – 18GHz)**

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 5000.000000 | 47.11 | 73.98 | 26.87 | 1000.000 | 376.0 | V | 148.0 | 9.4 |
| 16100.000000 | 56.31 | 73.98 | 17.67 | 1000.000 | 210.0 | V | 218.0 | 25.2 |

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 5000.000000 | 39.96 | 53.98 | 14.02 | 1000.000 | 376.0 | V | 148.0 | 9.4 |
| 16100.000000 | 42.86 | 53.98 | 11.12 | 1000.000 | 210.0 | V | 218.0 | 25.2 |

Test Personnel: Bryan Taylor

Supervising/Reviewing Engineer: (Where Applicable) N/A

Product Standard: FCC Part 15C, RSS-247

Input Voltage: 120VC / 60Hz

Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 1/31/2020


Limit Applied: 15.205 Restricted Bands

Ambient Temperature: 24.3°C

Relative Humidity: 52.8%

Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: None

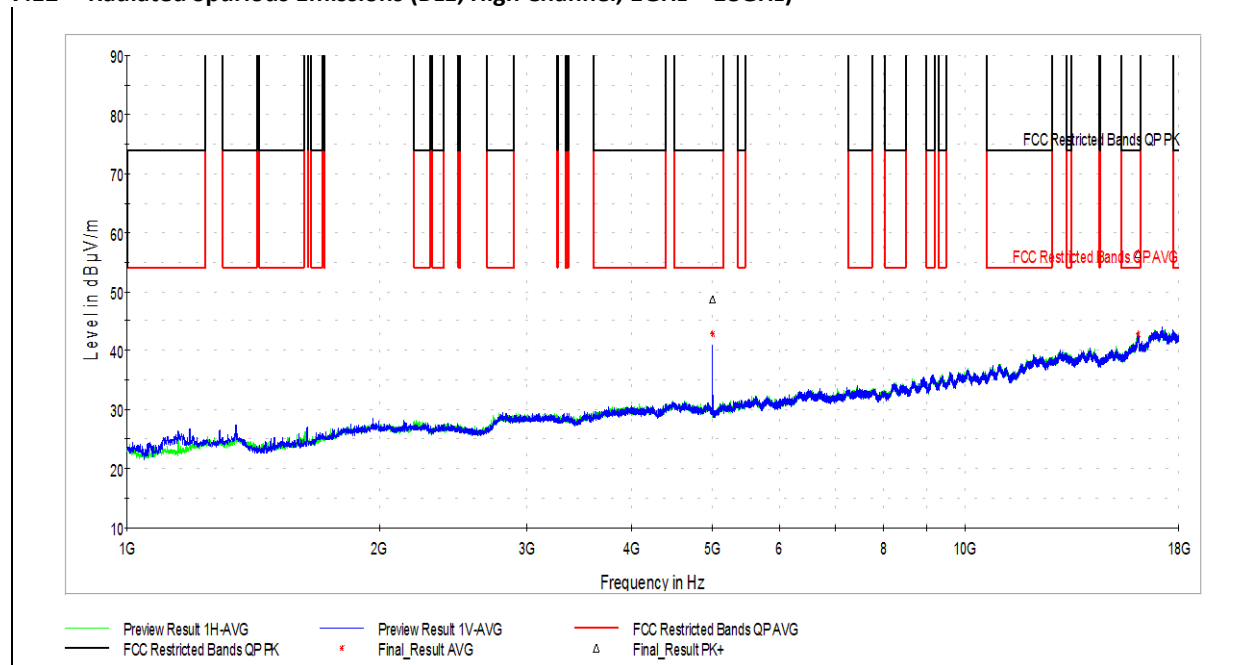**7.12 Radiated Spurious Emissions (BLE, High Channel, 1GHz – 18GHz)**

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 5000.000000 | 48.75 | 73.98 | 25.23 | 1000.000 | 377.0 | V | 157.0 | 9.4 |
| 16092.000000 | 56.42 | 73.98 | 17.56 | 1000.000 | 410.0 | H | 148.0 | 25.2 |

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-------------|-----|---------------|------------|
| 5000.000000 | 42.89 | 53.98 | 11.09 | 1000.000 | 377.0 | V | 157.0 | 9.4 |
| 16092.000000 | 42.82 | 53.98 | 11.16 | 1000.000 | 410.0 | H | 148.0 | 25.2 |

Test Personnel: Bryan Taylor

Supervising/Reviewing Engineer: (Where Applicable) N/A

Product Standard: FCC Part 15C, RSS-247

Input Voltage: 120VC / 60Hz

Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 1/31/2020

Limit Applied: 15.205 Restricted Bands

Ambient Temperature: 24.3°C

Relative Humidity: 52.8%

Atmospheric Pressure: 987.3 mbar

Deviations, Additions, or Exclusions: None



8 Output Power

8.1 Test Limits

FCC Part 15.247(b)(3):

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

RSS-247 Issue 2 § 5.4(d):

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.



8.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 12.1.1 Annex G

8.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|-----------------------|-----------------------|
| EMI Test Receiver | 3900 | Rohde & Schwarz | ESU40 | 10/5/2020 | 10/5/2021 |
| Horn Antenna | 4001 | ETS | 3117 | 1/16/2020 | 1/16/2021 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2592 | | | 12/21/2020 | 12/21/2021 |

8.4 Test Results

The device was found to be **compliant**. The peak output power was less than 1W.

8.5 Test Conditions

| | | | |
|---|-----------------|-----------------------|------------|
| Test Personnel: | Bryan Taylor | Test Date: | 12/31/2020 |
| Supervising/Reviewing Engineer: (Where Applicable) | NA | Limit Applied: | 1 Watt |
| | FCC Part 15.247 | | |
| Product Standard: | RSS-247 Issue 2 | Ambient Temperature: | 22.6C |
| Input Voltage: | 120VAC / 60Hz | Relative Humidity: | 41.2% |
| Pretest Verification w / Ambient | | | |
| Signals or BB Source: | Yes | Atmospheric Pressure: | 991.2mbar |

8.6 Test Data

| Frequency (MHz) | Peak Conducted Power (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|----------------------------|-------------|-------------|--------|
| 2402 | 2.12 | 30 | 27.88 | PASS |
| 2440 | 1.9 | 30 | 28.1 | PASS |
| 2480 | 0.97 | 30 | 29.03 | PASS |

Note: Since the sample could not be configured for a conducted measurement, the peak output power was performed by first measuring the field strength and converting to EIRP as outlined in ANSI C63.10:2013. The antenna gain was then subtracted from the EIRP measurement to arrive at the conducted power readings shown in the table above.



9 Occupied Bandwidth

9.1 Test Limits

FCC Part 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247 Issue 2 § 5.2(a):

The minimum 6 dB bandwidth shall be 500 kHz.

9.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 11.8.1.

9.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|--------------------------|--------------------------|
| EMI Test Receiver | 3900 | Rohde & Schwarz | ESU40 | 10/5/2020 | 10/5/2021 |
| Horn Antenna | 4001 | ETS | 3117 | 1/16/2020 | 1/16/2021 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2592 | | | 12/21/2020 | 12/21/2021 |



9.4 Test Results


The device was found to be **compliant**. The 6dB bandwidth was at least 500kHz.

9.5 Test Conditions

| | | | |
|----------------------------------|-----------------|-----------------------|----------------------------|
| Test Personnel: | Bryan Taylor | Test Date: | 12/23/2020 |
| Supervising/Reviewing Engineer: | | | |
| (Where Applicable) | NA | Limit Applied: | 500kHz (for 6dB bandwidth) |
| | FCC Part 15.247 | | |
| Product Standard: | RSS-247 Issue 2 | Ambient Temperature: | 22.1C |
| Input Voltage: | 120VAC / 60Hz | Relative Humidity: | 47.7% |
| Pretest Verification w / Ambient | | | |
| Signals or BB Source: | Yes | Atmospheric Pressure: | 992mbar |


9.6 Test Data

| Channel | Frequency (MHz) | DTS BW (kHz) | 6dB BW (kHz) | 99% BW (MHz) |
|---------|-----------------|--------------|--------------|--------------|
| 0 | 2402 | 741.4 | 625.2 | 1.04 |
| 39 | 2440 | 741.1 | 629.2 | 1.04 |
| 79 | 2480 | 733.4 | 629.2 | 1.04 |

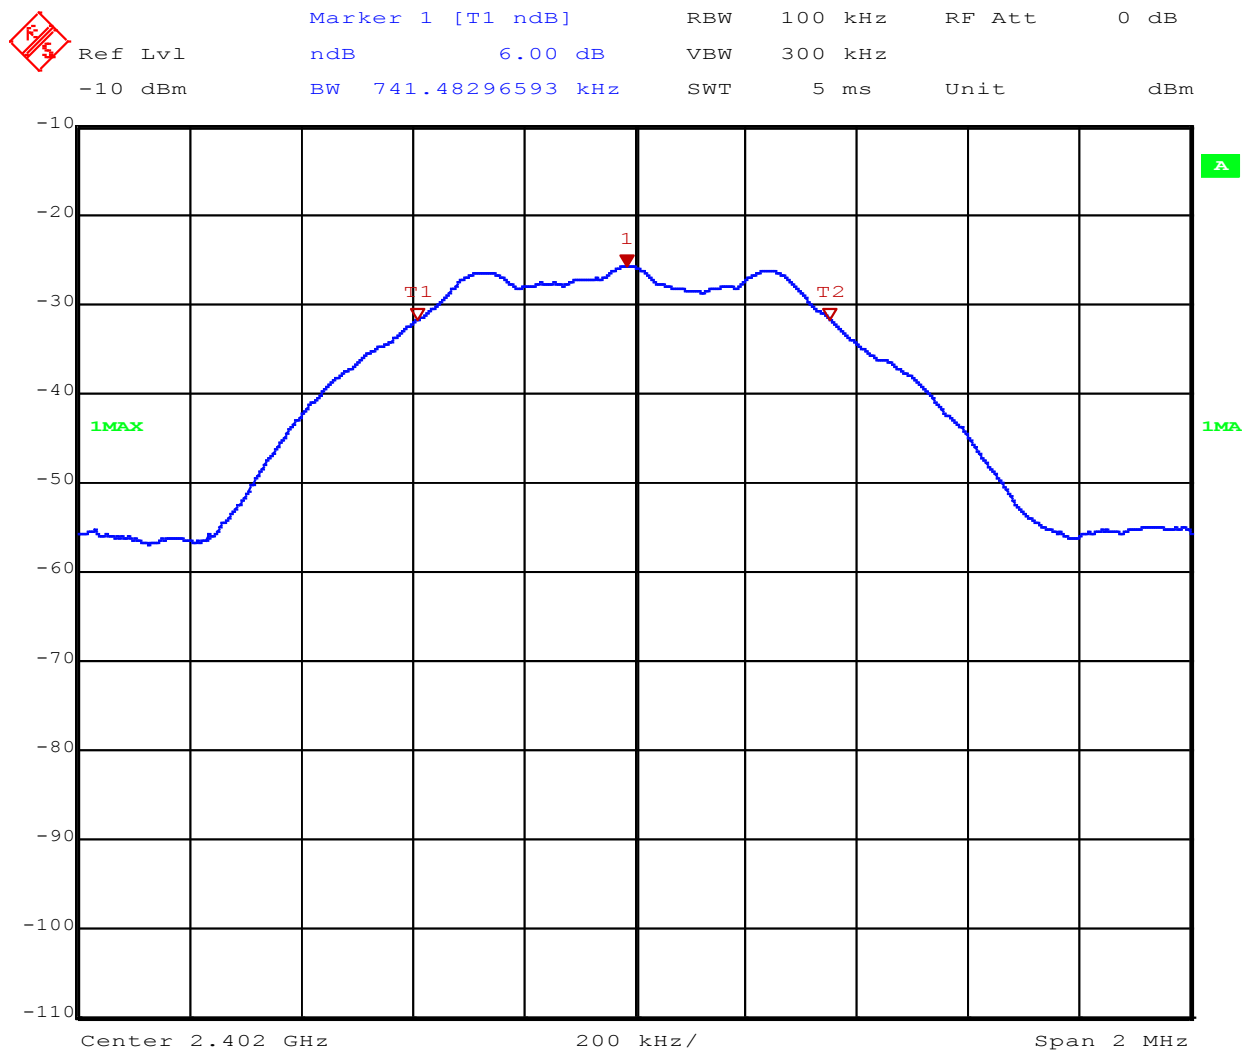


Date: 23.DEC.2020 15:35:01

DTS Bandwidth, 2402MHz

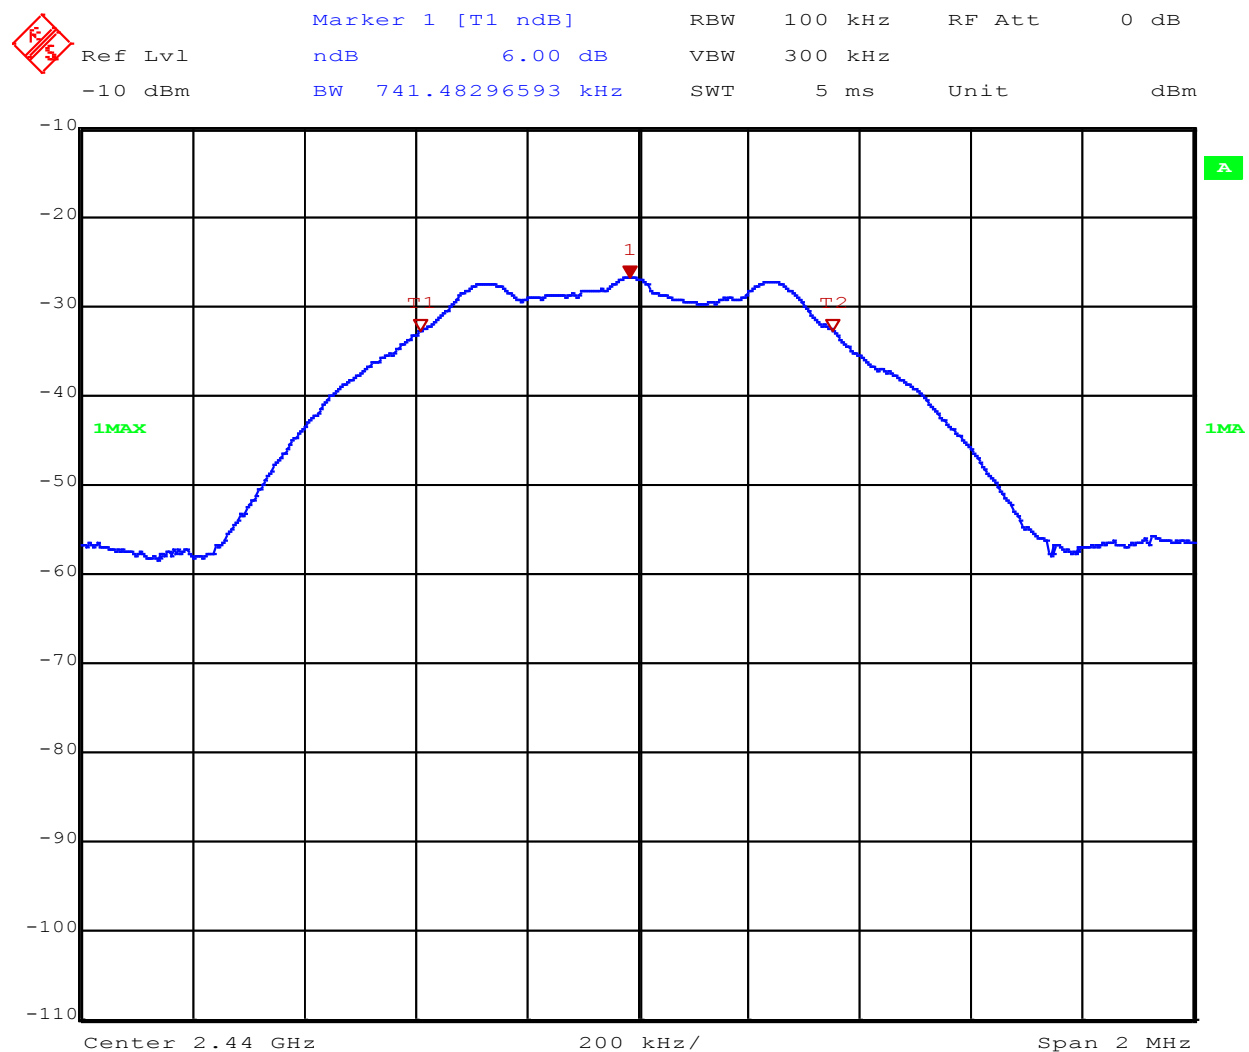

Date: 23.DEC.2020 15:36:15

DTS Bandwidth, 2440MHz

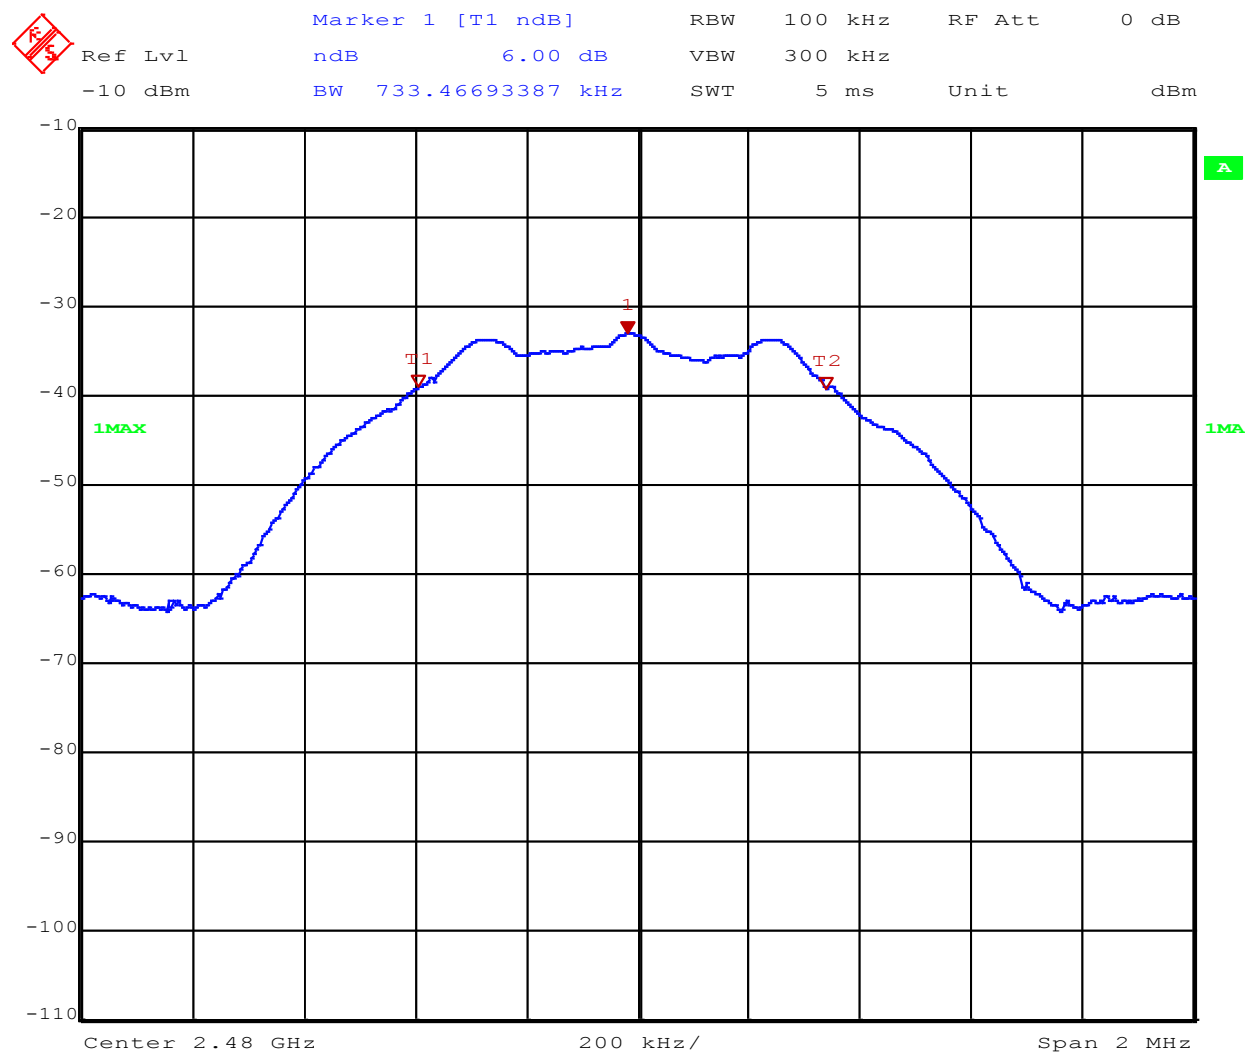


Date: 23.DEC.2020 15:36:56

DTS Bandwidth, 2480MHz




Delta 1 [T1] RBW 30 kHz RF Att 0 dB
Ref Lvl 0.07 dB VBW 300 kHz
-10 dBm 625.25050100 kHz SWT 6 ms Unit dBm

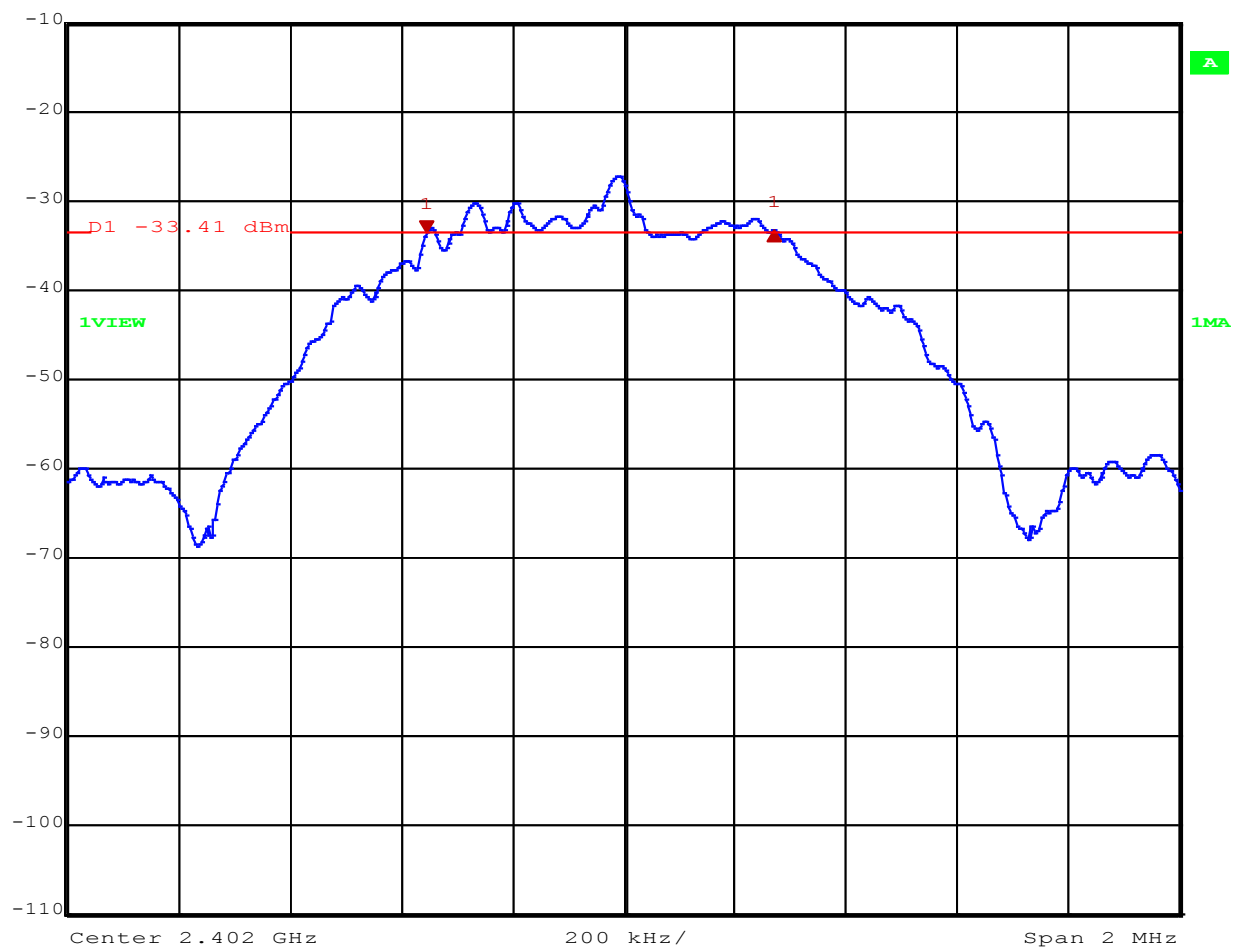


Date: 23.DEC.2020 15:43:39

6dB Bandwidth, 2402MHz

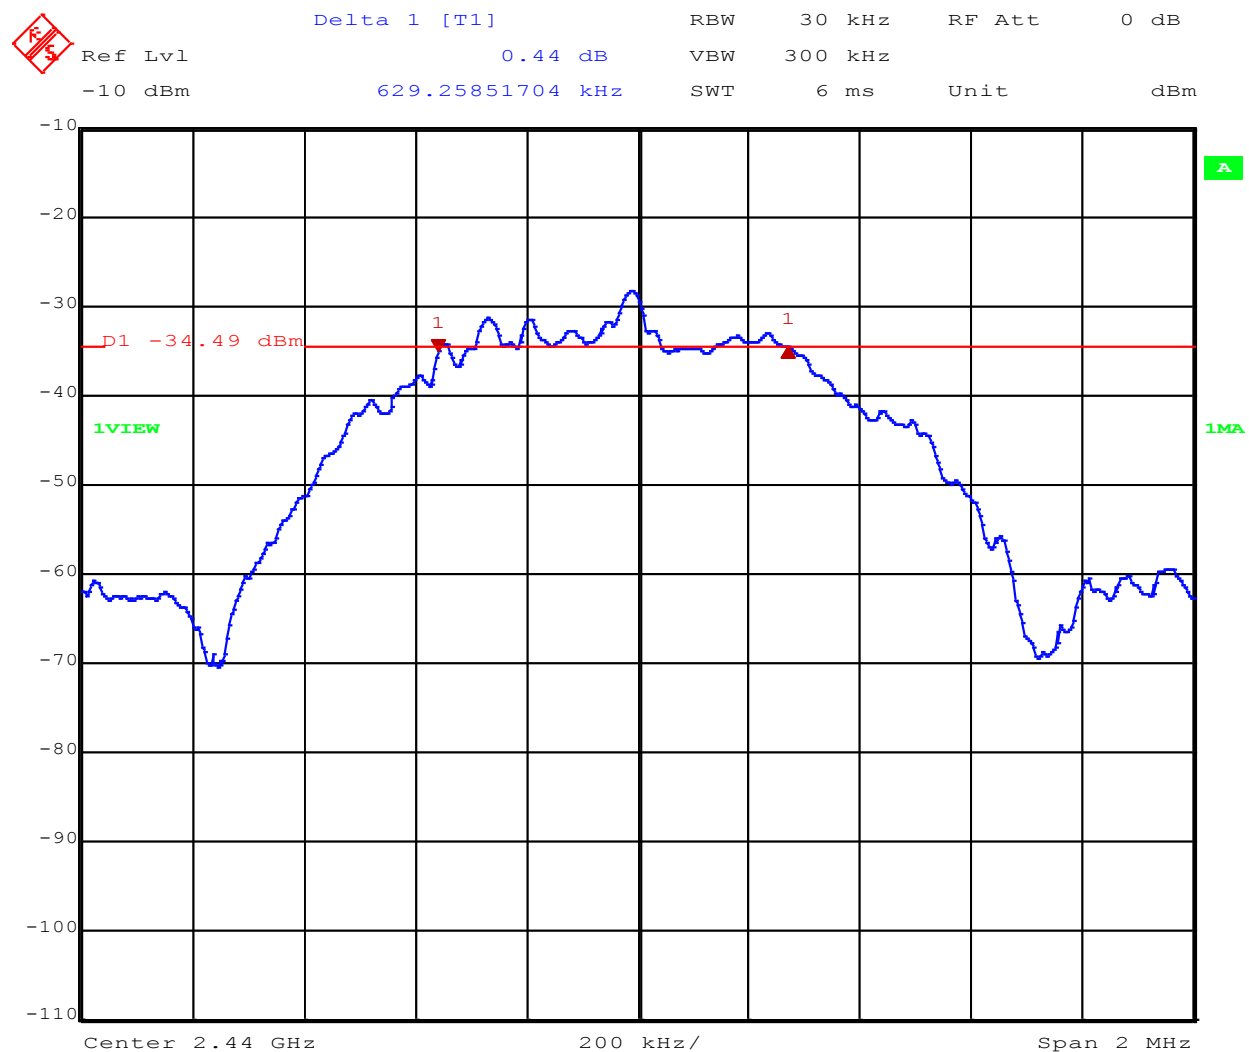


Date: 23.DEC.2020 15:45:26

6dB Bandwidth, 2440MHz

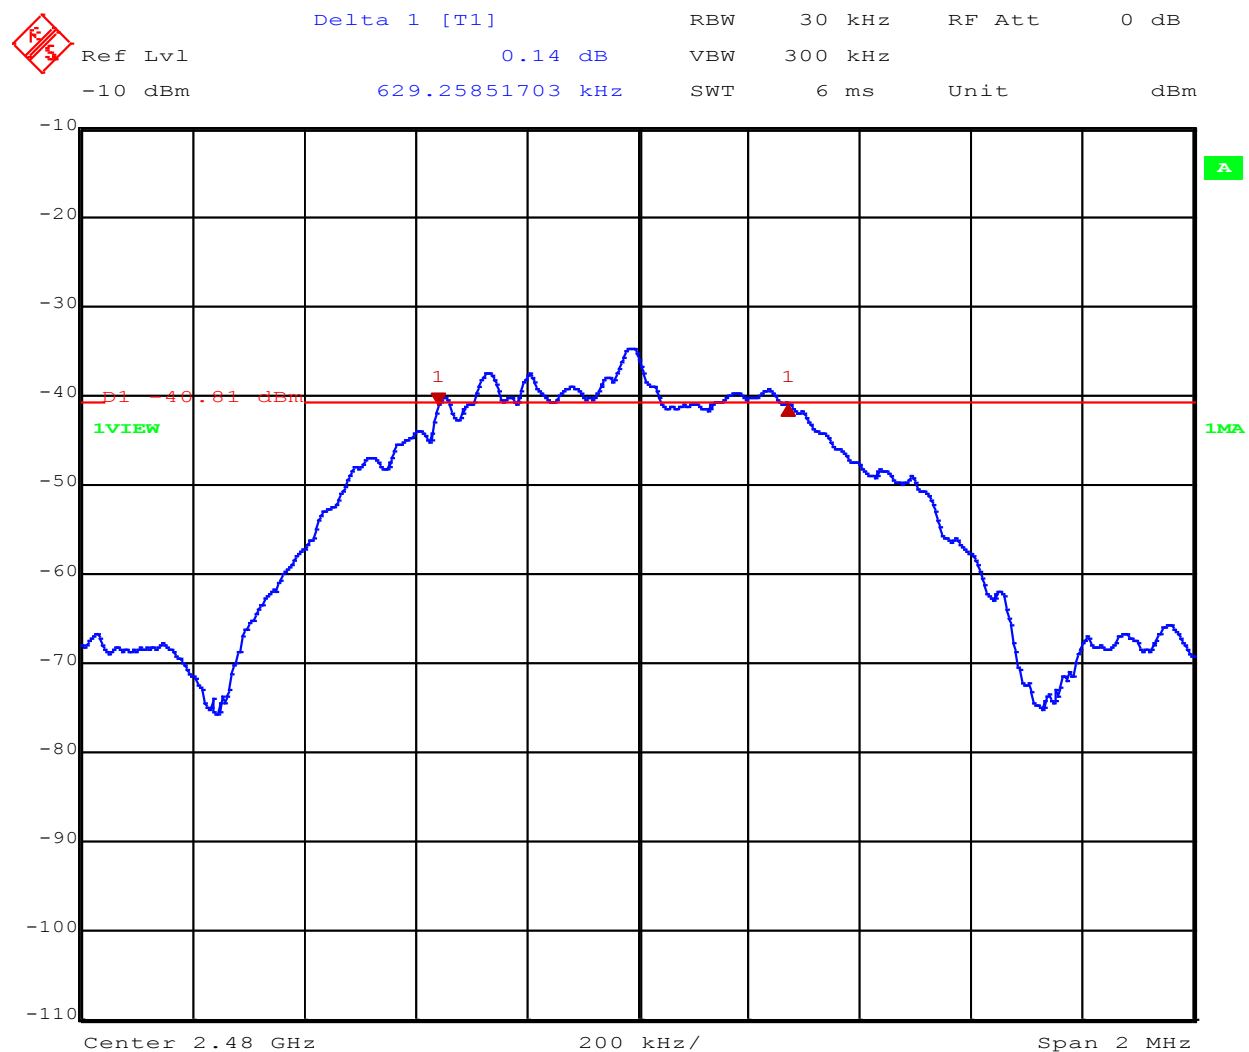


Date: 23.DEC.2020 15:47:12

6dB Bandwidth, 2480MHz

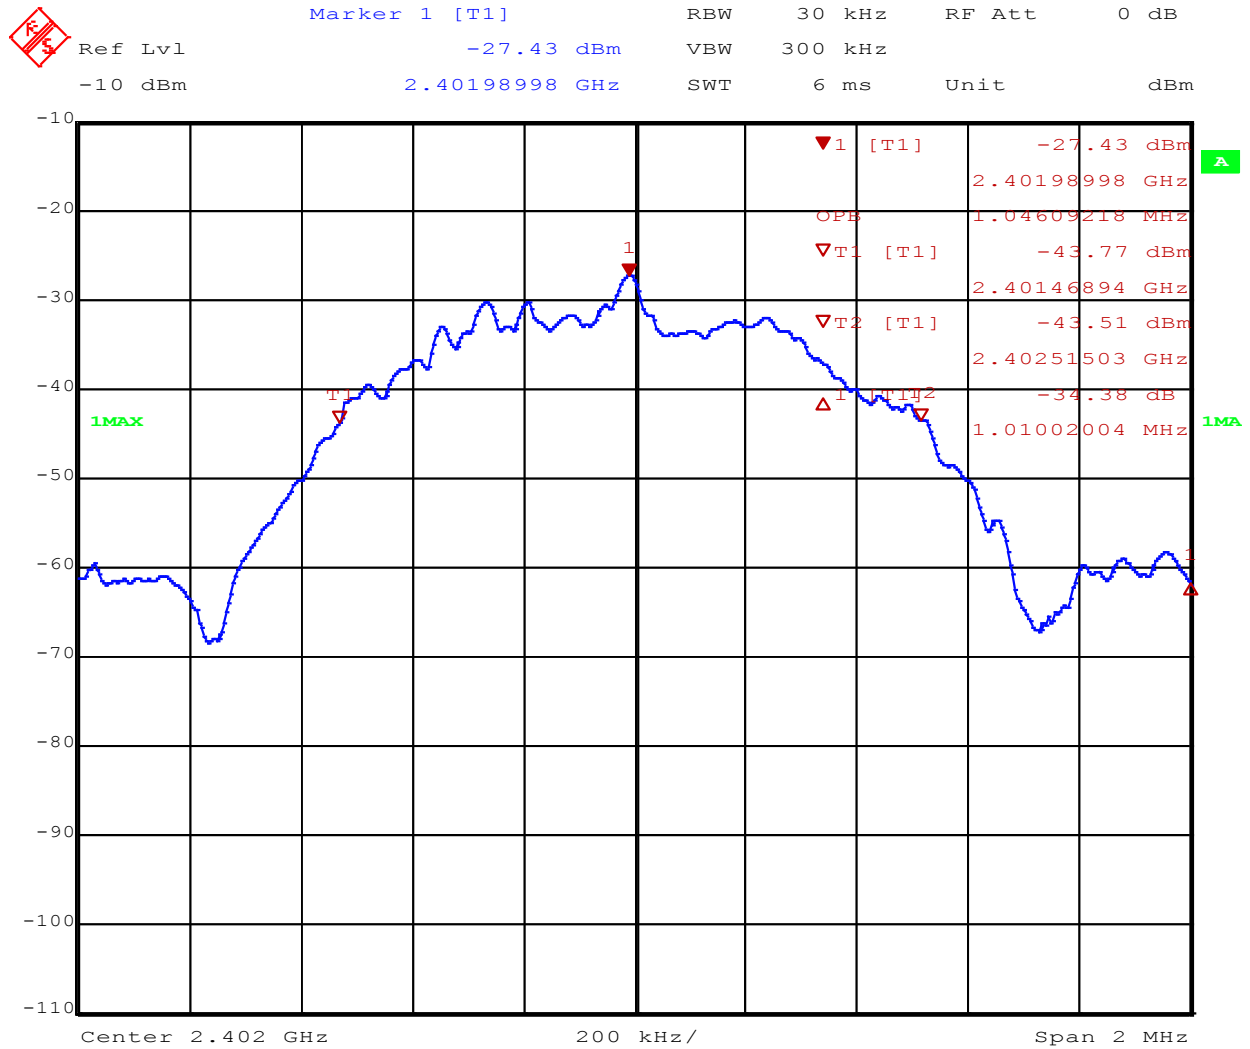


Date: 23.DEC.2020 15:53:25

99% Bandwidth, 2402MHz

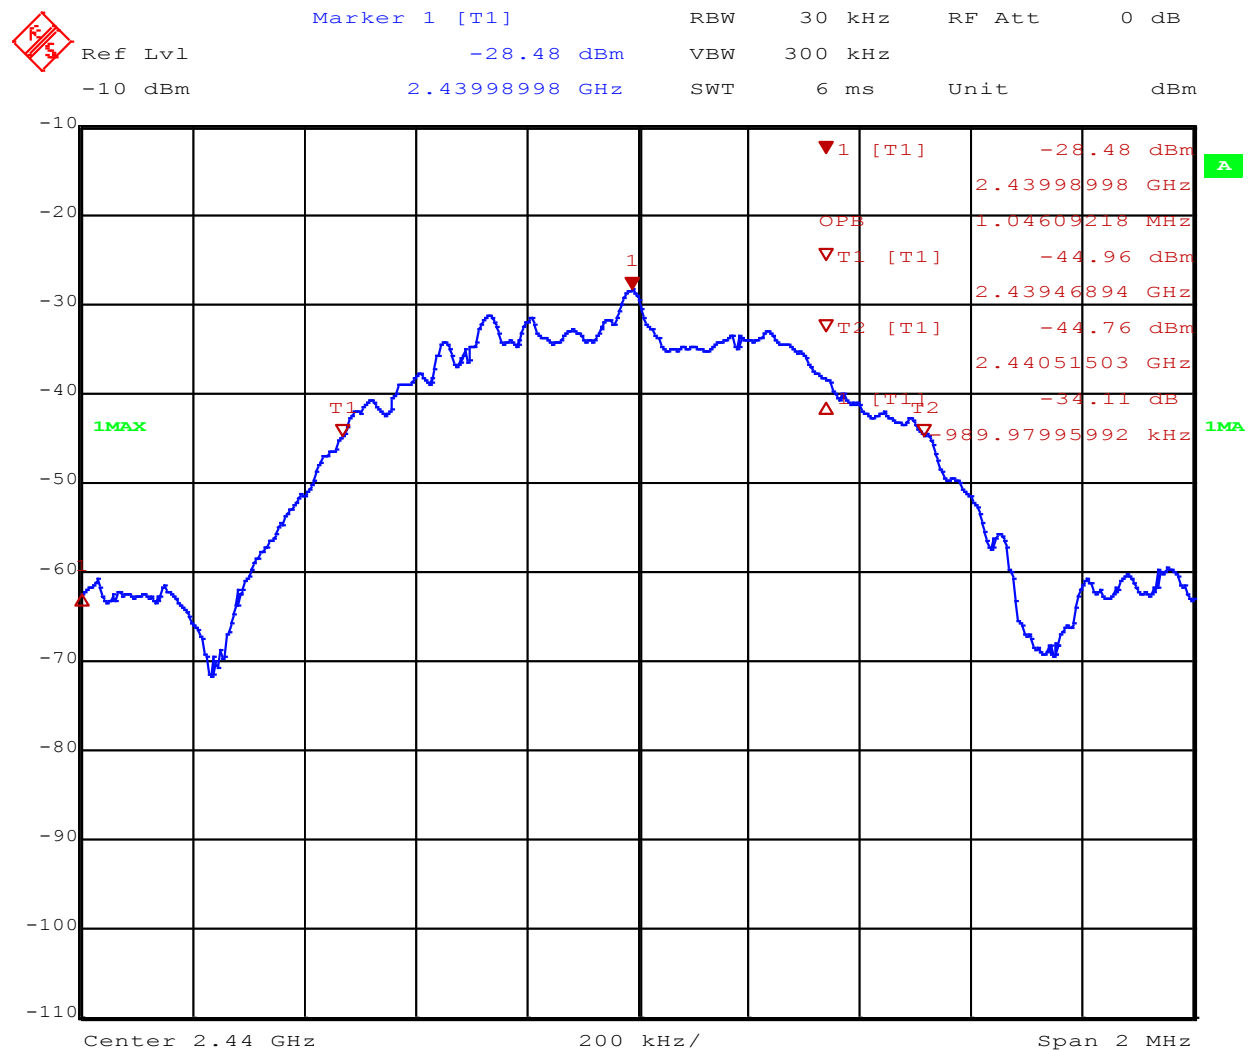

Date: 23.DEC.2020 15:54:29

99% Bandwidth, 2440MHz

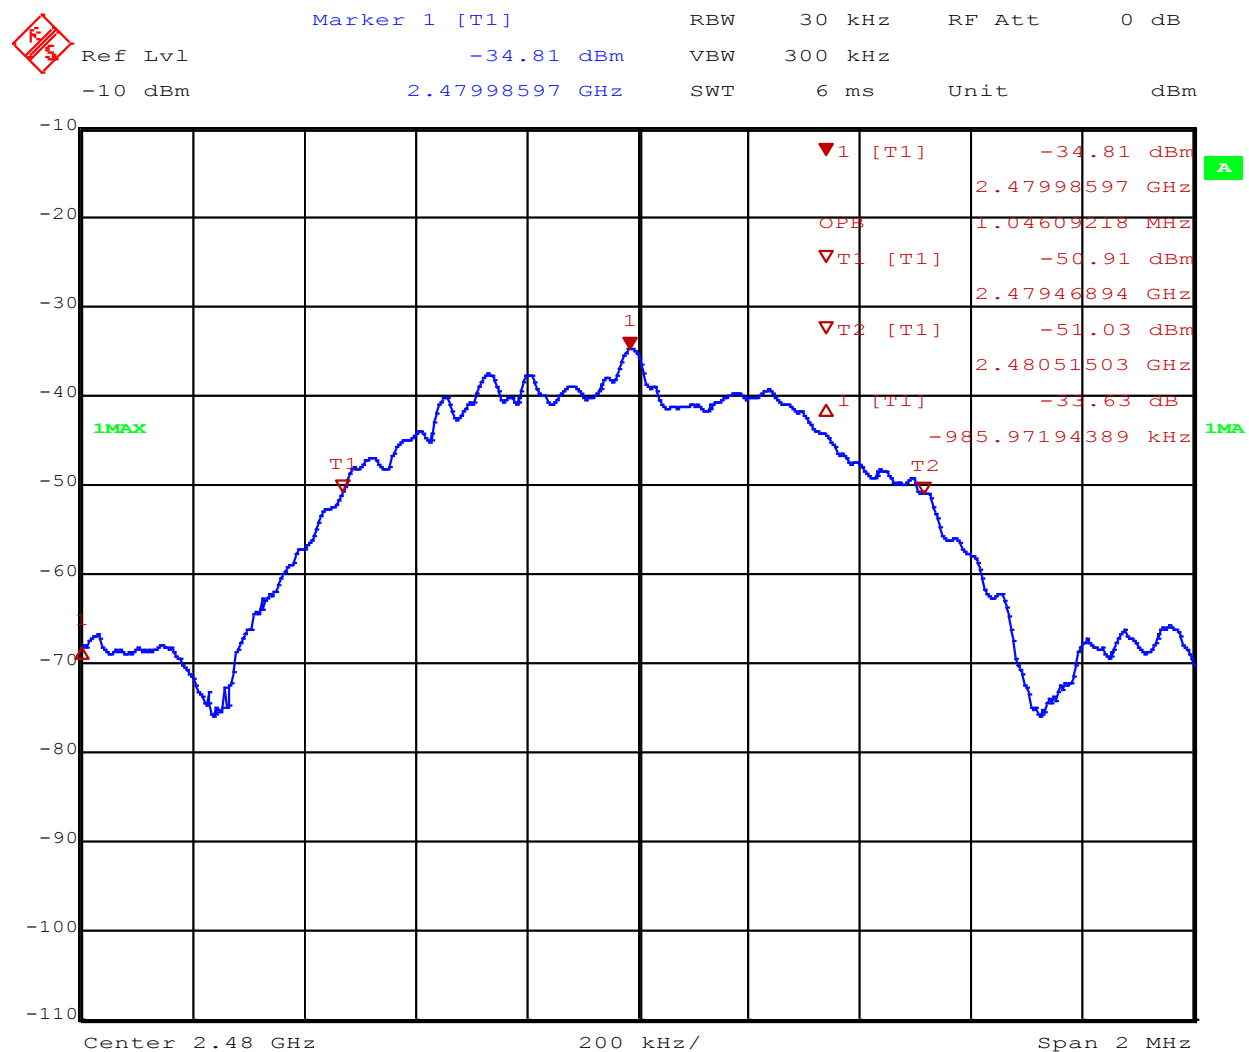

Date: 23.DEC.2020 15:55:34

99% Bandwidth, 2480MHz



10 Power Spectral Density

10.1 Test Limits

FCC Part 15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 Issue 2 § 5.2(b):

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.2 Test Method

Tests are performed in accordance with ANSI C63.10:2013 § 12.1.2, Annex G.

10.3 Test Equipment Used

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|-----------------|-------|--------------------------|--------------------------|
| EMI Test Receiver | 3900 | Rohde & Schwarz | ESU40 | 10/5/2020 | 10/5/2021 |
| Horn Antenna | 4001 | ETS | 3117 | 1/16/2020 | 1/16/2021 |
| System Controller | 4096 | ETS Lindgren | 2090 | Verify at Time of Use | Verify at Time of Use |
| Coaxial Cable | 3074 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2588 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2593 | | | 12/21/2020 | 12/21/2021 |
| Coaxial Cable | 2592 | | | 12/21/2020 | 12/21/2021 |



10.4 Test Results

The device was found to be **compliant**. The peak power spectral density was less than 8dBm.

10.5 Test Conditions

| | | | |
|----------------------------------|-----------------|-----------------------|-------------|
| Test Personnel: | Bryan Taylor | Test Date: | 12/31/2020 |
| Supervising/Reviewing Engineer: | | | |
| (Where Applicable) | NA | Limit Applied: | 8dBm / 3kHz |
| | FCC Part 15.247 | | |
| Product Standard: | RSS-247 Issue 2 | Ambient Temperature: | 22.6C |
| Input Voltage: | 120VAC / 60Hz | Relative Humidity: | 41.2% |
| Pretest Verification w / Ambient | | | |
| Signals or BB Source: | Yes | Atmospheric Pressure: | 991.2mbar |

Deviations, Additions, or Exclusions: None.

10.6 Test Data

| Frequency (MHz) | PPSD (dBm/3kHz) | Limit (dBm/3KHz) | Margin | Result |
|-----------------|-----------------|------------------|--------|--------|
| 2402 | -15.44 | 8 | 23.44 | PASS |
| 2440 | -16 | 8 | 24 | PASS |
| 2480 | -14.87 | 8 | 22.87 | PASS |

Note: Since the sample could not be configured for a conducted measurement, thePPSD was performed by first measuring the field strength and converting to EIRP as outlined in ANSI C63.10:2013. The antenna gain was then subtracted from the EIRP measurement to arrive at the conductedPPSD readings shown in the table above.

**MARKER 1**

2.401940385 GHz

*RBW 3 kHz

Marker 1 [T1]

*VBW 100 kHz


81.42 dBμV

Ref 126 dBμV

*Att 0 dB

SWT 135 ms

2.401940385 GHz

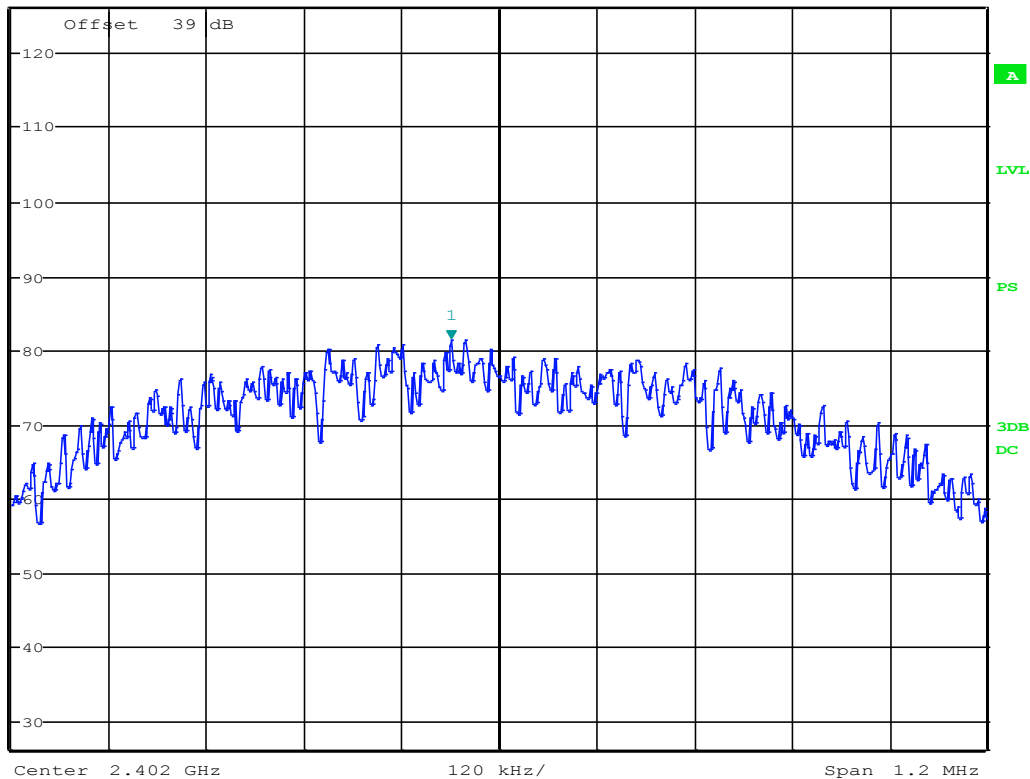1 PK
MAXH

Date: 31.DEC.2020 21:53:05

PPSD(Field Strength), 2402MHz

**MARKER 1**

2.439940385 GHz

*RBW 3 kHz

Marker 1 [T1]

*VBW 100 kHz


80.86 dBμV

Ref 126 dBμV

*Att 0 dB

SWT 135 ms

2.439940385 GHz

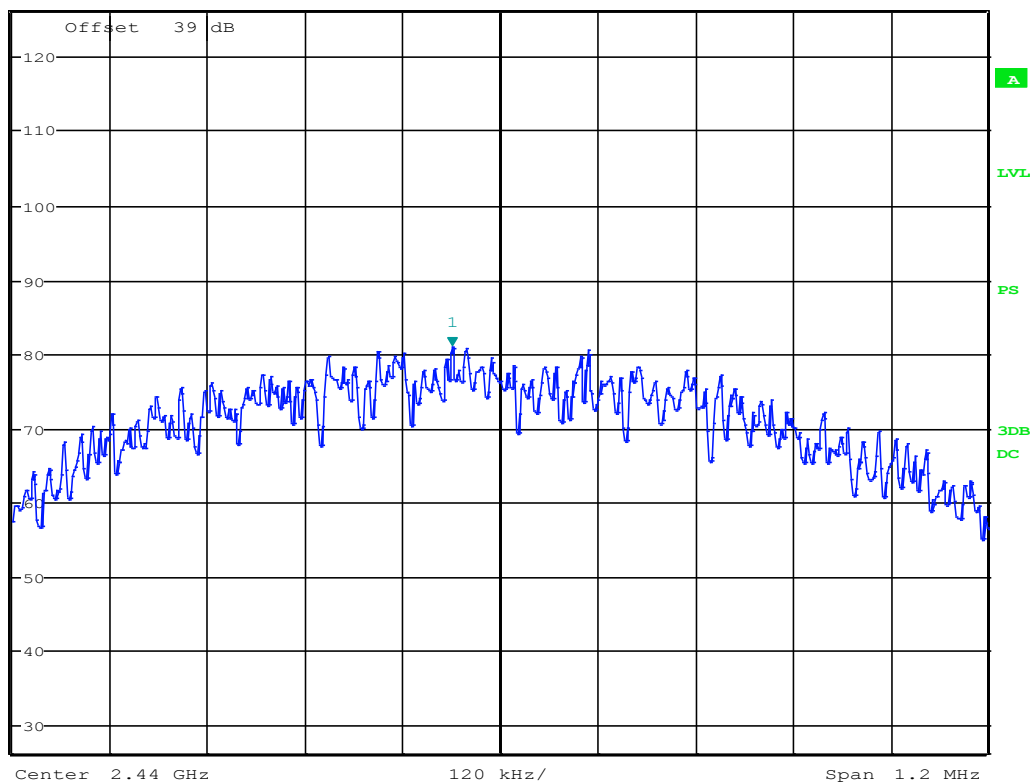1 PK
MAXH

Date: 31.DEC.2020 21:55:21

PPSD(Field Strength), 2440MHz

**MARKER 1**

2.479940385 GHz

*RBW 3 kHz

Marker 1 [T1]

*VBW 100 kHz


81.99 dBμV

Ref 126 dBμV

*Att 0 dB

SWT 135 ms

2.479940385 GHz

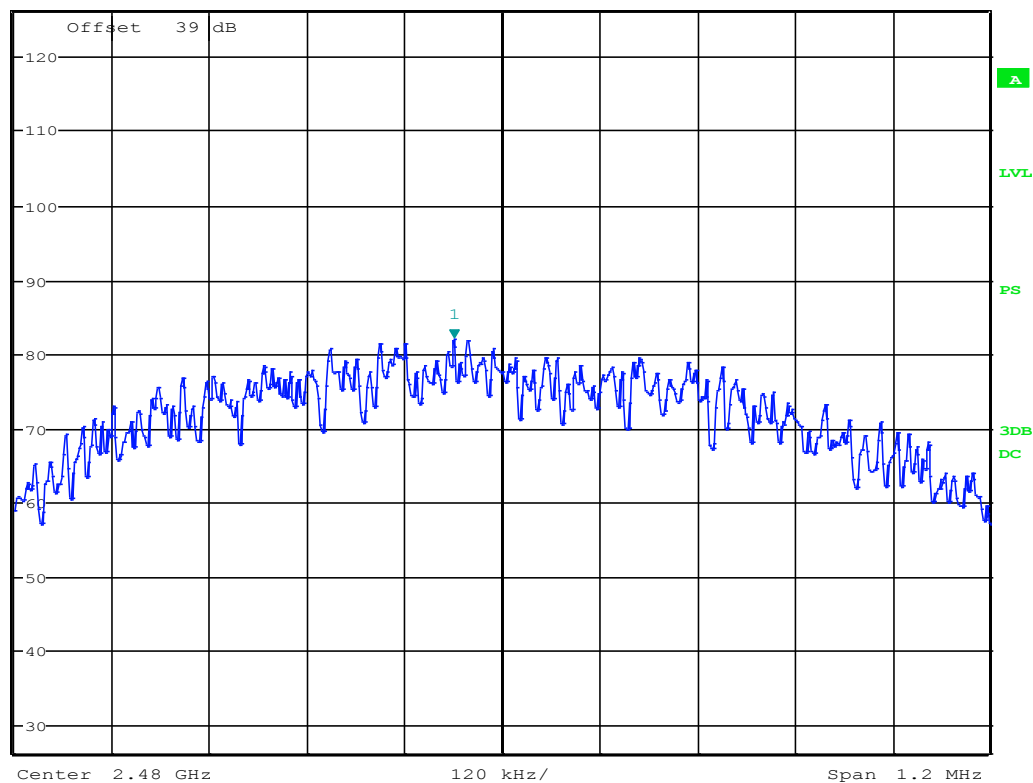1 PK
MAXH

Date: 31.DEC.2020 21:56:42

PPSD(Field Strength), 2480MHz



11 Antenna Requirement

11.1 Test Limits

FCC Part 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-Gen Issue 5 § 6.8:

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

11.2 Test Results

The device was found to be **compliant**. The device has an internal, permanently affixed antenna.



12 Conducted Emissions

12.1 Method

Tests are performed in accordance with ANSI C63.10: 2013

TEST SITE: Ground Plane

Site Designation: Ground Plane

Measurement Uncertainty

| Measurement | Frequency Range | Expanded Uncertainty (k=2) | Ucisp |
|--------------------------------|------------------|----------------------------|-------|
| Power Line Conducted Emissions | 150 kHz - 30 MHz | 3.1dB | 3.4dB |

As shown in the table above our conducted emissions U_{lab} is less than the corresponding U_{CISPR} reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required.

12.2 Sample Calculations

The following is how net line-conducted readings were determined:

$$NF = RF + LF + CF + AF$$

Where NF = Net Reading in dBμV

RF = Reading from receiver in dBμV

LF = LISN or ISN Correction Factor in dB

CF = Cable Correction Factor in dB

AF = Attenuator Loss Factor in dB

To convert from dBμV to μV or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu V$$

NF = Net Reading in dBμV

Example:

$$NF = RF + LF + CF + AF = 28.5 + 0.2 + 0.4 + 20.0 = 49.1 \text{ dB}\mu V$$

$$UF = 10^{(49.1 \text{ dB}\mu V / 20)} = 285.1 \mu V/m$$

**12.3 Test Equipment Used:**

| Description | Asset | Manufacturer | Model | Cal Date | Cal Due |
|-------------------|-------|------------------------------|-------------------|------------|------------|
| EMI Test Receiver | 2327 | Rohde&Schwarz | ESI26 | 10/9/2020 | 10/9/2021 |
| LISN | 2509 | Fischer Custom Communication | FCC-LISN-50-50-2M | 4/21/2020 | 4/21/2021 |
| Coaxial Cable | 6026 | | | 12/21/2020 | 12/21/2021 |

12.4 Software Utilized:


| Name | Manufacturer | Version |
|------|--------------|------------|
| TILE | ETS Lindgren | V7.0.6.545 |

12.5 Results:

The sample tested was found to Comply.



12.6 Plots/Data: Conducted Emissions (Line)

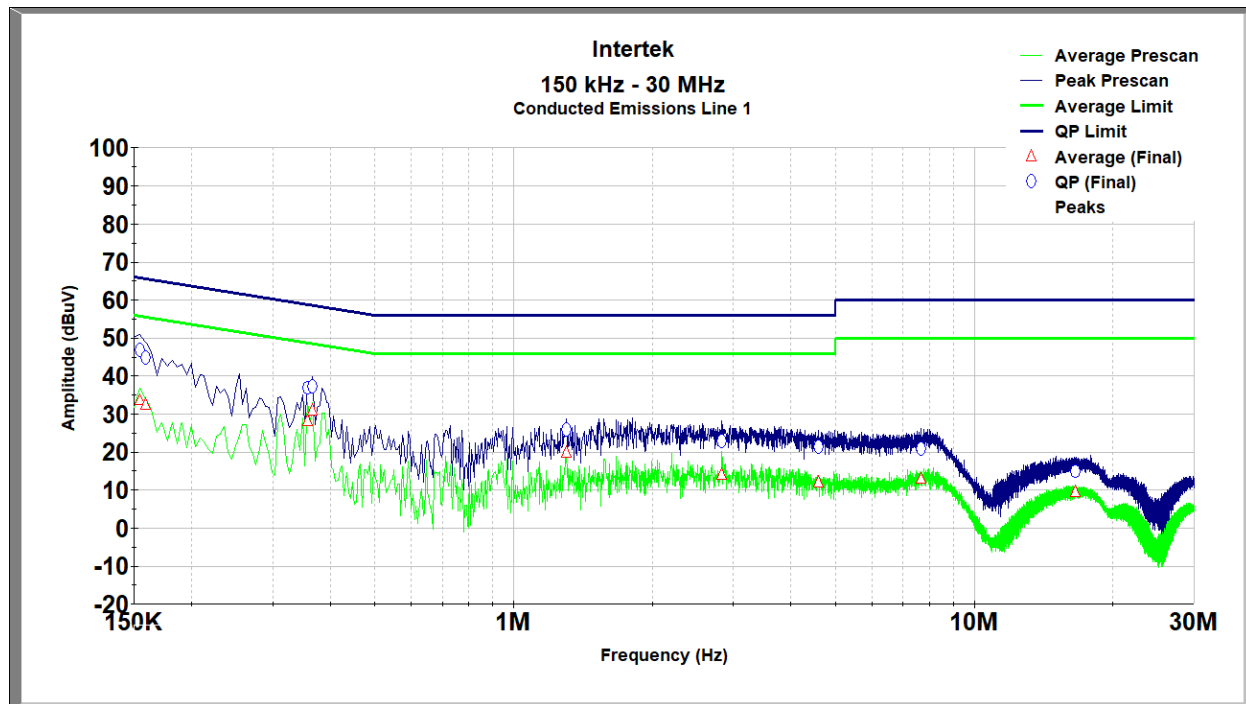

| Frequency (MHz) | Quasi-Peak (dBuV) | Quasi-Peak Limit (dBuV) | Quasi-Peak Margin (dB) | Average (dBuV) | Average Limit (dBuV) | Average Margin (dB) |
|-----------------|-------------------|-------------------------|------------------------|----------------|----------------------|---------------------|
| 0.155 | 46.985 | 65.871 | 18.886 | 33.675 | 55.871 | 22.196 |
| 0.159 | 44.804 | 65.743 | 20.939 | 32.446 | 55.743 | 23.297 |
| 0.357 | 37.134 | 60.086 | 22.951 | 28.160 | 50.086 | 21.926 |
| 0.366 | 37.349 | 59.829 | 22.480 | 30.891 | 49.829 | 18.937 |
| 1.302 | 25.868 | 56.000 | 30.132 | 19.787 | 46.000 | 26.213 |
| 2.832 | 23.018 | 56.000 | 32.982 | 14.104 | 46.000 | 31.896 |
| 4.580 | 21.477 | 56.000 | 34.523 | 12.084 | 46.000 | 33.916 |
| 7.673 | 20.794 | 60.000 | 39.206 | 13.069 | 50.000 | 36.931 |
| 16.596 | 14.995 | 60.000 | 45.005 | 9.512 | 50.000 | 40.488 |


Test Personnel: Bryan Taylor
Supervising/Reviewing Engineer: _____
(Where Applicable) NA
Product Standard: FCC Part 15.207
Input Voltage: 120VAC 60Hz
Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 1/18/2020
Limit Applied: Class B
Ambient Temperature: 22.4°C
Relative Humidity: 31.2%
Atmospheric Pressure: 986 mbar

Deviations, Additions, or Exclusions: None



12.7 Plots/Data: Conducted Emissions (Neutral)

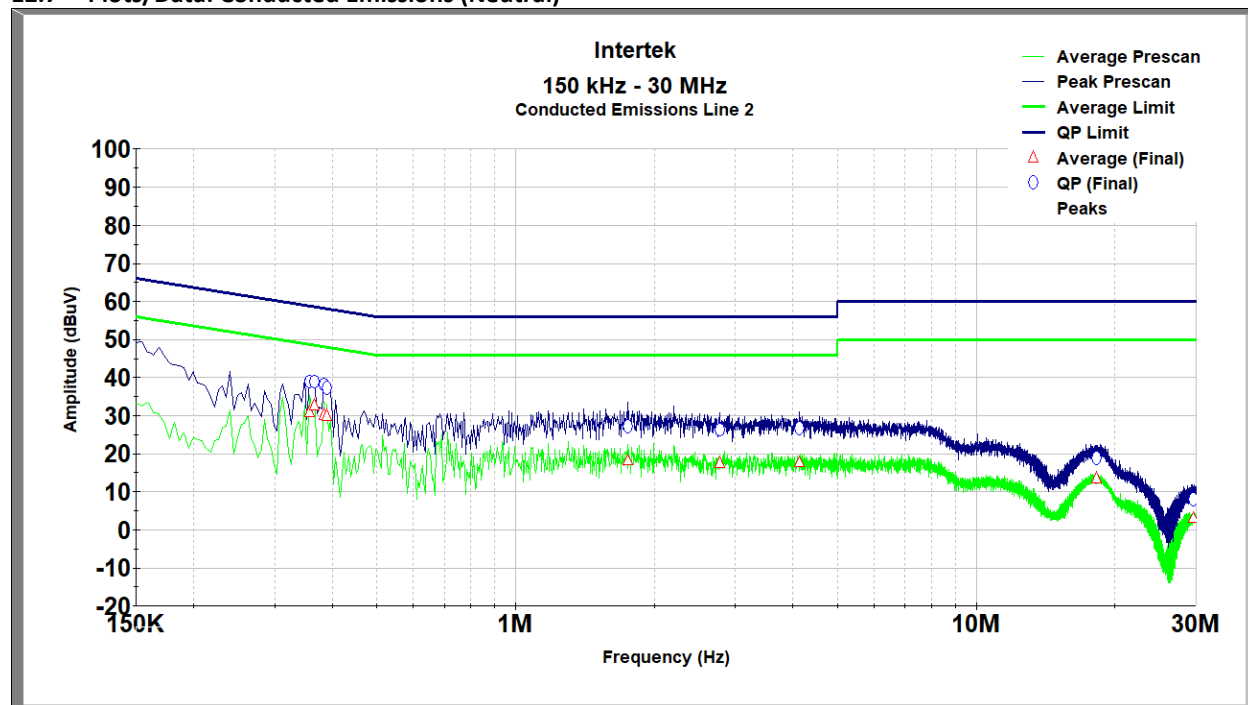

| Frequency (MHz) | Quasi-Peak (dBuV) | Quasi-Peak Limit (dBuV) | Quasi-Peak Margin (dB) | Average (dBuV) | Average Limit (dBuV) | Average Margin (dB) |
|-----------------|-------------------|-------------------------|------------------------|----------------|----------------------|---------------------|
| 0.357 | 39.006 | 60.086 | 21.080 | 30.893 | 50.086 | 19.193 |
| 0.366 | 39.131 | 59.829 | 20.698 | 32.639 | 49.829 | 17.190 |
| 0.384 | 38.404 | 59.314 | 20.910 | 30.166 | 49.314 | 19.148 |
| 0.389 | 37.357 | 59.186 | 21.829 | 29.944 | 49.186 | 19.242 |
| 1.752 | 27.313 | 56.000 | 28.687 | 18.324 | 46.000 | 27.676 |
| 2.769 | 26.463 | 56.000 | 29.537 | 17.527 | 46.000 | 28.473 |
| 4.125 | 26.597 | 56.000 | 29.403 | 17.773 | 46.000 | 28.227 |
| 18.262 | 18.913 | 60.000 | 41.087 | 13.557 | 50.000 | 36.443 |
| 29.580 | 8.092 | 60.000 | 51.908 | 3.267 | 50.000 | 46.733 |

Test Personnel: Bryan Taylor
Supervising/Reviewing Engineer: NA
(Where Applicable)
Product Standard: FCC Part 15.207
Input Voltage: 120VAC 60Hz
Pretest Verification w / Ambient
Signals or BB Source: Yes

Test Date: 1/18/2020
Limit Applied: Class B
Ambient Temperature: 22.4°C
Relative Humidity: 31.2%
Atmospheric Pressure: 986 mbar

Deviations, Additions, or Exclusions: None

**13 Revision History**

| Revision Level | Date | Report Number | Prepared By | Reviewed By | Notes |
|----------------|----------|--------------------|-------------|-------------|----------------|
| 0 | 2/3/2021 | 104517828LEX-002.1 | BCT | BZ | Original Issue |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |