



RF TEST REPORT

Product Name : Universal Bluetooth Helmet Adapter Kit, Mage

Model Number : HS830

Brand Name : Motorola

FCC ID : QVZ58905337

Applicant : Microlink Communications Inc.

Address : 6F, No. 30, Raykuang Rd., Neihu, Taipei 114,
Taiwan, R.O.C.

Received Date : November 08, 2004

Tested Date : November 08 ~ 15, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing
Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 2 of 44


Test Report Certification

Product Name : Universal Bluetooth Helmet Adapter Kit, Mage
Model Number : HS830
Brand Name : Motorola
FCC ID : QVZ58905337
Applicant : Microlink Communications Inc.

Measurement Standard :

FCC 47 C.F.R. Part 15, Subpart B and Subpart C (2004)
ANSI C63.4 (2003)

Tested By : Beck Wu, **Date** : November 16, 2004
(Beck Wu)
Approved By : C.F. Wu, **Date** : November 16, 2004
(C.F. Wu, Manager)



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION	5
1.1 General Statement	5
1.2 General Description of EUT & Power	5
1.3 Description of Peripherals.....	6
1.4 EUT & Peripherals Setup Diagram.....	6
1.5 EUT Operating Condition	6
1.6 Description of Test Site.....	7
1.7 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	8
3. 20dB BANDWIDTH FOR HOPPING	9
3.1 Test Equipments.....	9
3.2 Test Setup.....	9
3.3 Limits of 20db Bandwidth Measurement.....	9
3.4 Test Procedure.....	9
3.5 Uncertainty of Conducted Emission	10
3.6 Test Results	10
3.7 Photo of 20db Bandwidth Measurement.....	11
4. MAXIMUM PEAK OUTPUT POWER.....	12
4.1 Test Equipments.....	12
4.2 Test Setup.....	12
4.3 Limits of Maximum Peak Output Power	12
4.4 Test Procedure.....	13
4.5 Uncertainty of Conducted Emission	13
4.6 Test Results	13
4.7 Photo of Maximum Peak Output Power	14
5. HOPPING CHANNEL SEPARATION.....	15
5.1 Test Equipments.....	15
5.2 Test Setup.....	15
5.3 Limits of Hopping Channel Separation.....	15
5.4 Test Procedure.....	16
5.5 Uncertainty of Conducted Emission	16
5.6 Test Results	16
5.7 Photo of Hopping Channel Separation.....	16



TABLE OF CONTENTS

TITLE	PAGE NO.
6. NUMBER OF HOPPING FREQUENCY USED.....	17
6.1 Test Equipments.....	17
6.2 Test Setup.....	17
6.3 Limits of Number of Hopping Frequency Used.....	17
6.4 Test Procedure.....	18
6.5 Uncertainty of Conducted Emission	18
6.6 Test Results	18
6.7 Photo of Number of Hopping Frequency Used.....	18
7. DWELL TIME ON EACH CHANNEL	19
7.1 Test Equipments.....	19
7.2 Test Setup.....	19
7.3 Limits of Dwell Time on Each Channel	19
7.4 Test Procedure.....	20
7.5 Uncertainty of Conducted Emission	20
7.6 Test Results	20
7.7 Photo of Dwell Time on Each Channel.....	21
8. BAND EDGE MEASUREMENT	22
8.1 Test Equipments.....	22
8.2 Test Setup.....	22
8.3 Limits of Band edge Measurements.....	22
8.4 Test Procedure.....	22
8.5 Uncertainty of Conducted Emission	22
8.6 Test Results	23
8.7 Photo of Band Edge Measurement.....	24
9. OUT OF BAND SPURIOUS EMISSIONS -RADIATED MEASUREMENTS.....	26
9.1 Test Equipments.....	26
9.2 Test Setup.....	26
9.3 Radiation Limit	27
9.4 Test Procedures	28
9.5 Uncertainty of Radiated Emission	28
9.6 Radiated RF Noise Measurement.....	29-41
9.7 Photos of Open Site.....	42-43
10. ANTENNA REQUIREMENT	44
10.1 Standard Applicable.....	44
10.2 Antenna Connected Construction	44

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 5 of 44

1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to National or International std.

1.2 General Description of EUT & Power

Product Name	Universal Bluetooth Helmet Adapter Kit, Mage
Model Number	HS830
Frequency Range	2402MHz to 2480MHz $f = 2402 + n\text{MHz}$, $n = 0, \dots, 78$
Channel Spacing	1MHz
Channel Number	79
Air Data Rate	1 Mbps
Type of Modulation	Frequency Hopping Spread Spectrum
Frequency Selection	by software / firmware
Transmitter Classification	portable device
Antenna Type	INVERTED F Antenna, Antenna Gain : 0dBi
Power Source	5.9VDC (From Battery)



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337


Report No. : EC04-11-009FRF

Page 6 of 44

1.3 Description of Peripherals

No.	Product	Manufacturer	Model No.	Serial No.	Input Power	Output Power	FCC ID
1	Notebook PC	COMPAQ	N800V	5Y33KSQZM0YV 1YR	18.5VDC, 65W, 3.5A	-----	DoC
	Adapter	COMPAQ	PPP009H	2Y18650504	100~240VAC, 50/60, 1.6A	18.5VDC, 65W, 3.5A	-----

1.4 EUT & Peripherals Setup Diagram

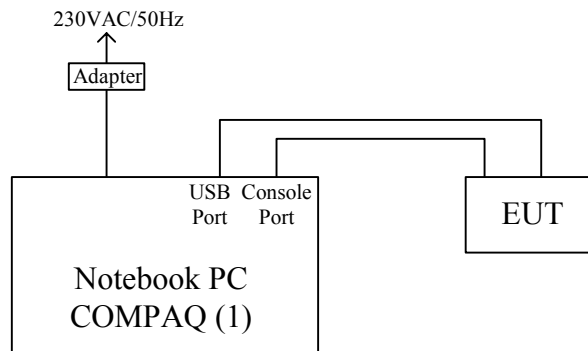

The indicated numbers (1), please refer to item 1.3

1.5 EUT Operating Condition

- (1) Turn on the power of all equipment.
- (2) Notebook runs a test program CSR Bluesuite (Blue test) to each channel.
- (3) The EUT transmits DH1 packets with PRBS9 as payload.
- (4) Select TXDATA1, change power Ext255, Int 50.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 7 of 44

1.6 Description of Test Site

SITE DESCRIPTION :

FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab Code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1229, C-1250
TÜV Rheinland Certificate NO. : 10008375

NAME OF SITE : Ecom Sertech Corp. Hsin-Chu Lab.
(Spin-off from ITRI / ERSO on Apr. 01, 2003)

SITE LOCATION : Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 8 of 44

1.7 Summary of Test Results

The EUT has been tested according to the following specifications : (1 ~ 79 Channel)

APPLIED STANDARD : FCC 47 C.F.R. Part 15, Subpart B and Subpart C			
Standard Section	Test Item and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit: Sec1.5.107	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit
15.247(a)(1)	Transmitter 20dB Bandwidth	N/A	Meet the requirement of limit
15.247(b)(1)	Maximum Peak Output Power Limit: max. 125mW	PASS	Meet the requirement of limit
15.247(a)(1)	Carrier Frequency Separation Limit: 2/3 of the 20dB bandwidth	PASS	Meet the requirement of limit
15.247(a)(1)(iii)	Number of Hopping Frequency Limit: at least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(iii)	Time of Occupancy (dwell time) Limit: 0.4sec within 31.6sec	PASS	Meet the requirement of limit
15.247(d)	Band Edge Compliance	PASS	Meet the requirement of limit
15.247(d)	Out of Band Measurements	PASS	Meet the requirement of limit

2. CONDUCTED POWERLINE TEST

Power supply of EUT is by Battery.



3. 20dB BANDWIDTH FOR HOPPING

Test Requirement: 15.247(a)(1)

3.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA

3.2 Test Setup



3.3 Limits of 20db Bandwidth Measurement

Limit : N/A

3.4 Test Procedure

The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 10 of 44

3.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 10\text{KHz}$.

3.6 Test Results

Refer to attached spectrum analyzer data chart.

Input Power (System)	5.9VDC (From Battery)	Environmental Conditions	26°C, 48%RH
Tested By	Beck Wu		

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Pass / Fail
01 (Low)	2402	0.876	N/A
40 (Mid)	2441	0.876	N/A
79 (High)	2480	0.876	N/A



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337


Report No. : EC04-11-009FRF

Page 11 of 44


3.7 Photo of 20db Bandwidth Measurement

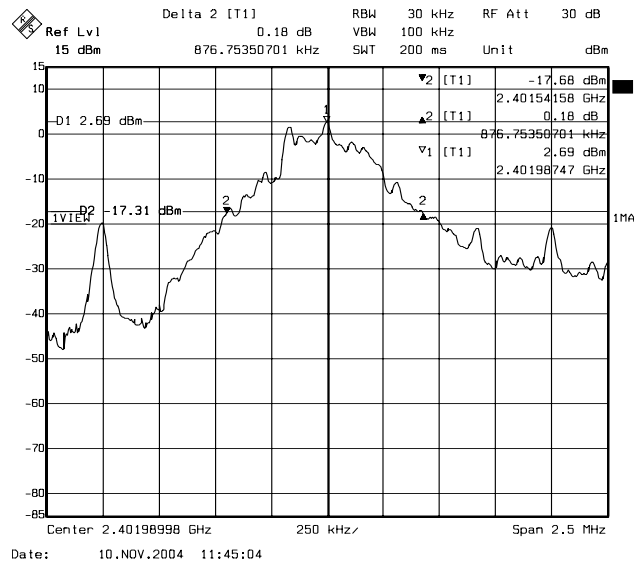

Channel Low

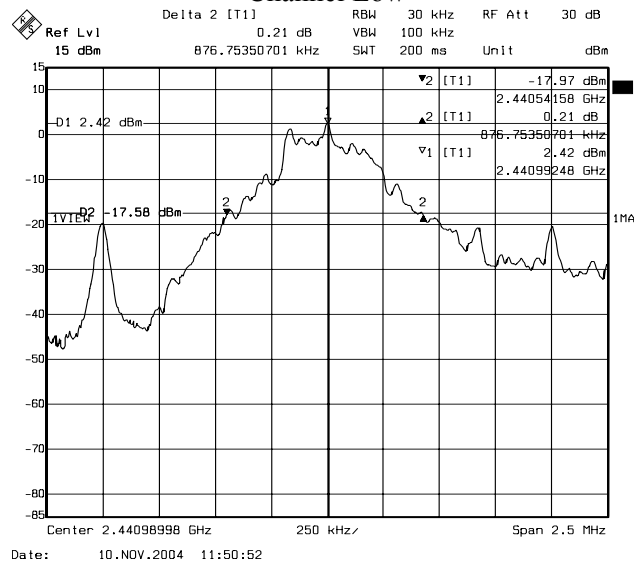

Channel Middle

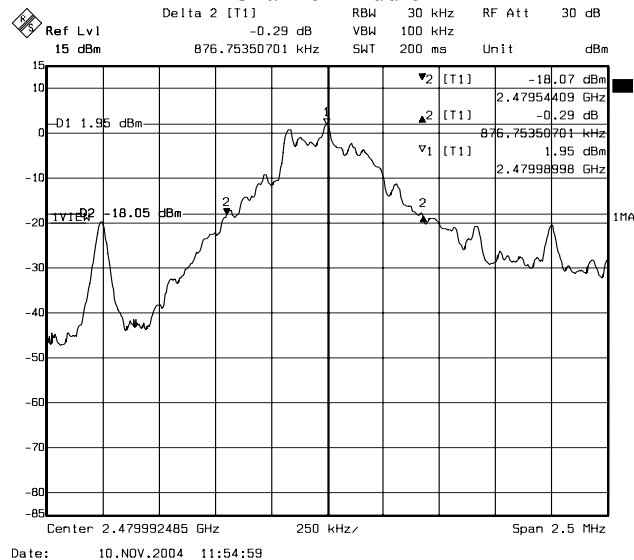

Channel High



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 12 of 44

4. MAXIMUM PEAK OUTPUT POWER

Test Requirement: 15.247(b)(1)


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 125mW for frequency hopping systems operating in 2400~2483.5 MHz employing at least 15 hopping channels.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 13 of 44

4.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal see 4.7 for the measurement set up.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

4.6 Test Results

Input Power (System)	5.9VDC (From Battery)	Environmental Conditions	26°C, 48%RH
Tested By	Beck Wu		

Cable loss = 0.5dB

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
01 (Low)	2402	3.51	20.97	PASS
40 (Mid)	2441	3.20	20.97	PASS
79 (High)	2480	2.75	20.97	PASS

Note : 1. At final test to get the worst-case emission at 1Mbps.

2. The result basic equation calculation as follow :

Peak Power Output = Peak Power Reading + Cable loss + Attenuator



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF


Page 14 of 44

4.7 Photo of Maximum Peak Output Power

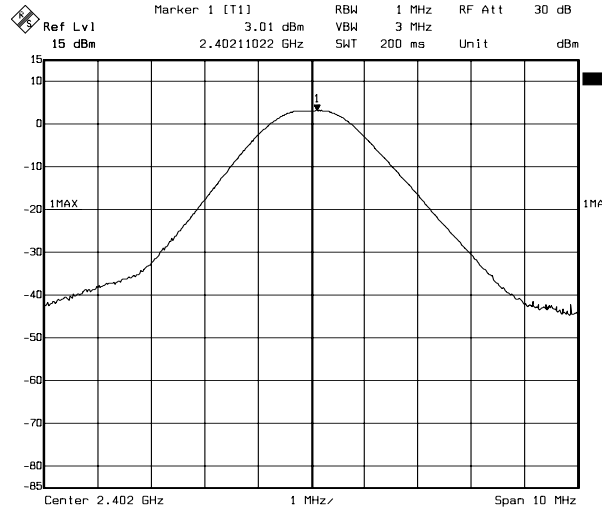


Date: 10.NOV.2004 13:14:20

Channel Low

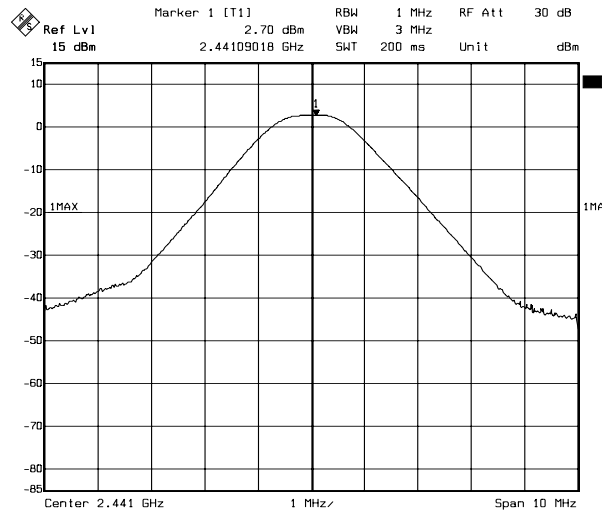

Date: 10.NOV.2004 13:13:28

Channel Middle

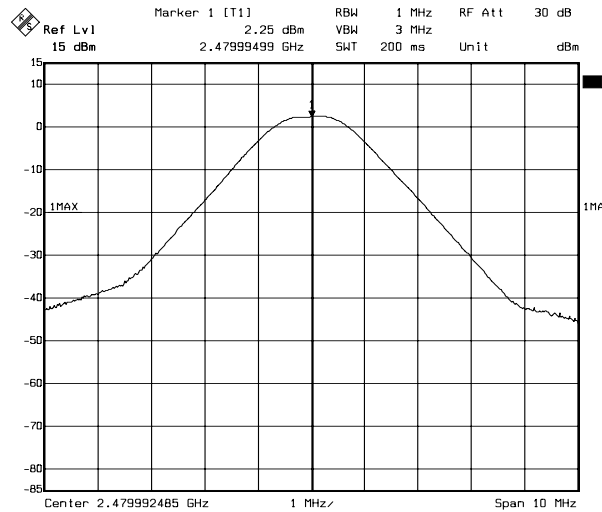

Date: 10.NOV.2004 13:12:30

Channel High

5. HOPPING CHANNEL SEPARATION

Test Requirement: 15.247(a)(1)


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Hopping Channel Separation

According to 15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25kHz or the two-thirds 20dB bandwidth of the hopping channel, whichever is greater.

5.4 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.

Repeat above procedures until all frequencies measured were complete.

5.5 Uncertainty of Conducted Emission


The uncertainty of conducted emission is $\pm 10\text{KHz}$.

5.6 Test Results

Refer to section 3, 20dB bandwidth measurement, the measured channel separation should be greater than 20dB bandwidth or Minimum bandwidth.

Channel	Adjacent Hopping Channel Separation (kHz)	20dB bandwidth (kHz)	Minimum Bandwidth	Result
2441MHz (Mid)	1004 kHz	876 kHz	25 kHz	PASS

5.7 Photo of Hopping Channel Separation

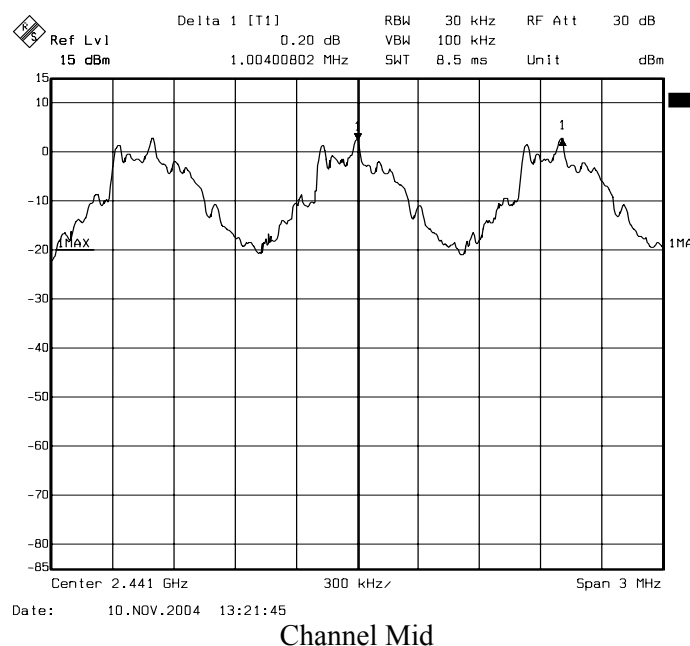

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 17 of 44

6. NUMBER OF HOPPING FREQUENCY USED

Test Requirement: 15.247(a)(1)(iii)


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Number of Hopping Frequency Used

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies

6.4 Test Procedure

- 1 Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2 Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3 Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 4 Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
- 5 Repeat above procedures until all frequencies measured were complete.

6.5 Uncertainty of Conducted Emission


The uncertainty is not applicable.

6.6 Test Results

Refer to the attached plot.

There are 79 hopping frequencies in a hopping sequence.

6.7 Photo of Number of Hopping Frequency Used

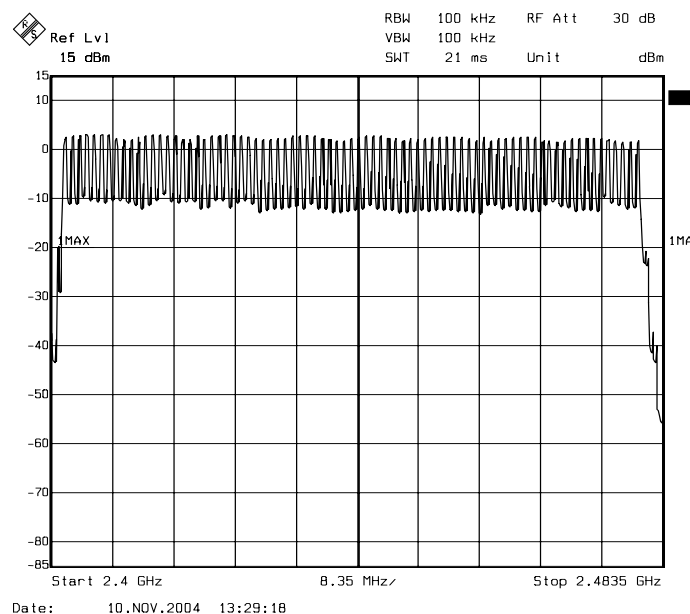



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 19 of 44

7. DWELL TIME ON EACH CHANNEL

Test Requirement: 15.247(a)(1)(iii)


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Dwell Time on Each Channel

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

7.4 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth USB Dongle has 3 type of payload, DH1. The hopping rate is 1600 per second. The longer the payload is, the slower the hopping rate is.

7.5 Uncertainty of Conducted Emission

The uncertainty of time is $\pm 5.25\text{ms}$.

7.6 Test Results

Time of occupancy on the TX channel in 31.6sec = time domain slot length $\times$ hop rate $\div$ number of hop per channel $\times 31.6$

Refer to the attached graph.

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Transmitting Frequency	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Resultts
2441MHz	DH1	0.420	134.40	400	PASS
2441MHz	DH3	1.663	266.08	400	PASS
2441MHz	DH5	2.254	240.42	400	PASS

DH1 Dwell time = $0.420\text{ms} \times (1600 \div 2) \div 79 \times 31.6 = 134.40 \text{ (ms)}$

DH3 Dwell time = $1.663 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 266.08 \text{ (ms)}$

DH5 Dwell time = $2.254 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 240.42 \text{ (ms)}$



Ecom Sertech Corp.




Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 21 of 44

7.7 Photo of Dwell Time on Each Channel

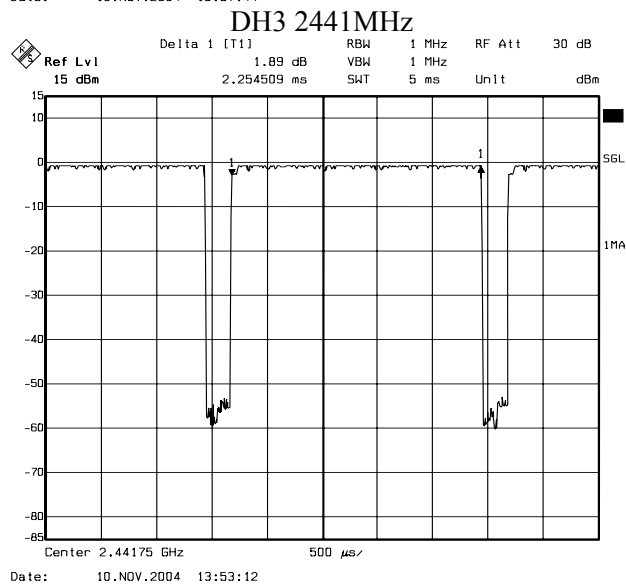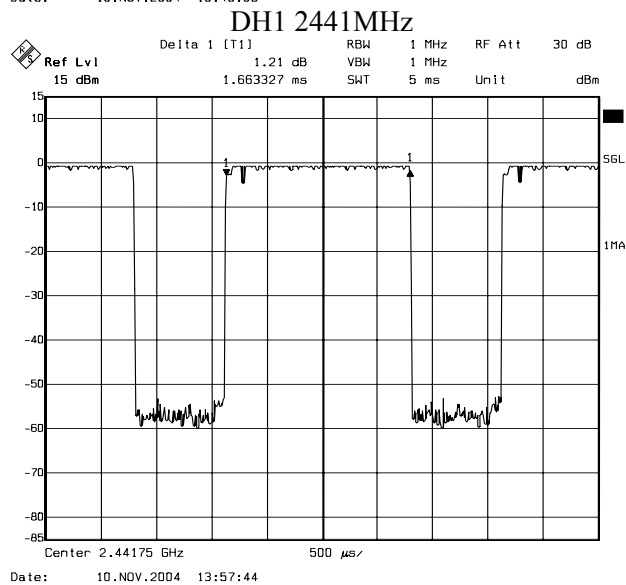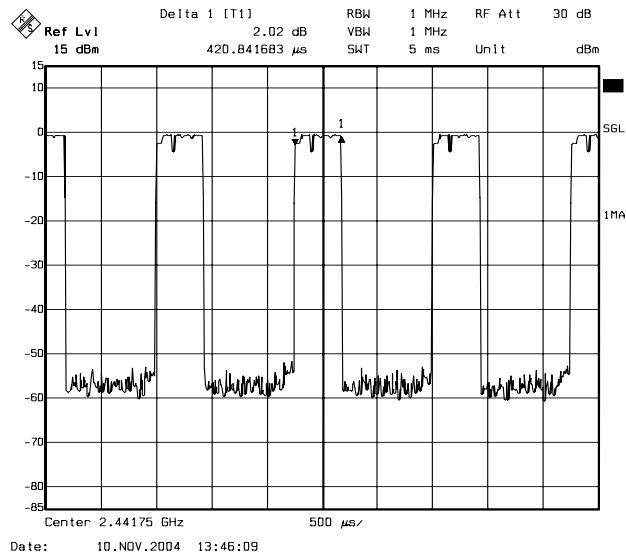

DH5 2441MHz



8. BAND EDGE MEASUREMENT

Test Requirement: 15.247(d)


8.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	June 17, 2004

Note :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.2 Test Setup



8.3 Limits of Band edge Measurements

The emission not fallen in restricted bands should be 20dB below the highest emission level of operating band (in 100KHz Resolution Bandwidth).

For the emissions fallen in the restricted bands listed in section 15.205, the maximum permitted average field strength should meet the requirement listed in section 15.209.

8.4 Test Procedure

Section 15.247(d): Spurious emissions. The following tests are required:

Set the span wide enough to capture the peak level of the emission operating on the channel closest to the band edge. Set the RBW and VBW and maxhold the trace. Allow the trace to stabilize. Enable the marker-delta function, then use the marker-delta value function to move the marker to the peak of the in-band emission submit the plot.

8.5 Uncertainty of Conducted Emission

The uncertainty of Frequency : $\pm 100\text{kHz}$.

The uncertainty of Amplitude : $\pm 2\text{dB}$.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 23 of 44

8.6 Test Results

(A) Left Edge

The band edge emission plot shows 40.95dB delta between fundamental emission and band edge emission (2399.9MHz)

(B) Right Edge

The band edge emission plot shows 56.04dB delta between fundamental emission and band edge emission (2483.5MHz)

Input Power (System)	5.9VDC (From Battery)	Environmental Conditions	26°C, 48%RH
Tested By	Beck Wu		

Band edge Frequency (MHz)		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	53.30	46.26	74.25	67.21	PASS
	AV	42.18	35.37	63.13	56.32	
2483.50	PK	35.99	31.08	74.00	74.00	PASS
	AV	24.74	20.07	54.00	54.00	

Note : 1. Radiated band edge field strength is measured with FCC recommended mark-delta method.

2. Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.

3. DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 8.7 photo of conducted Band Edge Measurement.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337


Report No. : EC04-11-009FRF

Page 24 of 44

8.7 Photo of Band Edge Measurement

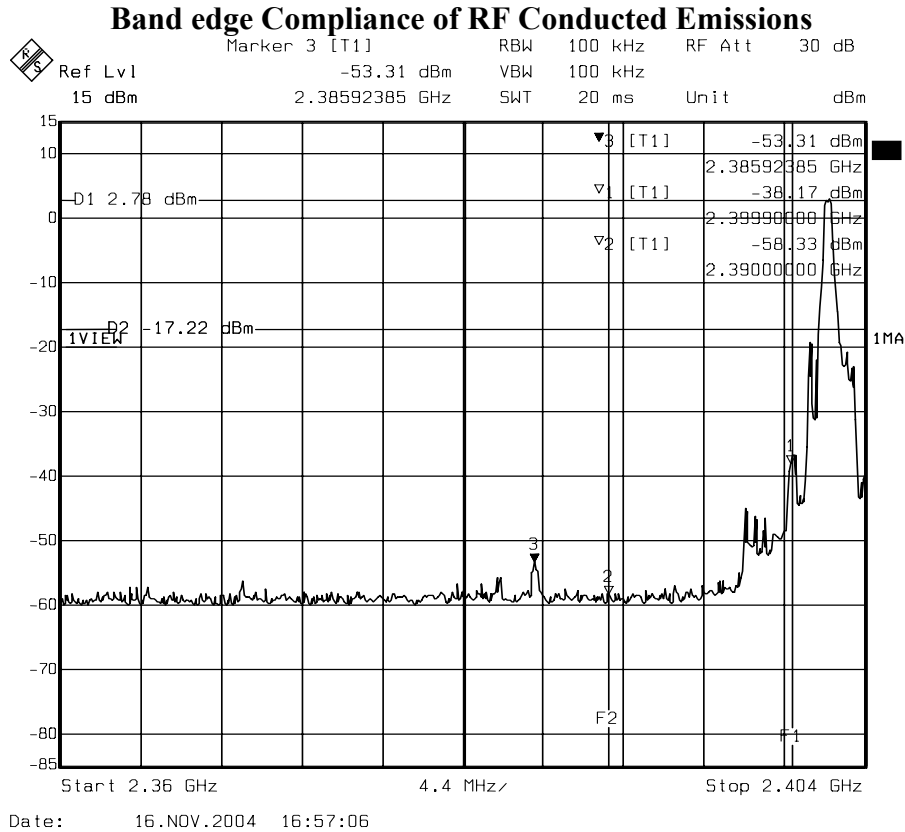

FRONT

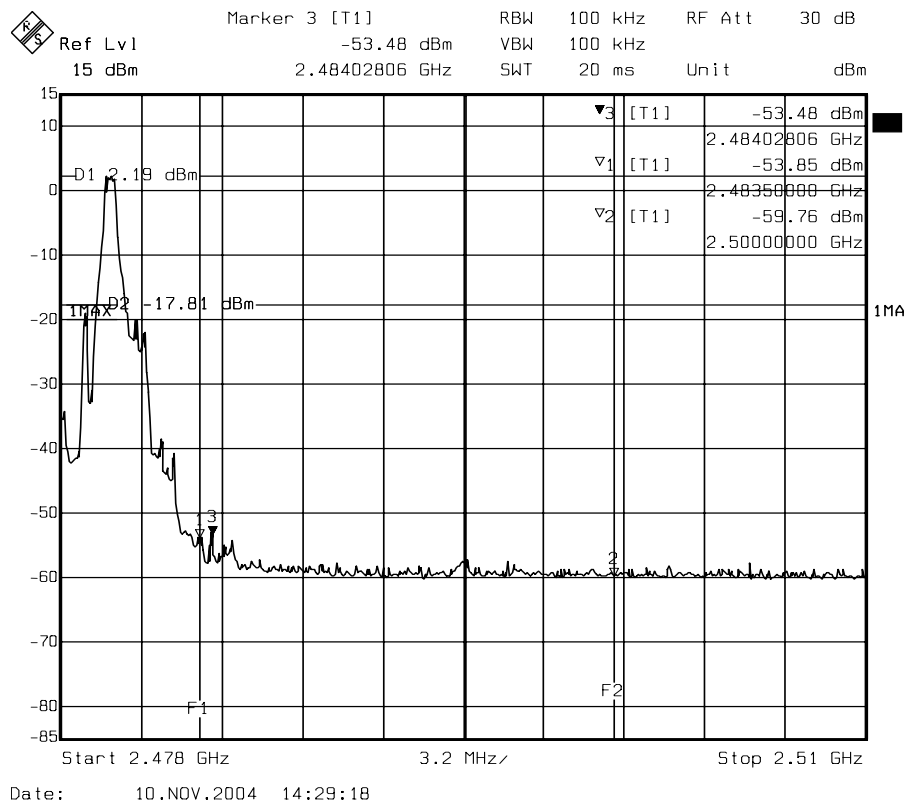

REAR



Ecom Sertech Corp.



Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 25 of 44

Out-of-band Spurious Emissions-conducted measurement

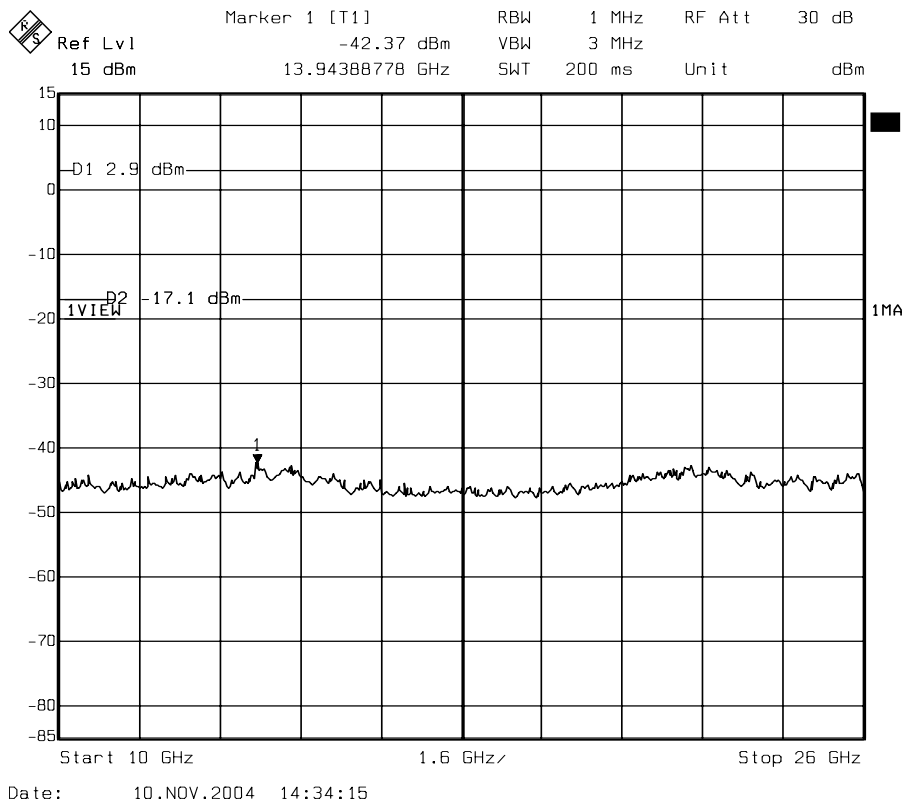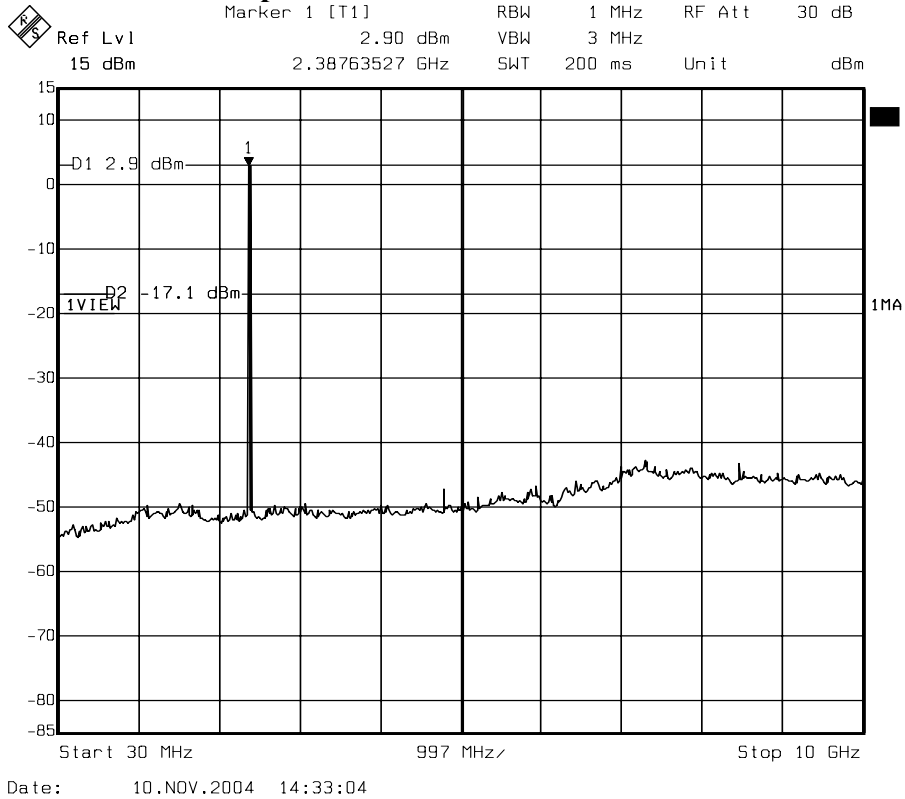

9. OUT OF BAND SPURIOUS EMISSIONS -RADIATED MEASUREMENTS

Test Requirement: 15.247(d)


9.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.


Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2562	May 20, 2004	1 Year	FINAL
OPEN SITE	-----	No.1	N/A	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	015	July 13, 2004	1 Year	FINAL
Horn Antenna	AH-118	10089	February 25, 2004	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	November 07, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2004	1 Year	FINAL

9.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

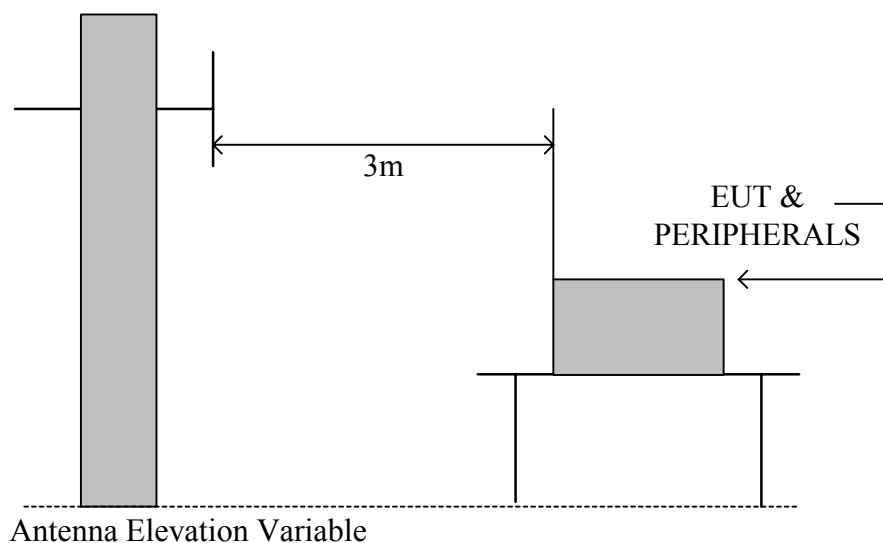

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

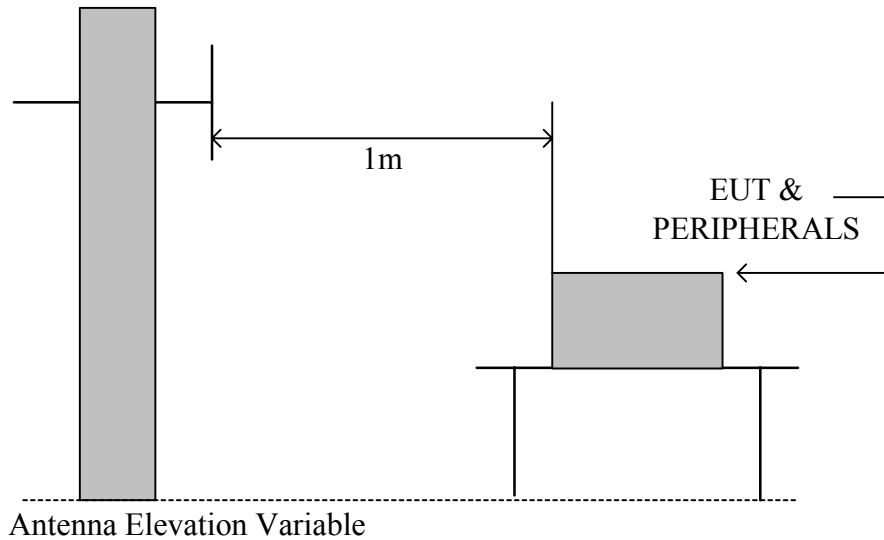

9.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

9.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

9.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is $\pm 2.72\text{dB}$.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 29 of 44

9.6 Radiated RF Noise Measurement

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported are much lower than the prescribed limits.

All readings are quasi-peak values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	22.5°C, 66%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dBμV)		Limits (dBμV/m)	Emission Level at 3m(dBμV/m)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	18.96	0.90	*	*	40.00	*	*
167.05	11.28	2.55	14.60	12.06	43.50	28.42	25.88
299.96	13.96	3.30	12.20	10.60	46.00	29.46	27.86
500.00	18.58	4.30	2.10	2.60	46.00	24.98	25.48
479.24	18.34	4.22	4.20	6.20	46.00	26.75	28.75
666.83	19.47	5.10	11.80	13.40	46.00	36.37	37.97
699.24	19.49	5.39	11.30	7.70	46.00	36.18	32.58
1000.00	21.79	6.40	*	*	54.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dBμV/M) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dBμV).

3. According to technical experience, all spurious emission at channel 1, 40 and 79 are almost the same below 1GHz, so the spurious emission test result of the channel 1 was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 30 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH01 (2402 MHz) RX (Low)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2399.80	45.30	31.80	3.58	35.30	9.50	0.00	35.88	74	-38.12	P	1.0
2399.80	33.56	31.80	3.58	35.30	9.50	0.00	24.14	54	-29.86	A	1.0
4800.50	45.26	34.28	5.08	35.14	9.50	0.00	39.98	74	-34.02	P	1.0
4800.50	33.21	34.28	5.08	35.14	9.50	0.00	27.93	54	-26.07	A	1.0
7200.60	46.12	39.82	6.72	35.66	9.50	0.00	47.50	74	-26.50	P	1.0
7200.60	33.46	39.82	6.72	35.66	9.50	0.00	34.84	54	-19.16	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 31 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH01 (2402 MHz) RX (Low)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2399.80	45.20	31.80	3.58	35.30	9.50	0.00	35.78	74	-38.22	P	1.0
2399.80	35.12	31.80	3.58	35.30	9.50	0.00	25.70	54	-28.30	A	1.0
4800.50	44.87	34.28	5.08	35.14	9.50	0.00	39.59	74	-34.41	P	1.0
4800.50	33.49	34.28	5.08	35.14	9.50	0.00	28.21	54	-25.79	A	1.0
7200.60	44.52	39.82	6.72	35.66	9.50	0.00	45.90	74	-28.10	P	1.0
7200.60	33.10	39.82	6.72	35.66	9.50	0.00	34.48	54	-19.52	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 32 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH40 (2441 MHz) RX (Mid)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2399.74	44.78	31.80	3.58	35.30	9.50	0.00	35.36	74	-38.64	P	1.0
2399.74	32.29	31.80	3.58	35.30	9.50	0.00	22.87	54	-31.13	A	1.0
4878.97	45.87	34.80	5.10	35.20	9.50	0.00	41.07	74	-32.93	P	1.0
4878.97	33.59	34.80	5.10	35.20	9.50	0.00	28.79	54	-25.21	A	1.0
7318.50	45.44	39.77	6.80	35.64	9.50	0.00	46.87	74	-27.13	P	1.0
7318.50	33.19	39.77	6.80	35.64	9.50	0.00	34.62	54	-19.38	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 33 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH40 (2441 MHz) RX (Mid)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2399.74	44.68	31.80	3.58	35.30	9.50	0.00	35.26	74	-38.74	P	1.0
2399.74	33.21	31.80	3.58	35.30	9.50	0.00	23.79	54	-30.21	A	1.0
4878.97	45.77	34.80	5.10	35.20	9.50	0.00	40.97	74	-33.03	P	1.0
4878.97	33.49	34.80	5.10	35.20	9.50	0.00	28.69	54	-25.31	A	1.0
7318.50	45.76	39.77	6.80	35.64	9.50	0.00	47.19	74	-26.81	P	1.0
7318.50	33.77	39.77	6.80	35.64	9.50	0.00	35.20	54	-18.80	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 34 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH79 (2480 MHz) RX (High)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2483.87	47.33	31.72	3.61	35.30	9.50	0.00	37.86	74	-36.14	P	1.0
2483.87	38.51	31.72	3.61	35.30	9.50	0.00	29.04	54	-24.96	A	1.0
4956.95	44.18	35.32	5.13	35.27	9.50	0.00	39.86	74	-34.14	P	1.0
4956.95	33.25	35.32	5.13	35.27	9.50	0.00	28.93	54	-25.07	A	1.0
7435.60	44.99	39.73	6.88	35.61	9.50	0.00	46.48	74	-27.52	P	1.0
7435.60	33.85	39.73	6.88	35.61	9.50	0.00	35.34	54	-18.66	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 35 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH79 (2480 MHz) RX (High)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2483.87	47.66	31.72	3.61	35.30	9.50	0.00	38.19	74	-35.81	P	1.0
2483.87	36.48	31.72	3.61	35.30	9.50	0.00	27.01	54	-26.99	A	1.0
4956.95	45.26	35.32	5.13	35.27	9.50	0.00	40.94	74	-33.06	P	1.0
4956.95	34.88	35.32	5.13	35.27	9.50	0.00	30.56	54	-23.44	A	1.0
7435.60	45.12	39.73	6.88	35.61	9.50	0.00	46.61	74	-27.39	P	1.0
7435.60	33.49	39.73	6.88	35.61	9.50	0.00	34.98	54	-19.02	A	1.0

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The frequency was searched to 18GHz.
7. The other emission levels were very low against the limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 36 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH01 (2402 MHz) TX (Low)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	23.51	31.81	3.57	0.00	9.50	0.00	49.39	74	-24.61	P	1.00
* 2389.90	11.78	31.81	3.57	0.00	9.50	0.00	37.66	54	-16.34	A	1.00
2401.85	68.38	31.80	3.58	0.00	9.50	0.00	94.25	Fundamental Frequency		P	1.00
2401.85	57.26	31.80	3.58	0.00	9.50	0.00	83.13			A	1.00
* 4804.19	57.24	34.31	5.08	35.14	9.50	2.08	54.06	74	-19.94	P	1.00
* 4804.19	43.68	34.31	5.08	35.14	9.50	2.08	40.50	54	-13.50	A	1.00
7206.00	46.23	39.82	6.72	35.66	9.50	2.00	49.61	74	-24.39	P	1.00
7206.00	33.18	39.82	6.72	35.66	9.50	2.00	36.56	54	-17.44	A	1.00
9608.00	47.15	38.54	8.28	36.37	9.50	0.64	48.73	74	-25.27	P	1.00
9608.00	34.06	38.54	8.28	36.37	9.50	0.64	35.64	54	-18.36	A	1.00
* 12009.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14411.10	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
16812.95	-----	-----	-----	-----	0.00	0.39	-----	-----	-----	-----	1.00
* 19214.80	-----	-----	-----	-----	0.00	1.86	-----	-----	-----	-----	1.00
21616.65	-----	-----	-----	-----	0.00	0.85	-----	-----	-----	-----	1.00
24018.50	-----	-----	-----	-----	0.00	3.07	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level=Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 37 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH01 (2402 MHz) TX (Low)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
* 2389.90	23.13	31.81	3.57	0.00	9.50	0.00	49.01	74	-24.99	P	1.00
* 2389.90	10.89	31.81	3.57	0.00	9.50	0.00	36.77	54	-17.23	A	1.00
2402.05	61.34	31.80	3.58	0.00	9.50	0.00	87.21	Fundamental Frequency		P	1.00
2402.05	50.45	31.80	3.58	0.00	9.50	0.00	76.32			A	1.00
* 4803.95	54.64	34.31	5.08	35.14	9.50	2.08	51.46	74	-22.54	P	1.00
* 4803.95	41.43	34.31	5.08	35.14	9.50	2.08	38.25	54	-15.75	A	1.00
7206.00	45.03	39.82	6.72	35.66	9.50	2.00	48.41	74	-25.59	P	1.00
7206.00	32.17	39.82	6.72	35.66	9.50	2.00	35.55	54	-18.45	A	1.00
9608.11	48.18	38.54	8.28	36.37	9.50	0.64	49.76	74	-24.24	P	1.00
9608.11	35.84	38.54	8.28	36.37	9.50	0.64	37.42	54	-16.58	A	1.00
* 12010.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14412.30	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
16814.35	-----	-----	-----	-----	0.00	0.39	-----	-----	-----	-----	1.00
* 19216.40	-----	-----	-----	-----	0.00	1.86	-----	-----	-----	-----	1.00
21618.45	-----	-----	-----	-----	0.00	0.85	-----	-----	-----	-----	1.00
24020.50	-----	-----	-----	-----	0.00	3.07	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 38 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9℃, 68%

CH40 (2441 MHz) TX (Mid)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2441.39	66.60	31.76	3.59	0.00	9.50	0.00	92.45	Fundamental Frequency		P	1.00
2441.39	55.33	31.76	3.59	0.00	9.50	0.00	81.18			A	1.00
* 4882.09	58.91	34.82	5.10	35.21	9.50	1.77	55.90	74	-18.10	P	1.00
* 4882.09	46.89	34.82	5.10	35.21	9.50	1.77	43.88	54	-10.12	A	1.00
* 7323.00	46.19	39.77	6.80	35.64	9.50	2.00	49.63	74	-24.37	P	1.00
* 7323.00	33.46	39.77	6.80	35.64	9.50	2.00	36.90	54	-17.10	A	1.00
9764.00	47.28	38.52	8.34	36.62	9.50	0.54	48.56	74	-25.44	P	1.00
9764.00	34.11	38.52	8.34	36.62	9.50	0.54	35.39	54	-18.61	A	1.00
* 12206.95	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14648.34	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
17089.73	-----	-----	-----	-----	0.00	0.54	-----	-----	-----	-----	1.00
* 19531.12	-----	-----	-----	-----	0.00	2.23	-----	-----	-----	-----	1.00
21972.51	-----	-----	-----	-----	0.00	0.71	-----	-----	-----	-----	1.00
24413.90	-----	-----	-----	-----	0.00	2.44	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 39 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9℃, 68%

CH40 (2441 MHz) TX (Mid)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2441.13	60.86	31.76	3.59	0.00	9.50	0.00	86.71	Fundamental Frequency		P	1.00
2441.13	50.21	31.76	3.59	0.00	9.50	0.00	76.06			A	1.00
* 4882.20	57.43	34.82	5.10	35.21	9.50	1.77	54.42	74	-19.58	P	1.00
* 4882.20	44.74	34.82	5.10	35.21	9.50	1.77	41.73	54	-12.27	A	1.00
* 7323.00	45.03	39.77	6.80	35.64	9.50	2.00	48.47	74	-25.53	P	1.00
* 7323.00	32.17	39.77	6.80	35.64	9.50	2.00	35.61	54	-18.39	A	1.00
9764.21	47.59	38.52	8.34	36.62	9.50	0.54	48.87	74	-25.13	P	1.00
9764.21	35.12	38.52	8.34	36.62	9.50	0.54	36.40	54	-17.60	A	1.00
* 12205.65	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14646.78	-----	-----	-----	-----	0.00	0.58	-----	-----	-----	-----	1.00
17087.91	-----	-----	-----	-----	0.00	0.54	-----	-----	-----	-----	1.00
* 19529.04	-----	-----	-----	-----	0.00	2.23	-----	-----	-----	-----	1.00
21970.17	-----	-----	-----	-----	0.00	0.71	-----	-----	-----	-----	1.00
24411.30	-----	-----	-----	-----	0.00	2.44	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 40 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.

Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9°C, 68%

CH79 (2480 MHz) TX (High)				Measurement Distance at 1m Horizontal polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2480.37	66.20	31.72	3.61	0.00	9.50	0.00	92.03	Fundamental Frequency		P	1.00
2480.37	54.95	31.72	3.61	0.00	9.50	0.00	80.78			A	1.00
* 2484.02	23.58	31.72	3.61	0.00	9.50	0.00	49.41	74	-24.59	P	1.00
* 2484.02	11.55	31.72	3.61	0.00	9.50	0.00	37.38	54	-16.62	A	1.00
* 4960.00	64.78	35.34	5.13	35.27	9.50	1.46	61.94	74	-12.06	P	1.00
* 4960.00	51.29	35.34	5.13	35.27	9.50	1.46	48.45	54	-5.55	A	1.00
* 7440.00	46.28	39.72	6.88	35.61	9.50	2.00	49.77	74	-24.23	P	1.00
* 7440.00	33.26	39.72	6.88	35.61	9.50	2.00	36.75	54	-17.25	A	1.00
9920.00	47.97	38.51	8.39	36.87	9.50	0.45	48.95	74	-25.05	P	1.00
9920.00	34.33	38.51	8.39	36.87	9.50	0.45	35.31	54	-18.69	A	1.00
* 12401.85	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14882.22	-----	-----	-----	-----	0.00	0.39	-----	-----	-----	-----	1.00
17362.59	-----	-----	-----	-----	0.00	0.65	-----	-----	-----	-----	1.00
* 19842.96	-----	-----	-----	-----	0.00	2.54	-----	-----	-----	-----	1.00
* 22323.33	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24803.70	-----	-----	-----	-----	0.00	1.87	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 41 of 44

The frequency spectrum above 1 GHz for Receiver was investigated. All emissions not reported are much lower than the prescribed limits. Readings are both peak and average values.


Company	Microlink Communications Inc.	Test Date	2004/11/11
Product Name	Universal Bluetooth Helmet Adapter Kit, Mage	Test By	Beck Wu
Model Name	HS830	TEMP&Humidity	23.9℃, 68%


CH79 (2480 MHz) TX (High)				Measurement Distance at 1m Vertical polarity							
Freq. (MHz)	Reading (dBμV)	AF (dBμV)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2480.12	61.29	31.72	3.61	0.00	9.50	0.00	87.12	Fundamental Frequency		P	1.00
2480.12	50.28	31.72	3.61	0.00	9.50	0.00	76.11			A	1.00
* 2484.78	24.64	31.72	3.61	0.00	9.50	0.00	50.47	74	-23.53	P	1.00
* 2484.78	11.40	31.72	3.61	0.00	9.50	0.00	37.23	54	-16.77	A	1.00
* 4960.11	59.68	35.34	5.13	35.27	9.50	1.46	56.84	74	-17.16	P	1.00
* 4960.11	46.87	35.34	5.13	35.27	9.50	1.46	44.03	54	-9.97	A	1.00
* 7440.00	45.22	39.72	6.88	35.61	9.50	2.00	48.71	74	-25.29	P	1.00
* 7440.00	32.31	39.72	6.88	35.61	9.50	2.00	35.80	54	-18.20	A	1.00
9920.00	47.22	38.51	8.39	36.87	9.50	0.45	48.20	74	-25.80	P	1.00
9920.00	34.30	38.51	8.39	36.87	9.50	0.45	35.28	54	-18.72	A	1.00
* 12400.60	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14880.72	-----	-----	-----	-----	0.00	0.40	-----	-----	-----	-----	1.00
17360.84	-----	-----	-----	-----	0.00	0.64	-----	-----	-----	-----	1.00
* 19840.96	-----	-----	-----	-----	0.00	2.54	-----	-----	-----	-----	1.00
* 22321.08	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24801.20	-----	-----	-----	-----	0.00	1.88	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark "-----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.

9.7 Photos of Open Site

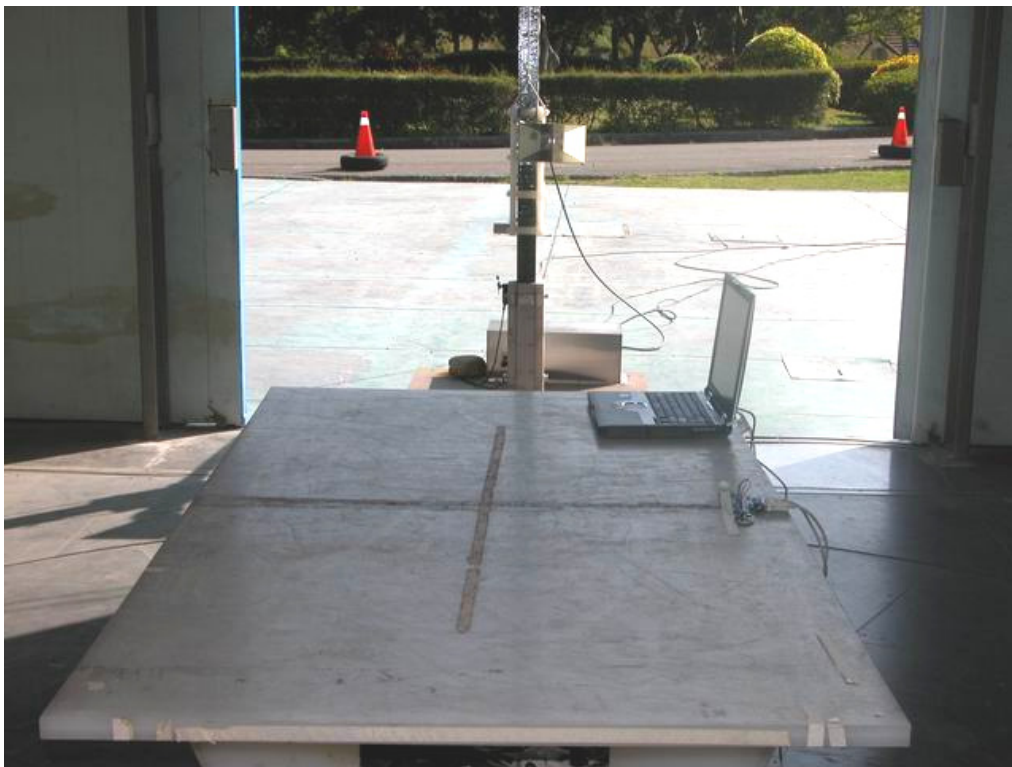

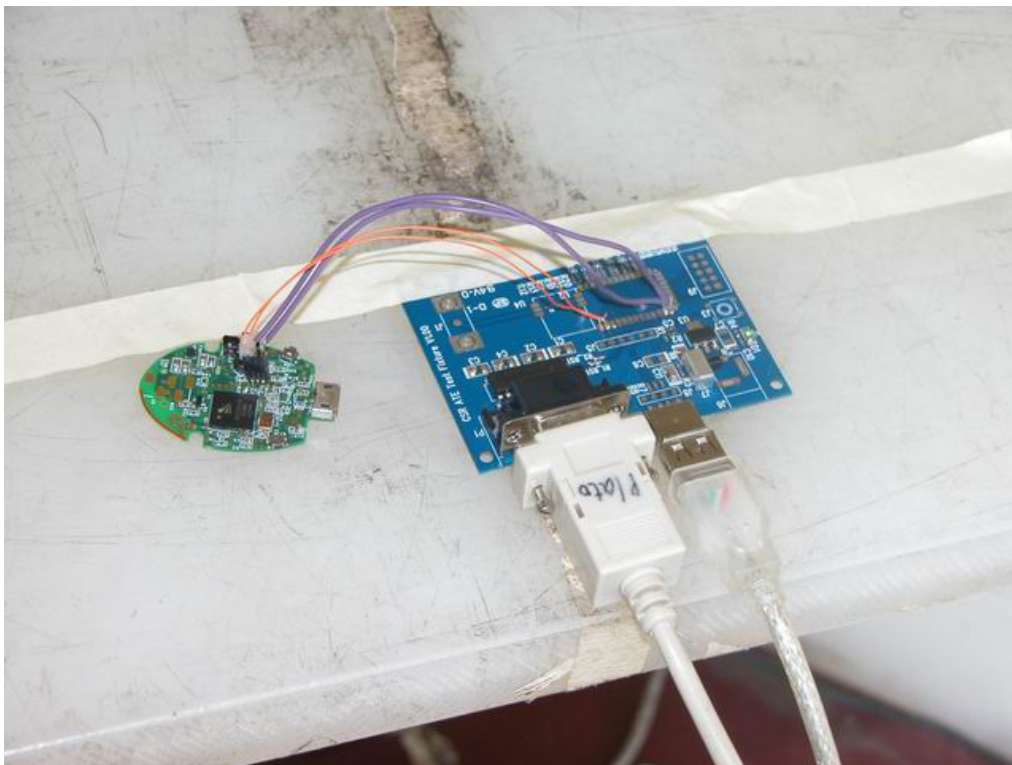



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd., ChuTugn Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : QVZ58905337

Report No. : EC04-11-009FRF

Page 44 of 44

10. ANTENNA REQUIREMENT

10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2 Antenna Connected Construction

The antenna used in this product is INVERTED F antenna. The maximum Gain of the antenna only 0dBi