

## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**AC1200 Wireless LAN Concurrent Dual Band Gigabit Router**

**Model: BR-6478AC V2**

**Trade Name: EDIMAX**

*Issued to*

**EDIMAX TECHNOLOGY CO., LTD.**  
**No.3, Wu-Chuan 3rd Road, Wu-Ku Industrial Park, New Taipei City, Taiwan**

*Issued by*

**Compliance Certification Services Inc.**  
**No.11, Wugong 6th Rd., Wugu Dist.,**  
**New Taipei City 24891, Taiwan. (R.O.C.)**  
**<http://www.ccsrf.com>**  
**[service@ccsrf.com](mailto:service@ccsrf.com)**  
**Issued Date: November 23, 2015**



---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 23, 2015	Initial Issue	ALL	Kelly Cheng
01	December 11, 2015	Added the KDB 662911 D01	6	Kelly Cheng

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE .....	6
3.3 GENERAL TEST PROCEDURES .....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	7
3.5 DESCRIPTION OF TEST MODES .....	8
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED.....	9
4.3 MEASUREMENT UNCERTAINTY .....	10
<b>5. FACILITIES AND ACCREDITATIONS.....</b>	<b>11</b>
5.1 FACILITIES .....	11
5.2 EQUIPMENT .....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS .....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT .....	13
<b>7. FCC PART 15.247 REQUIREMENTS .....</b>	<b>14</b>
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER .....	29
7.3 AVERAGE POWER .....	31
7.4 BAND EDGES MEASUREMENT .....	33
7.5 PEAK POWER SPECTRAL DENSITY .....	59
7.6 RADIATED EMISSIONS .....	73
7.7 POWERLINE CONDUCTED EMISSIONS.....	89
<b>APPENDIX I PHOTOGRAPHS OF TEST SETUP .....</b>	<b>92</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	

## 1. TEST RESULT CERTIFICATION

**Applicant:** EDIMAX TECHNOLOGY CO., LTD.  
No.3, Wu-Chuan 3rd Road, Wu-Ku Industrial Park, New Taipei City, Taiwan

**Equipment Under Test:** AC1200 Wireless LAN Concurrent Dual Band Gigabit Router

**Trade Name:** EDIMAX

**Model Number:** BR-6478AC V2

**Date of Test:** October 17 ~ November 13, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*



---

Miller Lee  
Manager  
Compliance Certification Services Inc.

*Reviewed by:*



---

Angel Cheng  
Section Manager  
Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	AC1200 Wireless LAN Concurrent Dual Band Gigabit Router		
<b>Trade Name</b>	EDIMAX		
<b>Model Number</b>	BR-6478AC V2		
<b>Model Discrepancy</b>	N/A		
<b>Received Date</b>	May 29, 2015		
<b>WLAN Manufacturer</b>	MEDIATEK	<b>Model</b>	MT7620A
<b>Power Adapter</b>	VDC from Power Adapter 1. APD / Model: WB-18D12FU I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 1.5A 2. DVE / Model: DSA-15P-12 US I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 1.25A		
<b>Frequency Range</b>	2412 ~ 2462 MHz		
<b>Transmit Power</b>	IEEE 802.11b mode: 28.57 dBm IEEE 802.11g mode: 28.69 dBm IEEE 802.11n HT 20 MHz mode: 28.63 dBm IEEE 802.11n HT 40 MHz mode: 28.78 dBm		
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM IEEE 802.11n HT 20 MHz mode: OFDM IEEE 802.11n HT 40 MHz mode: OFDM		
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels		
<b>Antenna Specification</b>	1. Master Wave Technology Co., Ltd. / 98202PYYF000 Dipole Antenna /Gain: 3.45dBi 2. Master Wave Technology Co., Ltd. / 98202PYYF001 Dipole Antenna /Gain: 3.3dBi MIMO: Total ANT=6.39 dBi		

**-Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **NDD9564781503** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.247 and KDB 558074 D01 DTS Meas Guidance v03r03

KDB 662911 D01 Multiple Transmitter Output v02r01

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: BR-6478AC V2) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

**IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

**IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz mode:**

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

**Remark:** Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/23/2015
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	07/07/2016
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	01/25/2016
EMI Test Receiver	R&S	ESCI	100064	06/03/2016
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016
Horn Antenna	EMCO	3117	00055165	01/26/2016
Horn Antenna	EMCO	3116	26370	12/25/2015
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	12/25/2015
Coaxial Cable	Huber+Suhner	102	29212/2	12/25/2015
Coaxial Cable	Huber+Suhner	102	29406/2	12/25/2015
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission Room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/08/2016
LISN	R&S	ENV216	101054	06/06/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/25/2015
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016
Test S/W	CCS-3A1-CE			

### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

- ☐ No.139, Wugong Rd., Wugu Dist., New Taipei City 24891, Taiwan (R.O.C.)  
Tel: 886-2-2298-4086 / Fax: 886-2-2298-1470
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- ☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### **5.2 EQUIPMENT**




Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

**Remark:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Sweep = auto.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted.*

## Test Data

### Test mode: IEEE 802.11b mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.144	>500	PASS
Mid	2437	10.144		PASS
High	2462	10.144		PASS

### Test mode: IEEE 802.11b mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.144	>500	PASS
Mid	2437	10.144		PASS
High	2462	10.144		PASS

### Test mode: IEEE 802.11g mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.682	>500	PASS
Mid	2437	16.586		PASS
High	2462	16.586		PASS

### Test mode: IEEE 802.11g mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.634	>500	PASS
Mid	2437	16.634		PASS
High	2462	16.634		PASS

### Test mode: IEEE 802.11n HT 20 MHz mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.836	>500	PASS
Mid	2437	17.836		PASS
High	2462	17.836		PASS

### Test mode: IEEE 802.11n HT 20 MHz mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.836	>500	PASS
Mid	2437	17.836		PASS
High	2462	17.836		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.666	>500	PASS
Mid	2437	36.666		PASS
High	2452	36.666		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode / Chain 1**


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.666	>500	PASS
Mid	2437	36.666		PASS
High	2452	36.666		PASS



## Test Plot


### IEEE 802.11b mode / Chain 0

#### 6dB Bandwidth (CH Low)

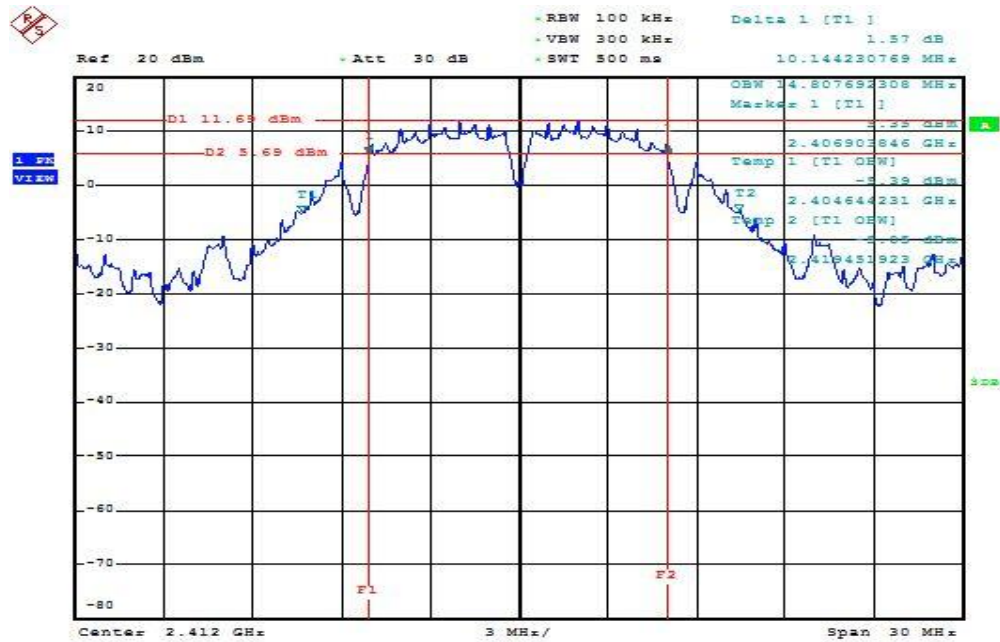


Date: 10.NOV.2015 13:20:48

#### 6dB Bandwidth (CH Mid)

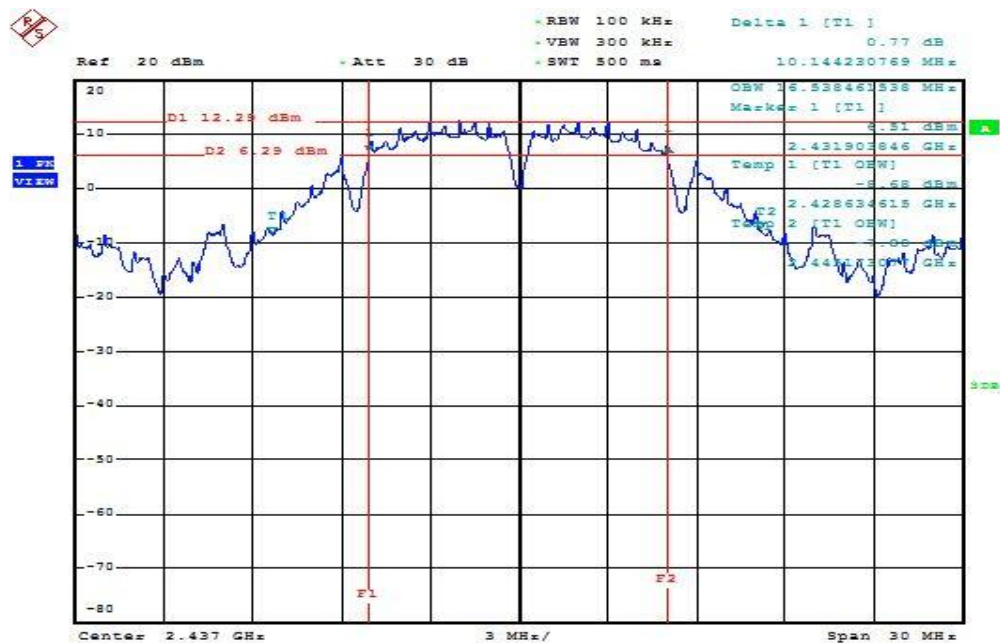

Date: 10.NOV.2015 13:22:52


## 6dB Bandwidth (CH High)

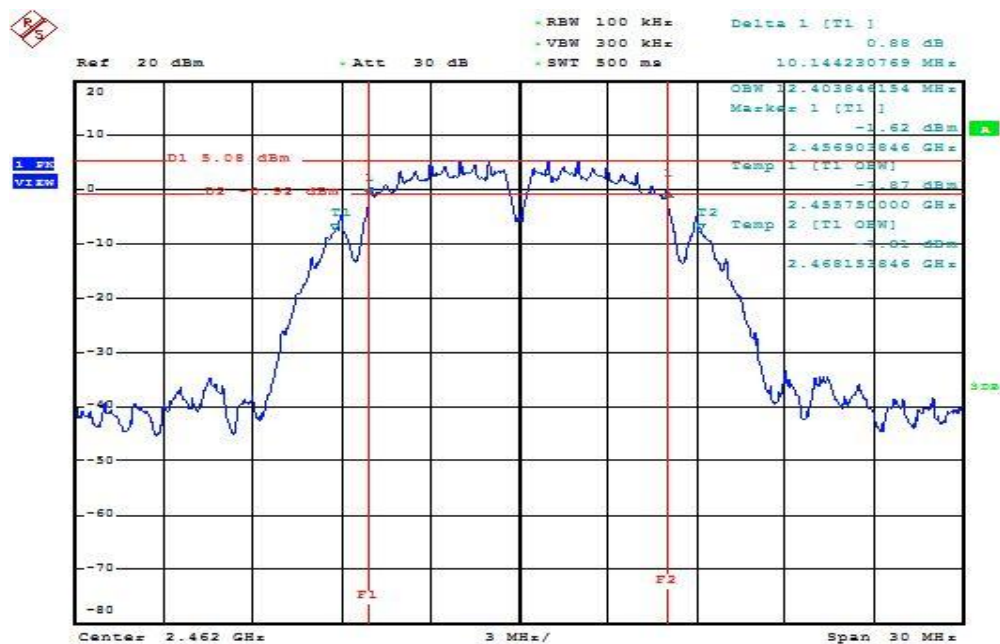

Date: 10.NOV.2015 13:34:07


## IEEE 802.11b mode / Chain 1

### 6dB Bandwidth (CH Low)

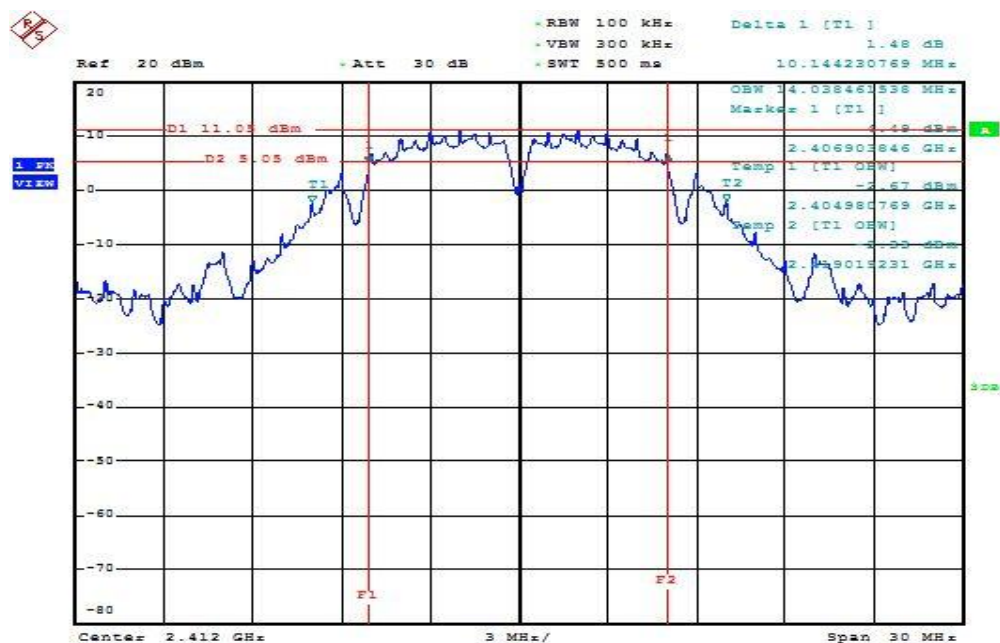


Date: 10.NOV.2015 13:18:34

## 6dB Bandwidth (CH Mid)

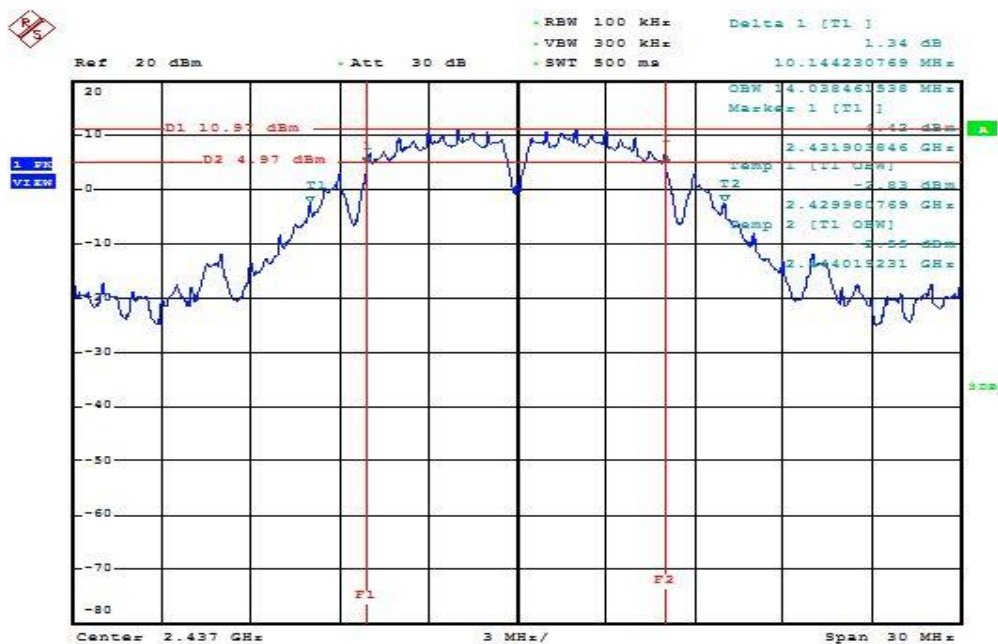



Date: 10.NOV.2015 13:26:47

## 6dB Bandwidth (CH High)

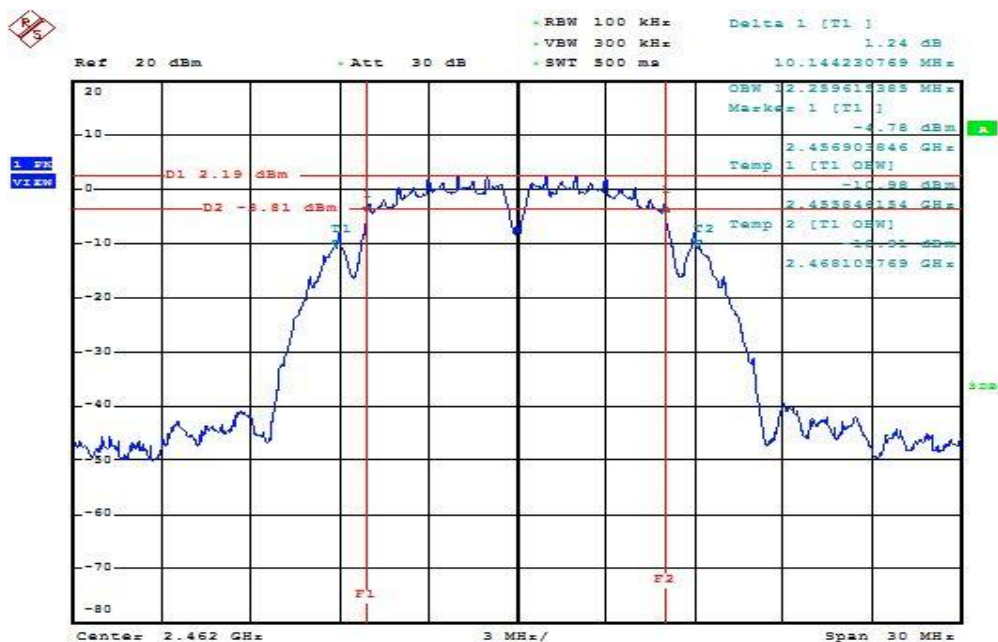


Date: 10.NOV.2015 13:28:53

### 6dB Bandwidth (CH Low)




## 6dB Bandwidth (CH High)

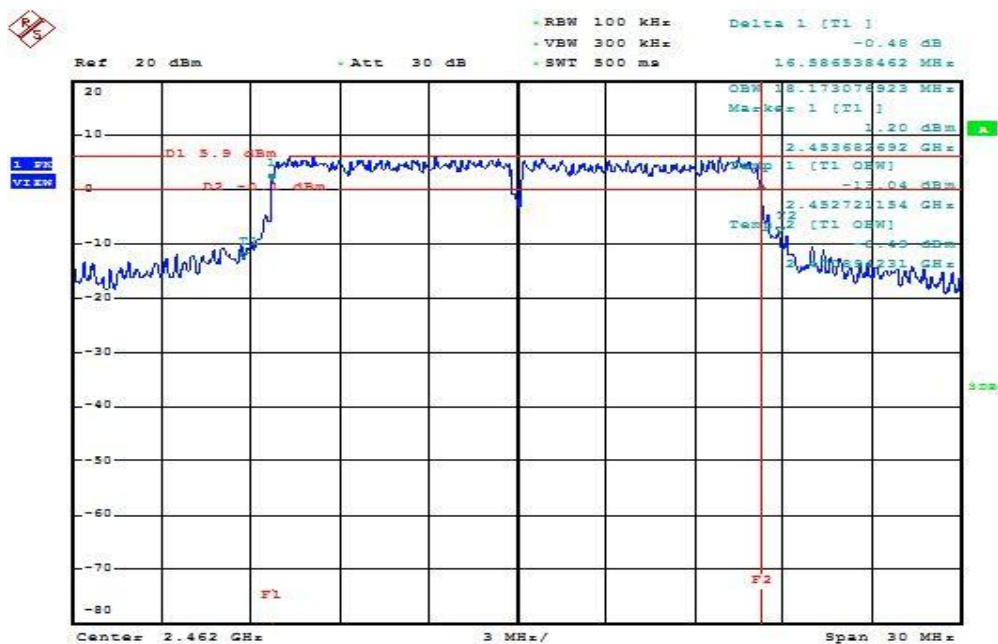

Date: 10.NOV.2015 14:05:21


## IEEE 802.11g mode / Chain 1

## 6dB Bandwidth (CH Low)

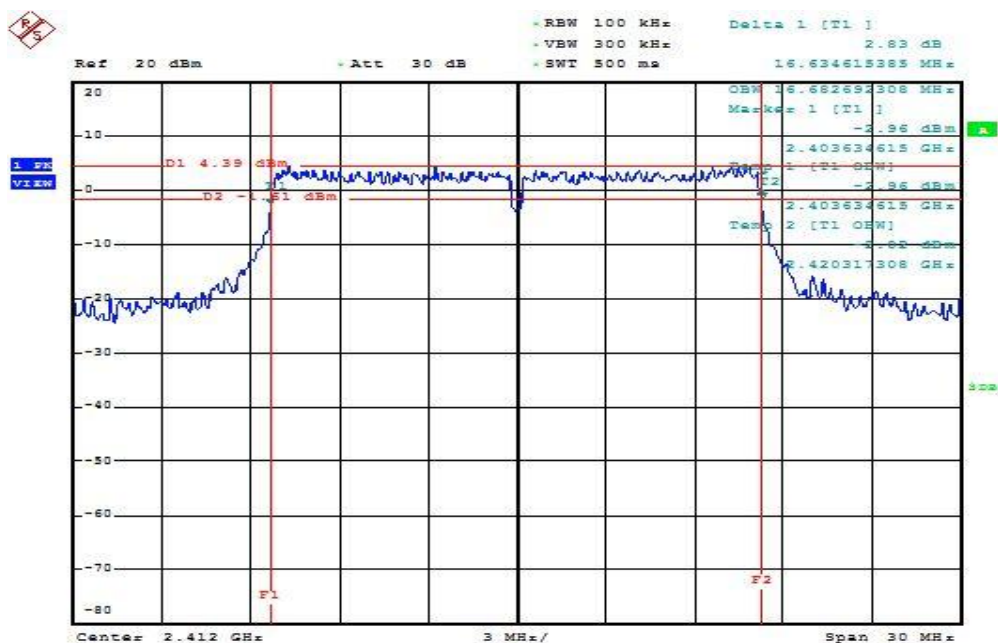


Date: 10.NOV.2015 13:55:03

## 6dB Bandwidth (CH Mid)

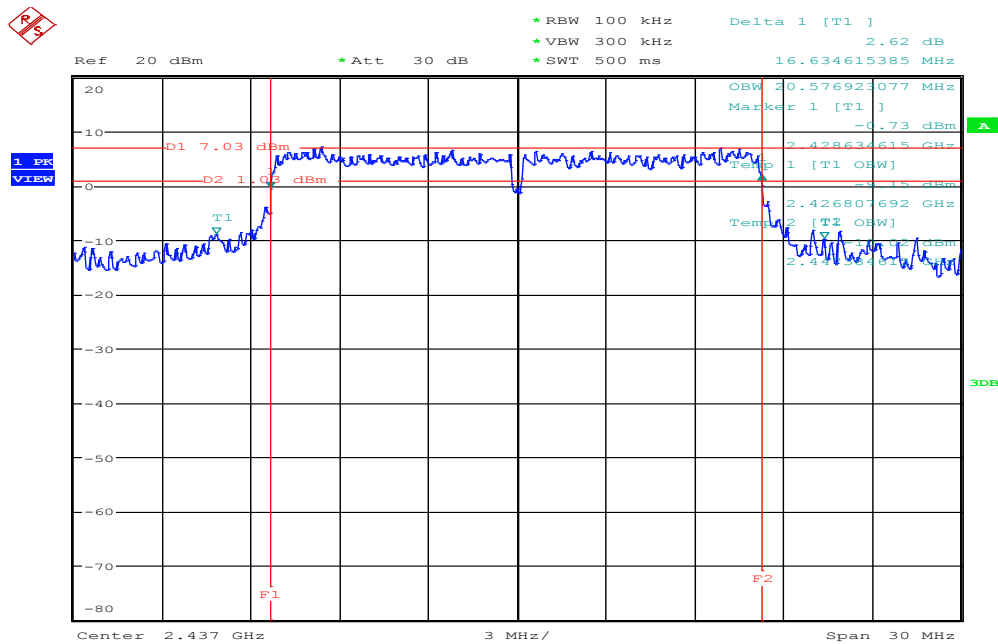

Date: 10.NOV.2015 13:58:36

## 6dB Bandwidth (CH High)

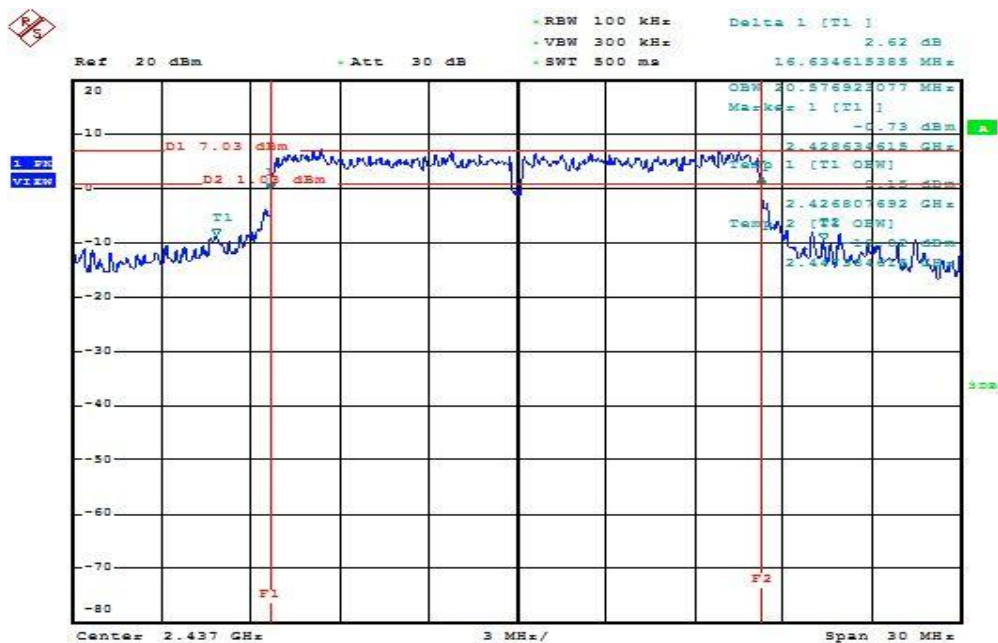


Date: 10.NOV.2015 13:58:36




## IEEE 802.11n HT 20 MHz mode / Chain 0

### 6dB Bandwidth (CH Low)

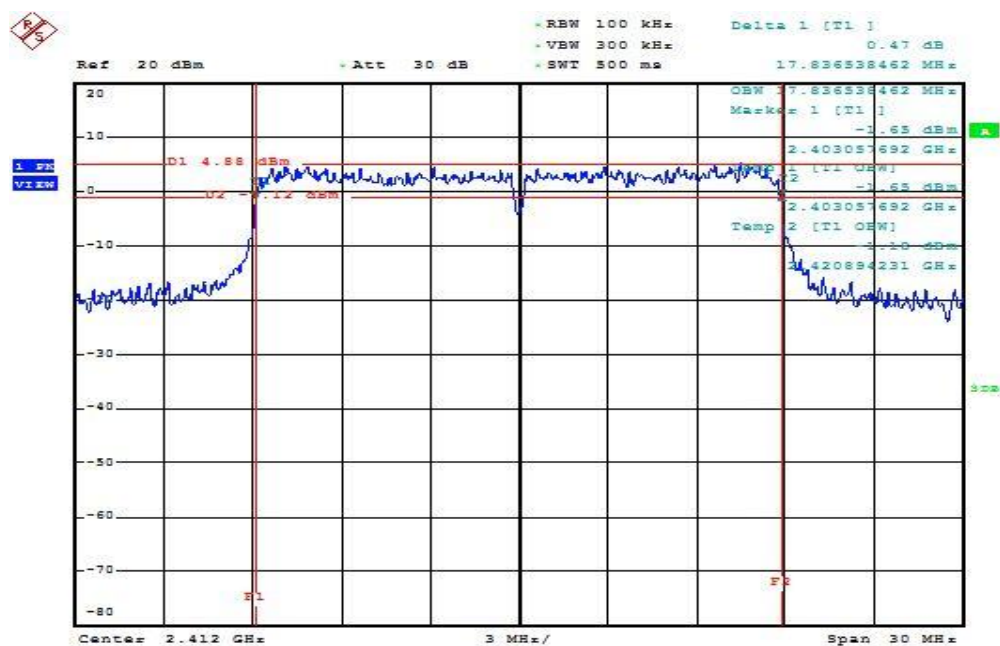


Date: 10.NOV.2015 14:19:11

### 6dB Bandwidth (CH Mid)

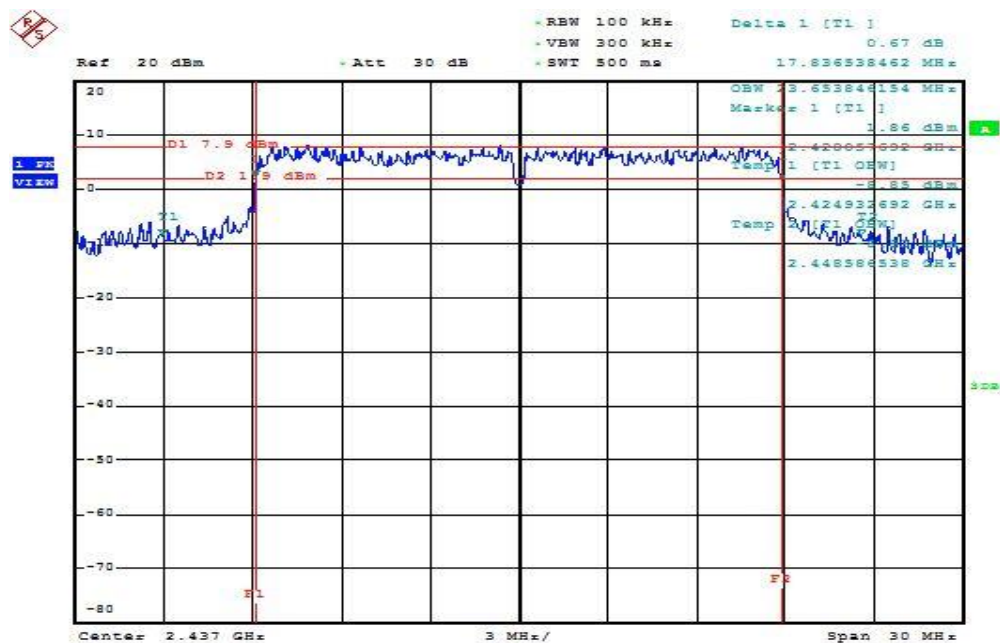

Date: 10.NOV.2015 14:22:45


## 6dB Bandwidth (CH High)

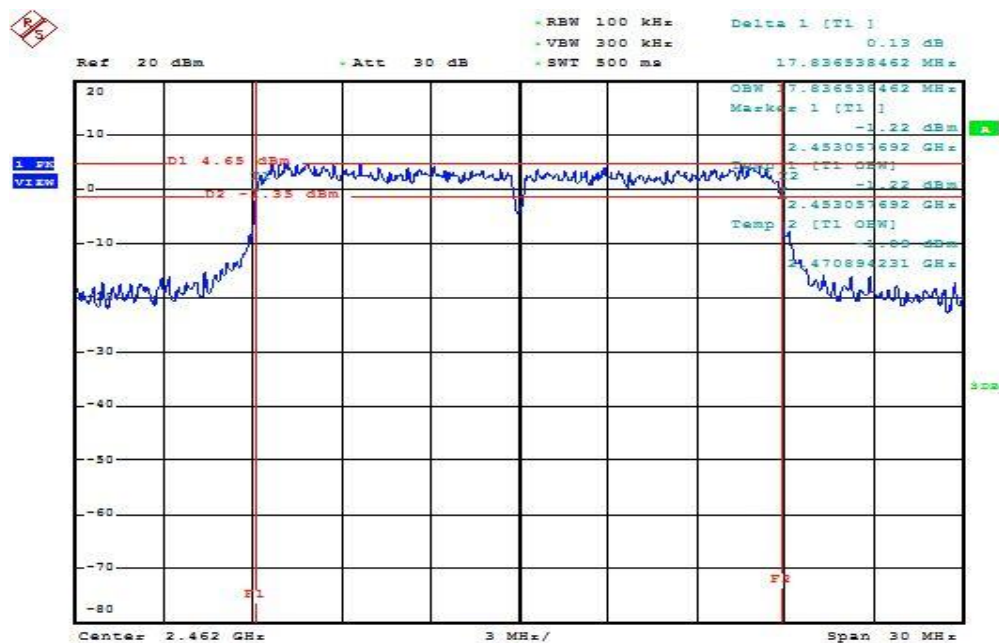

Date: 10.NOV.2015 14:33:59

## IEEE 802.11n HT 20 MHz mode / Chain 1


### 6dB Bandwidth (CH Low)

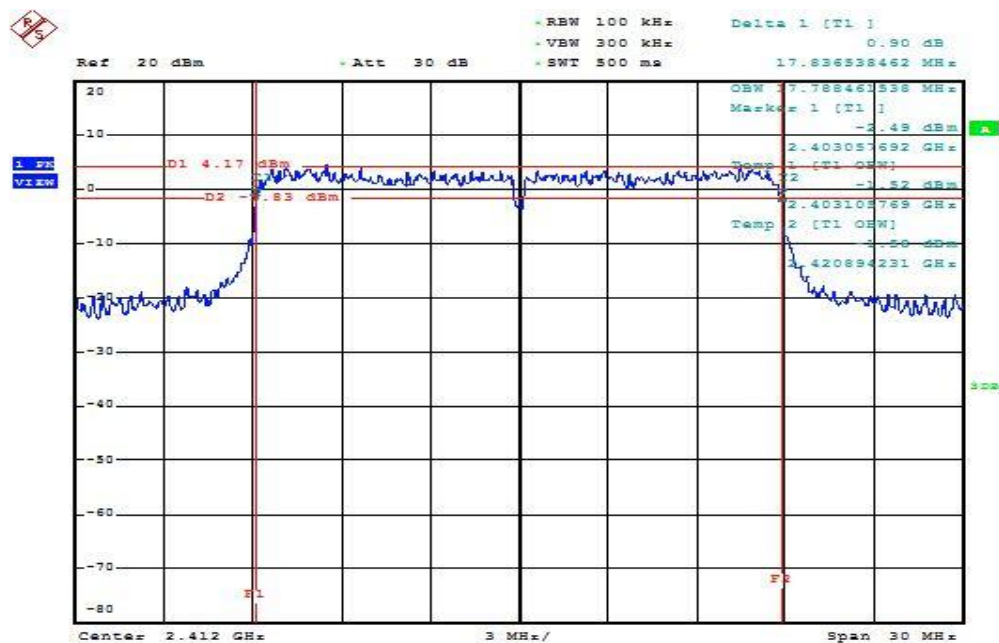

Date: 10.NOV.2015 14:12:44




## 6dB Bandwidth (CH Mid)

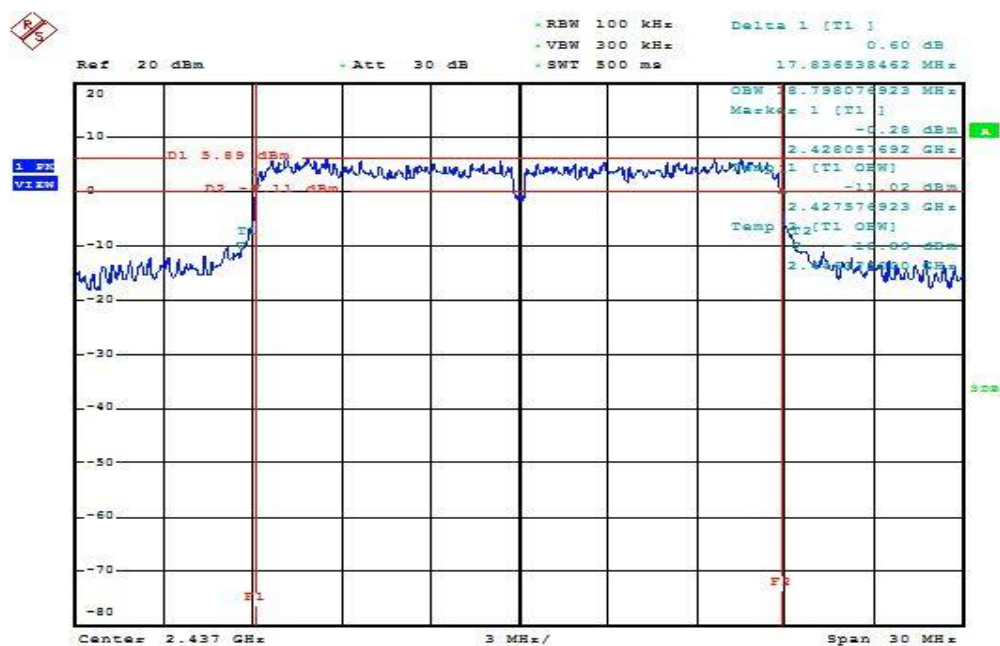

Date: 10.NOV.2015 14:24:28


## 6dB Bandwidth (CH High)

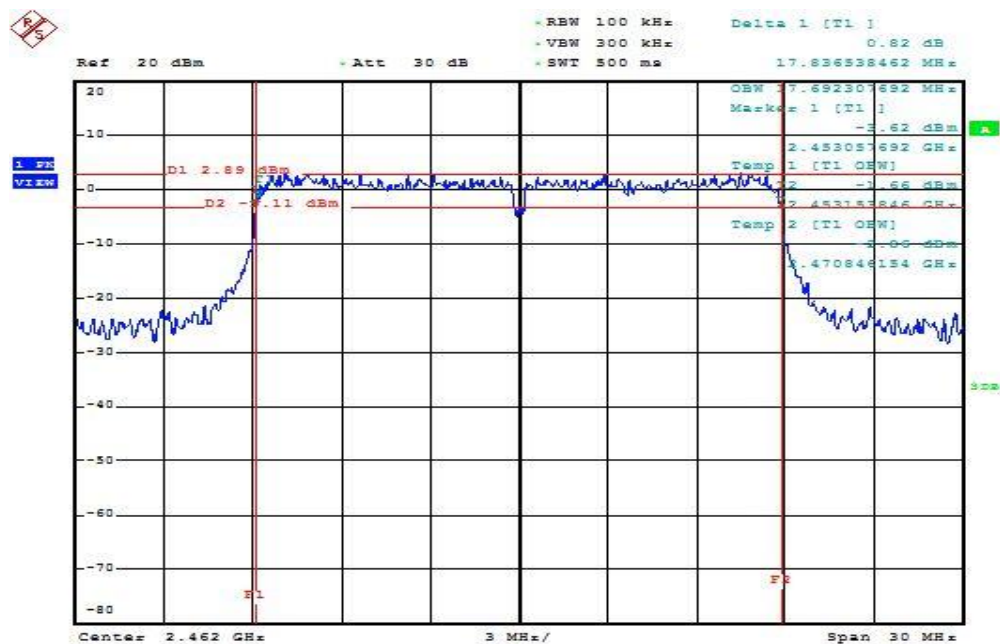

Date: 10.NOV.2015 14:27:22


## IEEE 802.11n HT 40 MHz mode / Chain 0

### 6dB Bandwidth (CH Low)

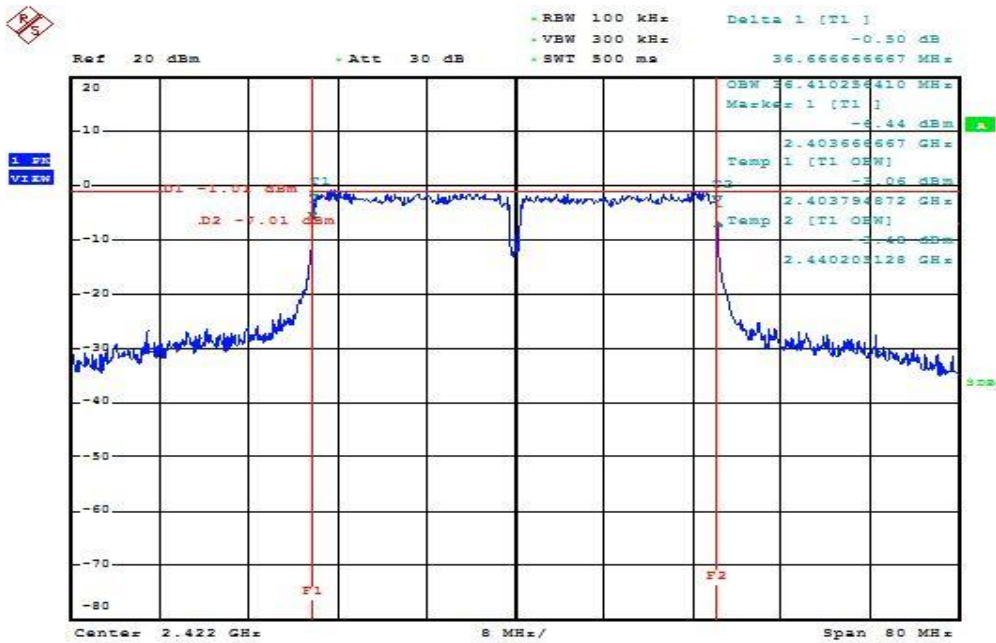


Date: 10.NOV.2015 14:54:10

### 6dB Bandwidth (CH Mid)

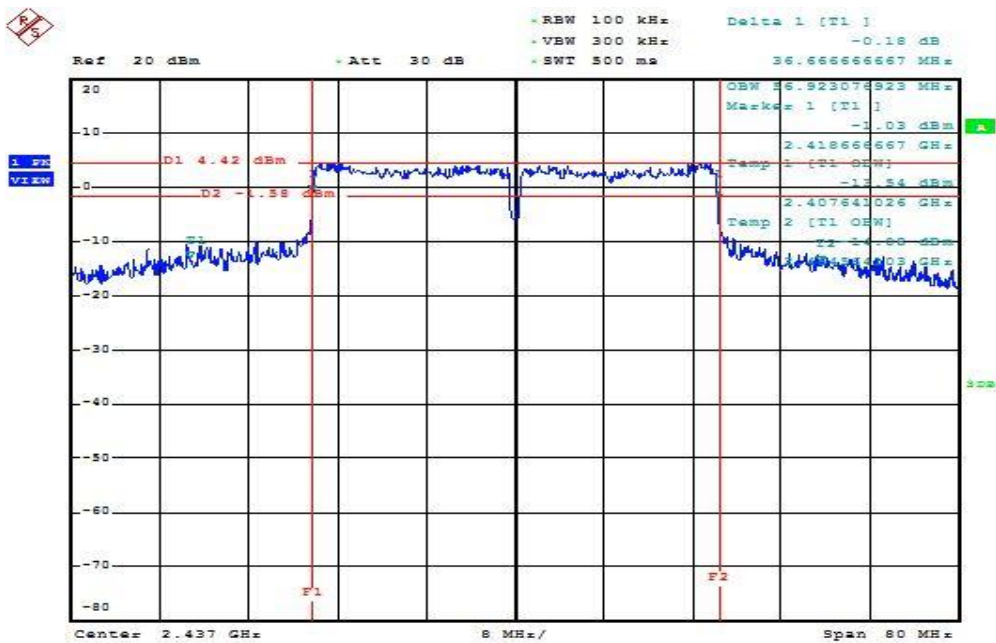

Date: 10.NOV.2015 14:57:15


## 6dB Bandwidth (CH High)

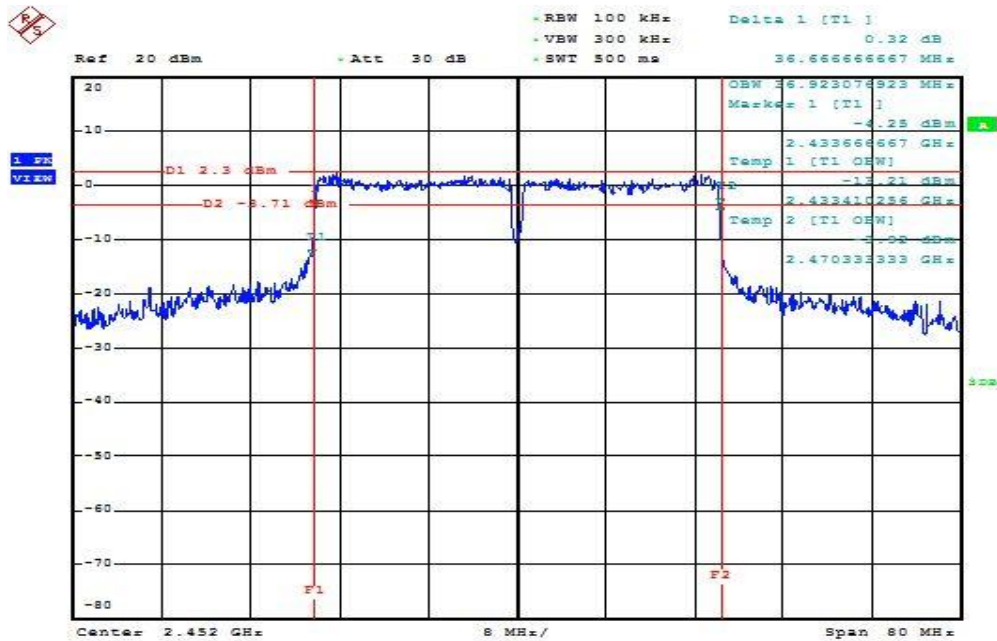

Date: 10.NOV.2015 16:19:24


## IEEE 802.11n HT 40 MHz mode / Chain 1

## 6dB Bandwidth (CH Low)

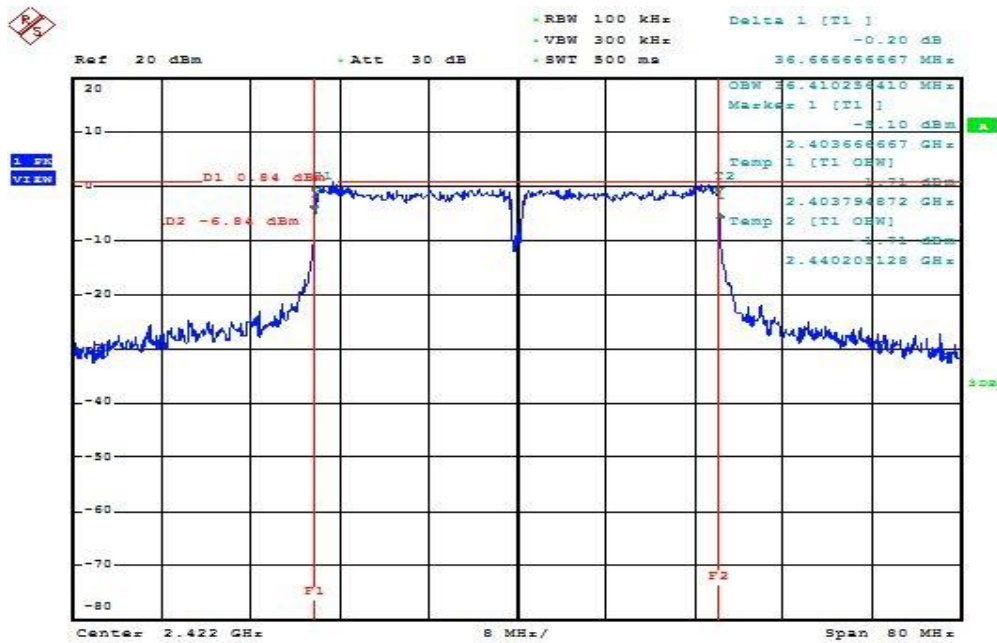


Date: 10.NOV.2015 14:45:16

## 6dB Bandwidth (CH Mid)

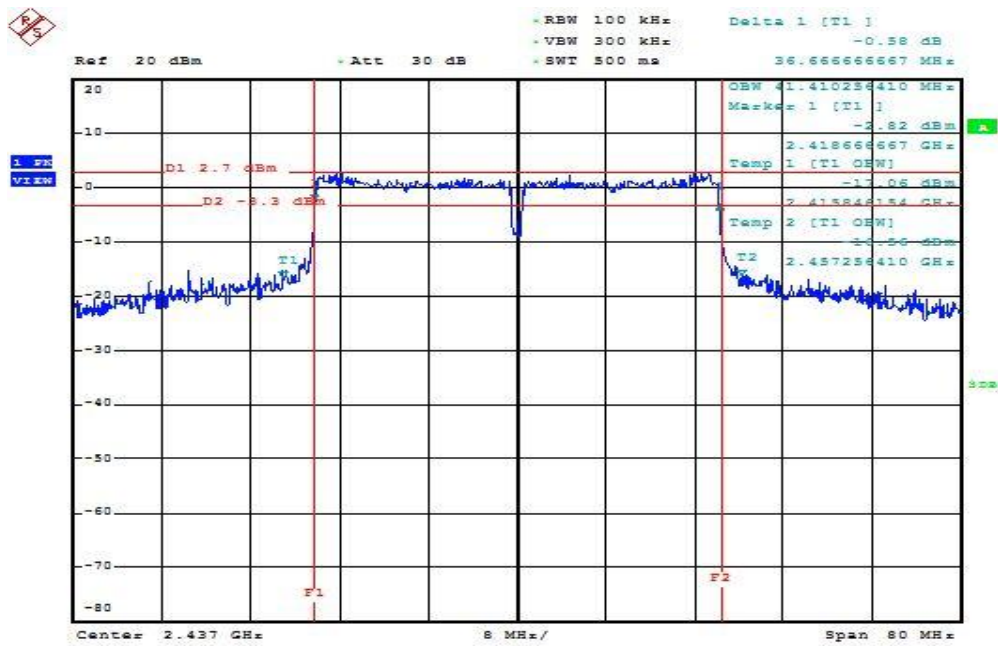

Date: 10.NOV.2015 14:58:48

## 6dB Bandwidth (CH High)

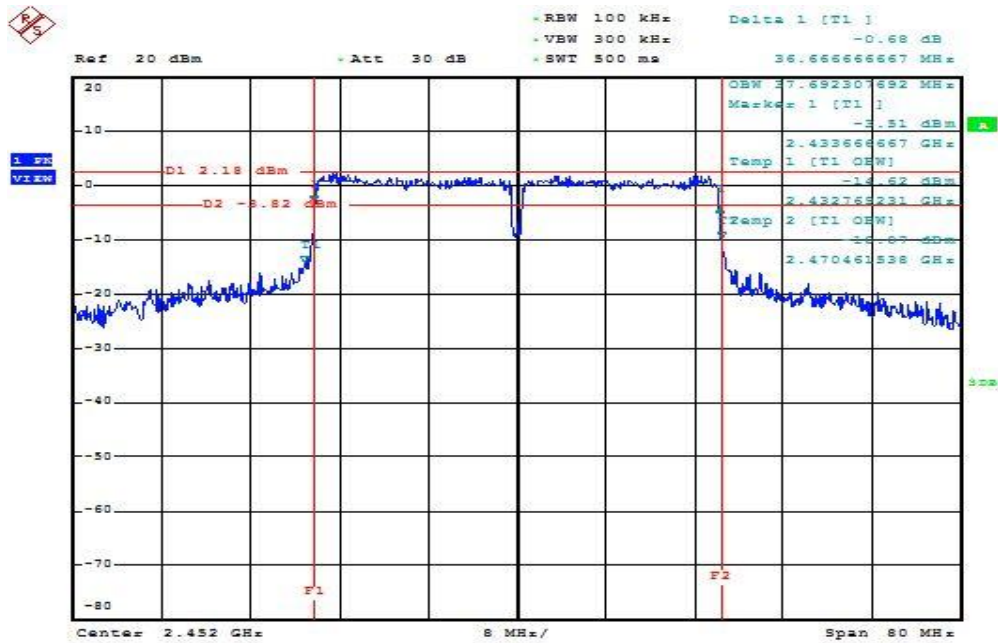

Date: 10.NOV.2015 15:08:00


## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	25.68	25.07	28.40	0.6918	29.61	PASS
Mid	2437	25.76	25.36	<b>*28.57</b>	0.7194		PASS
High	2462	20.61	17.57	22.36	0.1722		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	25.48	25.21	28.36	0.6855	29.61	PASS
Mid	2437	26.00	25.33	<b>*28.69</b>	0.7396		PASS
High	2462	25.61	25.41	28.52	0.7112		PASS

**Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	25.38	24.84	28.13	0.6501	29.61	PASS
Mid	2437	25.78	25.46	<b>*28.63</b>	0.7295		PASS
High	2462	25.58	24.94	28.28	0.6730		PASS

**Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2422	24.58	25.69	28.18	0.6577	29.61	PASS
Mid	2437	26.21	25.27	<b>*28.78</b>	0.7551		PASS
High	2452	25.43	25.15	28.30	0.6761		PASS

**Remark:**


1. Total Output Power (w) = Chain 0 ( $10^{(\text{Output Power}/10)/1000}$ ) + Chain 1 ( $10^{(\text{Output Power}/10)/1000}$ )
2. The maximum antenna gain is 6.39dBi; therefore the reduction due to antenna gain is 0.39dBi, so the limit is 29.61dBm.

## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the avg power detection.

### TEST RESULTS

*No non-compliance noted.*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	23.97	23.09	26.56	0.4529
Mid	2437	24.28	23.34	26.85	0.4842
High	2462	17.24	14.05	18.94	0.0783

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	20.26	19.39	22.86	0.1932
Mid	2437	23.14	21.54	25.42	0.3483
High	2462	21.21	19.65	23.51	0.2244

**Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	19.71	19.12	22.44	0.1754
Mid	2437	22.49	21.32	24.95	0.3126
High	2462	20.27	18.33	22.42	0.1746

**Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	17.68	20.81	22.53	0.1791
Mid	2437	22.97	20.93	25.08	0.3221
High	2452	20.38	18.15	22.42	0.1746

**Remark:**

1. Total Output Power (w) = Chain 0 ( $10^{(\text{Output Power}/10)/1000}$ ) + Chain 1 ( $10^{(\text{Output Power}/10)/1000}$ )




## 7.4 BAND EDGES MEASUREMENT

### LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

#### For Radiated

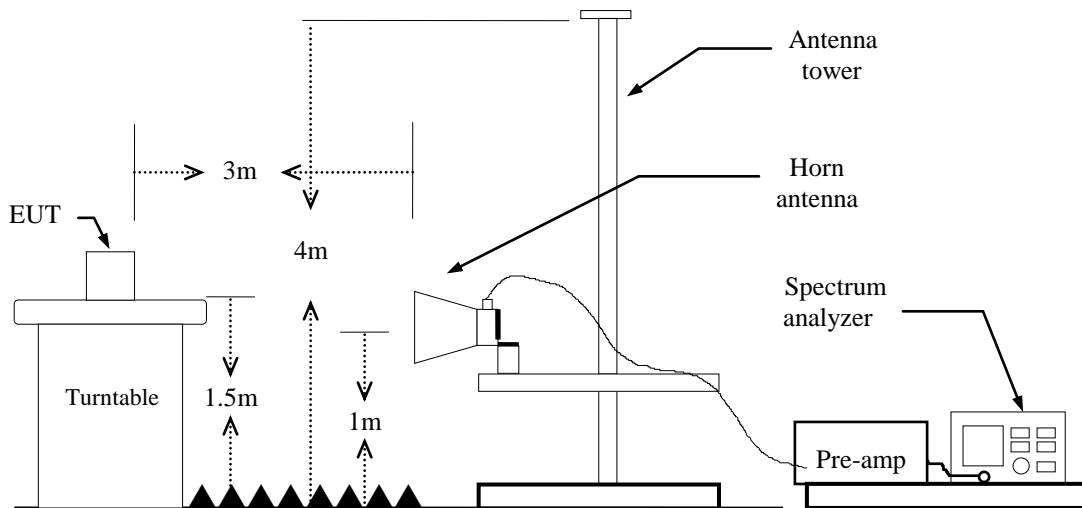

#### For Conducted



## **TEST PROCEDURE**

### **For Radiated**

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz,  
if duty cycle  $\geq 98\%$ , VBW=10Hz.  
if duty cycle  $< 98\%$  VBW=1/T.  
**IEEE 802.11b mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11g mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11n HT 20 MHz mode:**  $\geq 98\%$ , VBW=10Hz  
**IEEE 802.11n HT 40 MHz mode:**  $\geq 98\%$ =VBW 10Hz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### **For Conducted**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

## **TEST RESULTS**

Refer to attach spectrum analyzer data chart.


## Band Edges (IEEE 802.11b mode / CH Low)

Polarity: Vertical

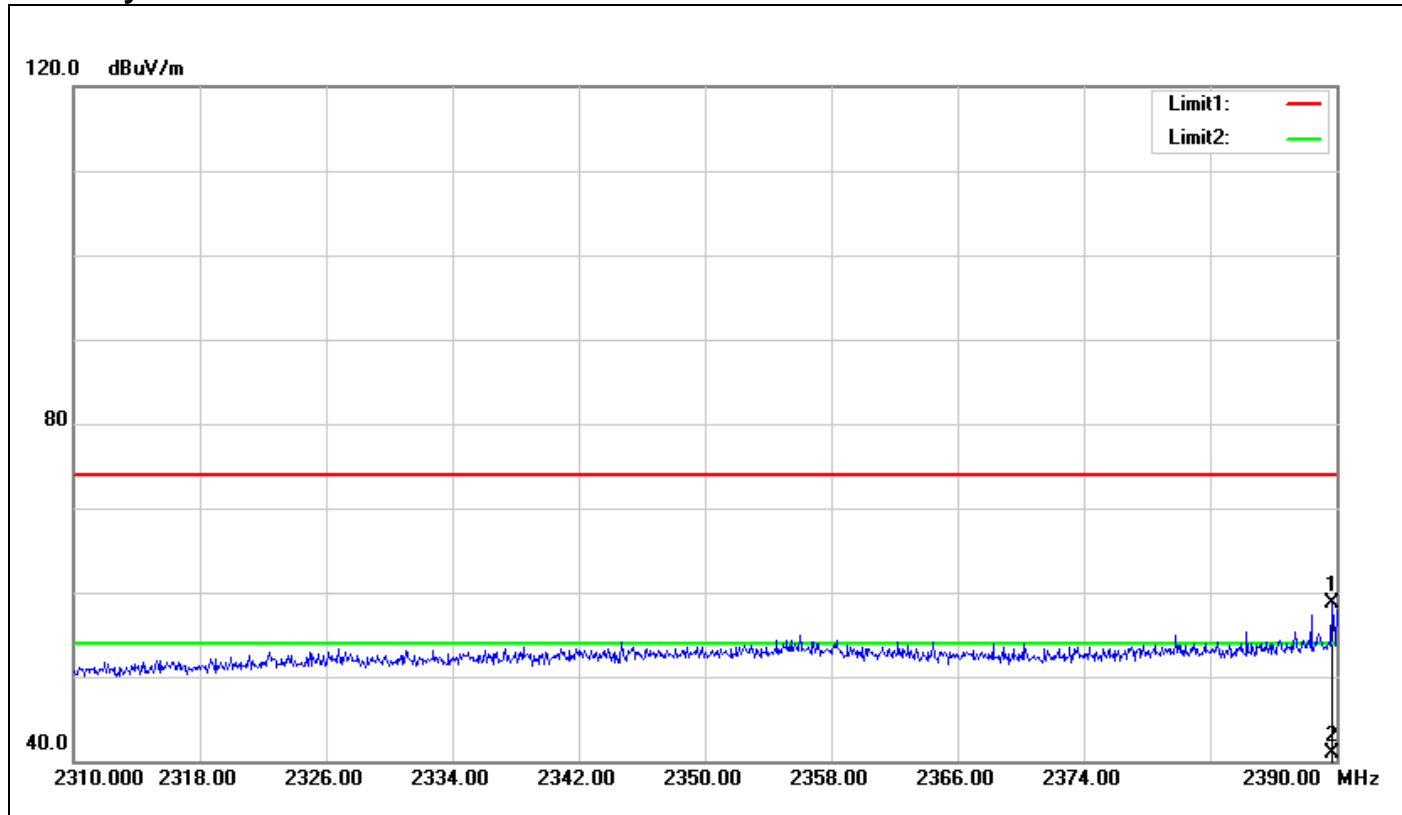

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2389.680	61.19	-2.49	58.70	74.00	-15.30	150	93	peak
2	2389.680	43.38	-2.49	40.89	54.00	-13.11	150	93	AVG


**Polarity: Horizontal**

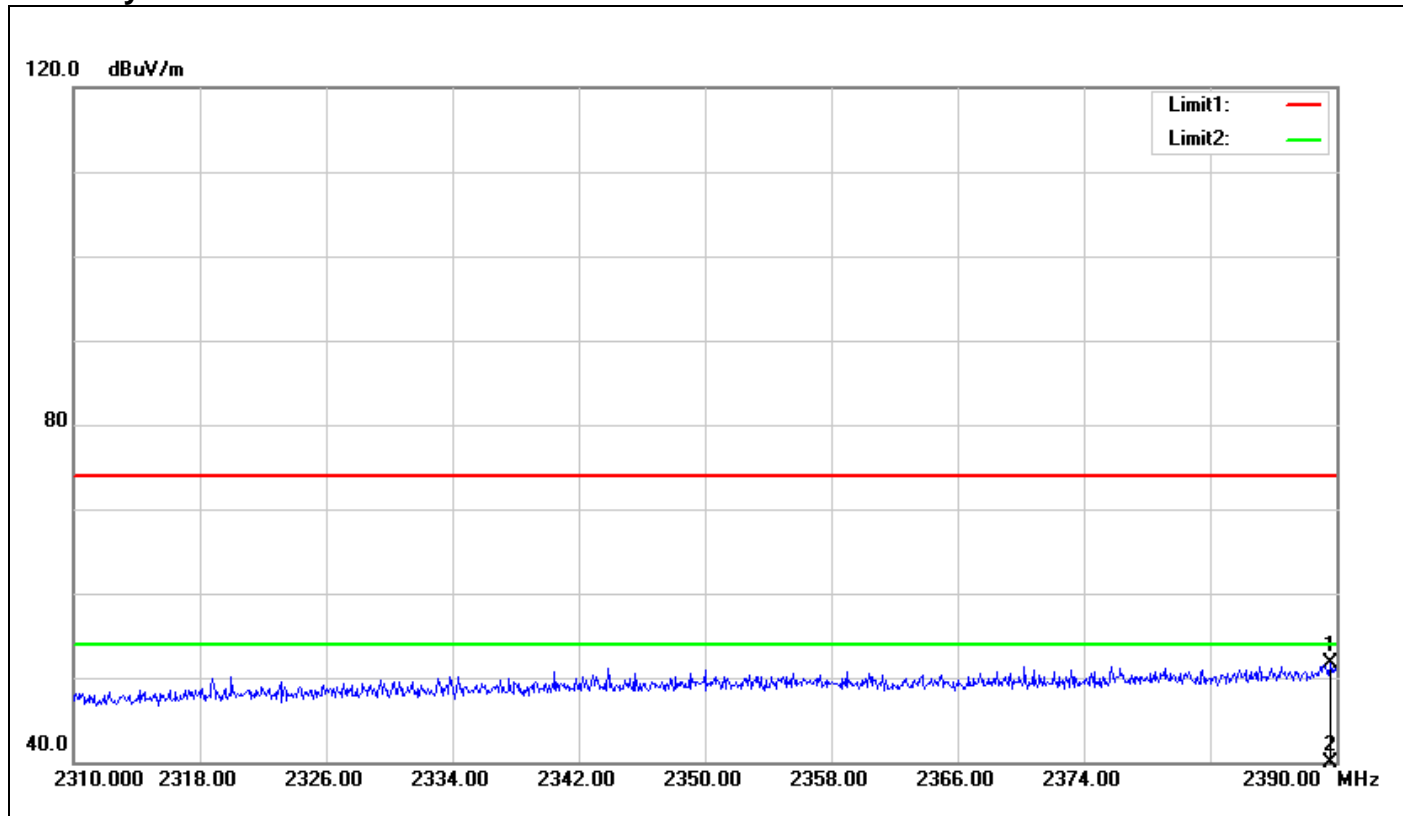

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2389.600	54.11	-2.49	51.62	74.00	-22.38	150	313	peak
2	2389.600	41.17	-2.49	38.68	54.00	-15.32	150	313	AVG


## Band Edges (IEEE 802.11b mode / CH High)

Polarity: Vertical

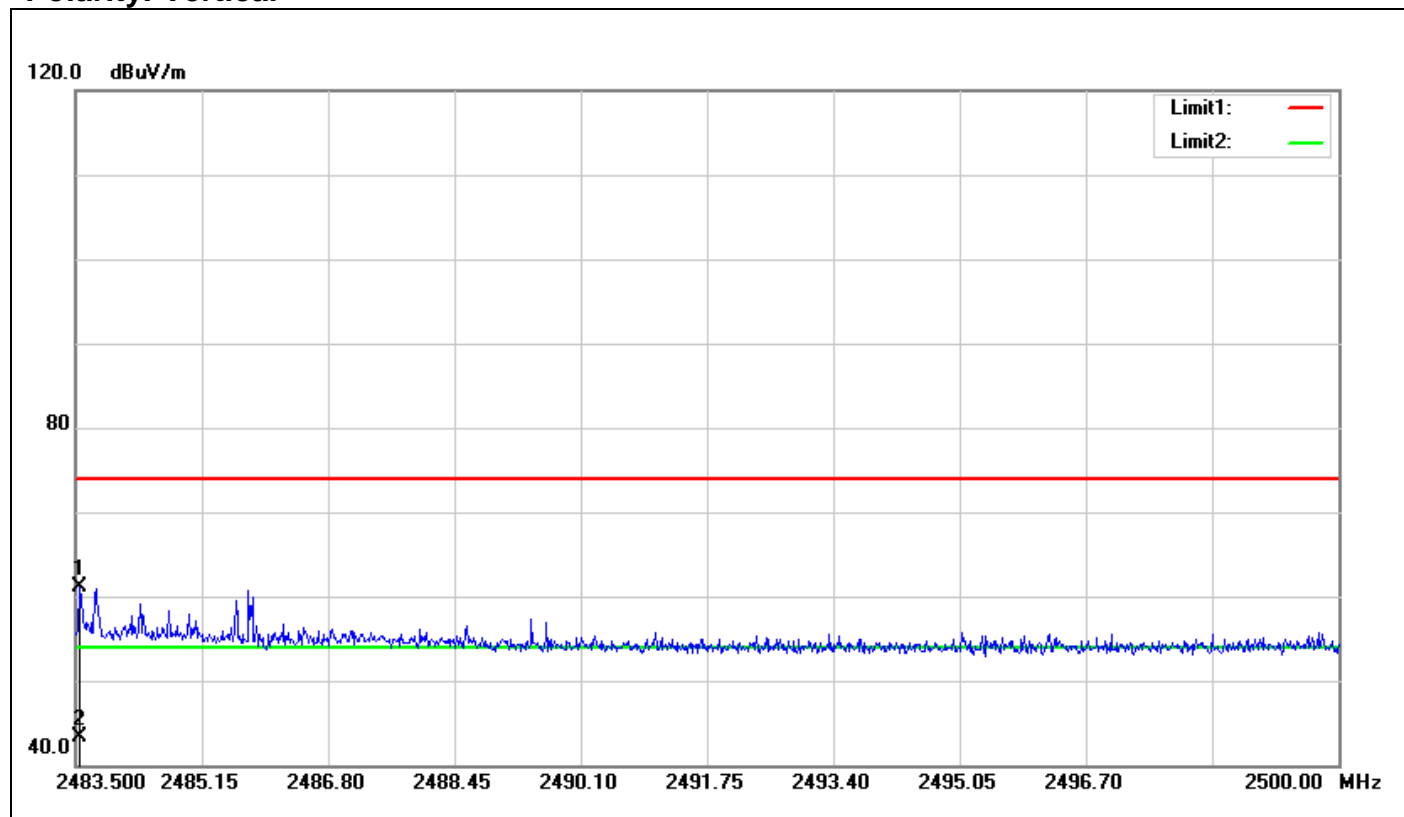

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2483.550	63.17	-1.99	61.18	74.00	-12.82	150	302	peak
2	2483.550	45.22	-1.99	43.23	54.00	-10.77	150	302	AVG


**Polarity: Horizontal**

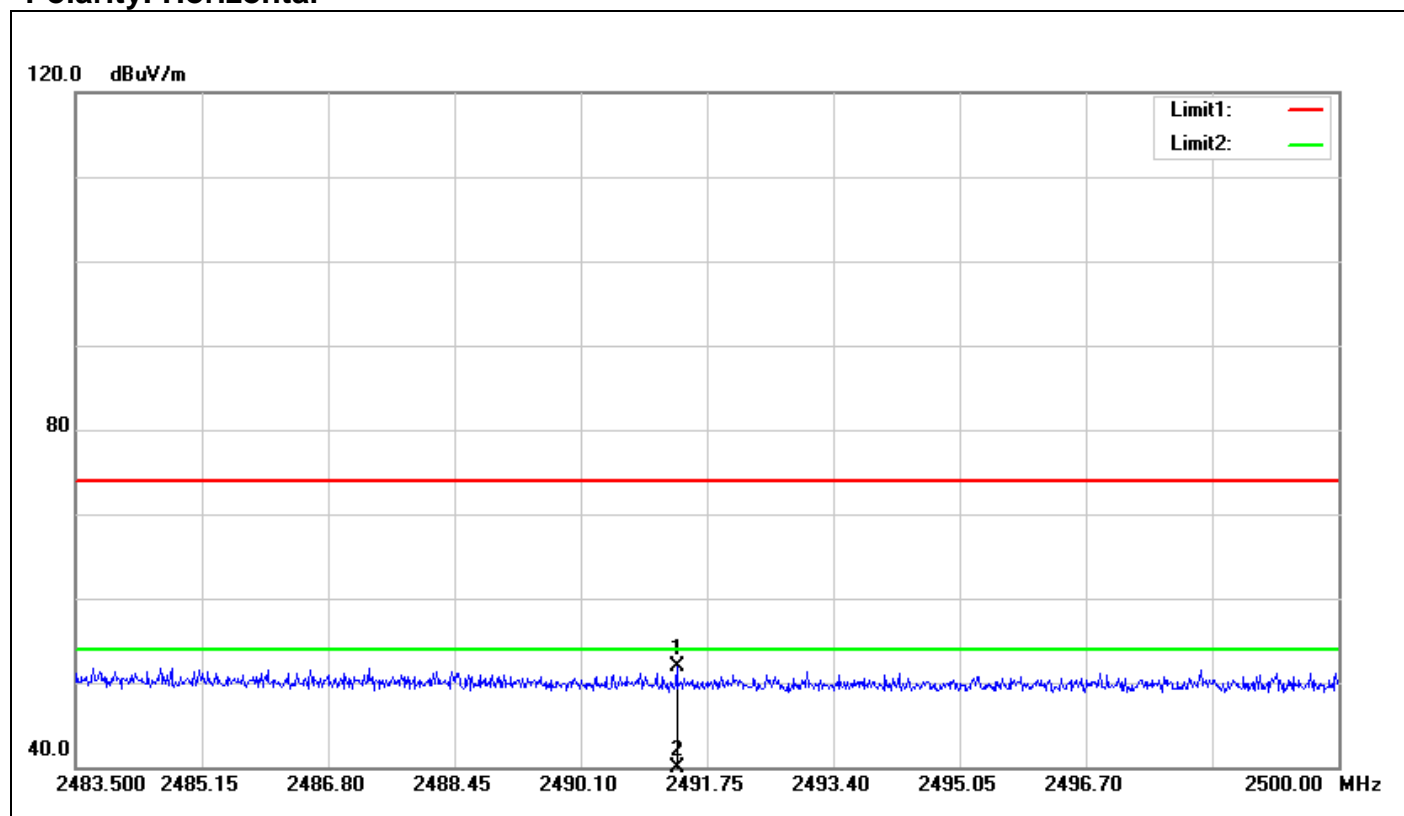

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2491.354	53.80	-1.92	51.88	74.00	-22.12	150	222	peak
2	2491.354	39.95	-1.92	38.03	54.00	-15.97	150	222	AVG


## Band Edges (IEEE 802.11g mode / CH Low)

Polarity: Vertical

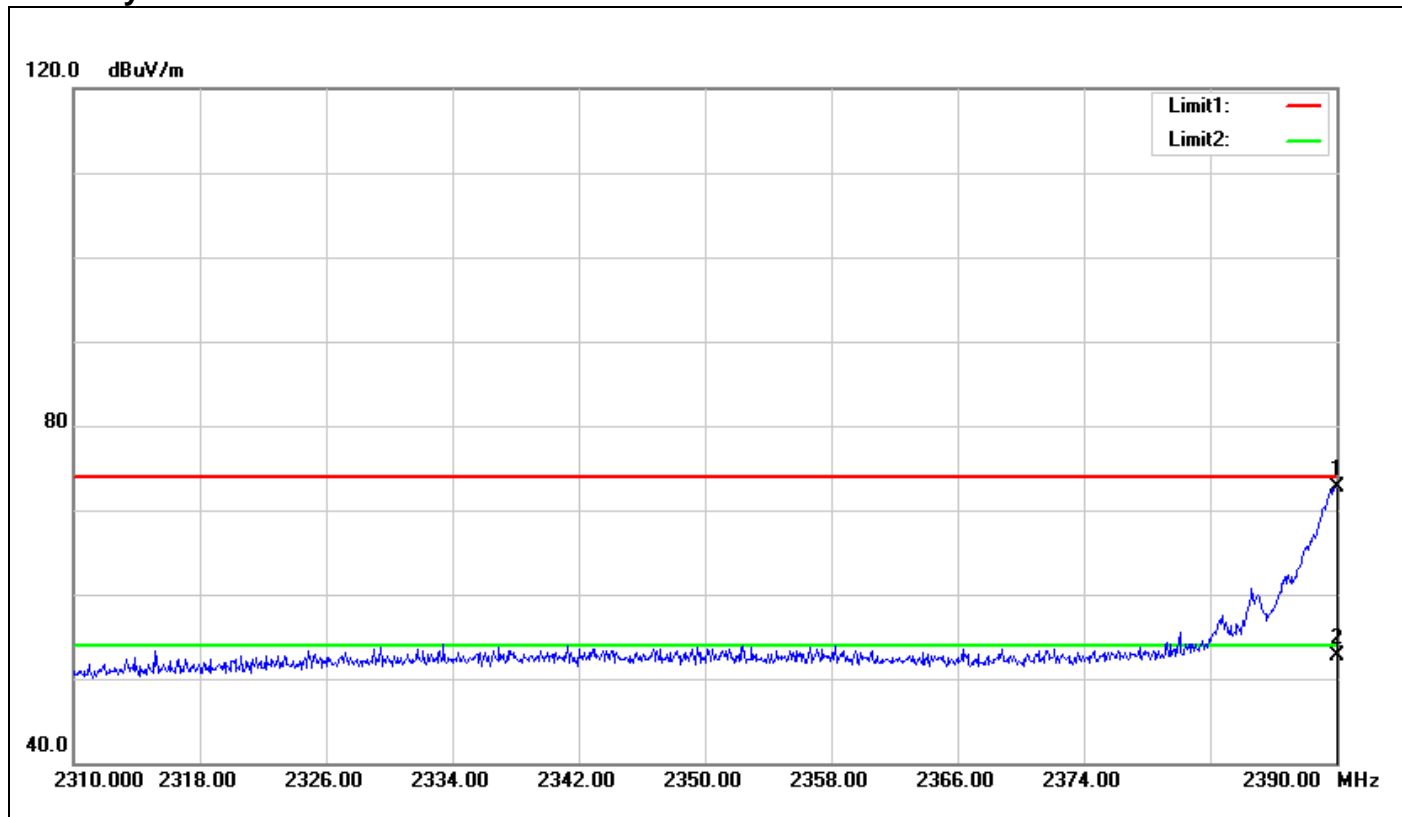

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2390.000	75.16	-2.49	72.67	74.00	-1.33	150	159	peak
2	2390.000	55.11	-2.49	52.62	54.00	-1.38	150	159	AVG

**Polarity: Horizontal**

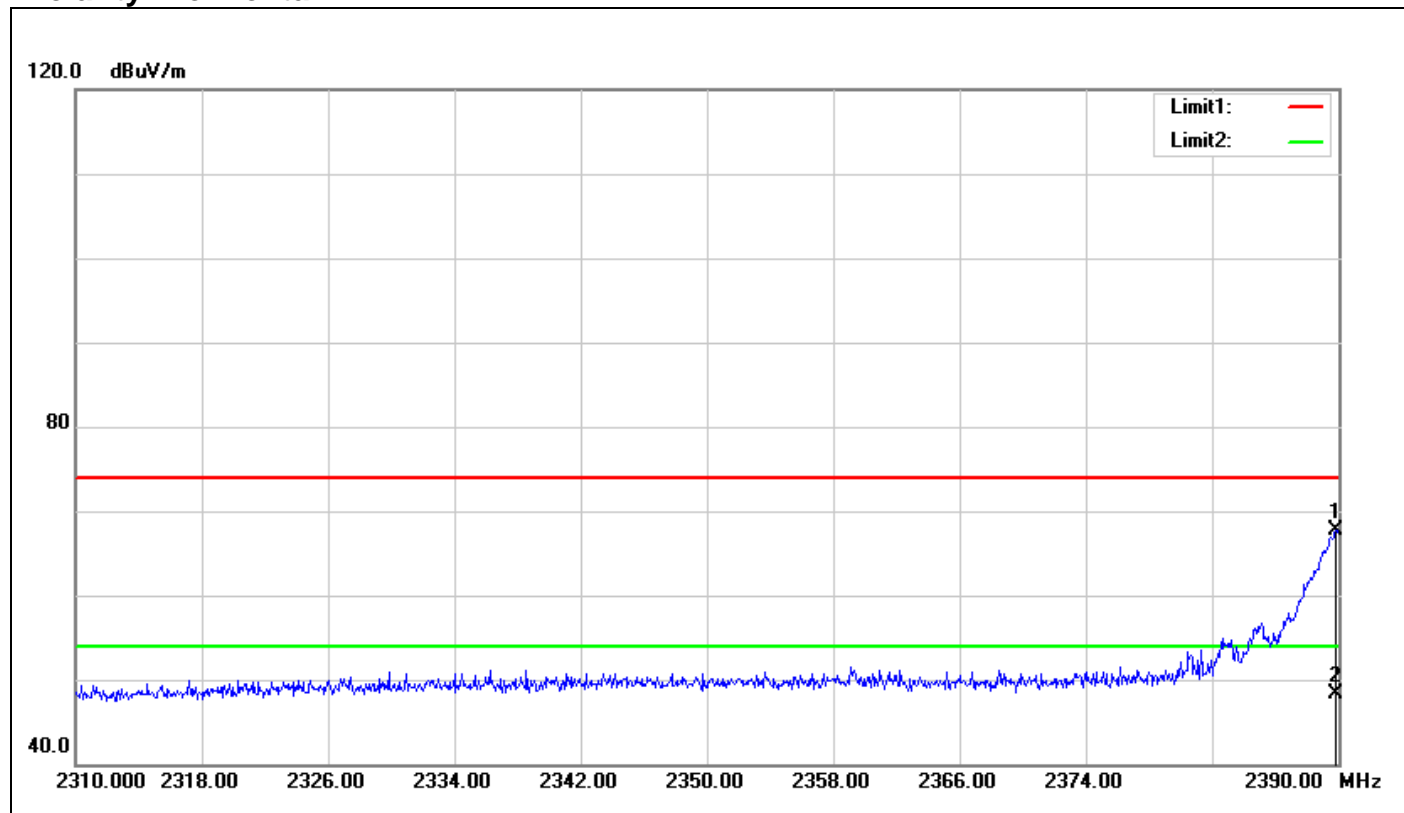


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2389.840	70.19	-2.49	67.70	74.00	-6.30	150	112	peak
2	2389.840	50.76	-2.49	48.27	54.00	-5.73	150	112	AVG




## Band Edges (IEEE 802.11g mode / CH High)

Polarity: Vertical

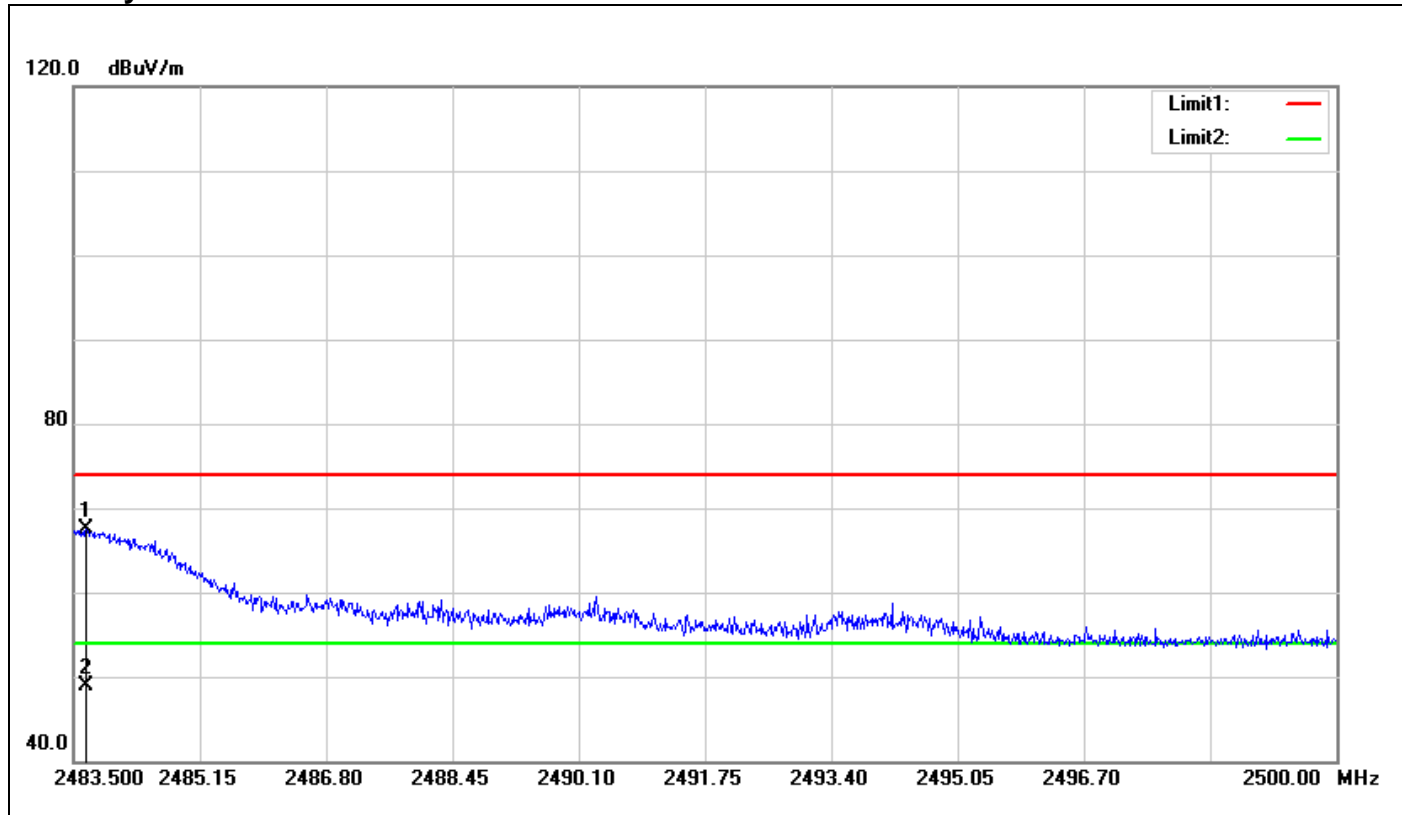

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2483.665	69.58	-1.99	67.59	74.00	-6.41	150	240	peak
2	2483.665	50.80	-1.99	48.81	54.00	-5.19	150	240	AVG


**Polarity: Horizontal**

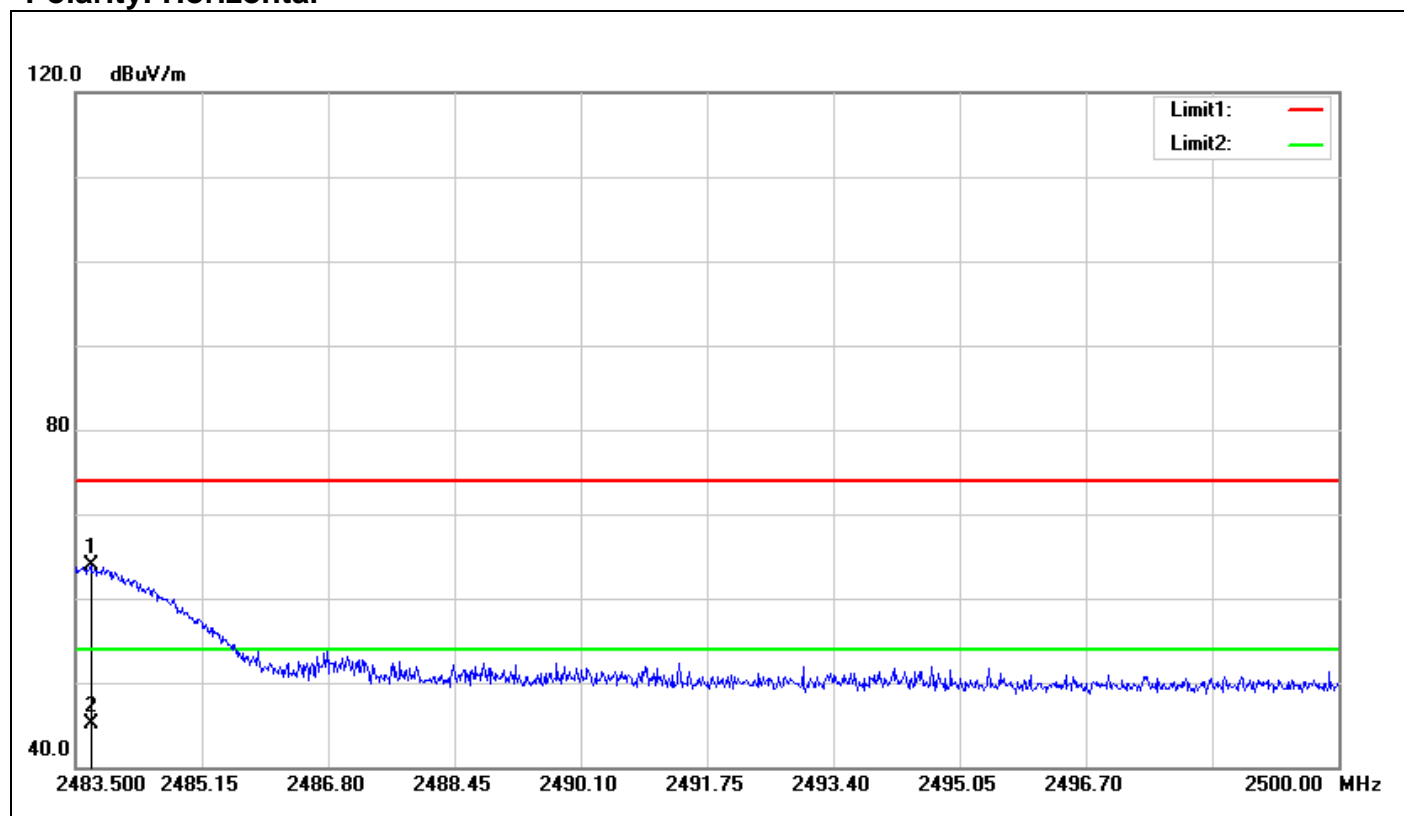

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2483.698	65.94	-1.99	63.95	74.00	-10.05	150	222	peak
2	2483.698	47.02	-1.99	45.03	54.00	-8.97	150	222	AVG


# **Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**

**Polarity: Vertical**

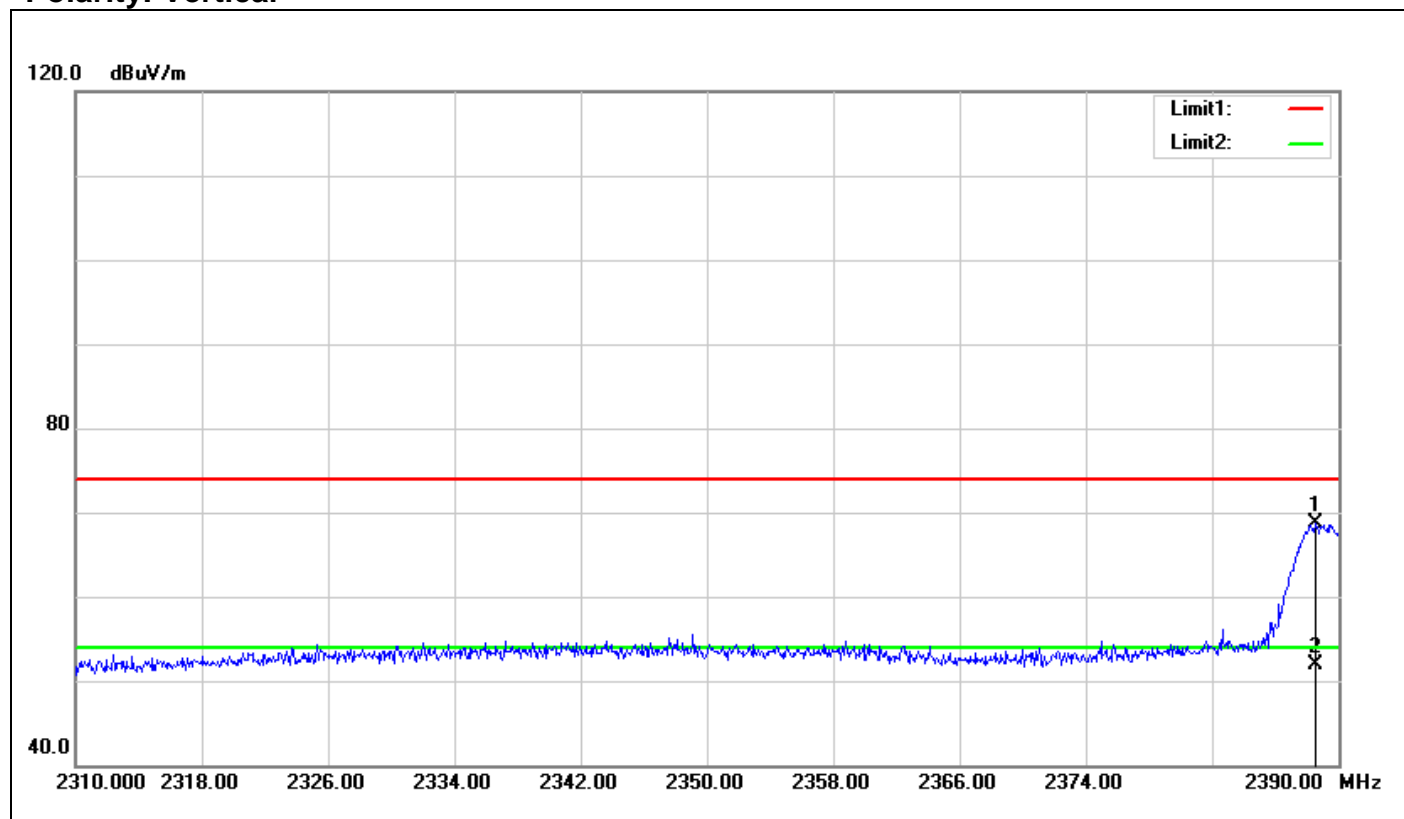

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2388.560	71.21	-2.50	68.71	74.00	-5.29	150	167	peak
2	2388.560	54.41	-2.50	51.91	54.00	-2.09	150	167	AVG


**Polarity: Horizontal**

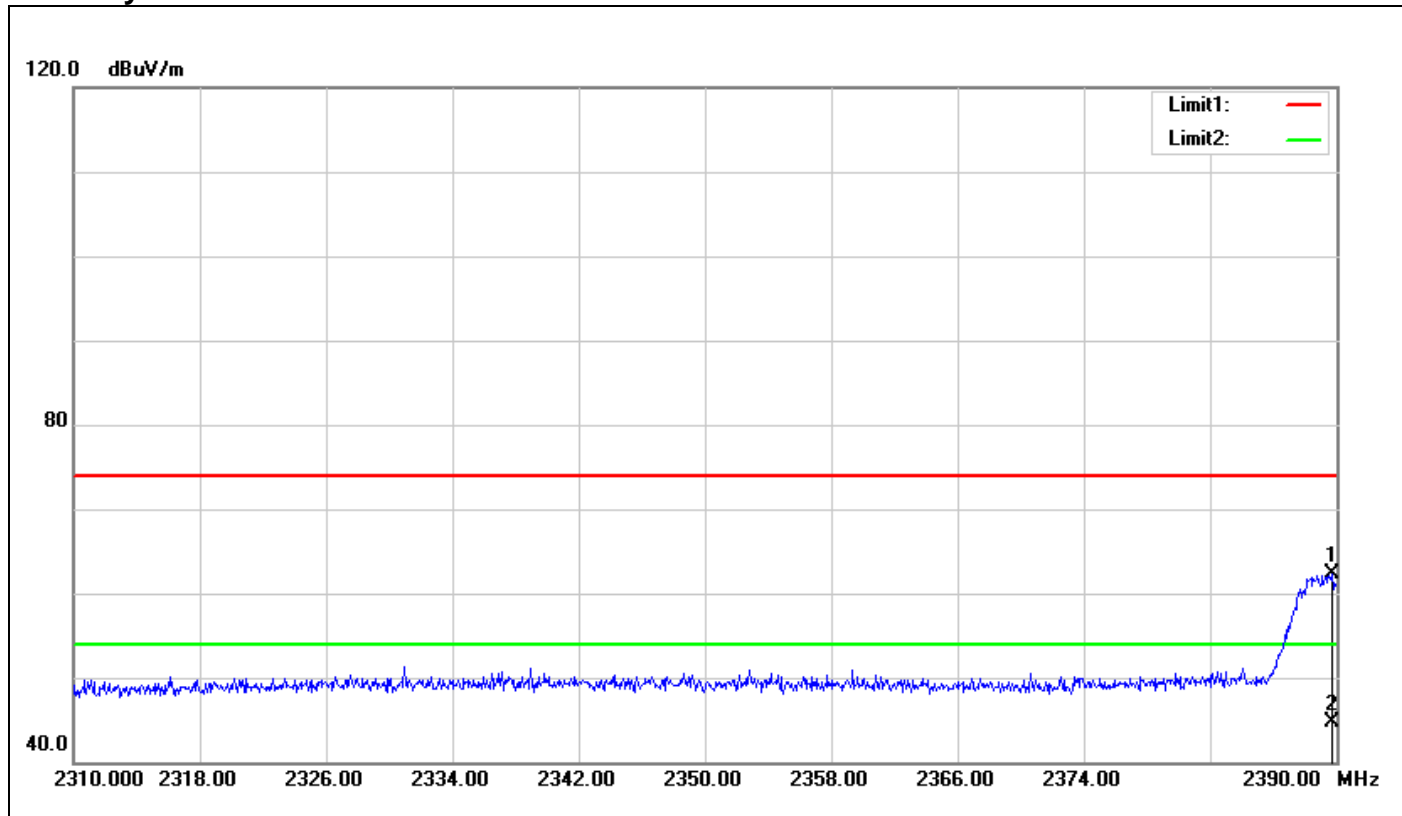

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2389.760	64.77	-2.49	62.28	74.00	-11.72	150	359	peak
2	2389.760	47.13	-2.49	44.64	54.00	-9.36	150	359	AVG


**Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**

**Polarity: Vertical**

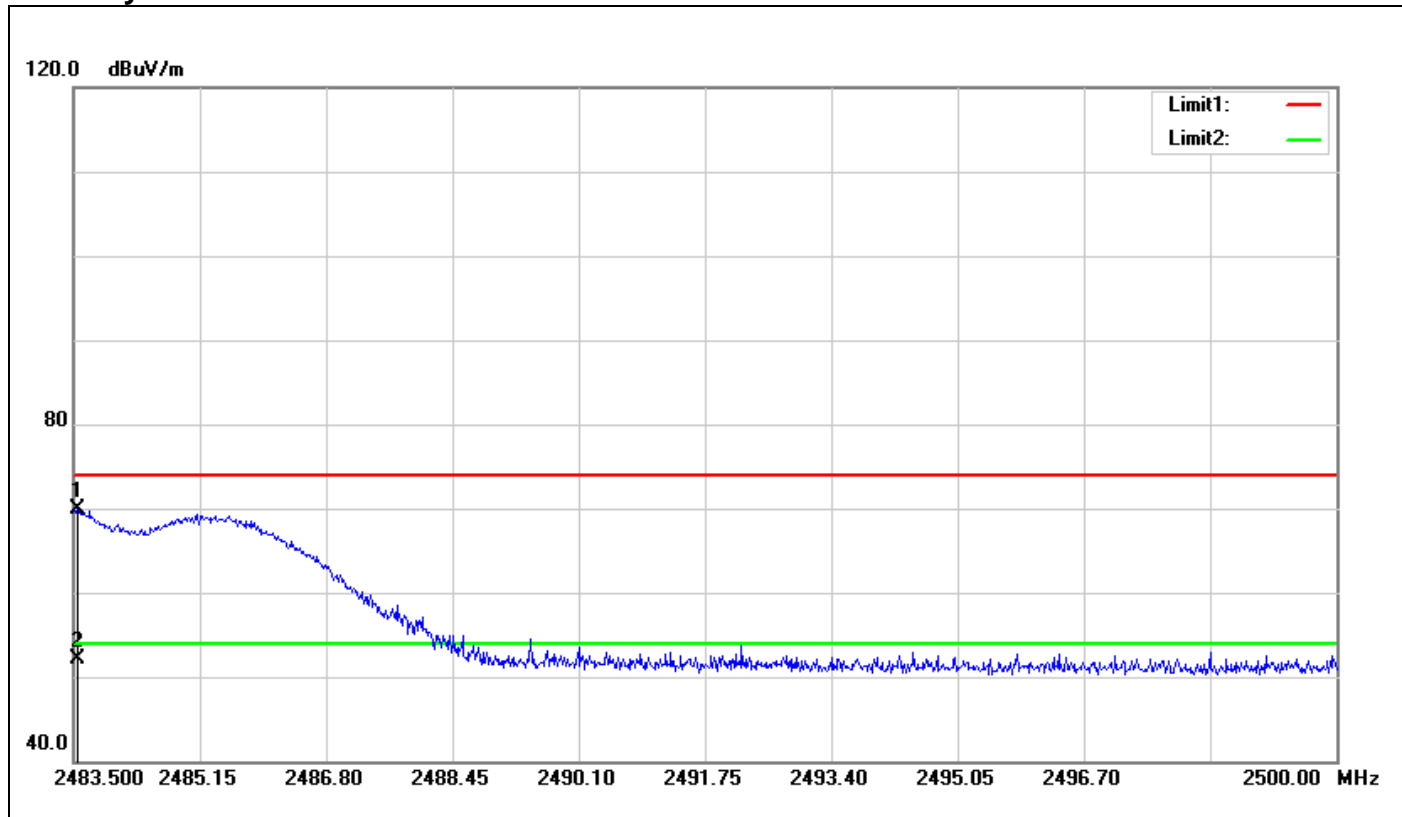

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2483.550	71.90	-1.99	69.91	74.00	-4.09	150	31	peak
2	2483.550	54.10	-1.99	52.11	54.00	-1.89	150	31	AVG


**Polarity: Horizontal**

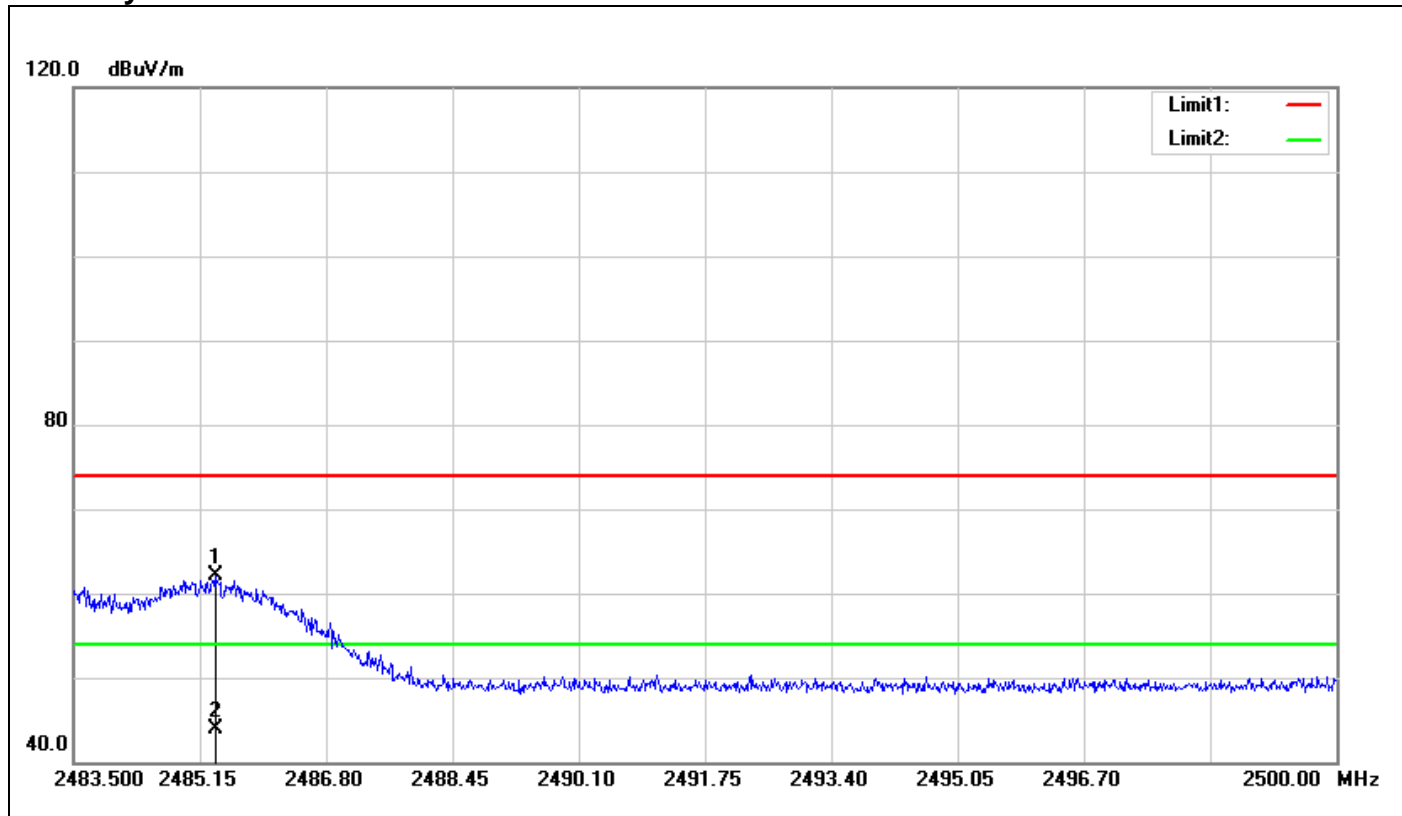

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2485.348	64.03	-1.98	62.05	74.00	-11.95	150	328	peak
2	2485.348	45.84	-1.98	43.86	54.00	-10.14	150	328	AVG


**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**

**Polarity: Vertical**

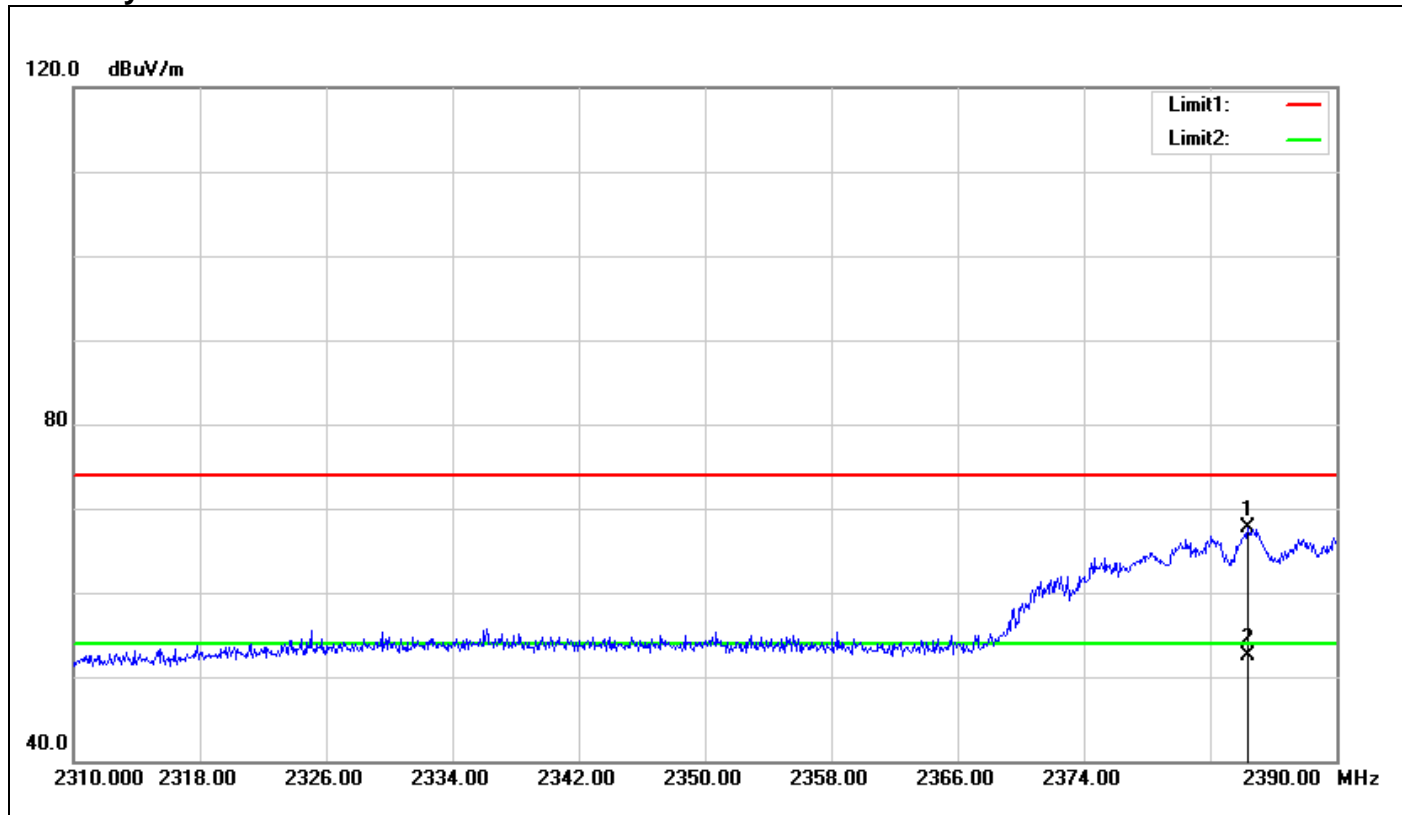

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2384.400	70.22	-2.54	67.68	74.00	-6.32	150	228	peak
2	2384.400	54.98	-2.54	52.44	54.00	-1.56	150	228	AVG

**Polarity: Horizontal**

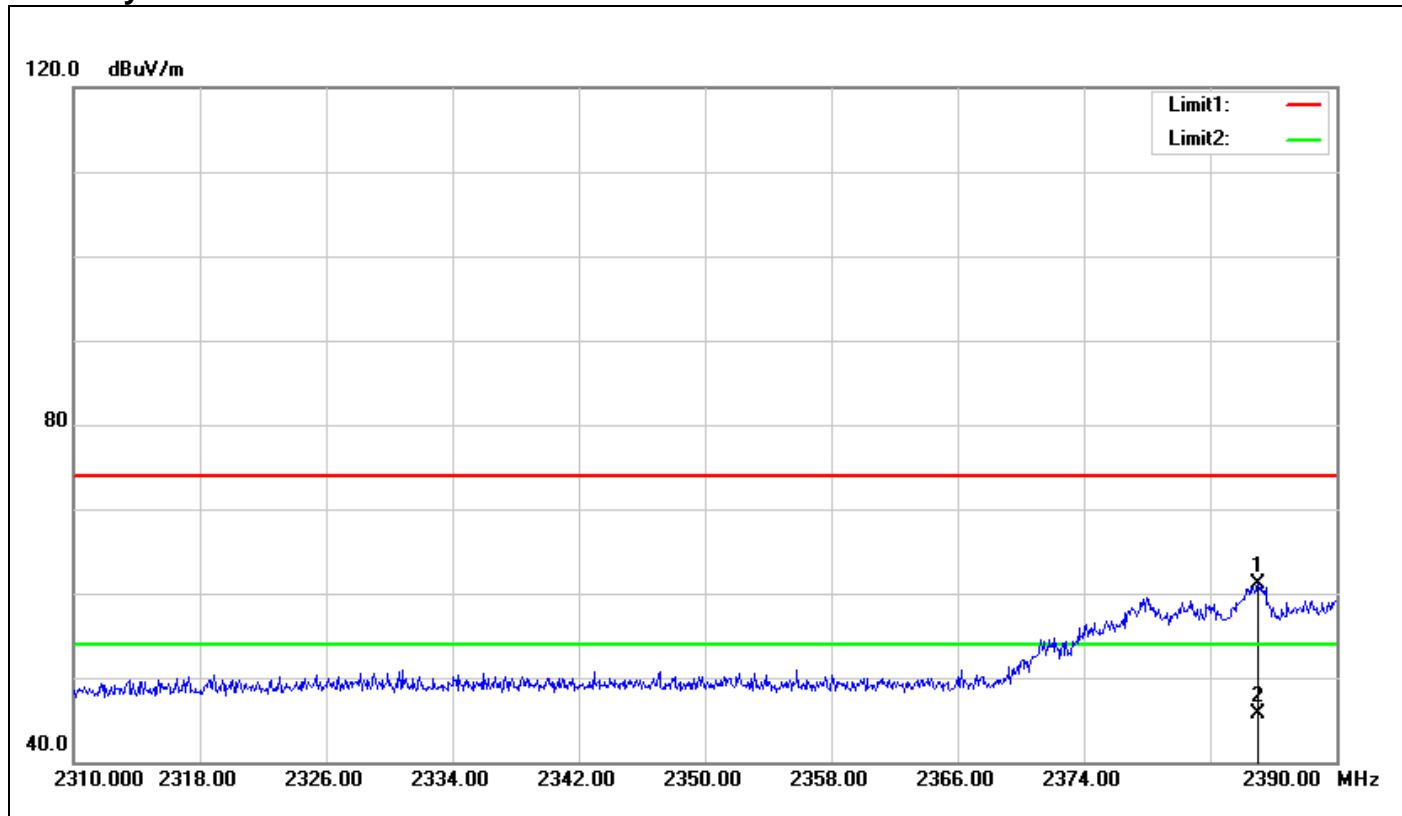


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )	
1	2385.040	63.66	-2.53	61.13	74.00	-12.87	150	104	peak
2	2385.040	48.24	-2.53	45.71	54.00	-8.29	150	104	AVG




**Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)**

**Polarity: Vertical**

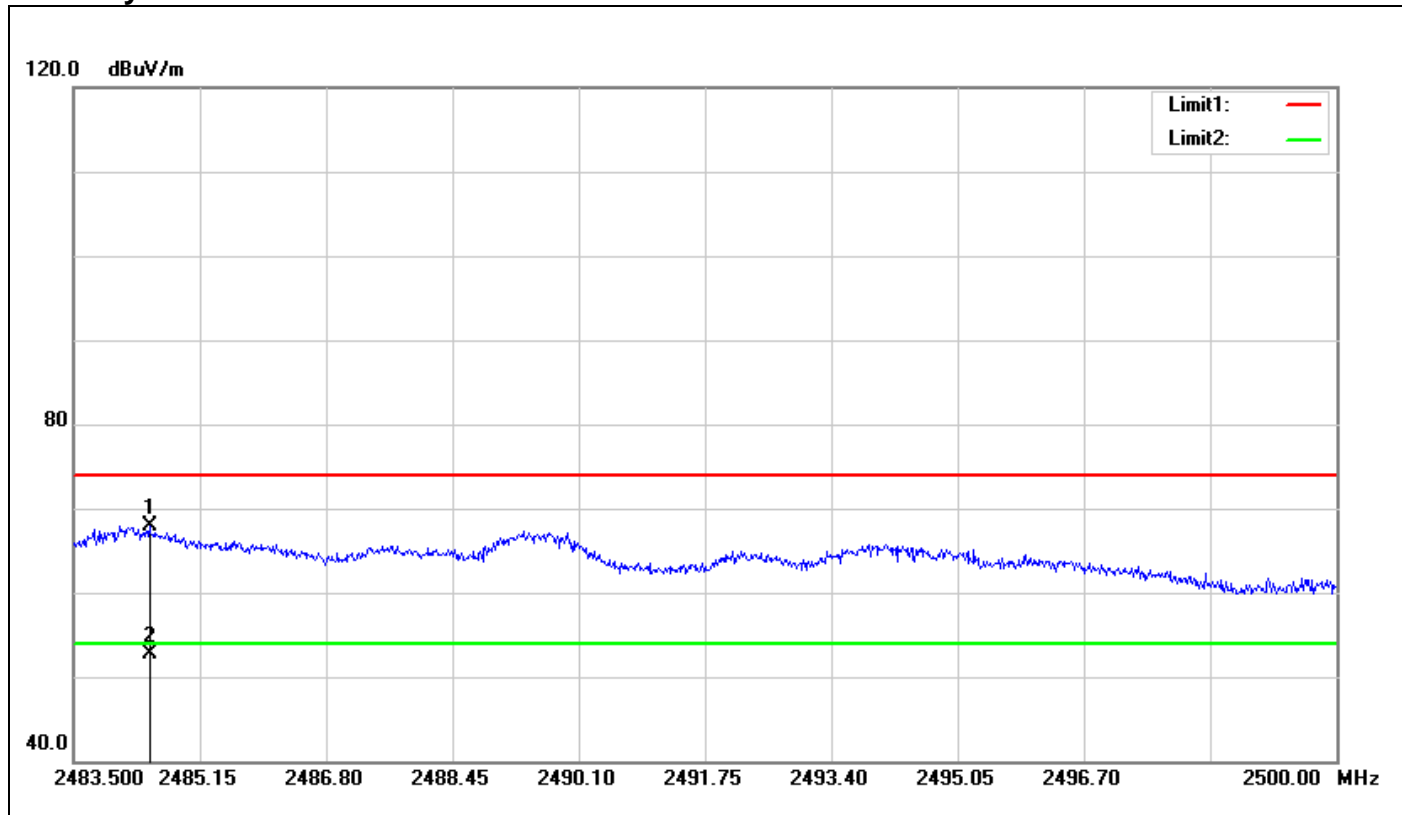

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2484.490	69.90	-1.99	67.91	74.00	-6.09	150	291	peak
2	2484.490	54.59	-1.99	52.60	54.00	-1.40	150	291	AVG


**Polarity: Horizontal**

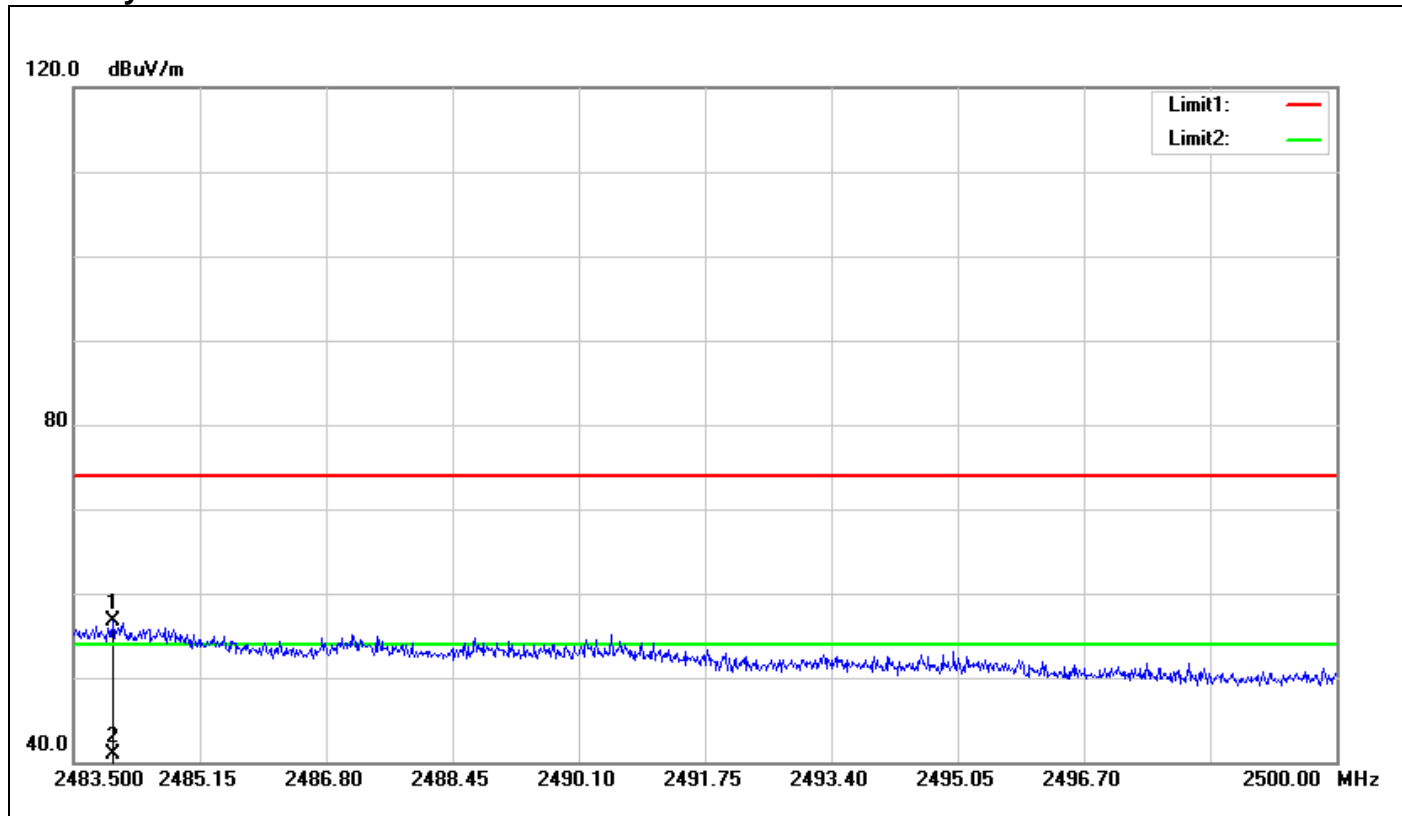

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )	Remark
1	2484.012	58.60	-1.99	56.61	74.00	-17.39	150	354	peak
2	2484.012	42.83	-1.99	40.84	54.00	-13.16	150	354	AVG


## Test Plot

### Conducted Band Edges (IEEE 802.11b mode / CH Low / Chain 0)

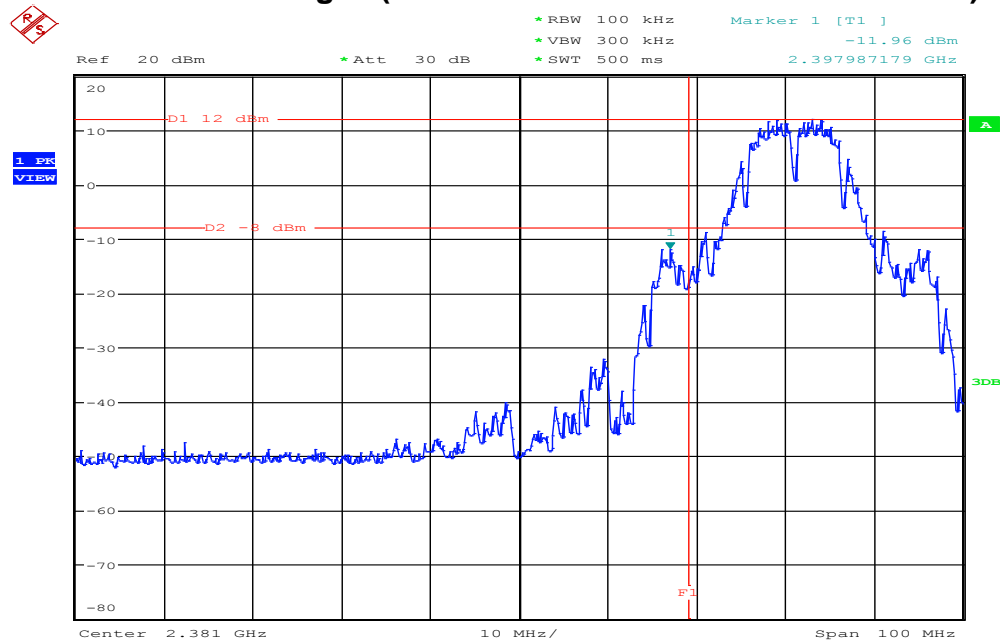


Date: 10.NOV.2015 13:14:59

### Conducted Band Edges (IEEE 802.11b mode / CH High / Chain 0)

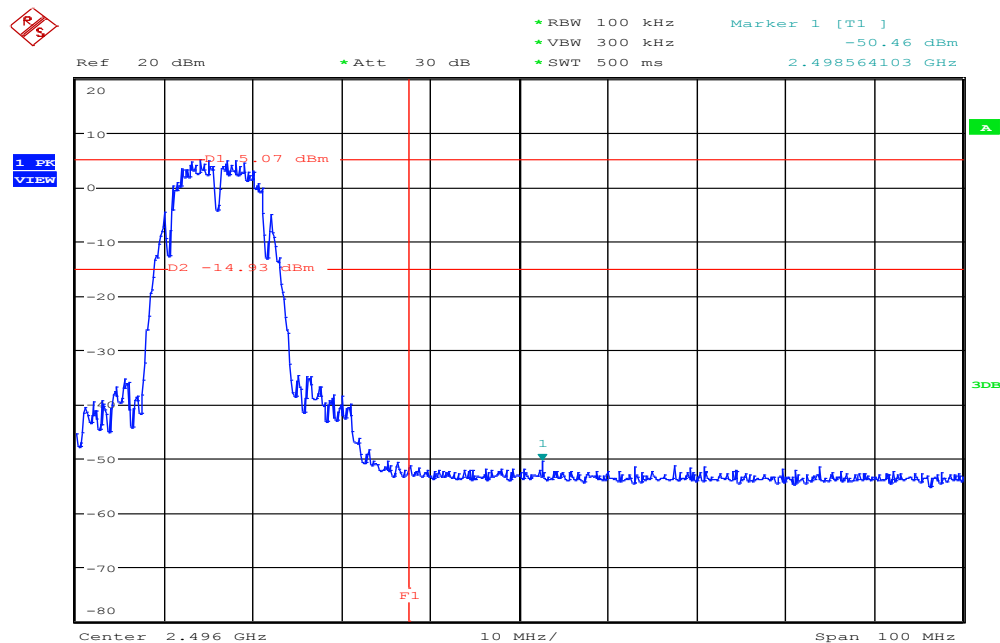


Date: 10.NOV.2015 13:32:48

## Conducted Band Edges (IEEE 802.11b mode / CH Low / Chain 1)

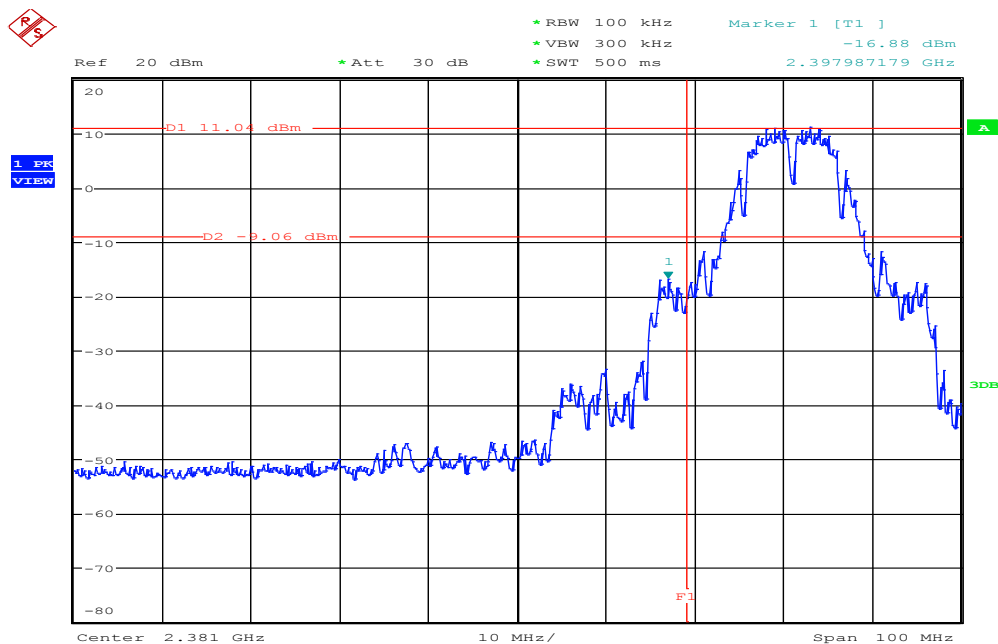


Date: 10.NOV.2015 13:16:15

## Conducted Band Edges (IEEE 802.11b mode / CH High / Chain 1)

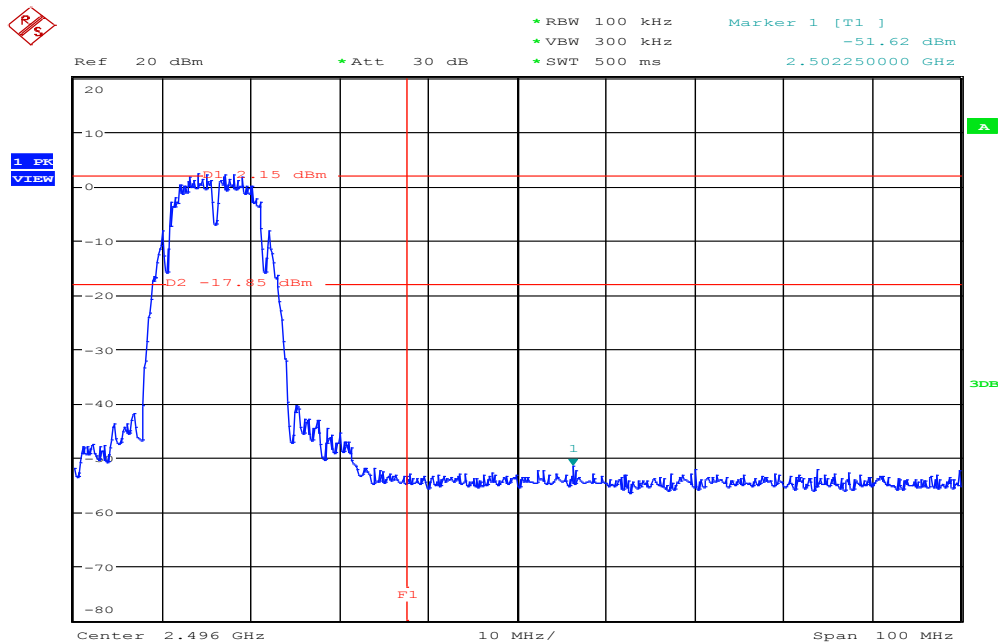


Date: 10.NOV.2015 13:31:14

## Conducted Band Edges (IEEE 802.11g mode / CH Low / Chain 0)

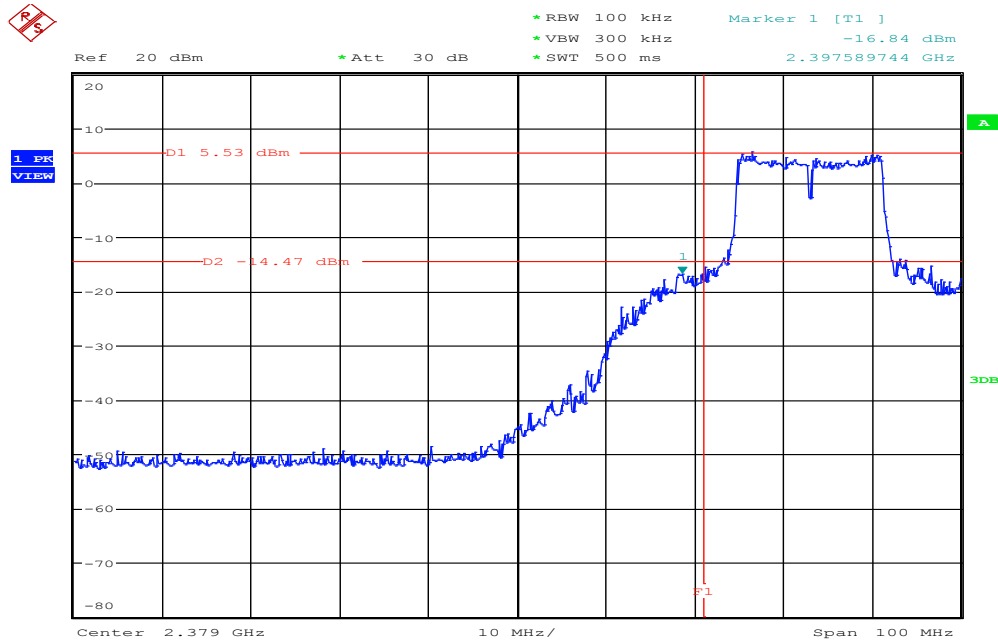


Date: 10.NOV.2015 13:42:24

## Conducted Band Edges (IEEE 802.11g mode / CH High / Chain 0)

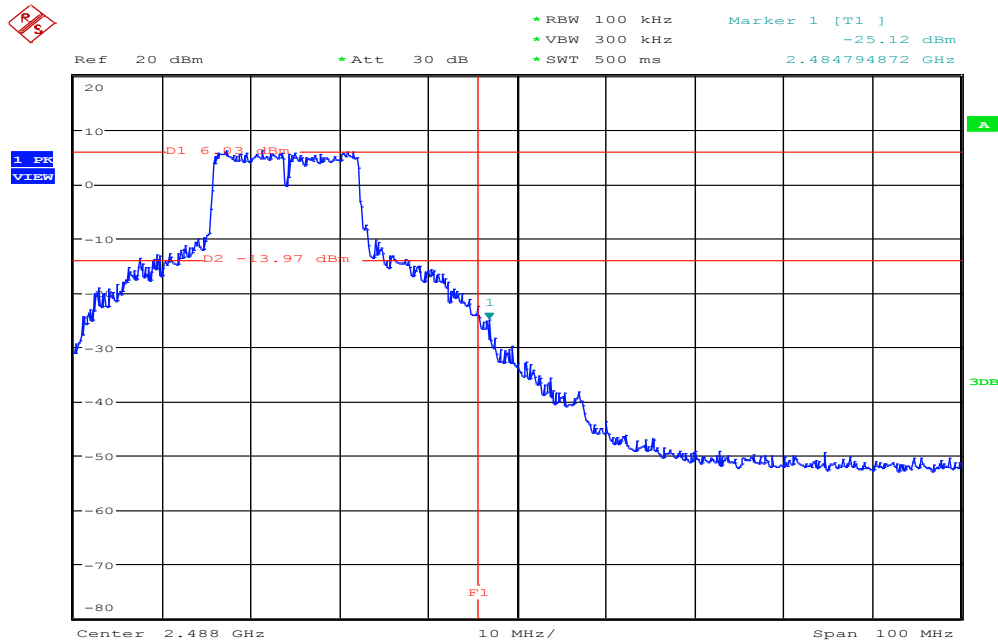


Date: 10.NOV.2015 14:04:08

## Conducted Band Edges (IEEE 802.11g mode / CH Low / Chain 1)

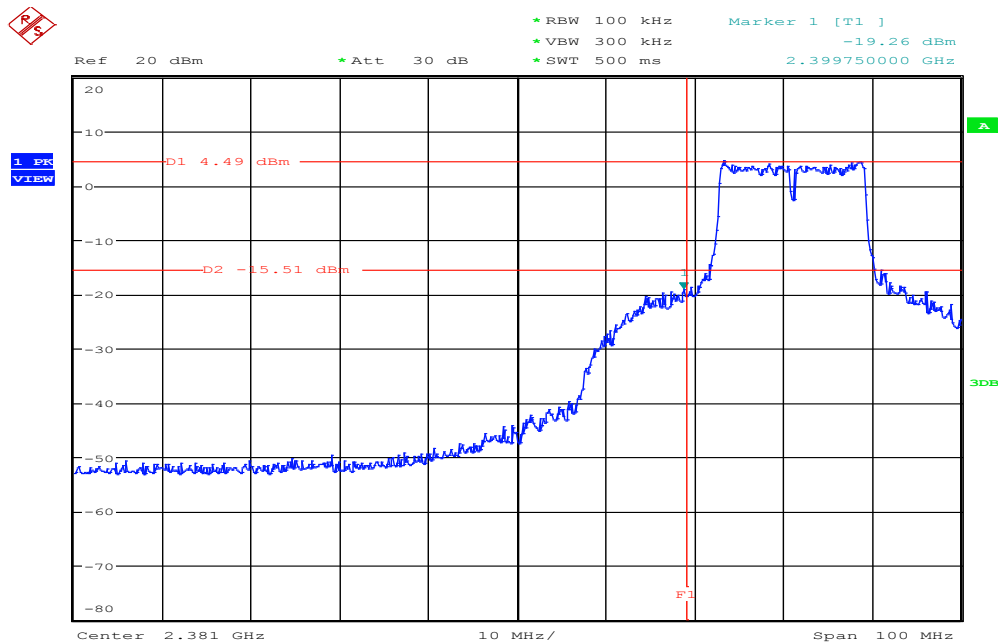


Date: 10.NOV.2015 13:53:08

## Conducted Band Edges (IEEE 802.11g mode / CH High / Chain 1)

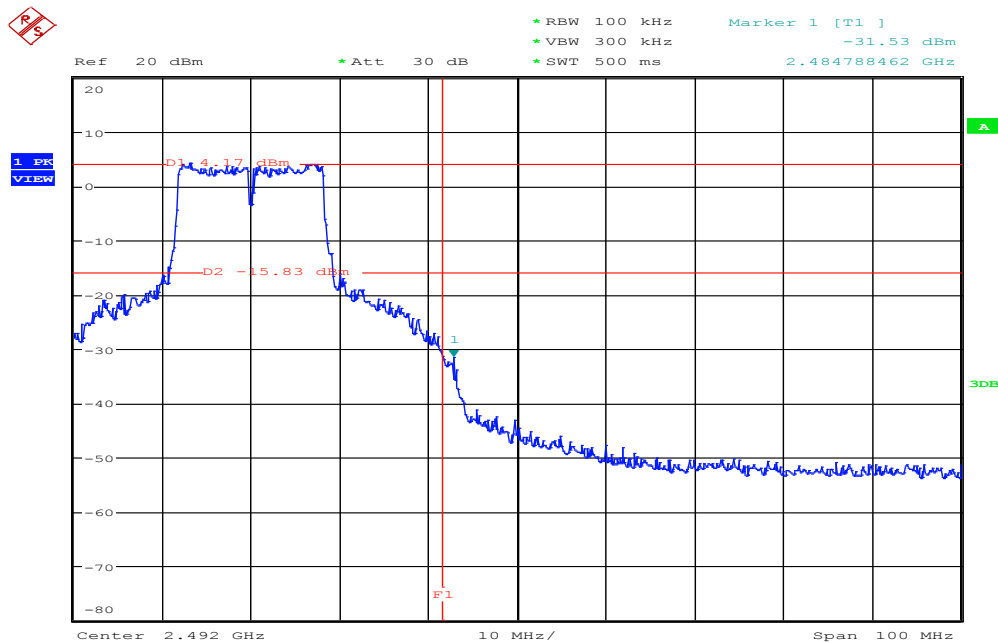


Date: 10.NOV.2015 14:08:42

## Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low / chain 0)

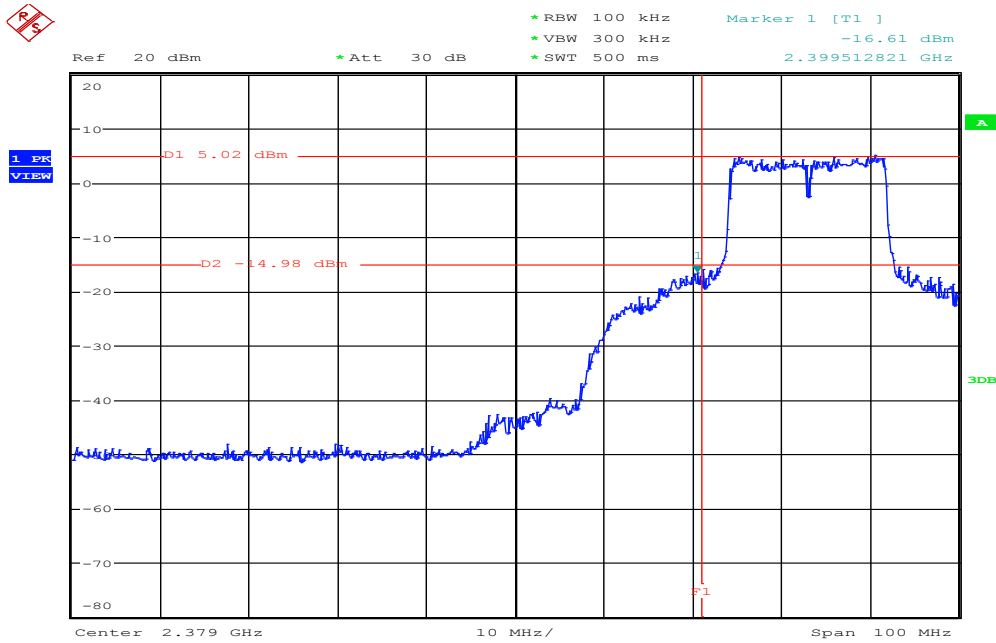


Date: 10.NOV.2015 14:17:23

## Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High / chain 0)

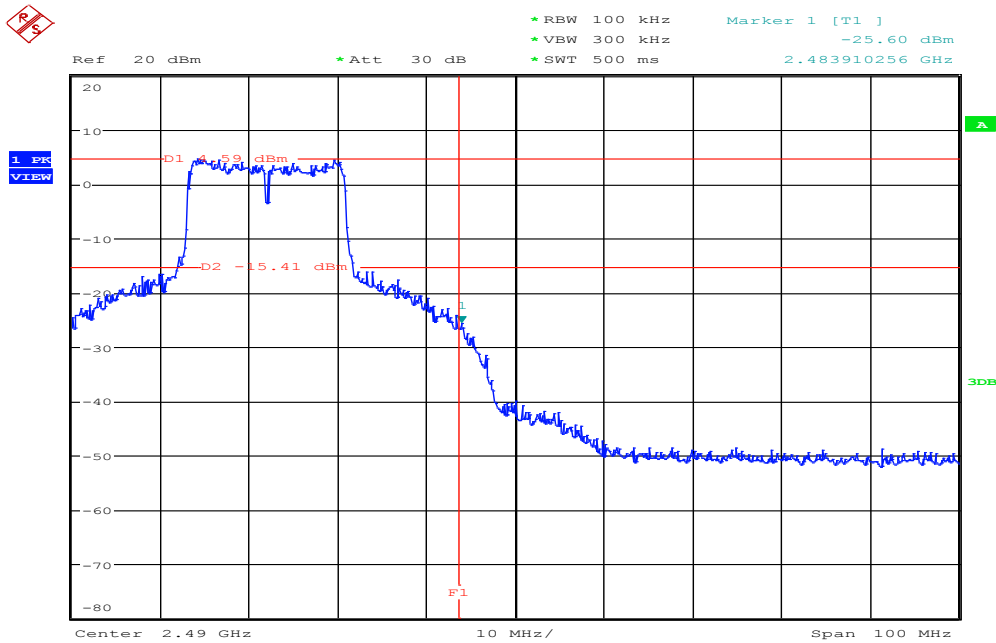


Date: 10.NOV.2015 14:32:11

## Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low / chain 1)

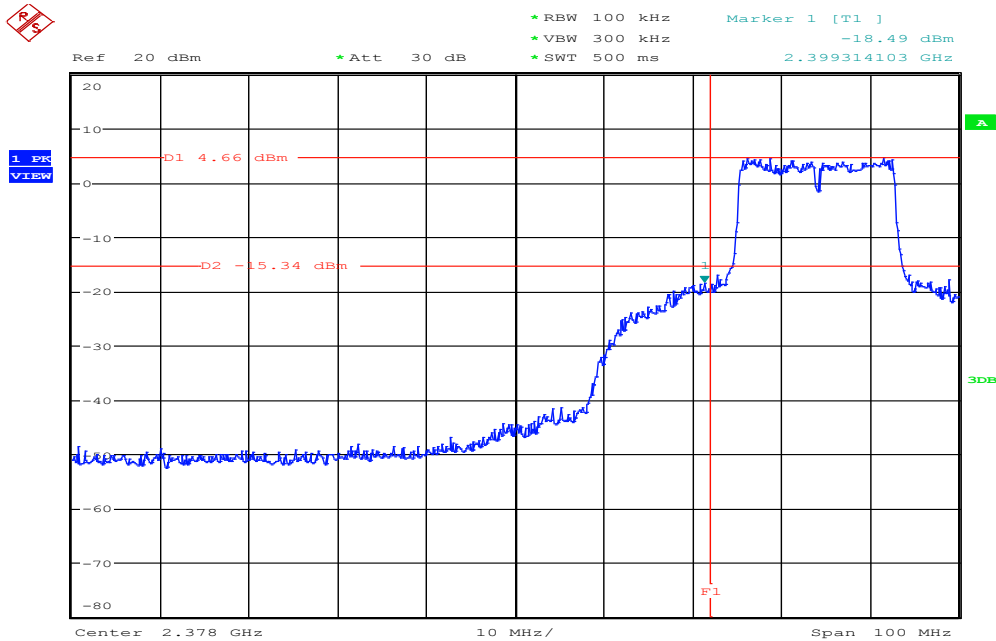

Date: 10.NOV.2015 14:11:21


## Conducted Band Edges (IEEE 802.11n HT 20 MHz mode / CH High / chain 1)

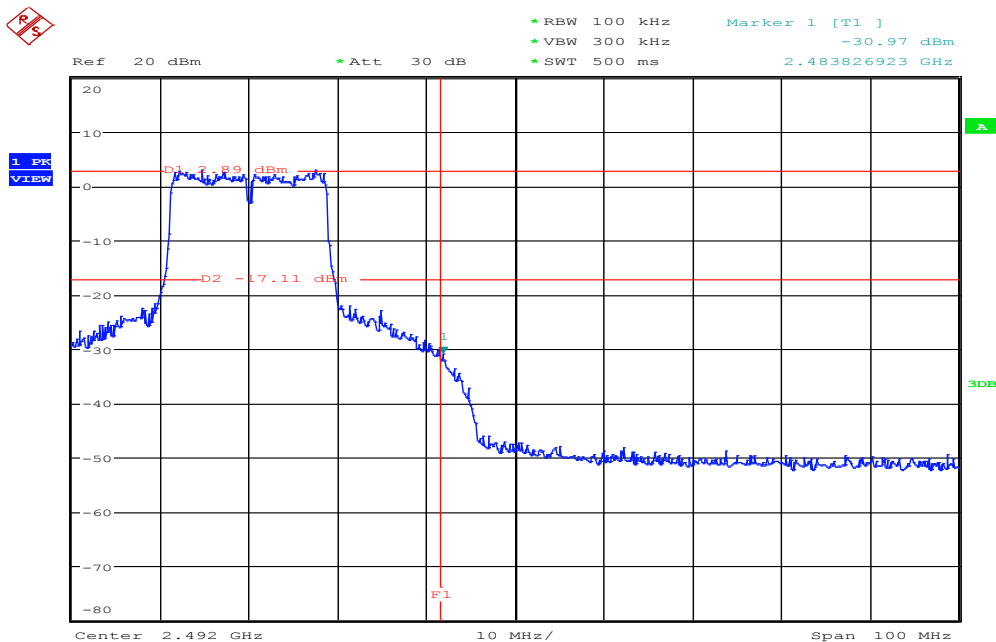

Date: 10.NOV.2015 14:35:54




## Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low / chain 0)

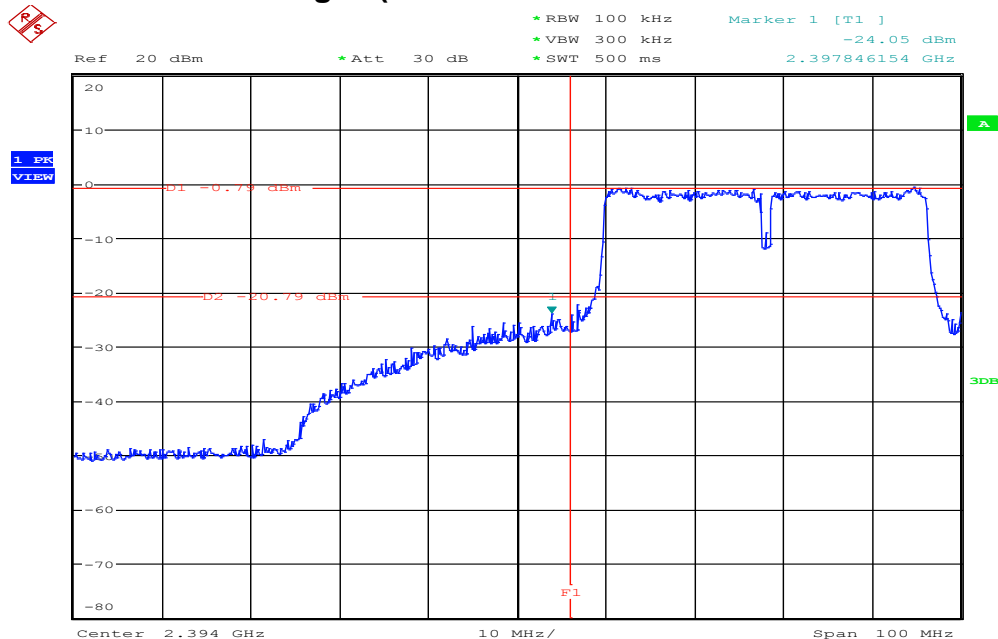


Date: 10.NOV.2015 14:52:27

## Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High / chain 0)

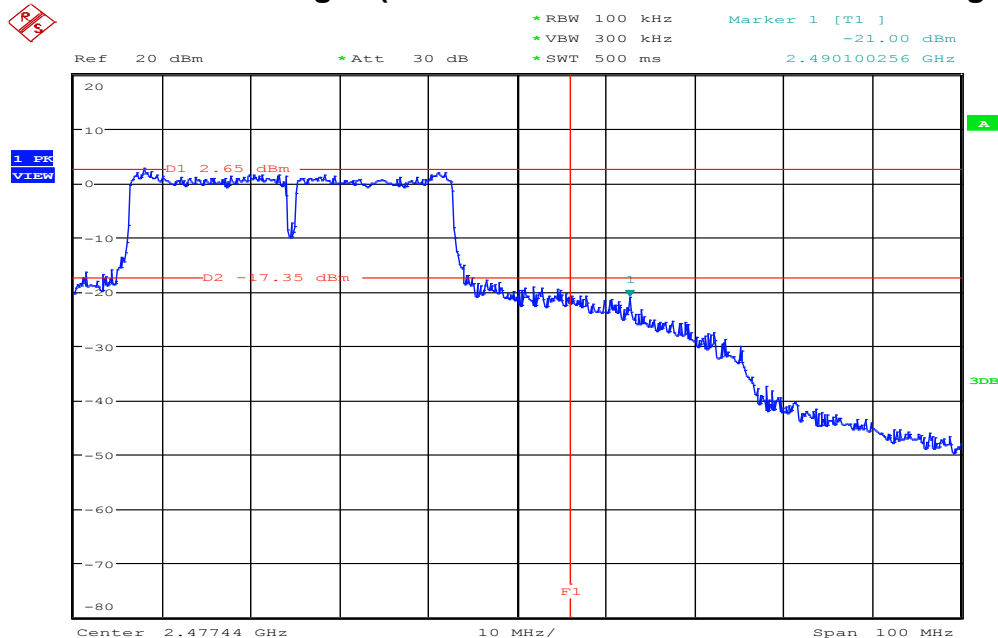


Date: 10.NOV.2015 16:23:03

## Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low / chain 1)

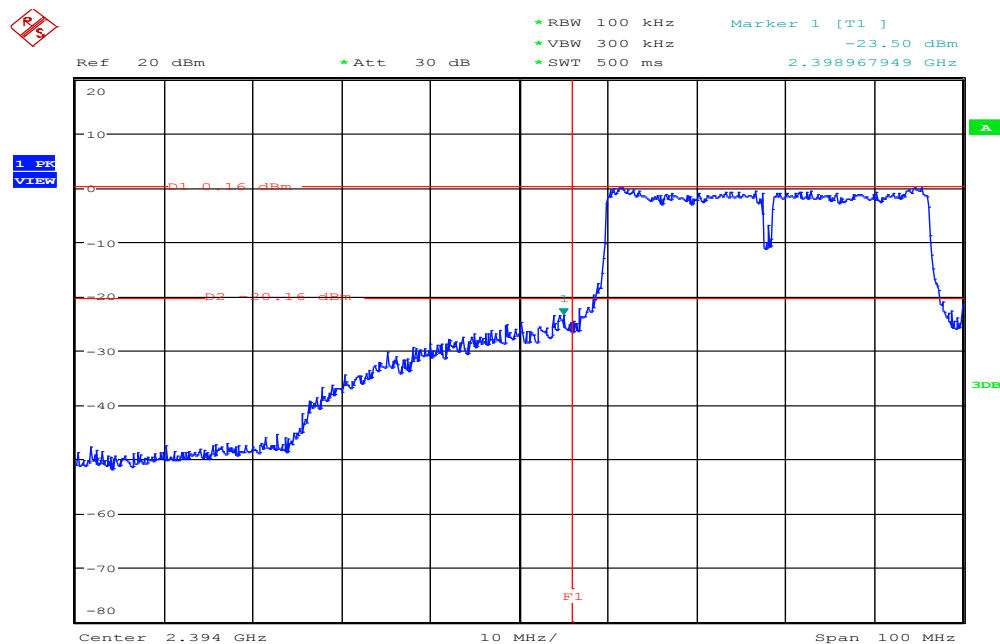

Date: 10.NOV.2015 14:43:53

## Conducted Band Edges (IEEE 802.11n HT 40 MHz mode / CH High / chain 1)

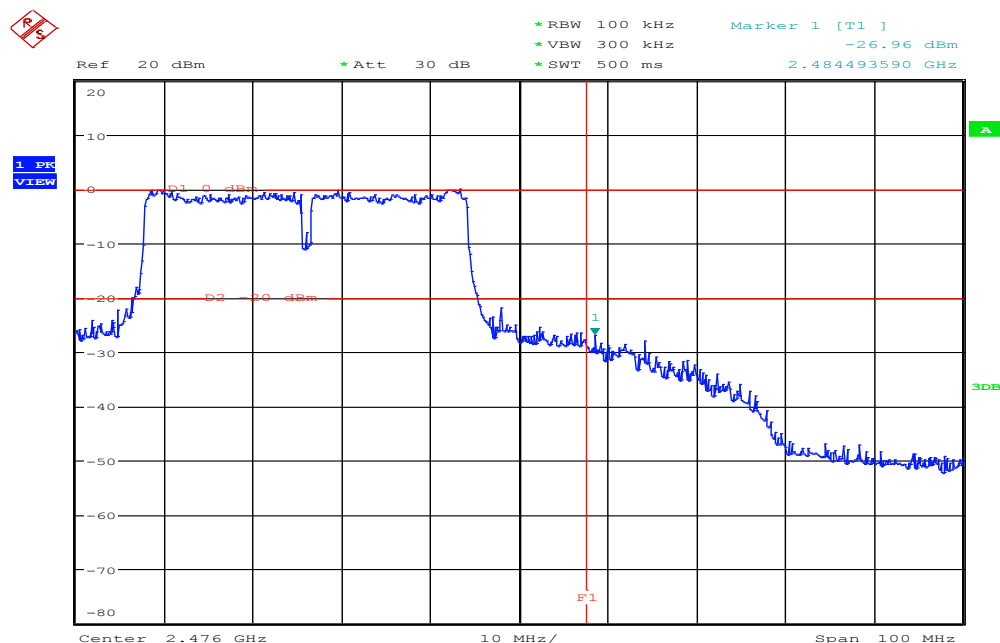


Date: 10.NOV.2015 15:01:28

## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW = 3 kHz, VBW  $\geq$  30 kHz, span to 1.5 times the DTS bandwidth, Detector = peak, Trace mode = max hold, Sweep = auto couple. Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds limit, reduce RBW (no less than 3 kHz).

### TEST RESULTS

*No non-compliance noted.*

## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-5.68	-6.34	-2.99	7.61	PASS
Mid	2437	-5.39	-6.36	-2.84		PASS
High	2462	-12.52	-15.39	-10.71		PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-7.18	-5.85	-3.45	7.61	PASS
Mid	2437	-4.82	-6.63	-2.62		PASS
High	2462	-7.10	-9.03	-4.95		PASS

### Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.88	-9.34	-6.09	7.61	PASS
Mid	2437	-4.84	-6.04	-2.39		PASS
High	2462	-7.72	-8.27	-4.98		PASS

### nTest mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-11.86	-10.72	-8.24	7.61	PASS
Mid	2437	-8.24	-10.17	-6.09		PASS
High	2452	-9.33	-11.86	-7.40		PASS


#### Remark:

1. Total PPSD (dBm) =  $10 \cdot \log(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$
2. The maximum antenna gain is 6.39dBi; therefore the reduction due to antenna gain is 0.39dBi, so the limit is 7.61dBm.

## Test Plot


### IEEE 802.11b mode / Chain 0

### PPSD (CH Low)

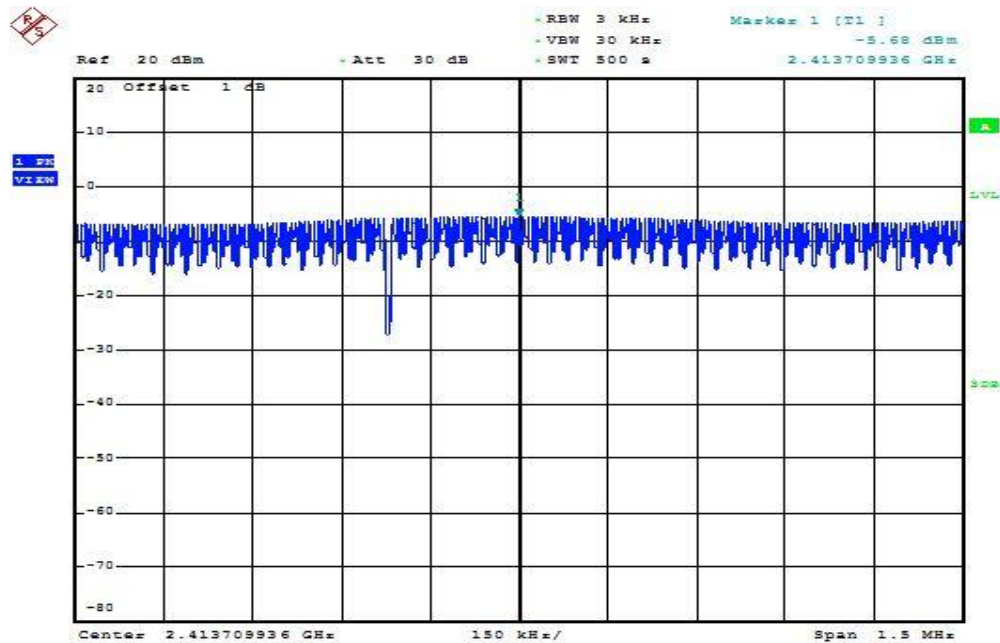


Date: 10.NOV.2015 15:14:13

### PPSD (CH Mid)

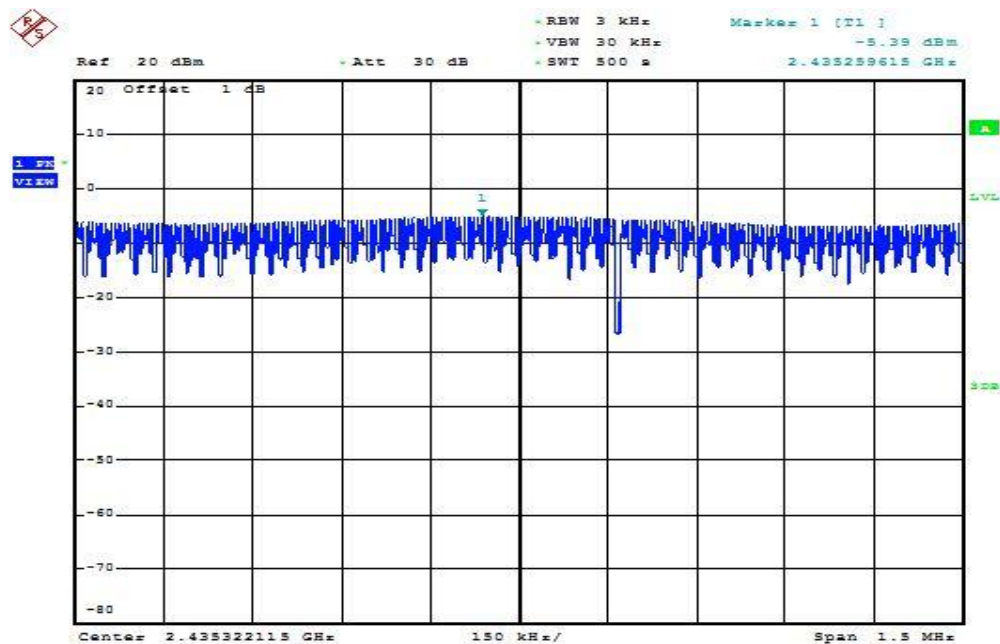

Date: 10.NOV.2015 15:22:31


## PPSD (CH High)

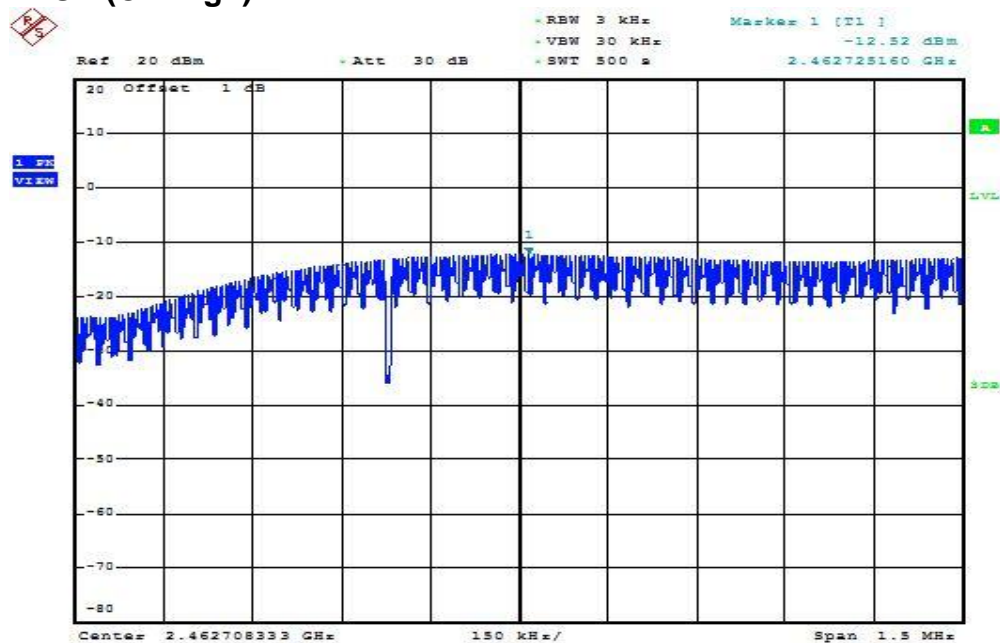

Date: 10.NOV.2015 15:24:54


## IEEE 802.11b mode / Chain 1

## PPSD (CH Low)

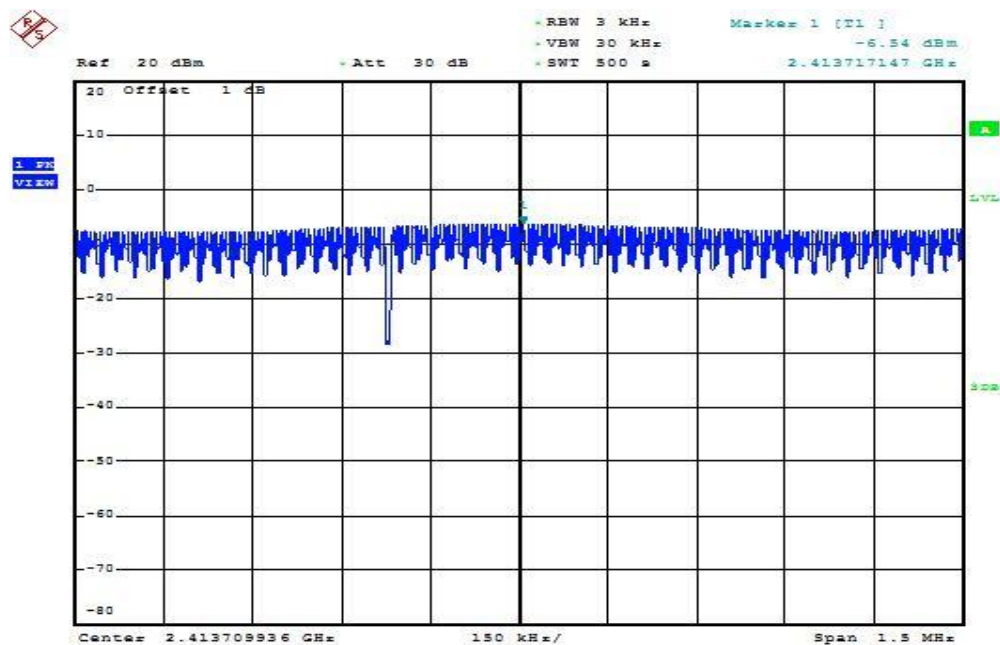


Date: 10.NOV.2015 15:15:58

## PPSD (CH Mid)

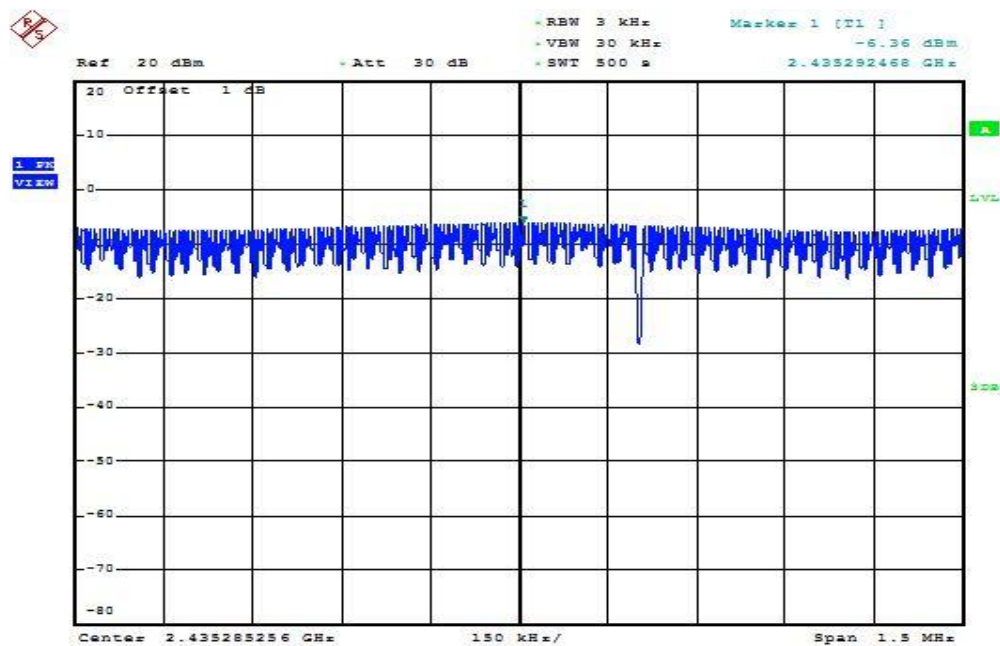

Date: 10.NOV.2015 15:19:56


## PPSD (CH High)

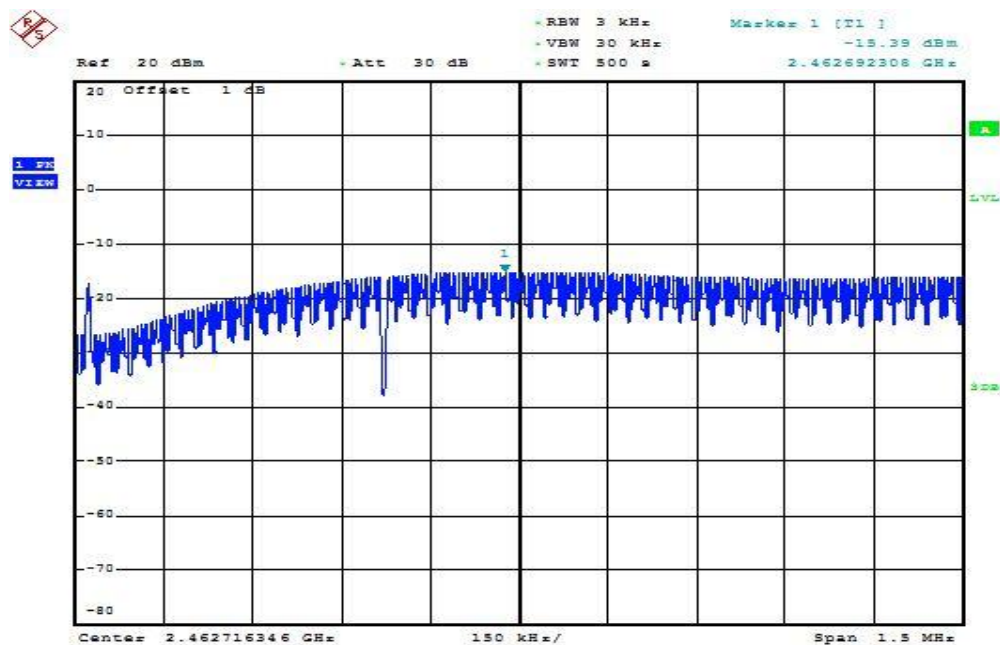

Date: 10.NOV.2015 15:27:25


## IEEE 802.11g mode/ Chain 0

### PPSD (CH Low)

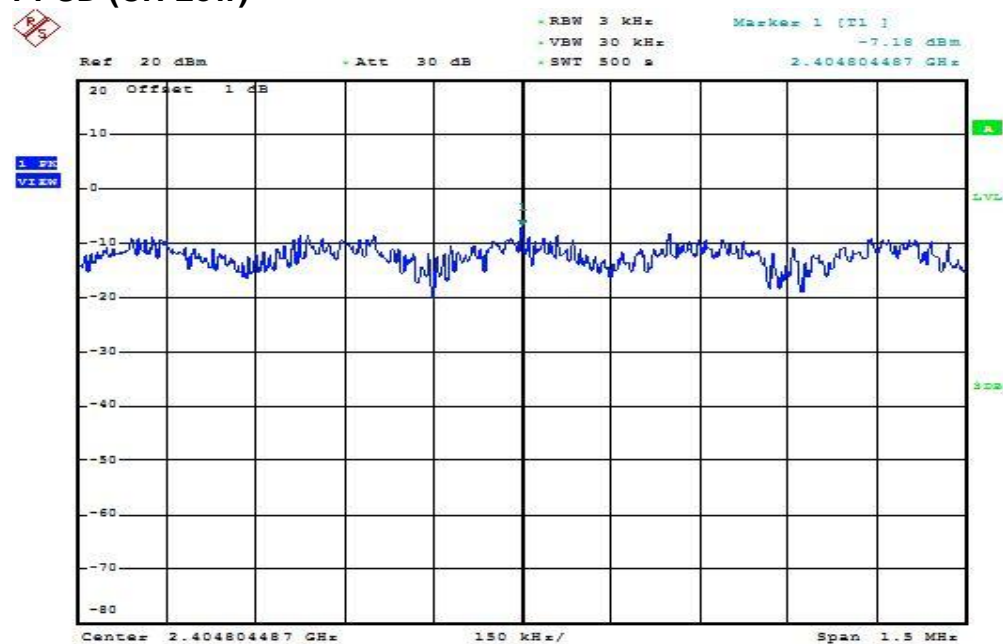

Date: 10.NOV.2015 15:31:59


### PPSD (CH Mid)

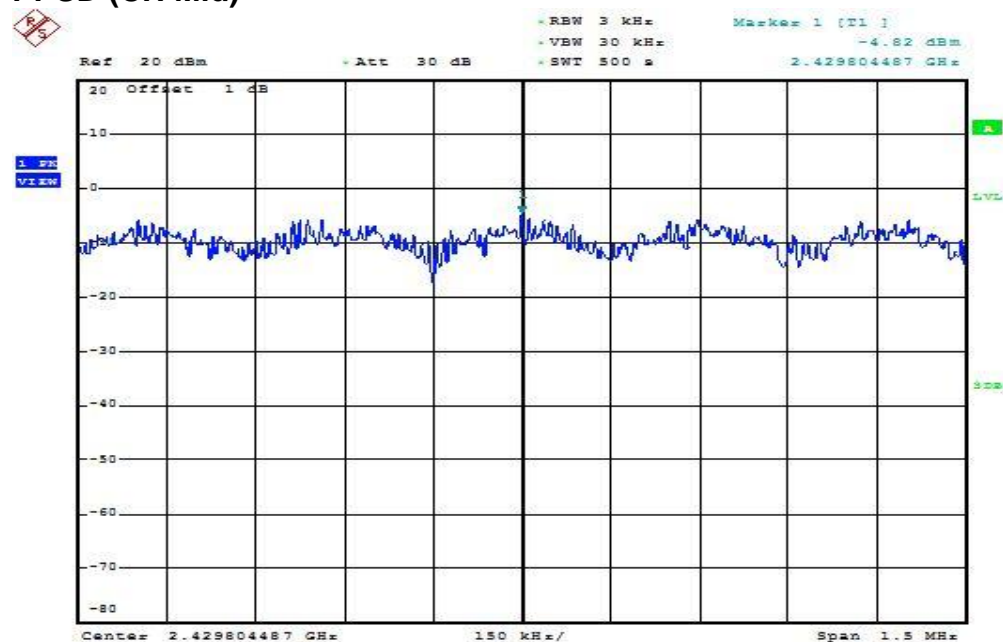

Date: 10.NOV.2015 15:34:37




## PPSD (CH High)

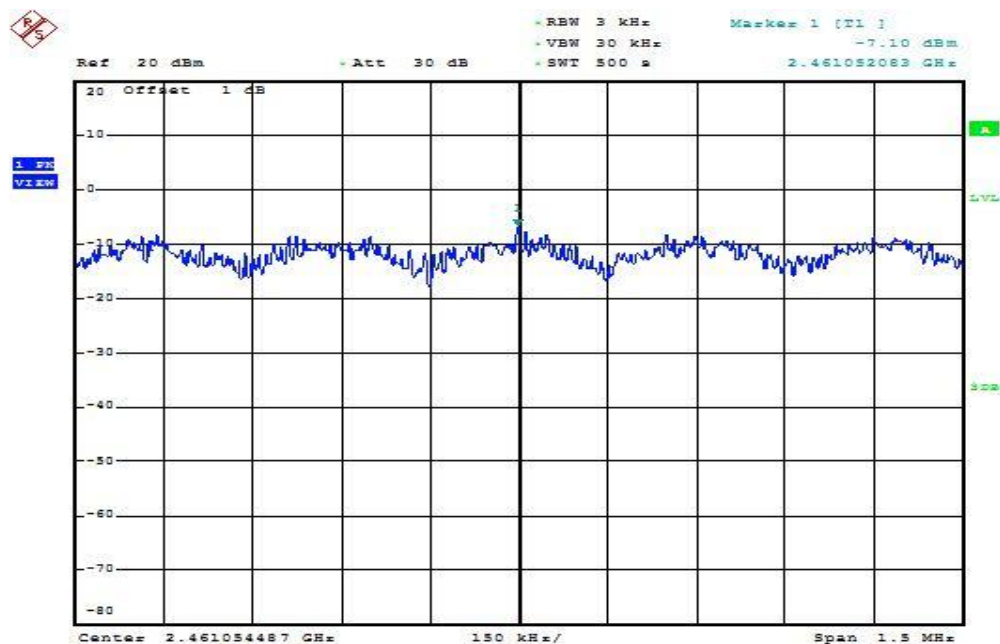

Date: 10.NOV.2015 15:41:04


## IEEE 802.11g mode/ Chain 1

## PPSD (CH Low)

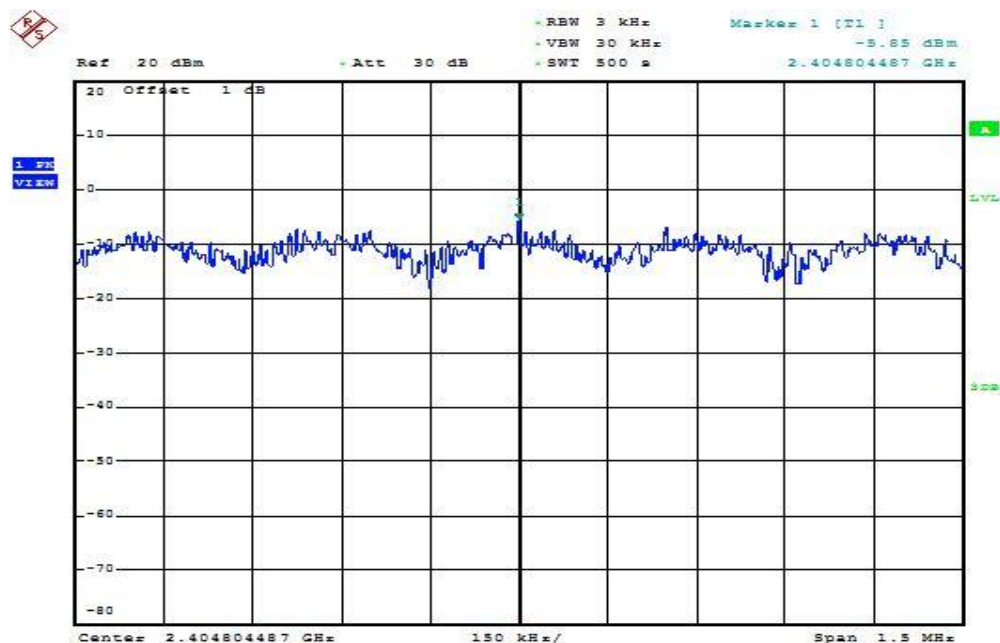


Date: 10.NOV.2015 15:30:17

## PPSD (CH Mid)

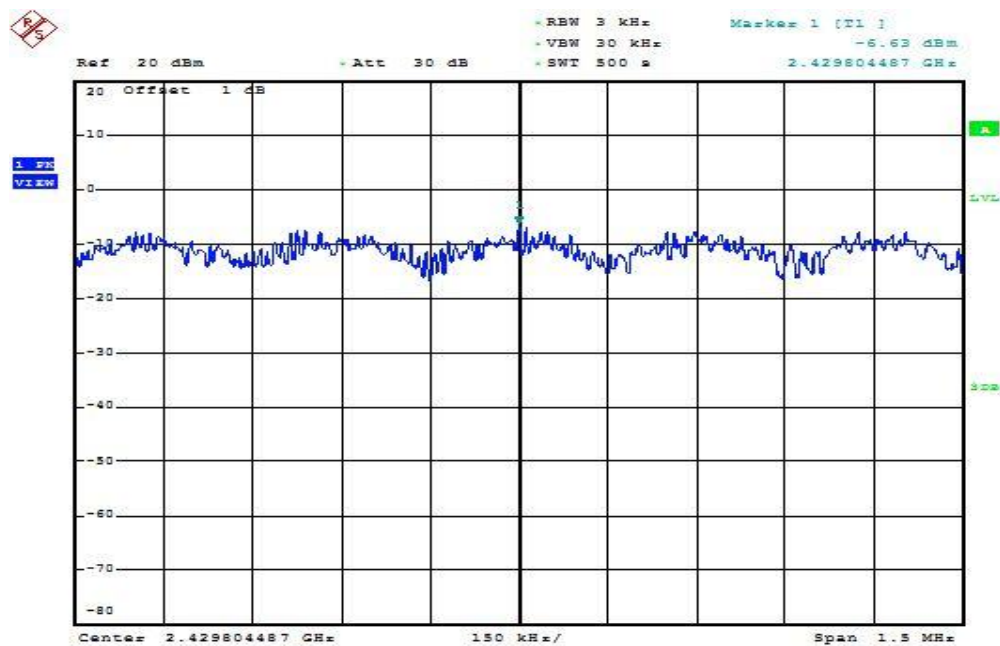

Date: 10.NOV.2015 15:36:41


## PPSD (CH High)

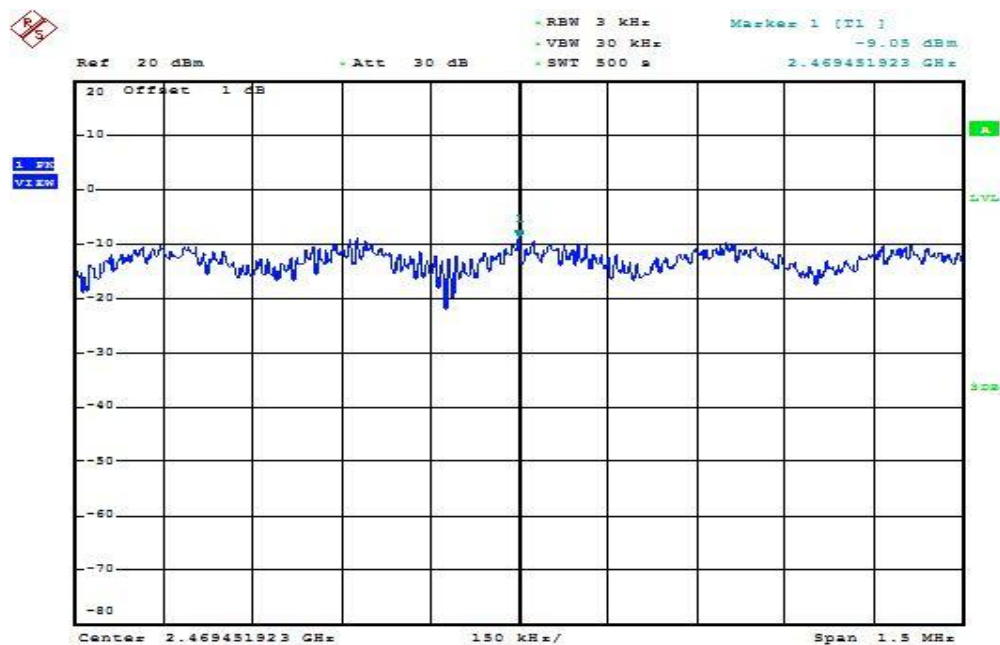

Date: 10.NOV.2015 15:39:05


## IEEE 802.11n HT 20 MHz mode / Chain 0

### PPSD (CH Low)

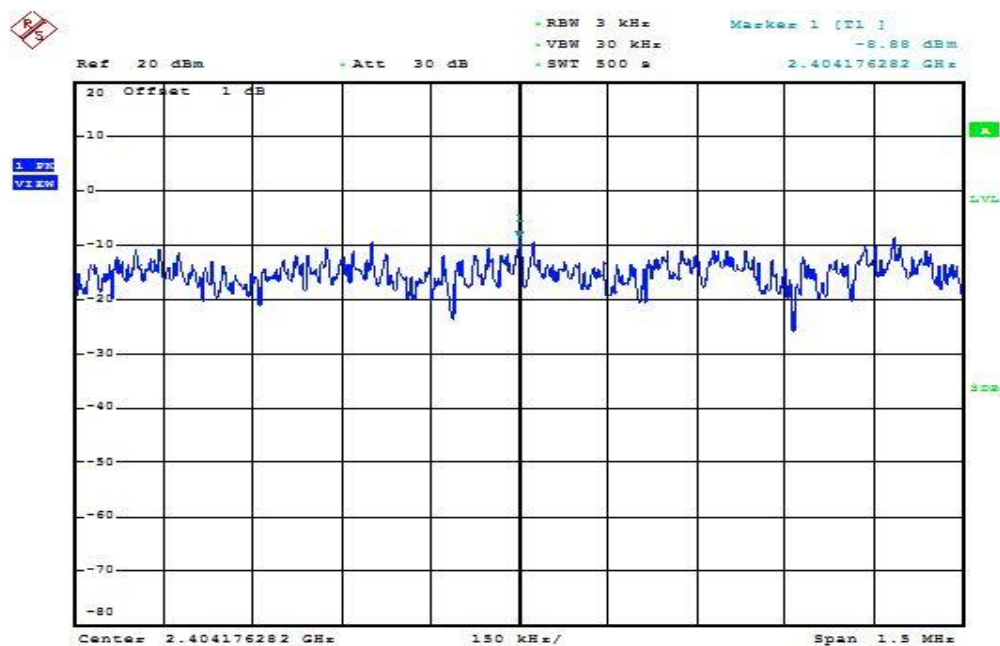


Date: 10.NOV.2015 15:43:58

### PPSD (CH Mid)

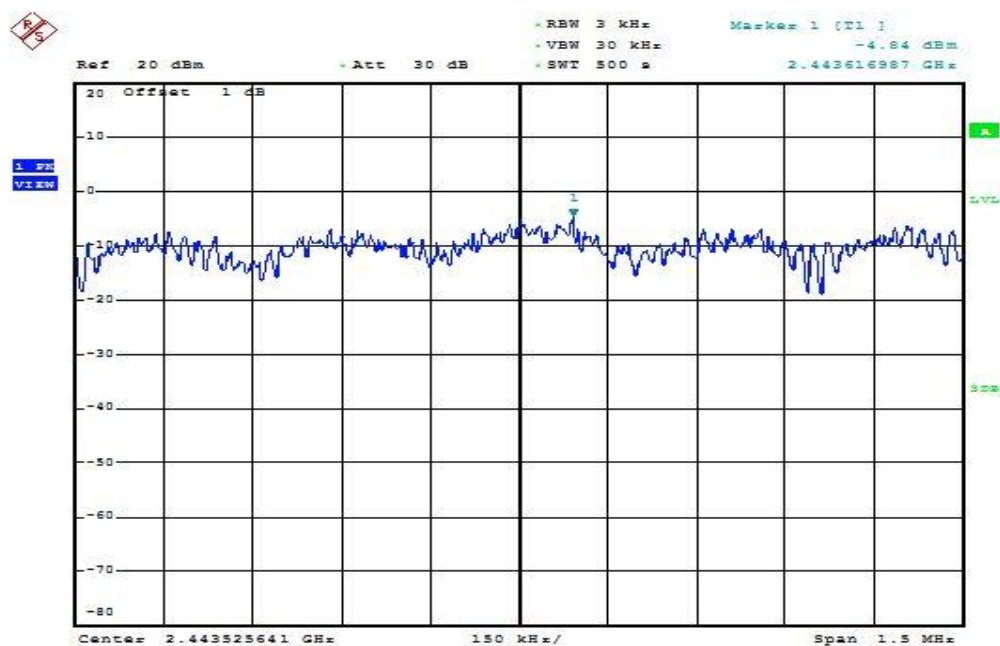

Date: 10.NOV.2015 15:49:26


## PPSD (CH High)

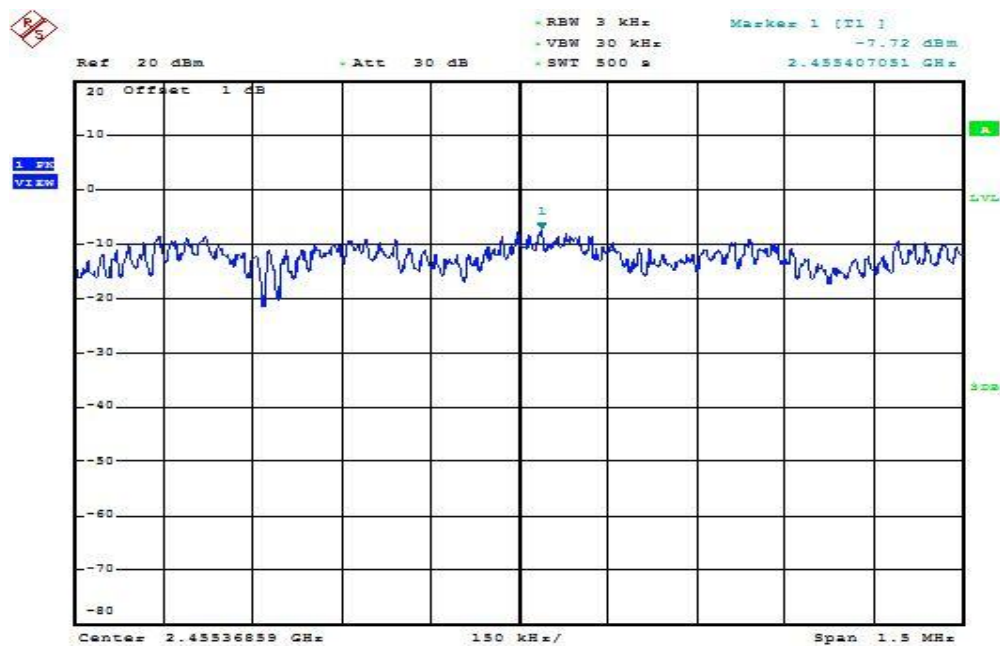

Date: 10.NOV.2015 15:50:59


## IEEE 802.11n HT 20 MHz mode / Chain 1

### PPSD (CH Low)

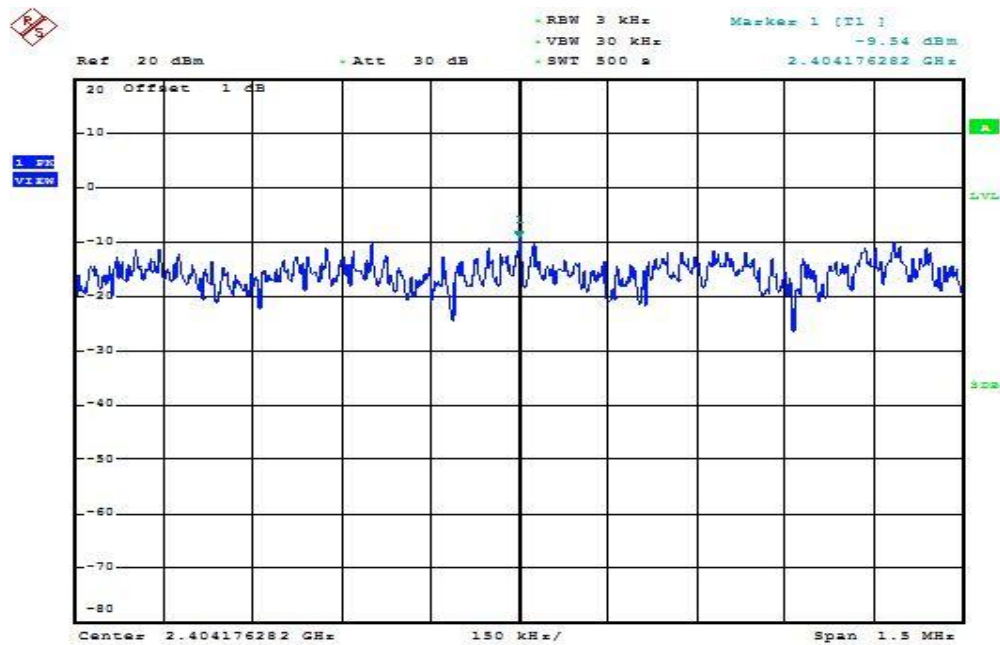


Date: 10.NOV.2015 15:46:19

## PPSD (CH Mid)

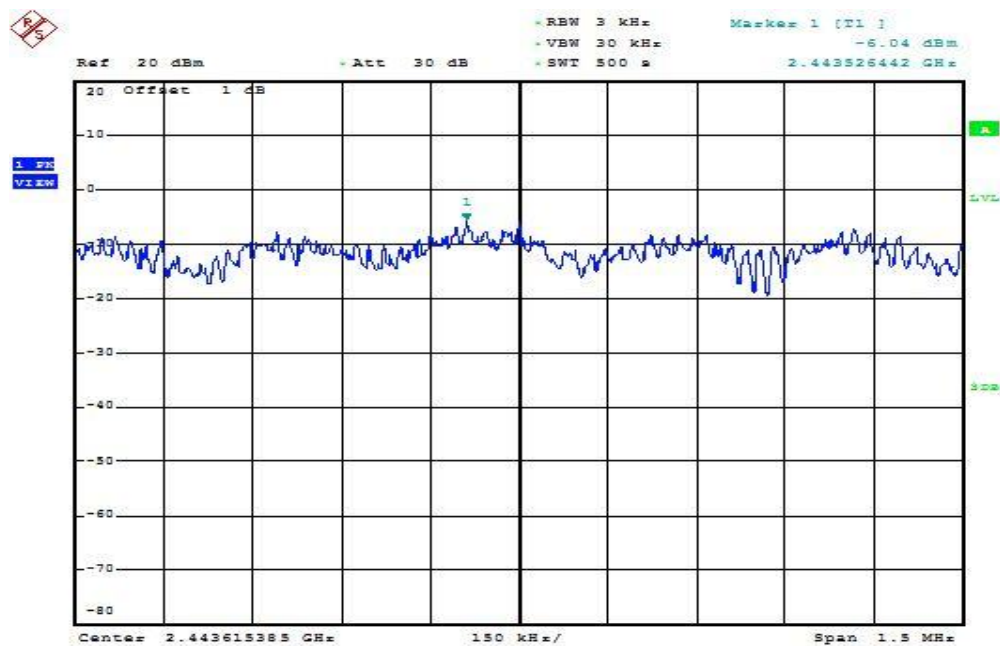

Date: 10.NOV.2015 15:47:57


## PPSD (CH High)

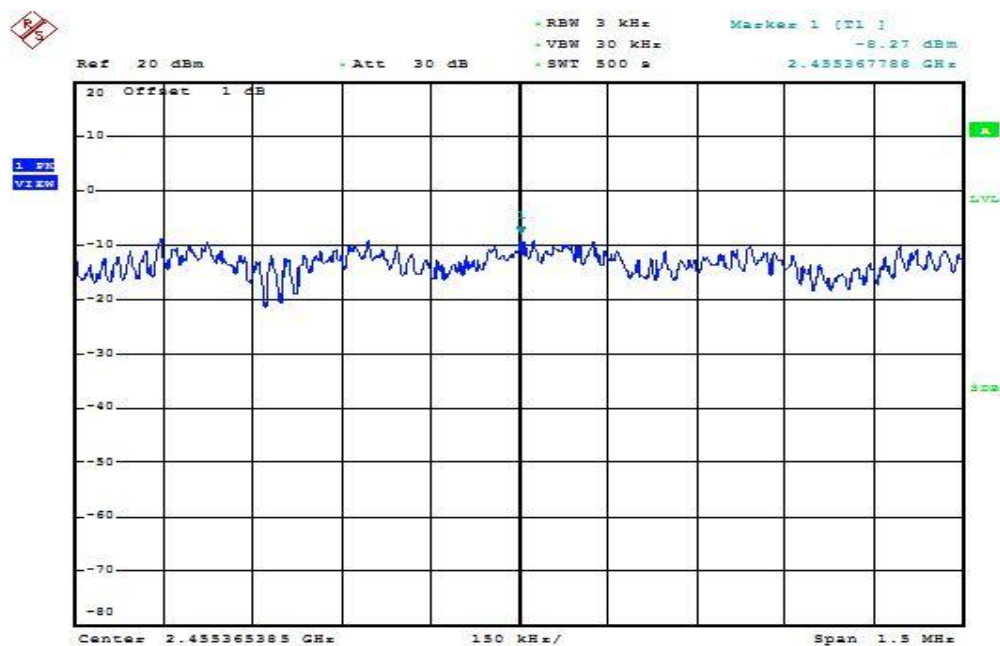

Date: 10.NOV.2015 15:52:41


## IEEE 802.11n HT 40 MHz mode / Chain 0

### PPSD (CH Low)

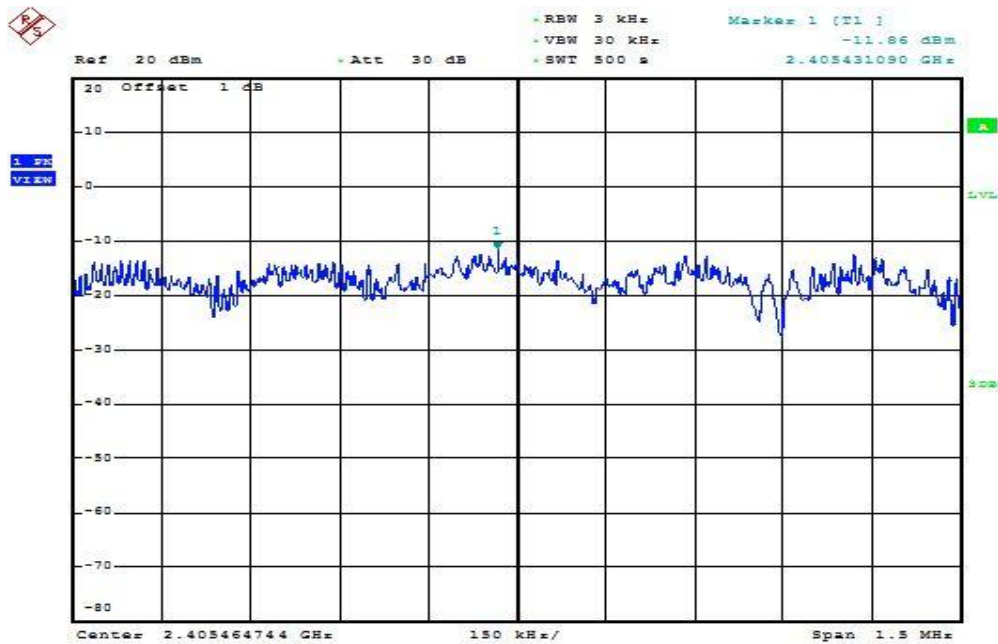


Date: 10.NOV.2015 16:00:33

### PPSD (CH Mid)

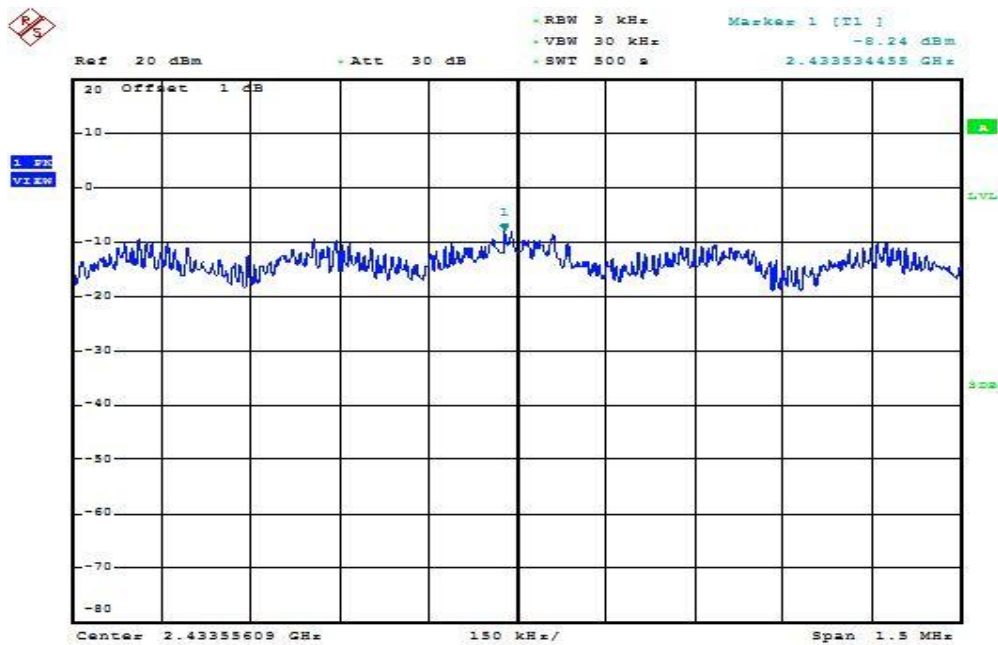

Date: 10.NOV.2015 16:03:28


## PPSD (CH High)

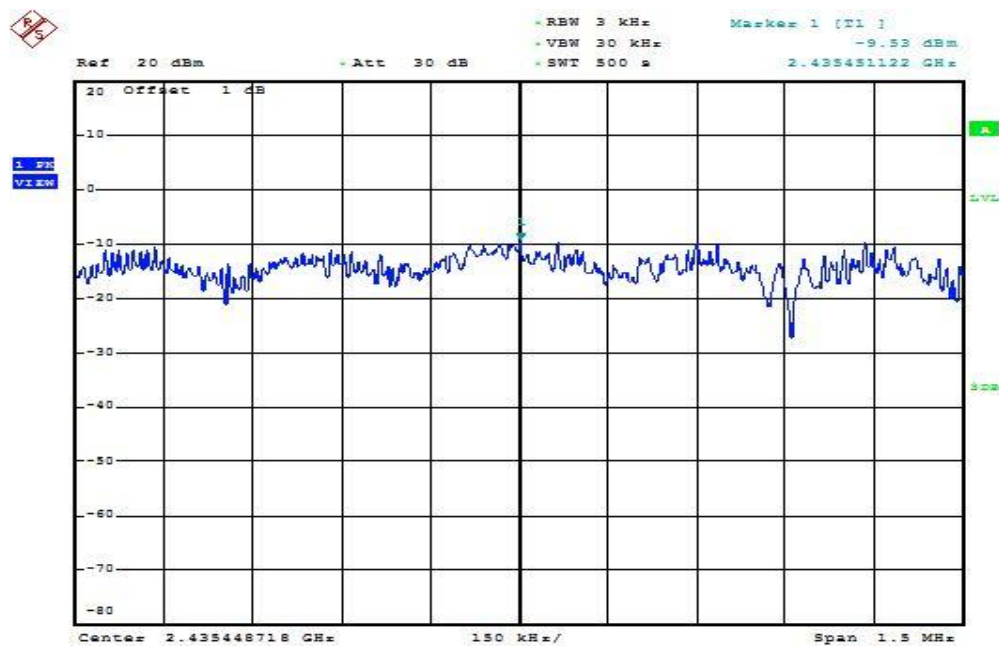

Date: 10.NOV.2015 16:14:23

## IEEE 802.11n HT 40 MHz mode / Chain 1


### PPSD (CH Low)

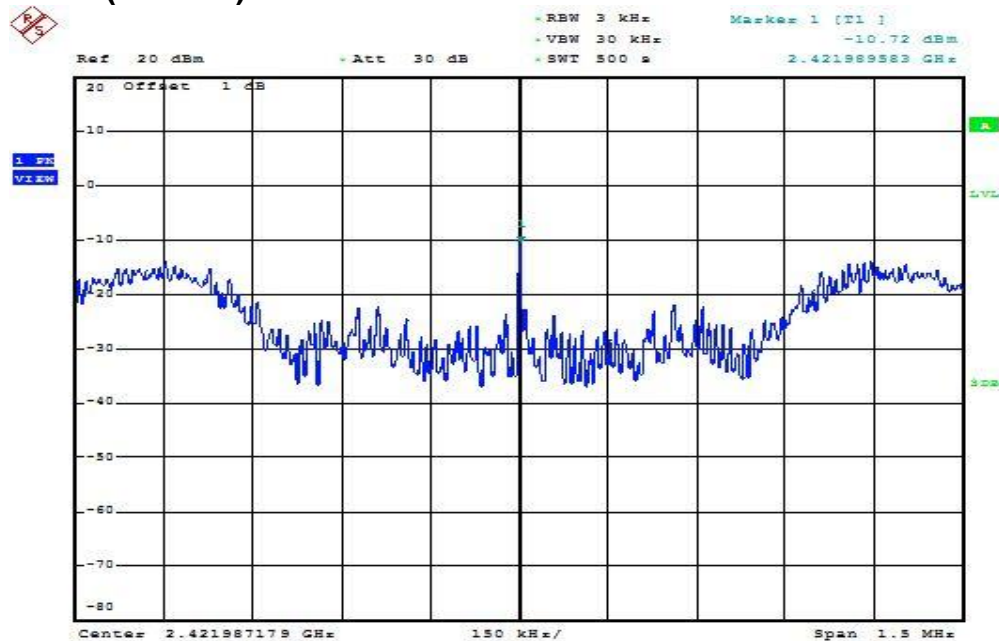

Date: 10.NOV.2015 15:57:59




## PPSD (CH Mid)

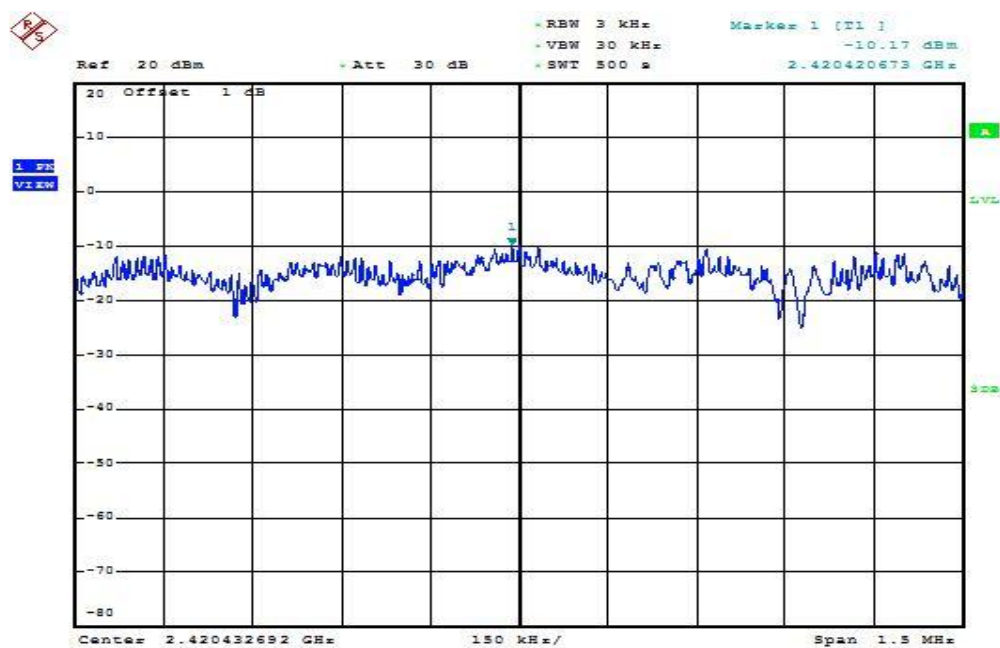

Date: 10.NOV.2015 16:05:27

## PPSD (CH High)

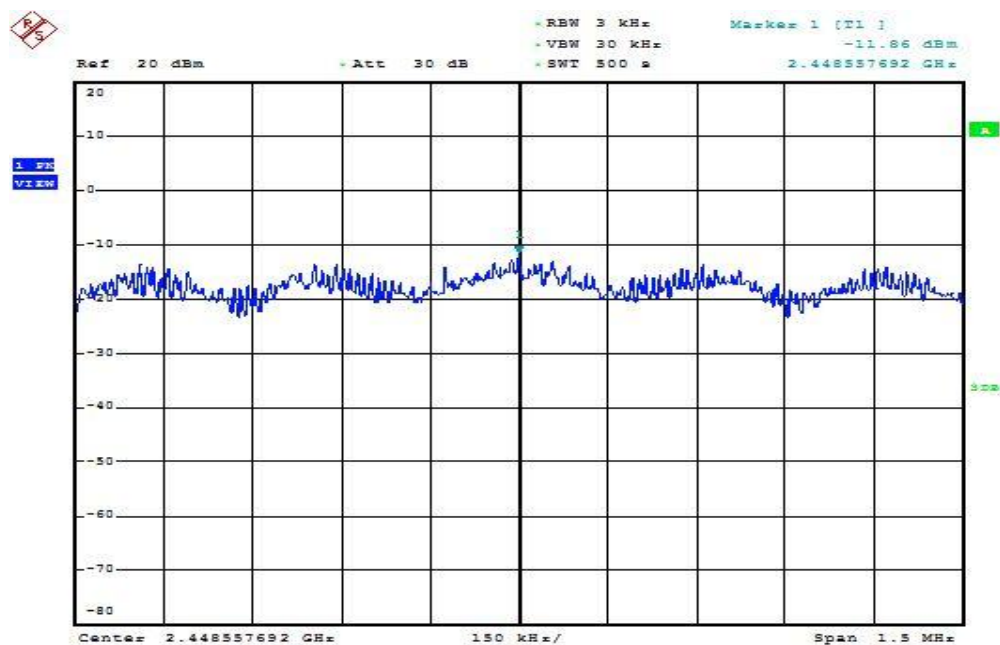

Date: 10.NOV.2015 16:56:20



## 7.6 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## Test Configuration


### 9kHz ~ 30MHz

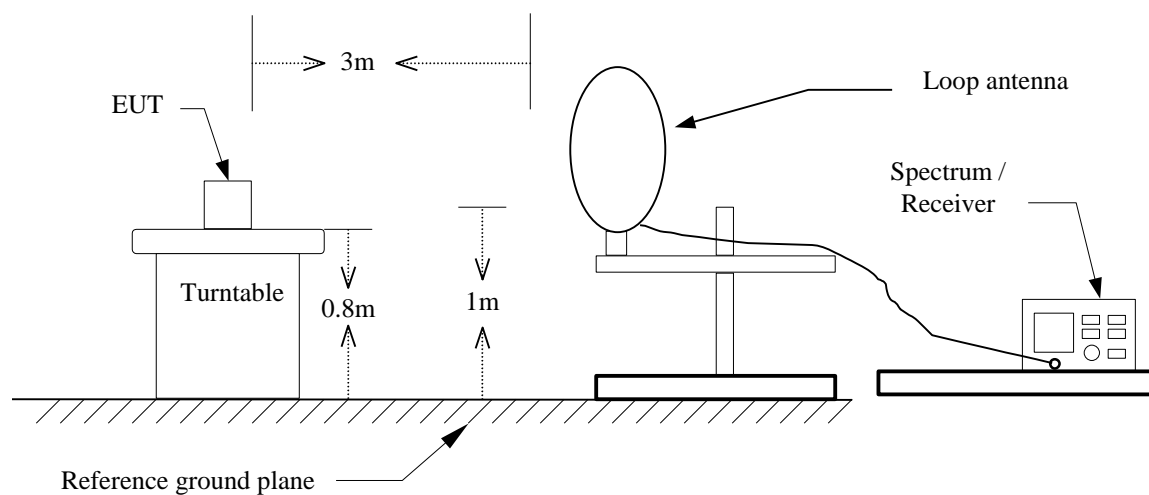

### 30MHz ~ 1GHz

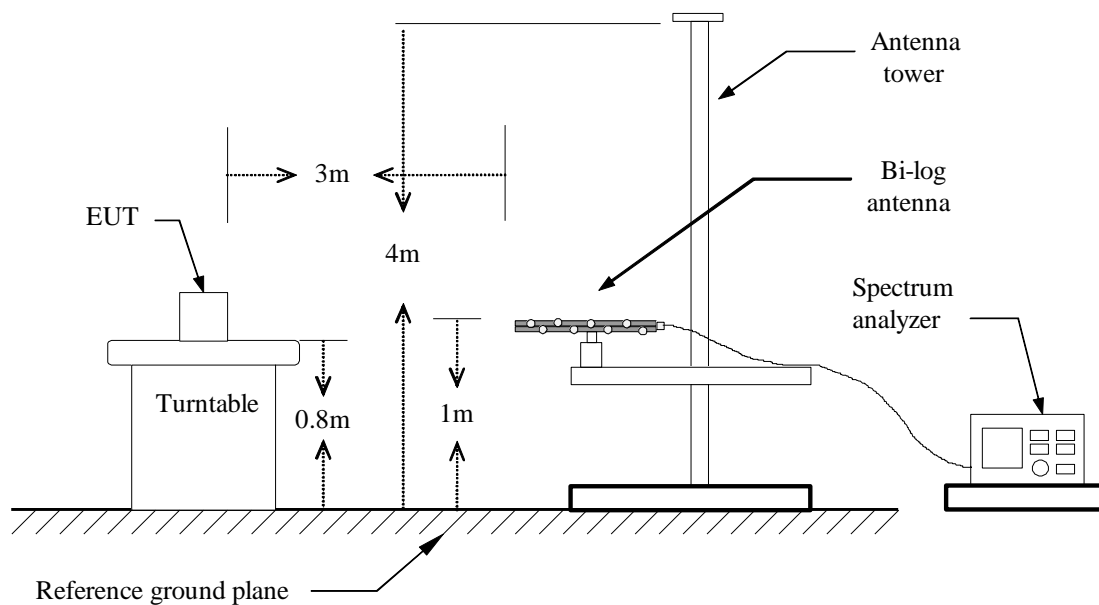

## Above 1 GHz

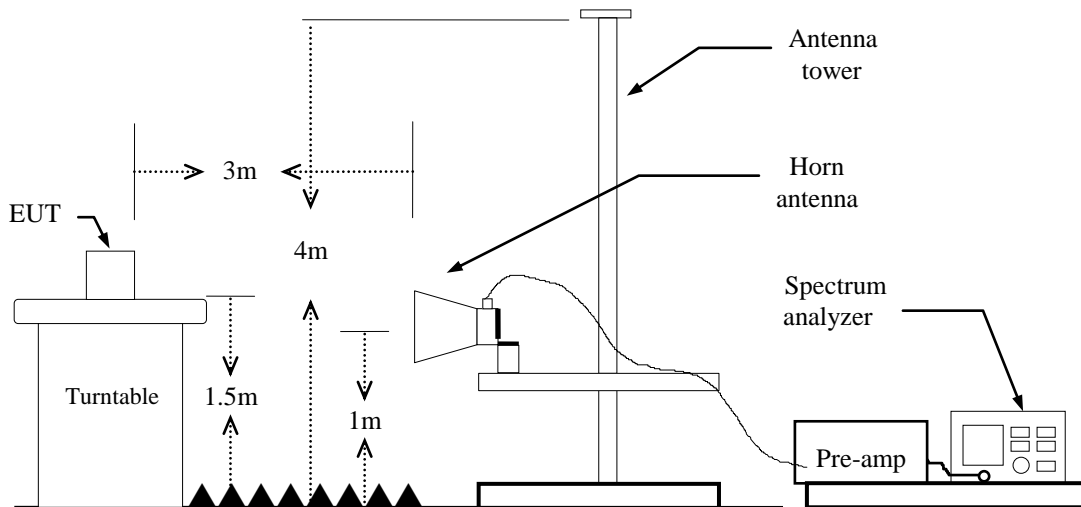

## TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=10MHz / Sweep=AUTO

(b) AVERAGE: RBW=10Hz,  
if duty cycle  $\geq 98\%$ , VBW=1Hz.

if duty cycle  $< 98\%$  VBW=1/T.

**IEEE 802.11b mode:**  $\geq 98\%$ , VBW=10Hz

**IEEE 802.11g mode:**  $\geq 98\%$ , VBW=10Hz

**IEEE 802.11n HT 20 MHz mode:**  $\geq 98\%$ , VBW=10Hz

**IEEE 802.11n HT 40 MHz mode:**  $\geq 98\%$ , VBW=10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.

## TEST RESULTS

*No non-compliance noted.*

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** October 17, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
59.1000	52.79	-22.02	30.77	40.00	-9.23	QP	V
141.5500	43.16	-15.82	27.34	43.50	-16.16	peak	V
375.3200	42.31	-12.29	30.02	46.00	-15.98	peak	V
624.6100	40.62	-7.17	33.45	46.00	-12.55	peak	V
749.7400	37.58	-4.93	32.65	46.00	-13.35	peak	V
874.8700	33.22	-3.49	29.73	46.00	-16.27	peak	V
58.1300	55.51	-21.92	33.59	40.00	-6.41	peak	H
192.9600	45.99	-16.18	29.81	43.50	-13.69	peak	H
375.3200	41.20	-12.29	28.91	46.00	-17.09	peak	H
676.9900	39.65	-6.30	33.35	46.00	-12.65	peak	H
725.4900	44.09	-5.48	38.61	46.00	-7.39	peak	H
874.8700	37.49	-3.49	34.00	46.00	-12.00	peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4.  $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limit (dBuV/m)}$ .

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** October 17, 2015**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1932.000	49.45	-3.95	45.50	74.00	-28.50	peak	V
3215.000	51.73	-0.09	51.64	74.00	-22.36	peak	V
4825.000	48.15	5.10	53.25	74.00	-20.75	peak	V
4825.000	47.67	5.10	52.77	54.00	-1.23	AVG	V
7235.000	40.22	12.71	52.93	74.00	-21.07	peak	V
N/A							
1932.000	52.60	-3.95	48.65	74.00	-25.35	peak	H
4825.000	45.56	5.10	50.66	74.00	-23.34	peak	H
7235.000	40.13	12.71	52.84	74.00	-21.16	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: October 17, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2000.000	49.69	-3.60	46.09	74.00	-27.91	peak	V
4875.000	42.29	5.24	47.53	74.00	-26.47	peak	V
7305.000	42.66	12.92	55.58	74.00	-18.42	peak	V
7305.000	39.69	12.92	52.61	54.00	-1.39	AVG	V
N/A							
2158.000	50.23	-3.38	46.85	74.00	-27.15	peak	H
4875.000	41.15	5.24	46.39	74.00	-27.61	peak	H
7310.000	39.80	12.94	52.74	74.00	-21.26	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: October 17, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1986.000	49.38	-3.67	45.71	74.00	-28.29	peak	V
4925.000	45.71	5.37	51.08	74.00	-22.92	peak	V
7385.000	41.20	13.16	54.36	74.00	-19.64	peak	V
7385.000	38.91	13.16	52.07	54.00	-1.93	AVG	V
N/A							
2036.000	49.56	-3.64	45.92	74.00	-28.08	peak	H
4925.000	44.38	5.37	49.75	74.00	-24.25	peak	H
7385.000	38.57	13.16	51.73	74.00	-22.27	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: October 17, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2070.000	54.80	-3.67	51.13	74.00	-22.87	peak	V
3215.000	51.48	-0.09	51.39	74.00	-22.61	peak	V
4825.000	44.10	5.10	49.20	74.00	-24.80	peak	V
7230.000	43.91	12.69	56.60	74.00	-17.40	peak	V
7230.000	32.98	12.69	45.67	54.00	-8.33	AVG	V
N/A							
1938.000	53.62	-3.92	49.70	74.00	-24.30	peak	H
7230.000	38.93	12.69	51.62	74.00	-22.38	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: October 17, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1968.000	49.99	-3.77	46.22	74.00	-27.78	peak	V
3250.000	48.76	-0.01	48.75	74.00	-25.25	peak	V
4875.000	46.40	5.24	51.64	74.00	-22.36	peak	V
7310.000	46.25	12.94	59.19	74.00	-14.81	peak	V
7310.000	35.32	12.94	48.26	54.00	-5.74	AVG	V
N/A							
2124.000	50.07	-3.57	46.50	74.00	-27.50	peak	H
7305.000	39.47	12.92	52.39	74.00	-21.61	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: October 17, 2015

Temperature: 27°C

Tested by: Jason Lu

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2018.000	50.62	-3.62	47.00	74.00	-27.00	peak	V
3285.000	46.14	0.07	46.21	74.00	-27.79	peak	V
4925.000	40.35	5.37	45.72	74.00	-28.28	peak	V
7385.000	38.51	13.16	51.67	74.00	-22.33	peak	V
N/A							
2132.000	49.95	-3.52	46.43	74.00	-27.57	peak	H
3285.000	40.06	0.07	40.13	74.00	-33.87	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** October 18, 2015

**Temperature:** 27°C

**Tested by:** Jason Lu

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1866.000	50.34	-4.29	46.05	74.00	-27.95	peak	V
3215.000	51.34	-0.09	51.25	74.00	-22.75	peak	V
4815.000	39.87	5.07	44.94	74.00	-29.06	peak	V
7240.000	38.36	12.72	51.08	74.00	-22.92	peak	V
N/A							
2128.000	52.32	-3.55	48.77	74.00	-25.23	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode /  
CH Mid

**Test Date:** October 18, 2015

**Temperature:** 27°C

**Tested by:** Jason Lu

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1912.000	49.42	-4.06	45.36	74.00	-28.64	peak	V
3250.000	48.64	-0.01	48.63	74.00	-25.37	peak	V
4875.000	43.09	5.24	48.33	74.00	-25.67	peak	V
7310.000	47.94	12.94	60.88	74.00	-13.12	peak	V
7310.000	39.24	12.94	52.18	54.00	-1.82	AVG	V
N/A							
2164.000	50.14	-3.35	46.79	74.00	-27.21	peak	H
7305.000	38.34	12.92	51.26	74.00	-22.74	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .

**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode /  
CH High

**Test Date:** October 18, 2015

**Temperature:** 27°C

**Tested by:** Jason Lu

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1936.000	50.25	-3.93	46.32	74.00	-27.68	peak	V
3285.000	45.14	0.07	45.21	74.00	-28.79	peak	V
N/A							
2148.000	52.06	-3.44	48.62	74.00	-25.38	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Low

**Test Date:** October 18, 2015

**Temperature:** 27°C

**Tested by:** Jason Lu

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2096.000	50.72	-3.70	47.02	74.00	-26.98	peak	V
3230.000	51.00	-0.06	50.94	74.00	-23.06	peak	V
N/A							
2202.000	51.27	-3.15	48.12	74.00	-25.88	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH Mid

**Test Date:** October 18, 2015

**Temperature:** 27°C

**Tested by:** Jason Lu

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1912.000	50.24	-4.06	46.18	74.00	-27.82	peak	V
4850.000	41.35	5.17	46.52	74.00	-27.48	peak	V
7300.000	44.29	12.91	57.20	74.00	-16.80	peak	V
7300.000	34.82	12.91	47.73	54.00	-6.27	AVG	V
N/A							
2190.000	50.78	-3.21	47.57	74.00	-26.43	peak	H
7300.000	39.08	12.91	51.99	74.00	-22.01	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .

**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode  
/ CH High

**Test Date:** October 18, 2015

**Temperature:** 27°C

**Tested by:** Jason Lu

**Humidity:** 53 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1994.000	49.92	-3.63	46.29	74.00	-27.71	peak	V
3270.000	45.49	0.04	45.53	74.00	-28.47	peak	V
N/A							
2090.000	51.21	-3.69	47.52	74.00	-26.48	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$ .



## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link      **Test Date:** November 13, 2015  
**Temperature:** 25.4°C      **Tested by:** Rick Wu  
**Humidity:** 44% RH


Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1580	41.44	25.71	9.69	51.13	35.40	65.56	55.57	-14.43	-20.17	L1
0.1819	36.43	16.93	9.68	46.11	26.61	64.39	54.40	-18.28	-27.79	L1
0.2180	33.69	15.42	9.68	43.37	25.10	62.89	52.89	-19.52	-27.79	L1
0.4340	28.45	18.22	9.74	38.19	27.96	57.18	47.18	-18.99	-19.22	L1
1.2100	18.62	11.00	10.36	28.98	21.36	56.00	46.00	-27.02	-24.64	L1
7.7060	24.50	16.73	9.89	34.39	26.62	60.00	50.00	-25.61	-23.38	L1
0.1580	41.10	25.00	9.64	50.74	34.64	65.57	55.57	-14.83	-20.93	L2
0.1900	37.61	22.81	9.64	47.25	32.45	64.04	54.04	-16.79	-21.59	L2
0.2180	33.80	16.95	9.64	43.44	26.59	62.89	52.89	-19.45	-26.30	L2
0.4220	23.49	11.60	9.68	33.17	21.28	57.41	47.41	-24.24	-26.13	L2
0.9540	17.25	11.75	10.42	27.67	22.17	56.00	46.00	-28.33	-23.83	L2
7.8220	20.62	14.23	9.86	30.48	24.09	60.00	50.00	-29.52	-25.91	L2

### Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

## Test Plots

### Conducted emissions (Line 1)

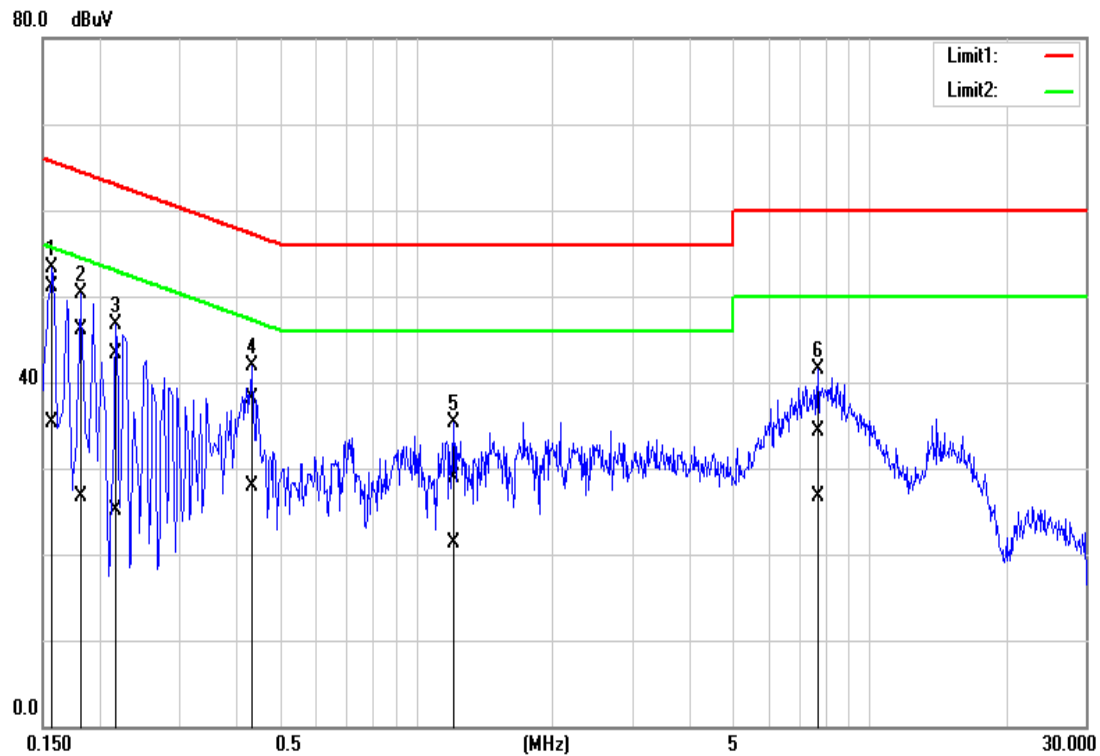

### Conducted emissions (Line 2)

