KTL Test Report:	0R03010
Applicant:	Nortel Networks 2351 Blvd. Alfred Nobel St. Laurent, PQ H4S 2A9
Equipment Under Test: (E.U.T.)	Digital Microwave Radio 18 GHz ODU
In Accordance With:	FCC Part 101, Subpart C
Tested By:	KTL Ottawa Inc. 3325 River Road, R.R. 5 Ottawa, Ontario K1V 1H2
Authorized By:	Aussell Grant
	R. Grant, Wireless Group Manager
Date:	November 1, 2000
Total Number of Pages:	29
Authorized Copy:	E-Mail

# Table of Contents

Section 1.	Summary of Test Results	3
Section 2.	General Equipment Specification	5
Section 3.	RF Power Output	6
Section 4.	Occupied Bandwidth	7
Section 5.	Spurious Emissions at Antenna Terminals	16
Section 6.	Field Strength of Spurious Emissions	24
Section 7.	Frequency Stability	25
Section 8.	Test Equipment List	26
Annex A	Test Diagrams	.A1

### Section 1. Summary of Test Results

#### General

#### All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 101, Subpart C.



New Submission Class II Permissive Change



Production Unit Pre-Production Unit



Equipment Code

#### THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. See "Summary of Test Data".

#### NVLAP LAB CODE: 100351-0

Glen Westwell, Technologist

**TESTED BY:** 

DATE: November 1, 2000

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: Digital Microwave Radio, 18 GHz ODU

### Summary Of Test Data

Name Of Test	Para. No.	Result
RF Power Output	101.113	Complies
Occupied Bandwidth	101.111	Complies
Spurious Emissions at Antenna Terminals	101.111	Marginal Compliance
Field Strength of Spurious Emissions	101.111	Complies
Frequency Stability	101.107	Complies

Footnotes For N/A's:

**Test Conditions:** 

.

Indoor	Temperature:	25 °C
	Humidity:	40 %
Outdoor	Temperature:	N/A
	Humidity:	N/A

Section 2. General Equipment Specification		
Manufacturer:	SierraCom Corp.	
Model No.:	18 GHz ODU Digital Microwave Radio	
Serial No.:	252	
Date Received In Laboratory:	October 2, 2000	
KTL Identification No.:	Item #1	
Transmitter Supply Voltage Input:	-48 VDC	
Frequency Range:	Tx = 17.70125 GHz to 19.69875 GHz @ 2 x T1 Tx = 17.70250 GHz to 19.69750 GHz @ 4 x T1	
Tunable Bands:	1	
Types of Modulation:	4 Level Frequency Shift Keying (4FSK)	
Data Rate(s)	2 x T1, 4 x T1 T1 = 1.544 Mb/s (DS1)	
Internal/External Data Source:	External	
Emission Designator:	$2 \times T1 = 2M62F7W$ $4 \times T1 = 5M07F7W$	
Output Impedance:	50 Ω	
<b>RF</b> Power Output (rated):	18 – 20 dBm	
Channel Spacing(s):	2 x T1 = 2.5 MHz, 4 x T1 = 5 MHz	
<b>Operator Selection of Operating Frequency:</b>	None	
Power Output Adjustment Capability:	0-20 dBm	

# Section 3. RF Power Output

#### Para. No.: 1.1046

Test Performed By: Glen	Westwell Date of Test: October	24, 2000
Minimum Standard:	101.113 (a)	
Test Results:	Complies. The RF power output is within 0.9 dB of the manufacturer's rating.	

### Measurement Data:

	Rated (dBm)	Measured (dBm)
4 x T1	20	20.9
2 x T1	20	20.9

EQUIPMENT: Digital Microwave Radio, 18 GHz ODU

# Section 4. Occupied Bandwidth


Para. No.: 2.1049


**Minimum Standard:** 101.111 (a)(2)(ii)


**Test Results:** 


Complies


**Test Data:** See attached graph(s).

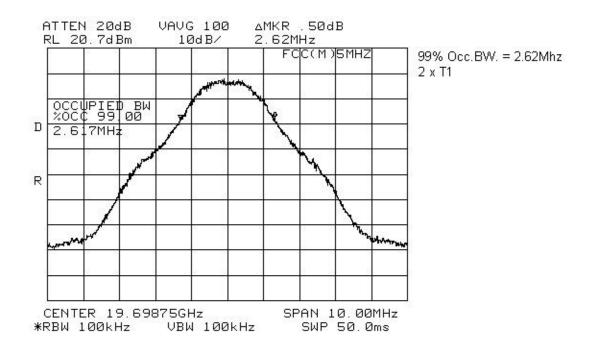


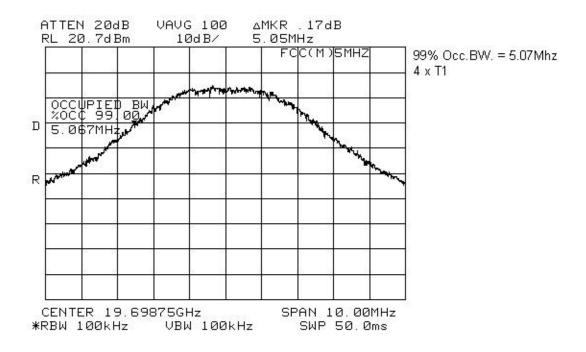


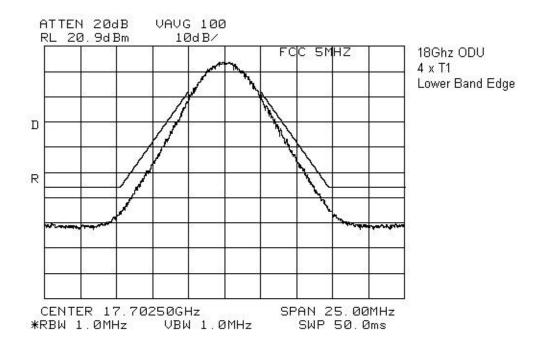


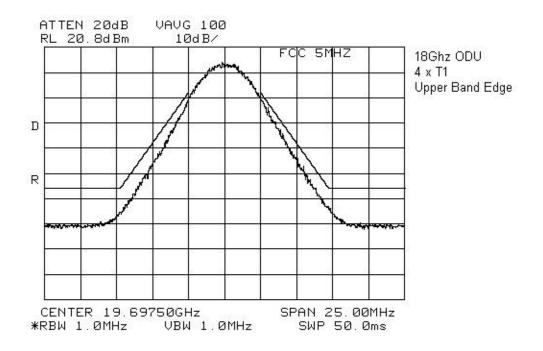

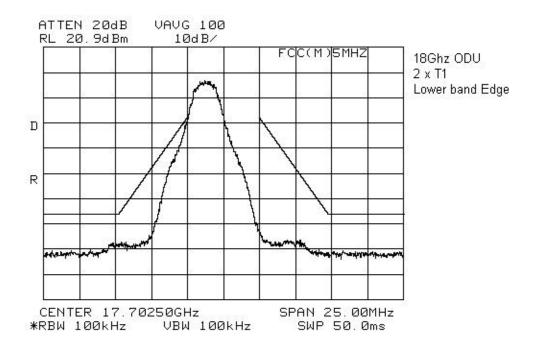

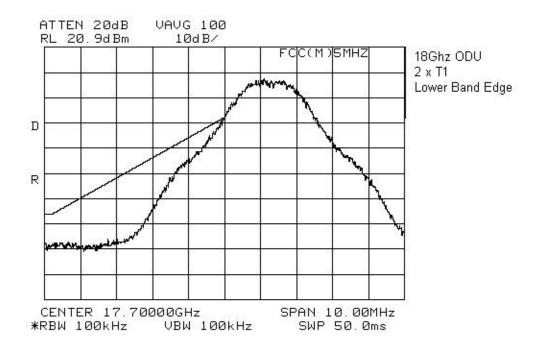

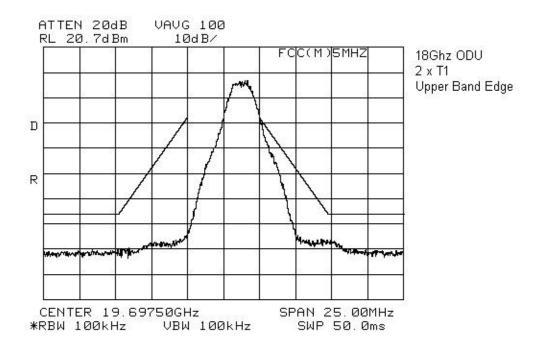

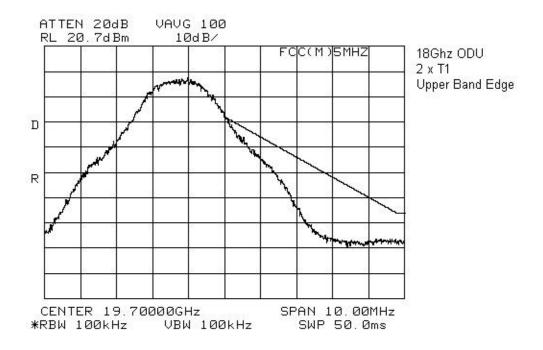



EQUIPMENT: Digital Microwave Radio, 18 GHz ODU


# Section 5. Spurious Emissions at Antenna Terminals


### Para. No.: 2.1051


Test Performed By: Gle	n Westwell	Date of Test: October 24, 2000
Minimum Standard:	101.111 (a)(2)(iii) –13 dBm	
Test Results:	Complies.	
	1.3 dB. This was the worst ca	sions complied with a pass margin of ase test scenario with diplexer data are plots with diplexer in.
Test Data:	See attached graphs.	

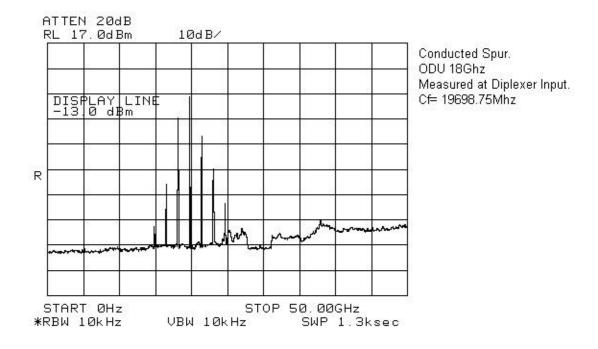


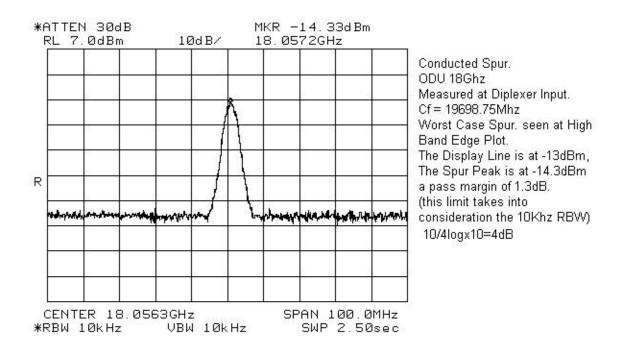


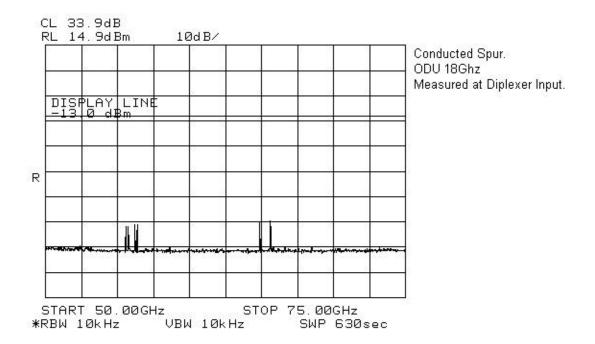

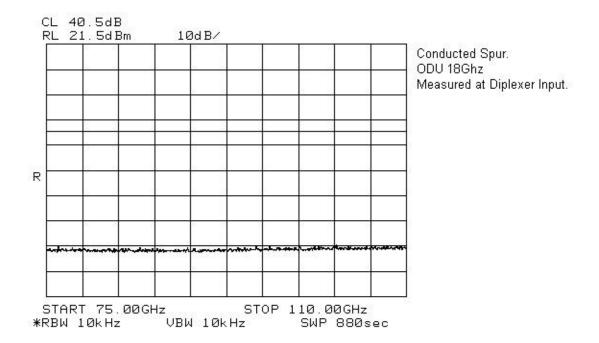

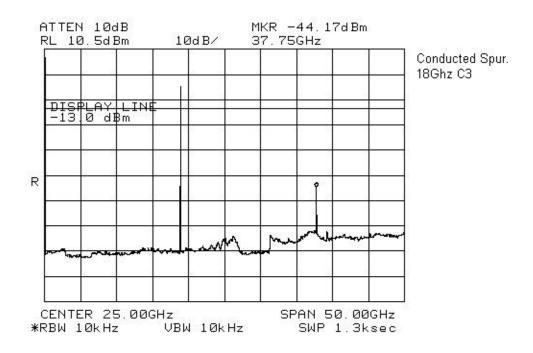

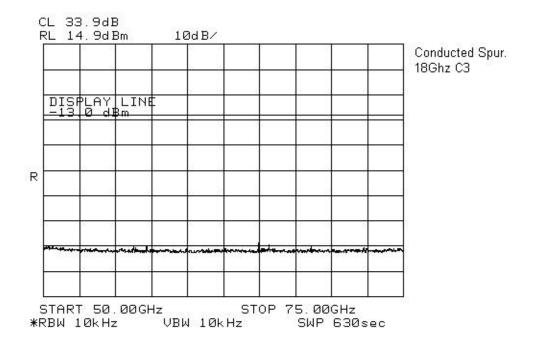

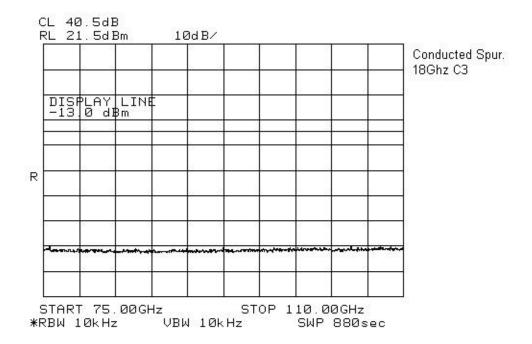

EQUIPMENT: Digital Microwave Radio, 18 GHz ODU

# Section 6. Field Strength of Spurious Emissions

Para. No.: 2.1053

Test Performed By: Gler	Westwell	Date of Test: October 4, 2000
Minimum Standard:	101.111 (a)(2)(iii) –13 dBm	
Willing Standard.	101.111 (a)(2)(m) = 15  dBm	
	84.4 dB $\mu$ V/m @ 3m < 1 GHz	
	82.2 dB $\mu$ V/m @ 3m > 1 GHz	
Test Results:	Complies.	
Test Data:	The spectrum was searched from No emissions were detected with	n 30 MHz to 100 GHz. hin 20dB of the specification limit.
	See attached data plots.	

# Section 7. Frequency Stability

#### Para. No.: 2.1055

Test Performed By: Glen	Date of Test: October 3, 2000
-------------------------	-------------------------------

Minimum Standard:	$\pm 0.001\%$ , 187 kHz
-------------------	-------------------------

**Test Results:** 

Complies.

The maximum frequency drift is 42,000 Hz. This is 0.0002%

Test Data:	Standard Test Voltage:	STV –48 VDC
	Standard Test Voltage:	18 732.500 MHz

Test Condition	Frequency (kHz)	Frequency Drift (kHz)	
STV	18 732 488	12	
115% STV	18 732 488	12	
85% STV	18 732 488	12	
-30°C	18 732 542	42	
-20°C	18 732 538	38	
-10°C	18 732 530	30	
0°C	18 732 520	20	
+10°C	18 732 518	18	
+30°C	18 732 470	30	
+40°C	18 732 472	28	
+50°C	18 732 473	27	

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	June 16/00	June 16/01
1 Year	Climate Chamber	Thermotron	SM-16C	15649-S	COU	COU
1 Year	RF Power Meter	Hewlett Packard	E4418B	FA001413	Nov. 8/99	Dec. 7/00
1 Year	Horn Antenna	EMCO #1	3115	3132	Dec. 21/99	Dec. 21/00
1 Year	Log Periodic Antenna 1	EMCO	LPA-25	1141	Aug. 4/99	Aug. 4/00
3 Year	Standard Gain Horn	Electro-Metrics	SH-50/60-1	FA000479	July 7/00	July 7/01
3 Year	Standard Gain Horn	Electro-Metrics	SH-50/60-2	FA000485	July 7/00	July 7/01
3 year	Harmonic Mixer	H.P.	50-75Ghz	FA001027	Mar. 9/00	Mar. 9/03
3 year	Harmonic Mixer	H.P.	75-110Ghz	FA001302	Oct. 13/98	Oct. 13/01
3 year	Diplexer	Olsen - OML	DPL.26 (H.P)		Mar. 15/00	Mar 15/03
3 year	Mixer/Antenna 40-60Ghz	Olsen – OML	M19HWA (H.P.)		Mar. 15/00	Mar. 15/03
3 year	Mixer /Antenna 60-90Ghz	Olsen – OML	M12HWA (H.P.)		Mar. 15/00	Mar. 15/03
3 year	Mixer / Antenna 90-140Ghz	Olsen – OML	M08HWA (H.P.)		Mar. 15/00	Mar. 15/03


# Section 8. Test Equipment List

NA: Not Applicable NCR: No Cal Required COU: CAL On Use

Annex A

**Test Diagrams** 

### Para. No. 2.1046 - R.F. Power Output



### Para. No. 2.1049 - Occupied Bandwidth



### Para. No. 2.1051 - Spurious Emissions at Antenna Terminals



### Para. No. 2.1053 - Field Strength of Spurious Radiation



### Para. No. 2.1055 - Frequency Stability

