

RF EXPOSURE EVALUATION

1. PRODUCT INFORMATION

Product Description	PULSE Smart Digital Scale
Model Name	QKY-PLSE-WHT, QKY-PLSE-BLK, QKY-PLSE, QKY-PLSE-XXXX
FCC ID	2AANZPLSE

2. EVALUATION METHOD

According to 447498 D01 General RF Exposure Guidance v05

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

Where $f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

3. CALCULATION

$$P_t = 13.68 \text{ dBm} = 23.33 \text{ mW}$$


The value of the Maximum output power P_t is referred to the test report of the CFR47

§15.247.

The result for RF exposure evaluation

$\text{SAR} = (23.33 \text{ mW} / 12.74 \text{ mm}) \cdot [\sqrt{2.437}(\text{GHz})] = 2.86 < 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

min. test separation distance is 12.74mm

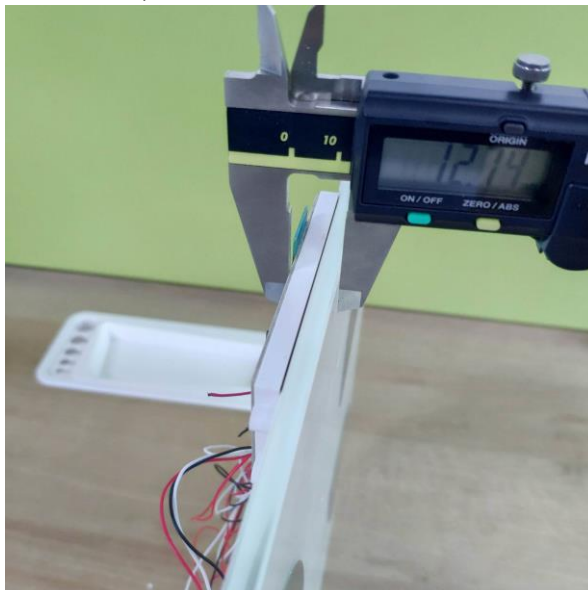

4. CONCLUSION

The SAR evaluation is not required.