

FCC - TEST REPORT

Report Number : **60.960.16.022.02R02** Date of Issue : February 20, 2016

Model : Coach Smart

Product Type : Bike Computer

Applicant : Dayton Industrial Co., Ltd

Address : 2-12 Kwai Fat Road, 11-A Kwai Chung, New Territories, Hong Kong

Production Facility : Kendy Enterprise Ltd

Address : 2-12 Kwai Fat Road, 11-A Kwai Chung, New Territories, Hong Kong

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : 23

TÜV SÜD HONG KONG LTD. is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025. TÜV SÜD HONG KONG LTD. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations TÜV SÜD HONG KONG LTD. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD HONG KONG LTD. issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1 Table of Contents.....	2
2 Description of Equipment Under Test	3
3 Summary of Test Standards	4
4 Details about the Test Laboratory	5
4.1 Test Equipment Site List.....	6
4.2 Measurement System Uncertainty	7
5 Summary of Test Results.....	8
6 General Remarks.....	9
7 Emission Test Results	10
7.1 Radiated Emission.....	10
7.2 20dB & 99% Bandwidth	12
7.3 Bandedge Emission.....	14
8 Appendix A - Photographs of EUT	16
9 Appendix B - Setup Photographs of EUT.....	21
10 Appendix C - General Product Information	23

2 Description of Equipment Under Test

Description of the Equipment Under Test

Product:	Bike Computer
Model no.:	Coach Smart
FCC ID:	O4G-MS279
Rating:	3.0VDC (1 x 3.0VDC size "CR2032" batteries)
Frequency:	2457MHz
Antenna gain:	0 dBi
Number of operated channel:	1
Modulation:	GFSK

3 Summary of Test Standards

Test Standards
FCC Part 15 Subpart C 10-1-14 Edition Federal Communications Commission, PART 15 — Radio Frequency Devices, Subpart C — Unintentional Radiators

4 Details about the Test Laboratory

Site 1

Company name: TÜV SÜD Hong Kong Ltd.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin, Hong Kong

Site 2

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13 Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2,
Shenzhen 518052, P.R.China
FCC Registration Number: 502708

Emission Tests	
Test Item	Test Site
FCC Part 15 Subpart C	
FCC Title 47 Part 15.249 & 15.209 Radiated Emission	Site 2
FCC Title 47 Part 15.249 & 15.207 Conduct Emission	NIL
FCC Title 47 Part 15.215 20dB & 99% Bandwidth	Site 2
FCC Title 47 Part 15.249 Bandedge Emission	Site 2

4.1 Test Equipment Site List

Radiated emission Test, Bandedge Emission – Site 3

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	17-Aug-16
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	17-Aug-17
Horn Antenna	Rohde & Schwarz	HF907	102294	17-Aug-17
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	17-Aug-16
3m Semi-anechoic chamber	TDK	9X6X6	----	29-May-19

20dB & 99% Bandwidth – Site 3

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Generator	Rohde & Schwarz	SMB100A	108272	17-Aug-16
Signal Analyzer	Rohde & Schwarz	FSV40	101030	17-Aug-16
Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	17-Aug-16
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	17-Aug-16

4.2 Measurement System Uncertainty

Measurement System Uncertainty Emissions

System Measurement Uncertainty	
Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.54dB
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 4.83dB; Vertical: 4.91dB;
Uncertainty for Radiated Emission in 3m chamber 1000MHz-25000MHz	Horizontal: 4.89dB; Vertical: 4.88dB;
Uncertainty for Conducted RF test	2.04dB

5 Summary of Test Results

Emission Tests				
FCC Part 15 Subpart C				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
FCC Title 47 Part 15.249 & 15.209 Radiated Emission	10-11	☒	☐	☐
FCC Title 47 Part 15.249 & 15.207 Conduct Emission	NIL	☐	☐	☒
FCC Title 47 Part 15.215 20dB & 99% Bandwidth	12-13	☒	☐	☐
FCC Title 47 Part 15.249 Bandedge Emission	14-15	☒	☐	☐

6 General Remarks

Remarks

NIL

SUMMARY:

- All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

- The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.


Sample Received Date: January 28, 2016

Testing Start Date: January 29, 2016

Testing End Date: February 16, 2016

- TÜV SÜD HONG KONG LTD. -

Reviewed by:

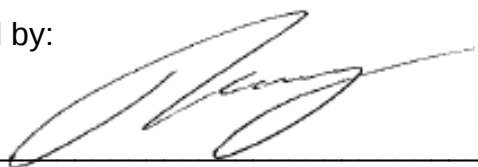

TSENG Chi Kit
EMC Project Engineer



Prepared by:



CHAN Kwong Ngai
EMC Test Engineer

7 Emission Test Results

7.1 Radiated Emission

EUT: Coach Smart
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.249 & 15.209, Antenna: Horizontal
 Comment: 3.0VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
50.352	15.61	40	-24.39	Quasi Peak
94.260	11.32	43.5	-32.18	Quasi Peak
279.654	16.32	46	-29.68	Quasi Peak
855.172	25.26	46	-20.74	Quasi Peak
2457.000	83.67	114	-30.33	Peak
2457.000	73.73	94	-20.27	Average
4914.000	58.16	74	-15.84	Peak
4914.000	41.37	54	-12.63	Average
7371.000	61.04	74	-12.96	Peak
7371.000	43.22	54	-10.78	Average

Radiated Emission

EUT: Coach Smart
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.249 & 15.209, Antenna: Vertical
 Comment: 3.0VDC
 Remark: 9kHz to 25GHz


Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
49.860	14.13	40	-25.87	Quasi Peak
101.260	16.20	43.5	-27.30	Quasi Peak
280.540	16.89	46	-29.11	Quasi Peak
723.600	21.03	46	-24.97	Quasi Peak
2457.166	82.18	114	-31.82	Peak
2457.166	66.72	94	-27.28	Average
4914.375	59.83	74	-14.17	Peak
4914.375	42.03	54	-11.97	Average
7330.625	61.05	74	-12.95	Peak
7330.625	43.31	54	-10.69	Average

7.2 20dB & 99% Bandwidth

EUT: Coach Smart
Op Condition: Operated, TX Mode (2457MHz)
Test Specification: FCC15.215, 20dB Bandwidth
Comment: 3.0VDC

Test Result

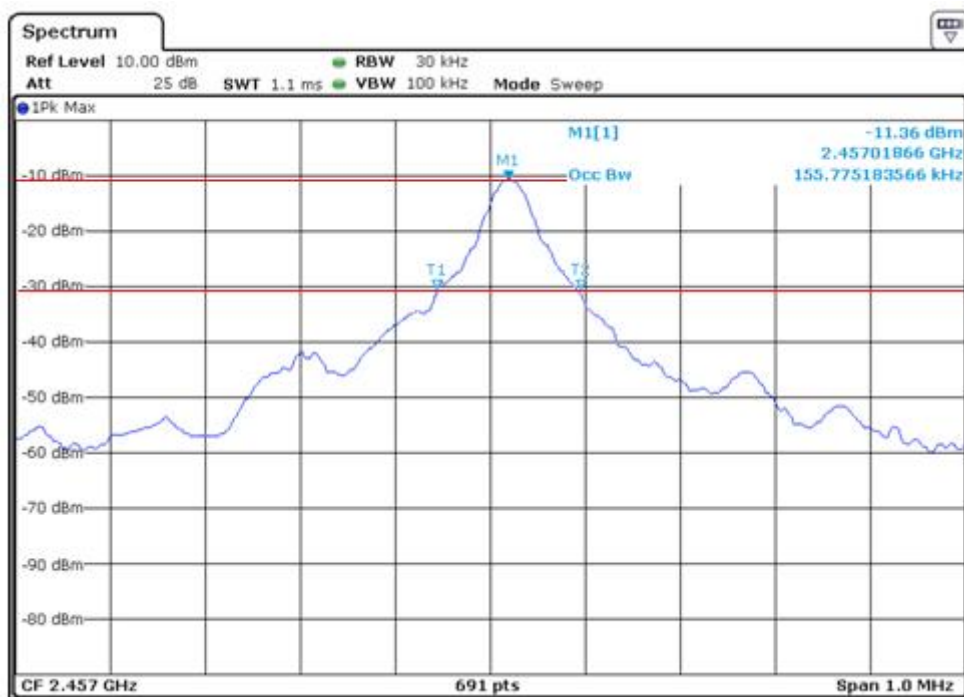
☒ Passed☐ Not Passed**20dB bandwidth**

155.775 kHz

20dB & 99% Bandwidth

EUT: Coach Smart
Op Condition: Operated, TX Mode (2457MHz)
Test Specification: FCC15.215, 99% Bandwidth
Comment: 3.0VDC

Test Result

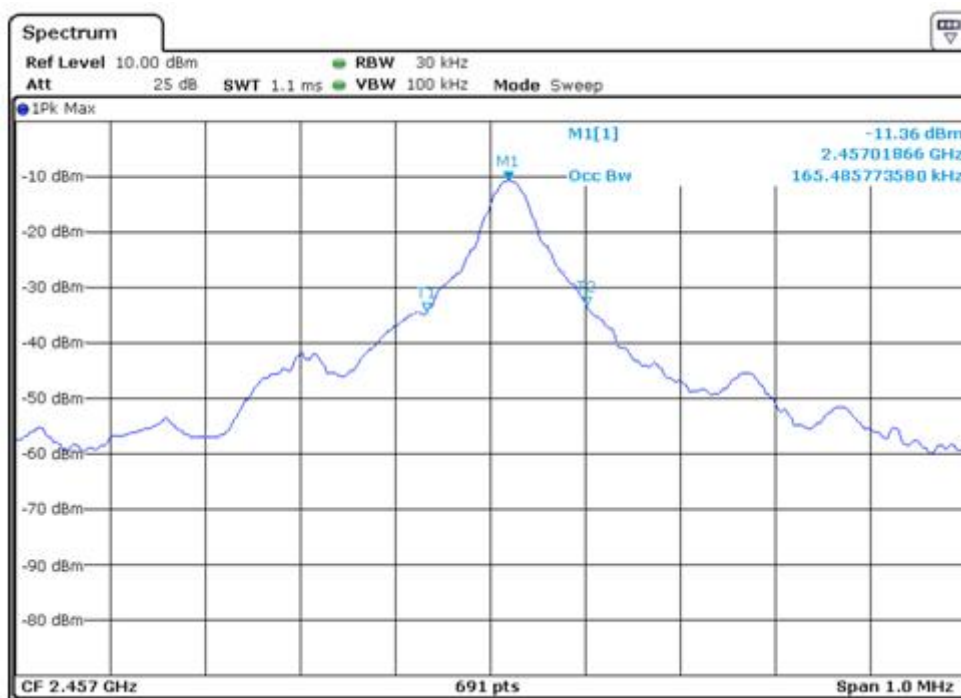
☒ Passed☐ Not Passed**99% bandwidth**

165.485 kHz

7.3 Bandedge Emission

EUT: Coach Smart
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.247, Antenna: Horizontal
 Comment: 3.0VDC

Test Result

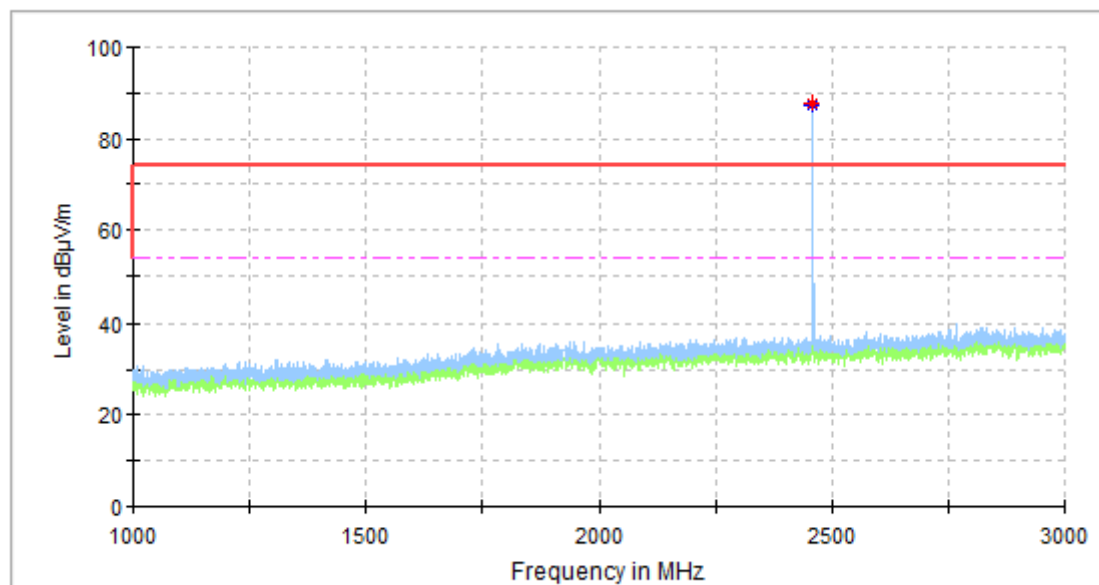☒ Passed☐ Not Passed


Band	Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
Low	2390.000	33.89	74	-40.11	Peak
Low	2390.000	30.63	54	-23.37	Average
High	2483.500	35.12	74	-38.88	Peak
High	2483.500	31.66	54	-22.34	Average

Bandedge Emission

EUT: Coach Smart
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.247, Antenna: Vertical
 Comment: 3.0VDC

Test Result

☒ Passed
☐ Not Passed

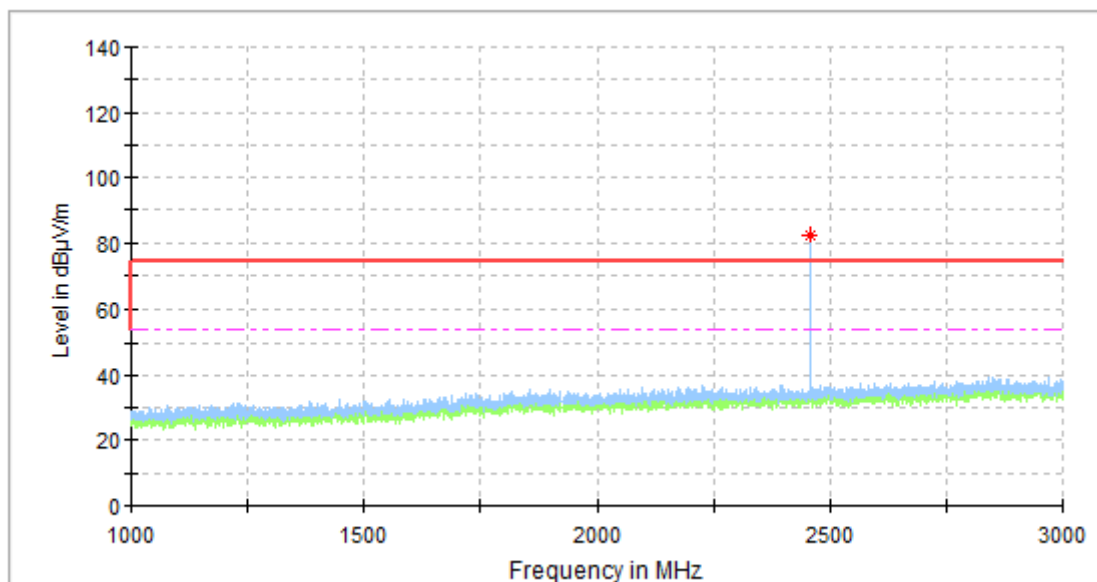


Band	Frequency MHz	Result dBμV/m	Limit dBμV/m	Margin dB	Detector
Low	2390.000	33.34	74	-40.66	Peak
Low	2390.000	30.16	54	-23.84	Average
High	2483.500	33.89	74	-40.11	Peak
High	2483.500	31.72	54	-22.38	Average


8 Appendix A - Photographs of EUT





Appendix A

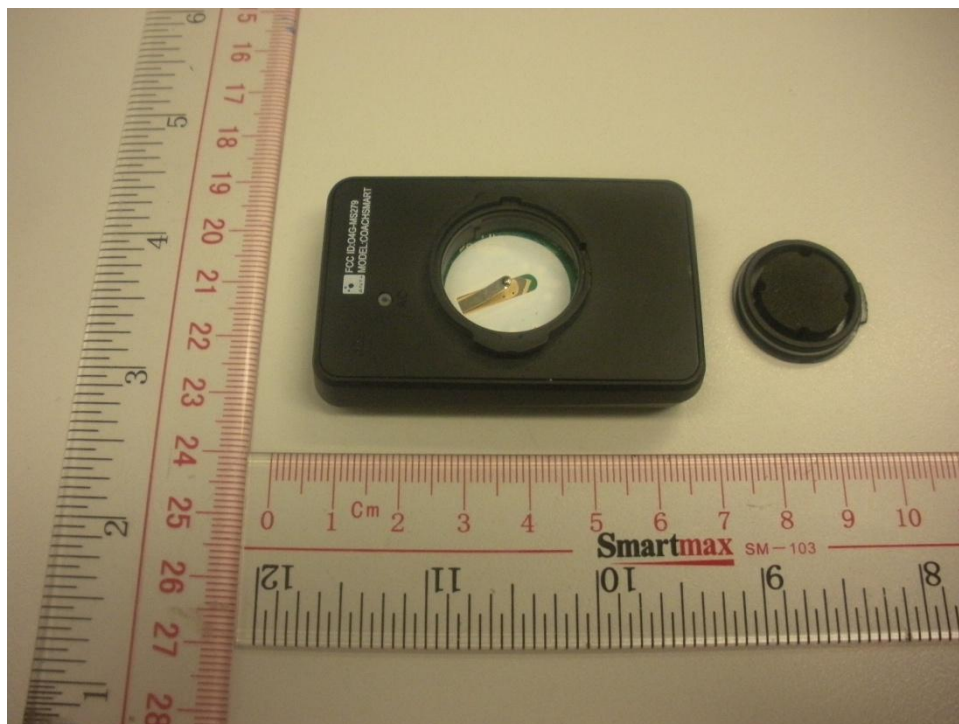


Appendix A

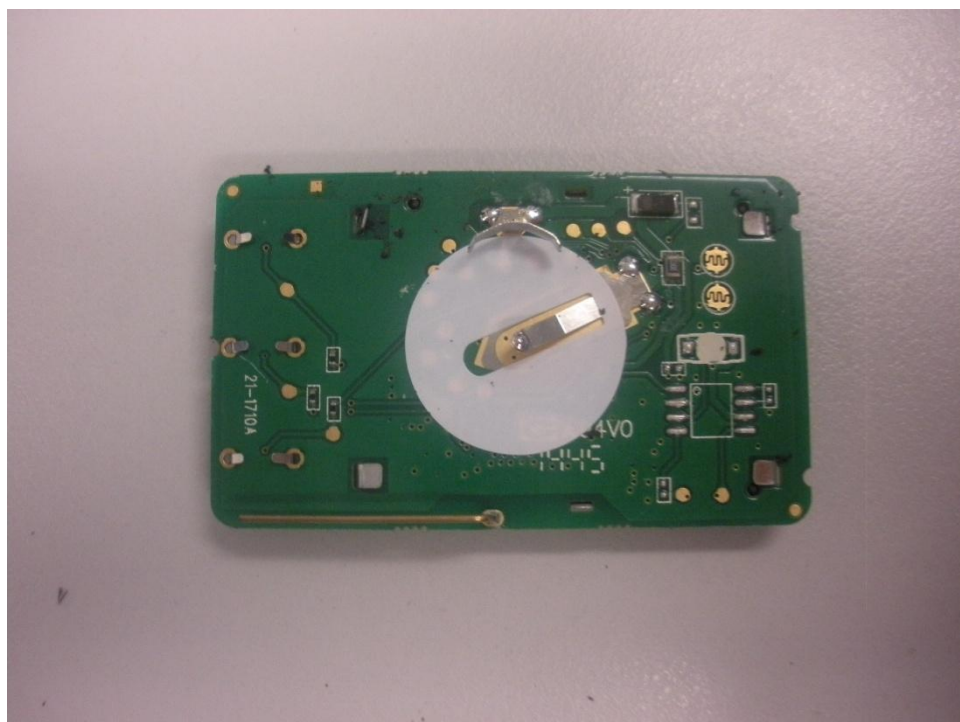



Appendix A

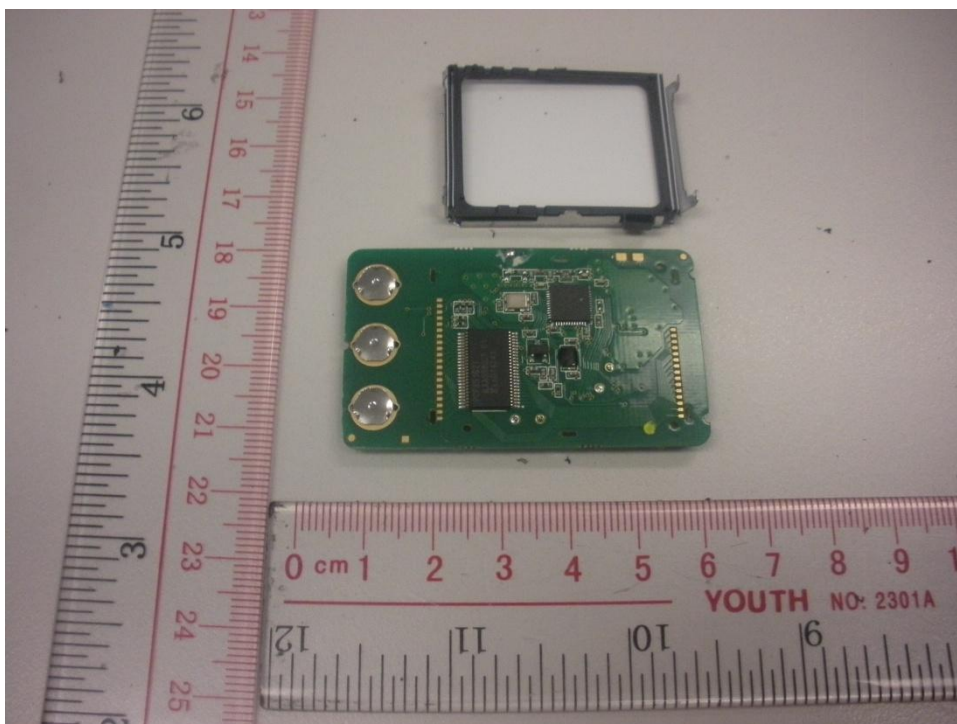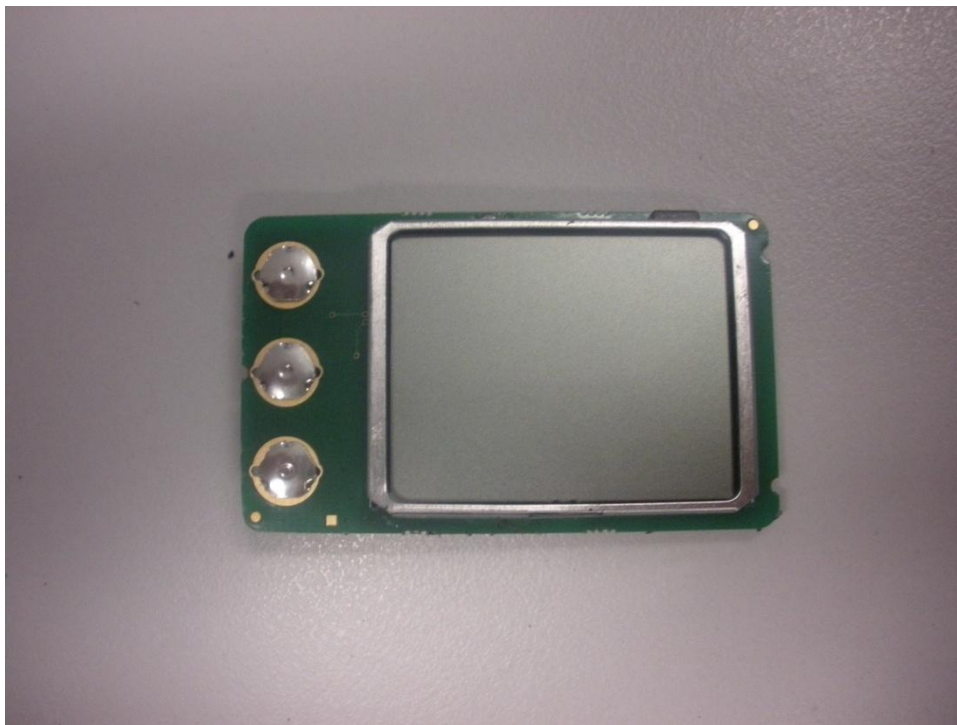



Appendix A

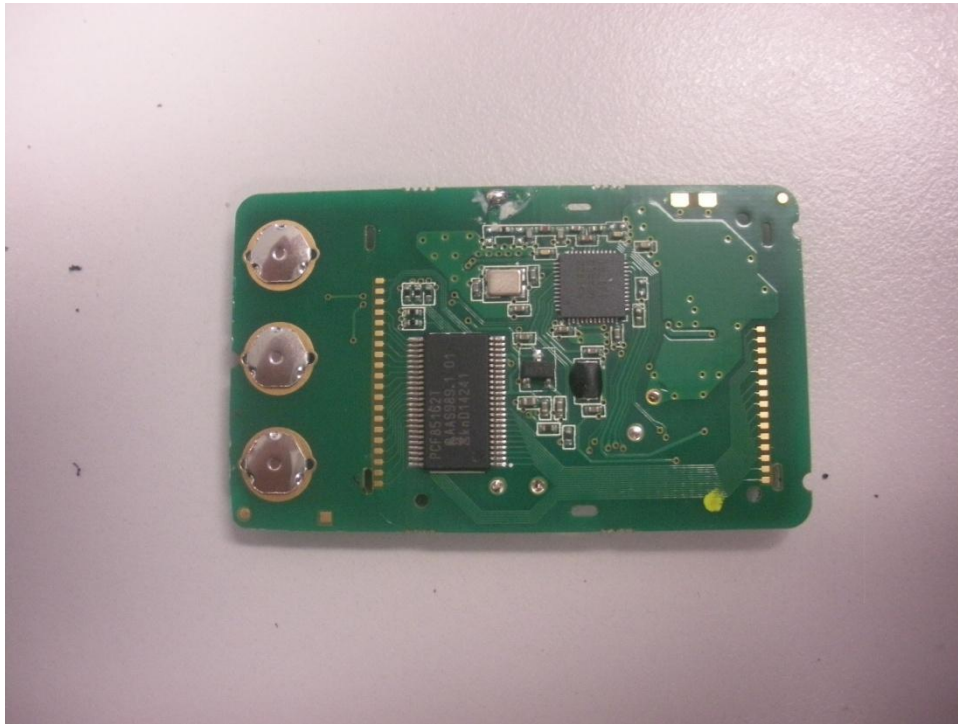

9 Appendix B - Setup Photographs of EUT

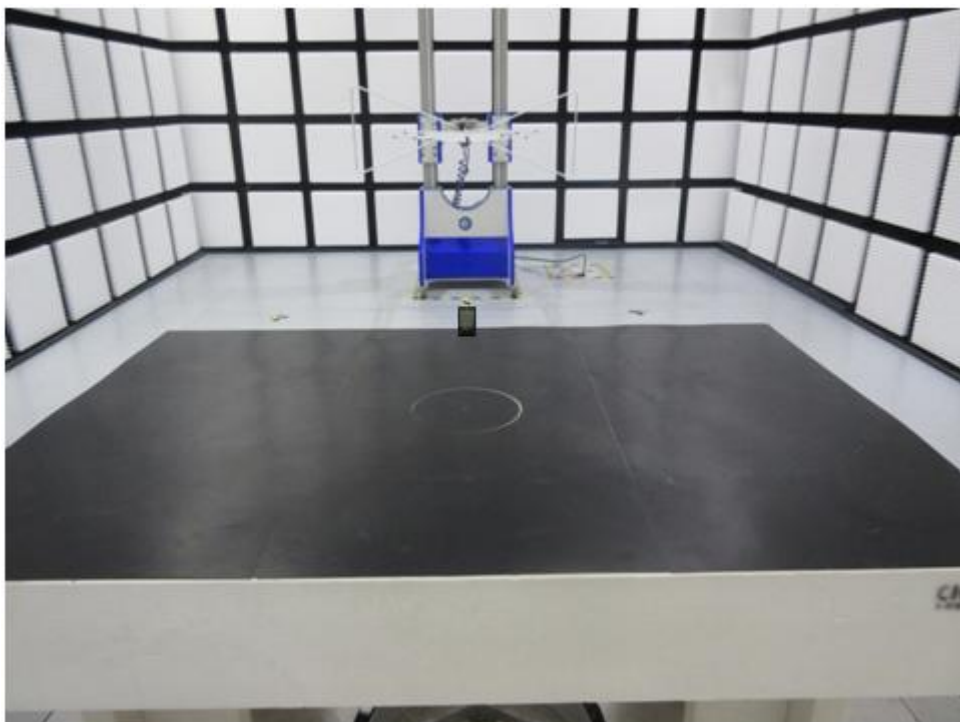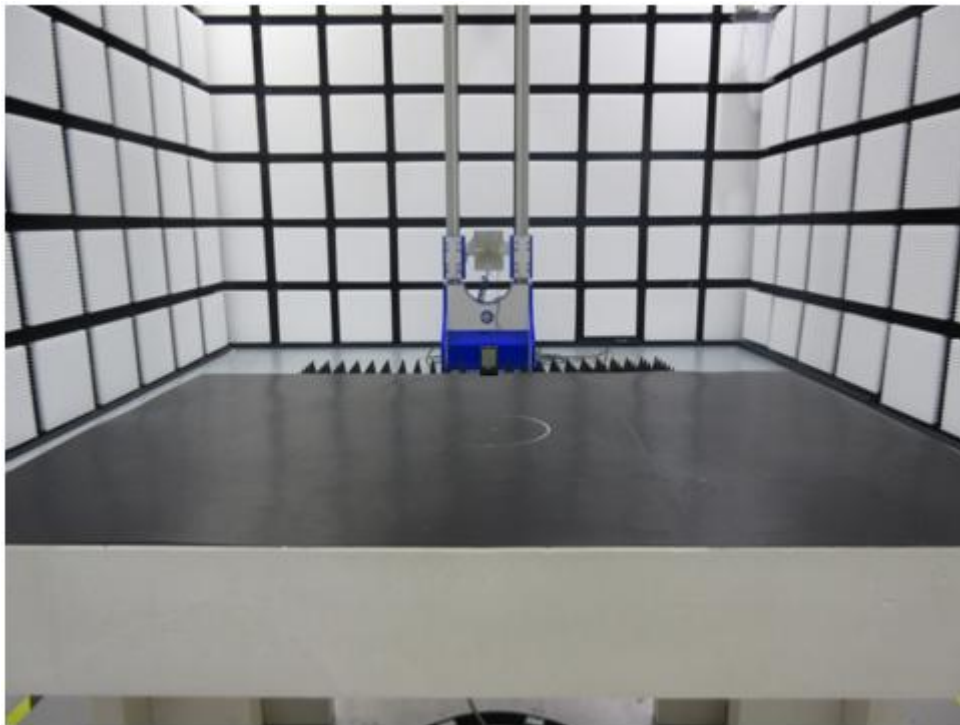

Appendix B

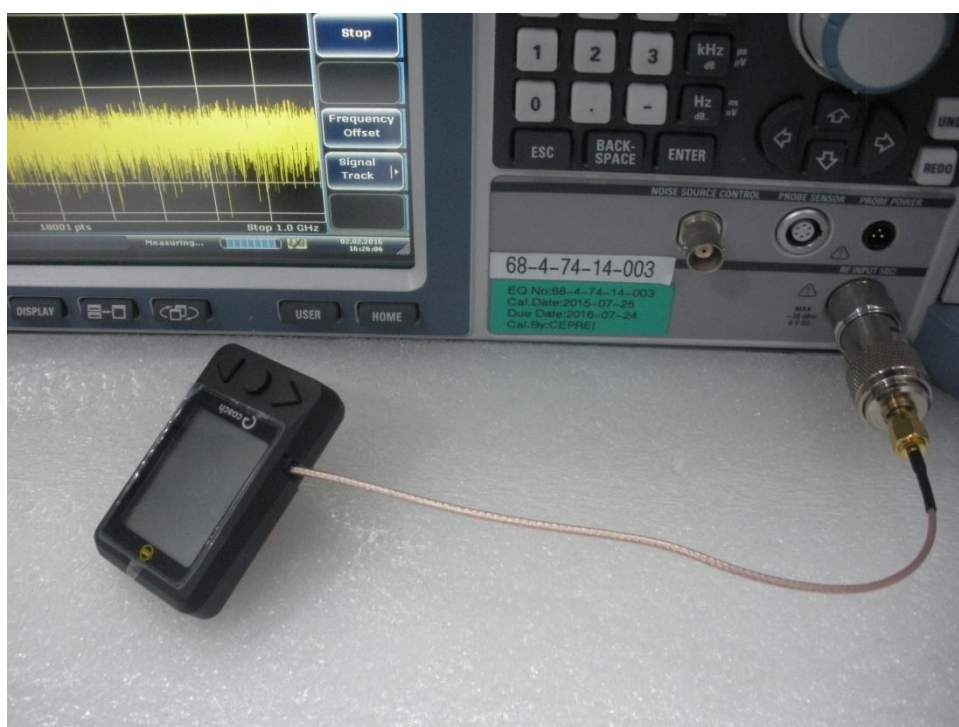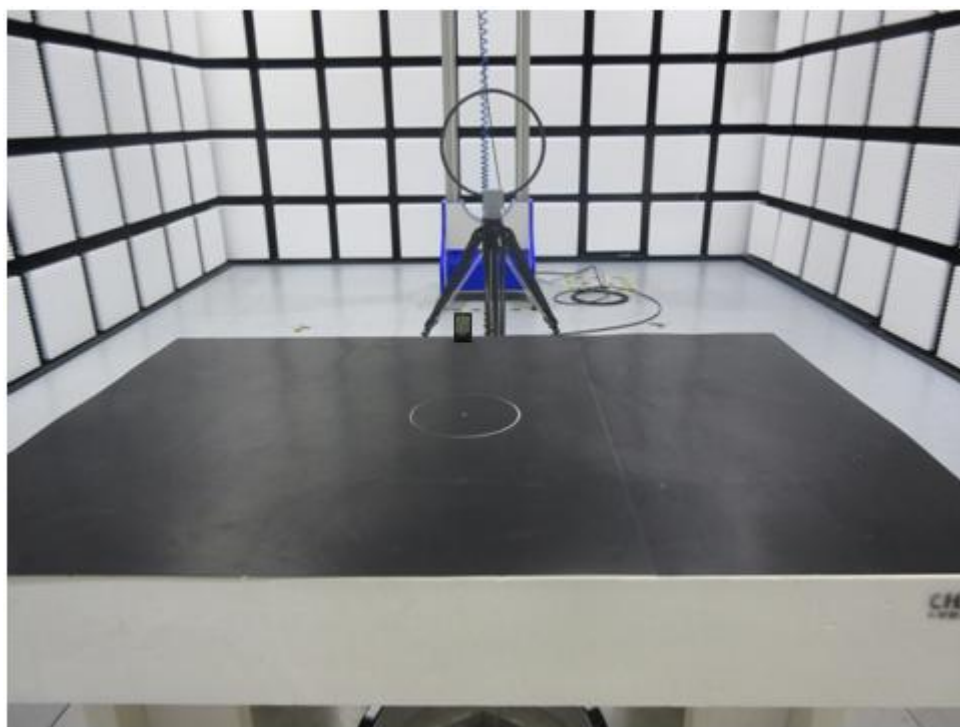

10 Appendix C - General Product Information

Radiofrequency radiation exposure evaluation

According to KDB 447498 D01v06 section 4.3.1,

>> The 1-g SAR test exclusion thresholds, for 100MHz to 6GHz, at test separation distances ≤ 50 mm are determined by:

Power at 2.457GHz = 0.0731 mW EIRP

$[(0.0731 \text{ mW}) / (20 \text{ mm})] \cdot [\text{sqrt}(2.457 \text{ GHz})] = 0.005729$ which is ≤ 3.0 for 1-g SAR.

Therefore the device is exempt from stand-alone SAR test requirements.

>> The fundamental frequency of the EUT is 2457MHz, the test separation distance is $< 50\text{mm}$.
(Manufacturer specified the separation distance is: 20mm)

>> The power of EUT measured is:

- For 2457MHz: $0.0731\text{mW} = 10 \log (0.0731) \text{ dBm} \sim -11.36\text{dBm}$