



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test report file number : E04DR-083

Applicant : IPOne Inc.

Address : Gusang Bldg., 2F., 1009-5, Daechi-Dong, Gangnam-Gu, Seoul 135-280, Korea

Manufacturer : IPOne Inc.

Address : Gusang Bldg., 2F., 1009-5, Daechi-Dong, Gangnam-Gu, Seoul 135-280 Korea

Type of Equipment : Wireless LAN Access Point

FCC ID. : RV5AIRGATE5031

Model Name : AG5031

Serial number : None

Total page of Report : 62 pages (including this page)

Date of Incoming : August 27, 2004

Date of issue : December 30, 2004

SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart E.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: G. W. Lee
G. W. Lee/ Chief Engineer
EMC & Telecom Div.
ONETECH Corp.

Reviewed by: Y. K. Kwon
Y. K. Kwon/ Director
EMC & Telecom Div.
ONETECH Corp.



CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTION	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION	8
5.3 PERIPHERAL EQUIPMENT	8
5.4 MODE OF OPERATION DURING THE TEST	8
5.5 CONFIGURATION OF TEST SYSTEM	9
5.6 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 26DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST EQUIPMENT USED	11
7.4 TEST DATA	11
8. MAXIMUM PEAK OUTPUT POWER	14
8.1 OPERATING ENVIRONMENT	14



8.2 TEST SET-UP	14
8.3 TEST EQUIPMENT USED	14
8.4 TEST DATA	14
9. PEAK POWER SPECTRUL DENSITY	17
9.1 OPERATING ENVIRONMENT	17
9.2 TEST SET-UP	17
9.3 TEST EQUIPMENT USED	17
9.4 TEST DATA	17
10. PEAK EXCLUSION	20
10.1 OPERATING ENVIRONMENT	20
10.2 TEST SET-UP	20
10.3 TEST EQUIPMENT USED	20
10.4 TEST DATA	20
11. MAXIMUM PERMISSIBLE EXPOSURE	23
11.1 RF EXPOSURE CALCULATION	23
11.2 CALCULATED MPE SAFE DISTANCE	23
12. UNDESIRABLE EMISSIONS	24
12.1 OPERATING ENVIRONMENT	24
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	24
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	24
12.4 TEST EQUIPMENT USED	24
12.5. TEST DATA FOR CONDUCTED EMISSION	25
12.6. TEST DATA FOR RADIATED EMISSION	28
12.6.1 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	28
12.6.2 SPURIOUS & HARMONIC RADIATED EMISSION	29
12.7. TEST DATA FOR CO-LOCATION	31
12.7.1 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BAND	31
12.7.2 SPURIOUS & HARMONIC RADIATED EMISSION	32
13. RADIATED EMISSION TEST, GENERAL REQUIREMENT	33
13.1 OPERATING ENVIRONMENT	33
13.2 TEST SET-UP	33
13.3 MEASUREMENT UNCERTAINTY	33
13.4 TEST EQUIPMENT USED	33



13.5 TEST DATA	34
14. CONDUCTED EMISSION TEST	35
14.1 OPERATING ENVIRONMENT	35
14.2 TEST SET-UP	35
14.3 MEASUREMENT UNCERTAINTY	35
14.4 TEST EQUIPMENT USED	35
14.5 TEST DATA	36

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : IPOne Inc.
ADDRESS : Gusang Bldg., 2F., 1009-5, Daechi-Dong, Gangnam-Gu, Seoul 135-280, Korea
CONTACT PERSON : Sanghoon Kim / Principal Engineer
TELEPHONE NO : +82-2-3011-0934
FCC ID : RV5AIRGATE5031
MODEL NO/NAME : AG5031
SERIAL NUMBER : N/A
DATE : December 30, 2004

DEVICE TYPE	Wireless LAN Access Point - <i>Unlicensed National Information Infrastructure Devices</i>
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/2001
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	NONE
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.207 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 and is not affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407 (a) (1), (2)	Maximum Conducted Output Power	Met the Limit / PASS
15.407 (a) (1), (2)	Peak Power Spectral Density	Met the Limit / PASS
15.407 (a) (6)	Peak Exclusion	Met the Limit / PASS
15.407 (b) (1), (2)	Undesirable Emission Limits	Met the Limit / PASS
15.407 (b) (6)	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.407 (b) (6)	Conducted Limits	Met the Limit / PASS
15.407 (e)	Indoor Use within the 5.15 – 5.25 GHz	Met requirement / PASS
15.407 (f)	Radiation Exposure Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4/2001. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myeon, Gwangju-Si, Gyeonggi-Do 464-080 Korea. Description details of test facilities were submitted to the Federal Communications Commission on January 18, 2002 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV, SEMKO and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.



3. GENERAL INFORMATION

3.1 Product Description

The IOne Inc., Model AG5031 (referred to as the EUT in this report) is an Access Point, which has 802.11a/b/g WLAN Module, 2 RJ-45 ports for WAN and Ethernet, and RS232C port for console. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wireless LAN & ADSL Combo Device
SPREAD SPECTRUM TYPE	DSSS and OFDM
STANDARD	IEEE 802.11b + 802.11g + 802.11a
OPERATING FREQUENCY	5180 ~ 5320 MHz
OUTPUT POWER	802.11a: Typ. 18.0 dBm
DATA TRANSFER RATE	802.11b: 1, 2, 5.5, and 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, and 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, and 54 Mbps
MODULATION TYPE	BBPSK, QPSK, CCK, 16-QAM and 64-QAM
DUTY CYCCLE	100%
ANTENNA	SMA Type
ANTENNA GAIN	2.0dBi
LIST OF EACH OSC. ORCRY. FREQ.(FREQ.>=1MHz)	25, 33 MHz
NUMBER OF LAYER	Main Board: 6 Layers
POWER REQUIREMENT	AC 100~240Vac, 2.4A from AC/DC Adapter
TEMPERATURE CONDITION	Operation: -100°C ~ 50°C, Storage: -20°C ~ 70°C
EXTERNAL CONNECTOR	2 SMA Type Antenna Connectors, DC Input Port, 2 RJ 45 ports (LAN/WAN), and RS232C Port (Console)

3.2 Alternative type(s)/model(s); also covered by this test report.

None.

4. EUT MODIFICATIONS

None



5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	IPOne Inc.	AG5031DUPBA	N/A
MPCI Card for WLAN	GEMTEK	WMIA-139AG-V00	N/A

5.3 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
AG5031	IPOne Inc.	RV5AIRGATE5031	Wireless LAN Access Point (EUT)	HOST
HES12-050240-8	Hitron Electronics	N/A	AC/DC Adapter for EUT	EUT
PLL011	Dell Computer Corp.	DoC	Notebook PC (HOST)	EUT
ADP-70EB	Delta Electronics	N/A	AC/DC Adapter for Host	HOST
2225C	HP	DS16XU2225	Printer	HOST

5.4 Mode of operation during the test

The EUT has a detachable antenna, so the antenna was fitted in a manner typical of normal intended use and the transmitting signal was modulated as specified by the manufacturer. The transmitting signal was set at maximum output power. For transmitting and receiving the RF signal between HOST and Notebook PC, software using Hyper terminal program was used supplied by the manufacturer. Also the EUT has several data transfer rate, so the EUT was tested at each transfer rate, but the worst data was recorded in this test report.



5.5 Configuration of Test System

Line Conducted Test: The power cord of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power lines Conducted Emission tests were performed by using the procedure in ANSI C63.4/2001 7.2.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4/2001 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is counter clockwise SMA Type, so no consideration of replacement by the user.



6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Stand-by mode	
TX mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Stand-by mode	
TX mode	X

7. MINIMUM 26dB BANDWIDTH


7.1 Operating environment

Temperature : 19°C

Relative humidity : 35 %

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to approximately 1 % of the emission bandwidth and peak detection is used. The emission bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26dB.



7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal
■ -	8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2005

All test equipment used is calibrated on a regular basis.

7.4 Test data

- Test Date : December 17, 2004

- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
Low	5180	23.50
Middle	5260	25.58
High	5320	24.50

Remark: See next page for an overview sweep performed with peak detector.





Tested by: Y. M. Choi / Senior Engineer6.



Photo of test data



Low Channel

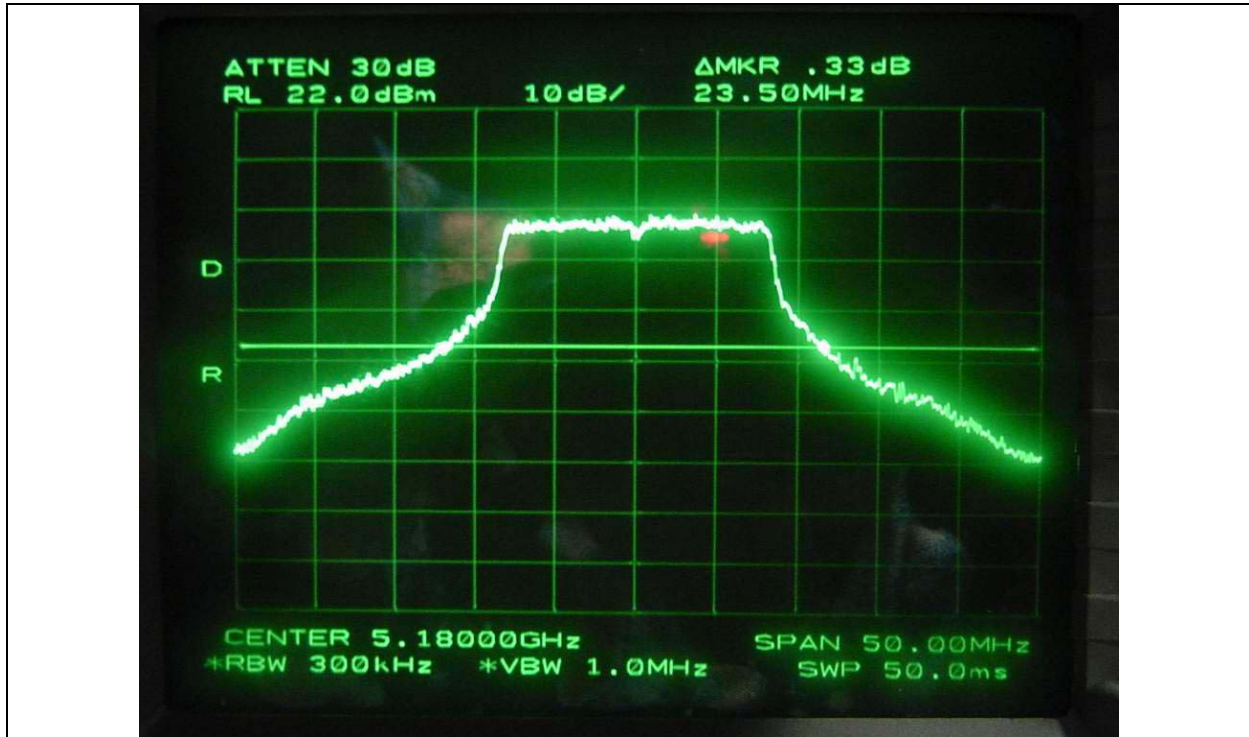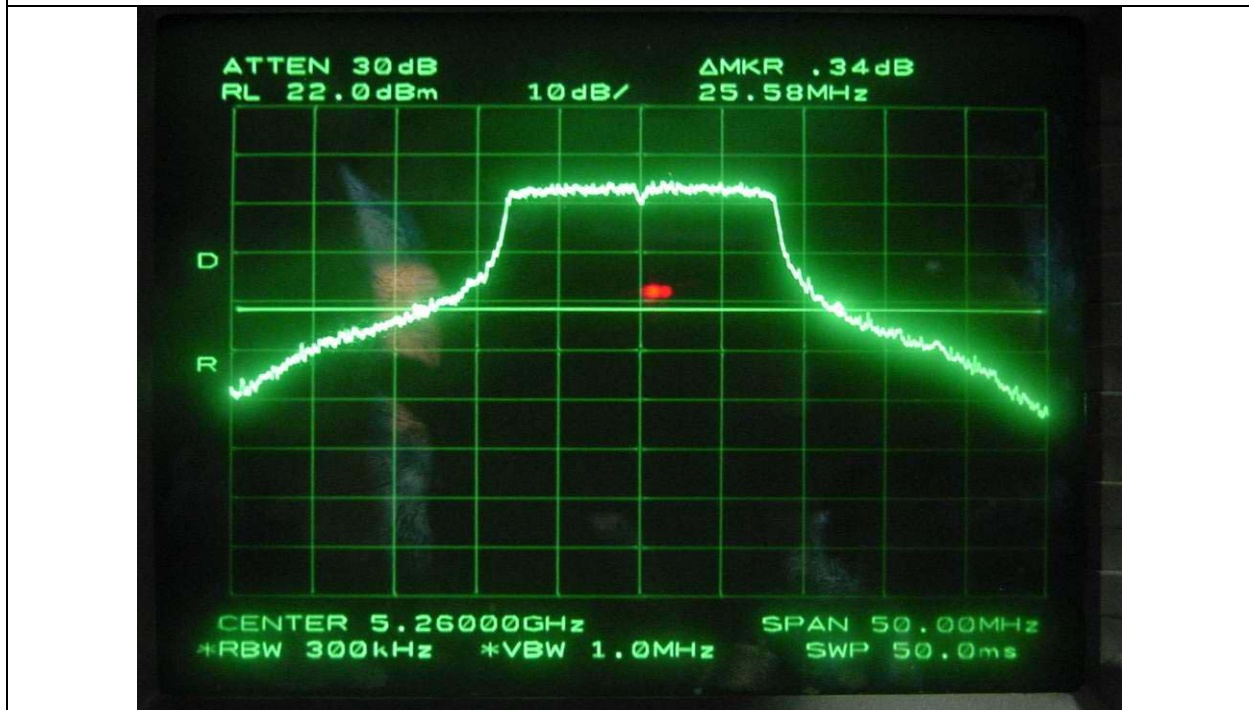

Middle Channel



8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 19°C

Relative humidity : 35 %

8.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer using RBW=1MHz, VBW=3MHz, connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over the previously measured emission bandwidth.. The EUT was operating in transmit mode at the appropriate center frequency.



8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due Cal
■ - 8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2005

All test equipment used is calibrated on a regular basis.

8.4 Test data

- Test Date : December 17, 2004

- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	Bandwidth (MHz)	Measured Value (dBm)	4 or 11 + 10log B (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	5180	23.50	13.8	17.71	17	-3.20
Middle	5260	25.58	20.7	25.08	24	-3.30
High	5320	24.50	19.7	24.89	24	-4.30


Remark: See next page for an overview sweep performed with peak detector.


Tested by: Y. M. Choi / Senior Engineer6.


Photo of test data



Low Channel

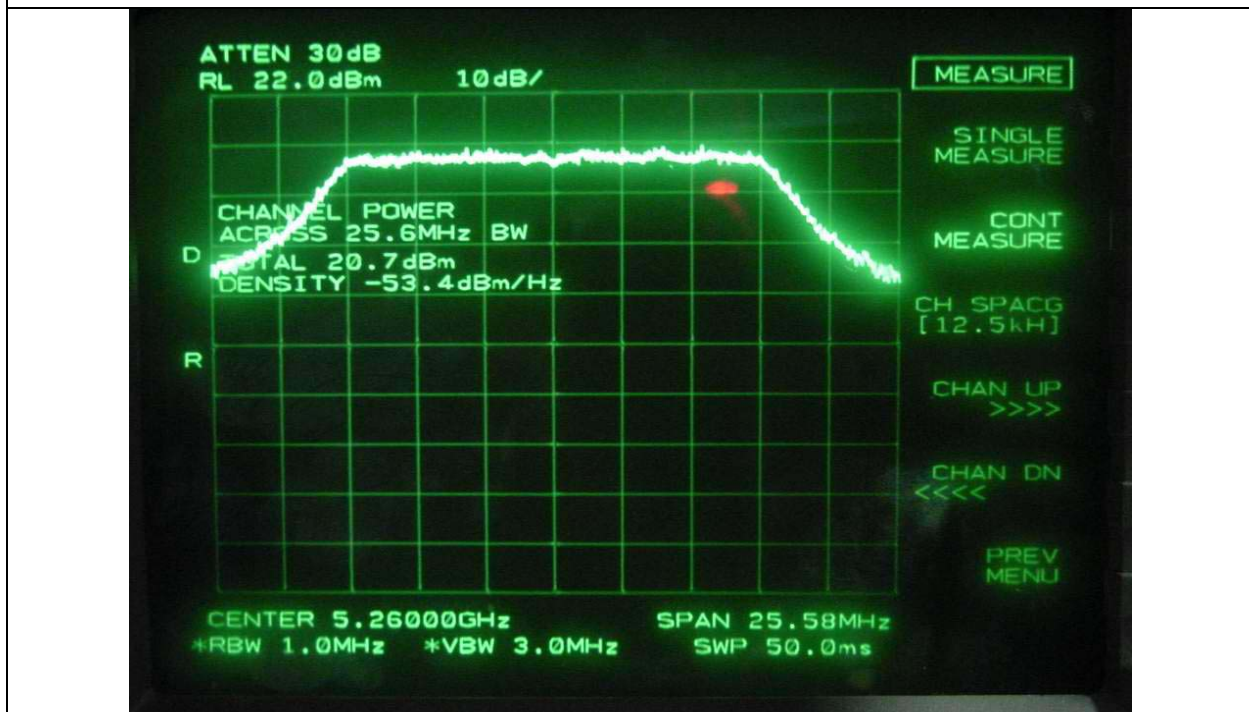

Middle Channel

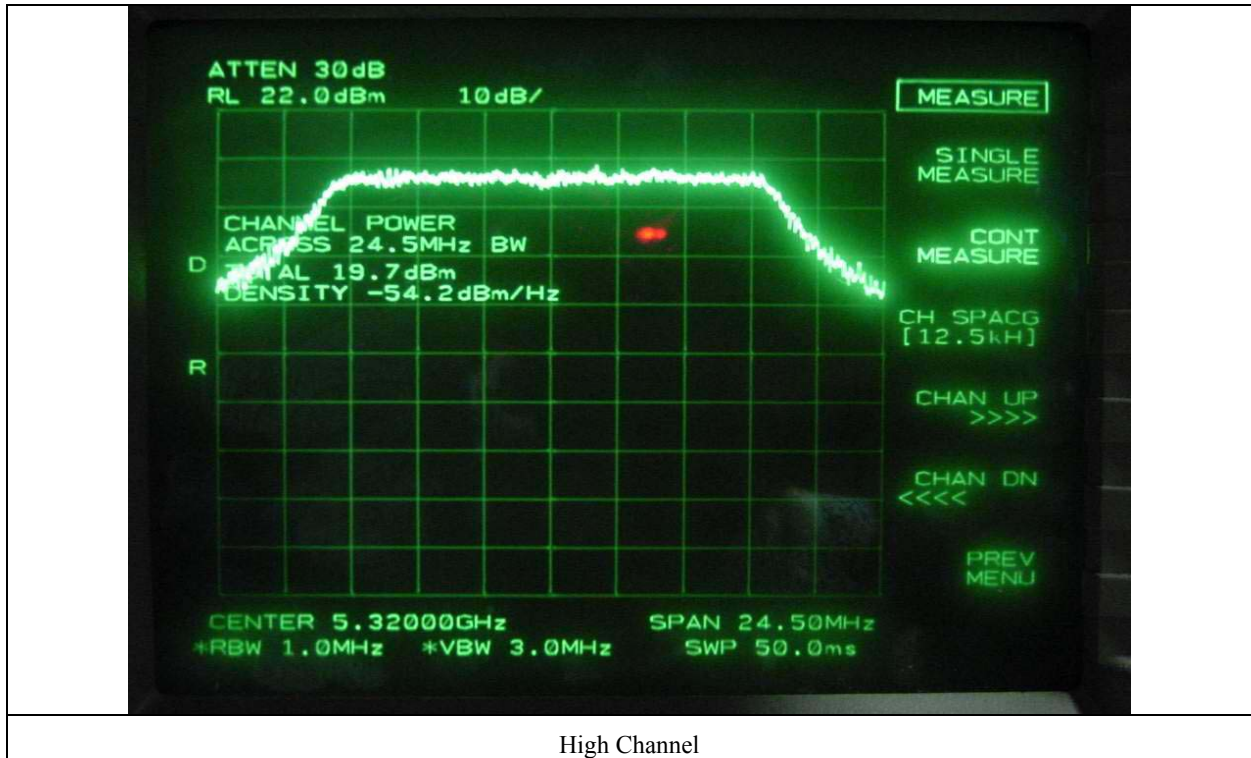

9. PEAK POWER SPECTRUL DENSITY


9.1 Operating environment

Temperature : 26°C

Relative humidity : 43 %

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The maximum level in a 1Mhz bandwidth is measured with the spectrum analyzer using RBW = 1 MHz, VBW = 3 MHz, and the 100 sweeps of video averaging. The Peak Power Spectral Density is the highest level found across the emission in any 1 MHz band.

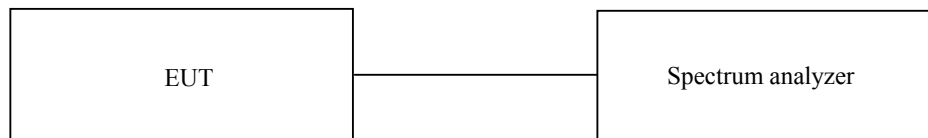

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due Cal
■ - 8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2005

All test equipment used is calibrated on a regular basis.

9.4 Test data

-. Test Date : December 17, 2004

-. Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	5180	-4.33	4	-8.33
Middle	5260	1.67	11	-9.33
High	5320	0.33	11	-10.67

Remark: See next page for an overview sweep performed with peak detector.



Tested by: Y. M. Choi / Senior Engineer6.




Photo of test data



Low Channel

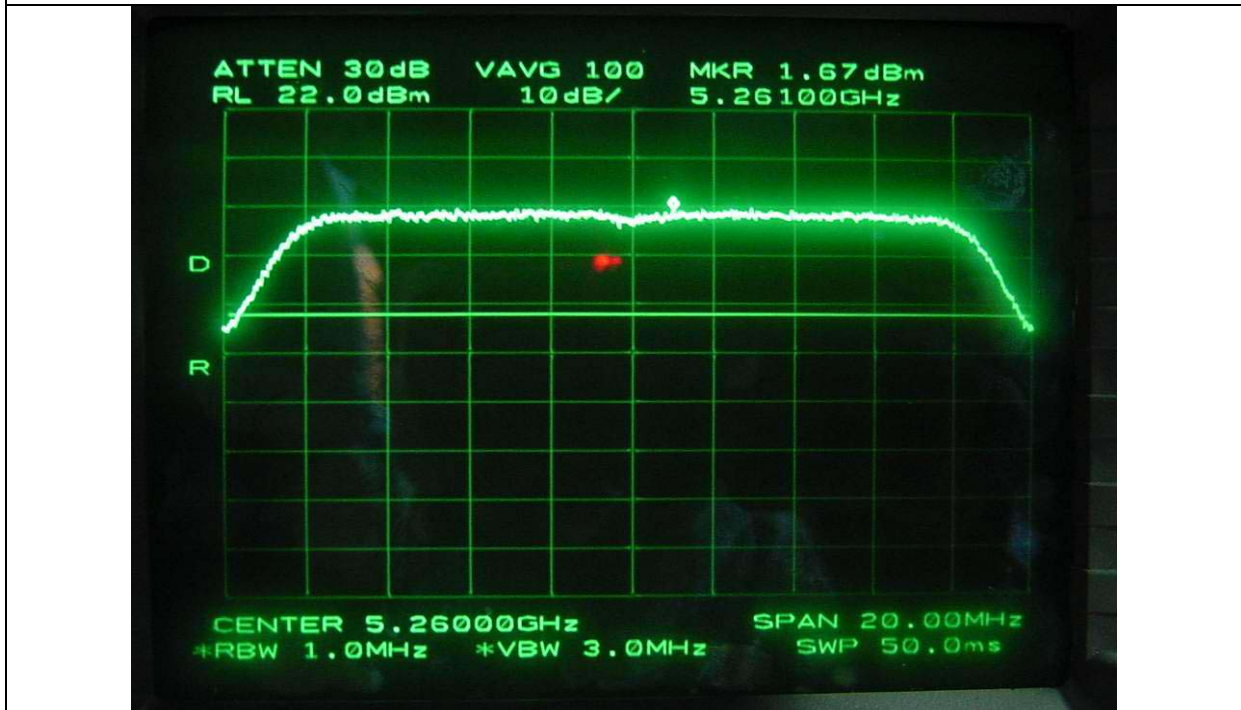

Middle Channel

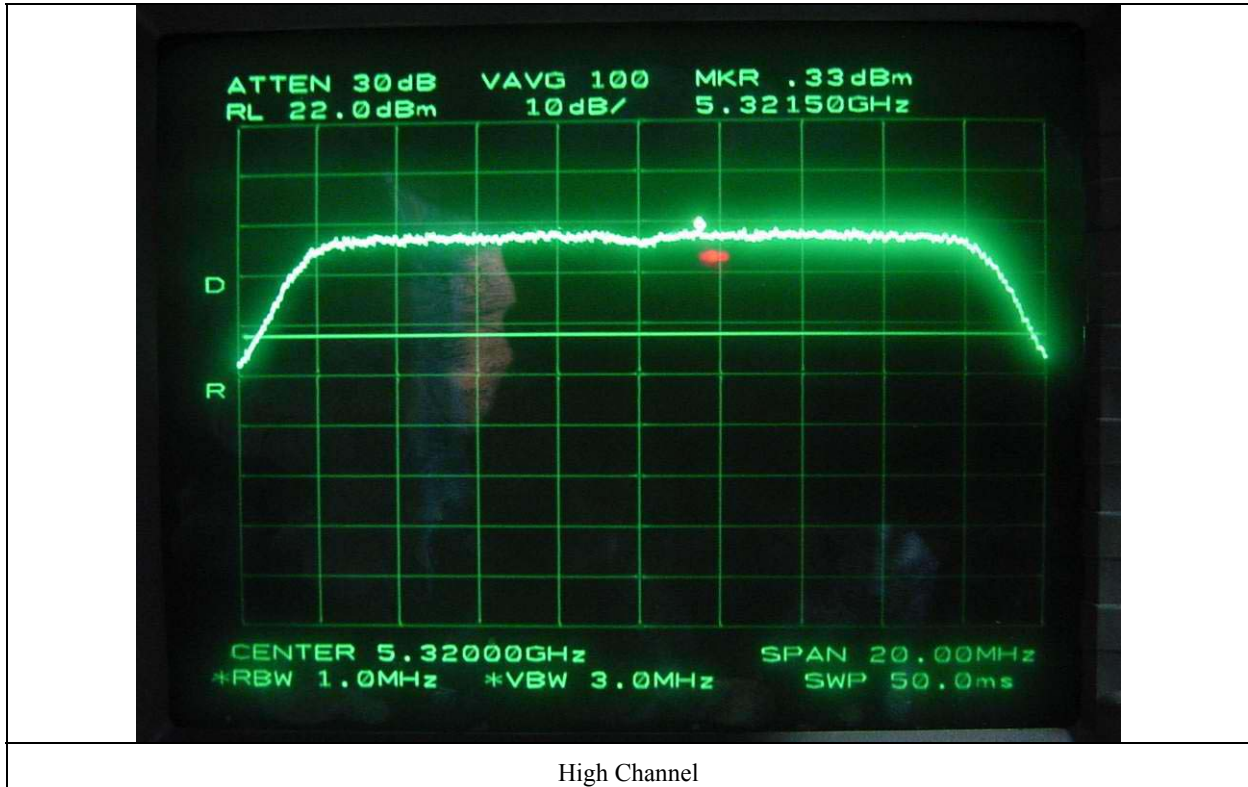

High Channel



10. PEAK EXCLUSION

10.1 Operating environment


Temperature : 26°C

Relative humidity : 43 %

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to and maintained at 1 MHz. First the video bandwidth is set to 1 MHz, Trace A is set to Max Hold, then to View. Then the video bandwidth is readjusted to 3 MHz, and the signal under this measurement condition is captured in trace B.

The difference between the traces is investigated. The marker is placed at the frequency which shows the largest difference. The amplitude delta between the traces at this frequency is the peak exclusion.

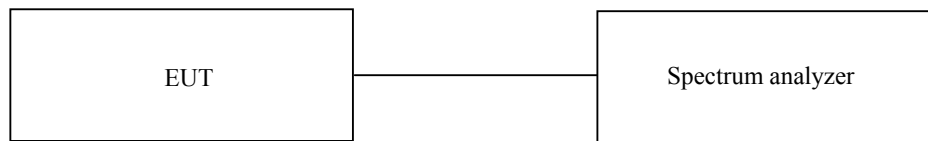

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Due Cal
■ - 8564E	HP	Spectrum Analyzer	3650A00756	July 10, 2005

All test equipment used is calibrated on a regular basis.

10.4 Test data

- Test Date : December 17, 2004

- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dB)	MARGIN (dB)
Low	5180	10.67	13	-2.33
Middle	5260	10.50	13	-2.50
High	5320	10.17	13	-2.83

Remark: See next page for an overview sweep performed with peak detector.



Tested by: Y. M. Choi / Senior Engineer6.




Photo of test data



Low Channel



Middle Channel

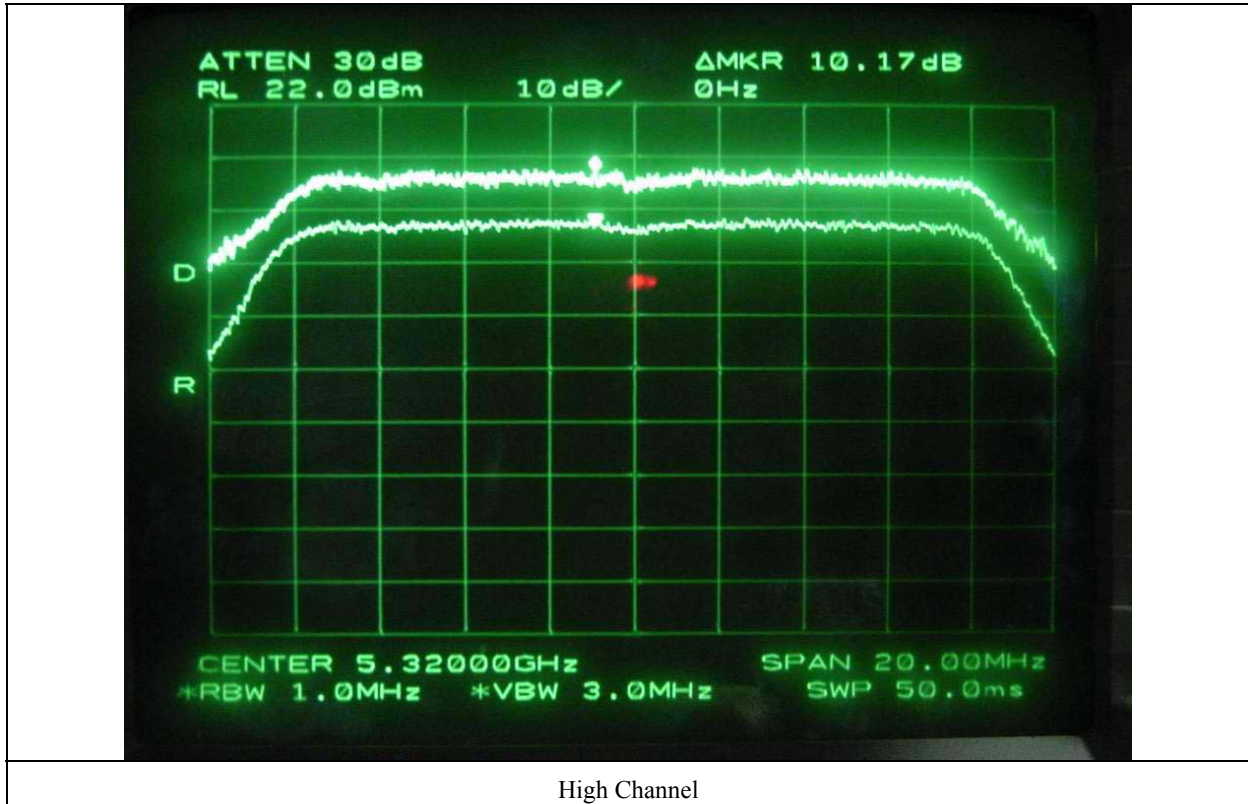

11. MAXIMUM PERMISSIBLE EXPOSURE

11.1 RF Exposure Calculation

According to the FCC rule 1.1310 table 1B, the limit for the maximum permissible RF exposure for an uncontrolled environment is $1\text{mW}/\text{cm}^2$.

The electric field generated for a $1\text{mW}/\text{cm}^2$ exposure is calculated as follows:

$$E = \sqrt{(30 * P * G) / d}, \text{ and } S = E^2 / Z = E^2 / 3770, \text{ because } 1\text{mW} / \text{cm}^2 = 10\text{W} / \text{m}^2$$

Where

S = Power density in mW/cm^2 , Z = Impedance of free space, 377Ω

E = Electric field strength in Volts/m, G = Numeric antenna gain, and d = distance in meter

Combining equations and rearranging the terms to express the distance as a function of the remaining variable

$$d = \sqrt{(30 * P * G) / (3770 * S)}$$

Changing to units of mW and cm, using $P (\text{mW}) = P (\text{W}) / 1000$, $d (\text{cm}) = 100 * d (\text{m})$

$$d = 0.282 * \sqrt{(P * G) / S}$$

Where

d = distance in cm, P = Power in mW, G = Numeric antenna gain, and S = Power density in mW/cm^2

11.2 Calculated MPE Safe Distance

According to above equation, the following result was obtained.

Operating Mode	Peak Output Power		Antenna Gain	Calculated RF Exposure Separation Distance (cm)
	(dBm)	(mW)	dBi	
802.11a	20.70	117.49	2.0	4.32

Following Caution on the manual will be described.

“CAUTION: Exposure to Radio Frequency Radiation.

Antenna shall be mounted in such a manner to minimize the potential for human contact during normal operation. The antenna should not be contacted during operation to avoid the possibility of exceeding the FCC radio frequency exposure limit.”

12. UNDESIRABLE EMISSIONS


12.1 Operating environment

Temperature : 19°C

Relative humidity : 35 %

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. For measurements above 1GHz, the resolution and video bandwidth is set to 1 MHz for peak measurement and video bandwidth is set to 10 Hz for average measurement.

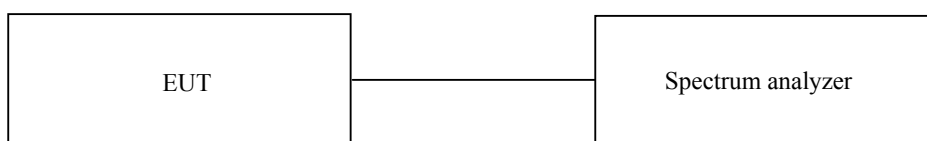

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3meters, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.


The frequency spectrum from 30MHz to 25GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

12.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Due Cal.
■ -	8564E	Hewlett-Packard	Spectrum Analyzer	3650A00756	July 10, 2005
■ -	8449B	Hewlett-Packard	Preamplifier	3008A00833	June 10, 2005
□ -	83051A	Agilent	Preamplifier	3950M00201	June 10, 2005
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	June 6, 2005
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.


12.5. Test data for conducted emission

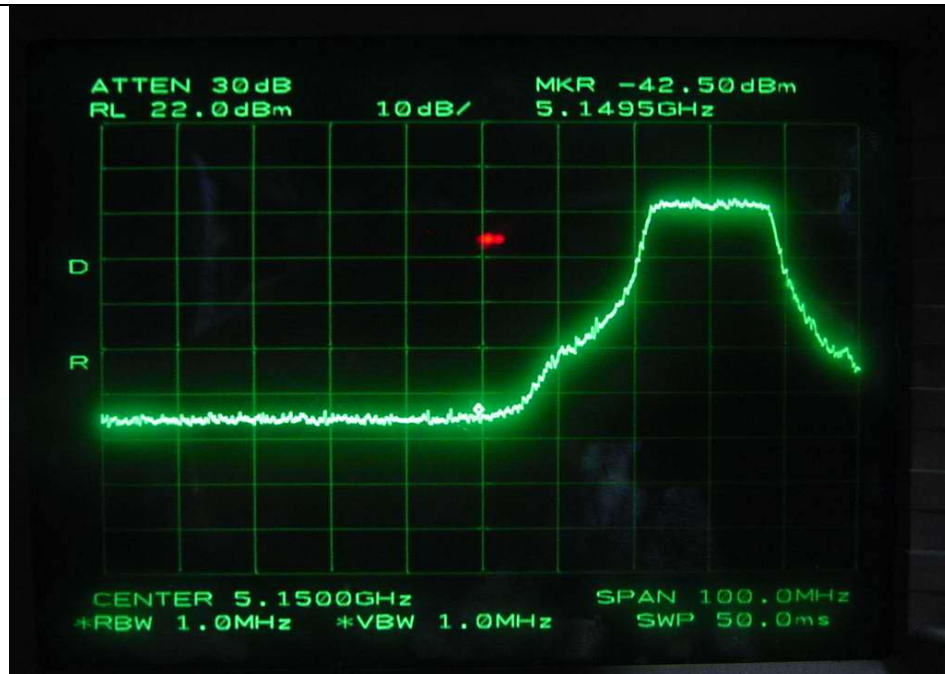


Low Channel

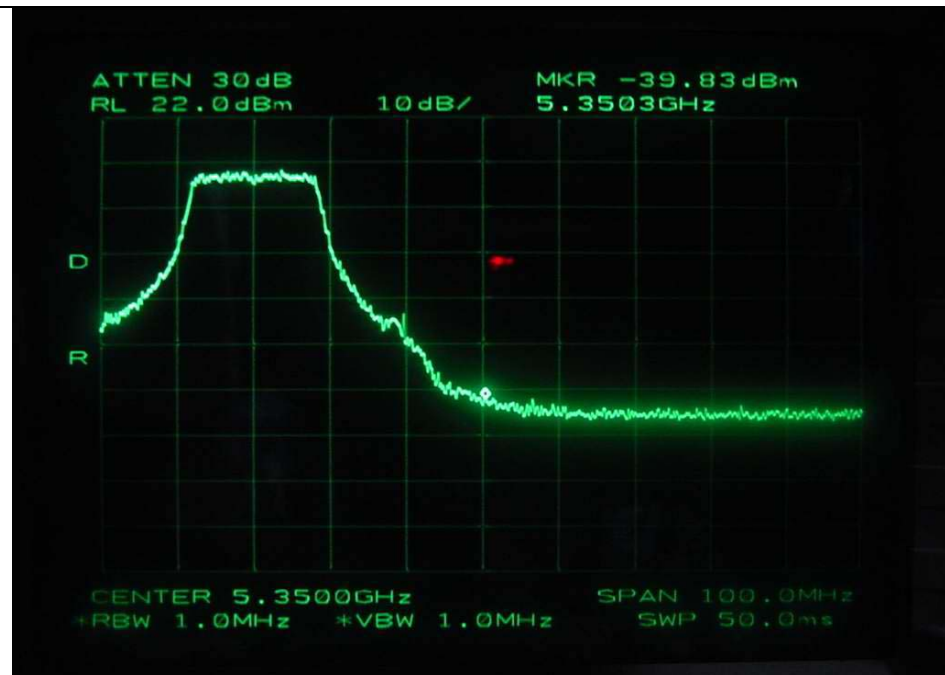


High Channel

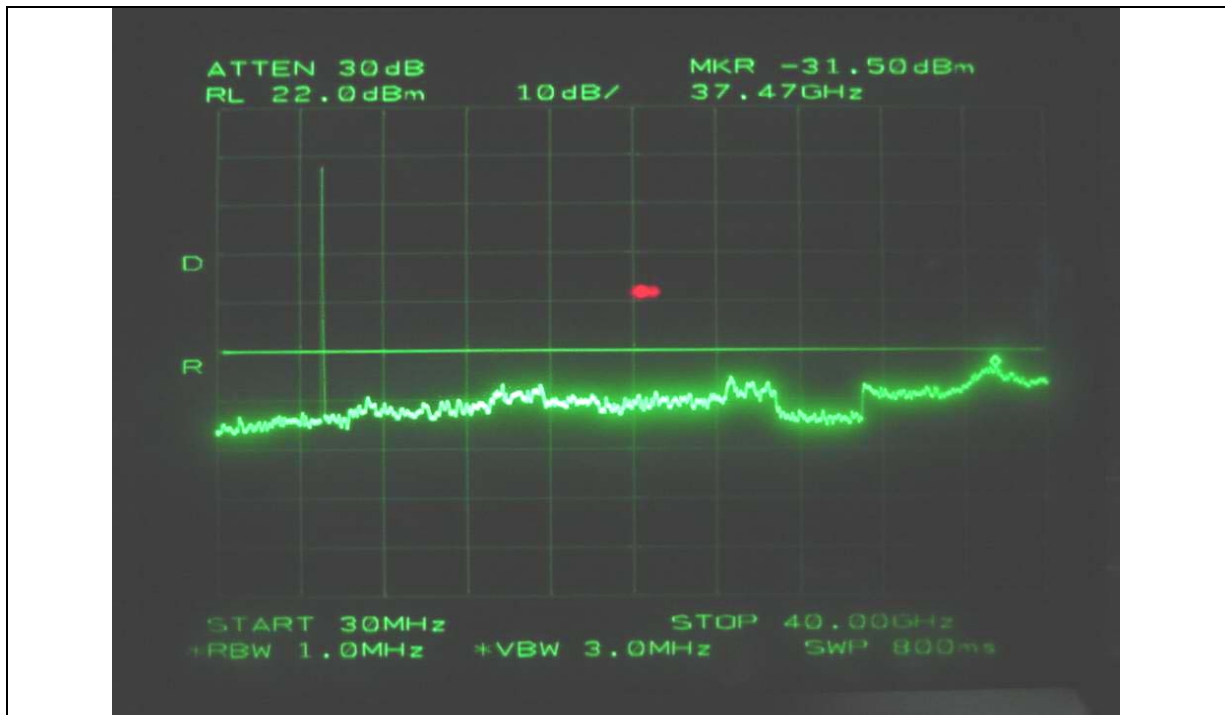

Low Channel

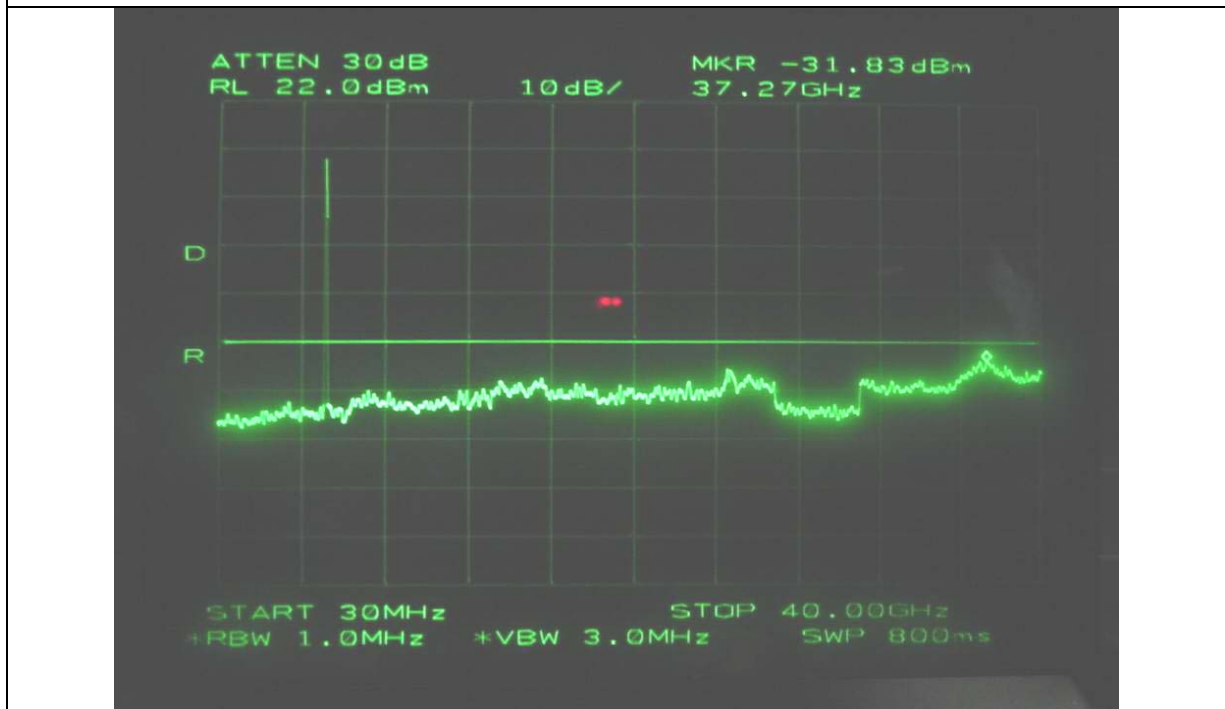

Middle Channel

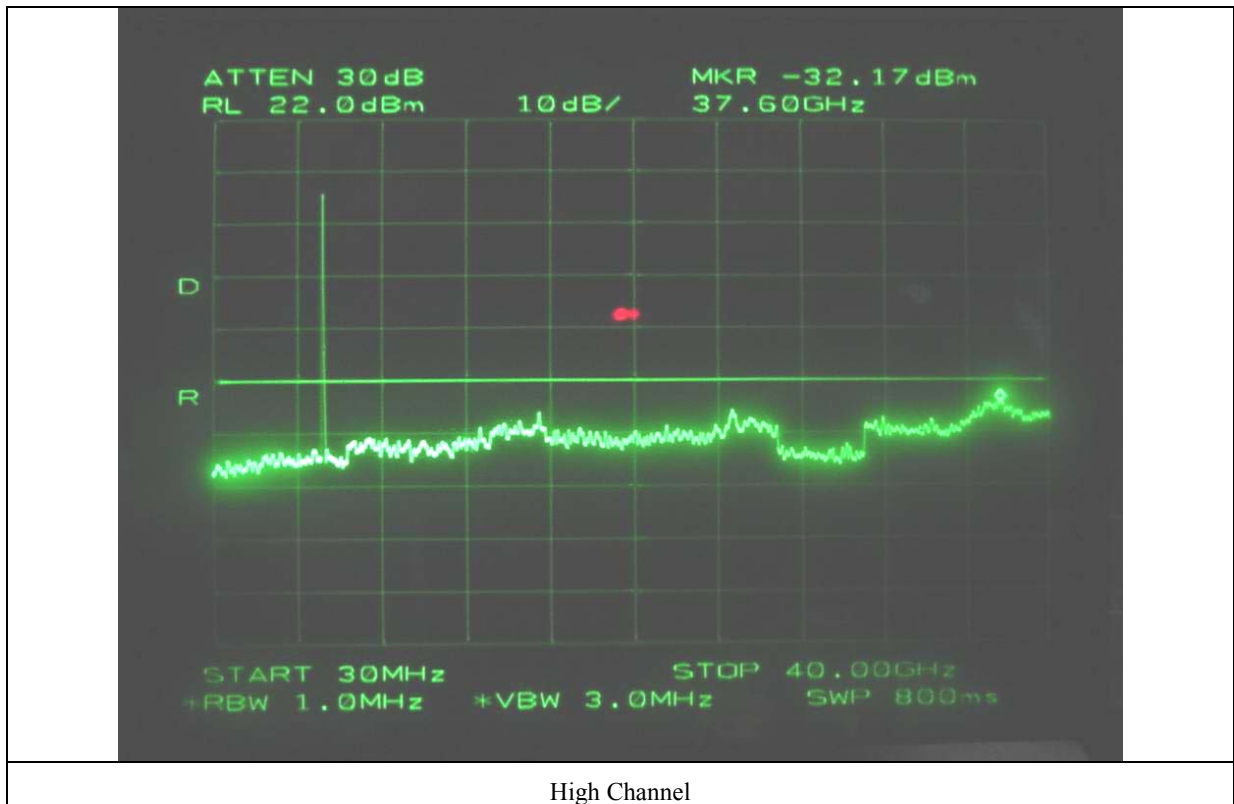

**12.6. Test data for radiated emission****12.6.1 Radiated Emission which fall in the Restricted Band**

- Test Date : December 18, 2004
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 40GHz
- Measurement distance : 3m
- Operating Condition : Low / High Channel
- Result : PASSED BY -13.17 dB at High Channel

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
5149.80	15.77	Peak	H	31.7	2.59			50.06	74.0	-23.94
	17.93	Peak	V					52.22	74.0	-21.78
	5.10	Average	H					39.39	54.0	-14.61
	5.77	Average	V					40.06	54.0	-13.94
Test Data for High Channel										
5350.50	16.67	Peak	H	31.9	2.76			51.33	74.0	-22.67
	18.17	Peak	V					52.83	74.0	-21.17
	5.00	Average	H					39.66	54.0	-14.34
	6.17	Average	V					40.83	54.0	-13.17

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


 Tested by: Y. M. Choi / Senior Engineer6.

12.6.2 Spurious & Harmonic Radiated Emission

- Test Date : December 18, 2004
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3m
- Result : PASSED BY -5.22 dB at Low Channel

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBuV/m)	EIRP (dBm)	Limits	Margin (dB)
Test Data for Low Channel Fundamental Freq.: 5.18 GHz										
5.180	46.60	Peak	H	31.7	2.59		80.89		-	
	65.27	Peak	V				99.56		-	
10.36	41.9	Peak	V	38.45	4.62	27.3	57.67	-37.53	-7	-30.53
	33.4	Average	V				49.17	-46.03	-27	-19.03
15.54*	42.8	Peak	V	38.65	6.46	28.5	59.41		74.00	-14.59
	32.17	Average	V				48.78		54.00	-5.22
Test Data for Middle Channel Fundamental Freq.:5.26 GHz										
5.260	58.27	Peak	H	31.8	2.67		92.74		-	
	73.10	Peak	V				107.57		-	
10.52	41.85	Peak	V	38.8	4.67	27.3	58.02	-37.18	-7	-30.18
	32.50	Average	V				48.67	-46.53	-27	-19.53
15.78*	42.9	Peak	V	37.88	6.67	28.5	58.95		74.00	-15.05
	32.6	Average	V				48.65		54.00	-5.35

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

EIRP Conversion Factor: 95.2 at 3m distance



-Continued

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBuV/m)	EIRP (dBm)	Limits	Margin (dB)
Test Data for High Channel Fundamental Freq.: 5.32 GHz										
5.320	57.43	Peak	H	31.9	2.76		92.09		-	
	72.10	Peak	V				106.76		-	
10.64*	42.00	Peak	V	38.98	4.67	27.3	58.35		74.00	-15.65
	31.80	Average	V				48.15		54.00	-5.85
15.96*	42.85	Peak	V	37.1	6.5	28.5	57.95		74.00	-16.05
	32.19	Average	V				47.29		54.00	-6.71

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band


Tested by: Y. M. Choi / Senior Engineer6.

**12.7. Test data for co-location****12.7.1 Radiated Emission which fall in the Restricted Band**

- Test Date : December 18, 2004
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 40GHz
- Measurement distance : 3m
- Operating Condition : 802.11a and 802.11g was simultaneously operated at their low and high channel
- Result : PASSED BY -12.63 dB at High Channel

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Test Data for Low Channel										
5149.70	16.10	Peak	H	31.7	2.59			50.39	74.0	-23.61
	18.50	Peak	V					52.79	74.0	-21.21
	5.83	Average	H					40.12	54.0	-13.88
	5.97	Average	V					40.26	54.0	-13.74
Test Data for High Channel										
5350.50	16.85	Peak	H	31.9	2.76			51.51	74.0	-22.49
	18.50	Peak	V					53.16	74.0	-20.84
	5.36	Average	H					40.02	54.0	-13.98
	6.71	Average	V					41.37	54.0	-12.63

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


 Tested by: Y. M. Choi / Senior Engineer6.


**12.7.2 Spurious & Harmonic Radiated Emission**

- Test Date : December 18, 2004
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10Hz for Average Mode
- Frequency range : 1 GHz ~ 40 GHz
- Measurement distance : 3m
- Operating Condition : 802.11a and 802.11g was simultaneously operated at their max power
- Result : PASSED BY -5.45 dB

Frequency (GHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Dist. Factor	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
Worst case harmonic 802.11a: 5260MHz, Max Power + 802.11g ON @2437 MHz, Max Power										
10.52	42.00	Peak	H	38.80	4.67	27.30		58.17	74.00	-15.83
	31.95	Peak	V					48.12	54.00	-5.88
15.78	43.20	Peak	V	37.88	6.67	28.50		59.25	74.00	-14.75
	32.50	Average	V					48.55	54.00	-5.45

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical,


 Tested by: Y. M. Choi / Senior Engineer6.



13. RADIATED EMISSION TEST, GENERAL REQUIREMENT

13.1 Operating environment

Temperature : 14°C

Relative humidity : 39 %

13.2 Test set-up

The radiated emissions measurements were on the 3 meters, open-field test site. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30MHz to 1000MHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

Test set-up photos are included in appendix VI.

13.3 Measurement uncertainty

Radiated emission electric field intensity, 30 MHz ~ 200 MHz : ±4.3 dB

Radiated emission electric field intensity, 200 MHz ~ 1000 MHz : ±4.1 dB

13.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal.
■ -	ESVS10	Rohde & Schwarz	EMI Test Receiver	827864/005	Nov. 01, 2005
■ -	85650A	Hewlett Packard	Quasi-Peak Adapter	3107A01542	July 10, 2005
■ -	8568B	Hewlett-Packard	Spectrum Analyzer	3109A05456	July 10, 2005
■ -	85685A	Hewlett-Packard	RF Preselector	3107A01264	July 10, 2005
□ -	8449B	Hewlett-Packard	RF Amplifier	3008A00833	June 10, 2005
□ -	8447F	Hewlett-Packard	RF Amplifier	3113A04554	June 10, 2005
■ -	MA220	HD	Turn Table	N/A	N/A
■ -	HD240	HD	Antenna Mast	N/A	N/A
■ -	3104C	EMCO	Biconical Antenna	9109-4441	July 11, 2005
■ -	3146	EMCO	Log Periodic Antenna	9109-3214	July 11, 2005
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

**13.5 Test data**

- Test Date : December 18, 2004
- Resolution bandwidth : 120 kHz
- Frequency range : 30MHz ~ 1000MHz
- Measurement distance : 3m
- Operating Condition : 802.11 b + g + a Mode
- Test result : Passed by -5.50 dB at 250.13 MHz

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
175.10	17.10	V	14.86	2.20	34.16	43.52	-9.36
200.00	16.50	H	16.07	2.20	34.77	43.52	-8.75
250.13	20.75	H	17.17	2.60	40.52	46.02	-5.50
275.00	18.30	H	17.55	2.70	38.55	46.02	-7.47
300.00	17.10	H	20.04	2.90	40.04	46.02	-5.98

Tabulated test data for Radiated Electromagnetic Field

Remark: "H": Horizontal, "V": Vertical

Each channels were tested, but the worst emissions were recorded in this test report.


Tested by: Y. M. Choi / Senior Engineer6.



14. CONDUCTED EMISSION TEST

14.1 Operating environment

Temperature : 20°C

Relative humidity : 34 %

14.2 Test set-up

The conducted emission measurements of power line were performed in a shielded room. The EUT was placed on a wooden table, 0.8 meters height above the floor. Power was fed to the EUT through a 50 ohm/ 50 microhenry Line Impedance Stabilization Network (LISN). The ground plane was electrically bonded to the shield room ground system and all power lines entering the shield room were filtered.

14.3 Measurement uncertainty

Conducted emission, quasi-peak detect : ± 3.0 dBConducted emission, average detect : ± 3.0 dB

14.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Due Cal.
■ -	ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Apr. 29, 2005
■ -	3825/2	EMCO	AMN	9109-1869	Oct. 20, 2005
■ -	N/A	HanKook Shield room	Shield Room	N/A	N/A
■ -	YSE 500B	YoungShin Eng.	Frequency Converter	950413001	N/A
■ -	ETCR-10	DaeHa	Automatic Voltage Com.	N/A	N/A

All test equipment used is calibrated on a regular basis.

**14.5 Test data**

- Test Date : October 21, 2004
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15MHz ~ 30MHz
- Operating Condition : Max Power Transmitting Mode
- Test Result : PASSED BY -3.33 dB at 2.220 MHz with Peak Detector


Frequency (MHz)	Line	Quasi-Peak (dBuV)			Margin (dB)	Average (dBuV)		Margin (dB)
		Emission level	Detect Mode	Limits		Emission level	Limits	
0.15	N	54.20	P	66.00	-11.80			
0.515	N	45.87	P	56.00	-10.13			
0.74	N	46.13	P	56.00	-9.87	30.32	46.00	-15.68
0.87	N	45.86	P	56.00	-10.14			
0.965	H	45.16	P	56.00	-10.84			
2.220	N	52.67	P	56.00	-3.33	33.18	46.00	-12.82
2.255	H	51.67	P	56.00	-4.33	29.41	46.00	-16.59
2.740	N	45.10	P	56.00	-10.90			


Line Conducted Emissions Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect.


Each channels were tested, but the worst emissions were recorded in this test report.

See next page for an overview sweep performed with peak and average detector.

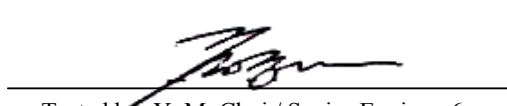
Tested by: Y. M. Choi / Senior Engineer6.

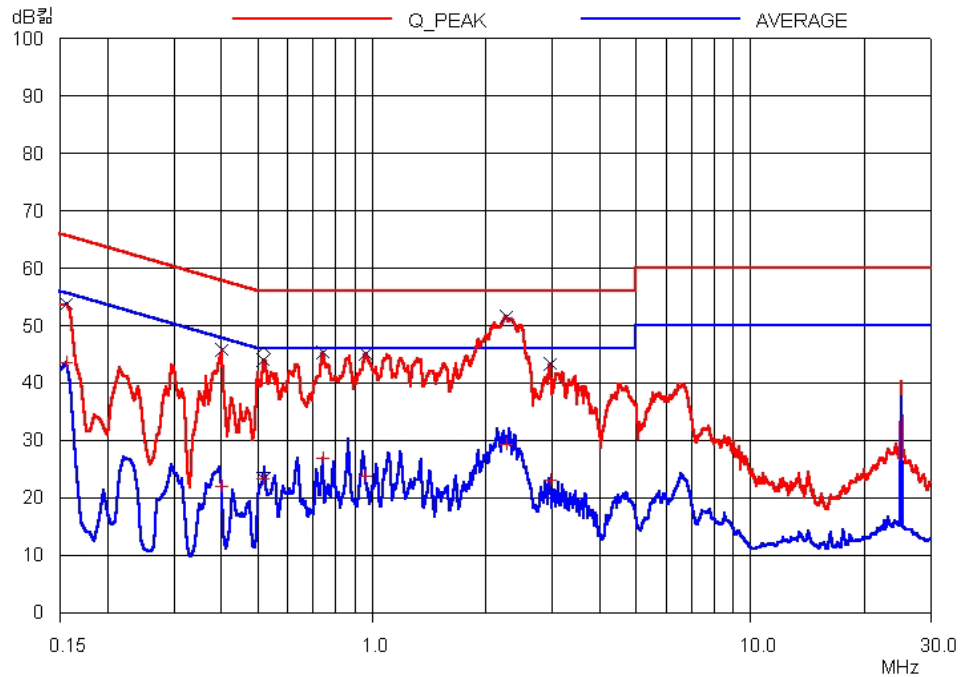

HOT LINE

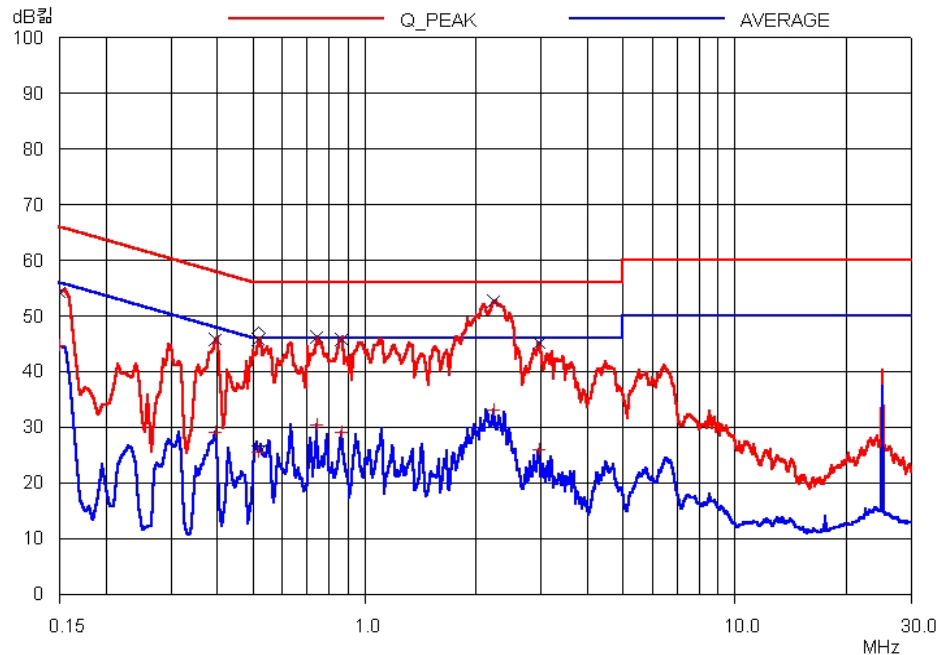

NEUTRAL LINE