



MEASUREMENT REPORT

FCC PART 15.225 NFC 13.56MHz

FCC ID: R5D10301001
IC: 22682-10301001
APPLICANT: 4MOD Technology

Application Type: Certification
Product: Luminion Hemis
Model No.: MAT010301001
Brand Name: Ubiant
FCC Classification: Low Power Communication Device Transmitter (DXX)
FCC Rule Part(s): Part 15.225
IC Rule(s): RSS-210 Issue 9, RSS-GEN Issue 4
Test Procedure(s): ANSI C63.10-2013
Test Date: May 15 ~July 07, 2017

Reviewed By : *Kevin Guo*
(Kevin Guo)
Approved By : *Marlin Chen*
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1705RSU02702	Rev. 01	Initial report	07-07-2017	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Test Mode	7
2.3. Device Capabilities	7
2.4. Test Configuration	7
2.5. EMI Suppression Device(s)/Modifications.....	8
2.6. Labeling Requirements.....	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions.....	10
4. ANTENNA REQUIREMENTS.....	11
5. TEST EQUIPMENT CALIBRATION DATE	12
6. MEASUREMENT UNCERTAINTY.....	14
7. TEST RESULT	15
7.1. Summary	15
7.2. In-band Emission.....	17
7.2.1. Test Limit	17
7.2.2. Test Procedure Used	17
7.2.3. Test Setup.....	18
7.2.4. Test Result.....	19
7.3. Out-band Emission	20
7.3.1. Test Limit	20
7.3.2. Test Procedure Used	20
7.3.3. Test Setup.....	21
7.3.4. Test Result.....	22
7.4. 20dB Bandwidth	23
7.4.1. Test Limit	23
7.4.2. Test Procedure Used	23
7.4.3. Test Setup.....	23

7.4.4.	Test Result.....	24
7.5.	Frequency Tolerance.....	25
7.5.1.	Test Limit	25
7.5.2.	Test Procedure Used	25
7.5.3.	Test Setup.....	25
7.5.4.	Test Result.....	26
7.6.	AC Conducted Emissions Measurement.....	27
7.6.1.	Test Limit	27
7.6.2.	Test Setup.....	27
7.6.3.	Test Result.....	28
8.	CONCLUSION.....	30

§2.1033 General Information

Applicant:	4MOD Technology
Applicant Address:	203, Avenue Carnot, 33150 Cenon, FRANCE
Manufacturer:	eSOL SA
Manufacturer Address:	18, Rue de l'artisanat - Immeuble Makni - ZI Charguia 2 - 2035 Tunis - TUNISIA
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
FCC Registration No.:	809388
IC Registration No.:	11384A
FCC Rule Part(s):	Part 15.225
IC Rule:	RSS-210 Issue 9, RSS-GEN Issue 4
Model No.:	MAT010301001
FCC ID:	R5D10301001
IC:	22682-10301001
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Part 15 Low Power Communication Device Transmitter (DXX)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Luminion Hemis
FCC ID	R5D10301001
IC	22682-10301001
Model No.	MAT010301001
Brand Name	Ubiant
Thread	802.15.4
NFC	13.56MHz

2.2. Test Mode

Test Mode
Mode 1: Transmit by NFC

2.3. Device Capabilities

This device contains the following capabilities:

Thread (802.15.4), NFC (13.56MHz)

2.4. Test Configuration

The **Luminion Hemis FCC ID: R5D10301001** was set to continuous transmission. This was performance using manufacturer software loaded on the terminal to allow for continuous transmission. This device was tested in accordance with the guidance of ANSI C63.10-2013. ANSI C63.4-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the **Luminion Hemis FCC ID: R5D10301001**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the Luminion Hemis is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Luminion Hemis FCC ID: R5D10301001** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	102030	1 year	2018/05/08
Two-Line V-Network	R&S	ENV216	101683	1 year	2018/06/21
Two-Line V-Network	R&S	ENV216	101684	1 year	2018/06/21
Temperature/Humidity Luminance Hemisity Meter	Yuhua	HTC-2	N/A	1 year	2017/12/22
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	N/A	1 year	2018/05/10

Radiated Disturbance – AC1

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Due Date
MXE EMI Receiver	Agilent	N9038A	MY51210182	1 year	2017/08/03
Broadband Coaxial Preamp	Schwarzbeck	BBV 9718	MY52090106	1 year	2017/12/10
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2017/10/22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	1457	1 year	2017/11/19
Loop Antenna	Schwarzbeck	FMZB1519	N/A	1 year	2018/04/28
RF Cable	HUBER+SUHNER	Cable 01	N/A	1 year	2018/03/29
RF Cable	HUBER+SUHNER	Cable 02	N/A	1 year	2018/03/29
Digital Thermometer & Hygrometer	Minggao	ETH529	N/A	1 year	2017/12/14
Anechoic Chamber	RIKEN	Chamber-AC1	N/A	1 year	2018/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Due Date
EMI Test Receiver	R&S	ESR 3.6	MRTSUE06185	1 year	2018/04/28
MXE EMI Receiver	Agilent	N9038A	MY51210182	1 year	2017/08/03
Loop Antenna	Schwarzbeck	FMZB1519	N/A	1 year	2018/04/28
Programmable Temperature & HuLuminion Hemisity Chamber	BAOYT	BYH-1500L	MRTSUE06051	1 year	2017/12/06
Temperature/HuLuminio n Hemisity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/22

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement -SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement – AC 1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$

7. TEST RESULT

7.1. Summary

Company Name: **4MOD Technology**

FCC ID: **R5D10301001**

IC: **22682-10301001**

Frequency Examined: **13.56MHz**

FCC Part Section(s)	IC Rule	Test Description	Test Limit	Test Condition	Test Result	Reference
15.225 (a), (b), (c)	B.6	In-Band Emission	15,848mV/m @ 30m 13.553 ~ 13.567 MHz	Radiated	Pass	Section 7.2
15.225(d)	B.6	Out-Band Emission	Emissions outside of the specified band(13.110 ~ 14.010 MHz) must meet the radiated limits detailed in 15.209		Pass	Section 7.3
2.1049	-	20dB Bandwidth	N/A		Pass	Section 7.4
-	RSS-GEN 6.6	99% Occupied Bandwidth	N/A		Pass	Section 7.4
15.225(e)	B.6	Frequency Stability Tolerance	±0.01% of operating frequency		Pass	Section 7.5
15.207	RSS-GEN 8.8	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.6

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators

used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. In-band Emission

7.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.225		
Frequency (MHz)	Distance (m)	Level (uV/m)
13.553 ~13.567	30	15,848
13.410 ~13.553 13.567 ~13.710	30	334.5
13.110 ~13.410 13.710 ~14.010	30	106

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

7.2.2. Test Procedure Used

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10: 2013 for compliance to FCC 47CFR 15.247 requirements.


The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2014 on radiated measurement.


The EUT should be operate in transmission mode.

7.2.3. Test Setup

9kHz ~ 30MHz Test Setup:

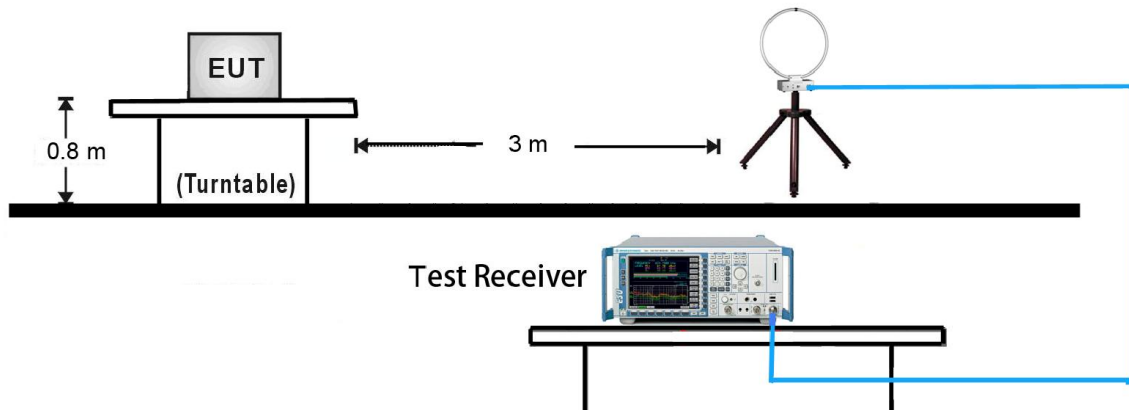

30MHz ~ 1GHz Test Setup:

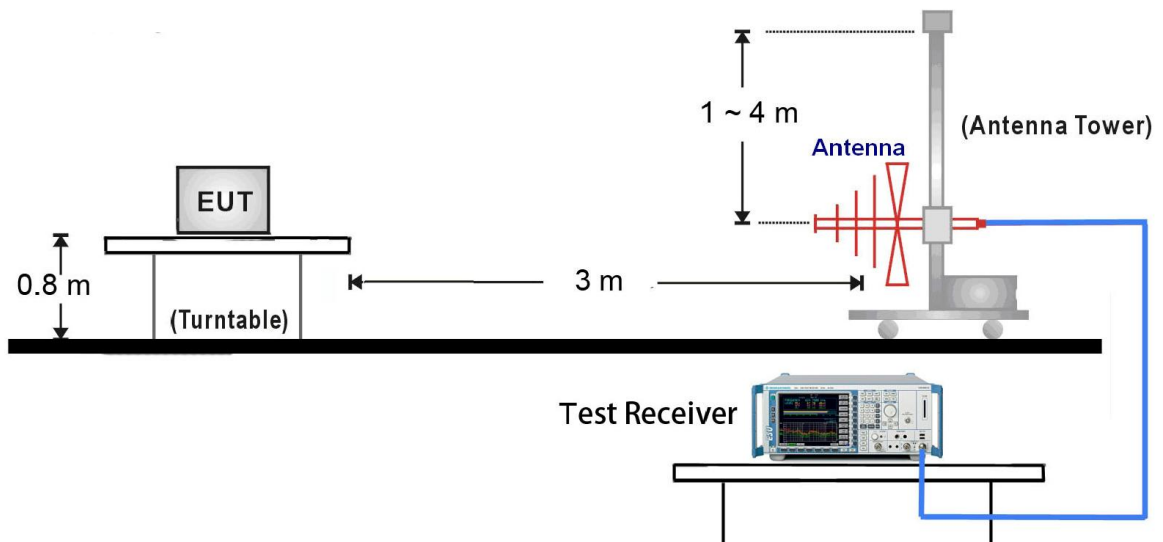

7.2.4. Test Result

Test Engineer	Bruce Wang	Temperature	20°C
Test Time	2017/06/12	Relative Humidity	52%
Test Mode	Mode1	Test Site	AC1

Frequency	Reading Level(dBuV/m)	Factor	Measure Level(dBuV/m)	Limit(3m) [dBuV/m]	Margin [dB]
Face On					
13.35	1.34	19.85	21.19	80.51	-59.32
13.54	0.34	19.86	20.20	90.49	-70.29
13.56	28.30	19.87	48.17	124.00	-75.83
13.64	0.48	19.86	20.34	90.49	-70.15
13.85	0.23	19.87	20.10	80.51	-60.41
Face Off					
13.34	0.25	19.85	20.10	80.51	-60.41
13.43	0.13	19.86	19.99	90.49	-70.50
13.56	4.34	19.87	24.21	124.00	-99.79
13.68	0.23	19.86	20.09	90.49	-70.40
13.73	0.23	19.87	20.10	80.51	-60.41

Note1: All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.

Note2: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).

Extrapolation Factor = $40 \times \text{LOG}(30/3) = 40 \text{ dB}$

Note3: All measurements were recorded using a EMI test receiver employing a quasi-peak detector.

7.3. Out-band Emission

7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (uV/m)
0.009 - 0.490	300	2400/F (kHz)
0.490 - 1.705	30	2400/F (kHz)
1.705 - 30	30	30
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
Above 960	3	500

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.


Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

7.3.2. Test Procedure Used


The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010 MHz. All measurements were recorded with a spectrum analyzer employing an average detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits shown as stated per Section 15.209. A loop antenna was used for searching for emissions below 30MHz.

7.3.3. Test Setup

9kHz ~ 30MHz Test Setup:

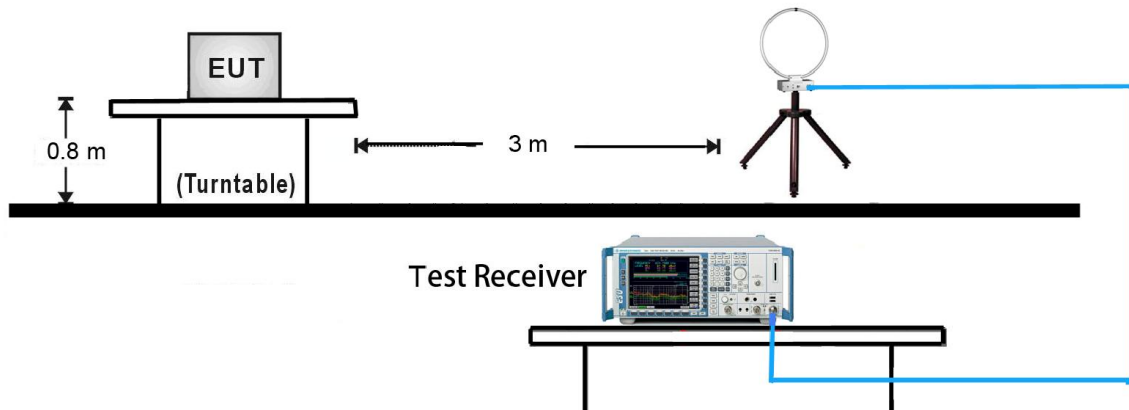

30MHz ~ 1GHz Test Setup:

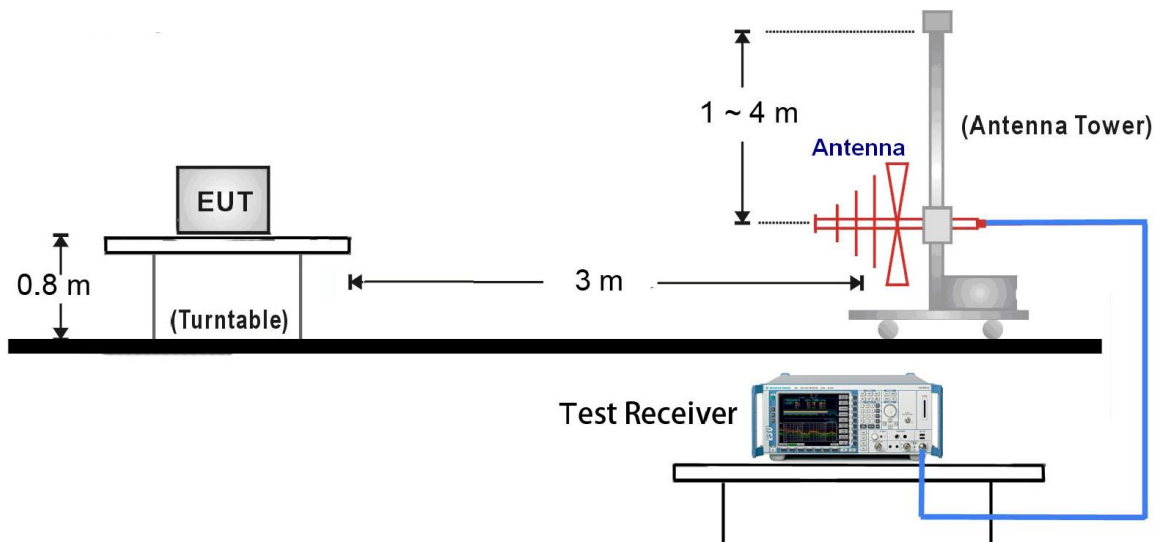

7.3.4. Test Result

Test Engineer	Bruce Wang	Temperature	20°C
Test Time	2017/06/12	Relative Humidity	52%
Test Mode	Mode1	Test Site	AC1

Out-Band Emission Below 30MHz						
Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Face On						
27.12	-3.15	19.51	16.36	69.54	-53.18	QP
Face Off						
27.12	-1.30	19.51	20.81	69.54	-48.73	QP

Out-Band Emission Above 30MHz							
Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	216.73	33.17	11.71	44.88	46.00	-1.12	QP
H	325.37	30.46	15.00	45.46	46.00	-0.54	QP
V	40.67	25.13	14.48	39.61	40.00	-0.39	QP
V	162.41	27.64	14.98	42.62	43.50	-0.88	QP
V	406.85	28.50	16.68	45.18	46.00	-0.82	QP

Note1: All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.

Note2: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in §15.31(f)(2).

Extrapolation Factor = $40 \times \log(30/3) = 40 \text{ dB}$

Note3: All measurements were recorded using a EMI test receiver employing a quasi-peak detector for emissions below 960MHz.

7.4. 20dB Bandwidth & 99% Occupied Bandwidth


7.4.1. Test Limit

N/A

7.4.2. Test Procedure Used

The 20dB bandwidth & 99% Occupied Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


7.4.3. Test Setup

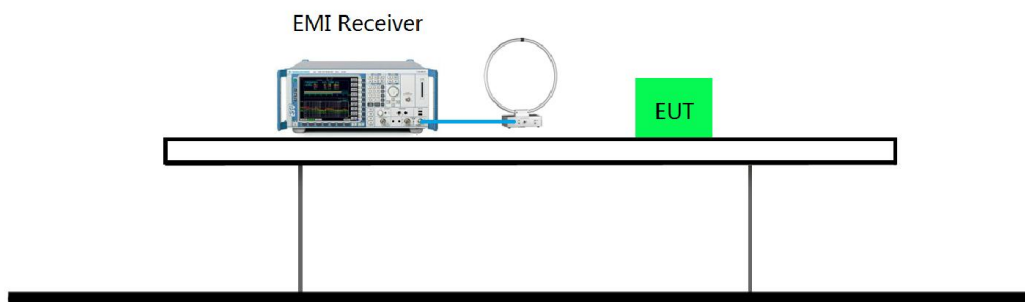

7.4.4. Test Result

Test Engineer	Bruce Wang	Temperature	20°C
Test Time	2017/06/15	Relative Humidity	52%
Test Mode	Mode1	Test Site	TR3

Frequency (MHz)	20dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
13.56	2.27	2.40

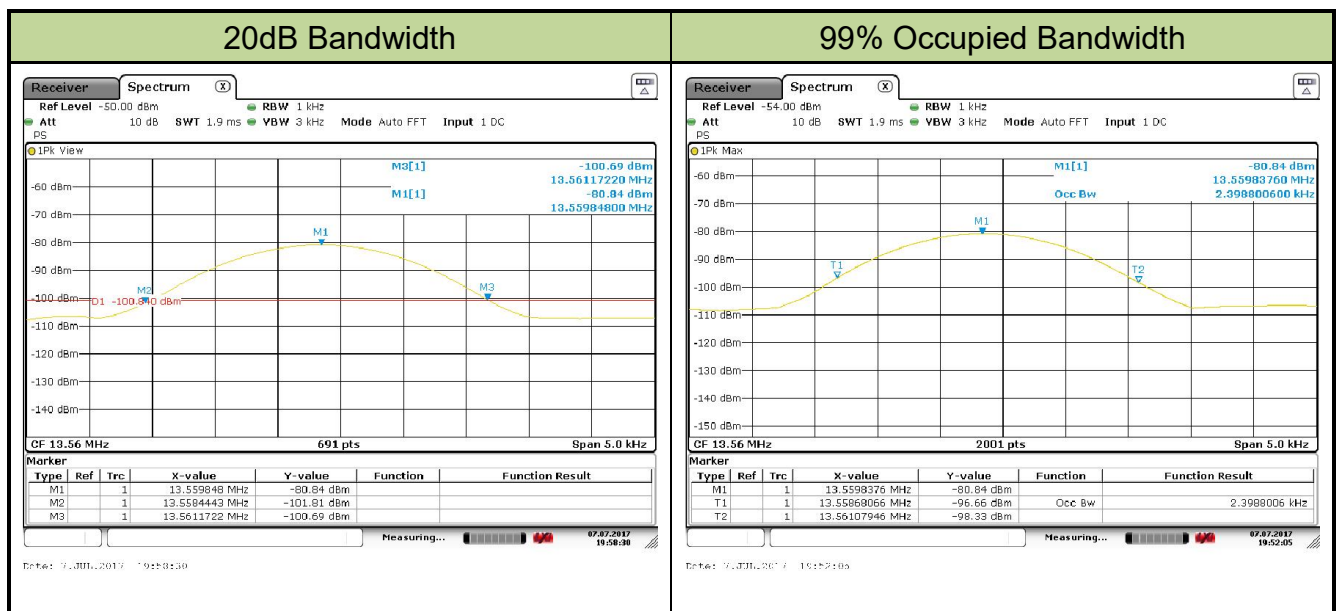

7.5. Frequency Tolerance


7.5.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

7.5.2. Test Procedure Used

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

7.5.3. Test Setup

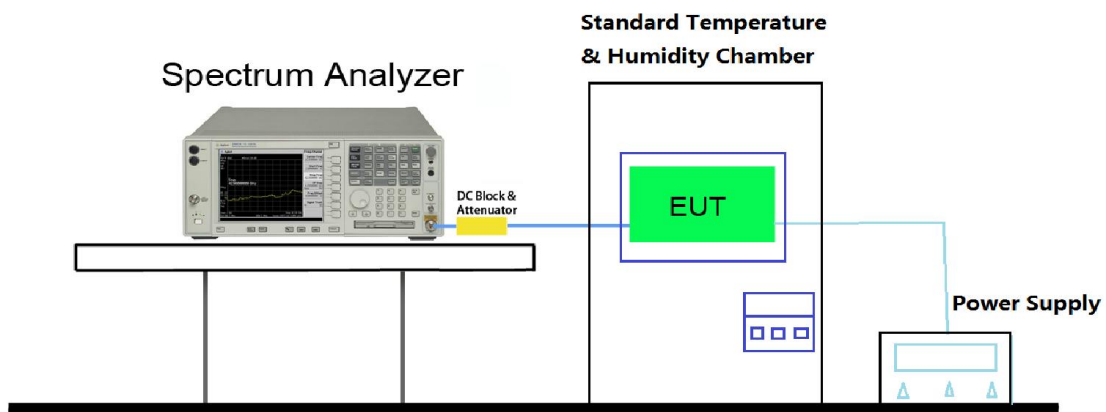

7.5.4. Test Result

Test Engineer	Bruce Wang	Temperature	-20 ~ 50°C
Test Time	2017/06/12	Relative Humidity	48 ~ 55%
Test Mode	Mode1	Test Site	TR3

Operating Frequency: 13.56MHz					
Reference Voltage: 5.0Vdc					
Deviation Limit: +/- 0.01% = 1356Hz					
Voltage (%)	Power Supply(DC)	TEMP (°C)	FREQ. (Hz)	FREQ. Dev. (Hz)	Deviation (%)
100%	5.00	+20(Ref)	13,560,435	435	0.003208
100%		-20	13,560,269	269	0.001984
100%		-10	13,560,370	370	0.002729
100%		0	13,559,847	-153	-0.001128
100%		+10	13,560,243	243	0.001792
100%		+20	13,559,978	-22	-0.000162
100%		+30	13,560,068	68	0.000501
100%		+40	13,560,157	157	0.001158
100%		+50	13,559,831	-169	-0.001246
85%	4.25	+20	13,559,986	-14	-0.000103
115%	5.75	+20	13,560,257	257	0.001895

7.6. AC Conducted Emissions Measurement


7.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.6.2. Test Setup

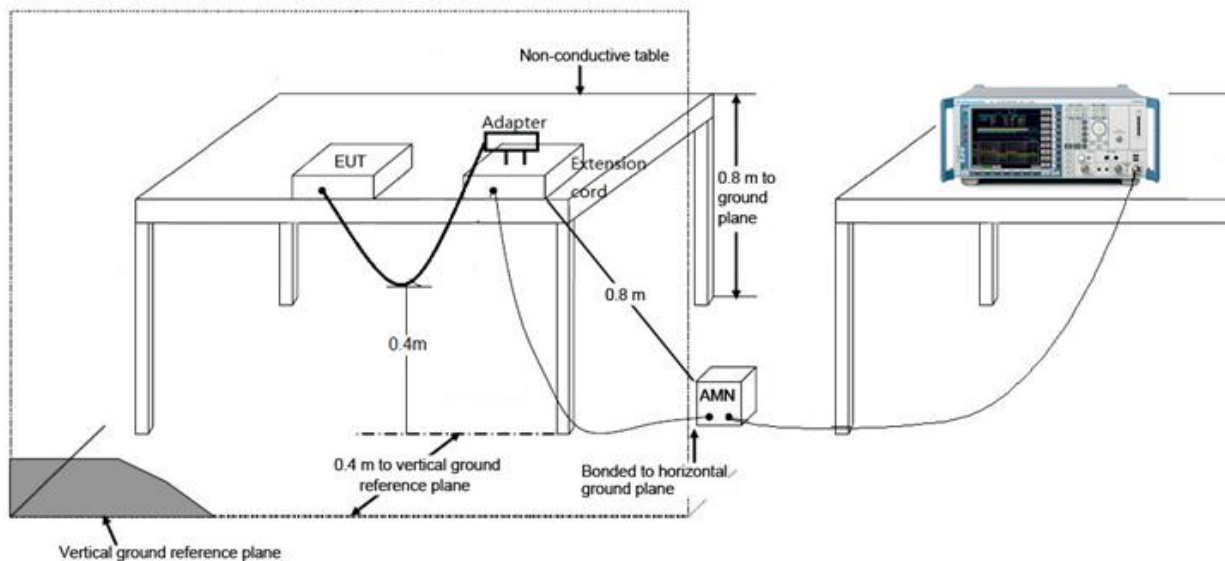

7.6.3. Test Result

Site: SR2	Time: 2017/06/13 - 20:22
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Luminion Hemis	Power: AC 120V/60Hz
Note: NFC On	

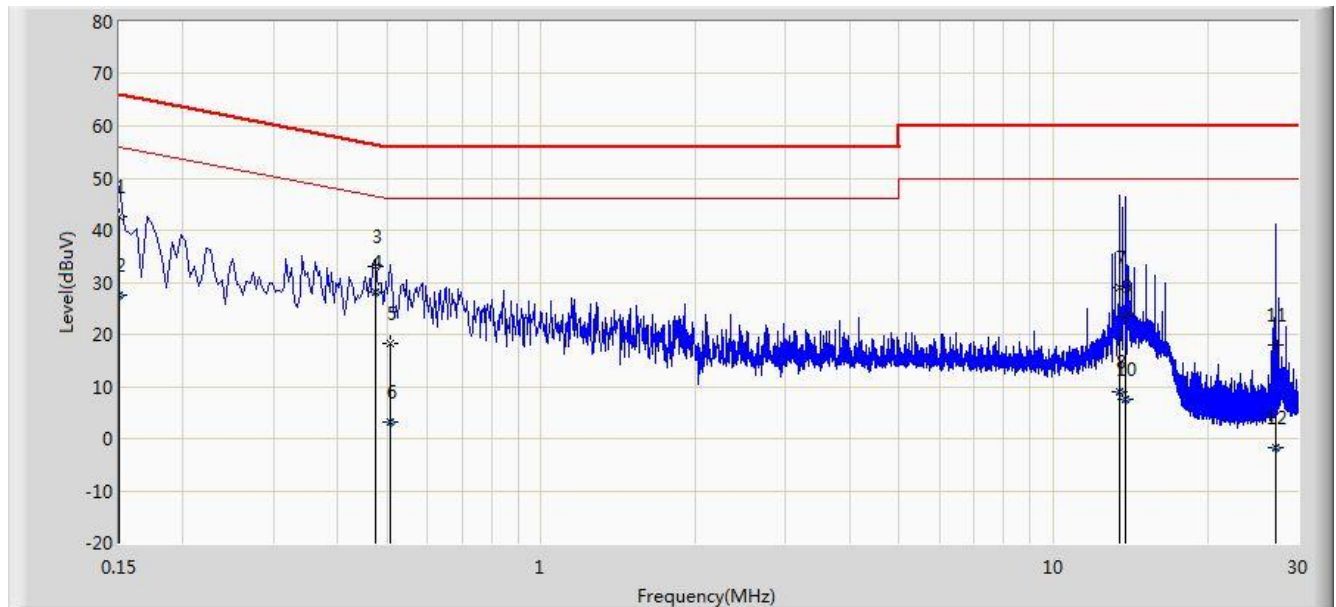


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	42.672	31.504	-23.328	66.000	11.168	QP
2			0.150	27.610	16.442	-28.390	56.000	11.168	AV
3			0.474	33.068	22.923	-23.375	56.444	10.145	QP
4		*	0.474	28.085	17.939	-18.359	46.444	10.145	AV
5			0.506	18.386	8.229	-37.614	56.000	10.157	QP
6			0.506	3.073	-7.084	-42.927	46.000	10.157	AV
7			13.426	29.078	19.012	-30.922	60.000	10.067	QP
8			13.426	8.922	-1.145	-41.078	50.000	10.067	AV
9			13.814	23.578	13.535	-36.422	60.000	10.043	QP
10			13.814	7.598	-2.445	-42.402	50.000	10.043	AV
11			27.182	17.897	7.652	-42.103	60.000	10.245	QP
12			27.182	-1.715	-11.960	-51.715	50.000	10.245	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2017/06/13 - 20:27
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Luminion Hemis	Power: AC 120V/60Hz
Note: NFC On	

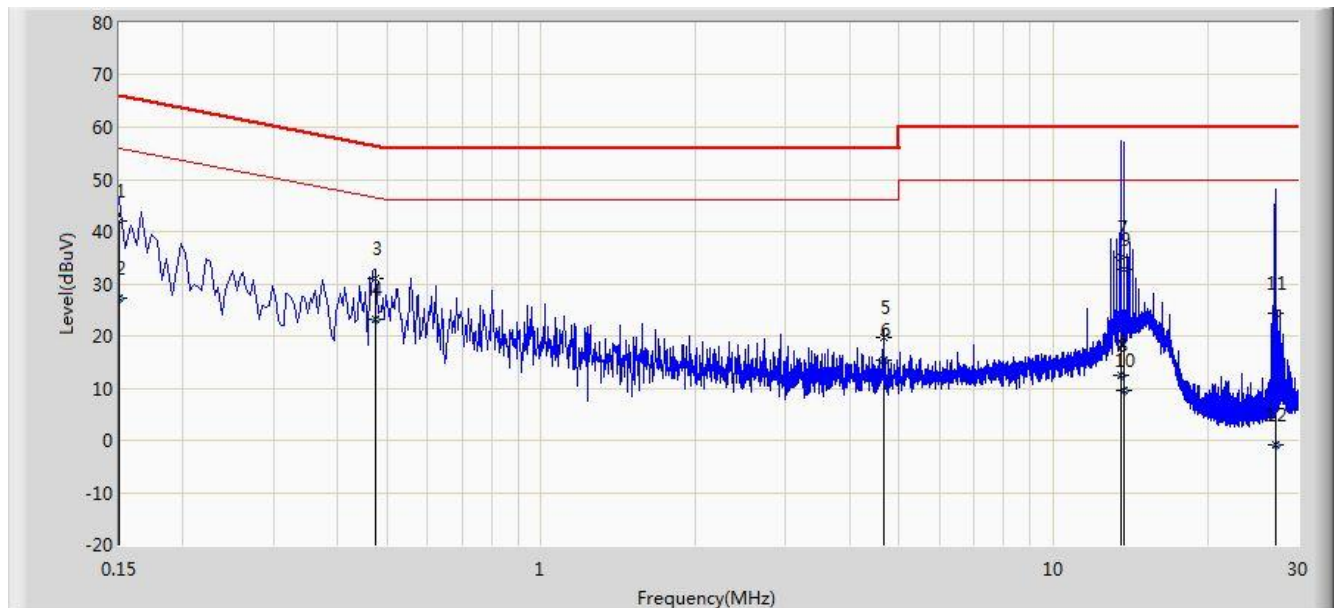

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	41.983	30.841	-24.017	66.000	11.142	QP
2			0.150	27.269	16.127	-28.731	56.000	11.142	AV
3			0.474	30.874	20.707	-25.570	56.444	10.167	QP
4		*	0.474	23.176	13.008	-23.268	46.444	10.167	AV
5			4.654	19.572	9.561	-36.428	56.000	10.011	QP
6			4.654	15.298	5.288	-30.702	46.000	10.011	AV
7			13.510	35.118	25.023	-24.882	60.000	10.095	QP
8			13.510	12.471	2.376	-37.529	50.000	10.095	AV
9			13.706	32.752	22.652	-27.248	60.000	10.099	QP
10			13.706	9.512	-0.588	-40.488	50.000	10.099	AV
11			27.074	24.490	14.125	-35.510	60.000	10.365	QP
12			27.074	-1.012	-11.378	-51.012	50.000	10.365	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Luminion Hemis FCC ID: R5D10301001 & IC: 22682-10301001** is in compliance with Part 15C of the FCC Rules and RSS-210 Issue 9 of IC Rules.

The End