



Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

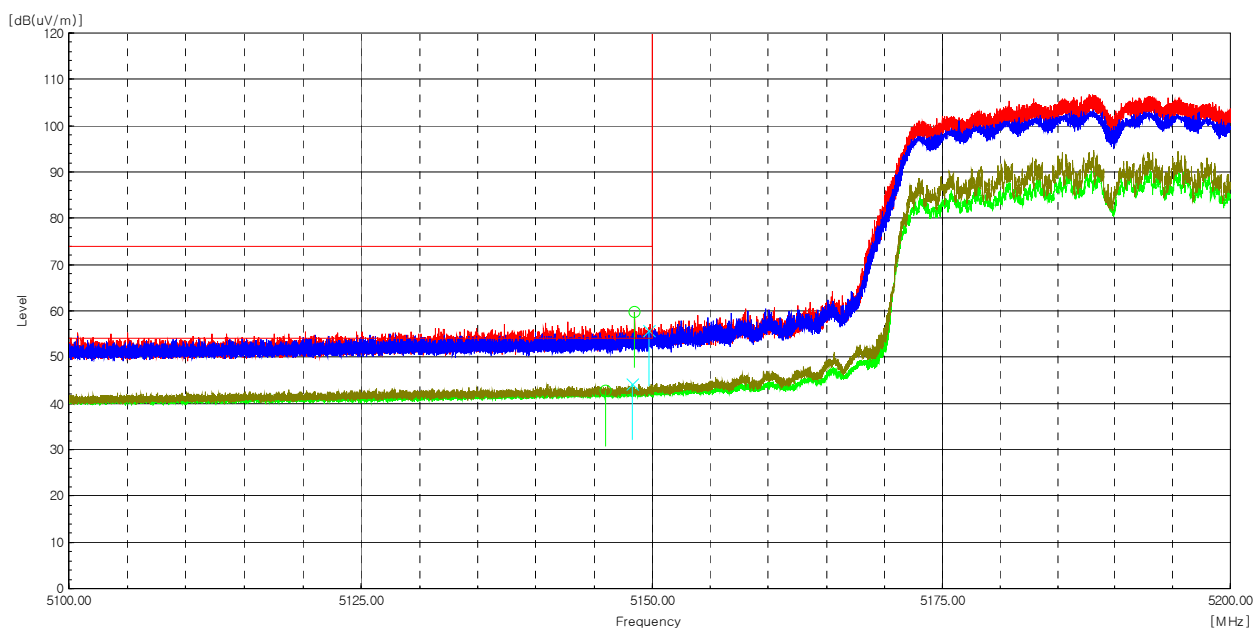

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 148.51	H	57.0	2.6	-----	59.6	-----	74.0	-----	14.4	-----	Peak
5 146.01	H	40.2	2.6	0.3	-----	43.1	-----	54.0	-----	10.9	Average
5 149.67	V	53.1	2.6	-----	55.7	-----	74.0	-----	18.3	-----	Peak
5 148.31	V	41.6	2.6	0.3	-----	44.5	-----	54.0	-----	9.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

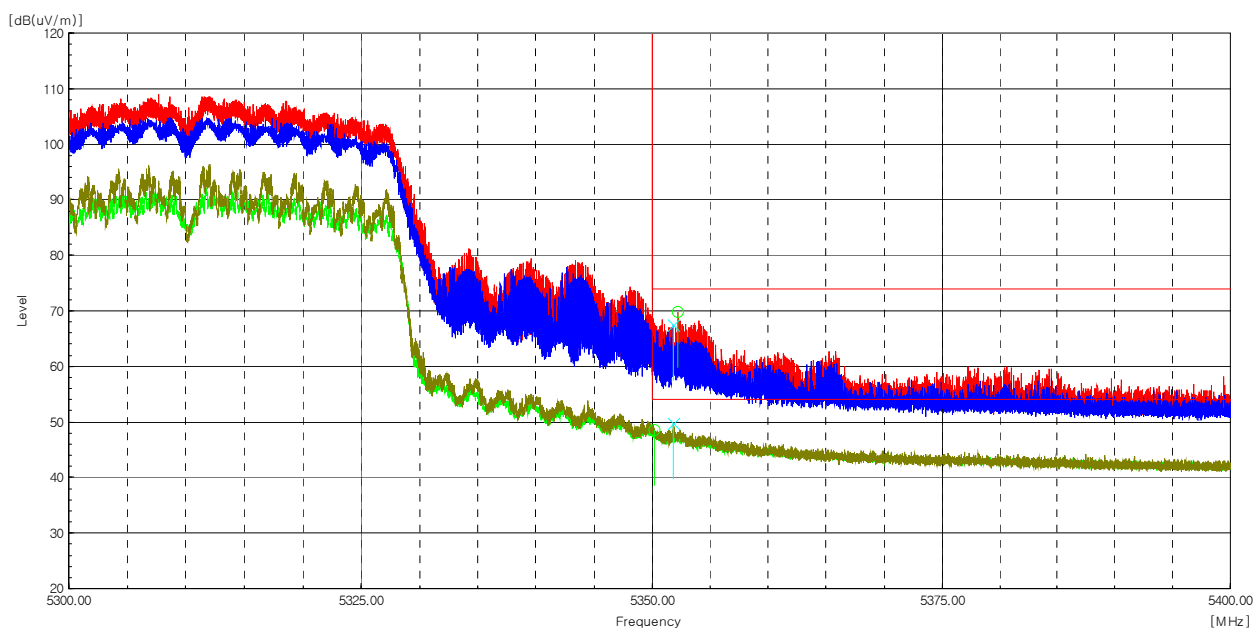

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 352.22	H	66.7	3.2	-----	69.9	-----	74.0	-----	4.1	-----	Peak
5 350.19	H	45.3	3.2	0.3	-----	48.8	-----	54.0	-----	5.2	Average
5 351.84	V	64.3	3.2	-----	67.5	-----	74.0	-----	6.5	-----	Peak
5 351.82	V	46.4	3.2	0.3	-----	49.9	-----	54.0	-----	4.1	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

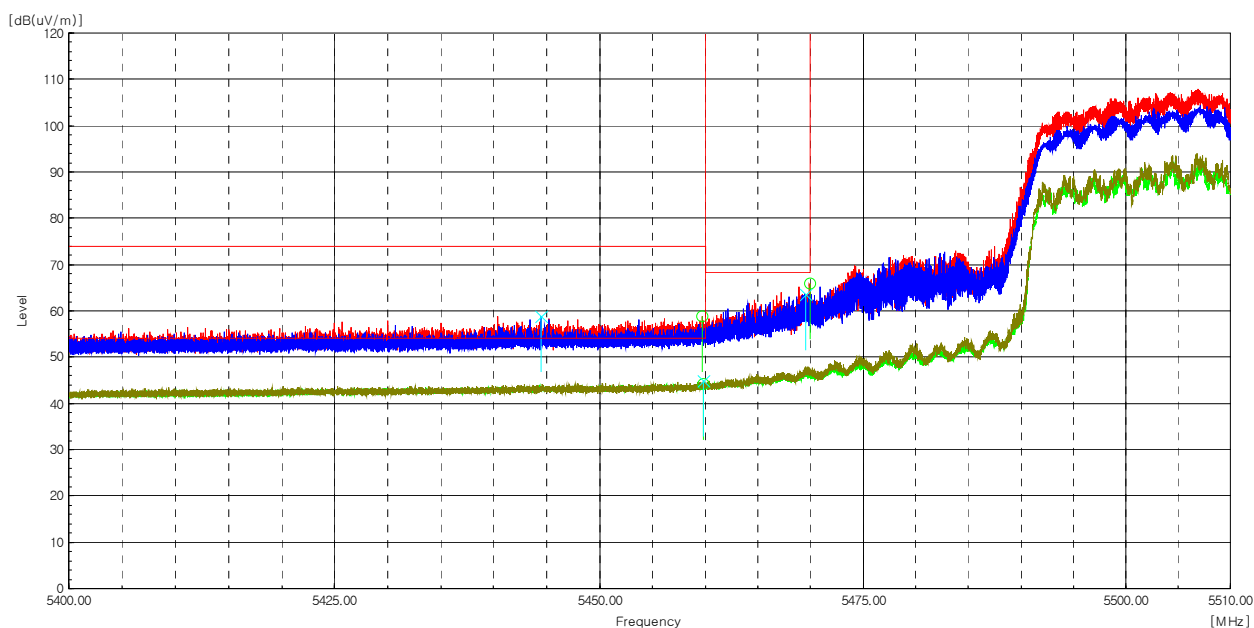

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 459.70	H	55.2	3.6	-----	58.8	-----	74.0	-----	15.2	-----	Peak
5 459.82	H	40.7	3.6	0.3	-----	44.6	-----	54.0	-----	9.4	Average
5 444.51	V	55.2	3.6	-----	58.8	-----	74.0	-----	15.2	-----	Peak
5 459.79	V	41.2	3.6	0.3	-----	45.1	-----	54.0	-----	8.9	Average
5 469.92	H	62.3	3.7	-----	66.0	-----	68.2	-----	2.2	-----	Peak
5 469.50	V	59.9	3.7	-----	63.6	-----	68.2	-----	4.6	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

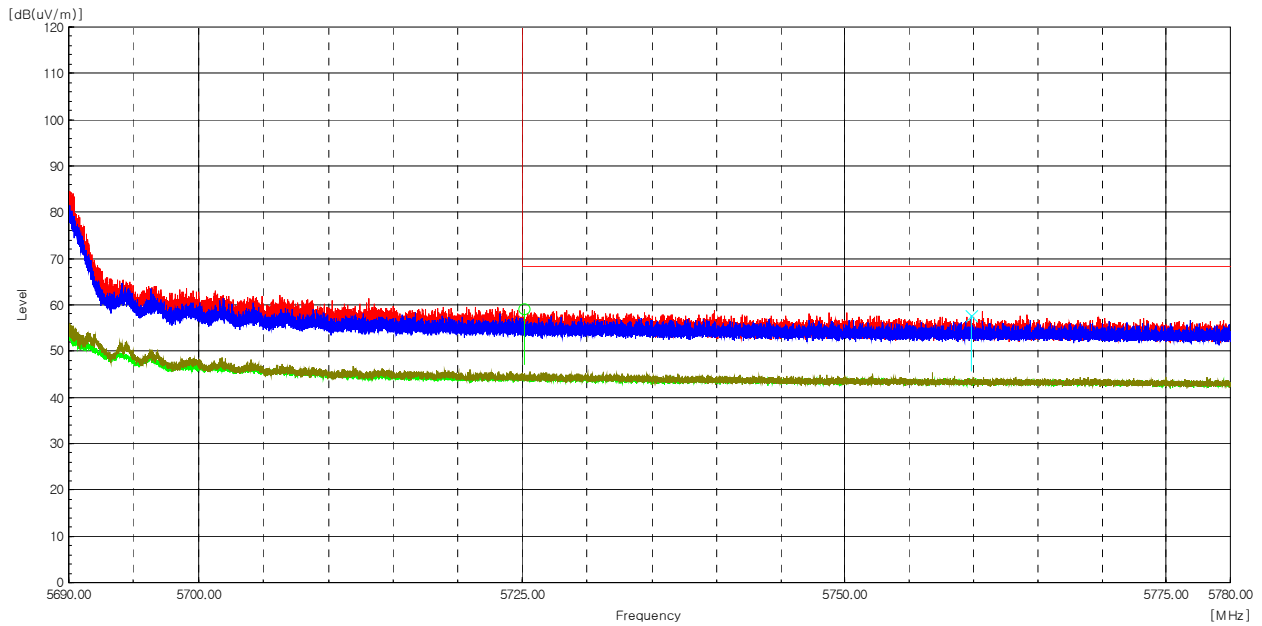

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 725.17	H	54.9	4.2	-----	59.1	-----	68.2	-----	9.1	-----	Peak
5 759.83	V	53.2	4.5	-----	57.7	-----	68.2	-----	10.5	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

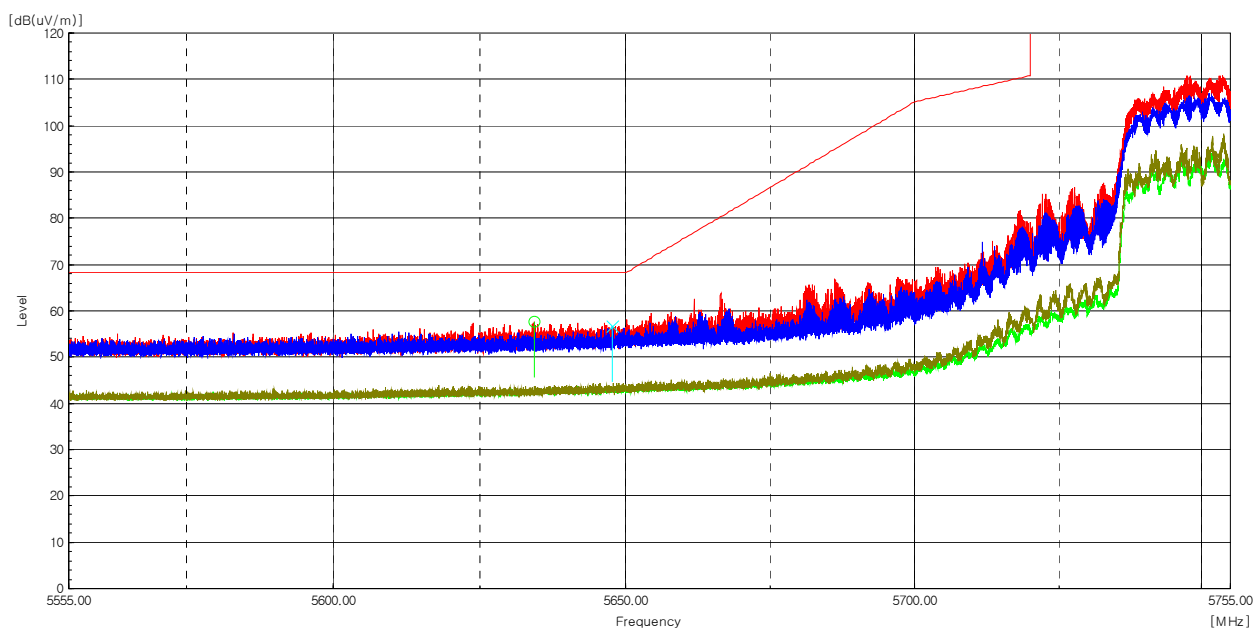

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 634.34	H	53.6	4.1	-----	57.7	-----	68.2	-----	10.5	-----	Peak
5 647.65	V	52.5	4.1	-----	56.6	-----	68.2	-----	11.6	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

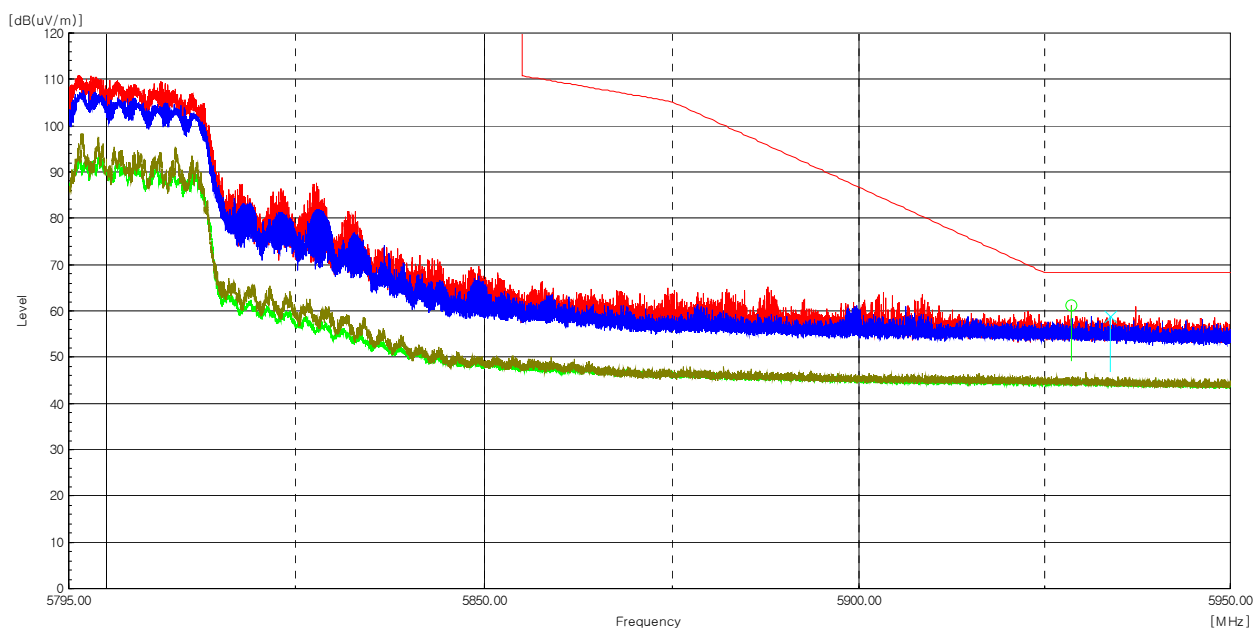

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 928.61	H	56.3	5.0	-----	61.3	-----	68.2	-----	6.9	-----	Peak
5 933.83	V	54.0	4.9	-----	58.9	-----	68.2	-----	9.3	-----	Peak

Radiated Restricted Band Edge Plot

Test mode : Transmitter, 802.11ac_VHT40

The requirements are:

☒ Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 378.62	H	46.9	11.3	-----	58.2	-----	68.2	-----	10.0	-----	Peak
10 386.82	V	44.9	11.3	-----	56.2	-----	68.2	-----	12.0	-----	Peak

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 468.10	H	45.3	11.6	-----	56.9	-----	68.2	-----	11.3	-----	Peak
10 466.20	V	44.3	11.6	-----	55.9	-----	68.2	-----	12.3	-----	Peak

Ch.54(5 270 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 541.60	H	44.8	11.7	-----	56.5	-----	68.2	-----	11.7	-----	Peak
10 534.87	V	43.7	11.7	-----	55.4	-----	68.2	-----	12.8	-----	Peak

Ch.62(5 310 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 621.22	H	44.4	11.8	-----	56.2	-----	74.0	-----	17.8	-----	Peak
10 609.29	H	32.9	11.8	0.5	-----	45.2	-----	54.0	-----	8.8	Average
10 613.33	V	43.3	11.8	-----	55.1	-----	74.0	-----	18.9	-----	Peak
10 615.11	V	32.3	11.8	0.5	-----	44.6	-----	54.0	-----	9.4	Average

Ch.102(5 510 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 025.16	H	45.0	12.2	-----	57.2	-----	74.0	-----	16.8	-----	Peak
11 027.24	H	33.1	12.2	0.5	-----	45.8	-----	54.0	-----	8.2	Average
11 040.22	V	43.1	12.2	-----	55.3	-----	74.0	-----	18.7	-----	Peak
11 032.32	V	31.8	12.2	0.5	-----	44.5	-----	54.0	-----	9.5	Average

Ch.118(5 590 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 180.13	H	44.4	12.7	-----	57.1	-----	74.0	-----	16.9	-----	Peak
11 171.25	H	33.0	12.7	0.5	-----	46.2	-----	54.0	-----	7.8	Average
11 192.79	V	42.9	12.7	-----	55.6	-----	74.0	-----	18.4	-----	Peak
11 172.17	V	31.6	12.7	0.5	-----	44.8	-----	54.0	-----	9.2	Average

Ch.134(5 670 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 340.91	H	44.3	12.1	-----	56.4	-----	74.0	-----	17.6	-----	Peak
11 329.28	H	32.7	12.2	0.5	-----	45.4	-----	54.0	-----	8.6	Average
11 339.44	V	43.1	12.1	-----	55.2	-----	74.0	-----	18.8	-----	Peak
11 347.33	V	31.8	12.0	0.5	-----	44.3	-----	54.0	-----	9.7	Average

Ch.142(5 710 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 423.65	H	45.7	12.6	-----	58.3	-----	74.0	-----	15.7	-----	Peak
11 416.00	H	33.7	12.5	0.5	-----	46.7	-----	54.0	-----	7.3	Average
11 427.75	V	44.5	12.6	-----	57.1	-----	74.0	-----	16.9	-----	Peak
11 442.20	V	32.5	12.7	0.5	-----	45.7	-----	54.0	-----	8.3	Average

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 511.29	H	46.6	12.6	-----	59.2	-----	74.0	-----	14.8	-----	Peak
11 510.86	H	33.8	12.6	0.5	-----	46.9	-----	54.0	-----	7.1	Average
11 488.46	V	43.7	12.6	-----	56.3	-----	74.0	-----	17.7	-----	Peak
11 518.21	V	32.3	12.6	0.5	-----	45.4	-----	54.0	-----	8.6	Average


Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 586.63	H	46.3	13.0	-----	59.3	-----	74.0	-----	14.7	-----	Peak
11 596.06	H	33.3	13.0	0.5	-----	46.8	-----	54.0	-----	7.2	Average
11 597.83	V	43.4	13.0	-----	56.4	-----	74.0	-----	17.6	-----	Peak
11 591.04	V	32.1	13.0	0.5	-----	45.6	-----	54.0	-----	8.4	Average
17 389.76	H	43.7	19.8	-----	63.5	-----	68.2	-----	4.7	-----	Peak
17 382.73	V	46.3	19.8	-----	66.1	-----	68.2	-----	2.1	-----	Peak

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain


Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

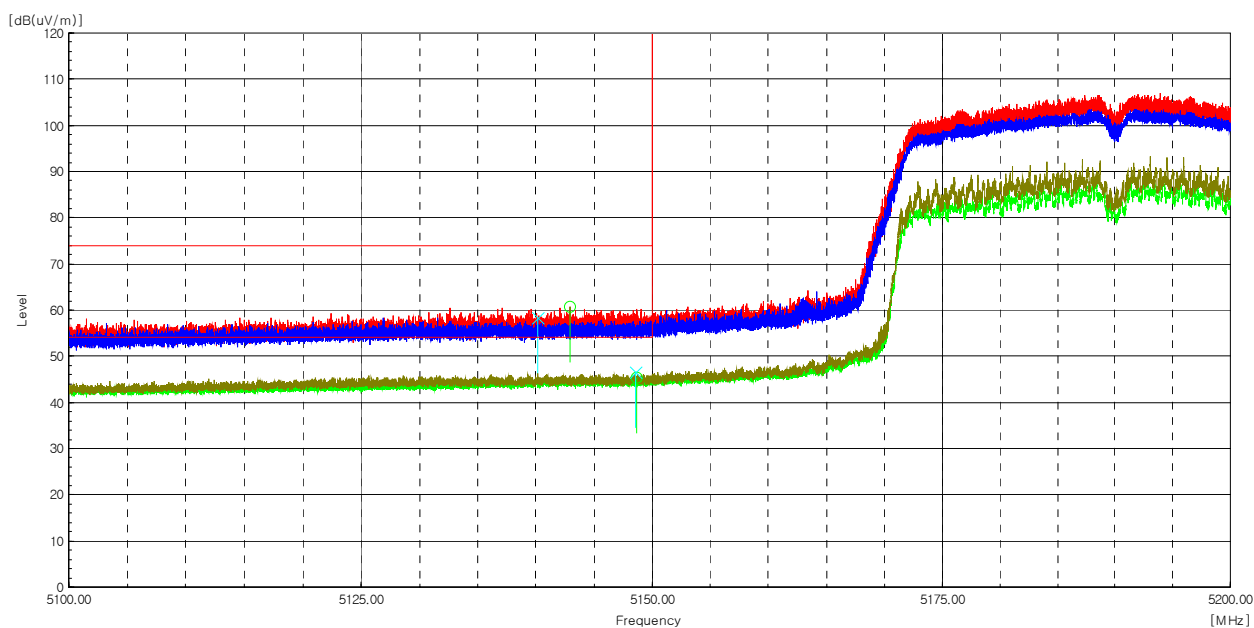

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 142.93	H	58.1	2.6	-----	60.7	-----	74.0	-----	13.3	-----	Peak
5 148.62	H	42.6	2.6	0.5	-----	45.7	-----	54.0	-----	8.3	Average
5 140.11	V	55.8	2.6	-----	58.4	-----	74.0	-----	15.6	-----	Peak
5 148.57	V	43.9	2.6	0.5	-----	47.0	-----	54.0	-----	7.0	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

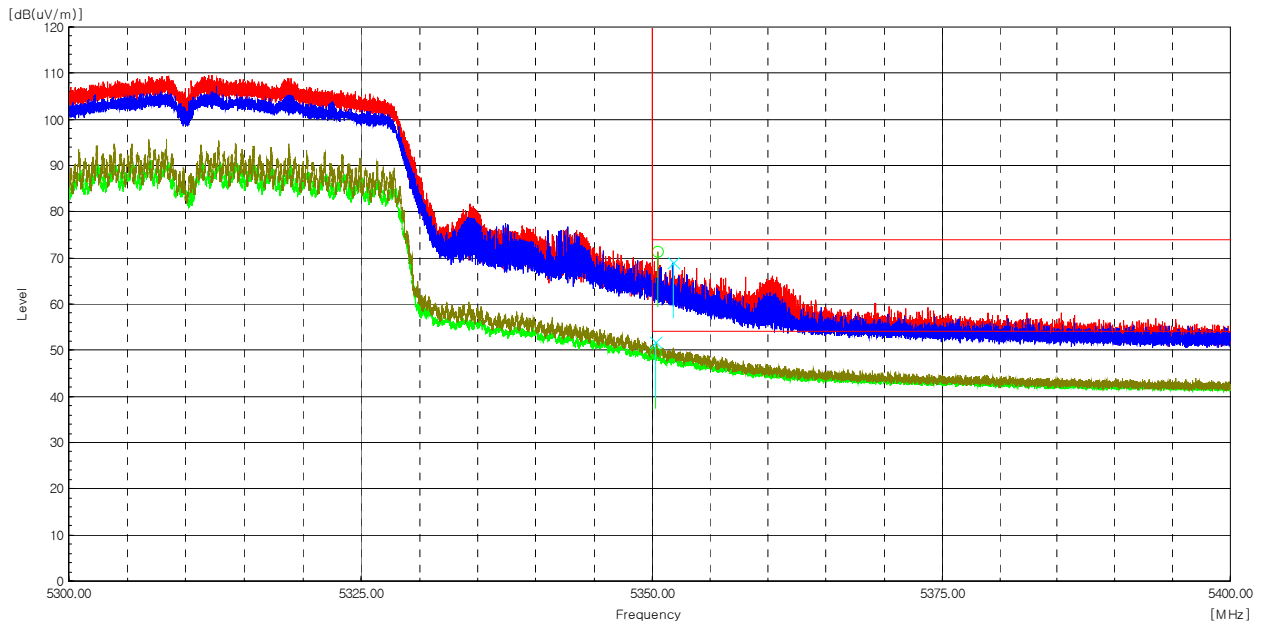

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 350.45	H	68.1	3.2	-----	71.3	-----	74.0	-----	2.7	-----	Peak
5 350.26	H	46.1	3.2	0.5	-----	49.8	-----	54.0	-----	4.2	Average
5 351.79	V	65.8	3.2	-----	69.0	-----	74.0	-----	5.0	-----	Peak
5 350.30	V	48.4	3.2	0.5	-----	52.1	-----	54.0	-----	1.9	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

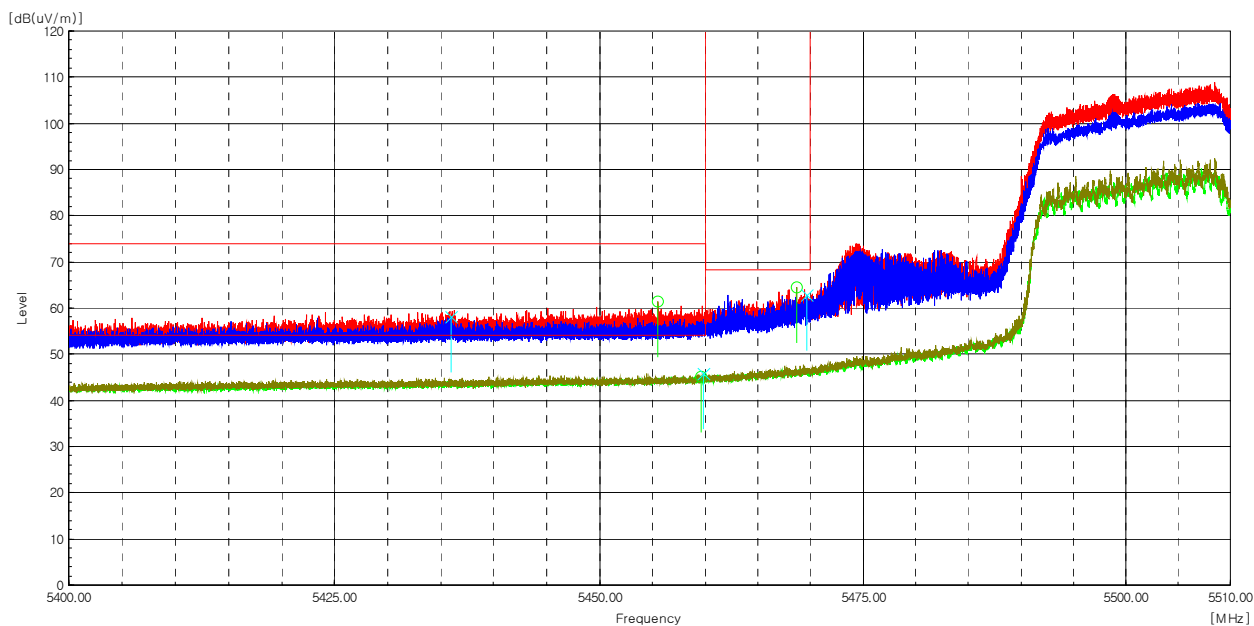

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 455.56	H	57.9	3.6	-----	61.5	-----	74.0	-----	12.5	-----	Peak
5 459.60	H	41.6	3.6	0.5	-----	45.7	-----	54.0	-----	8.3	Average
5 435.97	V	54.7	3.5	-----	58.2	-----	74.0	-----	15.8	-----	Peak
5 459.82	V	42.1	3.6	0.5	-----	46.2	-----	54.0	-----	7.8	Average
5 468.64	H	60.7	3.7	-----	64.4	-----	68.2	-----	3.8	-----	Peak
5 469.62	V	59.1	3.7	-----	62.8	-----	68.2	-----	5.4	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

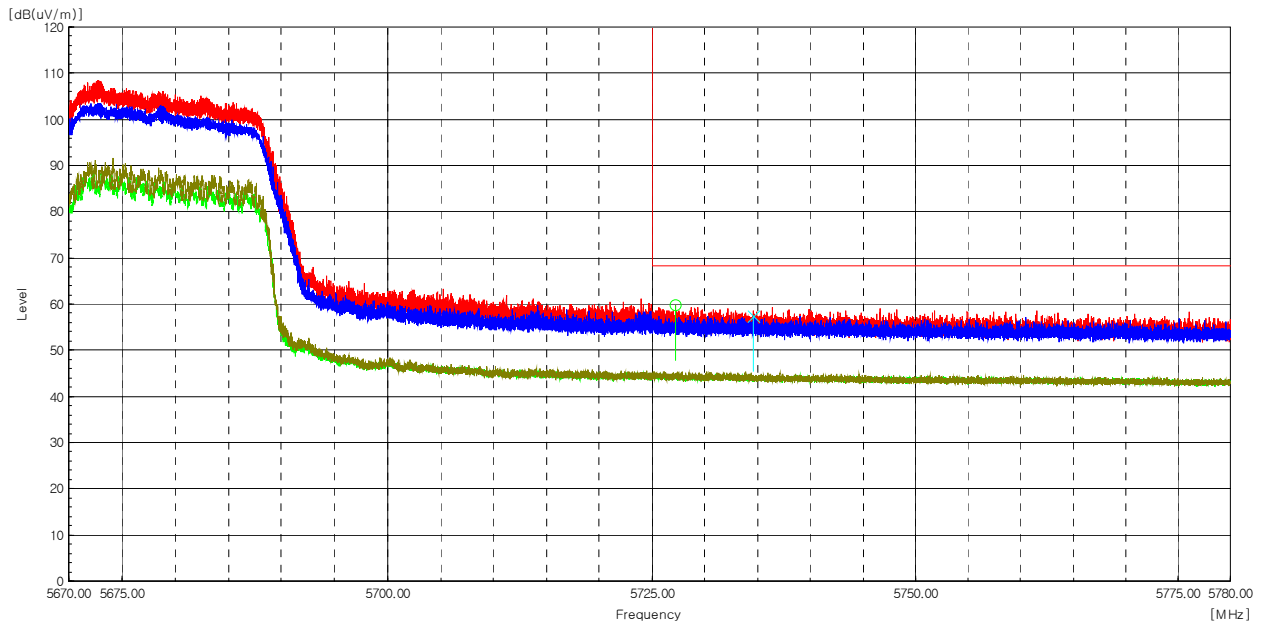

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 727.22	H	55.5	4.2	-----	59.7	-----	68.2	-----	8.5	-----	Peak
5 734.57	V	53.1	4.3	-----	57.4	-----	68.2	-----	10.8	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

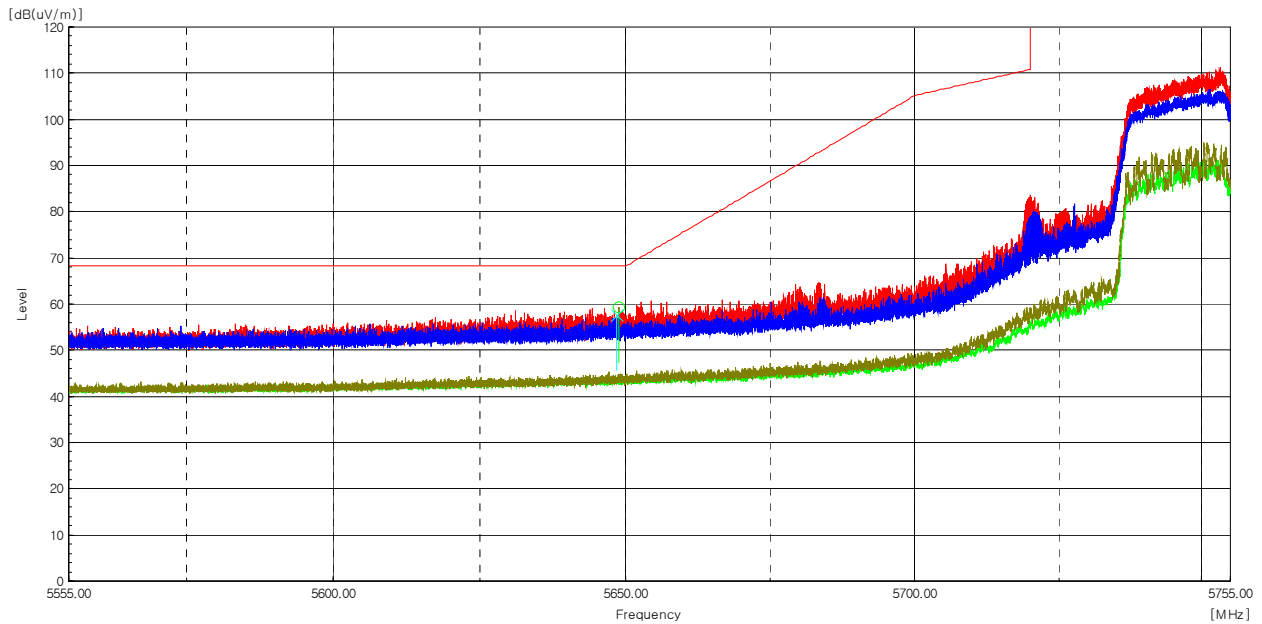

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 648.84	H	55.3	4.1	-----	59.4	-----	68.2	-----	8.8	-----	Peak
5 648.49	V	53.6	4.1	-----	57.7	-----	68.2	-----	10.5	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

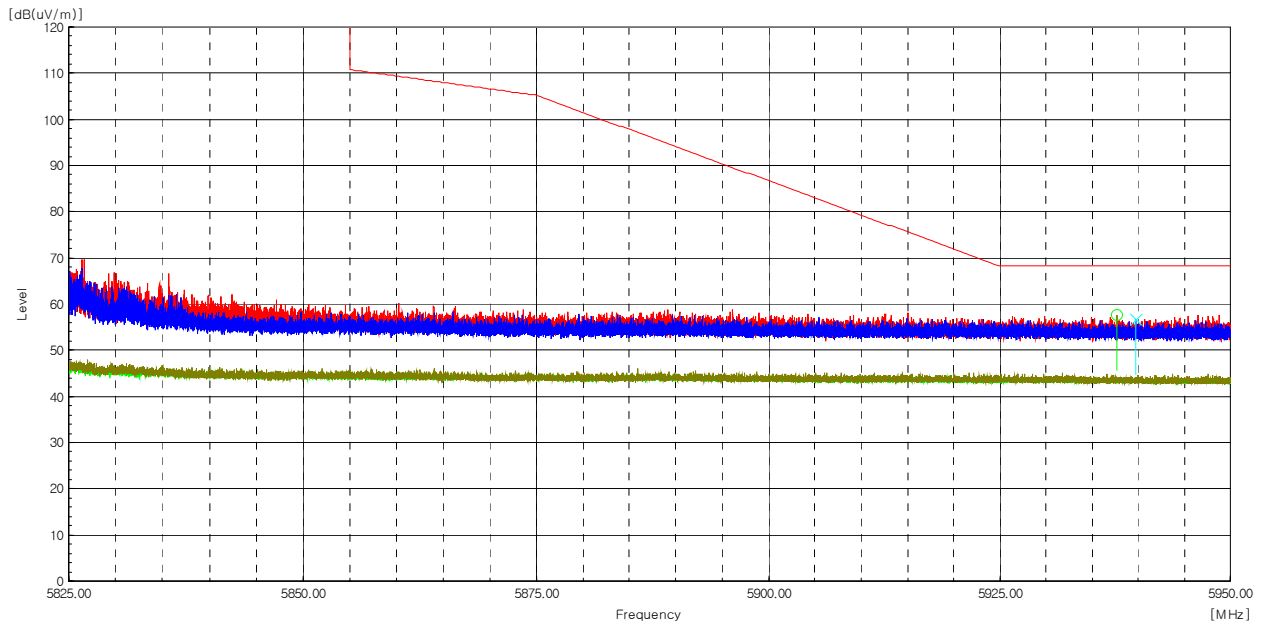

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	------------------------	------------------------	------------------------	------------------------	----------------------	----------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Test mode : Transmitter, 802.11ax_HE40_26T

The requirements are:

☒ Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.54(5 270 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 576.30	H	45.9	11.8	-----	57.7	-----	68.2	-----	10.5	-----	Peak
10 576.18	H	33.9	11.8	0.2	-----	45.9	-----	54.0	-----	8.1	Average
10 575.59	V	45.5	11.8	-----	57.3	-----	68.2	-----	10.9	-----	Peak
10 575.42	V	33.3	11.8	0.2	-----	45.3	-----	54.0	-----	8.7	Average

Ch.62(5 310 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 655.61	H	46.1	11.8	-----	57.9	-----	74.0	-----	16.1	-----	Peak
10 655.55	H	33.4	11.8	0.2	-----	45.4	-----	54.0	-----	8.6	Average
10 656.42	V	42.9	11.8	-----	54.7	-----	74.0	-----	19.3	-----	Peak
10 659.17	V	32.2	11.8	0.2	-----	44.2	-----	54.0	-----	9.8	Average

Ch.102(5 510 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 055.60	H	47.5	12.2	-----	59.7	-----	74.0	-----	14.3	-----	Peak
11 055.96	H	34.8	12.2	0.2	-----	47.2	-----	54.0	-----	6.8	Average
11 054.61	V	43.4	12.2	-----	55.6	-----	74.0	-----	18.4	-----	Peak
11 056.25	V	32.4	12.2	0.2	-----	44.8	-----	54.0	-----	9.2	Average

Ch.118(5 590 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 216.79	H	50.5	12.8	-----	63.3	-----	74.0	-----	10.7	-----	Peak
11 215.98	H	35.3	12.8	0.2	-----	48.3	-----	54.0	-----	5.7	Average
11 217.20	V	42.8	12.8	-----	55.6	-----	74.0	-----	18.4	-----	Peak
11 214.11	V	32.5	12.8	0.2	-----	45.5	-----	54.0	-----	8.5	Average

Ch.134(5 670 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 376.17	H	49.0	12.2	-----	61.2	-----	74.0	-----	12.8	-----	Peak
11 375.59	H	34.6	12.2	0.2	-----	47.0	-----	54.0	-----	7.0	Average
11 373.84	V	44.0	12.1	-----	56.1	-----	74.0	-----	17.9	-----	Peak
11 376.17	V	32.8	12.2	0.2	-----	45.2	-----	54.0	-----	8.8	Average

Ch.142(5 710 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 507.05	H	53.3	12.5	-----	65.8	-----	74.0	-----	8.2	-----	Peak
11 508.16	H	40.1	12.5	0.2	-----	52.8	-----	54.0	-----	1.2	Average
11 506.41	V	44.9	12.5	-----	57.4	-----	74.0	-----	16.6	-----	Peak
11 508.69	V	34.0	12.6	0.2	-----	46.8	-----	54.0	-----	7.2	Average
17 260.25	H	44.6	19.1	-----	63.7	-----	68.2	-----	4.5	-----	Peak
17 261.83	V	47.0	19.1	-----	66.1	-----	68.2	-----	2.1	-----	Peak


Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 588.58	H	53.9	13.0	-----	66.9	-----	74.0	-----	7.1	-----	Peak
11 587.24	H	39.2	13.0	0.2	-----	52.4	-----	54.0	-----	1.6	Average
11 588.29	V	44.7	13.0	-----	57.7	-----	74.0	-----	16.3	-----	Peak
11 588.00	V	32.7	13.0	0.2	-----	45.9	-----	54.0	-----	8.1	Average
17 380.81	H	46.2	19.8	-----	66.0	-----	68.2	-----	2.2	-----	Peak
17 380.55	V	46.5	19.8	-----	66.3	-----	68.2	-----	1.9	-----	Peak

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

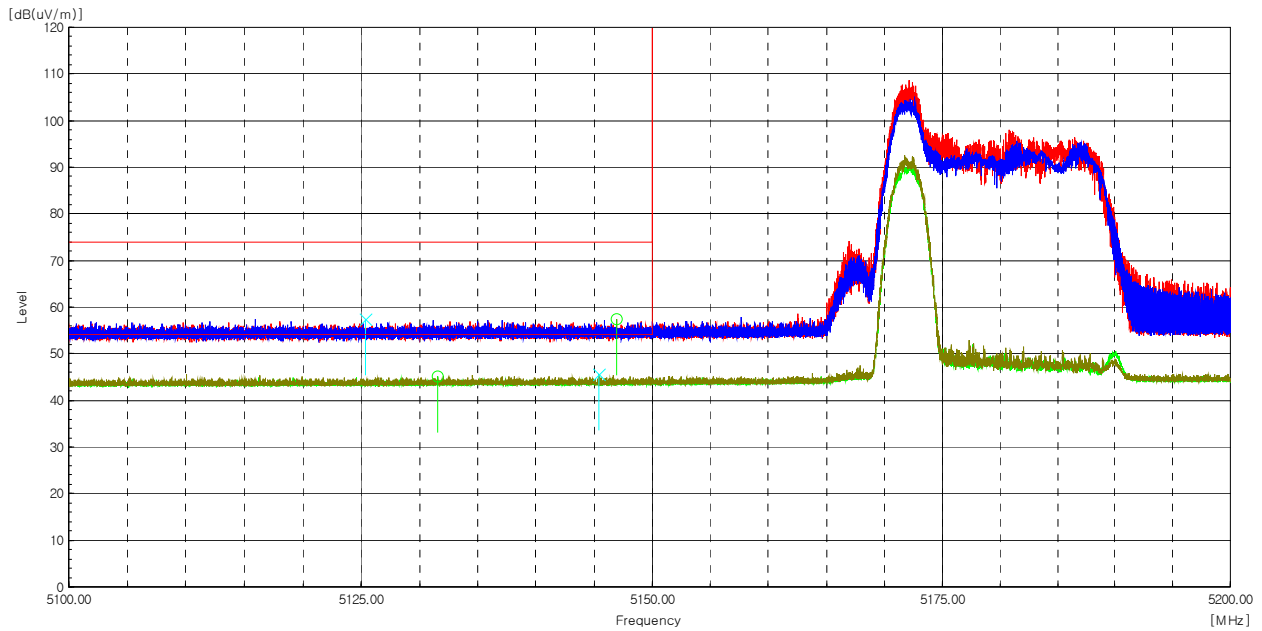


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

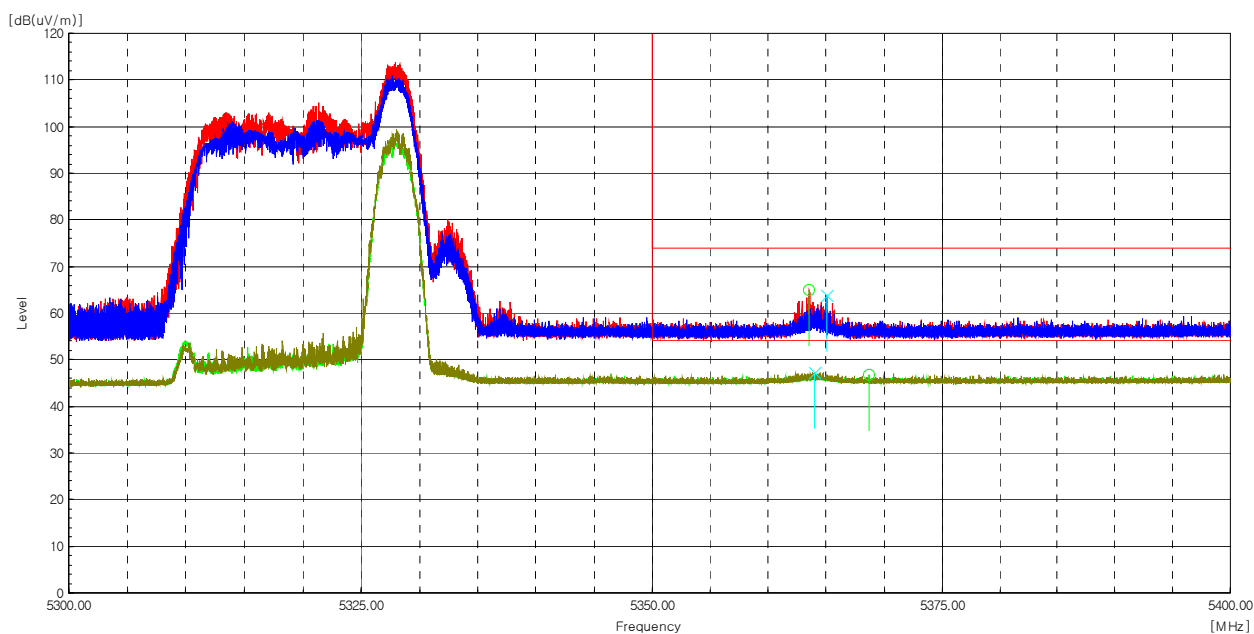

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 363.56	H	61.7	3.3	-----	65.0	-----	74.0	-----	9.0	-----	Peak
5 368.74	H	43.4	3.3	0.2	-----	46.9	-----	54.0	-----	7.1	Average
5 365.02	V	60.5	3.3	-----	63.8	-----	74.0	-----	10.2	-----	Peak
5 364.02	V	44.0	3.3	0.2	-----	47.5	-----	54.0	-----	6.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

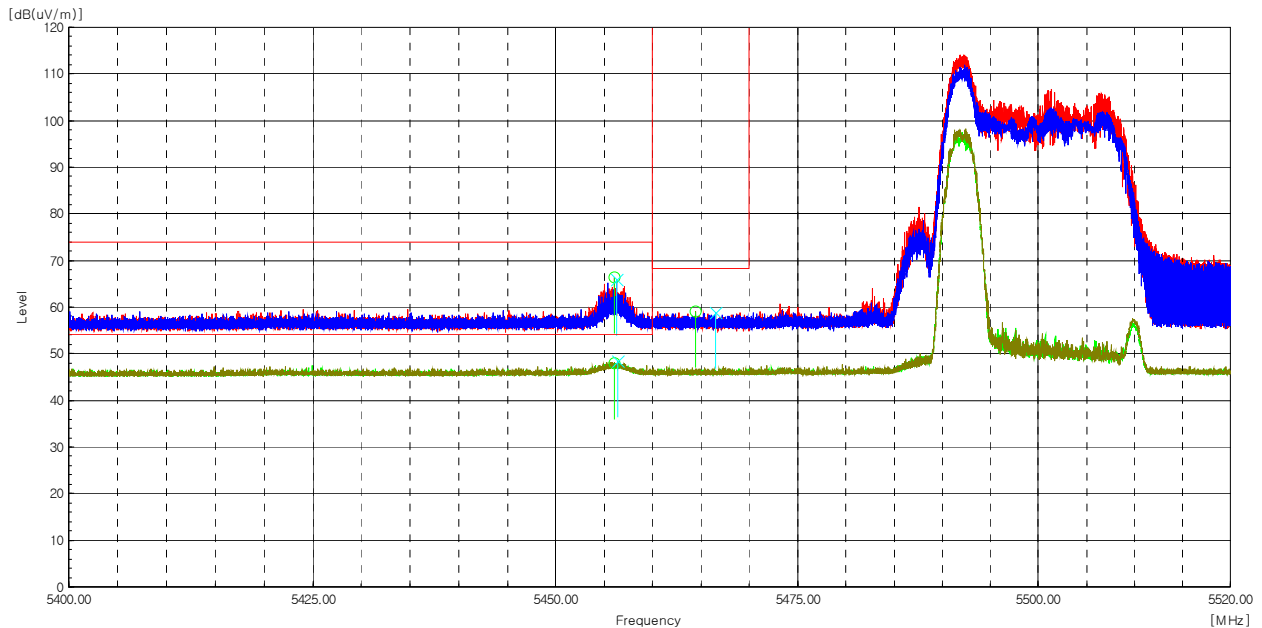

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 456.07	H	62.7	3.6	-----	66.3	-----	74.0	-----	7.7	-----	Peak
5 456.03	H	44.4	3.6	0.2	-----	48.2	-----	54.0	-----	5.8	Average
5 456.28	V	62.3	3.6	-----	65.9	-----	74.0	-----	8.1	-----	Peak
5 456.38	V	44.8	3.6	0.2	-----	48.6	-----	54.0	-----	5.4	Average
5 464.46	H	55.4	3.7	-----	59.1	-----	68.2	-----	9.1	-----	Peak
5 466.48	V	55.1	3.7	-----	58.8	-----	68.2	-----	9.4	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

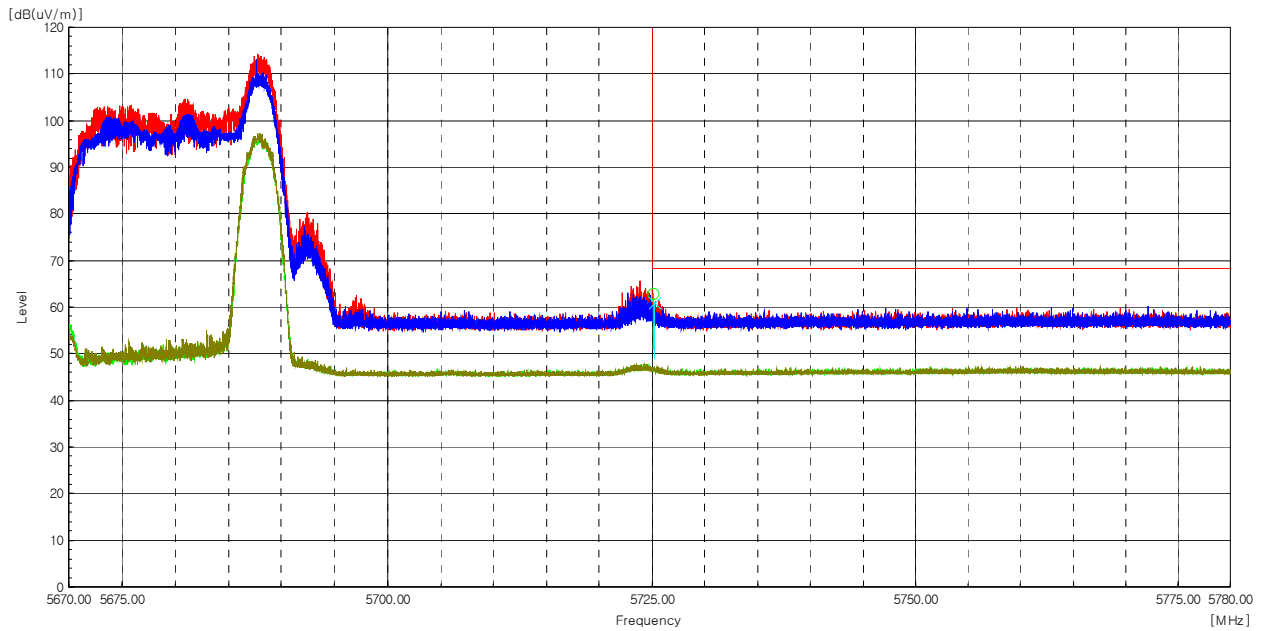

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 725.10	H	58.6	4.2	-----	62.8	-----	68.2	-----	5.4	-----	Peak
5 725.24	V	56.8	4.2	-----	61.0	-----	68.2	-----	7.2	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

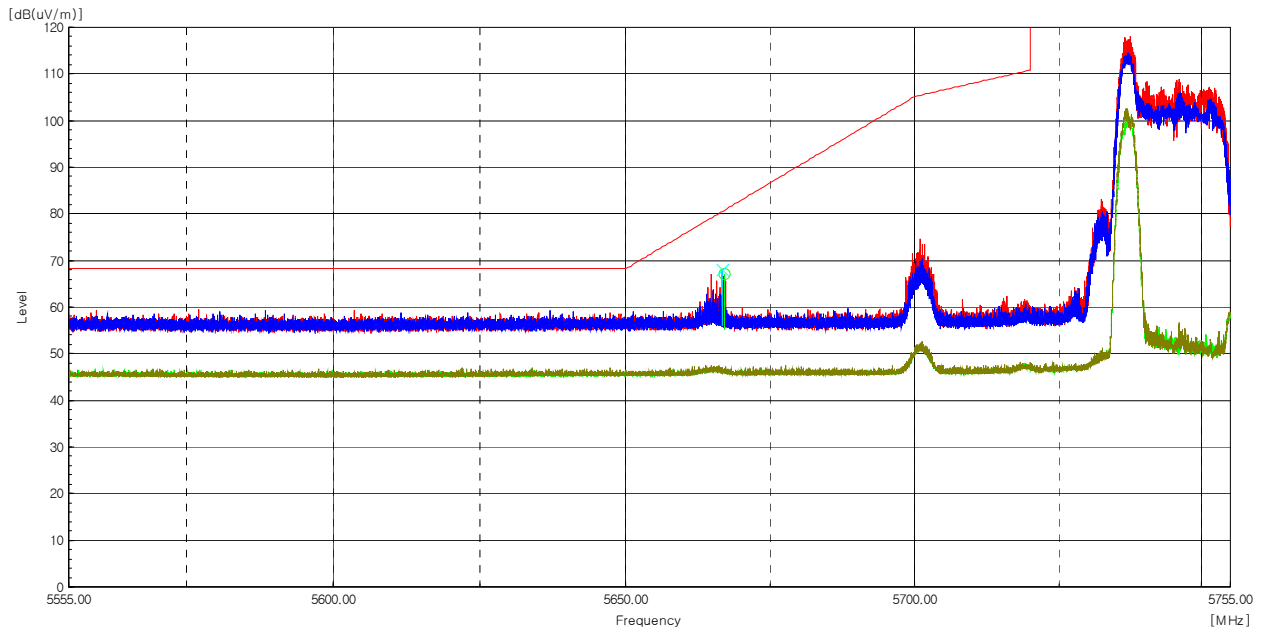

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 667.13	H	63.1	4.1	-----	67.2	-----	80.8	-----	13.7	-----	Peak
5 666.70	V	63.9	4.1	-----	68.0	-----	79.5	-----	12.6	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

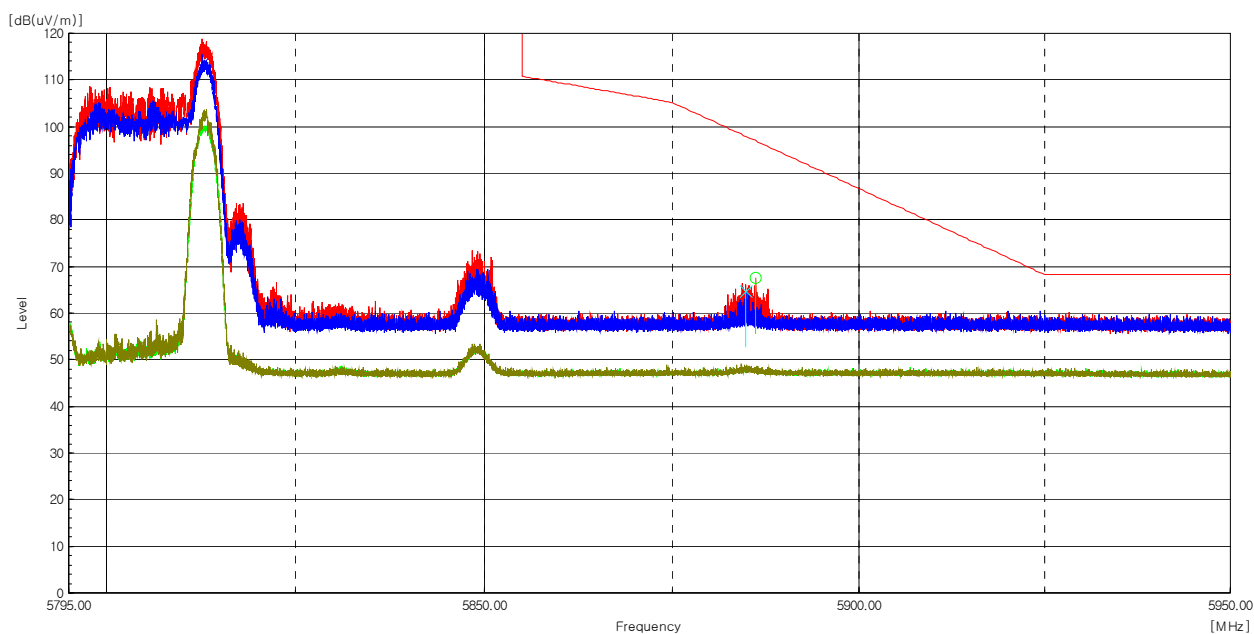

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 886.24	H	62.6	4.9	-----	67.5	-----	98.4	-----	29.4	-----	Peak
5 884.84	V	59.8	4.9	-----	64.7	-----	96.9	-----	33.2	-----	Peak

Radiated Restricted Band Edge Plot


Test mode : Transmitter, 802.11ax_HE40_52T

The requirements are:

☒ Complies

Test Data

Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

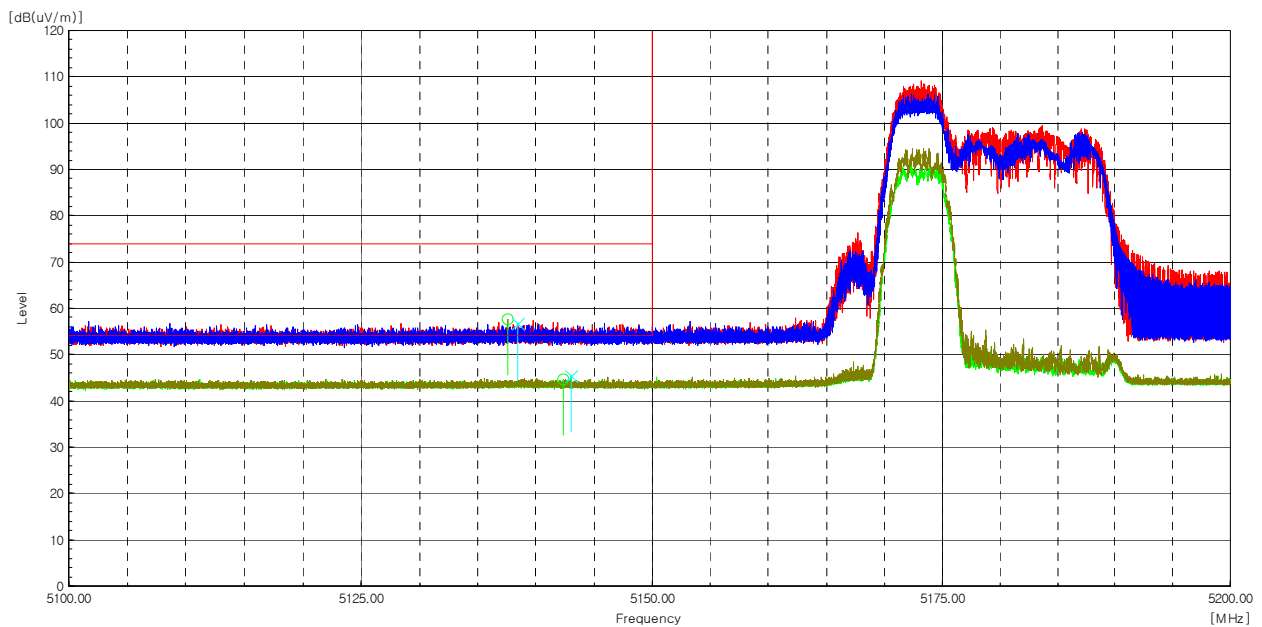


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

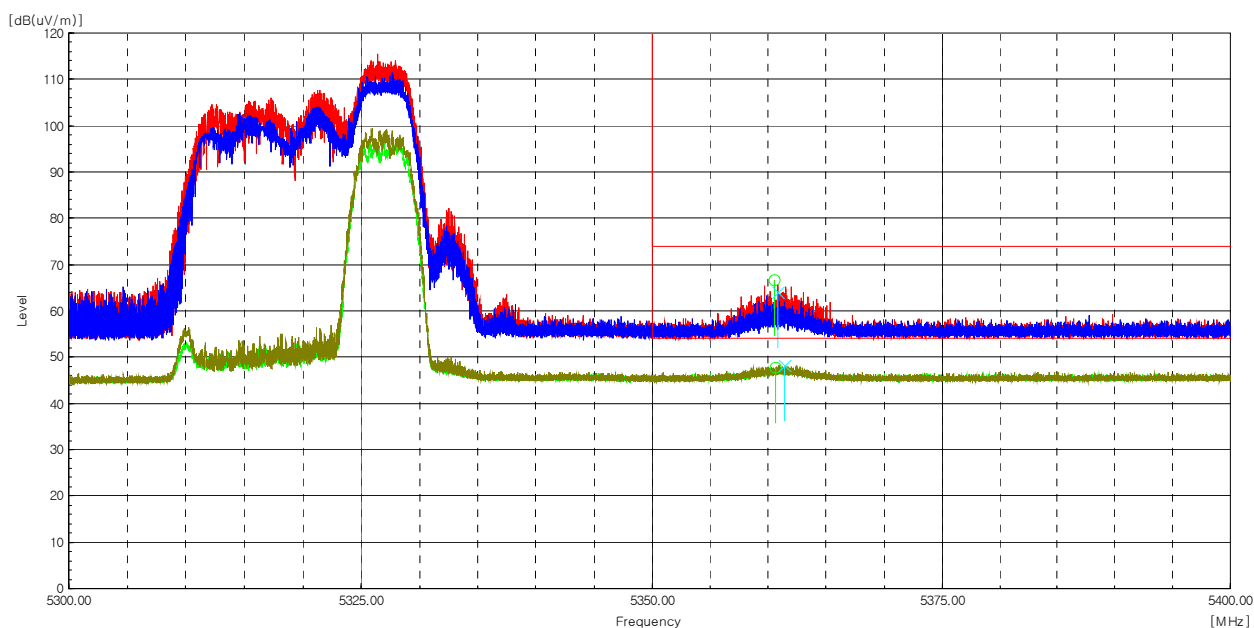

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 360.55	H	63.4	3.3	-----	66.7	-----	74.0	-----	7.3	-----	Peak
5 360.65	H	44.5	3.3	0.2	-----	48.0	-----	54.0	-----	6.0	Average
5 360.80	V	60.6	3.3	-----	63.9	-----	74.0	-----	10.1	-----	Peak
5 361.37	V	45.0	3.3	0.2	-----	48.5	-----	54.0	-----	5.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

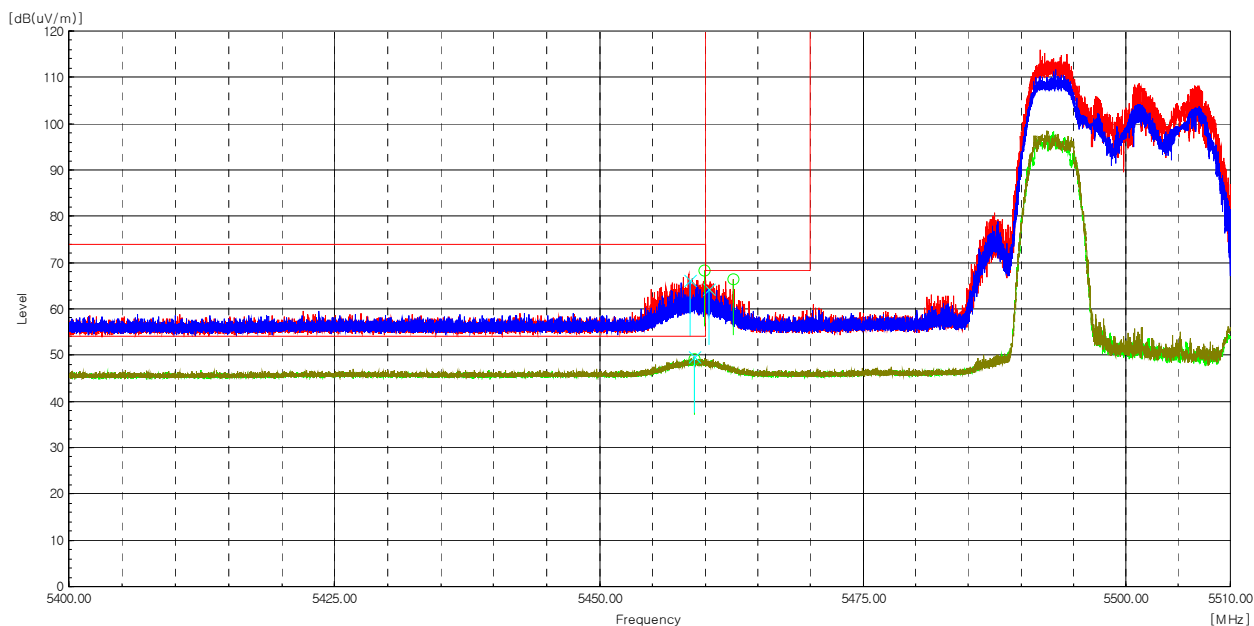

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 458.82	H	60.5	3.6	-----	64.1	-----	74.0	-----	9.9	-----	Peak
5 457.70	H	43.8	3.6	0.2	-----	47.6	-----	54.0	-----	6.4	Average
5 459.33	V	57.6	3.6	-----	61.2	-----	74.0	-----	12.8	-----	Peak
5 421.79	V	43.0	3.5	0.2	-----	46.7	-----	54.0	-----	7.3	Average
5 460.27	H	58.9	3.6	-----	62.5	-----	68.2	-----	5.7	-----	Peak
5 460.24	V	57.9	3.6	-----	61.5	-----	68.2	-----	6.7	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

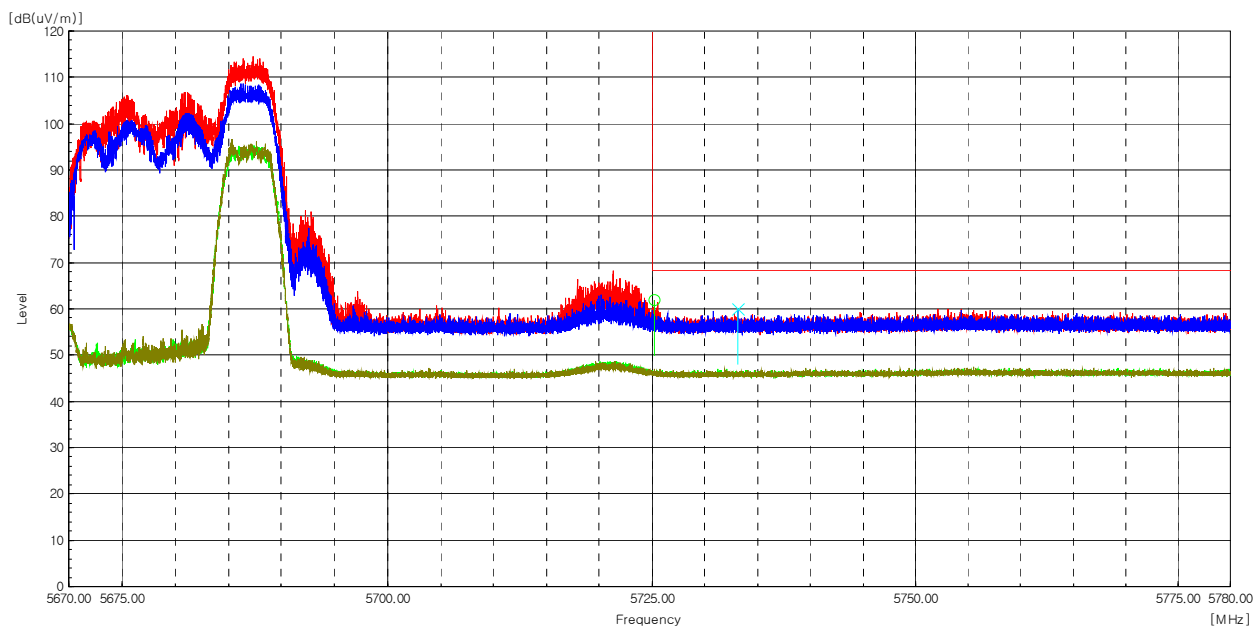

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 725.17	H	57.8	4.2	-----	62.0	-----	68.2	-----	6.2	-----	Peak
5 733.14	V	55.7	4.3	-----	60.0	-----	68.2	-----	8.2	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

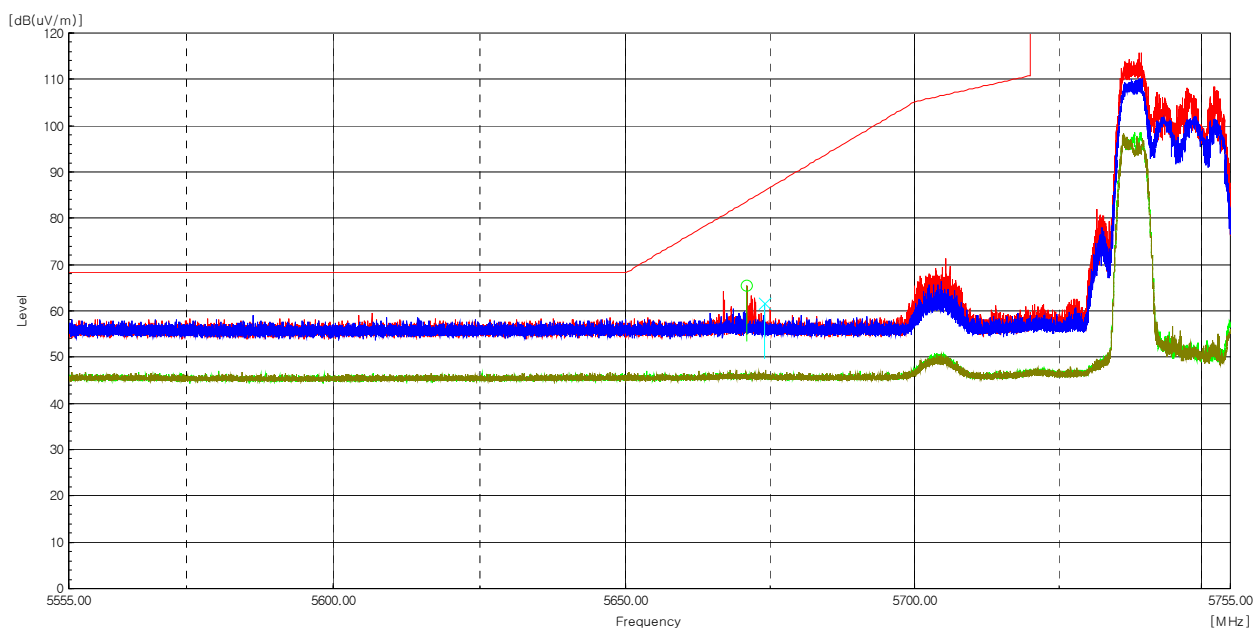

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 670.90	H	61.4	4.0	-----	65.4	-----	68.2	-----	18.3	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

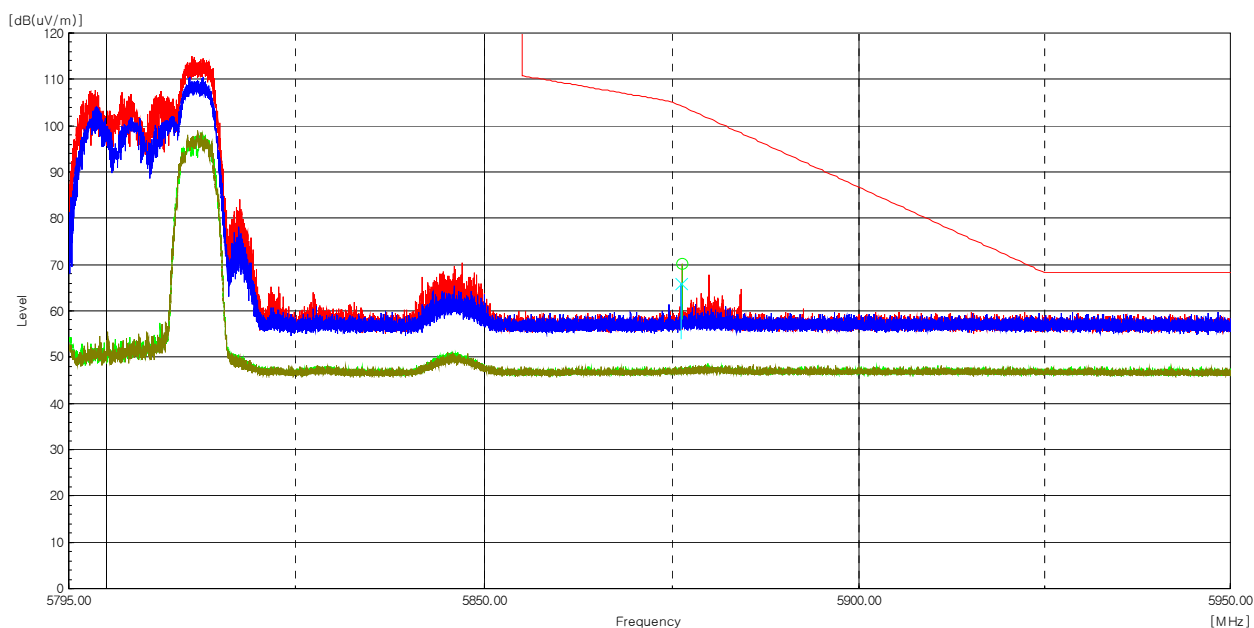

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Test mode : Transmitter, 802.11ax_HE40_106T

The requirements are:

☒ Complies

Test Data


Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

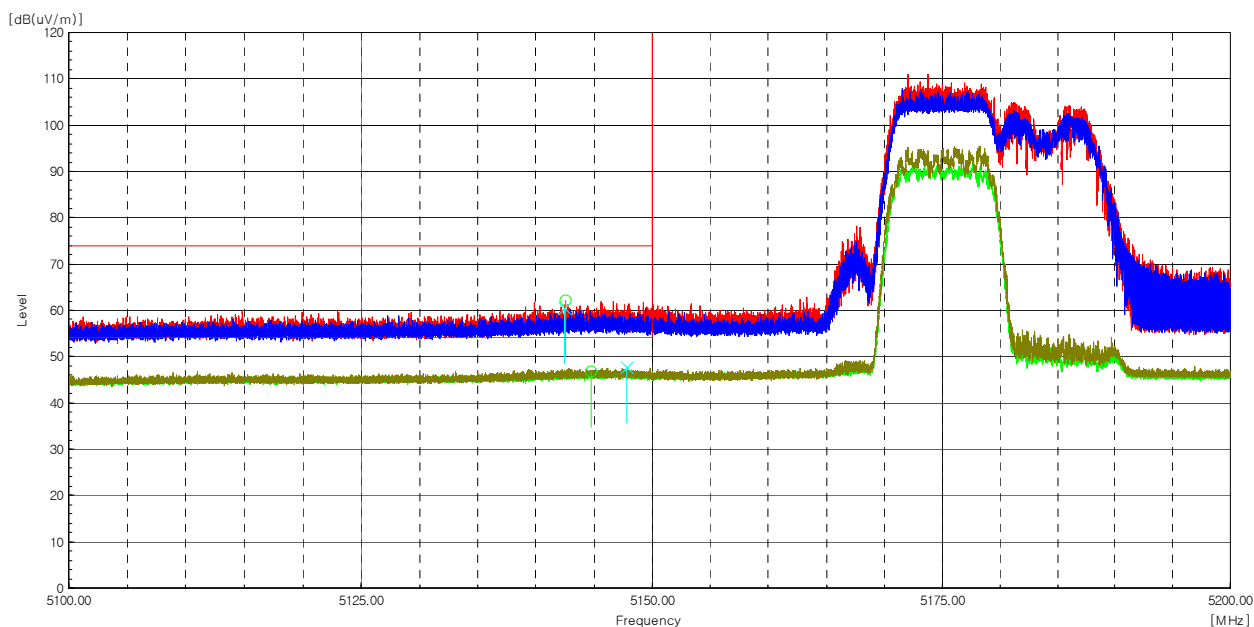

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 142.50	H	59.5	2.6	-----	62.1	-----	74.0	-----	11.9	-----	Peak
5 144.78	H	44.1	2.6	0.2	-----	46.9	-----	54.0	-----	7.1	Average
5 142.47	V	58.0	2.6	-----	60.6	-----	74.0	-----	13.4	-----	Peak
5 147.80	V	45.1	2.6	0.2	-----	47.9	-----	54.0	-----	6.1	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

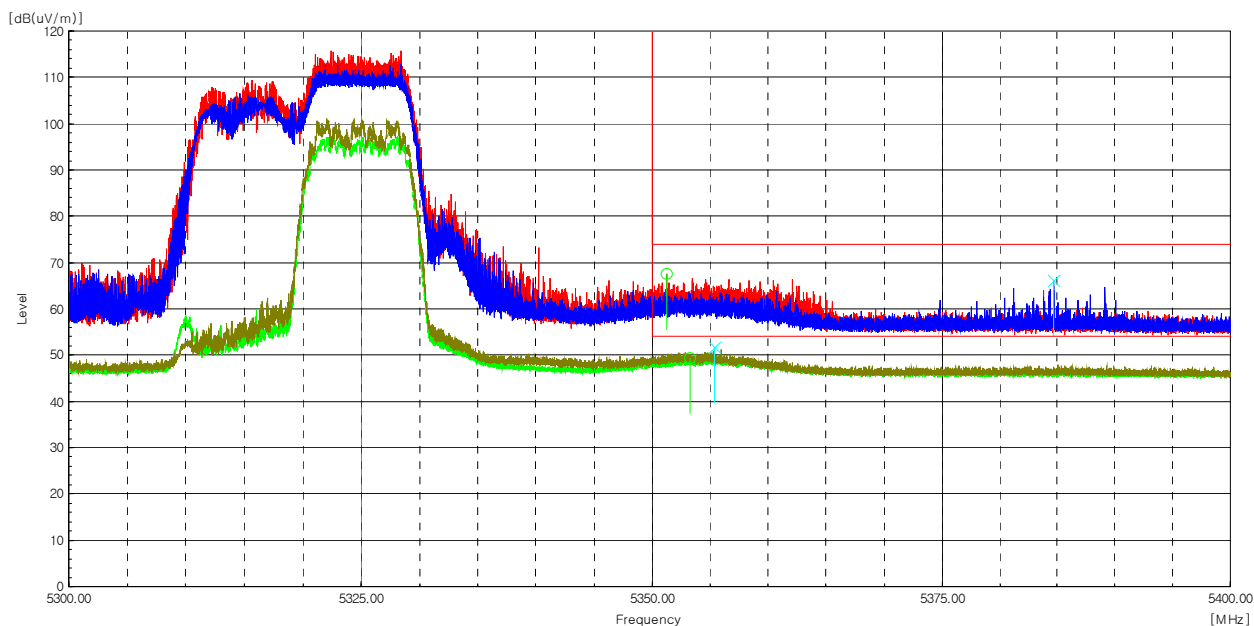

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 351.28	H	64.3	3.2	-----	67.5	-----	74.0	-----	6.5	-----	Peak
5 353.26	H	46.1	3.2	0.2	-----	49.5	-----	54.0	-----	4.5	Average
5 384.66	V	62.8	3.3	-----	66.1	-----	74.0	-----	7.9	-----	Peak
5 355.35	V	48.4	3.2	0.2	-----	51.8	-----	54.0	-----	2.2	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

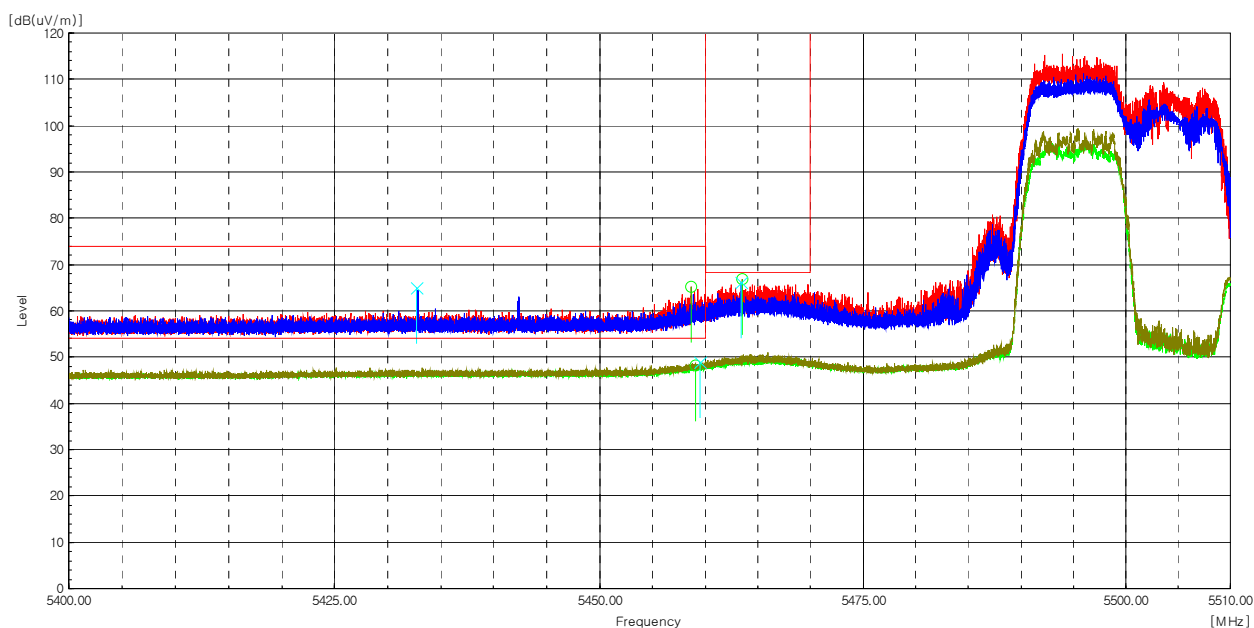

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 458.63	H	61.7	3.6	-----	65.3	-----	74.0	-----	8.7	-----	Peak
5 459.06	H	44.7	3.6	0.2	-----	48.5	-----	54.0	-----	5.5	Average
5 432.75	V	61.4	3.5	-----	64.9	-----	74.0	-----	9.1	-----	Peak
5 459.53	V	45.2	3.6	0.2	-----	49.0	-----	54.0	-----	5.0	Average
5 463.50	H	63.1	3.7	-----	66.8	-----	68.2	-----	1.4	-----	Peak
5 463.46	V	62.5	3.7	-----	66.2	-----	68.2	-----	2.0	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

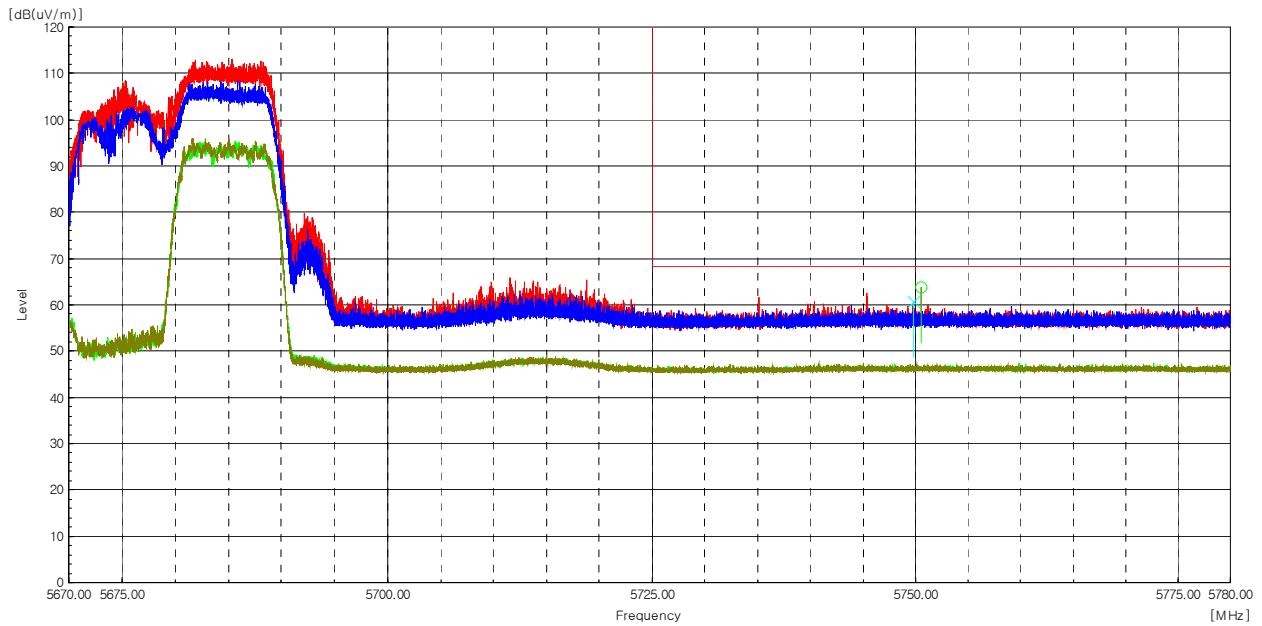

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 750.55	H	59.2	4.5	-----	63.7	-----	68.2	-----	4.5	-----	Peak
5 749.74	V	56.3	4.4	-----	60.7	-----	68.2	-----	7.5	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

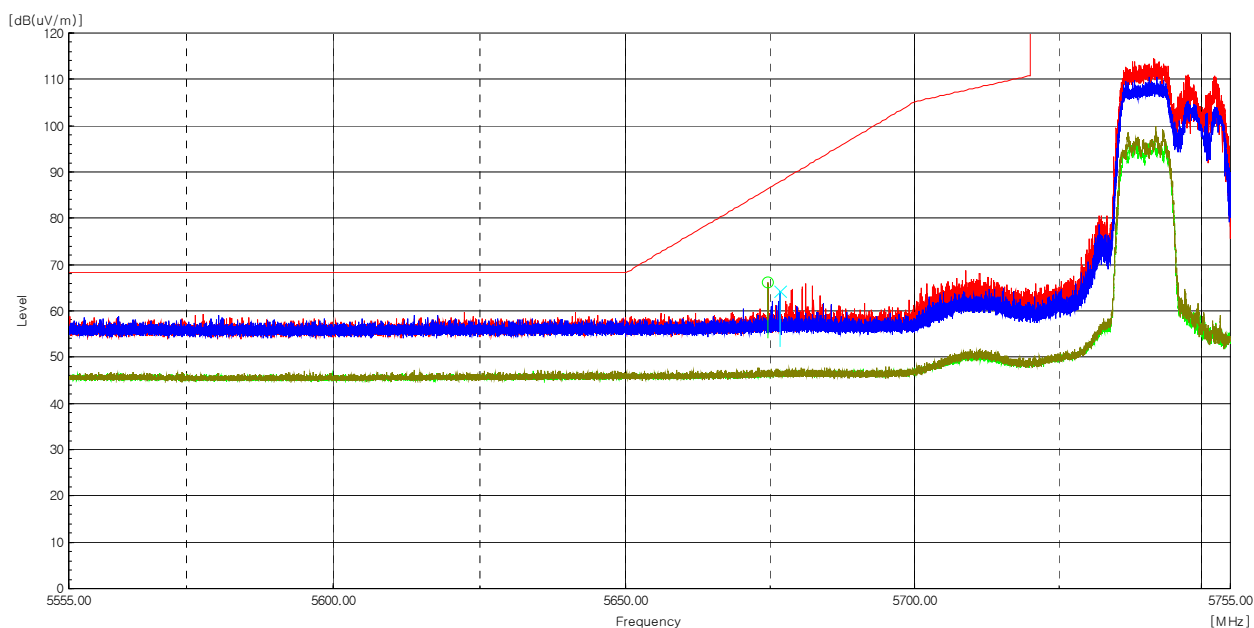


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

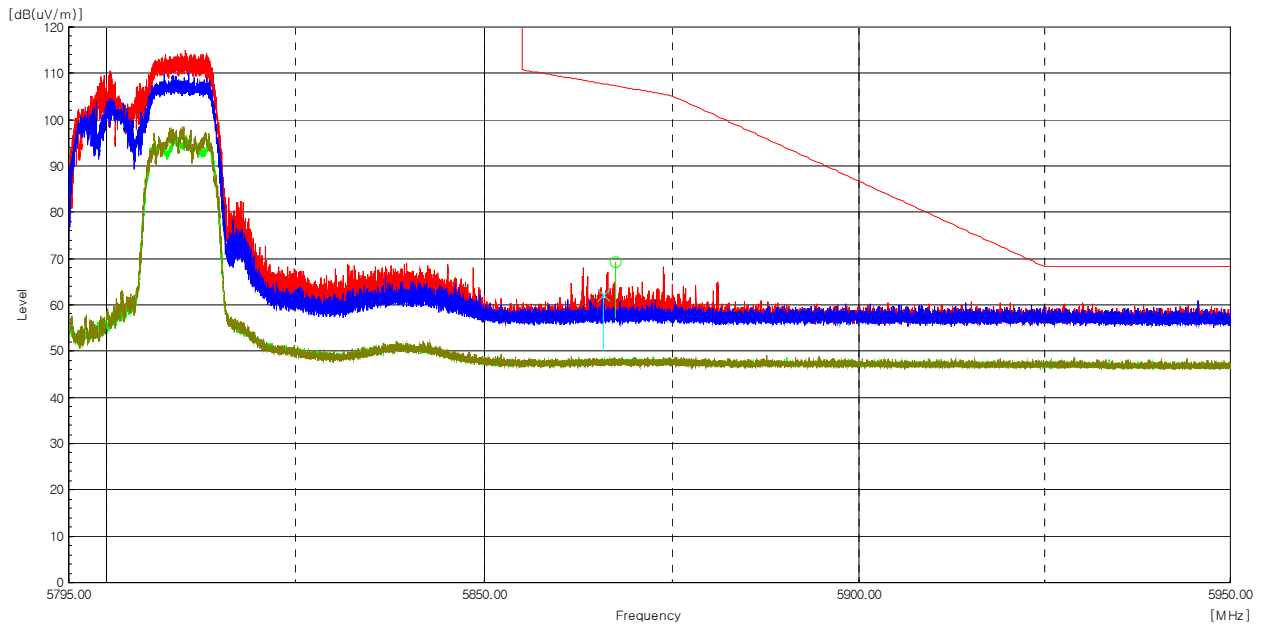

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Test mode : Transmitter, 802.11ax_HE40_242T

The requirements are:

☒ Complies

Test Data


Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

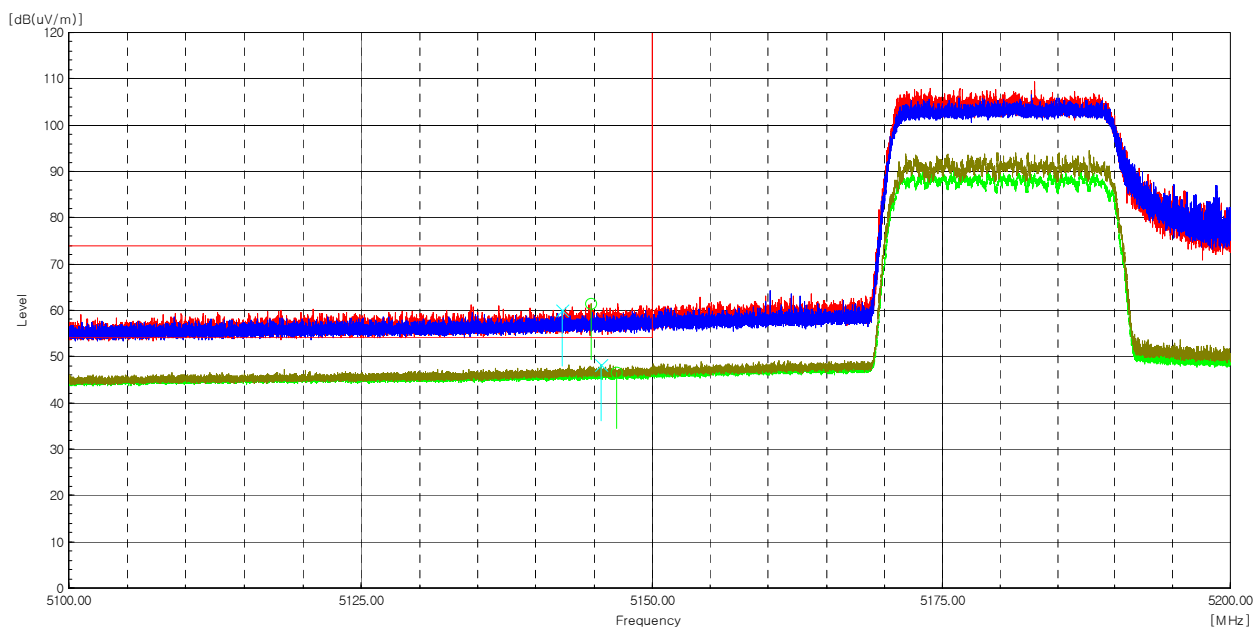

Frequency [MHz]	(P)	Reading [dBUV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 144.75	H	58.9	2.6	-----	61.5	-----	74.0	-----	12.5	-----	Peak
5 146.90	H	44.0	2.6	0.3	-----	46.9	-----	54.0	-----	7.1	Average
5 142.23	V	57.4	2.6	-----	60.0	-----	74.0	-----	14.0	-----	Peak
5 145.59	V	45.6	2.6	0.3	-----	48.5	-----	54.0	-----	5.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

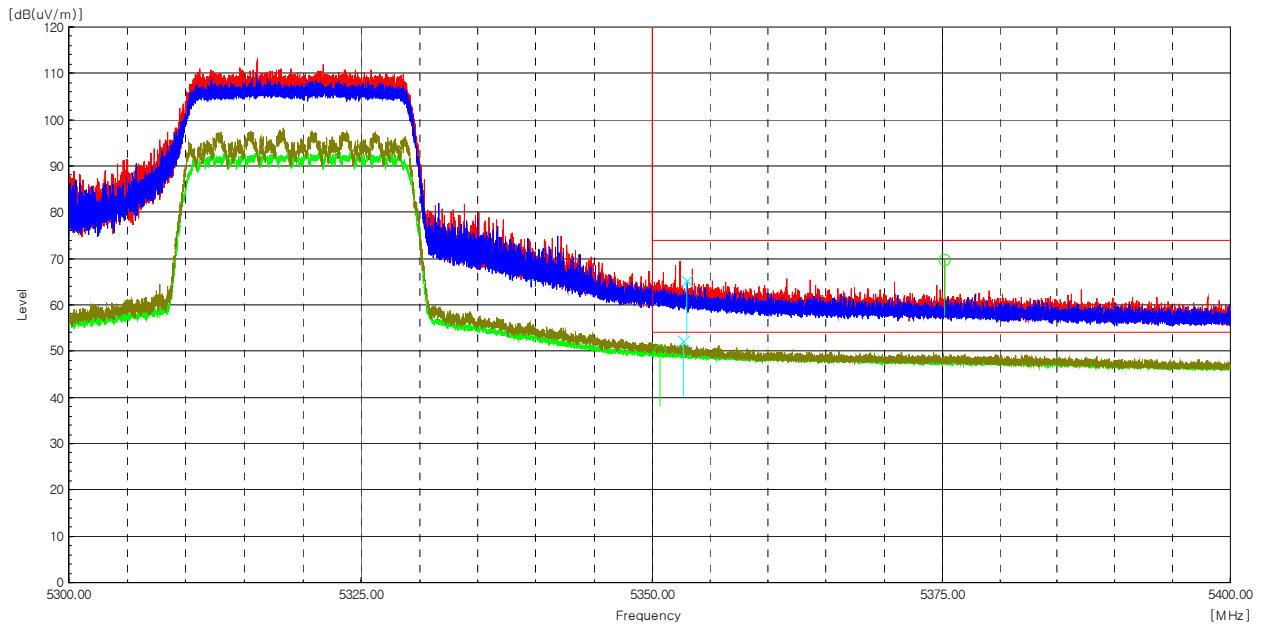

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 375.24	H	66.4	3.3	-----	69.7	-----	74.0	-----	4.3	-----	Peak
5 350.68	H	46.9	3.2	0.3	-----	50.4	-----	54.0	-----	3.6	Average
5 353.02	V	61.9	3.2	-----	65.1	-----	74.0	-----	8.9	-----	Peak
5 352.68	V	49.0	3.2	0.3	-----	52.5	-----	54.0	-----	1.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

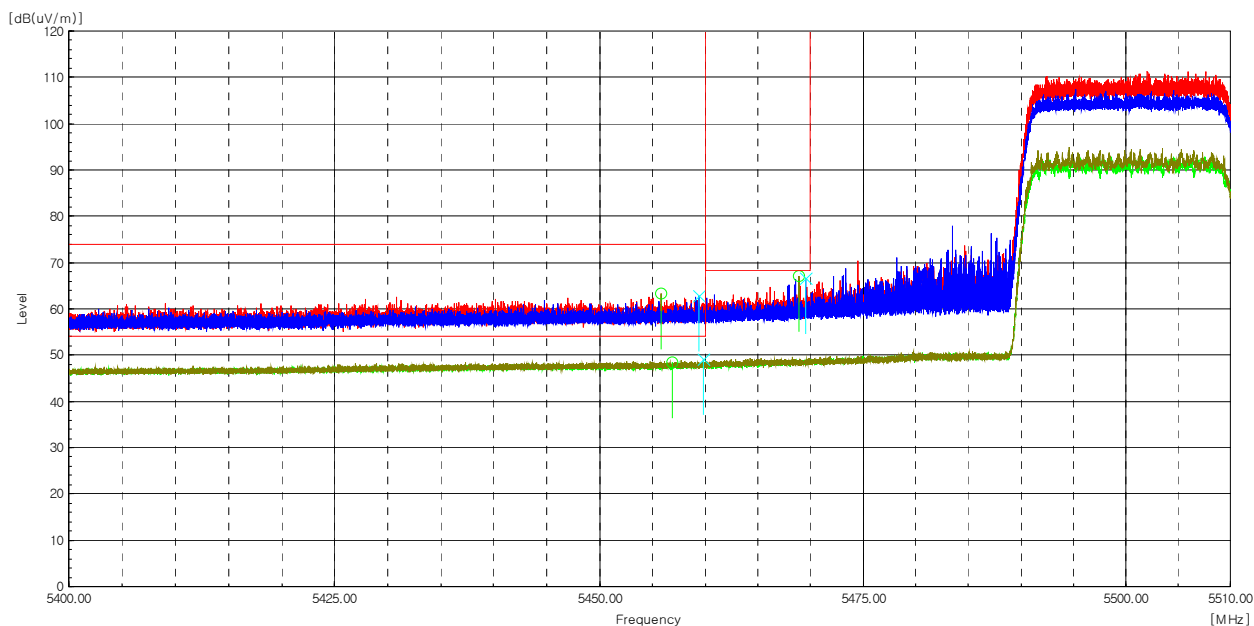

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 455.82	H	59.7	3.6	-----	63.3	-----	74.0	-----	10.7	-----	Peak
5 456.93	H	44.7	3.6	0.3	-----	48.6	-----	54.0	-----	5.4	Average
5 459.37	V	59.3	3.6	-----	62.9	-----	74.0	-----	11.1	-----	Peak
5 459.80	V	45.6	3.6	0.3	-----	49.5	-----	54.0	-----	4.5	Average
5 468.94	H	63.4	3.7	-----	67.1	-----	68.2	-----	1.1	-----	Peak
5 469.51	V	62.9	3.7	-----	66.6	-----	68.2	-----	1.6	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

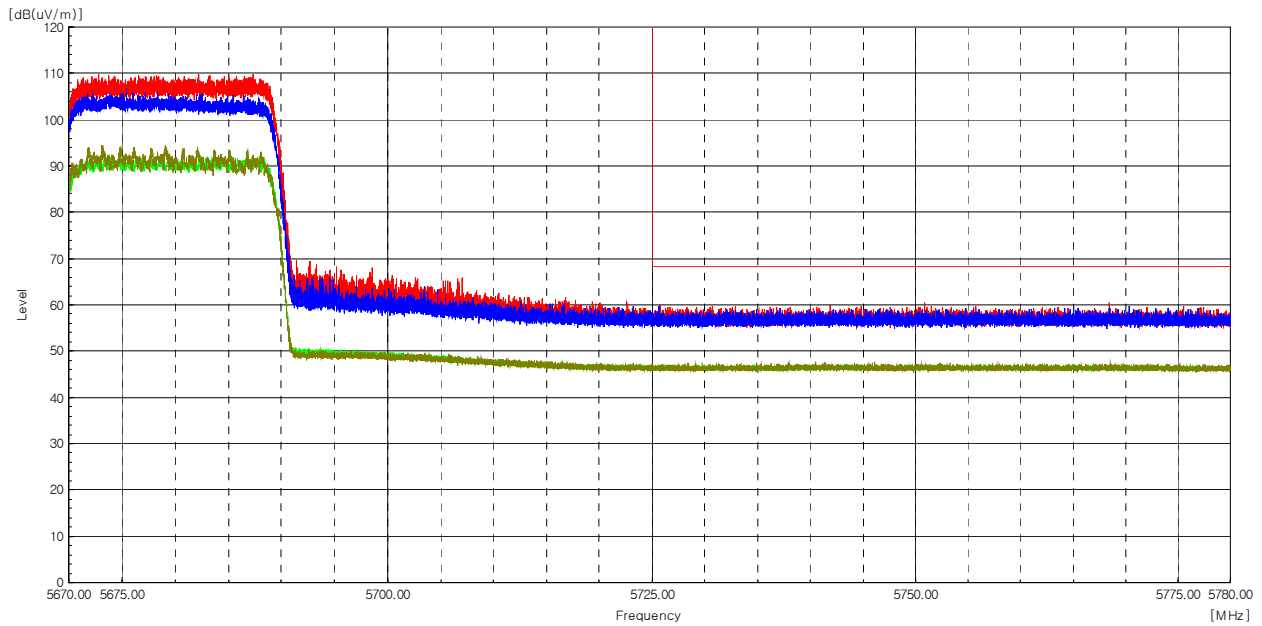


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

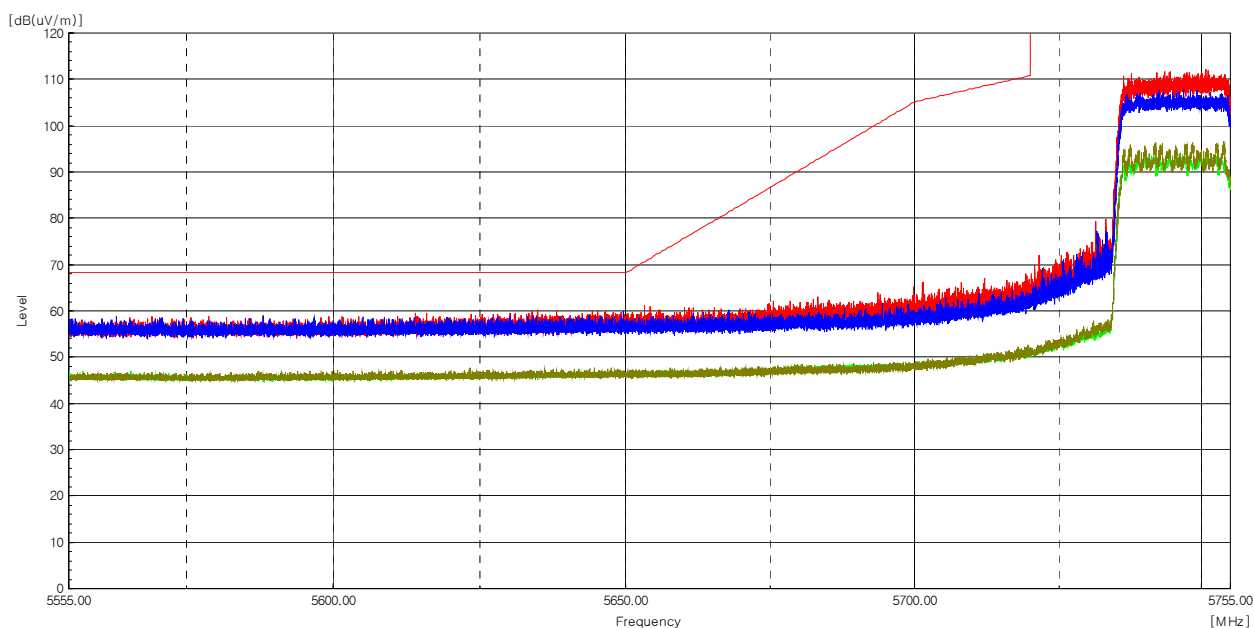


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

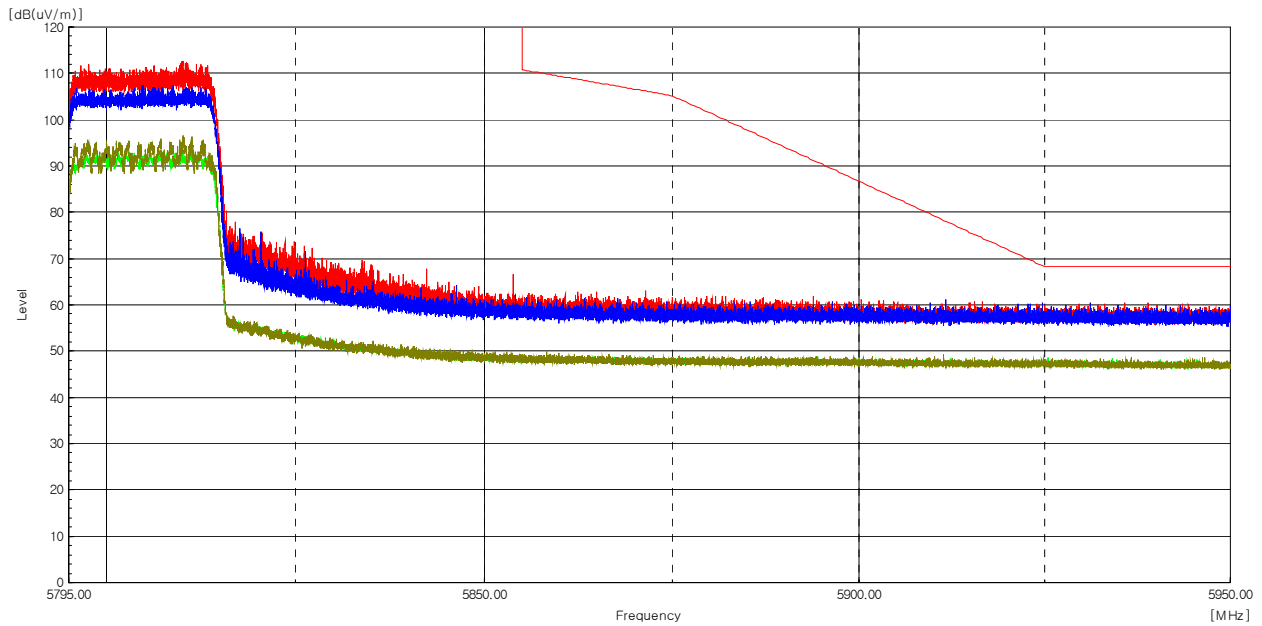

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Test mode : Transmitter, 802.11ax_HE40_484T

The requirements are:

☒ Complies

Test Data

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 385.61	H	46.4	11.3	-----	57.7	-----	68.2	-----	10.5	-----	Peak
10 385.90	V	44.6	11.3	-----	55.9	-----	68.2	-----	12.3	-----	Peak

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 452.42	H	45.7	11.6	-----	57.3	-----	68.2	-----	10.9	-----	Peak
10 463.35	V	44.9	11.6	-----	56.5	-----	68.2	-----	11.7	-----	Peak

Ch.54(5 270 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 528.23	H	44.9	11.7	-----	56.6	-----	68.2	-----	11.6	-----	Peak
10 536.70	V	43.9	11.7	-----	55.6	-----	68.2	-----	12.6	-----	Peak

Ch.62(5 310 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 614.20	H	44.6	11.8	-----	56.4	-----	74.0	-----	17.6	-----	Peak
10 614.72	H	33.9	11.8	0.3	-----	46.0	-----	54.0	-----	8.0	Average
10 608.13	V	43.8	11.8	-----	55.6	-----	74.0	-----	18.4	-----	Peak
10 628.86	V	32.8	11.8	0.3	-----	44.9	-----	54.0	-----	9.1	Average

Ch.102(5 510 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 036.33	H	44.4	12.2	-----	56.6	-----	74.0	-----	17.4	-----	Peak
11 025.47	H	33.2	12.2	0.3	-----	45.7	-----	54.0	-----	8.3	Average
11 034.58	V	43.4	12.2	-----	55.6	-----	74.0	-----	18.4	-----	Peak
11 056.60	V	32.8	12.2	0.3	-----	45.3	-----	54.0	-----	8.7	Average

Ch.118(5 590 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 167.45	H	44.6	12.7	-----	57.3	-----	74.0	-----	16.7	-----	Peak
11 182.16	H	33.9	12.7	0.3	-----	46.9	-----	54.0	-----	7.1	Average
11 188.12	V	43.6	12.7	-----	56.3	-----	74.0	-----	17.7	-----	Peak
11 173.23	V	32.2	12.7	0.3	-----	45.2	-----	54.0	-----	8.8	Average

Ch.134(5 670 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 336.52	H	44.2	12.1	-----	56.3	-----	74.0	-----	17.7	-----	Peak
11 333.02	H	32.6	12.1	0.3	-----	45.0	-----	54.0	-----	9.0	Average
11 341.13	V	42.7	12.1	-----	54.8	-----	74.0	-----	19.2	-----	Peak
11 336.29	V	31.8	12.1	0.3	-----	44.2	-----	54.0	-----	9.8	Average

Ch.142(5 710 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 434.69	H	46.1	12.7	-----	58.8	-----	74.0	-----	15.2	-----	Peak
11 427.10	H	33.7	12.6	0.3	-----	46.6	-----	54.0	-----	7.4	Average
11 413.73	V	44.3	12.5	-----	56.8	-----	74.0	-----	17.2	-----	Peak
11 413.14	V	33.3	12.5	0.3	-----	46.1	-----	54.0	-----	7.9	Average

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 514.41	H	47.9	12.6	-----	60.5	-----	74.0	-----	13.5	-----	Peak
11 501.62	H	35.2	12.5	0.3	-----	48.0	-----	54.0	-----	6.0	Average
11 509.04	V	44.6	12.6	-----	57.2	-----	74.0	-----	16.8	-----	Peak
11 517.86	V	33.1	12.6	0.3	-----	46.0	-----	54.0	-----	8.0	Average
17 245.29	H	45.6	19.0	-----	64.6	-----	68.2	-----	3.6	-----	Peak
17 270.28	V	46.4	19.1	-----	65.5	-----	68.2	-----	2.7	-----	Peak


Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 588.82	H	47.1	13.0	-----	60.1	-----	74.0	-----	13.9	-----	Peak
11 597.70	H	34.6	13.0	0.3	-----	47.9	-----	54.0	-----	6.1	Average
11 562.71	V	44.0	12.9	-----	56.9	-----	74.0	-----	17.1	-----	Peak
11 553.43	V	32.8	12.8	0.3	-----	45.9	-----	54.0	-----	8.1	Average
17 366.38	H	44.8	19.8	-----	64.6	-----	68.2	-----	3.6	-----	Peak
17 382.40	V	46.1	19.8	-----	65.9	-----	68.2	-----	2.3	-----	Peak

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

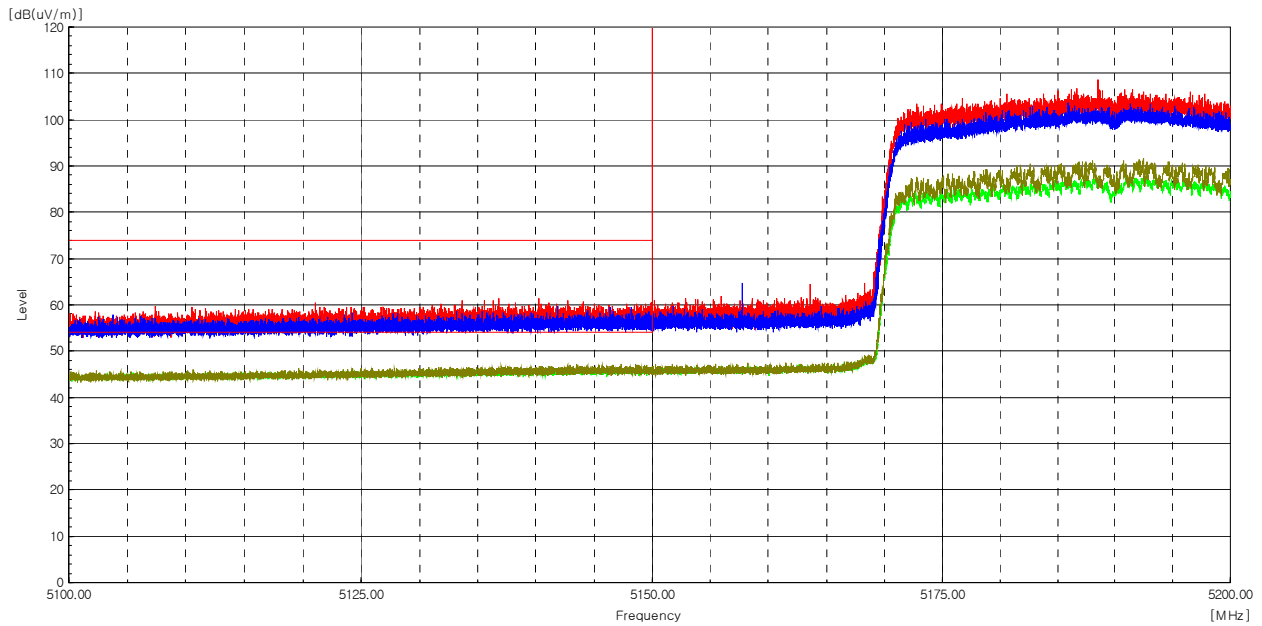


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

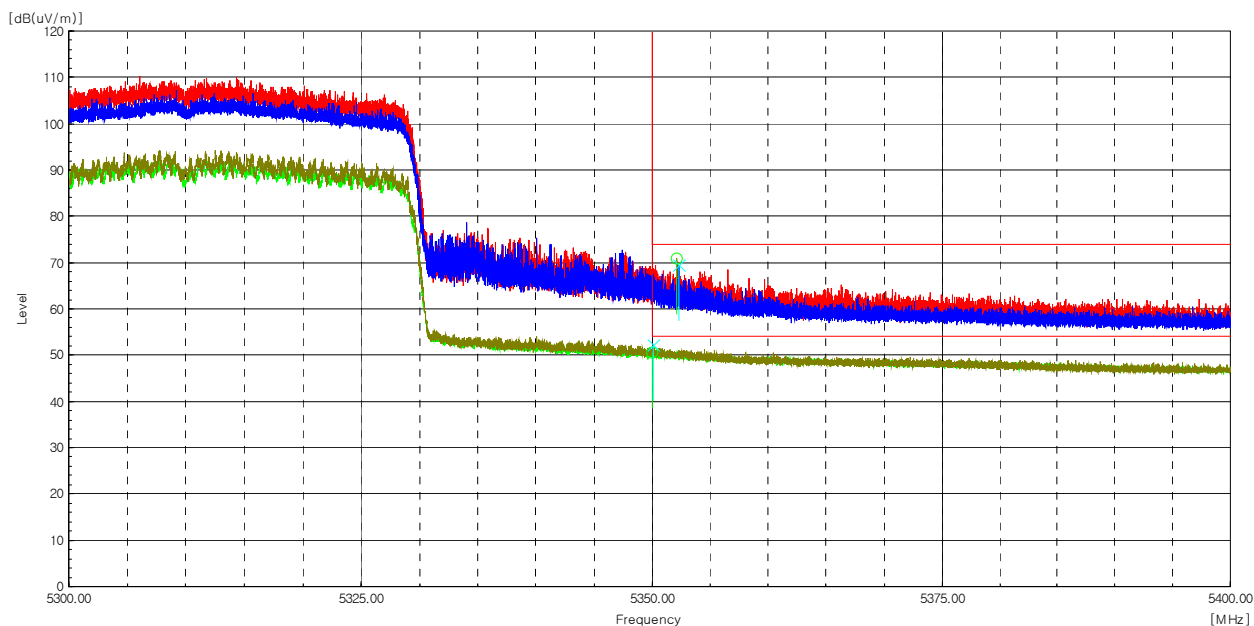

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 352.12	H	67.7	3.2	-----	70.9	-----	74.0	-----	3.1	-----	Peak
5 350.04	H	47.4	3.2	0.3	-----	50.9	-----	54.0	-----	3.1	Average
5 352.32	V	66.2	3.2	-----	69.4	-----	74.0	-----	4.6	-----	Peak
5 350.09	V	49.0	3.2	0.3	-----	52.5	-----	54.0	-----	1.5	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

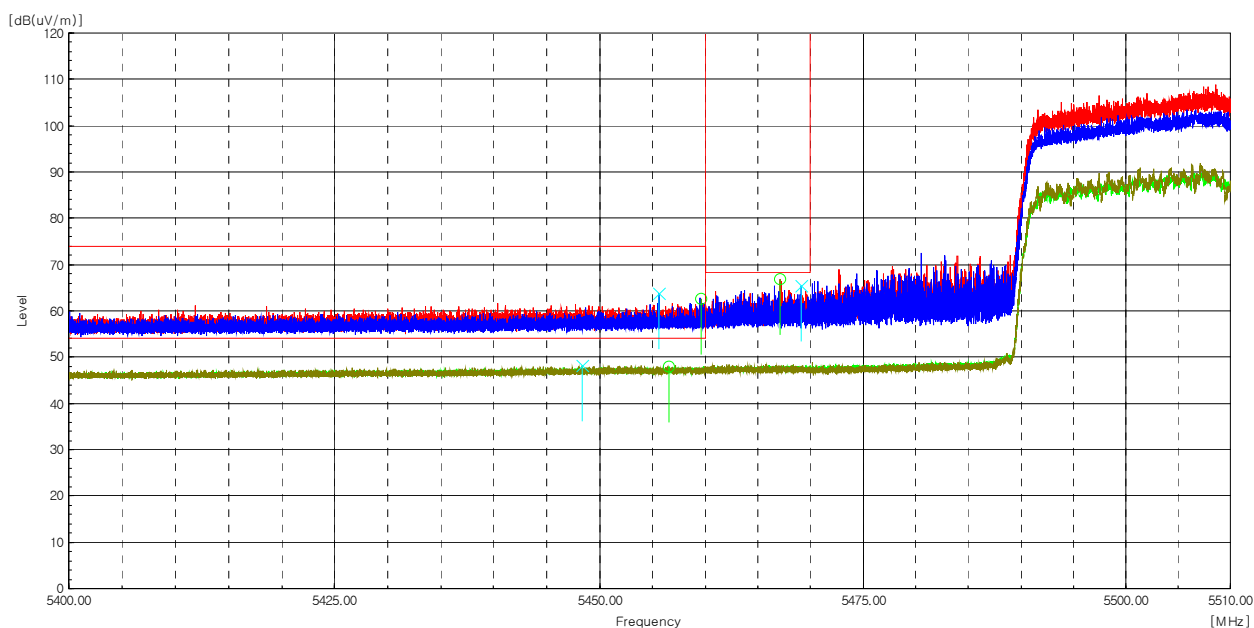

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 459.61	H	59.1	3.6	-----	62.7	-----	74.0	-----	11.3	-----	Peak
5 456.55	H	44.4	3.6	0.3	-----	48.3	-----	54.0	-----	5.7	Average
5 455.65	V	60.1	3.6	-----	63.7	-----	74.0	-----	10.3	-----	Peak
5 448.40	V	44.7	3.6	0.3	-----	48.6	-----	54.0	-----	5.4	Average
5 467.13	H	63.1	3.7	-----	66.8	-----	68.2	-----	1.4	-----	Peak
5 469.10	V	61.8	3.7	-----	65.5	-----	68.2	-----	2.7	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

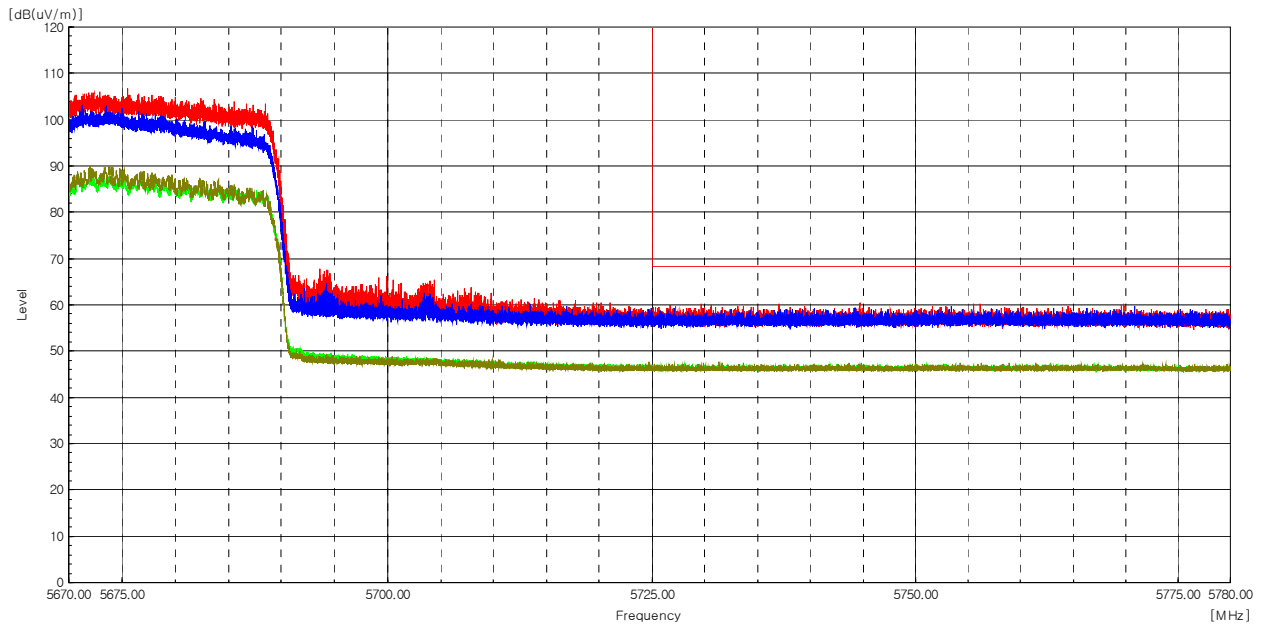


Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

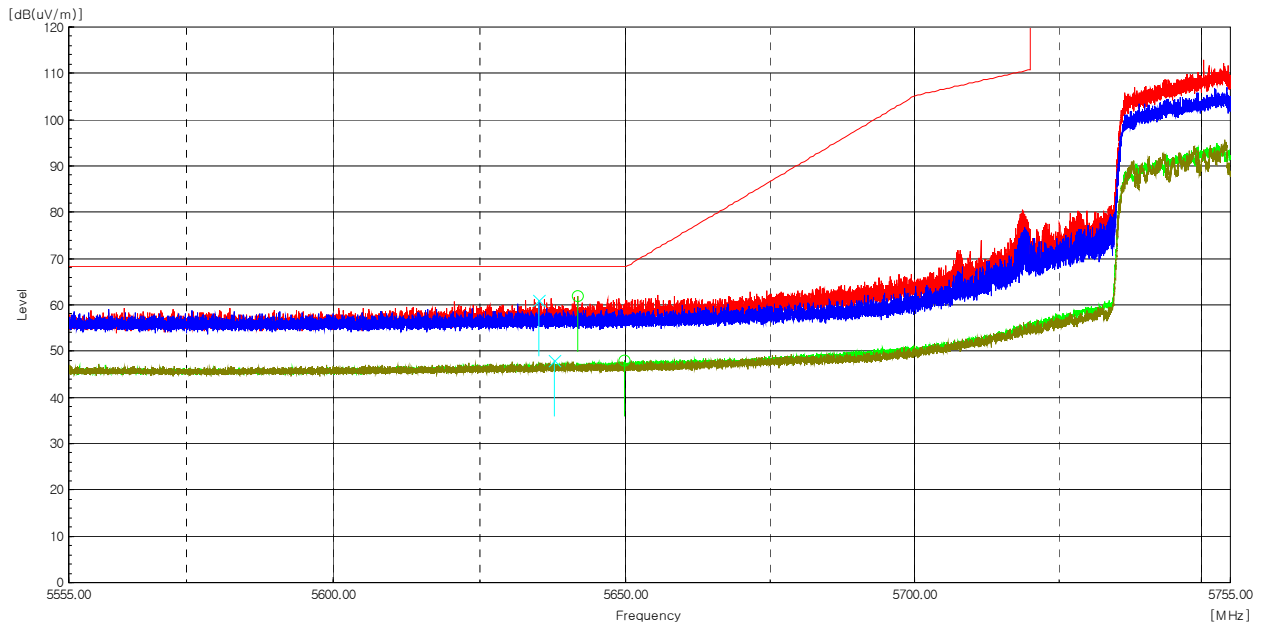

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 641.84	H	57.9	4.1	-----	62.0	-----	68.2	-----	6.2	-----	Peak
5 635.02	V	57.0	4.1	-----	61.1	-----	68.2	-----	7.1	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ax_HE40_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

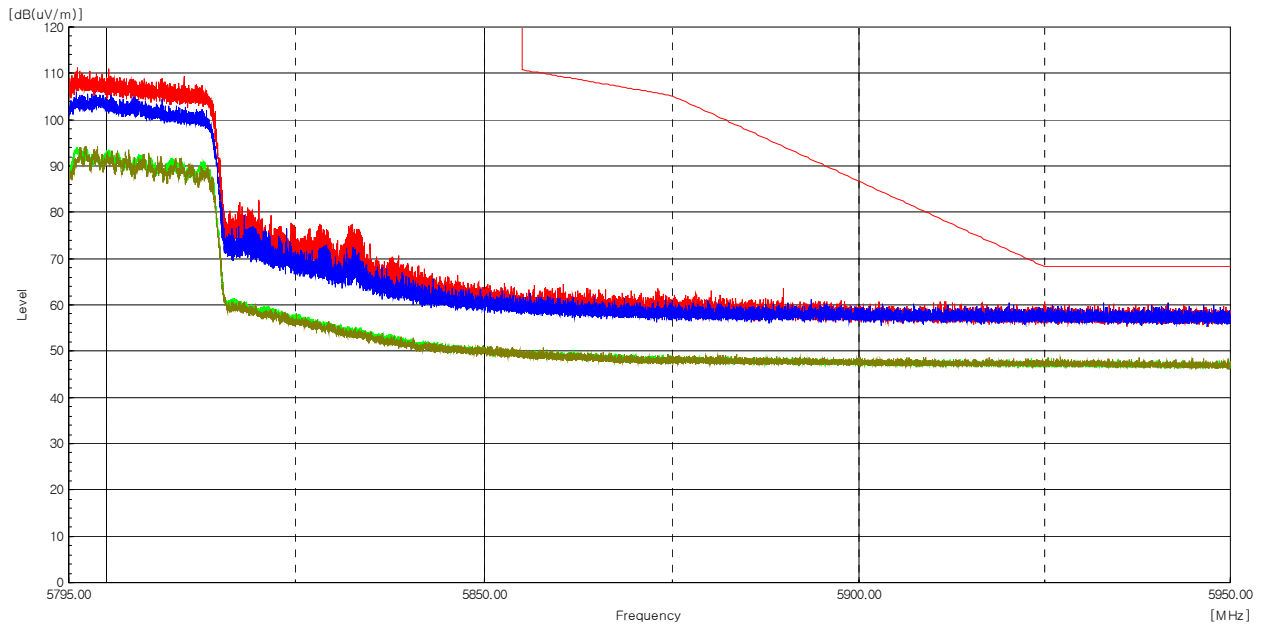

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Radiated Restricted Band Edge Plot

Test mode : Transmitter, 802.11ac_VHT80

The requirements are:

☒ Complies

Test Data

Ch.42(5 210 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.58(5 290 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 589.32	H	45.0	11.8	-----	56.8	-----	68.2	-----	11.4	-----	Peak
10 596.27	V	44.7	11.8	-----	56.5	-----	68.2	-----	11.7	-----	Peak

Ch.106(5 530 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 080.78	H	45.5	12.2	-----	57.7	-----	74.0	-----	16.3	-----	Peak
11 085.92	H	34.1	12.2	0.9	-----	47.2	-----	54.0	-----	6.8	Average
11 039.13	V	44.8	12.2	-----	57.0	-----	74.0	-----	17.0	-----	Peak
11 054.44	V	33.6	12.2	0.9	-----	46.7	-----	54.0	-----	7.3	Average

Ch.122(5 610 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 236.24	H	45.7	12.8	-----	58.5	-----	74.0	-----	15.5	-----	Peak
11 245.94	H	33.4	12.8	0.9	-----	47.1	-----	54.0	-----	6.9	Average
11 190.51	V	44.5	12.7	-----	57.2	-----	74.0	-----	16.8	-----	Peak
11 269.77	V	32.8	12.8	0.9	-----	46.5	-----	54.0	-----	7.5	Average

Ch.138(5 690 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 407.36	H	47.0	12.4	-----	59.4	-----	74.0	-----	14.6	-----	Peak
11 387.56	H	34.7	12.3	0.9	-----	47.9	-----	54.0	-----	6.1	Average
11 380.85	V	46.1	12.2	-----	58.3	-----	74.0	-----	15.7	-----	Peak
11 439.02	V	34.2	12.7	0.9	-----	47.8	-----	54.0	-----	6.2	Average


Ch.155(5 775 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 542.33	H	46.3	12.7	-----	59.0	-----	74.0	-----	15.0	-----	Peak
11 548.29	H	34.2	12.8	0.9	-----	47.9	-----	54.0	-----	6.1	Average
11 483.87	V	44.6	12.6	-----	57.2	-----	74.0	-----	16.8	-----	Peak
11 559.56	V	33.4	12.8	0.9	-----	47.1	-----	54.0	-----	6.9	Average
17 358.02	H	45.9	19.7	-----	65.6	-----	68.2	-----	2.6	-----	Peak
17 359.16	V	46.9	19.8	-----	66.7	-----	68.2	-----	1.5	-----	Peak

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain


Worst Case Mode :	802.11ac_VHT80
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

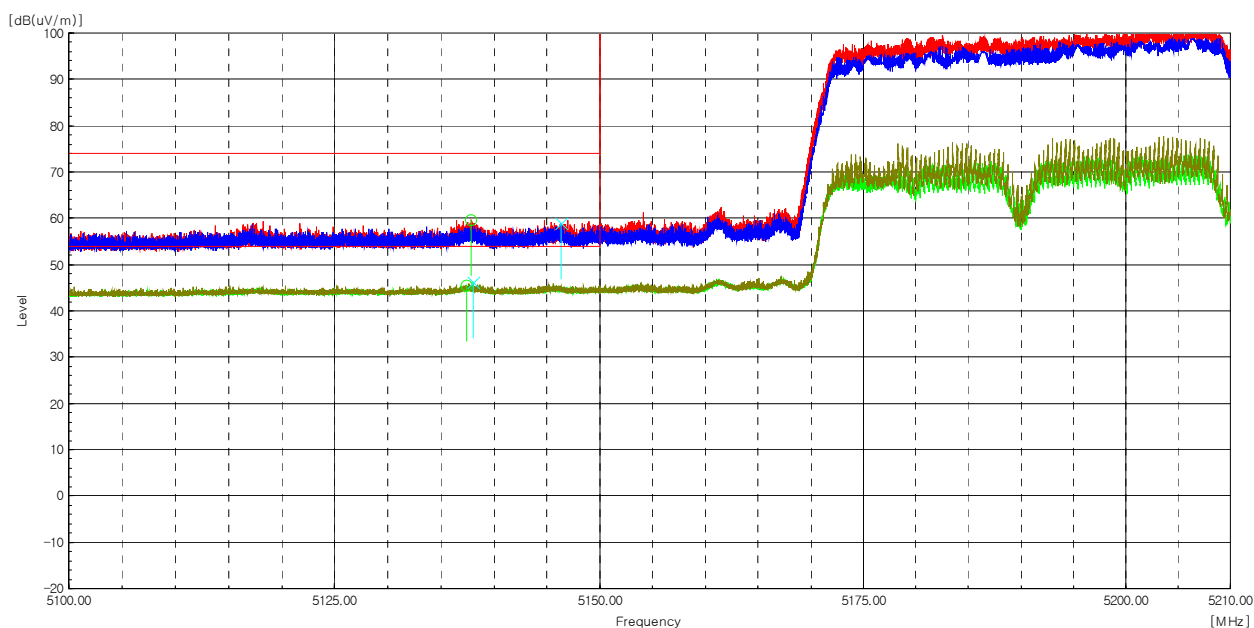

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 137.89	H	57.1	2.6	-----	59.7	-----	74.0	-----	14.3	-----	Peak
5 137.43	H	42.9	2.6	0.9	-----	46.4	-----	54.0	-----	7.6	Average
5 146.35	V	56.3	2.6	-----	58.9	-----	74.0	-----	15.1	-----	Peak
5 138.09	V	43.4	2.6	0.9	-----	46.9	-----	54.0	-----	7.1	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT80
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 290 MHz
Channel :	58

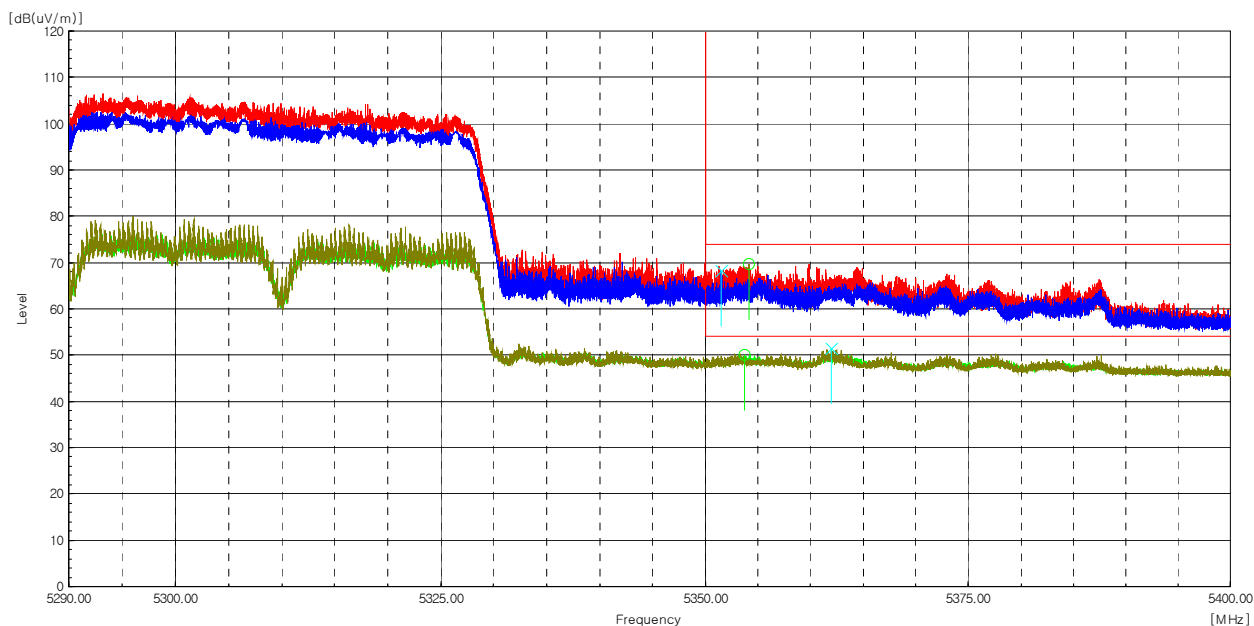

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 354.12	H	66.5	3.2	-----	69.7	-----	74.0	-----	4.3	-----	Peak
5 353.76	H	46.9	3.2	0.9	-----	51.0	-----	54.0	-----	3.0	Average
5 351.55	V	65.1	3.2	-----	68.3	-----	74.0	-----	5.7	-----	Peak
5 362.00	V	48.1	3.3	0.9	-----	52.3	-----	54.0	-----	1.7	Average

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT80
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 530 MHz
Channel :	106

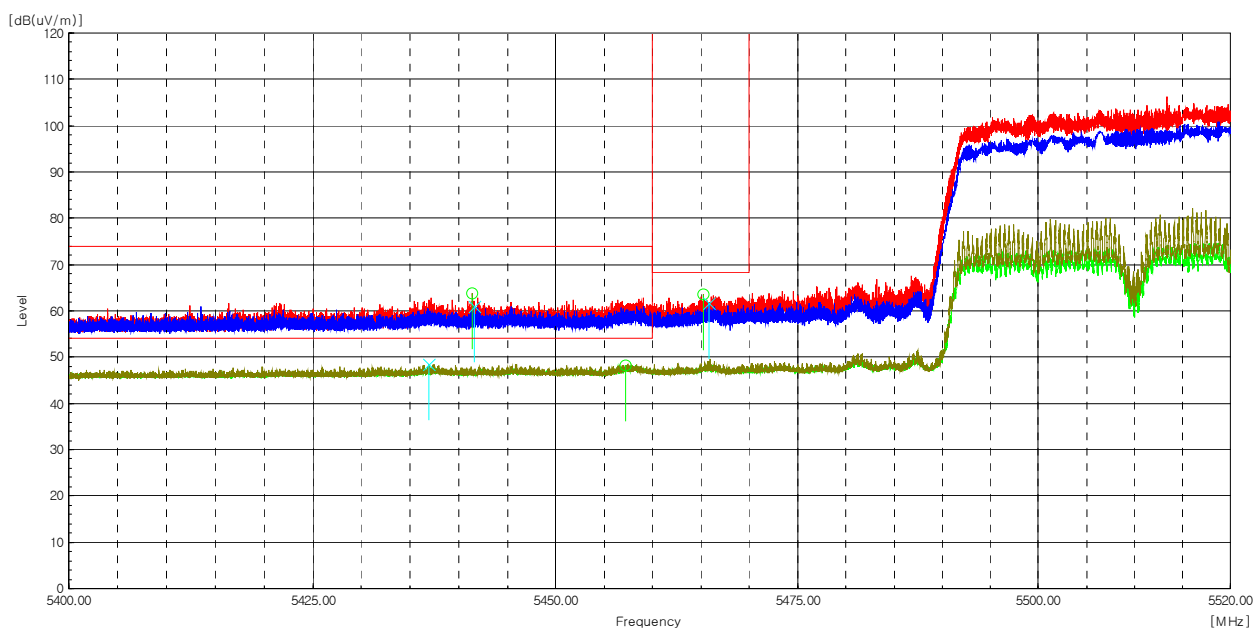

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 441.44	H	60.3	3.5	-----	63.8	-----	74.0	-----	10.2	-----	Peak
5 457.25	H	44.5	3.6	0.9	-----	49.0	-----	54.0	-----	5.0	Average
5 441.63	V	57.5	3.5	-----	61.0	-----	74.0	-----	13.0	-----	Peak
5 436.89	V	45.0	3.5	0.9	-----	49.4	-----	54.0	-----	4.6	Average
5 465.26	H	59.7	3.7	-----	63.4	-----	68.2	-----	4.8	-----	Peak
5 465.81	V	58.0	3.7	-----	61.7	-----	68.2	-----	6.5	-----	Peak

Radiated Restricted Band Edge Plot


Worst Case Mode :	802.11ac_VHT80
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 610 MHz
Channel :	122

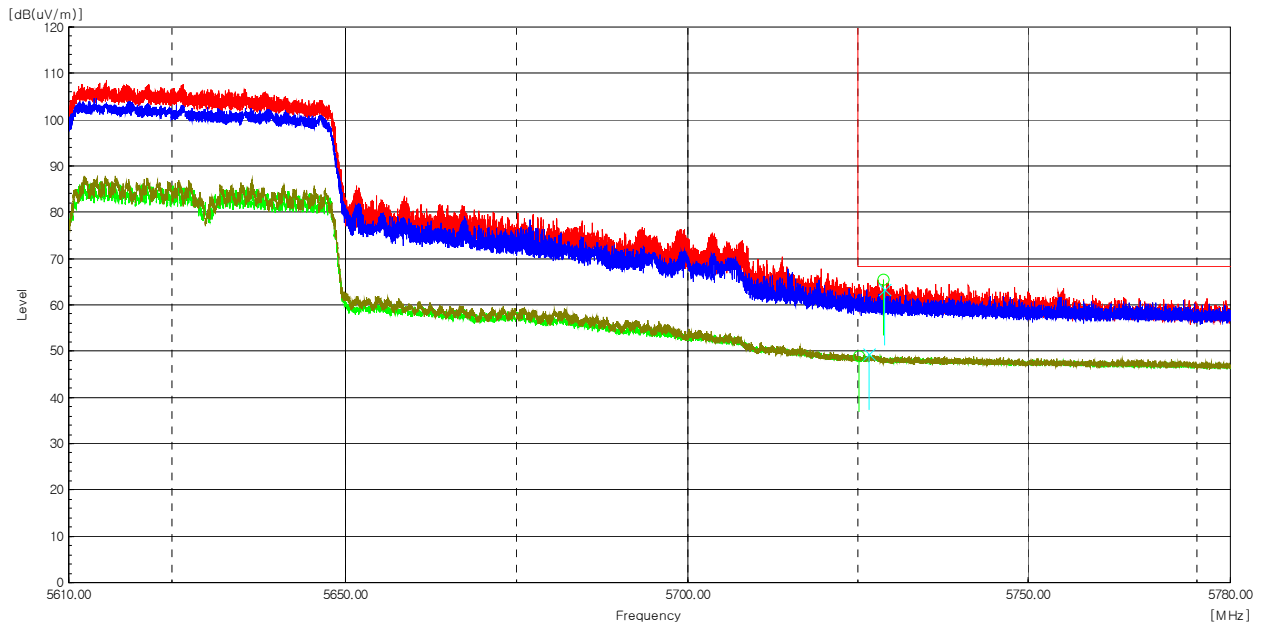

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 728.66	H	61.2	4.2	-----	65.4	-----	68.2	-----	2.8	-----	Peak
5 728.84	V	59.0	4.2	-----	63.2	-----	68.2	-----	5.0	-----	Peak

Radiated Restricted Band Edge Plot

Worst Case Mode :	802.11ac_VHT80
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz
Channel :	155

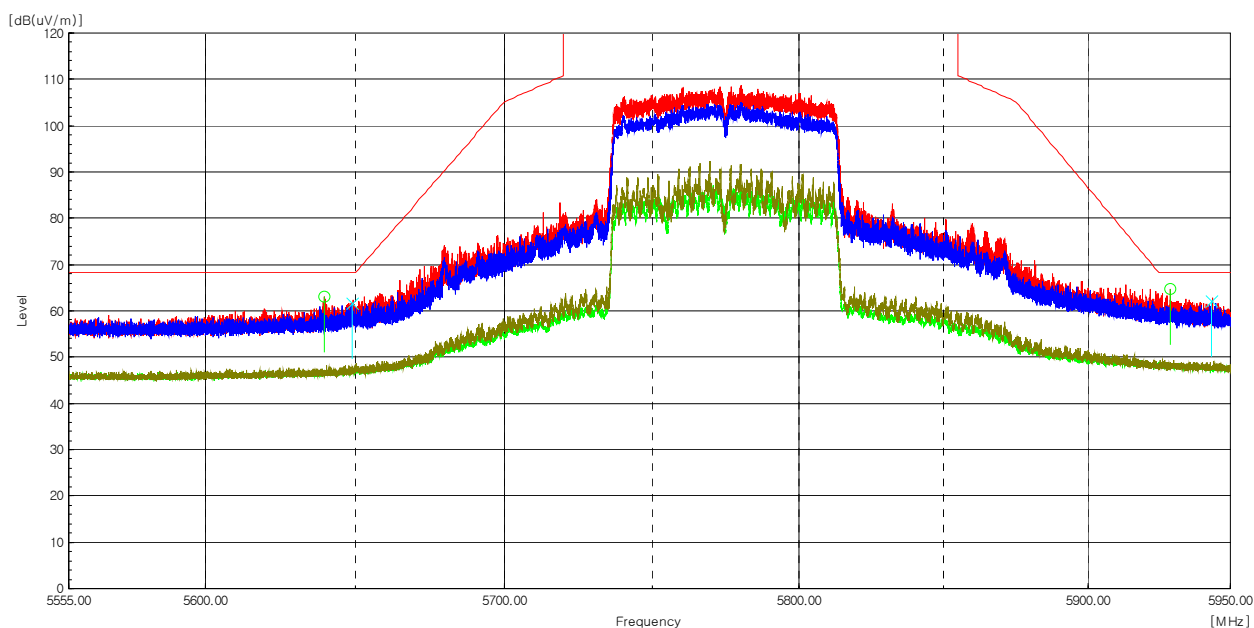

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 639.77	H	59.0	4.1	-----	63.1	-----	68.2	-----	5.1	-----	Peak
5 648.95	V	57.6	4.1	-----	61.7	-----	68.2	-----	6.5	-----	Peak
5 929.08	H	59.6	5.0	-----	64.6	-----	68.2	-----	3.6	-----	Peak
5 943.41	V	57.3	4.9	-----	62.2	-----	68.2	-----	6.0	-----	Peak

Radiated Restricted Band Edge Plot

Test mode : Transmitter, 802.11ax_HE80_26T

The requirements are:

☒ Complies

Test Data

Ch.42(5 210 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.58(5 290 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 656.48	H	48.1	11.8	-----	59.9	-----	74.0	-----	14.1	-----	Peak
10 656.42	H	33.2	11.8	0.2	-----	45.2	-----	54.0	-----	8.8	Average
10 656.25	V	43.4	11.8	-----	55.2	-----	74.0	-----	18.8	-----	Peak
10 655.31	V	32.8	11.8	0.2	-----	44.8	-----	54.0	-----	9.2	Average

Ch.106(5 530 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 136.26	H	50.2	12.5	-----	62.7	-----	74.0	-----	11.3	-----	Peak
11 136.43	H	35.1	12.5	0.2	-----	47.8	-----	54.0	-----	6.2	Average
11 135.38	V	43.3	12.4	-----	55.7	-----	74.0	-----	18.3	-----	Peak
11 134.21	V	32.3	12.4	0.2	-----	44.9	-----	54.0	-----	9.1	Average

Ch.122(5 610 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 296.40	H	49.6	12.6	-----	62.2	-----	74.0	-----	11.8	-----	Peak
11 296.34	H	34.7	12.6	0.2	-----	47.5	-----	54.0	-----	6.5	Average
11 297.16	V	43.6	12.6	-----	56.2	-----	74.0	-----	17.8	-----	Peak
11 296.16	V	32.5	12.6	0.2	-----	45.3	-----	54.0	-----	8.7	Average

Ch.138(5 690 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 457.00	H	48.9	12.7	-----	61.6	-----	74.0	-----	12.4	-----	Peak
11 455.19	H	34.6	12.7	0.2	-----	47.5	-----	54.0	-----	6.5	Average
11 455.49	V	44.0	12.7	-----	56.7	-----	74.0	-----	17.3	-----	Peak
11 454.26	V	32.7	12.7	0.2	-----	45.6	-----	54.0	-----	8.4	Average

Ch.155(5 775 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
11 626.20	H	51.6	12.9	-----	64.5	-----	74.0	-----	9.5	-----	Peak
11 625.79	H	35.7	12.9	0.2	-----	48.8	-----	54.0	-----	5.2	Average
11 625.85	V	43.6	12.9	-----	56.5	-----	74.0	-----	17.5	-----	Peak
11 624.91	V	32.4	12.9	0.2	-----	45.5	-----	54.0	-----	8.5	Average

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in lie-down positon(Y axis) and the worst case was recorded.
2. Peak Result = Reading + c.f(Correction factor)
Average Result = Reading + c.f(Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp Gain