



No. I21Z62345-SEM03

For

TCL Communication Ltd.

GSM/UMTS/LTE Mobile phone

Model name: 4188R,4188C

With

Hardware Version: 03

Software Version: LV3V

FCC ID: 2AC CJH159

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

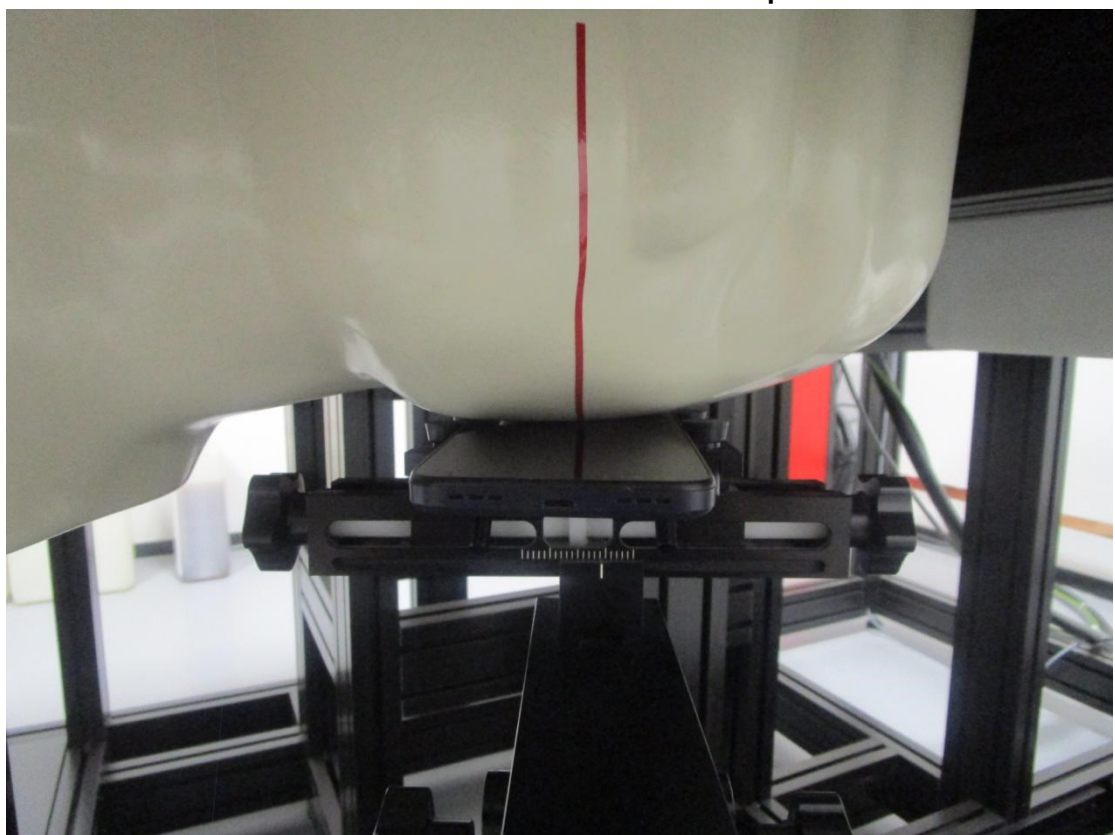


Picture 2: Left Hand Touch Cheek Position

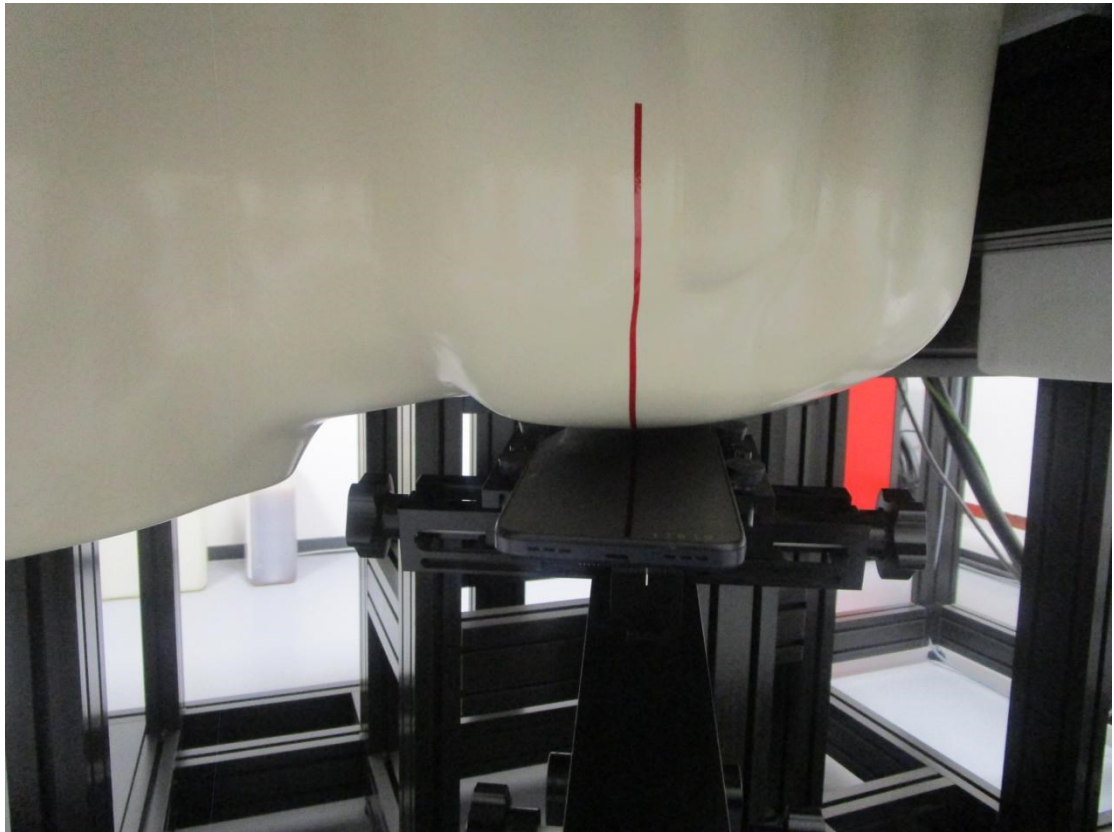

Picture 3: Left Hand Tilt 15° Position

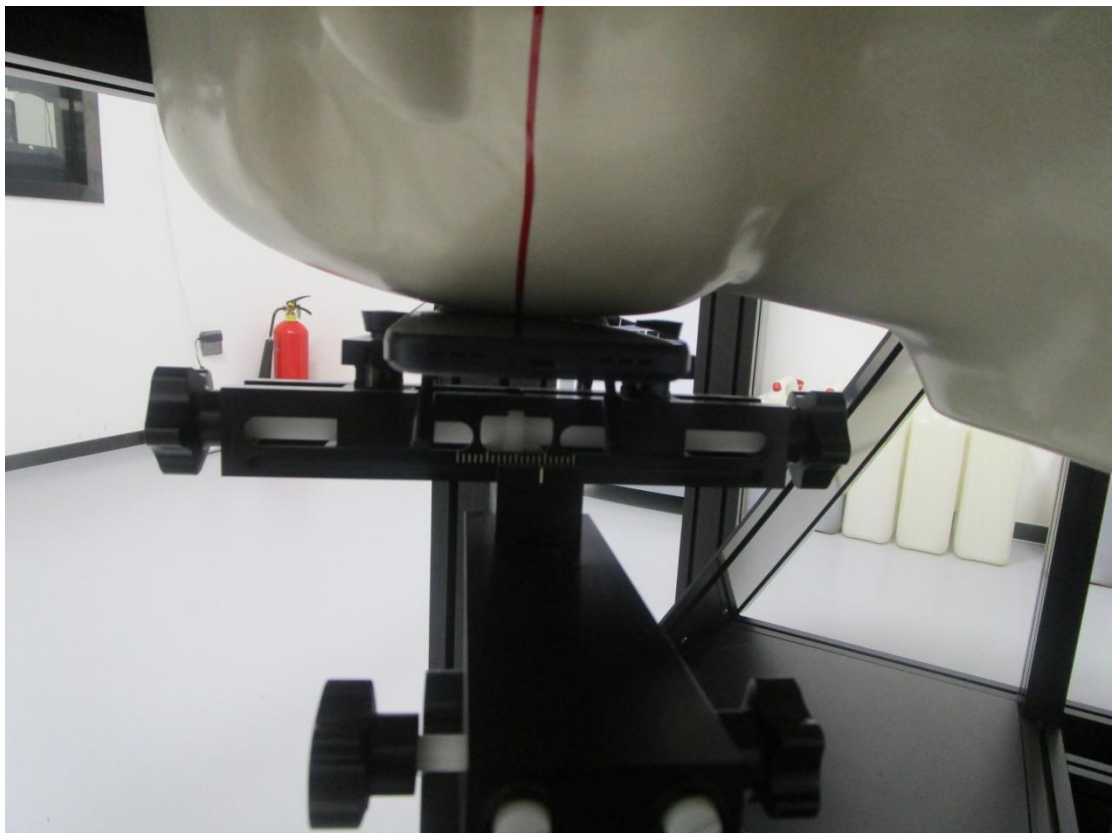


Picture 4: Right Hand Touch Cheek Position

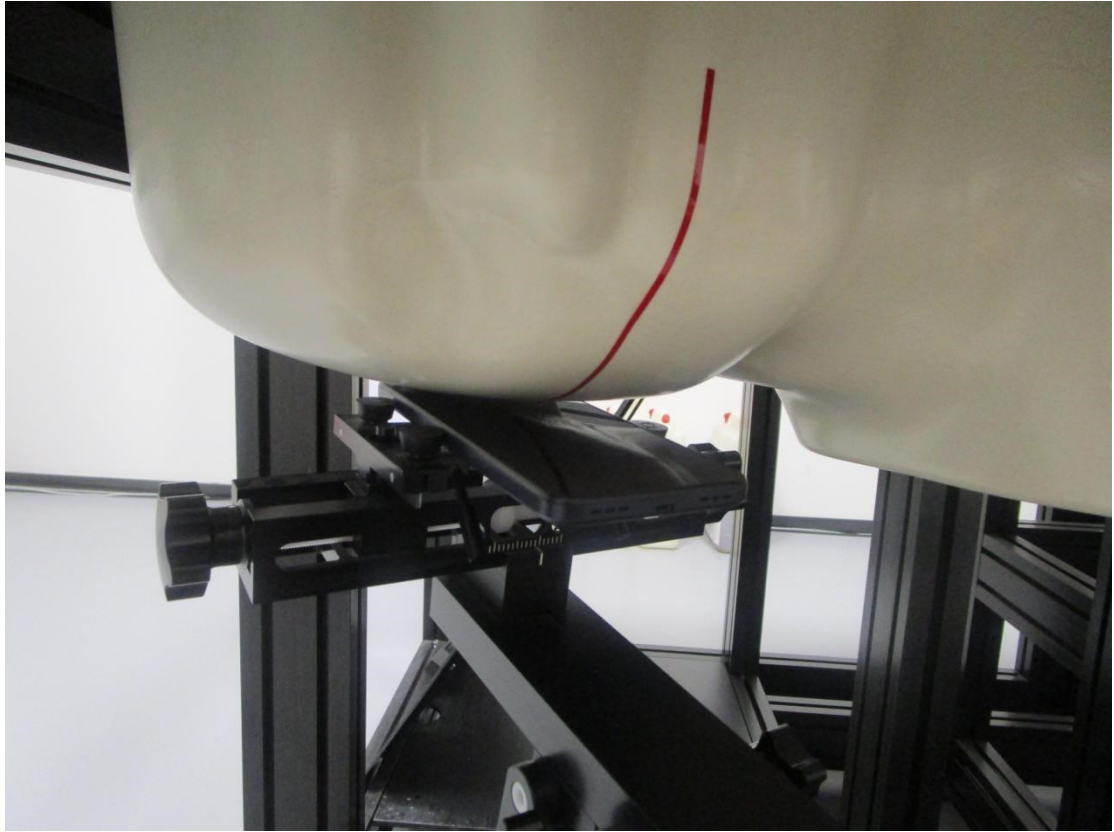


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 11 test positions all with the distance =10mm/15mm/0mm between the EUT and the phantom bottom:

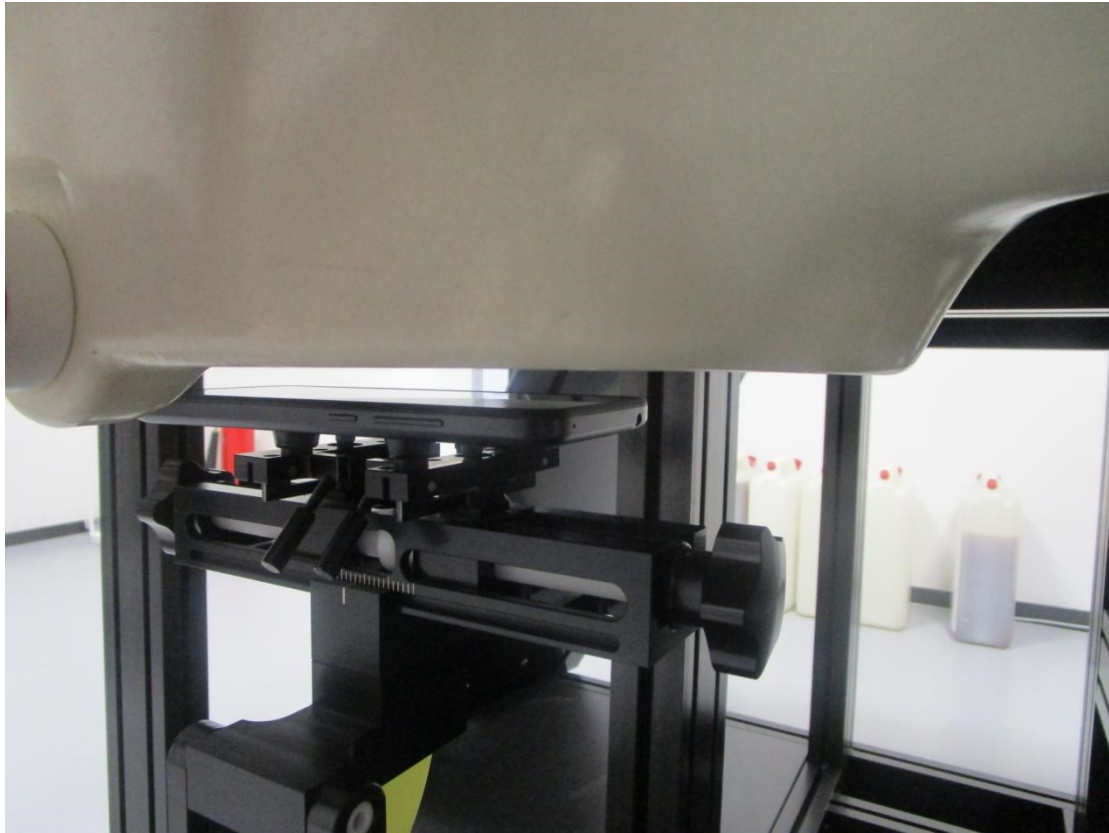


Picture 6: Front 10mm

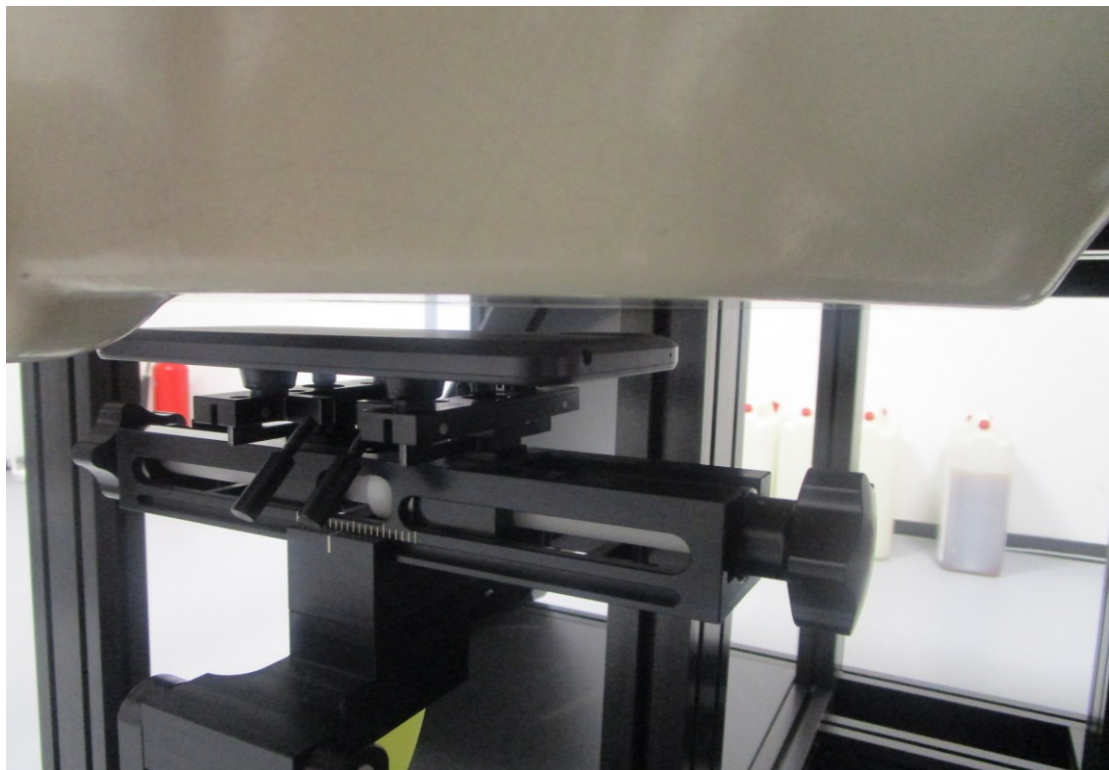


Picture 7: Rear 10mm

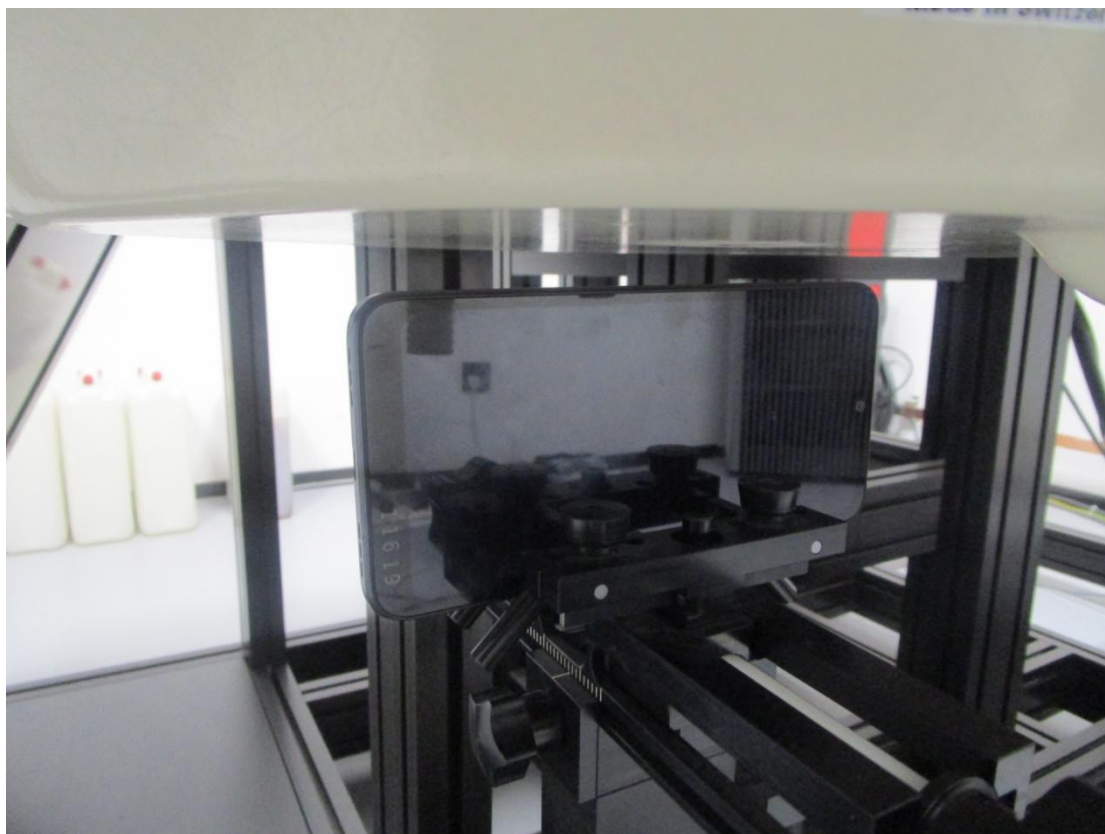


Picture 8: Left 10mm

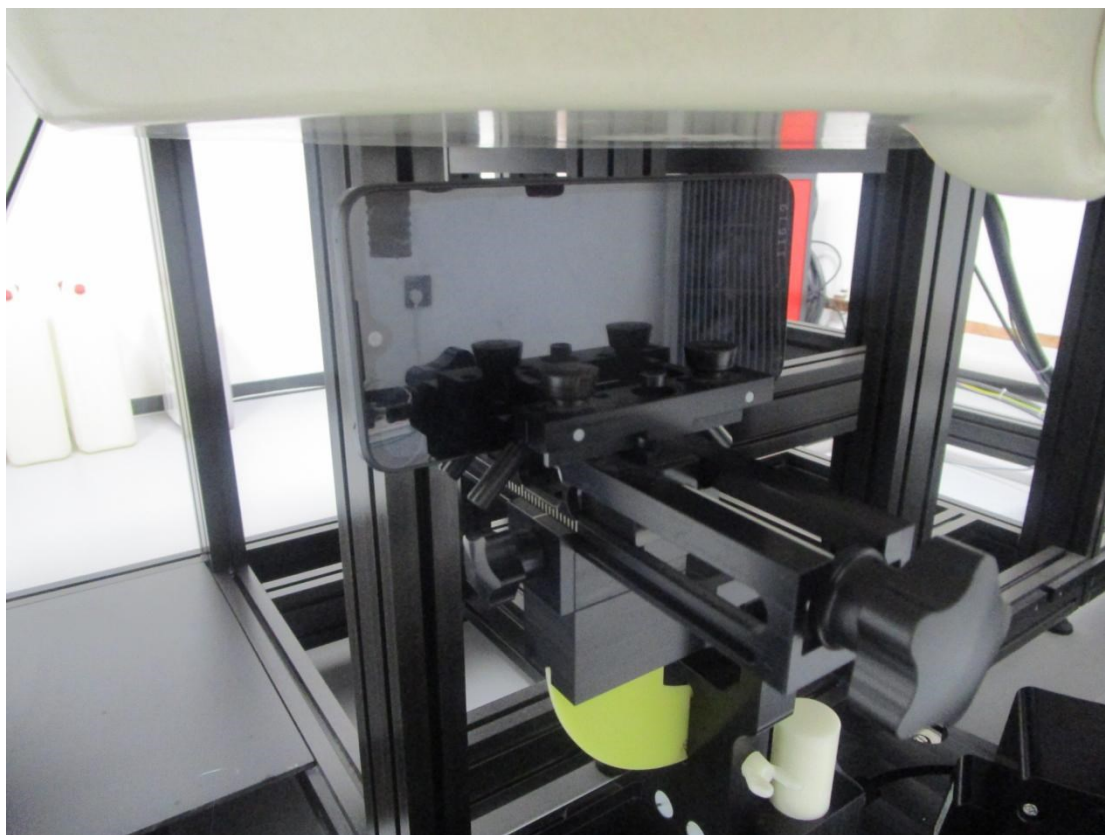


Picture 9: Right 10mm

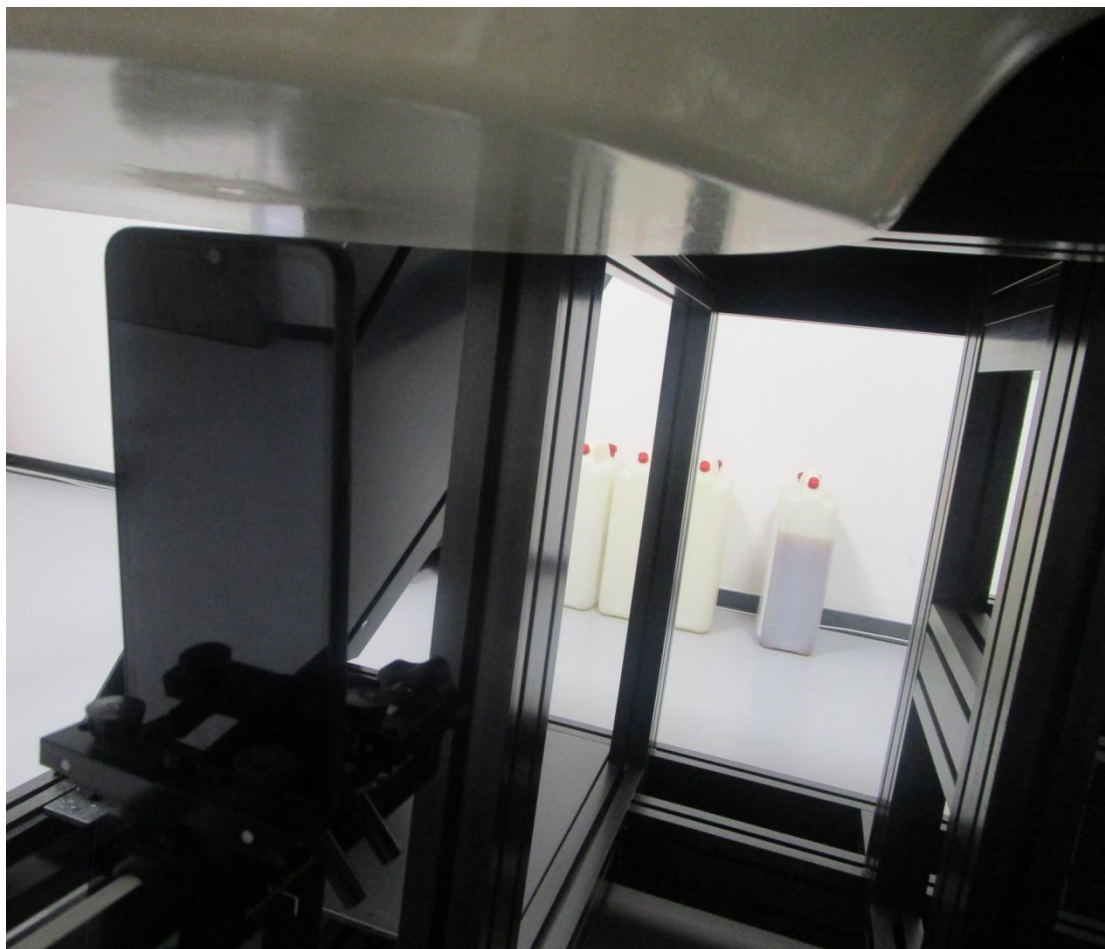

Picture 10: Top 10mm

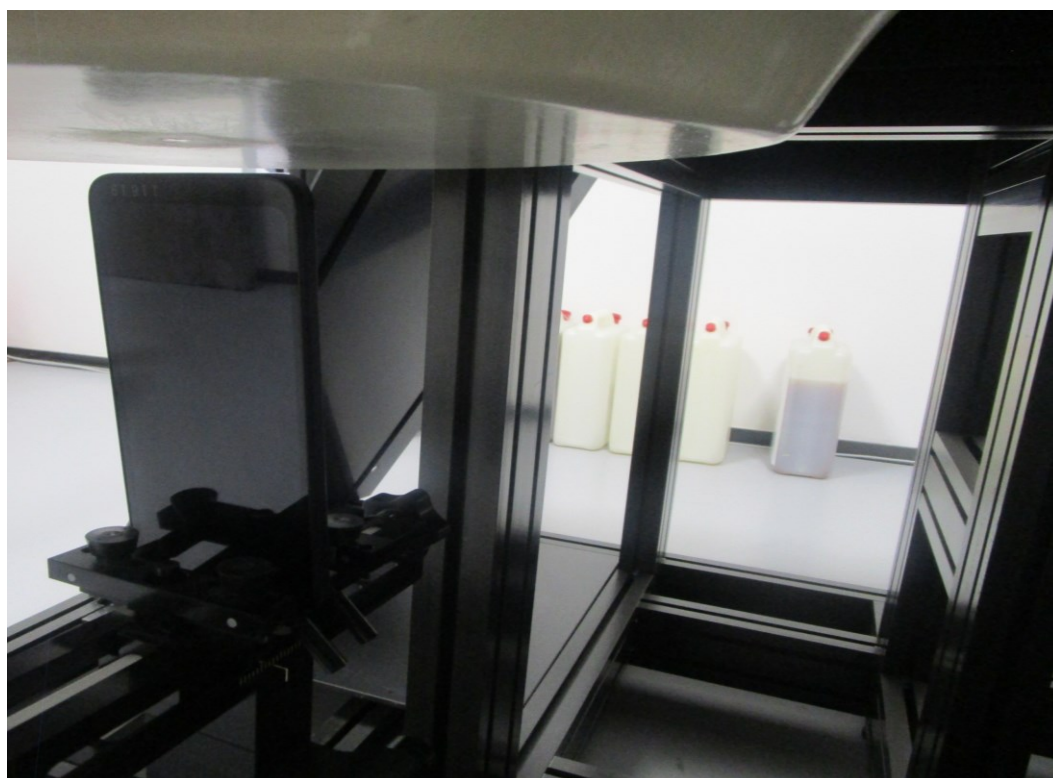


Picture 11: Bottom 10mm

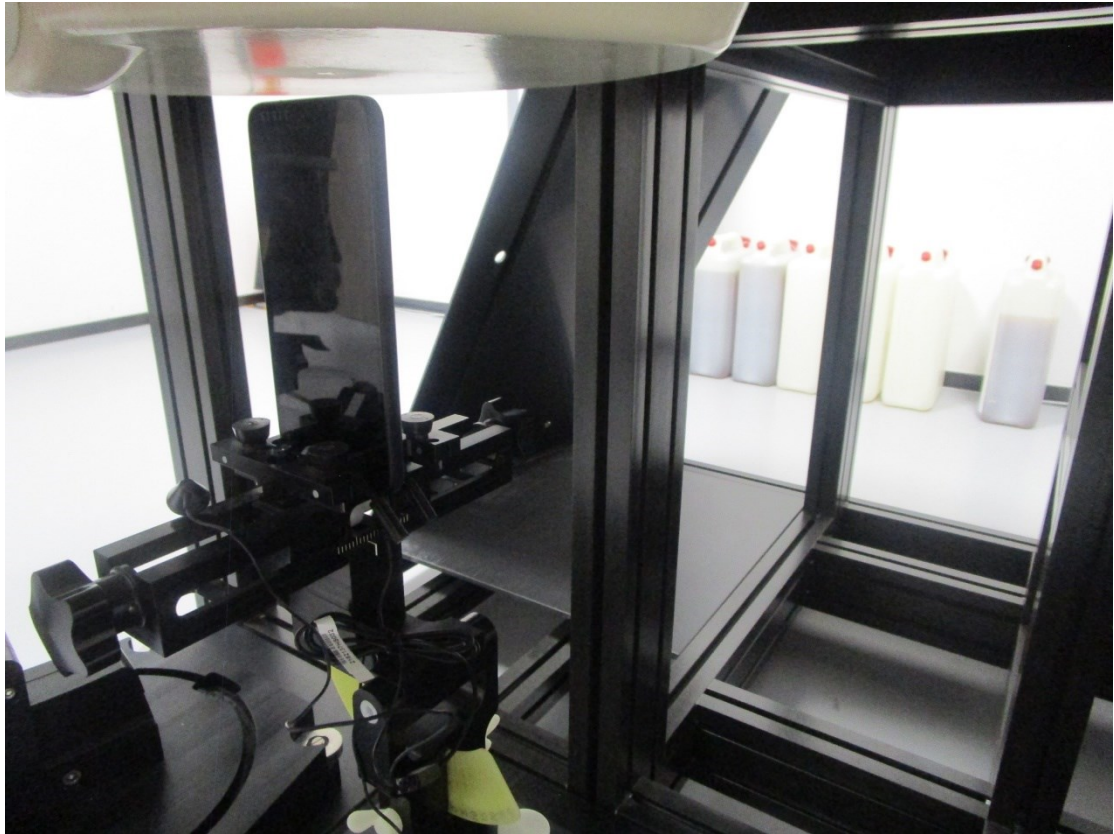


Picture 12: Bottom 10mm with headset




Picture 13: Bottom 0mm

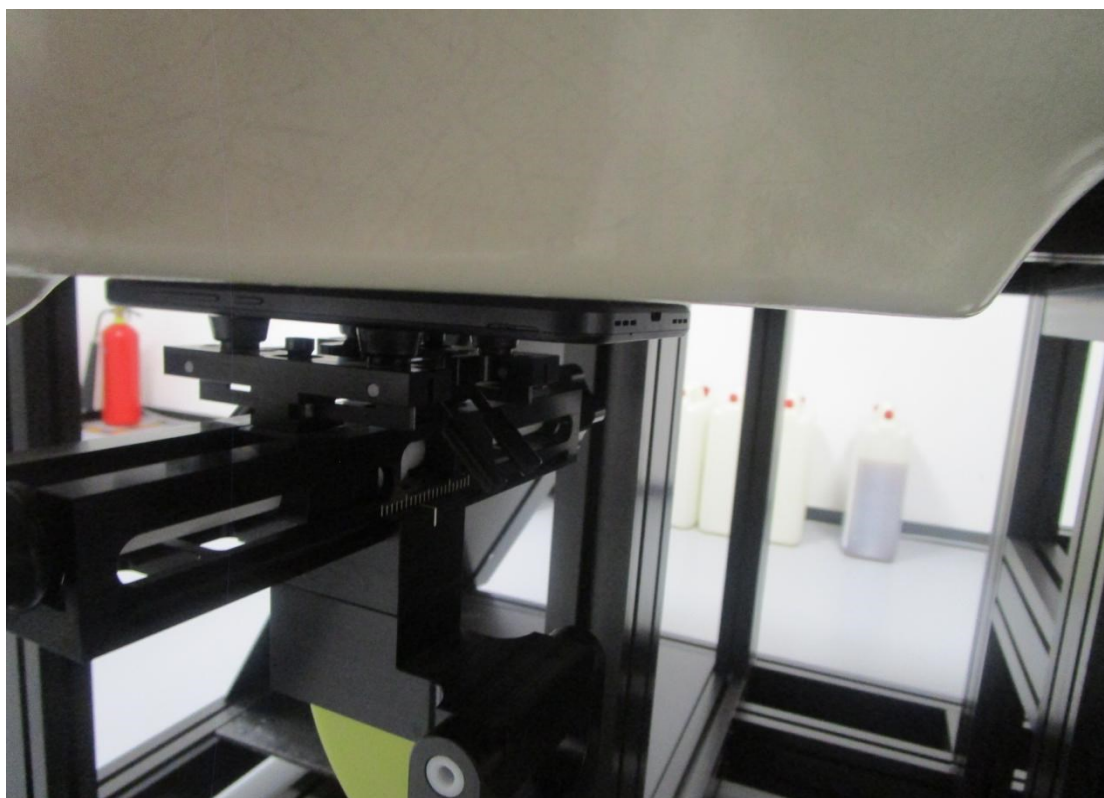

Picture 14: Rear 0mm

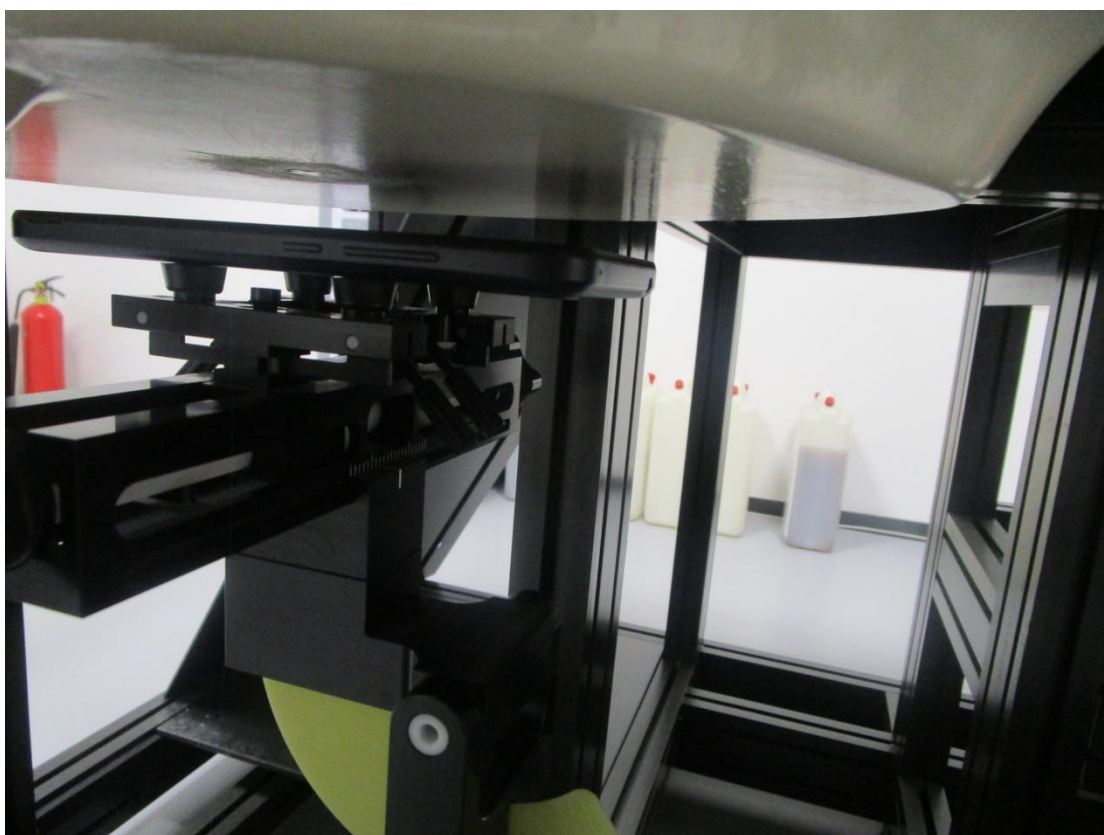

Picture 15: Front 15mm

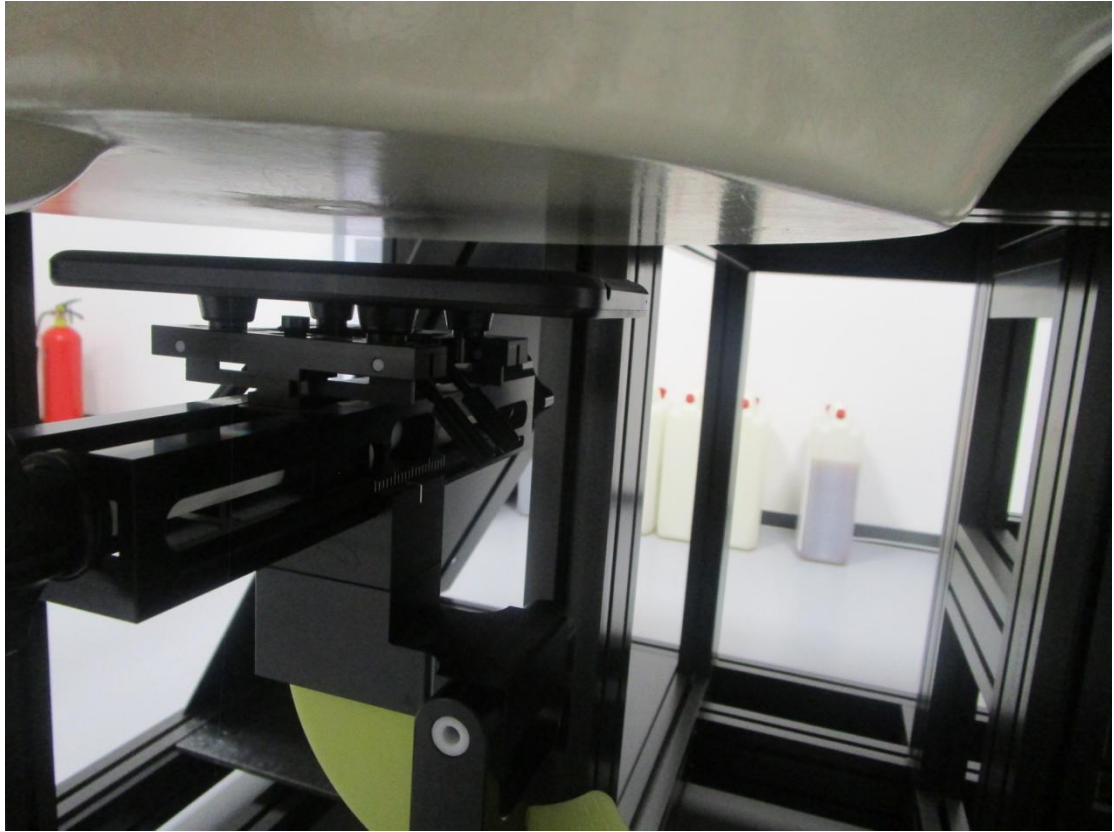

Picture 16: Rear 15mm