

TEST REPORT

Report Number: 103615308MPK-008

Project Number: G103615308

October 29, 2018

**Testing performed on
Vocera V5000 Smartbadge
Model: V5000**

FCC ID: QGZV5000

IC: 4362A-V5000

to

**FCC Part 15 Subpart C (15.247)
Industry Canada RSS-247 Issue 2
FCC Part 15, Subpart B
Industry Canada ICES-003**

For

Vocera Communications

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025 USA


Test Authorized by:

Vocera Communications

525 Race St, Ste 150

San Jose, CA 95126 USA

Prepared by:

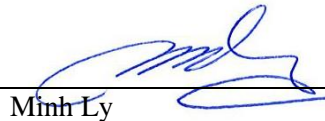
Minh Ly

Date: October 29, 2018

Reviewed by:


Krishna K Vemuri


Date: October 29, 2018

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.


Report No. 103615308MPK-008

Equipment Under Test:	Vocera V5000 Smartbadge
Trade Name:	Vocera Communications
Model Number:	V5000
Applicant:	Vocera Communications
Contact:	Prakash Guda
Address:	Vocera Communications 525 Race St, Ste 150 San Jose, CA 95126
Country	USA
Tel. Number:	(408) 882-5100
Email:	Pguda@vocera.com
Applicable Regulation:	FCC Part 15 Subpart C (15.247) Industry Canada RSS-247 Issue 2 FCC Part 15, Subpart B Industry Canada ICES-003 Issue 6
Date of Test:	September 17 - October 10, 2018

We attest to the accuracy of this report:



Minh Ly
Project Engineer



Krishna K Vemuri
Engineering Team Lead

TABLE OF CONTENTS

1.0	Summary of Tests	5
2.0	General Information.....	6
2.1	Product Description	6
2.2	Related Submittal(s) Grants.....	7
2.3	Test Facility	7
2.4	Test Methodology	7
2.5	Measurement Uncertainty	7
3.0	System Test Configuration.....	8
3.1	Support Equipment	8
3.2	Block Diagram of Test Setup.....	8
3.3	Justification	10
3.4	Software Exercise Program.....	10
3.5	Mode of Operation during Test.....	10
3.5	Modifications Required for Compliance	10
3.6	Additions, Deviations and Exclusions from Standards.....	10
4.0	Measurement Results.....	11
4.1	6-dB Bandwidth and 99% Occupied Bandwidth	11
4.1.1	Requirement.....	11
4.1.2	Procedure	11
4.1.3	Test Result	11
4.2	Maximum Peak Conducted Output Power at Antenna Terminals	18
4.2.1	Requirement.....	18
4.2.2	Procedure	18
4.3.3	Test Result	18
4.3	Maximum Power Spectral Density	22
4.3.1	Requirement.....	22
4.3.2	Procedure	22
4.3.3	Test Result	22
4.4	Unwanted Conducted Emissions	26
4.4.1	Requirement.....	26
4.4.2	Procedure	26
4.4.3	Test Result	26
4.5	Transmitter Radiated Emissions	31
4.5.1	Requirement.....	31
4.5.2	Procedure	31
4.5.3	Field Strength Calculation	32
4.5.4	Test Results.....	33
4.5.5	Test setup photographs	54
4.6	Radiated Emissions.....	55
4.6.1	Requirement.....	55
4.6.2	Procedures.....	56
4.6.3	Test Results.....	57
4.6.4	Test Configuration Photographs	61
4.7	AC Line Conducted Emission	62
4.7.1	Requirement.....	62
4.7.2	Procedure	62
4.7.3	Test Results.....	63

5.0	List of Test Equipment	67
6.0	Document History	68

1.0 Summary of Tests

Test	Reference FCC	Reference Industry Canada	Result
RF Output Power	15.247(b)(3)	RSS-247, 5.4.4	Complies
6 dB Bandwidth	15.247(a)(2)	RSS-247, 5.2.1	Complies
Power Density	15.247(e)	RSS-247, 5.2.2	Complies
Out of Band Antenna Conducted Emission	15.247(d)	RSS-247, 5.5	Complies
Transmitter Radiated Emissions	15.247(d), 15.209, 15.205	RSS-247, 5.5	Complies
AC Line Conducted Emission	15.207	RSS-GEN	Complies
Antenna Requirement	15.203	RSS-GEN	Complies (Internal Antenna)
Radiated Emissions	15.109	ICES-003	Complies
AC Line Conducted Emission	15.107	ICES-003	Complies

EUT receive date: September 17, 2018

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: September 17, 2018

Test completion date: October 10, 2018

The test results in this report pertain only to the item tested.

2.0 General Information

2.1 Product Description

Vocera Communications supplied the following description of the EUT:

The V5000 Smartbadge is a wearable communication device powered by a removable, rechargeable Lithium Ion battery. The badge contains a 2.4" color, capacitive touch screen, with an array of microphones, a hands free speaker and an audio receiver.

For more information, see user's manual provided by the manufacturer.

Information about the Bluetooth (BLE) radio is presented below:

For more information, refer to the following product specification, declared by the manufacturer.

Information about the 2.4 GHz radio is presented below:

Applicant	Vocera Communications
Model No.	V5000
FCC Identifier	QGZ V5000
IC Identifier	4362A- V5000
Type of transmission	Digital Transmission System (DTS)
Rated RF Output	4.52 dBm
Antenna(s) & Gain	Internal Antenna, Gain: +4.9 dBi
Frequency Range	2402 – 2480 MHz
Type of modulation	GFSK
Number of Channel(s)	40, Channel 0-39
Applicant Name & Address	Vocera Communications 525 Race St, Ste 150 San Jose, CA 95126 USA

2.2 Related Submittal(s) Grants

None.

2.3 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.4 Test Methodology

Antenna conducted measurements were performed according to the FCC documents "Guidance for Performing Compliance Measurement on Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System devices Operating under §15.247" (KDB 558074 D01 Meas Guidance v05), RSS-247 Issue 2, ANSI C63.10: 2013 and RSS-GEN Issue 4.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10: 2013 & ANSI C63.4-2014. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Data Sheet" of this report.

All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions - antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Measurement	Expanded Uncertainty (k=2)			
	0.15 MHz – 30MHz	30 – 200 MHz	200 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.7	4.6	5.1 dB
AC mains conducted emissions	2.1 dB	-	-	-

3.0 System Test Configuration


3.1 Support Equipment

Description	Manufacturer	Model Number
Laptop	Lenovo	T440P
USB Hub	Tendak	CP-029-BK
Serial Dongle	Vocera	210-01516-B04


3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Smartbadge – Conducted Unit	Vocera	V5000	SA3308HF5002D1
Smartbadge – Radiated Unit	Vocera	V5000	SA3308HR50031F
Power Adapter	Asian Power Devices Inc.	WB-10E05R	S8827999000015
Earphone	Kingstate Electronics Corp.	KJFGKS172JJB-01	Not listed


Antenna was removed and co-axial connector was installed for Conducted Measurements.

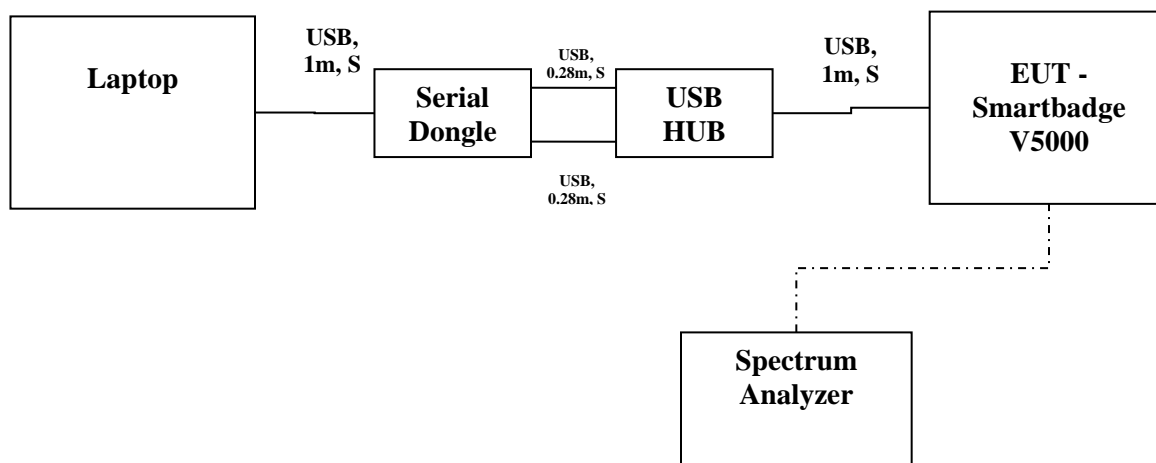

Radiated Measurements Charging Mode

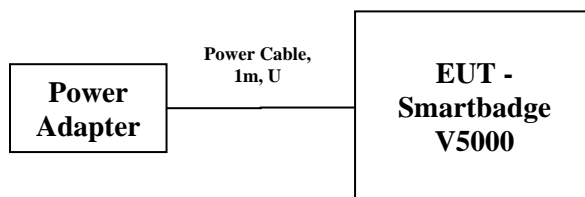

Radiated Measurements Normal Mode

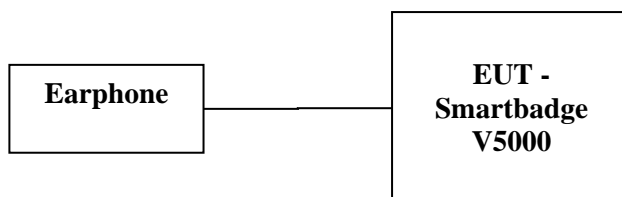

S = Shielded
U = Unshielded

F = With Ferrite
m = Length in Meters

3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT is attached to peripherals and they are connected and operational (as typical as possible). The EUT is wired to transmit full power. During testing, all cables are manipulated to produce worst-case emissions. Different orientation of the EUT were tested and only the worse-case emissions were reported.

The EUT was tested in 2 configurations:

- A/ Charging mode: tested with power adapter
- B/ Normal mode: tested in battery mode and earphone.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by Vocera Communications

3.5 Mode of Operation during Test

During transmitter testing, the transmitter was setup to transmit at maximum RF power on low, middle and high channel.

3.5 Modifications Required for Compliance

No modifications were made by the manufacturer or Intertek to the EUT in order to bring the EUT into compliance.

3.6 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

4.0 Measurement Results

4.1 6-dB Bandwidth and 99% Occupied Bandwidth FCC Rule: 15.247(a)(2); RSS-247 A8.2 and RSS-GEN;

4.1.1 Requirement

The minimum 6-dB bandwidth shall be at least 500 kHz

4.1.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

For FCC 6dB Channel Bandwidth the Procedure described in the FCC Publication 558074 D01 Meas Guidance v05 was used to determine the DTS bandwidth. Section 11.8.1 Option 1 of ANSI 63.10 was used.


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer. The resolution bandwidth is set to 1% of the selected span as is without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

4.1.3 Test Result


Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, MHz	Occupied bandwidth, RSS-GEN, MHz	Plot
2402	0.721	--	1.1
	--	1.057	1.4
2440	0.705	--	1.2
	--	1.065	1.5
2480	0.721	--	1.3
	--	1.057	1.6

Date of Test:	September 17, 2018
Results	Complies

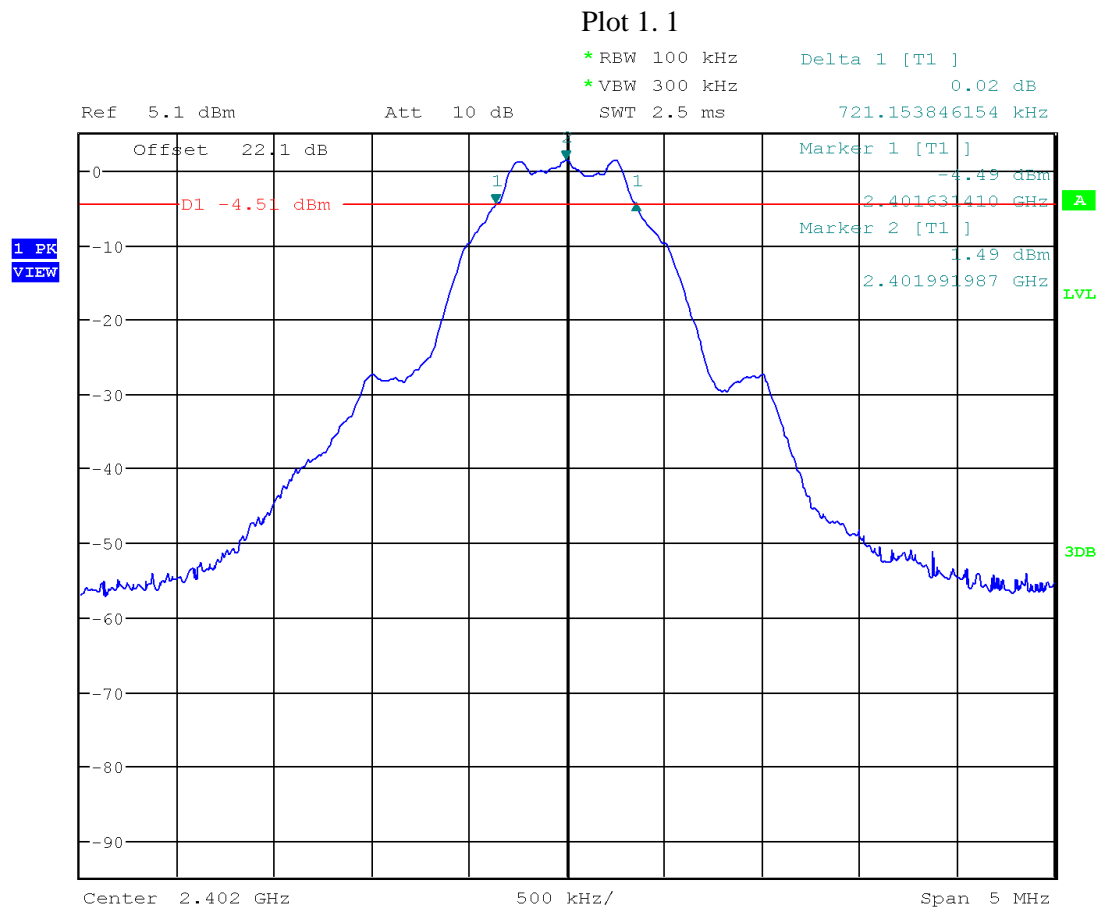


Date: 17.SEP.2018 16:53:32

Plot 1.2

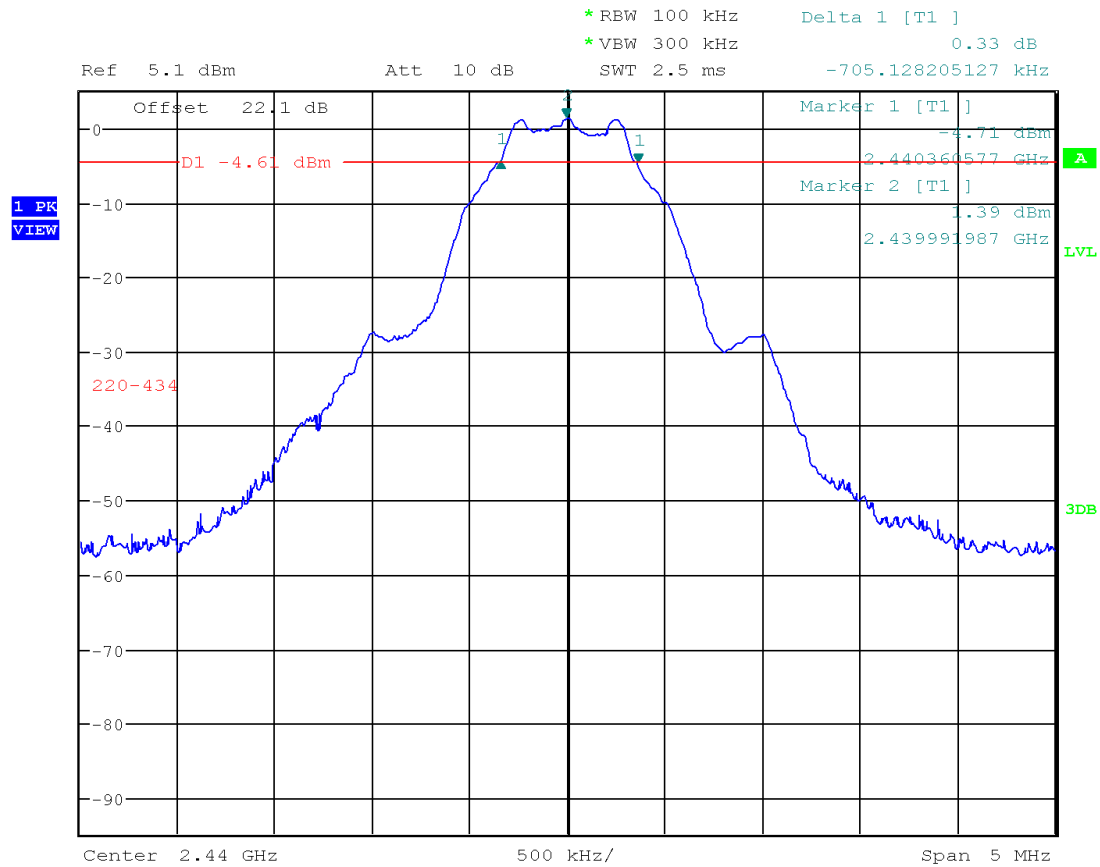


Date: 17.SEP.2018 16:55:27

Plot 1.3

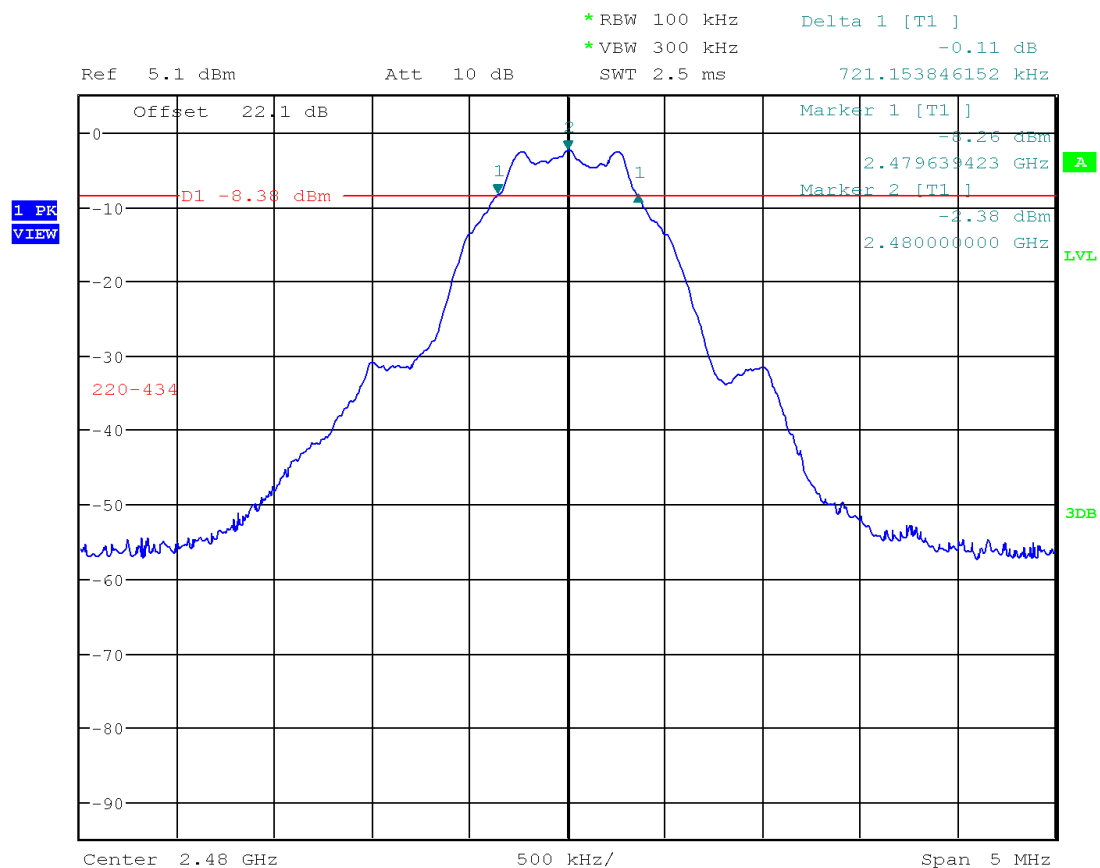


Date: 17.SEP.2018 16:57:24

Plot 1.4

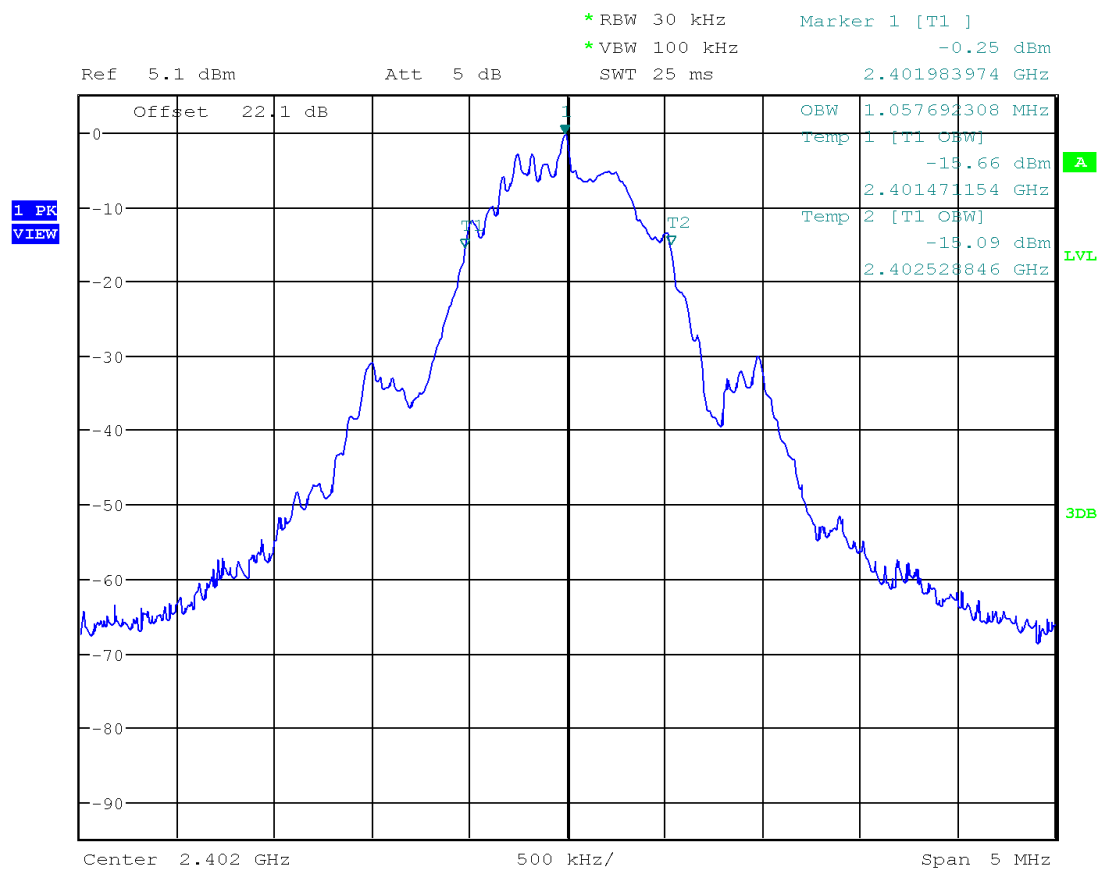


Date: 17.SEP.2018 17:01:12

Plot 1.5

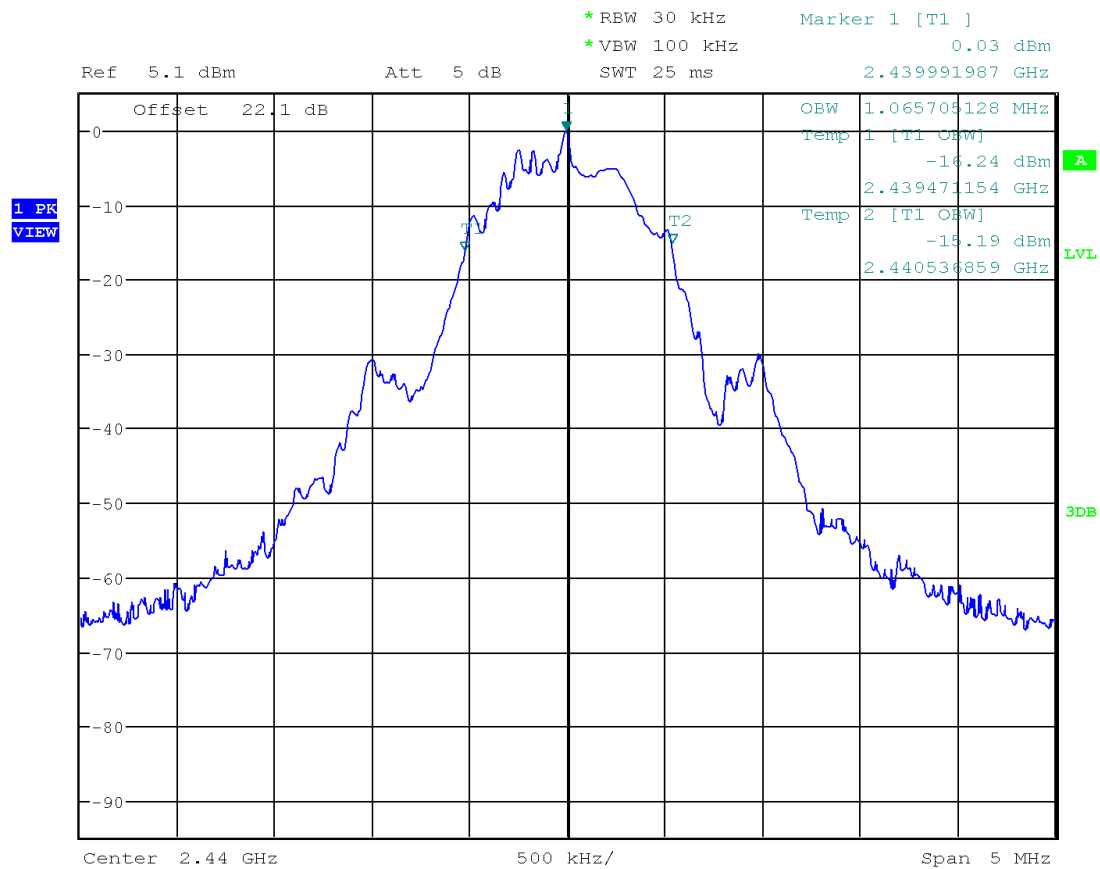

Date: 17.SEP.2018 16:59:54

Plot 1.6

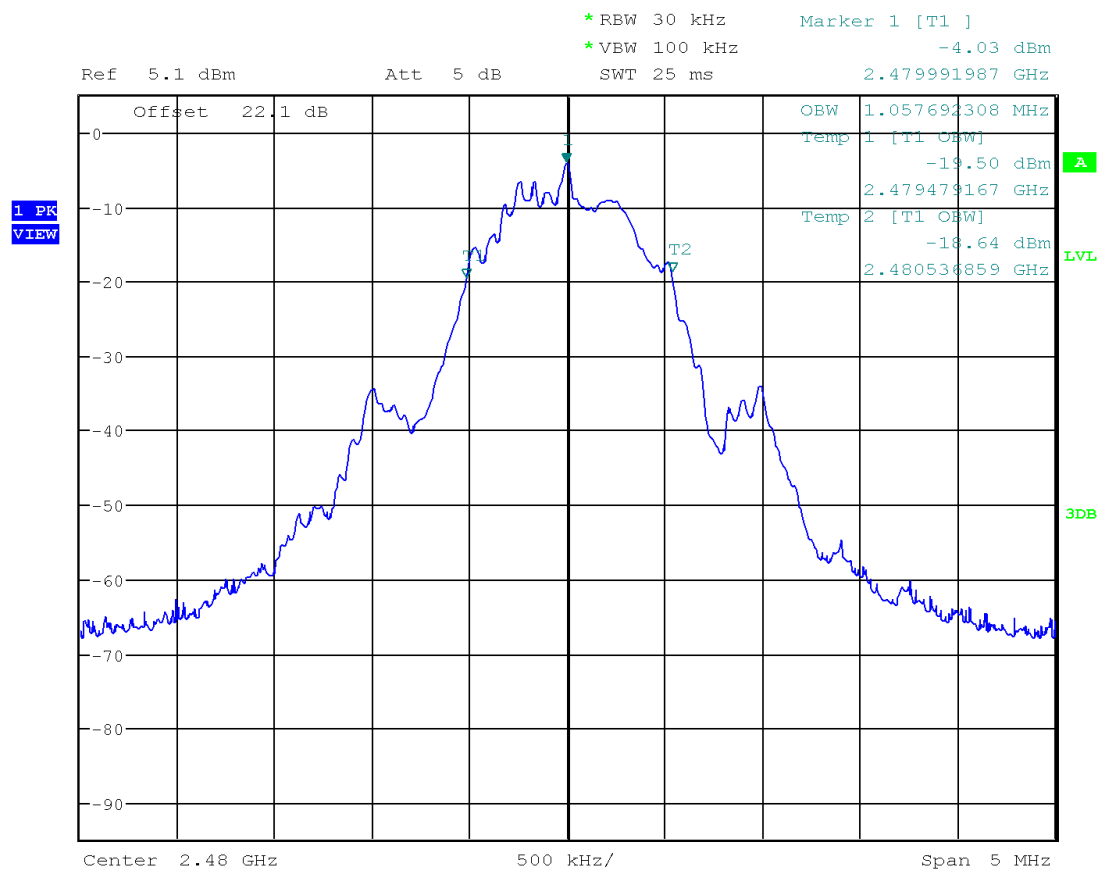

Date: 17.SEP.2018 16:59:09

4.2 Maximum Peak Conducted Output Power at Antenna Terminals FCC Rule: 15.247(b)(3); RSS-247 A8.4;

4.2.1 Requirement

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt or 30 dBm. For antennas with gains greater than 6 dBi, transmitter output level must be decreased appropriately, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05 was used. Specifically, section 11.9.1.1 $RBW \geq DTS$ Bandwidth of ANSI 63.10 was utilized as the spectrum analyzer's resolution bandwidth was greater than the DTS bandwidth.

1. Set the $RBW \geq DTS$ Bandwidth
2. Set the $VBW \geq 3 \times RBW$
3. Set the span $\geq 3 \times RBW$
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max Hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

A spectrum analyzer was connected to the antenna port of the transmitter.


4.3.3 Test Result

Refer to the following plots 2.1 – 2.3 for the test details.

Frequency, MHz	Conducted Power (peak), dBm	Conducted Power (peak), mW	Plot
2402	4.52	2.838	2.1
2440	4.28	2.685	2.2
2480	1.21	1.324	2.3


Date of Test:	September 24, 2018
Results	Complies

Plot 2. 1

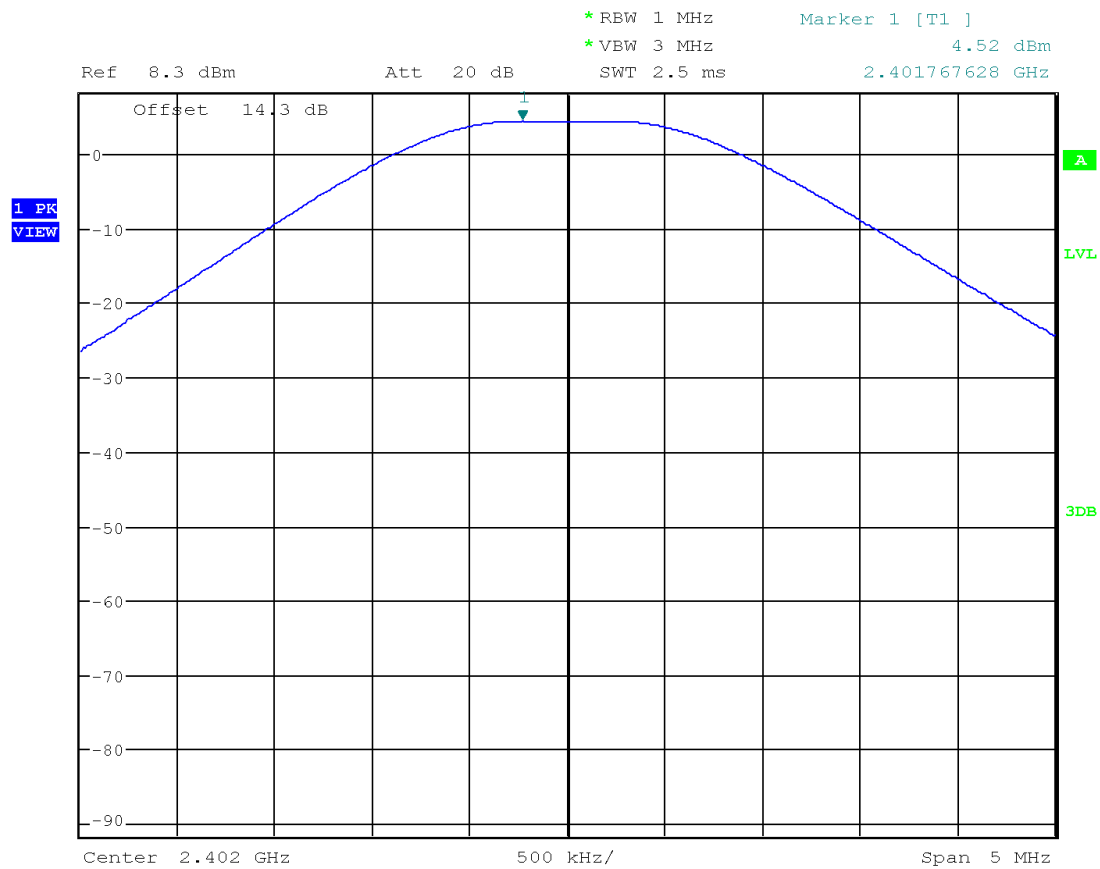


Date: 24.SEP.2018 15:40:08

Plot 2. 2

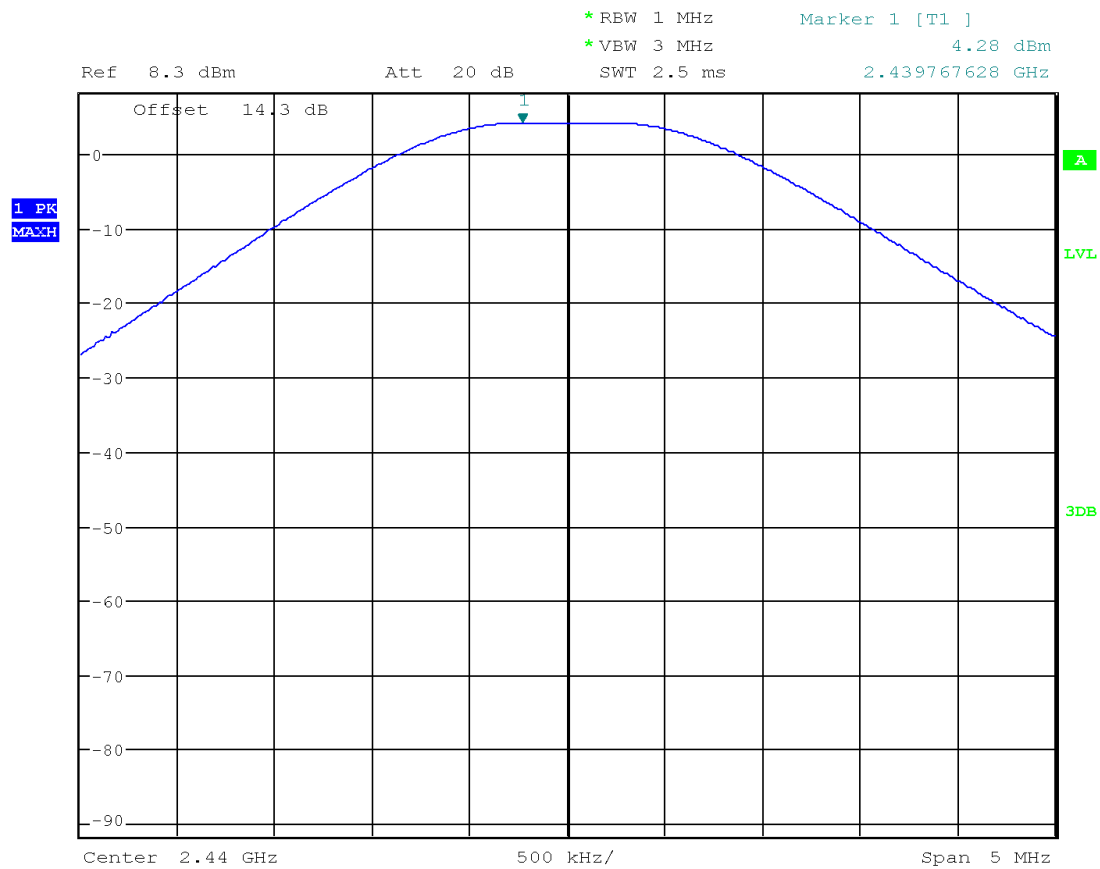

Date: 24.SEP.2018 15:40:51

Plot 2.3

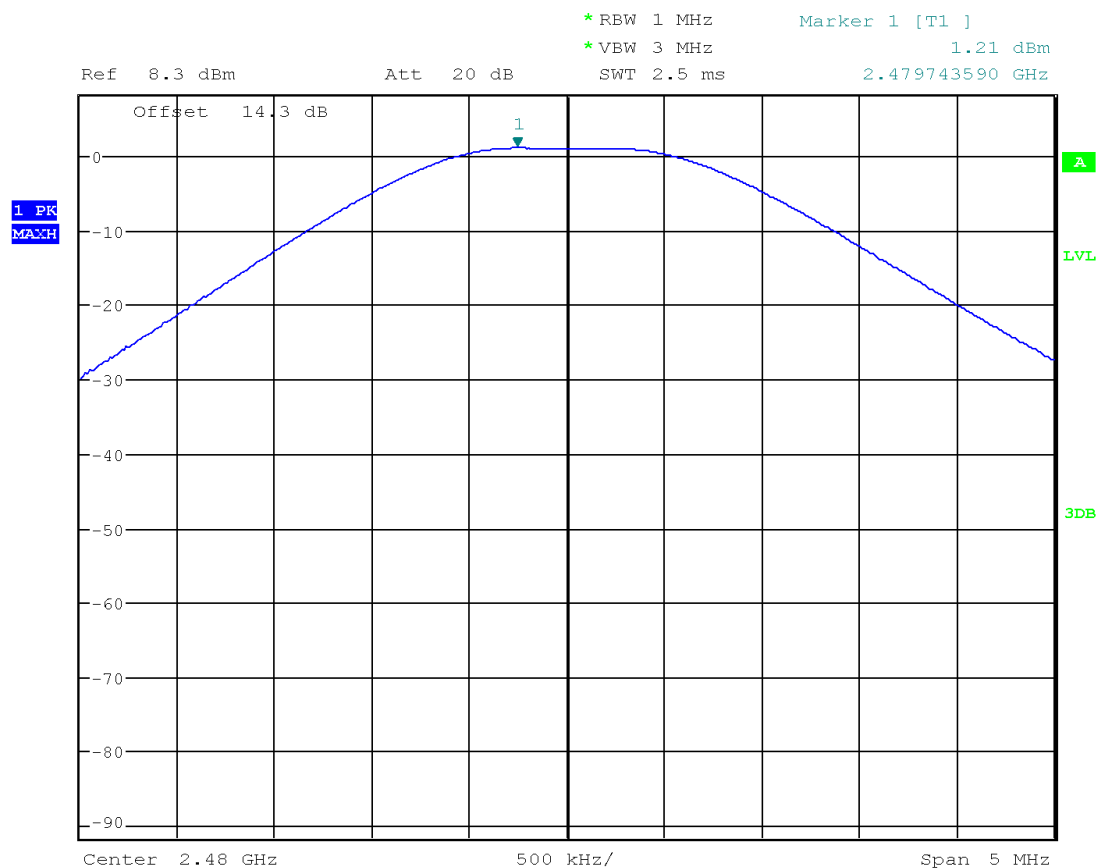

Date: 24.SEP.2018 15:31:05

4.3 Maximum Power Spectral Density FCC: 15.247 (e); RSS-247 A8.2b;

4.3.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna should not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

The procedure described in FCC Publication 558074 D01 Meas Guidance v05, specifically section 11.10.2 Method PKPSD (peak PSD) of ANSI 63.10.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


4.3.3 Test Result

Refer to the following plots for the test result

Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	-10.06	8.0	-18.06	3.1
2440	-10.27	8.0	-18.27	3.2
2480	-14.17	8.0	-22.17	3.3


Date of Test:	September 24, 2018
Results	Complies

Plot 3. 1

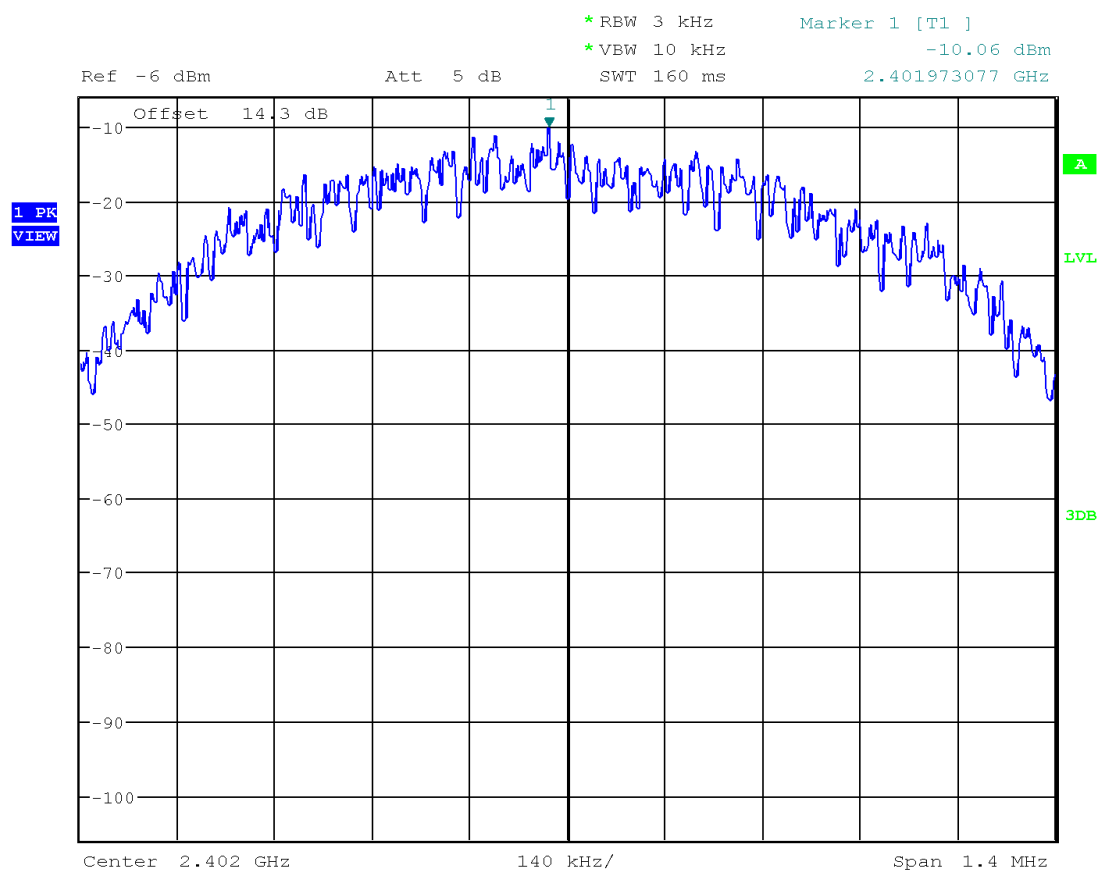


Date: 24.SEP.2018 16:18:17

Plot 3.2

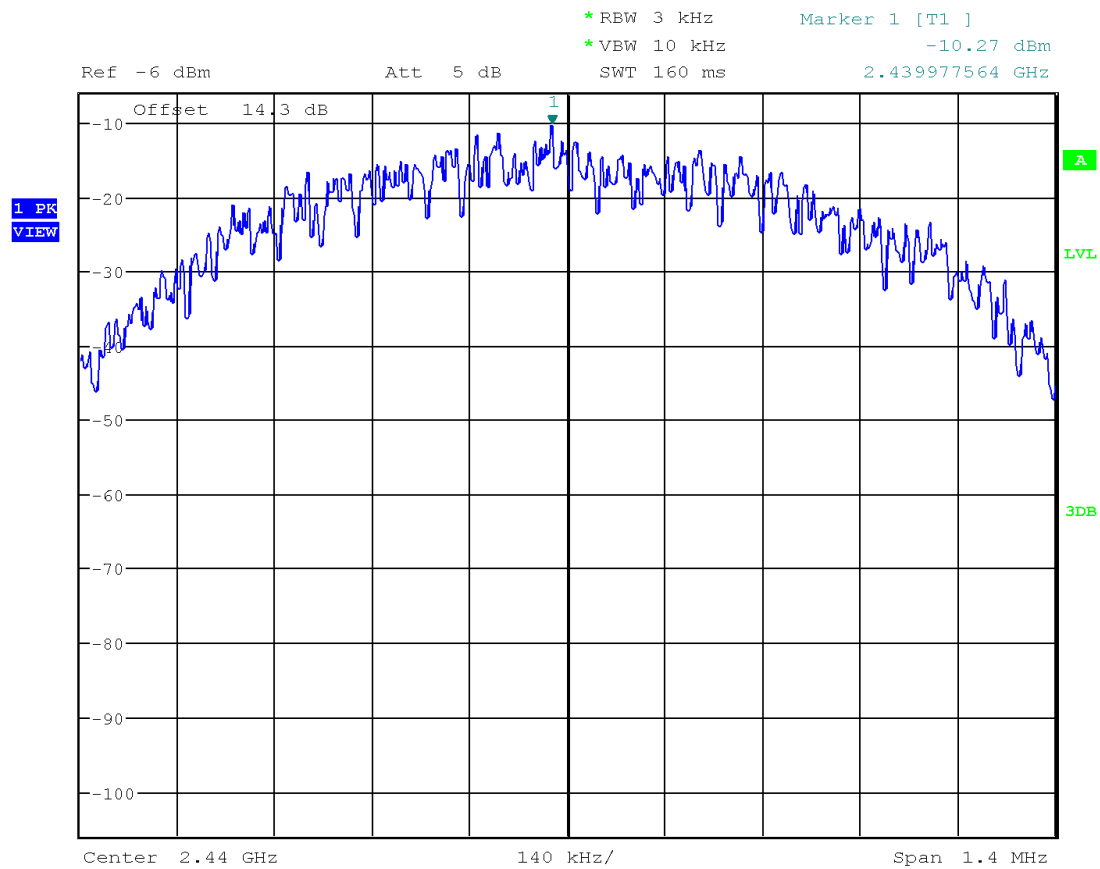

Date: 24.SEP.2018 16:17:21

Plot 3.3

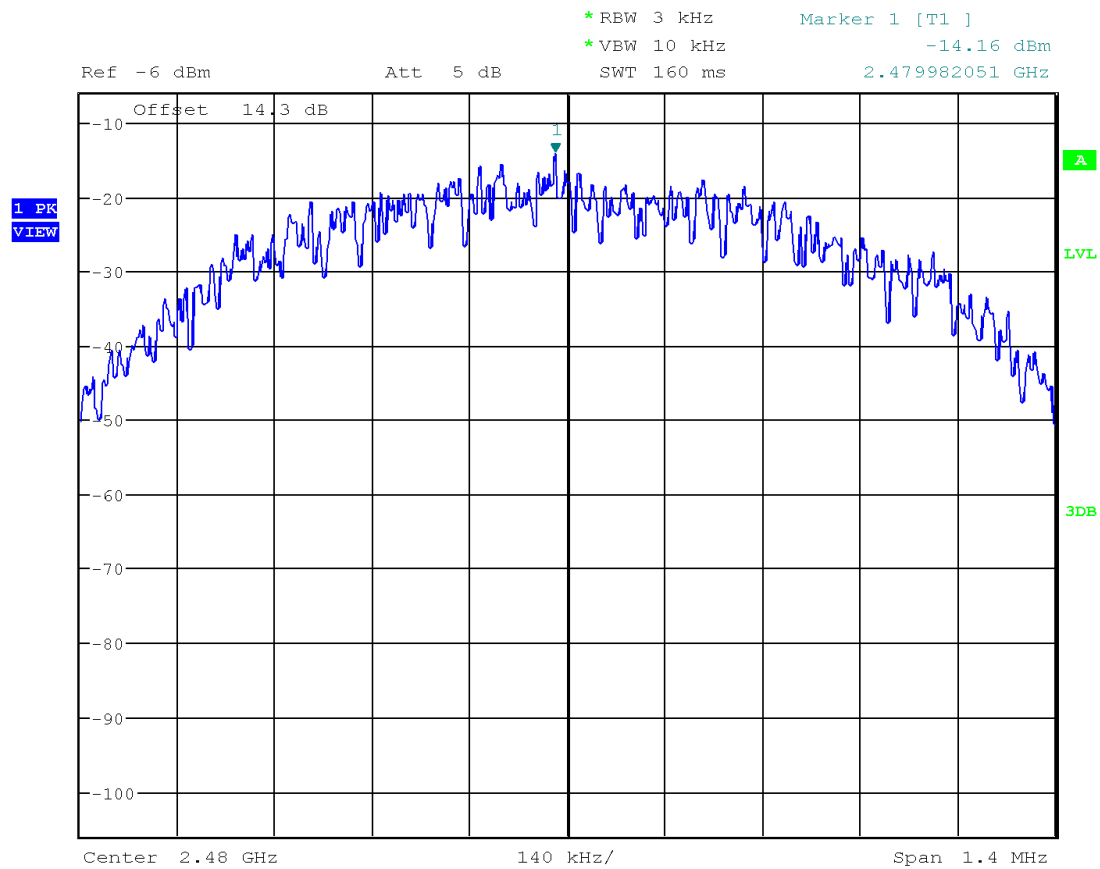

Date: 24.SEP.2018 16:19:18

4.4 Unwanted Conducted Emissions FCC: 15.247(d); RSS-247 A8.5;

4.4.1 Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be below the maximum in-band 100 kHz emissions by at least 20 dB (if peak power of in-band emission is measured) or 30 dB (if average power of in-band emission is measured).

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

4.4.2 Procedure

The procedure described in FCC Publication 558074 D01 Meas Guidance v05, specifically section 11.11 DTS Emissions in non-restricted frequency bands of ANSI 63.10.

A spectrum analyzer was connected to the antenna port of the transmitter.

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


The unwanted emissions were measured from 30 MHz to 25 GHz. Plots below are corrected for cable loss and then compared to the limits.

4.4.3 Test Result


Refer to the following plots 4.1 – 4.3 for unwanted conducted emissions. The plot shows -20dB attenuation limit line.

Date of Test:	September 17, 2018
Results	Complies


Tx @ Low Channel, 2402 MHz
30MHz -25GHz Conducted Spurious
Plot 4.1

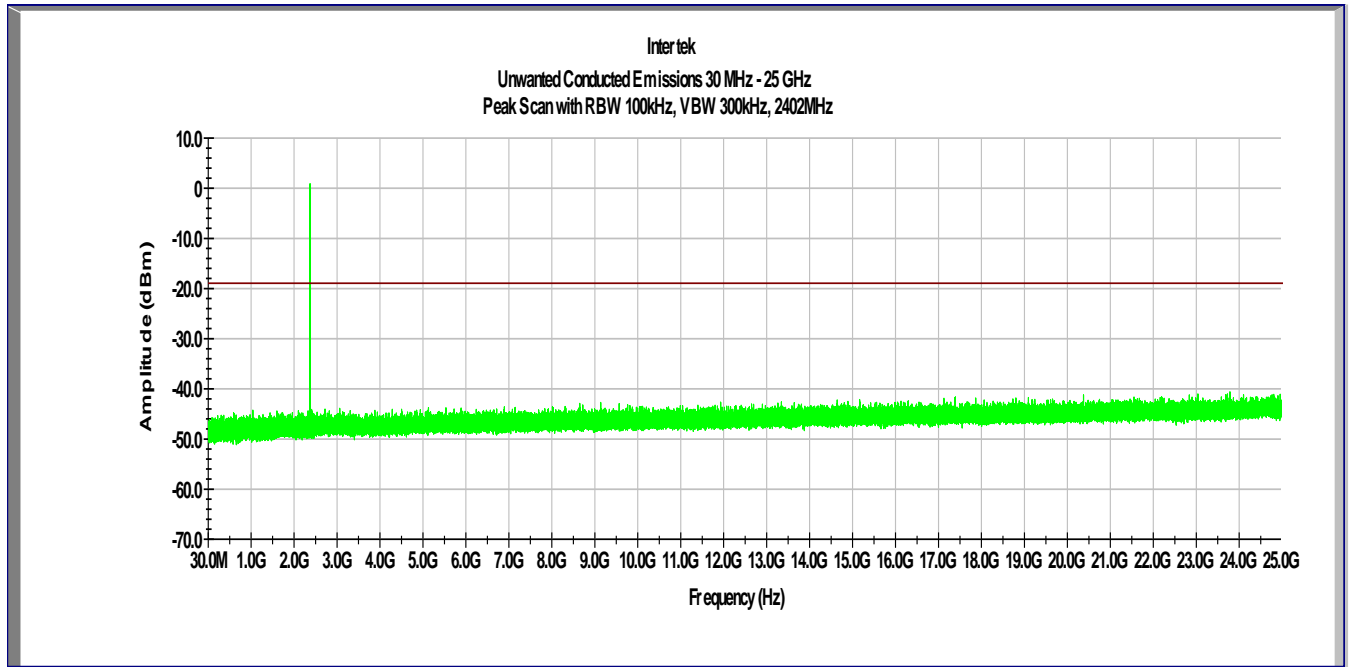


Tx @ Mid Channel, 2440 MHz
30MHz -25GHz Conducted Spurious
Plot 4.2

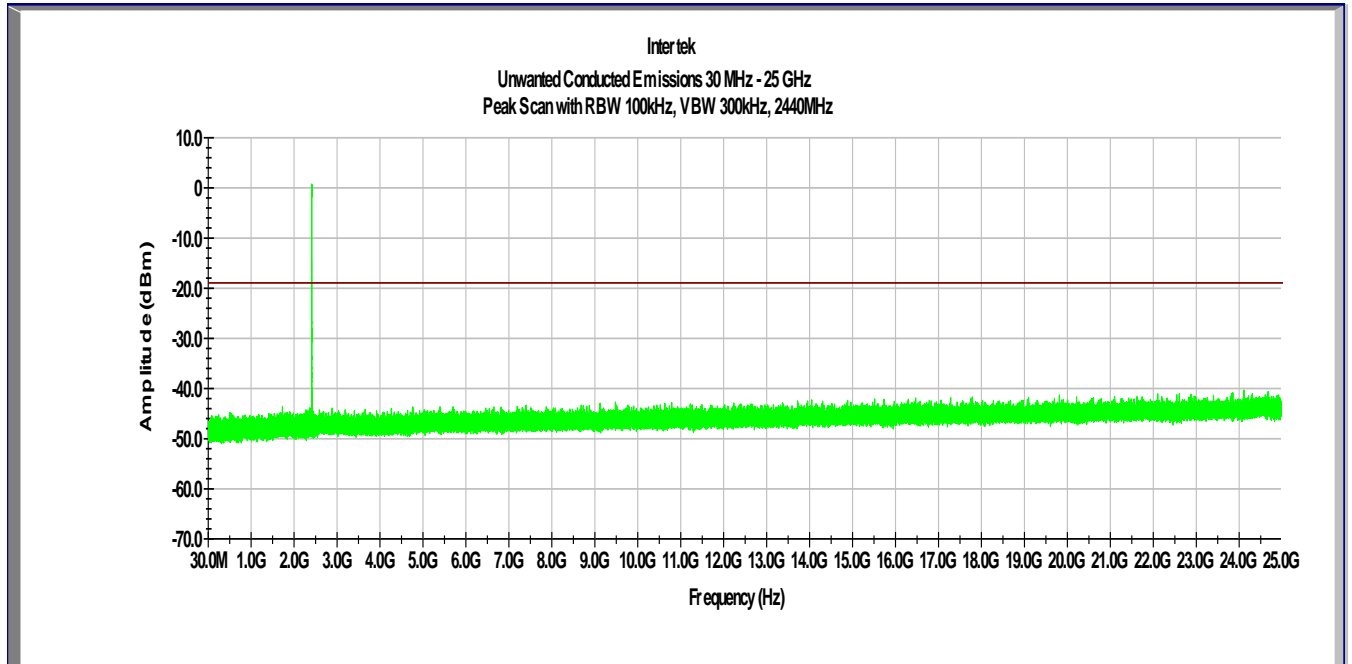

Tx @ High Channel, 2480 MHz
30MHz -25GHz Conducted Spurious
Plot 4.3

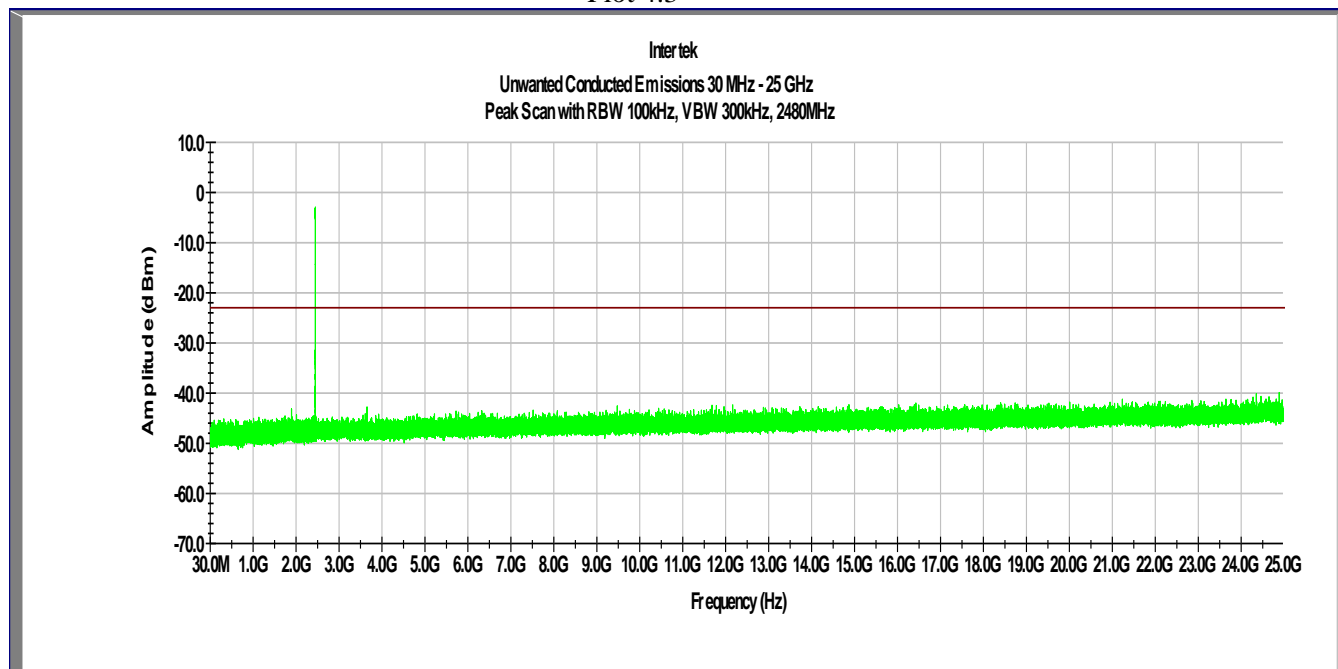


Plot 4.4
Conducted Band Edge, Low Channel

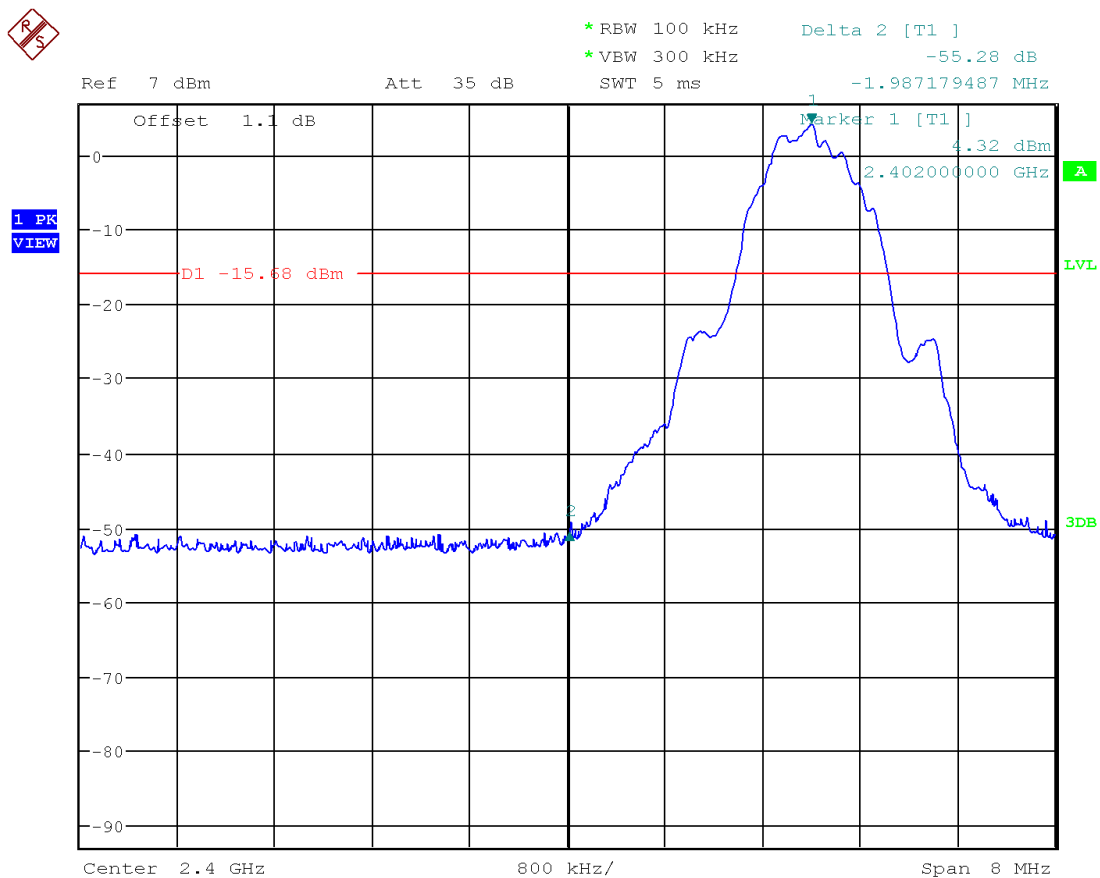

Date: 10.OCT.2018 16:49:46

Plot 4.5
Conducted Band Edge, High Channel

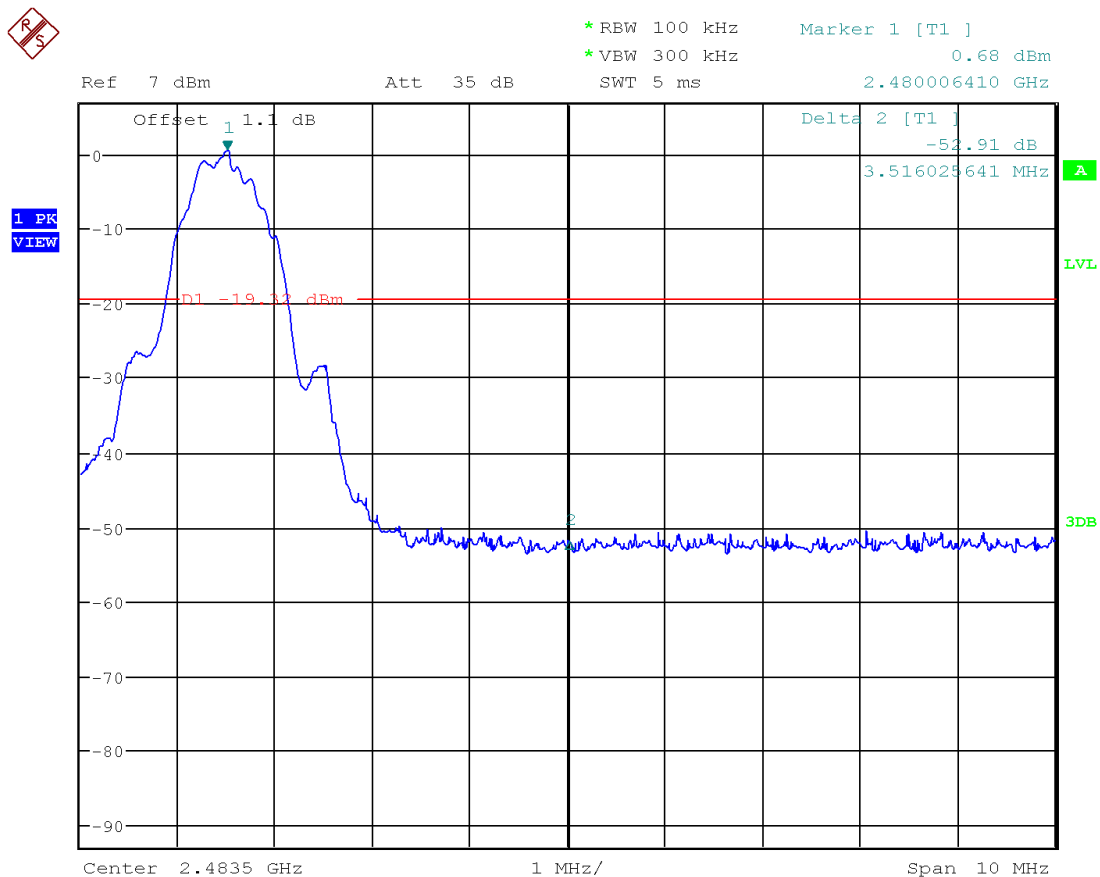

Date: 10.OCT.2018 16:52:13

4.5 Transmitter Radiated Emissions FCC Rules: 15.247(d), 15.209, 15.205; RSS-247;

4.5.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 25 GHz according to the procedure described in ANSI C63.10: 2013. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 1 GHz to 18GHz had a 2.4-2.5GHz notch filter in place. A preamp was used from 30MHz to 26GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 26GHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

EUT was tested with Internal Antenna.

Measurements for Radiated Band Edge were performed at the lowest and highest channels. Additional measurements were performed and verified at the second to highest channel (channel 38) and found to be in compliance with 15.205 & 15.209.

4.5.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32$ dB(μ V/m).

Level in μ V/m = Common Antilogarithm [$(32 \text{ dB}\mu\text{V/m})/20$] = 39.8 μ V/m.


4.5.4 Test Results

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Date of Test:	September 20-28, 2018
Results	Complies

**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2310–2390 MHz, Peak Scan with Average Limit
Charging Mode, EUT in Horizontal Position**


— FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/
— FCC Part 15/FCC Part 15.109 30M-40GHz B - QPeak/3.0m/
— Meas.Peak (Horizontal)
— Meas.Peak (Vertical)

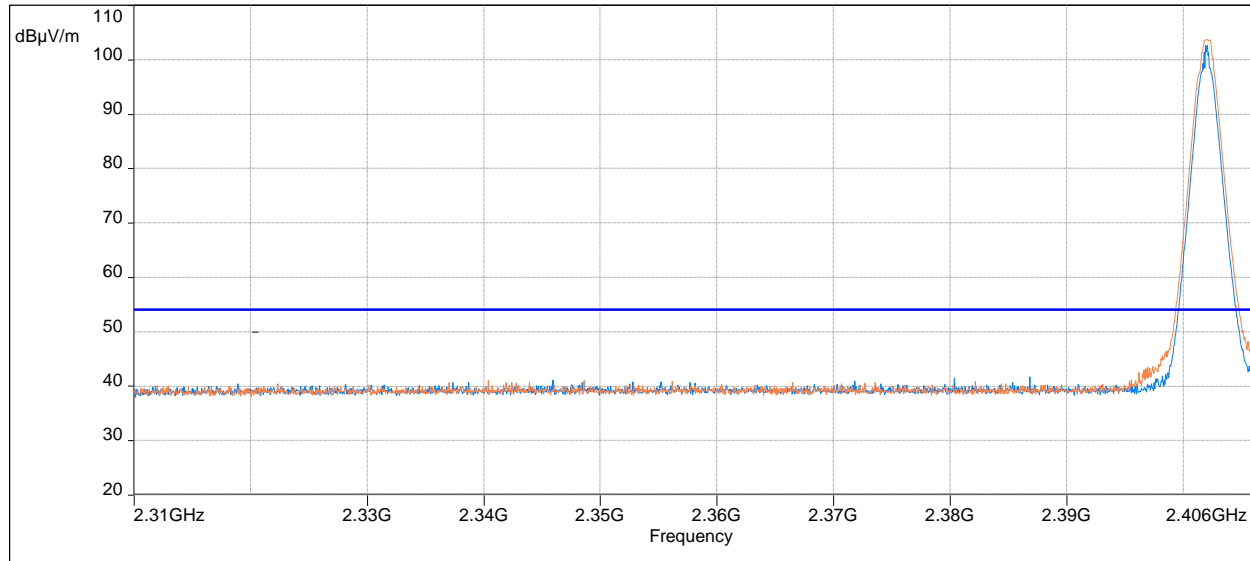

Model: ; Client: ; Comments: ; Test Date: 09/25/2018 14:48

Frequency (MHz)	Peak (dBμV/m)	Ave Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2390.000	39.0	54.0	-15.0	66.0	2.5	Vertical	53.4	-14.4


**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2310–2390 MHz, Peak Scan with Average Limit
Normal Mode, EUT in Horizontal Position**

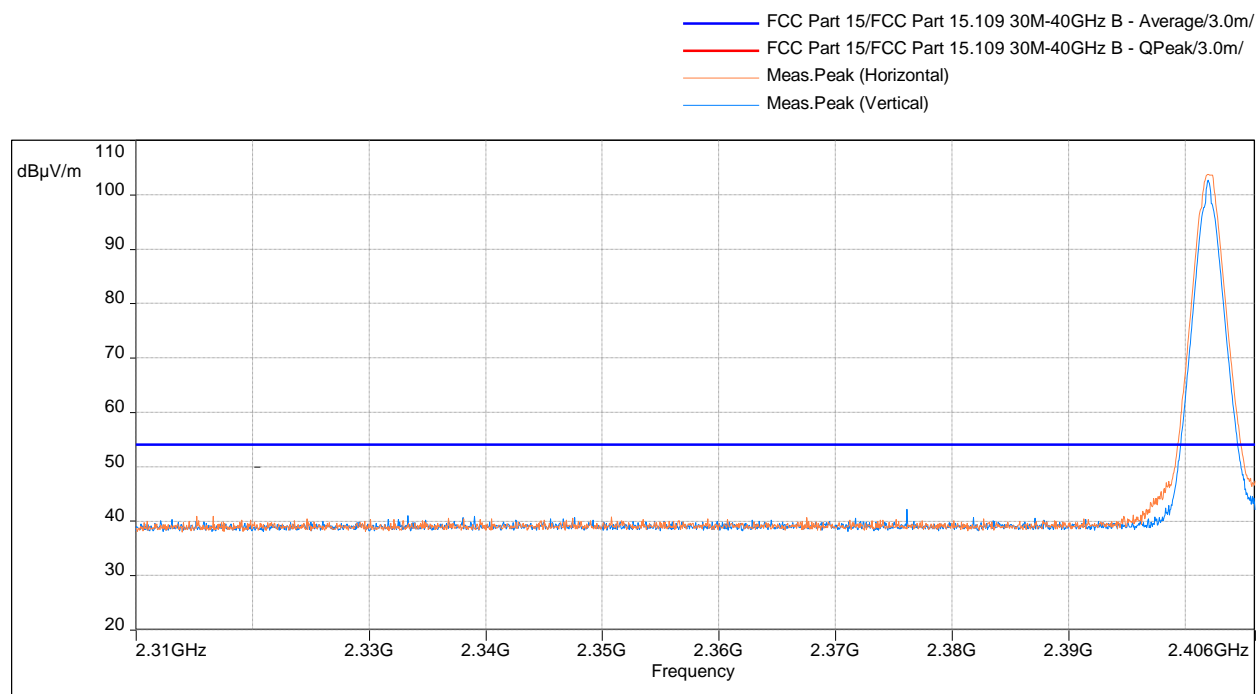

Model: ; Client: ; Comments: ; Test Date: 09/25/2018 14:59


Frequency (MHz)	Peak (dBμV/m)	Ave Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBμV)	Correction (dB)
2390.000	38.7	54.0	-15.3	358.5	2.5	Horizontal	53.1	-14.4

**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2483.5–2500 MHz, Peak Scan with Average Limit
Charging Mode, EUT in Horizontal Position**

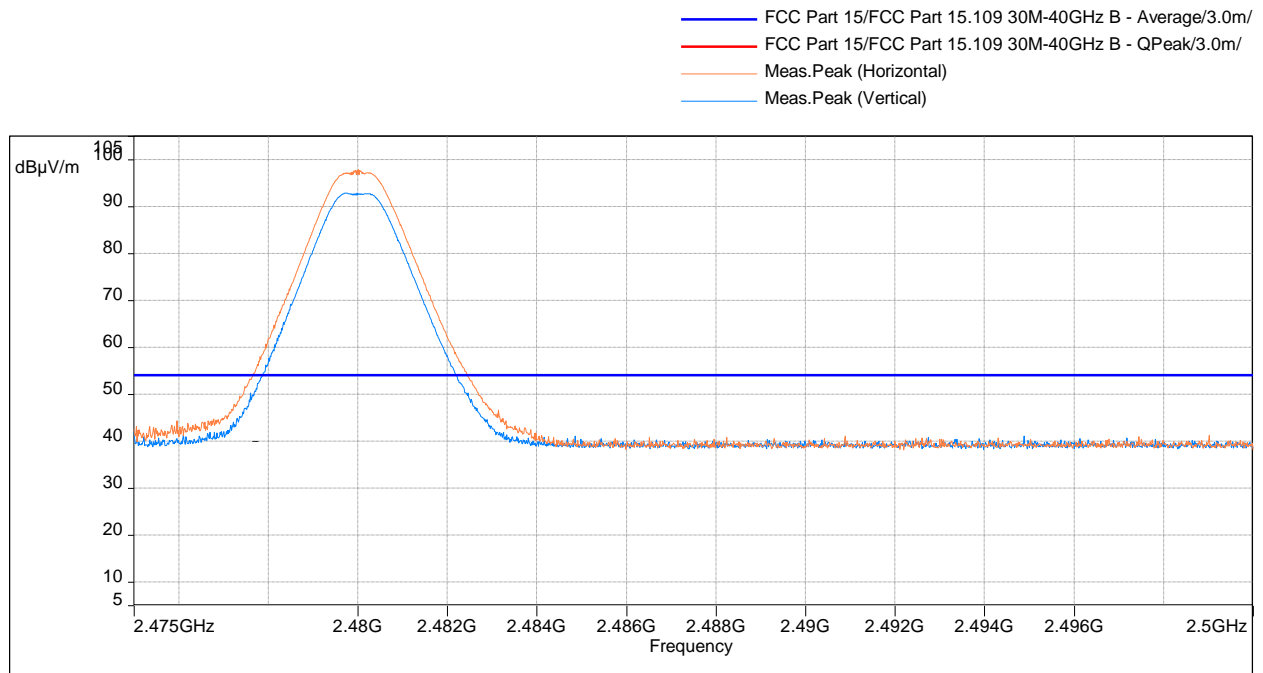

Frequency (MHz)	Q-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBμV)	Correction (dB)
2483.500	42.3	54.0	-11.7	186.0	1.5	Horizontal	56.5	-14.1


Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2483.5–2500 MHz, Peak Scan with Average Limit
Normal Mode, EUT in Horizontal Position

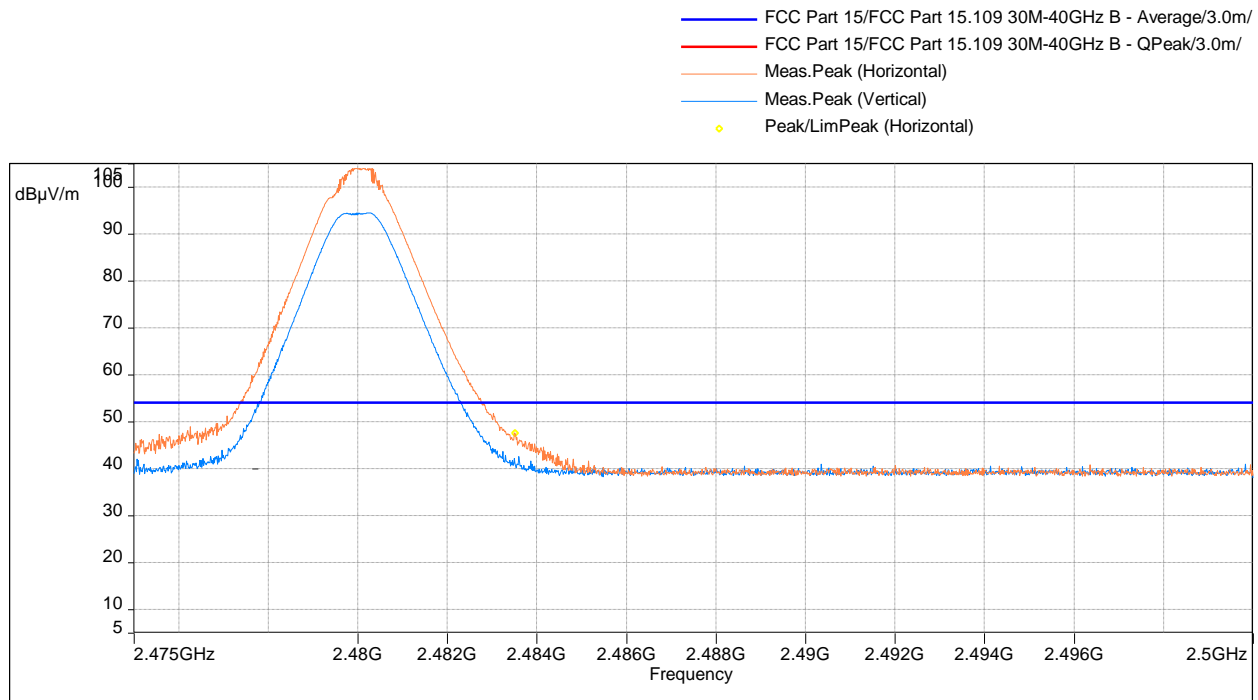

Model: ; Client: ; Comments: ; Test Date: 09/25/2018 17:43

Frequency (MHz)	Q-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBμV)	Correction (dB)
2483.518	47.6	54.0	-6.4	337.3	1.5	Horizontal	61.7	-14.1


Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2310–2390 MHz, Peak Scan with Average Limit
Charging Mode, EUT in Vertical Position

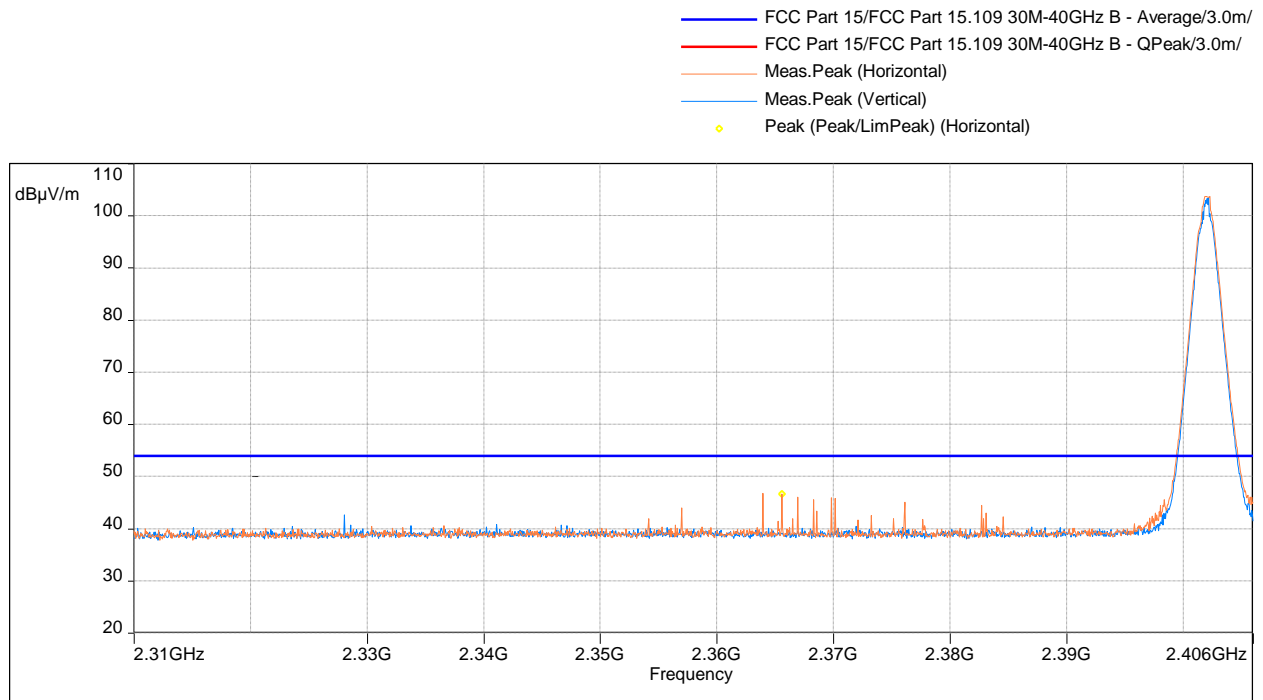

Model: ; Client: ; Comments: ; Test Date: 09/25/2018 15:23


Frequency (MHz)	Q-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2365.603	46.7	54.0	-7.3	17.8	1.5	Horizontal	61.1	-14.4

**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2310–2390 MHz, Peak Scan with Average Limit
Normal Mode, EUT in Vertical Position**

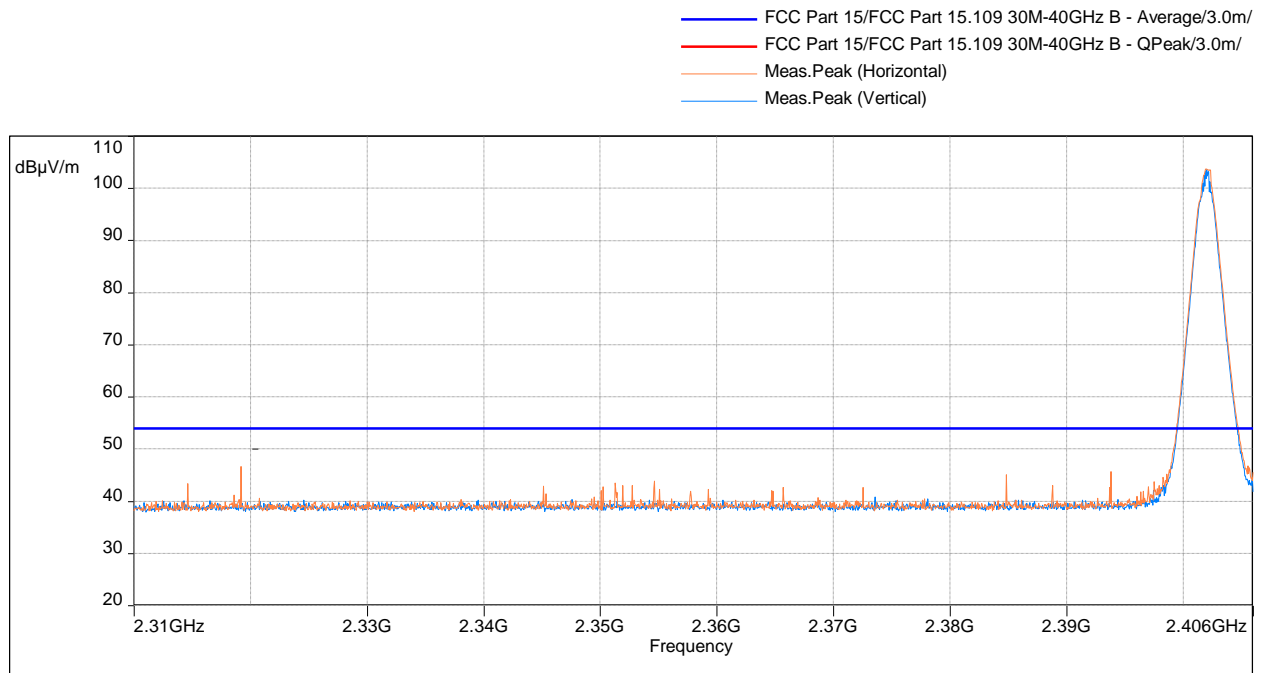


Frequency (MHz)	Q-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2319.187	46.6	54.0	-7.4	195.5	3.5	Horizontal	61.3	-14.7

**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2483.5–2500 MHz, Peak Scan with Average Limit
Charging Mode, EUT in Vertical Position**

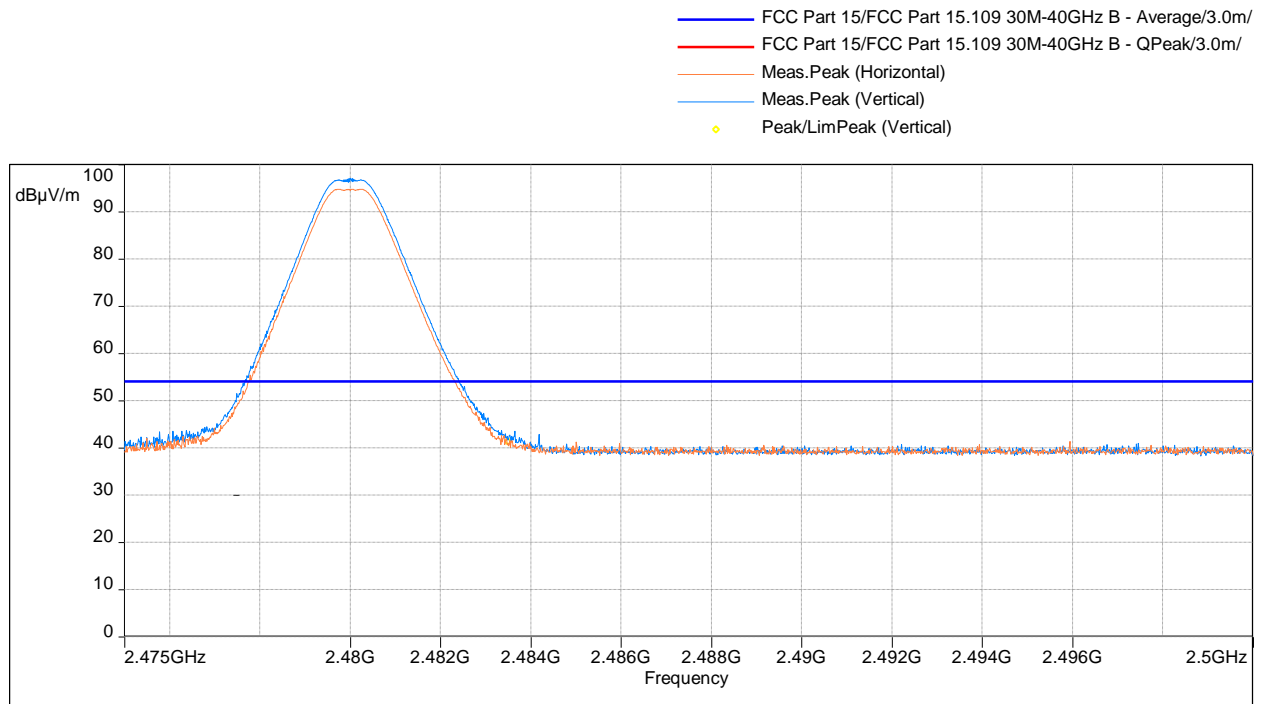

Frequency (MHz)	FS (dBμV/m)	Ave Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2483.500	41.4	54.0	-12.6	31.8	2.5	Vertical	55.5	-14.1


Out-of-Band Radiated spurious emissions at the Band-edge @3m distance
2483.5–2500 MHz, Peak Scan with Average Limit
Normal Mode, EUT in Vertical Position

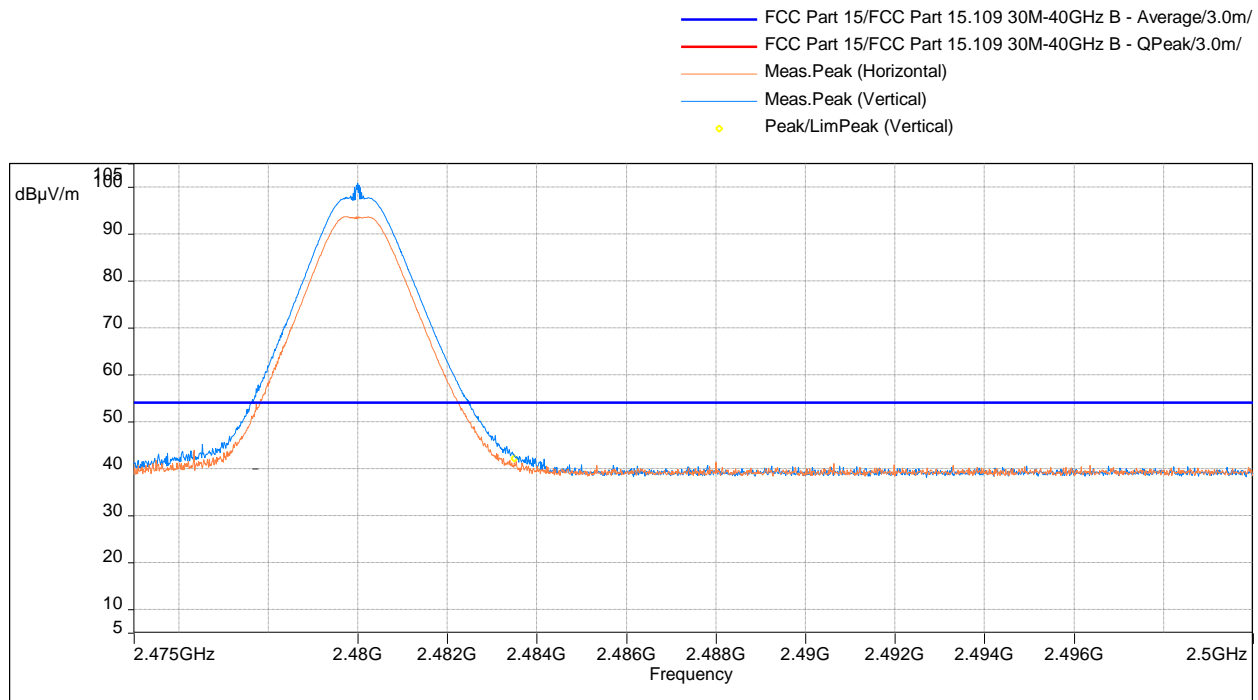

Frequency (MHz)	FS (dBμV/m)	Ave Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
2483.500	42.2	54.0	-11.8	27.3	2.5	Vertical	56.3	-14.1

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz, Charging Mode


Radiated Spurious Emissions 30 MHz - 1000 MHz

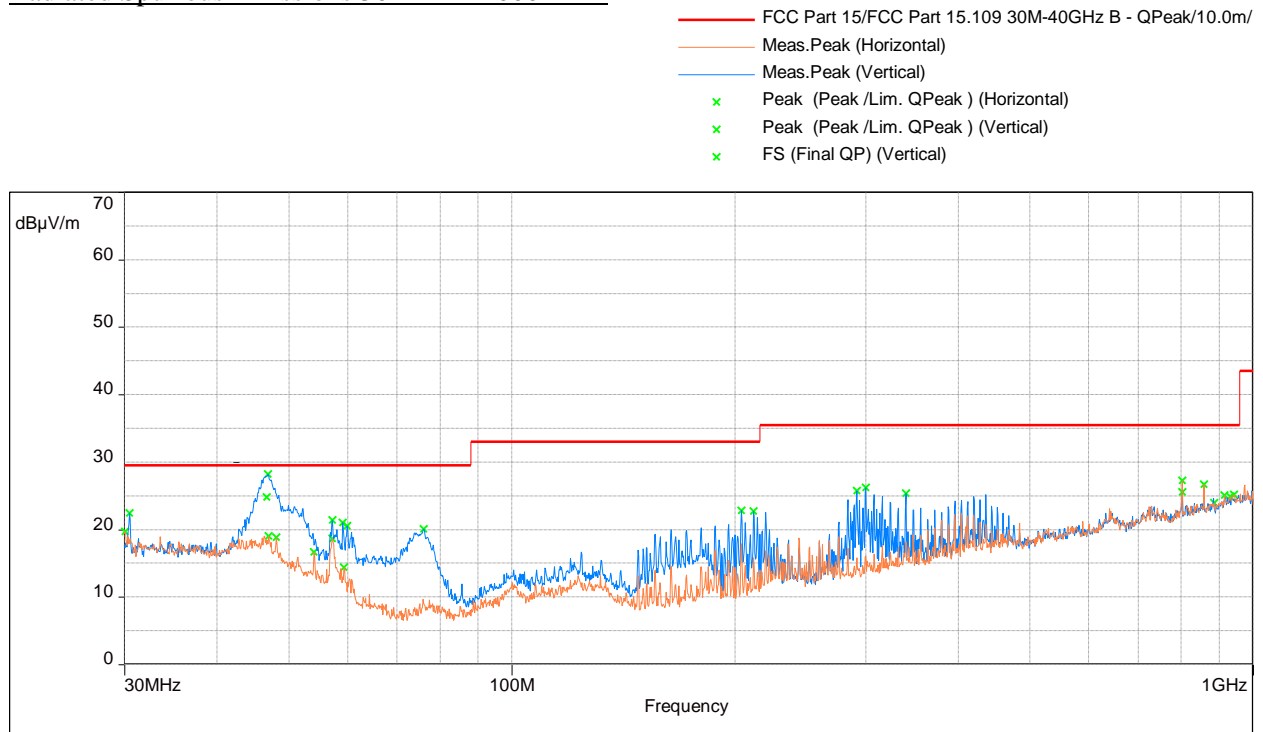

Model: ; Client: ; Comments: ; Test Date: 09/18/2018 19:23

Frequency (MHz)	Q-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
46.703	24.8	29.5	-4.7	20.8	2.4	Vertical	34.7	-9.9

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Charging Mode

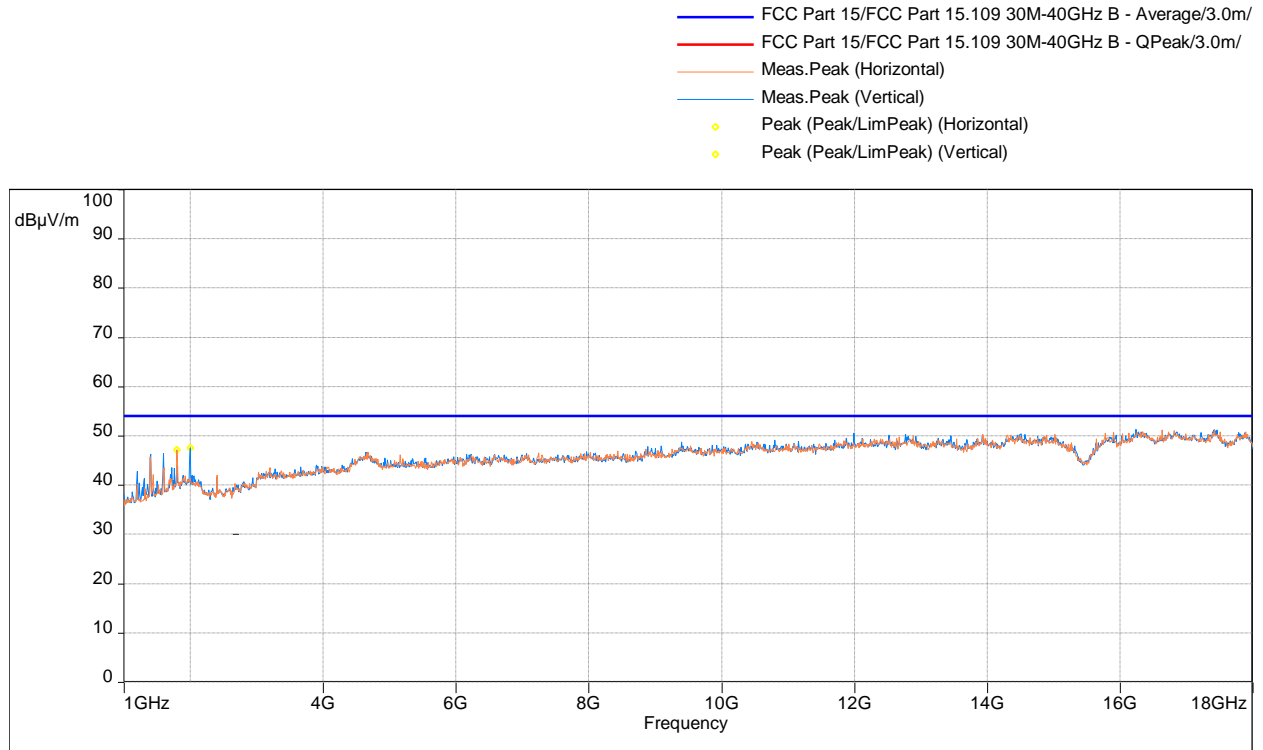

Model: ; Client: ; Comments: ; Test Date: 09/28/2018 15:53


Frequency (MHz)	Peak (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
1996.200	47.6	54.0	-6.5	155.0	1.5	Vertical	60.5	-12.9

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: FS@3m = RA + Correction
Correction = AF + CF - Preamp


Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2440MHz, Charging Mode

Radiated Spurious Emissions 30 MHz - 1000 MHz

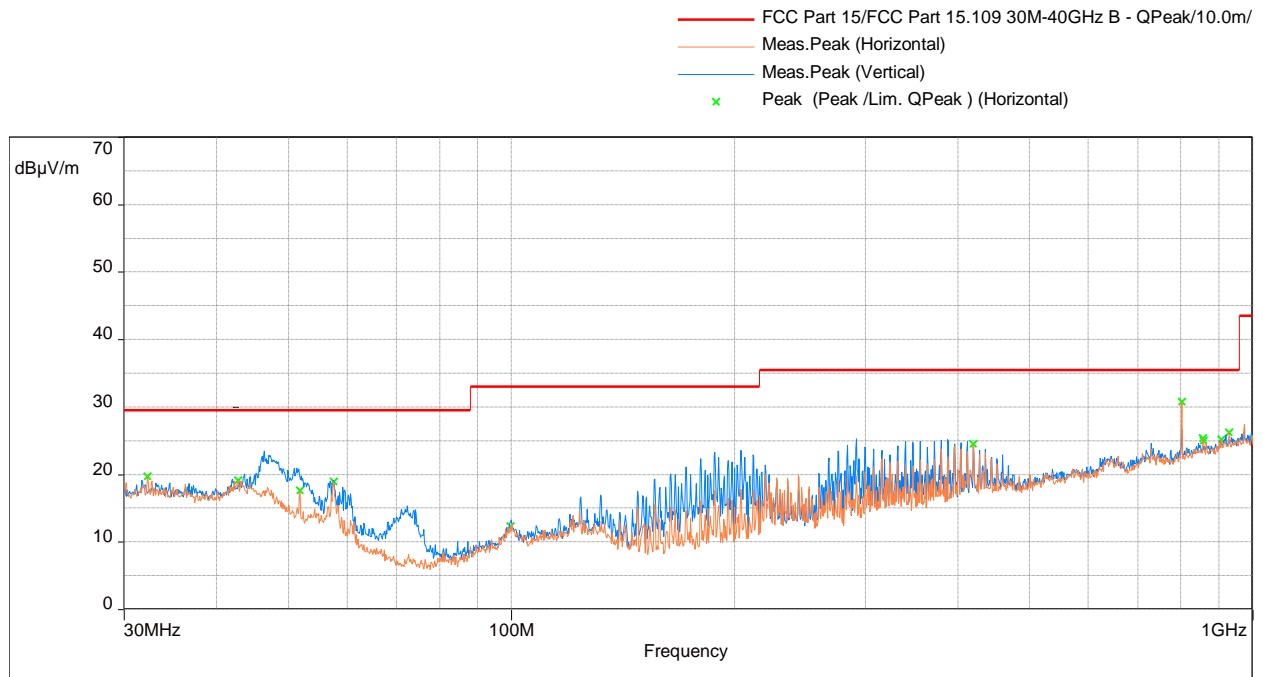

Frequency (MHz)	Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
801.829	30.8	35.5	-4.7	126	1.0	Horizontal	34.3	-3.5

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Charging Mode

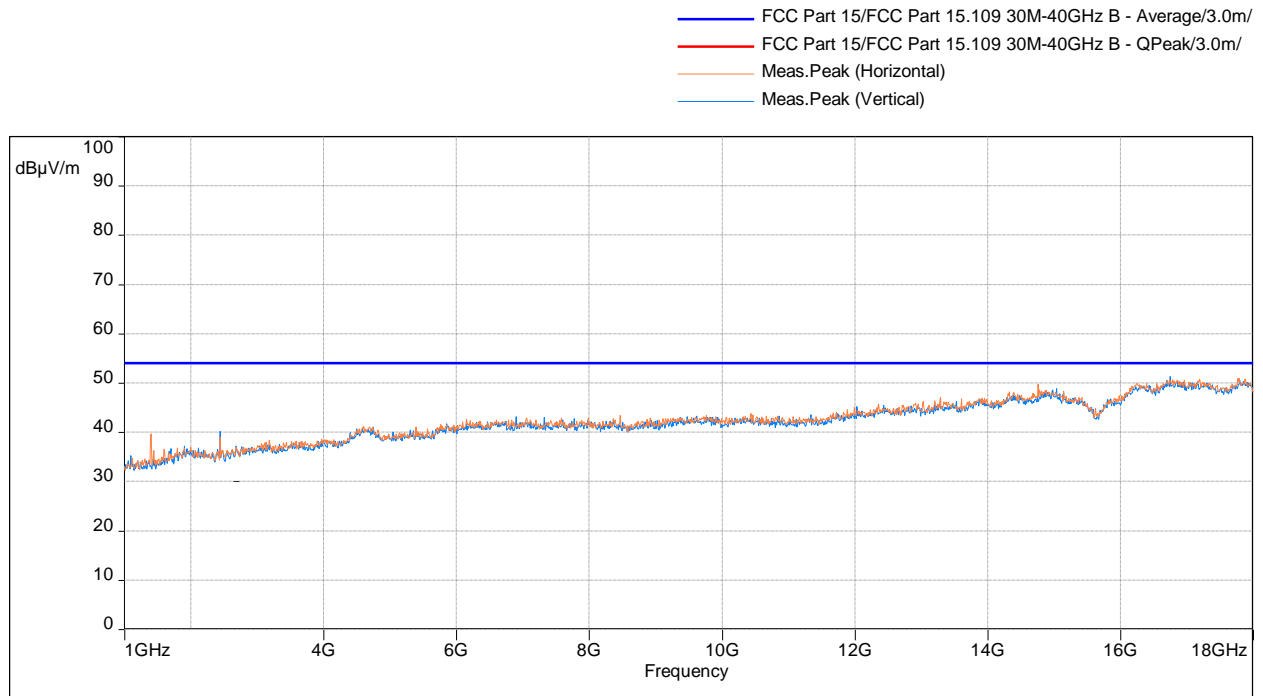


Frequency (MHz)	FS@3m (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
1399.500	39.6	54.0	-14.4	0.0	2.5	Horizontal	57.2	-17.5

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: FS@3m = RA + Correction
Correction = AF + CF - Preamp


Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz, Charging Mode

Radiated Spurious Emissions 30 MHz - 1000 MHz

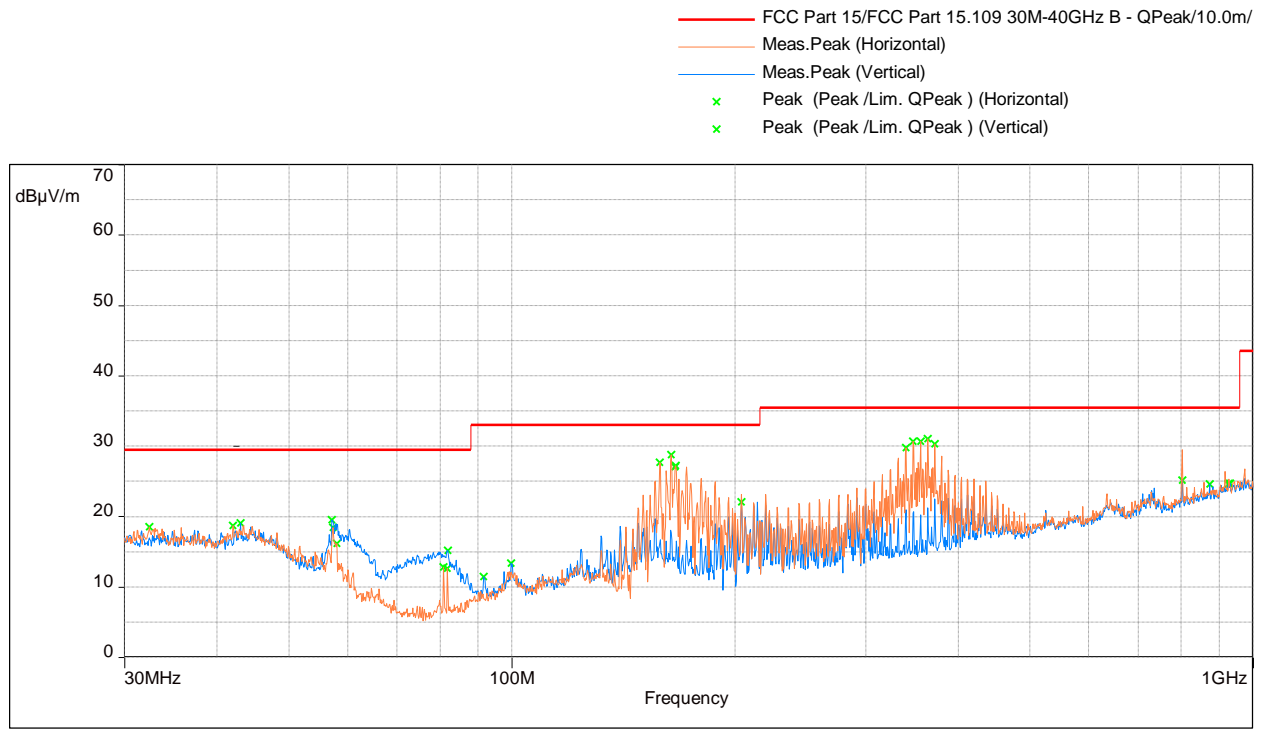

Frequency (MHz)	Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
347.934	30.7	35.5	-4.9	0.3	3.0	Horizontal	41.9	-11.2
356.017	30.7	35.5	-4.8	0.0	2.0	Horizontal	41.9	-11.2
363.971	31.0	35.5	-4.5	1.3	2.0	Horizontal	41.9	-10.8
371.957	30.3	35.5	-5.2	0.3	2.0	Horizontal	40.8	-10.5

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Charging Mode

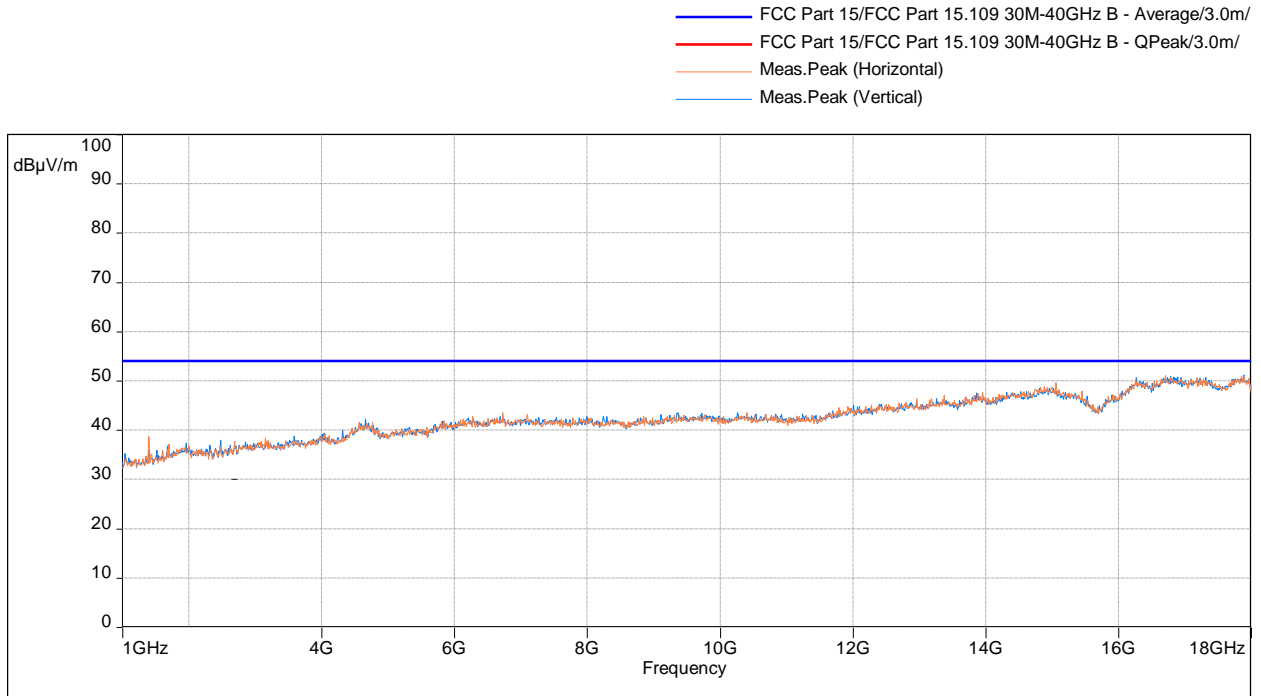


Frequency (MHz)	FS@3m (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
1397.800	38.8	54.0	-15.2	110.8	2.5	Horizontal	56.3	-17.5

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: FS@3m = RA + Correction
Correction = AF + CF - Preamp

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz, Normal Mode


Radiated Spurious Emissions 30 MHz - 1000 MHz

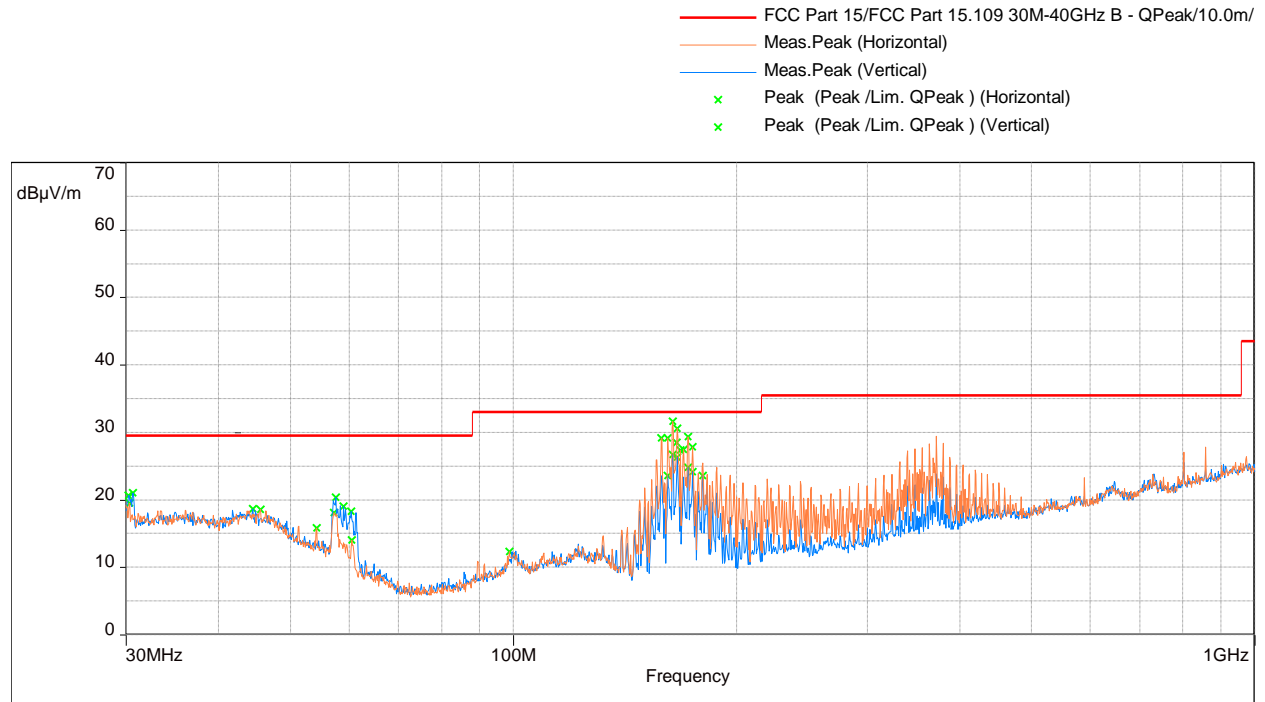

Model: ; Client: ; Comments: ; Test Date: 09/18/2018 19:40

Frequency (MHz)	Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
158.396	29.2	33.0	-3.8	219.0	4.0	Horizontal	47.2	-18.0
161.564	29.1	33.0	-3.9	219.0	4.0	Horizontal	47.3	-18.1
164.022	31.6	33.0	-1.4	29.5	4.0	Horizontal	49.3	-17.7
166.091	28.5	33.0	-4.5	53.5	4.0	Horizontal	45.9	-17.4
166.414	30.6	33.0	-2.4	6.3	4.0	Horizontal	48.0	-17.4
172.008	29.4	33.0	-3.7	33.3	4.0	Horizontal	46.3	-17.0

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Normal Mode

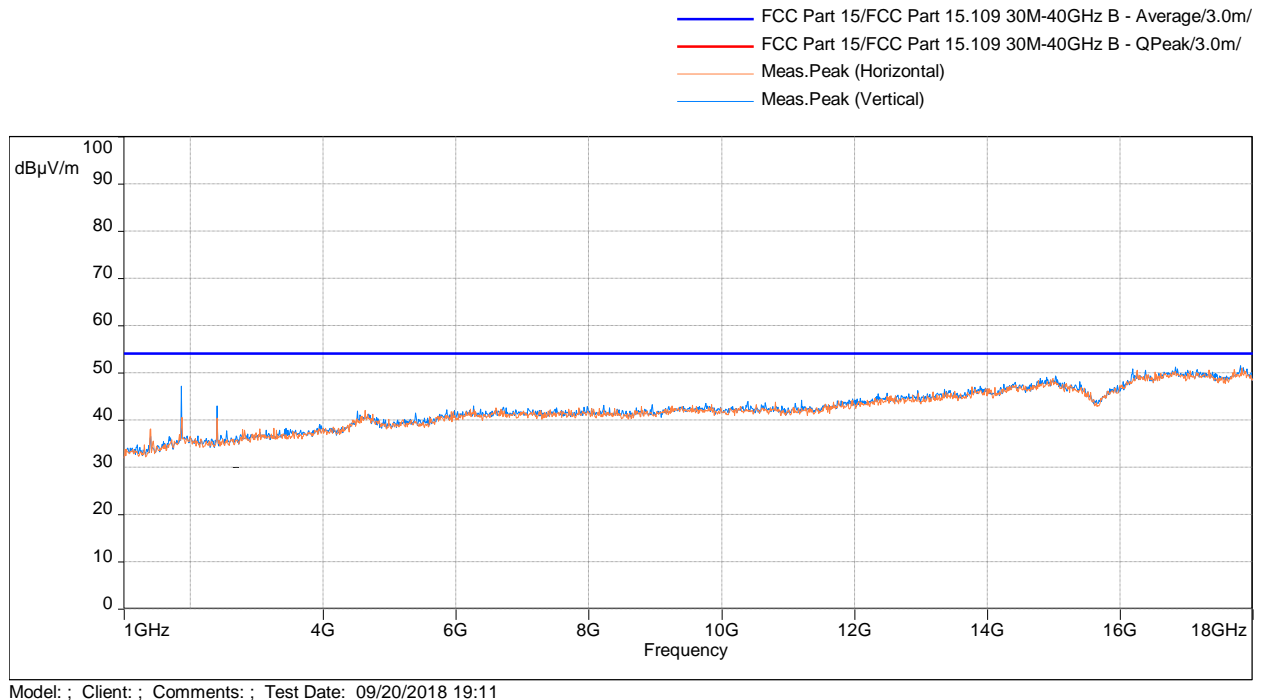


Frequency (MHz)	FS@3m (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
1867.000	47.2	54.0	-6.8	101.5	2.5	Vertical	62.3	-15.1

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: FS@3m = RA + Correction
Correction = AF + CF - Preamp


Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2440MHz, Normal Mode

Radiated Spurious Emissions 30 MHz - 1000 MHz

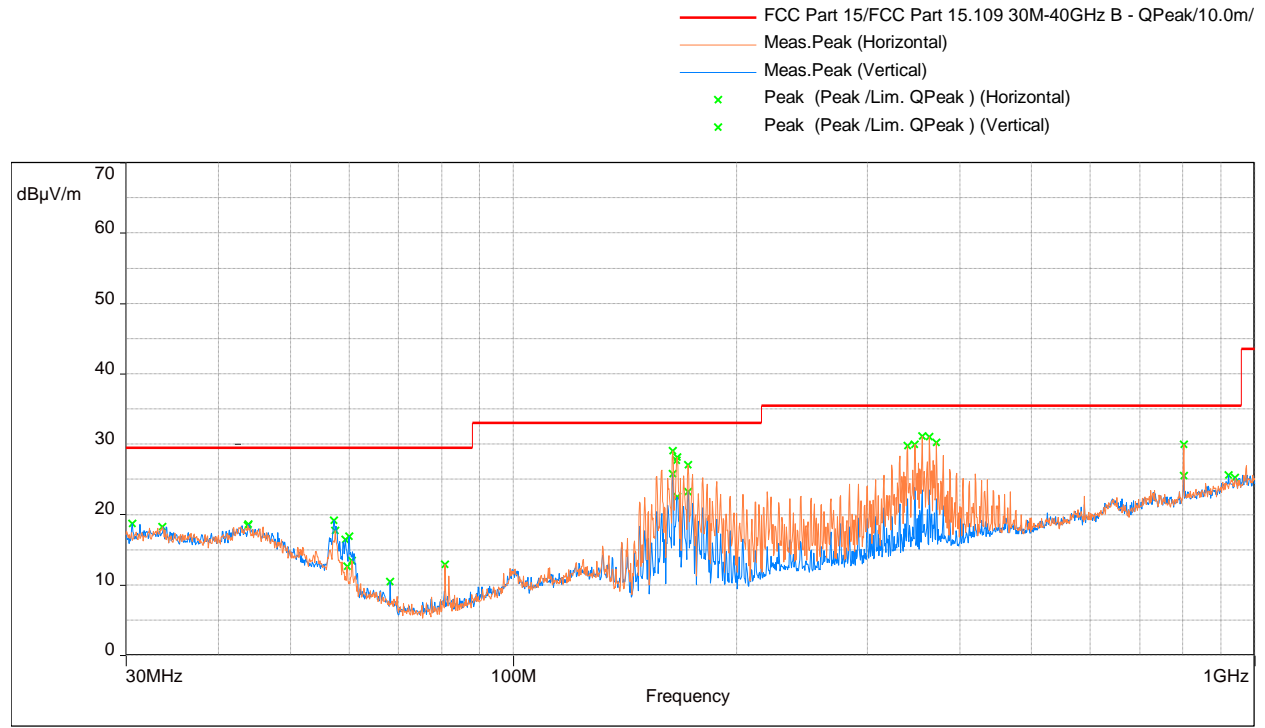

Frequency (MHz)	Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBμV)	Correction (dB)
163.989	29.0	33.0	-4.0	203.3	3.0	Horizontal	46.7	-17.7
166.059	27.7	33.0	-5.3	199.5	3.0	Horizontal	45.1	-17.4
166.414	28.1	33.0	-4.9	219.5	3.0	Horizontal	45.5	-17.4
355.952	31.1	35.5	-4.4	351.0	2.0	Horizontal	42.3	-11.2
364.036	31.0	35.5	-4.5	0.8	2.0	Horizontal	41.8	-10.8
372.054	30.2	35.5	-5.3	358.5	2.0	Horizontal	40.7	-10.5

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Normal Mode

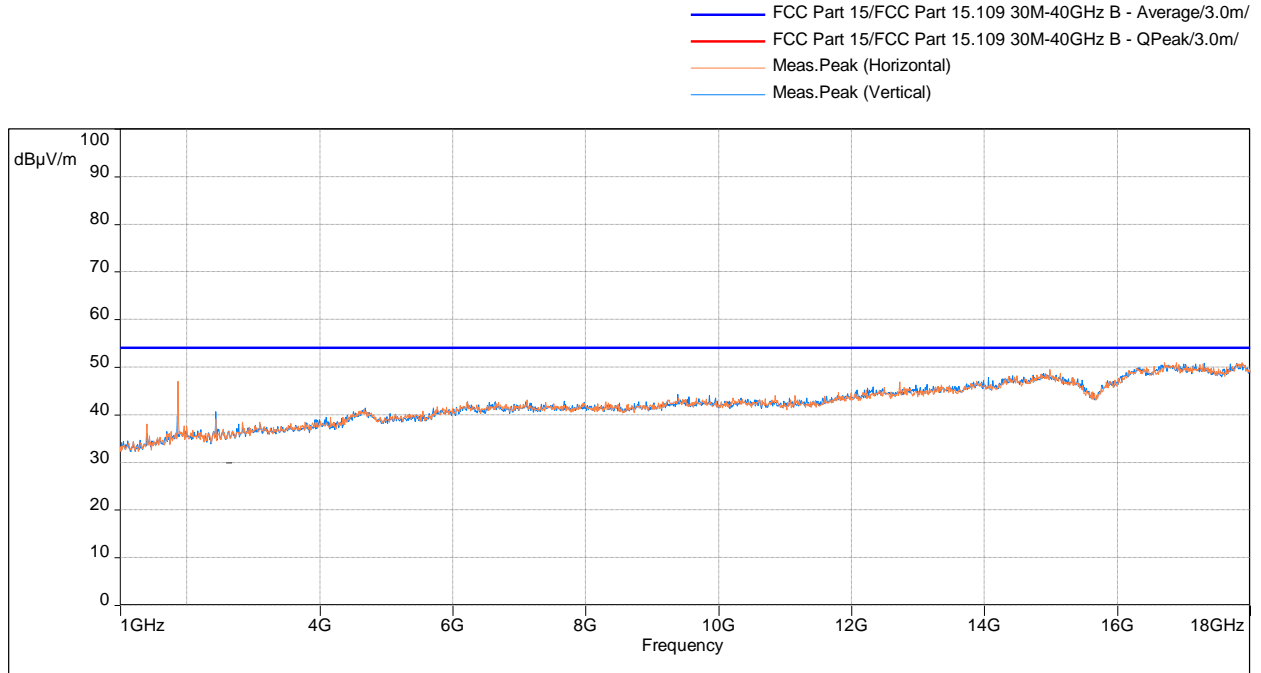


Frequency (MHz)	FS@3m (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
1870.400	47.0	54.0	-7.0	223.3	2.5	Horizontal	62.1	-15.0

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: FS@3m = RA + Correction
Correction = AF + CF - Preamp

Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz, Normal Mode


Radiated Spurious Emissions 30 MHz - 1000 MHz

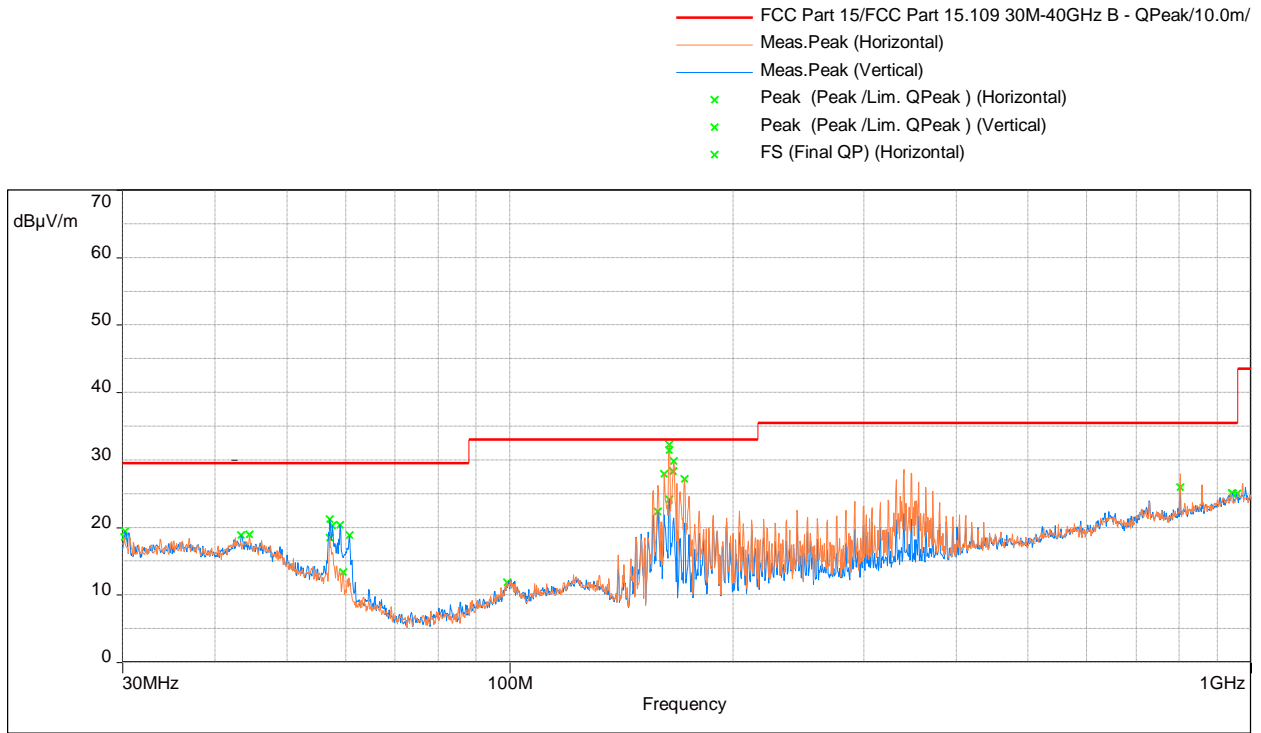

Model: ; Client: ; Comments: ; Test Date: 09/24/2018 18:08

Frequency (MHz)	Q-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
164.013	31.4	33.0	-1.6	209.3	4.0	Horizontal	49.1	-17.7

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Average Limit, Normal Mode

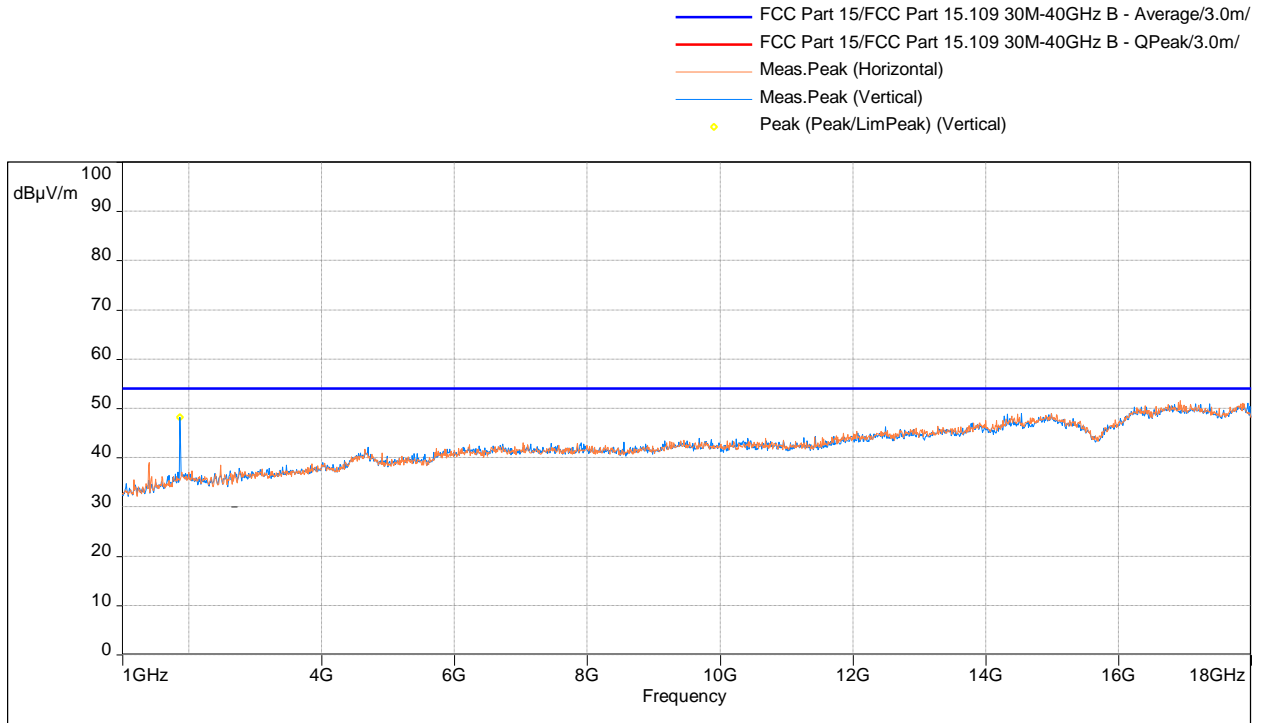

Model: ; Client: ; Comments: ; Test Date: 09/20/2018 18:58

Frequency (MHz)	FS@3m (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Angle (°)	Height (m)	Polarity	Raw (dBuV)	Correction (dB)
1861.900	48.2	54.0	-5.8	278.0	1.5	Vertical	63.3	-15.1


Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

Note: FS@3m = RA + Correction
Correction = AF + CF - Preamp

Result: Complies by 1.4 dB

4.5.5 Test setup photographs

The following photographs show the testing configurations used.

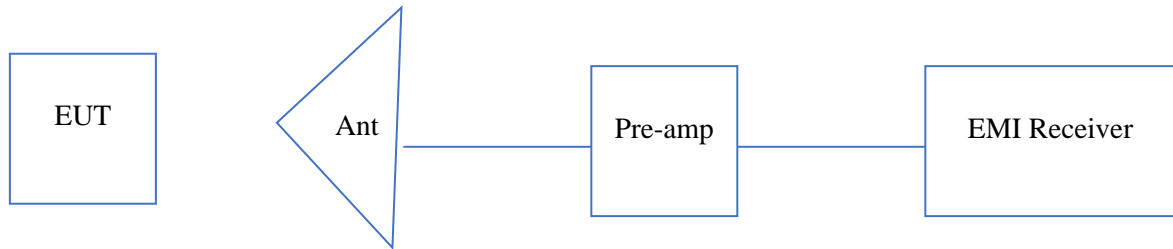

4.6 Radiated Emissions

FCC Ref: 15.109, ICES 003

4.6.1 Requirement

Limits for Electromagnetic Radiated Emissions FCC Section 15.109(b), ICES 003*, RSS GEN

Frequency (MHz)	Class A at 10m dB(μV/m)	Class B at 3m dB(μV/m)
30-88	39	40.0
88-216	43.5	43.5
216-960	46.4	46.0
Above 960	49.5	54.0

* According to FCC Part 15.109(g) an alternative to the radiated emission limits shown above, digital devices may be shown to comply with the limit of CISPR Pub. 22

4.6.2 Procedures

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.


Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material.

Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4.

4.6.3 Test Results

Date of Test:	October 01-02, 2018
Results	Complies


Test Results: Radiated Emissions 30 MHz – 1000 MHz, Charging Mode

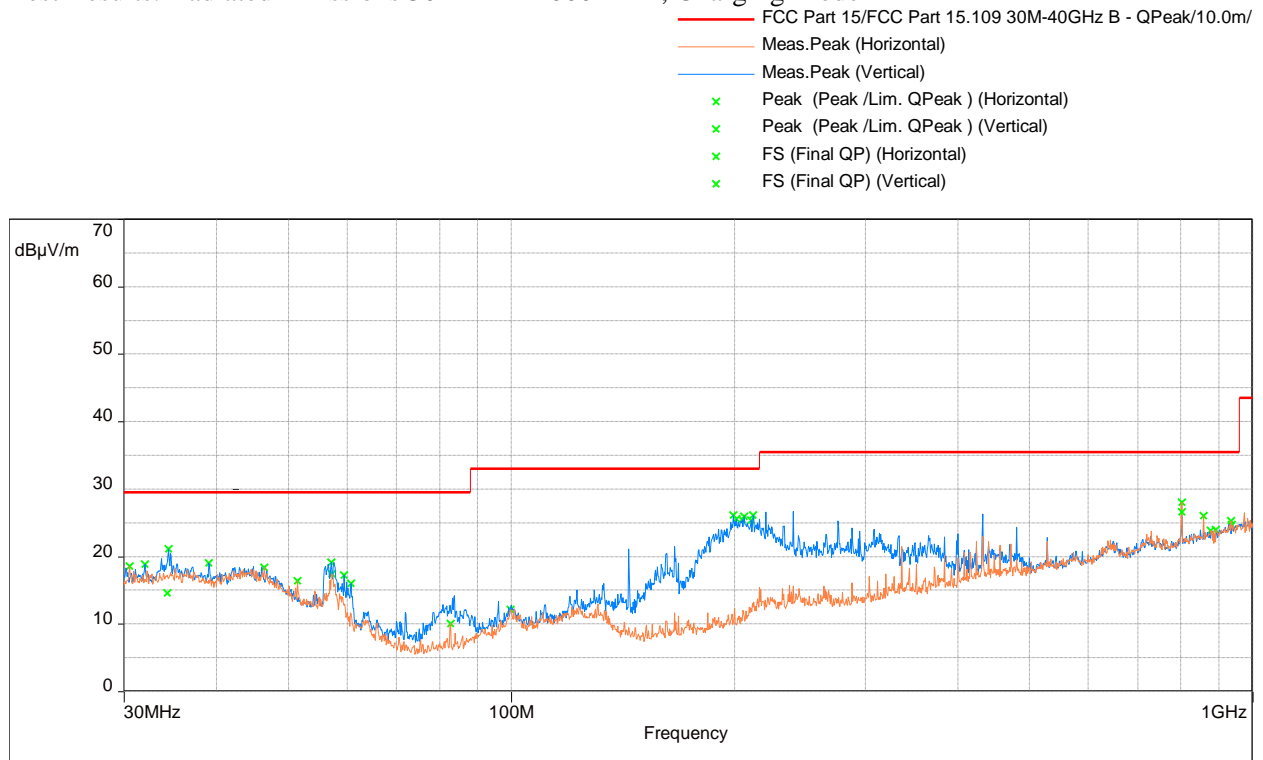

Frequency	Quasi Pk FS	Limit	Margin	Azimuth	Height	Polarity	Raw	Correction
MHz	dB(uV/m)	dB(uV/m)	dB	deg	cm		dB(uV/m)	dB
34.324	14.6	29.5	-15.0	314.3	1.2	Vertical	24.7	-10.1
199.200	26.1	33.0	-6.9	131.5	1.0	Vertical	42.6	-16.5
206.184	25.9	33.0	-7.1	135.5	1.0	Vertical	42.0	-16.1
211.681	26.1	33.0	-6.9	74.8	1.0	Vertical	41.5	-15.4
801.837	26.6	35.5	-8.9	311.8	2.2	Horizontal	30.1	-3.5
859.091	26.0	35.5	-9.5	217.8	2.0	Horizontal	28.6	-2.6


4.6.3 Test Results (Continued)

Radiated Emissions 1GHz – 18GHz, Peak Scan vs Average Limit, Charging Mode

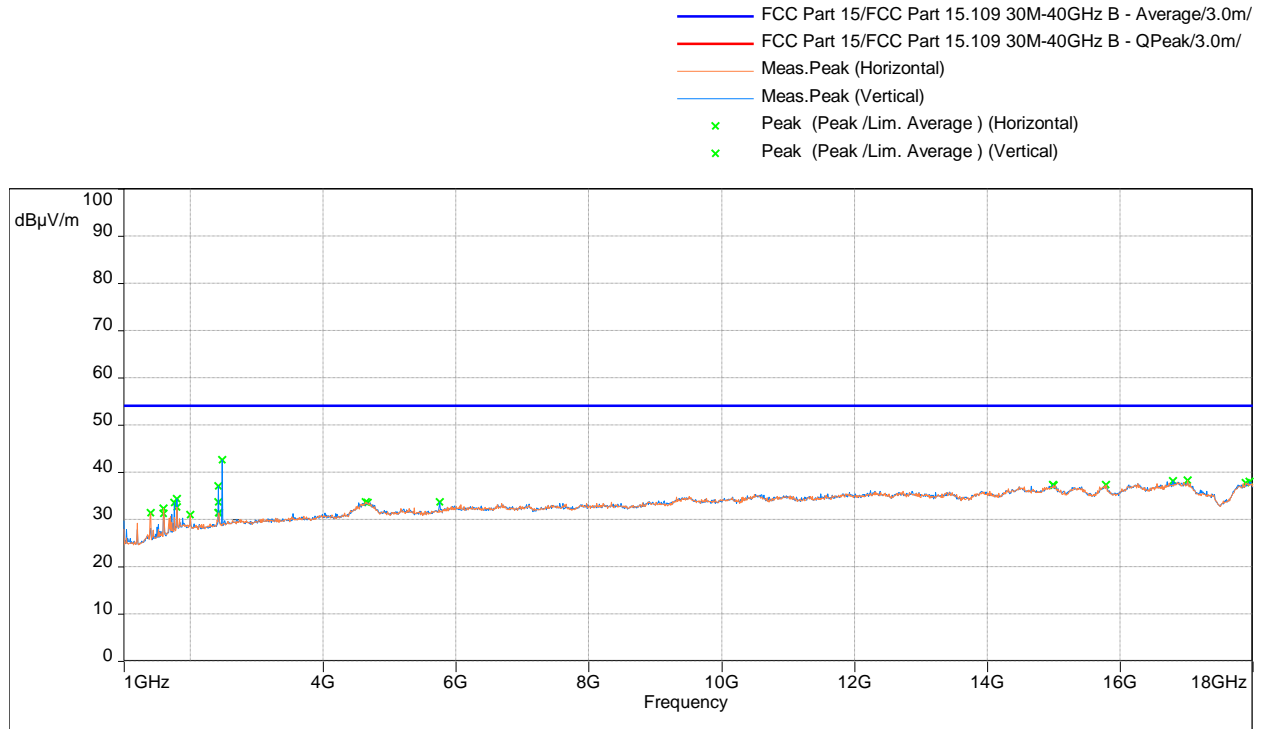

4.6.3 Test Results (Continued)

Test Results: Radiated Emissions 30 MHz – 1000 MHz, Normal Mode

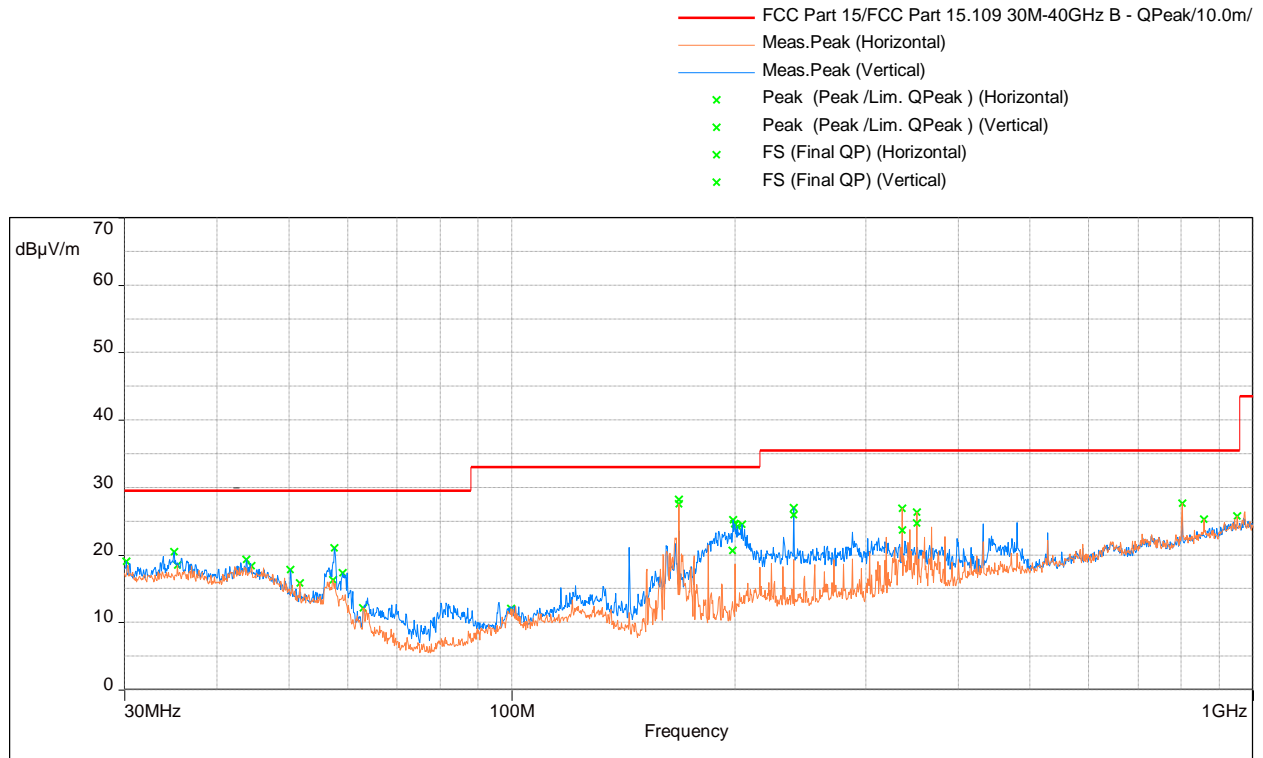

Model: ; Client: ; Comments: ; Test Date: 10/01/2018 19:56

Frequency	Quasi Pk FS	Limit	Margin	Azimuth	Height	Polarity	Raw	Correction
MHz	dB(uV/m)	dB(uV/m)	dB	deg	cm		dB(uV/m)	dB
168.002	28.2	33.0	-4.8	15.0	4.0	Horizontal	45.7	-17.5
336.000	23.6	35.5	-11.9	35.5	2.9	Horizontal	34.8	-11.2
352.004	24.7	35.5	-10.8	36.5	2.4	Horizontal	36.0	-11.3
198.479	20.6	33.0	-12.4	78.3	1.0	Vertical	37.1	-16.5
240.027	25.9	35.5	-9.6	238.3	1.0	Vertical	39.5	-13.6

4.6.3 Test Results (Continued)


Radiated Emissions 1GHz – 18GHz, Peak Scan vs Average Limit, Normal Mode



Result:	Complies by 4.8 dB
----------------	---------------------------

4.6.4 Test Configuration Photographs

The following photographs show the testing configurations used.

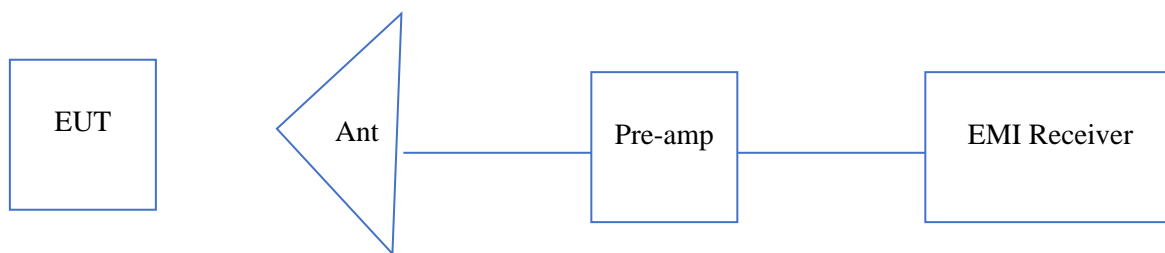

4.7 AC Line Conducted Emission FCC: 15.107, 15.207; RSS-GEN;

4.7.1 Requirement

Frequency Band MHz	Class B Limit dB(μV)		Class A Limit dB(μV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: *Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.*

4.7.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4:2014 and ANSI C63.10-2013

Tested By:	Minh Ly
Test Date:	September 20 to October 02, 2018

4.7.3 Test Results


FCC Part 15.207 Conducted Disturbances, 120V 60Hz

Sub-range 1

Frequencies: 150 kHz - 30 MHz (Mode: - Step: 2.25 kHz)

Settings: RBW: 9kHz, VBW: 30kHz, Sweep time: 1e+03 ms, Attenuation: 10 dB, Sweep count 3, Preamp: Off, Lim Preamp: Off, Preselector: On

Line:Phase 1

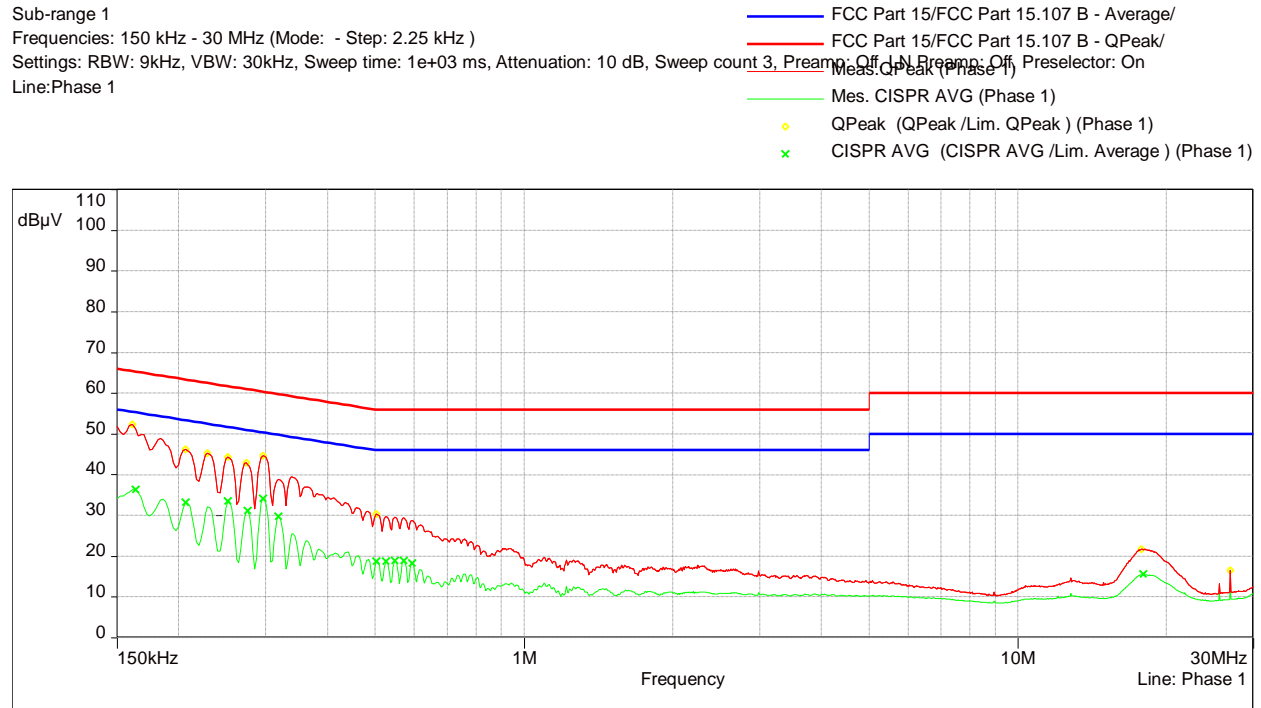


Sub-range 2

Frequencies: 150 kHz - 30 MHz (Mode: - Step: 2.25 kHz)

Settings: RBW: 9kHz, VBW: 30kHz, Sweep time: 1e+03 ms, Attenuation: 10 dB, Sweep count 1, Preamp: Off, Lim Preamp: Off, Preselector: On

Line:Phase 2

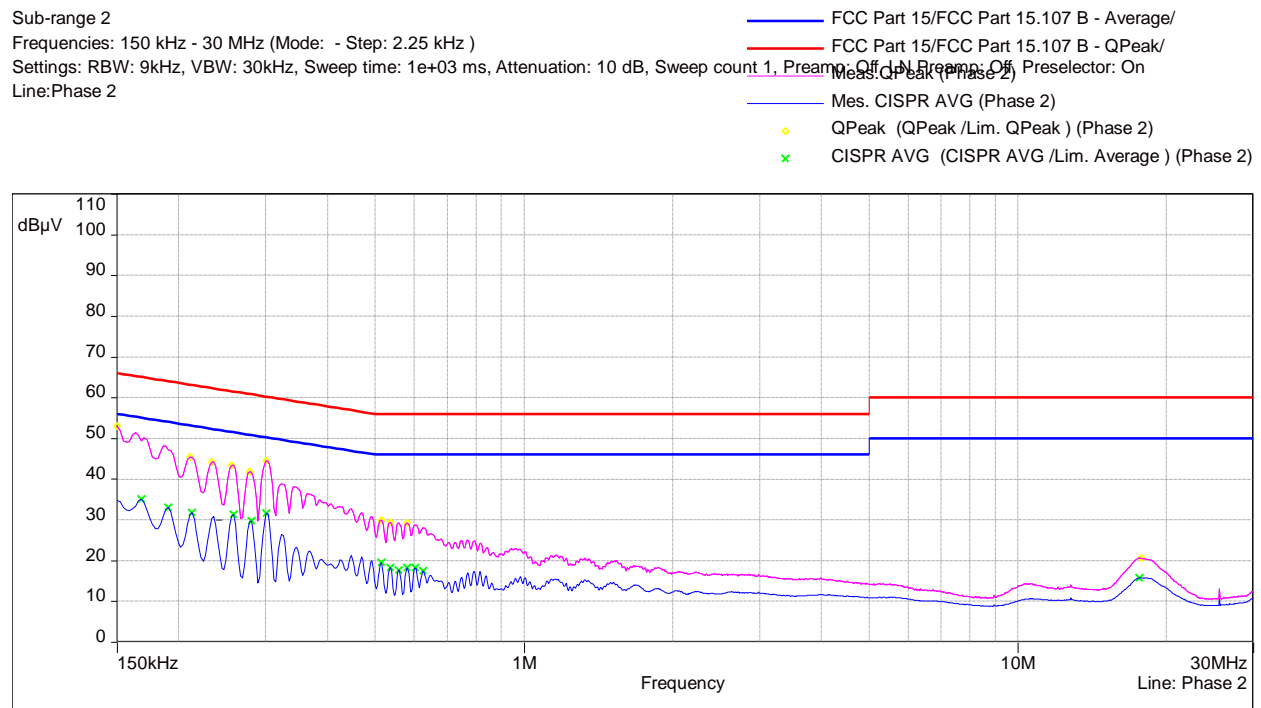

Frequency (MHz)	QP Level (dBuV)	QP Limit (dBuV)	Margin (dB)	Line	Correction (dB)
0.161	52.4	65.4	-13.0	Phase 1	11.5
0.206	46.3	63.4	-17.1	Phase 1	11.6
0.296	44.6	60.4	-15.7	Phase 1	11.6
0.503	30.3	56.0	-25.7	Phase 1	11.6
17.792	21.7	60.0	-38.3	Phase 1	11.9
26.957	16.5	60.0	-43.5	Phase 1	12.0
0.150	53.0	66.0	-13.0	Phase 2	11.5
0.211	45.4	63.2	-17.8	Phase 2	11.6
0.301	44.5	60.2	-15.7	Phase 2	11.6
0.515	29.9	56.0	-26.1	Phase 2	11.6
0.580	29.3	56.0	-26.7	Phase 2	11.6
17.792	20.6	60.0	-39.4	Phase 2	11.9

Frequency (MHz)	Ave Level (dBuV)	Ave Limit (dBuV)	Margin (dB)	Line	Correction (dB)
0.164	36.3	55.3	-19.0	Phase 1	11.5
0.296	34.1	50.4	-16.2	Phase 1	11.6
0.319	29.7	49.7	-20.0	Phase 1	11.6
0.503	18.8	46.0	-27.2	Phase 1	11.6
0.526	18.7	46.0	-27.3	Phase 1	11.6
0.548	18.8	46.0	-27.2	Phase 1	11.6
0.168	35.1	55.1	-19.9	Phase 2	11.5
0.191	33.1	54.0	-20.9	Phase 2	11.5
0.213	31.7	53.1	-21.4	Phase 2	11.6
0.258	31.2	51.5	-20.3	Phase 2	11.6
0.281	29.7	50.8	-21.1	Phase 2	11.6
0.301	31.5	50.2	-18.7	Phase 2	11.6

Results: Complies by 13.0 dB at 120V 60Hz

4.7.3 Test Results (Continued)


FCC Part 15.107 Conducted Disturbances, 120V 60Hz

Sub-range 1

Frequencies: 150 kHz - 30 MHz (Mode: - Step: 2.25 kHz)

Settings: RBW: 9kHz, VBW: 30kHz, Sweep time: 1e+03 ms, Attenuation: 10 dB, Sweep count 3, Preamplifier: Off, Lim. Preamplifier: Off, Preselector: On

Line: Phase 1

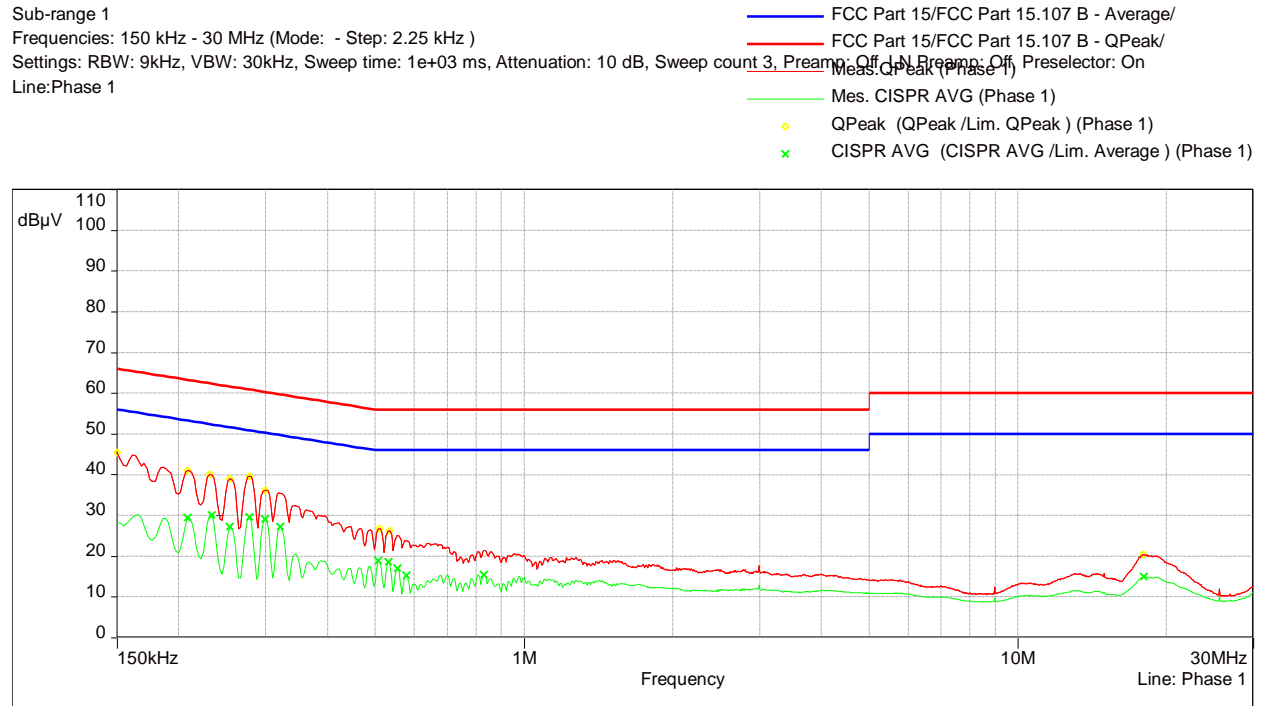


Sub-range 2

Frequencies: 150 kHz - 30 MHz (Mode: - Step: 2.25 kHz)

Settings: RBW: 9kHz, VBW: 30kHz, Sweep time: 1e+03 ms, Attenuation: 10 dB, Sweep count 1, Preamplifier: Off, Lim. Preamplifier: Off, Preselector: On

Line: Phase 2

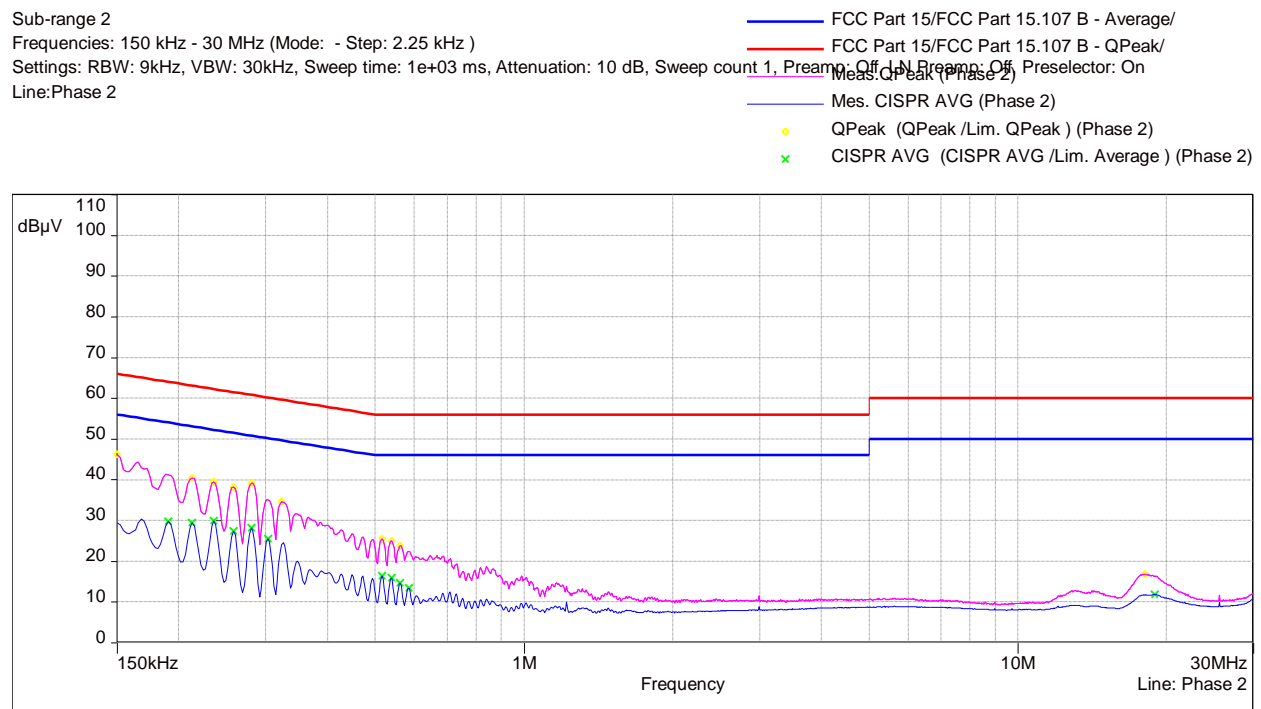

Frequency (MHz)	QP Level (dBuV)	QP Limit (dBuV)	Margin (dB)	Line	Correction (dB)
0.150	45.4	66.0	-20.6	Phase 1	11.5
0.231	40.1	62.4	-22.3	Phase 1	11.6
0.278	39.6	60.9	-21.2	Phase 1	11.6
0.510	26.7	56.0	-29.3	Phase 1	11.6
0.535	26.2	56.0	-29.8	Phase 1	11.6
0.150	46.2	66.0	-19.8	Phase 2	11.5
0.213	40.5	63.1	-22.6	Phase 2	11.6
0.236	39.4	62.3	-22.9	Phase 2	11.6
0.258	38.2	61.5	-23.3	Phase 2	11.6
0.281	39.1	60.8	-21.7	Phase 2	11.6
0.323	34.6	59.6	-25.0	Phase 2	11.6
18.114	16.8	60.0	-43.2	Phase 2	11.9

Frequency (MHz)	Ave Level (dBuV)	Ave Limit (dBuV)	Margin (dB)	Line	Correction (dB)
0.209	29.3	53.3	-23.9	Phase 1	11.6
0.233	30.0	52.3	-22.4	Phase 1	11.6
0.321	27.1	49.7	-22.6	Phase 1	11.6
0.508	18.8	46.0	-27.2	Phase 1	11.6
0.533	18.6	46.0	-27.5	Phase 1	11.6
17.993	14.9	50.0	-35.1	Phase 1	11.9
0.191	29.8	54.0	-24.2	Phase 2	11.5
0.213	29.4	53.1	-23.7	Phase 2	11.6
0.236	29.9	52.3	-22.4	Phase 2	11.6
0.539	15.9	46.0	-30.1	Phase 2	11.6
0.562	14.6	46.0	-31.4	Phase 2	11.6
18.965	11.8	50.0	-38.2	Phase 2	11.9

Results: Complies by 19.8 dB at 120V 60Hz

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
Spectrum Analyzer	Rohde and Schwarz	FSU	ITS 00913	12	01/24/19
Pyramidal Horn Antenna	EMCO	3160-09	ITS 00571	#	#
Pre-Amplifier (18-40GHz)	Miteq	TTA1840-35-S-M	ITS 01393	12	01/19/19
Active Horn Antenna	ETS-Lindgren	3117-PA	ITS 01325	12	01/25/19
EMI Receiver	Rohde and Schwarz	ESR7	ITS 01607	12	10/09/18
BI-Log Antenna	Antenna Research	LPB-2513	ITS 00355	12	02/21/19
Pre-Amplifier	Sonoma Instrument	310N	ITS 01493	12	10/20/18
Notch Filter	Micro-Tronics	BRM50702	ITS 01166	12	03/10/19
Notch Filter	MICRO-TRONICS	BRM50702	ITS 01166	12	12/08/18
RF Cable	Megaphase	EMC1-K1K1-236	ITS 01538	12	06/25/19
RF Cable	Megaphase	TM40-K1K1-59	ITS 01657	12	06/26/19
RF Cable	TRU Corporation	TRU CORE 300	ITS 01330	12	11/29/18
RF Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	08/16/19
RF Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/16/19
Transient Limiter	COM-POWER	LIT-153A	ITS 01452	12	06/21/19
LISN	FCC	FCC-LISN-50-50-M-H	ITS 00552	12	11/14/18

No Calibration required

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
Tile	Quantum Change	3.4.K.22	Conducted Spurious_30M-26GHz
BAT-EMC	Nexio	3.16.0.64	Vocere, BLE09-2018.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)

6.0 Document History

Revision/ Job Number	Writer Initials	Reviewers Initials	Date	Change
1.0 / G103615308	ML	KV	October 29, 2018	Original document