

7.5 PEAK-TO-AVERAGE RATIO

7.5.1 Applicable Standard

According to FCC 22.913 and FCC 24.232(d) and FCC KDB 971168 D01 Section 5.7.1

7.5.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

7.5.6 Test Results

EUT:	Mobile phone	Model No.:	AX1092
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/ EGPRS 850/ GSM/GPRS/ EGPRS 1900 /UMTS band II/ UMTS band V	Test By:	Allen Liu
Results: PASS			

Cellular Band						
Modes	GSM850			GSM1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.68	2.66	2.65	2.66	2.66	2.66

Cellular Band						
Modes	GPRS850			GPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.69	2.69	2.70	2.66	2.66	2.67


Cellular Band						
Modes	EGPRS850			EGPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.64	2.64	2.64	2.64	2.64	2.64

UMTS Band						
Modes	WCDMA Band II (RMC 12.2Kbps)			WCDMA Band V (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	2.72	2.76	2.62	3.18	3.15	3.13

Test plot


(GSM850)

Peak-to-Average Ratio on channel 128

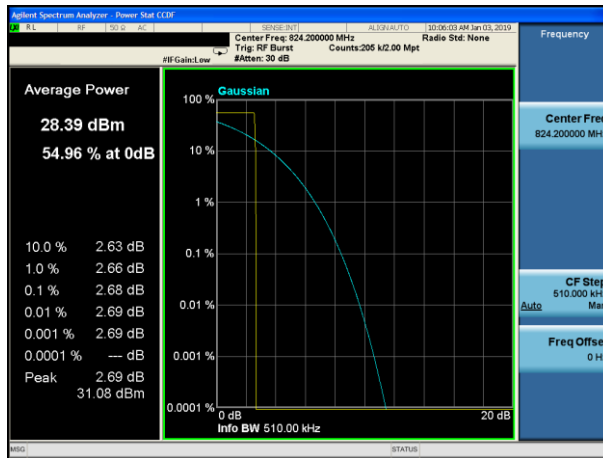


(GSM1900)


Peak-to-Average Ratio on channel 512

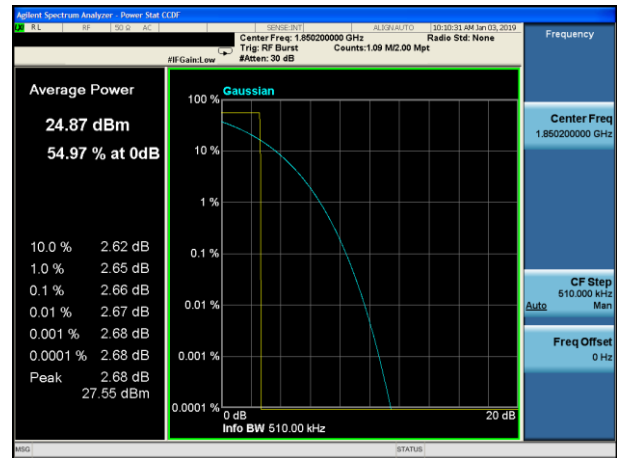


Peak-to-Average Ratio on channel 190

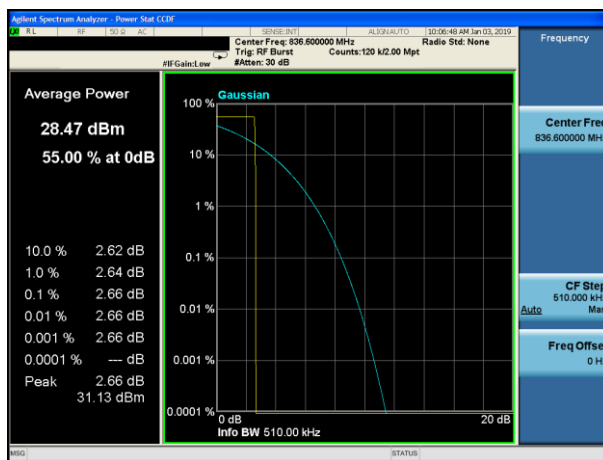


Peak-to-Average Ratio on channel 661

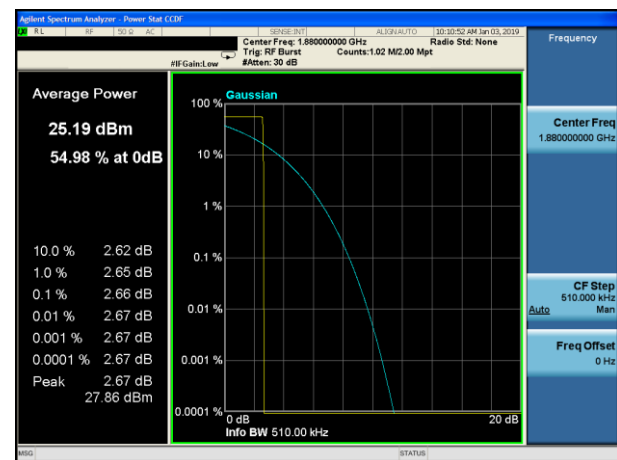

Peak-to-Average Ratio on channel 251

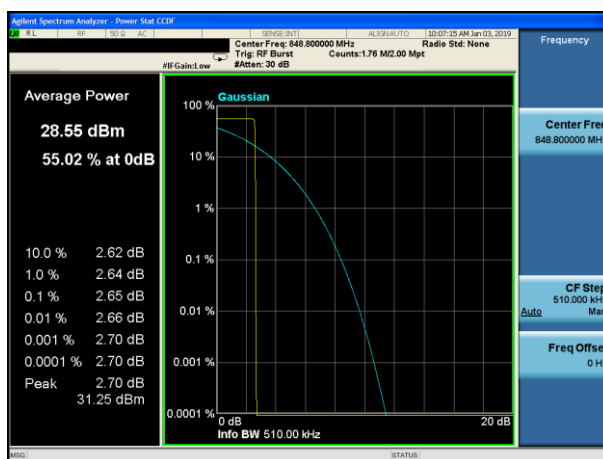


Peak-to-Average Ratio on channel 810

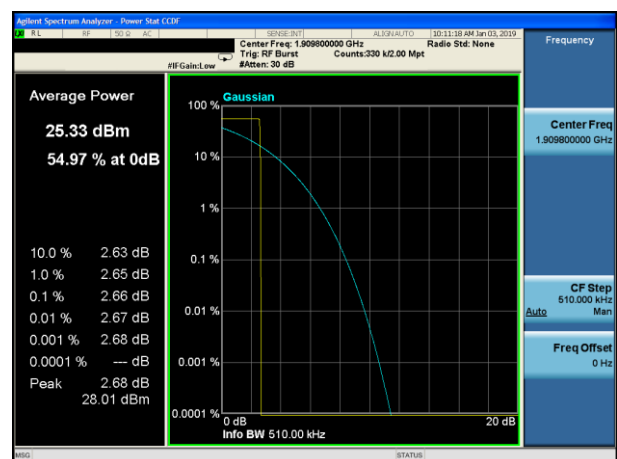

Test plot


(GPRS850)

Peak-to-Average Ratio on channel 128

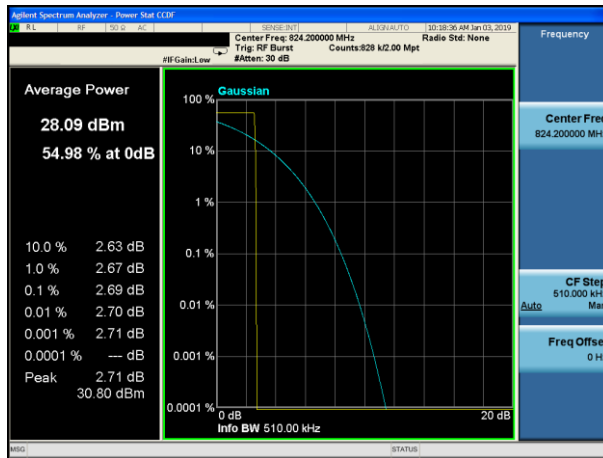


(GPRS1900)


Peak-to-Average Ratio on channel 512

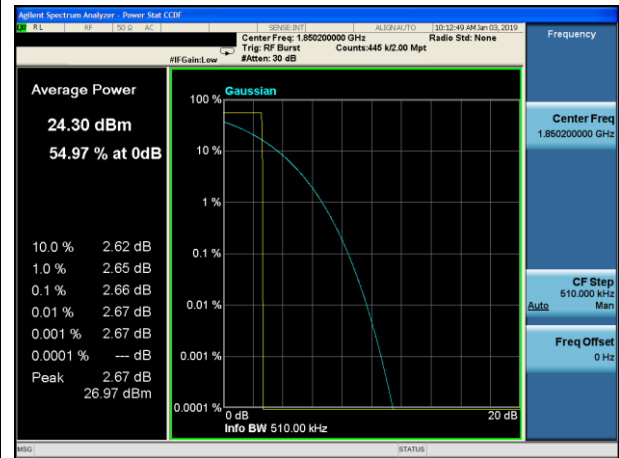

Peak-to-Average Ratio on channel 190

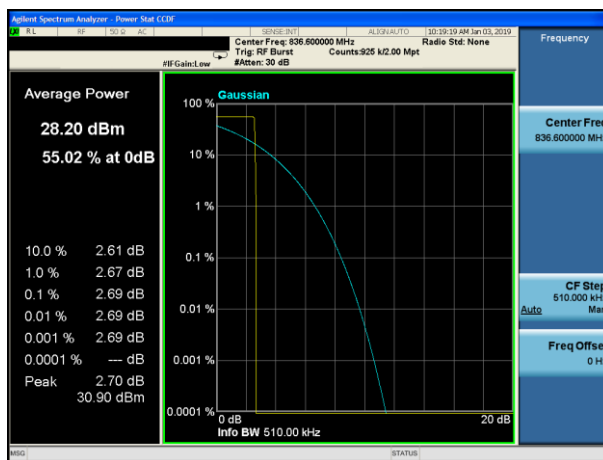


Peak-to-Average Ratio on channel 661

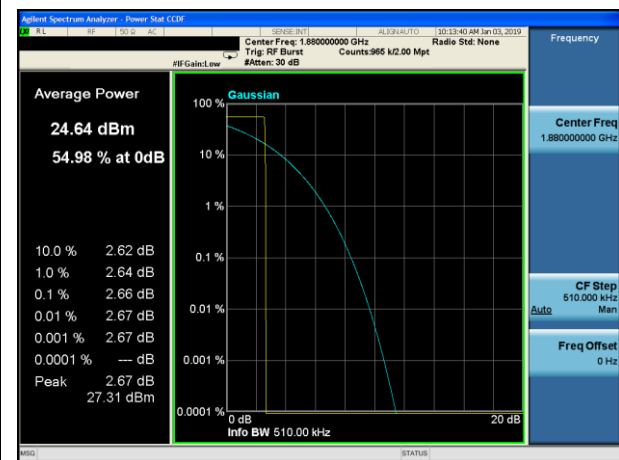

Peak-to-Average Ratio on channel 251




Peak-to-Average Ratio on channel 810

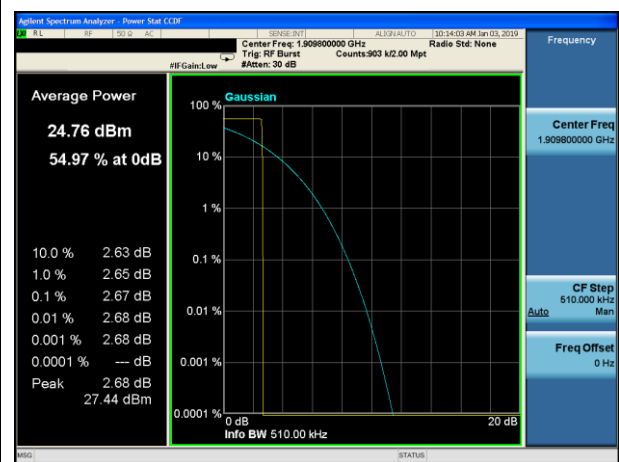

Test plot


(EGPRS850)

Peak-to-Average Ratio on channel 128

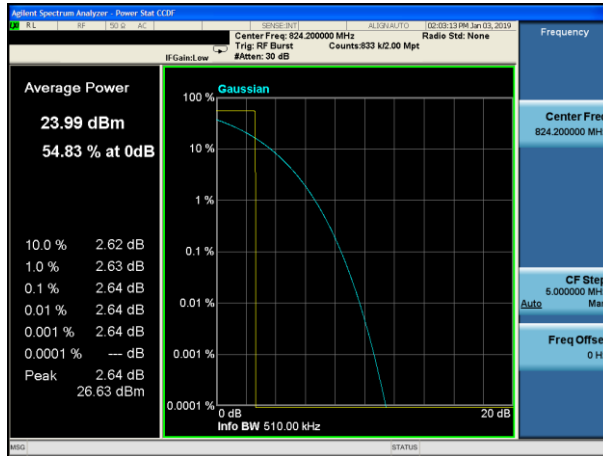


(EGPRS1900)


Peak-to-Average Ratio on channel 512

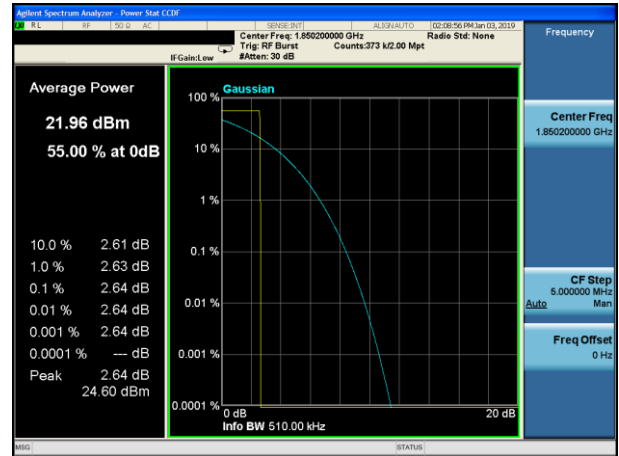


Peak-to-Average Ratio on channel 190

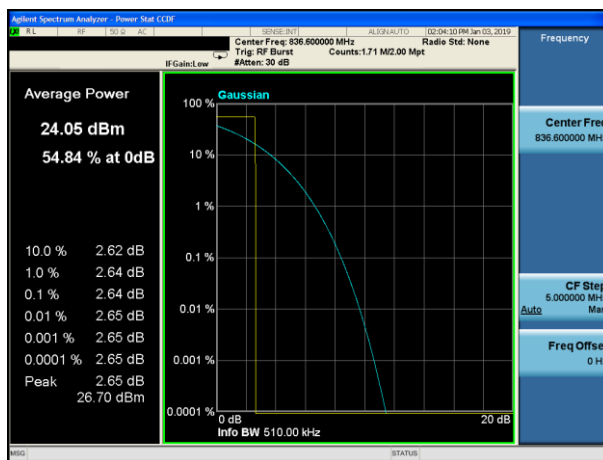


Peak-to-Average Ratio on channel 661

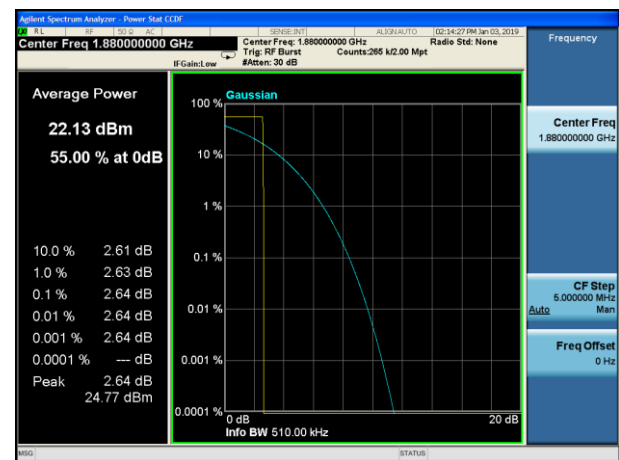

Peak-to-Average Ratio on channel 251

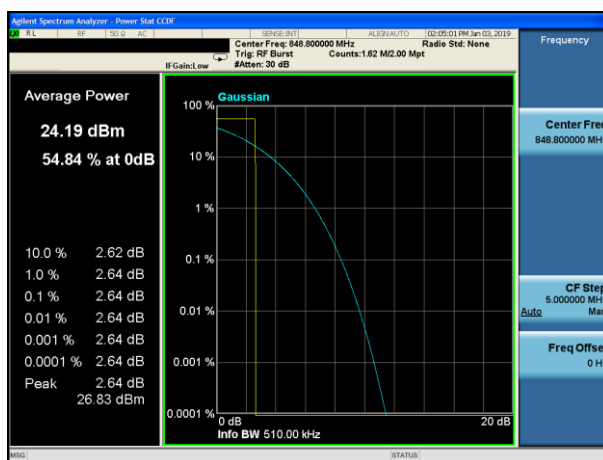

Peak-to-Average Ratio on channel 810

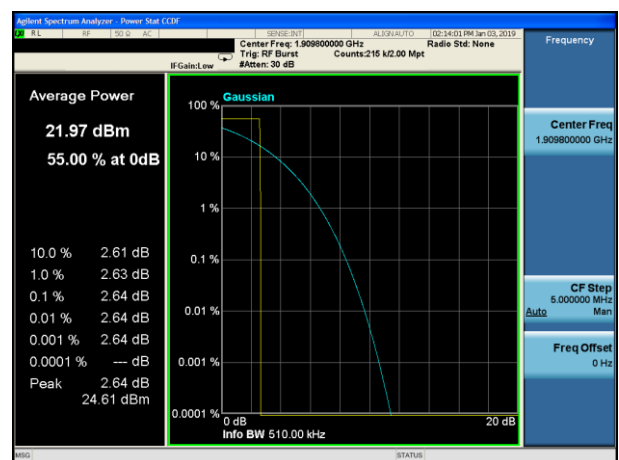



Test plot

UMTS Band V

UMTS Band II



Peak-to-Average Ratio on channel 4132

Peak-to-Average Ratio on channel 9262

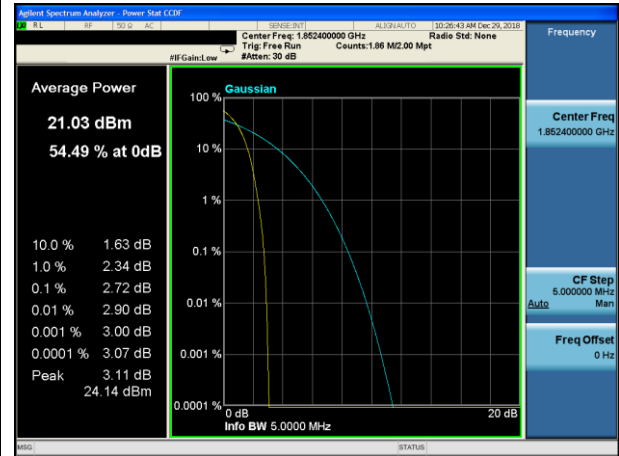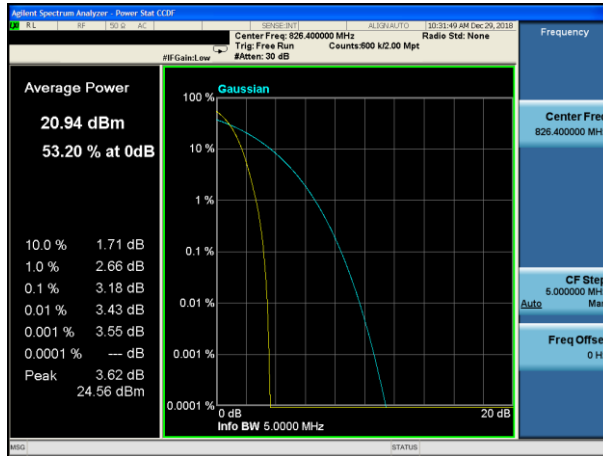



Peak-to-Average Ratio on channel 4183

Peak-to-Average Ratio on channel 9400

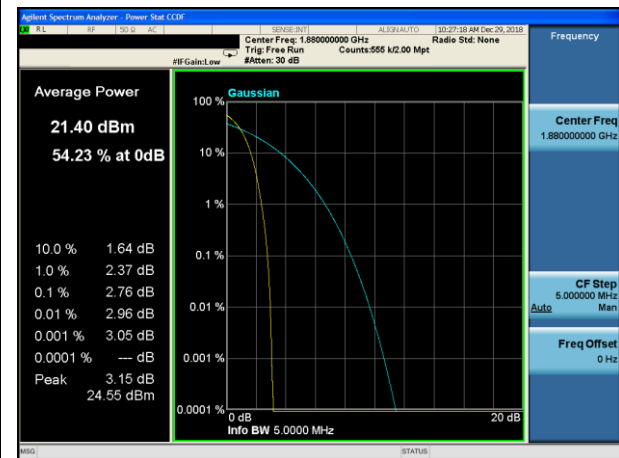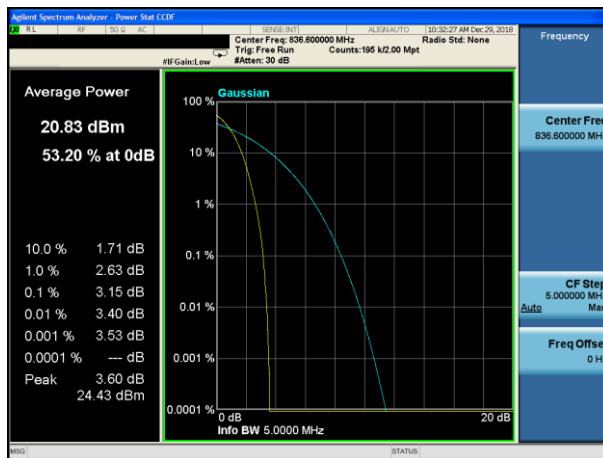

Peak-to-Average Ratio on channel 4233

Peak-to-Average Ratio on channel 9538

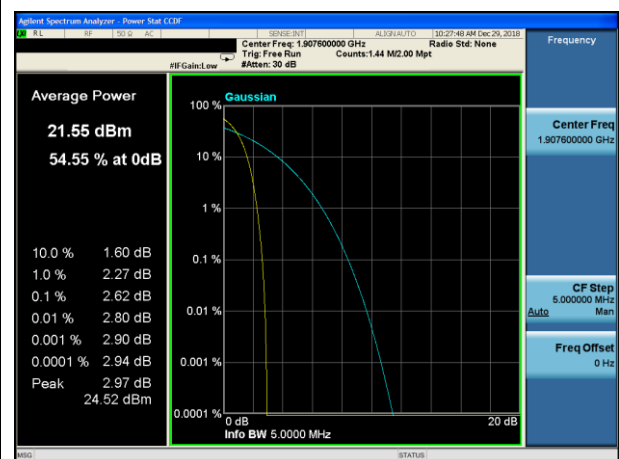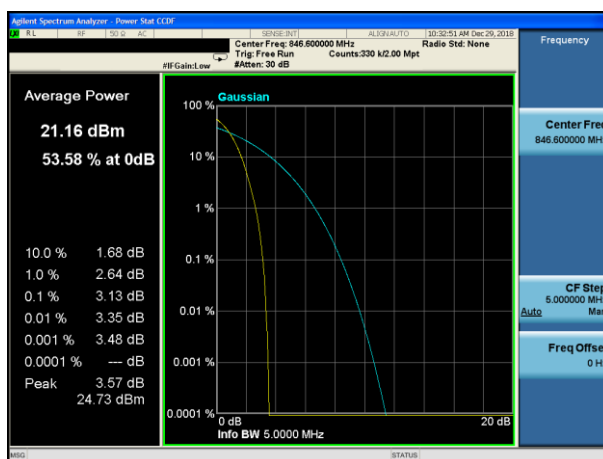

7.6 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.6.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC Part 24E and FCC KDB 971168 D01 Section 4.0

7.6.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 4.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.6.6 Test Results


EUT:	Mobile phone	Model No.:	AX1092
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900 /UMTS band II/ UMTS band V	Test By:	Allen Liu
Results: PASS			

Operation Mode	Channel Number	Channel Frequency (MHz)	26dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Verdict
GSM 850	128	824.2	313.3	243.41	N/A	PASS
	190	836.4	316.9	241.44	N/A	PASS
	251	848.8	315.8	243.59	N/A	PASS
GSM 1900	512	1850.2	313.5	245.68	N/A	PASS
	661	1880.0	316.2	242.94	N/A	PASS
	810	1909.8	318.6	242.83	N/A	PASS
GPRS 850	128	824.2	322.0	246.05	N/A	PASS
	190	836.4	316.8	242.94	N/A	PASS
	251	848.8	317.0	243.41	N/A	PASS
GPRS 1900	512	1850.2	311.1	241.76	N/A	PASS
	661	1880.0	312.0	244.79	N/A	PASS
	810	1909.8	324.9	247.84	N/A	PASS
EGPRS 850	128	824.2	317.7	246.06	N/A	PASS
	190	836.4	319.6	245.63	N/A	PASS
	251	848.8	317.4	244.92	N/A	PASS
EGPRS 1900	512	1850.2	321.6	245.35	N/A	PASS
	661	1880.0	317.6	244.93	N/A	PASS
	810	1909.8	319.4	243.42	N/A	PASS
UMTS Band V	4132	826.4	4703	4133.6	N/A	PASS
	4183	836.4	4706	4128.9	N/A	PASS
	4233	846.6	4699	4125.5	N/A	PASS
UMTS Band II	9262	1852.4	4728	4144.2	N/A	PASS
	9400	1880.0	4737	4150.2	N/A	PASS
	9538	1907.6	4732	4151.8	N/A	PASS

Test plot


(GSM850)

-26dB&99% Bandwidth plot on channel 128

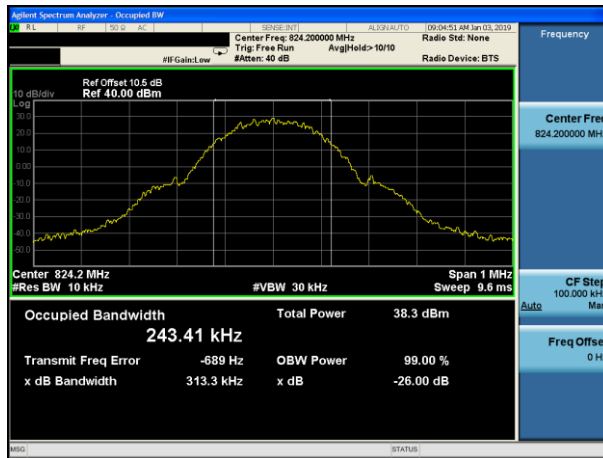


(GSM1900)


-26dB&99% Bandwidth plot on channel 512

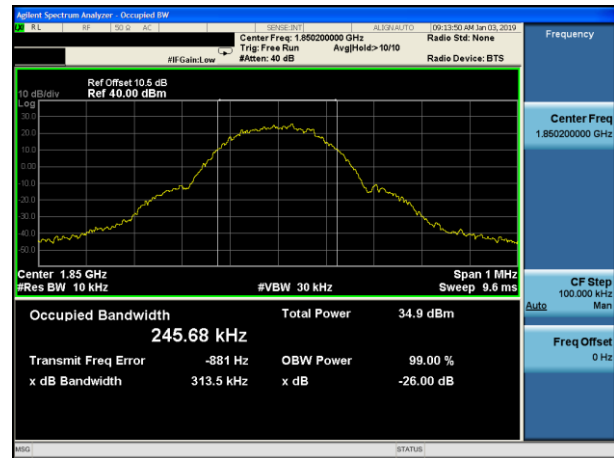


-26dB&99% Bandwidth plot on channel 190

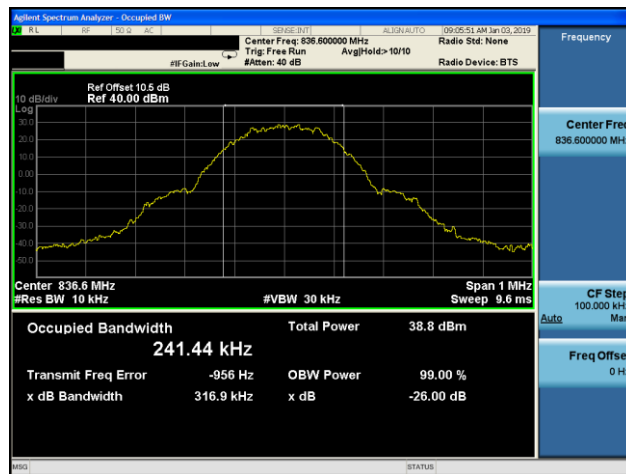


-26dB&99% Bandwidth plot on channel 661

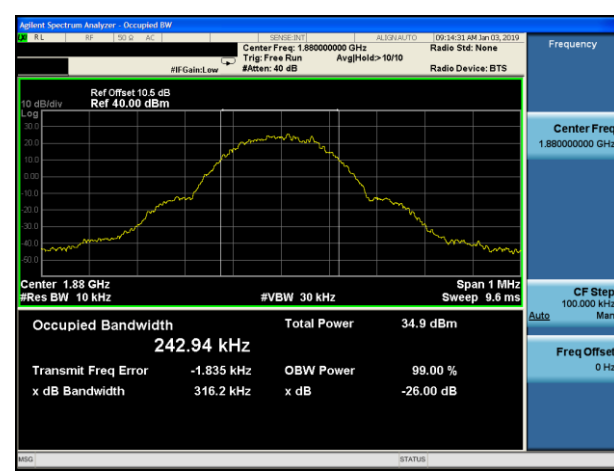

-26dB&99% Bandwidth plot on channel 251

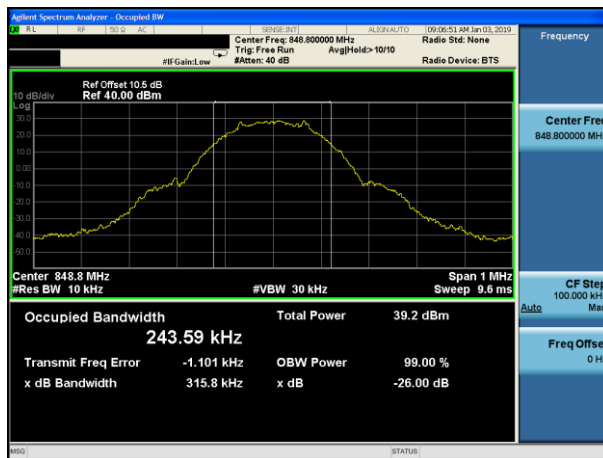


-26dB&99% Bandwidth plot on channel 810

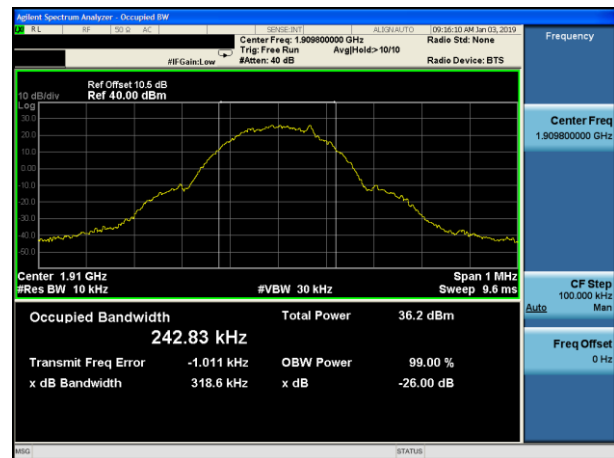

Test plot


(GPRS850)

-26dB&99% Bandwidth plot on channel 128

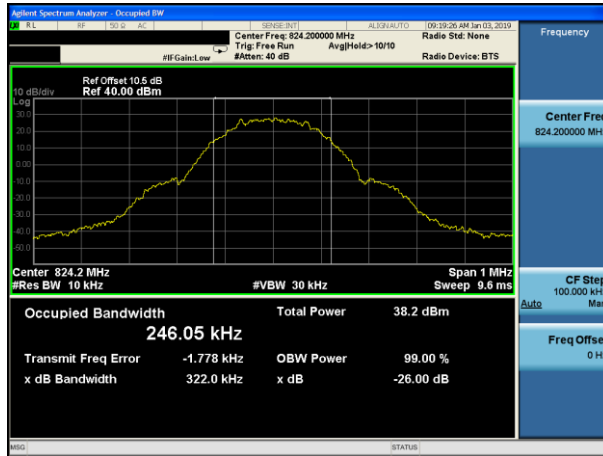


(GPRS1900)


-26dB&99% Bandwidth plot on channel 512

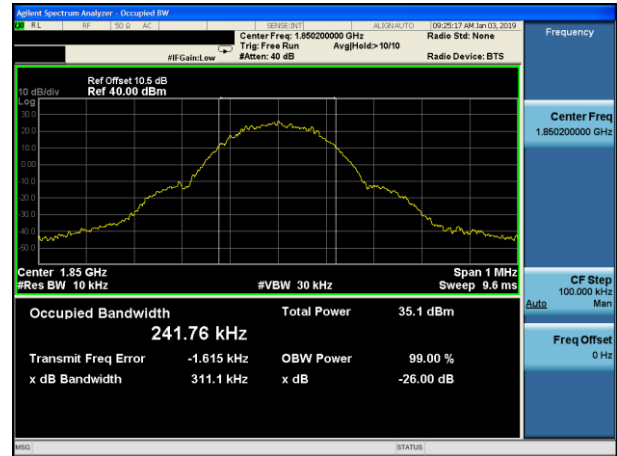


-26dB&99% Bandwidth plot on channel 190

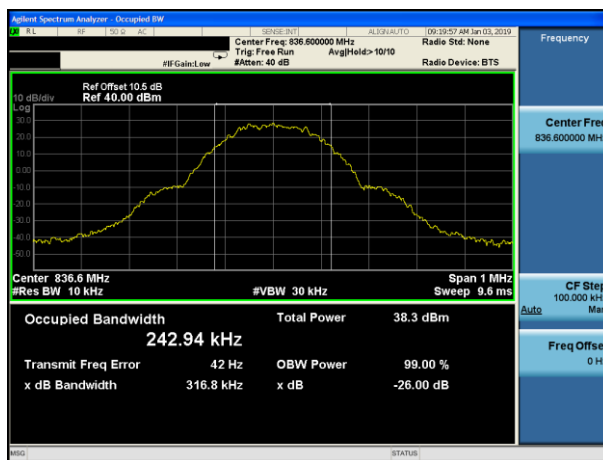


-26dB&99% Bandwidth plot on channel 661

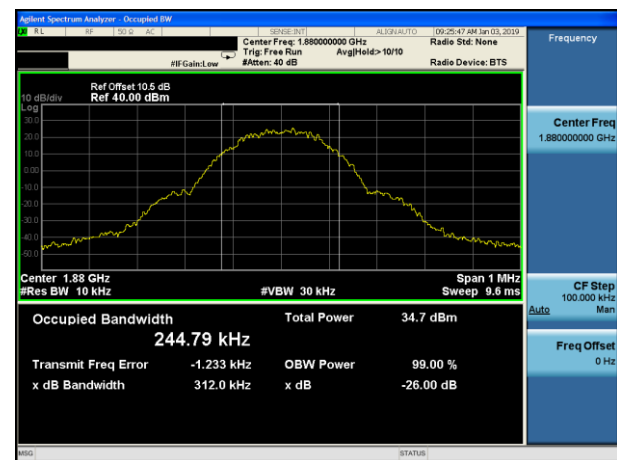

-26dB&99% Bandwidth plot on channel 251

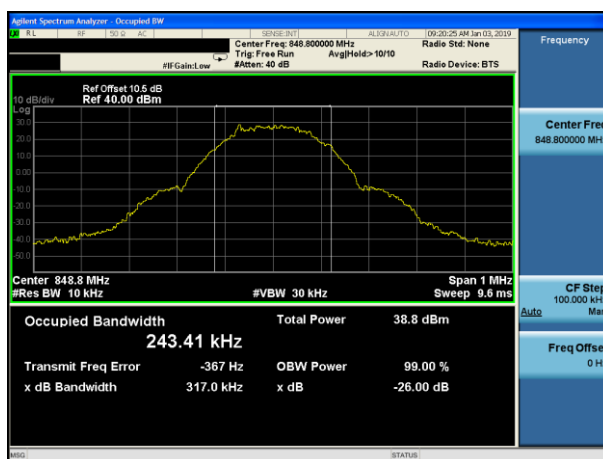


-26dB&99% Bandwidth plot on channel 810

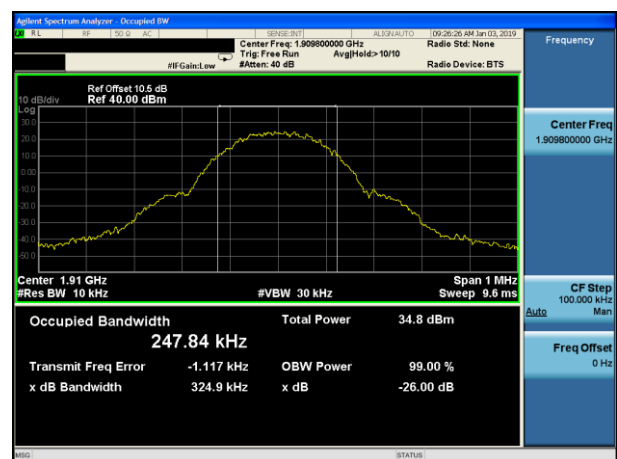

Test plot


(EGPRS850)

-26dB&99% Bandwidth plot on channel 128

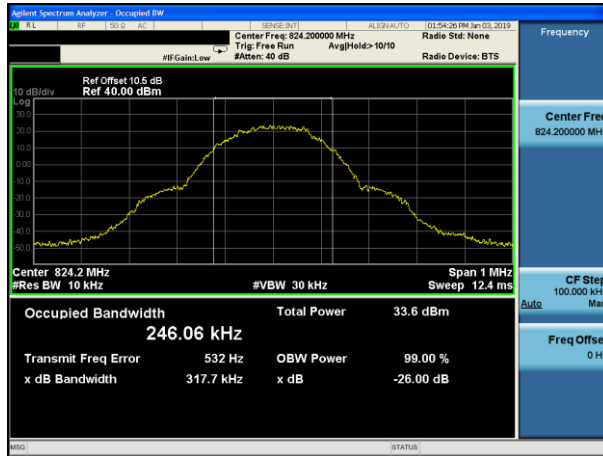


(EGPRS1900)


-26dB&99% Bandwidth plot on channel 512

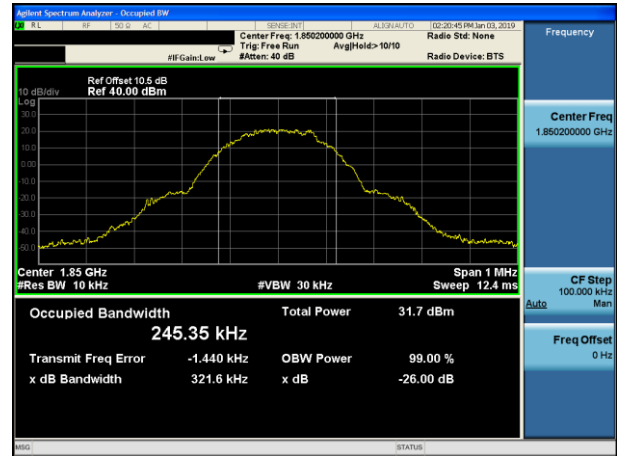


-26dB&99% Bandwidth plot on channel 190

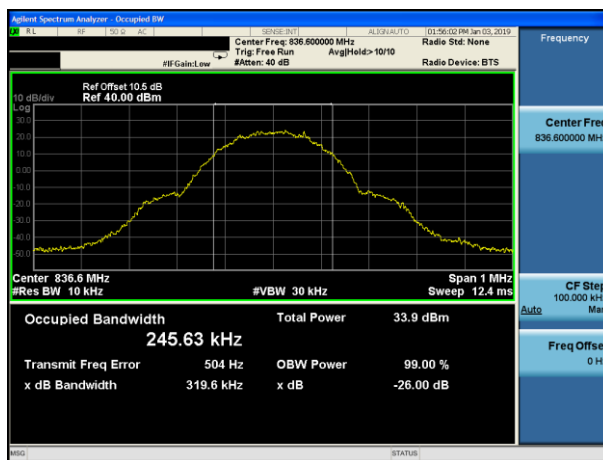


-26dB&99% Bandwidth plot on channel 661

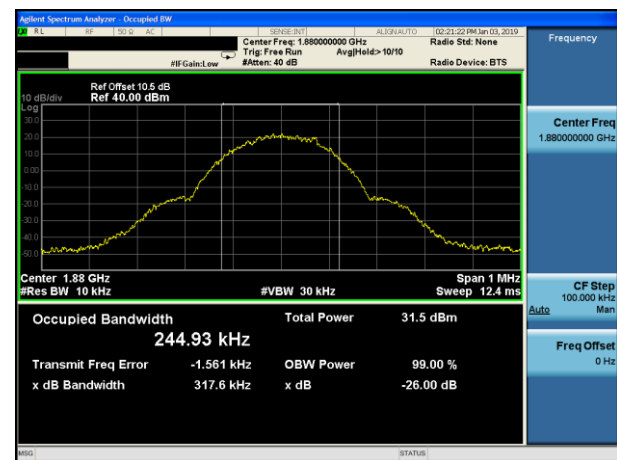

-26dB&99% Bandwidth plot on channel 251

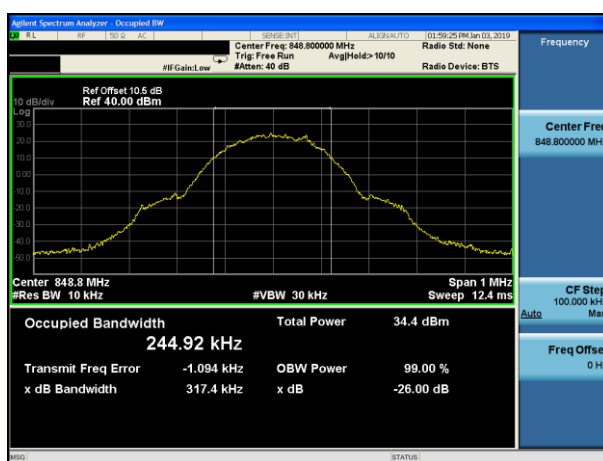


-26dB&99% Bandwidth plot on channel 810

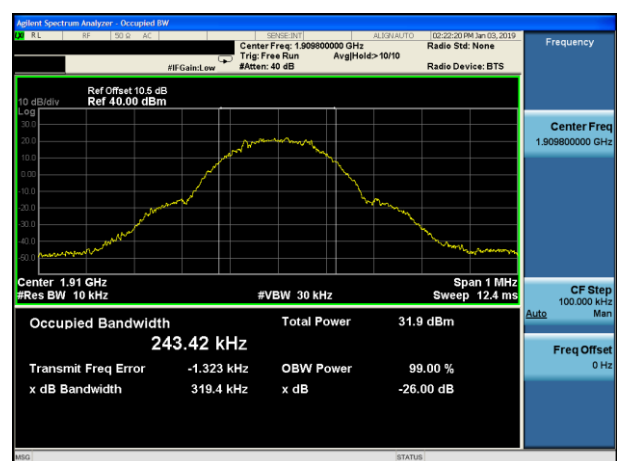

Test plot


UMTS Band V

-26dB&99% Bandwidth plot on channel 4132

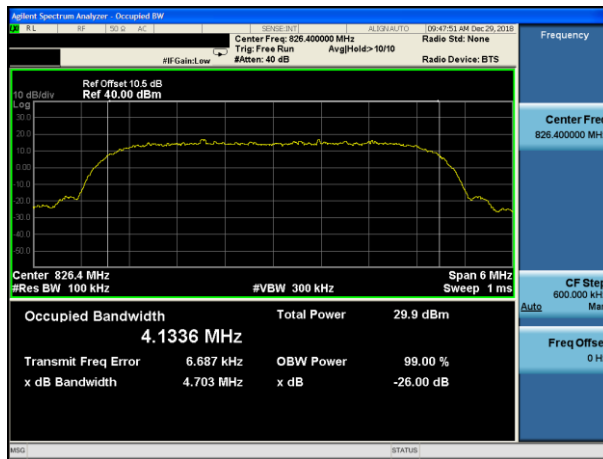


UMTS Band II


-26dB&99% Bandwidth plot on channel 9262

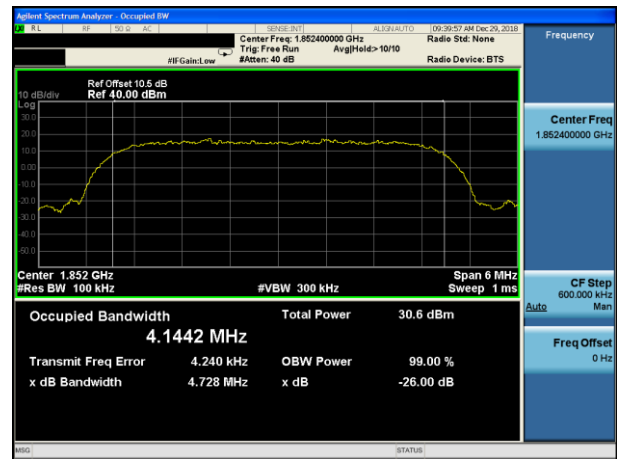


-26dB&99% Bandwidth plot on channel 4183

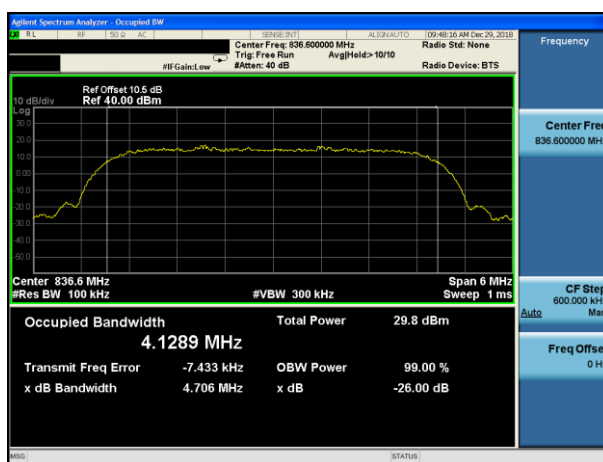


-26dB&99% Bandwidth plot on channel 9400

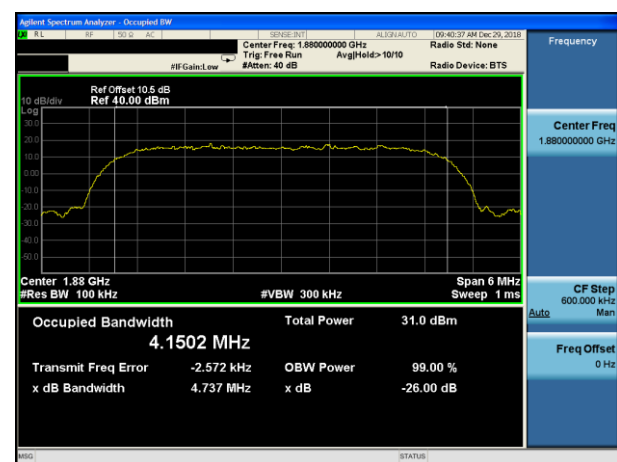

-26dB&99% Bandwidth plot on channel 4233

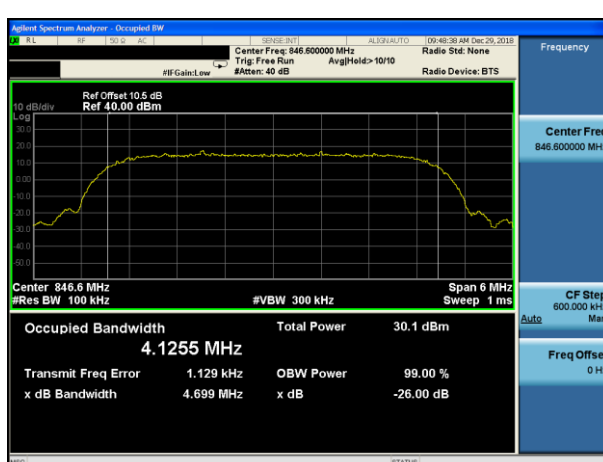

-26dB&99% Bandwidth plot on channel 9538

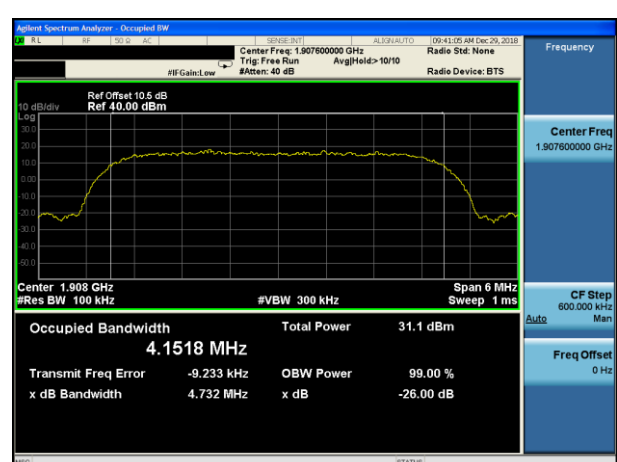

7.7 CONDUCTED BAND EDGE

7.7.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and 24.238(a) and FCC KDB 971168 D01 Section 6.0

7.7.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$

$$= -13 \text{ dBm.}$$


7.7.6 Test Results

EUT:	Mobile phone	Model No.:	AX1092
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900/ UMTS band II/ UMTS band V	Test By:	Allen Liu
Results: PASS			

Test plot For


(GSM850)

Conducted Band Edge plot on channel 128

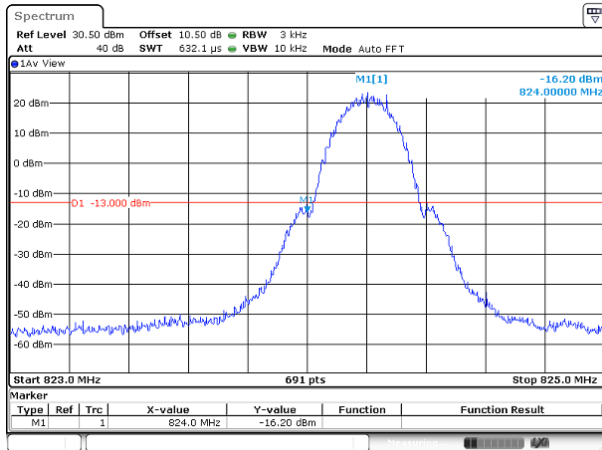


(GSM1900)


Conducted Band Edge plot on channel 512

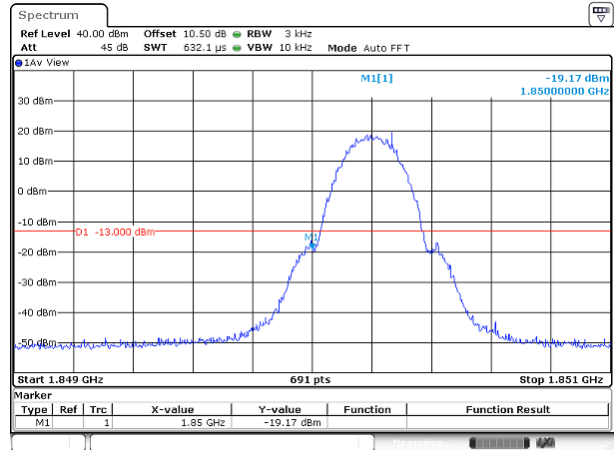

Conducted Band Edge plot on channel 251

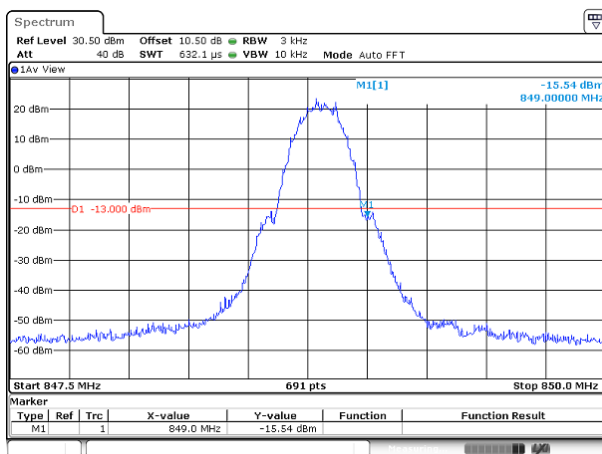


Conducted Band Edge plot on channel 810

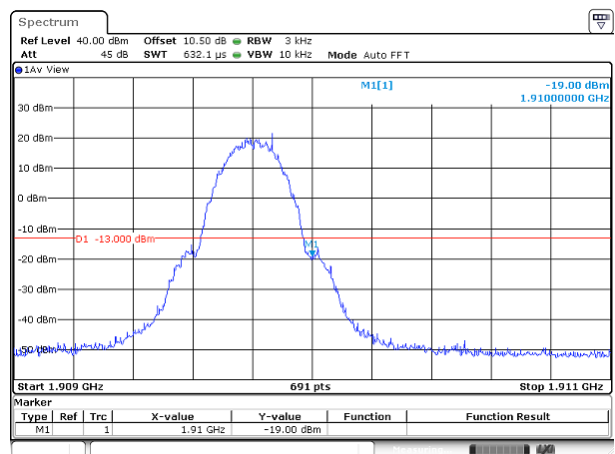

Test plot For


(GPRS850)

Conducted Band Edge plot on channel 128

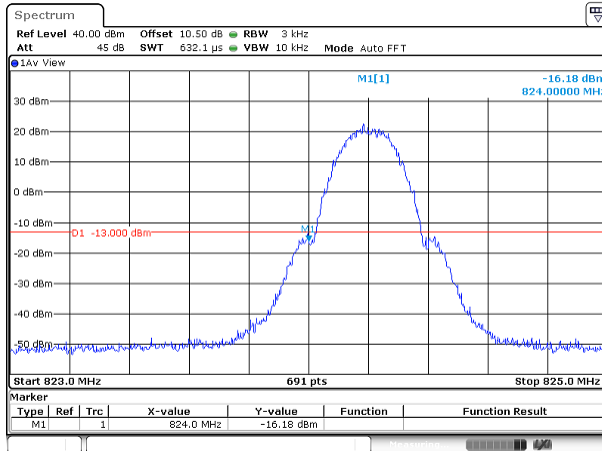


(GPRS1900)


Conducted Band Edge plot on channel 512

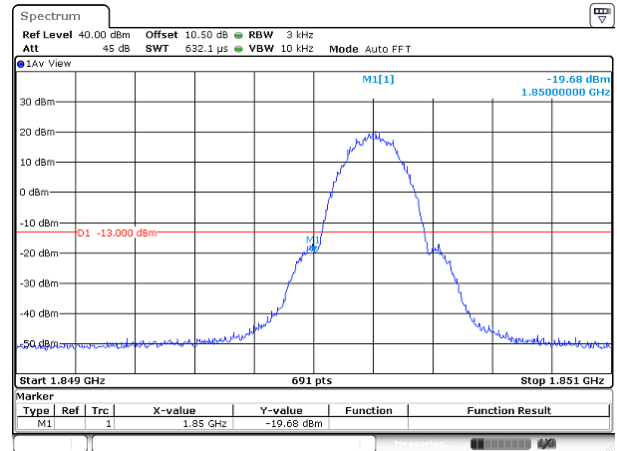

Conducted Band Edge plot on channel 251

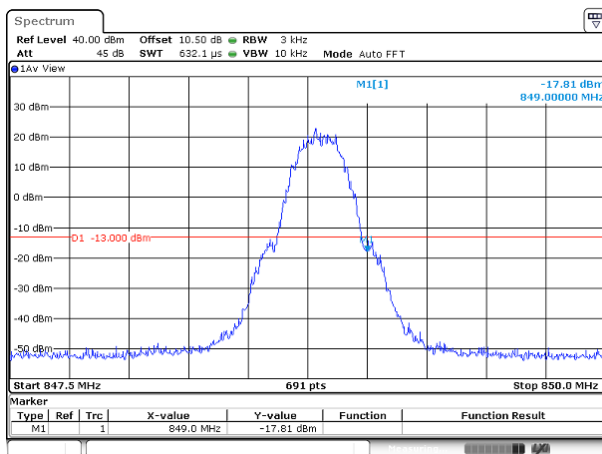


Conducted Band Edge plot on channel 810

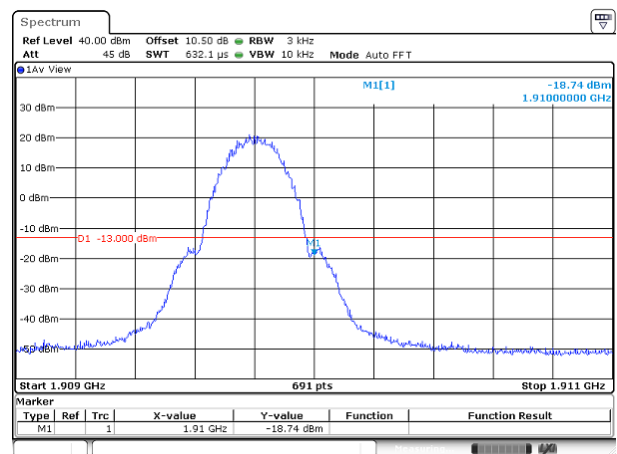

Test plot For


(EGPRS850)

Conducted Band Edge plot on channel 128

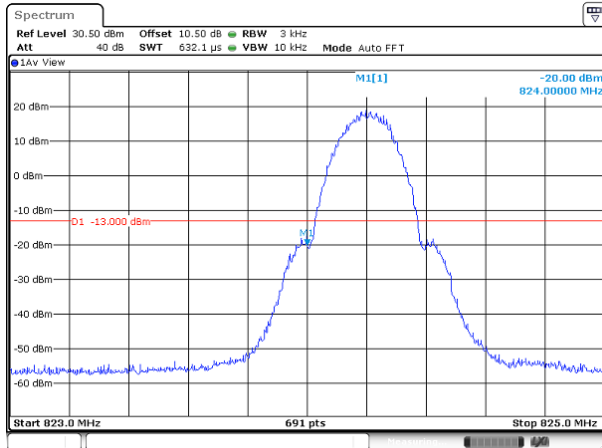


(EGPRS1900)


Conducted Band Edge plot on channel 512

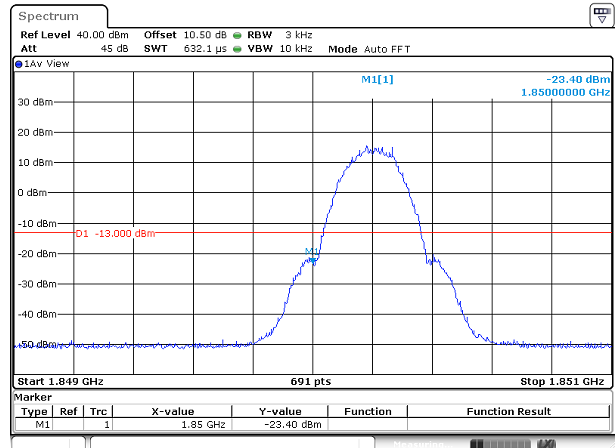

Conducted Band Edge plot on channel 251

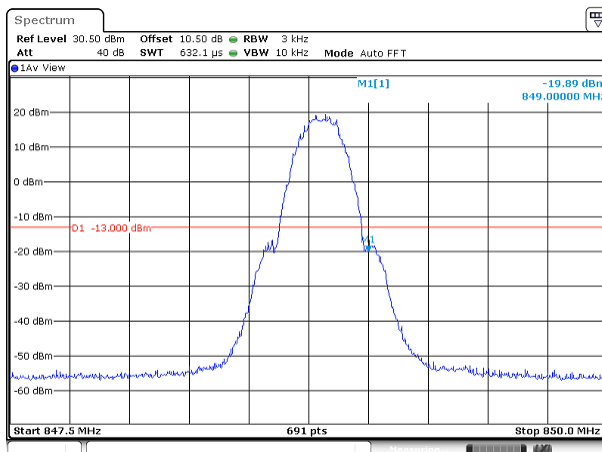


Conducted Band Edge plot on channel 810

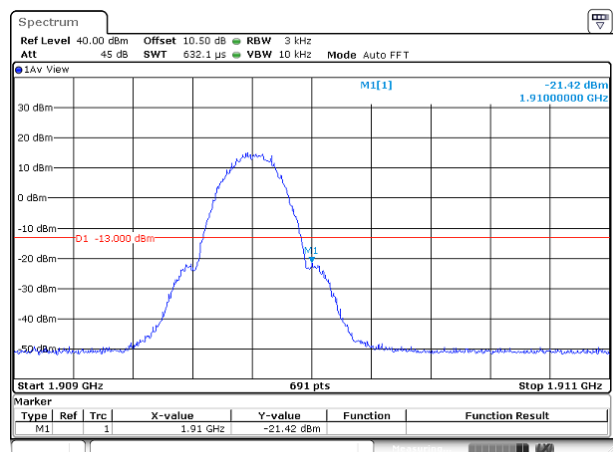

Test plot For


UMTS Band V

Conducted Band Edge plot on channel 4132

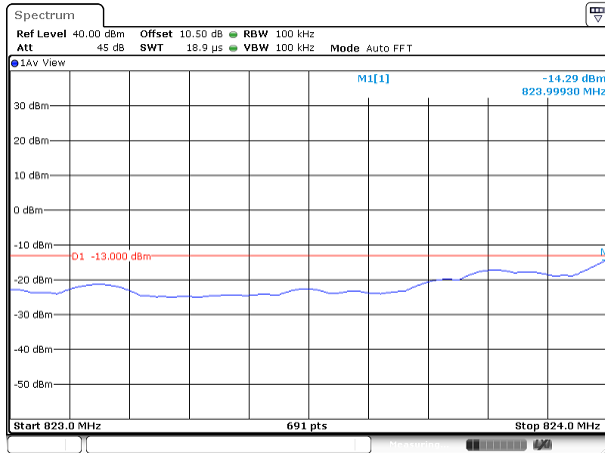


UMTS Band II


Conducted Band Edge plot on channel 9262

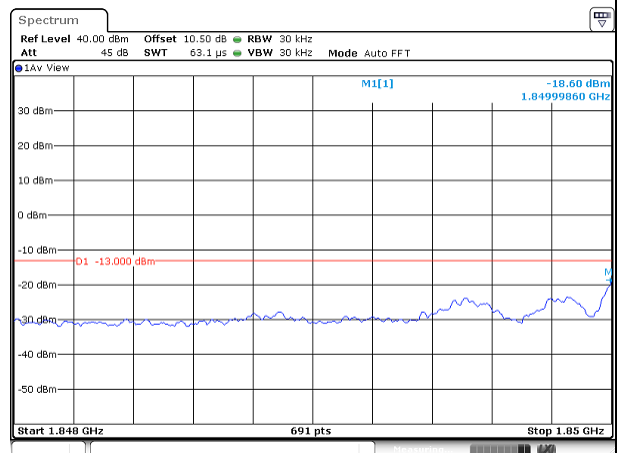

Conducted Band Edge plot on channel 4233

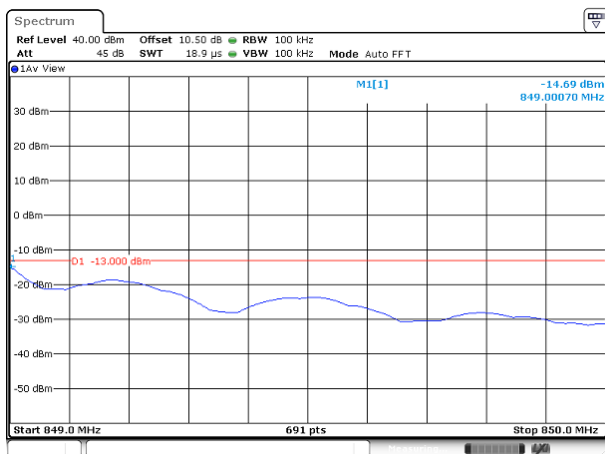

Conducted Band Edge plot on channel 9538

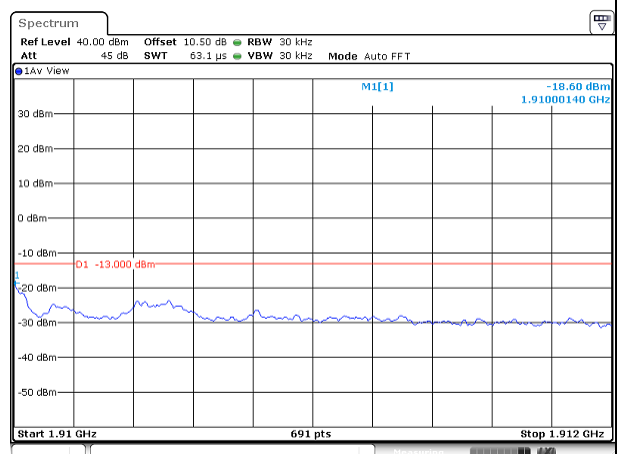

7.8 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and Part 24.238(a) and FCC KDB 971168 D01 Section 6.0

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log(P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v03 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


7.8.6 Test Results

EUT:	Mobile phone	Model No.:	AX1092
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM/GPRS/EGPRS 850/ GSM/GPRS/EGPRS 1900/ UMTS band II/ UMTS band V	Test By:	Allen Liu
Results: PASS			

Test Plot


GSM850

Conducted Emission Transmitting Mode CH 128
30MHz – 5GHz

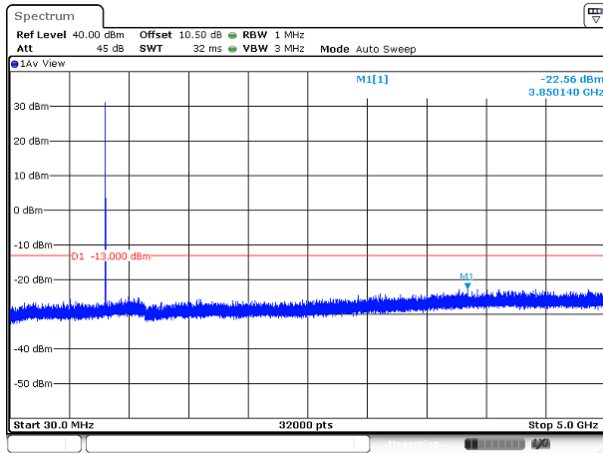


GSM850


Conducted Emission Transmitting Mode CH 190
30MHz – 5GHz

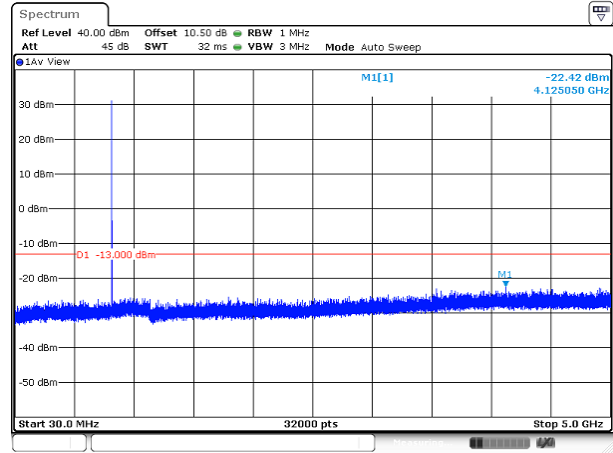

Conducted Emission Transmitting Mode CH 128
5GHz – 10GHz

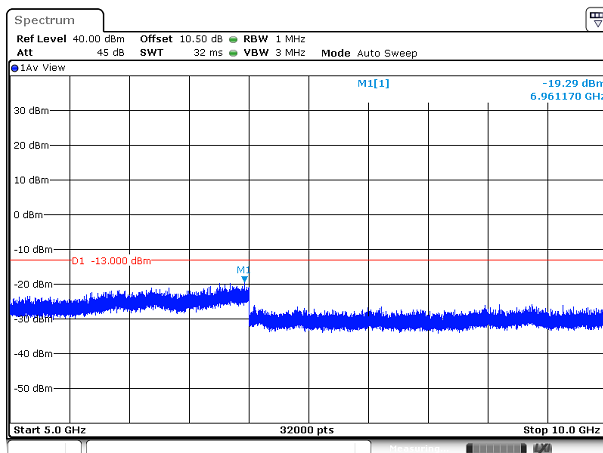


Conducted Emission Transmitting Mode CH 190
5GHz – 10GHz

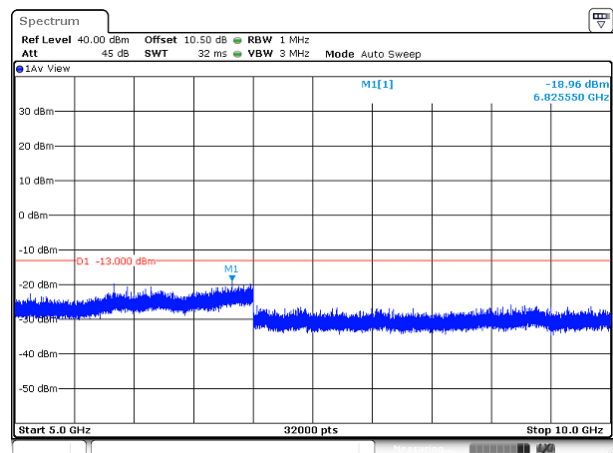

Test Plot


GSM850

Conducted Emission Transmitting Mode CH 251
30MHz – 5GHz

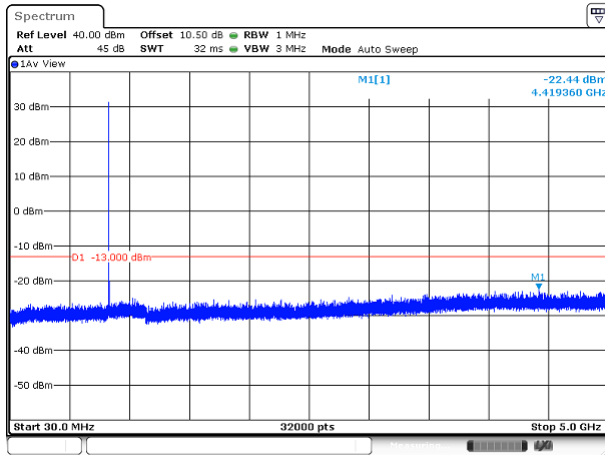


GSM1900


Conducted Emission Transmitting Mode CH 512
30MHz – 10GHz

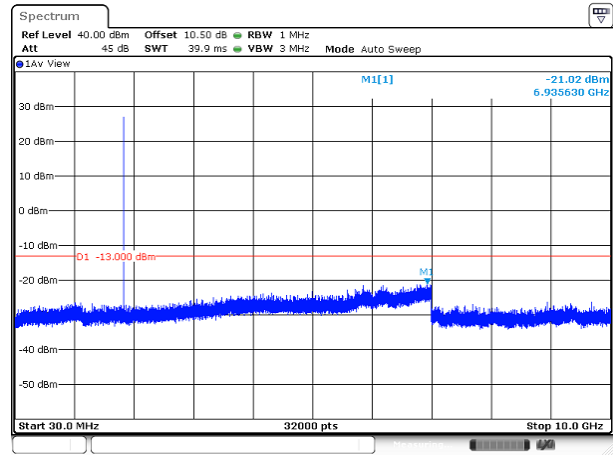

Conducted Emission Transmitting Mode CH 251
5GHz – 10GHz

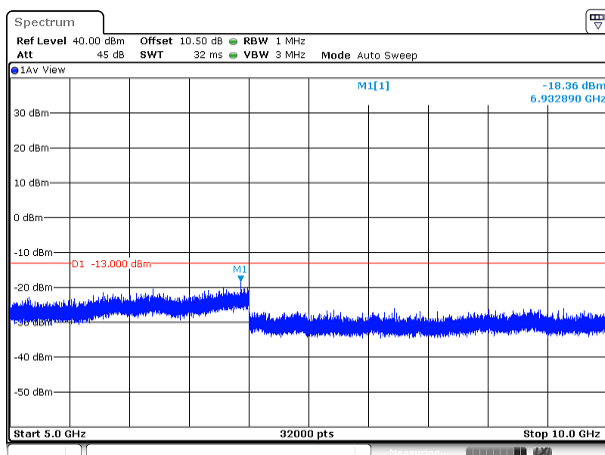


Conducted Emission Transmitting Mode CH 512
10GHz – 20GHz

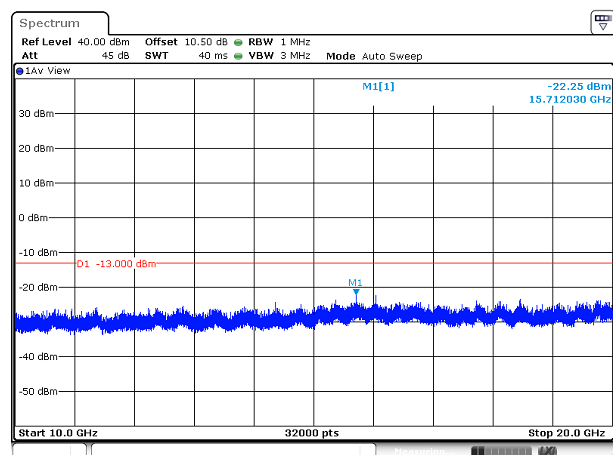

Test Plot


GSM1900

Conducted Emission Transmitting Mode CH 661
30MHz – 10GHz

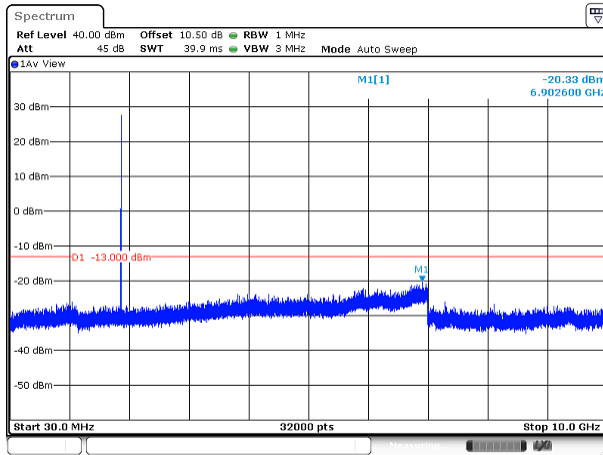


GSM1900


Conducted Emission Transmitting Mode CH 810
30MHz – 10GHz

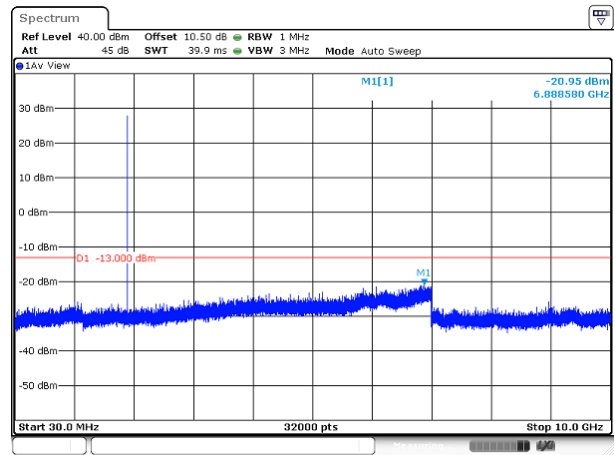

Conducted Emission Transmitting Mode CH 661
10GHz – 20GHz

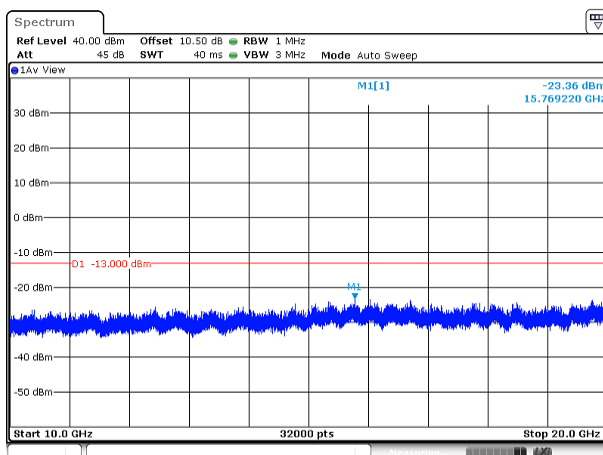


Conducted Emission Transmitting Mode CH 810
10GHz – 20GHz

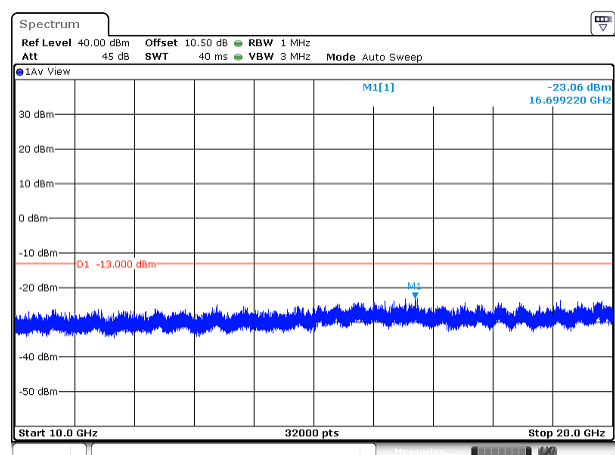

Test Plot


GPRS850

Conducted Emission Transmitting Mode CH 128
30MHz – 5GHz

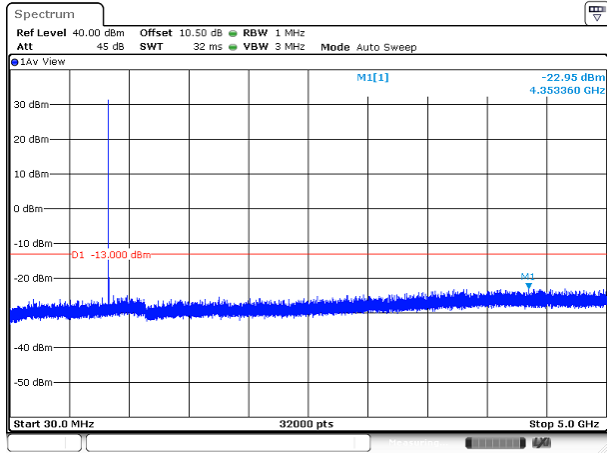


GPRS850


Conducted Emission Transmitting Mode CH 190
30MHz – 5GHz

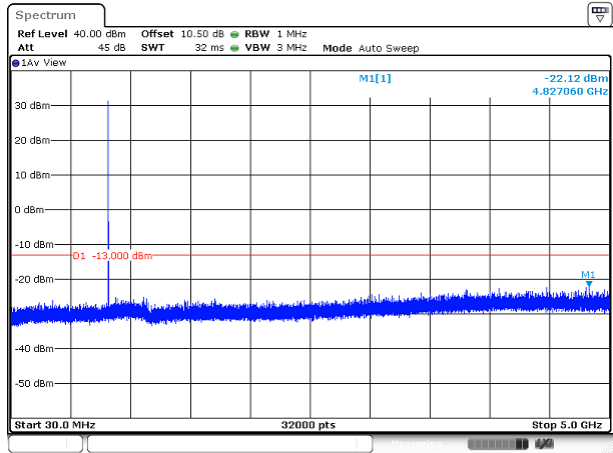

Conducted Emission Transmitting Mode CH 128
5GHz – 10GHz

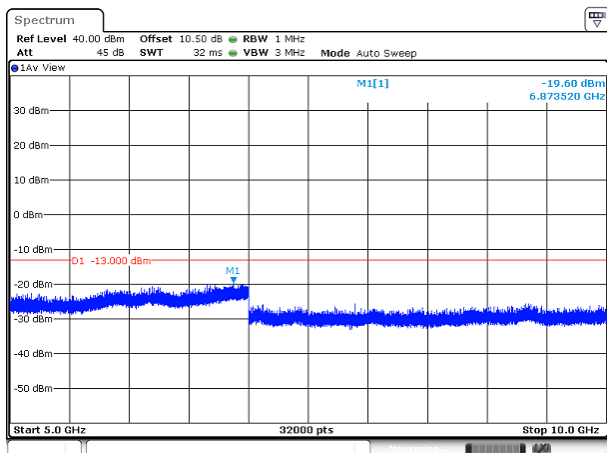


Conducted Emission Transmitting Mode CH 190
5GHz – 10GHz

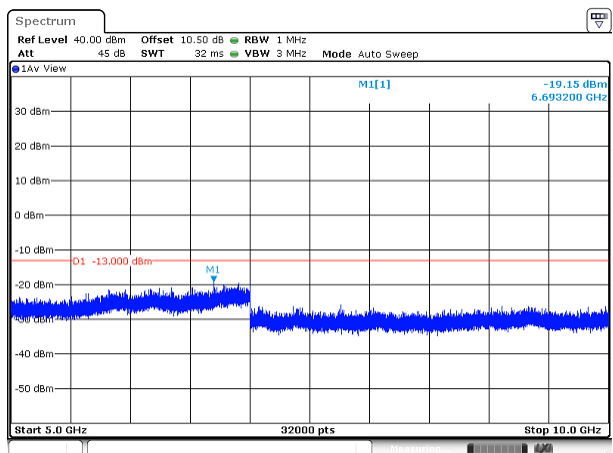

Test Plot


GPRS850

Conducted Emission Transmitting Mode CH 251
30MHz – 5GHz

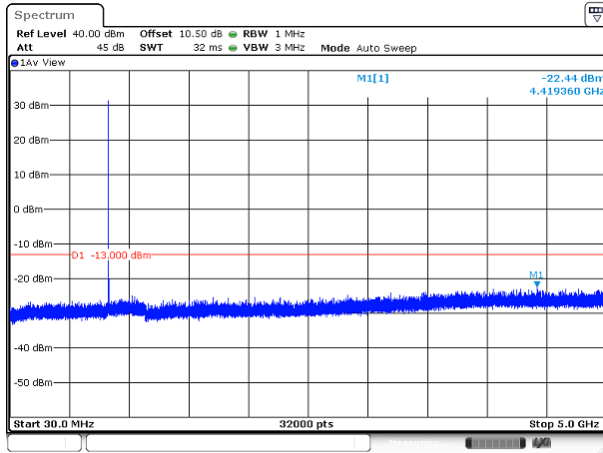


GPRS1900


Conducted Emission Transmitting Mode CH 512
30MHz – 10GHz

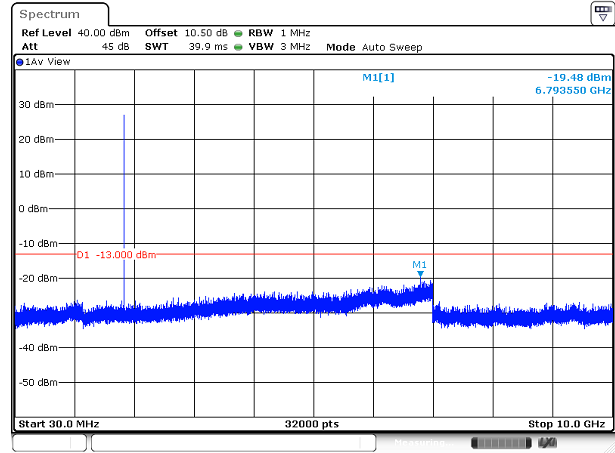

Conducted Emission Transmitting Mode CH 251
5GHz – 10GHz

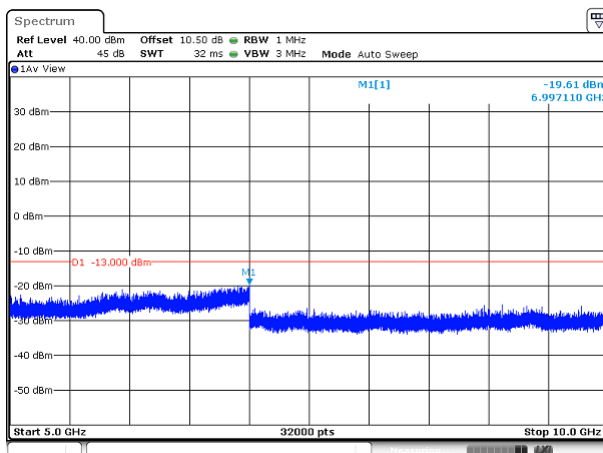


Conducted Emission Transmitting Mode CH 512
10GHz – 20GHz

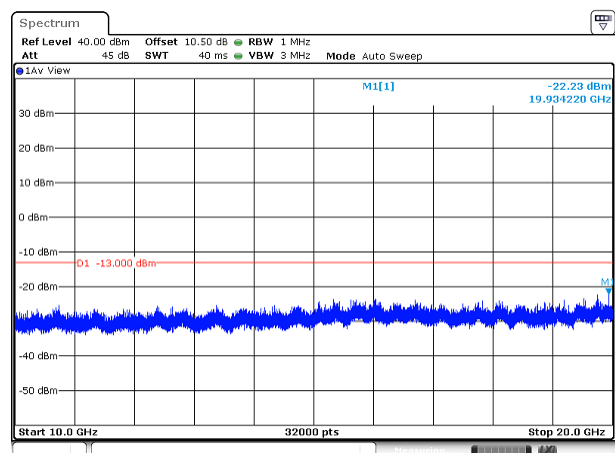

Test Plot


GPRS1900

Conducted Emission Transmitting Mode CH 661
30MHz – 10GHz

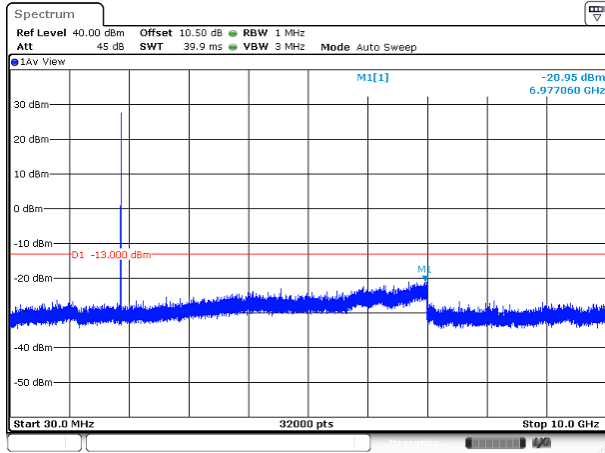


GPRS1900


Conducted Emission Transmitting Mode CH 810
30MHz – 10GHz

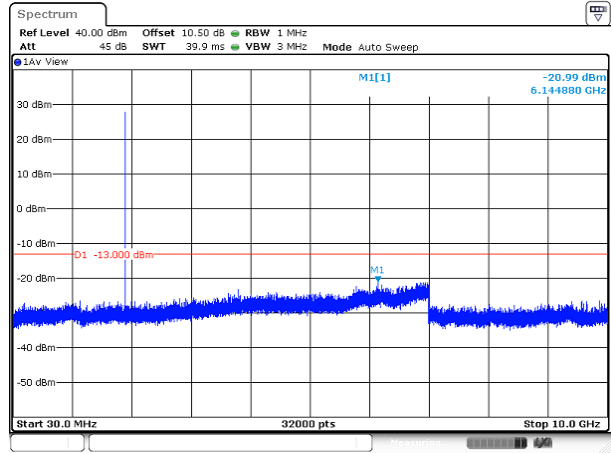

Conducted Emission Transmitting Mode CH 661
10GHz – 20GHz

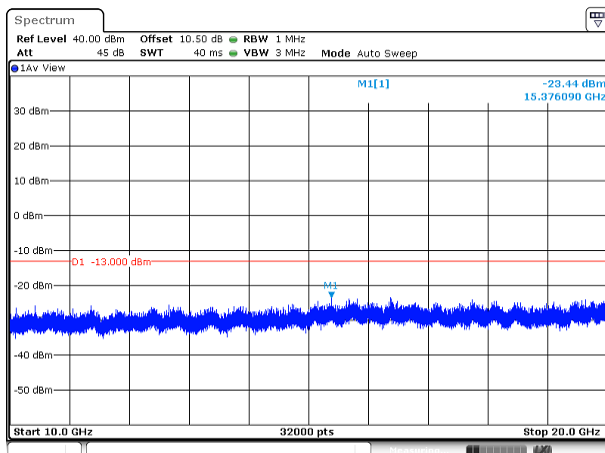


Conducted Emission Transmitting Mode CH 810
10GHz – 20GHz

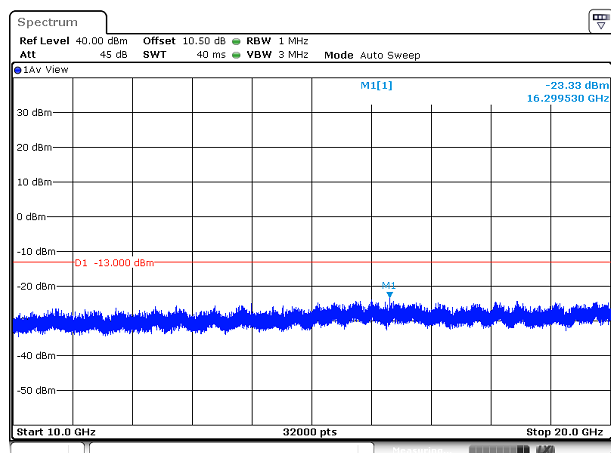

Test Plot


EGPRS850

Conducted Emission Transmitting Mode CH 128
30MHz – 5GHz

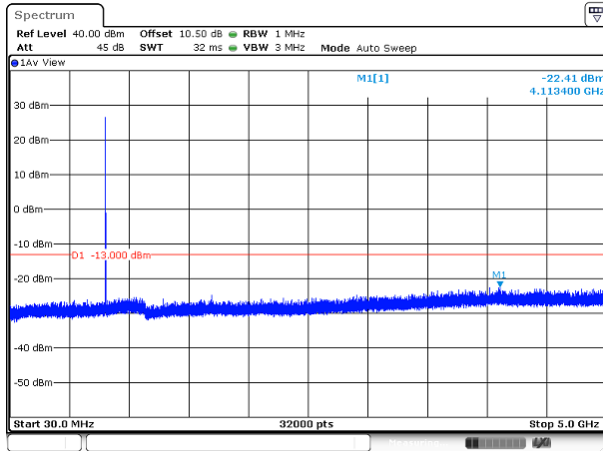


EGPRS850


Conducted Emission Transmitting Mode CH 190
30MHz – 5GHz

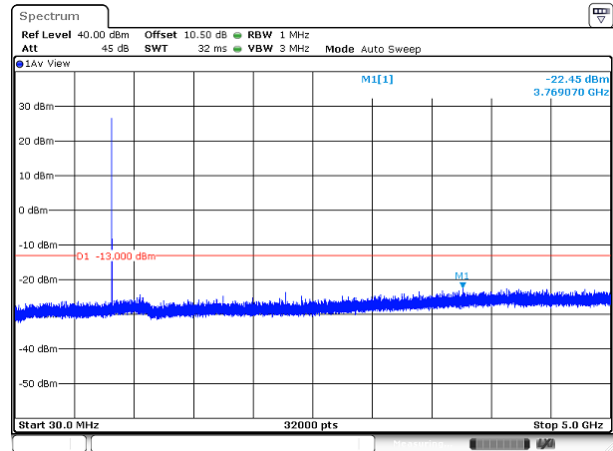

Conducted Emission Transmitting Mode CH 128
5GHz – 10GHz

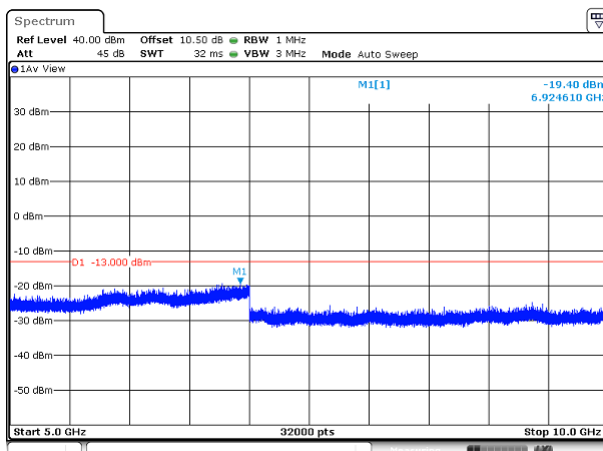


Conducted Emission Transmitting Mode CH 190
5GHz – 10GHz

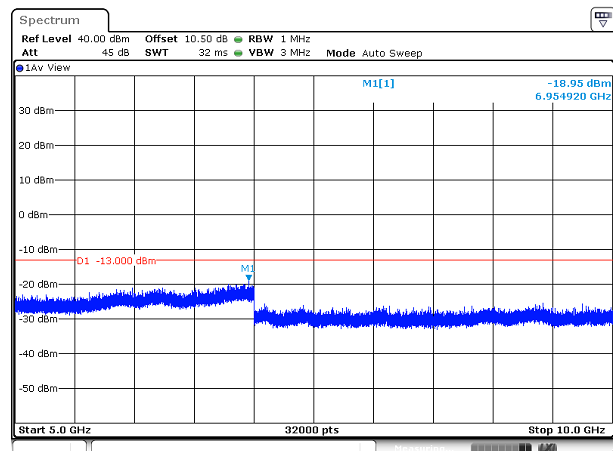

Test Plot


EGPRS850

Conducted Emission Transmitting Mode CH 251
30MHz – 5GHz

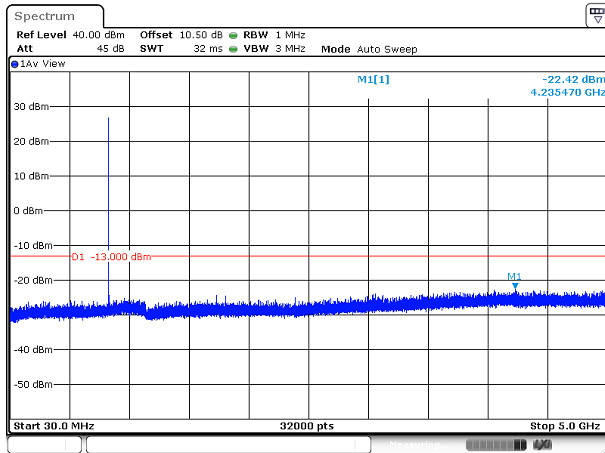


EGPRS1900


Conducted Emission Transmitting Mode CH 512
30MHz – 10GHz

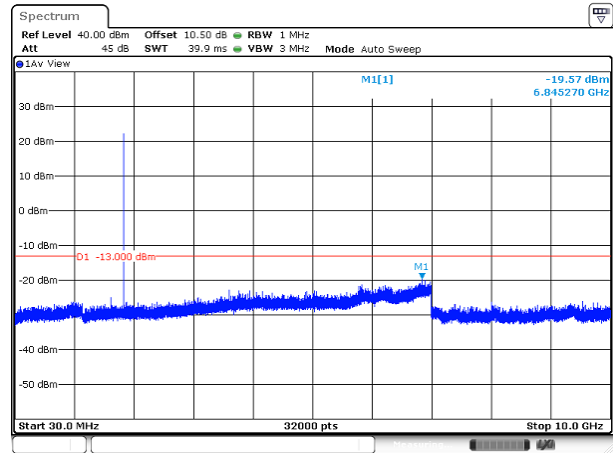

Conducted Emission Transmitting Mode CH 251
5GHz – 10GHz

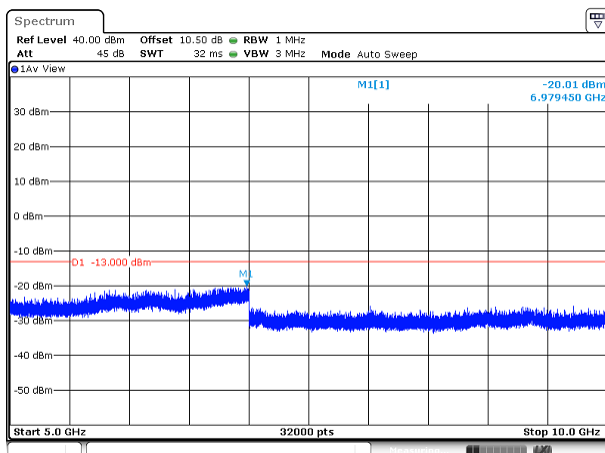


Conducted Emission Transmitting Mode CH 512
10GHz – 20GHz

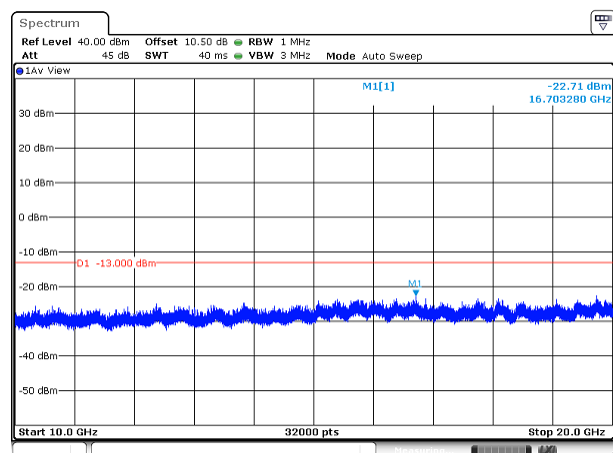

Test Plot


EGPRS1900

Conducted Emission Transmitting Mode CH 661
30MHz – 10GHz

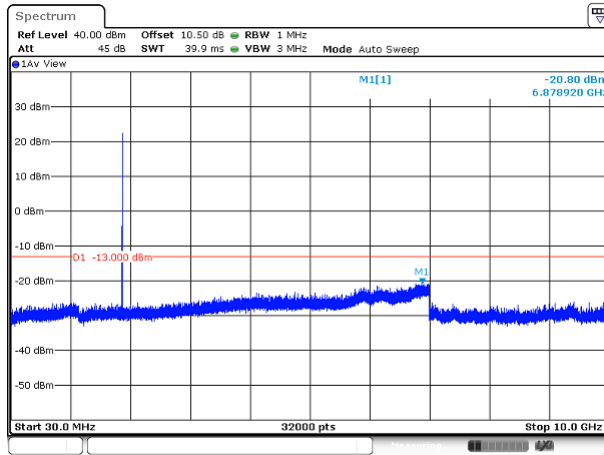


EGPRS1900


Conducted Emission Transmitting Mode CH 810
30MHz – 10GHz

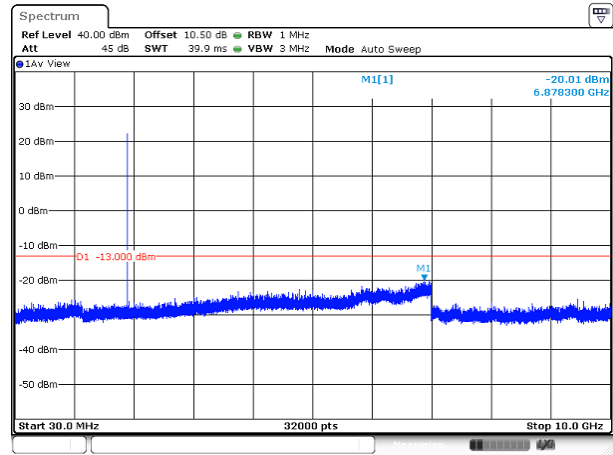

Conducted Emission Transmitting Mode CH 661
10GHz – 20GHz

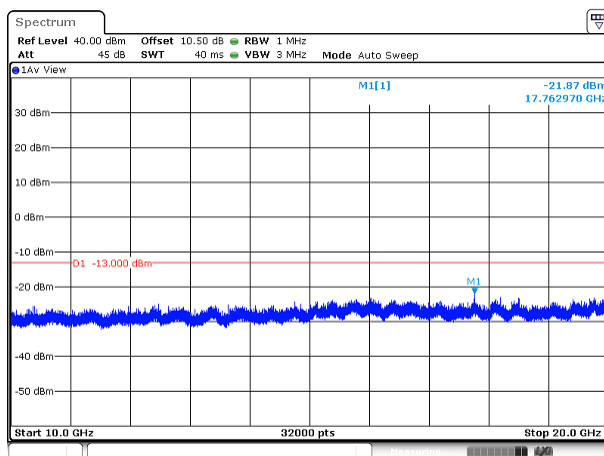


Conducted Emission Transmitting Mode CH 810
10GHz – 20GHz

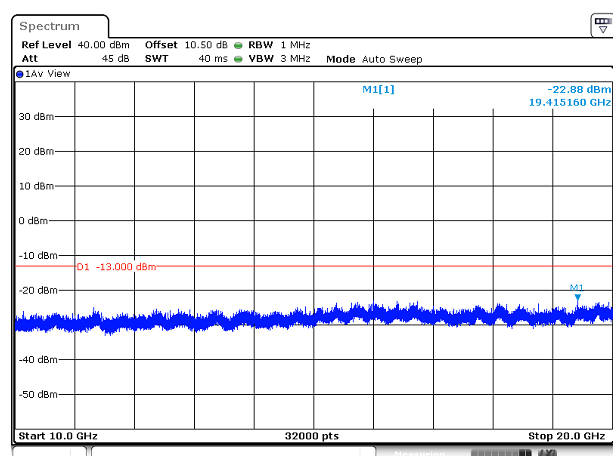

Test Plot


UMTS band V

Conducted Emission Transmitting Mode CH
4132 30MHz – 5GHz

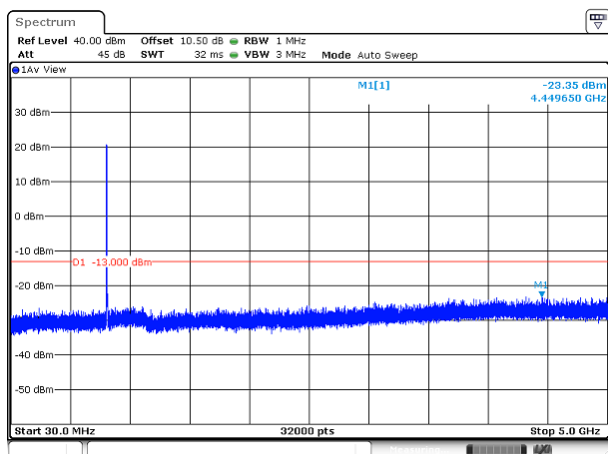


UMTS band V


Conducted Emission Transmitting Mode CH 4183
30MHz – 5GHz

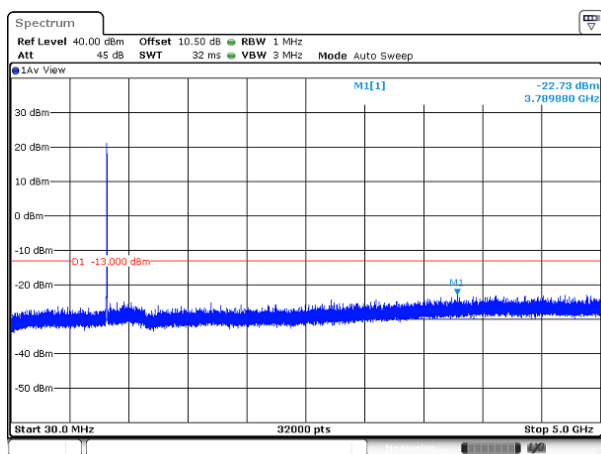

Conducted Emission Transmitting Mode CH
4132 5GHz – 10GHz

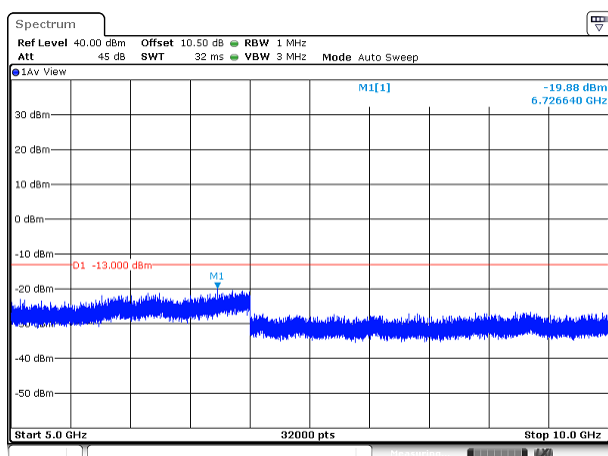


Conducted Emission Transmitting Mode CH 4183
5GHz – 10GHz

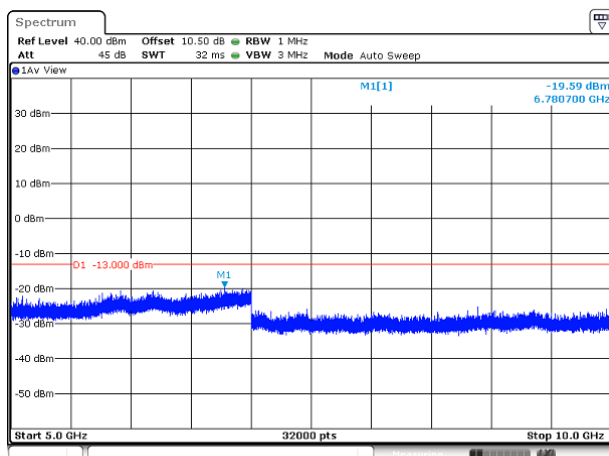

Test Plot


UMTS band V

Conducted Emission Transmitting Mode CH
4233 30MHz – 5GHz

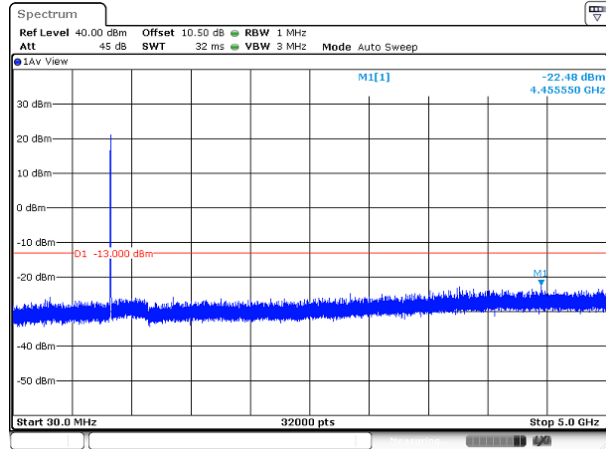


UMTS band II


Conducted Emission Transmitting Mode CH 9262
30MHz – 10GHz

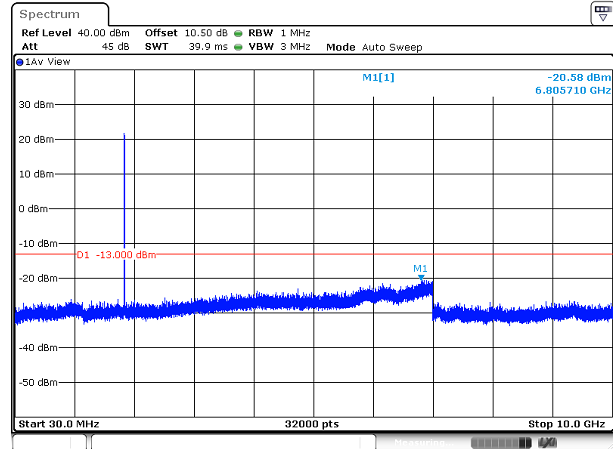

Conducted Emission Transmitting Mode CH
4233 5GHz – 10GHz

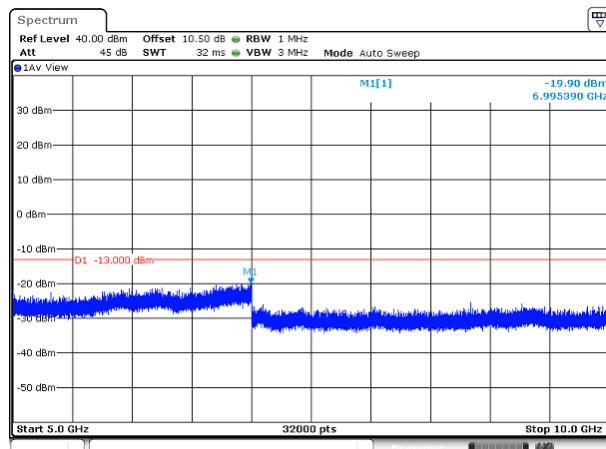


Conducted Emission Transmitting Mode CH 9262
10GHz – 20GHz

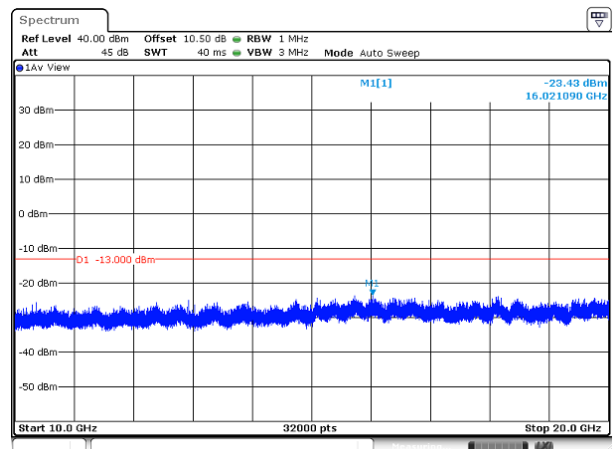

Test Plot


UMTS band II

Conducted Emission Transmitting Mode CH
9400 30MHz – 10GHz

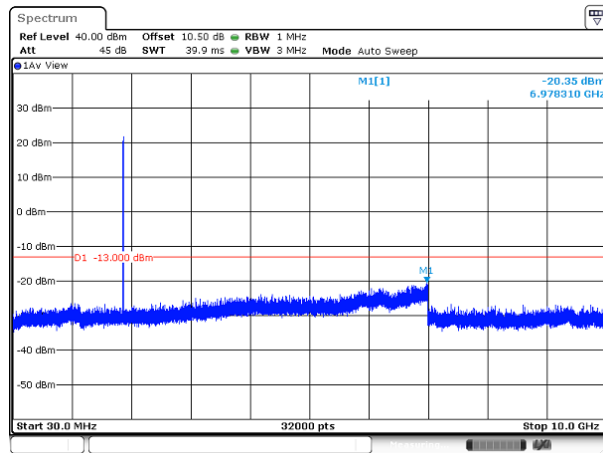


UMTS band II


Conducted Emission Transmitting Mode CH 9538
30MHz – 10GHz

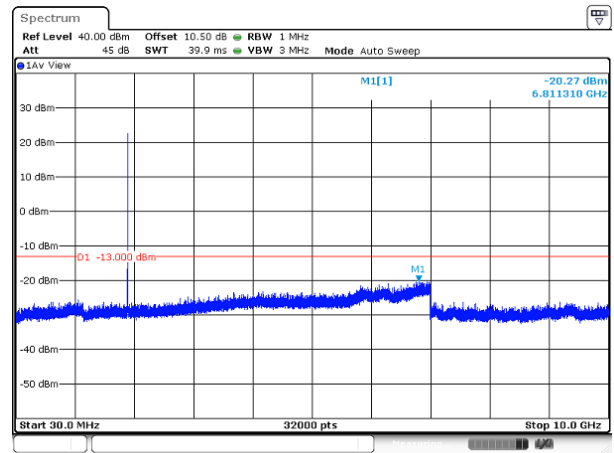

Conducted Emission Transmitting Mode CH
9400 10GHz – 20GHz

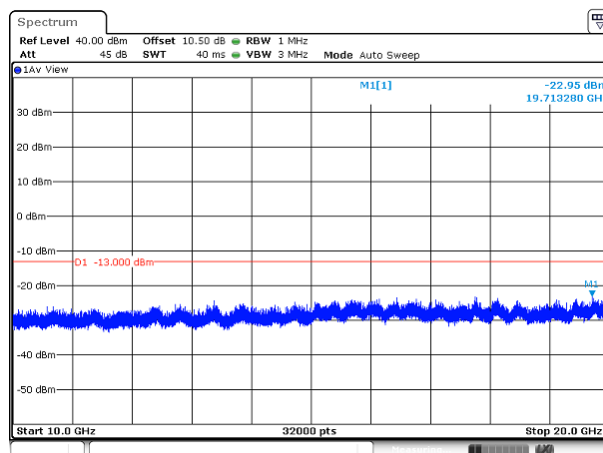

Conducted Emission Transmitting Mode CH 9538
10GHz – 20GHz

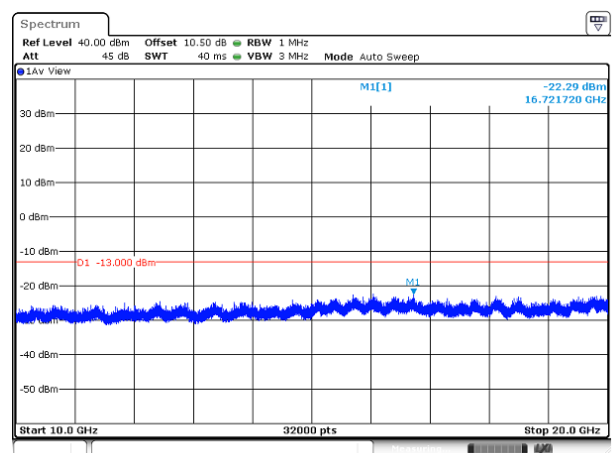

END OF REPORT