

Appendix A - System Verification

Test Laboratory: TUV Inc.

Date: 2024/3/24

System Check_HSL2450MHz

DUT: D2450V2 - SN804

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450_240324 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=250mW/Area Scan (7x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 21.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 104.4 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 27.5 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 22.2 W/kg

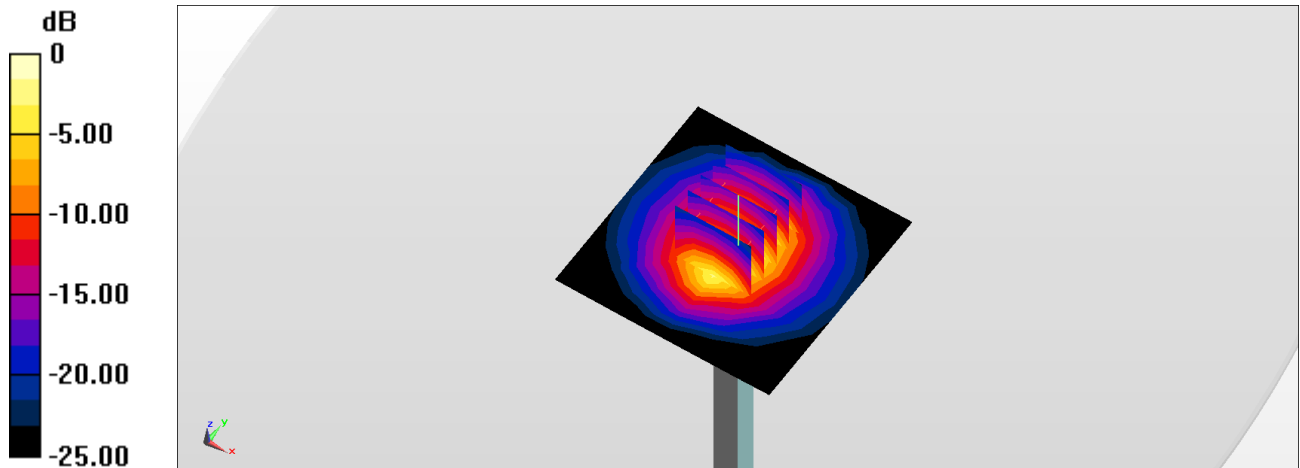

0 dB = 22.2 W/kg = 13.46 dBW/kg

System Check_HSL5250MHz

DUT: D5GHzV2-SN:1235

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL5G_240324 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.637$ S/m; $\epsilon_r = 36.561$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(5.07, 5.07, 5.07) @ 5250 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=100mW/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 19.7 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 63.42 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

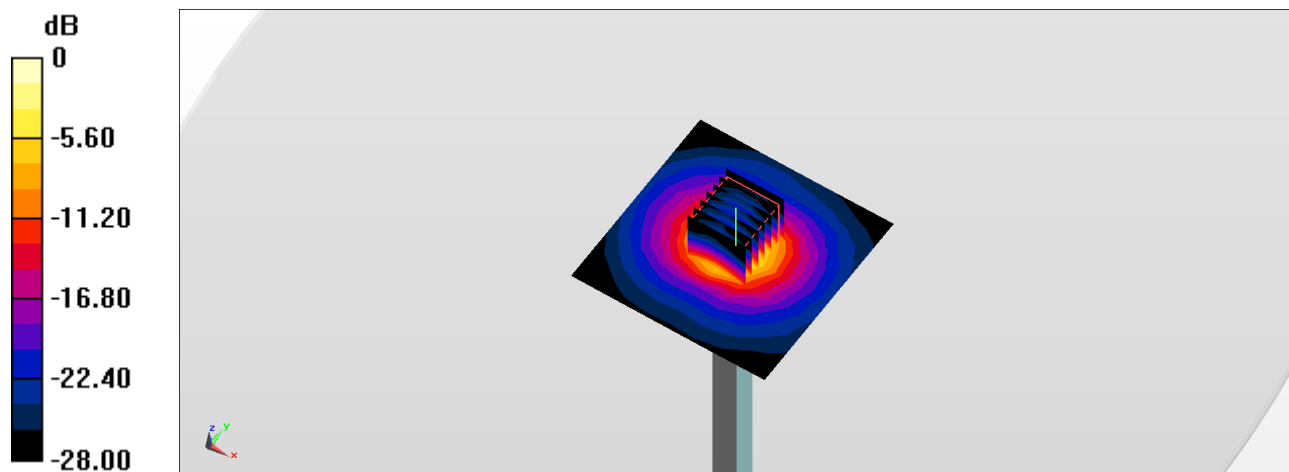

0 dB = 20.6 W/kg = 13.14 dBW/kg

System Check_HSL5750MHz

DUT: D5GHzV2-SN:1235

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL5G_240324 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.163$ S/m; $\epsilon_r = 35.944$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2023/4/25
- Probe: EX3DV4 - SN7400; ConvF(4.8, 4.8, 4.8) @ 5750 MHz; Calibrated: 2023/4/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 23.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=100mW/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 21.2 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 61.06 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 39.4 W/kg

SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

