



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15 SUBPART C 15.247

Report Reference No. : CTL2207053064-WF04

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Happy Guo

Tested by:
(position+printed name+signature)

Gary Gao
(Test Engineer)

Gary Gao

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name : Mondo Duo Smart Internet Radio

Model/Type reference : GDI-WHAMD201

List Model(s)..... : GDI-WHAMD205

Trade Mark..... : gracedigital

FCC ID..... : 2AAUI-MONDODUO

Applicant's name : Grace Digital Inc.

Address of applicant : 10531 4S Commons Drive #166 Suite #430 San Diego, CA 92127

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : 47 CFR FCC Part 15 Subpart C 15.247

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of receipt of test item : Jul. 25, 2022

Date of sampling : Jul. 25, 2022

Date of Test Date..... : Jul. 25, 2022 - Sept. 05, 2022

Date of Issue : Sept. 05, 2022

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2207053064-WF04	Sept. 05, 2022
		Date of issue

Equipment under Test : Mondo Duo Smart Internet Radio

Sample No. : CTL220705306-4-S001(Normal sample)
CTL220705306-4-S002(Engineer sample)

Model /Type : GDI-WHAMD201

Listed Models : GDI-WHAMD205

Applicant : **Grace Digital Inc.**

Address : 10531 4S Commons Drive #166 Suite #430 San Diego, CA 92127

Manufacturer : **Ming Le Electronics Factory**

Address : NO. 33 Lane 7, XinZhuangShe, LianTang, XinHua Town, HuaDu District, GuangZhou, CHINA.

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

** Modified History **

[illegible]

Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	8
2.1. ENVIRONMENTAL CONDITIONS	8
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(s) / GRANT (s)	10
2.6. MODIFICATIONS	10
3. TEST CONDITIONS AND RESULTS	11
3.1. CONDUCTED EMISSIONS TEST	11
3.2. RADIATED EMISSIONS AND BAND EDGE	14
3.3. MAXIMUM CONDUCTED OUTPUT POWER	42
3.4. POWER SPECTRAL DENSITY	43
3.5. 6dB BANDWIDTH	44
3.6. OUT-OF-BAND EMISSIONS	45
3.7. ANTENNA REQUIREMENT	46
4. TEST SETUP PHOTOS OF THE EUT	47
5. PHOTOS OF THE EUT	48

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 9KHz~30MHz	±3.40dB	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)

Radiated Emission Above 1GHz	$\pm 4.32\text{dB}$	(1)
Conducted Disturbance 0.15~30MHz	$\pm 3.20\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Mondo Duo Smart Internet Radio
Model/Type reference:	GDI-WHAMD201
Power supply:	DC 18V from adapter
Adapter information:	Model No: GM42-180220-1A Input: AC 100-240V 50/60Hz 1.5A Output: 18V---2.0A
Hardware version:	V1.0
Software version:	V1.0
Bluetooth LE	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	FPC Antenna
Antenna1 gain:	1.6dBi
Antenna2 gain:	1.3dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software(CMD Command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 40 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

Operation Frequency List :

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
:	:
19	2440
:	:
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

Power setting during the test:

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters:

Antenna ID	Test Software Version	Test Command		
	Frequency	2402MHz	2440MHz	2480MHz
1	BLE 1Mbps power level	Default	Default	Default
	BLE 2Mbps power level	Default	Default	Default
2	BLE 1Mbps power level	Default	Default	Default
	BLE 2Mbps power level	Default	Default	Default

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2022/05/07	2023/05/06
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2020/04/07	2023/04/06
Horn Antenna	Ocean Microwave	OBH100400	26999002	2019/11/28	2022/11/27
EMI Test Receiver	R&S	ESCI	1166.5950.03	2022/05/07	2023/05/06
Spectrum Analyzer	Agilent	E4407B	MY41440676	2022/05/07	2023/05/06
Spectrum Analyzer	Agilent	N9020A	US46220290	2022/05/07	2023/05/06
Spectrum Analyzer	Keysight	N9020A	MY53420874	2022/05/07	2023/05/06
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
Active Loop Antenna	Da Ze	ZN30900A	/	2021/05/13	2024/05/12
Amplifier	Agilent	8449B	3008A02306	2022/05/07	2023/05/06
Amplifier	Agilent	8447D	2944A10176	2022/05/06	2023/05/05
Amplifier	Brief&Smart	LNA-4018	2104197	2022/05/07	2023/05/06
Temperature/Humidity Meter	Ji Yu	MC501	/	2022/05/07	2023/05/06
Power Sensor	Agilent	U2021XA	MY55130004	2022/05/07	2023/05/06
Power Sensor	Agilent	U2021XA	MY55130006	2022/05/07	2023/05/06
Power Sensor	Agilent	U2021XA	MY54510008	2022/05/07	2023/05/06
Power Sensor	Agilent	U2021XA	MY55060003	2022/05/07	2023/05/06
Spectrum Analyzer	RS	FSP	1164.4391.38	2022/05/07	2023/05/06
RF Cable	Megalon	RF-A303	N/A	2022/05/07	2023/05/06
RF Control Unit	Tonsecnd	JS0806-2	20J8060323	2022/05/07	2023/05/06
Test Software					
Name of Software			Version		

JS1120-3	2.6.880341
EZ_EMG(Below 1GHz)	V1.1.4.2
EZ_EMG((Above 1GHz)	V1.1.4.2

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207 and RSS Gen 8.8, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

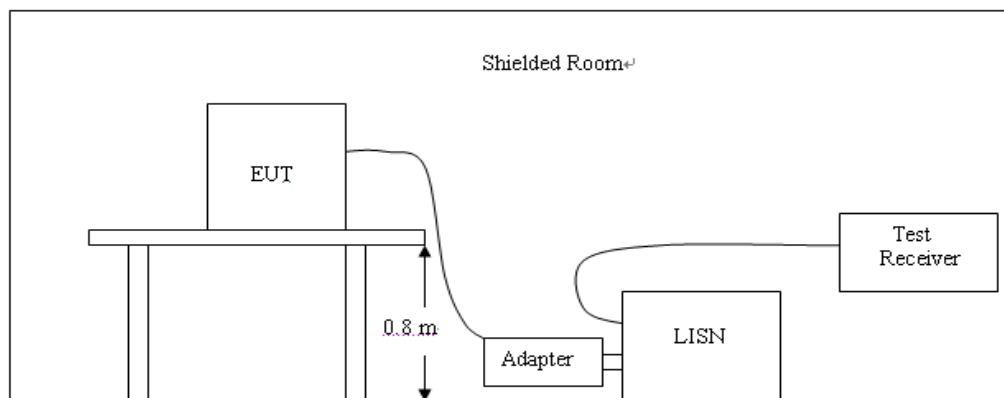


TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark:

- Both modes of BLE 1Mbps and 2Mbps were tested at Low, Middle, and High channel; only the worst result of antenna1 BLE 1Mbps was reported as below:
- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply(adapter)have been tested, only the worst result of 120 VAC, 60 Hz with BLE middle channel was reported as below:

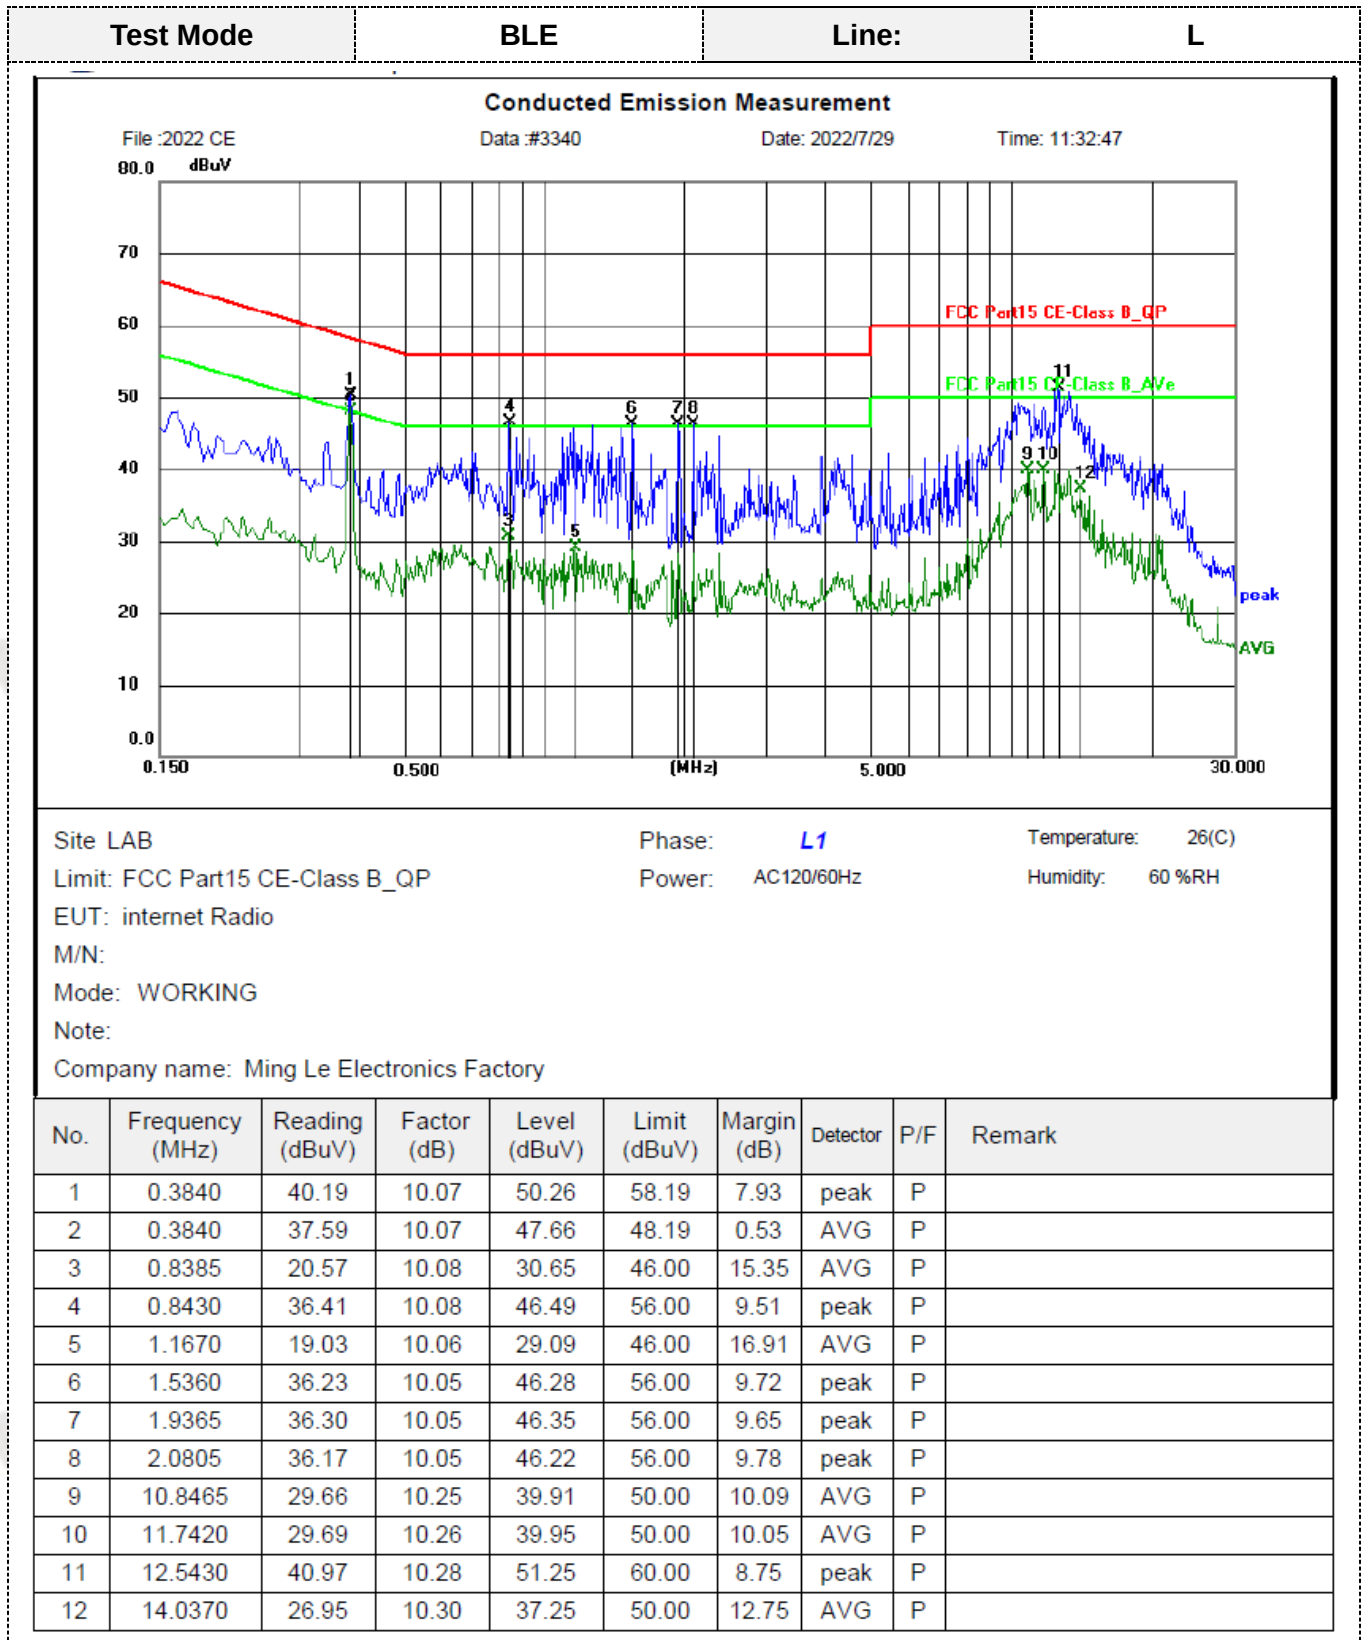

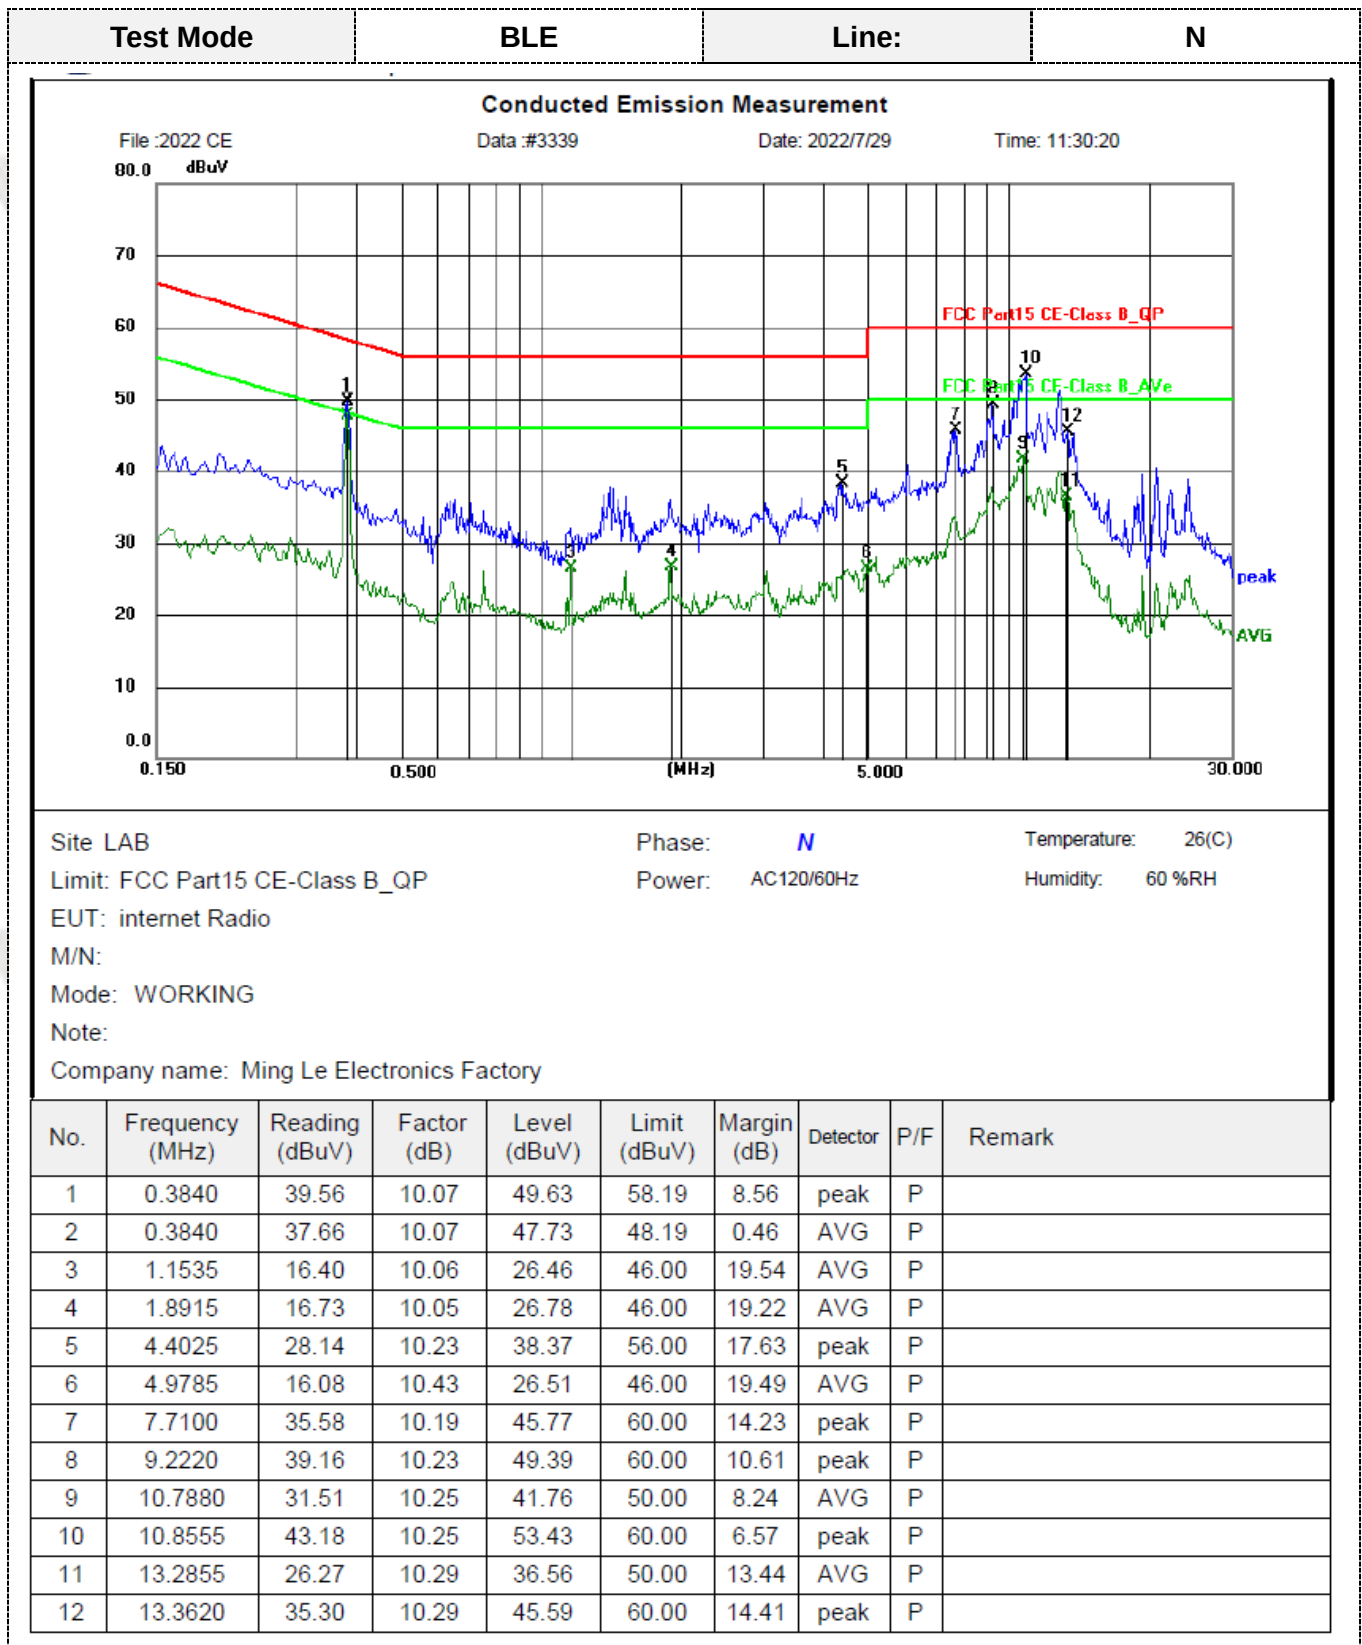

Remark: Level(dBuV)=Reading(dBuV) + Factor(dB)

Margin=Limit(dBuV)- Level(dBuV)

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

For intentional device, according to RSS-Gen section 8.9, the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in RSS-Gen section 8.10, must also comply with the radiated emission limits specified in RSS-Gen section 8.9

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

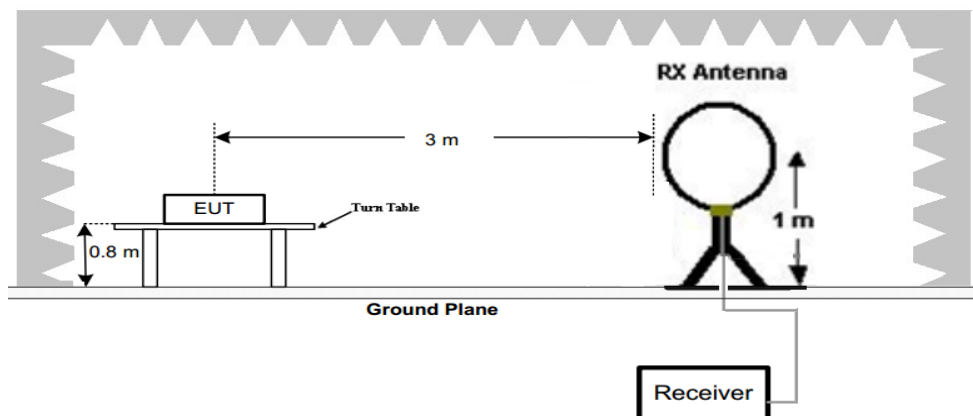

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

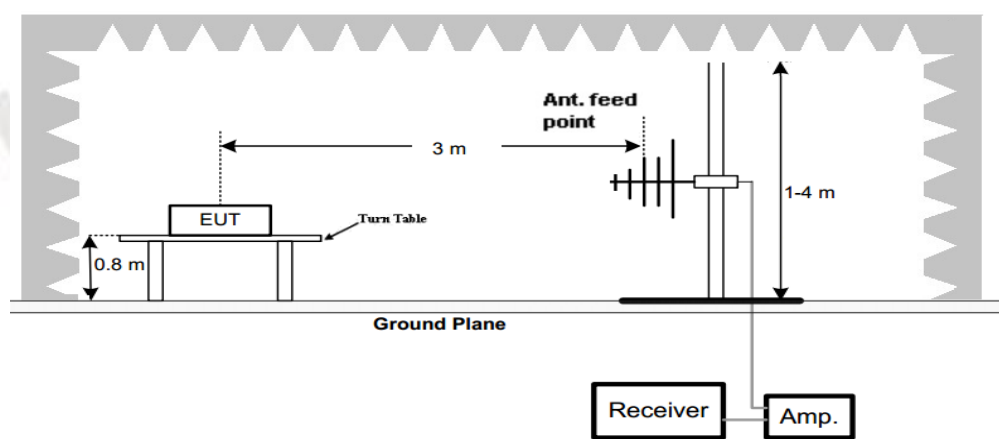

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

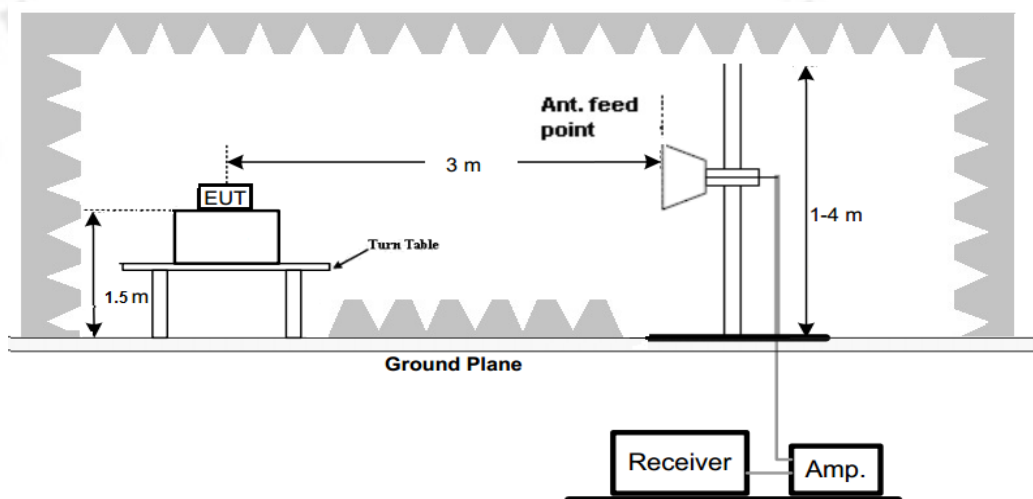**Test Procedure**

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:


Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS

Remark:

- Both BLE 1Mbps and 2Mbps were tested at Low, Middle, and High channel and recorded worst mode at BLE 1Mbps.
- For below 1GHz testing recorded worst at antenna1 BLE 1Mbps low channel.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and The emission levels from 9kHz to 30MHz are attenuated 20dB below the limit and not recorded in report.

For 30MHz-1GHz

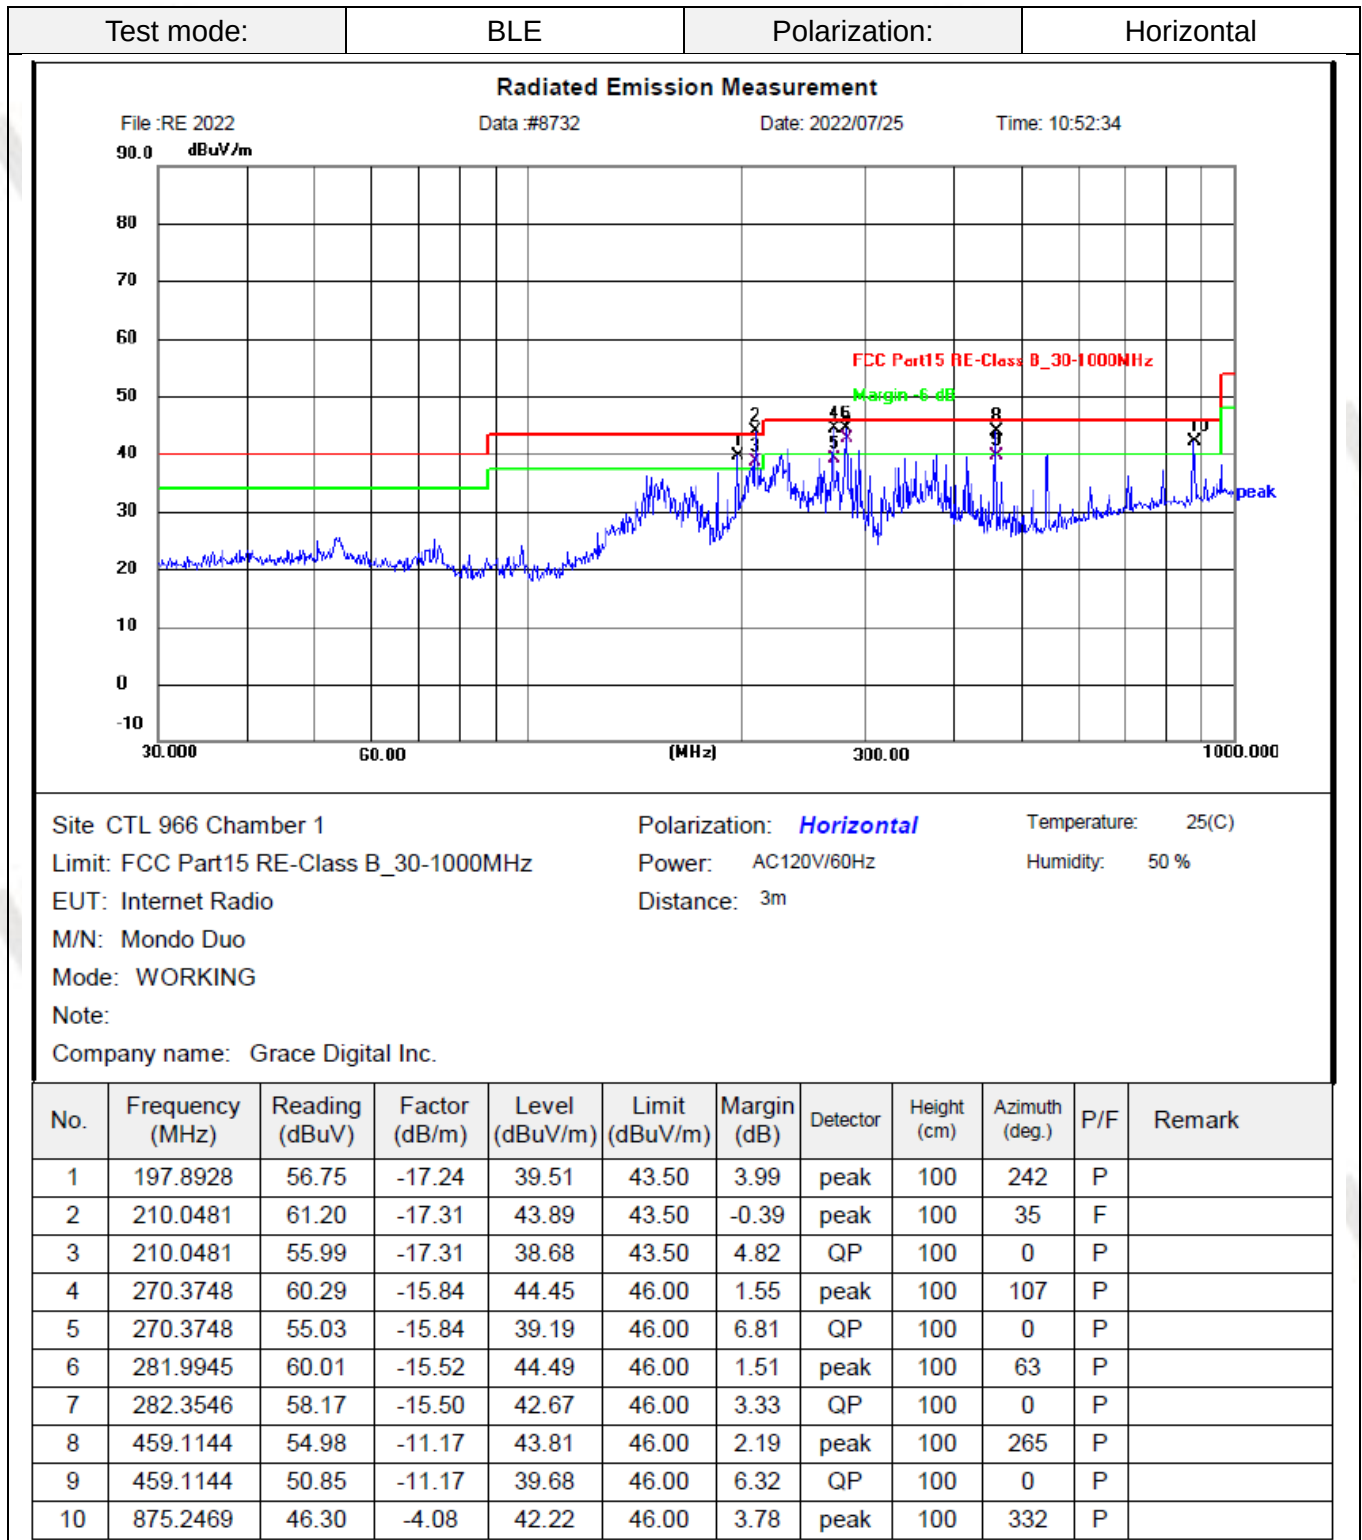

Test mode:

BLE

Polarization:

Vertical

Radiated Emission Measurement


File :RE 2022

Data :#8733

Date: 2022/07/25

Time: 10:53:52

90.0 dBuV/m

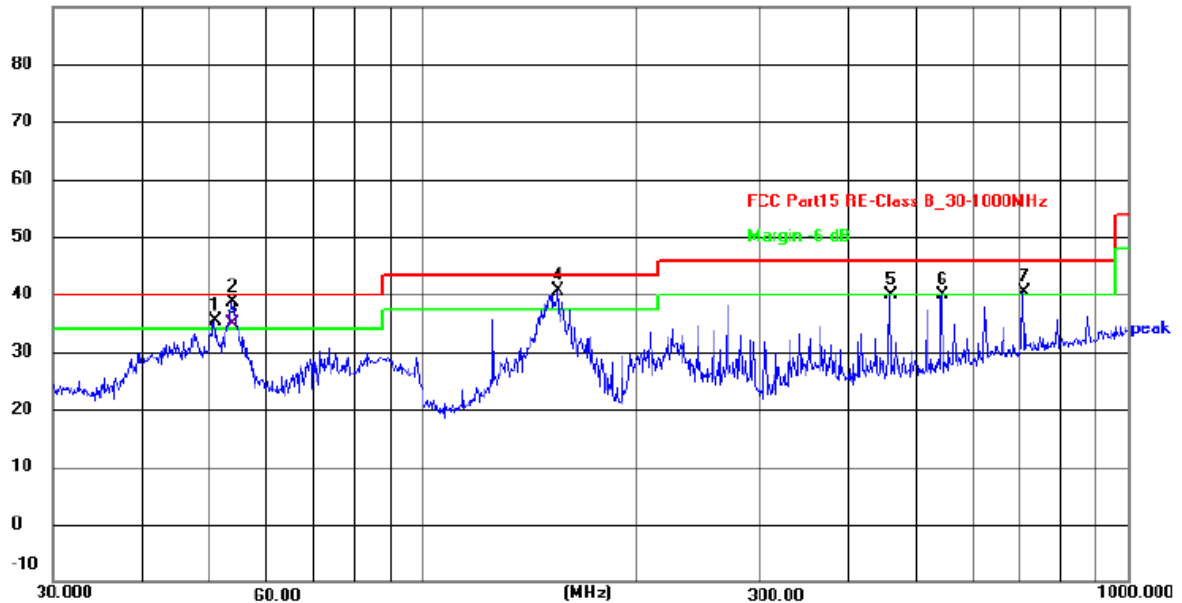

Site CTL 966 Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 50 %

EUT: Internet Radio

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note:

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	50.7637	50.86	-15.50	35.36	40.00	4.64	peak	100	249	P	
2	53.6932	54.22	-15.67	38.55	40.00	1.45	peak	100	275	P	
3	53.6932	50.54	-15.67	34.87	40.00	5.13	QP	100	0	P	
4	155.3644	53.54	-13.01	40.53	43.50	2.97	peak	100	258	P	
5	459.1144	50.94	-11.17	39.77	46.00	6.23	peak	100	253	P	
6	543.2742	49.35	-9.58	39.77	46.00	6.23	peak	100	352	P	
7	709.1823	46.69	-6.42	40.27	46.00	5.73	peak	100	240	P	

Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)

Margin= Limit(dBuV/m)-Level(dBuV/m)

For 1GHz to 25GHz**BLE 1M Antenna 1
GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	51.35	PK	74	22.65	64.34	33.49	6.91	53.39	-12.99
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	47.41	PK	74	26.59	54.46	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	58.29	PK	74	15.71	71.28	33.49	6.91	53.39	-12.99
4804.00	51.03	AV	54	2.97	64.02	33.49	6.91	53.39	-12.99
7206.00	46.83	PK	74	27.17	53.88	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	49.48	PK	74	24.52	62.26	33.60	6.95	53.33	-12.78
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	46.07	PK	74	27.93	52.57	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	59.18	PK	74	14.82	71.96	33.60	6.95	53.33	-12.78
4880.00	52.24	AV	54	1.76	65.02	33.60	6.95	53.33	-12.78
7320.00	46.27	PK	74	27.73	52.77	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	48.51	PK	74	25.49	60.93	33.84	7.00	53.26	-12.42
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	46.32	PK	74	27.68	52.60	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	57.08	PK	74	16.92	69.50	33.84	7.00	53.26	-12.42
4960.00	51.67	AV	54	2.33	64.09	33.84	7.00	53.26	-12.42
7440.00	47.38	PK	74	26.62	53.66	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. Other emission levels are attenuated 20dB below the limit and not recorded in report.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BLE 1M Antenna 2
GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	50.50	PK	74	23.50	63.49	33.49	6.91	53.39	-12.99
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	46.58	PK	74	27.42	53.63	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	50.53	PK	74	23.47	63.52	33.49	6.91	53.39	-12.99
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	47.15	PK	74	26.85	54.20	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	49.76	PK	74	24.24	62.54	33.60	6.95	53.33	-12.78
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	45.44	PK	74	28.56	51.94	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	50.82	PK	74	23.18	63.60	33.60	6.95	53.33	-12.78
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	46.25	PK	74	27.75	52.75	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	50.68	PK	74	23.32	63.10	33.84	7.00	53.26	-12.42
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	46.91	PK	74	27.09	53.19	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	49.16	PK	74	24.84	61.58	33.84	7.00	53.26	-12.42
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	47.07	PK	74	26.93	53.35	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. Other emission levels are attenuated 20dB below the limit and not recorded in report.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BLE 2M Antenna 1
GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	49.51	PK	74	24.49	62.50	33.49	6.91	53.39	-12.99
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	45.17	PK	74	28.83	52.22	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	57.13	PK	74	16.87	70.12	33.49	6.91	53.39	-12.99
4804.00	44.65	AV	54	9.35	57.64	33.49	6.91	53.39	-12.99
7206.00	46.23	PK	74	27.77	53.28	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	49.48	PK	74	24.52	62.26	33.60	6.95	53.33	-12.78
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	46.10	PK	74	27.90	52.60	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	58.05	PK	74	15.95	70.83	33.60	6.95	53.33	-12.78
4880.00	45.61	AV	54	8.39	58.39	33.60	6.95	53.33	-12.78
7320.00	46.98	PK	74	27.02	53.48	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	49.25	PK	74	24.75	61.67	33.84	7.00	53.26	-12.42
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	46.37	PK	74	27.63	52.65	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	55.72	PK	74	18.28	68.14	33.84	7.00	53.26	-12.42
4960.00	44.08	AV	54	9.92	56.50	33.84	7.00	53.26	-12.42
7440.00	46.15	PK	74	27.85	52.43	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

7. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
8. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
9. Margin value = Limit value- Emission level.
10. -- Mean the PK detector measured value is below average limit.
11. Other emission levels are attenuated 20dB below the limit and not recorded in report.
12. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BLE 2M Antenna 2
GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	52.15	PK	74	21.85	65.14	33.49	6.91	53.39	-12.99
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	46.21	PK	74	27.79	53.26	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804.00	48.30	PK	74	25.70	61.29	33.49	6.91	53.39	-12.99
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	48.81	PK	74	25.19	55.86	36.95	9.18	53.18	-7.05
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	52.07	PK	74	21.93	64.85	33.60	6.95	53.33	-12.78
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	47.49	PK	74	26.51	53.99	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4880.00	50.60	PK	74	23.40	63.38	33.60	6.95	53.33	-12.78
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	45.53	PK	74	28.47	52.03	37.46	9.23	53.19	-6.50
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	51.14	PK	74	22.86	63.56	33.84	7.00	53.26	-12.42
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	48.07	PK	74	25.93	54.35	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960.00	47.36	PK	74	26.64	59.78	33.84	7.00	53.26	-12.42
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	46.52	PK	74	27.48	52.80	37.64	9.28	53.20	-6.28
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

7. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
8. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
9. Margin value = Limit value- Emission level.
10. -- Mean the PK detector measured value is below average limit.
11. Other emission levels are attenuated 20dB below the limit and not recorded in report.
12. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)**BLE 1M Antenna 1**

Test frequency:	2402 MHz	Polarization:	Horizontal
-----------------	----------	---------------	------------

Radiated Emission Measurement


File :RSE 2022

Data :#1958

Date: 2022/08/22

Time: 13:56:33

110.0 dBuV/m

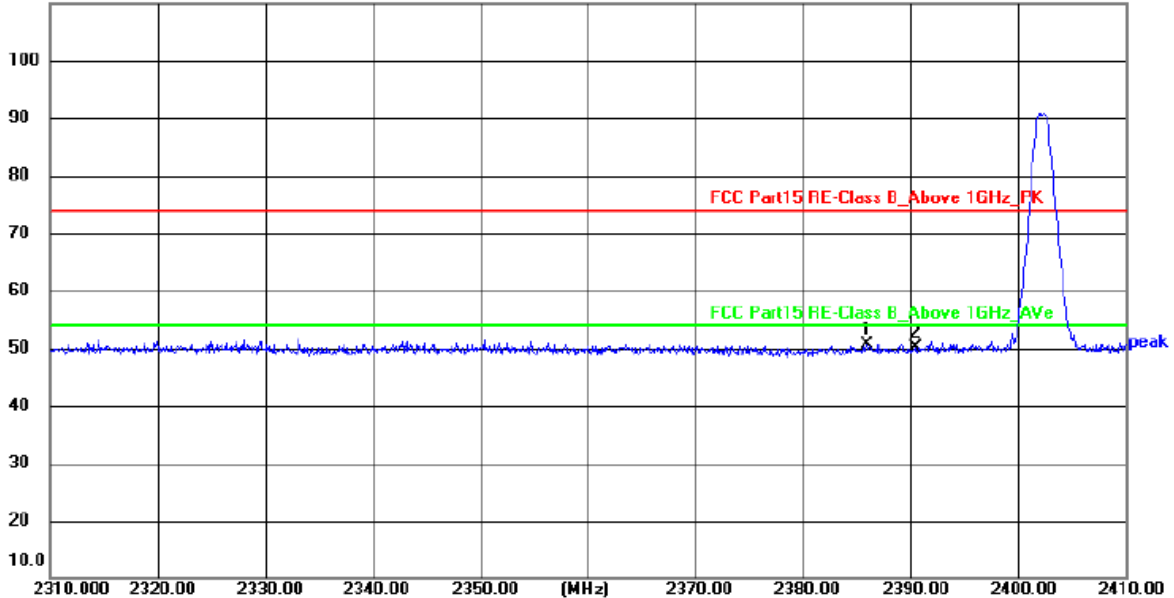

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 1M 2402 ANT1

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2385.511	55.37	-4.70	50.67	74.00	23.33	peak	149	360	P	
2	2390.000	54.87	-4.69	50.18	74.00	23.82	peak	149	360	P	

Test frequency:

2402 MHz

Polarization:

Vertical

Radiated Emission Measurement


File :RSE 2022

Data :#1959

Date: 2022/08/22

Time: 13:58:22

110.0 dBuV/m

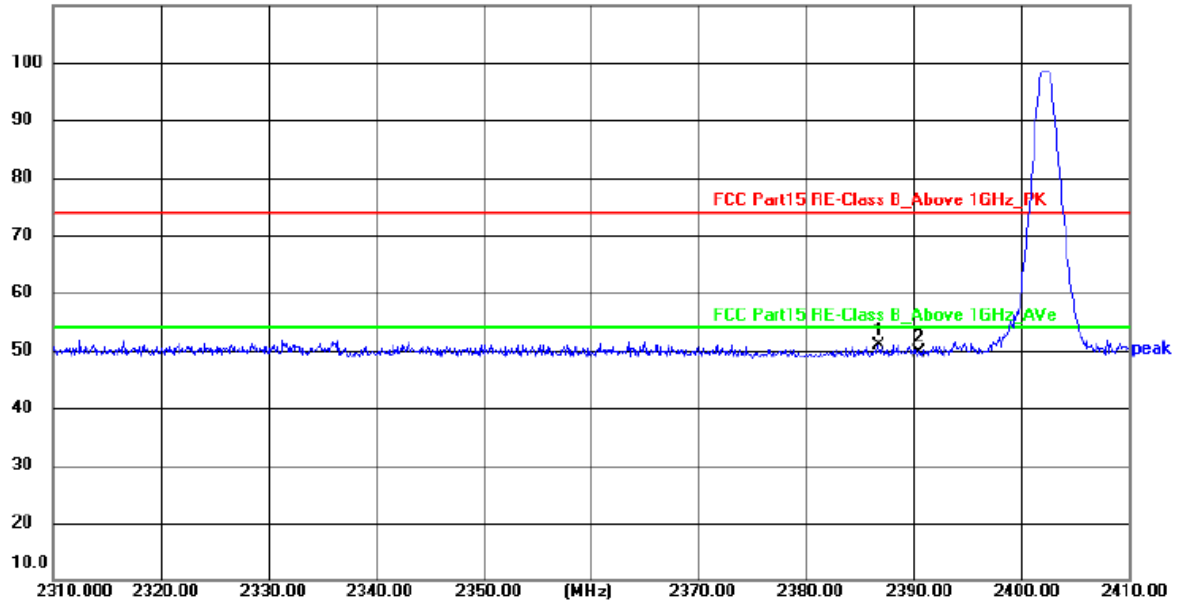

Site CTL 966 Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 1M 2402 ANT1

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2386.219	55.53	-4.70	50.83	74.00	23.17	peak	149	0	P	
2	2390.000	54.42	-4.69	49.73	74.00	24.27	peak	149	0	P	

Test frequency:

2480 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1960

Date: 2022/08/22

Time: 14:00:20

110.0 dBuV/m

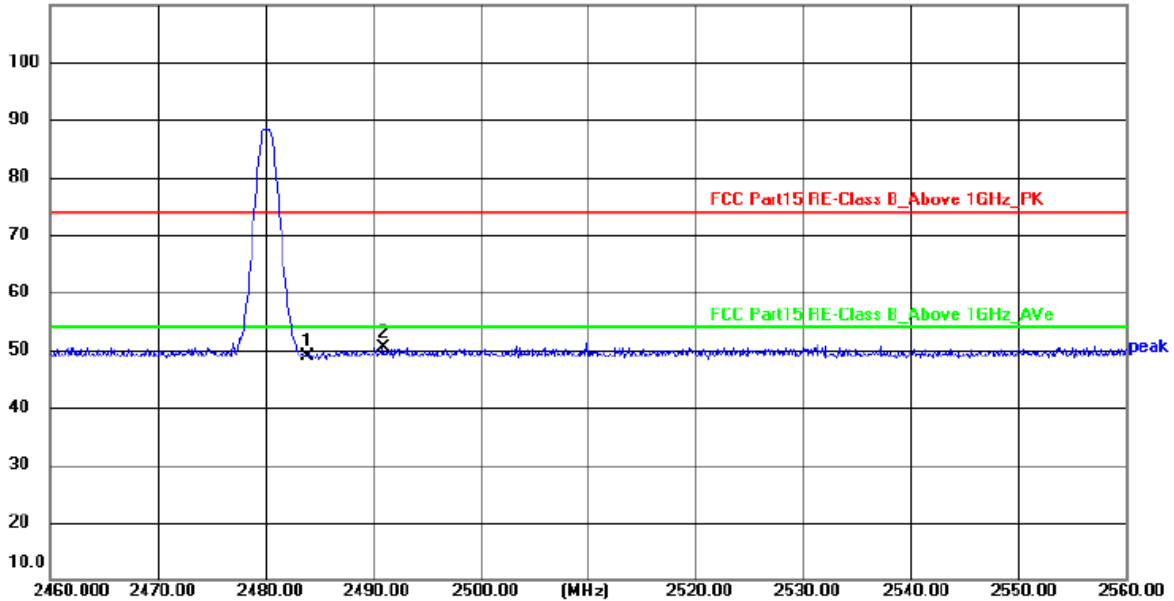

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m


M/N: Mondo Duo

Mode: WORKING

Note: 1M 2480 ANT1

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	53.41	-4.45	48.96	74.00	25.04	peak	149	360	P	
2	2490.476	54.76	-4.44	50.32	74.00	23.68	peak	149	360	P	

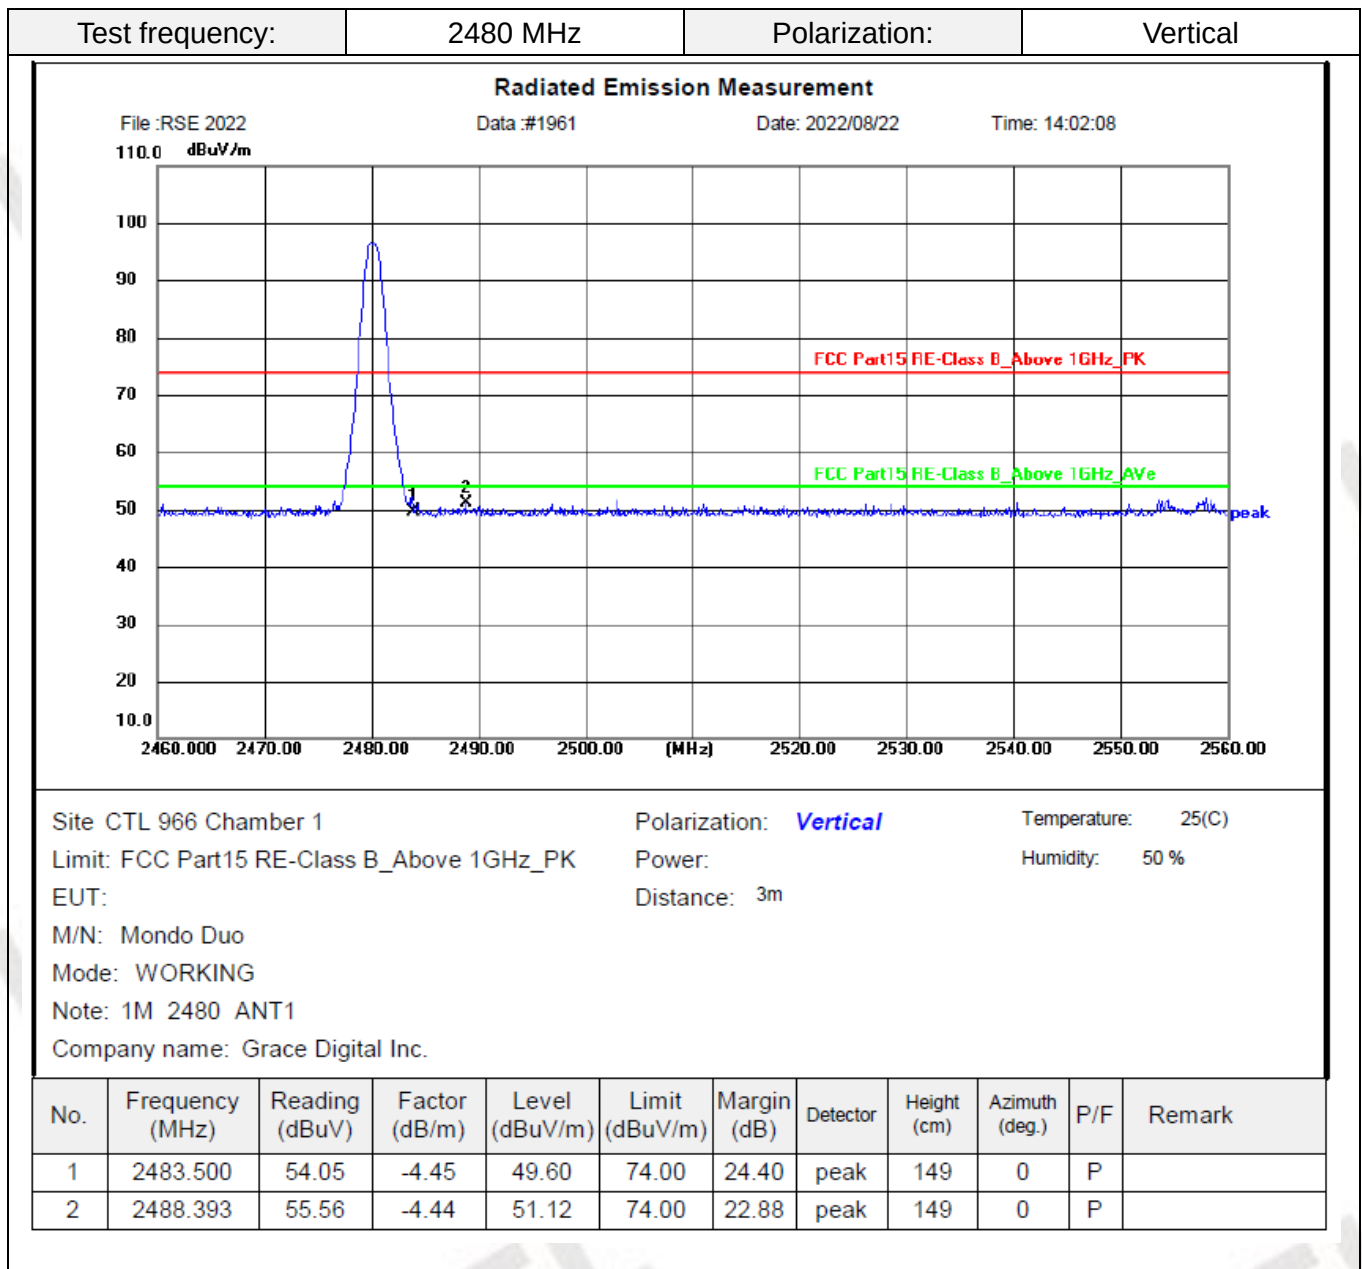

REMARKS:

1. Level (dBUV/m) = Reading (dBUV) + Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Level value.
4. Other emission levels are attenuated 20dB below the limit and not recorded in report.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BLE 1M Antenna 2

Test frequency:

2402 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1970

Date: 2022/08/22

Time: 14:19:02

110.0 dBuV/m

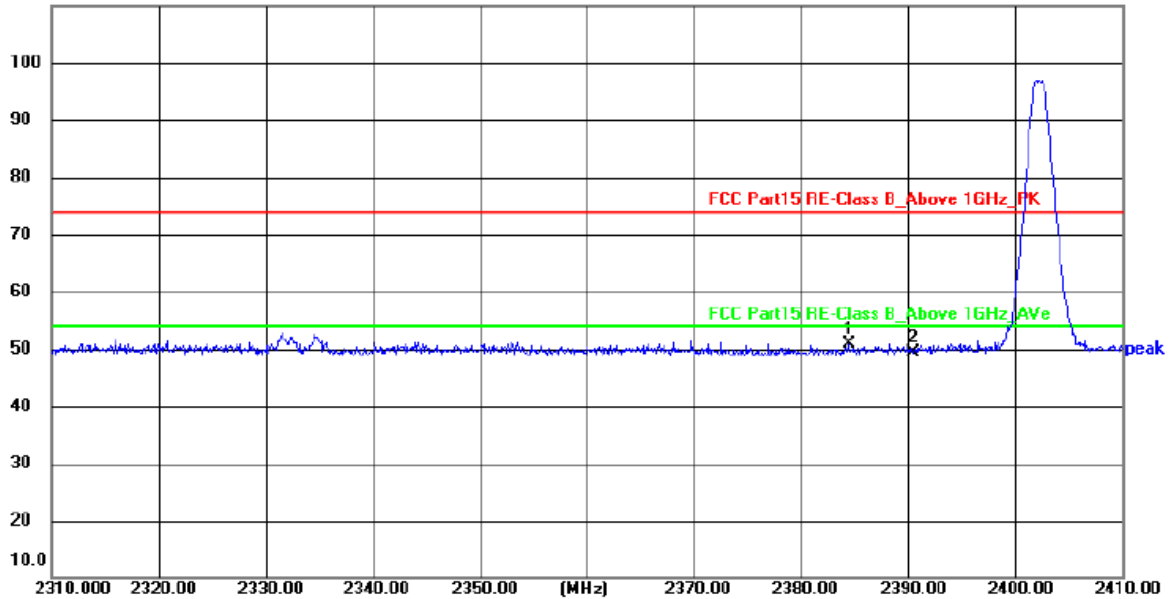

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power: AC230V/50Hz

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 1M 2402 ANT2

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2383.995	55.48	-4.70	50.78	74.00	23.22	peak	149	360	P	
2	2390.000	54.11	-4.69	49.42	74.00	24.58	peak	149	360	P	

Test frequency:

2402 MHz

Polarization:

Vertical

Radiated Emission Measurement


File :RSE 2022

Data :#1971

Date: 2022/08/22

Time: 14:21:25

110.0 dBuV/m

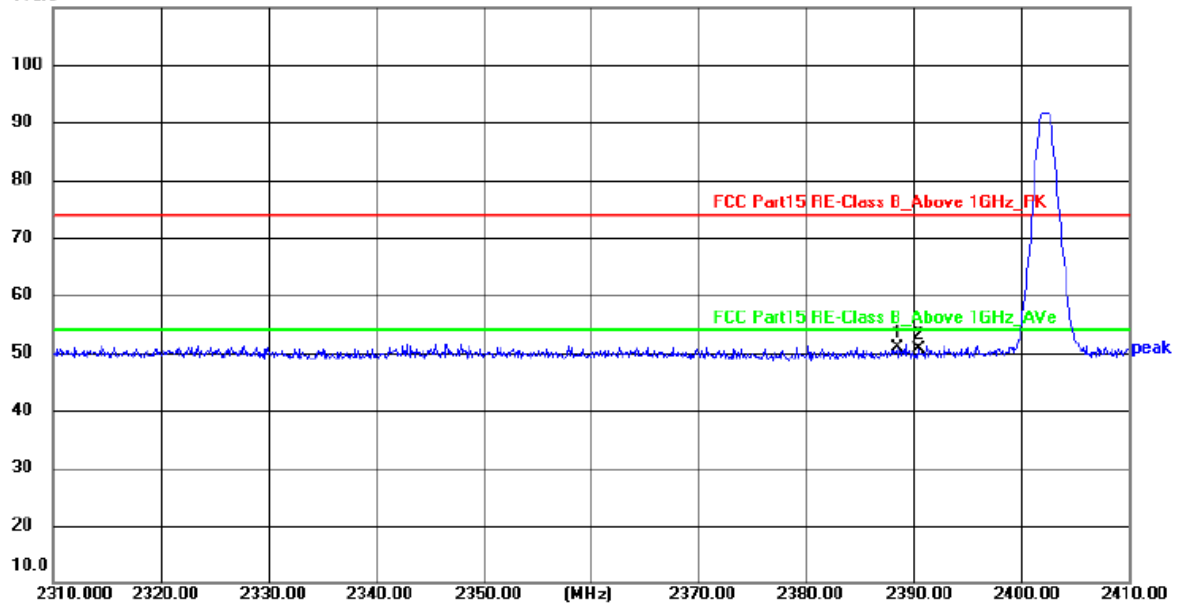

Site CTL 966 Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power: AC230V/50Hz

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 1M 2402 ANT2

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2388.040	55.62	-4.70	50.92	74.00	23.08	peak	149	0	P	
2	2390.000	55.26	-4.69	50.57	74.00	23.43	peak	149	0	P	

Test frequency:

2480 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1972

Date: 2022/08/22

Time: 14:23:05

110.0 dBuV/m

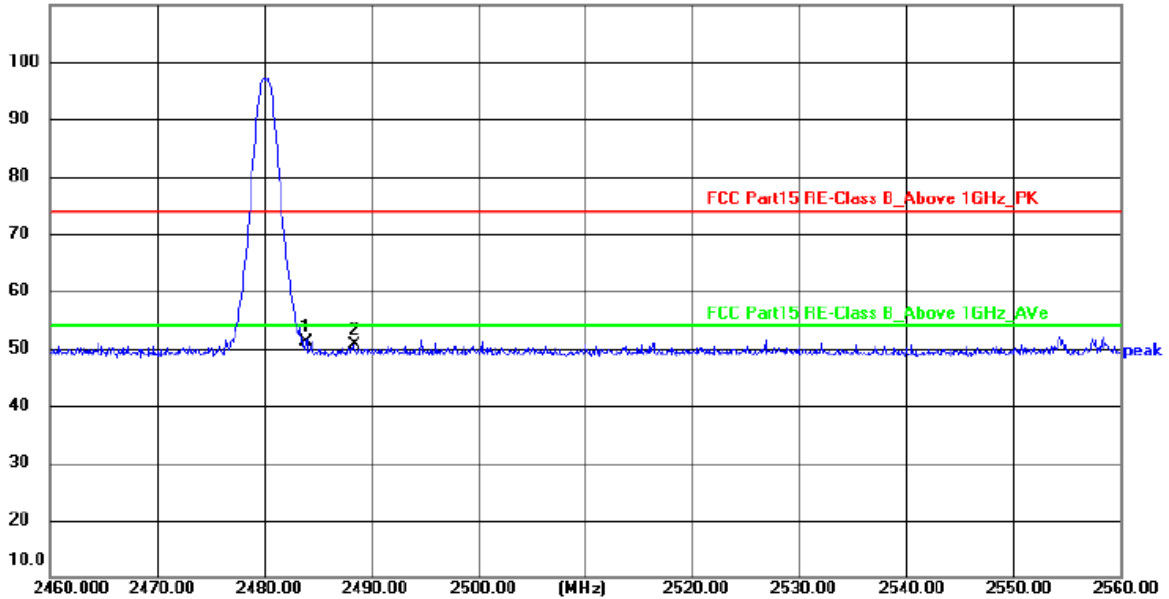

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power: AC230V/50Hz

Humidity: 50 %

EUT:

Distance: 3m


M/N: Mondo Duo

Mode: WORKING

Note: 1M 2480 ANT2

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	55.66	-4.45	51.21	74.00	22.79	peak	149	360	P	
2	2487.897	55.12	-4.44	50.68	74.00	23.32	peak	149	360	P	

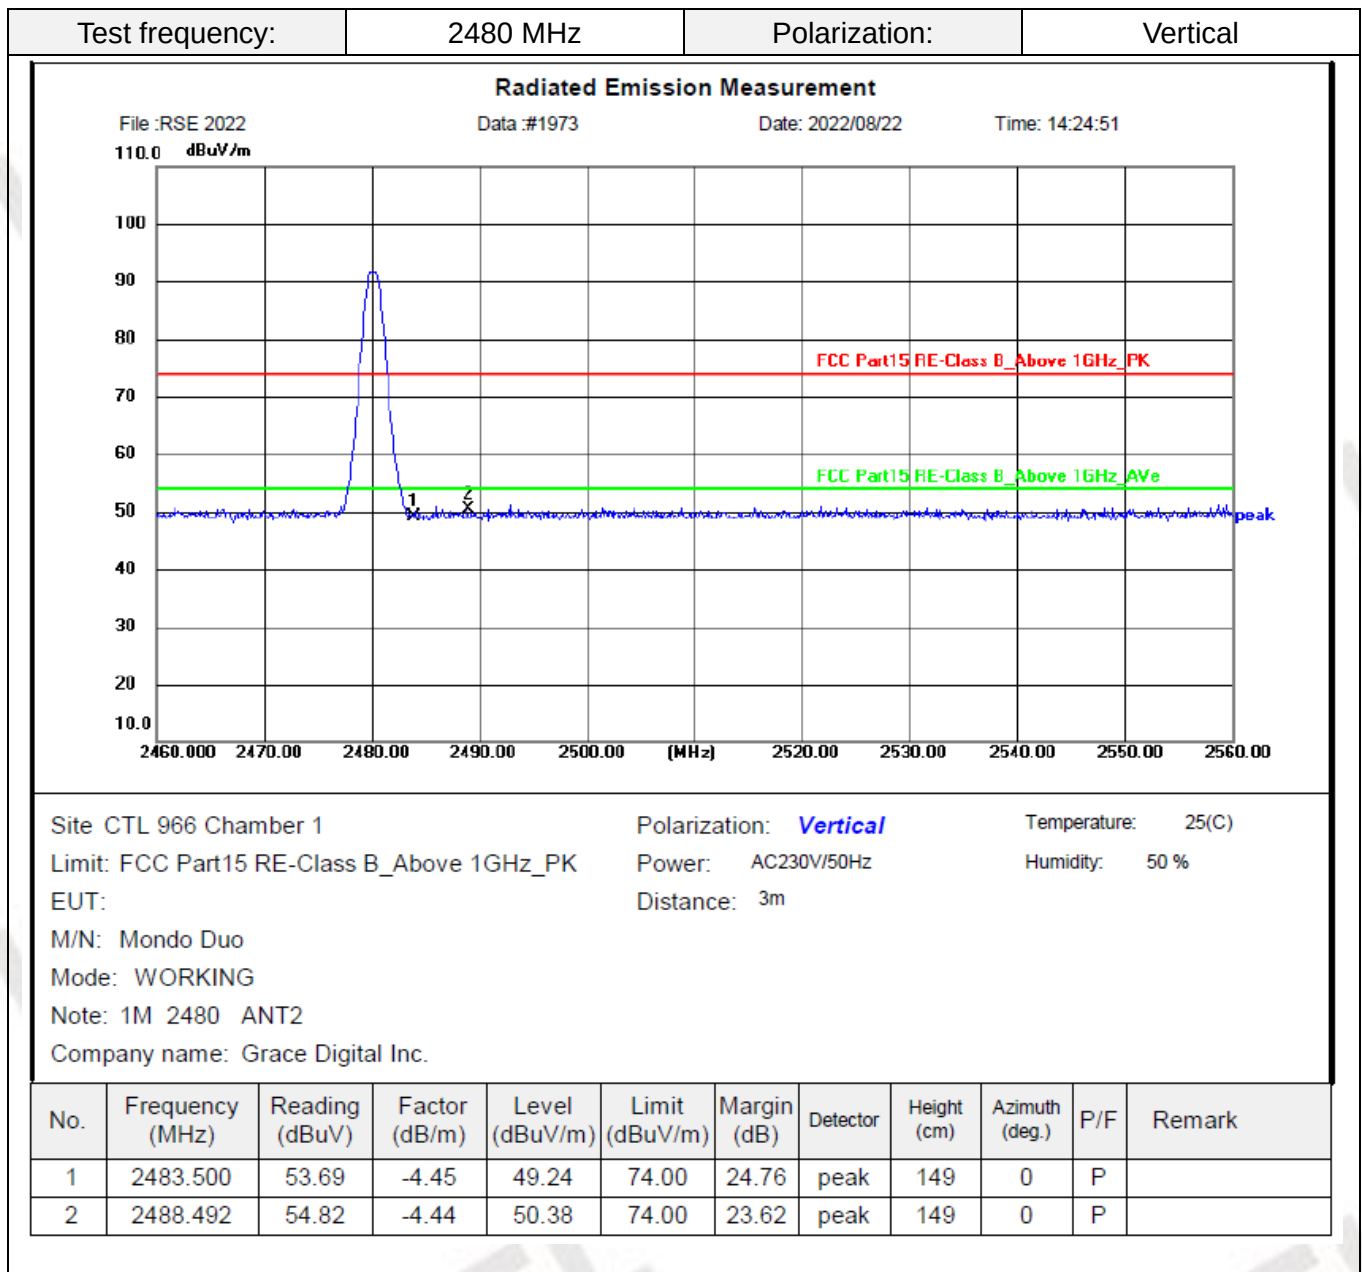

REMARKS:

1. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)
2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Level value.
4. Other emission levels are attenuated 20dB below the limit and not recorded in report.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BLE 2M Antenna 1

Test frequency:

2402 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1962

Date: 2022/08/22

Time: 14:03:48

110.0 dBuV/m

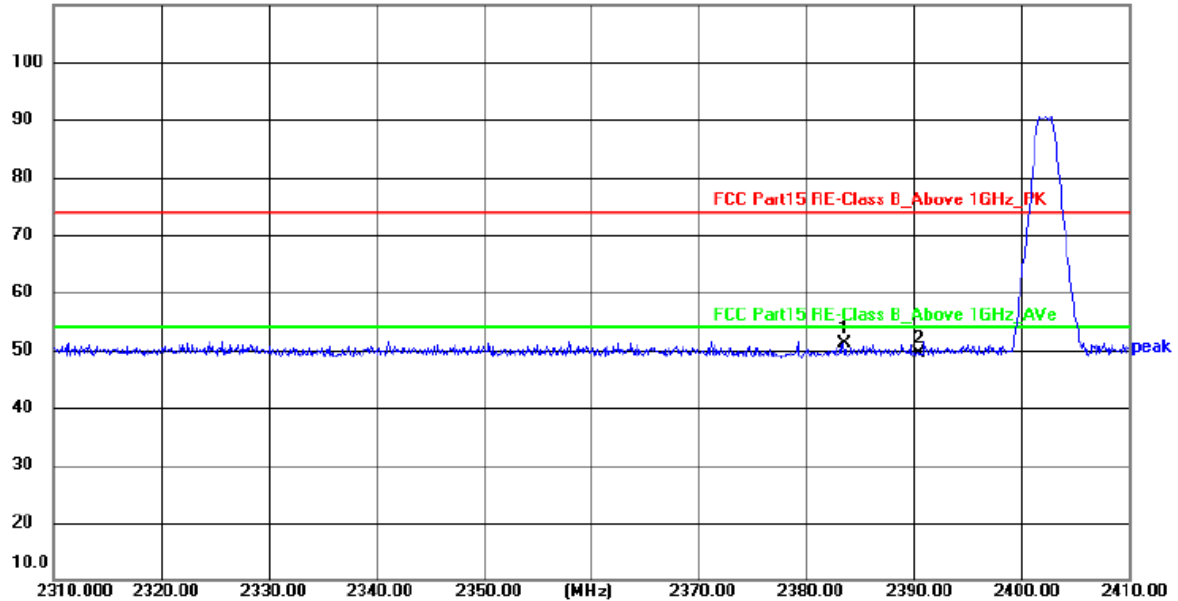

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 2M 2402 ANT1

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2382.985	55.80	-4.70	51.10	74.00	22.90	peak	149	360	P	
2	2390.000	54.16	-4.69	49.47	74.00	24.53	peak	149	360	P	

Test frequency:

2402 MHz

Polarization:

Vertical

Radiated Emission Measurement


File :RSE 2022

Data :#1963

Date: 2022/08/22

Time: 14:05:41

110.0 dBuV/m

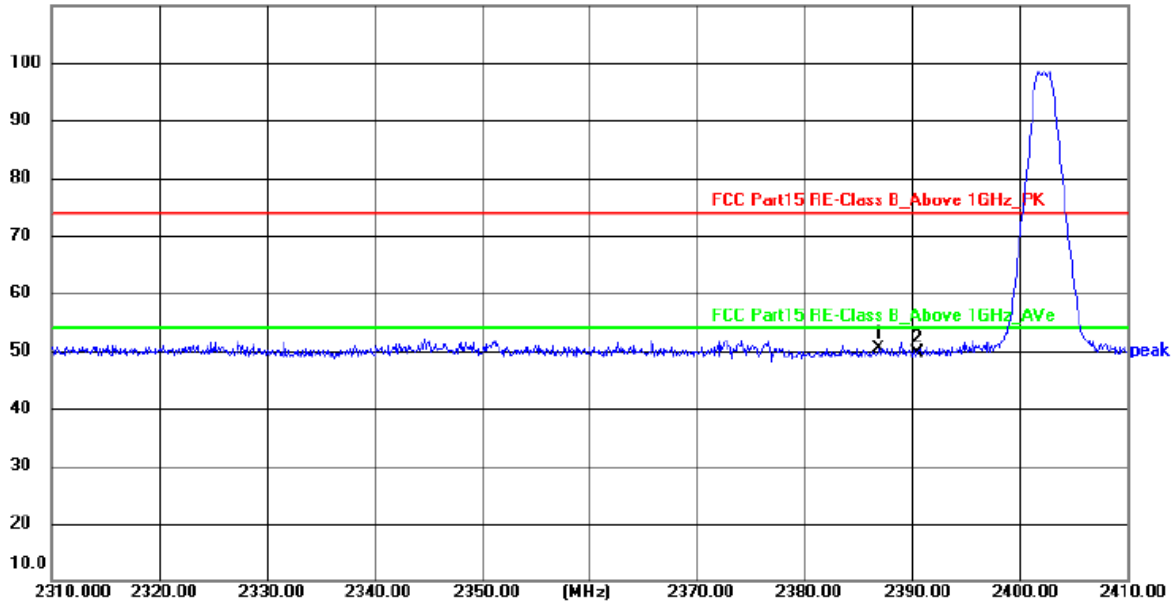

Site CTL 966 Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 2M 2402 ANT1

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2386.522	55.13	-4.70	50.43	74.00	23.57	peak	149	0	P	
2	2390.000	54.42	-4.69	49.73	74.00	24.27	peak	149	0	P	

Test frequency:

2480 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1964

Date: 2022/08/22

Time: 14:07:33

110.0 dBuV/m

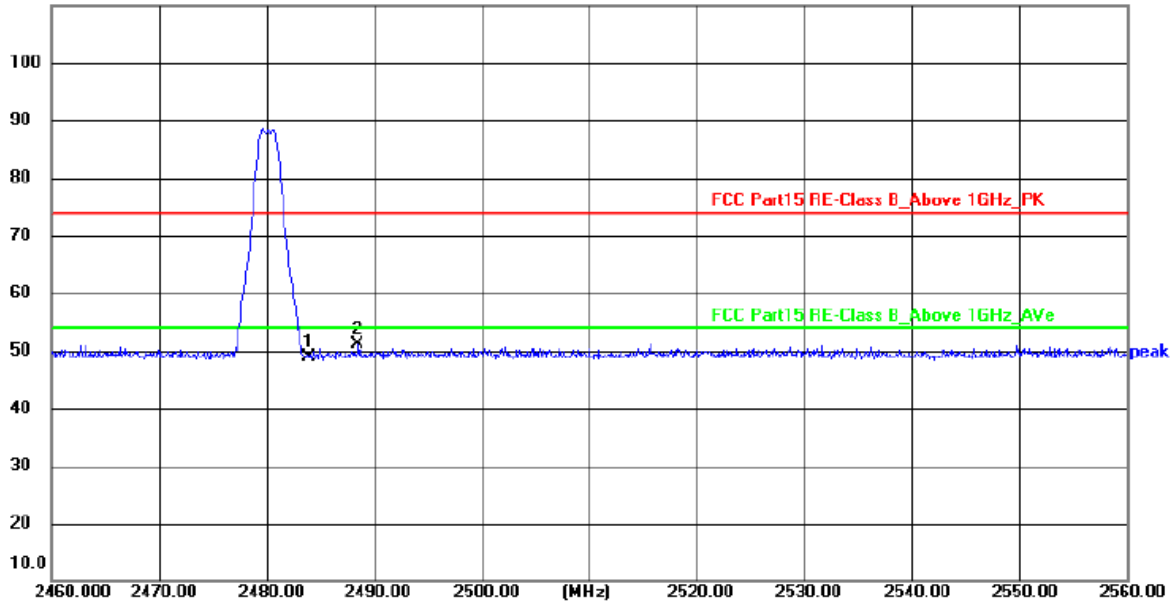

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m


M/N: Mondo Duo

Mode: WORKING

Note: 2M 2480 ANT1

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	53.28	-4.45	48.83	74.00	25.17	peak	149	360	P	
2	2488.095	55.47	-4.44	51.03	74.00	22.97	peak	149	360	P	

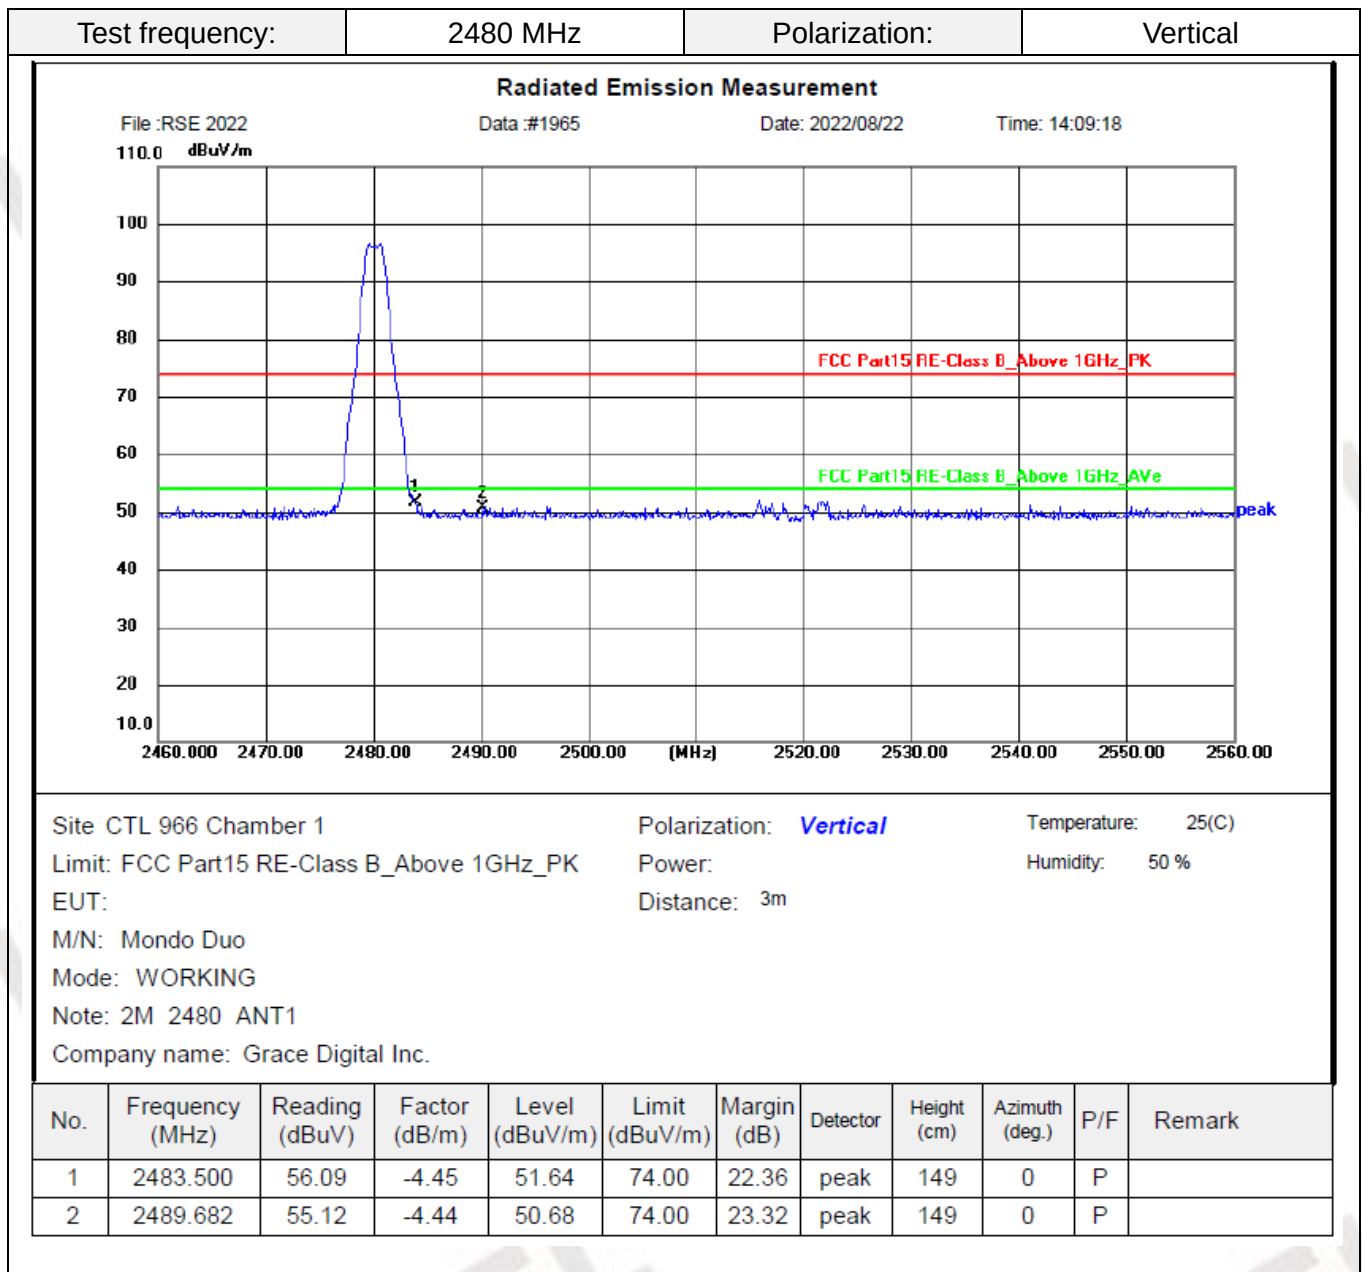**REMARKS:**

6. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)
7. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
8. Margin value = Limit value - Level value.
9. Other emission levels are attenuated 20dB below the limit and not recorded in report.
10. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BLE 2M Antenna 2

Test frequency:

2402 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1974

Date: 2022/08/22

Time: 14:26:42

110.0 dBuV/m

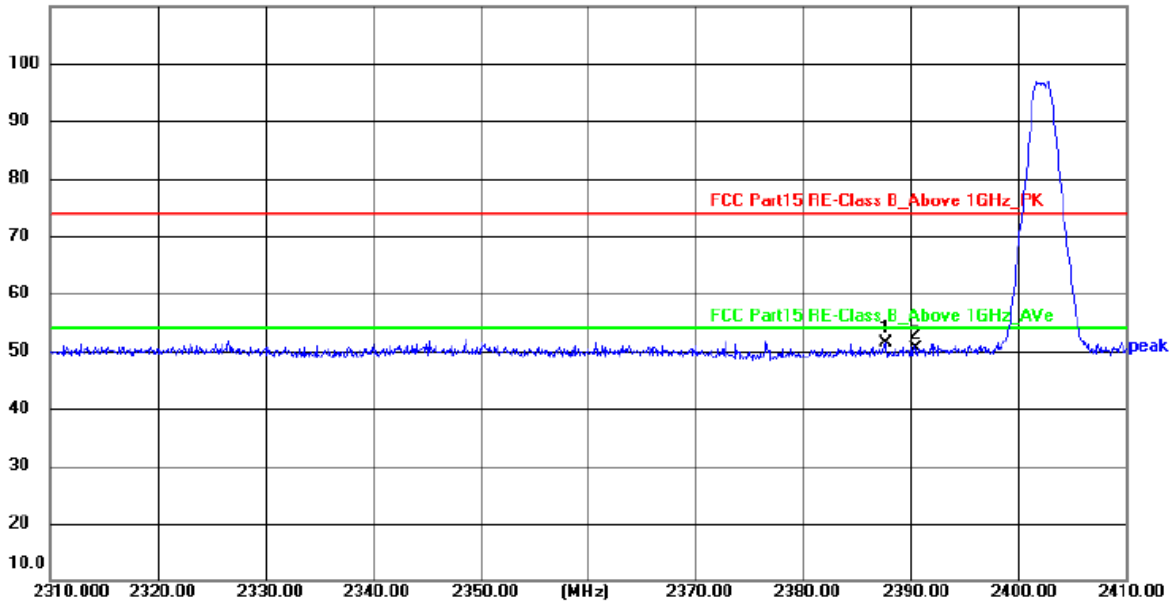

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power: AC230V/50Hz

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 2M 2402 ANT2

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2387.230	56.11	-4.70	51.41	74.00	22.59	peak	149	360	P	
2	2390.000	54.98	-4.69	50.29	74.00	23.71	peak	149	360	P	

Test frequency:

2402 MHz

Polarization:

Vertical

Radiated Emission Measurement


File :RSE 2022

Data :#1975

Date: 2022/08/22

Time: 14:28:40

110.0 dBuV/m

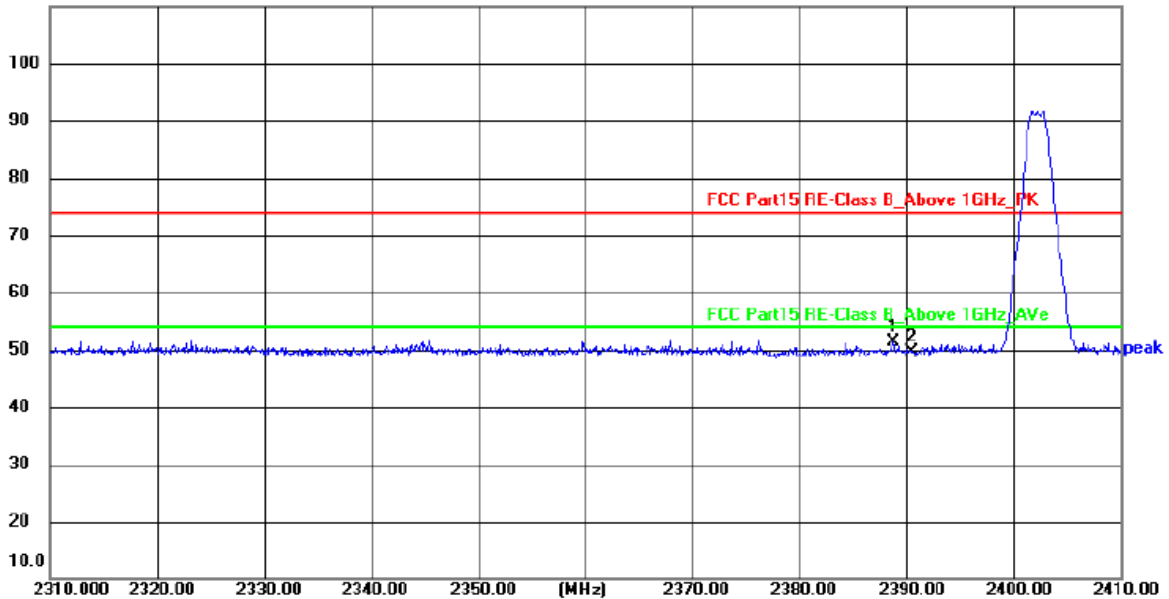

Site CTL 966 Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power: AC230V/50Hz

Humidity: 50 %

EUT:

Distance: 3m

M/N: Mondo Duo

Mode: WORKING

Note: 2M 2402 ANT2

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2388.343	56.18	-4.70	51.48	74.00	22.52	peak	149	0	P	
2	2390.000	54.22	-4.69	49.53	74.00	24.47	peak	149	0	P	

Test frequency:

2480 MHz

Polarization:

Horizontal

Radiated Emission Measurement


File :RSE 2022

Data :#1976

Date: 2022/08/22

Time: 14:30:56

110.0 dBuV/m

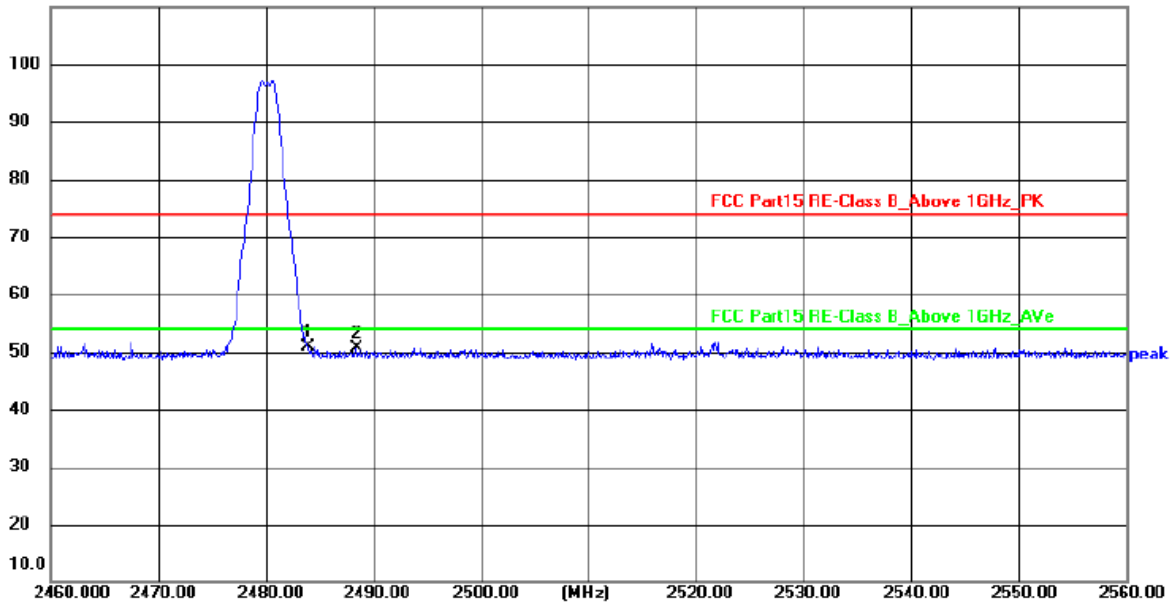

Site CTL 966 Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m


M/N: Mondo Duo

Mode: WORKING

Note: 2M 2480 ANT2

Company name: Grace Digital Inc.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	55.31	-4.45	50.86	74.00	23.14	peak	149	360	P	
2	2487.897	55.12	-4.44	50.68	74.00	23.32	peak	149	360	P	

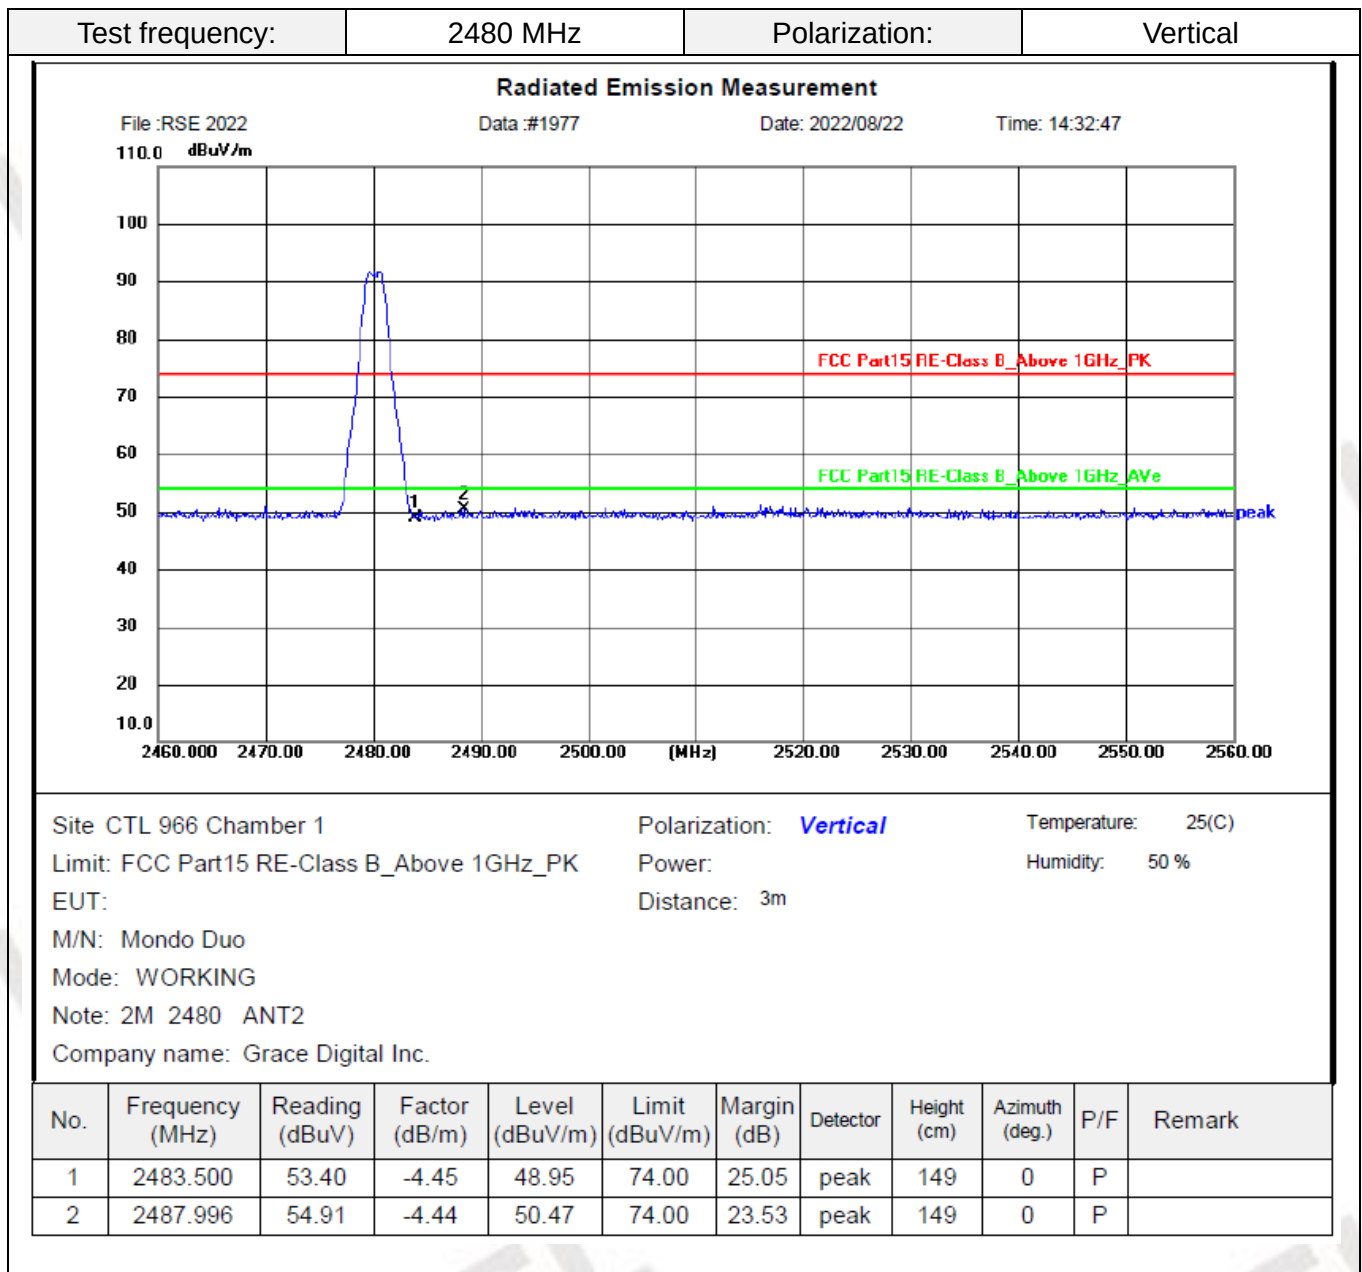

REMARKS:

6. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)
7. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
8. Margin value = Limit value - Level value.
9. Other emission levels are attenuated 20dB below the limit and not recorded in report.
10. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

3.3. Maximum Conducted Output Power

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

Test Configuration



Test Results

Raw data reference to Appendix for BLE.

3.4. Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration



Test Results

Raw data reference to Appendix for BLE.

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Raw data reference to Appendix for BLE.

3.6. Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Raw data reference to Appendix for BLE.

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c)(1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The device used a FPC antenna and the maximum gain is antenna1 1.6dBi antenna2 1.3dBi.

4. Test Setup Photos of the EUT

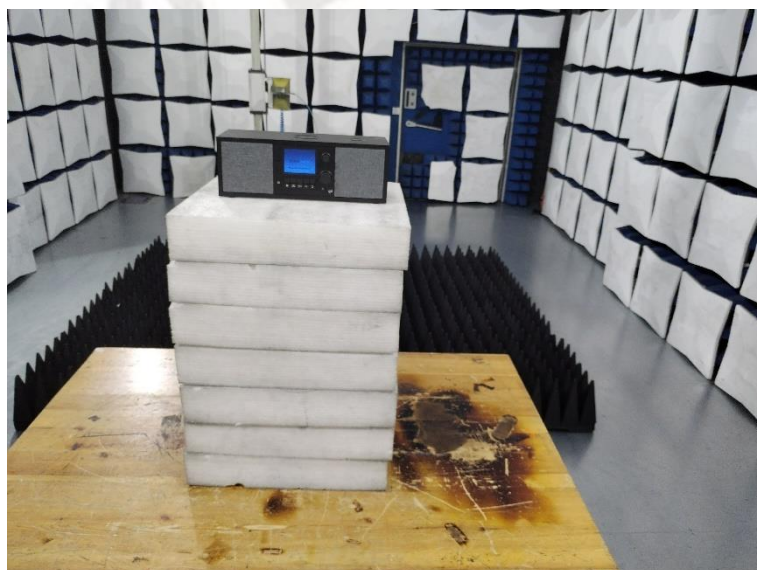

5. Photos of the EUT

Reference to the test report No. CTL2207053064-WF01

***** End of Report *****