



EMI - TEST REPORT

- FCC 15.247 -

Type / Model Name : WRTZ - 1500

Product Description : UHF RFID-Reader

Applicant : Checkpoint Systems, Inc.

Address : 101 Wolf Drive, Thorofare
New Jersey, USA 08086

Manufacturer : RM Gerätebau

Address : Hirschbachstr. 47
64354 Reinheim, Germany

Licence holder : Checkpoint Systems, Inc.

Address : 101 Wolf Drive, Thorofare
New Jersey, USA 08086

Test Result according to the standards listed in clause 1 test standards:

POSITIVE

Test Report No. : **T42115-00-00HU**

06. February 2018
Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-01
D-PL-12030-01-02

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
3	<u>EQUIPMENT UNDER TEST</u>	5
3.1	Photo documentation of the EUT – Detailed photos see Attachment A	5
3.2	Test setup	5
3.3	Power supply system utilised	5
3.4	Short description of the EUT	5
4	<u>TEST ENVIRONMENT</u>	7
4.1	Address of the test laboratory	7
4.2	Environmental conditions	7
4.3	Statement of the measurement uncertainty	7
4.4	Measurement Protocol for FCC, VCCI and AUSTEL	8
5	<u>TEST CONDITIONS AND RESULTS</u>	9
5.1	Conducted emissions	9
5.2	20 dB bandwidth	11
5.3	Maximum peak conducted output power	12
5.4	Spurious RF conducted emissions	14
5.5	Spurious radiated emissions in restricted bands	15
5.6	Hopping sequence	19
5.7	Equal hopping frequency use	19
5.8	Receiver input bandwidth	19
5.9	Dwell time	20
5.10	Channel separation	21
5.11	Quantity of hopping channels	22
5.12	Antenna application - Detailed photos see Attachment A	23
5.13	Receiver conducted disturbances	24
5.14	Receiver spurious emissions conducted	25
5.15	Maximum permissible exposure (MPE) – See Attachment B	26
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	27

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2017)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart B - Unintentional Radiators (October, 2017)

Part 15, Subpart B, Section 15.107	AC Line conducted emissions,
Part 15, Subpart B, Section 15.109	Radiated emissions, general requirements

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2017)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: portable device

OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

ANSI C63.10: 2013	Testing Unlicensed Wireless Devices
ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006 EN 55022: 2006	Information technology equipment

2 SUMMARY

GENERAL REMARKS:

The frequency range was scanned from 9 kHz to 10 GHz.

All emissions not reported in this test report were more than 10 dB below the specified limit.

The EuT is a frequency hopping system using 50 channels in the frequency band from 902 to 928 MHz.

This test report covers only partly testing with the new provided antennas.

All other tests with the reader and the other provided antennas (with max. conducted output power – 30.0 dBm) were performed in August 2011.

Following antennas are **new** provided with the EuT:

- 5270 10079 antenna: circular (8.3 dBi)
- BEAM SWITCH ANTENNA, 35° vertical, 80° horizontal (7 dBi)

The EuT is declared as Class A digital device. The EuT fulfills the requirements of a class B device

The device has a maximum of eight external antenna ports for connection of the transmission/reception antennas for communication with RFID tags.

The device transmits to each antenna in turn (not all at the same time). This function is controlled via software from the manufacturer and can not be changed from the user.

Spurious emission measurements and maximum peak conducted output power have been made with power settings of 27.7 dBm (520 10079 antenna).

Spurious emission measurements and maximum peak conducted output power have been made with power settings of 29.0 dBm (BEAM SWITCH ANTENNA).

For detailed information please refer to the user manual.

It is not possible to set the EuT only in receiving mode.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 04. April 2017

Testing concluded on : 10. April 2017

Checked by:

Tested by:


Klaus Gegenfurtner
Teamleader Radio

Markus Huber

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – Detailed photos see Attachment A

3.2 Test setup

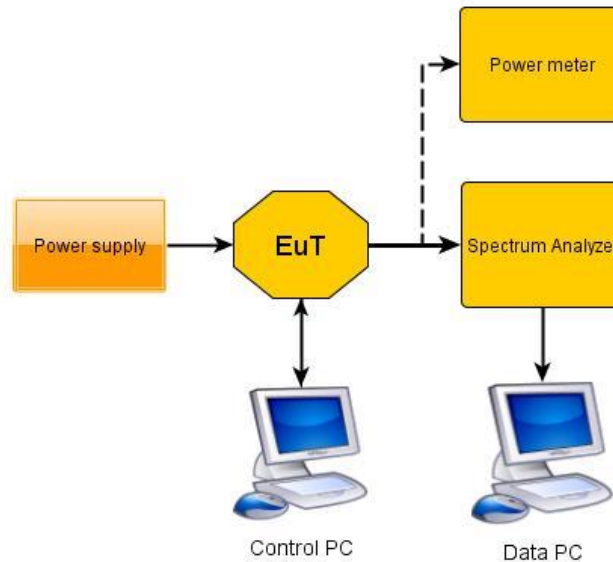

3.3 Power supply system utilised

[illegible]

3.4 Short description of the EUT

The WRTZ-1500 is a UHF RFID reader. It can read active and passive Tags in the frequency range from 902 to 928 MHz. 8 antenna connectors are available.

Number of tested samples: 1
Serial number: see Photo documentation of the EuT / Equipment Under Test

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TAG reading mode supplying 29.0 dBm and 27.7 dBm

- Standby mode

—

EUT configuration:

The following peripheral devices and interface cables were connected during the measurements:

- | | |
|---|--|
| - <u>Test Software</u> | Model : <u>Supplied by manufacturer</u> |
| - <u>Lap Top</u> | Model : <u>Supplied by manufacturer</u> |
| - <u></u> | Model : <u></u> |
| - <u>PSU (Power Supply Unit) – UHF Reader</u> | Model : <u>XP Power Supply – AEB70US12 –
Serial No.: 70120-0002683</u> |
| - <u>Antenna</u> | Model : <u>Kathrein Type No.520 10079</u> |
| - <u>Antenna</u> | Model : <u>Checkpoint Type BEAM SWITCH ANTENNA</u> |
| - <u>PSU (Power Supply Unit) - Antenna</u> | Model : <u>EOS, LFZVC65SG24S92, S/N:E01-B-Q130-1846</u> |
| - customer specific cables | |

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

FCC ID: DO4WRTZ1500

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
20 dB Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EuT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	± 3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 3.71 dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	± 2.34 dB
Radiated power of the fundamental wave	Center frequency of EuT	95%	± 3.71 dB
Peak conducted output power	902 MHz to 928 MHz	95%	± 0.35 dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	± 2.15 dB

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: NONE

5.1.2 Photo documentation of the test set-up

5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Description of Measurement

The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a line impedance stabilization network (LISN) with 50 Ω/50 μH (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded.

To convert between dBμV and μV, the following conversions apply:

$$\text{dB}\mu\text{V} = 20 \log \mu\text{V}$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

5.1.5 Test result

Frequency range:

Min. limit margin

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

FCC ID: DO4WRTZ1500

FCC ID: DO4WRTZ1500**5.2 20 dB bandwidth**

For test instruments and accessories used see section 6 Part MB.

5.2.1 Description of the test location

Test location: NONE

5.2.2 Photo documentation of the test set-up**5.2.1 Applicable standard**

According to FCC Part 15C, Section 15.247(a):

Frequency hopping systems shall have hopping carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2.2 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

5.2.3 Test result

Bandwidth limit according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit -20 db bandwidth (kHz)
902-928	≥ 50	< 250

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

FCC ID: DO4WRTZ1500


5.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part CPC 2.

5.3.1 Description of the test location

Test location: Shielded Room S4

5.3.2 Photo documentation of the test set-up

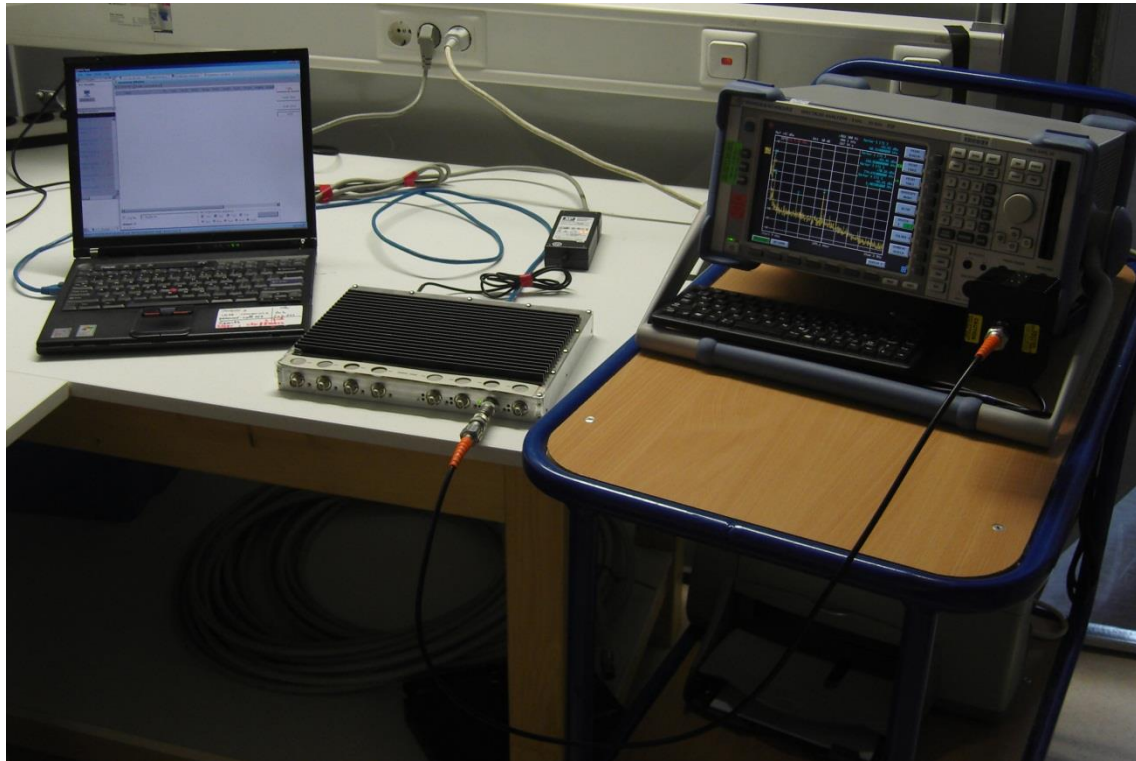

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.247(b)(2):

For frequency hopping systems operating in the 902-928 MHz band the maximum peak conducted output power shall not exceed the limit of 1 watt for systems employing at least 50 hopping channels.

5.3.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode using the assigned frequency.

Spectrum analyser settings:

RBW	300 kHz	Sweep time	5 ms (Auto)
VBW	1 MHz	Power Mode	Max. hold
Detector	Peak	Span	500 kHz

FCC ID: DO4WRTZ1500

5.3.5 Test result

a) Power setting 29.0 dBm

Antenna BEAM SWITCH ANTENNA: antenna gain: 7.0 dBic

Channel	Frequency (MHz)	Peak Power (dBm)	Correction (dB)	Corr. Peak power (dBm)	Limit (dBm)	Delta (dB)
1	902.75	8.46	20	28.46	30.0	- 1.54
25	914.75	8.45	20	28.45	30.0	- 1.55
50	927.25	8.31	20	28.31	30.0	- 1.69

b) Power setting 27.7 dBm

Antenna 520 10079: antenna gain: 8.3 dBi

Channel	Frequency (MHz)	Peak Power (dBm)	Correction (dB)	Corr. Peak power (dBm)	Limit (dBm)	Delta (dB)
1	902.75	7.32	20	27.32	30.0	- 2.68
25	914.75	7.29	20	27.29	30.0	- 2.71
50	927.25	7.13	20	27.13	30.0	- 2.87

Note: Correction means fixed attenuation of 20 dB.

Test cable loss is included in the analyzer reading (Transducer factor).

Peak Power Limit according to FCC Part 15C, Section 15.247(b)(2):

Frequency (MHz)	Hopping channels	Hop. CH carrier frequ. separation	Peak Power Limit	
			(dBm)	(W)
902-928	≥ 50		30	1.0

The requirements are **FULFILLED**.

Remarks:

FCC ID: DO4WRTZ1500**5.4 Spurious RF conducted emissions**

For test instruments and accessories used see section 6 Part SEC1, SEC2 and SEC3.

5.4.1 Description of the test location

Test location: NONE

5.4.2 Photo documentation of the test set-up**5.4.3 Applicable standard**

According to FCC Part 15C, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.4.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode at the assigned frequency.

5.4.5 Test result

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

FCC ID: DO4WRTZ1500**5.5 Spurious radiated emissions in restricted bands**

For test instruments and accessories used see section 6 Part SER 1, SER 2, SER 3.


5.5.1 Description of the test location

Test location: OATS1
Test distance: 3 metres

Test location: Anechoic Chamber A2 and A1
Test distance: 3 metres

5.5.2 Photo documentation of the test set-up

Open area test site

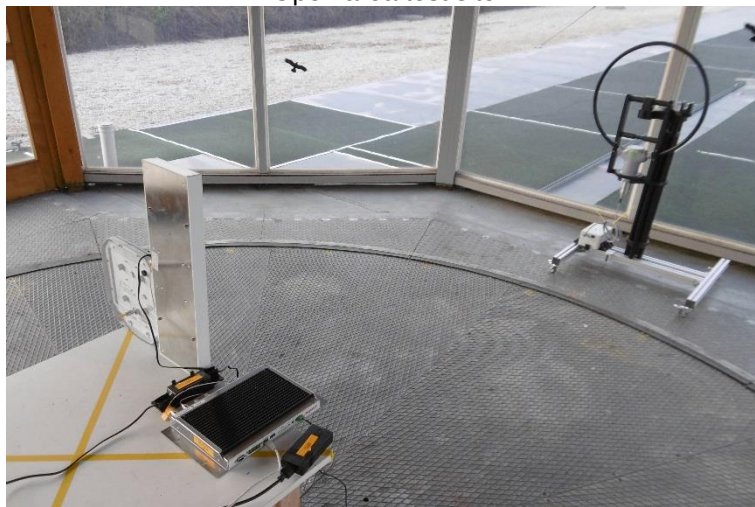


Open area test site



FCC ID: DO4WRTZ1500

Anechoic chamber A1

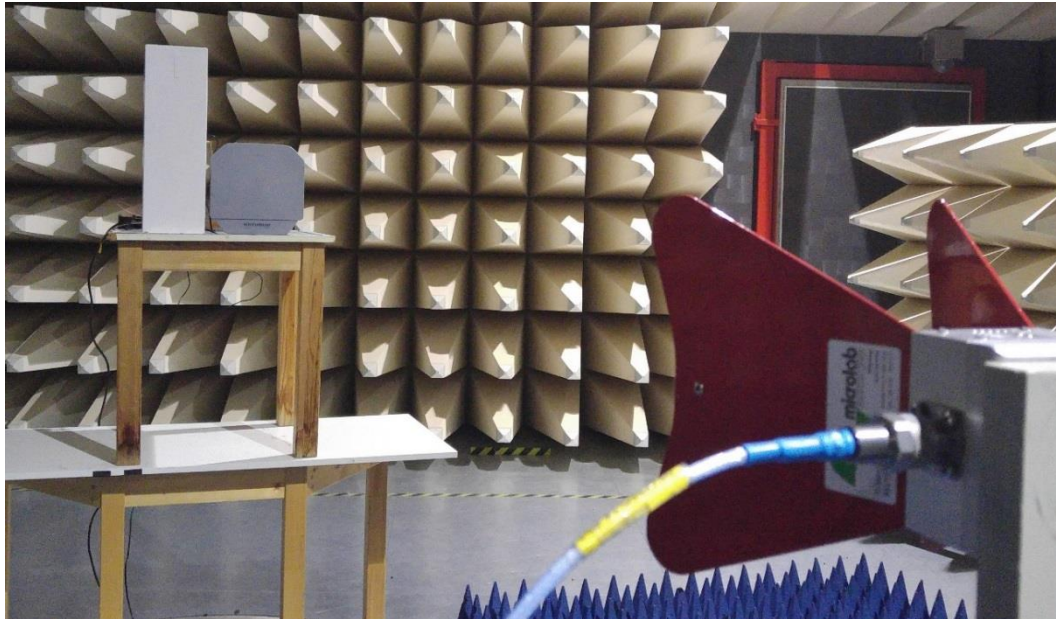

5.5.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency bands 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

5.5.4 Description of Measurement

Radiated spurious emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linear polarized antennas. The measurements are made with 120 kHz bandwidth and quasi-peak detection (200 Hz, 9 kHz up to 30 MHz). The EUT was placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the equipment under test will be in accordance to ANSI C63.4. The antenna was positioned 3 metres horizontally from the EUT. To locate maximum emissions from the EUT the antenna is shifted in height from 1 to 4 metres, after the EUT is rotated 360 degrees. The measurement scan is made in horizontal and vertical polarization of the antenna. The correction factors for antenna gain and cable loss are stored in the EMI receiver and automatically added to a measurement data to display the final level in dBµV/m.

For the radiated measurement up from 1 GHz to maximum frequency as specified in Section 15.33, a spectrum analyzer and appropriate linear polarized antennas are used. The EUT is placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The antenna was positioned 3 m horizontally from the EUT. To locate maximum emissions the EUT was rotated 360 degrees in the fully anechoic chamber. The measurement scan is made in horizontal and vertical polarization of the antenna. For testing above 1 GHz, if the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.

FCC ID: DO4WRTZ1500

5.5.5 Test result

5.5.5.1 Radiated emission test $f < 1$ GHz

In the frequency range from 9 kHz to 30 MHz no radiated emissions from the EuT could be measured.
Only ambient noises could be detected.

In the frequency range from 30 MHz up to 1 GHz no radiated emissions from the EuT could be measured.
Only ambient noises could be detected.

5.5.5.2 Radiated emission test $f > 1$ GHz

Power setting 27.7 dBm

Antenna 520 10079: antenna gain 8.3 dBi

Power setting 29.0 dBm

BEAM SWITCH ANTENNA: antenna gain 7.0 dBic

Frequency (GHz)	L: PK (dB μ V)	L: AV (dB μ V)	Bandwidth (kHz)	Correct. (dB)	L: PK dB(μ V/m)	L: AV dB(μ V/m)	Limit AV dB(μ V/m)	Delta (dB)
3.610	39.82	29.78	1000	-8.0	31.82	21.78	54.0	-32.2
7.264	41.56	38.46	1000	7.5	49.06	45.96	54.0	-8.04

Radiated limits according to FCC Part 15C, Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance
	(μ V/m)	dB(μ V/m)	(metres)
0.009 - 0.490	2400/F(kHz)		300
0.490 - 1.705	24000/F(kHz)		30
1.705 - 30	30	29,5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

FCC ID: DO4WRTZ1500

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

Remarks: During the test the EUT was set into TX continuous mode with normal modulation.

The measurement was performed up to the 10th harmonic (10000 MHz).

5.6 Hopping sequence

Requirement according to FCC Part 15C, Section 15.247(a):

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

5.7 Equal hopping frequency use

Requirement according to FCC Part 15C, Section 15.247(a):

Each frequency must be used equally on the average by each transmitter.

Remarks: The device fulfills the requirement according to FCC Part 15C, Section 15.247(a).

The manufacturer declares in the system manual that this function is controlled via software.

For detailed information, please refer to

"Theory of Operation Manual", clause 3.0 Detailed Description.

5.8 Receiver input bandwidth

Requirement according to FCC Part 15C, Section 15.247(a):

The system receivers shall have input bandwidth that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signal.

Remarks: The receiver bandwidth is equal to the transmitter bandwidth in the 50 hopping channel mode.

(Declared by the manufacturer.)

For detailed information, please refer to

"Theory of Operation Manual", clause 3.0 Detailed Description.

FCC ID: DO4WRTZ1500**5.9 Dwell time**

For test instruments and accessories used see section 6 Part DC.

5.9.1 Description of the test location

Test location: NONE

5.9.2 Photo documentation of the test set-up**5.9.3 Applicable standard**

According to FCC Part 15, Section 15.247(a)(i):

Frequency hopping systems operating in the 902-928 MHz band: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

5.9.4 Description of Measurement

The measurement was done using a spectrum analyser in time domain function and able to store the maximum time of a period. This time period has been stored and added up the appropriate time intervals the hopping system has applied this channel.

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

5.10 Channel separation

For test instruments and accessories used see section 6 Part MB.

5.10.1 Description of the test location

Test location: NONE

5.10.2 Photo documentation of the test set-up

5.10.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.10.4 Description of Measurement

This measurement was done by using a spectrum analyser. The Span of the analyzer was set wide enough to capture 2 frequencies. The result of the channel separation was compared with the 20 dB bandwidth and recorded.

5.10.5 Test result

Limit according to FCC Part 15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit channel separation (kHz)
All systems		> 25 kHz or 20 dB bandwidth, which ever is greater
2400-2483.5	≥ 15	

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

FCC ID: DO4WRTZ1500**5.11 Quantity of hopping channels**

For test instruments and accessories used see section 6 Part **MB**.

5.11.1 Description of the test location

Test location: NONE

5.11.2 Photo documentation of the test set-up**5.11.3 Applicable standard**

According to FCC Part 15, Section 15.247(a)(1)(i):

For frequency hopping systems operating in the 902-928 MHz band: If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

5.11.4 Description of Measurement

This measurement was done by using a spectrum analyser. The EuT was transmitting at its maximum data rate. The Span of the analyzer was set wide enough to capture the frequency band from 902-928 MHz.

5.11.5 Test result

Limit according to FCC Part 15C, Section 15.247(1):

Frequency range (MHz)	LIMIT (Quantity of Hopping Channels)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	---	---

Remarks: Test is not necessary.

Test was already performed with same UHF RFID reader, other antenna and

higher power setting (30.0 dBm).

FCC ID: DO4WRTZ1500**5.12 Antenna application - Detailed photos see Attachment A****5.12.1 Applicable standard**

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has reverse TNC plugs to connect the defined antennas supplied by the manufacturer.
All supplied antennas meet the requirements of part 15.203 and 15.204.

5.12.2 Antenna requirements

According to FCC Part 15C, Section 15.247 (b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.13 Receiver conducted disturbances

5.13.1 Description of the test location

Test location: None

5.13.2 Photo documentation of the test set-up

5.13.3 Applicable standard

According to FCC Part 15C, Section 15.107(a):

Except as shown in paragraphs (b) and (c) of this Section, for an unintentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Remarks: The measurement is not applicable, because the EuT don't have only a receive mode.

FCC ID: DO4WRTZ1500**5.14 Receiver spurious emissions conducted**

For test instruments and accessories used see section 6 Part SEC 2 and SEC 3.

5.14.1 Description of the test location

Test location: None

5.14.2 Applicable standard

According to EN 300 328, clause 4.3.7:

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

Limit according to EN 300 328, clause 4.3.7.2

Narrowband spurious emission limits for receivers:

30 MHz to 1000 MHz	1000 MHz to 12750 MHz
2.0nW (-57dBm)	20.0nW (-47dBm)

Wideband spurious emission limits for receivers:

30 MHz to 1000 MHz	1000 MHz to 12750 MHz
-107 dBm/Hz	-97 dBm/Hz

Remarks: The measurement is not applicable, because the EuT don't have only a receive mode.

FCC ID: DO4WRTZ1500**5.15 Maximum permissible exposure (MPE) – See Attachment B**

For test instruments and accessories used see section 6 Part **CPC 2**.

5.15.1 Description of the test location

Test location: None

5.15.2 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

5.15.3 Description of Measurement

The maximum total power input to the antenna has been measured conducted as described in clause 5.3 of this document. Through the Friis transmission formula, the known maximum gain of the antenna and the maximum power, the MPE can be calculated in a defined distance away from the product.

Friis transmission formula:
$$P_d = \frac{P_{out} * G}{4 * \pi * r^2}$$

where

P_d = power density (mW/cm²)

P_{out} = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

Remarks: For detailed test result please refer Attachment B.

FCC ID: DO4WRTZ1500

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPC 2	FSP 30 18N50W-20dB	02-02/11-05-001 02-02/50-16-031	04/10/2018	04/10/2017		
SER 1	FMZB 1516 ESCI FSP 30 HFH 2 - Z 2 KK-EF393-21N-16 NW-2000-NB KK-SD_7/8-2X21N-33,0M	01-02/24-01-018 02-02/03-05-005 02-02/11-05-001 02-02/24-15-001 02-02/50-05-033 02-02/50-05-113 02-02/50-15-028	14/12/2018 04/10/2018 23/03/2018	14/12/2017 04/10/2017 23/03/2017	27/03/2018	27/03/2017
SER 2	ESVS 30 VULB 9168 NW-2000-NB KK-EF393/U-16N-21N20 m KK-SD_7/8-2X21N-33,0M	02-02/03-05-006 02-02/24-05-005 02-02/50-05-113 02-02/50-12-018 02-02/50-15-028	03/07/2018 12/04/2018	03/07/2017 12/04/2017	28/03/2018	28/09/2017
SER 3	FSP 30 AFS4-01000400-10-10P-4 AMF-4F-04001200-15-10P BBHA 9120 E 251 WBH2-18NHG Sucoflex N-2000-SMA SF104/11N/11N/1500MM SF104/11SMA/11N/1500MM SF104/11SMA/11N/1500MM	02-02/11-05-001 02-02/17-13-002 02-02/17-13-003 02-02/24-05-006 02-02/24-08-002 02-02/50-05-075 02-02/50-13-015 02-02/50-13-016 02-02/50-13-017	04/10/2018 27/04/2018 27/04/2018	04/10/2017 27/04/2017 27/04/2017	27/01/2018 27/01/2018	27/07/2017 27/07/2017