

## TEST REPORT

**Applicant:** Vertel Digital Private Limited

**Address:** H-103, Electronics City, Sector-63, Noida, (U.P.) 201301, India

**Product Name:** Digital FM Transceiver


**FCC ID:** 2BL7PSPU-VERTEL

**Standard(s):** 47 CFR Part 2  
47 CFR Part 90  
ANSI C63.26-2015  
ANSI/TIA 603-E-2016

**Report Number:** 2402X64721E-RF-00A

**Report Date:** 2024/11/12

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



**Reviewed By:** Pedro Yun

Title: Project Engineer



**Approved By:** Ivan Cao

Title: EMC Manager

---

**Bay Area Compliance Laboratories Corp. (Dongguan)**  
No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

## CONTENTS

|  |           |
|--|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                       | <b>4</b>  |
| <b>1. GENERAL INFORMATION .....</b>                          | <b>5</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 5         |
| 1.2 ACCESSORY INFORMATION.....                               | 5         |
| 1.3 ANTENNA INFORMATION DETAIL▲ .....                        | 5         |
| 1.4 EQUIPMENT MODIFICATIONS .....                            | 5         |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                      | <b>6</b>  |
| TRANSMITTER OUTPUT POWER .....                               | 6         |
| <b>3. DESCRIPTION OF TEST CONFIGURATION .....</b>            | <b>7</b>  |
| 3.1 TEST FREQUENCY DETAIL .....                              | 7         |
| 3.2 EUT OPERATION CONDITION.....                             | 7         |
| 3.3 EUT EXERCISE SOFTWARE.....                               | 7         |
| 3.4 SUPPORT EQUIPMENT LIST AND DETAILS .....                 | 7         |
| 3.5 SUPPORT CABLE LIST AND DETAILS .....                     | 7         |
| 3.6 BLOCK DIAGRAM OF TEST SETUP .....                        | 8         |
| 3.7 TEST FACILITY.....                                       | 9         |
| 3.8 MEASUREMENT UNCERTAINTY .....                            | 9         |
| <b>4. REQUIREMENTS AND TEST PROCEDURES .....</b>             | <b>10</b> |
| 4.1 TRANSMITTER FREQUENCY STABILITY .....                    | 10        |
| 4.1.1 Applicable Standard.....                               | 10        |
| 4.1.2 EUT Setup Block Diagram .....                          | 10        |
| 4.1.3 Test Procedure .....                                   | 11        |
| 4.1.4 Test Data And Result .....                             | 12        |
| 4.2 TRANSMITTER OUTPUT POWER .....                           | 13        |
| 4.2.1 Applicable Standard.....                               | 13        |
| 4.2.2 EUT Setup Block Diagram .....                          | 13        |
| 4.2.3 Test Procedure .....                                   | 14        |
| 4.2.4 Test Data And Result .....                             | 15        |
| 4.3 OCCUPIED BANDWIDTH & EMISSION MASK.....                  | 18        |
| 4.3.1 Applicable Standard.....                               | 18        |
| 4.3.2 EUT Setup Block Diagram .....                          | 19        |
| 4.3.3 Test Procedure .....                                   | 19        |
| 4.3.4 Test Data And Result .....                             | 20        |
| 4.4 TRANSMITTER UNWANTED EMISSIONS(CONDUCTED).....           | 26        |
| 4.4.1 Applicable Standard.....                               | 26        |
| 4.4.2 EUT Setup Block Diagram .....                          | 26        |

|   |           |
|---|-----------|
| 4.4.3 Test Procedure .....                                | 27        |
| 4.4.4 Test Data And Result .....                          | 28        |
| <b>4.5 TRANSIENT FREQUENCY BEHAVIOR .....</b>             | <b>33</b> |
| 4.5.1 Applicable Standard.....                            | 33        |
| 4.5.2 EUT Setup Block Diagram .....                       | 33        |
| 4.5.3 Test Procedure .....                                | 34        |
| 4.5.4 Test Data And Result .....                          | 35        |
| <b>4.6 MODULATION CHARACTERISTICS. ....</b>               | <b>37</b> |
| 4.6.1 Applicable Standard.....                            | 37        |
| 4.6.2 Test Procedure .....                                | 37        |
| 4.6.3 Test Data And Result .....                          | 39        |
| <b>4.7 TRANSMITTER UNWANTED EMISSIONS(RADIATED) .....</b> | <b>43</b> |
| 4.7.1 Applicable Standard.....                            | 43        |
| 4.7.2 Test setup: .....                                   | 44        |
| 4.7.3 Test Procedure: .....                               | 45        |
| 4.7.4 Test Data And Result .....                          | 46        |
| <b>EXHIBIT A - EUT PHOTOGRAPHS.....</b>                   | <b>50</b> |
| <b>EXHIBIT B - TEST SETUP PHOTOGRAPHS .....</b>           | <b>51</b> |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number      | Description of Revision | Date of Revision |
|-----------------|--------------------|-------------------------|------------------|
| 1.0             | 2402X64721E-RF-00A | Original Report         | 2024/11/12       |

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

|                                    |   |
|------------------------------------|---|
| EUT Name:                          | Digital FM Transceiver                      |
| EUT Model:                         | Smart Pro-Digital                           |
| Operation Frequency:               | 400-480 MHz                                 |
| Modulation Type:                   | FM, 4FSK                                    |
| Channel Spacing:                   | 12.5 kHz                                    |
| Rated Output Power:<br>(Conducted) | High Power Level: 5W<br>Low Power Level: 1W |
| Rated Input Voltage:               | DC 7.4V from battery or DC 12V from Charger |
| Serial Number:                     | 2RUA-1                                      |
| EUT Received Date:                 | 2024/9/19                                   |
| EUT Received Status:               | Good  |

1.2 Accessory Information

| Accessory Description | Manufacturer  | Model                | Parameters   |
|-----------------------|---------------|----------------------|--|
| Adapter               | Unknown       | RSF-DY080B-1201000US | Input: 100-240Vac 50/60Hz 0.3A<br>Output: 12Vdc 1A |
| Charger               | Verteldigital | VDC-711              | Input: 12V-0.9A<br>Output: 500mAh                  |

1.3 Antenna Information Detail▲

| Antenna Manufacturer           | Antenna Type | input impedance (Ohm) | Frequency Range | Antenna Gain |
|--------------------------------|--------------|-----------------------|-----------------|--------------|
| Vertel Digital Private Limited | Helical      | 50                    | 400-480MHz      | 0 dBi        |

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

## 2. SUMMARY OF TEST RESULTS

| Standard/Rule(s)             | Description of Test                                | Results   |
|------------------------------|--|-----------|
| §2.1055; §90.213             | Transmitter Frequency Stability                    | Compliant |
| §2.1046; §90.205             | Transmitter Output Power                           | Compliant |
| §2.1049;<br>§90.209; §90.210 | Occupied Bandwidth & Emission Mask                 | Compliant |
| §2.1051;§90.210              | Transmitter Unwanted Emissions at Antenna Terminal | Compliant |
| §2.1053;§90.210              | Transmitter Unwanted Emissions-Radiated            | Compliant |
| §90.214                      | Transient Frequency Behavior                       | Compliant |
| §2.1047                      | Modulation Characteristic                          | Compliant |

### 3. DESCRIPTION OF TEST CONFIGURATION

#### 3.1 Test Frequency Detail

Per C63.26-2015, section 5.1, the lowest frequency, middle frequency, and highest frequency was performed the test as below:

| Modulation/<br>Channel<br>Bandwidth | Test Channel | Frequency<br>(MHz) | Rule Part   |
|-------------------------------------|--------------|--------------------|-------------|
| FM 12.5kHz                          | Lowest       | 400.0125           | For Federal |
|                                     | Middle       | 453.2125           | For Part 90 |
|                                     | Highest      | 479.9875           | For Part 90 |
| 4FSK 12.5kHz                        | Lowest       | 400.0125           | For Federal |
|                                     | Middle       | 453.2125           | For Part 90 |
|                                     | Highest      | 479.9875           | For Part 90 |

#### 3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

#### 3.3 EUT Exercise Software

No software was used during test.


#### 3.4 Support Equipment List and Details

| Manufacturer | Description | Model   | Serial Number |
|--------------|-------------|---------|---------------|
| Fenfei       | terminal    | N-J-10W | S1            |

#### 3.5 Support Cable List and Details

| Cable Description | Shielding<br>Type | Ferrite Core | Length<br>(m) | From Port | To |
|-------------------|-------------------|--------------|---------------|-----------|----|
| /                 | /                 | /            | /             | /         | /  |

### 3.6 Block Diagram of Test Setup

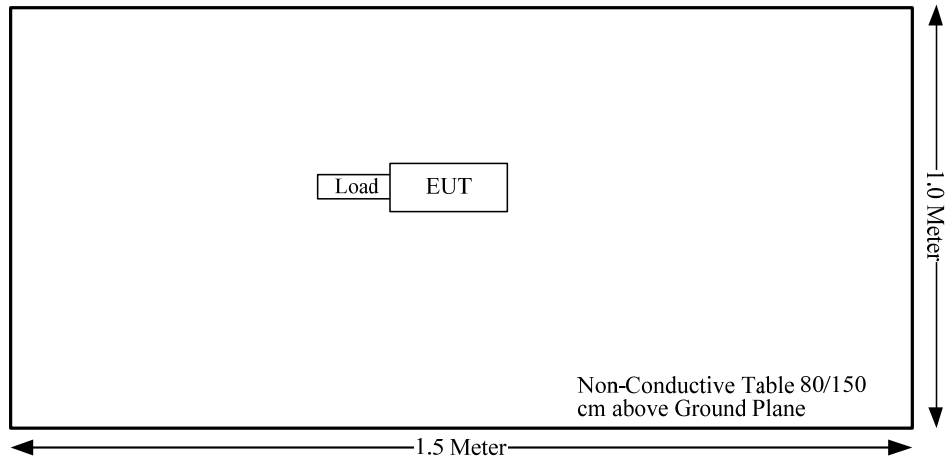



### 3.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

### 3.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                     | Measurement Uncertainty |
|-------------------------------|-------------------------|
| Occupied Channel Bandwidth    | ±5 %                    |
| RF output power, conducted    | ±0.61dB                 |
| RF Frequency                  | $0.082 \times 10^{-6}$  |
| Unwanted Emissions, radiated  | ±3.62 dB                |
| Unwanted Emissions, conducted | ±2.47 dB                |
| Temperature                   | ±1 °C                   |
| Humidity                      | ±5%                     |
| DC and low frequency voltages | ±0.4%                   |
| Duty Cycle                    | 1%                      |

## 4. REQUIREMENTS AND TEST PROCEDURES

### 4.1 Transmitter Frequency Stability

#### 4.1.1 Applicable Standard


FCC §90.213

In the 150-174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

In the 150-174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.

In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

#### 4.1.2 EUT Setup Block Diagram

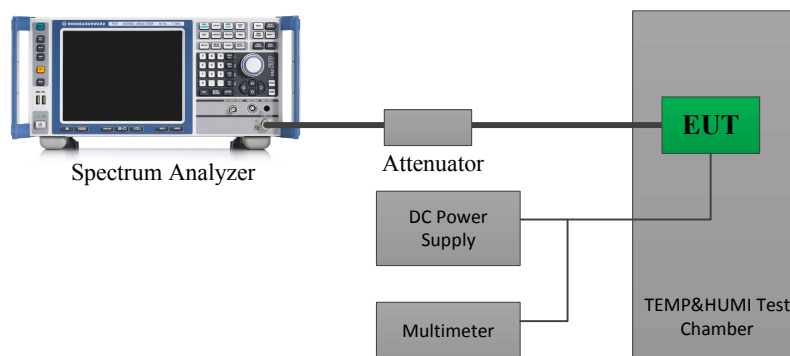

#### 4.1.3 Test Procedure

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

4.1.4 Test Data And Result

|                |          |              |              |
|----------------|----------|--------------|--------------|
| Serial Number: | 2RUA-1   | Test Date:   | 2024/10/11   |
| Test Site:     | RF       | Test Mode:   | Transmitting |
| Tester:        | Stu Song | Test Result: | Pass         |

| Environmental Conditions: |      |                           |    |                        |       |
|---------------------------|------|---------------------------|----|------------------------|-------|
| Temperature:<br>(°C)      | 25.1 | Relative Humidity:<br>(%) | 47 | ATM Pressure:<br>(kPa) | 101.5 |

Test Equipment List and Details:

| Manufacturer | Description            | Model      | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------|------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer      | FSV40      | 101947        | 2024/9/5         | 2025/9/4             |
| Unknown      | Coaxial Cable          | C-NJNJ-50  | C-0200-03     | 2024/8/23        | 2025/8/22            |
| Huaxiang     | Coaxial Attenuator     | DTS250-30  | 11022109      | 2024/6/7         | 2025/6/6             |
| BACL         | TEMP&HUMI Test Chamber | BTH-150-40 | 30173         | 2024/9/6         | 2025/9/5             |
| All-sun      | Multimeter             | EM305A     | 8348897       | 2024/8/16        | 2025/8/15            |
| TDK-Lambda   | DC Power Supply        | Z+60-14    | F-08-EM038-1  | N/A              | N/A                  |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

| Un-modulation, $f_c = 453.2125\text{MHz}$ |                 |             |                 |       |
|---|-----------------|-------------|-----------------|-------|
| Temperature                               | Voltage         | Measured    | Frequency Error | Limit |
| °C  | V <sub>DC</sub> | MHz         | ppm             | ppm   |
| -30                                       | 7.4             | 453.2129407 | 0.97            | 2.5   |
| -20                                       |                 | 453.2129172 | 0.92            |       |
| -10                                       |                 | 453.2128924 | 0.87            |       |
| 0   |                 | 453.2128688 | 0.81            |       |
| 10  |                 | 453.2128433 | 0.76            |       |
| 20  |                 | 453.2128180 | 0.70            |       |
| 30  |                 | 453.2127956 | 0.65            |       |
| 40  |                 | 453.2127681 | 0.59            |       |
| 50  |                 | 453.2127425 | 0.54            |       |
| 20  | 6.5             | 453.2128574 | 0.79            |       |
| 20  | 8.2             | 453.2127708 | 0.60            |       |

Note: the Operation Voltage range was provided by manufacturer ▲.

## 4.2 Transmitter Output Power

### 4.2.1 Applicable Standard

FCC §90.205

(d) 150-174 MHz. (1) The maximum allowable station ERP is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 1. Applicants requesting an ERP in excess of that listed in table 1 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.


(h) 450-470 MHz.

(1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2. Applicants requesting an ERP in excess of that listed in table 2 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

(2) Applications for stations where special circumstances exist that make it necessary to deviate from the ERP and antenna heights in Table 2 will be submitted to the frequency coordinator accompanied by a technical analysis, based upon generally accepted engineering practices and standards, that demonstrates that the requested station parameters will not produce a signal strength in excess of 39 dBu at any point along the edge of the requested service area. The coordinator may then recommend any ERP appropriate to meet this condition.

(3) An applicant for a station with a service area radius greater than 32 km (20 mi) must justify the requested service area radius, which may be authorized only in accordance with table 2, note 4. For base stations with service areas greater than 80 km, all operations 80 km or less from the base station will be on a primary basis and all operations outside of 80 km from the base station will be on a secondary basis and will be entitled to no protection from primary operations.

### 4.2.2 EUT Setup Block Diagram

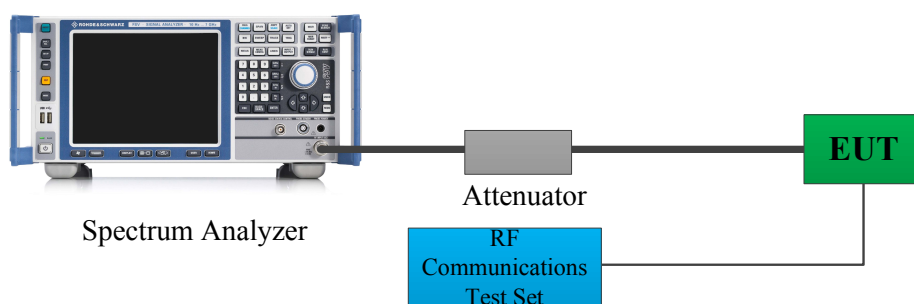

**Note:** The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

### 4.2.3 Test Procedure

C63.26-2015, Clause 5.2.3.3

This procedure can be used to measure the peak power in either a CW-like or noise-like narrowband RF signal. The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 2 \times$  OBW.
- d) Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the peak amplitude level

4.2.4 Test Data And Result

|                |          |              |              |
|----------------|----------|--------------|--------------|
| Serial Number: | 2RUA-1   | Test Date:   | 2024/10/11   |
| Test Site:     | RF       | Test Mode:   | Transmitting |
| Tester:        | Stu Song | Test Result: | Pass         |

| Environmental Conditions: |      |                           |    |                        |       |
|---------------------------|------|---------------------------|----|------------------------|-------|
| Temperature:<br>(°C)      | 25.1 | Relative Humidity:<br>(%) | 47 | ATM Pressure:<br>(kPa) | 101.5 |

Test Equipment List and Details:


| Manufacturer | Description                | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------|----------------------------|-----------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer          | FSV40     | 101947        | 2024/9/5         | 2025/9/4             |
| Unknown      | Coaxial Cable              | C-NJNJ-50 | C-0200-03     | 2024/8/23        | 2025/8/22            |
| Huaxiang     | Coaxial Attenuator         | DTS250-30 | 11022109      | 2024/6/7         | 2025/6/6             |
| HP           | RF Communications Test Set | 8920A     | 3438A05201    | 2023/10/18       | 2024/10/17           |

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

| Channel Separation | Test Modulation | Test Channel | Test Frequency (MHz) | Conducted Output Power (dBm) |                 | Limit (dBm)      |                 |
|--------------------|-----------------|--------------|----------------------|------------------------------|-----------------|------------------|-----------------|
|                    |                 |              |                      | High Power Level             | Low Power Level | High Power Level | Low Power Level |
| 12.5kHz            | FM              | Low          | 400.0125             | 36.70                        | 30.43           | 37.78            | 30.79           |
|                    |                 | Middle       | 453.2125             | 36.82                        | 30.54           | 37.78            | 30.79           |
|                    |                 | High         | 479.9875             | 36.31                        | 30.60           | 37.78            | 30.79           |
| 12.5kHz            | 4FSK            | Low          | 400.0125             | 36.90                        | 30.42           | 37.78            | 30.79           |
|                    |                 | Middle       | 453.2125             | 36.89                        | 30.64           | 37.78            | 30.79           |
|                    |                 | High         | 479.9875             | 36.43                        | 30.73           | 37.78            | 30.79           |


Note:  
 The high rated power level is 5W(37dBm), and low rated power level is 1W(30dBm).  
 The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

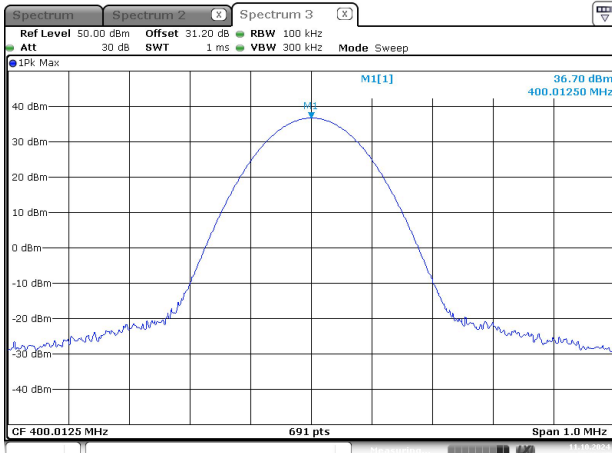**FM, 12.5kHz:****Low Channel, 400.0125 MHz High Power**


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:18:07

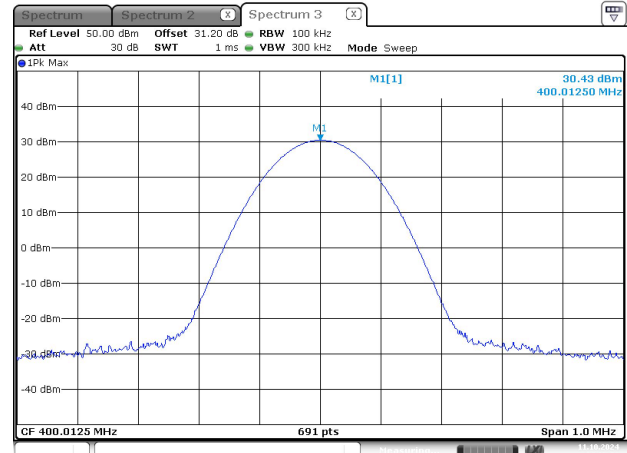**Low Channel, 400.0125 MHz Low Power**


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:18:31

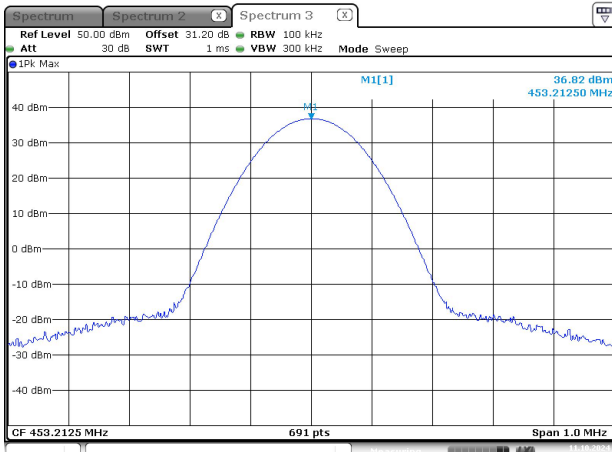**Middle Channel, 453.2125 MHz High Power**


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:20:47

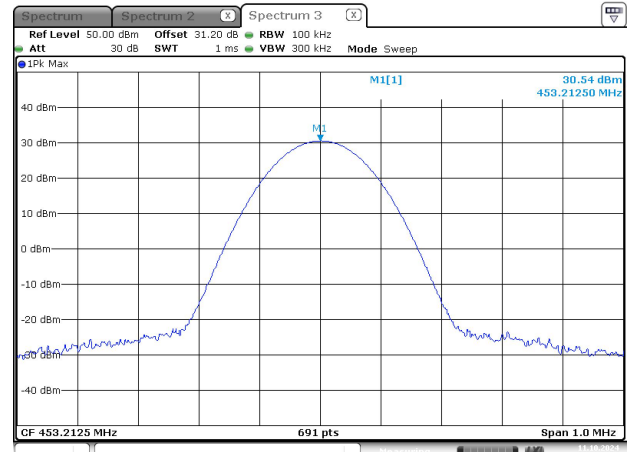**Middle Channel, 453.2125 MHz Low Power**

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:21:08

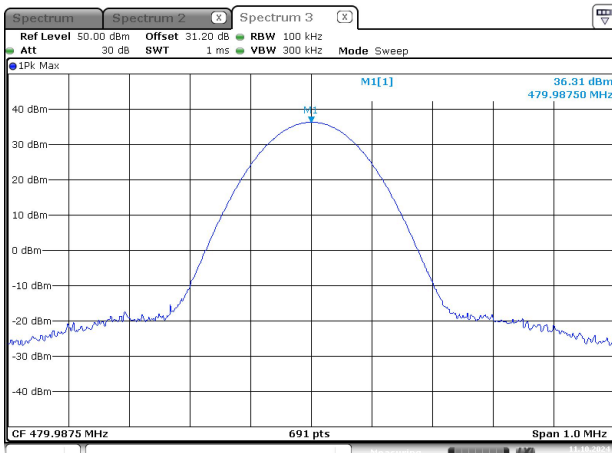
**High Channel, 479.9875 MHz High Power**

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:24:07

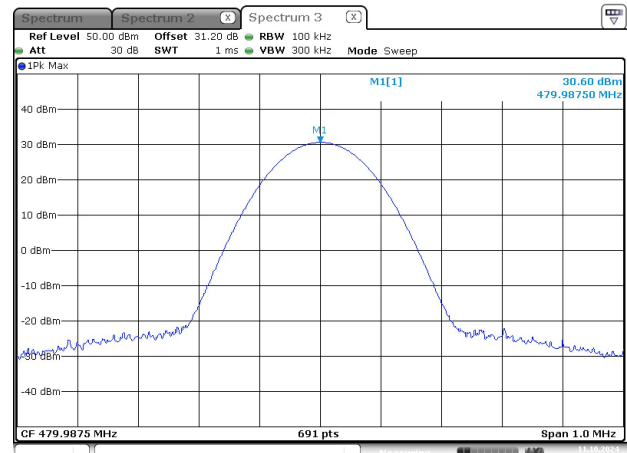
**High Channel, 479.9875 MHz Low Power**

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:24:23

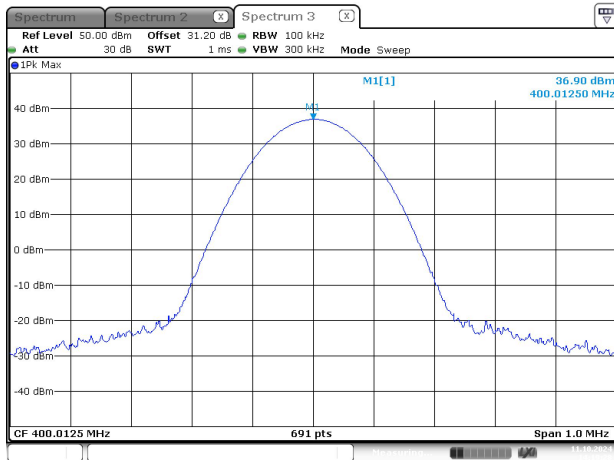


**4FSK, 12.5kHz:****Low Channel, 400.0125 MHz High Power**


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:19:28

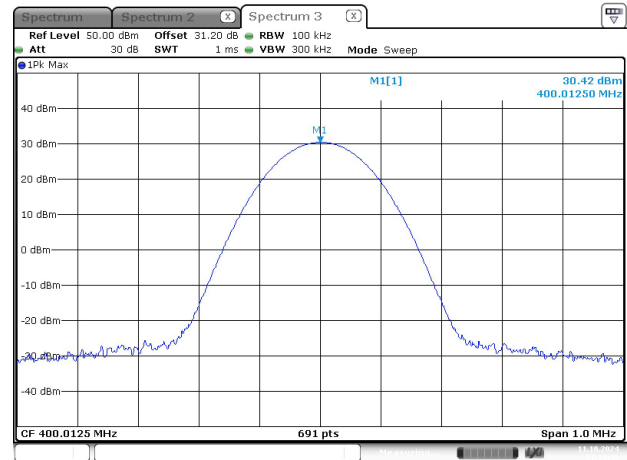**Low Channel, 400.0125 MHz Low Power**


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:19:48

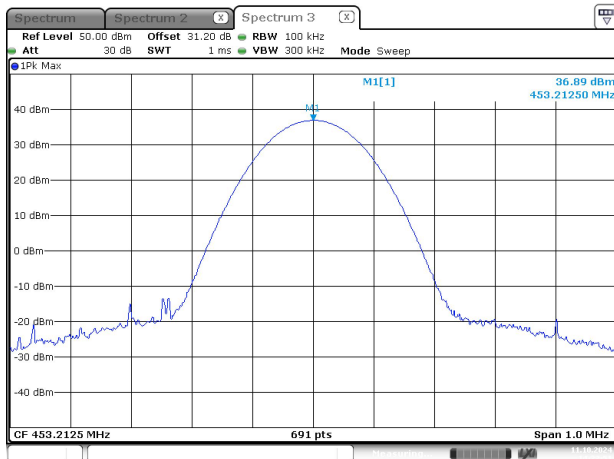**Middle Channel, 453.2125 MHz High Power**


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:22:51

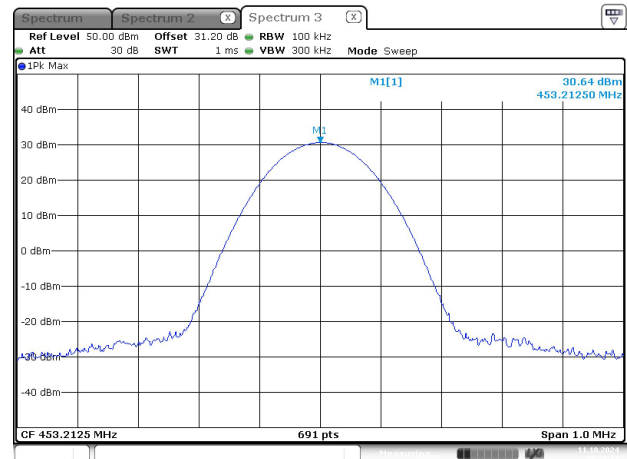**Middle Channel, 453.2125 MHz Low Power**

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:23:12

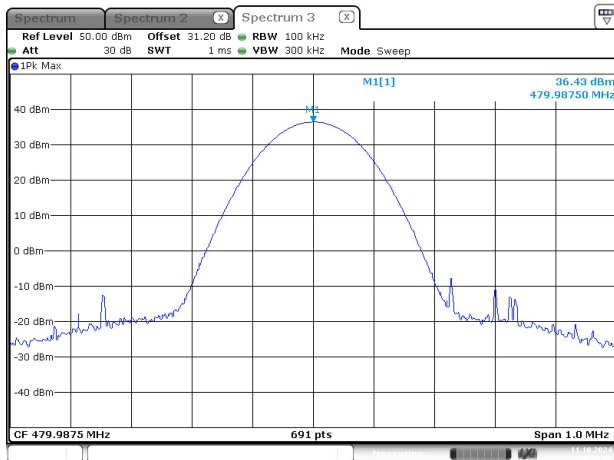**High Channel, 479.9875 MHz High Power**

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:25:00

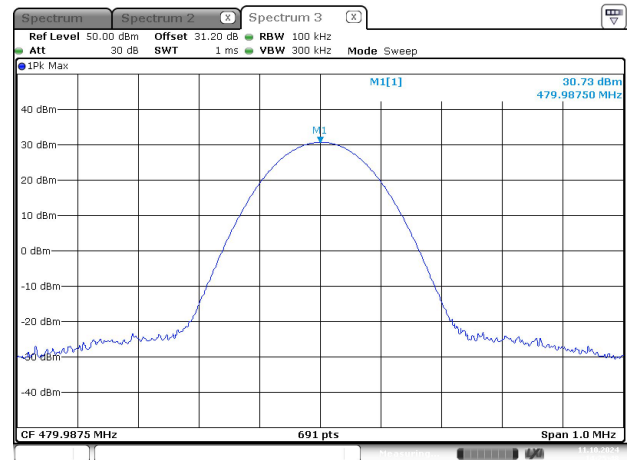**High Channel, 479.9875 MHz Low Power**

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 14:25:48

### 4.3 Occupied Bandwidth & Emission Mask

#### 4.3.1 Applicable Standard

FCC §90.209

(a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.


(b) (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table: STANDARD CHANNEL SPACING/BANDWIDTH

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

### 4.3.2 EUT Setup Block Diagram

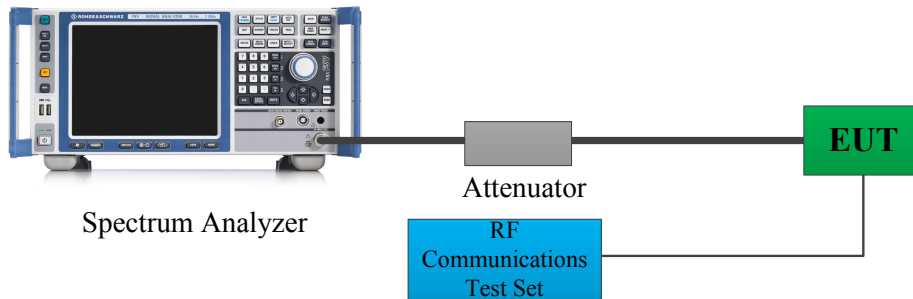

**Note:** The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

### 4.3.3 Test Procedure

According to ANSI C63.26-2015 Section 5.4.4:

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- Set the detection mode to peak, and the trace mode to max-hold.
- If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

According to ANSI C63.26-2015 Section 5.7.3:

- See Annex I for example emission mask plots.

4.3.4 Test Data And Result

|                |          |              |              |
|----------------|----------|--------------|--------------|
| Serial Number: | 2RUA-1   | Test Date:   | 2024/10/12   |
| Test Site:     | RF       | Test Mode:   | Transmitting |
| Tester:        | Stu Song | Test Result: | Pass         |

| Environmental Conditions: |      |                           |    |                        |       |
|---------------------------|------|---------------------------|----|------------------------|-------|
| Temperature:<br>(°C)      | 25.6 | Relative Humidity:<br>(%) | 52 | ATM Pressure:<br>(kPa) | 100.9 |

Test Equipment List and Details:

| Manufacturer | Description                | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------|----------------------------|-----------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer          | FSU 26    | 200160/026    | 2024/9/5         | 2025/9/4             |
| Unknown      | Coaxial Cable              | C-NJNJ-50 | C-0200-03     | 2024/8/23        | 2025/8/22            |
| Huaxiang     | Coaxial Attenuator         | DTS250-30 | 11022109      | 2024/6/7         | 2025/6/6             |
| HP           | RF Communications Test Set | 8920A     | 3438A05201    | 2023/10/18       | 2024/10/17           |

*\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

**Bandwidth:**

| Test Mode       | Test Channel | Test Frequency (MHz) | High Power Level             |                               | Low Power Level              |                               |
|-----------------|--------------|----------------------|------------------------------|-------------------------------|------------------------------|-------------------------------|
|                 |              |                      | 99% Occupied Bandwidth (kHz) | 26dB Emission Bandwidth (kHz) | 99% Occupied Bandwidth (kHz) | 26dB Emission Bandwidth (kHz) |
| FM<br>12.5kHz   | Low          | 400.0125             | 9.936                        | 10.401                        | 9.936                        | 10.401                        |
|                 | Middle       | 453.2125             | 9.936                        | 10.321                        | 9.936                        | 10.321                        |
|                 | High         | 479.9875             | 9.936                        | 10.321                        | 9.936                        | 10.321                        |
| 4FSK<br>12.5kHz | Low          | 400.0125             | 7.692                        | 10.561                        | 7.532                        | 10.080                        |
|                 | Middle       | 453.2125             | 7.853                        | 9.840                         | 7.853                        | 9.599                         |
|                 | High         | 479.9875             | 7.532                        | 9.519                         | 7.452                        | 9.679                         |

Emission Mask please refer to the plots.

Note:

*Emission bandwidth was based on calculation method instead of measurement.*

*Emission Designator: Per CFR 47 §2.201 & §2.202,  $BW = 2M + 2D$*

**For FM Mode (Channel Spacing: 12.5 kHz)**

*Emission Designator: 11K0F3E*

*In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.*

*$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$*

*F3E portion of the designator represents an FM voice transmission*

*Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.*

**For Digital Mode (Channel Spacing: 12.5 kHz)**

*Emission Designator: 7K60F1D and 7K60F1E*



*The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).*

*F1D and F1E portion of the designator indicates digital information.*

*Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.*

## FM, 12.5kHz, High Power:



### Low Channel

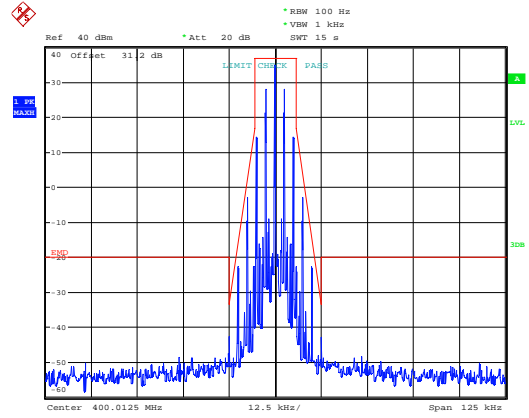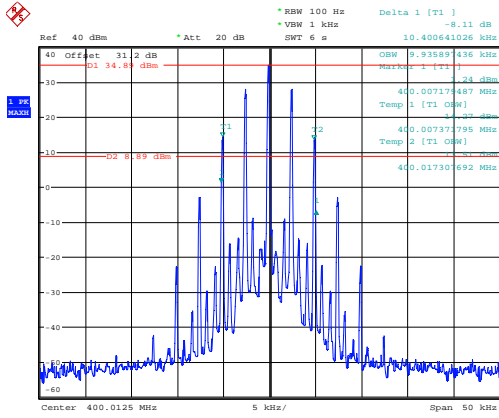

ProjectNo.:2402X64721E-RF Tester:Stu Song  
 Date: 12.OCT.2024 13:42:30

ProjectNo.:2402X64721E-RF Tester:Stu Song  
 Date: 12.OCT.2024 14:11:10



### Middle Channel

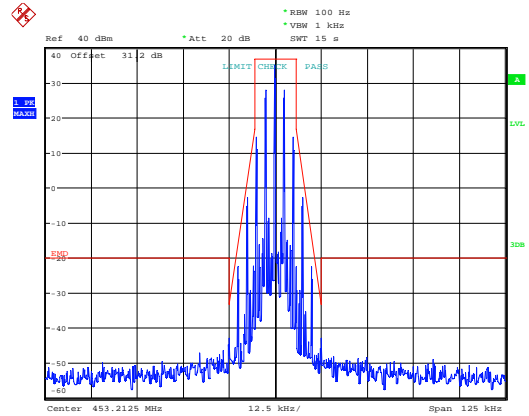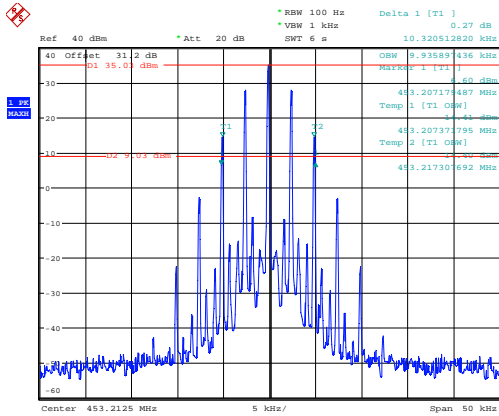

ProjectNo.:2402X64721E-RF Tester:Stu Song  
 Date: 12.OCT.2024 13:44:49

ProjectNo.:2402X64721E-RF Tester:Stu Song  
 Date: 12.OCT.2024 14:24:35

### High Channel

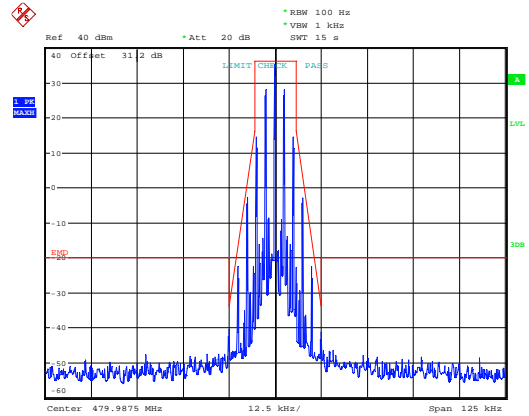
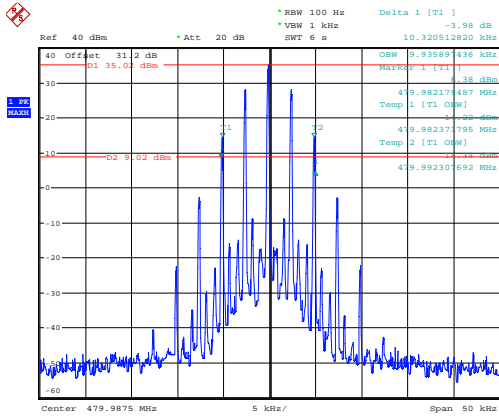


ProjectNo.:2402X64721E-RF Tester:Stu Song  
 Date: 12.OCT.2024 13:47:06

ProjectNo.:2402X64721E-RF Tester:Stu Song  
 Date: 12.OCT.2024 14:36:25

FM, 12.5kHz, Low Power:



Low Channel

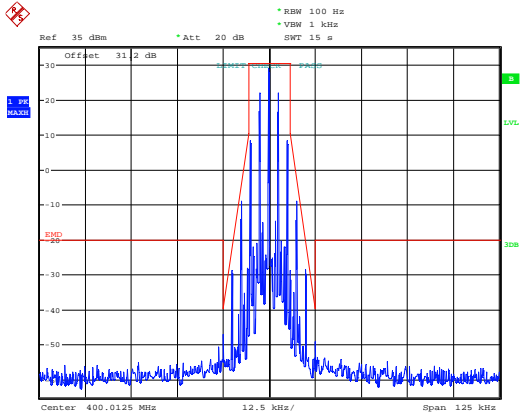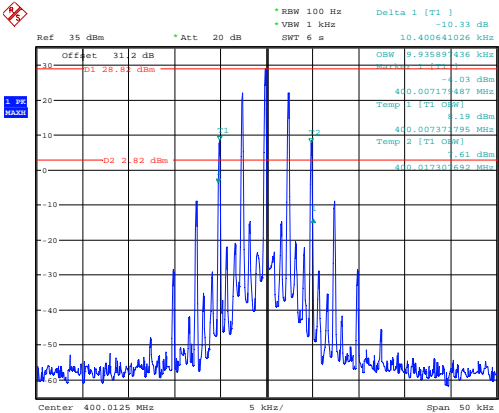

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 13:43:36

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:13:36



Middle Channel

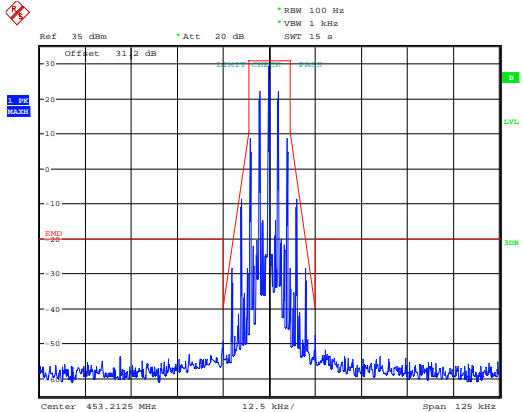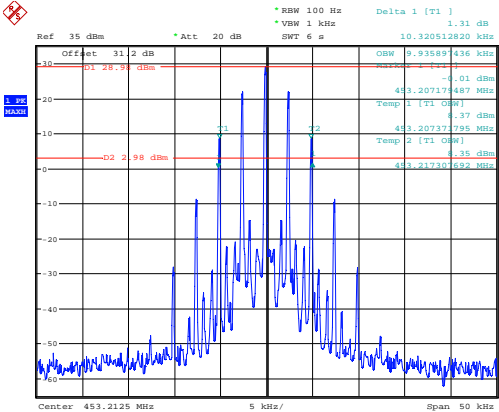

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 13:45:51

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:27:37


High Channel

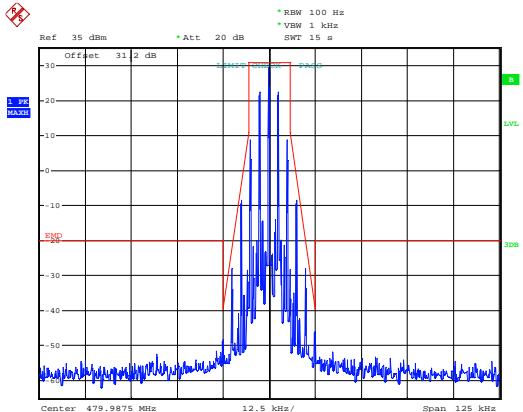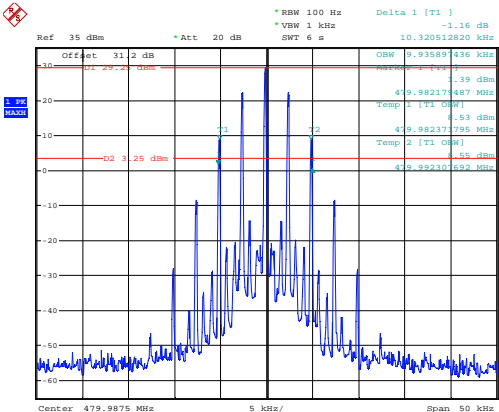

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 13:48:26

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:38:13

### Low Channel

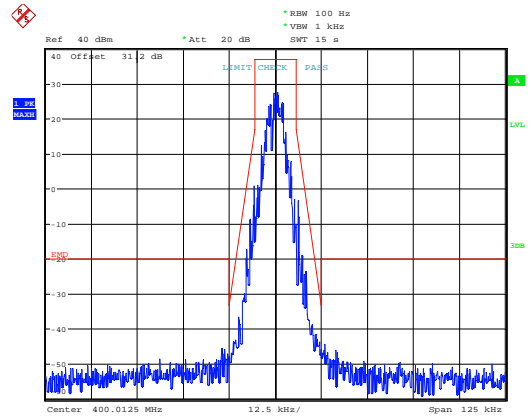

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:18:46

Ref 40 dBm Att 20 dB SNT 15 s

RBW 100 kHz VBW 1 kHz

40 Offset 31.2 dB

LIMIT CHECK PASS

dB

Center 453.2125 MHz 12.5 kHz/ Span 125 kHz

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:30:37

Ref 40 dBm Att 20 dB \*RBW 100 Hz \*VBW 1 kHz SMT 15 s

40 Offset 31.2 dB

LIMIT CHECK PASS

1 PR MAX

dBm


Center 479.9875 MHz 12.5 kHz/ Span 125 kHz

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:41:01




## 4FSK, 12.5kHz, Low Power:

## Low Channel

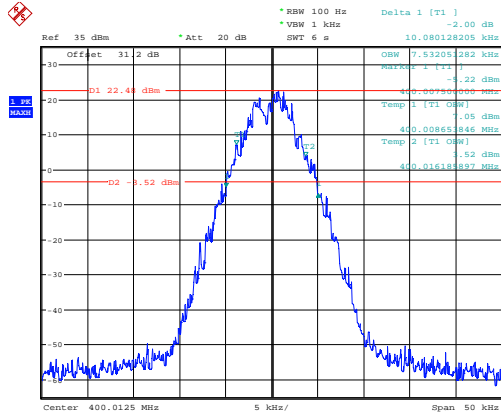


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 13:54:37

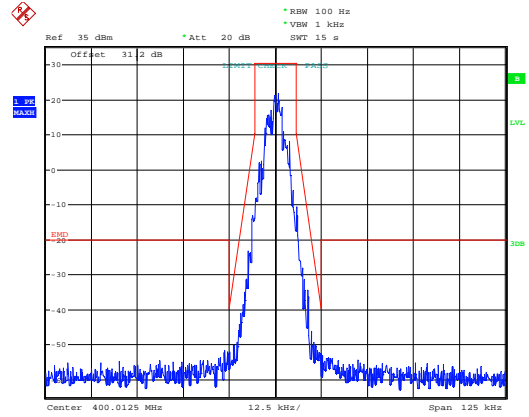


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:22:43

## Middle Channel

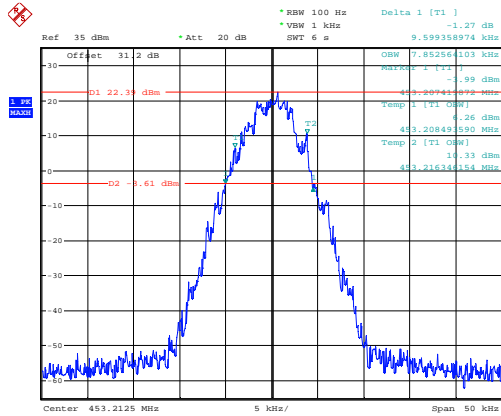


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:00:24

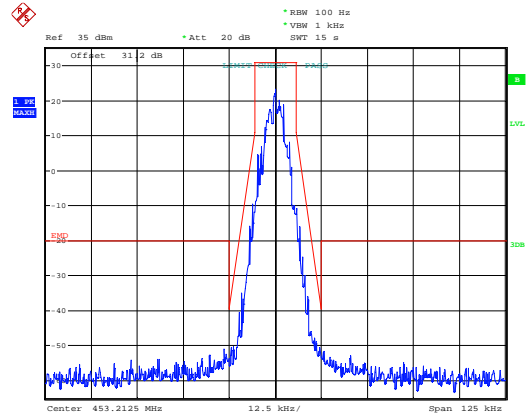


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:32:57

## High Channel

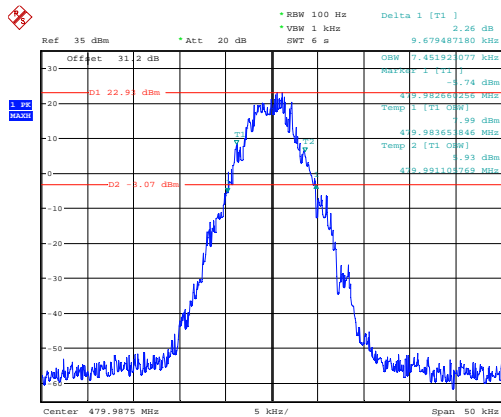

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:07:46

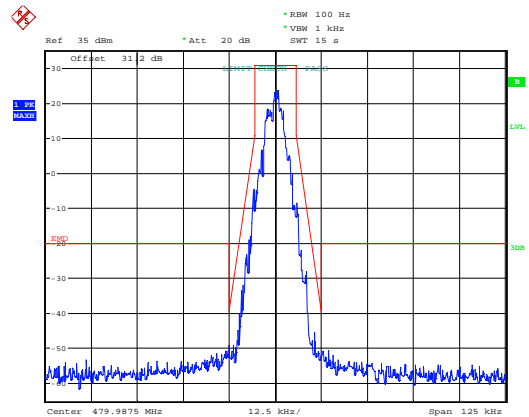

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 12.OCT.2024 14:45:11

#### 4.4 Transmitter Unwanted Emissions(Conducted)


##### 4.4.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88)$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

##### 4.4.2 EUT Setup Block Diagram

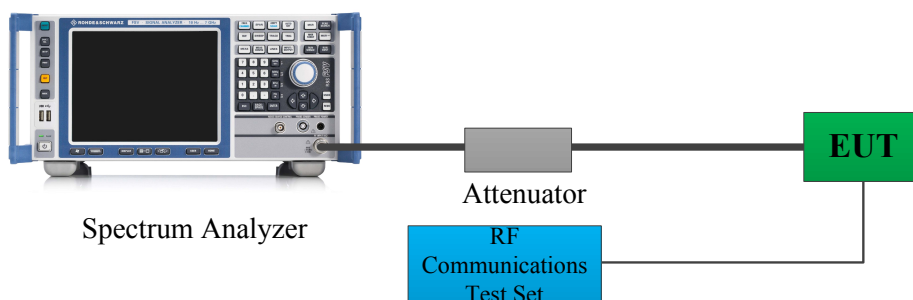

**Note:** The Insertion loss of the RF cable, Attenuators was offset into the Spectrum Analyzer.

#### 4.4.3 Test Procedure

According to ANSI C63.26-2015 Section 5.7.4:

- a) Set the spectrum analyzer start frequency to the lowest frequency generated by the EUT, without going below 9 kHz, and the stop frequency to the lower frequency covered by the measurements previously performed in 5.7.3. As an alternative, the stop frequency can be set to the value specified in 5.1.1, depending on the EUT operating range, if the resulting plot can clearly demonstrate compliance for all frequencies not addressed by the out-of-band emissions measurements performed as per 5.7.3.
- b) When using an average power (rms) detector, ensure that the number of points in the sweep  $\geq 2 \times (\text{span} / \text{RBW})$ . This may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the spectrum analyzer capabilities. This requirement does not apply to peak-detected power measurements. When average power is specified by the applicable regulation, a peak-detector can be utilized for preliminary measurements to accommodate wider frequency spans. Any emissions found in the preliminary measurement to exceed the applicable limit(s) shall be further examined using a power averaging (rms) detector with the minimum number of measurement points as defined above.
- c) The sweep time should be set to auto-couple for performing peak-detector measurements. For measurements that use a power averaging (rms) detector, the sweep time shall be set as described for out-of-band emissions measurements in item d) of 5.7.3.
- d) Identify and measure the highest spurious emission levels in each frequency range. It is not necessary to re-measure the out-of-band emissions as a part of this test. Record the frequencies and amplitudes corresponding to the measured emissions and capture the data plots.
- e) Repeat step b) through step d) for the upper spurious emission frequency range if not already captured by a wide span measurement performed as per the alternative provided in step a). The upper frequency for this measurement is defined in 5.1.1 as a function of the EUT operating range.
- f) Compare the results with the corresponding limit in the applicable regulation.
- g) The test report shall include the data plots of the measuring instrument display and the measured data.

4.4.4 Test Data And Result

|                |          |              |              |
|----------------|----------|--------------|--------------|
| Serial Number: | 2RUA-1   | Test Date:   | 2024/10/11   |
| Test Site:     | RF       | Test Mode:   | Transmitting |
| Tester:        | Stu Song | Test Result: | Pass         |

| Environmental Conditions: |      |                           |    |                        |       |
|---------------------------|------|---------------------------|----|------------------------|-------|
| Temperature:<br>(°C)      | 25.1 | Relative Humidity:<br>(%) | 47 | ATM Pressure:<br>(kPa) | 101.5 |

Test Equipment List and Details:

| Manufacturer | Description                | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------|----------------------------|-----------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer          | FSV40     | 101947        | 2024/9/5         | 2025/9/4             |
| Unknown      | Coaxial Cable              | C-NJNJ-50 | C-0200-03     | 2024/8/23        | 2025/8/22            |
| Huaxiang     | Coaxial Attenuator         | DTS250-30 | 11022109      | 2024/6/7         | 2025/6/6             |
| HP           | RF Communications Test Set | 8920A     | 3438A05201    | 2023/10/18       | 2024/10/17           |


\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: Test only was performed at high power level.


FM, 12.5kHz:

Low Channel

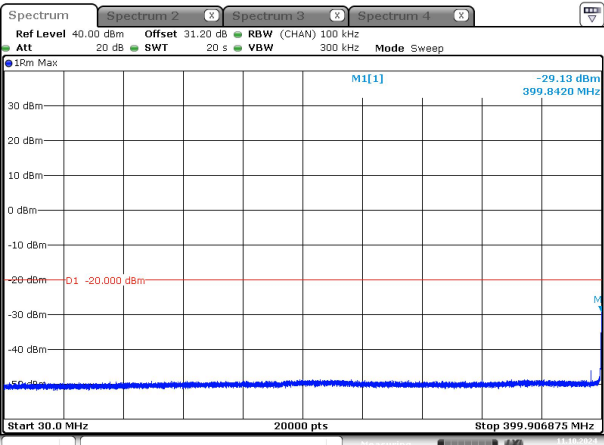


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 16:52:51


Middle Channel

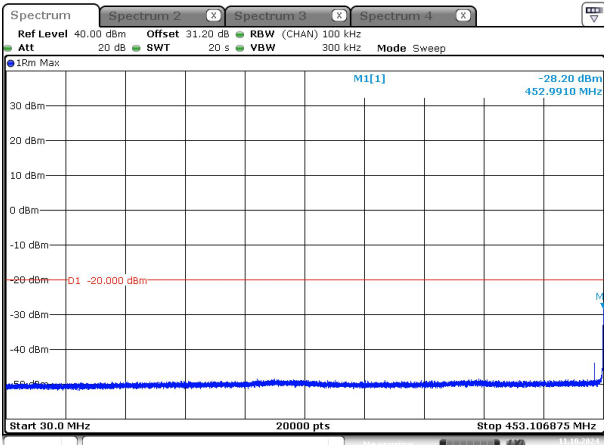


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 17:03:04

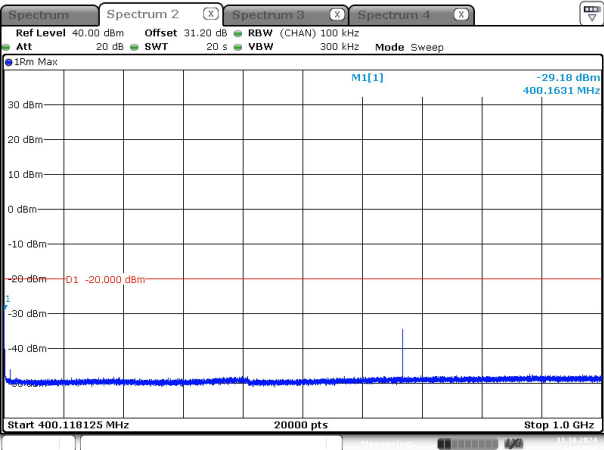


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 16:53:56

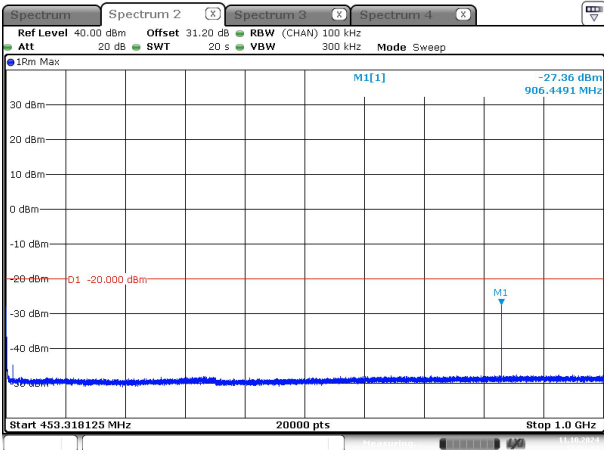

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 17:04:34

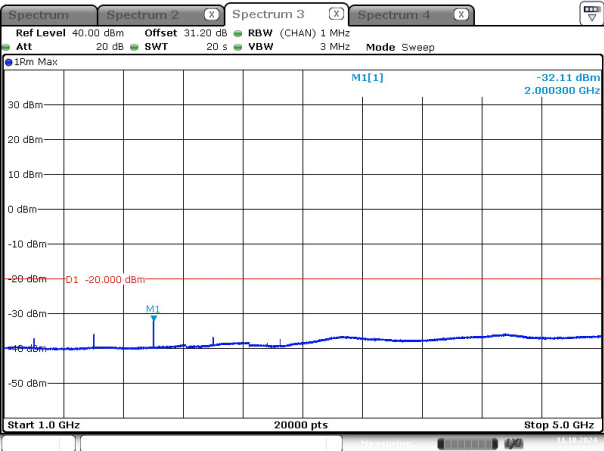


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 16:54:50

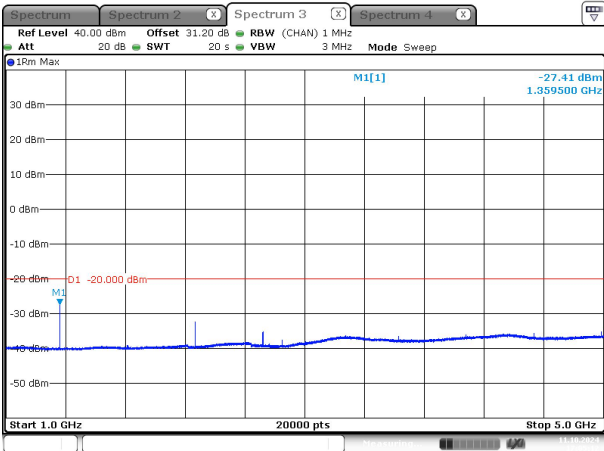


ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 17:05:12


High Channel

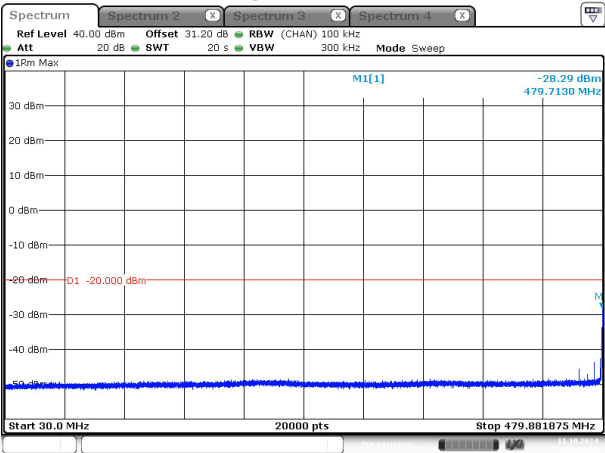

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 17:11:17

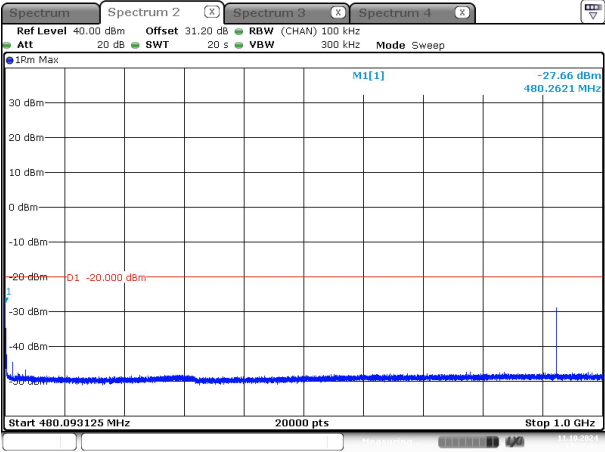

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 17:12:32

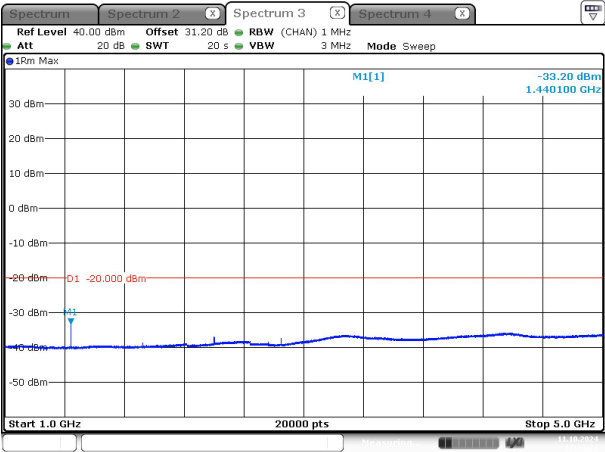

ProjectNo.:2402X64721E-RF Tester:Stu Song  
Date: 11.OCT.2024 17:13:25