

TEST REPORT

Report No.: SHE23100101-01CE Date: 2024-05-31 Page 51 of 69

Figure 31: Hopping Frequency Separation, Hopping Mode, GFSK


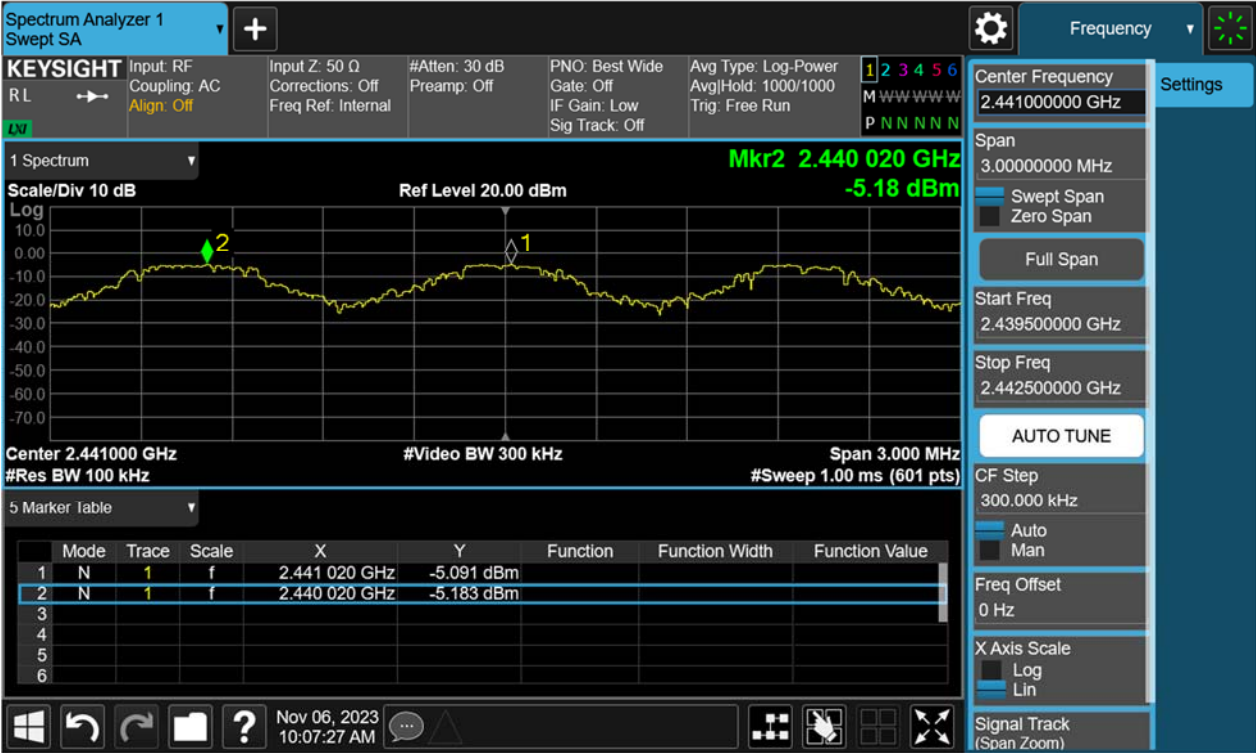


Figure 32: Hopping Frequency Separation, Hopping Mode, $\pi/4$ -DQPSK

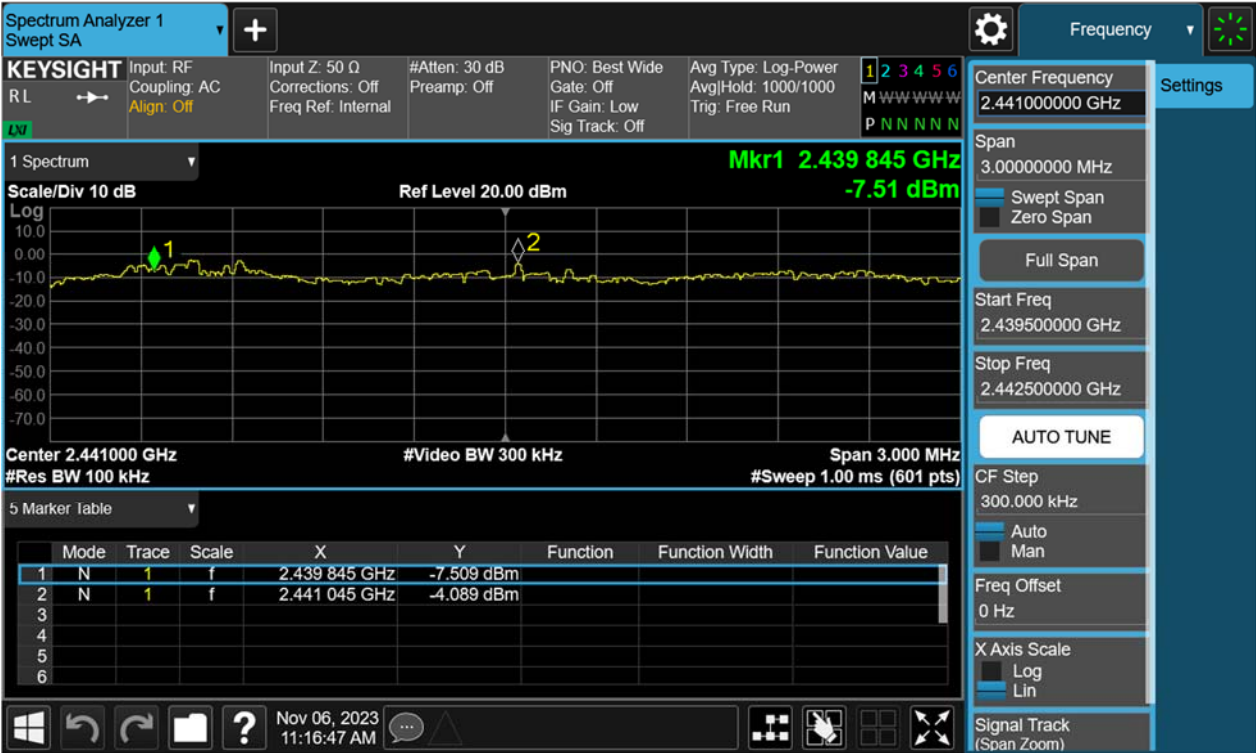


TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 52 of 69

Figure 33: Hopping Frequency Separation, Hopping Mode, 8DPSK

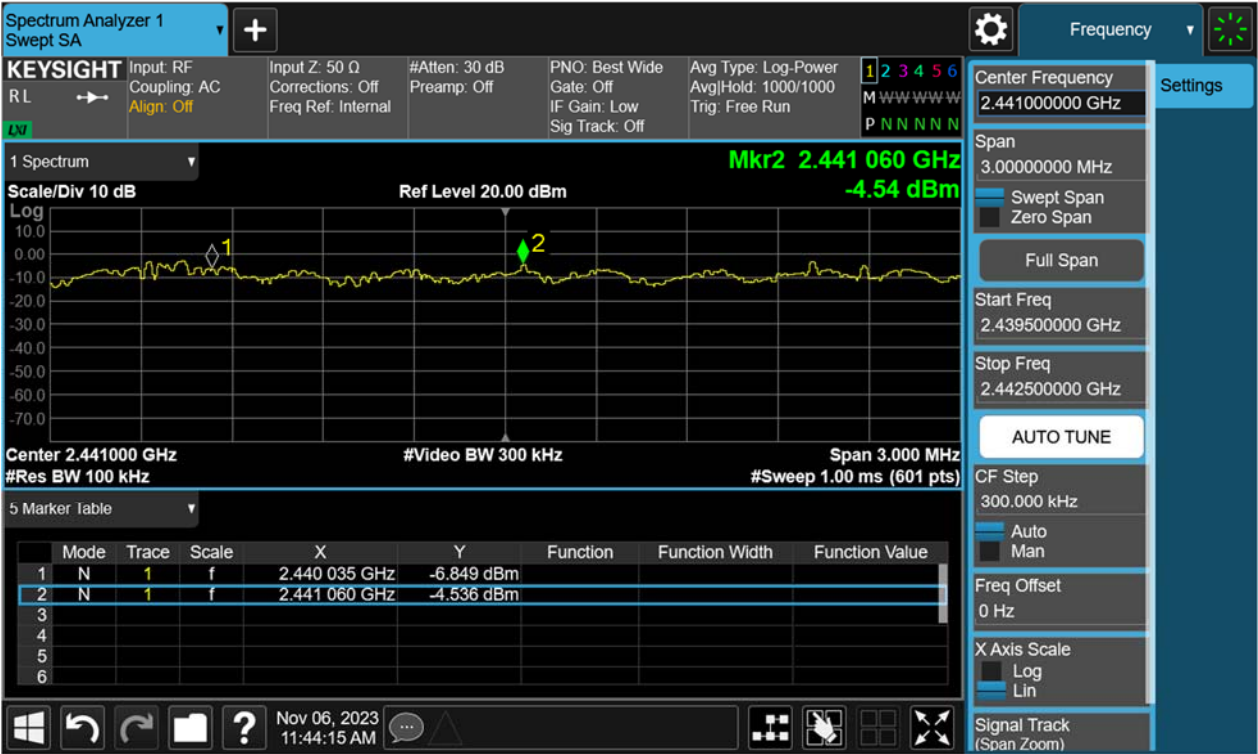

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 53 of 69

4.1.8 Number of Hopping Frequency

RESULT:

PASS

Test standard : FCC Part 15.247(a)(1)(iii)

Requirement : ANSI C63.10-2013, Clause 7.8.3
KDB 558074 D01 v05r02, Clause 2.2

Kind of test site : Shielded room

Test setup

Test Channel : Hopping

Operation Mode : A.1.a.iv

Ambient temperature : 21.3°C

Relative humidity : 42%

Table 4: Number of Hopping Frequency

Mode	Frequency Range	Measured Quantity of Hopping Channel	Limit
GFSK	2400 – 2483.5	79	≥15
π /4-DQPSK	2400 – 2483.5	79	≥15
8-DPSK	2400 – 2483.5	79	≥15

TEST REPORT

Report No.: SHE23100101-01CE Date: 2024-05-31 Page 54 of 69

Figure 34: Number of Hopping Frequency, Hopping Mode, GFSK


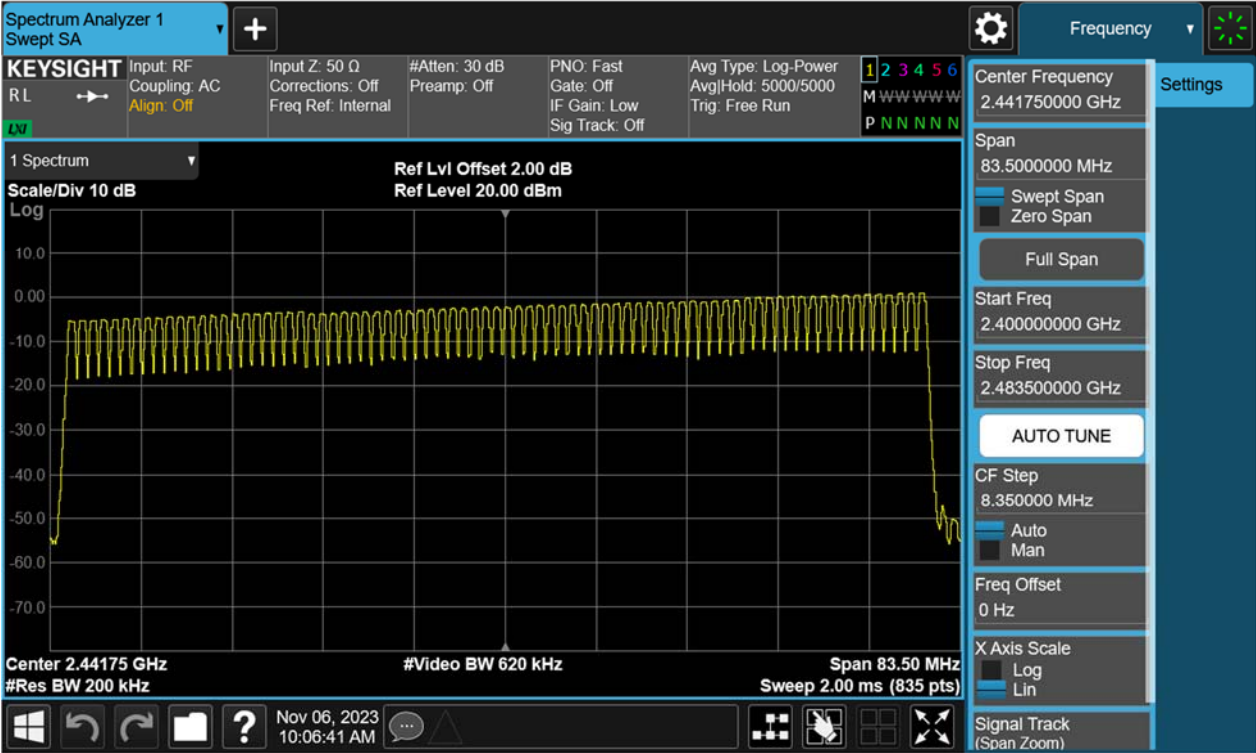


Figure 35: Number of Hopping Frequency, Hopping Mode, $\pi/4$ -DQPSK

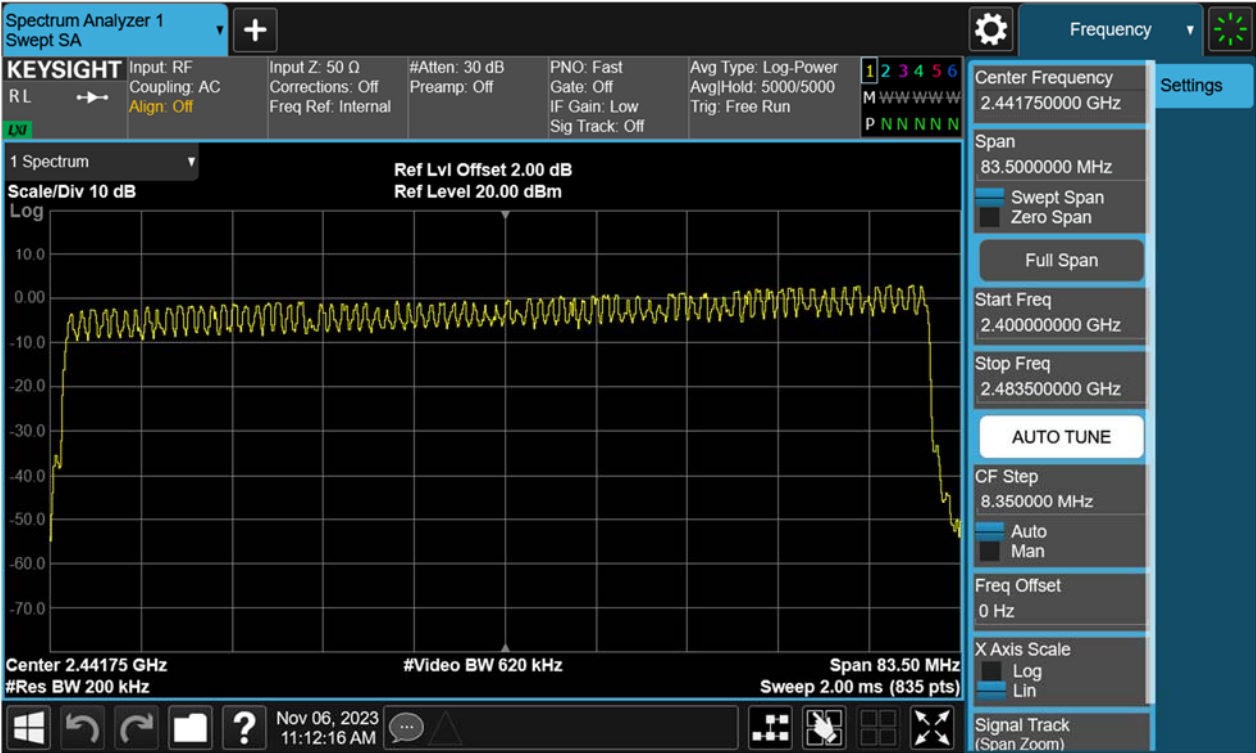

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 55 of 69

Figure 36: Number of Hopping Frequency, Hopping Mode, 8-DPSK



TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 56 of 69

4.1.9 Time of Occupancy

RESULT:

PASS

Test standard : FCC Part 15.247(a)(1)(iii)

Requirement : ANSI C63.10-2013, Clause 7.8.4
KDB 558074 D01 v05r02, Clause 2.2

Kind of test site : Shielded room

Test setup

Test Channel : Middle

Operation Mode : A.1.a

Ambient temperature : 21.3°C

Relative humidity : 42%

Table 5: Time of Occupancy

Mode	Packet Type	Pulse Time (ms)	Total of Dwell Time (ms)	Total of Dwell Time (s)	Limit (s)
GFSK	DH1	0.3800	121.600	0.1216	0.4
	DH3	1.6350	261.600	0.2616	0.4
	DH5	2.8870	307.947	0.3079	0.4
π /4-DQPSK	DH1	0.3867	123.744	0.1237	0.4
	DH3	1.6400	262.400	0.2624	0.4
	DH5	2.8870	307.947	0.3079	0.4
8-DPSK	DH1	0.3867	123.744	0.1237	0.4
	DH3	1.6350	261.600	0.2616	0.4
	DH5	2.8930	308.587	0.3086	0.4

Note:

For DH1 package type:
Total of Dwell = Pulse Time*(1600/2)/Number of Hopping Frequency*Period
Period = 0.4* Number of Hopping Frequency

For DH3 package type:
Total of Dwell = Pulse Time*(1600/4)/Number of Hopping Frequency*Period
Period = 0.4* Number of Hopping Frequency

For DH5 package type:
Total of Dwell = Pulse Time*(1600/6)/Number of Hopping Frequency*Period
Period = 0.4* Number of Hopping Frequency

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 57 of 69

Figure 37: Time of Occupancy, 2441MHz, GFSK DH1



Figure 38: Time of Occupancy, 2441MHz, GFSK DH3



TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 58 of 69

Figure 39: Time of Occupancy, 2441MHz, GFSK DH5


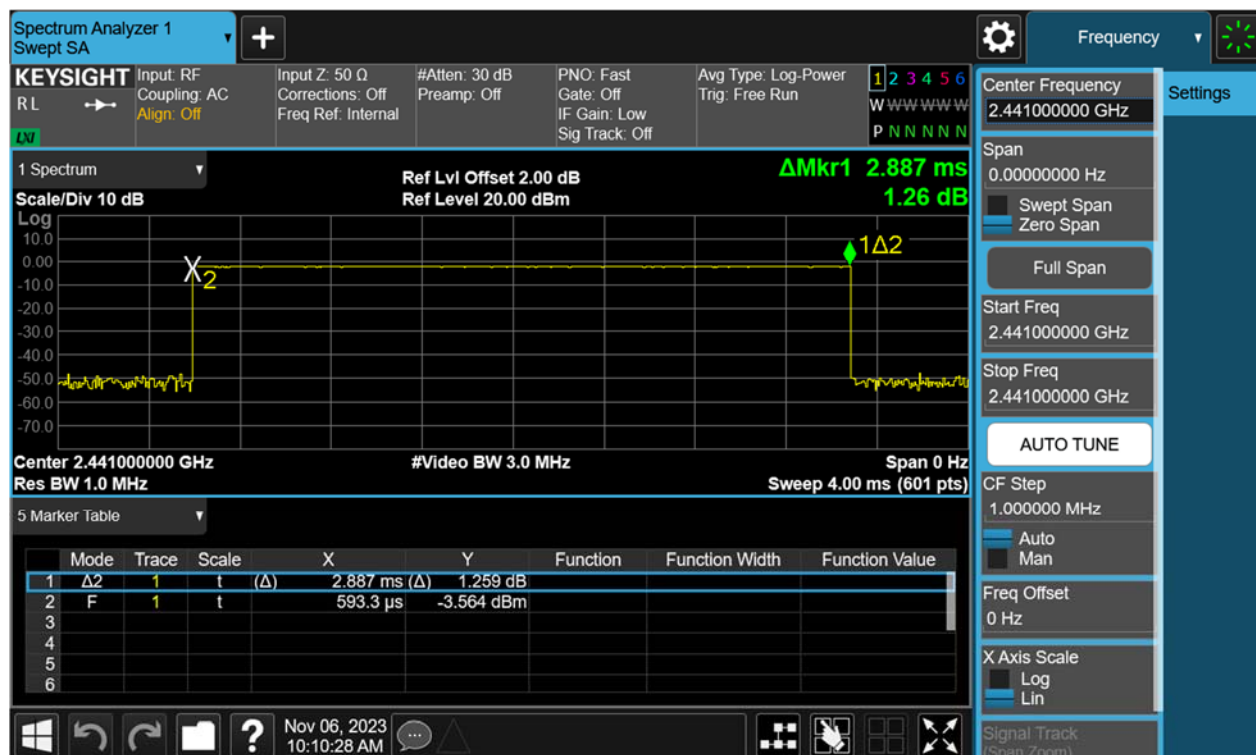


Figure 40: Time of Occupancy, 2441MHz, $\pi/4$ -DQPSK DH1

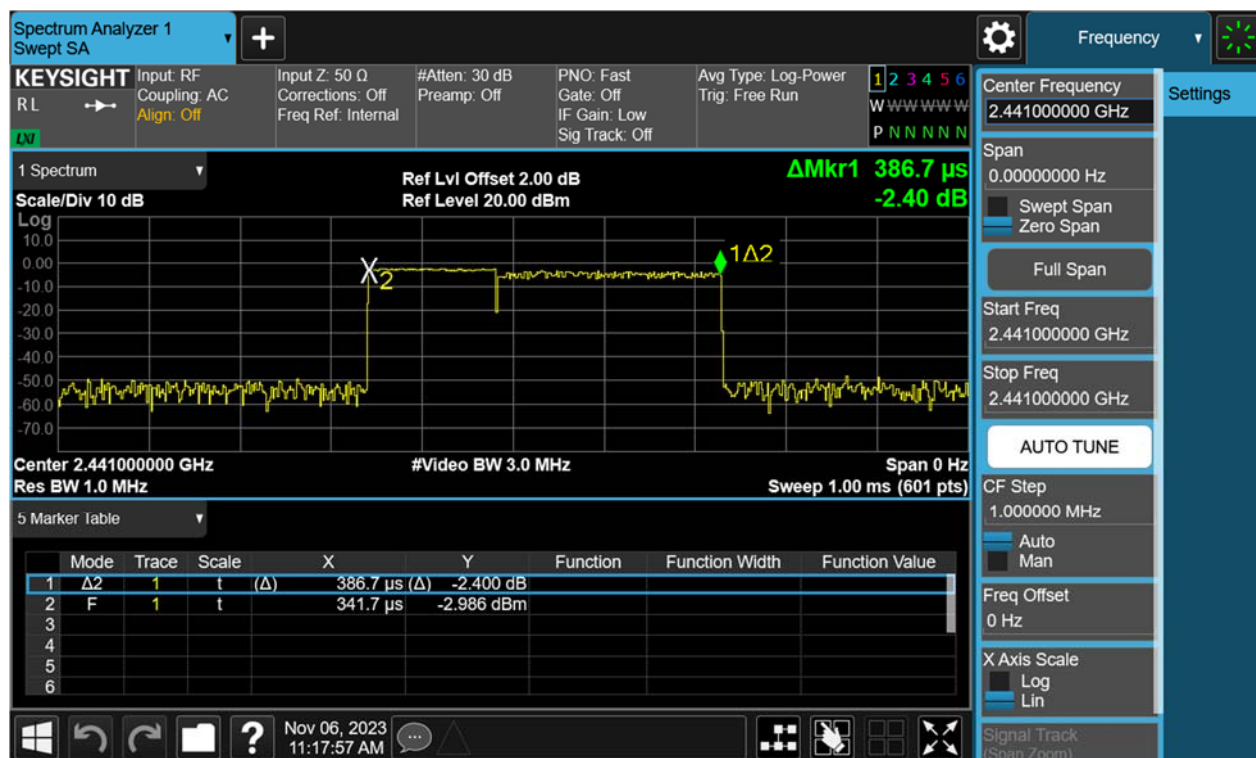

TEST REPORT

Report No.: SHE23100101-01CE Date: 2024-05-31 Page 59 of 69

Figure 41: Time of Occupancy, 2441MHz, $\pi/4$ -DQPSK DH3


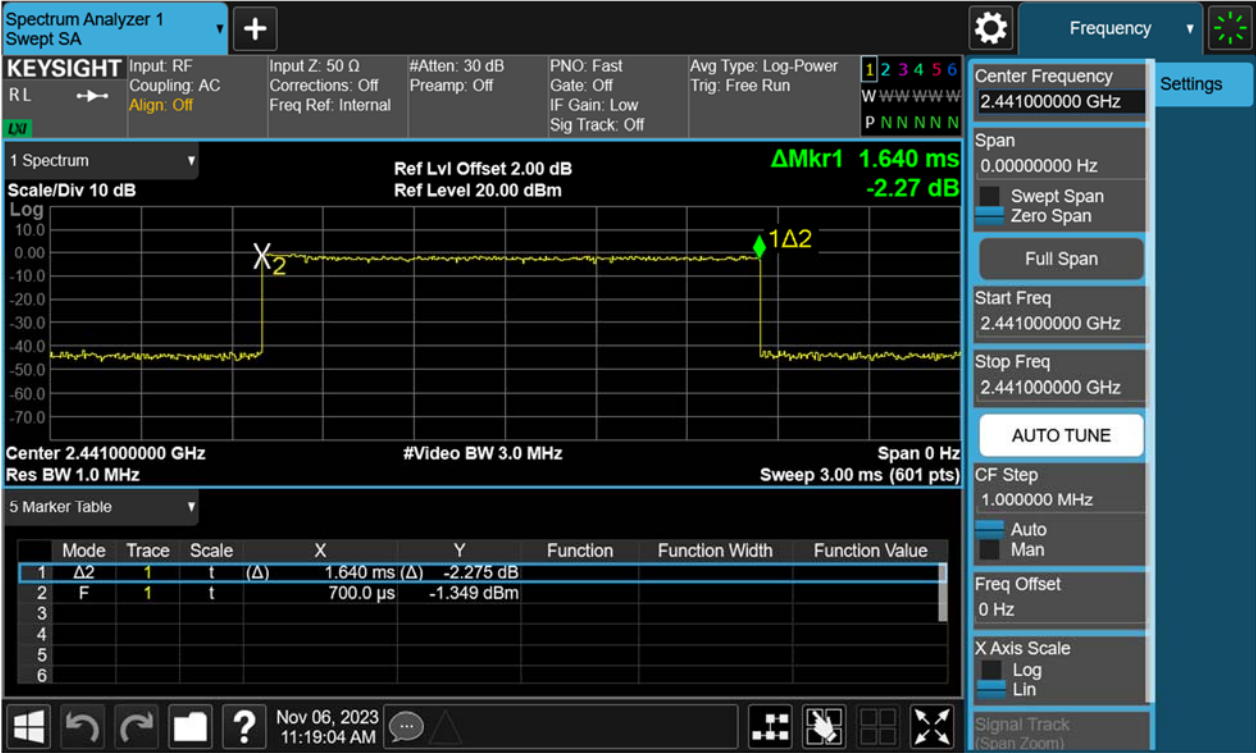


Figure 42: Time of Occupancy, 2441MHz, $\pi/4$ -DQPSK DH5

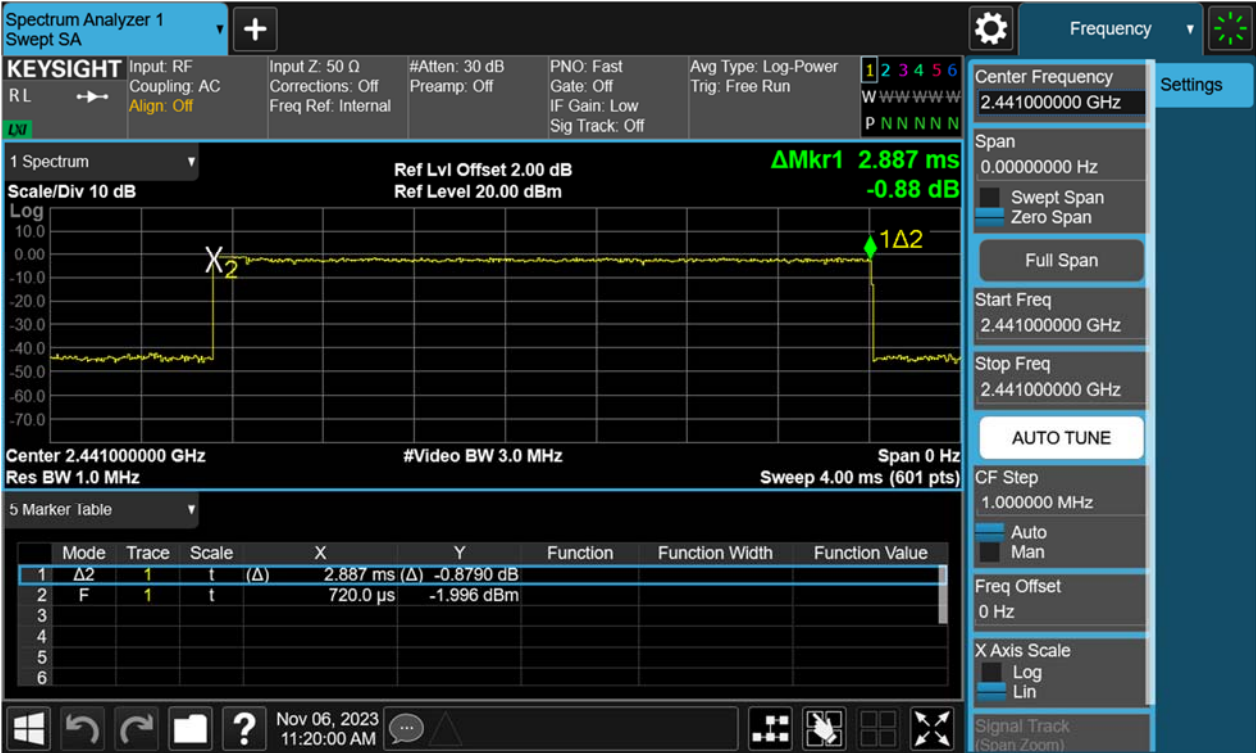

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 60 of 69

Figure 43: Time of Occupancy, 2441MHz, 8-DPSK DH1


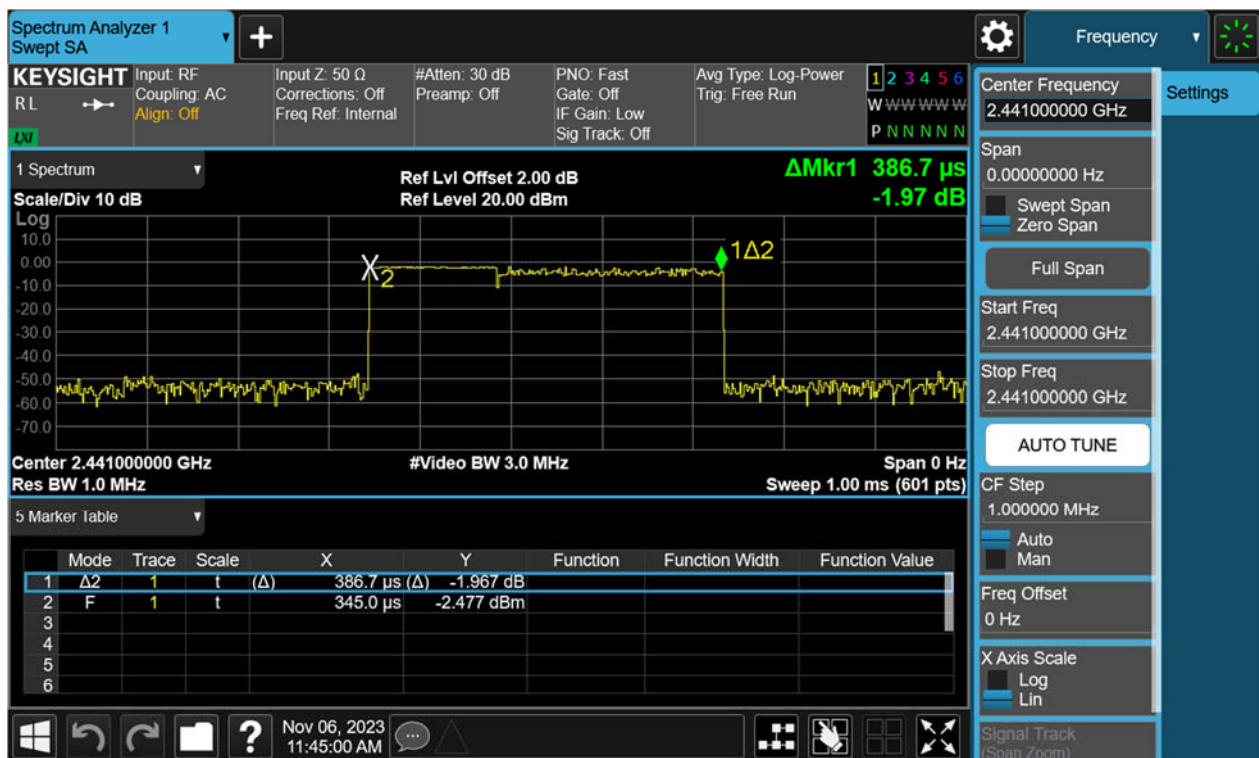


Figure 44: Time of Occupancy, 2441MHz, 8-DPSK DH3

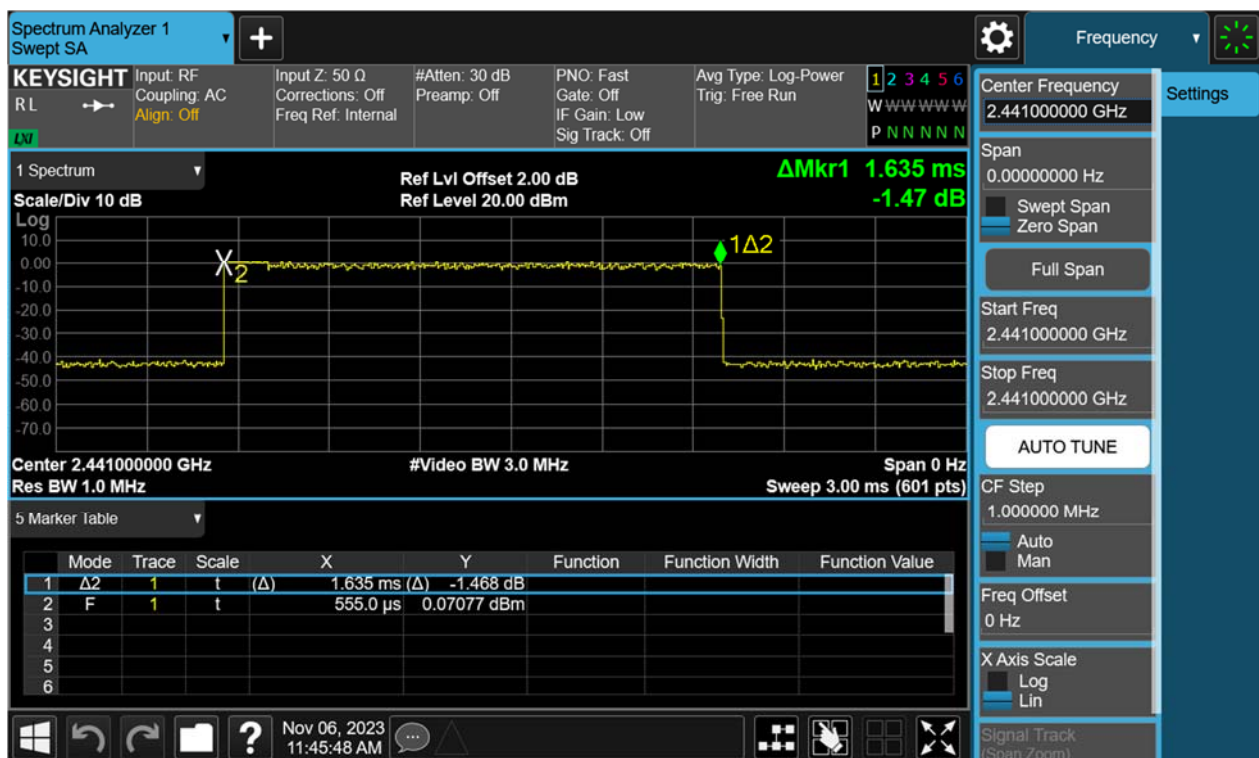

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 61 of 69

Figure 45: Time of Occupancy, 2441MHz, 8-DPSK DH5



TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 62 of 69

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207(a)
Requirement	: ANSI C63.10-2013, Clause 6.2
Kind of test site	: Shielded room

Test setup

Input Voltage	: which received AC 120V, 60Hz Power
Operation Mode	: A.1.a
Earthing	: Connected to GND
Ambient temperature	: 26°C
Relative humidity	: 49%

For details refer to following test plot.

TEST REPORT


Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 63 of 69

Note: The all configurations were tested respectively, Only the worst mode data of 8DPSK-hopping-DH5 was recorded in the test report.


Figure 46: Conducted Emission on AC Mains, L Phase

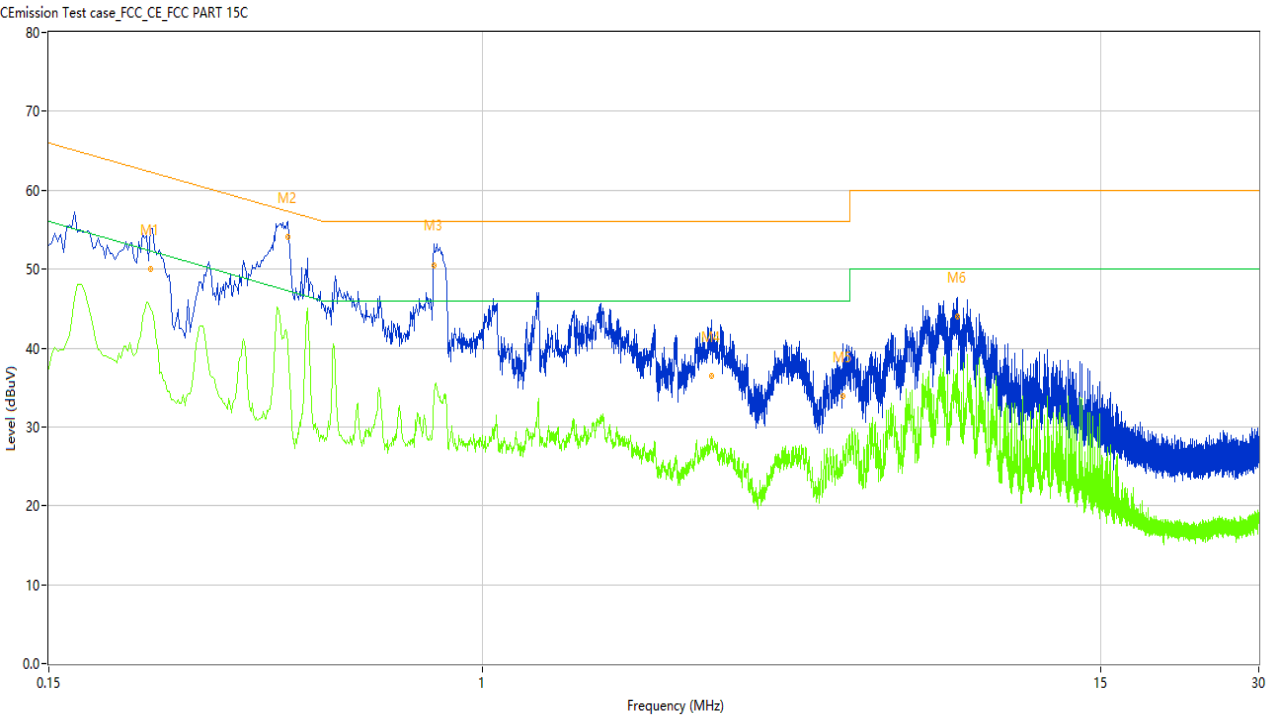

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.234	56.91	9.96	62.31	5.40	Peak	L	Pass
1*	0.234	50.07	9.96	62.31	12.24	QP	L	Pass
1**	0.234	44.87	9.96	52.31	7.44	AV	L	Pass
2	0.428	56.19	9.97	57.29	1.10	Peak	L	Pass
2*	0.428	54.07	9.97	57.29	3.22	QP	L	Pass
2**	0.428	40.40	9.97	47.29	6.89	AV	L	Pass
3	0.810	53.29	9.94	56.00	2.71	Peak	L	Pass
3*	0.810	50.50	9.94	56.00	5.50	QP	L	Pass
3**	0.810	33.82	9.94	46.00	12.18	AV	L	Pass
4	2.732	44.01	9.84	56.00	11.99	Peak	L	Pass
4*	2.732	36.46	9.84	56.00	19.54	QP	L	Pass
4**	2.732	28.49	9.84	46.00	17.51	AV	L	Pass
5	4.860	41.51	9.82	56.00	14.49	Peak	L	Pass
5*	4.860	33.84	9.82	56.00	22.16	QP	L	Pass
5**	4.860	26.38	9.82	46.00	19.62	AV	L	Pass
6	8.030	48.50	9.75	60.00	11.50	Peak	L	Pass
6*	8.030	44.06	9.75	60.00	15.94	QP	L	Pass
6**	8.030	38.92	9.75	50.00	11.08	AV	L	Pass

TEST REPORT

Figure 47: Conducted Emission on AC Mains, N Phase

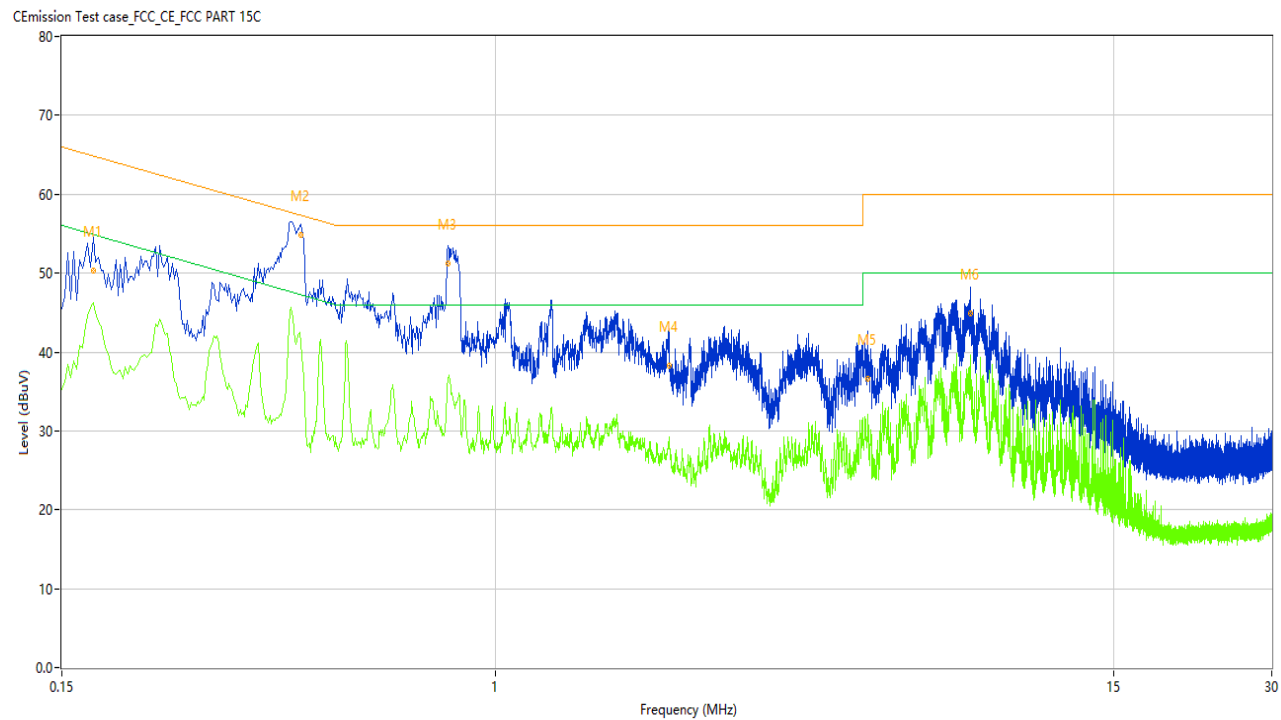

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.172	55.96	10.02	64.86	8.90	Peak	N	Pass
1*	0.172	50.31	10.02	64.86	14.55	QP	N	Pass
1**	0.172	46.23	10.02	54.86	8.63	AV	N	Pass
2	0.428	56.39	10.07	57.29	0.90	Peak	N	Pass
2*	0.428	54.88	10.07	57.29	2.41	QP	N	Pass
2**	0.428	41.21	10.07	47.29	6.08	AV	N	Pass
3	0.814	54.34	10.04	56.00	1.66	Peak	N	Pass
3*	0.814	51.21	10.04	56.00	4.79	QP	N	Pass
3**	0.814	36.64	10.04	46.00	9.36	AV	N	Pass
4	2.140	43.04	9.94	56.00	12.96	Peak	N	Pass
4*	2.140	38.34	9.94	56.00	17.66	QP	N	Pass
4**	2.140	28.89	9.94	46.00	17.11	AV	N	Pass
5	5.122	43.17	9.73	60.00	16.83	Peak	N	Pass
5*	5.122	36.63	9.73	60.00	23.37	QP	N	Pass
5**	5.122	31.55	9.73	50.00	18.45	AV	N	Pass
6	8.030	49.33	9.81	60.00	10.67	Peak	N	Pass
6*	8.030	44.88	9.81	60.00	15.12	QP	N	Pass
6**	8.030	39.64	9.81	50.00	10.36	AV	N	Pass

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 65 of 69

5 Appendixes

5.1 Photographs of the Sample




Front of the sample




Rear of the sample

TEST REPORT

Report No.: SHE23100101-01CE Date: 2024-05-31 Page 66 of 69

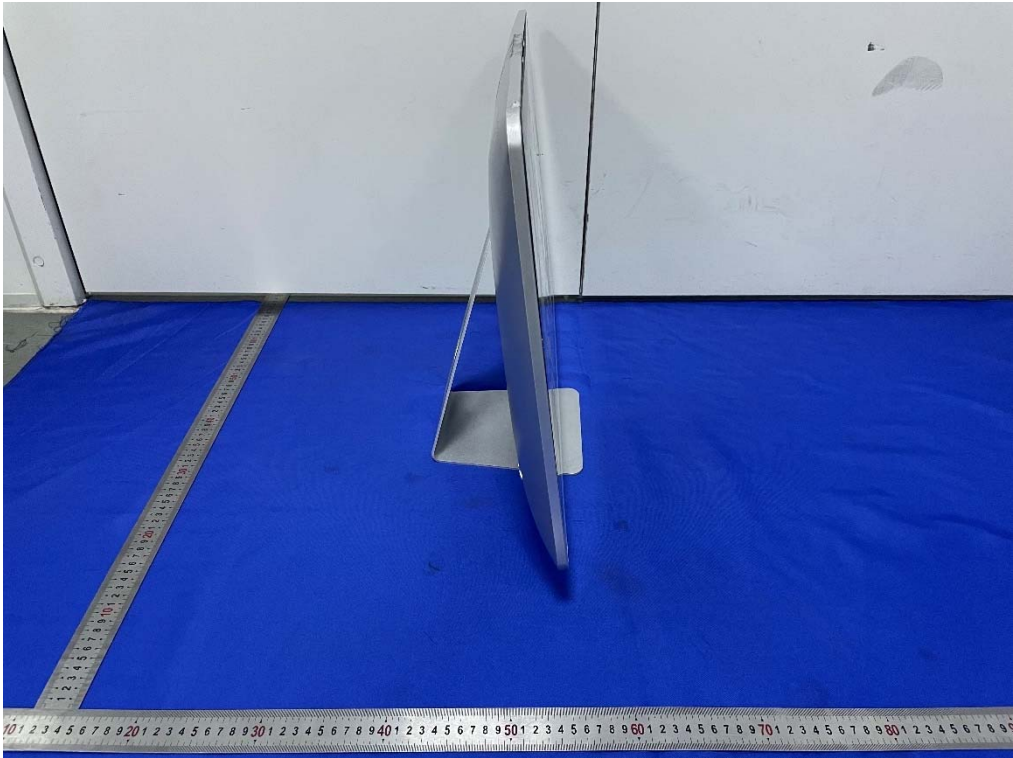

Left of the sample

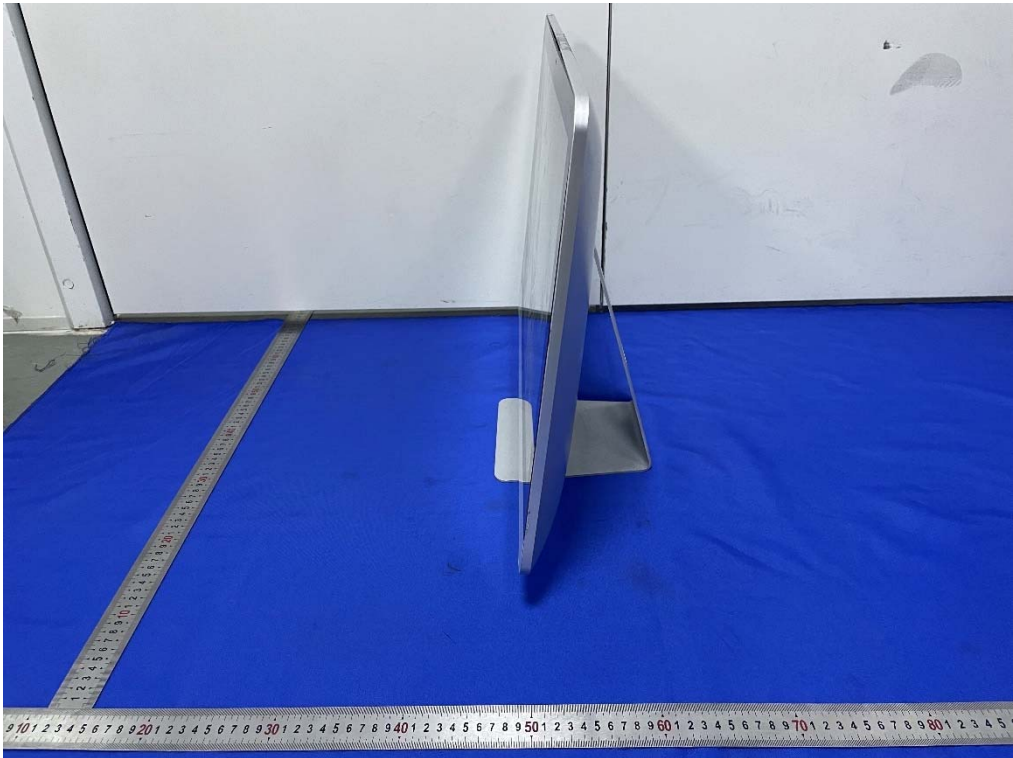


Right of the sample

TEST REPORT


Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 67 of 69

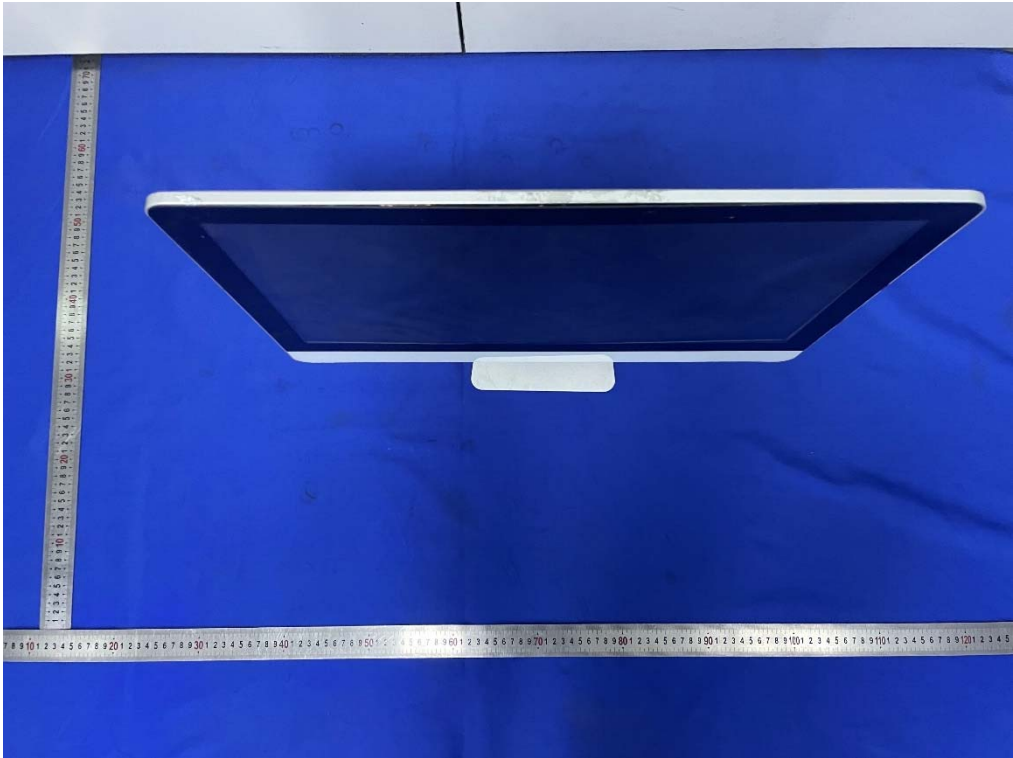

Top of the sample

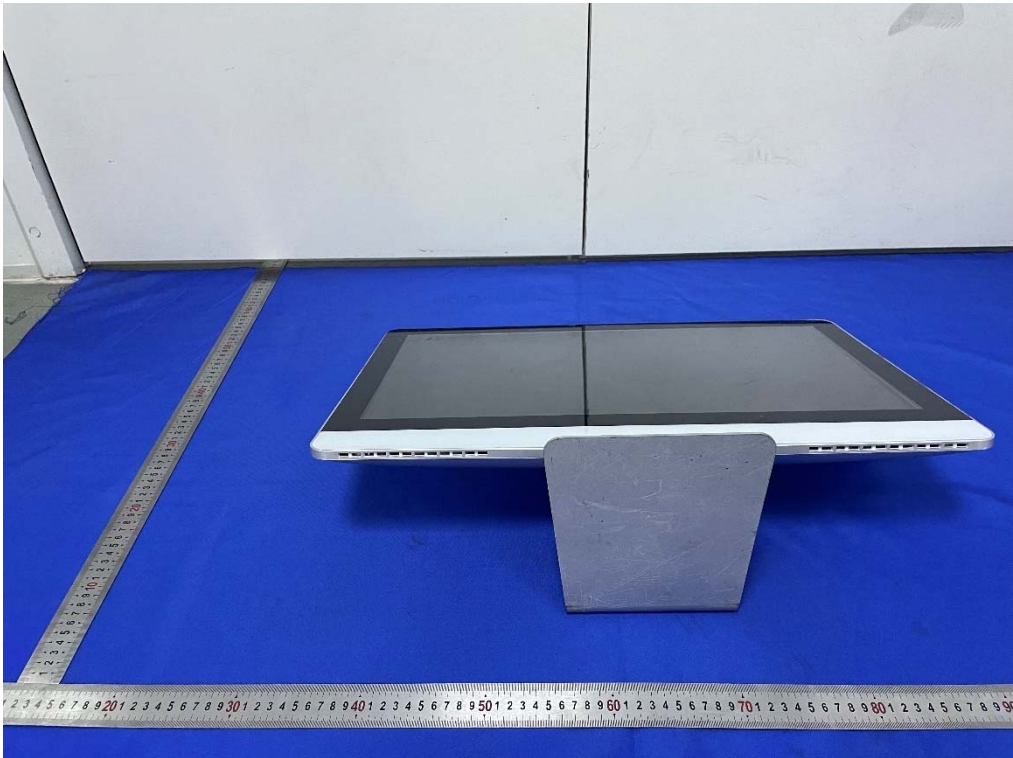

Bottom of the sample

TEST REPORT

Report No.: SHE23100101-01CE

Date: 2024-05-31

Page 68 of 69

5.2 Set-up for Conducted Emission on AC Mains



5.3 Set-up for Conducted RF test at Antenna Port




TEST REPORT

Report No.: SHE23100101-01CE


Date: 2024-05-31

Page 69 of 69

5.4 Set-up for Spurious Emissions below 1GHz

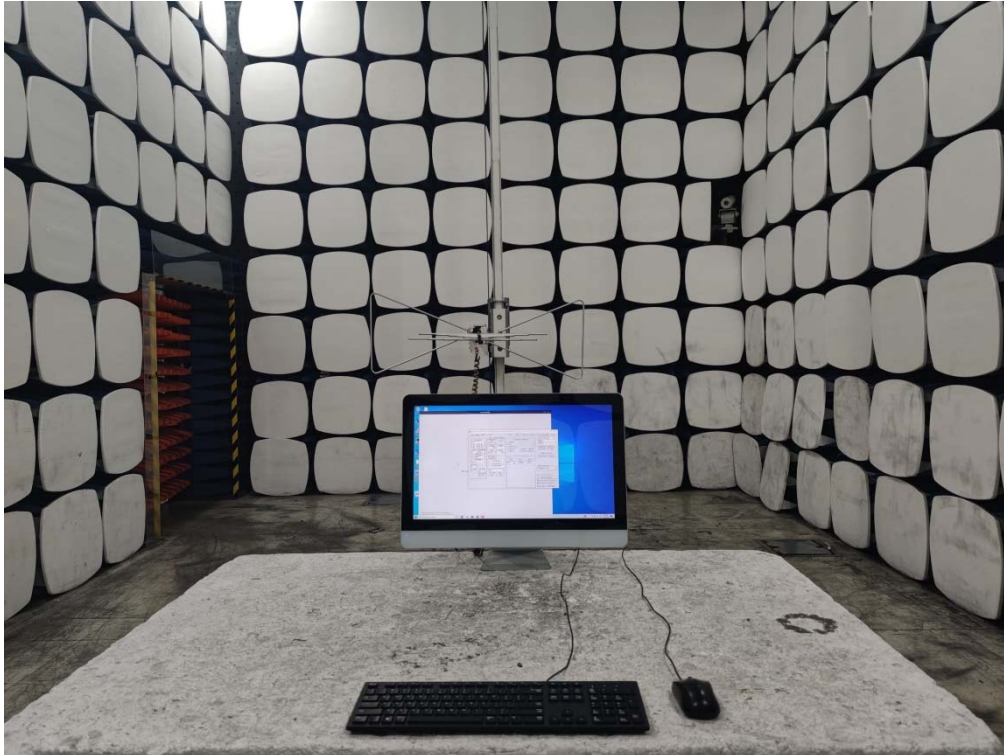

5.5 Set-up for Spurious Emissions above 1GHz

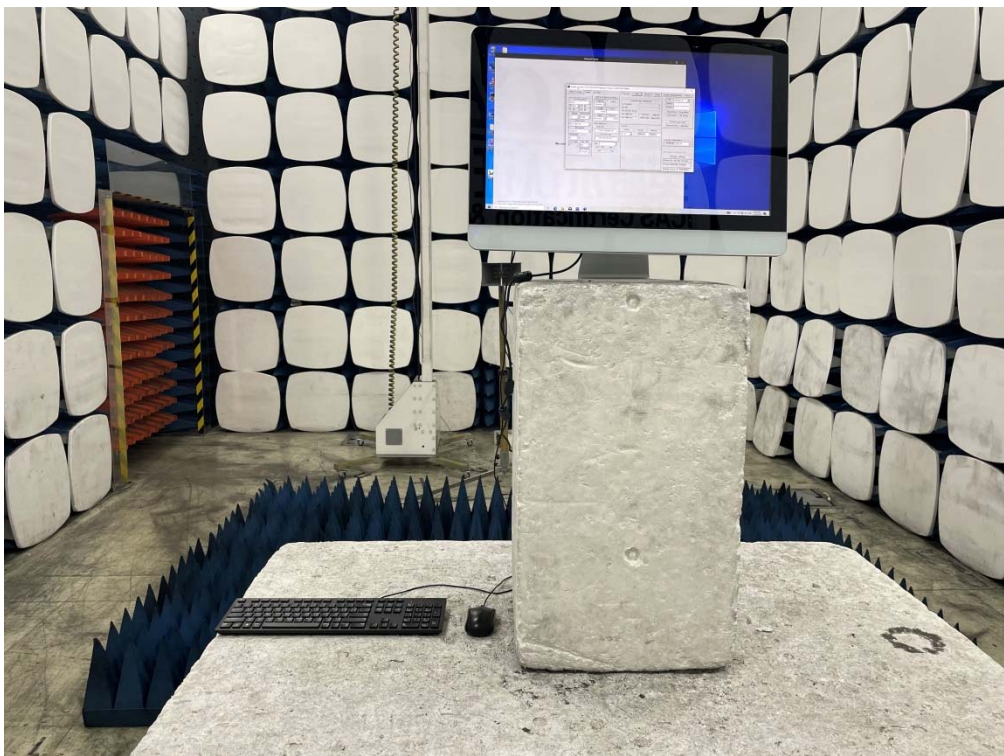

End of the report