

Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Bluetooth headset

Trade Mark: N/A

Test Model: SY-BT1632

FCC ID: 2BEM6-SY-BT1632

Environmental Conditions

Temperature:	25.5°C
Relative Humidity:	55%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A


Appendix A: 20dB Emission Bandwidth

Test Result


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.939	2401.583	2402.522	---	---
		2441	0.948	2440.586	2441.534	---	---
		2480	0.942	2479.589	2480.531	---	---
2DH5	Ant1	2402	1.263	2401.415	2402.678	---	---
		2441	1.320	2440.388	2441.708	---	---
		2480	1.281	2479.418	2480.699	---	---

Test Graphs


DH5_Ant1_2402

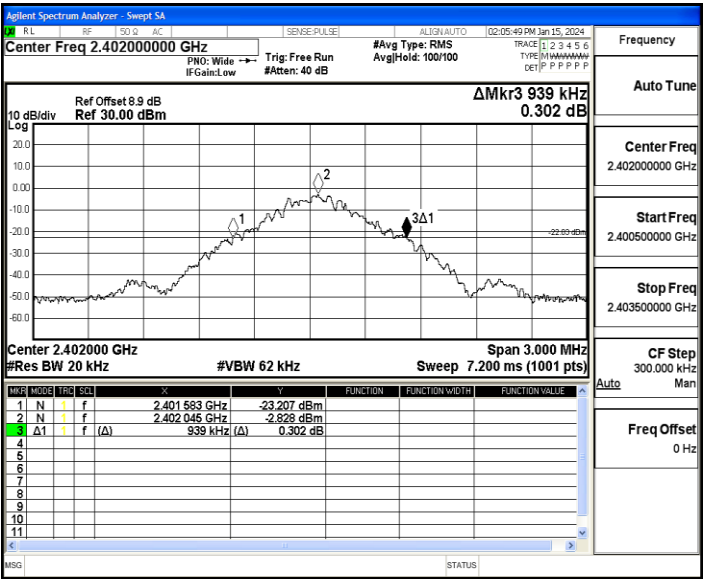


DH5_Ant1_2441

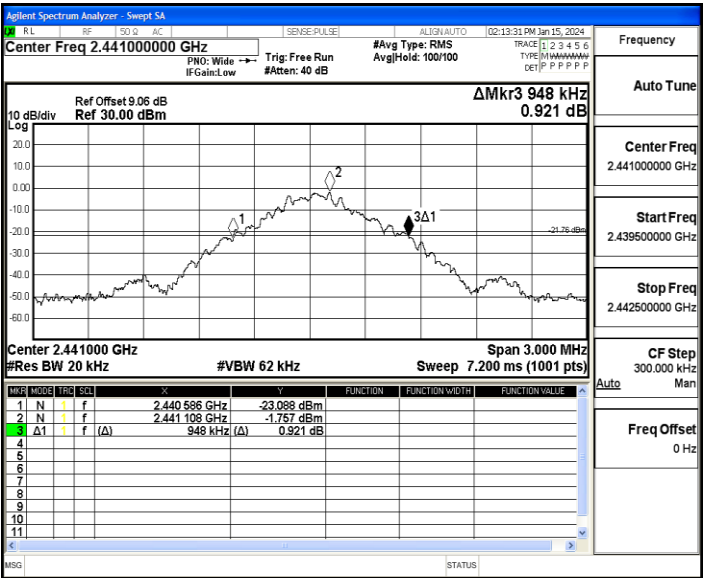


DH5_Ant1_2480

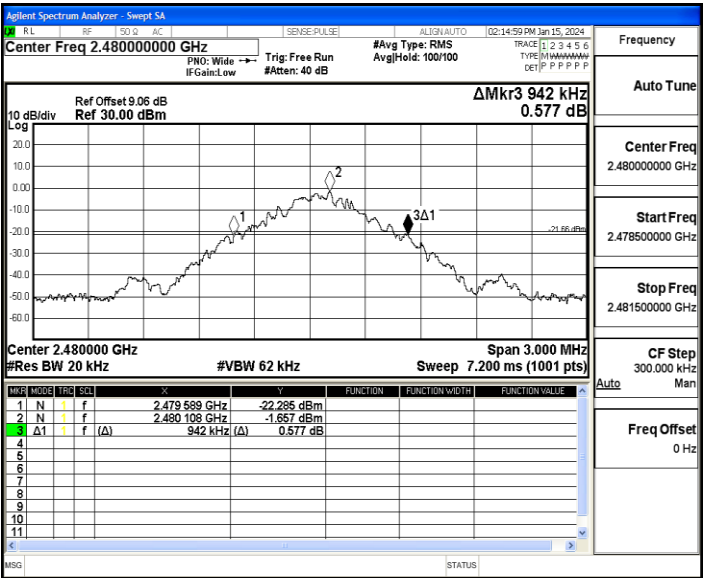


2DH5_Ant1_2402

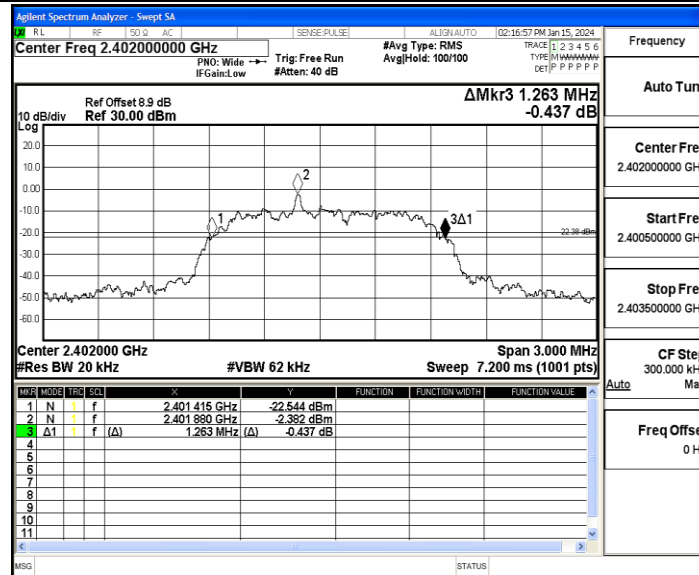

2DH5_Ant1_2441

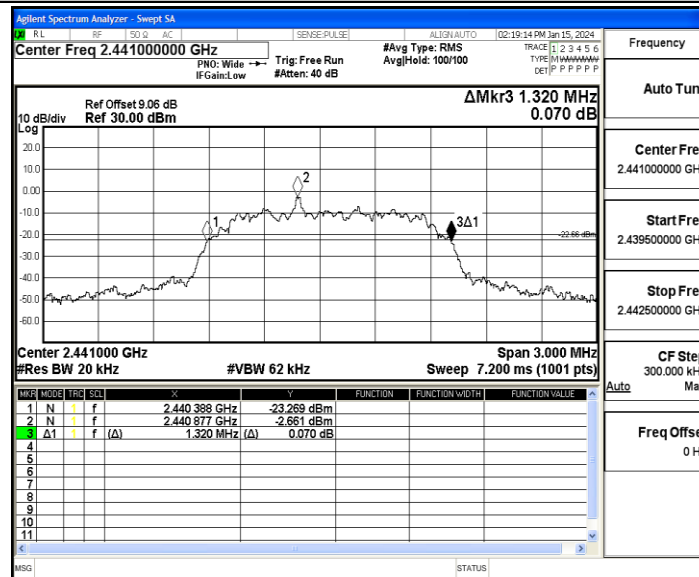

2DH5_Ant1_2480

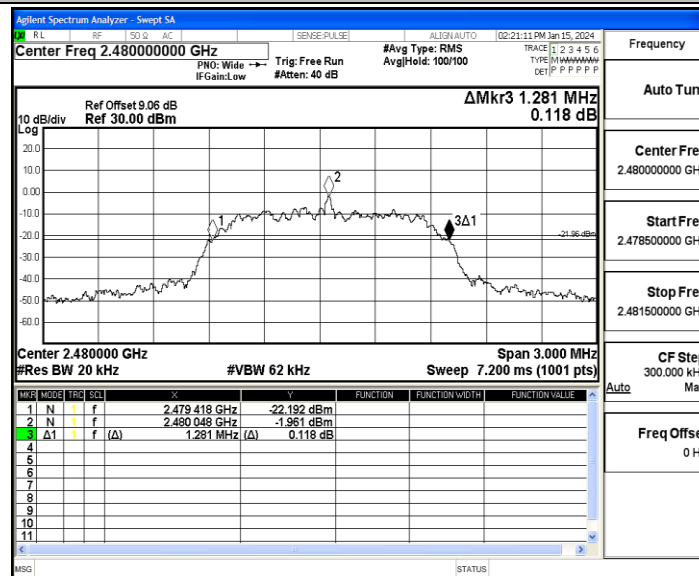



Appendix B: Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.88648	2401.6025	2402.4889	---	---
		2441	0.87727	2440.6083	2441.4856	---	---
		2480	0.87520	2479.6076	2480.4828	---	---
2DH5	Ant1	2402	1.1921	2401.4523	2402.6444	---	---
		2441	1.1834	2440.4564	2441.6398	---	---
		2480	1.2026	2479.4505	2480.6531	---	---

Test Graphs

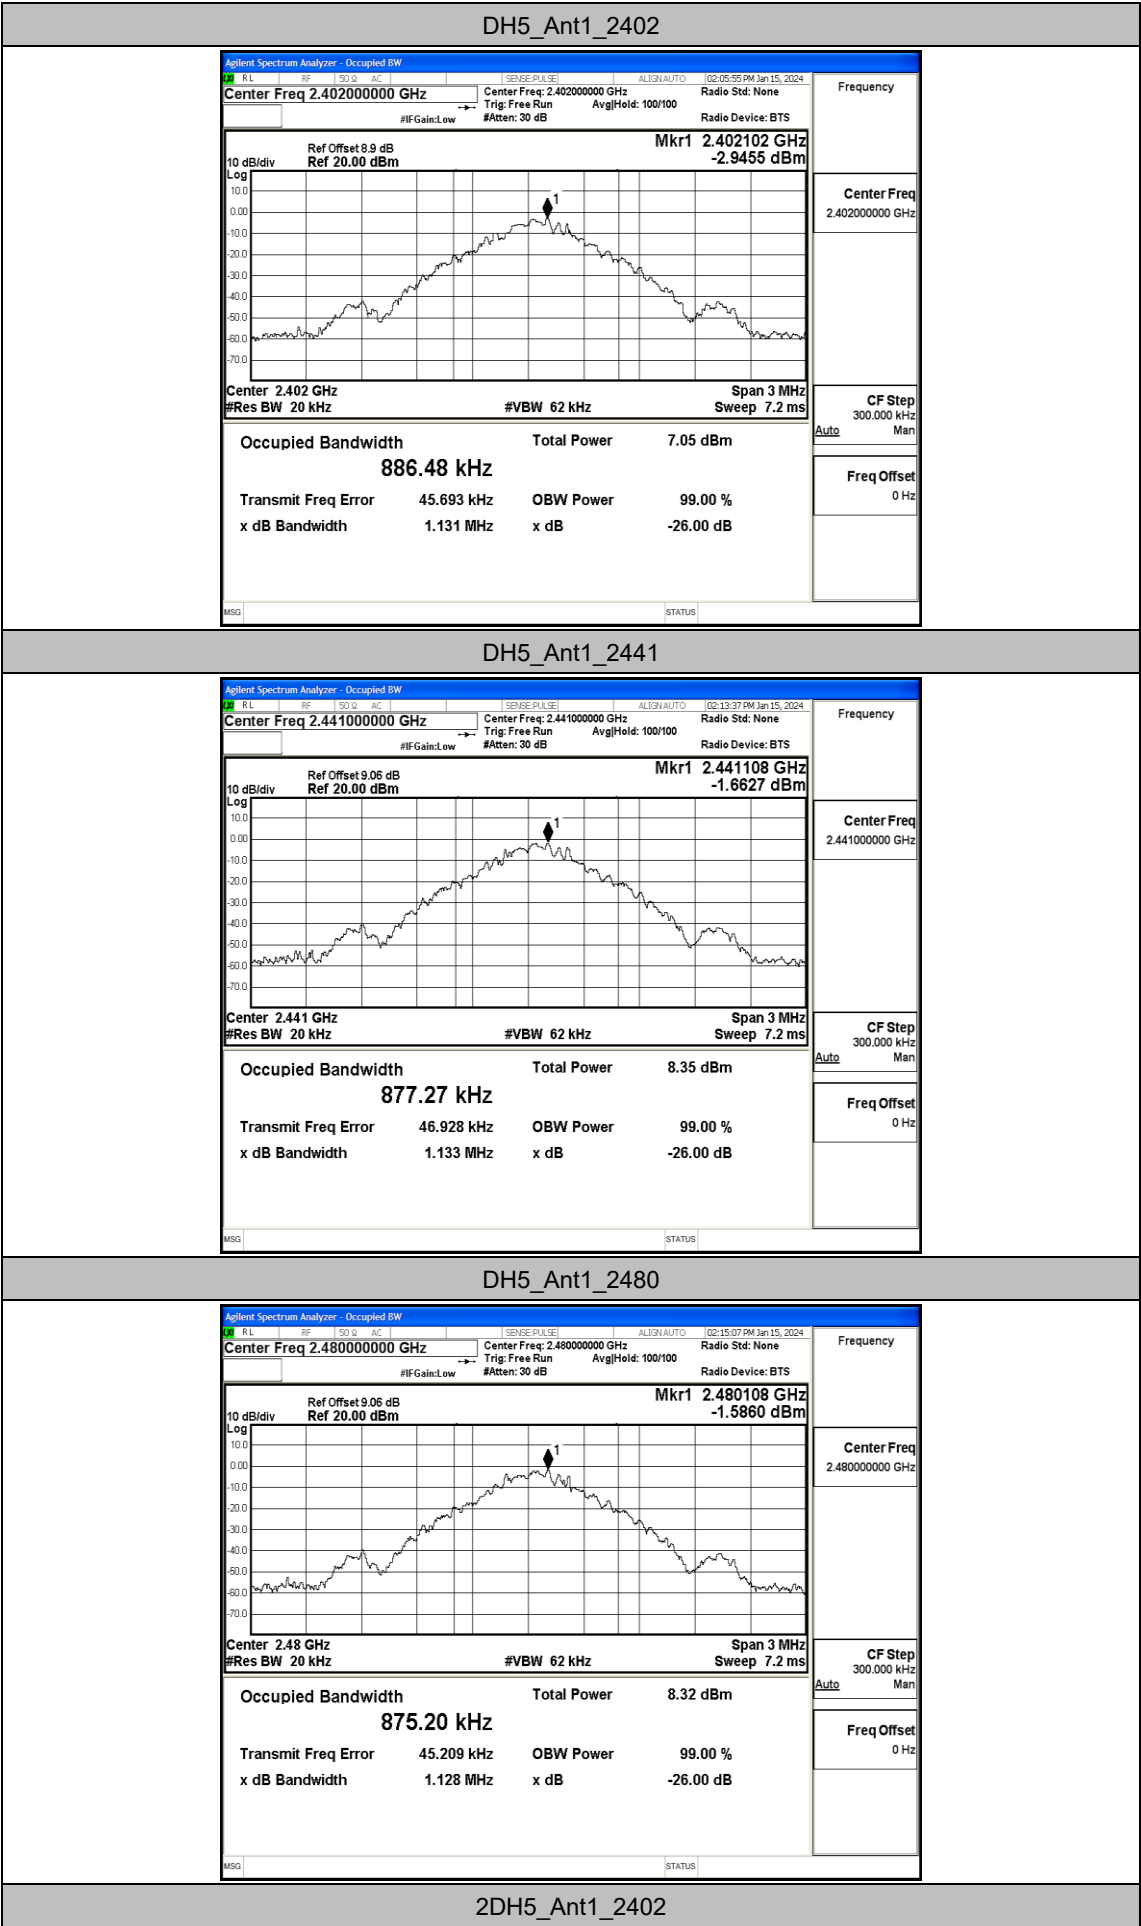


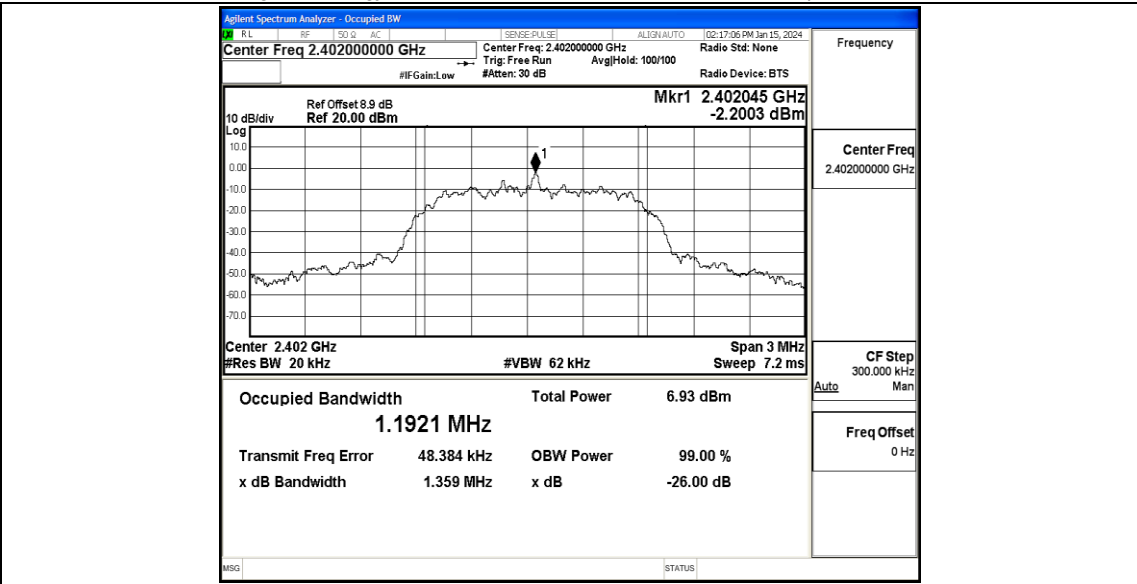

2DH5_Ant1_2441

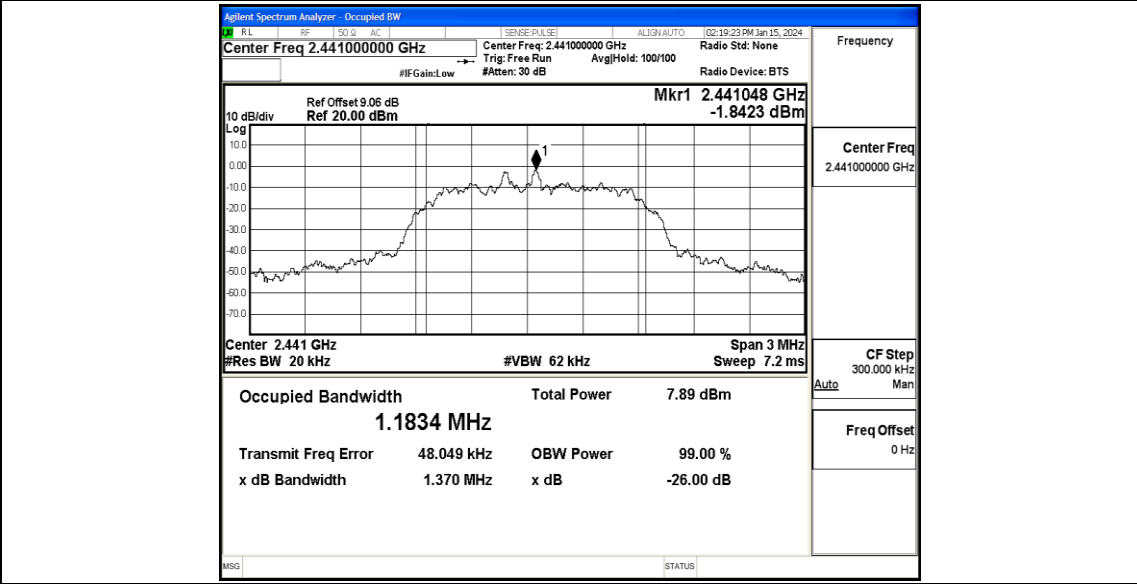

2DH5_Ant1_2480

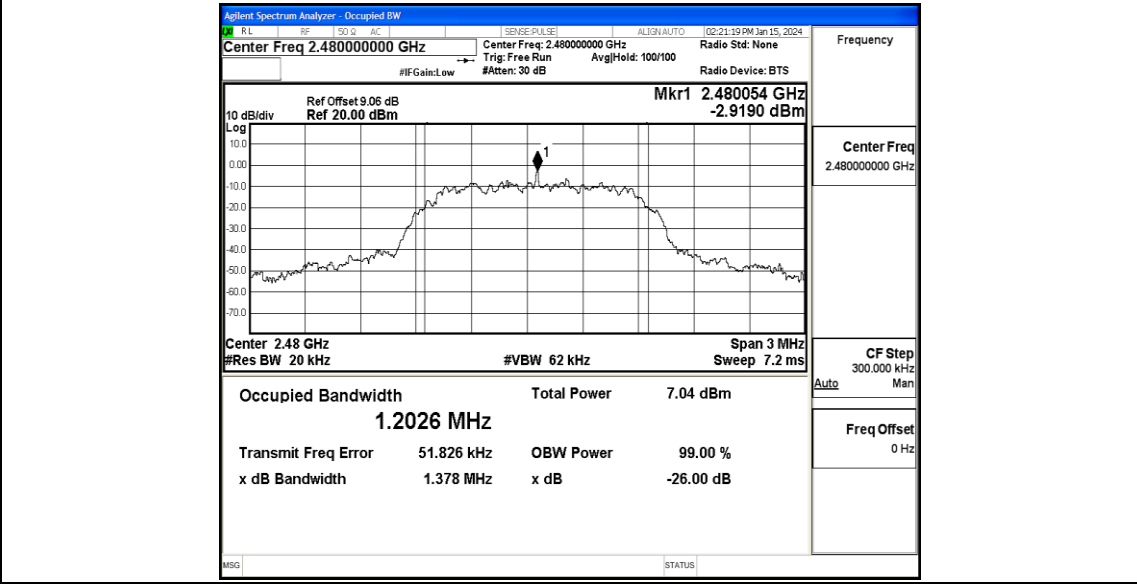


Appendix C: Maximum Peak conducted output power


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	0.86	≤30	PASS
		2441	1.87	≤30	PASS
		2480	1.84	≤30	PASS
2DH5	Ant1	2402	2.17	≤20.97	PASS
		2441	2.65	≤20.97	PASS
		2480	2.67	≤20.97	PASS


Test Graphs

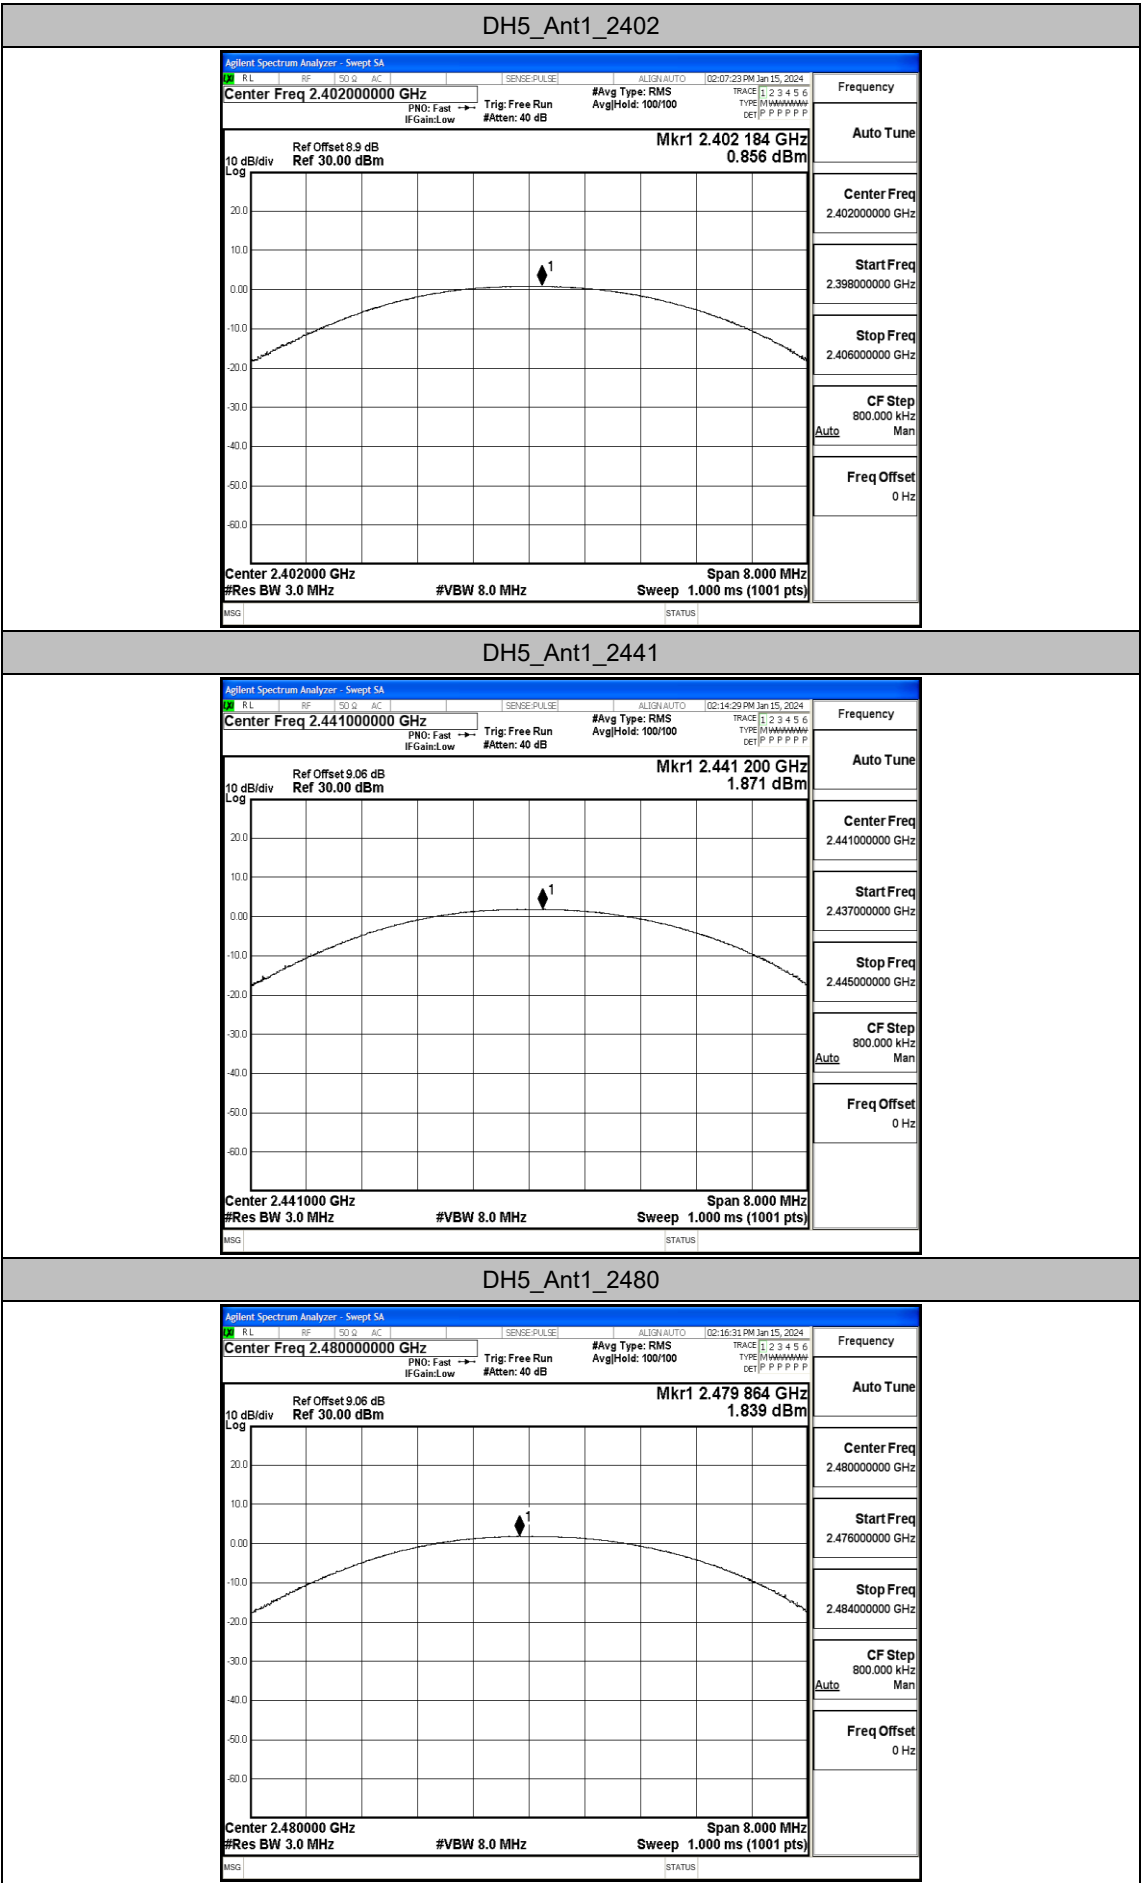


2DH5_Ant1_2402

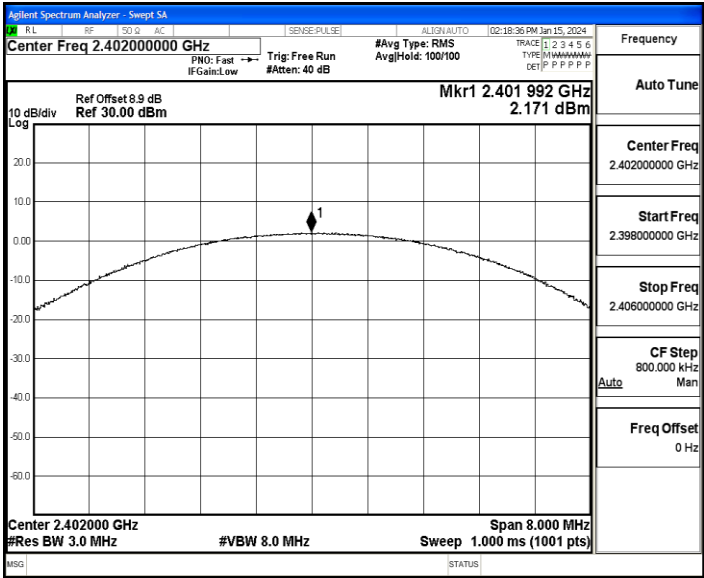

2DH5_Ant1_2441

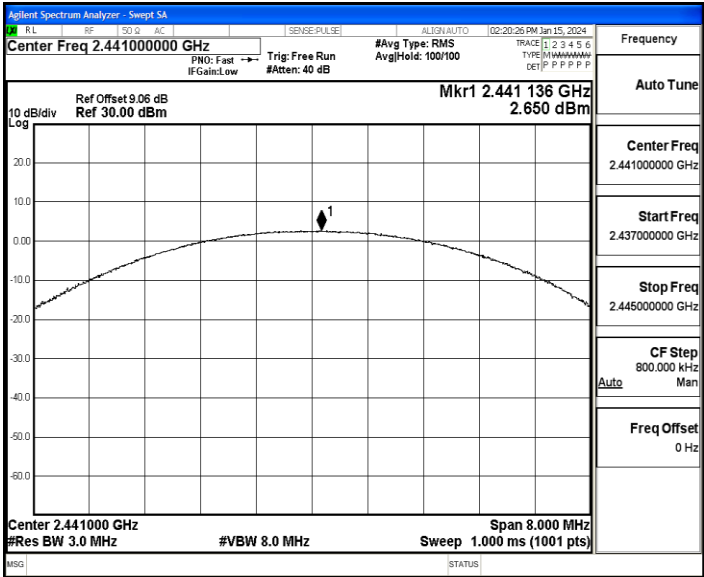

2DH5_Ant1_2480

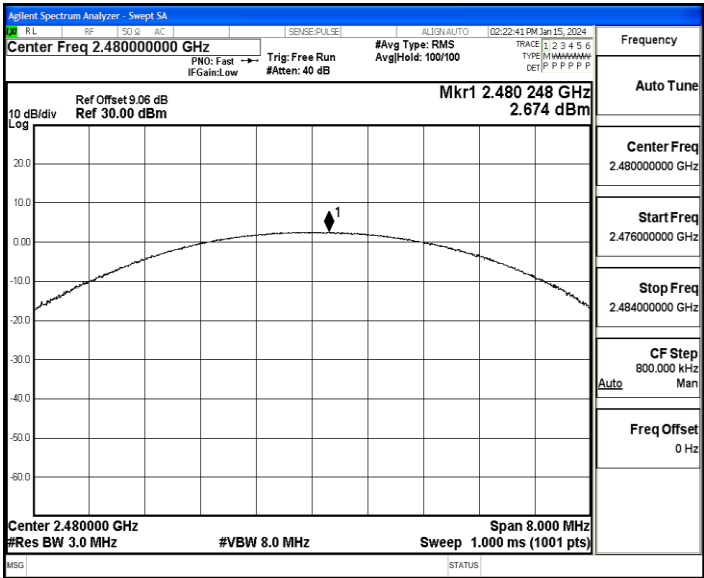

Appendix D: Carrier frequency separation

Test Result


TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.018	≥ 0.948	PASS
2DH5	Ant1	Hop	1.006	≥ 0.880	PASS


Appendix E: Time of occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.885	120	0.346	≤0.4	PASS
2DH5	Ant1	Hop	2.891	100	0.289	≤0.4	PASS

Test Graphs

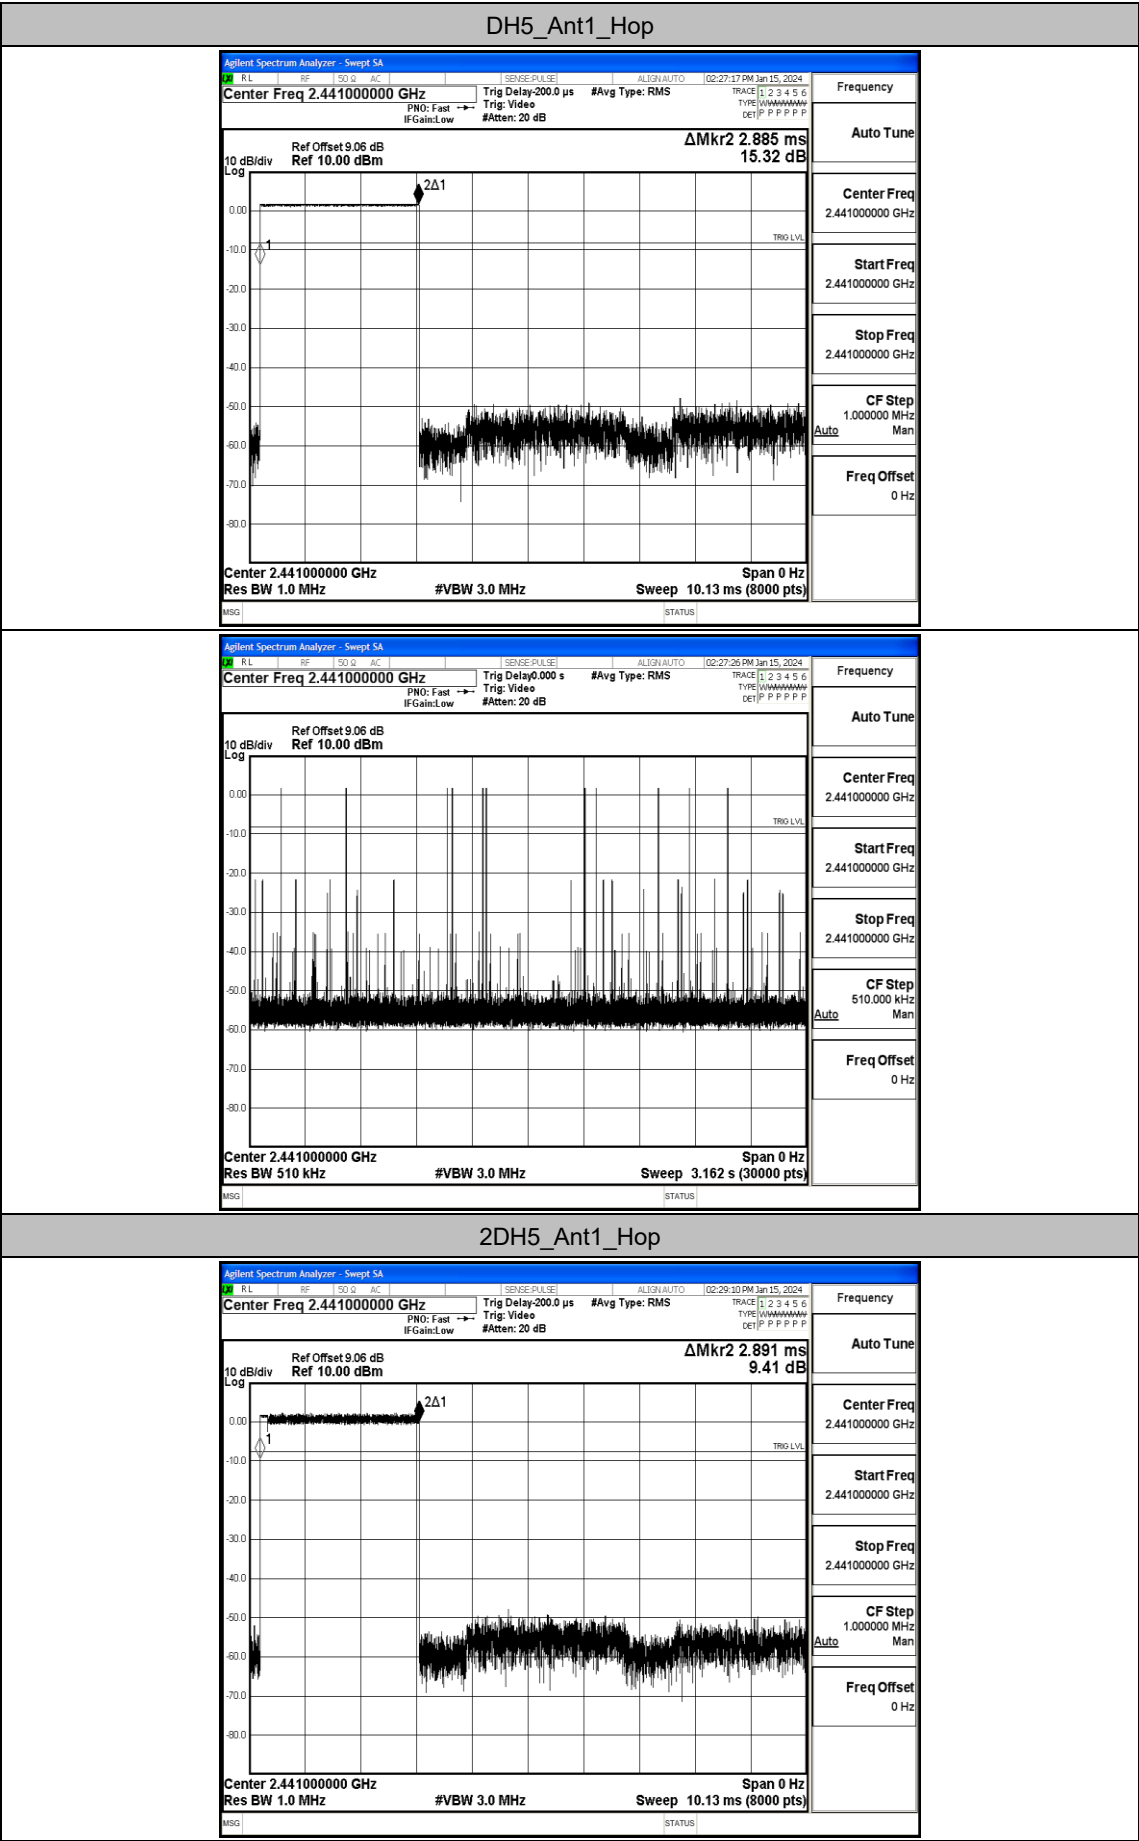

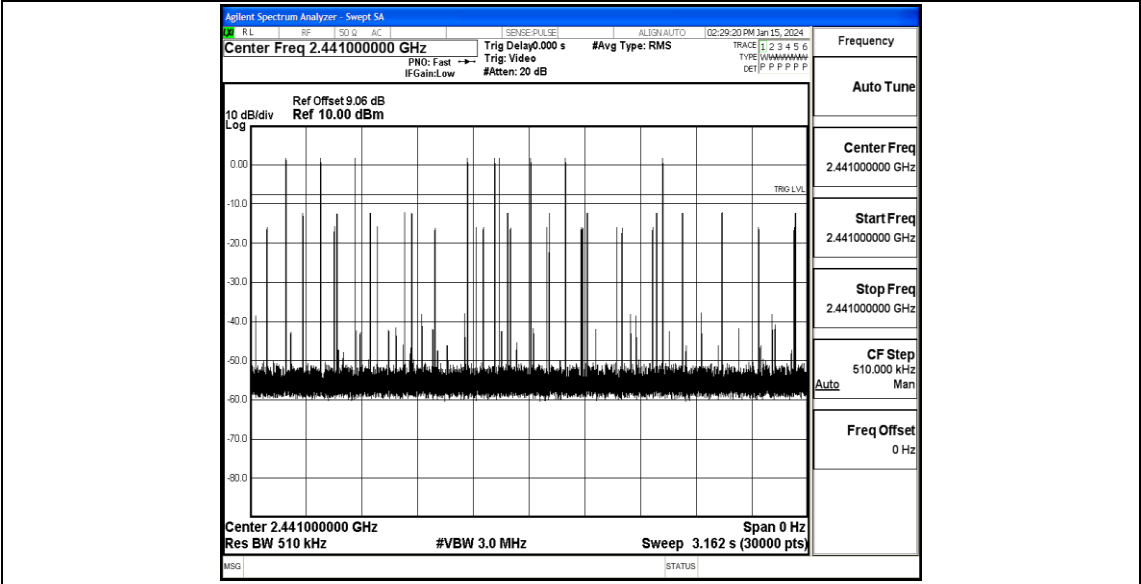


Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

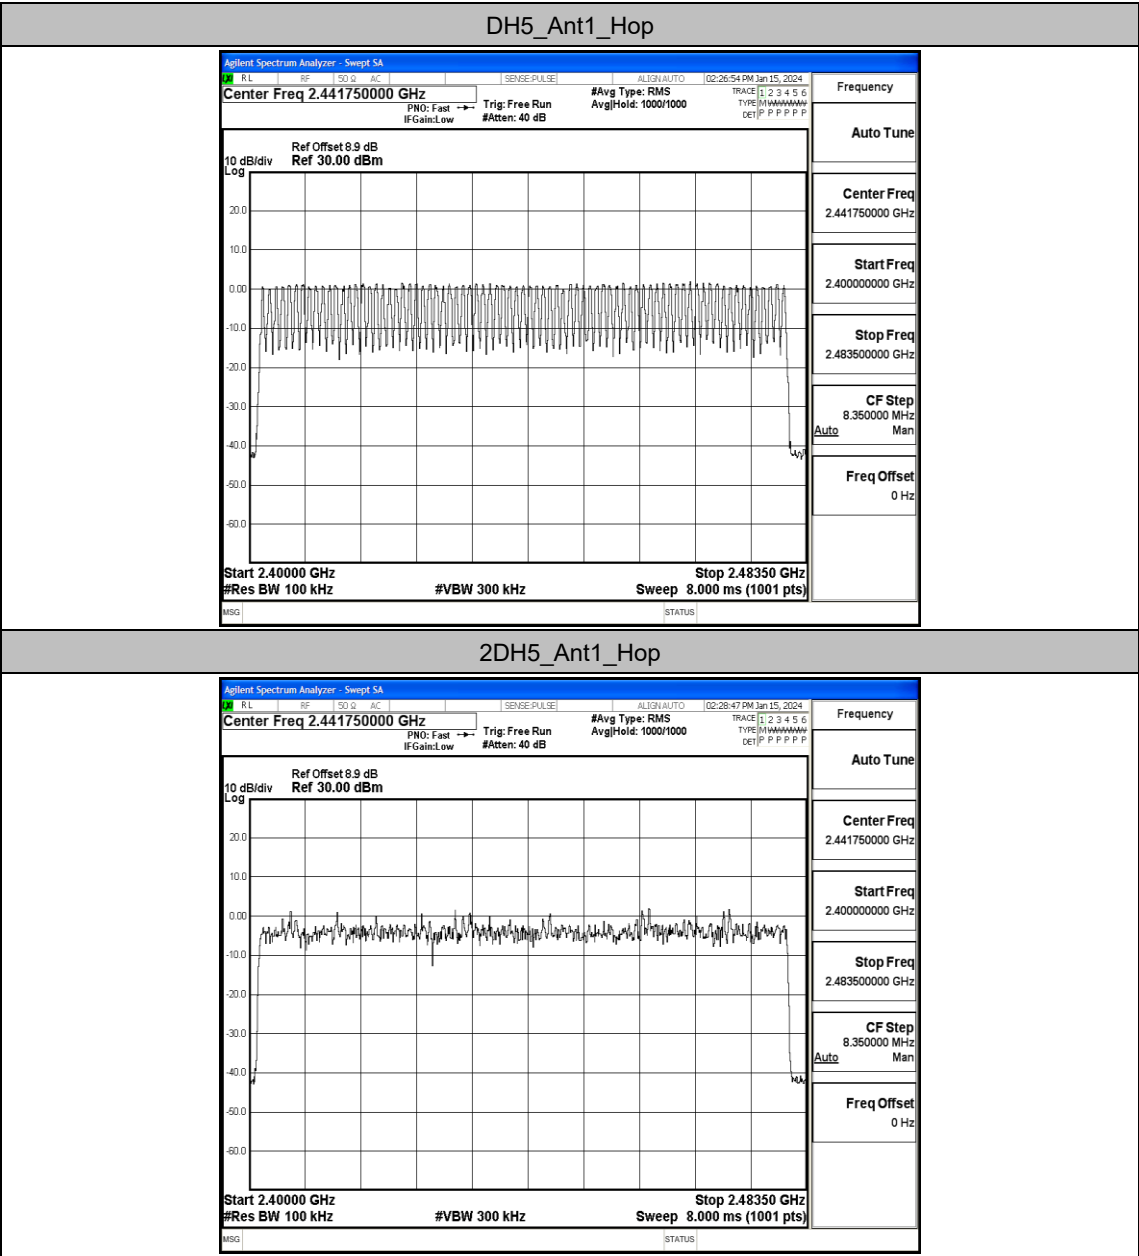



Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.52	-50.29	≤-19.49	PASS
		High	2480	1.43	-49.23	≤-18.58	PASS
		Low	Hop_2402	0.27	-50.65	≤-19.73	PASS
		High	Hop_2480	1.86	-49.52	≤-18.14	PASS
2DH5	Ant1	Low	2402	-0.62	-49.77	≤-20.62	PASS
		High	2480	1.59	-48.36	≤-18.41	PASS
		Low	Hop_2402	-3.66	-50.67	≤-23.66	PASS
		High	Hop_2480	-1.84	-49.58	≤-21.84	PASS

Test Graphs

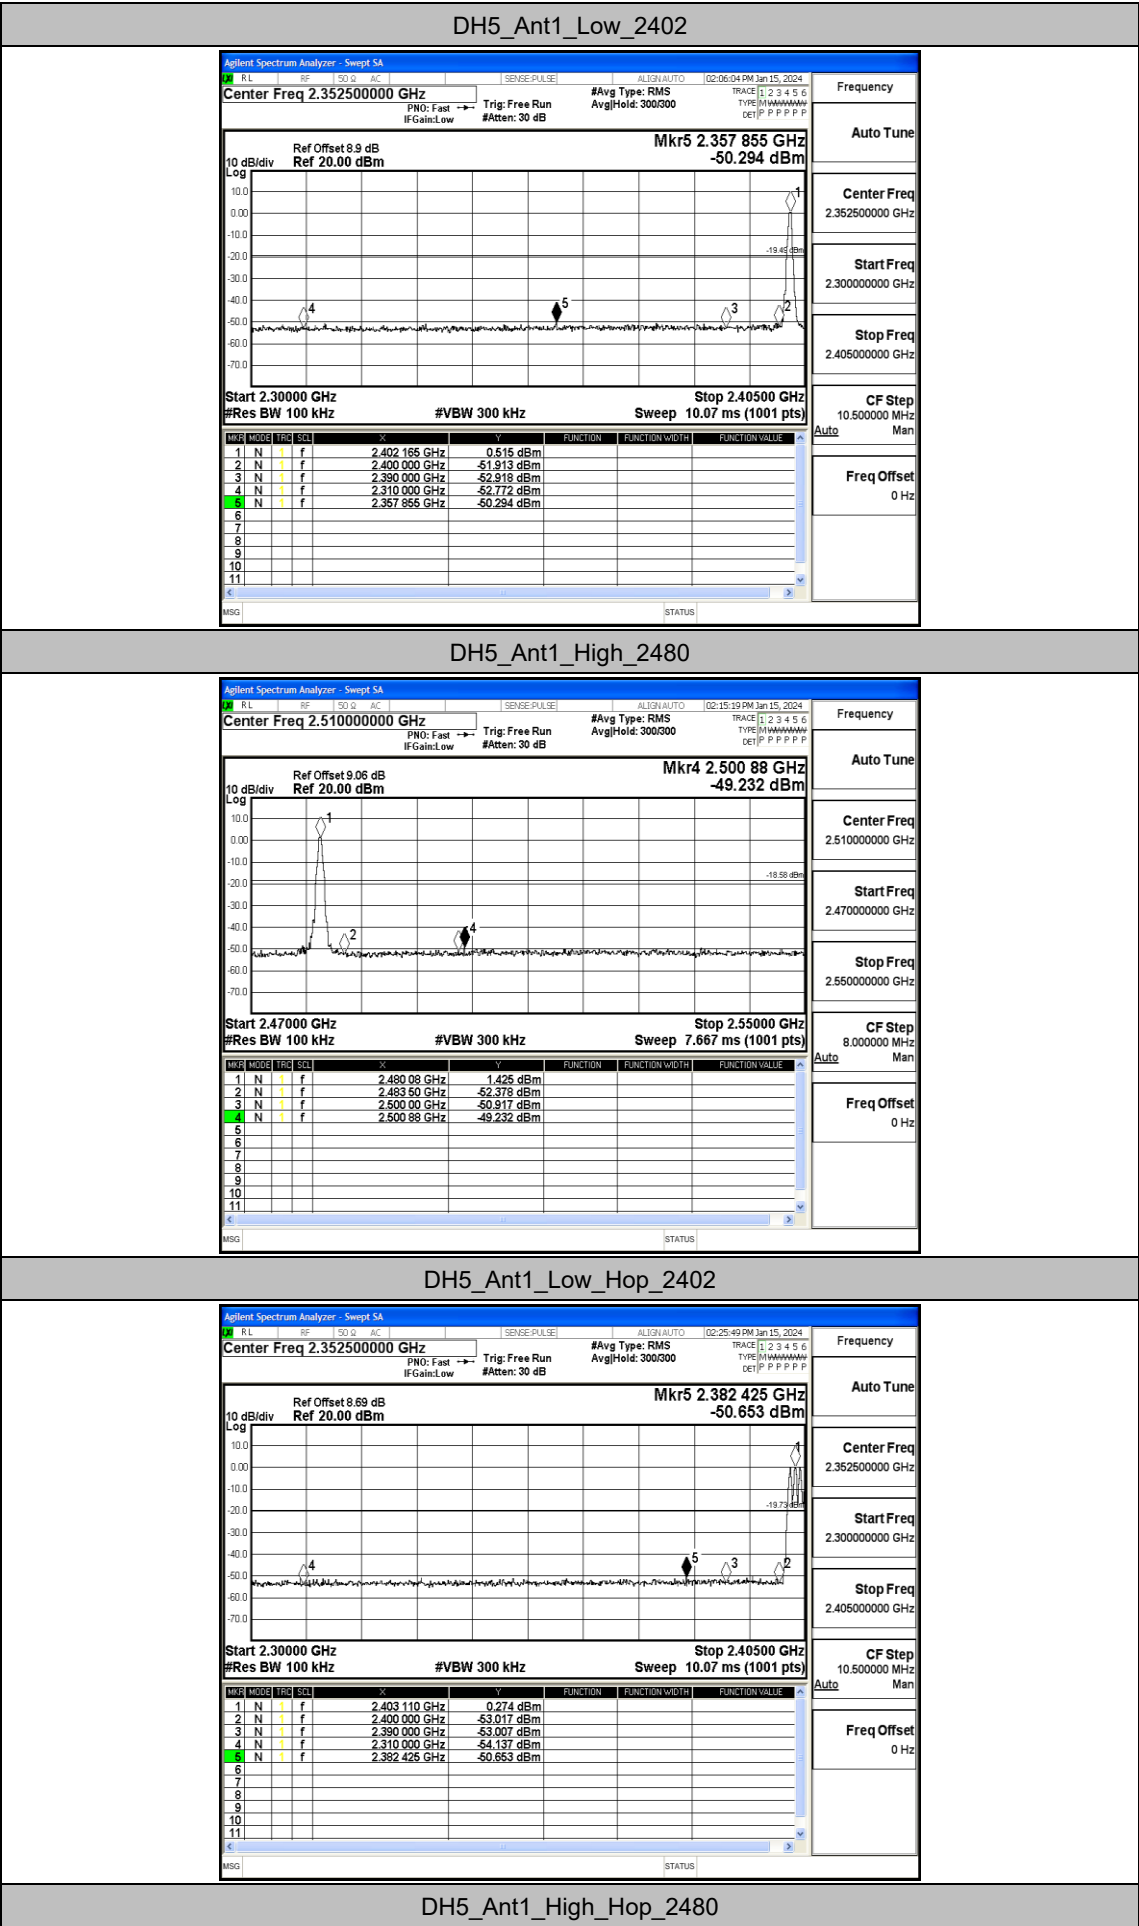


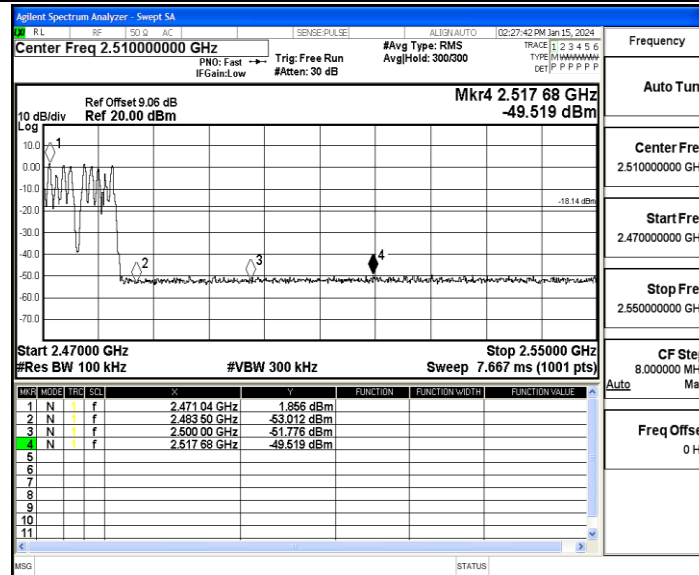


2DH5_Ant1_Low_2402

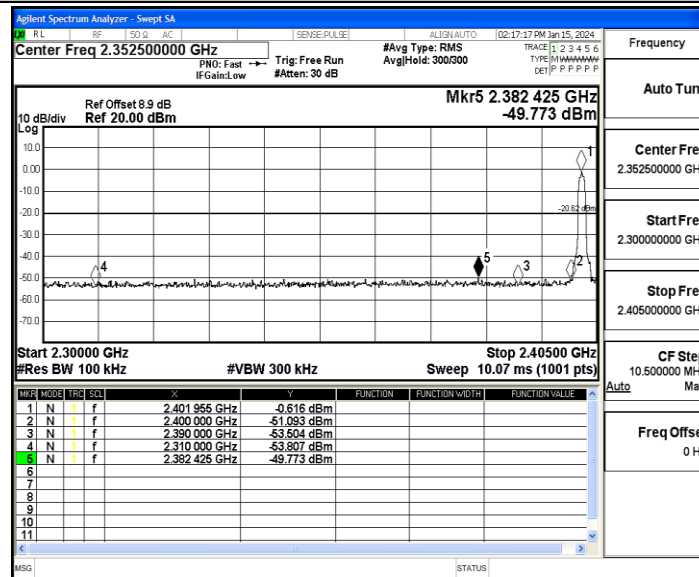

2DH5_Ant1_High_2480

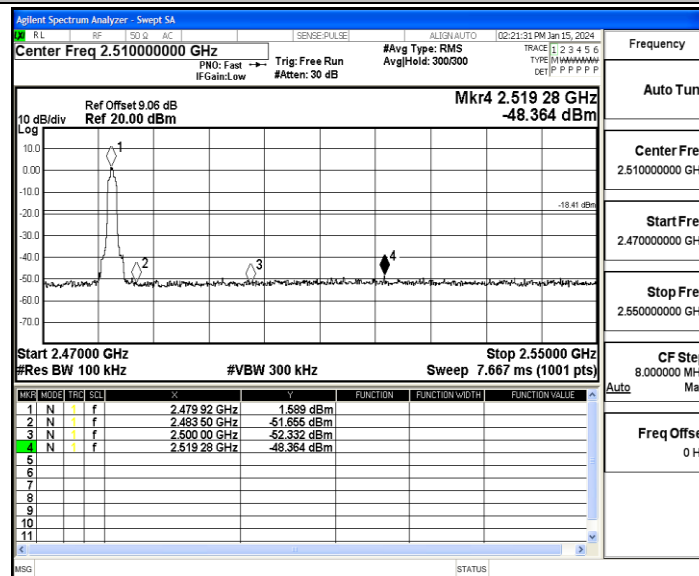

2DH5_Ant1_Low_Hop_2402

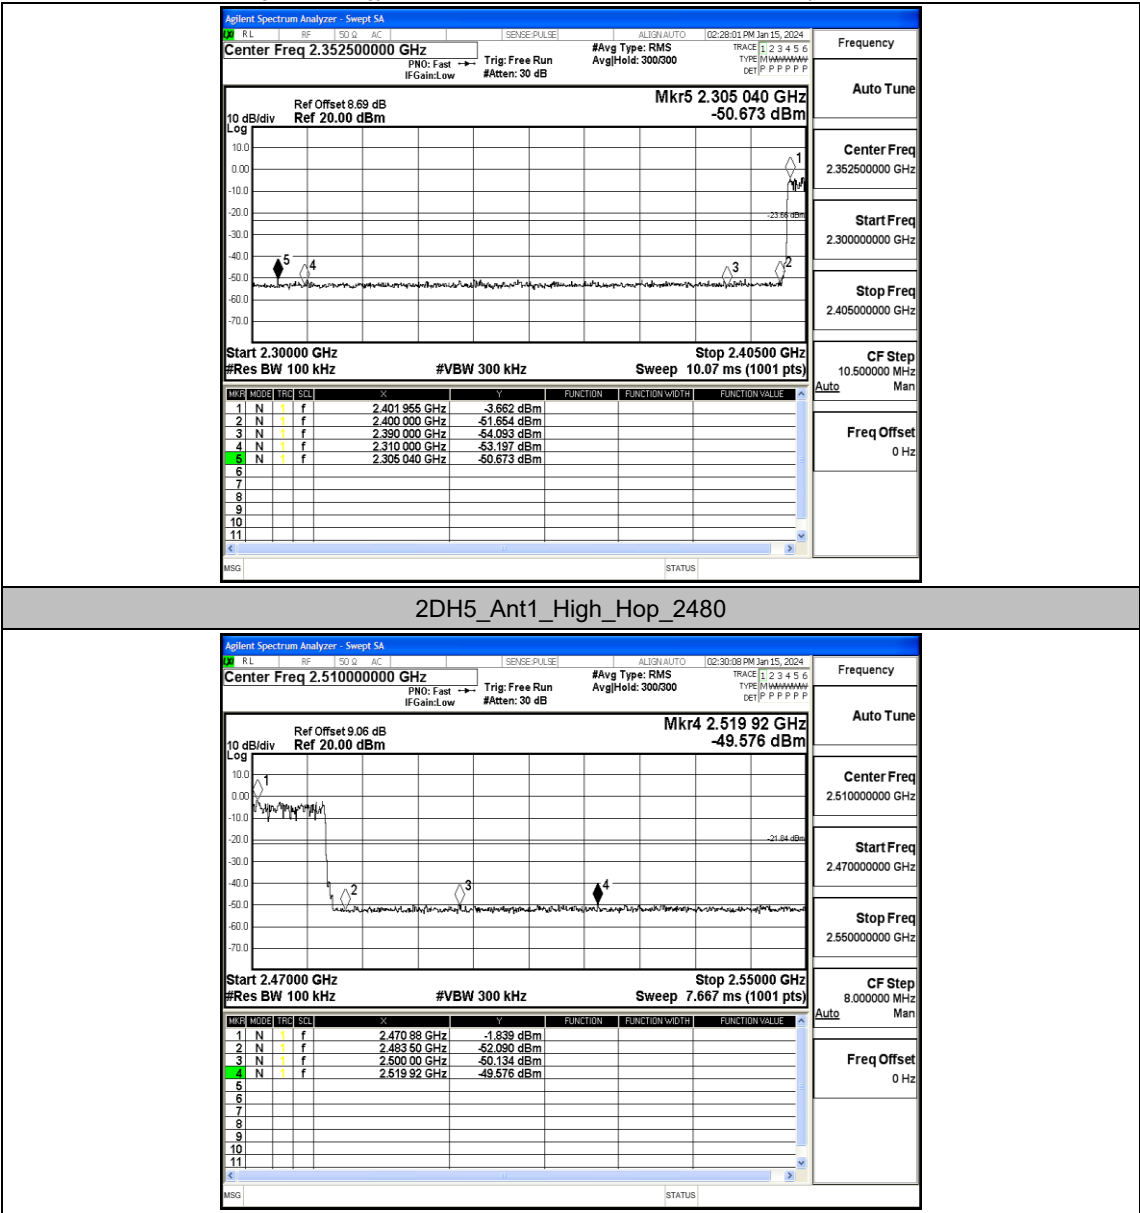



Appendix H: Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-0.26	-0.26	---	PASS
			30~1000	-0.26	-63.11	≤-20.26	PASS
			1000~26500	-0.26	-39.06	≤-20.26	PASS
		2441	Reference	0.72	0.72	---	PASS
			30~1000	0.72	-63.14	≤-19.28	PASS
			1000~26500	0.72	-38.52	≤-19.28	PASS
		2480	Reference	0.89	0.89	---	PASS
			30~1000	0.89	-62.12	≤-19.11	PASS
			1000~26500	0.89	-38.59	≤-19.11	PASS
2DH5	Ant1	2402	Reference	0.31	0.31	---	PASS
			30~1000	0.31	-62.05	≤-19.69	PASS
			1000~26500	0.31	-38.26	≤-19.69	PASS
		2441	Reference	-0.09	-0.09	---	PASS
			30~1000	-0.09	-62.48	≤-20.09	PASS
			1000~26500	-0.09	-38.8	≤-20.09	PASS
		2480	Reference	0.55	0.55	---	PASS
			30~1000	0.55	-62.31	≤-19.45	PASS
			1000~26500	0.55	-38.43	≤-19.45	PASS

Test Graphs

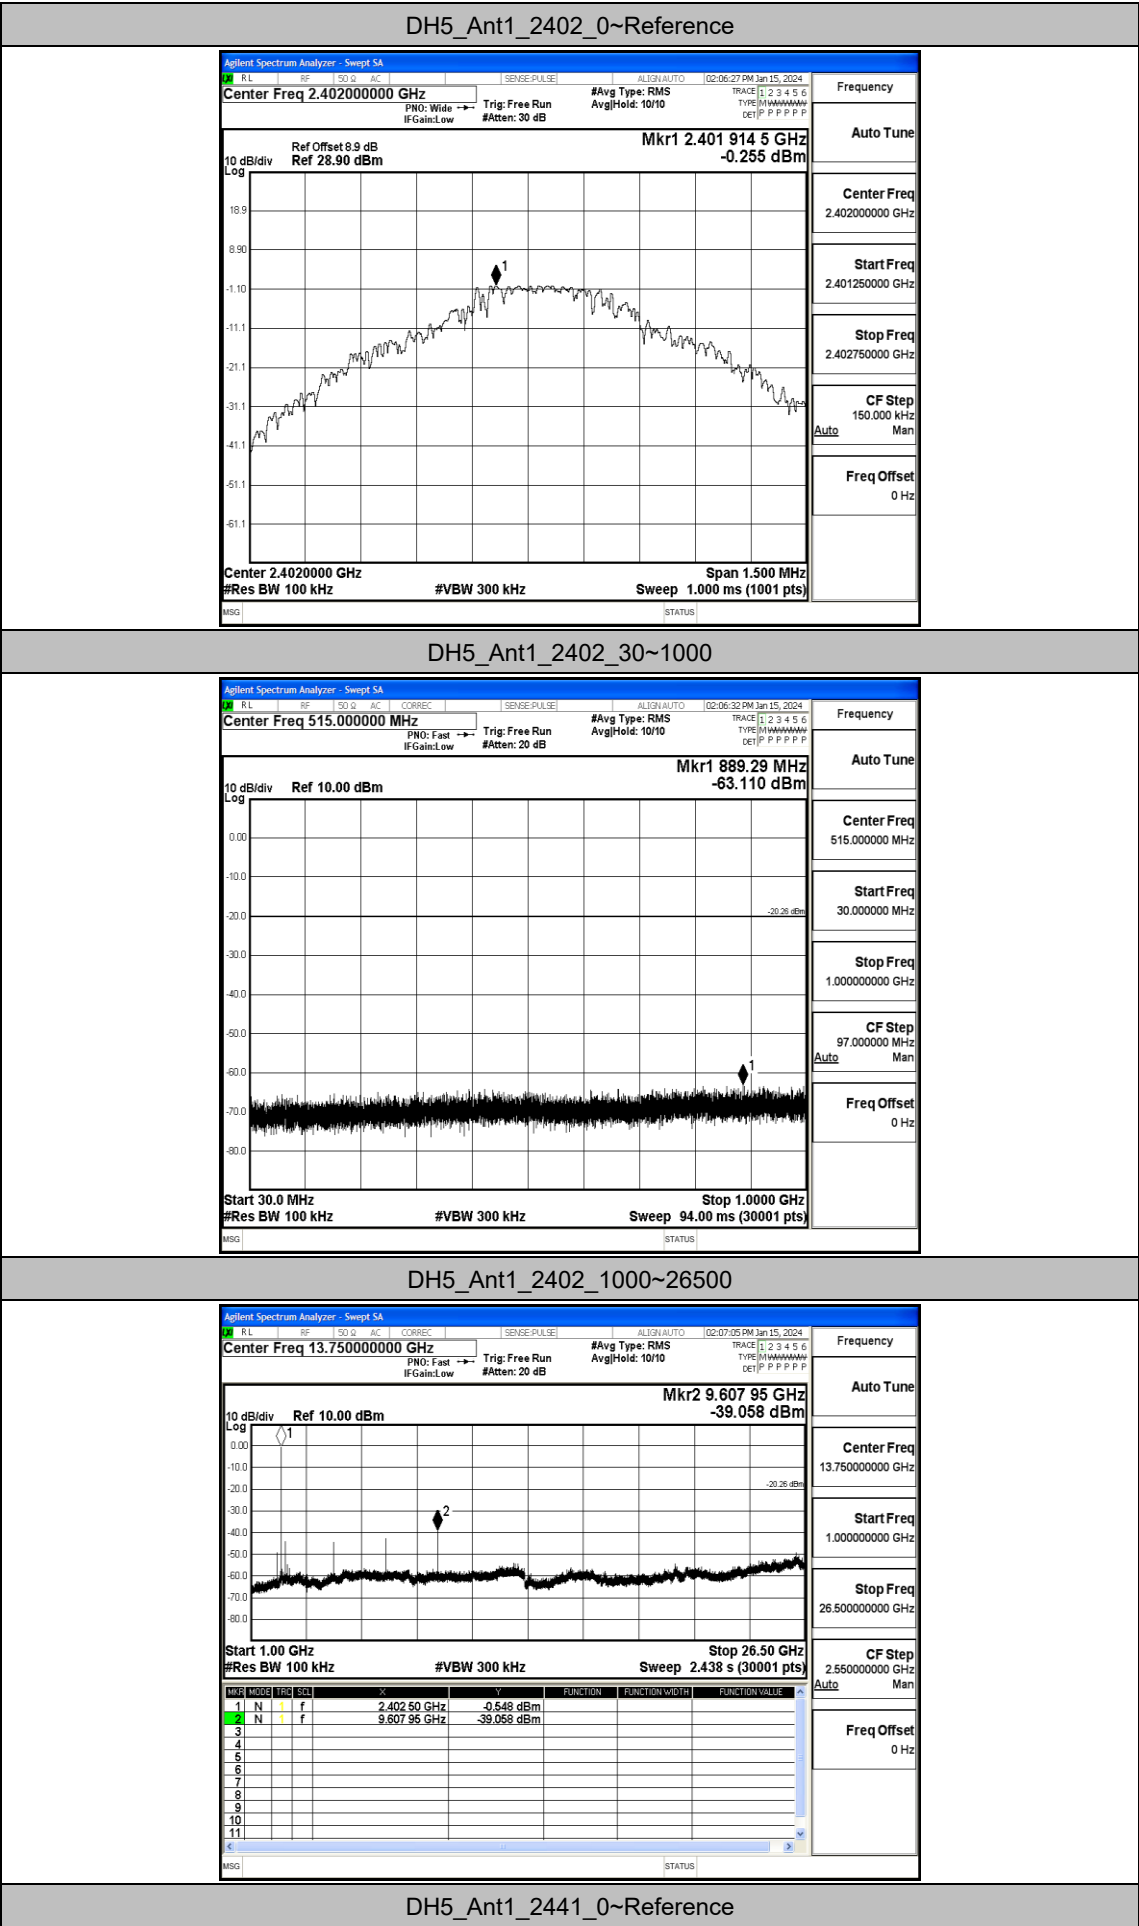


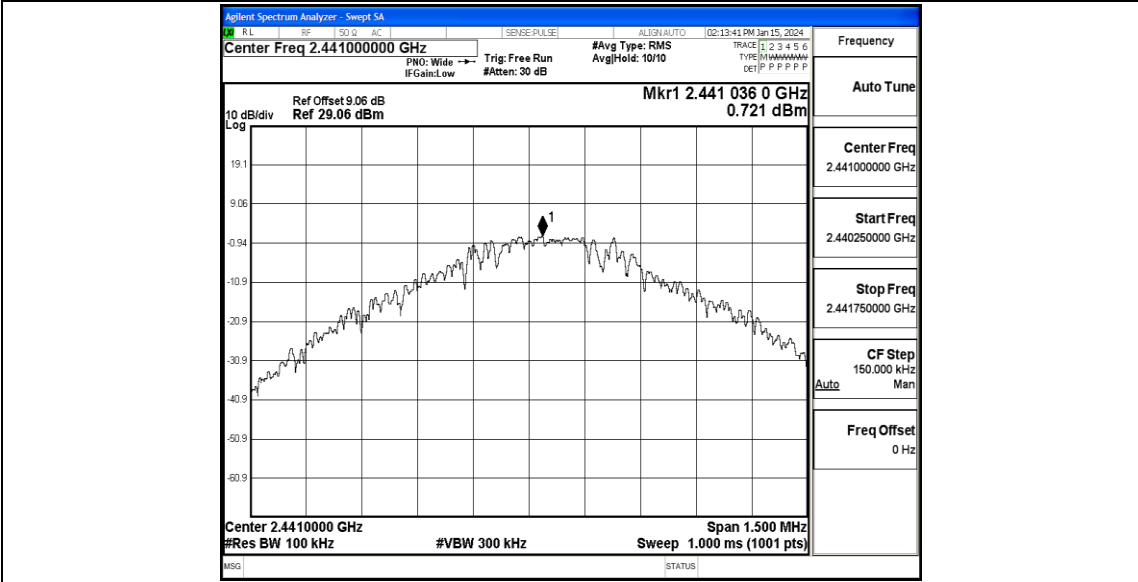


DH5_Ant1_2441_30~1000

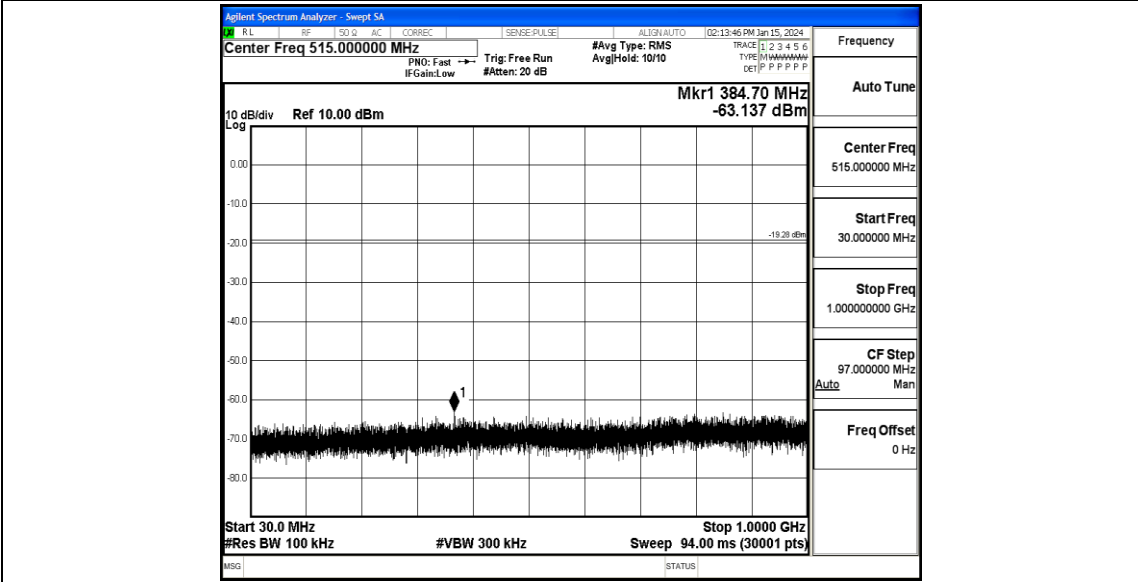


DH5_Ant1_2441_1000~26500

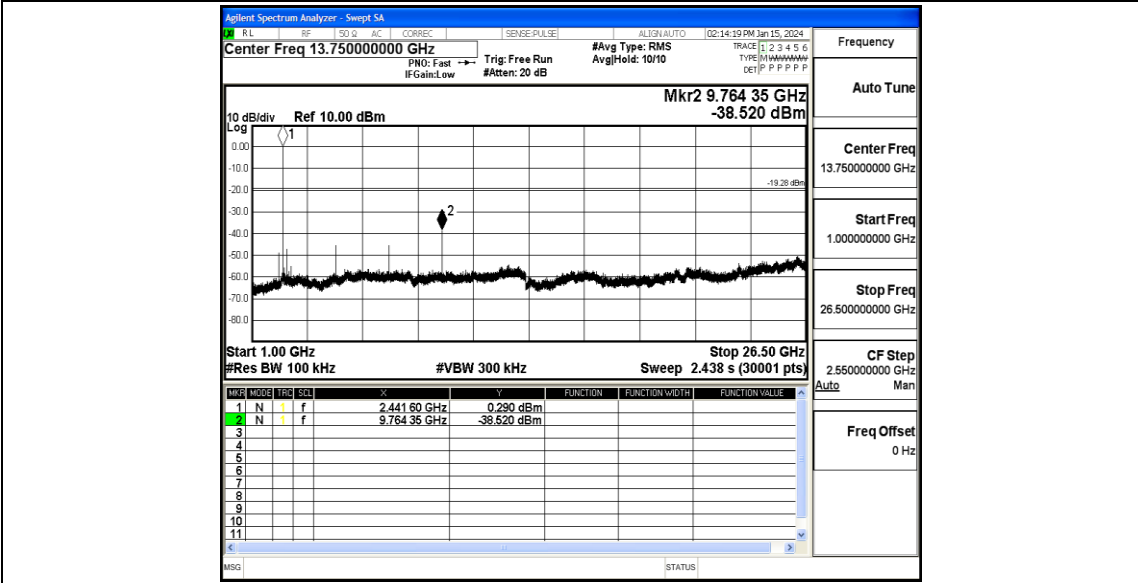


DH5_Ant1_2480_0~Reference

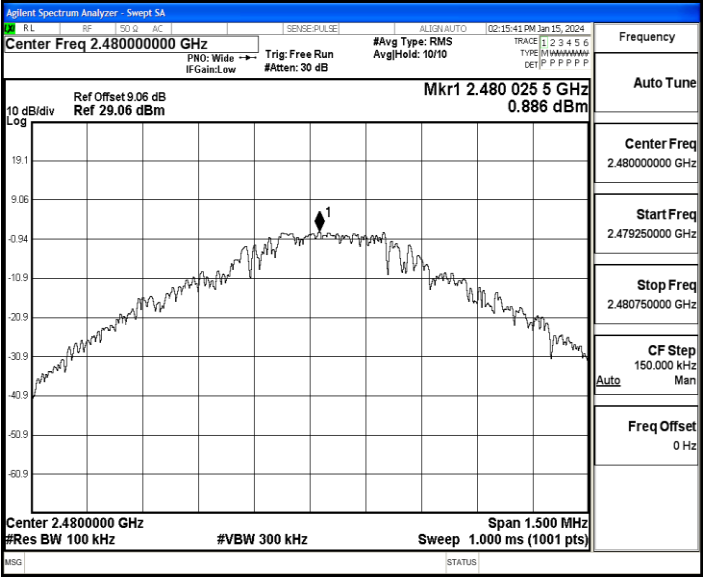


DH5_Ant1_2480_30~1000

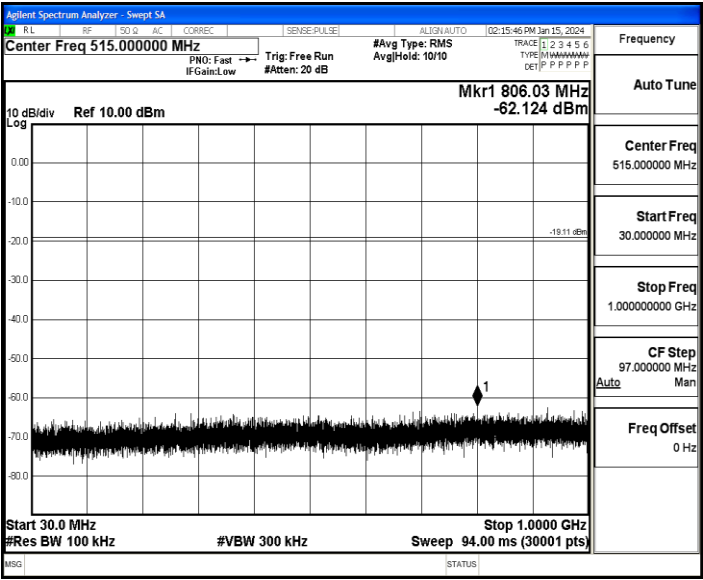


DH5_Ant1_2480_1000~26500

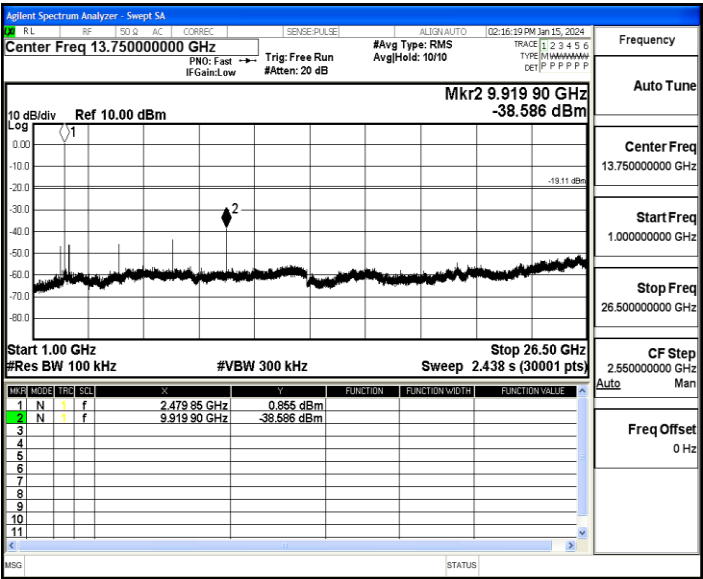


2DH5_Ant1_2402_0~Reference

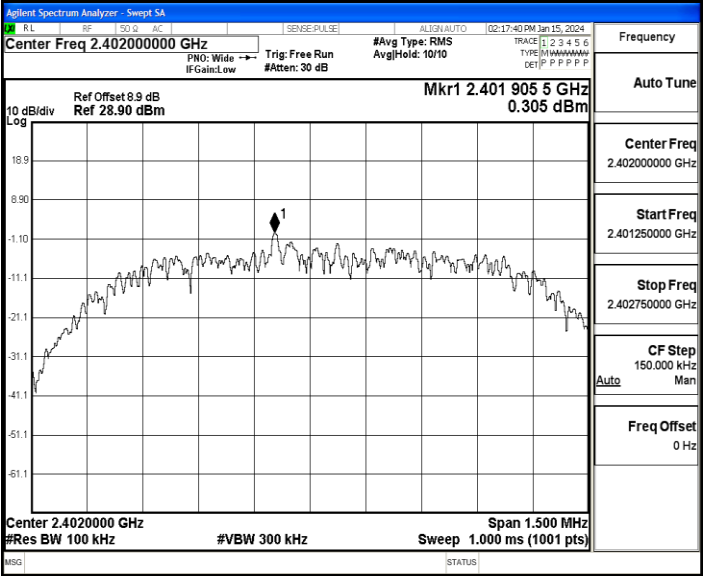


2DH5_Ant1_2402_30~1000

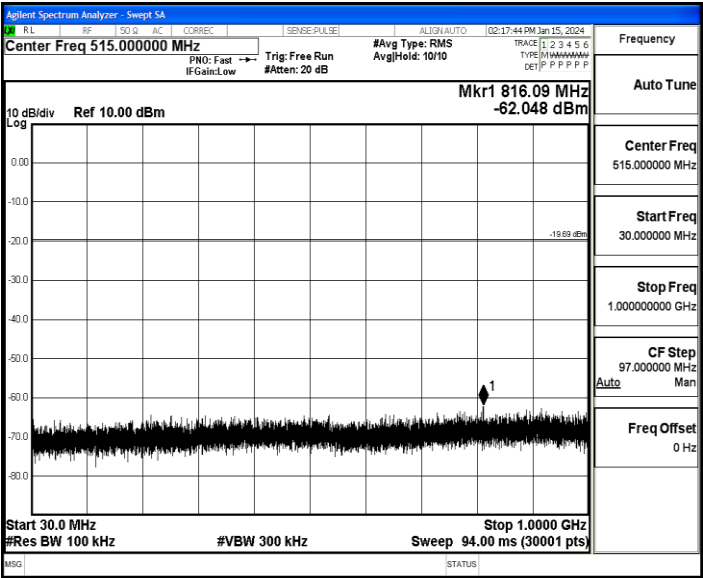


2DH5_Ant1_2402_1000~26500

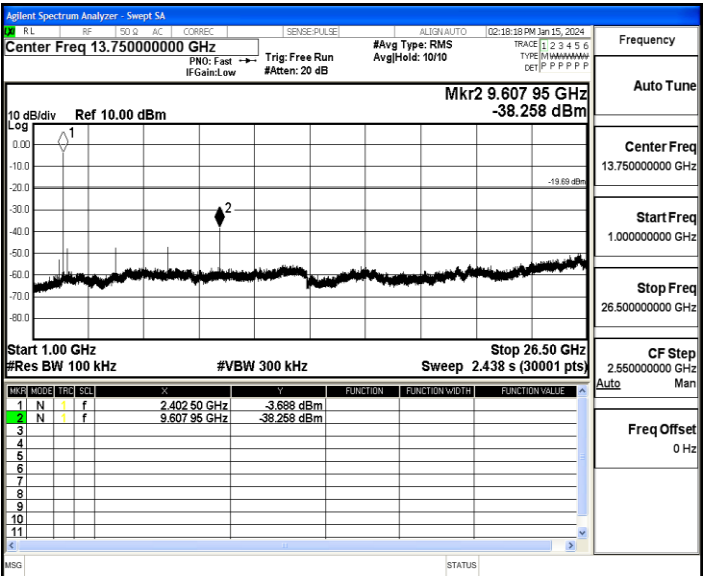


2DH5_Ant1_2441_0~Reference

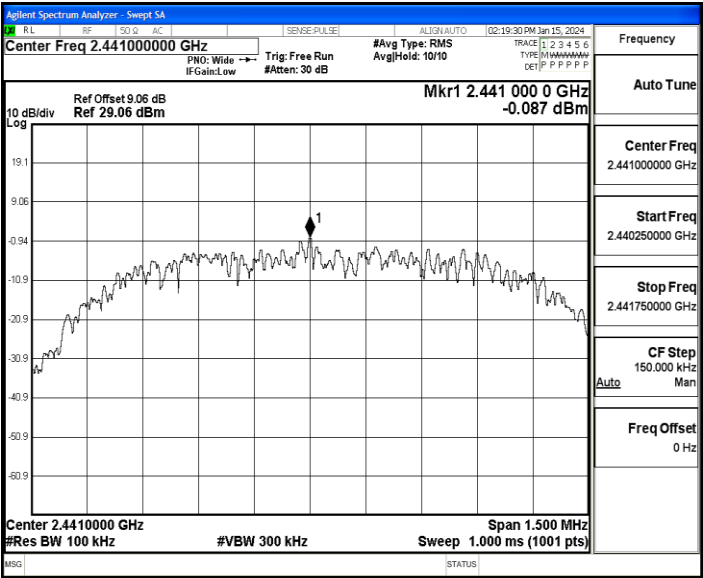


2DH5_Ant1_2441_30~1000

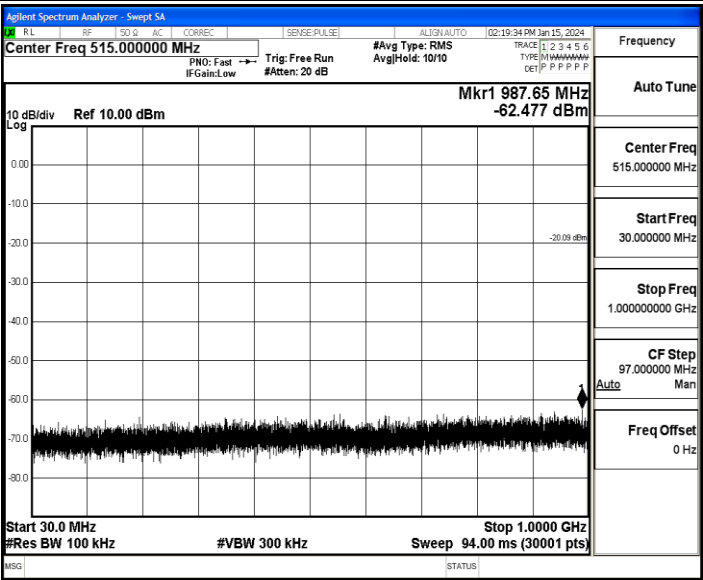


2DH5_Ant1_2441_1000~26500

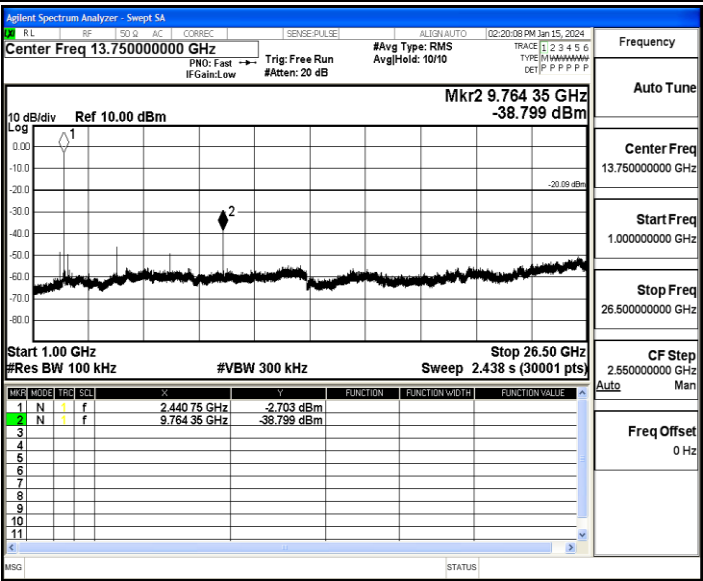


2DH5_Ant1_2480_0~Reference

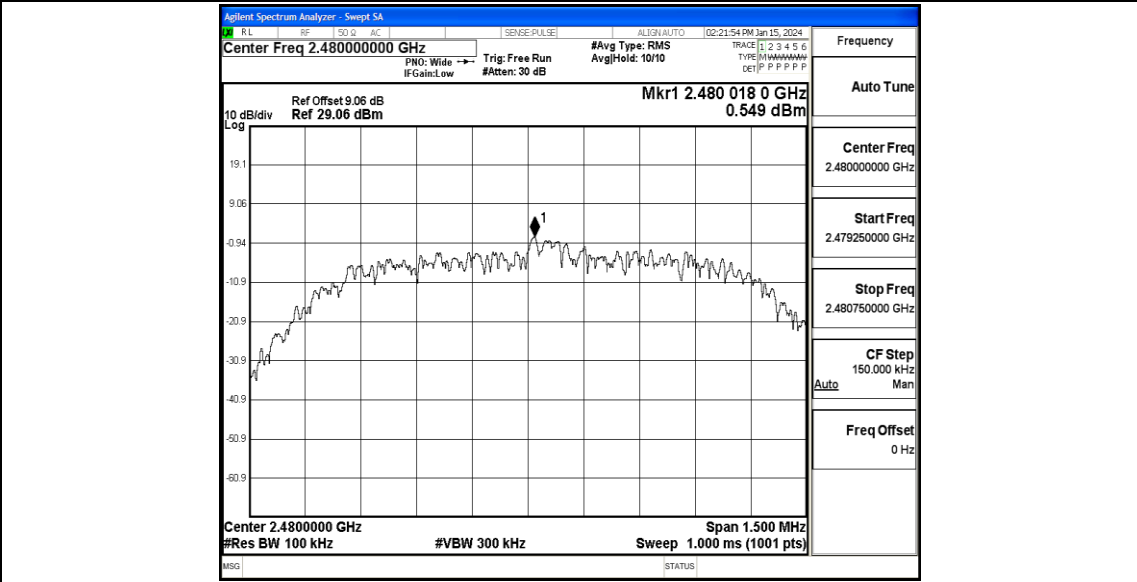

2DH5_Ant1_2480_30~1000

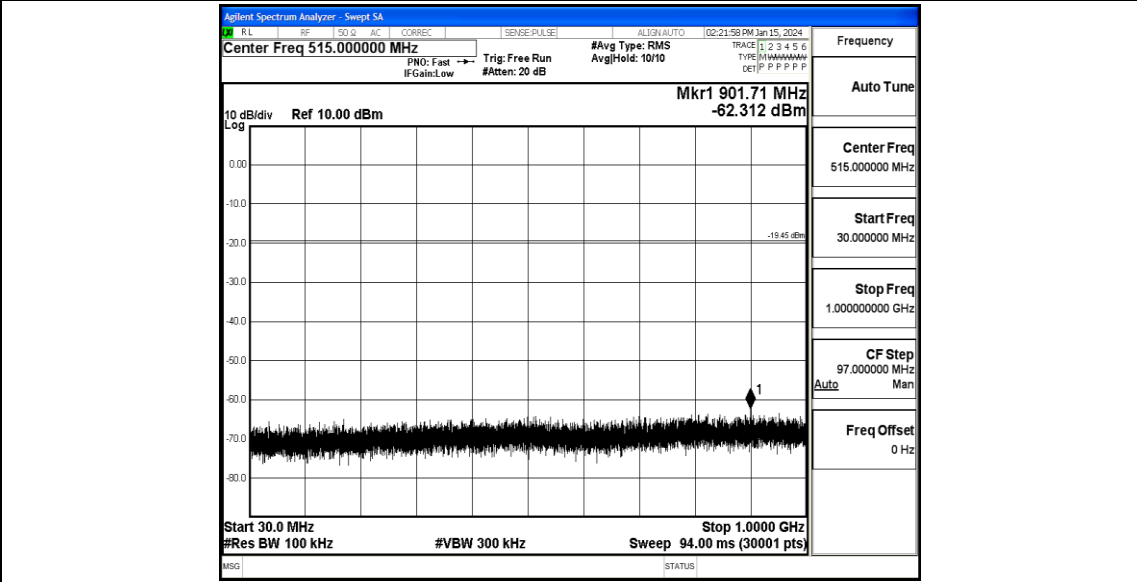

2DH5_Ant1_2480_1000~26500

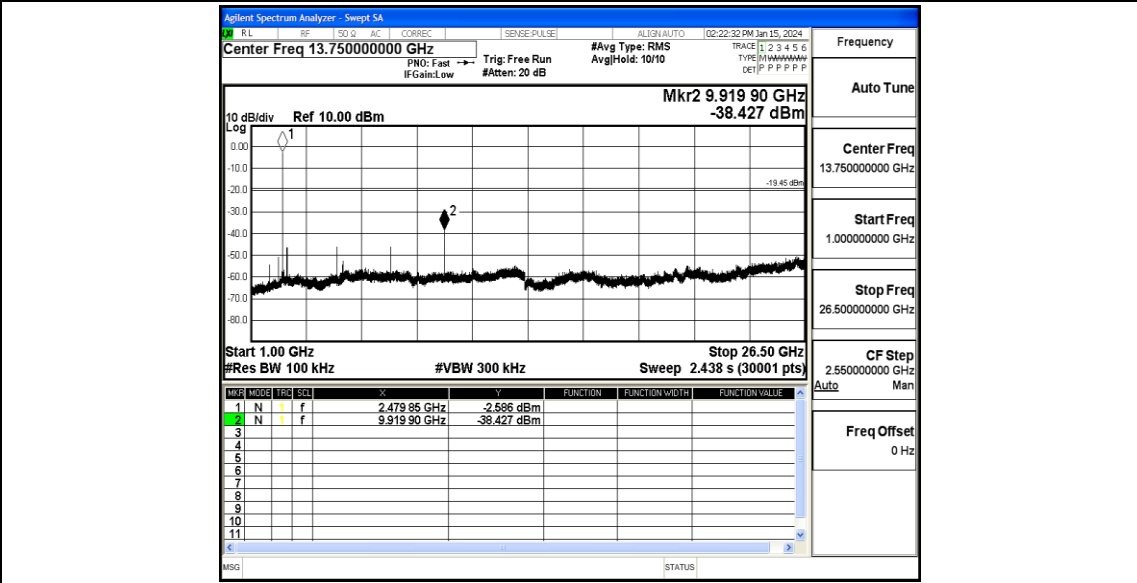



Appendix I: Duty Cycle

Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T[kHz]
DH5	Ant1	2402	2.89	3.73	77.48	0.35
		2441	2.89	3.73	77.48	0.35
		2480	2.89	3.73	77.48	0.35
2DH5	Ant1	2402	2.89	3.75	77.07	0.35
		2441	2.89	3.75	77.07	0.35
		2480	2.89	3.75	77.07	0.35

Test Graphs

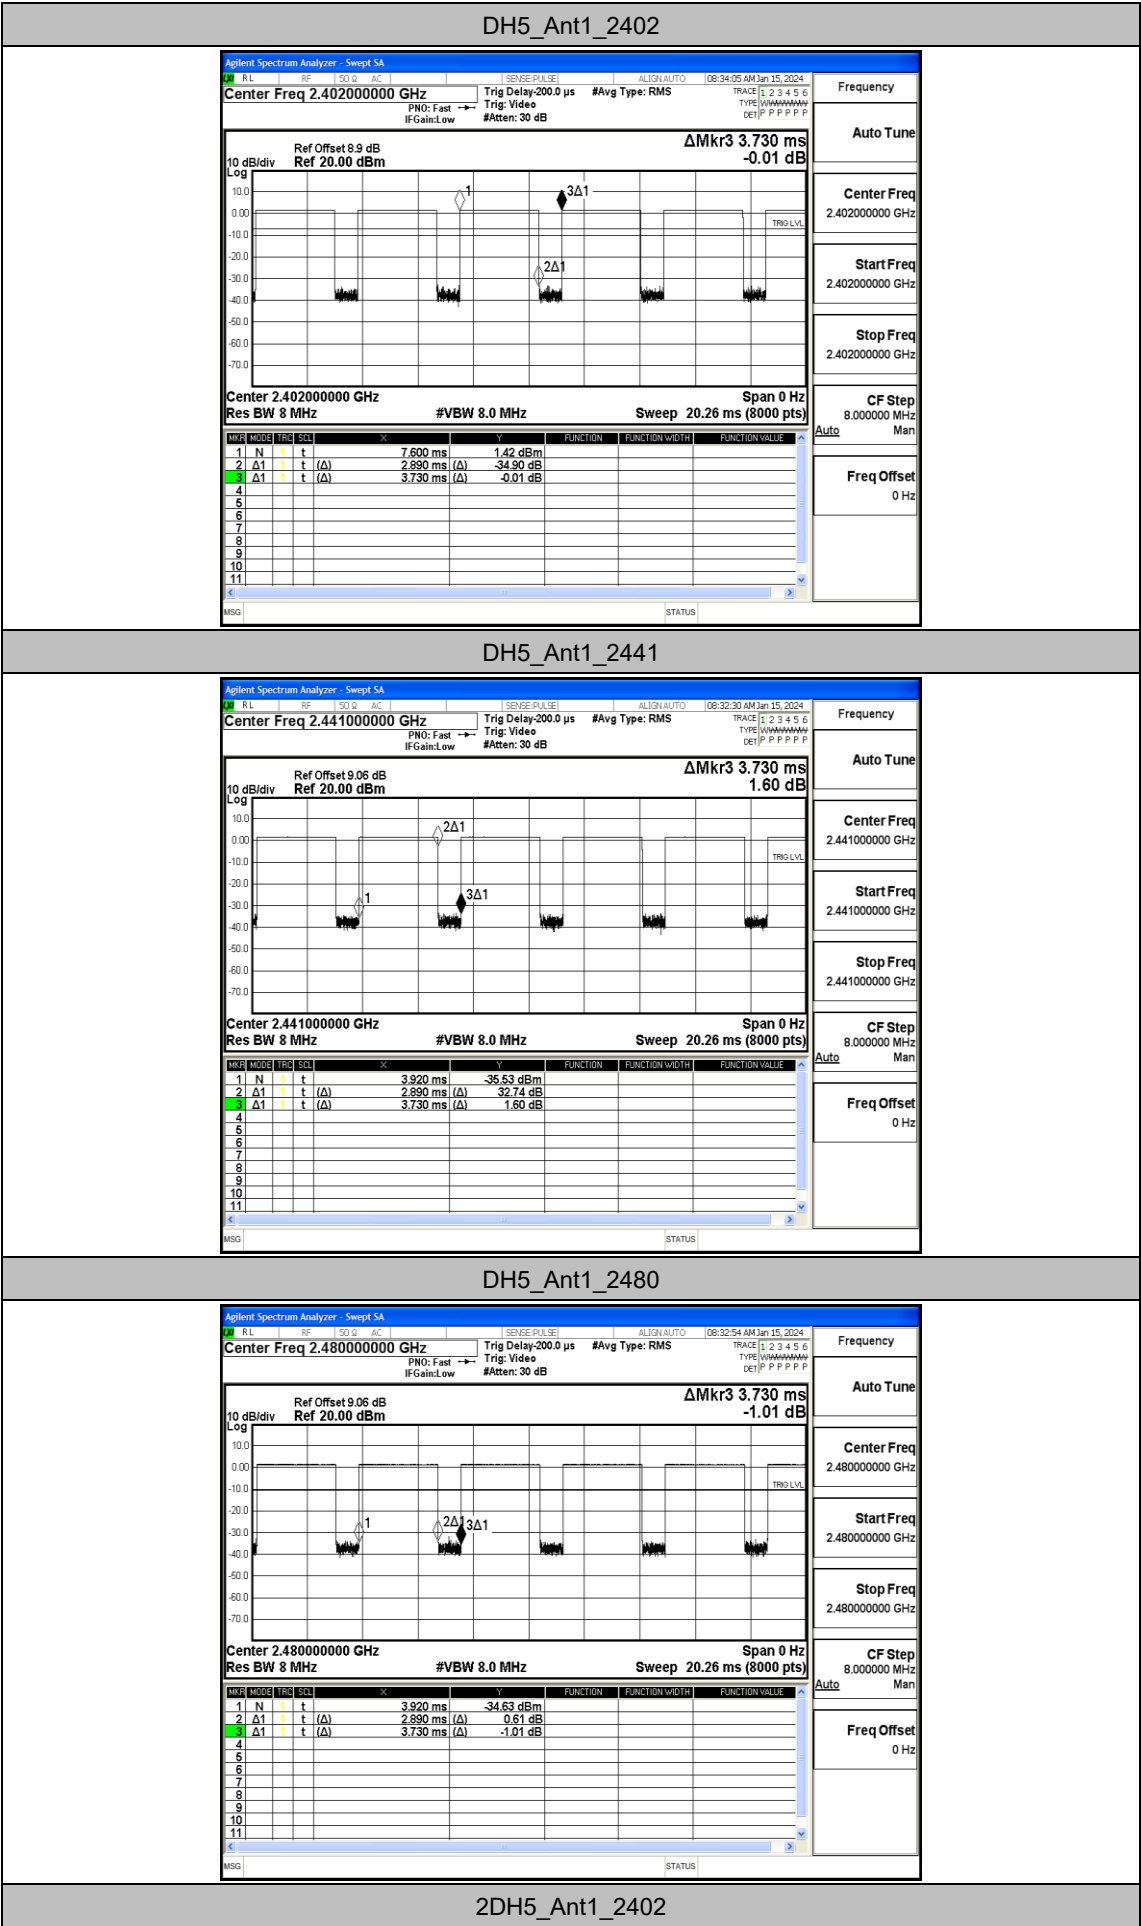

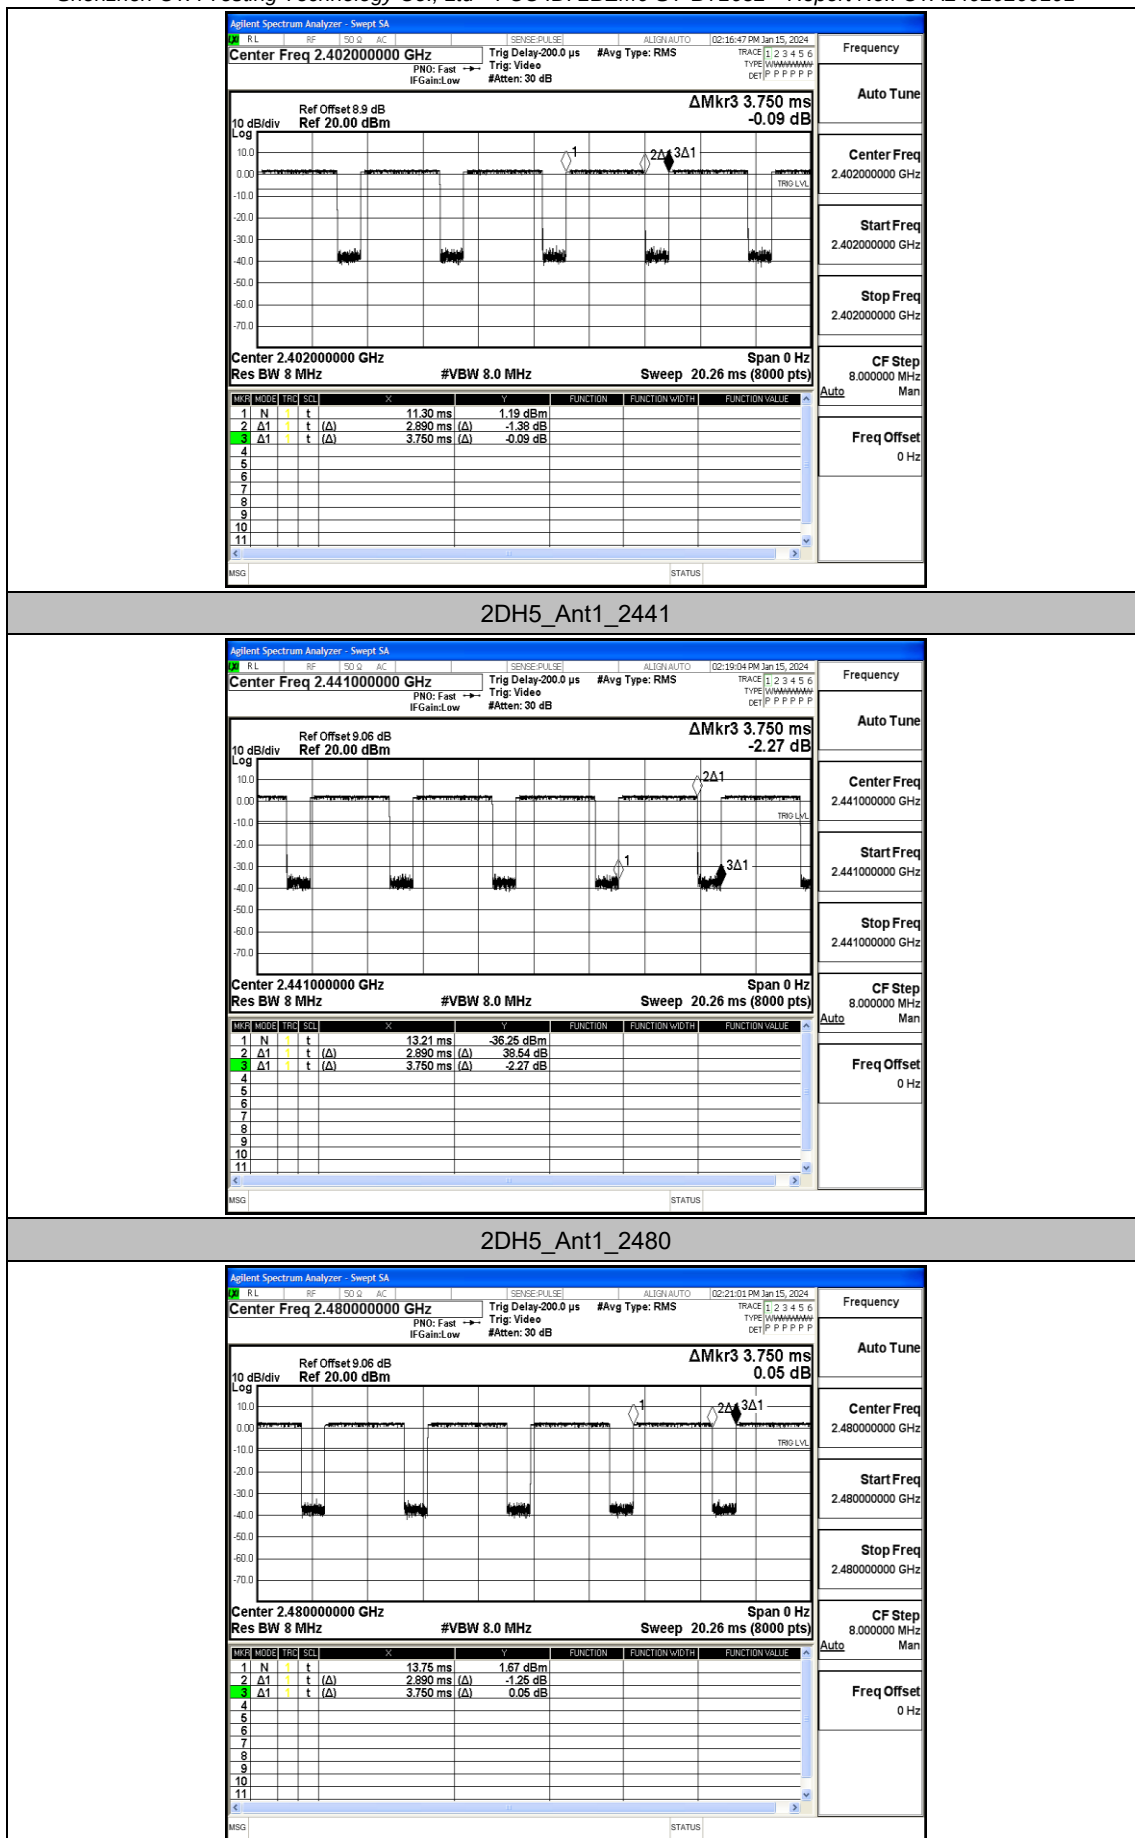

Appendix J: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Channel	Detector	Freq(MHz)	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-60.48	≤-41.20	PASS
				AV	2372.450	-56.52	≤-41.20	PASS
				AV	2390.000	-58.38	≤-41.20	PASS
				Peak	2310.000	-57.6	≤-21.20	PASS
				Peak	2354.180	-54.06	≤-21.20	PASS
				Peak	2390.000	-55.87	≤-21.20	PASS
		High	2480	AV	2483.500	-58.38	≤-41.20	PASS
				AV	2483.680	-55.07	≤-41.20	PASS
				AV	2500.000	-55.12	≤-41.20	PASS
				Peak	2483.500	-53.71	≤-21.20	PASS
				Peak	2499.120	-52.25	≤-21.20	PASS
				Peak	2500.000	-54.86	≤-21.20	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-60.42	≤-41.20	PASS
				AV	2366.780	-56.36	≤-41.20	PASS
				AV	2390.000	-58.53	≤-41.20	PASS
				Peak	2310.000	-57.86	≤-21.20	PASS
				Peak	2371.190	-54	≤-21.20	PASS
				Peak	2390.000	-56.37	≤-21.20	PASS
		High	2480	AV	2483.500	-56.97	≤-41.20	PASS
				AV	2498.640	-56.79	≤-41.20	PASS
				AV	2500.000	-57.23	≤-41.20	PASS
				Peak	2483.500	-54.23	≤-21.20	PASS
				Peak	2498.000	-53.81	≤-21.20	PASS
				Peak	2500.000	-54.33	≤-21.20	PASS

Note:


1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


DH5_Ant1_Low_2402_AV

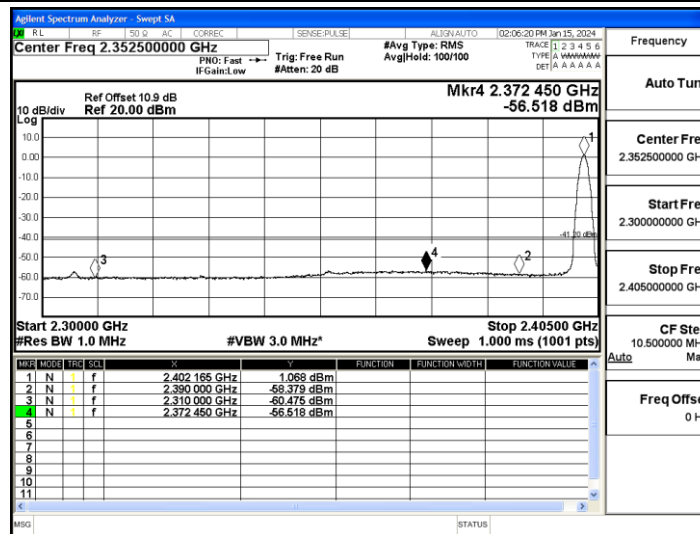


DH5_Ant1_Low_2402_Peak

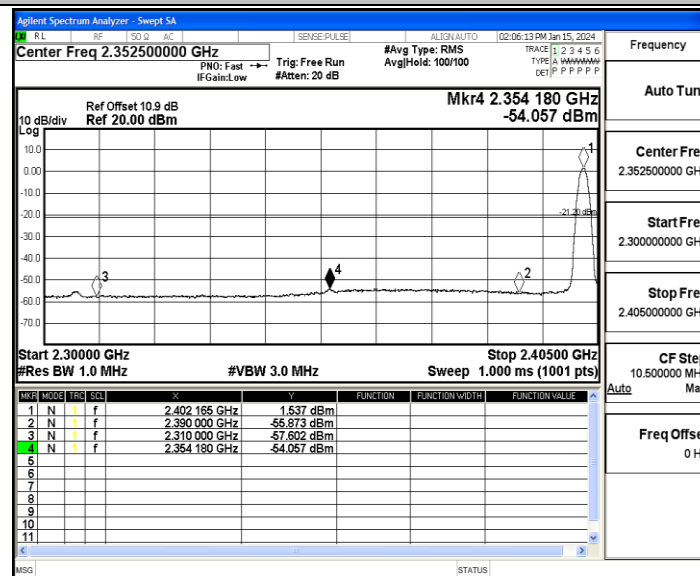


DH5_Ant1_High_2480_AV

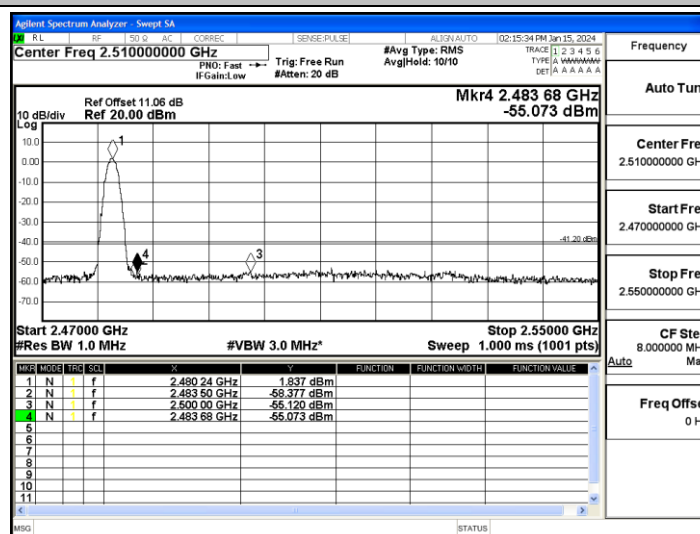


DH5_Ant1_High_2480_Peak

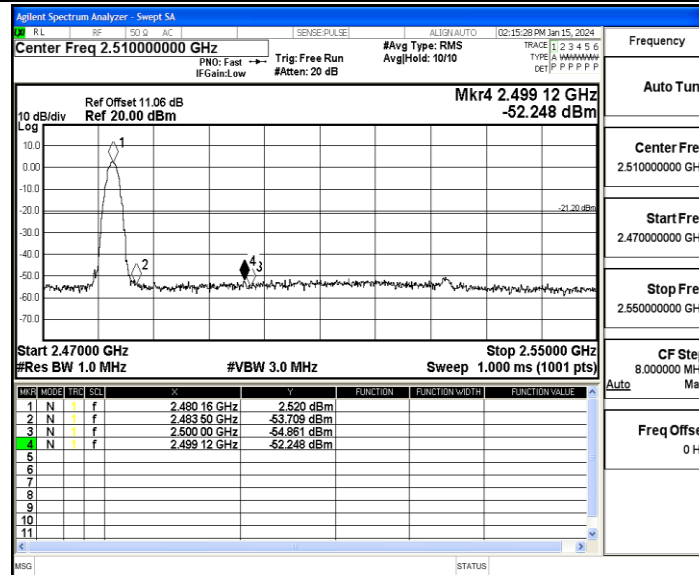

2DH5_Ant1_Low_2402_AV

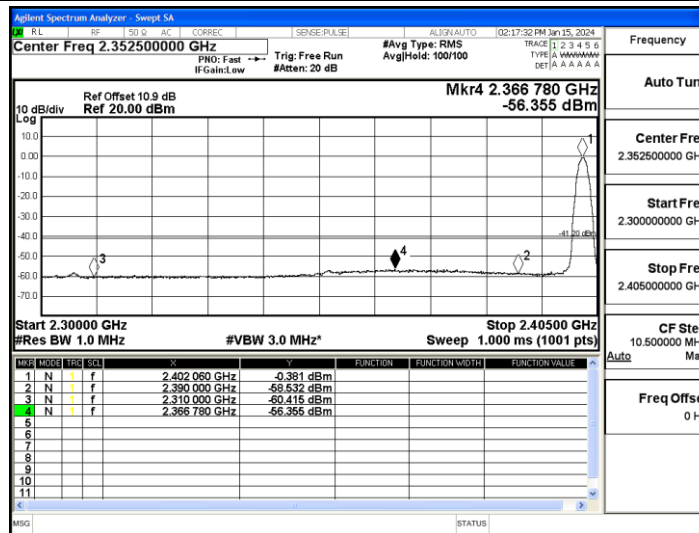

2DH5_Ant1_Low_2402_Peak

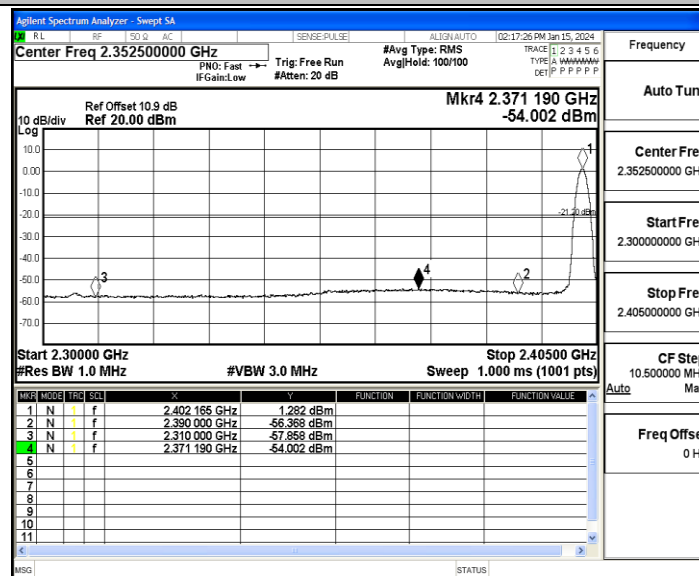

2DH5_Ant1_High_2480_AV

