



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2127-2
FCC ID : IHDT56ZM2
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Oct. 20, 2020 and testing was completed on Nov. 29, 2020. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	8
1.9 Specification of Accessory.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT.....	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement.....	20
3.5 AC Conducted Emission Measurement.....	24
3.6 Automatically Discontinue Transmission	26
3.7 Antenna Requirements.....	27
4 LIST OF MEASURING EQUIPMENT	28
5 UNCERTAINTY OF EVALUATION	29
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR002013F	Rev. 01	Initial issue of report	Dec. 08, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 7.25 dB at 41.640 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.83 dB at 0.66 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2127-2
FCC ID	IHDT56ZM2
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted: 351546360020959/351546360020967 Conduction: 351546360021650/351546360021668 Radiation: 351546360021890/351546360021908
HW Version	DVT2
SW Version	RRB31.30
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 12.63 dBm / 0.0183 W 802.11n HT20 : 12.46 dBm / 0.0176 W 802.11n HT40 : 12.18 dBm / 0.0165 W 802.11ac VHT20: 12.43 dBm / 0.0175 W 802.11ac VHT40: 12.16 dBm / 0.0164 W 802.11ac VHT80: 12.25 dBm / 0.0168 W
99% Occupied Bandwidth	802.11a : 16.78 MHz 802.11n HT20 : 18.03 MHz 802.11n HT40 : 36.86 MHz 802.11ac VHT80 : 76.36 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PIFA Antenna with gain -4.50 dBi

Remark: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to the higher output power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013
- ♦ FCC RSS-247 Issue 2
- ♦ FCC RSS-Gen Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 1(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
AC Adapter 3(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 3(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
Battery	Brand Name	Motorola (Sunwoda)	Model Name	JK50
Earphone 1	Brand Name	Motorola (New Leader)	Model Name	EM301K-11SF
Earphone 2	Brand Name	Motorola (Juwei)	Model Name	JWEP1182-T03H
Earphone 3	Brand Name	Motorola (New Leader)	Model Name	NLD-EM313A-11SF
Earphone 4	Brand Name	Motorola (LIANYUN)	Model Name	SH38C81577
Earphone 5	Brand Name	Motorola (Lianchuang)	Model Name	SH38C81576
USB Cable 1	Brand Name	Motorola (Chuangyitong)	Model Name	88806-025
USB Cable 2	Brand Name	Motorola (Yihuaxing)	Model Name	T365-011B

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151 [*]	5755	159 [*]	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 1(Charging from Adapter 3) + Earphone 4 + Battery
Remark: For Radiated Test Cases, The tests were performance with Adapter 3, Battery, Earphone 4 and USB Cable1	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

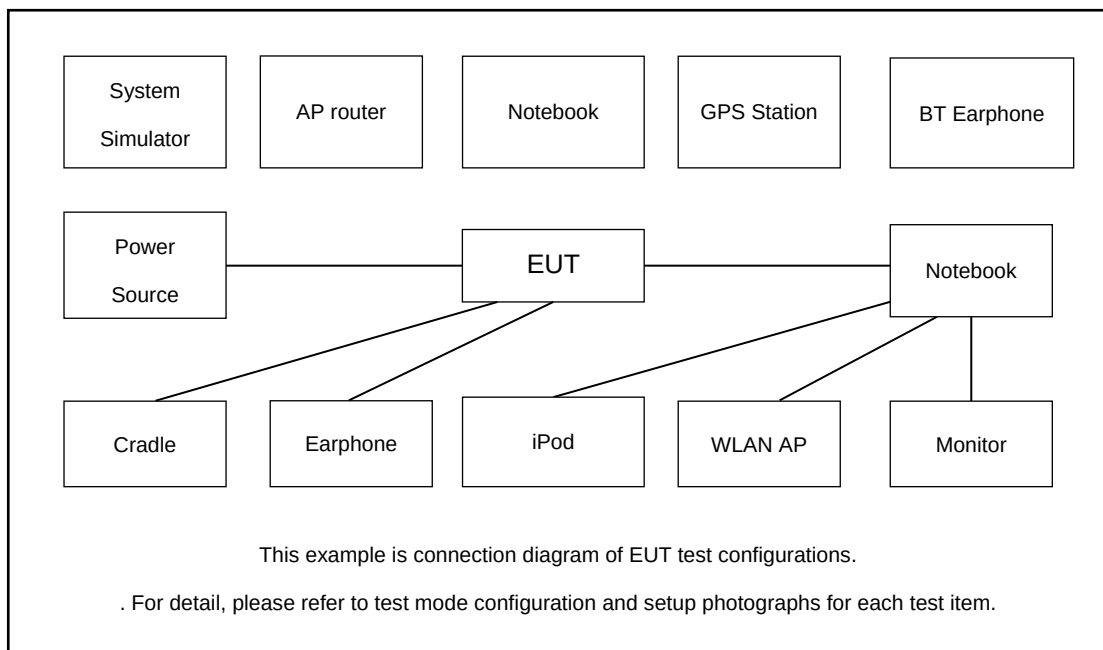

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	SD Card	N/A	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.5 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.5 + 20 = 22.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

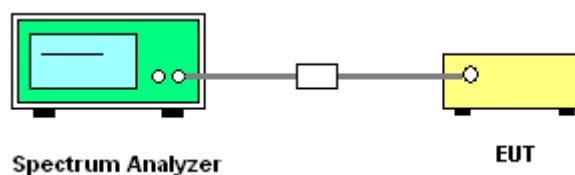

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

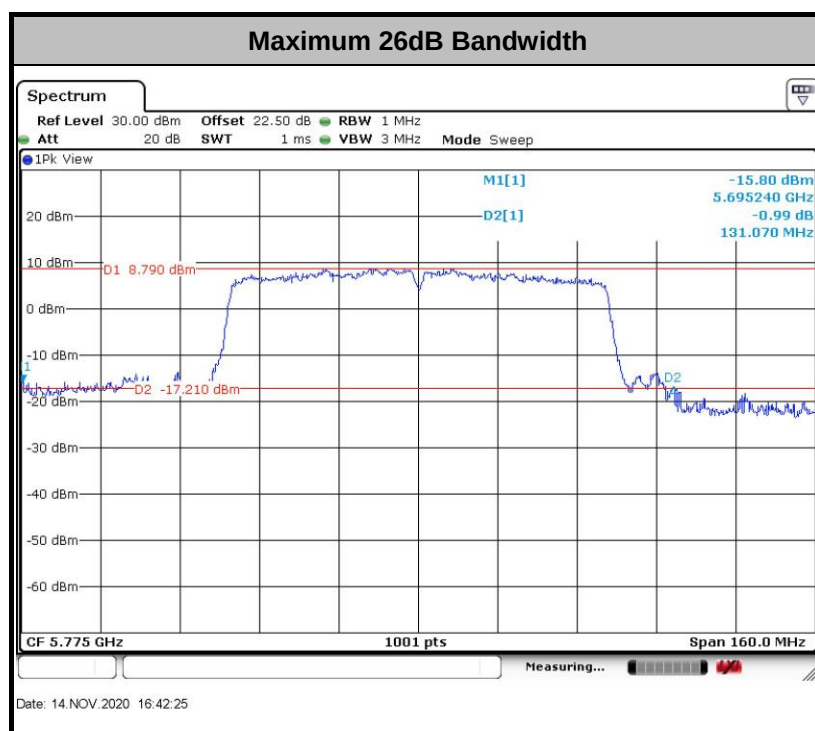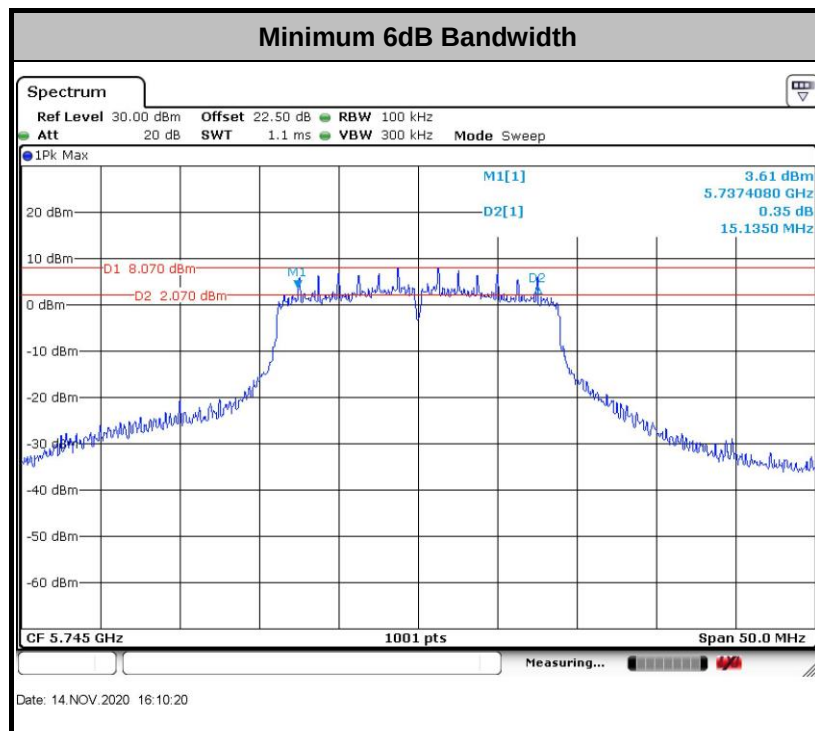

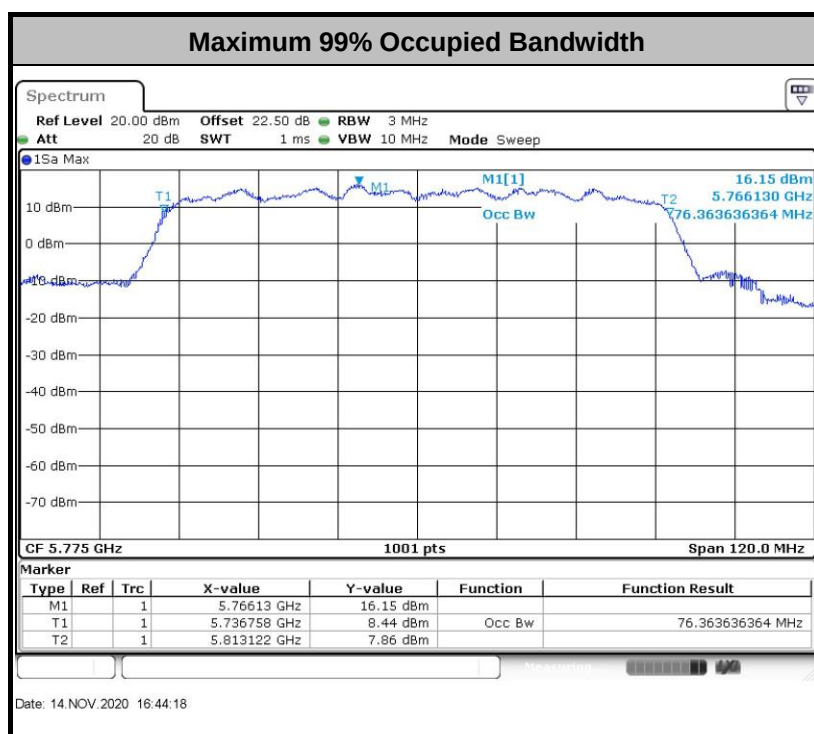

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

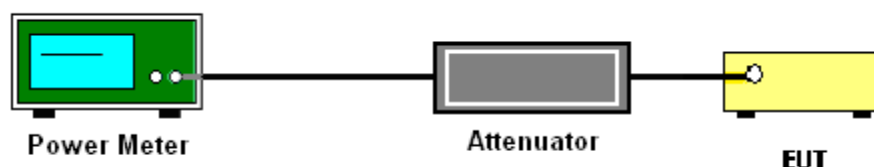

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

<TXBF Modes>**# Method SA-3 #**

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
-
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

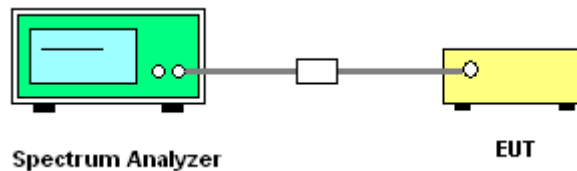3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

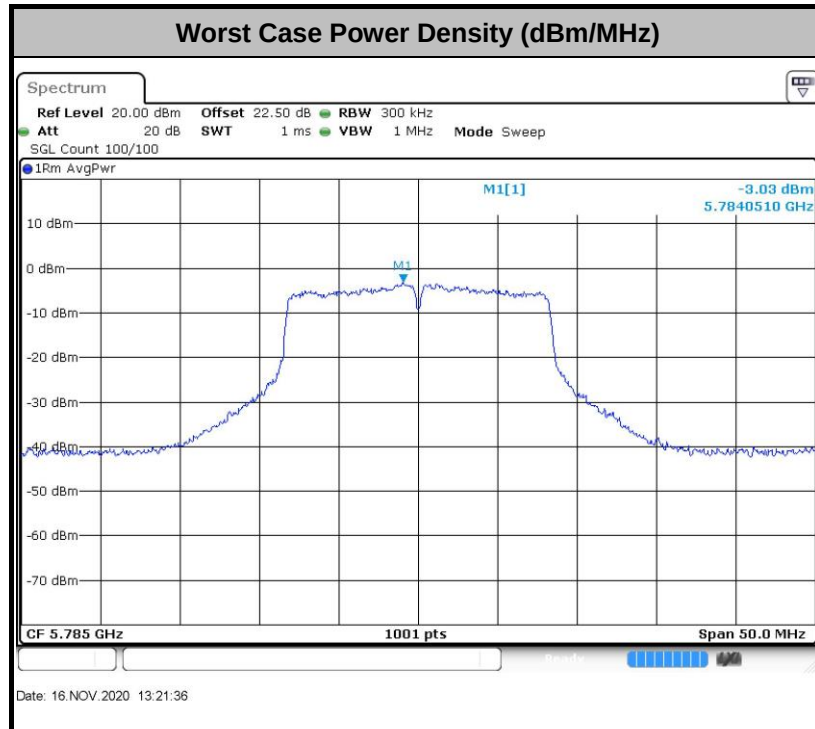

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

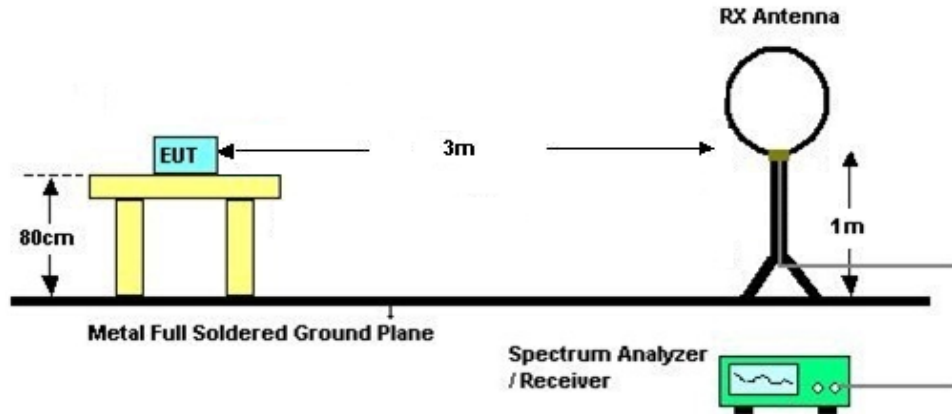

For radiated emissions from 30MHz to 1GHz

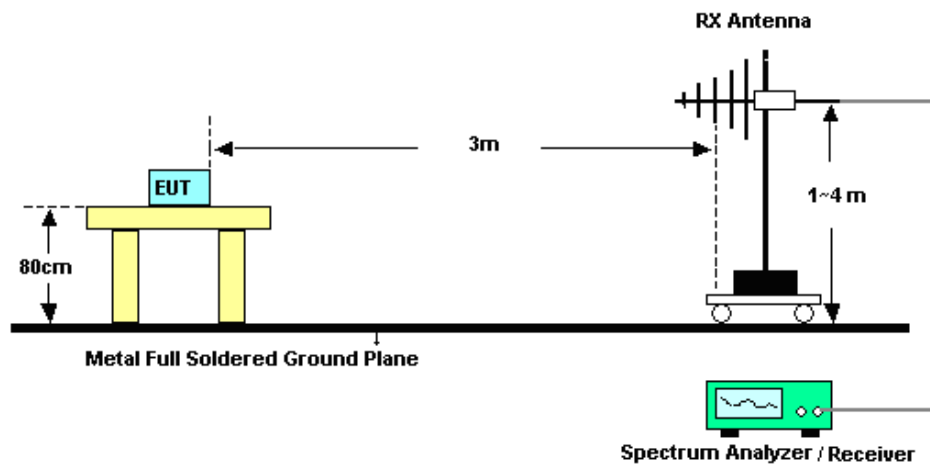

For radiated emissions above 1GHz

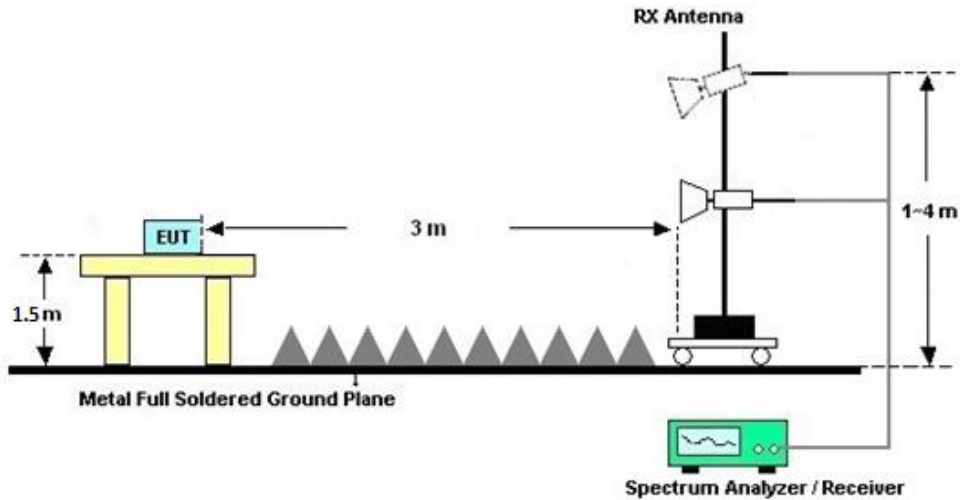

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

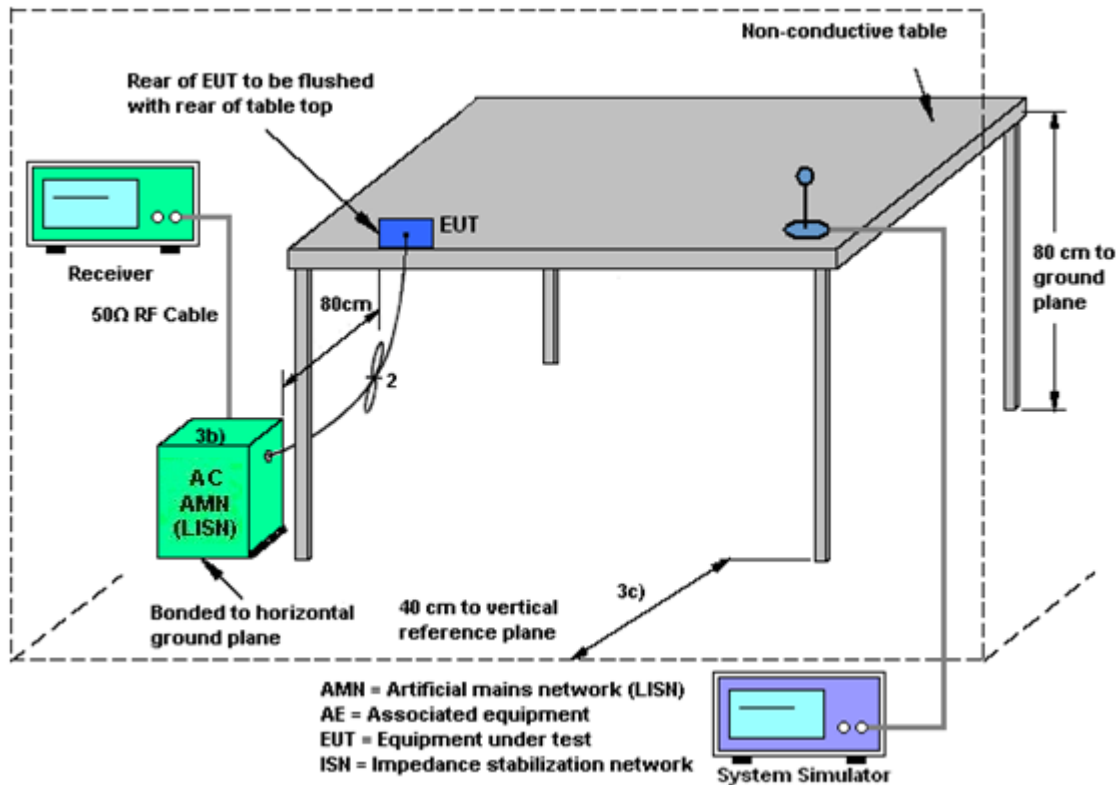

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 17, 2020	Nov. 14, 2020~ Nov. 16, 2020	Apr. 16, 2021	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2019	Nov. 14, 2020~ Nov. 16, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2019	Nov. 14, 2020~ Nov. 16, 2020	Dec. 25, 2020	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 16, 2020	Nov. 29, 2020	Oct. 15, 2021	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2020	Nov. 29, 2020	Jul. 20, 2021	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Nov. 29, 2020	Jun. 21, 2022	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Nov. 07, 2020	Nov. 29, 2020	Nov. 06, 2021	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	May 23, 2020	Nov. 29, 2020	Mar. 22, 2021	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 26, 2020	Nov. 29, 2020	Jul. 25, 2021	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 16, 2020	Nov. 29, 2020	Oct. 15, 2021	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 17, 2020	Nov. 29, 2020	Oct. 16, 2021	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2020	Nov. 29, 2020	Jul. 20, 2021	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Oct. 17, 2020	Nov. 29, 2020	Oct. 16, 2021	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Nov. 29, 2020	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 29, 2020	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 29, 2020	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 27, 2019	Nov. 11, 2020	Dec. 26, 2021	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Dec. 27, 2020	Nov. 11, 2020	Dec 26, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Nov. 11, 2020	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2020	Nov. 11, 2020	Jul. 20, 2021	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Chen Hong	Temperature:	21~25	°C
Test Date:	2020/11/14~2020/11/16	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.78	24.78	15.29	0.5	Pass
11a	6Mbps	1	157	5785	16.78	24.58	15.29	0.5	Pass
11a	6Mbps	1	165	5825	16.78	23.98	15.29	0.5	Pass
HT20	MCS 0	1	149	5745	17.98	24.93	15.14	0.5	Pass
HT20	MCS 0	1	157	5785	18.03	25.33	15.44	0.5	Pass
HT20	MCS 0	1	165	5825	18.03	25.57	15.93	0.5	Pass
HT40	MCS 0	1	151	5755	36.86	41.99	35.36	0.5	Pass
HT40	MCS 0	1	159	5795	36.86	47.47	35.16	0.5	Pass
VHT80	MCS 0	1	155	5775	76.36	131.07	75.04	0.5	Pass

TEST RESULTS DATA
Average Power Table


Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.08	12.23	30.00	-4.50		Pass
11a	6Mbps	1	157	5785	0.08	12.40	30.00	-4.50		Pass
11a	6Mbps	1	165	5825	0.08	12.63	30.00	-4.50		Pass
HT20	MCS 0	1	149	5745	0.08	12.07	30.00	-4.50		Pass
HT20	MCS 0	1	157	5785	0.08	12.24	30.00	-4.50		Pass
HT20	MCS 0	1	165	5825	0.08	12.46	30.00	-4.50		Pass
HT40	MCS 0	1	151	5755	0.16	12.12	30.00	-4.50		Pass
HT40	MCS 0	1	159	5795	0.16	12.18	30.00	-4.50		Pass
VHT20	MCS 0	1	149	5745	0.08	12.00	30.00	-4.50		Pass
VHT20	MCS 0	1	157	5785	0.08	12.22	30.00	-4.50		Pass
VHT20	MCS 0	1	165	5825	0.08	12.43	30.00	-4.50		Pass
VHT40	MCS 0	1	151	5755	0.16	12.09	30.00	-4.50		Pass
VHT40	MCS 0	1	159	5795	0.16	12.16	30.00	-4.50		Pass
VHT80	MCS 0	1	155	5775	0.33	12.25	30.00	-4.50		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.08	2.22	-1.41	30.00	-4.50	Pass
11a	6Mbps	1	157	5785	0.08	2.22	-0.74	30.00	-4.50	Pass
11a	6Mbps	1	165	5825	0.08	2.22	-0.96	30.00	-4.50	Pass
HT20	MCS 0	1	149	5745	0.08	2.22	-1.54	30.00	-4.50	Pass
HT20	MCS 0	1	157	5785	0.08	2.22	-1.55	30.00	-4.50	Pass
HT20	MCS 0	1	165	5825	0.08	2.22	-1.16	30.00	-4.50	Pass
HT40	MCS 0	1	151	5755	0.16	2.22	-4.80	30.00	-4.50	Pass
HT40	MCS 0	1	159	5795	0.16	2.22	-4.90	30.00	-4.50	Pass
VHT80	MCS 0	1	155	5775	0.33	2.22	-7.92	30.00	-4.50	Pass




Appendix B. AC Conducted Emission Test Results

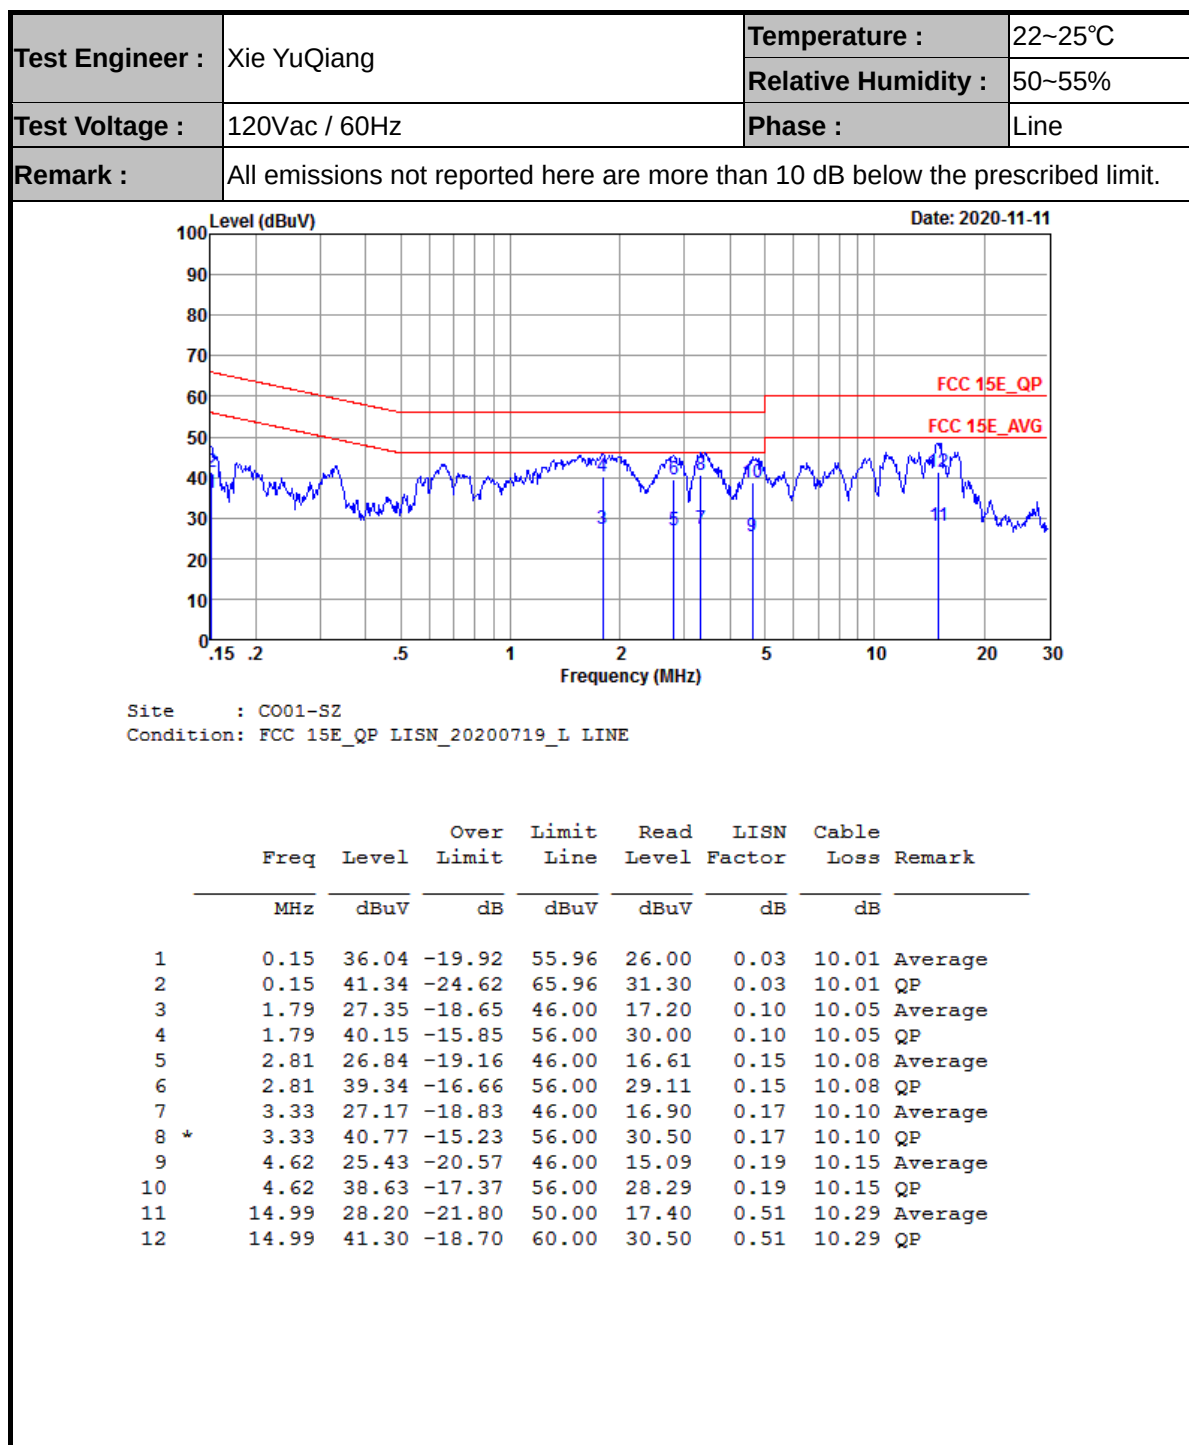



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

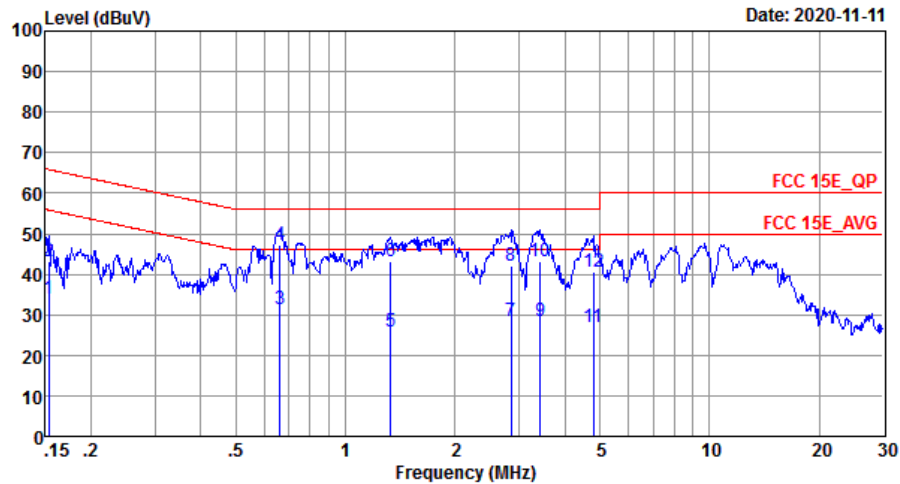

Site : CO01-SZ
Condition: FCC 15E_QP LISN_20170907_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	34.01	-21.81	55.82	24.00	0.00	10.01	Average
2	0.15	43.21	-22.61	65.82	33.20	0.00	10.01	QP
3	0.66	31.37	-14.63	46.00	21.30	0.00	10.07	Average
4 *	0.66	47.17	-8.83	56.00	37.10	0.00	10.07	QP
5	1.33	25.65	-20.35	46.00	15.60	0.00	10.05	Average
6	1.33	43.05	-12.95	56.00	33.00	0.00	10.05	QP
7	2.85	28.39	-17.61	46.00	18.30	0.00	10.09	Average
8	2.85	42.09	-13.91	56.00	32.00	0.00	10.09	QP
9	3.44	28.31	-17.69	46.00	18.20	0.00	10.11	Average
10	3.44	43.31	-12.69	56.00	33.20	0.00	10.11	QP
11	4.80	26.75	-19.25	46.00	16.60	0.00	10.15	Average
12	4.80	40.45	-15.55	56.00	30.30	0.00	10.15	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5645	47.76	-20.54	68.3	39.32	32.2	9.84	33.6	355	199	P	H
		5689.8	57.71	-39.99	97.7	49.19	32.2	9.92	33.6	355	199	P	H
		5715.8	50.03	-59.6	109.63	41.42	32.2	10.01	33.6	355	199	P	H
		5725	55.34	-66.86	122.2	46.73	32.2	10.01	33.6	355	199	P	H
		5745	101.65	-	-	92.96	32.2	10.09	33.6	355	199	P	H
		5745	94.75	-	-	86.06	32.2	10.09	33.6	355	199	A	H
		5630.4	48.11	-20.19	68.3	39.67	32.2	9.84	33.6	396	288	P	V
		5694.6	54.52	-46.71	101.23	46	32.2	9.92	33.6	396	288	P	V
		5720	50.67	-60.13	110.8	42.06	32.2	10.01	33.6	396	288	P	V
		5724.2	52.23	-68.15	120.38	43.62	32.2	10.01	33.6	396	288	P	V
		5745	99.15	-	-	90.46	32.2	10.09	33.6	396	288	P	V
		5745	92.79	-	-	84.1	32.2	10.09	33.6	396	288	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5648.8	49.34	-18.96	68.3	40.9	32.2	9.84	33.6	301	357	P	H
		5680.2	48.55	-42.08	90.63	40.03	32.2	9.92	33.6	301	357	P	H
		5709.4	50.35	-57.48	107.83	41.74	32.2	10.01	33.6	301	357	P	H
		5720.8	48.9	-63.72	112.62	40.29	32.2	10.01	33.6	301	357	P	H
		5785	101.44	-	-	92.67	32.2	10.17	33.6	301	357	P	H
		5785	94.83	-	-	86.06	32.2	10.17	33.6	301	357	A	H
		5854	48.35	-64.73	113.08	39.42	32.28	10.25	33.6	301	357	P	H
		5859.8	52.18	-57.27	109.45	43.16	32.29	10.33	33.6	301	357	P	H
		5917.6	48	-25.74	73.74	38.8	32.38	10.42	33.6	301	357	P	H
		5939.4	49.7	-18.6	68.3	40.39	32.41	10.5	33.6	301	357	P	H
		5629.2	48.19	-20.11	68.3	39.75	32.2	9.84	33.6	378	296	P	V
		5694.4	48.1	-52.98	101.08	39.58	32.2	9.92	33.6	378	296	P	V
		5719.6	48.61	-62.08	110.69	40	32.2	10.01	33.6	378	296	P	V
		5723.6	52.62	-66.39	119.01	44.01	32.2	10.01	33.6	378	296	P	V
		5785	100.41	-	-	91.64	32.2	10.17	33.6	378	296	P	V
		5785	94.07	-	-	85.3	32.2	10.17	33.6	378	296	A	V
		5854.4	48.57	-63.6	112.17	39.64	32.28	10.25	33.6	378	296	P	V
		5863	48.65	-59.91	108.56	39.63	32.29	10.33	33.6	378	296	P	V
		5896	48.64	-41.02	89.66	39.48	32.34	10.42	33.6	378	296	P	V
		5928	47.62	-20.68	68.3	38.41	32.39	10.42	33.6	378	296	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5825	101.55	-	-	92.66	32.24	10.25	33.6	126	293	P	H
		5825	94.3	-	-	85.41	32.24	10.25	33.6	126	293	A	H
		5850.8	48.42	-71.96	120.38	39.49	32.28	10.25	33.6	126	293	P	H
		5870.2	49.99	-56.55	106.54	40.95	32.31	10.33	33.6	126	293	P	H
		5894.4	51.82	-39.03	90.85	42.75	32.34	10.33	33.6	126	293	P	H
		5926.4	48.41	-19.89	68.3	39.2	32.39	10.42	33.6	126	293	P	H
		5825	100.21	-	-	91.32	32.24	10.25	33.6	268	292	P	V
		5825	93.36	-	-	84.47	32.24	10.25	33.6	268	292	A	V
		5853.8	49.55	-63.99	113.54	40.62	32.28	10.25	33.6	268	292	P	V
		5873.8	58.68	-46.86	105.54	49.64	32.31	10.33	33.6	268	292	P	V
		5876.2	50.55	-53.76	104.31	41.51	32.31	10.33	33.6	268	292	P	V
		5926.2	48.47	-19.83	68.3	39.26	32.39	10.42	33.6	268	292	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	47.16	-26.84	74	56.14	39.28	9.5	57.76	160	360	P	H
		17235	52.58	-15.62	68.2	52.62	43.04	14.89	57.97	170	360	P	H
		11490	47.66	-26.34	74	56.64	39.28	9.5	57.76	160	360	P	V
		17235	50.38	-17.82	68.2	50.42	43.04	14.89	57.97	161	0	P	V
802.11a CH 157 5785MHz		11570	49.79	-24.21	74	49.34	40.32	12.93	52.8	175	198	P	H
		17355	49.1	-19.2	68.3	42.18	43.61	15.8	52.49	189	185	P	H
		11570	48.42	-25.58	74	47.97	40.32	12.93	52.8	175	198	P	V
		17355	50.12	-18.18	68.3	43.2	43.61	15.8	52.49	189	185	P	V
802.11a CH 165 5825MHz		11650	49.63	-24.37	74	49.24	40.11	12.99	52.71	156	347	P	H
		17475	50.91	-17.39	68.3	43.66	44.01	15.89	52.65	100	0	P	H
		11650	50.72	-23.28	74	50.33	40.11	12.99	52.71	142	326	P	V
		17475	49.74	-18.56	68.3	42.49	44.01	15.89	52.65	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5606	48.63	-19.67	68.3	40.27	32.2	9.76	33.6	346	336	P	H
		5683.4	49.91	-43.08	92.99	41.39	32.2	9.92	33.6	346	336	P	H
		5701.6	51.28	-54.37	105.65	42.67	32.2	10.01	33.6	346	336	P	H
		5723.6	54.69	-64.32	119.01	46.08	32.2	10.01	33.6	346	336	P	H
		5745	100.78	-	-	92.09	32.2	10.09	33.6	346	336	P	H
		5745	94.38	-	-	85.69	32.2	10.09	33.6	346	336	A	H
		5620.2	48.53	-19.77	68.3	40.17	32.2	9.76	33.6	265	300	P	V
		5676	50.3	-37.23	87.53	41.78	32.2	9.92	33.6	265	300	P	V
		5714.6	50.6	-58.69	109.29	41.99	32.2	10.01	33.6	265	300	P	V
		5720.6	53.48	-58.69	112.17	44.87	32.2	10.01	33.6	265	300	P	V
		5745	101.34	-	-	92.65	32.2	10.09	33.6	265	300	P	V
		5745	94.46	-	-	85.77	32.2	10.09	33.6	265	300	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5616	48.5	-19.8	68.3	40.14	32.2	9.76	33.6	377	357	P	H
		5698.8	48.83	-55.49	104.32	40.31	32.2	9.92	33.6	377	357	P	H
		5714.8	48.11	-61.24	109.35	39.5	32.2	10.01	33.6	377	357	P	H
		5721.8	47.8	-67.1	114.9	39.19	32.2	10.01	33.6	377	357	P	H
		5785	101.16	-	-	92.39	32.2	10.17	33.6	377	357	P	H
		5785	94.77	-	-	86	32.2	10.17	33.6	377	357	A	H
		5853	47.33	-68.03	115.36	38.4	32.28	10.25	33.6	377	357	P	H
		5868.6	49.99	-57	106.99	40.96	32.3	10.33	33.6	377	357	P	H
		5923	49.94	-19.83	69.77	40.74	32.38	10.42	33.6	377	357	P	H
		5932	48.26	-20.04	68.3	39.04	32.4	10.42	33.6	377	357	P	H
		5611.2	48.65	-19.65	68.3	40.29	32.2	9.76	33.6	271	294	P	V
		5653.2	48.86	-21.81	70.67	40.42	32.2	9.84	33.6	271	294	P	V
		5715.6	48.26	-61.31	109.57	39.65	32.2	10.01	33.6	271	294	P	V
		5724.8	49.2	-72.54	121.74	40.59	32.2	10.01	33.6	271	294	P	V
		5785	100.48	-	-	91.71	32.2	10.17	33.6	271	294	P	V
		5785	93	-	-	84.23	32.2	10.17	33.6	271	294	A	V
		5850.4	47.57	-73.72	121.29	38.64	32.28	10.25	33.6	271	294	P	V
		5869.6	47.98	-58.73	106.71	38.95	32.3	10.33	33.6	271	294	P	V
		5888.6	48.54	-46.59	95.13	39.48	32.33	10.33	33.6	271	294	P	V
		5940.8	48.71	-19.59	68.3	39.4	32.41	10.5	33.6	271	294	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5825	101.88	-	-	92.99	32.24	10.25	33.6	211	185	P	H
		5825	94.48	-	-	85.59	32.24	10.25	33.6	211	185	A	H
		5853.6	49.86	-64.13	113.99	40.93	32.28	10.25	33.6	211	185	P	H
		5862.4	49.84	-58.89	108.73	40.82	32.29	10.33	33.6	211	185	P	H
		5905.6	50.5	-32.08	82.58	41.32	32.36	10.42	33.6	211	185	P	H
		5941.4	48.67	-19.63	68.3	39.36	32.41	10.5	33.6	211	185	P	H
		5825	99.66	-	-	90.77	32.24	10.25	33.6	299	309	P	V
		5825	93.41	-	-	84.52	32.24	10.25	33.6	299	309	A	V
		5850.2	50.04	-71.7	121.74	41.11	32.28	10.25	33.6	299	309	P	V
		5857.4	49.52	-60.61	110.13	40.5	32.29	10.33	33.6	299	309	P	V
		5891.6	48.94	-43.97	92.91	39.87	32.34	10.33	33.6	299	309	P	V
		5932	48.93	-19.37	68.3	39.71	32.4	10.42	33.6	299	309	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		11490	49.8	-24.2	74	49.3	40.5	12.88	52.88	165	110	P	H
HT20		17235	50.17	-18.13	68.3	43.59	43.2	15.71	52.33	170	155	P	H
CH 149		11490	50.16	-23.84	74	49.66	40.5	12.88	52.88	201	0	P	V
5745MHz		17235	50.85	-17.45	68.3	44.27	43.2	15.71	52.33	129	185	P	V
802.11n		11570	50.43	-23.57	74	49.98	40.32	12.93	52.8	163	225	P	H
HT20		17355	49.98	-18.32	68.3	43.06	43.61	15.8	52.49	144	105	P	H
CH 157		11570	49.44	-24.56	74	48.99	40.32	12.93	52.8	163	225	P	V
5785MHz		17355	51.33	-16.97	68.3	44.41	43.61	15.8	52.49	144	105	P	V
802.11n		11650	50.3	-23.7	74	49.91	40.11	12.99	52.71	156	347	P	H
HT20		17475	51.71	-16.59	68.3	44.46	44.01	15.89	52.65	136	192	P	H
CH 165		11650	49.84	-24.16	74	49.45	40.11	12.99	52.71	142	326	P	V
5825MHz		17475	51.27	-17.03	68.3	44.02	44.01	15.89	52.65	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5647.8	48.88	-19.42	68.3	40.44	32.2	9.84	33.6	112	187	P	H
		5674.8	50.6	-36.04	86.64	42.08	32.2	9.92	33.6	112	187	P	H
		5718.2	59.25	-51.05	110.3	50.64	32.2	10.01	33.6	112	187	P	H
		5723.8	59.79	-59.67	119.46	51.18	32.2	10.01	33.6	112	187	P	H
		5755	99.68	-	-	90.99	32.2	10.09	33.6	112	187	P	H
		5755	92.43	-	-	83.74	32.2	10.09	33.6	112	187	A	H
		5853.4	47.8	-66.65	114.45	38.87	32.28	10.25	33.6	112	187	P	H
		5865.2	48.52	-59.42	107.94	39.49	32.3	10.33	33.6	112	187	P	H
		5903.8	48.46	-35.45	83.91	39.28	32.36	10.42	33.6	112	187	P	H
		5931.6	48.13	-20.17	68.3	38.91	32.4	10.42	33.6	112	187	P	H
		5607	47.96	-20.34	68.3	39.6	32.2	9.76	33.6	346	291	P	V
		5673.4	49.28	-36.33	85.61	40.76	32.2	9.92	33.6	346	291	P	V
		5715	55.53	-53.87	109.4	46.92	32.2	10.01	33.6	346	291	P	V
		5724	56.13	-63.79	119.92	47.52	32.2	10.01	33.6	346	291	P	V
		5755	97.51	-	-	88.82	32.2	10.09	33.6	346	291	P	V
		5755	90.8	-	-	82.11	32.2	10.09	33.6	346	291	A	V
		5852.2	47.88	-69.3	117.18	38.95	32.28	10.25	33.6	346	291	P	V
		5866.4	48.61	-59	107.61	39.58	32.3	10.33	33.6	346	291	P	V
		5924.2	49.07	-19.82	68.89	39.86	32.39	10.42	33.6	346	291	P	V
		5950	48.29	-20.01	68.3	38.97	32.42	10.5	33.6	346	291	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5649.4	47.97	-20.33	68.3	39.53	32.2	9.84	33.6	303	356	P	H
		5689.4	48.48	-48.92	97.4	39.96	32.2	9.92	33.6	303	356	P	H
		5715.8	50.25	-59.38	109.63	41.64	32.2	10.01	33.6	303	356	P	H
		5725	48.13	-74.07	122.2	39.52	32.2	10.01	33.6	303	356	P	H
		5795	99.14	-	-	90.37	32.2	10.17	33.6	303	356	P	H
		5795	92.41	-	-	83.64	32.2	10.17	33.6	303	356	A	H
		5850.4	48.33	-72.96	121.29	39.4	32.28	10.25	33.6	303	356	P	H
		5862.4	50.37	-58.36	108.73	41.35	32.29	10.33	33.6	303	356	P	H
		5878.6	48.64	-53.89	102.53	39.59	32.32	10.33	33.6	303	356	P	H
		5926.2	48.08	-20.22	68.3	38.87	32.39	10.42	33.6	303	356	P	H
		5630.8	48.65	-19.65	68.3	40.21	32.2	9.84	33.6	393	295	P	V
		5665.6	48.84	-31.01	79.85	40.32	32.2	9.92	33.6	393	295	P	V
		5708	47.87	-59.57	107.44	39.26	32.2	10.01	33.6	393	295	P	V
		5720.2	47.62	-63.64	111.26	39.01	32.2	10.01	33.6	393	295	P	V
		5795	97.1	-	-	88.33	32.2	10.17	33.6	393	295	P	V
		5795	90.34	-	-	81.57	32.2	10.17	33.6	393	295	A	V
		5853.4	47.79	-66.66	114.45	38.86	32.28	10.25	33.6	393	295	P	V
		5859.4	48.74	-60.83	109.57	39.72	32.29	10.33	33.6	393	295	P	V
		5887	48.08	-48.24	96.32	39.02	32.33	10.33	33.6	393	295	P	V
		5932.4	49.44	-18.86	68.3	40.22	32.4	10.42	33.6	393	295	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		11510	49.26	-24.74	74	48.81	40.47	12.88	52.9	126	336	P	H
HT40		17265	49.94	-18.36	68.3	43.27	43.3	15.74	52.37	156	291	P	H
CH 151		11510	49.8	-24.2	74	49.35	40.47	12.88	52.9	160	360	P	V
5755MHz		17265	47.92	-20.38	68.3	41.25	43.3	15.74	52.37	100	0	P	V
802.11n		11590	49.92	-24.08	74	49.47	40.27	12.96	52.78	126	297	P	H
HT40		17385	51.05	-17.25	68.3	44.05	43.71	15.83	52.54	136	248	P	H
CH 159		11590	50.01	-23.99	74	49.56	40.27	12.96	52.78	170	300	P	V
5795MHz		17385	51.2	-17.1	68.3	44.2	43.71	15.83	52.54	150	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5647.8	49.52	-18.78	68.3	41.08	32.2	9.84	33.6	337	209	P	H
		5697.6	58.17	-45.27	103.44	49.65	32.2	9.92	33.6	337	209	P	H
		5719.4	59.18	-51.45	110.63	50.57	32.2	10.01	33.6	337	209	P	H
		5723.8	57.13	-62.33	119.46	48.52	32.2	10.01	33.6	337	209	P	H
		5775	95.51	-	-	86.82	32.2	10.09	33.6	337	209	P	H
		5775	88.79	-	-	80.1	32.2	10.09	33.6	337	209	A	H
		5850	54.35	-67.85	122.2	45.42	32.28	10.25	33.6	337	209	P	H
		5860.8	53.42	-55.75	109.17	44.4	32.29	10.33	33.6	337	209	P	H
		5875.4	50.84	-54.06	104.9	41.8	32.31	10.33	33.6	337	209	P	H
		5935	48.92	-19.38	68.3	39.62	32.4	10.5	33.6	337	209	P	H
		5632.8	48.32	-19.98	68.3	39.88	32.2	9.84	33.6	315	289	P	V
		5699	56.21	-48.26	104.47	47.69	32.2	9.92	33.6	315	289	P	V
		5712.8	58.04	-50.75	108.79	49.43	32.2	10.01	33.6	315	289	P	V
		5724.6	65.85	-55.44	121.29	57.24	32.2	10.01	33.6	315	289	P	V
		5775	96.08	-	-	87.39	32.2	10.09	33.6	315	289	P	V
		5775	88.24	-	-	79.55	32.2	10.09	33.6	315	289	A	V
		5851.4	52.38	-66.63	119.01	43.45	32.28	10.25	33.6	315	289	P	V
		5867.8	53.85	-53.36	107.21	44.82	32.3	10.33	33.6	315	289	P	V
		5881.4	48.47	-51.99	100.46	39.42	32.32	10.33	33.6	315	289	P	V
		5939.8	48.38	-19.92	68.3	39.07	32.41	10.5	33.6	315	289	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	49.22	-24.78	74	48.75	40.37	12.93	52.83	125	332	P	H
VHT80		17325	49.74	-18.56	68.3	42.87	43.51	15.8	52.44	144	196	P	H
CH 155		11550	48.37	-25.63	74	47.9	40.37	12.93	52.83	160	360	P	V
5775MHz		17325	50.16	-18.14	68.3	43.29	43.51	15.8	52.44	170	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11n HT20 LF		34.85	27.96	-12.04	40	35.62	22.37	0.57	30.6	-	-	P	H
		150.28	31.63	-11.87	43.5	46.02	16.76	1.25	32.4	136	299	P	H
		282.2	31.4	-14.6	46	42.53	19.12	1.75	32	-	-	P	H
		623.64	27.4	-18.6	46	31.45	25.5	2.6	32.15	-	-	P	H
		685.72	27.99	-18.01	46	32.15	25.31	2.73	32.2	-	-	P	H
		797.27	29.35	-16.65	46	32.32	26.31	2.93	32.21	-	-	P	H
		41.64	32.75	-7.25	40	46.32	18.4	0.63	32.6	182	196	P	V
		78.5	29.46	-10.54	40	48.03	13.15	0.88	32.6	-	-	P	V
		166.77	30.67	-12.83	43.5	45.7	15.98	1.32	32.33	-	-	P	V
		277.35	28.8	-17.2	46	40.04	19.03	1.73	32	-	-	P	V
		446.13	28.28	-17.72	46	35.14	22.85	2.19	31.9	-	-	P	V
		703.18	28.59	-17.41	46	32.68	25.35	2.77	32.21	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.28	-	-	10Hz
802.11n HT20	98.16	-	-	10Hz
802.11n HT40	96.32	0.9493	1.053	3KHz
802.11ac VHT80	92.79	0.466	2.146	3KHz

802.11a

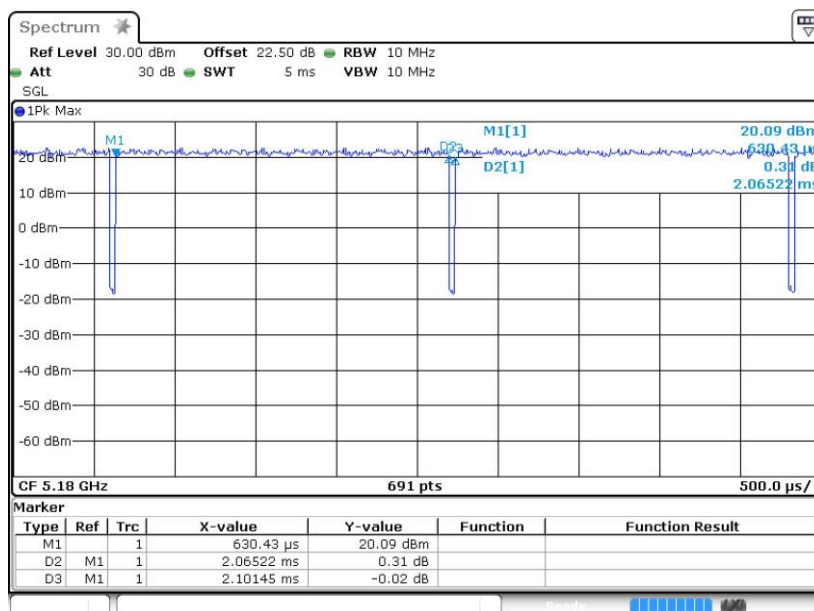




802.11n HT20

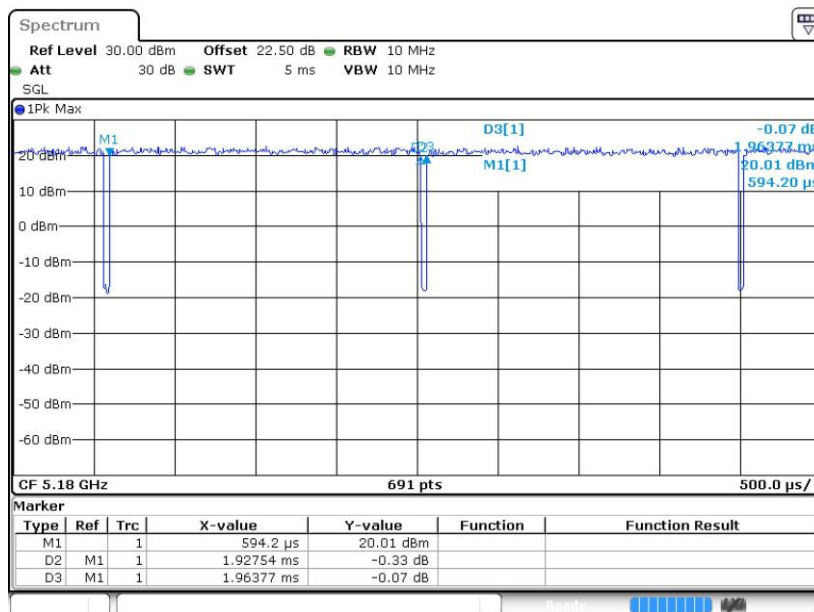

802.11n HT40

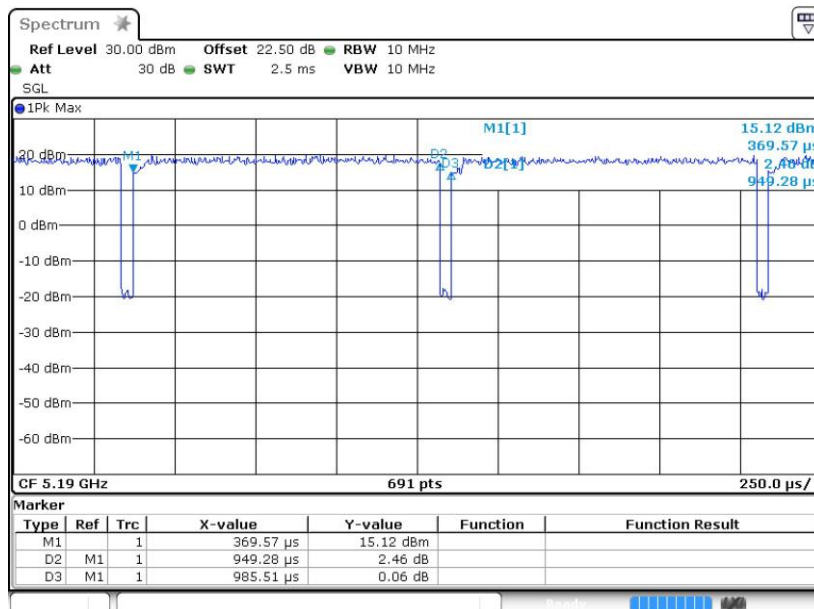

802.11ac VHT80

