




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/15/2006 7:23:32 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	54.92
Relative Humidity:	30%	Conductivity:	0.971
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	36.00 mm
DUT Position:	lap touching (antenna end of unit)	Max SAR Y-axis Location:	28.00 mm
Antenna Configuration:	integral	Max E Field:	16.46 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.289 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.211 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.107 W/kg
Type of Modulation:		SAR End:	0.106 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.85 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/15/06
Input Power Level:	GPRS 2 timeslots	Extrapolation:	poly4

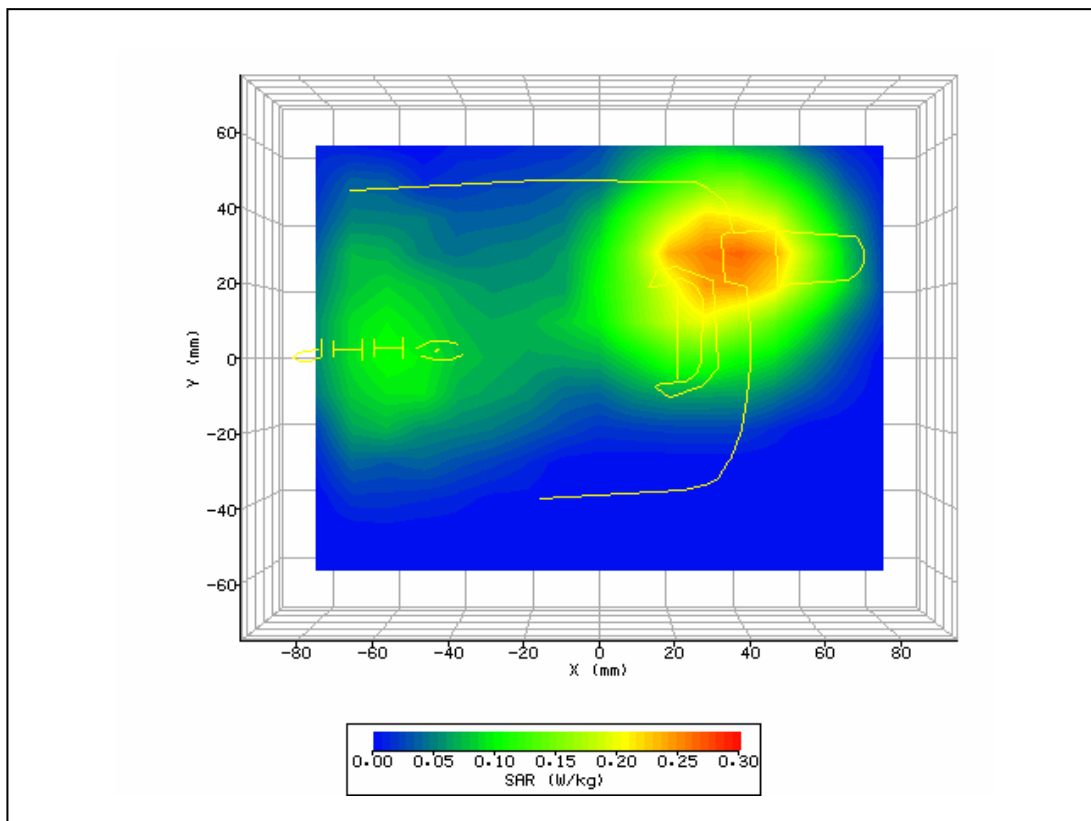

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/15/2006 6:38:32 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	54.92
Relative Humidity:	30%	Conductivity:	0.971
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	17.00 mm
DUT Position:	lap touching (bottom end of unit)	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	integral	Max E Field:	9.83 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.107 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.078 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.039 W/kg
Type of Modulation:		SAR End:	0.040 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/15/06
Input Power Level:	GPRS 2 timeslots	Extrapolation:	poly4

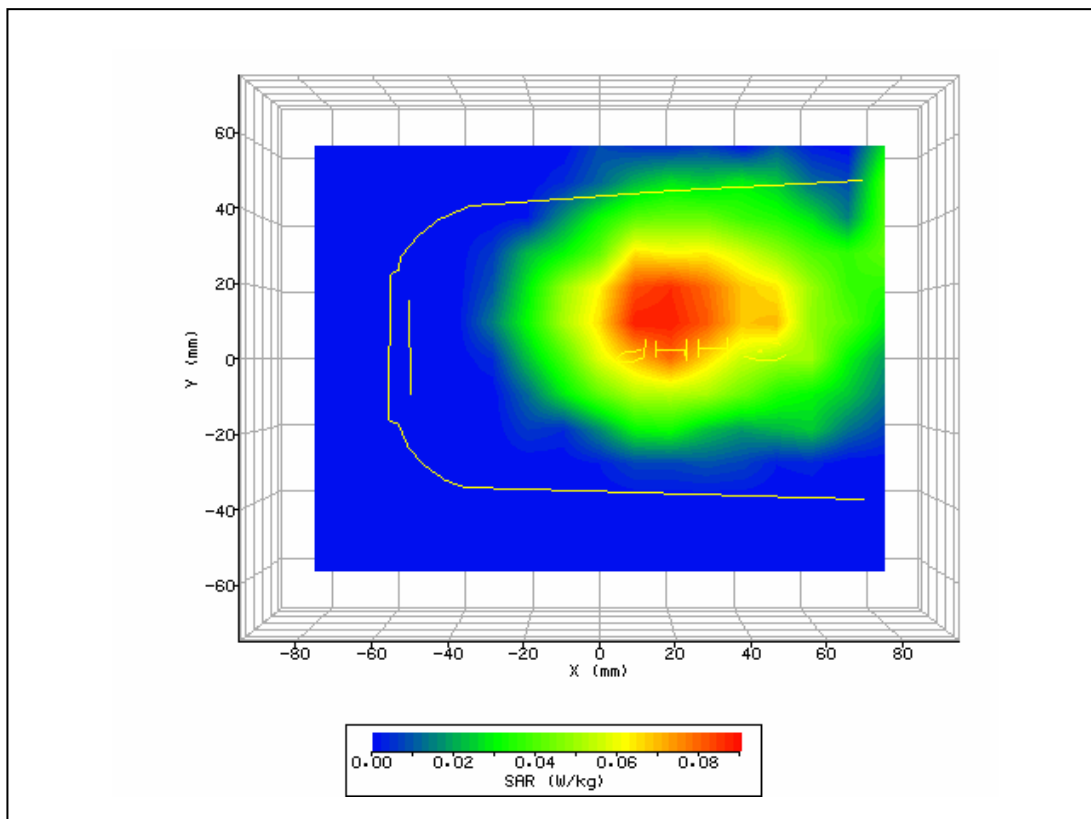

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/15/2006 8:14:14 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	52.65
Relative Humidity:	30%	Conductivity:	1.549
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	9.00 mm
DUT Position:	lap touching (antenna end of unit)	Max SAR Y-axis Location:	34.00 mm
Antenna Configuration:	integral	Max E Field:	7.93 V/m
Test Frequency:	1880MHz	SAR 1g:	0.146 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.078 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.55 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/15/06
Input Power Level:	GPRS 2 timeslots	Extrapolation:	poly4

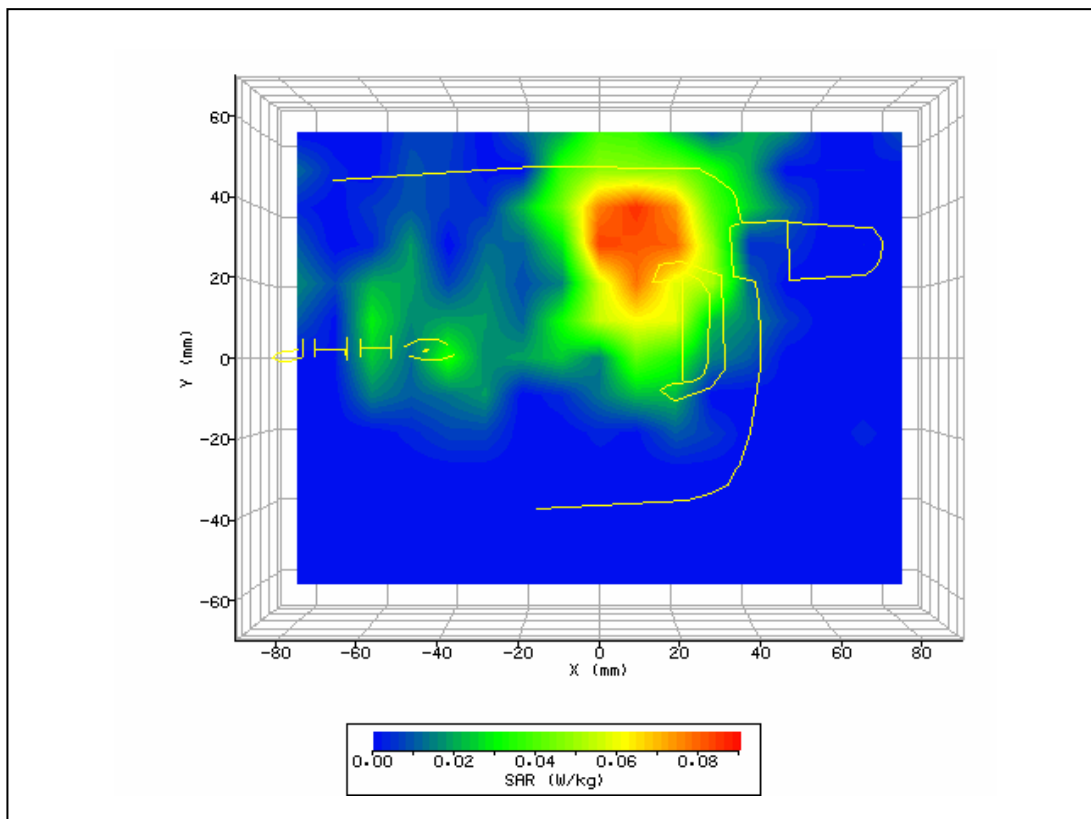

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	9/15/2006 8:38:33 PM	DUT Battery Model/No:	
Filename:	top.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	52.65
Relative Humidity:	30%	Conductivity:	1.549
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	80.00 mm
DUT Position:	lap touching (bottom end of unit)	Max SAR Y-axis Location:	60.00 mm
Antenna Configuration:	integral	Max E Field:	5.81 V/m
Test Frequency:	1880MHz	SAR 1g:	0.049 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.028 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.011 W/kg
Type of Modulation:		SAR End:	0.011 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/15/06
Input Power Level:	GPRS 2 timeslots	Extrapolation:	poly4

