


Site: SIP-AC3	Time: 2020/11/16 - 17:22
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz	

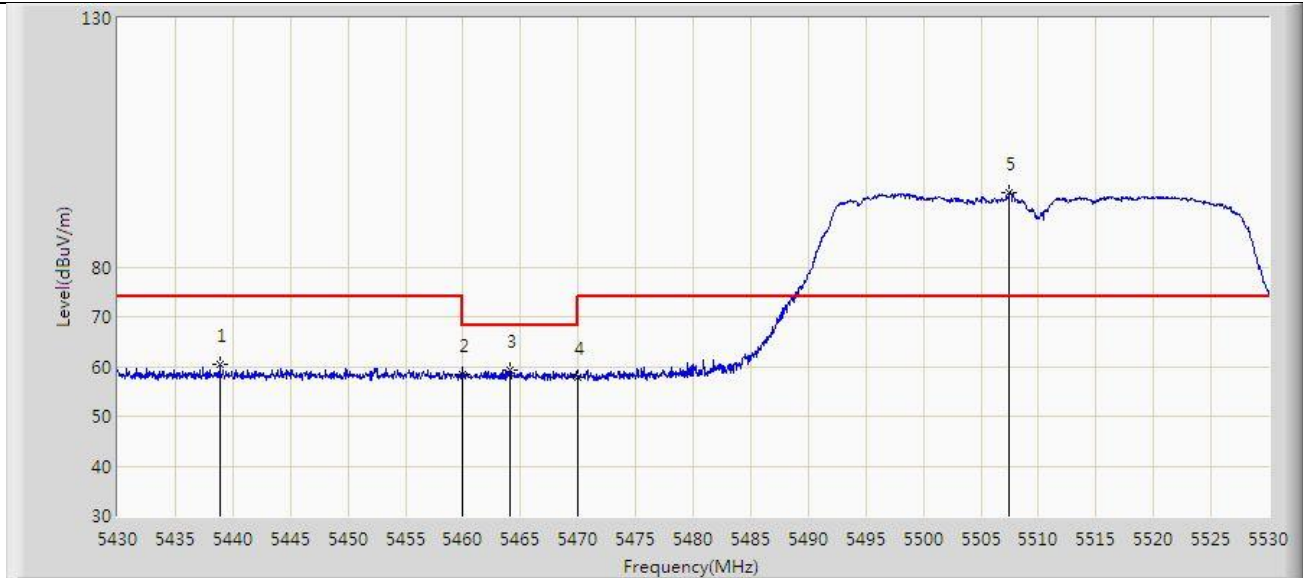


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5438.850	60.352	69.180	-13.648	74.000	-8.828	PK
2			5460.000	58.434	67.327	-15.566	74.000	-8.894	PK
3			5464.050	59.242	68.186	-8.958	68.200	-8.944	PK
4			5470.000	57.738	66.756	-10.462	68.200	-9.018	PK
5		*	5507.450	94.978	103.749	N/A	N/A	-8.771	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:25
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz	

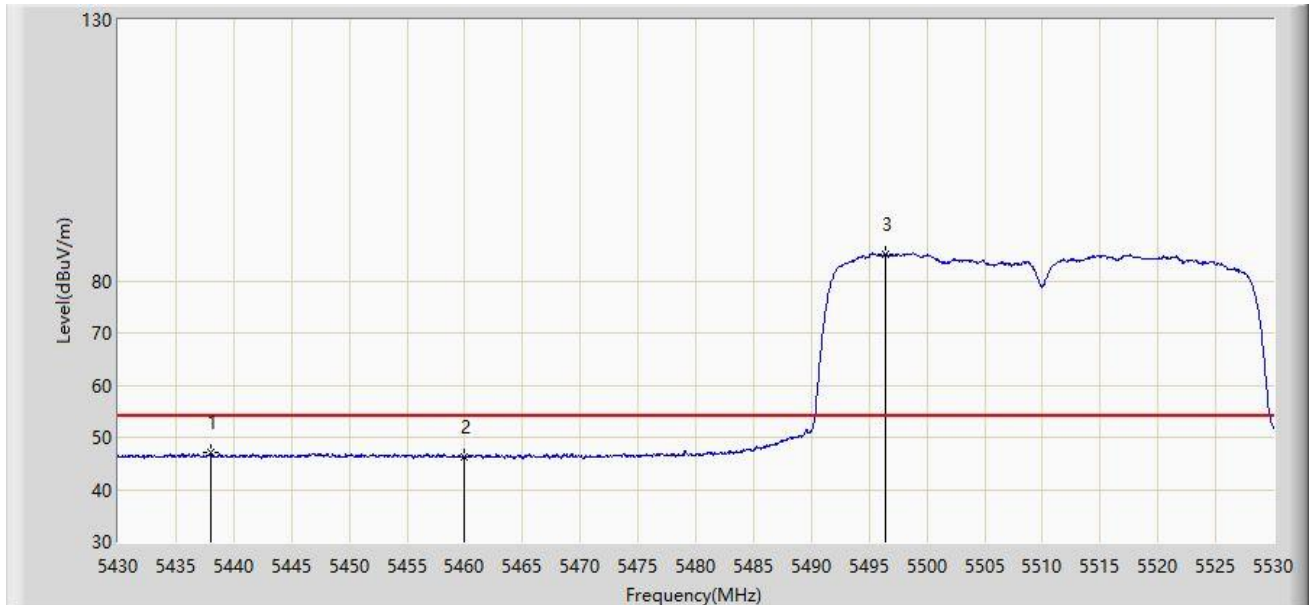


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5438.000	47.026	55.854	-6.974	54.000	-8.828	AV
2			5460.000	46.297	55.190	-7.703	54.000	-8.894	AV
3		*	5496.400	85.126	93.928	N/A	N/A	-8.802	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:26
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz	

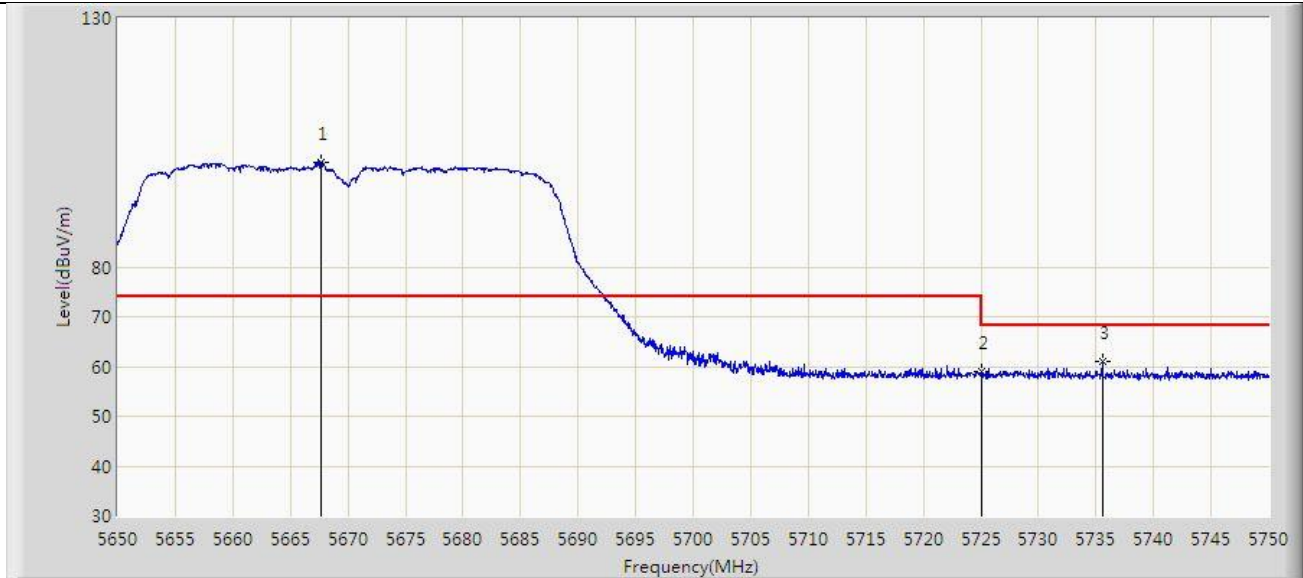


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.700	100.969	110.131	N/A	N/A	-9.162	PK
2			5725.000	59.085	68.192	-9.115	68.200	-9.107	PK
3			5735.550	60.996	70.253	-7.204	68.200	-9.256	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:30
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz	

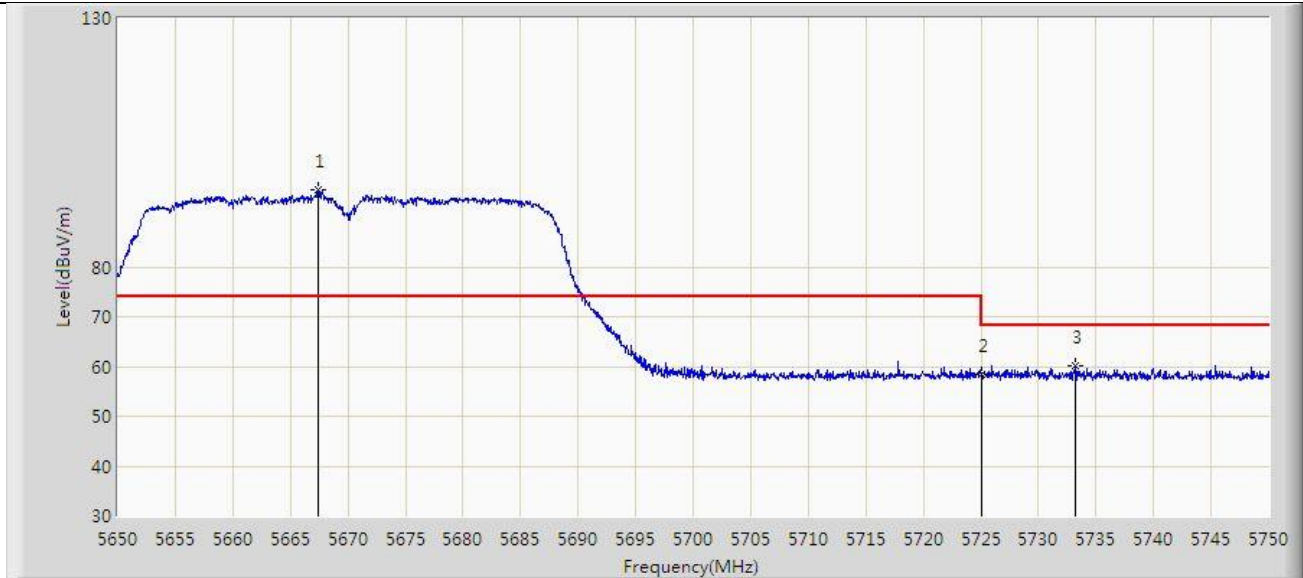


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.400	95.432	104.592	N/A	N/A	-9.160	PK
2			5725.000	58.318	67.425	-9.882	68.200	-9.107	PK
3			5733.250	60.170	69.388	-8.030	68.200	-9.218	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:33
Limit: FCC_Part15.407_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

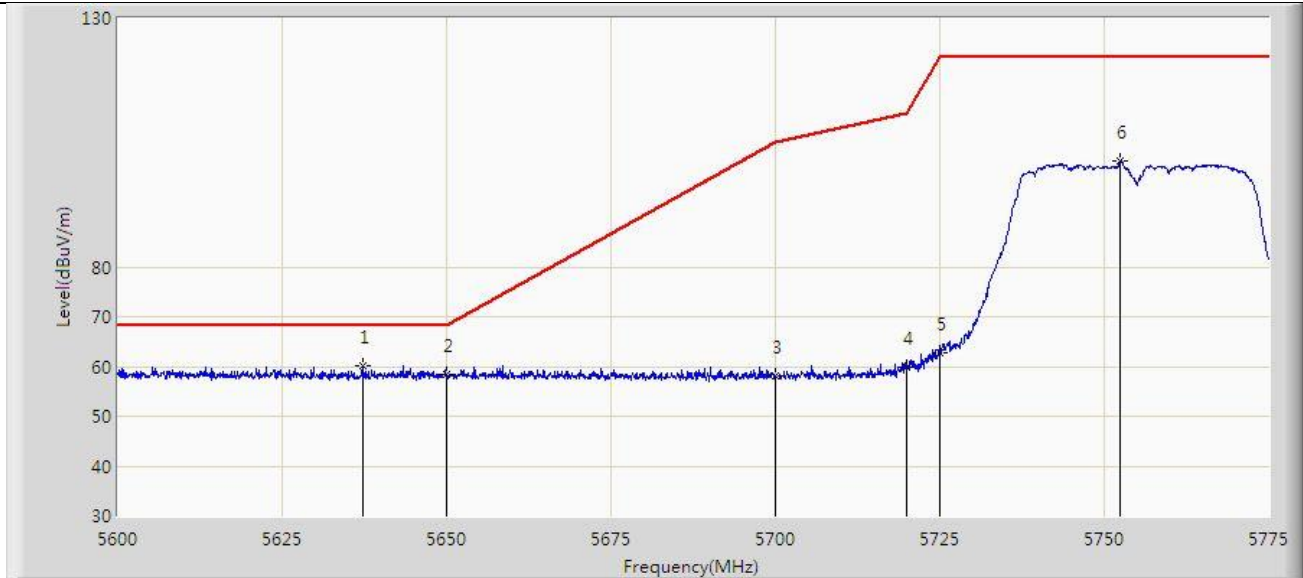


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5637.187	60.057	69.185	-8.143	68.200	-9.129	PK
2			5650.000	58.303	67.432	-9.897	68.200	-9.129	PK
3			5700.000	58.164	67.429	-47.036	105.200	-9.266	PK
4			5720.000	59.724	68.887	-51.076	110.800	-9.163	PK
5			5725.000	62.841	71.948	-59.359	122.200	-9.107	PK
6			5752.425	101.378	110.753	N/A	N/A	-9.376	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:38
Limit: FCC_Part15.407_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

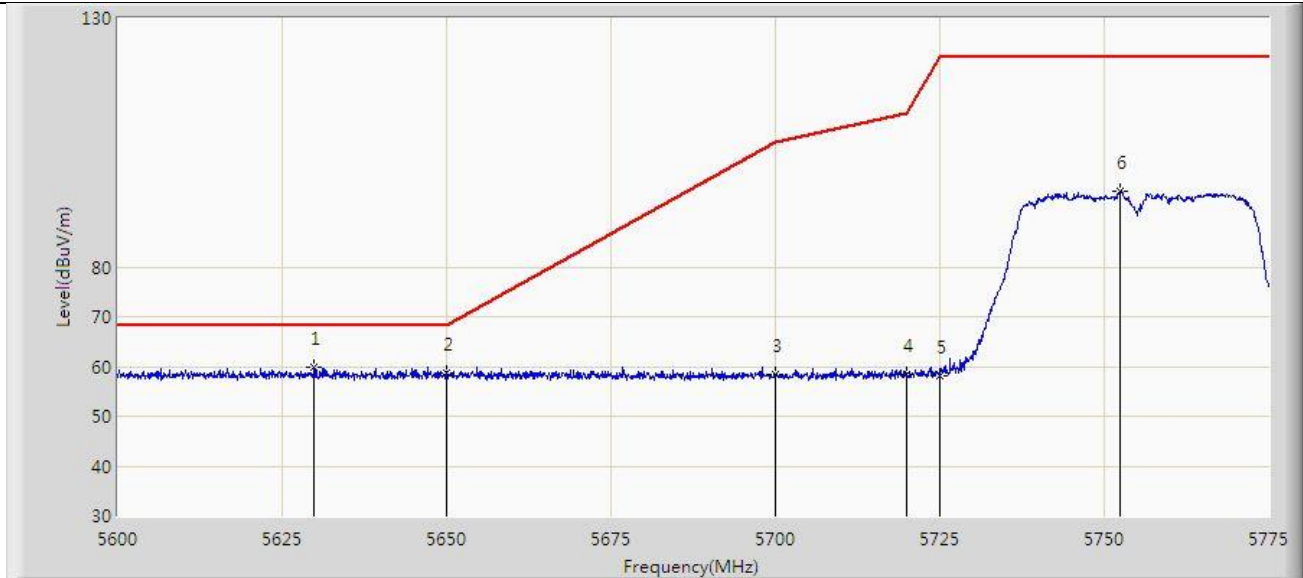


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.837	59.765	68.875	-8.435	68.200	-9.110	PK
2			5650.000	58.647	67.776	-9.553	68.200	-9.129	PK
3			5700.000	58.301	67.566	-46.899	105.200	-9.266	PK
4			5720.000	58.474	67.637	-52.326	110.800	-9.163	PK
5			5725.000	58.125	67.232	-64.075	122.200	-9.107	PK
6			5752.337	95.106	104.481	N/A	N/A	-9.376	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:41
Limit: FCC_Part15.407_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

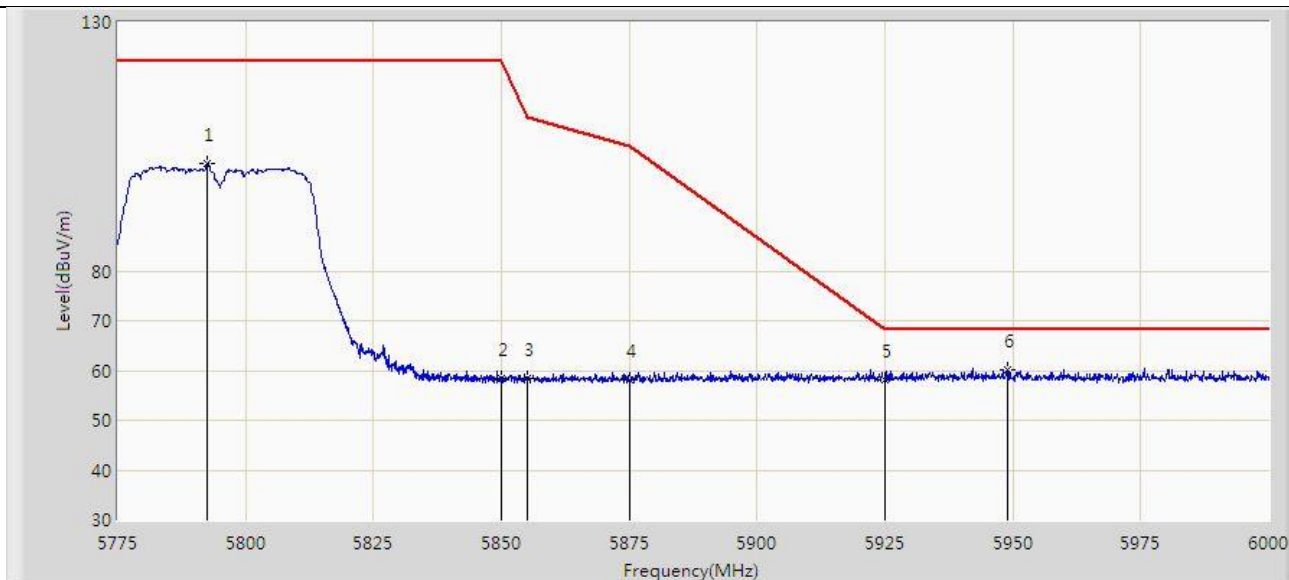


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.550	101.591	110.917	N/A	N/A	-9.327	PK
2			5850.000	58.478	67.531	-63.722	122.200	-9.053	PK
3			5855.000	58.510	67.558	-52.290	110.800	-9.049	PK
4			5875.000	58.067	67.087	-47.133	105.200	-9.020	PK
5			5925.000	58.227	66.990	-9.973	68.200	-8.762	PK
6		*	5948.925	60.006	68.707	-8.194	68.200	-8.700	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:43
Limit: FCC_Part15.407_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

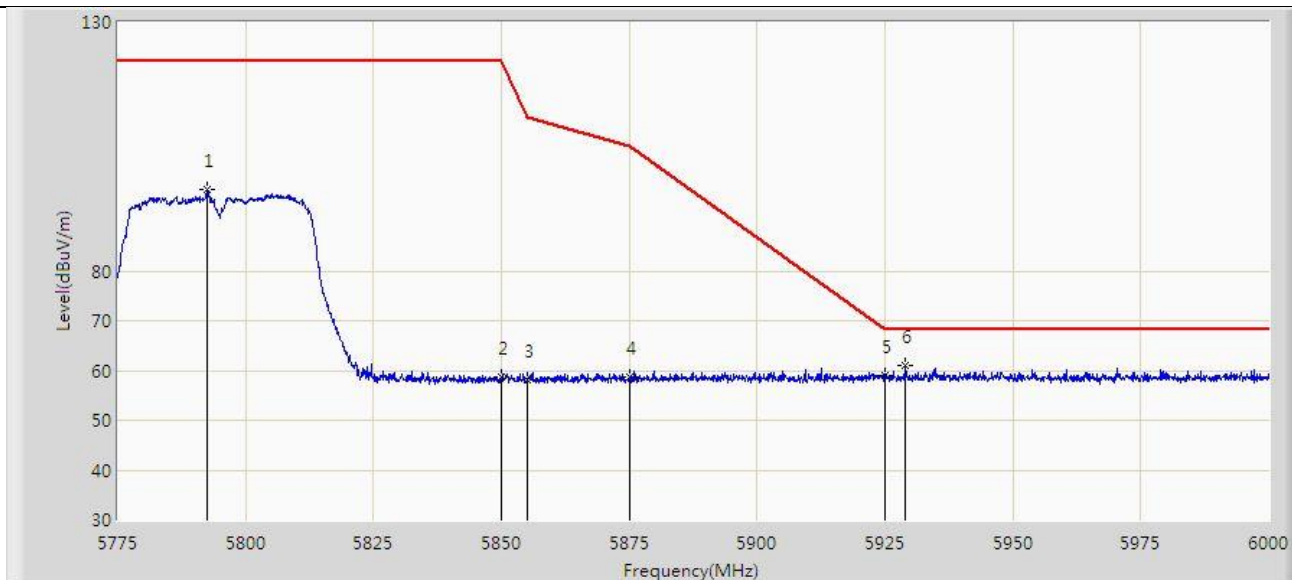


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.550	96.332	105.658	N/A	N/A	-9.327	PK
2			5850.000	58.595	67.648	-63.605	122.200	-9.053	PK
3			5855.000	58.158	67.206	-52.642	110.800	-9.049	PK
4			5875.000	58.719	67.739	-46.481	105.200	-9.020	PK
5			5925.000	58.878	67.641	-9.322	68.200	-8.762	PK
6		*	5929.013	61.114	69.849	-7.086	68.200	-8.735	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:52
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

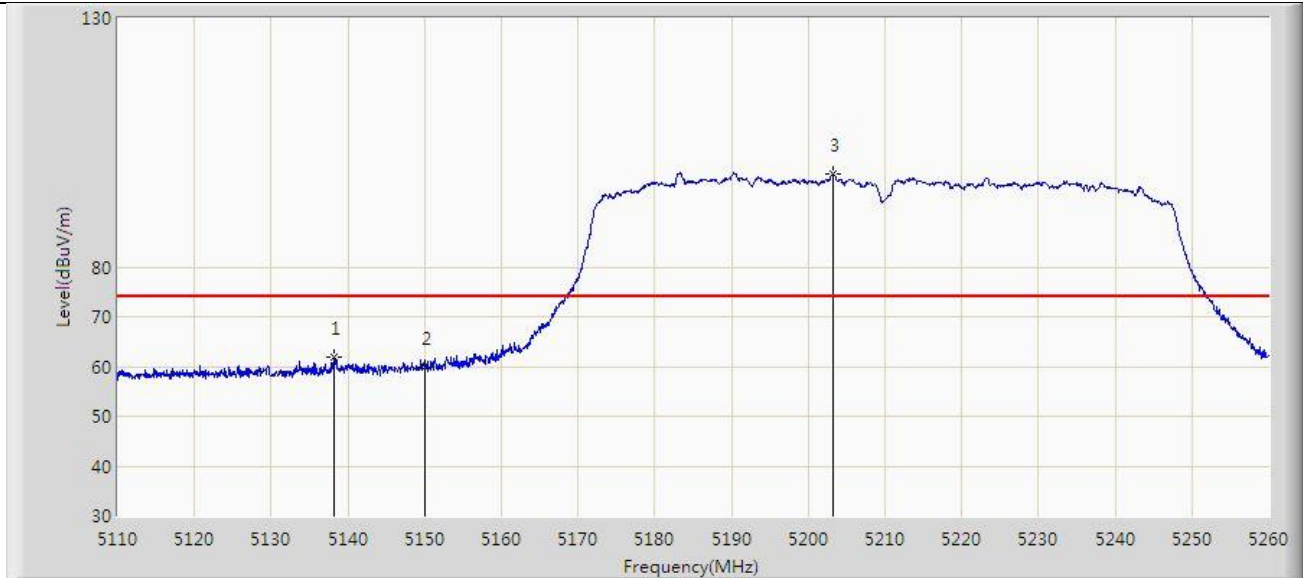


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.125	61.760	71.293	-12.240	74.000	-9.533	PK
2			5150.000	59.818	69.345	-14.182	74.000	-9.527	PK
3		*	5203.225	98.551	108.029	N/A	N/A	-9.479	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 17:57
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

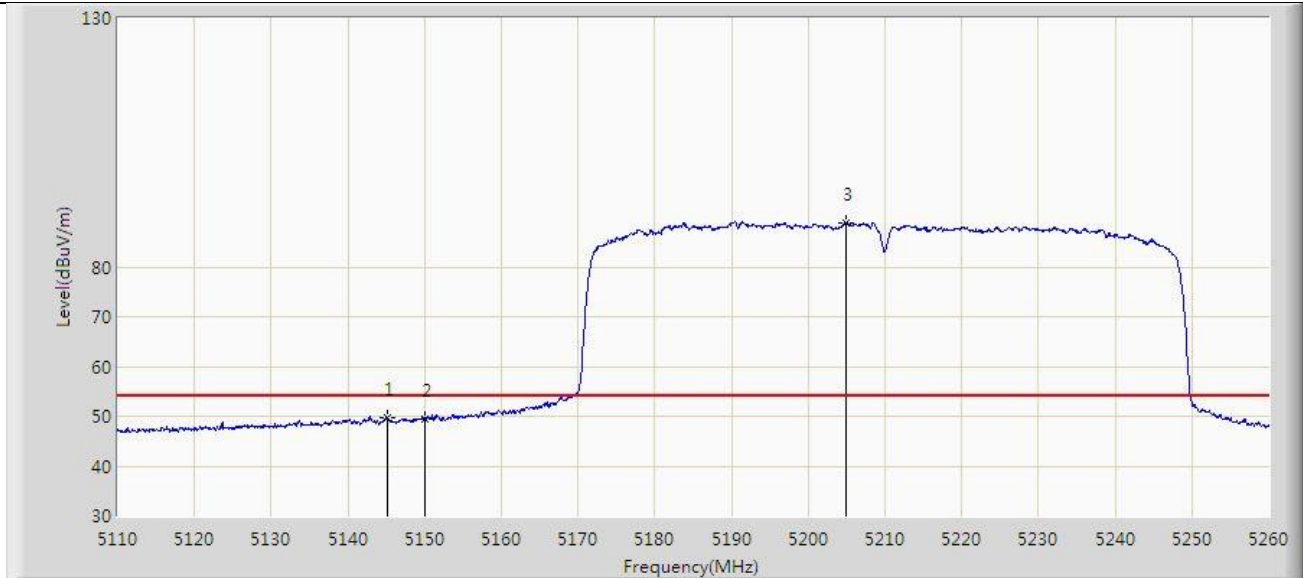


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.100	49.737	59.266	-4.263	54.000	-9.528	AV
2			5150.000	49.490	59.017	-4.510	54.000	-9.527	AV
3		*	5204.875	88.964	98.444	N/A	N/A	-9.480	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 18:02
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

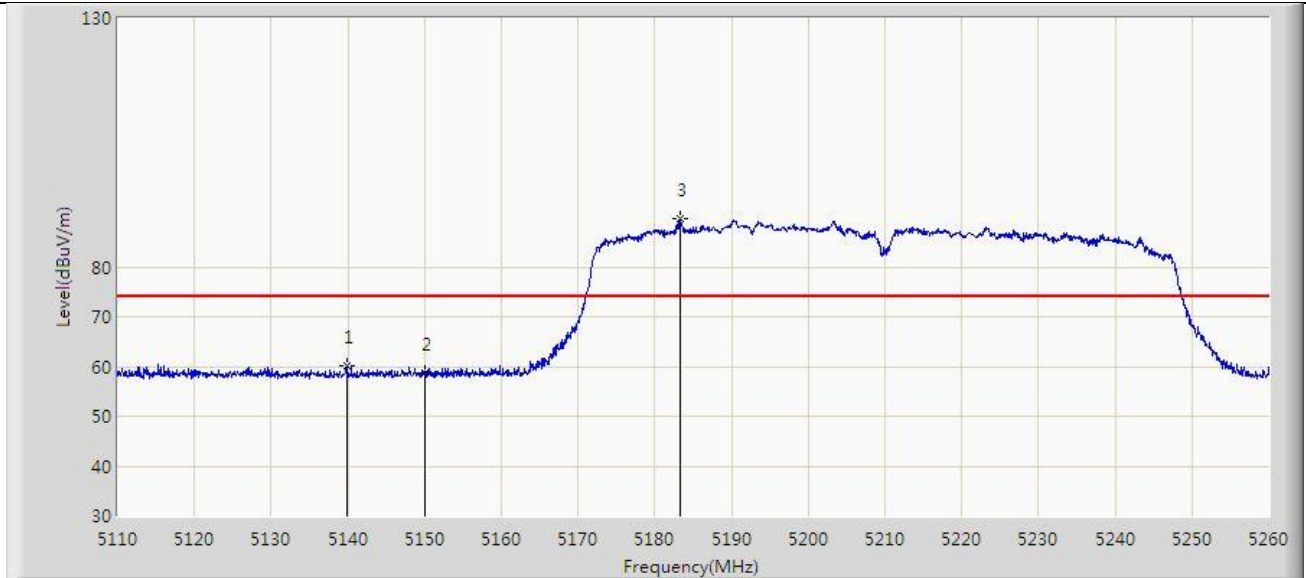


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.850	60.083	69.615	-13.917	74.000	-9.532	PK
2			5150.000	58.722	68.249	-15.278	74.000	-9.527	PK
3		*	5183.275	89.718	99.256	N/A	N/A	-9.538	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/16 - 18:08
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

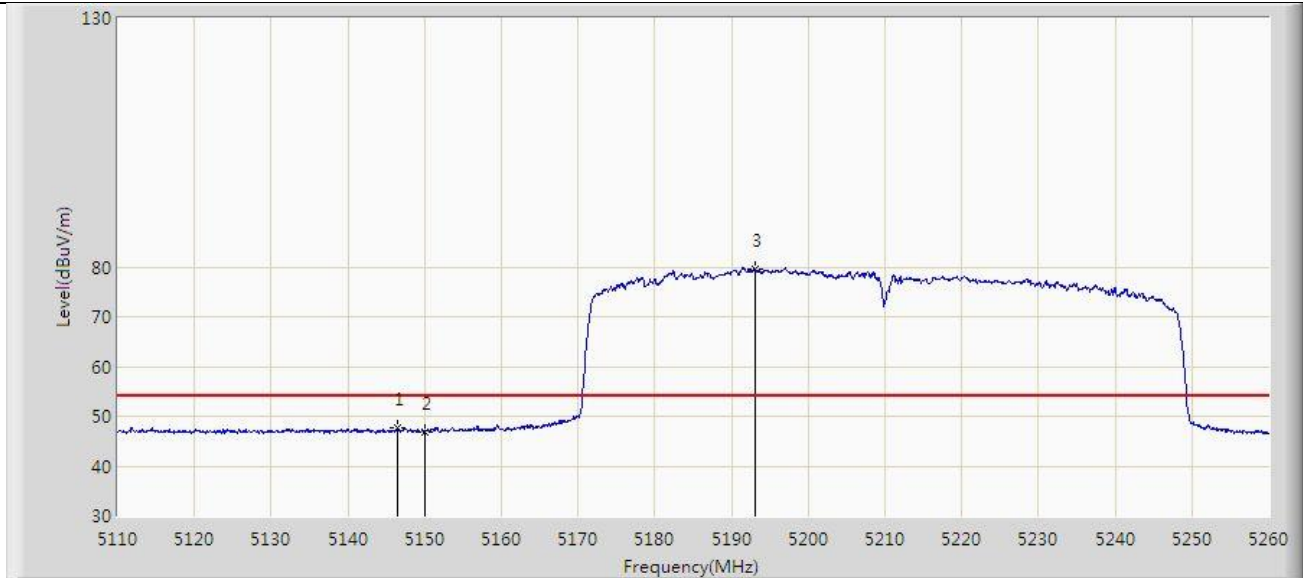


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.525	47.581	57.109	-6.419	54.000	-9.527	AV
2			5150.000	46.908	56.435	-7.092	54.000	-9.527	AV
3		*	5193.025	79.625	89.123	N/A	N/A	-9.498	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 09:29
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

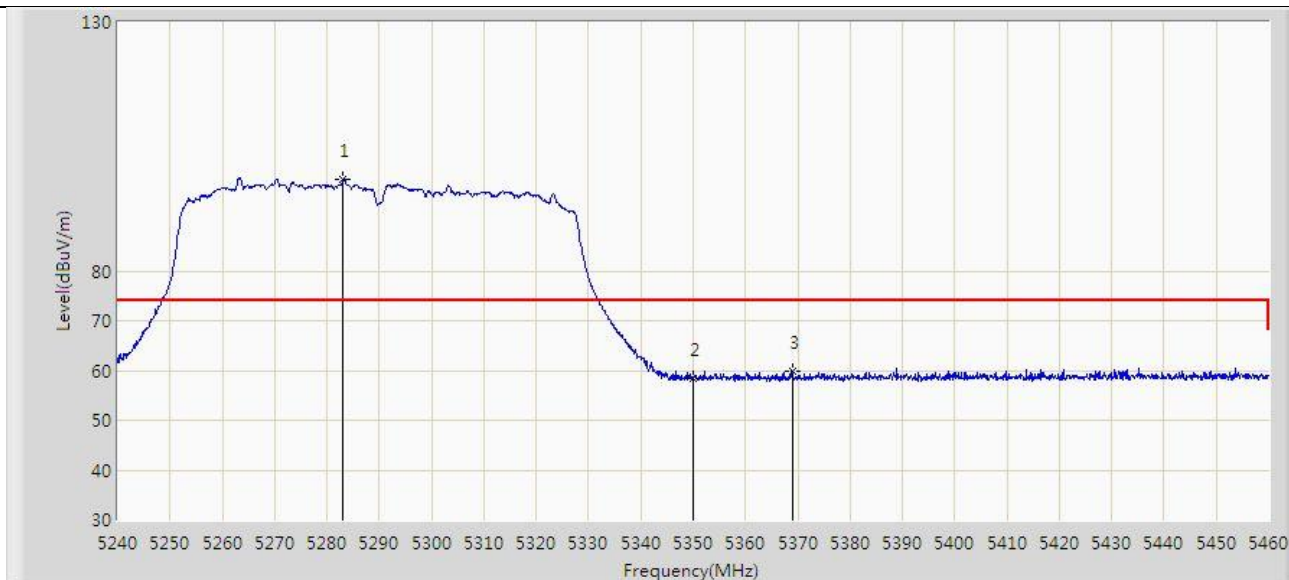


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5283.120	98.488	107.728	N/A	N/A	-9.240	PK
2			5350.000	58.514	67.737	-15.486	74.000	-9.222	PK
3			5369.030	59.936	69.164	-14.064	74.000	-9.228	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 09:44
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

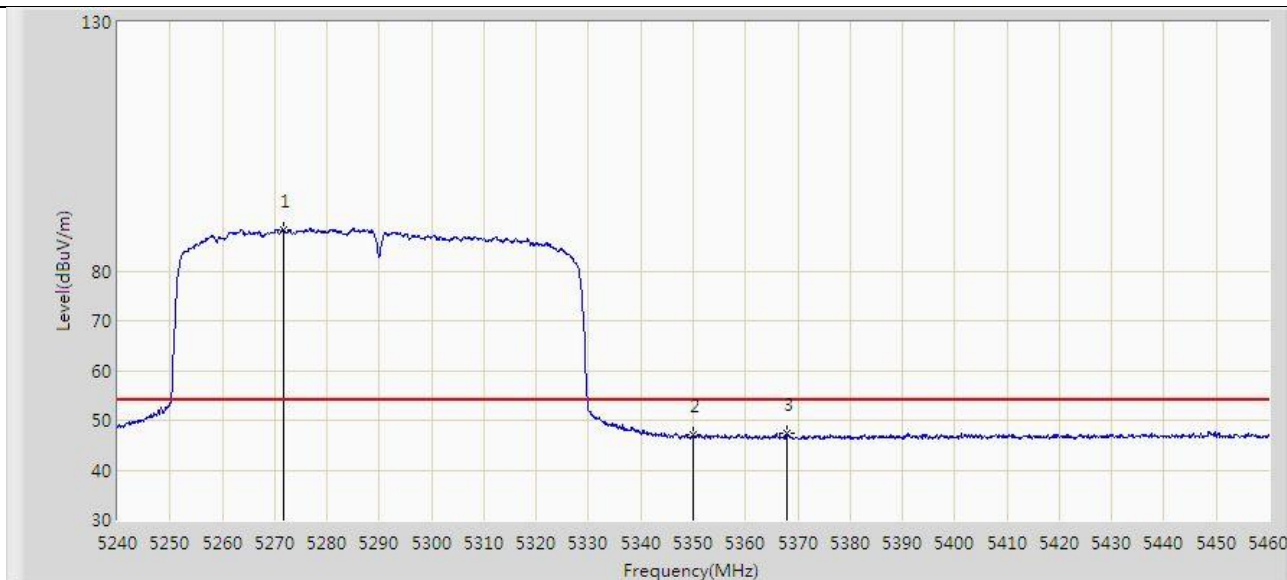

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5271.680	88.365	97.717	N/A	N/A	-9.351	AV
2			5350.000	46.963	56.186	-7.037	54.000	-9.222	AV
3			5367.930	47.483	56.712	-6.517	54.000	-9.229	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 09:44
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5270.360	90.060	99.425	N/A	N/A	-9.365	PK
2			5350.000	58.380	67.603	-15.620	74.000	-9.222	PK
3			5383.330	60.297	69.385	-13.703	74.000	-9.088	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:00
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

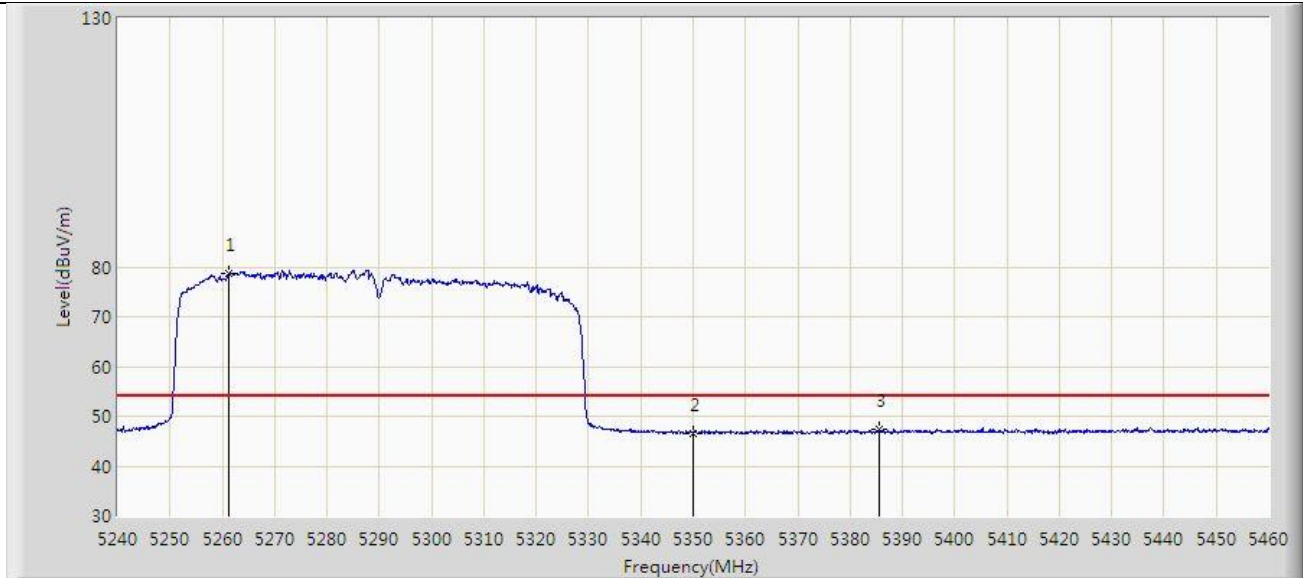


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5261.340	78.689	88.111	N/A	N/A	-9.423	AV
2			5350.000	46.571	55.794	-7.429	54.000	-9.222	AV
3			5385.640	47.428	56.494	-6.572	54.000	-9.065	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:03
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

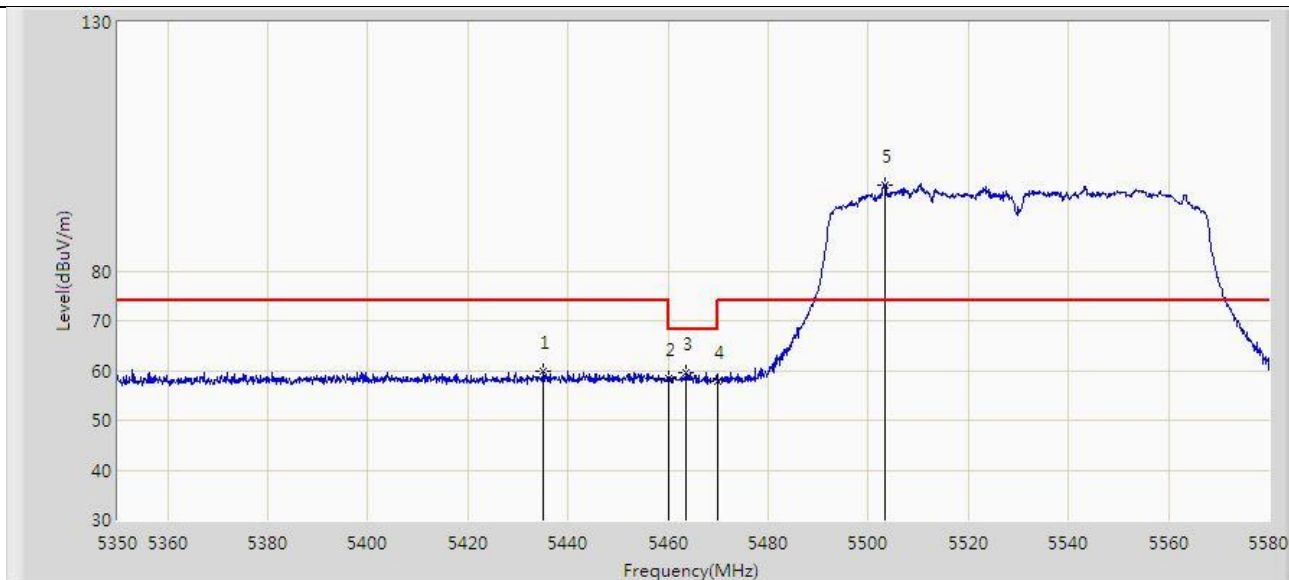


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5434.985	59.728	68.582	-14.272	74.000	-8.855	PK
2			5460.000	58.390	67.283	-15.610	74.000	-8.894	PK
3			5463.505	59.486	68.423	-8.714	68.200	-8.937	PK
4			5470.000	57.955	66.973	-10.245	68.200	-9.018	PK
5		*	5503.295	97.289	106.037	N/A	N/A	-8.748	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:07
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

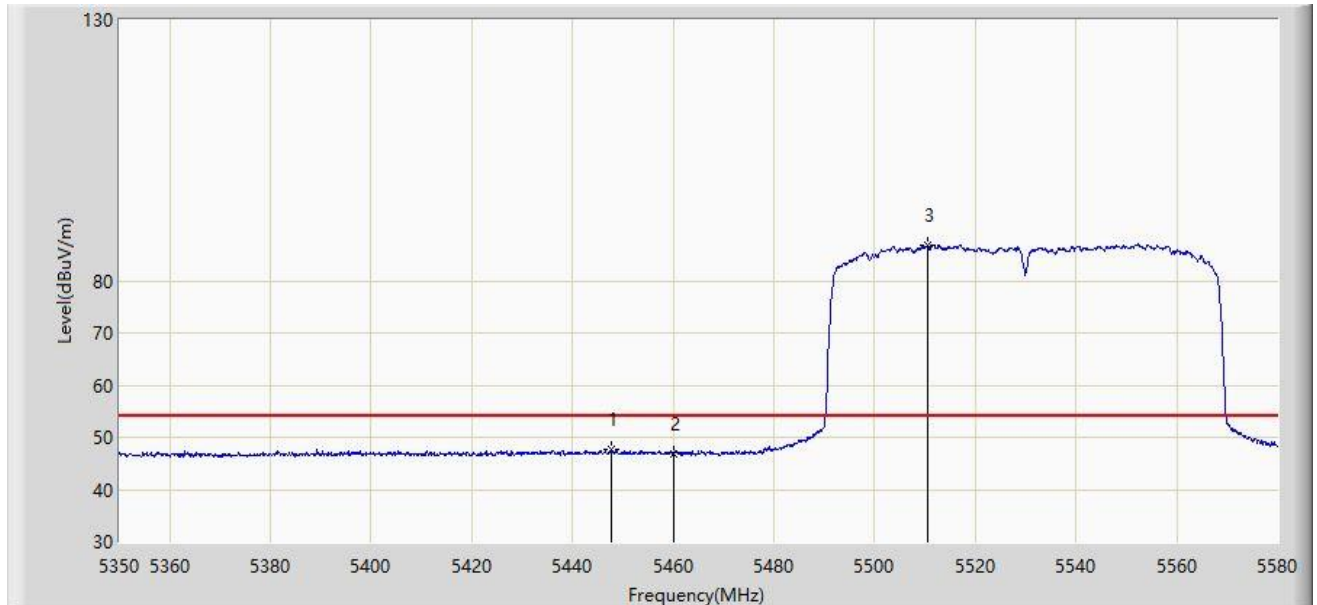


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.635	47.551	56.374	-6.449	54.000	-8.822	AV
2			5460.000	46.860	55.753	-7.140	54.000	-8.894	AV
3		*	5510.425	86.775	95.591	N/A	N/A	-8.816	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:08
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

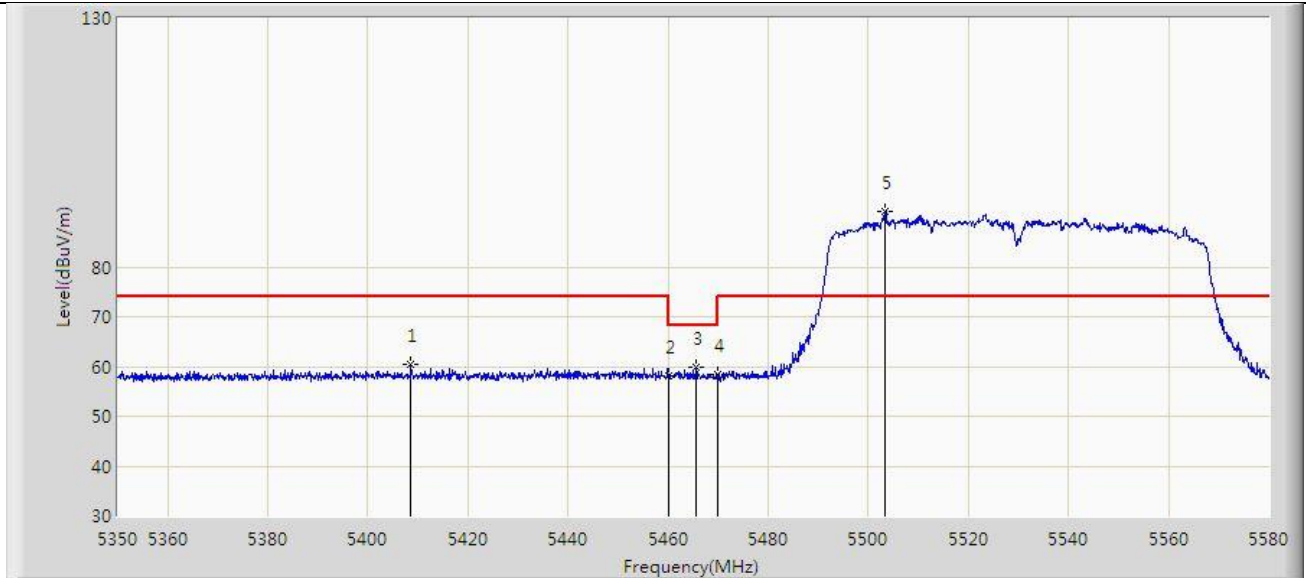


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5408.650	60.553	69.531	-13.447	74.000	-8.977	PK
2			5460.000	58.180	67.073	-15.820	74.000	-8.894	PK
3			5465.575	59.748	68.711	-8.452	68.200	-8.963	PK
4			5470.000	58.328	67.346	-9.872	68.200	-9.018	PK
5		*	5503.295	91.079	99.827	N/A	N/A	-8.748	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:11
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

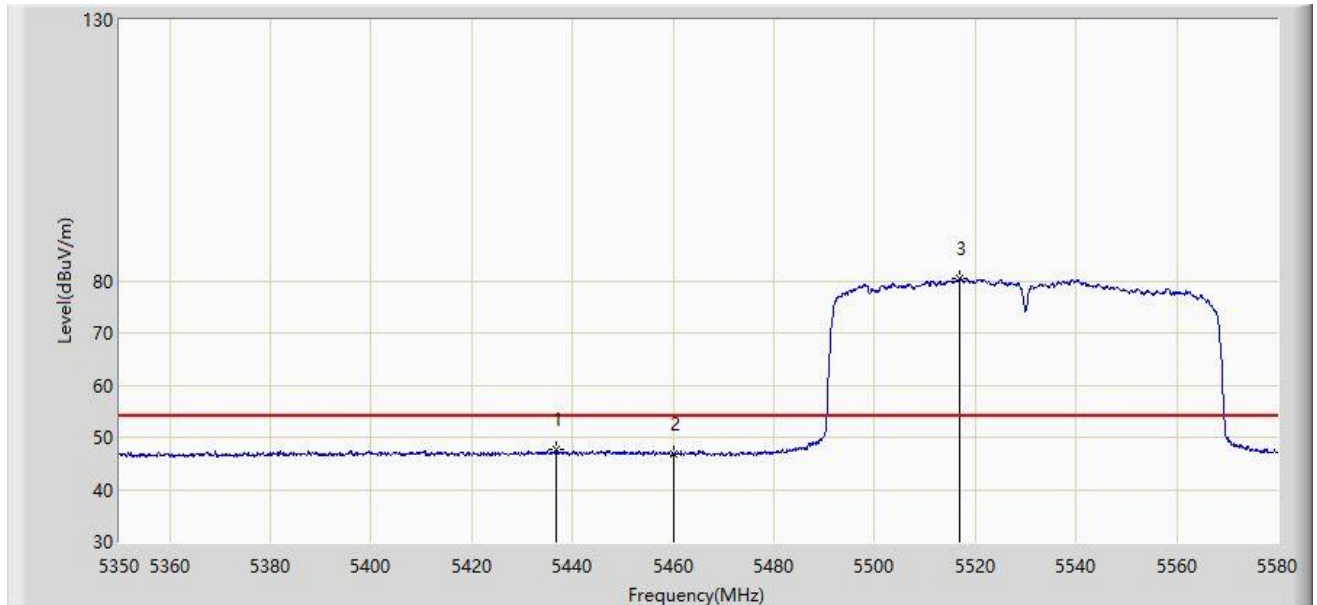


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5436.825	47.660	56.491	-6.340	54.000	-8.832	AV
2			5460.000	46.820	55.713	-7.180	54.000	-8.894	AV
3		*	5516.865	80.485	89.397	N/A	N/A	-8.912	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:12
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz	

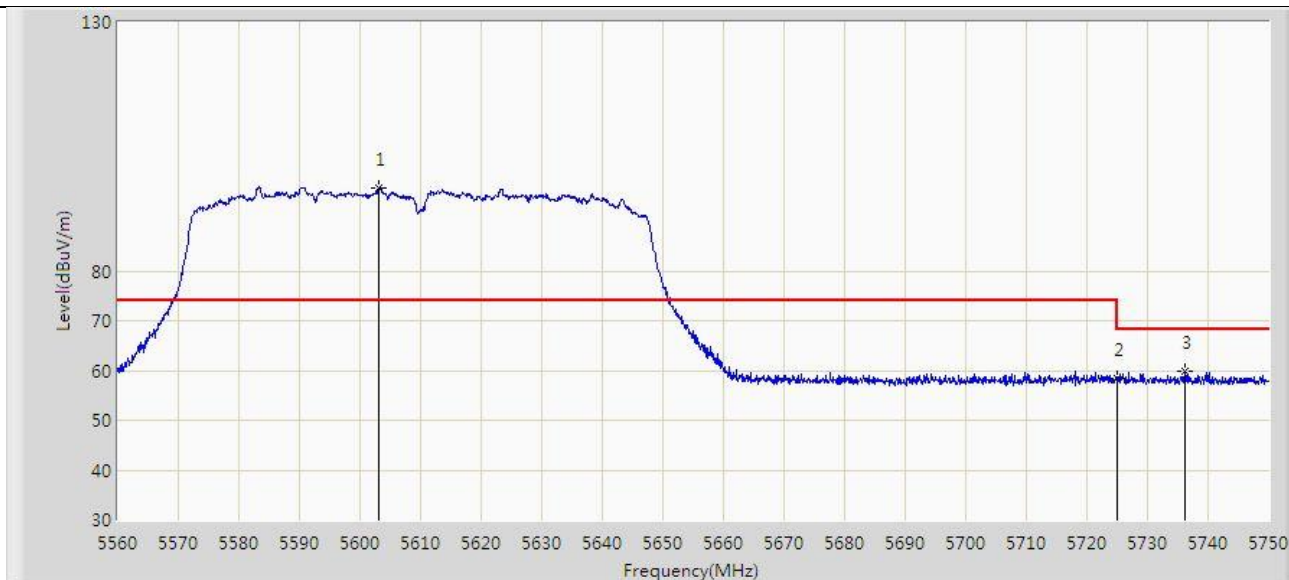


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5603.035	96.707	105.823	N/A	N/A	-9.116	PK
2			5725.000	58.386	67.493	-9.814	68.200	-9.107	PK
3			5736.225	59.767	69.035	-8.433	68.200	-9.268	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:15
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz	

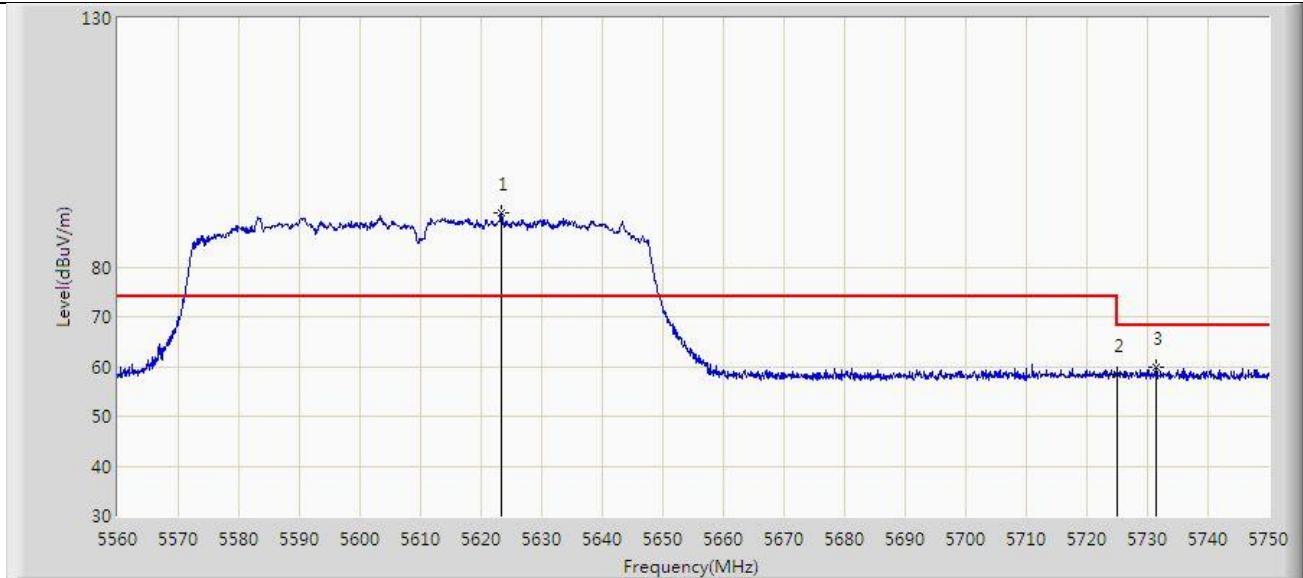


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.365	90.815	99.909	N/A	N/A	-9.094	PK
2			5725.000	58.524	67.631	-9.676	68.200	-9.107	PK
3			5731.475	59.771	68.959	-8.429	68.200	-9.188	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:20
Limit: FCC_Part15.407_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

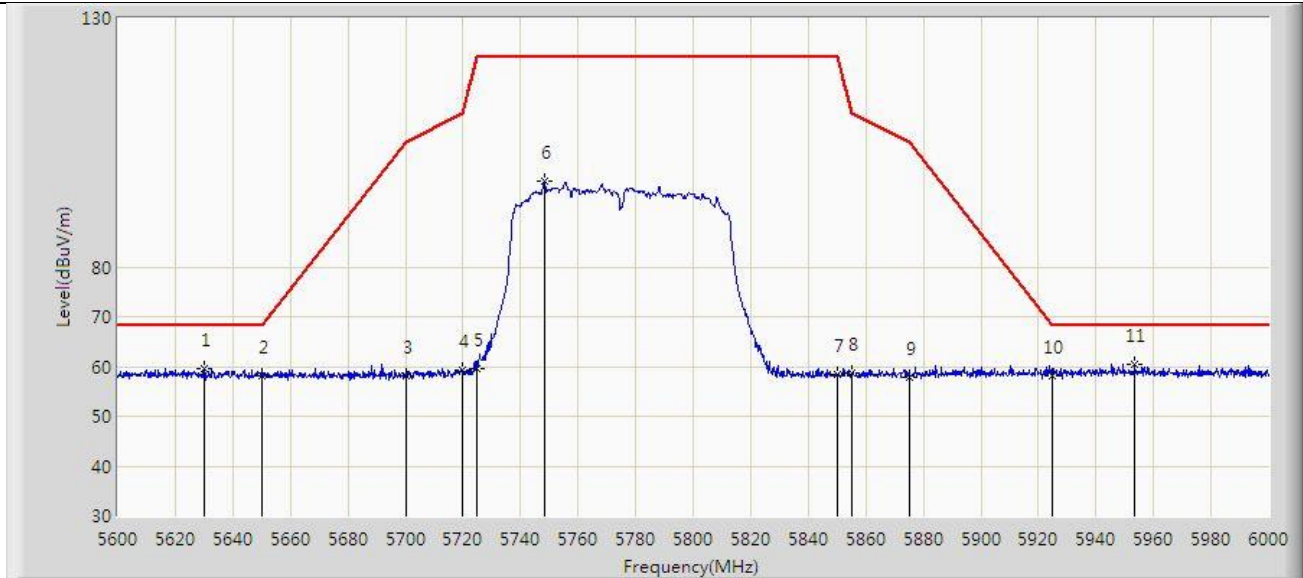


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5630.000	59.597	68.707	-8.603	68.200	-9.110	PK
2			5650.000	58.090	67.219	-10.110	68.200	-9.129	PK
3			5700.000	58.236	67.501	-46.964	105.200	-9.266	PK
4			5720.000	59.186	68.349	-51.614	110.800	-9.163	PK
5			5725.000	59.454	68.561	-62.746	122.200	-9.107	PK
6			5748.400	97.214	106.592	N/A	N/A	-9.379	PK
7			5850.000	58.545	67.598	-63.655	122.200	-9.053	PK
8			5855.000	58.668	67.716	-52.132	110.800	-9.049	PK
9			5875.000	57.753	66.773	-47.447	105.200	-9.020	PK
10			5925.000	58.238	67.001	-9.962	68.200	-8.762	PK
11		*	5953.400	60.349	69.100	-7.851	68.200	-8.751	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: SIP-AC3	Time: 2020/11/17 - 10:34
Limit: FCC_Part15.407_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

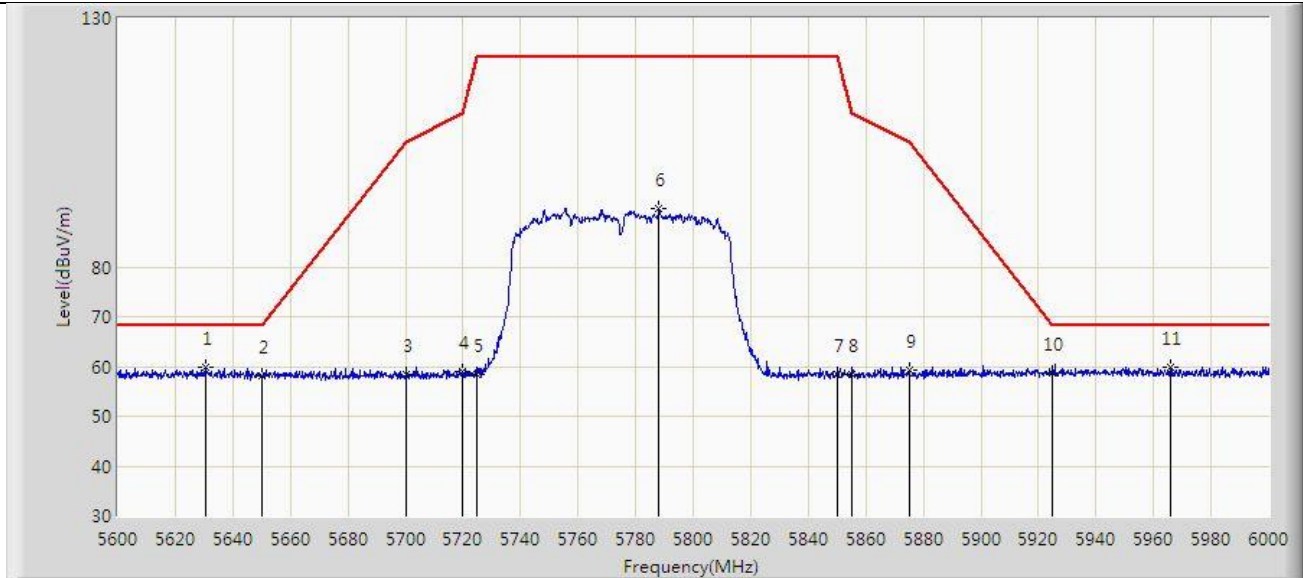

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5630.400	59.875	68.986	-8.325	68.200	-9.111	PK
2			5650.000	57.972	67.101	-10.228	68.200	-9.129	PK
3			5700.000	58.302	67.567	-46.898	105.200	-9.266	PK
4			5720.000	58.892	68.055	-51.908	110.800	-9.163	PK
5			5725.000	58.333	67.440	-63.867	122.200	-9.107	PK
6			5788.200	91.660	100.946	N/A	N/A	-9.286	PK
7			5850.000	58.512	67.565	-63.688	122.200	-9.053	PK
8			5855.000	58.265	67.313	-52.535	110.800	-9.049	PK
9			5875.000	59.131	68.151	-46.069	105.200	-9.020	PK
10			5925.000	58.833	67.596	-9.367	68.200	-8.762	PK
11			5965.800	59.831	68.695	-8.369	68.200	-8.864	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

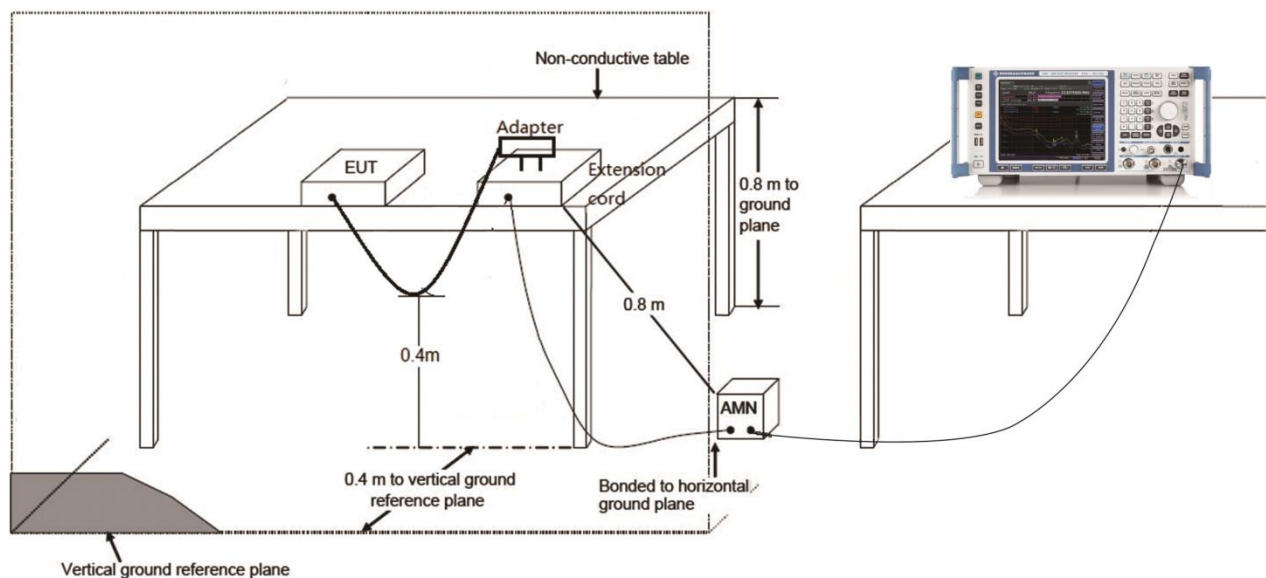

6.10.3.Test Result

Site: SIP-SR2	Time: 2020/11/20 - 14:59
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: ENV216_101684_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

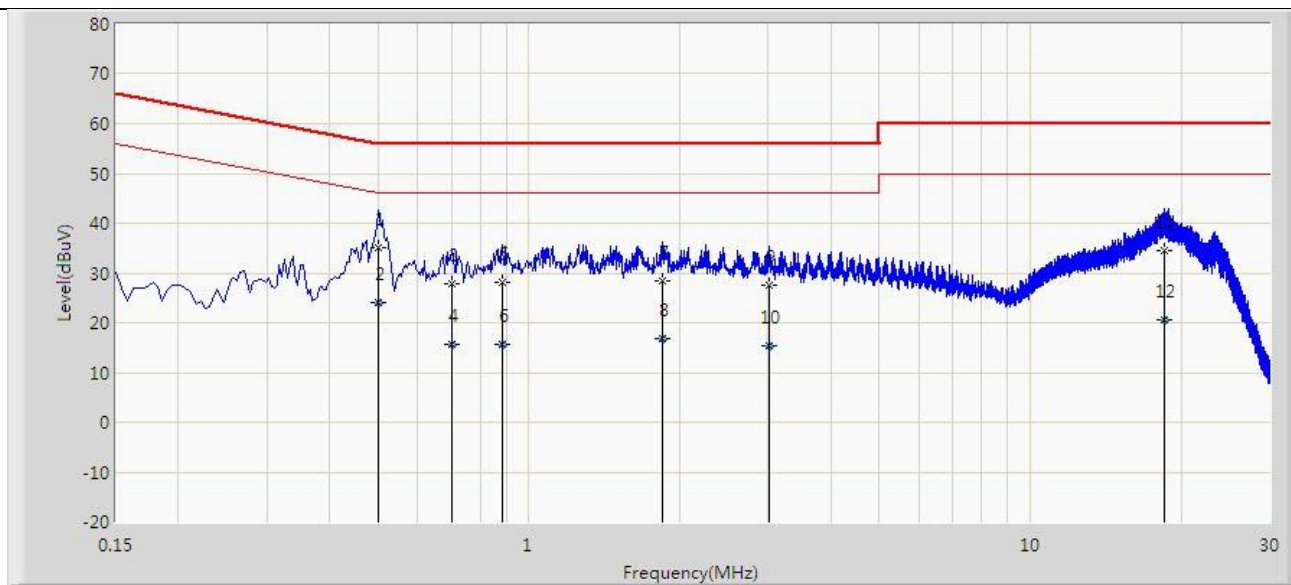


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.502	34.998	24.829	-21.002	56.000	10.168	QP
2			0.502	23.980	13.812	-22.020	46.000	10.168	AV
3			0.702	27.727	17.641	-28.273	56.000	10.086	QP
4			0.702	15.604	5.518	-30.396	46.000	10.086	AV
5			0.886	28.108	18.102	-27.892	56.000	10.006	QP
6			0.886	15.692	5.686	-30.308	46.000	10.006	AV
7			1.850	28.439	18.507	-27.561	56.000	9.933	QP
8			1.850	16.888	6.955	-29.112	46.000	9.933	AV
9			3.014	27.470	17.559	-28.530	56.000	9.911	QP
10			3.014	15.218	5.307	-30.782	46.000	9.911	AV
11			18.486	34.454	24.389	-25.546	60.000	10.064	QP
12			18.486	20.591	10.526	-29.409	50.000	10.064	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SIP-SR2	Time: 2020/11/20 - 15:04
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: ENV216_101684_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

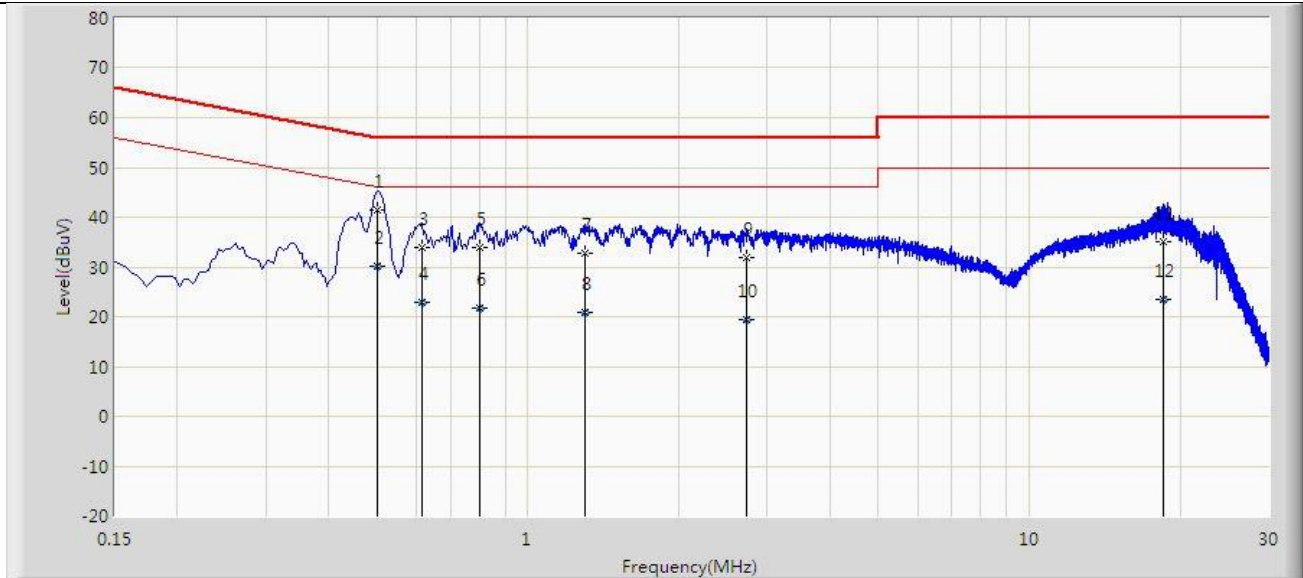

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.502	41.510	31.312	-14.490	56.000	10.198	QP
2			0.502	30.152	19.953	-15.848	46.000	10.198	AV
3			0.614	34.025	23.870	-21.975	56.000	10.155	QP
4			0.614	22.797	12.642	-23.203	46.000	10.155	AV
5			0.802	33.845	23.792	-22.155	56.000	10.053	QP
6			0.802	21.844	11.791	-24.156	46.000	10.053	AV
7			1.298	32.809	22.858	-23.191	56.000	9.950	QP
8			1.298	20.773	10.823	-25.227	46.000	9.950	AV
9			2.726	31.923	21.994	-24.077	56.000	9.929	QP
10			2.726	19.348	9.419	-26.652	46.000	9.929	AV
11			18.490	35.142	25.032	-24.858	60.000	10.109	QP
12			18.490	23.450	13.341	-26.550	50.000	10.109	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2010RSU078-UT” file.

Appendix B-EUT Photograph

Refer to “2010RSU078-UE” file.