


FCC SAR TEST REPORT

FCC ID : E2KFM350GL
Equipment : 5G Module
Brand Name : Fibocom
Model Name : FM350-GL
Applicant : Fibocom Wireless Inc.
1101,Tower A, Building 6, Shenzhen International,
Innovation Valley, Dashi 1st Rd, Nanshan, ShenZhen, China
Manufacturer : Fibocom Wireless Inc.
1101,Tower A, Building 6, Shenzhen International,
Innovation Valley, Dashi 1st Rd, Nanshan, ShenZhen, China
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Portable Computer (Brand Name: DELL, Model Name: P179G) during test.

The product was received on Jan. 18, 2023 and testing was started from May 19, 2023 and completed on May 19, 2023. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	5
3. Equipment Under Test (EUT) Information.....	6
3.1 General Information	6
3.2 General LTE SAR Test and Reporting Considerations	8
3.3 General 5G NR SAR Test and Reporting Considerations	11
3.1 Sensor Triggering angle and power verification	13
4. Proximity Sensor Triggering Test.....	18
5. RF Exposure Limits.....	26
5.1 Uncontrolled Environment.....	26
5.2 Controlled Environment.....	26
6. Specific Absorption Rate (SAR).....	27
6.1 Introduction	27
6.2 SAR Definition.....	27
7. System Description and Setup	28
7.1 Test Site Location	28
7.2 E-Field Probe	29
7.3 Data Acquisition Electronics (DAE)	29
7.4 Phantom.....	30
7.5 Device Holder.....	31
8. Measurement Procedures	32
8.1 Spatial Peak SAR Evaluation	32
8.2 Power Reference Measurement.....	33
8.3 Area Scan	33
8.4 Zoom Scan.....	34
8.5 Volume Scan Procedures.....	34
8.6 Power Drift Monitoring.....	34
9. Test Equipment List.....	35
10. System Verification	36
10.1 Tissue Verification	36
10.2 System Performance Check Results.....	36
11. RF Exposure Positions	37
11.1 SAR Testing for Tablet.....	37
12. 5G NR Output Power (Unit: dBm)	37
13. Antenna Location	41
14. SAR Test Results	44
14.1 Body SAR	45
14.2 Repeated SAR Measurement	45
15. Simultaneous Transmission Analysis	46
15.1 Body Exposure Conditions	47
15.2 SPLSR Evaluation and Analysis.....	47
16. Uncertainty Assessment	53
17. References.....	53
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA2O2012-01	01	Initial issue of report	Jun. 20, 2023

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Fibocom Wireless Inc., 5G Module, FM350-GL, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
			Body		
			1g SAR (W/kg)		
Licensed	WCDMA	WCDMA II	1.19		1.59
		WCDMA IV	0.66		
		WCDMA V	1.17		
	LTE	LTE Band 7	1.15		
		LTE Band 12 / 17	0.64		
		LTE Band 13	0.83		
		LTE Band 14	0.94		
		LTE Band 2 / 25	1.15		
		LTE Band 5 / 26	0.80		
		LTE Band 30	1.12		
		LTE Band 4 / 66	1.16		
		LTE Band 71	0.75		
		LTE Band 38 / 41	1.19		
		LTE Band 48	1.02		
		FR1	FR1 n2	1.11	
	FR1 n5		1.06		
	FR1 n7		1.11		
	FR1 n25		1.14		
	FR1 n30		1.00		
	FR1 n66		1.13		
	FR1 n71		0.26		
	FR1 n38 / n41		1.19		
	FR1 n48		1.01		
	FR1 n77 / n78		1.13		
Date of Testing:			2023/5/19		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	5G Module
Brand Name	Fibocom
Model Name	FM350-GL
FCC ID	E2KFM350GL
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz 5G NR n78: 3700 MHz ~ 3800 MHz, 3450MHz ~ 3550MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM
Remark: 1. Based on the original RF Exposure test report No.: FA2O2012, enable 5G NR n48. 2. The device implements P and G sensor detection, the G-sensor is control when the device from laptop change to tablet mode that device will limit different output power for SAR compliance. The P-sensor will detect device is close or away human body and limit output power for SAR compliance	

WWAN Antenna Information (Laptop)				
Main Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	-0.19
	Part number	0J3HG6	Type	PIFA
MIMO 2 Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	1.25
	Part number	0C75WW	Type	PIFA
WWAN Antenna Information (Tablet)				
Main Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	-2.09
	Part number	0J3HG6	Type	PIFA
MIMO 2 Antenna	Manufacturer	Wistron Corporation	Peak gain(dBi)	1.60
	Part number	0C75WW	Type	PIFA



Host Information	
Equipment Name	Portable Computer
Brand Name	DELL
Model Name	P179G
Integrated WLAN Module	Brand Name: Intel Model Name: AX211D2W
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz WLAN 5.9GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype
Remark: 1. The Intel AX211D2W WLAN/BT module is integrated into this host. The WLAN 2.4GHz/5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 221017-01.TR01 (FCC ID: PD9AX211D2), WLAN 6GHz SAR referred to new report No.: 221017-01. TR02 (FCC ID: PD9AX211D2).	

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	E2KFM350GL							
Equipment Name	5G Module							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM							
LTE Voice / Data requirements	Data only							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, P-Sensor and G-Sensor.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band														
LTE Band 2														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860		
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880		
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900		
LTE Band 4														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720		
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5		
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745		
LTE Band 5														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829						
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5						
H	20643	848.3	20635	847.5	20625	846.5	20600	844						
LTE Band 7														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510						
M	21100	2535	21100	2535	21100	2535	21100	2535						
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560						
LTE Band 12														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704						
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5						
H	23173	715.3	23165	714.5	23155	713.5	23130	711						
LTE Band 13														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)							
L	23205		779.5		23230		782							
M	23230		782											
H	23255		784.5											
LTE Band 14														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Channel #		Channel #		Freq.(MHz)							
L	23305		790.5		23330		793							
M	23330		793											
H	23355		795.5											
LTE Band 17														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)							
L	23755		706.5		23780		709							
M	23790		710		23790		710							
H	23825		713.5		23800		711							

LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz						Bandwidth 10 MHz					
	Channel #			Freq.(MHz)			Channel #			Freq.(MHz)		
L	27685			2307.5			27710			2310		
M	27710			2310								
H	27735			2312.5								
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
L	55810	3607	55815	3607.5	55820	3608	55830	3609				
M	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				

3.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information								
FCC	E2KFM350GL							
Equipment Name	5G Module							
Operating Frequency Range of each 5G NR transmission band	5G NR n2: 1850 MHz ~ 1910 MHz							
	5G NR n5: 824 MHz ~ 849 MHz							
	5G NR n7: 2500 MHz ~ 2570 MHz							
	5G NR n25: 1850 MHz ~ 1915 MHz							
	5G NR n30 : 2305 MHz ~ 2315 MHz							
	5G NR n38: 2570 MHz ~ 2620 MHz							
	5G NR n41: 2496 MHz ~ 2690 MHz							
	5G NR n48 : 3550 MHz ~ 3700 MHz							
	5G NR n66: 1710 MHz ~ 1780 MHz							
	5G NR n71: 663 MHz ~ 698 MHz							
	5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz							
5G NR n78: 3700 MHz ~ 3800 MHz, 3450MHz ~ 3550MHz								
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n25: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n30: 5MHz, 10MHz							
	5G NR n38: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n41: 10MHz, 15MHz, 40MHz, 50MHz, 80MHz, 100MHz							
	5G NR n48: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz							
	5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 40MHz							
	5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz							
	5G NR n77/n78: 10MHz, 15MHz, 20MHz, 40MHz, 50MHz, 60MHz, 80MHz, 100MHz							
SCS	FDD/TDD: SCS15KHz, SCS30KHz							
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM							
A-MPR (Additional MPR) disabled for SAR Testing?	Yes							
LTE Anchor Bands for n2	LTE B5/12/13/14							
LTE Anchor Bands for n5	LTE B2/7/30/48/66							
LTE Anchor Bands for n41	LTE B2/41/66							
LTE Anchor Bands for n66	LTE B5/12/13/48							
LTE Anchor Bands for n71	LTE B2/66							
LTE Anchor Bands for n77	LTE B2/5/12/13/14/30/41/66							
LTE Anchor Bands for n78	LTE B2/5/7/38							
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839
NR Band 7								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510
M	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560
NR Band 25								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905

NR Band 30													
	Bandwidth 5MHz				Bandwidth 10MHz				Bandwidth 15MHz				
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	461500	2307.5											
M	462000	2310											
H	462500	2312.5											
NR Band 38													
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	514500	2572.5	515004	2575.02	515502	2577.51	516000	2580	516500	2582.5	517000	2585	
M	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595	519000	2595	
H	523500	2617.5	522996	2614.98	522498	2612.49	522000	2610	521500	2607.5	521000	2605	
NR Band 41													
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 80MHz		Bandwidth100MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	500202	2501.01	500700	2503.5	503202	2516.01	504204	2521.02	507204	2536.02	509202	2546.01	
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	
H	537000	2685	536496	2682.48	534000	2670	532998	2664.99	529998	2649.99	528000	2640	
NR Band 48													
	Bandwidth10MHz		Bandwidth 15MHz		Bandwidth20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	637000	3555	637168	3557.52	637334	3560.01	637668	3565.02	638000	3570	638332	3575	
M	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99	641666	3624.99	
H	646332	3694.98	646166	3692.49	646000	3690	645666	3684.99	645332	3679.98	645000	3675	
NR Band 66													
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	344500	1722.5	345000	1725	
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353500	1767.5	353000	1765	
NR Band 71													
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	133100	665.5	133600	668	134100	670.5	134600	673	135100	675.5	135600	678	
M	136100	680.5	136100	680.5	136100	680.5	136100	680.5	136100	680.5	136100	680.5	
H	139100	695.5	138600	693	138100	690.5	137600	688	137100	685.5	136600	683	
NR Band 77 (3700MHz – 3980MHz)													
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	
H	665000	3975	664832	3972.48	664666	3969.99	664000	3960	663666	3954.99	663332	3949.98	
NR Band 78 (3700MHz – 3800MHz)													
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	647000	3705	647168	3707.52	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	
H	653000	3795	652832	3792.48	652666	3789.99	652000	3780	651666	3774.99	651332	3769.98	
NR Band 77/78 (3450MHz – 3550MHz)													
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	630334	3455.01	630500	3457.5	630668	3460.02	631334	3470.01	631668	3475.02	632000	3480	
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	
H	636332	3544.98	636166	3542.49	636000	3540	635332	3529.98	635000	3525	634666	3519.99	

3.1 Sensor Triggering angle and power verification

General Note:

- The following guidance should be applied to laptops/tablets that use Hall Effect or gravity sensors to detect lid angle for the purpose of power reduction:

Step 1: With the lid is in closed mode (0 degrees), open the screen in 10 degree steps until laptop mode is obtained
 Step 2: Lower the screen 5 degrees. Closed mode should be reobtained. If not keep lowering in 5 degree steps
 Step 3: Open the screen in 1 degree steps until laptop mode is reobtained
 Step 4: Continue opening the screen in 1 degree steps until at least 5 degrees past where laptop mode was obtained
 Step 5: Then continue opening the screen in 10 degree steps until tablet mode is obtained
 Step 6: Power measurements should be taken at each step
 Step 7: Reverse this procedure going from tablet mode back down to closed mode

when the screen angle is from 0 degree to 360 degree																											
	Wireless		Main																								
	Band		WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 7	LTE Band 12/17	LTE Band 13	LTE Band 14	LTE Band 25/2	LTE Band 26/5	LTE Band 30	LTE Band 66/4	LTE Band 71	LTE Band 41/38	FR1 n5	FR1 n7	FR1 n25/2	FR1 n30	FR1 n66	FR1 n71	FR1 n41	FR1 n41 HPUE	FR1 n77 Part 27Q	FR1 n77 Part 27Q HPUE	FR1 n77 Part 27Q	FR1 n77 Part 27Q HPUE
	Lid Close	0	23.75	23.92	23.46	23.81	23.62	23.52	23.53	23.39	23.37	23.33	23.21	23.43	23.06	21.93	23.04	22.95	22.10	22.74	22.51	23.13	25.90	22.91	25.64	23.02	25.72
Screen angle (degree) v.s. power	Notebook	1	23.79	23.94	23.49	23.90	23.64	23.56	23.61	23.39	23.40	23.40	23.23	23.53	23.13	22.03	23.10	23.05	22.13	22.79	22.58	23.23	25.96	22.93	25.73	23.05	25.81
		2	23.78	23.97	23.43	23.83	23.67	23.61	23.56	23.40	23.31	23.34	23.25	23.45	23.06	22.01	23.19	22.97	22.14	22.82	22.53	23.28	25.97	22.94	25.73	23.06	25.76
		3	23.76	23.96	23.44	23.90	23.66	23.56	23.58	23.42	23.40	23.32	23.32	23.51	23.07	22.02	23.19	22.99	22.10	22.84	22.54	23.28	25.96	22.98	25.81	23.12	25.79
		4	23.83	23.93	23.46	23.81	23.68	23.56	23.61	23.45	23.38	23.33	23.25	23.47	23.13	22.06	23.17	23.03	22.12	22.79	22.61	23.28	26.00	22.91	25.72	23.03	25.80
		5	23.79	23.97	23.42	23.82	23.70	23.60	23.60	23.35	23.33	23.35	23.29	23.48	23.06	22.01	23.14	23.05	22.13	22.87	22.57	23.21	26.02	22.93	25.82	23.06	25.83
		10	23.77	23.97	23.45	23.90	23.71	23.61	23.60	23.38	23.32	23.42	23.29	23.46	23.12	22.02	23.16	22.98	22.12	22.83	22.52	23.31	25.96	22.97	25.79	23.10	25.82
		20	23.83	23.92	23.46	23.82	23.68	23.66	23.61	23.45	23.37	23.35	23.29	23.51	23.06	21.99	23.19	23.02	22.06	22.86	22.58	23.31	25.95	22.92	25.79	23.06	25.78
		30	23.85	23.98	23.46	23.85	23.63	23.64	23.65	23.36	23.41	23.34	23.27	23.45	23.15	22.00	23.10	23.00	22.13	22.83	22.54	23.22	25.96	22.90	25.73	23.04	25.84
		40	23.81	23.93	23.50	23.89	23.63	23.63	23.63	23.36	23.39	23.34	23.28	23.51	23.12	21.99	23.15	23.00	22.12	22.86	22.58	23.28	25.93	22.95	25.81	23.09	25.81
		50	23.76	23.93	23.50	23.88	23.68	23.59	23.58	23.42	23.37	23.34	23.29	23.52	23.08	22.04	23.15	22.99	22.14	22.86	22.61	23.28	25.94	22.99	25.77	23.02	25.81
		60	23.77	23.97	23.42	23.83	23.68	23.62	23.60	23.43	23.39	23.40	23.30	23.52	23.11	22.03	23.09	23.07	22.11	22.77	22.58	23.27	25.95	22.96	25.75	23.06	25.75
		70	23.80	24.01	23.52	23.87	23.68	23.58	23.57	23.36	23.39	23.40	23.30	23.50	23.05	22.01	23.11	23.03	22.07	22.86	22.58	23.22	25.98	22.90	25.76	23.08	25.83
		80	23.78	23.92	23.49	23.87	23.62	23.65	23.59	23.37	23.41	23.35	23.29	23.48	23.15	22.02	23.19	23.02	22.15	22.78	22.56	23.25	25.97	22.91	25.76	23.07	25.76
		90	23.85	23.91	23.49	23.90	23.68	23.60	23.60	23.41	23.41	23.35	23.29	23.49	23.13	22.05	23.09	22.98	22.14	22.87	22.56	23.27	26.01	22.93	25.78	23.10	25.74
		100	23.79	23.97	23.47	23.88	23.68	23.59	23.58	23.35	23.37	23.35	23.31	23.54	23.10	22.06	23.18	23.04	22.15	22.80	22.58	23.22	25.92	22.91	25.81	23.07	25.78
		110	23.78	23.92	23.51	23.85	23.70	23.63	23.64	23.43	23.34	23.40	23.26	23.45	23.09	22.00	23.15	22.97	22.12	22.80	22.60	23.22	25.94	22.90	25.81	23.04	25.80
		120	23.79	23.91	23.44	23.81	23.64	23.59	23.57	23.43	23.36	23.35	23.30	23.51	23.08	22.08	23.10	23.07	22.07	22.77	22.59	23.25	26.00	22.94	25.80	23.10	25.81
		130	23.82	23.97	23.51	23.81	23.69	23.59	23.63	23.45	23.34	23.33	23.27	23.45	23.09	22.07	23.10	22.98	22.06	22.78	22.55	23.31	26.00	22.99	25.80	23.07	25.83
		140	23.85	23.93	23.43	23.81	23.72	23.62	23.66	23.42	23.40	23.33	23.24	23.53	23.15	22.06	23.13	22.97	22.10	22.86	22.59	23.31	26.01	22.97	25.81	23.05	25.78
		150	23.77	23.95	23.47	23.84	23.62	23.57	23.60	23.36	23.39	23.36	23.23	23.48	23.07	22.00	23.13	23.07	22.12	22.86	22.53	23.25	25.97	23.00	25.82	23.08	25.80
		160	23.81	23.95	23.43	23.83	23.72	23.59	23.61	23.44	23.41	23.40	23.23	23.50	23.12	22.05	23.16	23.05	22.08	22.86	22.61	23.27	25.97	22.92	25.72	23.11	25.76
		170	23.84	23.97	23.48	23.82	23.69	23.61	23.57	23.38	23.41	23.32	23.23	23.53	23.14	22.05	23.16	22.98	22.11	22.87	22.59	23.28	25.99	22.95	25.80	23.09	25.82
		180	23.83	23.98	23.45	23.80	23.68	23.63	23.58	23.39	23.39	23.40	23.29	23.49	23.09	22.00	23.19	23.02	22.15	22.87	22.61	23.27	25.96	22.94	25.82	23.06	25.79
		185	23.82	24.01	23.50	23.90	23.69	23.58	23.56	23.41	23.39	23.41	23.31	23.45	23.10	22.01	23.14	22.98	22.11	22.86	22.59	23.27	25.99	23.00	25.77	23.06	25.77
		186	23.78	23.92	23.45	23.80	23.72	23.65	23.60	23.37	23.39	23.34	23.32	23.44	23.06	22.00	23.15	23.05	22.09	22.81	22.52	23.23	25.98	22.99	25.74	23.05	25.74
		187	23.82	23.96	23.42	23.89	23.69	23.60	23.58	23.36	23.31	23.37	23.31	23.47	23.07	22.00	23.17	22.99	22.16	22.82	22.58	23.27	25.95	22.99	25.79	23.03	25.78
		188	23.85	24.00	23.47	23.83	23.67	23.63	23.62	23.37	23.34	23.38	23.29	23.50	23.08	22.00	23.09	23.07	22.10	22.86	22.58	23.24	25.98	22.91	25.73	23.12	25.74
		189	23.85	23.96	23.44	23.87	23.68	23.66	23.57	23.43	23.36	23.32	23.32	23.51	23.07	22.04	23.15	23.04	22.13	22.87	22.56	23.24	26.02	22.98	25.78	23.06	25.78
		190	23.75	24.01	23.50	23.89	23.64	23.66	23.60	23.43	23.41	23.33	23.29	23.52	23.10	22.07	23.09	23.00	22.12	22.84	22.54	23.25	25.95	22.92	25.72	23.02	25.82
		Tablet Mode	191	20.28	24.01	23.44	23.86	23.64	23.27	23.62	21.58	23.40	23.33	23.27	23.45	23.11	22.06	23.18	21.97	22.06	22.78	22.56	23.31	26.01	17.46	20.37	17.31
192	20.27		23.93	23.39	23.90	23.72	23.23	23.57	21.61	23.38	23.32	23.25	23.49	23.08	22.05	23.16	22.02	22.09	22.87	22.53	23.22	25.99	17.47	20.28	17.32	20.51	
193	20.22		23.99	23.46	23.86	23.70	23.30	23.60	21.65	23.40	23.36	23.24	23.44	23.14	22.03	23.15	21.98	22.16	22.84	22.55	23.23	25.98	17.45	20.35	17.35	20.52	
194	20.28		24.01	23.49	23.80	23.62	23.28	23.59	21.64	23.34	23.40	23.31	23.51	23.07	22.03	23.16	21.97	22.15	22.77	22.55	23.22	26.02	17.44	20.38	17.37	20.47	
195	20.19		23.92	23.40	23.82	23.66	23.27	23.63	21.63	23.35	23.41	23.29	23.48	23.06	22.07	23.13	21.99	22.09	22.87	22.55	23.31	25.98	17.50	20.33	17.34	20.45	
200	20.29		23.91	23.47	23.80	23.67	23.21	23.56	21.65	23.39	23.38	23.25	23.54	23.09	22.07	23.13	22.07	22.14	22.77	22.60	23.28	25.96	17.42	20.31	17.40	20.51	
205	20.23		23.94	23.41	23.89	23.64	23.22	23.62	21.60	23.40	23.42	23.32	23.54	23.05	22.01	23.12	21.98	22.16	22.87	22.53	23.22	25.98	17.42	20.29	17.35	20.45	
210	20.20		23.91	23.41	23.83	23.65	23.27	23.66	21.61	23.36	23.36	23.29	23.52	23.11	22.05	23.13	21.99	22.10	22.81	22.53	23.21	25.93	17.49	20.33	17.32	20.51	
220	20.20		23.95	23.43	23.86	23.63	23.23	23.65	21.65	23.31	23.37	23.26	23.52	23.14	22.02	23.09	21.97	22.15	22.80	22.58	23.28	25.97	17.44	20.37	17.30	20.53	
230	20.20		23.98	23.49	23.87	23.69	23.26	23.60	21.64	23.32	23.41	23.25	23.53	23.10	22.04	23.14	22.04	22.16	22.85	22.52	23.21	26.02	17.49	20.28	17.36	20.46	



FCC SAR TEST REPORT

Report No. : FA202012-01

		240	20.21	23.97	23.41	23.89	23.68	23.27	23.60	21.64	23.40	23.42	23.24	23.53	23.13	22.03	23.18	22.07	22.16	22.85	22.60	23.29	25.95	17.42	20.37	17.31	20.45
		250	20.21	23.98	23.43	23.84	23.63	23.26	23.58	21.59	23.34	23.40	23.26	23.46	23.14	22.00	23.10	21.99	22.14	22.84	22.61	23.29	25.95	17.41	20.35	17.31	20.45
		260	20.19	23.93	23.43	23.81	23.66	23.27	23.56	21.59	23.38	23.41	23.24	23.45	23.06	21.99	23.09	22.06	22.09	22.87	22.58	23.31	25.92	17.43	20.30	17.37	20.48
		270	20.19	23.96	23.48	23.83	23.63	23.22	23.60	21.60	23.32	23.34	23.24	23.53	23.12	21.99	23.18	21.98	22.06	22.82	22.57	23.28	25.94	17.48	20.31	17.38	20.49
		280	20.25	24.01	23.45	23.89	23.70	23.23	23.56	21.67	23.33	23.38	23.32	23.46	23.08	21.98	23.18	22.03	22.09	22.78	22.54	23.28	26.00	17.41	20.32	17.37	20.49
		290	20.26	23.96	23.45	23.83	23.70	23.28	23.64	21.65	23.36	23.35	23.24	23.45	23.09	22.03	23.11	22.00	22.09	22.84	22.58	23.23	26.02	17.50	20.37	17.39	20.53
		300	20.24	24.01	23.43	23.85	23.67	23.21	23.57	21.59	23.38	23.42	23.22	23.54	23.07	22.06	23.12	22.00	22.08	22.86	22.57	23.29	26.02	17.41	20.37	17.40	20.50
		310	20.20	23.96	23.42	23.90	23.63	23.30	23.62	21.62	23.31	23.38	23.32	23.48	23.09	22.07	23.11	21.98	22.08	22.86	22.54	23.25	25.97	17.43	20.32	17.38	20.54
		320	20.21	23.99	23.47	23.87	23.66	23.26	23.58	21.65	23.41	23.34	23.27	23.53	23.09	22.02	23.19	22.00	22.13	22.85	22.57	23.30	26.02	17.42	20.35	17.39	20.54
		330	20.25	23.95	23.42	23.86	23.63	23.21	23.57	21.61	23.36	23.38	23.28	23.53	23.10	22.02	23.12	22.03	22.10	22.85	22.55	23.21	25.99	17.42	20.32	17.34	20.49
		340	20.28	24.00	23.48	23.83	23.65	23.31	23.56	21.63	23.41	23.32	23.32	23.52	23.07	21.98	23.14	21.97	22.06	22.81	22.52	23.23	25.99	17.48	20.29	17.37	20.52
		350	20.27	23.96	23.42	23.89	23.67	23.25	23.56	21.60	23.39	23.34	23.26	23.47	23.08	22.06	23.14	22.03	22.07	22.85	22.59	23.30	26.00	17.40	20.31	17.37	20.52
		360	20.24	23.95	23.46	23.89	23.66	23.22	23.64	21.58	23.40	23.32	23.27	23.48	23.10	22.01	23.10	21.99	22.06	22.82	22.55	23.30	25.93	17.49	20.29	17.31	20.48

when the screen angle is from 0 degree to 360 degree																											
	Wireless		Main																								
	Band		WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 7	LTE Band 12/17	LTE Band 13	LTE Band 14	LTE Band 25/2	LTE Band 26/5	LTE Band 30	LTE Band 66/4	LTE Band 71	LTE Band 41/38	FR1 n5	FR1 n7	FR1 n25/2	FR1 n30	FR1 n66	FR1 n71	FR1 n41	FR1 n41 HPUE	FR1 n77 Part 270	FR1 n77 Part 27Q HPUE	FR1 n77 Part 27Q HPUE	
Screen angle (degree) v.s. power	Tablet Mode	360	20.29	23.96	23.47	23.82	23.66	23.31	23.64	21.65	23.40	23.42	23.27	23.45	23.07	22.04	23.19	22.07	22.11	22.83	22.56	23.22	26.02	17.41	20.38	17.32	20.46
		350	20.21	24.01	23.39	23.88	23.63	23.30	23.64	21.68	23.37	23.37	23.24	23.54	23.06	22.01	23.17	22.00	22.14	22.81	22.51	23.29	25.96	17.41	20.30	17.33	20.51
		340	20.21	23.97	23.46	23.85	23.69	23.25	23.63	21.60	23.39	23.41	23.27	23.50	23.10	21.99	23.10	22.03	22.16	22.79	22.56	23.21	25.99	17.48	20.37	17.30	20.54
		330	20.19	24.01	23.44	23.86	23.72	23.28	23.56	21.67	23.37	23.38	23.31	23.51	23.05	22.04	23.17	22.01	22.08	22.79	22.54	23.29	25.93	17.47	20.33	17.30	20.45
		320	20.28	23.98	23.39	23.85	23.63	23.26	23.58	21.62	23.33	23.42	23.29	23.48	23.07	21.98	23.12	21.97	22.12	22.82	22.55	23.28	25.92	17.46	20.30	17.35	20.46
		310	20.21	23.91	23.49	23.88	23.64	23.22	23.64	21.61	23.31	23.39	23.29	23.49	23.13	21.98	23.09	22.04	22.12	22.77	22.53	23.25	26.00	17.40	20.29	17.38	20.46
		300	20.23	23.99	23.41	23.90	23.64	23.30	23.57	21.65	23.31	23.35	23.30	23.50	23.06	22.02	23.11	21.99	22.12	22.78	22.54	23.29	26.02	17.45	20.33	17.32	20.53
		290	20.28	23.96	23.40	23.84	23.69	23.24	23.66	21.63	23.32	23.42	23.28	23.54	23.08	22.07	23.17	22.00	22.10	22.85	22.58	23.30	25.94	17.43	20.32	17.31	20.50
		280	20.20	23.97	23.42	23.87	23.63	23.21	23.56	21.63	23.33	23.32	23.30	23.47	23.15	22.03	23.12	22.00	22.16	22.85	22.60	23.29	26.01	17.43	20.38	17.36	20.46
		270	20.22	23.97	23.44	23.86	23.63	23.29	23.60	21.66	23.39	23.32	23.27	23.44	23.12	22.03	23.18	22.06	22.14	22.82	22.51	23.27	26.01	17.46	20.34	17.35	20.54
		260	20.25	23.97	23.45	23.83	23.67	23.27	23.66	21.66	23.31	23.41	23.31	23.45	23.06	22.02	23.12	22.00	22.11	22.83	22.54	23.31	25.94	17.50	20.34	17.39	20.49
		250	20.28	24.01	23.44	23.80	23.67	23.24	23.62	21.60	23.33	23.33	23.28	23.52	23.09	22.08	23.18	21.99	22.14	22.78	22.60	23.29	26.01	17.45	20.32	17.37	20.54
		240	20.29	23.97	23.41	23.88	23.70	23.23	23.58	21.67	23.38	23.37	23.28	23.44	23.12	22.03	23.14	22.06	22.16	22.80	22.54	23.29	25.95	17.50	20.30	17.39	20.47
		230	20.26	23.95	23.46	23.88	23.71	23.28	23.56	21.60	23.35	23.32	23.29	23.51	23.07	22.06	23.13	22.05	22.11	22.78	22.59	23.28	25.92	17.48	20.36	17.36	20.47
		220	20.19	23.95	23.46	23.84	23.69	23.25	23.60	21.68	23.38	23.40	23.31	23.46	23.15	22.03	23.13	22.04	22.16	22.85	22.52	23.31	25.98	17.42	20.37	17.39	20.52
		210	20.20	23.94	23.45	23.88	23.63	23.27	23.56	21.66	23.34	23.38	23.28	23.45	23.10	21.99	23.10	21.99	22.11	22.82	22.53	23.29	25.92	17.48	20.37	17.31	20.45
		200	20.25	23.92	23.40	23.83	23.66	23.30	23.59	21.67	23.38	23.34	23.29	23.51	23.14	21.99	23.15	22.03	22.09	22.79	22.52	23.22	25.96	17.40	20.37	17.39	20.53
		190	20.23	23.91	23.43	23.89	23.67	23.21	23.65	21.62	23.38	23.38	23.23	23.47	23.09	22.01	23.13	22.00	22.09	22.80	22.51	23.21	26.01	17.42	20.29	17.30	20.54
		180	20.21	23.98	23.43	23.84	23.62	23.25	23.61	21.65	23.34	23.41	23.27	23.51	23.13	22.02	23.17	22.01	22.08	22.87	22.60	23.27	25.92	17.45	20.28	17.32	20.55
		175	20.26	23.94	23.39	23.80	23.71	23.25	23.63	21.68	23.41	23.42	23.28	23.46	23.06	22.04	23.09	21.97	22.12	22.84	22.57	23.24	25.93	17.47	20.34	17.38	20.54
	174	20.26	23.95	23.39	23.83	23.71	23.22	23.64	21.67	23.36	23.38	23.28	23.45	23.13	21.99	23.16	22.02	22.06	22.82	22.51	23.21	26.02	17.45	20.37	17.30	20.46	
	173	20.27	23.91	23.42	23.86	23.66	23.21	23.58	21.64	23.41	23.36	23.22	23.54	23.11	22.07	23.13	22.02	22.16	22.87	22.54	23.31	26.00	17.46	20.30	17.38	20.48	
	172	20.23	23.99	23.45	23.83	23.65	23.23	23.66	21.61	23.41	23.35	23.25	23.50	23.09	22.04	23.12	22.00	22.10	22.82	22.56	23.23	26.00	17.49	20.34	17.35	20.54	
	171	20.25	23.93	23.40	23.88	23.62	23.28	23.62	21.67	23.37	23.39	23.30	23.51	23.13	21.99	23.09	21.99	22.13	22.82	22.58	23.24	25.99	17.50	20.34	17.35	20.46	
	170	20.21	23.95	23.49	23.90	23.64	23.28	23.57	21.66	23.34	23.33	23.23	23.53	23.15	22.02	23.18	22.04	22.15	22.79	22.51	23.29	25.95	17.40	20.28	17.30	20.50	
	Notebook	169	23.78	24.01	23.51	23.83	23.62	23.56	23.57	23.42	23.41	23.34	23.31	23.49	23.09	22.03	23.17	23.00	22.09	22.87	22.51	23.25	26.01	22.90	25.73	23.06	25.74
		168	23.82	24.01	23.50	23.82	23.65	23.62	23.57	23.45	23.34	23.42	23.24	23.45	23.12	22.01	23.17	23.01	22.10	22.86	22.61	23.23	25.99	22.96	25.73	23.07	25.79
		167	23.85	23.93	23.46	23.86	23.64	23.65	23.65	23.39	23.40	23.42	23.27	23.48	23.15	22.04	23.09	23.03	22.14	22.84	22.55	23.27	25.99	22.94	25.75	23.11	25.83
		166	23.84	23.95	23.46	23.83	23.69	23.57	23.58	23.38	23.38	23.36	23.23	23.54	23.15	22.03	23.16	23.02	22.08	22.84	22.61	23.22	25.96	22.91	25.79	23.09	25.78
		165	23.84	24.00	23.46	23.81	23.64	23.62	23.65	23.41	23.40	23.36	23.32	23.46	23.12	22.08	23.14	22.97	22.16	22.78	22.58	23.26	26.02	22.98	25.79	23.12	25.81
		160	23.77	23.95	23.46	23.88	23.72	23.61	23.63	23.36	23.34	23.40	23.22	23.44	23.06	22.03	23.10	23.05	22.07	22.83	22.56	23.25	25.98	22.96	25.80	23.05	25.75
		155	23.80	23.95	23.47	23.81	23.62	23.65	23.61	23.44	23.40	23.34	23.25	23.44	23.06	21.98	23.13	23.07	22.15	22.80	22.60	23.22	25.97	23.00	25.72	23.07	25.79
		150	23.82	24.00	23.46	23.85	23.65	23.64	23.56	23.41	23.31	23.42	23.27	23.48	23.12	21.99	23.19	22.98	22.11	22.81	22.56	23.25	25.92	22.97	25.77	23.08	25.76
		140	23.81	23.99	23.50	23.86	23.63	23.60	23.60	23.44	23.41	23.38	23.30	23.49	23.11	22.01	23.19	23.04	22.12	22.77	22.60	23.25	26.01	22.91	25.75	23.05	25.83
		130	23.77	23.97	23.46	23.87	23.63	23.61	23.60	23.35	23.41	23.32	23.27	23.48	23.06	22.05	23.09	23.05	22.15	22.86	22.58	23.21	25.98	22.99	25.80	23.04	25.77
		120	23.83	23.91	23.44	23.80	23.70	23.62	23.66	23.43	23.36	23.38	23.28	23.48	23.06	22.00	23.11	23.07	22.10	22.79	22.55	23.26	25.95	22.91	25.77	23.12	25.75
110		23.83	23.94	23.50	23.87	23.70	23.63	23.61	23.41	23.31	23.33	23.22	23.48	23.10	21.99	23.15	22.99	22.15	22.83	22.55	23.22	25.92	22.96	25.74	23.07	25.84	
100		23.84	23.98	23.52	23.85	23.64	23.65	23.60	23.39	23.38	23.40	23.22	23.48	23.06	22.01	23.11	23.07	22.10	22.85	22.57	23.30	25.98	22.99	25.81	23.04	25.74	
90		23.79	23.91	23.47	23.81	23.67	23.57	23.59	23.43	23.37	23.38	23.32	23.51	23.15	21.99	23.18	23.06	22.16	22.79	22.57	23.30	26.01	22.98	25.75	23.03	25.76	



FCC SAR TEST REPORT

Report No. : FA202012-01

		80	23.83	23.95	23.49	23.87	23.71	23.63	23.62	23.39	23.33	23.37	23.23	23.52	23.10	22.02	23.09	23.04	22.13	22.79	22.53	23.28	25.94	22.95	25.81	23.04	25.83
		70	23.75	23.96	23.47	23.90	23.71	23.62	23.62	23.41	23.38	23.33	23.32	23.44	23.14	22.08	23.12	23.01	22.13	22.81	22.61	23.30	25.97	22.91	25.81	23.03	25.80
		60	23.75	23.99	23.45	23.90	23.69	23.66	23.61	23.37	23.40	23.42	23.23	23.48	23.08	22.06	23.14	22.99	22.13	22.81	22.54	23.30	26.02	22.99	25.79	23.04	25.80
		50	23.82	23.99	23.46	23.87	23.67	23.56	23.62	23.41	23.40	23.33	23.23	23.45	23.12	22.00	23.13	22.98	22.11	22.85	22.51	23.24	25.93	22.99	25.72	23.06	25.74
		40	23.77	23.96	23.42	23.88	23.66	23.61	23.66	23.41	23.31	23.32	23.22	23.44	23.13	22.01	23.13	22.97	22.10	22.86	22.61	23.24	25.98	22.95	25.76	23.10	25.82
		30	23.81	23.91	23.48	23.83	23.62	23.59	23.56	23.39	23.40	23.38	23.24	23.47	23.08	22.07	23.17	23.01	22.07	22.83	22.60	23.26	25.97	22.99	25.76	23.12	25.79
		20	23.80	23.92	23.47	23.81	23.72	23.57	23.56	23.36	23.33	23.42	23.25	23.47	23.15	22.04	23.16	23.00	22.11	22.85	22.57	23.29	25.99	22.90	25.82	23.02	25.75
		10	23.83	23.92	23.49	23.84	23.63	23.57	23.60	23.40	23.32	23.33	23.29	23.45	23.14	22.04	23.16	23.06	22.10	22.78	22.55	23.29	25.97	22.97	25.76	23.07	25.81
		5	23.81	23.93	23.51	23.80	23.72	23.65	23.58	23.40	23.41	23.36	23.22	23.50	23.11	22.02	23.13	23.02	22.15	22.77	22.51	23.30	25.98	22.97	25.76	23.11	25.80
		4	23.84	24.01	23.49	23.89	23.63	23.58	23.60	23.37	23.32	23.42	23.24	23.54	23.14	22.08	23.17	23.06	22.08	22.81	22.53	23.31	25.97	23.00	25.75	23.06	25.84
		3	23.82	23.91	23.43	23.89	23.70	23.58	23.66	23.42	23.32	23.35	23.22	23.50	23.11	22.01	23.11	23.07	22.11	22.86	22.51	23.25	25.97	22.98	25.79	23.11	25.75
		2	23.85	23.95	23.48	23.85	23.68	23.57	23.59	23.42	23.34	23.33	23.23	23.49	23.11	22.07	23.18	23.07	22.06	22.85	22.56	23.21	26.01	22.90	25.82	23.08	25.77
		1	23.79	23.94	23.45	23.86	23.62	23.61	23.59	23.45	23.41	23.37	23.30	23.51	23.13	22.05	23.10	22.99	22.07	22.83	22.60	23.31	26.01	22.97	25.80	23.09	25.84
		Lid Close	0	23.7	23.92	23.45	23.86	23.55	23.51	23.6	23.4	23.4	23.3	23.2	23.49	23.1	22.04	23.1	23.0	22.0	22.8	22.5	23.25	25.9	22.93	25.72	23.0

when the screen angle is from 0 degree to 360 degree

when the screen angle is from 0 degree to 360 degree																	
	Wireless		MIMO2														
	Band	LTE Band 7	LTE Band 25/2	LTE Band 30	LTE Band 66/4	LTE Band 41	LTE Band 48	FR1 n2	FR1n66	FR1 n41	FR1 n48	FR1 n41 HPUE	FR1 n77 Part 27O	FR1 n77 Part 27O HPUE	FR1 n77 Part 27Q	FR1 n77 Part 27Q HPUE	
	Lid Close	0	20.21	20.73	20.22	21.78	20.48	21.55	22.70	23.01	19.66	21.96	22.59	17.75	20.64	18.85	21.69
Screen angle (degree) v.s. power	Notebook	1	20.27	20.80	20.30	21.87	20.58	21.55	22.74	23.06	19.70	21.95	22.64	17.81	20.67	18.88	21.73
		2	20.32	20.79	20.26	21.83	20.49	21.51	22.70	23.08	19.77	21.93	22.61	17.81	20.73	18.93	21.67
		3	20.22	20.83	20.24	21.83	20.56	21.56	22.71	23.13	19.71	21.95	22.67	17.85	20.73	18.85	21.71
		4	20.27	20.81	20.31	21.80	20.56	21.50	22.68	23.12	19.78	21.94	22.60	17.84	20.63	18.89	21.75
		5	20.30	20.79	20.29	21.80	20.51	21.55	22.69	23.13	19.74	21.90	22.62	17.89	20.71	18.89	21.72
		10	20.28	20.81	20.23	21.82	20.51	21.57	22.72	23.13	19.79	21.95	22.65	17.85	20.69	18.84	21.74
		20	20.26	20.83	20.23	21.86	20.56	21.57	22.70	23.15	19.77	21.93	22.63	17.83	20.65	18.84	21.66
		30	20.26	20.82	20.25	21.80	20.52	21.55	22.72	23.12	19.77	21.95	22.69	17.86	20.64	18.84	21.76
		40	20.24	20.77	20.28	21.88	20.59	21.55	22.68	23.08	19.79	21.94	22.68	17.88	20.64	18.89	21.69
		50	20.26	20.84	20.23	21.87	20.53	21.50	22.71	23.09	19.74	21.90	22.62	17.88	20.73	18.90	21.74
		60	20.22	20.82	20.29	21.82	20.52	21.53	22.77	23.09	19.74	21.96	22.64	17.82	20.66	18.86	21.71
		70	20.23	20.82	20.29	21.85	20.55	21.53	22.76	23.12	19.74	21.96	22.60	17.82	20.64	18.85	21.66
		80	20.30	20.84	20.29	21.89	20.52	21.51	22.72	23.09	19.78	21.95	22.67	17.90	20.70	18.86	21.75
		90	20.25	20.83	20.32	21.89	20.51	21.51	22.75	23.11	19.71	21.93	22.64	17.86	20.64	18.83	21.67
		100	20.29	20.86	20.25	21.86	20.49	21.50	22.68	23.10	19.69	21.95	22.62	17.90	20.72	18.93	21.73
		110	20.31	20.80	20.27	21.84	20.50	21.57	22.72	23.14	19.79	21.94	22.68	17.86	20.73	18.88	21.75
		120	20.27	20.84	20.23	21.80	20.54	21.55	22.71	23.11	19.73	21.90	22.65	17.86	20.72	18.83	21.76
		130	20.25	20.82	20.25	21.84	20.51	21.52	22.73	23.11	19.74	21.92	22.69	17.91	20.64	18.93	21.68
		140	20.30	20.84	20.32	21.79	20.56	21.54	22.72	23.10	19.75	21.90	22.64	17.81	20.67	18.83	21.71
		150	20.32	20.84	20.23	21.89	20.49	21.49	22.77	23.13	19.73	21.96	22.60	17.83	20.65	18.85	21.66
		160	20.28	20.76	20.23	21.83	20.50	21.50	22.76	23.09	19.73	21.92	22.69	17.87	20.65	18.86	21.69
		170	20.22	20.83	20.30	21.82	20.57	21.57	22.68	23.15	19.74	21.92	22.69	17.87	20.71	18.92	21.75
		180	20.29	20.83	20.31	21.86	20.59	21.55	22.68	23.14	19.78	21.91	22.69	17.81	20.73	18.92	21.69
		185	20.24	20.80	20.25	21.89	20.57	21.55	22.74	23.09	19.77	21.96	22.59	17.85	20.67	18.86	21.70
		186	20.30	20.85	20.32	21.87	20.59	21.56	22.72	23.13	19.71	21.96	22.59	17.88	20.72	18.84	21.66
		187	20.22	20.77	20.32	21.88	20.56	21.47	22.71	23.14	19.69	21.93	22.62	17.91	20.71	18.88	21.66
		188	20.30	20.84	20.29	21.85	20.52	21.48	22.71	23.06	19.75	21.94	22.61	17.87	20.63	18.84	21.76
		189	20.28	20.80	20.31	21.86	20.55	21.53	22.69	23.08	19.72	21.90	22.62	17.86	20.68	18.89	21.68
190	20.27	20.85	20.27	21.83	20.59	21.48	22.70	23.11	19.72	21.96	22.59	17.81	20.70	18.83	21.75		
	Tablet Mode	191	13.37	13.58	14.21	14.44	12.95	12.45	14.06	13.74	12.55	12.95	15.28	8.87	11.61	8.79	11.64
		192	13.34	13.54	14.14	14.49	12.95	12.41	14.02	13.73	12.57	12.85	15.37	8.89	11.71	8.80	11.60
		193	13.31	13.61	14.15	14.50	12.91	12.45	14.06	13.76	12.55	12.87	15.30	8.85	11.70	8.75	11.62
		194	13.40	13.55	14.19	14.51	12.99	12.41	14.11	13.69	12.57	12.93	15.35	8.89	11.68	8.74	11.67
		195	13.31	13.59	14.18	14.44	12.90	12.47	14.01	13.72	12.64	12.94	15.33	8.87	11.69	8.84	11.64



FCC SAR TEST REPORT

Report No. : FA202012-01

		200	13.34	13.60	14.13	14.49	12.94	12.44	14.05	13.76	12.65	12.90	15.35	8.86	11.71	8.76	11.67
		205	13.35	13.63	14.20	14.51	12.92	12.43	14.05	13.77	12.55	12.84	15.30	8.81	11.62	8.82	11.63
		210	13.32	13.60	14.17	14.51	12.97	12.40	14.06	13.72	12.62	12.88	15.34	8.87	11.63	8.76	11.59
		220	13.40	13.54	14.19	14.46	12.91	12.43	14.02	13.78	12.58	12.93	15.28	8.80	11.67	8.83	11.61
		230	13.38	13.59	14.20	14.45	12.92	12.38	14.03	13.72	12.63	12.93	15.33	8.82	11.64	8.79	11.63
		240	13.39	13.62	14.19	14.46	12.94	12.40	14.02	13.76	12.64	12.96	15.28	8.82	11.67	8.75	11.58
		250	13.38	13.58	14.21	14.42	12.95	12.48	14.07	13.69	12.65	12.87	15.31	8.86	11.71	8.76	11.65
		260	13.32	13.64	14.22	14.48	12.96	12.40	14.06	13.74	12.65	12.85	15.34	8.82	11.71	8.83	11.59
		270	13.36	13.58	14.12	14.42	12.93	12.47	14.03	13.78	12.62	12.94	15.30	8.86	11.66	8.80	11.67
		280	13.35	13.58	14.13	14.46	12.94	12.39	14.11	13.68	12.57	12.90	15.32	8.80	11.70	8.82	11.65
		290	13.41	13.58	14.14	14.46	12.96	12.39	14.09	13.68	12.56	12.90	15.33	8.85	11.66	8.78	11.60
		300	13.31	13.62	14.21	14.42	12.89	12.38	14.02	13.69	12.64	12.84	15.30	8.80	11.63	8.76	11.62
		310	13.32	13.56	14.16	14.45	12.97	12.39	14.08	13.77	12.55	12.90	15.33	8.81	11.66	8.74	11.66
		320	13.33	13.61	14.19	14.43	12.91	12.47	14.02	13.75	12.58	12.84	15.29	8.82	11.66	8.83	11.63
		330	13.38	13.63	14.12	14.52	12.90	12.44	14.04	13.68	12.62	12.93	15.31	8.90	11.63	8.80	11.66
		340	13.41	13.57	14.22	14.43	12.96	12.38	14.01	13.69	12.65	12.93	15.32	8.84	11.61	8.78	11.62
		350	13.36	13.58	14.17	14.51	12.95	12.43	14.09	13.74	12.65	12.89	15.28	8.80	11.64	8.74	11.65
		360	13.35	13.64	14.18	14.47	12.97	12.44	14.10	13.71	12.57	12.96	15.31	8.81	11.66	8.74	11.64

when the screen angle is from 0 degree to 360 degree																	
Screen angle (degree) v.s. power	Wireless		MIMO2														
	Band		LTE Band 7	LTE Band 25/2	LTE Band 30	LTE Band 66/4	LTE Band 41	LTE Band 48	FR1 n2	FR1 n66	FR1 n41	FR1 n48	FR1 n41 HPUE	FR1 n77 Part 27O	FR1 n77 Part 27O HPUE	FR1 n77 Part 27Q	FR1 n77 Part 27Q HPUE
	Tablet Mode	360	13.33	13.62	14.17	14.44	12.92	12.43	14.04	13.69	12.59	12.95	15.38	8.86	11.61	8.82	11.67
350		13.34	13.59	14.14	14.50	12.94	12.39	14.07	13.71	12.65	12.85	15.32	8.84	11.64	8.80	11.63	
340		13.34	13.55	14.12	14.50	12.95	12.48	14.09	13.78	12.61	12.87	15.29	8.90	11.64	8.83	11.59	
330		13.33	13.61	14.15	14.46	12.98	12.46	14.02	13.75	12.59	12.93	15.38	8.84	11.68	8.79	11.65	
320		13.37	13.61	14.18	14.43	12.91	12.47	14.01	13.78	12.58	12.94	15.38	8.85	11.71	8.79	11.59	
310		13.33	13.59	14.12	14.45	12.98	12.41	14.04	13.73	12.57	12.90	15.30	8.82	11.65	8.76	11.60	
300		13.40	13.54	14.19	14.43	12.95	12.42	14.09	13.77	12.64	12.84	15.32	8.86	11.69	8.78	11.60	
290		13.34	13.63	14.21	14.50	12.94	12.47	14.07	13.71	12.64	12.88	15.31	8.80	11.61	8.75	11.61	
280		13.34	13.64	14.15	14.49	12.94	12.42	14.01	13.70	12.57	12.93	15.38	8.81	11.69	8.78	11.67	
270		13.40	13.55	14.21	14.52	12.98	12.43	14.09	13.75	12.65	12.93	15.34	8.87	11.67	8.83	11.65	
260		13.34	13.63	14.13	14.48	12.92	12.43	14.03	13.73	12.59	12.96	15.31	8.80	11.69	8.77	11.66	
250		13.36	13.55	14.14	14.48	12.92	12.43	14.06	13.68	12.58	12.87	15.38	8.81	11.64	8.79	11.59	
240		13.31	13.55	14.14	14.49	12.96	12.45	14.07	13.78	12.64	12.85	15.38	8.84	11.61	8.82	11.58	
230		13.37	13.59	14.22	14.46	12.99	12.47	14.02	13.78	12.63	12.94	15.34	8.85	11.63	8.83	11.58	
220		13.33	13.62	14.20	14.43	12.93	12.41	14.01	13.68	12.57	12.90	15.31	8.88	11.70	8.75	11.58	
210		13.41	13.54	14.21	14.43	12.97	12.39	14.07	13.78	12.60	12.90	15.28	8.82	11.63	8.78	11.57	
200		13.32	13.58	14.13	14.43	12.97	12.48	14.05	13.69	12.59	12.84	15.28	8.80	11.63	8.82	11.57	
190		13.39	13.58	14.14	14.45	12.95	12.41	14.08	13.75	12.60	12.90	15.37	8.85	11.64	8.82	11.64	
180		13.32	13.59	14.16	14.47	12.99	12.43	14.11	13.75	12.61	12.84	15.34	8.84	11.68	8.77	11.62	
175		13.33	13.57	14.17	14.44	12.89	12.45	14.06	13.72	12.58	12.93	15.36	8.85	11.69	8.74	11.65	
174		13.40	13.60	14.13	14.47	12.90	12.42	14.02	13.73	12.55	12.93	15.30	8.89	11.67	8.77	11.66	
173		13.34	13.61	14.22	14.42	12.92	12.43	14.11	13.71	12.57	12.89	15.30	8.83	11.66	8.74	11.59	
172		13.39	13.61	14.14	14.44	12.97	12.46	14.05	13.74	12.55	12.96	15.33	8.80	11.70	8.84	11.58	
171		13.31	13.54	14.21	14.44	12.99	12.48	14.06	13.68	12.62	12.85	15.33	8.81	11.66	8.77	11.61	
170		13.36	13.64	14.18	14.43	12.92	12.39	14.05	13.76	12.62	12.96	15.34	8.89	11.68	8.78	11.63	
Notebook	169	20.28	20.82	20.31	21.81	20.50	21.56	22.75	23.10	19.71	21.96	22.68	17.85	20.69	18.92	21.74	
	168	20.29	20.77	20.30	21.88	20.59	21.50	22.72	23.14	19.75	21.95	22.60	17.91	20.63	18.83	21.72	
	167	20.29	20.79	20.25	21.80	20.51	21.47	22.76	23.11	19.73	21.93	22.66	17.82	20.69	18.83	21.73	
	166	20.30	20.80	20.33	21.87	20.50	21.53	22.75	23.16	19.77	21.95	22.63	17.89	20.68	18.86	21.71	
	165	20.23	20.83	20.28	21.87	20.53	21.50	22.78	23.11	19.71	21.94	22.66	17.85	20.72	18.88	21.70	
	160	20.27	20.78	20.26	21.88	20.53	21.53	22.74	23.06	19.70	21.90	22.67	17.82	20.68	18.92	21.68	
	155	20.23	20.79	20.27	21.88	20.50	21.54	22.74	23.13	19.75	21.95	22.61	17.89	20.63	18.84	21.75	



FCC SAR TEST REPORT

Report No. : FA2O2012-01

		150	20.25	20.85	20.26	21.84	20.54	21.52	22.77	23.13	19.75	21.93	22.68	17.85	20.71	18.93	21.76
		140	20.28	20.79	20.24	21.87	20.54	21.50	22.71	23.16	19.74	21.95	22.61	17.91	20.70	18.87	21.68
		130	20.24	20.78	20.33	21.84	20.59	21.51	22.74	23.09	19.72	21.94	22.60	17.87	20.67	18.88	21.71
		120	20.32	20.76	20.31	21.79	20.58	21.52	22.69	23.14	19.74	21.90	22.65	17.87	20.63	18.85	21.76
		110	20.22	20.79	20.27	21.85	20.51	21.55	22.75	23.16	19.73	21.96	22.59	17.88	20.69	18.84	21.70
		100	20.29	20.77	20.32	21.81	20.51	21.49	22.77	23.12	19.72	21.96	22.61	17.81	20.72	18.85	21.72
		90	20.29	20.80	20.33	21.81	20.57	21.53	22.72	23.06	19.70	21.95	22.65	17.81	20.69	18.85	21.74
		80	20.32	20.77	20.24	21.88	20.49	21.52	22.68	23.15	19.75	21.93	22.63	17.83	20.68	18.85	21.66
		70	20.27	20.83	20.31	21.83	20.50	21.55	22.74	23.07	19.79	21.95	22.60	17.88	20.73	18.90	21.67
		60	20.25	20.80	20.27	21.89	20.51	21.54	22.68	23.13	19.77	21.94	22.69	17.86	20.68	18.89	21.76
		50	20.24	20.82	20.23	21.83	20.59	21.52	22.72	23.16	19.69	21.90	22.66	17.91	20.64	18.92	21.69
		40	20.32	20.79	20.26	21.86	20.50	21.51	22.76	23.08	19.73	21.92	22.62	17.91	20.67	18.87	21.72
		30	20.25	20.86	20.25	21.86	20.49	21.48	22.73	23.08	19.72	21.90	22.59	17.81	20.70	18.93	21.69
		20	20.24	20.84	20.33	21.89	20.58	21.56	22.74	23.10	19.78	21.96	22.66	17.91	20.65	18.93	21.76
		10	20.23	20.86	20.27	21.85	20.57	21.51	22.70	23.14	19.70	21.92	22.63	17.82	20.69	18.91	21.75
		5	20.22	20.83	20.31	21.88	20.55	21.53	22.74	23.06	19.71	21.92	22.64	17.82	20.67	18.93	21.70
		4	20.22	20.85	20.32	21.89	20.52	21.50	22.70	23.10	19.69	21.91	22.67	17.89	20.63	18.87	21.71
		3	20.26	20.82	20.28	21.83	20.55	21.49	22.75	23.16	19.77	21.96	22.65	17.82	20.63	18.90	21.74
		2	20.23	20.84	20.24	21.82	20.58	21.56	22.71	23.15	19.69	21.96	22.68	17.86	20.73	18.83	21.73
		1	20.25	20.77	20.25	21.87	20.58	21.47	22.78	23.06	19.78	21.93	22.63	17.81	20.73	18.90	21.73
	Lid Close	0	20.2	20.73	20.15	21.87	20.55	21.42	22.7	23.0	19.7	21.96	22.5	17.8	20.63	18.8	21.73


4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

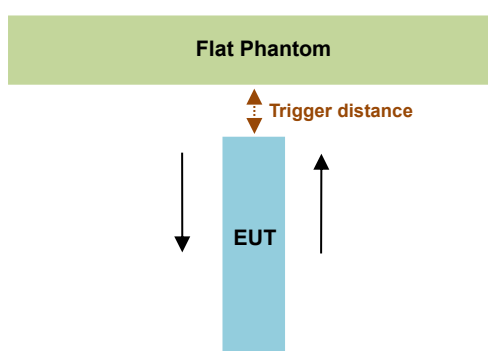

Main Antenna				
Proximity Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 2	
	moving toward	moving away	moving toward	moving away
Minimum	15	16	4	4

MIMO 2 Antenna						
Proximity Sensor Trigger Distance (mm)						
Position	Bottom of Laptop		Bottom Face		Edge 3	
	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	10	9	26	27	22	18


<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section 6.3, these procedures do not apply and are not required for this device. Due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance.

Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

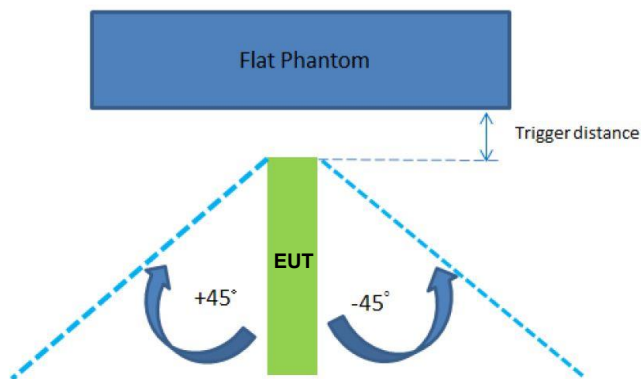

Main Antenna				
The Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 2	
	+45	-45	45	-45
Minimum	15	15	4	4

MIMO2 Antenna		
The Sensor Trigger Distance (mm)		
Position	Edge 3	
	45	-45
Minimum	18	18

Proximity sensor power reduction
<For Tablet Mode>

Exposure Position		Reduce Level (dB)
Wireless mode	Antenna	Bottom Face/ Edge 1/ Edge 2/ Edge 3 ⁽¹⁾
WCDMA Band II	Main	4.0 dB
WCDMA Band V	Main	0.5 dB
LTE Band 7	MIMO2	9.5 dB
LTE Band 2 / 25	Main	2.0 dB
LTE Band 2 / 25	MIMO2	9.5 dB
LTE Band 13	Main	0.5 dB
LTE Band 30	MIMO2	8.0 dB
LTE Band 41	MIMO2	10.0 dB
LTE Band 48	MIMO2	9.0 dB
LTE Band 4 / 66	MIMO2	9.0 dB
FR1 n2 / 25	Main	1.0 dB
FR1 n2	MIMO2	9.5 dB
FR1 n5	Main	1.0 dB
FR1 n7	Main	0.5 dB
FR1 n41	MIMO2	10.5 dB
FR1 n41_HPUE	MIMO2	10.5 dB
FR1 n48	MIMO2	9 dB
FR1 n66	MIMO2	10.0 dB
FR1 n77 / 78	Main	5.5 dB
FR1 n77 / 78	MIMO2	14.0 dB
FR1 n77_HPUE	Main	5.5 dB
FR1 n77_HPUE	MIMO2	14.0 dB

<For Laptop Mode>



Exposure Position		Reduce Level (dB)
Wireless mode	Antenna	Bottom of Laptop ⁽¹⁾
LTE Band 7	MIMO2	3.0 dB
LTE Band 2 / 25	MIMO2	2.5 dB
LTE Band 30	MIMO2	2.0 dB
LTE Band 41	MIMO2	2.5 dB
LTE Band 4 / 66	MIMO2	1.5 dB
FR1 n2	MIMO2	2.5 dB
FR1 n41	MIMO2	3.5 dB
FR1 n41_HPUE	MIMO2	3.5 dB
FR1 n66	MIMO2	1.5 dB
FR1 n77 / 78	MIMO2	5.5 dB
FR1 n77_HPUE	MIMO2	5.5 dB



Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown as below.
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Main**
 - Edge1: [14 mm](#)
 - Edge2: [3 mm](#)
 - MIMO 2**
 - Bottom of Laptop: [8 mm](#)
 - Bottom Face: [25 mm](#)
 - Edge3: [17 mm](#)



Power Measurement during Sensor Trigger distance testing



<Main Antenna>

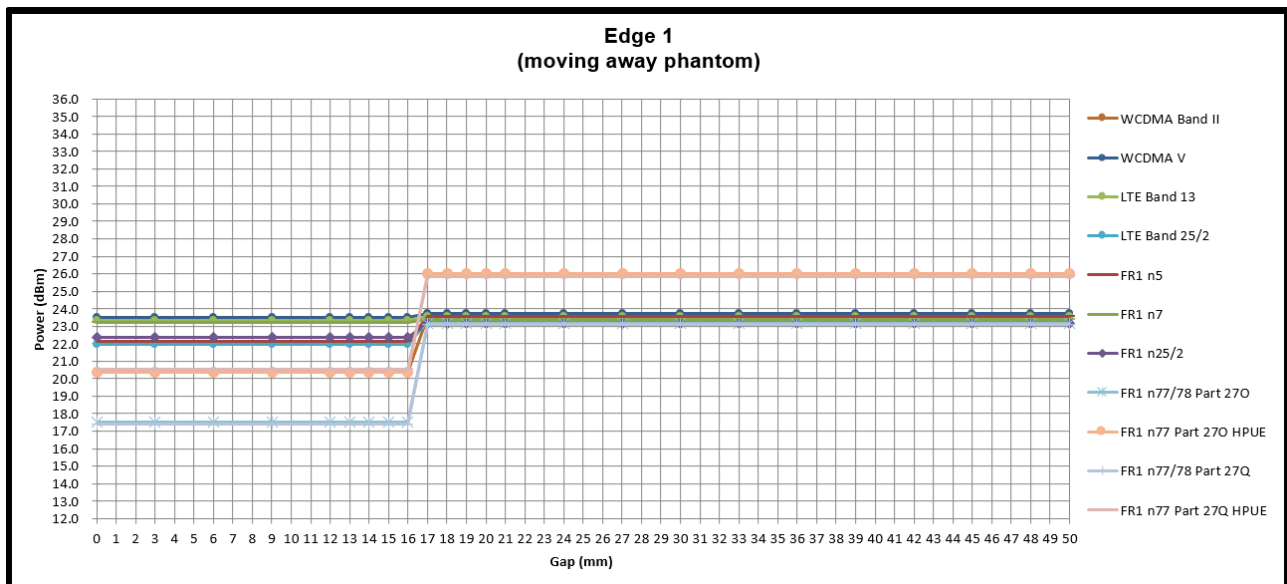
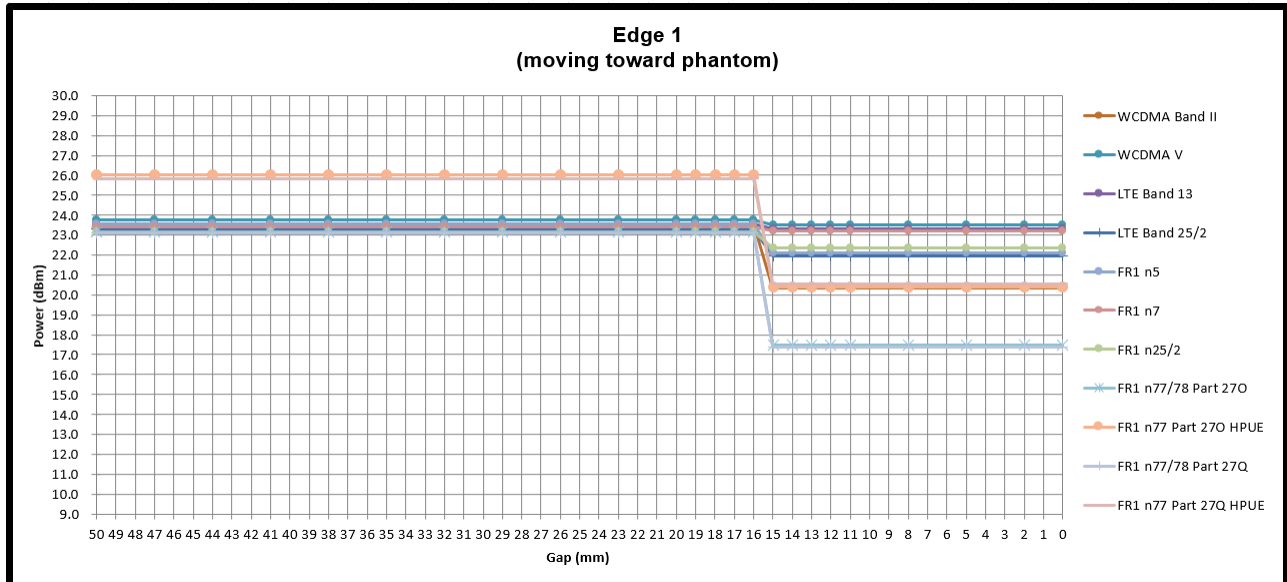


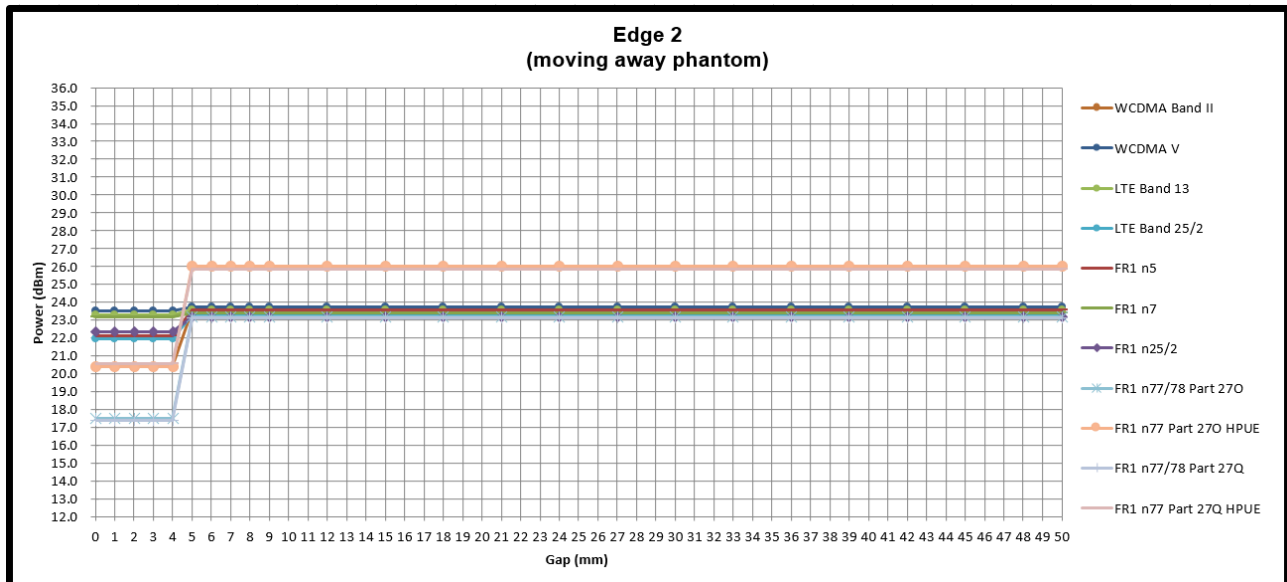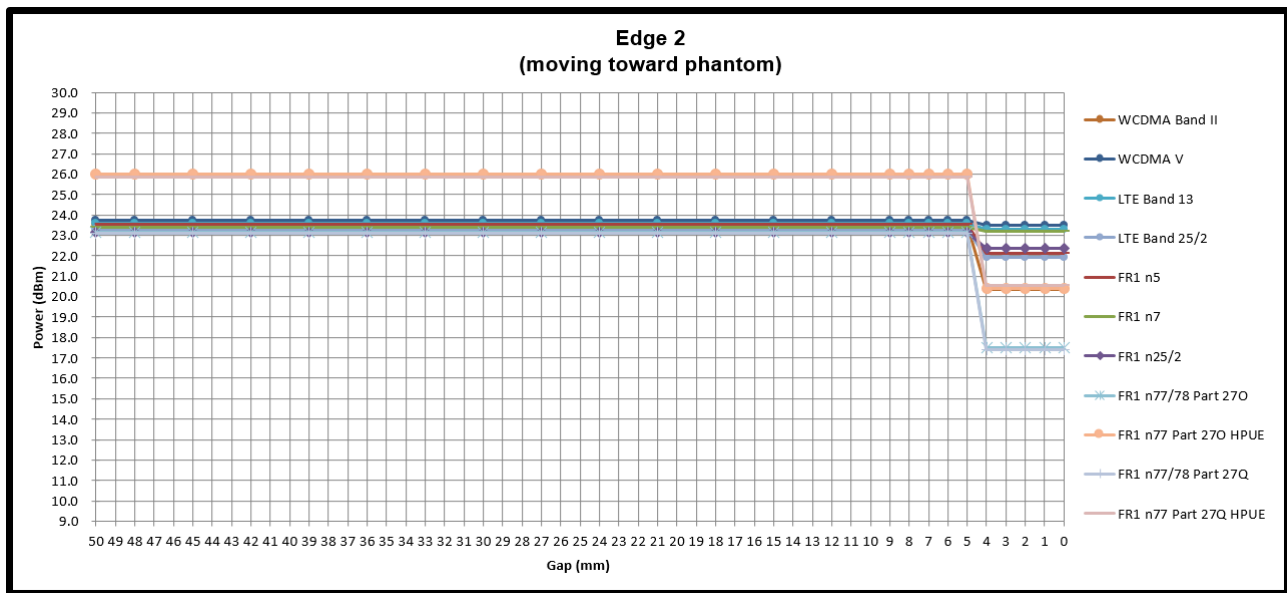

<MIMO 2 Antenna>

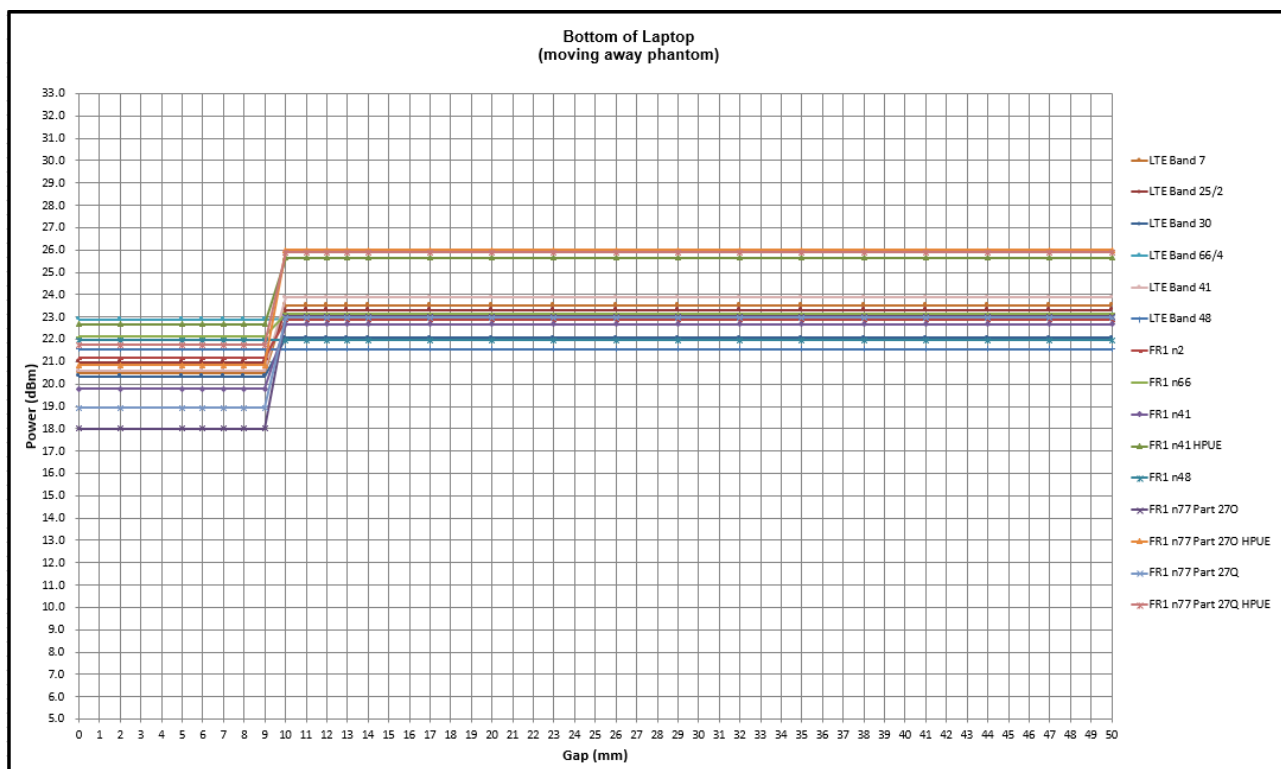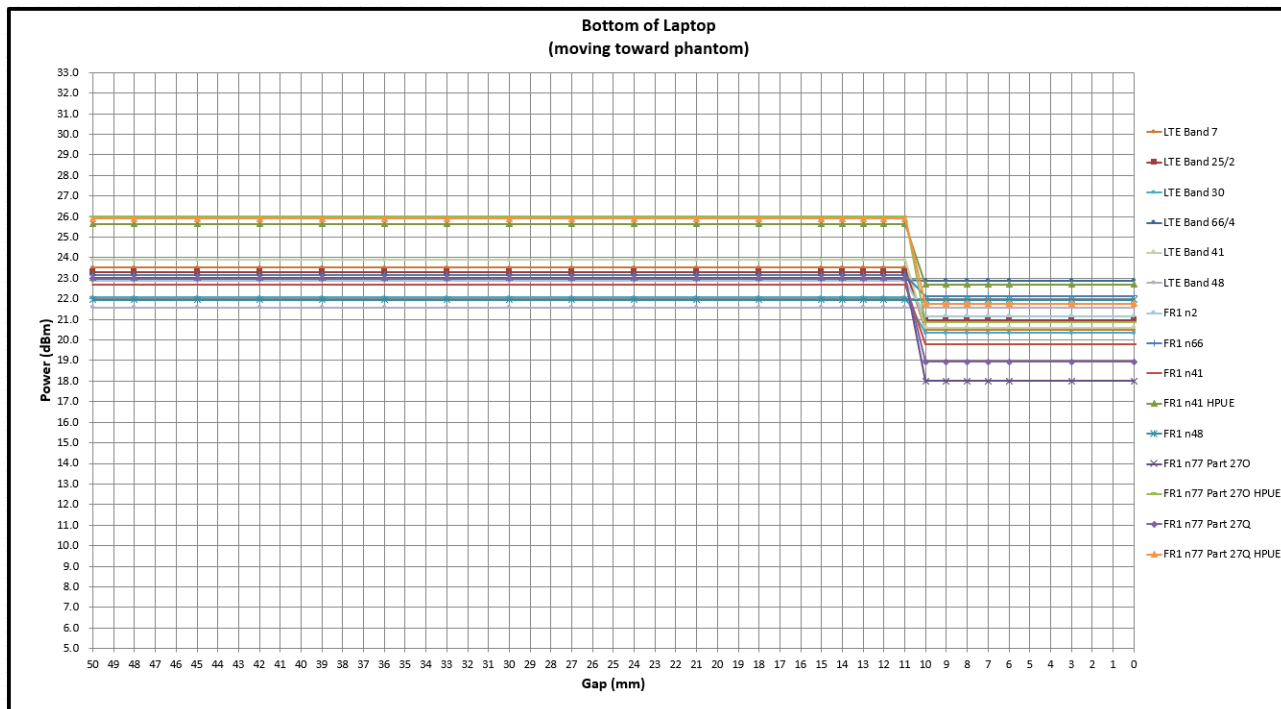

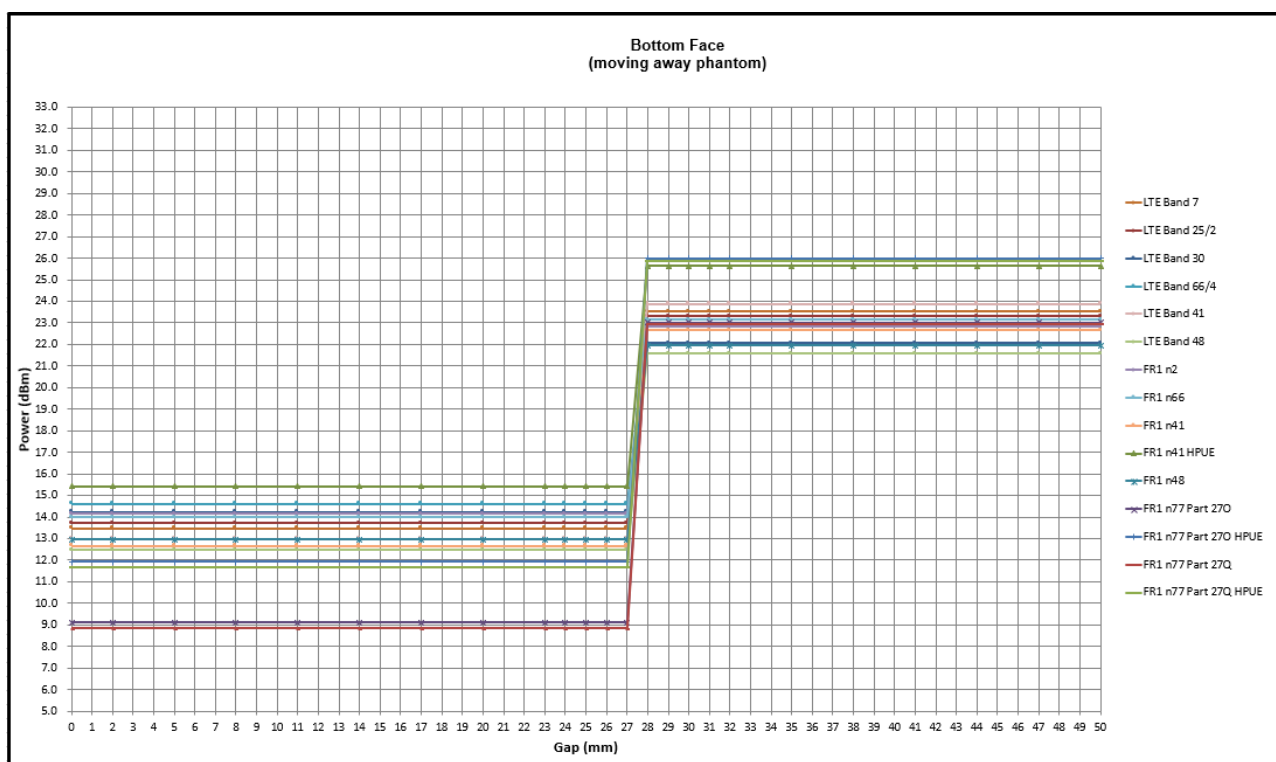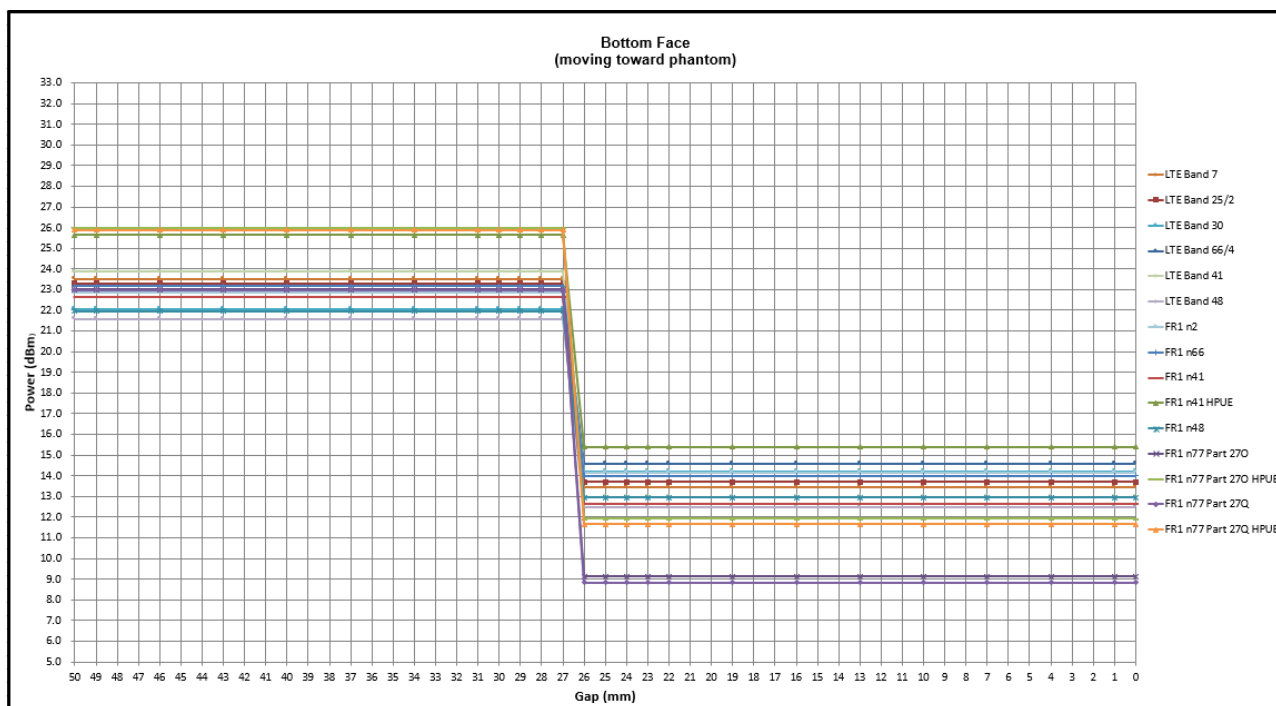

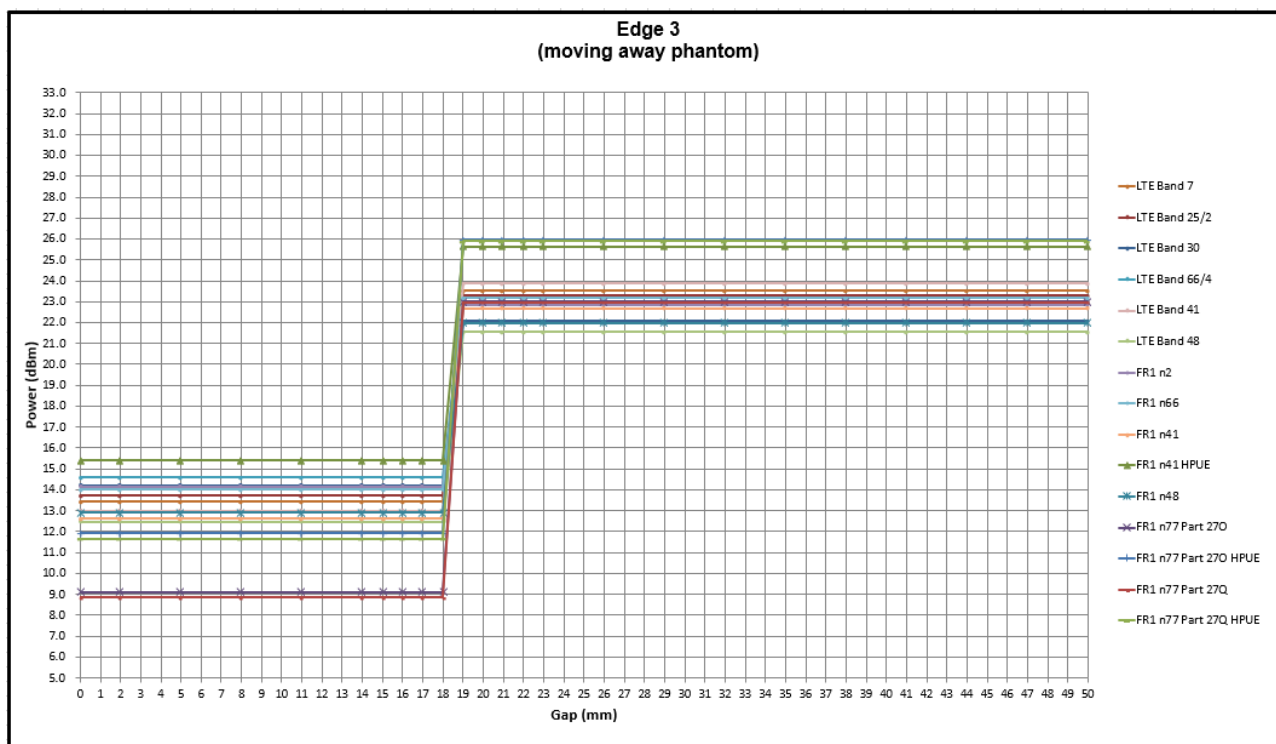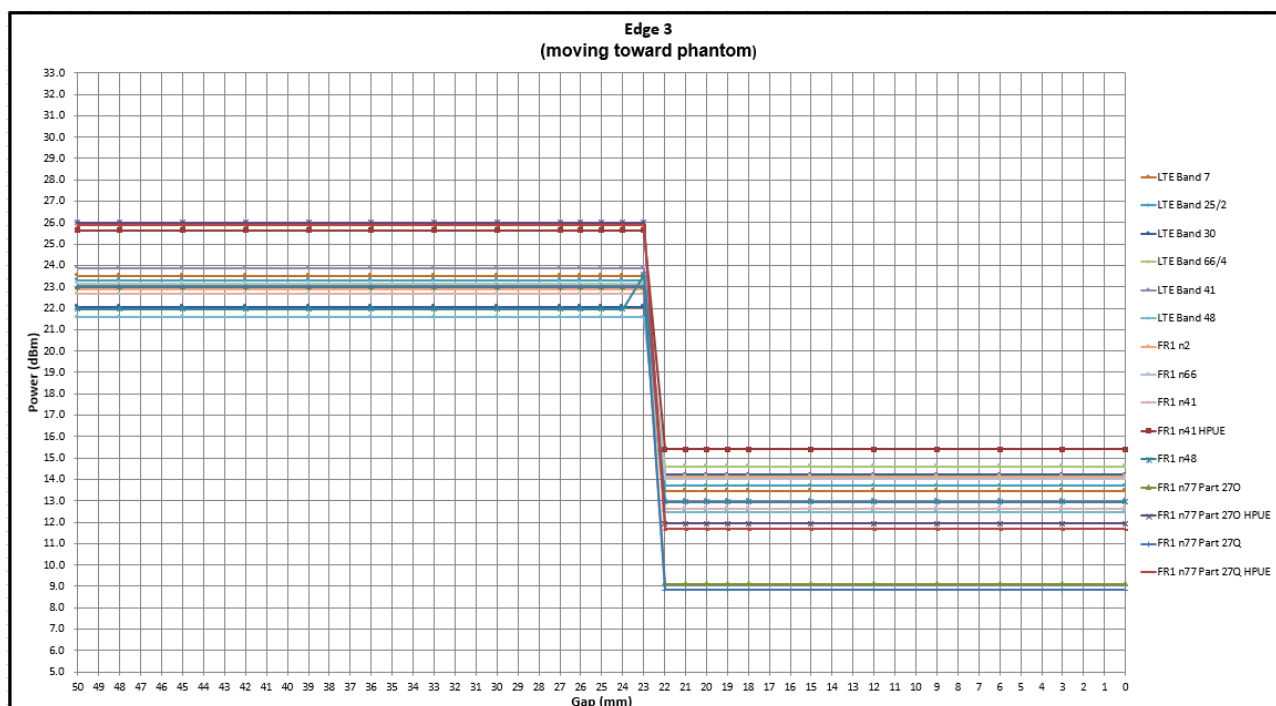

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

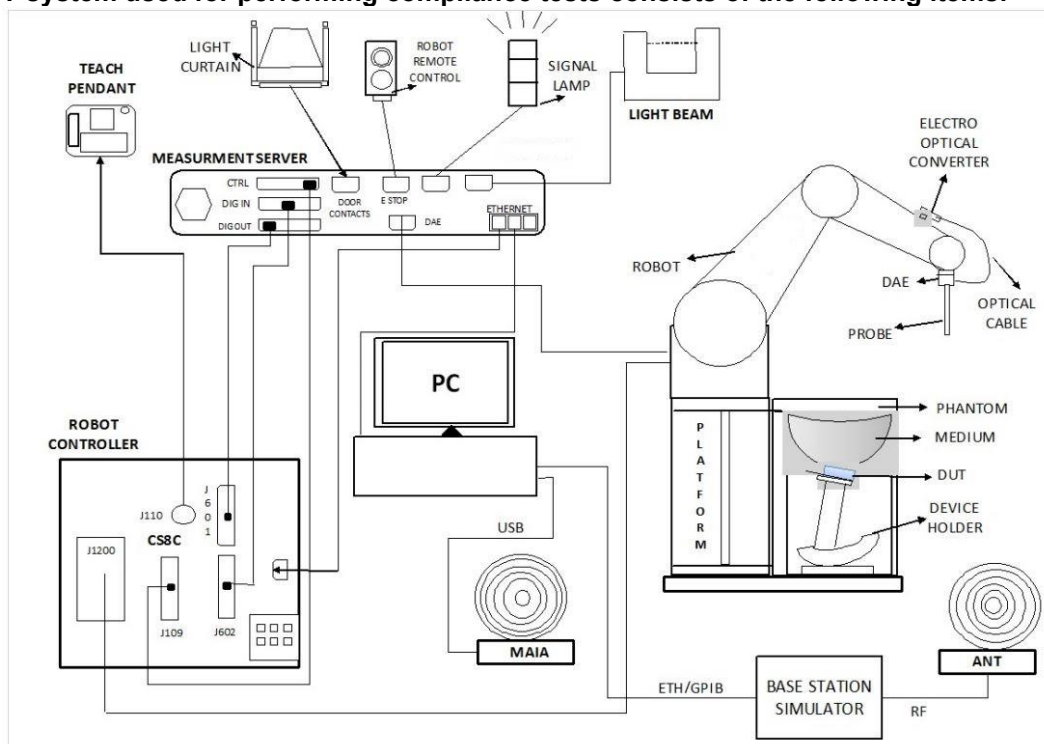

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY

7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1014	Jan. 17, 2022	Jan. 15, 2024
SPEAG	3700MHz System Validation Kit	D3700V2	1006	Jun. 20, 2022	Jun. 19, 2023
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 20, 2022	Jul. 19, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7439	Feb. 21, 2023	Feb. 20, 2024
Testo	Hygro meter	608-H1	45196600	Nov. 02, 2022	Nov. 01, 2023
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 12, 2022	Oct. 11, 2023
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 22, 2022	Sep. 21, 2023
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 28, 2022	Sep. 27, 2023
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3252	Jul. 25, 2022	Jul. 24, 2023
Anritsu	Power Meter	ML2495A	1419002	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Sensor	MA2411B	1911176	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Meter	ML2495A	1804003	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Power Sensor	MA2411B	1726150	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 10, 2023	Jan. 09, 2024
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 17, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 14, 2022	Oct. 13, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 15, 2022	Sep. 14, 2023
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
3500	22.5	2.994	38.417	2.91	37.90	2.89	1.36	± 5	2023/5/19
3700	22.5	3.208	38.215	3.12	37.70	2.82	1.37	± 5	2023/5/19

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Test Site
2023/5/19	3500	100	D3500V2-1014	EX3DV4 - SN7439	DAE4 Sn853	6.910	67.200	69.1	2.83	SAR05
2023/5/19	3700	100	D3700V2-1006	EX3DV4 - SN7439	DAE4 Sn853	6.550	65.600	65.5	-0.15	SAR05

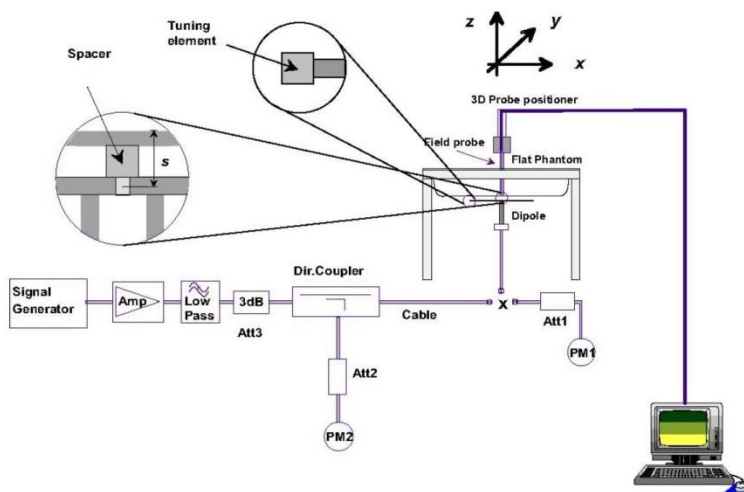


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. 5G NR Output Power (Unit: dBm)

General Note:

1. The device support SCS 15KHz and 30KHz for NR FDD and TDD and have the same maximum power, in this report only select SCS 15KHz for NR FDD and SCS 30KHz for NR TDD power measurement, due to SCS 15KHz for FDD and SCS 30KHz for TDD have highest support bandwidth, and the NR SAR is < 1g SAR 1.45W/kg. Output power and SAR measurement for SCS30KHz for FDD and SCS15KHz for TDD shall be not necessary.
2. Referencing the procedure in KDB 941225, the test procedures are outlined as below
 - a. For DFT-OFDM output power measurement, full measurement was done for Pi/2 BPSK and QPSK and for the largest supported bandwidth, repeat test for 16QAM/64QAM/256QAM under 1RB 1Offset configuration. For smaller bandwidth, measure conducted power for Pi/2 BPSK and 1RB 1Offset configuration.
 - b. According to the tune-up, CP-OFDM output power is not ½ dB higher than DFT-OFDM mode, and the reported SAR of DFT-OFDM mode reported SAR is ≤ 1.45 W/kg, SAR test and thus conducted power for CP-OFDM mode is not required.
 - c. To start SAR test for the largest channel bandwidth for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for PI/2 BPSK SAR testing using 1RB PI/2 BPSK allocation procedure
 - d. For PI/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - e. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not ½ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - f. Smaller bandwidth output power for each RB allocation configuration for this device is not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device.
3. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM		≤ 2.5	
CP-OFDM	256 QAM		≤ 4.5	
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

<FR1 n48_Ant MIMO2 Default Power Laptop / Tablet Mode>							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				638000	641666	645332	Tune-up limit (dBm)
Frequency (MHz)				3570	3624.99	3679.98	
40	PI/2 BPSK	1	1	21.87	21.96	21.90	22.0
40	PI/2 BPSK	1	53	21.93	21.95	21.77	
40	PI/2 BPSK	1	104	21.81	21.89	21.82	
40	PI/2 BPSK	50	0	21.48	21.50	21.38	21.5
40	PI/2 BPSK	50	28	21.88	21.95	21.89	22.0
40	PI/2 BPSK	50	56	21.33	21.46	21.31	21.5
40	PI/2 BPSK	100	0	21.32	21.44	21.25	
40	QPSK	1	1	21.37	21.52	21.37	22.0
40	QPSK	1	53	21.82	21.93	21.92	
40	QPSK	1	104	21.87	21.91	21.88	
40	QPSK	50	0	20.94	21.03	20.86	22.0
40	QPSK	50	28	21.94	21.94	21.86	
40	QPSK	50	56	21.08	21.10	21.05	
40	QPSK	100	0	20.96	20.96	20.90	21.0
40	16QAM	1	1	20.59	20.63	20.59	21.0
40	64QAM	1	1	18.82	18.87	18.67	19.5
40	256QAM	1	1	17.10	17.24	17.05	17.5
Channel				637668	641666	645666	Tune-up limit (dBm)
Frequency (MHz)				3565.02	3624.99	3684.99	
30	PI/2 BPSK	1	1	21.67	21.84	21.89	22.0
Channel				637334	641666	646000	Tune-up limit (dBm)
Frequency (MHz)				3560.01	3624.99	3690	
20	PI/2 BPSK	1	1	21.73	21.90	21.73	22.0
Channel				637168	641666	646166	Tune-up limit (dBm)
Frequency (MHz)				3557.52	3624.99	3692.49	
15	PI/2 BPSK	1	1	21.76	21.93	21.74	22.0
Channel				637000	641666	646332	Tune-up limit (dBm)
Frequency (MHz)				3555	3624.99	3694.98	
10	PI/2 BPSK	1	1	21.82	21.89	21.74	22.0

<FR1 n48_Ant MIMO2 Reduced Power Tablet Mode>							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				638000	641666	645332	Tune-up limit (dBm)
Frequency (MHz)				3570	3624.99	3679.98	
40	PI/2 BPSK	1	1	12.90	12.95	12.87	13.0
40	PI/2 BPSK	1	53	12.81	12.90	12.74	
40	PI/2 BPSK	1	104	12.89	12.88	12.86	
40	PI/2 BPSK	50	0	12.82	12.89	12.85	13.0
40	PI/2 BPSK	50	28	12.79	12.81	12.76	13.0
40	PI/2 BPSK	50	56	12.72	12.83	12.71	13.0
40	PI/2 BPSK	100	0	12.78	12.81	12.84	
40	QPSK	1	1	12.77	12.86	12.79	13.0
40	QPSK	1	53	12.81	12.84	12.82	
40	QPSK	1	104	12.90	12.94	12.93	
40	QPSK	50	0	12.77	12.80	12.81	13.0
40	QPSK	50	28	12.79	12.84	12.71	
40	QPSK	50	56	12.80	12.88	12.85	
40	QPSK	100	0	12.76	12.88	12.68	13.0
40	16QAM	1	1	12.82	12.87	12.76	13.0
40	64QAM	1	1	12.73	12.86	12.74	13.0
40	256QAM	1	1	12.77	12.84	12.84	13.0
Channel				637668	641666	645666	Tune-up limit (dBm)
Frequency (MHz)				3565.02	3624.99	3684.99	
30	PI/2 BPSK	1	1	12.79	12.89	12.76	13.0
Channel				637334	641666	646000	Tune-up limit (dBm)
Frequency (MHz)				3560.01	3624.99	3690	
20	PI/2 BPSK	1	1	12.80	12.88	12.66	13.0
Channel				637168	641666	646166	Tune-up limit (dBm)
Frequency (MHz)				3557.52	3624.99	3692.49	
15	PI/2 BPSK	1	1	12.79	12.73	12.76	13.0
Channel				637000	641666	646332	Tune-up limit (dBm)
Frequency (MHz)				3555	3624.99	3694.98	
10	PI/2 BPSK	1	1	12.76	12.76	12.77	13.0

13. Antenna Location


<For Tablet>



The separation distance for antenna to edge :

Antenna	To Edge1 (mm)	To Edge2 (mm)	To Edge3 (mm)	To Edge4 (mm)
WWAN Main Antenna	< 5	26	200.4	188
WWAN MIMO2 Antenna	201.4	136.6	< 5	67.5
WWAN MIMO3 Antenna	201.4	136.6	< 5	67.5
WWAN Aux Antenna	< 5	188	200.4	26

<For Laptop>

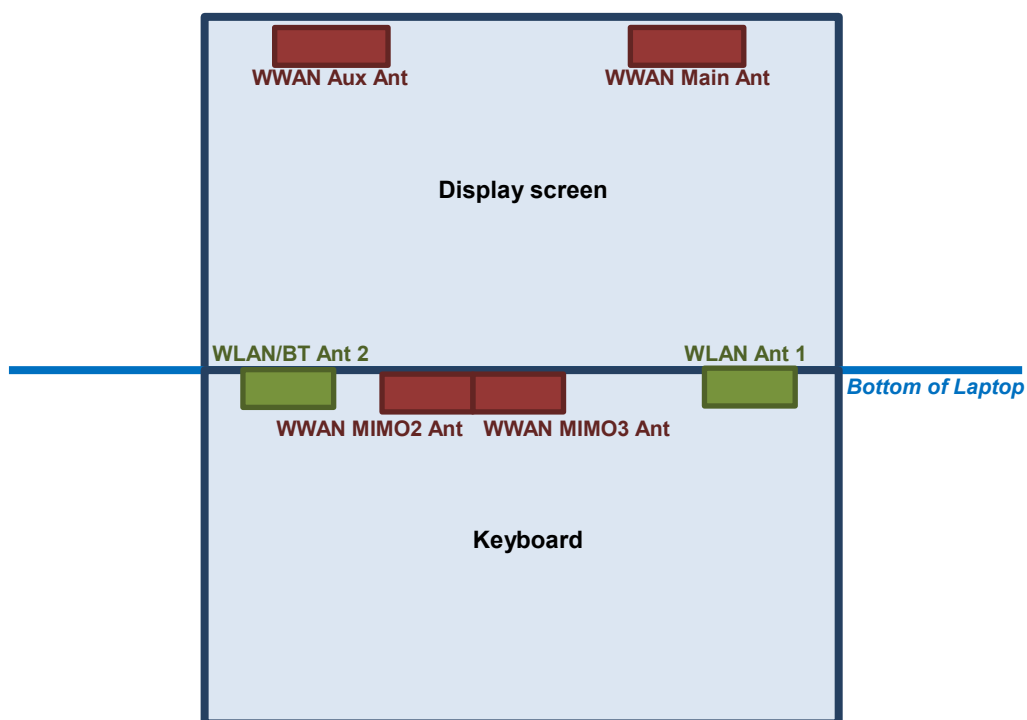

The separation distance for antenna to edge :

Antenna	To Bottom of Laptop (mm)
WWAN Main Antenna	200.4
WWAN MIMO2 Antenna	< 5
WWAN MIMO3 Antenna	< 5
WWAN Aux Antenna	200.4

<SAR test exclusion table>
General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

<MIMO2 Antenna>

Exposure Position	Wireless Interface	FR1 n48
	Calculated Frequency (MHz)	3700
	Maximum power (dBm)	22.0
	Maximum rated power(mW)	158.49
Bottom Face	Separation distance(mm)	5.0
	exclusion threshold	96.0
	Testing required?	Yes
Edge 1	Separation distance(mm)	201.4
	exclusion threshold	1592.0
	Testing required?	No
Edge 2	Separation distance(mm)	136.6
	exclusion threshold	254.0
	Testing required?	No
Edge 3	Separation distance(mm)	5.0
	exclusion threshold	96.0
	Testing required?	Yes
Edge 4	Separation distance(mm)	67.5
	exclusion threshold	945.0
	Testing required?	No
Bottom of Laptop	Separation distance(mm)	5.0
	exclusion threshold	96.0
	Testing required?	Yes

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in sensor trigger distance was performed according to section 4. The test results just verification the sensor trigger distance to meet KDB 616217 requirement, when in normal usage will not operate at trigger distance, therefore, these results were not using performed Sim-Tx analysis.

5G NR Note:

1. Referencing the procedure in KDB 941225, the test procedures are outlined as below:
 - a. To start SAR test for the largest channel bandwidth for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for PI/2 BPSK SAR testing using 1RB PI/2 BPSK allocation procedure
 - b. For PI/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - c. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - d. Smaller bandwidth output power for each RB allocation configuration for this device is not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - e. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.

**14.1 Body SAR**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Configuration (Tablet / Laptop)	Power State	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	25mm	MIMO2	Tablet	Full	OFF	641666	3624.99	Speed	21.96	22.00	1.009	0.05	0.068	0.069
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Bottom Face	25mm	MIMO2	Tablet	Full	OFF	641666	3624.99	Speed	21.95	22.00	1.012	0.06	0.059	0.060
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 3	17mm	MIMO2	Tablet	Full	OFF	641666	3624.99	Speed	21.96	22.00	1.009	-0.04	0.059	0.060
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 3	17mm	MIMO2	Tablet	Full	OFF	641666	3624.99	Speed	21.95	22.00	1.012	0.13	0.056	0.057
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	MIMO2	Laptop	Full	OFF	641666	3624.99	Speed	21.96	22.00	1.009	-0.11	0.886	0.894
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	MIMO2	Laptop	Full	OFF	638000	3570	Speed	21.87	22.00	1.030	-0.11	0.835	0.860
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	MIMO2	Laptop	Full	OFF	645332	3679.98	Speed	21.90	22.00	1.023	-0.11	0.805	0.824
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Bottom of Laptop	0mm	MIMO2	Laptop	Full	OFF	641666	3624.99	Speed	21.87	22.00	1.030	0.01	0.774	0.798
01	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	MIMO2	Tablet	Down	ON	641666	3624.99	Speed	21.95	22.00	1.012	0.02	1.000	1.012
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	MIMO2	Tablet	Down	ON	638000	3570	Speed	12.95	13.00	1.012	0.05	0.987	0.998
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	MIMO2	Tablet	Down	ON	645332	3679.98	Speed	12.90	13.00	1.023	0.04	0.965	0.987
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom Face	0mm	MIMO2	Tablet	Down	ON	641666	3624.99	Speed	12.87	13.00	1.030	-0.08	0.958	0.987
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom Face	0mm	MIMO2	Tablet	Down	ON	638000	3570	Speed	12.89	13.00	1.026	-0.07	0.962	0.987
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom Face	0mm	MIMO2	Tablet	Down	ON	645332	3679.98	Speed	12.82	13.00	1.042	0.15	0.943	0.983
	FR1 n48_Ant MIMO2	40M	BPSK	100	0	Bottom Face	0mm	MIMO2	Tablet	Down	ON	645332	3679.98	Speed	12.85	13.00	1.035	0.1	0.946	0.979
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 3	0mm	MIMO2	Tablet	Down	ON	641666	3624.99	Speed	12.84	13.00	1.038	-0.04	0.125	0.130
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Edge 3	0mm	MIMO2	Tablet	Down	ON	641666	3624.99	Speed	12.95	13.00	1.012	-0.06	0.112	0.113

14.2 Repeated SAR Measurement

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Configuration (Tablet / Laptop)	Power State	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	MIMO2	Tablet	Down	ON	641666	3624.99	Speed	21.95	22.00	1.012	0.02	1.000	-	1.012
2nd	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	MIMO2	Tablet	Down	ON	641666	3624.99	Speed	12.95	13.00	1.012	0.14	0.978	1.02	0.989

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN Main + WWAN MIMO2 + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
2.	WWAN Main + WWAN MIMO2 + WLAN2.4GHz Ant 1 + Bluetooth Ant 2	Yes
3.	WWAN Main + WWAN MIMO2 + WLAN5/6GHz Ant 1 + WLAN5/6GHz Ant 2 + Bluetooth Ant 2	Yes
4.	WWAN MIMO3 + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
5.	WWAN MIMO3 + WLAN2.4GHz Ant 1 + Bluetooth Ant 2	Yes
6.	WWAN MIMO3 + WLAN5/6GHz Ant 1 + WLAN5/6GHz Ant 2 + Bluetooth Ant 2	Yes
7.	WWAN Aux + WLAN2.4GHz Ant 1 + WLAN2.4GHz Ant 2	Yes
8.	WWAN Aux + WLAN2.4GHz Ant 1 + Bluetooth Ant 2	Yes
9.	WWAN Aux + WLAN5/6GHz Ant 1 + WLAN5/6GHz Ant 2 + Bluetooth Ant 2	Yes

General Note:

- The Intel AX211D2W WLAN/BT module is integrated into this host. The WLAN 2.4GHz/5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 221017-01.TR01 (FCC ID: PD9AX211D2), WLAN 6GHz SAR referred to new report No.: 221017-01. TR02 (FCC ID: PD9AX211D2).
- The worst case SAR from each WWAN transmit antenna is used for Sim-Tx analysis. Therefore, the following summations represent the absolute worst cases for simultaneous transmission for this device and it is conservative.
- The Sim-Tx analysis for EN-DC active is choose the worst case standalone SAR from the WWAN main and MIMO2 antenna within the exposure positions, regardless of whether the EN-DC combinations. Therefore, the following summations represent the absolute worst cases for simultaneous transmission for this device and it is conservative.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - The SPLSR calculated results please refer to section 15.2.

15.1 Body Exposure Conditions

Exposure Position	1	2	5	6	7	8	9	1+2+5+6	1+2+5+9	1+2+7+8+9	1+2+5+6	1+2+5+6	1+2+5+9	1+2+5+9	1+2+7+8+9	1+2+7+8+9
	Maximum WWAN Main	Maximum WWAN MIMO2	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5/6GHz Ant 1	WLAN5/6GHz Ant 2	Bluetooth Ant 2	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No	SPLSR	Case No
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)									
Bottom of Laptop at 0mm		1.191	0.290	0.380	0.840	0.370	0.110	1.861	1.591	2.511	0.02	Case 1			0.02	Case 2
Bottom Face at 0mm	0.122	1.126	0.760	0.630	0.730	0.920	0.190	2.638	2.198	3.088	0.02	Case 3	0.01	Case 4	0.03	Case 5
Edge 1 at 0mm	1.185							1.185	1.185	1.185						
Edge 2 at 0mm	1.011					0.070		1.011	1.011	1.081						
Edge 3 at 0mm		0.287	0.090	0.030	0.330	0.100	0.000	0.407	0.377	0.717						
Edge 4 at 0mm					0.400			0.000	0.000	0.400						


Exposure Position	3	5	6	7	8	9	3+5+6	3+5+9	3+7+8+9	3+5+6	3+5+6	3+7+8+9	3+7+8+9
	Maximum WWAN MIMO3	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5/6GHz Ant 1	WLAN5/6GHz Ant 2	Bluetooth Ant 2	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No	SPLSR	Case No
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
Bottom of Laptop at 0mm	0.140	0.290	0.380	0.840	0.370	0.110	0.810	0.540	1.460				
Bottom Face at 0mm	0.360	0.760	0.630	0.730	0.920	0.190	1.750	1.310	2.200	0.02	Case 6	0.03	Case 7
Edge 1 at 0mm							0.000	0.000	0.000				
Edge 2 at 0mm					0.070		0.000	0.000	0.070				
Edge 3 at 0mm	0.124	0.090	0.030	0.330	0.100	0.000	0.244	0.214	0.554				
Edge 4 at 0mm				0.400			0.000	0.000	0.400				


Exposure Position	4	5	6	7	8	9	4+5+6	4+5+9	4+7+8+9	4+7+8+9	4+7+8+9
	Maximum WWAN Aux	WLAN2.4GHz Ant 1	WLAN2.4GHz Ant 2	WLAN5/6GHz Ant 1	WLAN5/6GHz Ant 2	Bluetooth Ant 2	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR	Case No
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
Bottom of Laptop at 0mm		0.290	0.380	0.840	0.370	0.110	0.670	0.400	1.320		
Bottom Face at 0mm	0.098	0.760	0.630	0.730	0.920	0.190	1.488	1.048	1.938	0.01	Case 8
Edge 1 at 0mm	1.079						1.079	1.079	1.079		
Edge 2 at 0mm					0.070		0.000	0.000	0.070		
Edge 3 at 0mm		0.090	0.030	0.330	0.100	0.000	0.120	0.090	0.430		
Edge 4 at 0mm	0.328			0.400			0.328	0.328	0.728		

15.2 SPLSR Evaluation and Analysis


General Note:


- Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
- The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

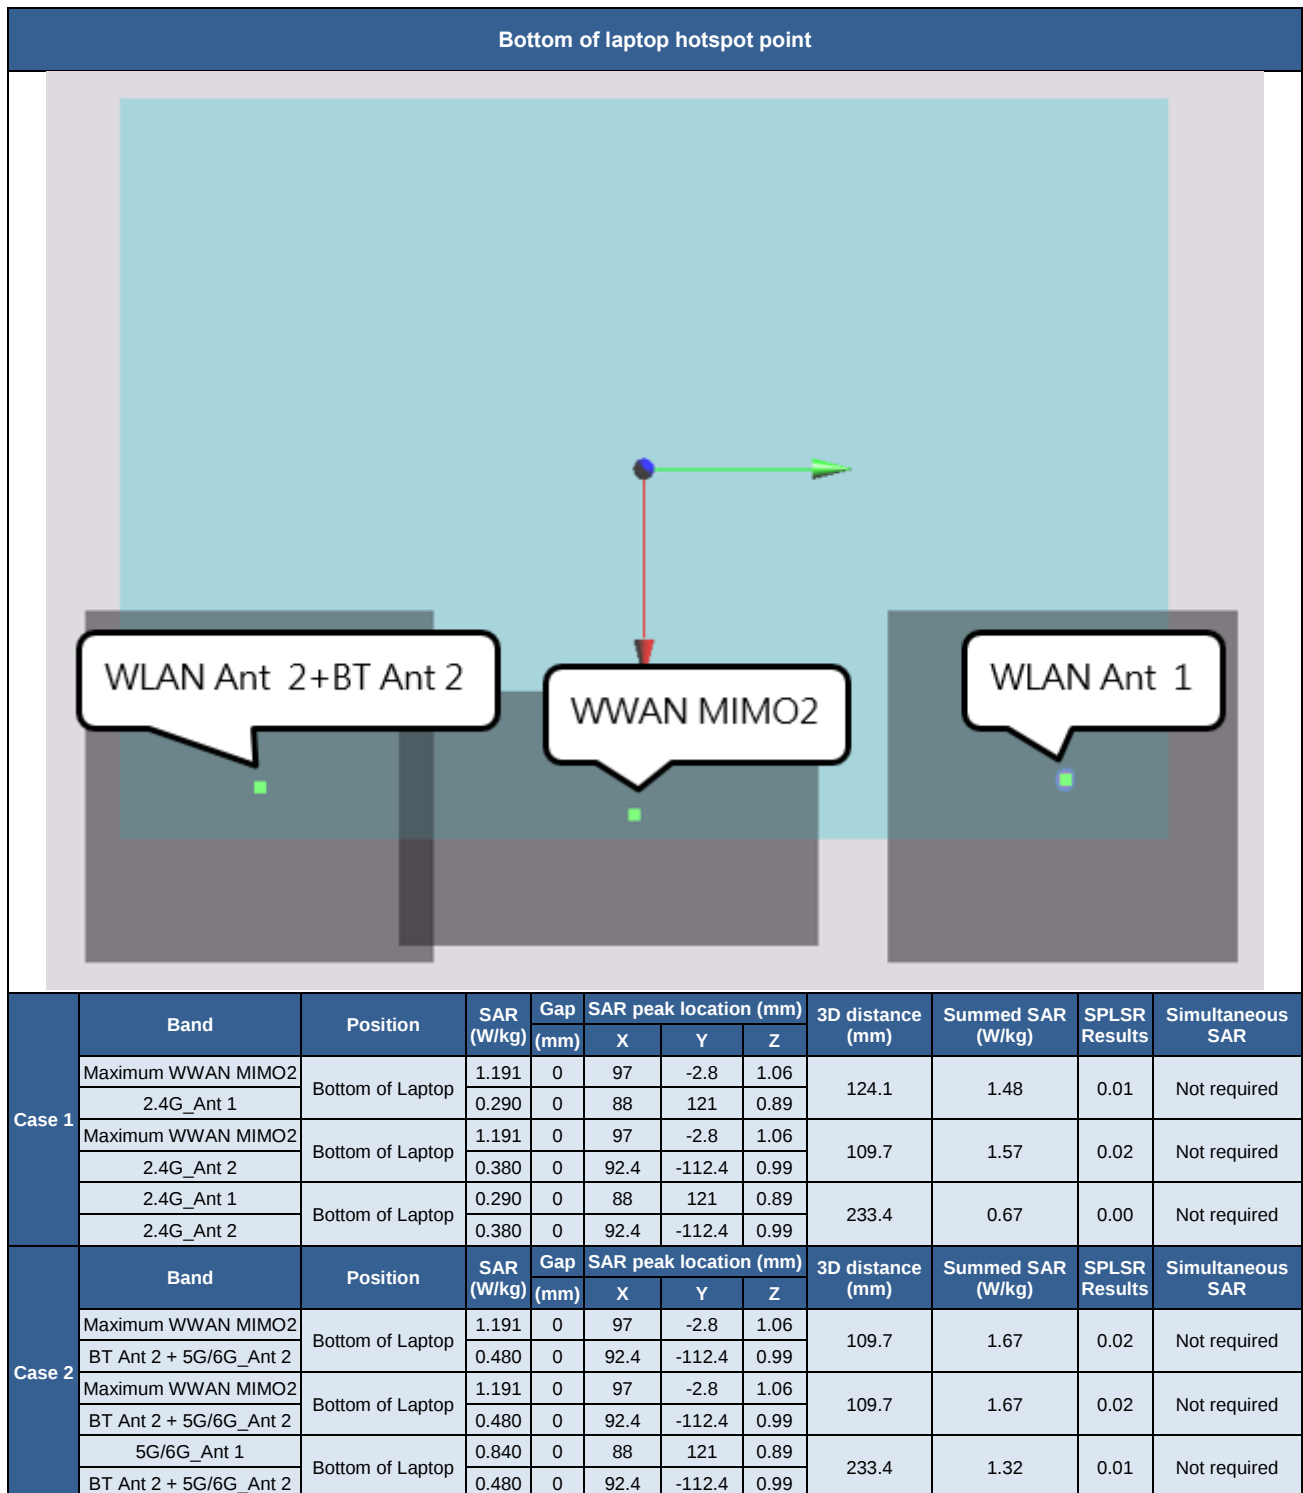

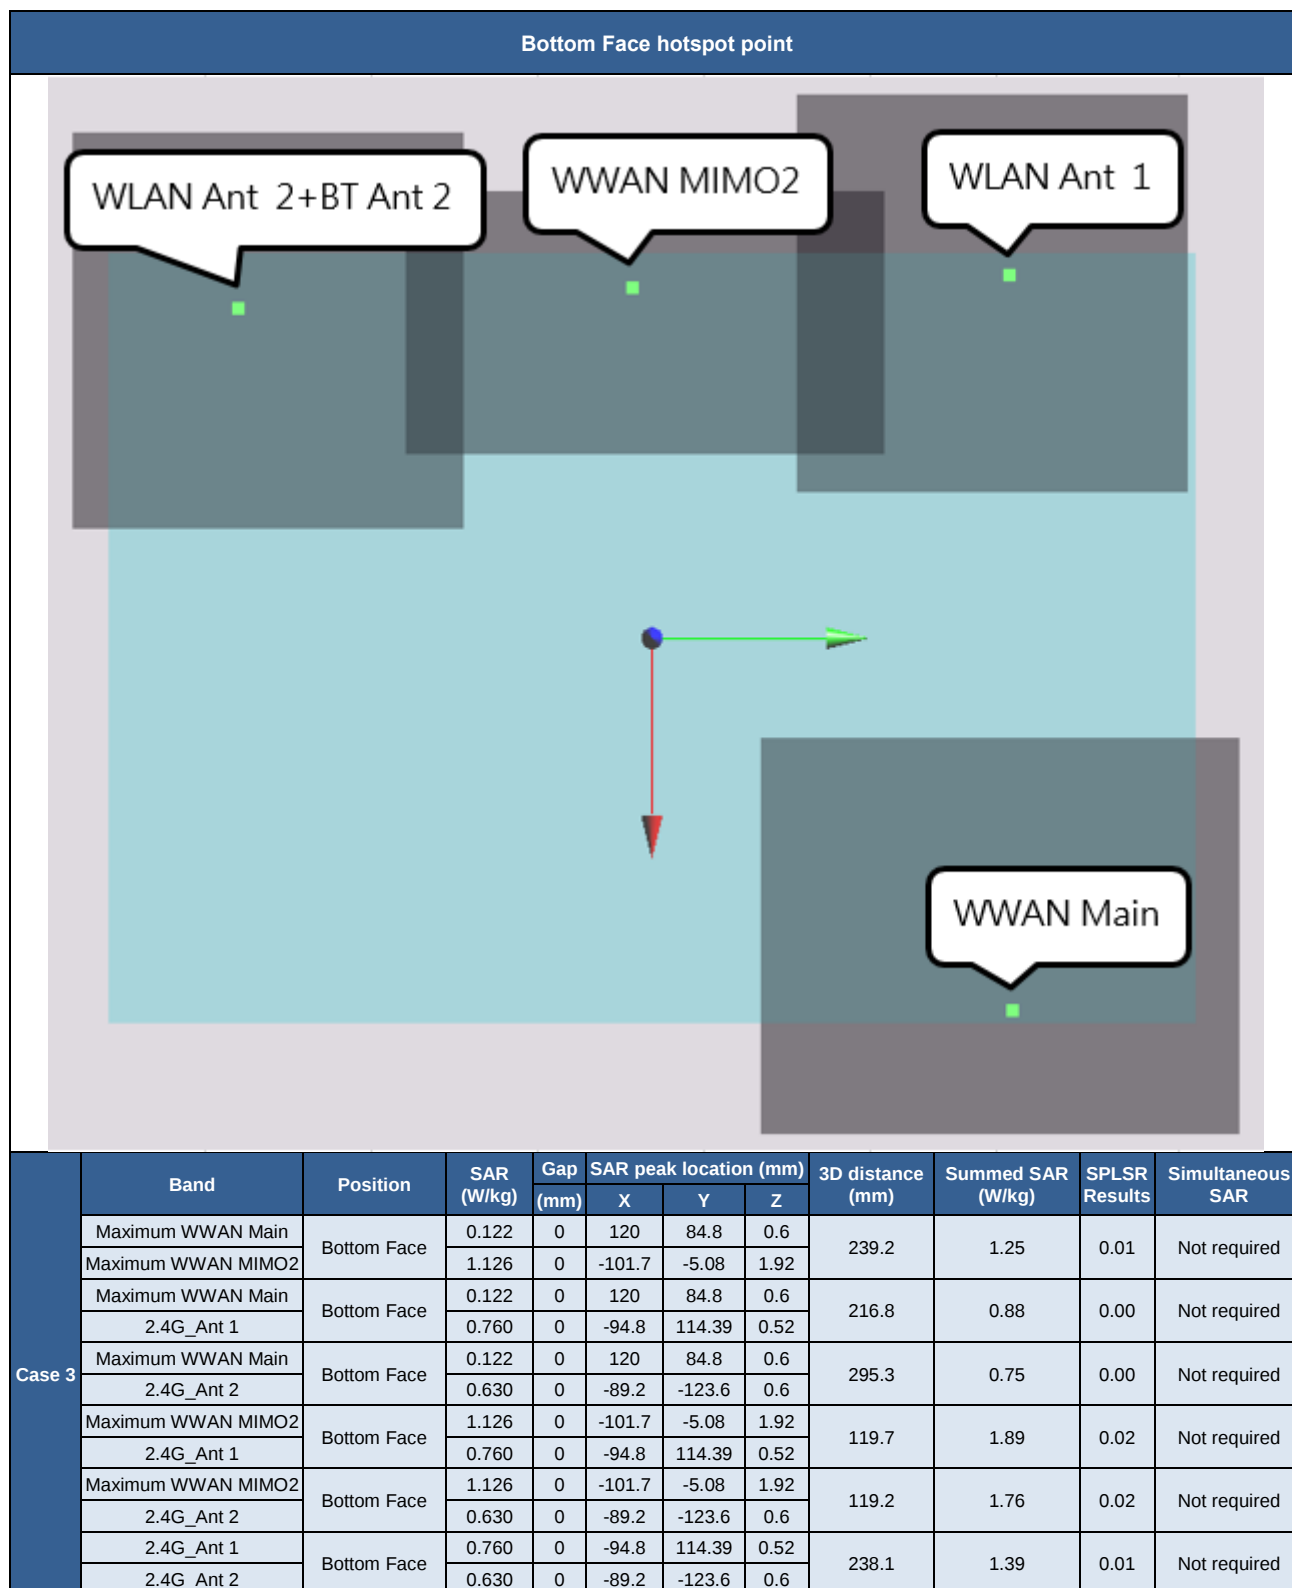

	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 4	Maximum WWAN Main	Bottom Face	0.122	0	120	84.8	0.6	295.3	0.31	0.00	Not required
	BT_Ant 2		0.190	0	-89.2	-123.6	0.6				
	Maximum WWAN MIMO2	Bottom Face	1.126	0	-101.7	-5.08	1.92	119.2	1.32	0.01	Not required
	BT_Ant 2		0.190	0	-89.2	-123.6	0.6				
	2.4G_Ant 1	Bottom Face	0.290	0	-94.8	114.39	0.52	238.1	0.48	0.00	Not required
	BT_Ant 2		0.190	0	-89.2	-123.6	0.6				
	Maximum WWAN Main	Bottom Face	0.122	0	120	84.8	0.6	239.2	1.25	0.01	Not required
	Maximum WWAN MIMO2		1.126	0	-101.7	-5.08	1.92				
	Maximum WWAN Main	Bottom Face	0.122	0	120	84.8	0.6	216.8	0.41	0.00	Not required
	2.4G_Ant 1		0.290	0	-94.8	114.39	0.52				
	Maximum WWAN MIMO2	Bottom Face	1.126	0	-101.7	-5.08	1.92	119.7	1.42	0.01	Not required
	2.4G_Ant 1		0.290	0	-94.8	114.39	0.52				
Case 5	Band	Position	SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Maximum WWAN Main	Bottom Face	0.122	0	120	84.8	0.6	239.2	1.25	0.01	Not required
	Maximum WWAN MIMO2		1.126	0	-101.7	-5.08	1.92				
	Maximum WWAN Main	Bottom Face	0.122	0	120	84.8	0.6	216.8	0.85	0.00	Not required
	5G/6G_Ant 1		0.730	0	-94.8	114.39	0.52				
	Maximum WWAN Main	Bottom Face	0.122	0	120	84.8	0.6	295.3	1.23	0.00	Not required
	BT Ant 2 + 5G/6G_Ant 2		1.110	0	-89.2	-123.6	0.6				
	Maximum WWAN MIMO2	Bottom Face	1.126	0	-101.7	-5.08	1.92	119.2	2.24	0.03	Not required
	BT Ant 2 + 5G/6G_Ant 2		1.110	0	-89.2	-123.6	0.6				
	Maximum WWAN MIMO2	Bottom Face	1.126	0	-101.7	-5.08	1.92	119.2	2.24	0.03	Not required
	BT Ant 2 + 5G/6G_Ant 2		1.110	0	-89.2	-123.6	0.6				
	5G/6G_Ant 1	Bottom Face	0.730	0	-94.8	114.39	0.52	238.1	1.84	0.01	Not required
	BT Ant 2 + 5G/6G_Ant 2		1.110	0	-89.2	-123.6	0.6				

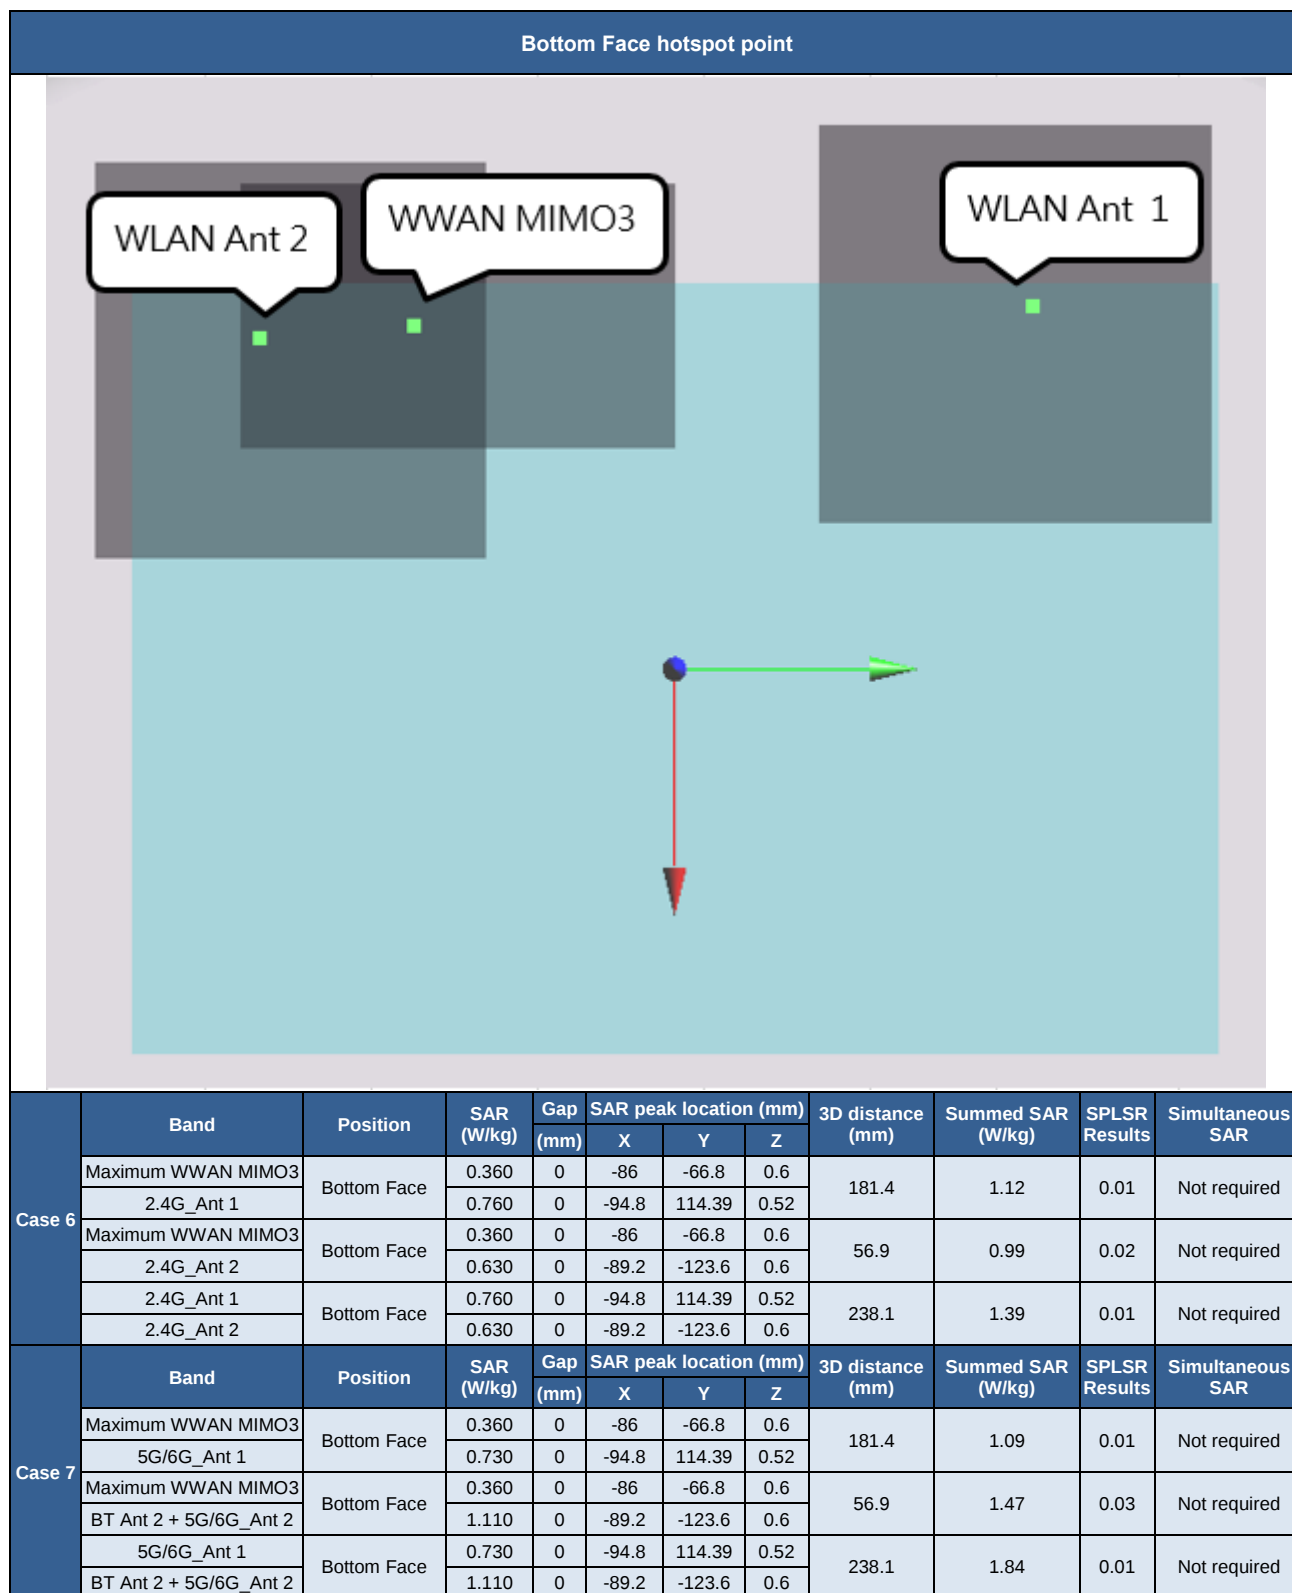

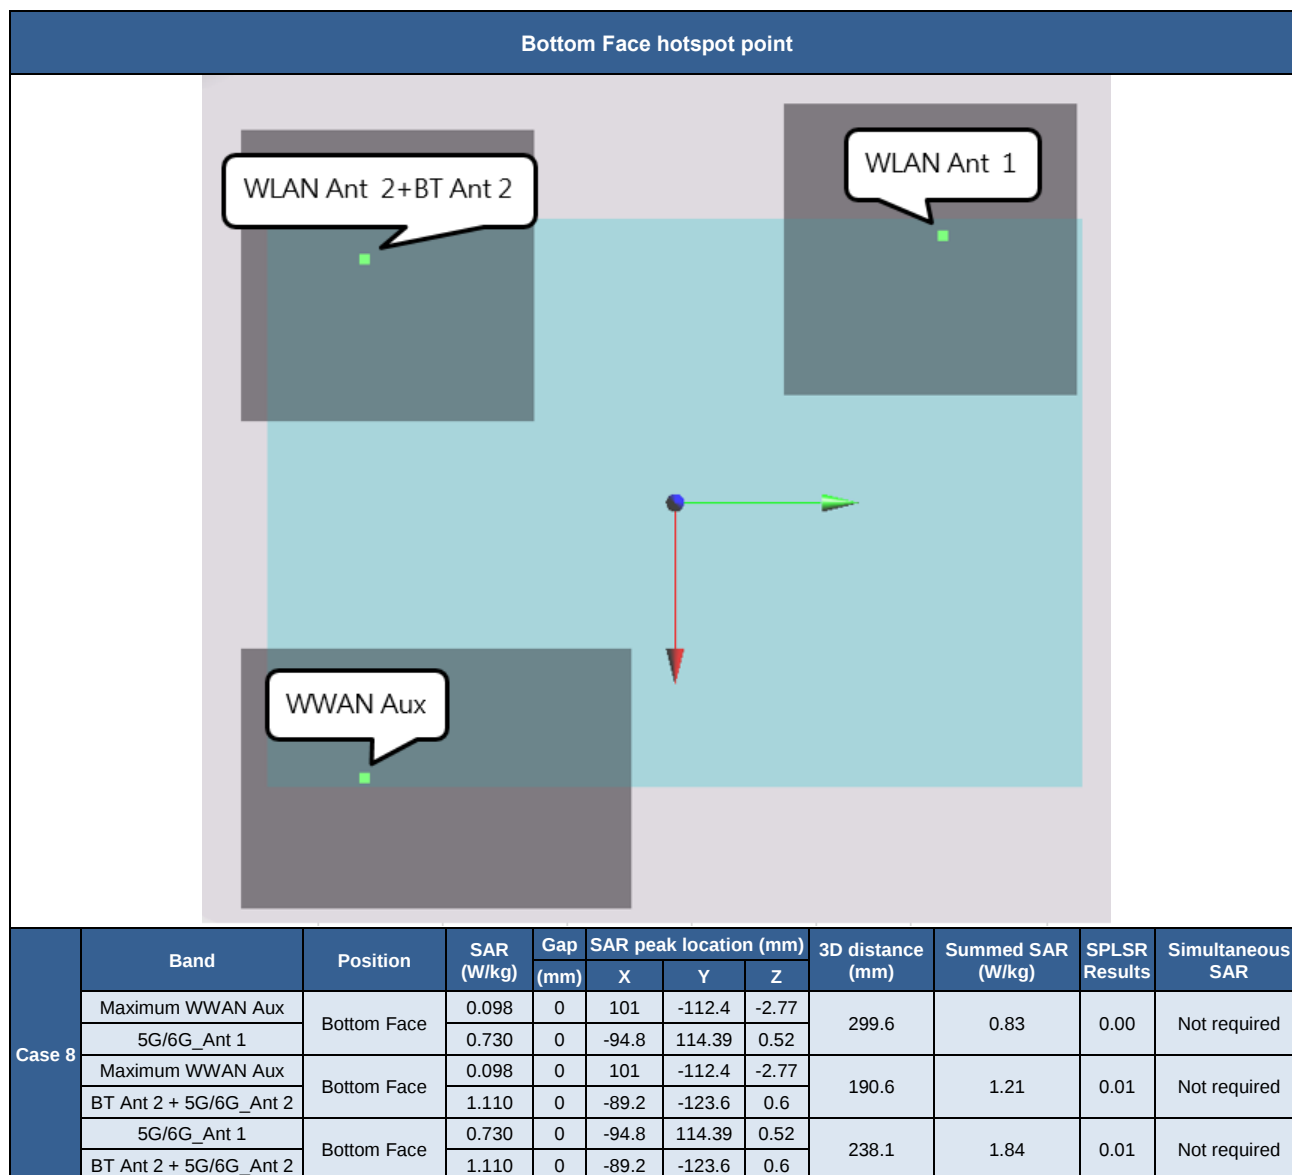

Test Engineer : Mood Huang

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.