





Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13450.00</td><td>42.39</td><td>68.20</td><td>-25.81</td><td>36.19</td><td>6.20</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>13450.00</td><td>56.51</td><td>88.20</td><td>-31.69</td><td>50.31</td><td>6.20</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>20175.00</td><td>39.16</td><td>54.00</td><td>-14.84</td><td>37.64</td><td>1.52</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>4</td><td>20175.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>51.06</td><td>1.52</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>5</td><td>26900.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>34.68</td><td>8.03</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>6</td><td>26900.00</td><td>56.59</td><td>88.20</td><td>-31.61</td><td>48.56</td><td>8.03</td><td>Peak</td><td>100</td><td>241</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	42.39	68.20	-25.81	36.19	6.20	Average	100	147	2	13450.00	56.51	88.20	-31.69	50.31	6.20	Peak	100	147	3	20175.00	39.16	54.00	-14.84	37.64	1.52	Average	100	155	4	20175.00	52.58	74.00	-21.42	51.06	1.52	Peak	100	155	5	26900.00	42.71	68.20	-25.49	34.68	8.03	Average	100	241	6	26900.00	56.59	88.20	-31.61	48.56	8.03	Peak	100	241
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	42.39	68.20	-25.81	36.19	6.20	Average	100	147																																																																
2	13450.00	56.51	88.20	-31.69	50.31	6.20	Peak	100	147																																																																
3	20175.00	39.16	54.00	-14.84	37.64	1.52	Average	100	155																																																																
4	20175.00	52.58	74.00	-21.42	51.06	1.52	Peak	100	155																																																																
5	26900.00	42.71	68.20	-25.49	34.68	8.03	Average	100	241																																																																
6	26900.00	56.59	88.20	-31.61	48.56	8.03	Peak	100	241																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13450.00</td><td>42.42</td><td>68.20</td><td>-25.78</td><td>36.22</td><td>6.20</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>13450.00</td><td>56.49</td><td>88.20</td><td>-31.71</td><td>50.29</td><td>6.20</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>20175.00</td><td>39.63</td><td>54.00</td><td>-14.37</td><td>38.11</td><td>1.52</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>20175.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>51.06</td><td>1.52</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>26900.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>34.68</td><td>8.03</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>6</td><td>26900.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>47.26</td><td>8.03</td><td>Peak</td><td>100</td><td>224</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	42.42	68.20	-25.78	36.22	6.20	Average	100	115	2	13450.00	56.49	88.20	-31.71	50.29	6.20	Peak	100	115	3	20175.00	39.63	54.00	-14.37	38.11	1.52	Average	100	105	4	20175.00	52.58	74.00	-21.42	51.06	1.52	Peak	100	105	5	26900.00	42.71	68.20	-25.49	34.68	8.03	Average	100	224	6	26900.00	55.29	88.20	-32.91	47.26	8.03	Peak	100	224
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	42.42	68.20	-25.78	36.22	6.20	Average	100	115																																																																
2	13450.00	56.49	88.20	-31.71	50.29	6.20	Peak	100	115																																																																
3	20175.00	39.63	54.00	-14.37	38.11	1.52	Average	100	105																																																																
4	20175.00	52.58	74.00	-21.42	51.06	1.52	Peak	100	105																																																																
5	26900.00	42.71	68.20	-25.49	34.68	8.03	Average	100	224																																																																
6	26900.00	55.29	88.20	-32.91	47.26	8.03	Peak	100	224																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

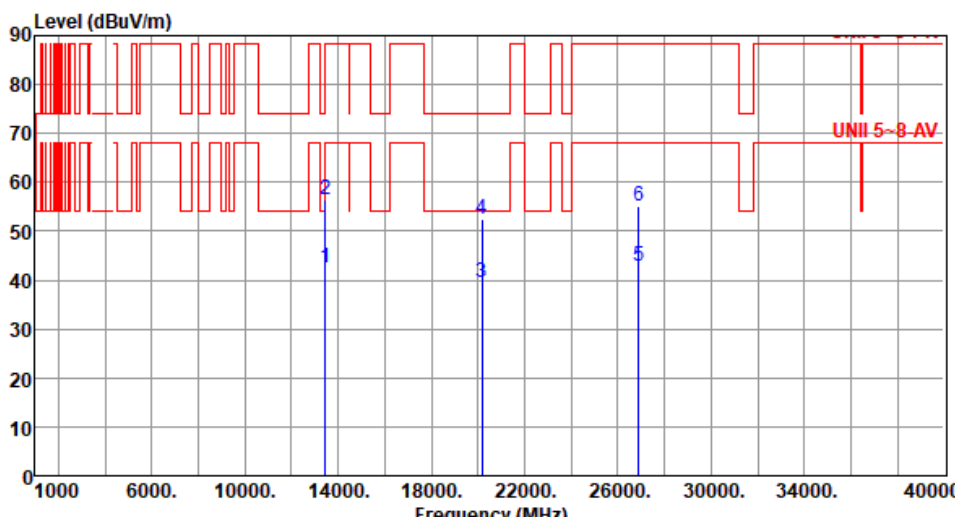

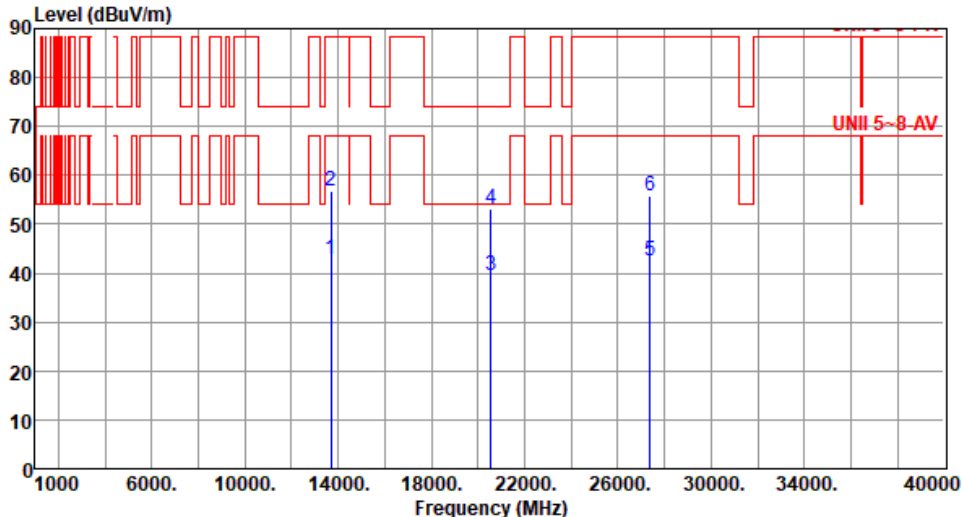Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13690.00</td><td>42.93</td><td>68.20</td><td>-25.27</td><td>36.69</td><td>6.24</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>2</td><td>13690.00</td><td>56.70</td><td>88.20</td><td>-31.50</td><td>50.46</td><td>6.24</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>3</td><td>20535.00</td><td>39.61</td><td>54.00</td><td>-14.39</td><td>37.60</td><td>2.01</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4</td><td>20535.00</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>51.04</td><td>2.01</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>27380.00</td><td>42.47</td><td>68.20</td><td>-25.73</td><td>34.52</td><td>7.95</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>6</td><td>27380.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>47.86</td><td>7.95</td><td>Peak</td><td>100</td><td>186</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13690.00	42.93	68.20	-25.27	36.69	6.24	Average	100	117	2	13690.00	56.70	88.20	-31.50	50.46	6.24	Peak	100	117	3	20535.00	39.61	54.00	-14.39	37.60	2.01	Average	100	211	4	20535.00	53.05	74.00	-20.95	51.04	2.01	Peak	100	211	5	27380.00	42.47	68.20	-25.73	34.52	7.95	Average	100	186	6	27380.00	55.81	88.20	-32.39	47.86	7.95	Peak	100	186
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13690.00	42.93	68.20	-25.27	36.69	6.24	Average	100	117																																																																
2	13690.00	56.70	88.20	-31.50	50.46	6.24	Peak	100	117																																																																
3	20535.00	39.61	54.00	-14.39	37.60	2.01	Average	100	211																																																																
4	20535.00	53.05	74.00	-20.95	51.04	2.01	Peak	100	211																																																																
5	27380.00	42.47	68.20	-25.73	34.52	7.95	Average	100	186																																																																
6	27380.00	55.81	88.20	-32.39	47.86	7.95	Peak	100	186																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

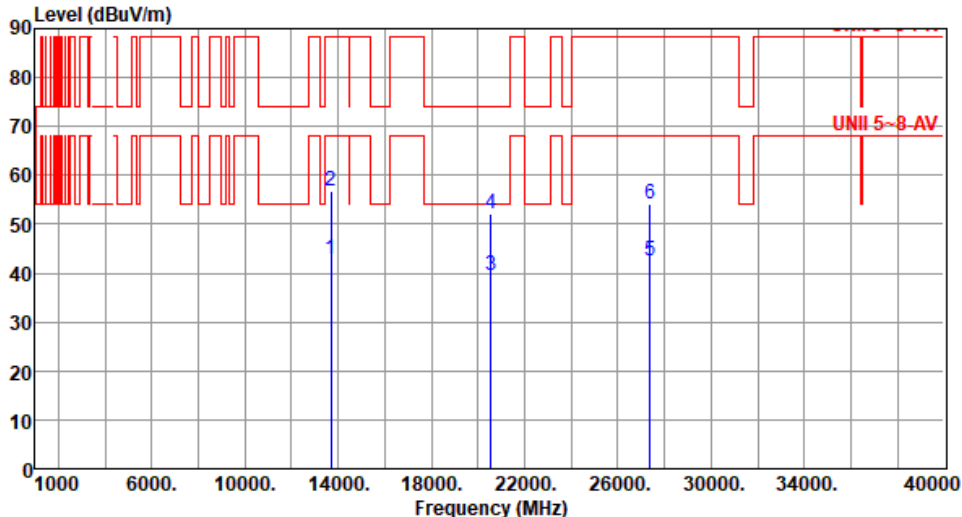


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 113690.0042.8768.20-25.3336.636.24Average100155 213690.0056.7288.20-31.4850.486.24Peak100155 320535.0039.5754.00-14.4337.562.01Average100187 420535.0052.0474.00-21.9650.032.01Peak100187 527380.0042.4968.20-25.7134.547.95Average100205 627380.0053.9888.20-34.2246.037.95Peak100205 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			

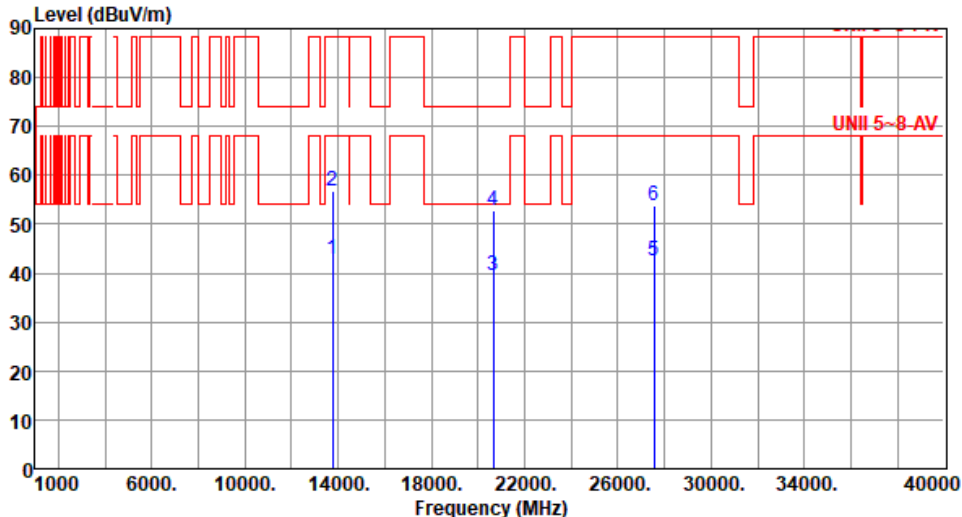


Modulation	be EHT40-OFDMA		Test Freq. (MHz)		6885																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13770.00</td><td>42.77</td><td>68.20</td><td>-25.43</td><td>36.50</td><td>6.27</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>2</td><td>13770.00</td><td>56.68</td><td>88.20</td><td>-31.52</td><td>50.41</td><td>6.27</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>3</td><td>20655.00</td><td>39.65</td><td>54.00</td><td>-14.35</td><td>37.47</td><td>2.18</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>20655.00</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>50.78</td><td>2.18</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>27540.00</td><td>42.54</td><td>68.20</td><td>-25.66</td><td>34.56</td><td>7.98</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>6</td><td>27540.00</td><td>53.83</td><td>88.20</td><td>-34.37</td><td>45.85</td><td>7.98</td><td>Peak</td><td>100</td><td>215</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13770.00	42.77	68.20	-25.43	36.50	6.27	Average	100	248	2	13770.00	56.68	88.20	-31.52	50.41	6.27	Peak	100	248	3	20655.00	39.65	54.00	-14.35	37.47	2.18	Average	100	176	4	20655.00	52.96	74.00	-21.04	50.78	2.18	Peak	100	176	5	27540.00	42.54	68.20	-25.66	34.56	7.98	Average	100	215	6	27540.00	53.83	88.20	-34.37	45.85	7.98	Peak	100	215
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13770.00	42.77	68.20	-25.43	36.50	6.27	Average	100	248																																																																						
2	13770.00	56.68	88.20	-31.52	50.41	6.27	Peak	100	248																																																																						
3	20655.00	39.65	54.00	-14.35	37.47	2.18	Average	100	176																																																																						
4	20655.00	52.96	74.00	-21.04	50.78	2.18	Peak	100	176																																																																						
5	27540.00	42.54	68.20	-25.66	34.56	7.98	Average	100	215																																																																						
6	27540.00	53.83	88.20	-34.37	45.85	7.98	Peak	100	215																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

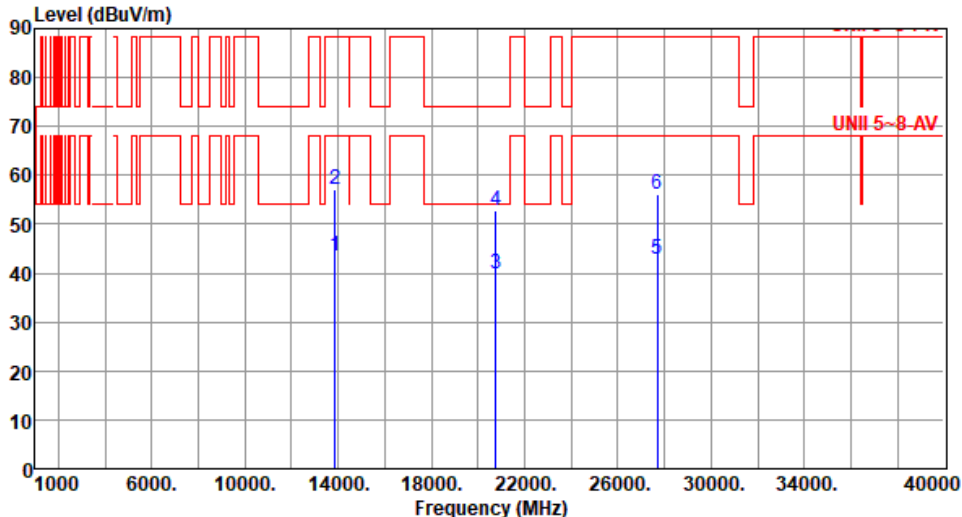

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13850.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>37.12</td><td>6.43</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>2</td><td>13850.00</td><td>56.97</td><td>88.20</td><td>-31.23</td><td>50.54</td><td>6.43</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>3</td><td>20775.00</td><td>39.69</td><td>54.00</td><td>-14.31</td><td>37.31</td><td>2.38</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>20775.00</td><td>52.87</td><td>74.00</td><td>-21.13</td><td>50.49</td><td>2.38</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>27700.00</td><td>42.90</td><td>68.20</td><td>-25.30</td><td>34.74</td><td>8.16</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>27700.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>47.83</td><td>8.16</td><td>Peak</td><td>100</td><td>118</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	43.55	68.20	-24.65	37.12	6.43	Average	100	177	2	13850.00	56.97	88.20	-31.23	50.54	6.43	Peak	100	177	3	20775.00	39.69	54.00	-14.31	37.31	2.38	Average	100	162	4	20775.00	52.87	74.00	-21.13	50.49	2.38	Peak	100	162	5	27700.00	42.90	68.20	-25.30	34.74	8.16	Average	100	118	6	27700.00	55.99	88.20	-32.21	47.83	8.16	Peak	100	118
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	43.55	68.20	-24.65	37.12	6.43	Average	100	177																																																																
2	13850.00	56.97	88.20	-31.23	50.54	6.43	Peak	100	177																																																																
3	20775.00	39.69	54.00	-14.31	37.31	2.38	Average	100	162																																																																
4	20775.00	52.87	74.00	-21.13	50.49	2.38	Peak	100	162																																																																
5	27700.00	42.90	68.20	-25.30	34.74	8.16	Average	100	118																																																																
6	27700.00	55.99	88.20	-32.21	47.83	8.16	Peak	100	118																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

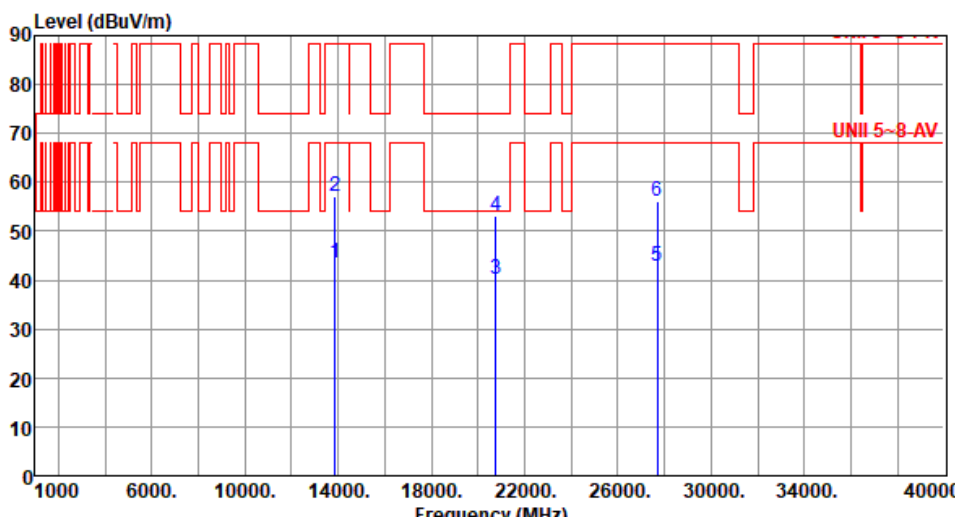


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13850.00</td><td>43.65</td><td>68.20</td><td>-24.55</td><td>37.22</td><td>6.43</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>13850.00</td><td>57.13</td><td>88.20</td><td>-31.07</td><td>50.70</td><td>6.43</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>20775.00</td><td>40.27</td><td>54.00</td><td>-13.73</td><td>37.89</td><td>2.38</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>20775.00</td><td>52.98</td><td>74.00</td><td>-21.02</td><td>50.60</td><td>2.38</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>5</td><td>27700.00</td><td>42.94</td><td>68.20</td><td>-25.26</td><td>34.78</td><td>8.16</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>6</td><td>27700.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>48.13</td><td>8.16</td><td>Peak</td><td>100</td><td>192</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	43.65	68.20	-24.55	37.22	6.43	Average	100	208	2	13850.00	57.13	88.20	-31.07	50.70	6.43	Peak	100	208	3	20775.00	40.27	54.00	-13.73	37.89	2.38	Average	100	117	4	20775.00	52.98	74.00	-21.02	50.60	2.38	Peak	100	117	5	27700.00	42.94	68.20	-25.26	34.78	8.16	Average	100	192	6	27700.00	56.29	88.20	-31.91	48.13	8.16	Peak	100	192
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	43.65	68.20	-24.55	37.22	6.43	Average	100	208																																																																
2	13850.00	57.13	88.20	-31.07	50.70	6.43	Peak	100	208																																																																
3	20775.00	40.27	54.00	-13.73	37.89	2.38	Average	100	117																																																																
4	20775.00	52.98	74.00	-21.02	50.60	2.38	Peak	100	117																																																																
5	27700.00	42.94	68.20	-25.26	34.78	8.16	Average	100	192																																																																
6	27700.00	56.29	88.20	-31.91	48.13	8.16	Peak	100	192																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

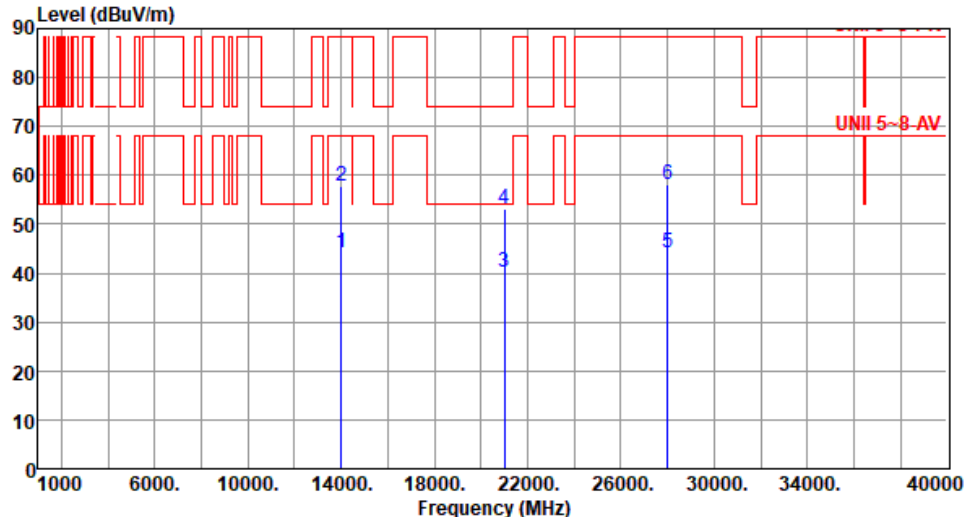


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14010.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>37.27</td><td>6.75</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>14010.00</td><td>57.77</td><td>88.20</td><td>-30.43</td><td>51.02</td><td>6.75</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>21015.00</td><td>40.17</td><td>54.00</td><td>-13.83</td><td>37.19</td><td>2.98</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>21015.00</td><td>53.15</td><td>74.00</td><td>-20.85</td><td>50.17</td><td>2.98</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>28020.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>35.52</td><td>8.54</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>6</td><td>28020.00</td><td>57.97</td><td>88.20</td><td>-30.23</td><td>49.43</td><td>8.54</td><td>Peak</td><td>100</td><td>183</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14010.00	44.02	68.20	-24.18	37.27	6.75	Average	100	213	2	14010.00	57.77	88.20	-30.43	51.02	6.75	Peak	100	213	3	21015.00	40.17	54.00	-13.83	37.19	2.98	Average	100	176	4	21015.00	53.15	74.00	-20.85	50.17	2.98	Peak	100	176	5	28020.00	44.06	68.20	-24.14	35.52	8.54	Average	100	183	6	28020.00	57.97	88.20	-30.23	49.43	8.54	Peak	100	183
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14010.00	44.02	68.20	-24.18	37.27	6.75	Average	100	213																																																																
2	14010.00	57.77	88.20	-30.43	51.02	6.75	Peak	100	213																																																																
3	21015.00	40.17	54.00	-13.83	37.19	2.98	Average	100	176																																																																
4	21015.00	53.15	74.00	-20.85	50.17	2.98	Peak	100	176																																																																
5	28020.00	44.06	68.20	-24.14	35.52	8.54	Average	100	183																																																																
6	28020.00	57.97	88.20	-30.23	49.43	8.54	Peak	100	183																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.53</td><td>68.20</td><td>-20.67</td><td>42.75</td><td>4.78</td><td>Average</td><td>131</td><td>344</td></tr><tr><td>2</td><td>7125.00</td><td>59.06</td><td>88.20</td><td>-29.14</td><td>54.28</td><td>4.78</td><td>Peak</td><td>131</td><td>344</td></tr><tr><td>3</td><td>14170.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>37.24</td><td>7.11</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>14170.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>50.47</td><td>7.11</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>21255.00</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>37.21</td><td>3.29</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>21255.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>50.48</td><td>3.29</td><td>Peak</td><td>100</td><td>162</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.53	68.20	-20.67	42.75	4.78	Average	131	344	2	7125.00	59.06	88.20	-29.14	54.28	4.78	Peak	131	344	3	14170.00	44.35	68.20	-23.85	37.24	7.11	Average	100	178	4	14170.00	57.58	88.20	-30.62	50.47	7.11	Peak	100	178	5	21255.00	40.50	54.00	-13.50	37.21	3.29	Average	100	162	6	21255.00	53.77	74.00	-20.23	50.48	3.29	Peak	100	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.53	68.20	-20.67	42.75	4.78	Average	131	344																																																																
2	7125.00	59.06	88.20	-29.14	54.28	4.78	Peak	131	344																																																																
3	14170.00	44.35	68.20	-23.85	37.24	7.11	Average	100	178																																																																
4	14170.00	57.58	88.20	-30.62	50.47	7.11	Peak	100	178																																																																
5	21255.00	40.50	54.00	-13.50	37.21	3.29	Average	100	162																																																																
6	21255.00	53.77	74.00	-20.23	50.48	3.29	Peak	100	162																																																																

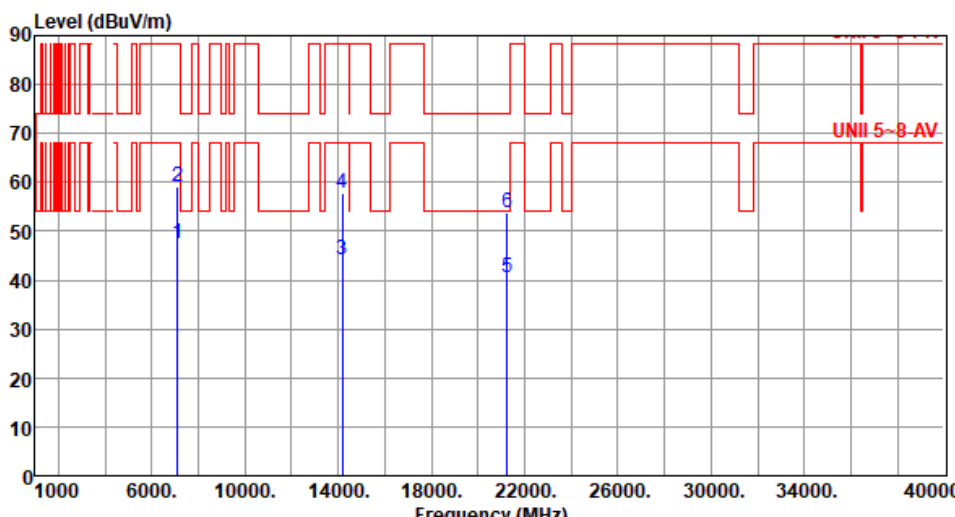


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.45</td><td>68.20</td><td>-20.75</td><td>42.67</td><td>4.78</td><td>Average</td><td>350</td><td>352</td></tr><tr><td>2</td><td>7125.00</td><td>59.06</td><td>88.20</td><td>-29.14</td><td>54.28</td><td>4.78</td><td>Peak</td><td>350</td><td>352</td></tr><tr><td>3</td><td>14170.00</td><td>44.24</td><td>68.20</td><td>-23.96</td><td>37.13</td><td>7.11</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>4</td><td>14170.00</td><td>57.88</td><td>88.20</td><td>-30.32</td><td>50.77</td><td>7.11</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>5</td><td>21255.00</td><td>40.53</td><td>54.00</td><td>-13.47</td><td>37.24</td><td>3.29</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>6</td><td>21255.00</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>50.60</td><td>3.29</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.45	68.20	-20.75	42.67	4.78	Average	350	352	2	7125.00	59.06	88.20	-29.14	54.28	4.78	Peak	350	352	3	14170.00	44.24	68.20	-23.96	37.13	7.11	Average	100	183	4	14170.00	57.88	88.20	-30.32	50.77	7.11	Peak	100	183	5	21255.00	40.53	54.00	-13.47	37.24	3.29	Average	100	176	6	21255.00	53.89	74.00	-20.11	50.60	3.29	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.45	68.20	-20.75	42.67	4.78	Average	350	352																																																																
2	7125.00	59.06	88.20	-29.14	54.28	4.78	Peak	350	352																																																																
3	14170.00	44.24	68.20	-23.96	37.13	7.11	Average	100	183																																																																
4	14170.00	57.88	88.20	-30.32	50.77	7.11	Peak	100	183																																																																
5	21255.00	40.53	54.00	-13.47	37.24	3.29	Average	100	176																																																																
6	21255.00	53.89	74.00	-20.11	50.60	3.29	Peak	100	176																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA

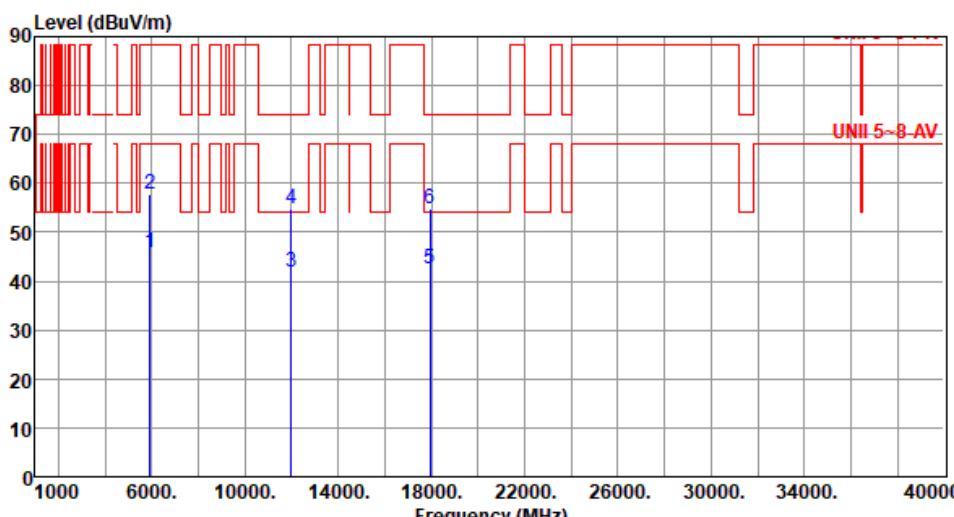Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>45.70</td><td>68.20</td><td>-22.50</td><td>44.51</td><td>1.19</td><td>Average</td><td>149</td><td>326</td></tr><tr><td>2</td><td>5925.00</td><td>57.69</td><td>88.20</td><td>-30.51</td><td>56.50</td><td>1.19</td><td>Peak</td><td>149</td><td>326</td></tr><tr><td>3</td><td>11970.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>35.54</td><td>6.15</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>4</td><td>11970.00</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>48.66</td><td>6.15</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>5</td><td>17955.00</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>31.40</td><td>11.17</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>6</td><td>17955.00</td><td>54.64</td><td>74.00</td><td>-19.36</td><td>43.47</td><td>11.17</td><td>Peak</td><td>100</td><td>173</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.70	68.20	-22.50	44.51	1.19	Average	149	326	2	5925.00	57.69	88.20	-30.51	56.50	1.19	Peak	149	326	3	11970.00	41.69	54.00	-12.31	35.54	6.15	Average	100	218	4	11970.00	54.81	74.00	-19.19	48.66	6.15	Peak	100	218	5	17955.00	42.57	54.00	-11.43	31.40	11.17	Average	100	173	6	17955.00	54.64	74.00	-19.36	43.47	11.17	Peak	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.70	68.20	-22.50	44.51	1.19	Average	149	326																																																																
2	5925.00	57.69	88.20	-30.51	56.50	1.19	Peak	149	326																																																																
3	11970.00	41.69	54.00	-12.31	35.54	6.15	Average	100	218																																																																
4	11970.00	54.81	74.00	-19.19	48.66	6.15	Peak	100	218																																																																
5	17955.00	42.57	54.00	-11.43	31.40	11.17	Average	100	173																																																																
6	17955.00	54.64	74.00	-19.36	43.47	11.17	Peak	100	173																																																																

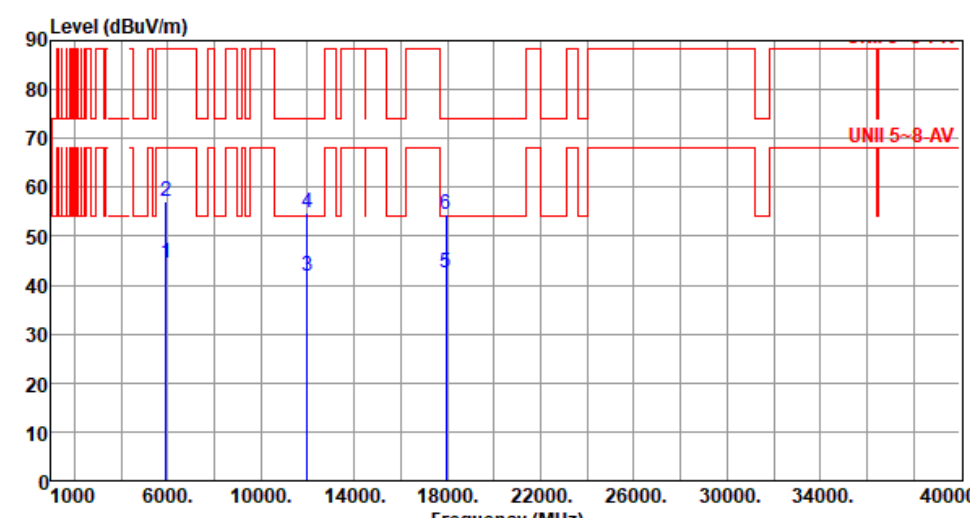


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>43.16</td><td>1.19</td><td>Average</td><td>100</td><td>338</td></tr><tr><td>2</td><td>5925.00</td><td>57.02</td><td>88.20</td><td>-31.18</td><td>55.83</td><td>1.19</td><td>Peak</td><td>100</td><td>338</td></tr><tr><td>3</td><td>11970.00</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>35.57</td><td>6.15</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>4</td><td>11970.00</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>48.57</td><td>6.15</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>5</td><td>17955.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>31.32</td><td>11.17</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>6</td><td>17955.00</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>43.31</td><td>11.17</td><td>Peak</td><td>100</td><td>231</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.35	68.20	-23.85	43.16	1.19	Average	100	338	2	5925.00	57.02	88.20	-31.18	55.83	1.19	Peak	100	338	3	11970.00	41.72	54.00	-12.28	35.57	6.15	Average	100	127	4	11970.00	54.72	74.00	-19.28	48.57	6.15	Peak	100	127	5	17955.00	42.49	54.00	-11.51	31.32	11.17	Average	100	231	6	17955.00	54.48	74.00	-19.52	43.31	11.17	Peak	100	231
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.35	68.20	-23.85	43.16	1.19	Average	100	338																																																																
2	5925.00	57.02	88.20	-31.18	55.83	1.19	Peak	100	338																																																																
3	11970.00	41.72	54.00	-12.28	35.57	6.15	Average	100	127																																																																
4	11970.00	54.72	74.00	-19.28	48.57	6.15	Peak	100	127																																																																
5	17955.00	42.49	54.00	-11.51	31.32	11.17	Average	100	231																																																																
6	17955.00	54.48	74.00	-19.52	43.31	11.17	Peak	100	231																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

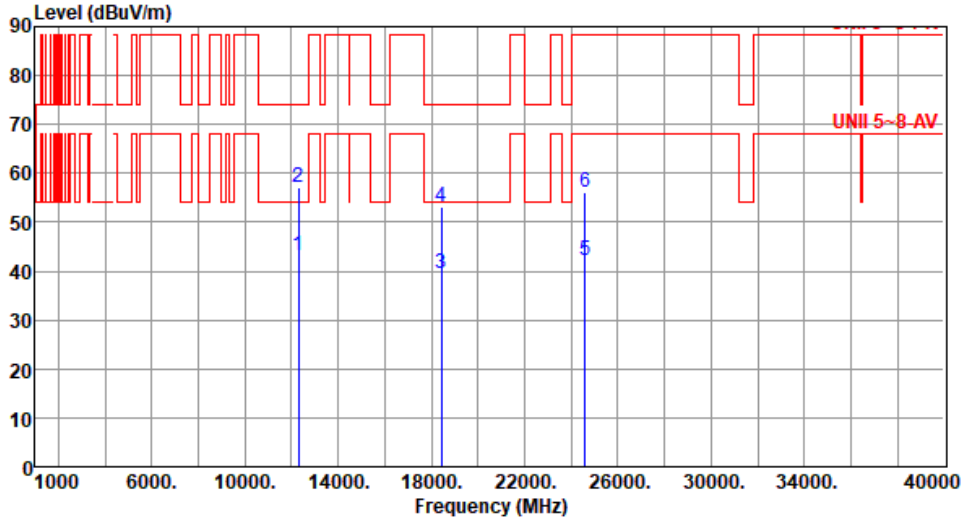


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12290.00</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>36.96</td><td>6.20</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>12290.00</td><td>56.98</td><td>74.00</td><td>-17.02</td><td>50.78</td><td>6.20</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>18435.00</td><td>39.66</td><td>54.00</td><td>-14.34</td><td>39.10</td><td>0.56</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>4</td><td>18435.00</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>52.44</td><td>0.56</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>5</td><td>24580.00</td><td>42.12</td><td>68.20</td><td>-26.08</td><td>34.67</td><td>7.45</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>6</td><td>24580.00</td><td>55.97</td><td>88.20</td><td>-32.23</td><td>48.52</td><td>7.45</td><td>Peak</td><td>100</td><td>107</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	43.16	54.00	-10.84	36.96	6.20	Average	100	218	2	12290.00	56.98	74.00	-17.02	50.78	6.20	Peak	100	218	3	18435.00	39.66	54.00	-14.34	39.10	0.56	Average	100	111	4	18435.00	53.00	74.00	-21.00	52.44	0.56	Peak	100	111	5	24580.00	42.12	68.20	-26.08	34.67	7.45	Average	100	107	6	24580.00	55.97	88.20	-32.23	48.52	7.45	Peak	100	107
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	43.16	54.00	-10.84	36.96	6.20	Average	100	218																																																																
2	12290.00	56.98	74.00	-17.02	50.78	6.20	Peak	100	218																																																																
3	18435.00	39.66	54.00	-14.34	39.10	0.56	Average	100	111																																																																
4	18435.00	53.00	74.00	-21.00	52.44	0.56	Peak	100	111																																																																
5	24580.00	42.12	68.20	-26.08	34.67	7.45	Average	100	107																																																																
6	24580.00	55.97	88.20	-32.23	48.52	7.45	Peak	100	107																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

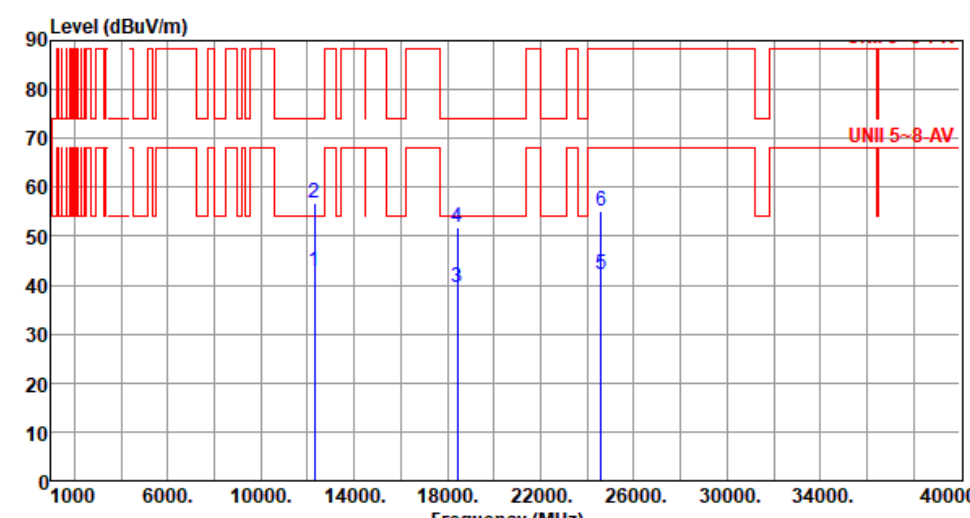

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12290.00</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>36.69</td><td>6.20</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>12290.00</td><td>56.89</td><td>74.00</td><td>-17.11</td><td>50.69</td><td>6.20</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>18435.00</td><td>39.59</td><td>54.00</td><td>-14.41</td><td>39.03</td><td>0.56</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>18435.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>51.38</td><td>0.56</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>24580.00</td><td>42.30</td><td>68.20</td><td>-25.90</td><td>34.85</td><td>7.45</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>6</td><td>24580.00</td><td>55.12</td><td>88.20</td><td>-33.08</td><td>47.67</td><td>7.45</td><td>Peak</td><td>100</td><td>210</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	42.89	54.00	-11.11	36.69	6.20	Average	100	105	2	12290.00	56.89	74.00	-17.11	50.69	6.20	Peak	100	105	3	18435.00	39.59	54.00	-14.41	39.03	0.56	Average	100	178	4	18435.00	51.94	74.00	-22.06	51.38	0.56	Peak	100	178	5	24580.00	42.30	68.20	-25.90	34.85	7.45	Average	100	210	6	24580.00	55.12	88.20	-33.08	47.67	7.45	Peak	100	210
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	42.89	54.00	-11.11	36.69	6.20	Average	100	105																																																																
2	12290.00	56.89	74.00	-17.11	50.69	6.20	Peak	100	105																																																																
3	18435.00	39.59	54.00	-14.41	39.03	0.56	Average	100	178																																																																
4	18435.00	51.94	74.00	-22.06	51.38	0.56	Peak	100	178																																																																
5	24580.00	42.30	68.20	-25.90	34.85	7.45	Average	100	210																																																																
6	24580.00	55.12	88.20	-33.08	47.67	7.45	Peak	100	210																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

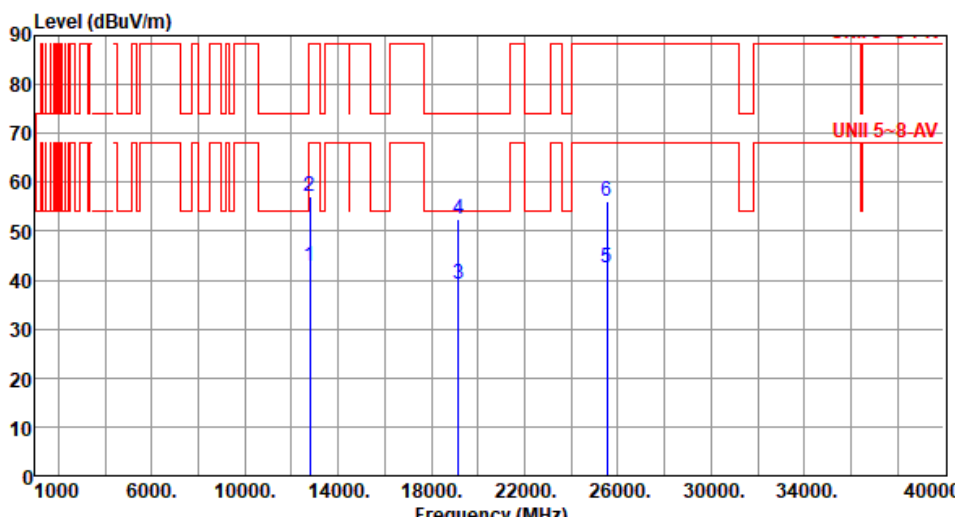

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12770.00</td><td>42.80</td><td>68.20</td><td>-25.40</td><td>36.55</td><td>6.25</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>2</td><td>12770.00</td><td>57.19</td><td>88.20</td><td>-31.01</td><td>50.94</td><td>6.25</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>3</td><td>19155.00</td><td>39.15</td><td>54.00</td><td>-14.85</td><td>38.26</td><td>0.89</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>4</td><td>19155.00</td><td>52.47</td><td>74.00</td><td>-21.53</td><td>51.58</td><td>0.89</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>5</td><td>25540.00</td><td>42.48</td><td>68.20</td><td>-25.72</td><td>35.05</td><td>7.43</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>6</td><td>25540.00</td><td>56.06</td><td>88.20</td><td>-32.14</td><td>48.63</td><td>7.43</td><td>Peak</td><td>100</td><td>241</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12770.00	42.80	68.20	-25.40	36.55	6.25	Average	100	154	2	12770.00	57.19	88.20	-31.01	50.94	6.25	Peak	100	154	3	19155.00	39.15	54.00	-14.85	38.26	0.89	Average	100	164	4	19155.00	52.47	74.00	-21.53	51.58	0.89	Peak	100	164	5	25540.00	42.48	68.20	-25.72	35.05	7.43	Average	100	241	6	25540.00	56.06	88.20	-32.14	48.63	7.43	Peak	100	241
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12770.00	42.80	68.20	-25.40	36.55	6.25	Average	100	154																																																																
2	12770.00	57.19	88.20	-31.01	50.94	6.25	Peak	100	154																																																																
3	19155.00	39.15	54.00	-14.85	38.26	0.89	Average	100	164																																																																
4	19155.00	52.47	74.00	-21.53	51.58	0.89	Peak	100	164																																																																
5	25540.00	42.48	68.20	-25.72	35.05	7.43	Average	100	241																																																																
6	25540.00	56.06	88.20	-32.14	48.63	7.43	Peak	100	241																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m) <			




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12930.00</td><td>43.68</td><td>68.20</td><td>-24.52</td><td>37.23</td><td>6.45</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>12930.00</td><td>57.31</td><td>88.20</td><td>-30.89</td><td>50.86</td><td>6.45</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>19395.00</td><td>40.30</td><td>54.00</td><td>-13.70</td><td>39.29</td><td>1.01</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>19395.00</td><td>52.66</td><td>74.00</td><td>-21.34</td><td>51.65</td><td>1.01</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>5</td><td>25860.00</td><td>42.59</td><td>68.20</td><td>-25.61</td><td>35.18</td><td>7.41</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>25860.00</td><td>54.59</td><td>88.20</td><td>-33.61</td><td>47.18</td><td>7.41</td><td>Peak</td><td>100</td><td>162</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12930.00	43.68	68.20	-24.52	37.23	6.45	Average	100	147	2	12930.00	57.31	88.20	-30.89	50.86	6.45	Peak	100	147	3	19395.00	40.30	54.00	-13.70	39.29	1.01	Average	100	200	4	19395.00	52.66	74.00	-21.34	51.65	1.01	Peak	100	200	5	25860.00	42.59	68.20	-25.61	35.18	7.41	Average	100	162	6	25860.00	54.59	88.20	-33.61	47.18	7.41	Peak	100	162
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12930.00	43.68	68.20	-24.52	37.23	6.45	Average	100	147																																																																
2	12930.00	57.31	88.20	-30.89	50.86	6.45	Peak	100	147																																																																
3	19395.00	40.30	54.00	-13.70	39.29	1.01	Average	100	200																																																																
4	19395.00	52.66	74.00	-21.34	51.65	1.01	Peak	100	200																																																																
5	25860.00	42.59	68.20	-25.61	35.18	7.41	Average	100	162																																																																
6	25860.00	54.59	88.20	-33.61	47.18	7.41	Peak	100	162																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12930.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>37.19</td><td>6.45</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>2</td><td>12930.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>50.46</td><td>6.45</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>3</td><td>19395.00</td><td>39.92</td><td>54.00</td><td>-14.08</td><td>38.91</td><td>1.01</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>4</td><td>19395.00</td><td>52.49</td><td>74.00</td><td>-21.51</td><td>51.48</td><td>1.01</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>5</td><td>25860.00</td><td>42.22</td><td>68.20</td><td>-25.98</td><td>34.81</td><td>7.41</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>25860.00</td><td>54.69</td><td>88.20</td><td>-33.51</td><td>47.28</td><td>7.41</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12930.00	43.64	68.20	-24.56	37.19	6.45	Average	100	58	2	12930.00	56.91	88.20	-31.29	50.46	6.45	Peak	100	58	3	19395.00	39.92	54.00	-14.08	38.91	1.01	Average	100	271	4	19395.00	52.49	74.00	-21.51	51.48	1.01	Peak	100	271	5	25860.00	42.22	68.20	-25.98	34.81	7.41	Average	100	108	6	25860.00	54.69	88.20	-33.51	47.28	7.41	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12930.00	43.64	68.20	-24.56	37.19	6.45	Average	100	58																																																																
2	12930.00	56.91	88.20	-31.29	50.46	6.45	Peak	100	58																																																																
3	19395.00	39.92	54.00	-14.08	38.91	1.01	Average	100	271																																																																
4	19395.00	52.49	74.00	-21.51	51.48	1.01	Peak	100	271																																																																
5	25860.00	42.22	68.20	-25.98	34.81	7.41	Average	100	108																																																																
6	25860.00	54.69	88.20	-33.51	47.28	7.41	Peak	100	108																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

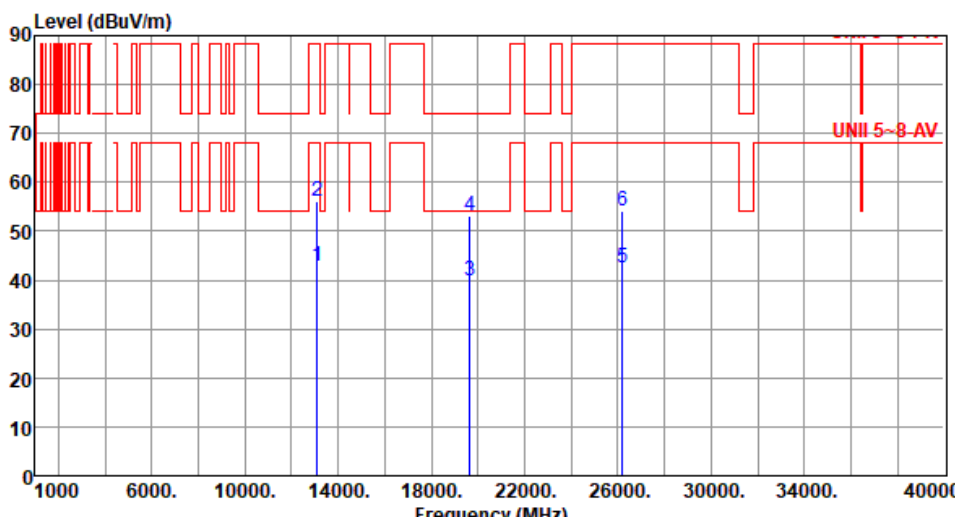


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13090.00</td><td>42.72</td><td>68.20</td><td>-25.48</td><td>36.70</td><td>6.02</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>2</td><td>13090.00</td><td>56.25</td><td>88.20</td><td>-31.95</td><td>50.23</td><td>6.02</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>3</td><td>19635.00</td><td>39.85</td><td>54.00</td><td>-14.15</td><td>38.68</td><td>1.17</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>19635.00</td><td>53.10</td><td>74.00</td><td>-20.90</td><td>51.93</td><td>1.17</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>26180.00</td><td>42.54</td><td>68.20</td><td>-25.66</td><td>34.96</td><td>7.58</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>26180.00</td><td>54.22</td><td>88.20</td><td>-33.98</td><td>46.64</td><td>7.58</td><td>Peak</td><td>100</td><td>157</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	42.72	68.20	-25.48	36.70	6.02	Average	100	125	2	13090.00	56.25	88.20	-31.95	50.23	6.02	Peak	100	125	3	19635.00	39.85	54.00	-14.15	38.68	1.17	Average	100	208	4	19635.00	53.10	74.00	-20.90	51.93	1.17	Peak	100	208	5	26180.00	42.54	68.20	-25.66	34.96	7.58	Average	100	157	6	26180.00	54.22	88.20	-33.98	46.64	7.58	Peak	100	157
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	42.72	68.20	-25.48	36.70	6.02	Average	100	125																																																																
2	13090.00	56.25	88.20	-31.95	50.23	6.02	Peak	100	125																																																																
3	19635.00	39.85	54.00	-14.15	38.68	1.17	Average	100	208																																																																
4	19635.00	53.10	74.00	-20.90	51.93	1.17	Peak	100	208																																																																
5	26180.00	42.54	68.20	-25.66	34.96	7.58	Average	100	157																																																																
6	26180.00	54.22	88.20	-33.98	46.64	7.58	Peak	100	157																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

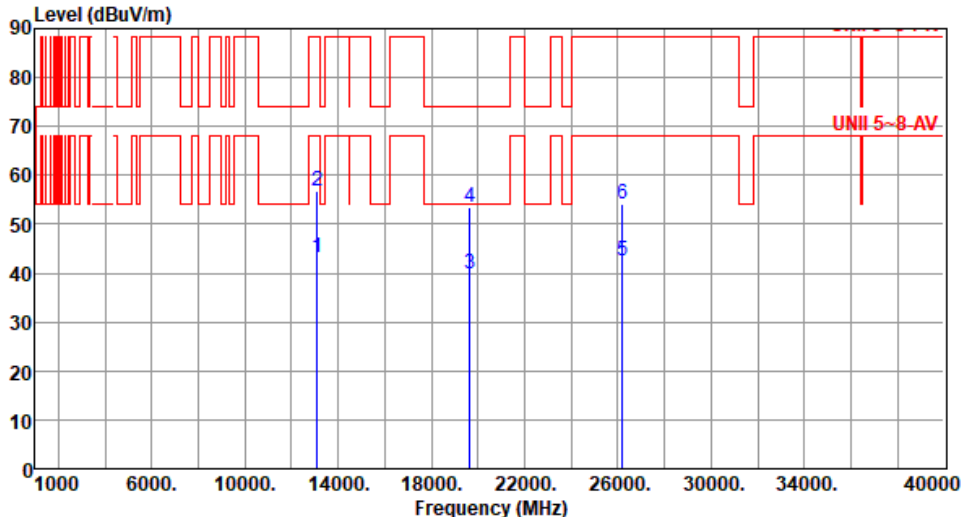

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13090.00</td><td>43.04</td><td>68.20</td><td>-25.16</td><td>37.02</td><td>6.02</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>2</td><td>13090.00</td><td>56.78</td><td>88.20</td><td>-31.42</td><td>50.76</td><td>6.02</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>3</td><td>19635.00</td><td>39.86</td><td>54.00</td><td>-14.14</td><td>38.69</td><td>1.17</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>19635.00</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>52.28</td><td>1.17</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>26180.00</td><td>42.62</td><td>68.20</td><td>-25.58</td><td>35.04</td><td>7.58</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>6</td><td>26180.00</td><td>54.21</td><td>88.20</td><td>-33.99</td><td>46.63</td><td>7.58</td><td>Peak</td><td>100</td><td>114</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	43.04	68.20	-25.16	37.02	6.02	Average	100	102	2	13090.00	56.78	88.20	-31.42	50.76	6.02	Peak	100	102	3	19635.00	39.86	54.00	-14.14	38.69	1.17	Average	100	208	4	19635.00	53.45	74.00	-20.55	52.28	1.17	Peak	100	208	5	26180.00	42.62	68.20	-25.58	35.04	7.58	Average	100	114	6	26180.00	54.21	88.20	-33.99	46.63	7.58	Peak	100	114
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	43.04	68.20	-25.16	37.02	6.02	Average	100	102																																																																
2	13090.00	56.78	88.20	-31.42	50.76	6.02	Peak	100	102																																																																
3	19635.00	39.86	54.00	-14.14	38.69	1.17	Average	100	208																																																																
4	19635.00	53.45	74.00	-20.55	52.28	1.17	Peak	100	208																																																																
5	26180.00	42.62	68.20	-25.58	35.04	7.58	Average	100	114																																																																
6	26180.00	54.21	88.20	-33.99	46.63	7.58	Peak	100	114																																																																

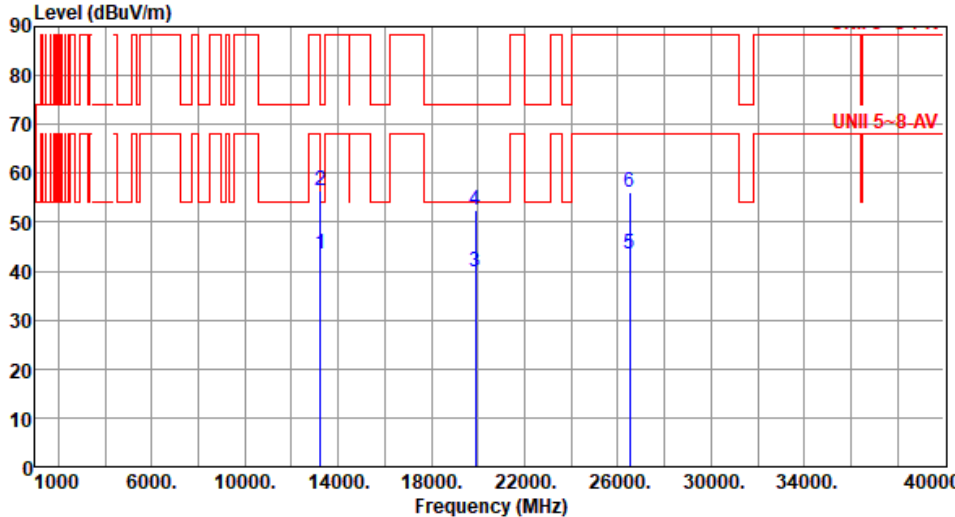

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13250.00</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>37.75</td><td>5.84</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>13250.00</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>50.56</td><td>5.84</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>19875.00</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>38.72</td><td>1.29</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>4</td><td>19875.00</td><td>52.40</td><td>74.00</td><td>-21.60</td><td>51.11</td><td>1.29</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>5</td><td>26500.00</td><td>43.42</td><td>68.20</td><td>-24.78</td><td>35.31</td><td>8.11</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>6</td><td>26500.00</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>47.93</td><td>8.11</td><td>Peak</td><td>100</td><td>154</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.59	54.00	-10.41	37.75	5.84	Average	100	251	2	13250.00	56.40	74.00	-17.60	50.56	5.84	Peak	100	251	3	19875.00	40.01	54.00	-13.99	38.72	1.29	Average	100	271	4	19875.00	52.40	74.00	-21.60	51.11	1.29	Peak	100	271	5	26500.00	43.42	68.20	-24.78	35.31	8.11	Average	100	154	6	26500.00	56.04	88.20	-32.16	47.93	8.11	Peak	100	154
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.59	54.00	-10.41	37.75	5.84	Average	100	251																																																																
2	13250.00	56.40	74.00	-17.60	50.56	5.84	Peak	100	251																																																																
3	19875.00	40.01	54.00	-13.99	38.72	1.29	Average	100	271																																																																
4	19875.00	52.40	74.00	-21.60	51.11	1.29	Peak	100	271																																																																
5	26500.00	43.42	68.20	-24.78	35.31	8.11	Average	100	154																																																																
6	26500.00	56.04	88.20	-32.16	47.93	8.11	Peak	100	154																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13250.00</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>37.75</td><td>5.84</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>2</td><td>13250.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>50.68</td><td>5.84</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>3</td><td>19875.00</td><td>40.07</td><td>54.00</td><td>-13.93</td><td>38.78</td><td>1.29</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>4</td><td>19875.00</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>51.03</td><td>1.29</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>5</td><td>26500.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>35.26</td><td>8.11</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>6</td><td>26500.00</td><td>55.94</td><td>88.20</td><td>-32.26</td><td>47.83</td><td>8.11</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.59	54.00	-10.41	37.75	5.84	Average	100	205	2	13250.00	56.52	74.00	-17.48	50.68	5.84	Peak	100	205	3	19875.00	40.07	54.00	-13.93	38.78	1.29	Average	100	147	4	19875.00	52.32	74.00	-21.68	51.03	1.29	Peak	100	147	5	26500.00	43.37	68.20	-24.83	35.26	8.11	Average	100	206	6	26500.00	55.94	88.20	-32.26	47.83	8.11	Peak	100	206
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.59	54.00	-10.41	37.75	5.84	Average	100	205																																																																
2	13250.00	56.52	74.00	-17.48	50.68	5.84	Peak	100	205																																																																
3	19875.00	40.07	54.00	-13.93	38.78	1.29	Average	100	147																																																																
4	19875.00	52.32	74.00	-21.68	51.03	1.29	Peak	100	147																																																																
5	26500.00	43.37	68.20	-24.83	35.26	8.11	Average	100	206																																																																
6	26500.00	55.94	88.20	-32.26	47.83	8.11	Peak	100	206																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13410.00	44.03	68.20	-24.17	37.82	6.21	Average	100	176
2	13410.00	57.49	88.20	-30.71	51.28	6.21	Peak	100	176
3	20115.00	39.85	54.00	-14.15	38.38	1.47	Average	100	224
4	20115.00	51.79	74.00	-22.21	50.32	1.47	Peak	100	224
5	26820.00	42.72	68.20	-25.48	34.59	8.13	Average	100	351
6	26820.00	55.44	88.20	-32.76	47.31	8.13	Peak	100	351
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

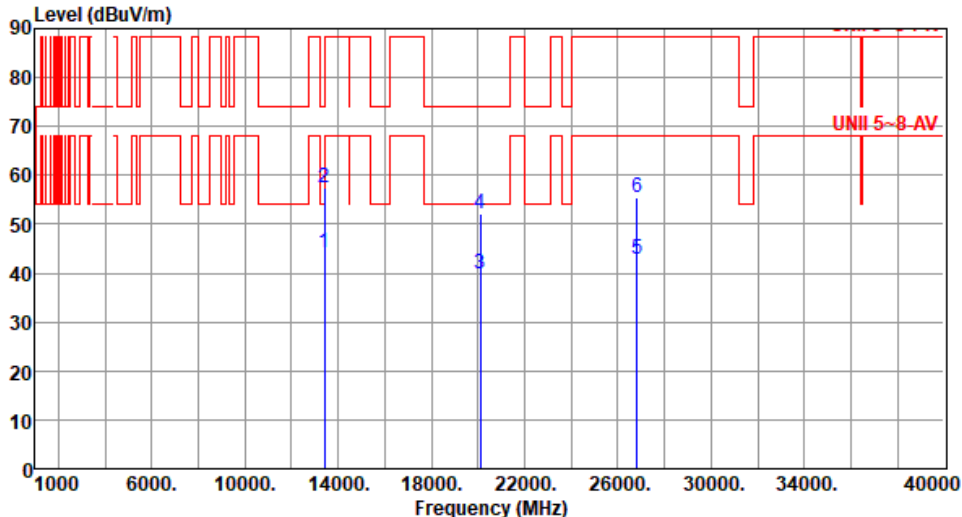


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg <table><tr><td>1</td><td>13410.00</td><td>44.07</td><td>68.20</td><td>-24.13</td><td>37.86</td><td>6.21</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>2</td><td>13410.00</td><td>57.43</td><td>88.20</td><td>-30.77</td><td>51.22</td><td>6.21</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>3</td><td>20115.00</td><td>39.76</td><td>54.00</td><td>-14.24</td><td>38.29</td><td>1.47</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>20115.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>50.59</td><td>1.47</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>5</td><td>26820.00</td><td>42.79</td><td>68.20</td><td>-25.41</td><td>34.66</td><td>8.13</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>26820.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>47.23</td><td>8.13</td><td>Peak</td><td>100</td><td>205</td></tr></table>				1	13410.00	44.07	68.20	-24.13	37.86	6.21	Average	100	103	2	13410.00	57.43	88.20	-30.77	51.22	6.21	Peak	100	103	3	20115.00	39.76	54.00	-14.24	38.29	1.47	Average	100	117	4	20115.00	52.06	74.00	-21.94	50.59	1.47	Peak	100	117	5	26820.00	42.79	68.20	-25.41	34.66	8.13	Average	100	205	6	26820.00	55.36	88.20	-32.84	47.23	8.13	Peak	100	205
1	13410.00	44.07	68.20	-24.13	37.86	6.21	Average	100	103																																																						
2	13410.00	57.43	88.20	-30.77	51.22	6.21	Peak	100	103																																																						
3	20115.00	39.76	54.00	-14.24	38.29	1.47	Average	100	117																																																						
4	20115.00	52.06	74.00	-21.94	50.59	1.47	Peak	100	117																																																						
5	26820.00	42.79	68.20	-25.41	34.66	8.13	Average	100	205																																																						
6	26820.00	55.36	88.20	-32.84	47.23	8.13	Peak	100	205																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13570.00</td><td>44.44</td><td>68.20</td><td>-23.76</td><td>38.23</td><td>6.21</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>2</td><td>13570.00</td><td>57.48</td><td>88.20</td><td>-30.72</td><td>51.27</td><td>6.21</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>3</td><td>20355.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>36.73</td><td>1.73</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>4</td><td>20355.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>50.34</td><td>1.73</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>5</td><td>27140.00</td><td>41.52</td><td>68.20</td><td>-26.68</td><td>33.58</td><td>7.94</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>27140.00</td><td>54.90</td><td>88.20</td><td>-33.30</td><td>46.96</td><td>7.94</td><td>Peak</td><td>100</td><td>221</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	44.44	68.20	-23.76	38.23	6.21	Average	100	215	2	13570.00	57.48	88.20	-30.72	51.27	6.21	Peak	100	215	3	20355.00	38.46	54.00	-15.54	36.73	1.73	Average	100	221	4	20355.00	52.07	74.00	-21.93	50.34	1.73	Peak	100	221	5	27140.00	41.52	68.20	-26.68	33.58	7.94	Average	100	221	6	27140.00	54.90	88.20	-33.30	46.96	7.94	Peak	100	221
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	44.44	68.20	-23.76	38.23	6.21	Average	100	215																																																																
2	13570.00	57.48	88.20	-30.72	51.27	6.21	Peak	100	215																																																																
3	20355.00	38.46	54.00	-15.54	36.73	1.73	Average	100	221																																																																
4	20355.00	52.07	74.00	-21.93	50.34	1.73	Peak	100	221																																																																
5	27140.00	41.52	68.20	-26.68	33.58	7.94	Average	100	221																																																																
6	27140.00	54.90	88.20	-33.30	46.96	7.94	Peak	100	221																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

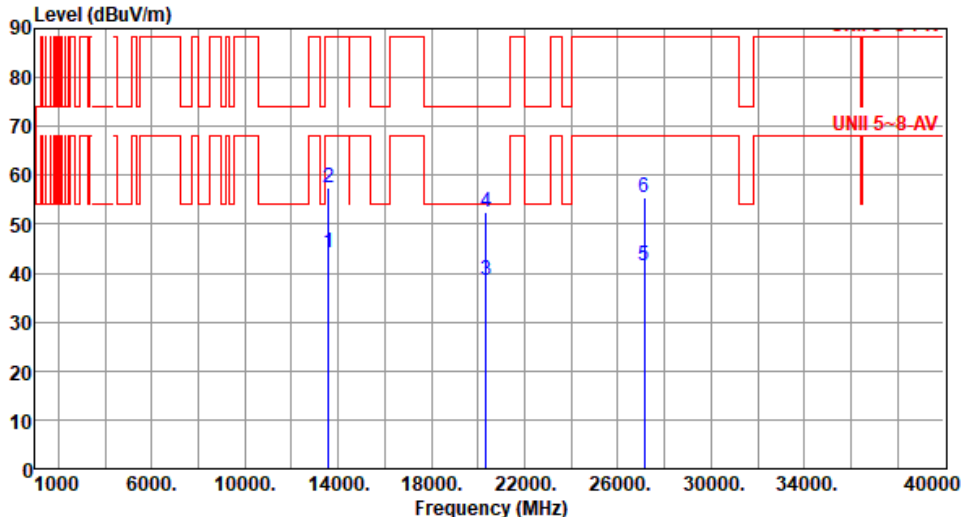


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>44.33</td><td>68.20</td><td>-23.87</td><td>38.12</td><td>6.21</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>2</td><td>13570.00</td><td>57.55</td><td>88.20</td><td>-30.65</td><td>51.34</td><td>6.21</td><td>Peak</td><td>100</td><td>225</td></tr><tr><td>3</td><td>20355.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>36.73</td><td>1.73</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>20355.00</td><td>52.38</td><td>74.00</td><td>-21.62</td><td>50.65</td><td>1.73</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>27140.00</td><td>41.62</td><td>68.20</td><td>-26.58</td><td>33.68</td><td>7.94</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>6</td><td>27140.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>47.65</td><td>7.94</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	44.33	68.20	-23.87	38.12	6.21	Average	100	225	2	13570.00	57.55	88.20	-30.65	51.34	6.21	Peak	100	225	3	20355.00	38.46	54.00	-15.54	36.73	1.73	Average	100	108	4	20355.00	52.38	74.00	-21.62	50.65	1.73	Peak	100	108	5	27140.00	41.62	68.20	-26.58	33.68	7.94	Average	100	227	6	27140.00	55.59	88.20	-32.61	47.65	7.94	Peak	100	227
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	44.33	68.20	-23.87	38.12	6.21	Average	100	225																																																																
2	13570.00	57.55	88.20	-30.65	51.34	6.21	Peak	100	225																																																																
3	20355.00	38.46	54.00	-15.54	36.73	1.73	Average	100	108																																																																
4	20355.00	52.38	74.00	-21.62	50.65	1.73	Peak	100	108																																																																
5	27140.00	41.62	68.20	-26.58	33.68	7.94	Average	100	227																																																																
6	27140.00	55.59	88.20	-32.61	47.65	7.94	Peak	100	227																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

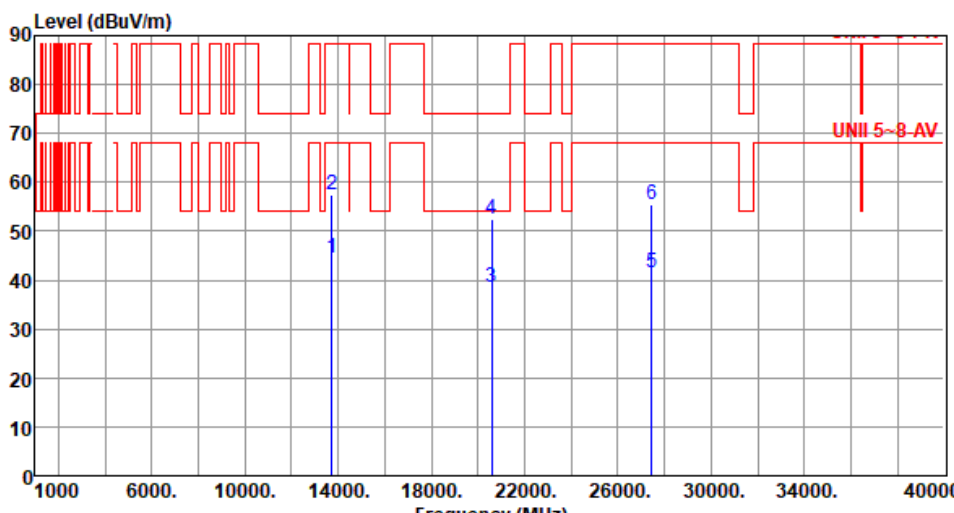

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13730.00</td><td>44.42</td><td>68.20</td><td>-23.78</td><td>38.17</td><td>6.25</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>13730.00</td><td>57.50</td><td>88.20</td><td>-30.70</td><td>51.25</td><td>6.25</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>20595.00</td><td>38.57</td><td>54.00</td><td>-15.43</td><td>36.48</td><td>2.09</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>4</td><td>20595.00</td><td>52.31</td><td>74.00</td><td>-21.69</td><td>50.22</td><td>2.09</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>5</td><td>27460.00</td><td>41.45</td><td>68.20</td><td>-26.75</td><td>33.51</td><td>7.94</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>6</td><td>27460.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>47.68</td><td>7.94</td><td>Peak</td><td>100</td><td>224</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	44.42	68.20	-23.78	38.17	6.25	Average	100	251	2	13730.00	57.50	88.20	-30.70	51.25	6.25	Peak	100	251	3	20595.00	38.57	54.00	-15.43	36.48	2.09	Average	100	117	4	20595.00	52.31	74.00	-21.69	50.22	2.09	Peak	100	117	5	27460.00	41.45	68.20	-26.75	33.51	7.94	Average	100	224	6	27460.00	55.62	88.20	-32.58	47.68	7.94	Peak	100	224
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13730.00	44.42	68.20	-23.78	38.17	6.25	Average	100	251																																																																
2	13730.00	57.50	88.20	-30.70	51.25	6.25	Peak	100	251																																																																
3	20595.00	38.57	54.00	-15.43	36.48	2.09	Average	100	117																																																																
4	20595.00	52.31	74.00	-21.69	50.22	2.09	Peak	100	117																																																																
5	27460.00	41.45	68.20	-26.75	33.51	7.94	Average	100	224																																																																
6	27460.00	55.62	88.20	-32.58	47.68	7.94	Peak	100	224																																																																

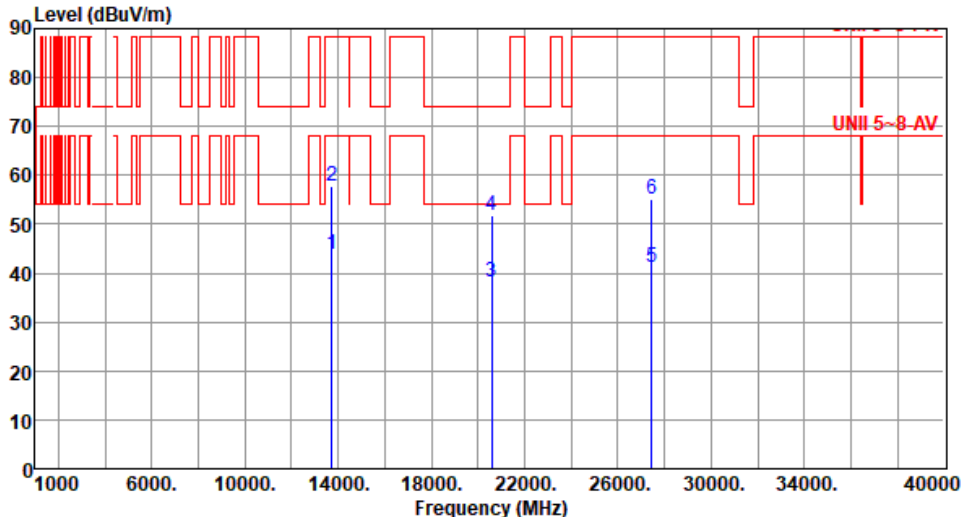


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13730.00</td><td>43.81</td><td>68.20</td><td>-24.39</td><td>37.56</td><td>6.25</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>2</td><td>13730.00</td><td>57.74</td><td>88.20</td><td>-30.46</td><td>51.49</td><td>6.25</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>3</td><td>20595.00</td><td>38.31</td><td>54.00</td><td>-15.69</td><td>36.22</td><td>2.09</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>20595.00</td><td>51.70</td><td>74.00</td><td>-22.30</td><td>49.61</td><td>2.09</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>27460.00</td><td>41.35</td><td>68.20</td><td>-26.85</td><td>33.41</td><td>7.94</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>6</td><td>27460.00</td><td>55.17</td><td>88.20</td><td>-33.03</td><td>47.23</td><td>7.94</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	43.81	68.20	-24.39	37.56	6.25	Average	100	154	2	13730.00	57.74	88.20	-30.46	51.49	6.25	Peak	100	154	3	20595.00	38.31	54.00	-15.69	36.22	2.09	Average	100	178	4	20595.00	51.70	74.00	-22.30	49.61	2.09	Peak	100	178	5	27460.00	41.35	68.20	-26.85	33.41	7.94	Average	100	206	6	27460.00	55.17	88.20	-33.03	47.23	7.94	Peak	100	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13730.00	43.81	68.20	-24.39	37.56	6.25	Average	100	154																																																																
2	13730.00	57.74	88.20	-30.46	51.49	6.25	Peak	100	154																																																																
3	20595.00	38.31	54.00	-15.69	36.22	2.09	Average	100	178																																																																
4	20595.00	51.70	74.00	-22.30	49.61	2.09	Peak	100	178																																																																
5	27460.00	41.35	68.20	-26.85	33.41	7.94	Average	100	206																																																																
6	27460.00	55.17	88.20	-33.03	47.23	7.94	Peak	100	206																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

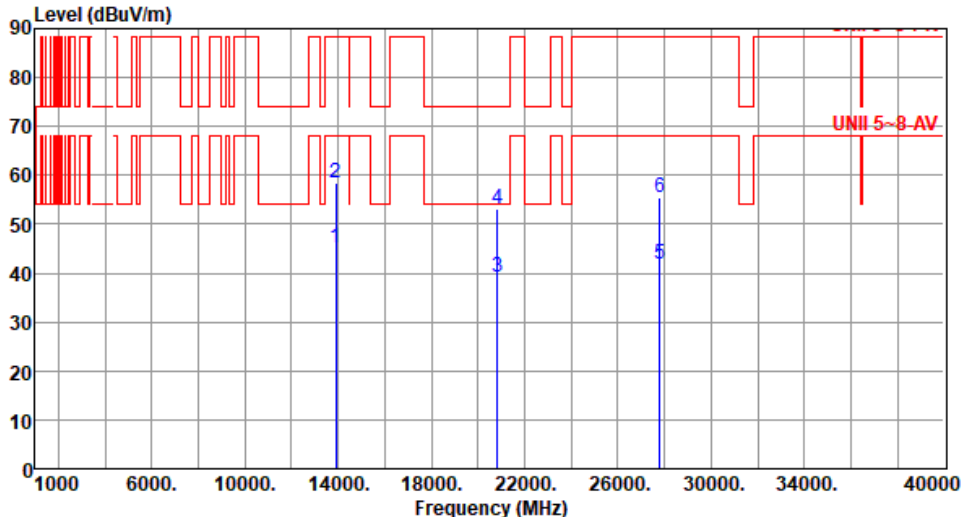

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13890.00</td><td>45.13</td><td>68.20</td><td>-23.07</td><td>38.57</td><td>6.56</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>2</td><td>13890.00</td><td>58.31</td><td>88.20</td><td>-29.89</td><td>51.75</td><td>6.56</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>3</td><td>20835.00</td><td>39.21</td><td>54.00</td><td>-14.79</td><td>36.67</td><td>2.54</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>20835.00</td><td>53.30</td><td>74.00</td><td>-20.70</td><td>50.76</td><td>2.54</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>27780.00</td><td>41.98</td><td>68.20</td><td>-26.22</td><td>33.72</td><td>8.26</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>27780.00</td><td>55.52</td><td>88.20</td><td>-32.68</td><td>47.26</td><td>8.26</td><td>Peak</td><td>100</td><td>251</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13890.00	45.13	68.20	-23.07	38.57	6.56	Average	100	220	2	13890.00	58.31	88.20	-29.89	51.75	6.56	Peak	100	220	3	20835.00	39.21	54.00	-14.79	36.67	2.54	Average	100	108	4	20835.00	53.30	74.00	-20.70	50.76	2.54	Peak	100	108	5	27780.00	41.98	68.20	-26.22	33.72	8.26	Average	100	251	6	27780.00	55.52	88.20	-32.68	47.26	8.26	Peak	100	251
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13890.00	45.13	68.20	-23.07	38.57	6.56	Average	100	220																																																																
2	13890.00	58.31	88.20	-29.89	51.75	6.56	Peak	100	220																																																																
3	20835.00	39.21	54.00	-14.79	36.67	2.54	Average	100	108																																																																
4	20835.00	53.30	74.00	-20.70	50.76	2.54	Peak	100	108																																																																
5	27780.00	41.98	68.20	-26.22	33.72	8.26	Average	100	251																																																																
6	27780.00	55.52	88.20	-32.68	47.26	8.26	Peak	100	251																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

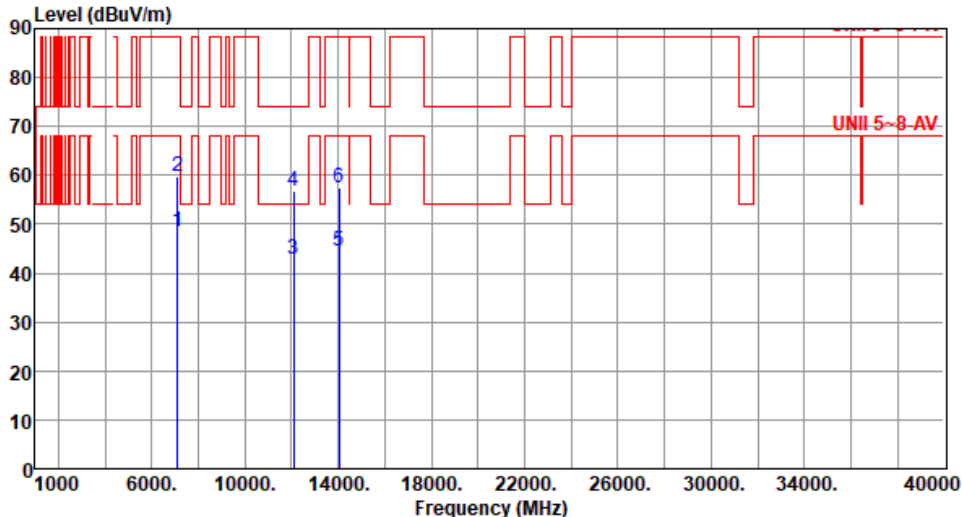


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 1 7125.00 48.58 68.20 -19.62 43.80 4.78 Average 291 276 2 7125.00 59.91 88.20 -28.29 55.13 4.78 Peak 291 276 3 12075.00 42.96 54.00 -11.04 36.44 6.52 Average 100 214 4 12075.00 56.81 74.00 -17.19 50.29 6.52 Peak 100 214 5 14050.00 44.54 68.20 -23.66 37.68 6.86 Average 100 111 6 14050.00 57.37 88.20 -30.83 50.51 6.86 Peak 100 111 Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>48.34</td><td>68.20</td><td>-19.86</td><td>43.56</td><td>4.78</td><td>Average</td><td>243</td><td>1</td></tr><tr><td>2</td><td>7125.00</td><td>60.06</td><td>88.20</td><td>-28.14</td><td>55.28</td><td>4.78</td><td>Peak</td><td>243</td><td>1</td></tr><tr><td>3</td><td>14050.00</td><td>44.40</td><td>68.20</td><td>-23.80</td><td>37.54</td><td>6.86</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>4</td><td>14050.00</td><td>57.42</td><td>88.20</td><td>-30.78</td><td>50.56</td><td>6.86</td><td>Peak</td><td>100</td><td>57</td></tr><tr><td>5</td><td>21075.00</td><td>39.40</td><td>54.00</td><td>-14.60</td><td>36.34</td><td>3.06</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>6</td><td>21075.00</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>50.32</td><td>3.06</td><td>Peak</td><td>100</td><td>271</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.34	68.20	-19.86	43.56	4.78	Average	243	1	2	7125.00	60.06	88.20	-28.14	55.28	4.78	Peak	243	1	3	14050.00	44.40	68.20	-23.80	37.54	6.86	Average	100	57	4	14050.00	57.42	88.20	-30.78	50.56	6.86	Peak	100	57	5	21075.00	39.40	54.00	-14.60	36.34	3.06	Average	100	271	6	21075.00	53.38	74.00	-20.62	50.32	3.06	Peak	100	271
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.34	68.20	-19.86	43.56	4.78	Average	243	1																																																																
2	7125.00	60.06	88.20	-28.14	55.28	4.78	Peak	243	1																																																																
3	14050.00	44.40	68.20	-23.80	37.54	6.86	Average	100	57																																																																
4	14050.00	57.42	88.20	-30.78	50.56	6.86	Peak	100	57																																																																
5	21075.00	39.40	54.00	-14.60	36.34	3.06	Average	100	271																																																																
6	21075.00	53.38	74.00	-20.62	50.32	3.06	Peak	100	271																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

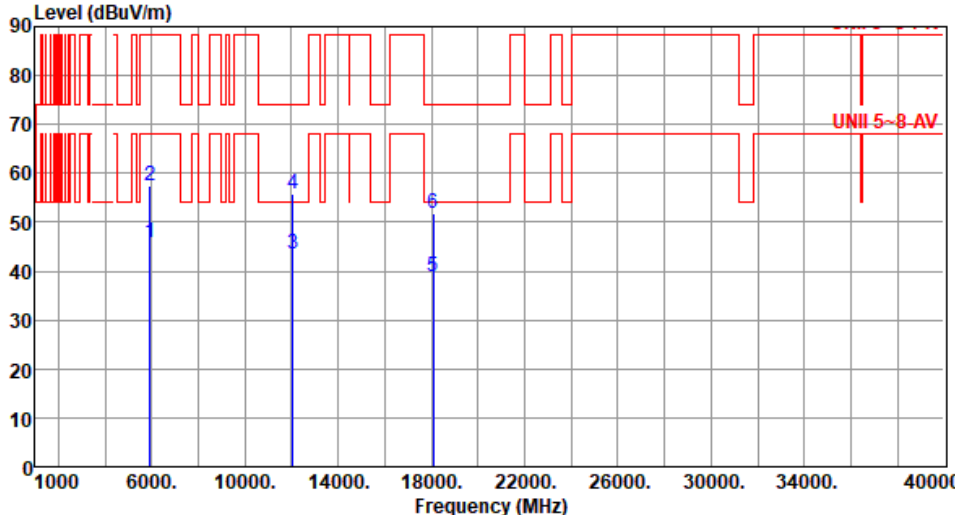Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6025																																																																							
Polarization	Horizontal																																																																											
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																												
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>45.94</td><td>68.20</td><td>-22.26</td><td>44.75</td><td>1.19</td><td>Average</td><td>144</td><td>19</td></tr><tr><td>2</td><td>5925.00</td><td>57.54</td><td>88.20</td><td>-30.66</td><td>56.35</td><td>1.19</td><td>Peak</td><td>144</td><td>19</td></tr><tr><td>3</td><td>12050.00</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>37.16</td><td>6.40</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>4</td><td>12050.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>49.46</td><td>6.40</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>5</td><td>18075.00</td><td>38.95</td><td>54.00</td><td>-15.05</td><td>38.47</td><td>0.48</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>6</td><td>18075.00</td><td>51.74</td><td>74.00</td><td>-22.26</td><td>51.26</td><td>0.48</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.94	68.20	-22.26	44.75	1.19	Average	144	19	2	5925.00	57.54	88.20	-30.66	56.35	1.19	Peak	144	19	3	12050.00	43.56	54.00	-10.44	37.16	6.40	Average	100	218	4	12050.00	55.86	74.00	-18.14	49.46	6.40	Peak	100	218	5	18075.00	38.95	54.00	-15.05	38.47	0.48	Average	100	222	6	18075.00	51.74	74.00	-22.26	51.26	0.48	Peak	100	222
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	5925.00	45.94	68.20	-22.26	44.75	1.19	Average	144	19																																																																			
2	5925.00	57.54	88.20	-30.66	56.35	1.19	Peak	144	19																																																																			
3	12050.00	43.56	54.00	-10.44	37.16	6.40	Average	100	218																																																																			
4	12050.00	55.86	74.00	-18.14	49.46	6.40	Peak	100	218																																																																			
5	18075.00	38.95	54.00	-15.05	38.47	0.48	Average	100	222																																																																			
6	18075.00	51.74	74.00	-22.26	51.26	0.48	Peak	100	222																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																												




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg <table><tr><td>1</td><td>5925.00</td><td>43.77</td><td>68.20</td><td>-24.43</td><td>42.58</td><td>1.19</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>2</td><td>5925.00</td><td>56.03</td><td>88.20</td><td>-32.17</td><td>54.84</td><td>1.19</td><td>Peak</td><td>100</td><td>351</td></tr><tr><td>3</td><td>12050.00</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>37.02</td><td>6.40</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>4</td><td>12050.00</td><td>55.78</td><td>74.00</td><td>-18.22</td><td>49.38</td><td>6.40</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>5</td><td>18075.00</td><td>38.74</td><td>54.00</td><td>-15.26</td><td>38.26</td><td>0.48</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>6</td><td>18075.00</td><td>52.06</td><td>74.00</td><td>-21.94</td><td>51.58</td><td>0.48</td><td>Peak</td><td>100</td><td>208</td></tr></table>				1	5925.00	43.77	68.20	-24.43	42.58	1.19	Average	100	351	2	5925.00	56.03	88.20	-32.17	54.84	1.19	Peak	100	351	3	12050.00	43.42	54.00	-10.58	37.02	6.40	Average	100	116	4	12050.00	55.78	74.00	-18.22	49.38	6.40	Peak	100	116	5	18075.00	38.74	54.00	-15.26	38.26	0.48	Average	100	208	6	18075.00	52.06	74.00	-21.94	51.58	0.48	Peak	100	208
1	5925.00	43.77	68.20	-24.43	42.58	1.19	Average	100	351																																																						
2	5925.00	56.03	88.20	-32.17	54.84	1.19	Peak	100	351																																																						
3	12050.00	43.42	54.00	-10.58	37.02	6.40	Average	100	116																																																						
4	12050.00	55.78	74.00	-18.22	49.38	6.40	Peak	100	116																																																						
5	18075.00	38.74	54.00	-15.26	38.26	0.48	Average	100	208																																																						
6	18075.00	52.06	74.00	-21.94	51.58	0.48	Peak	100	208																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

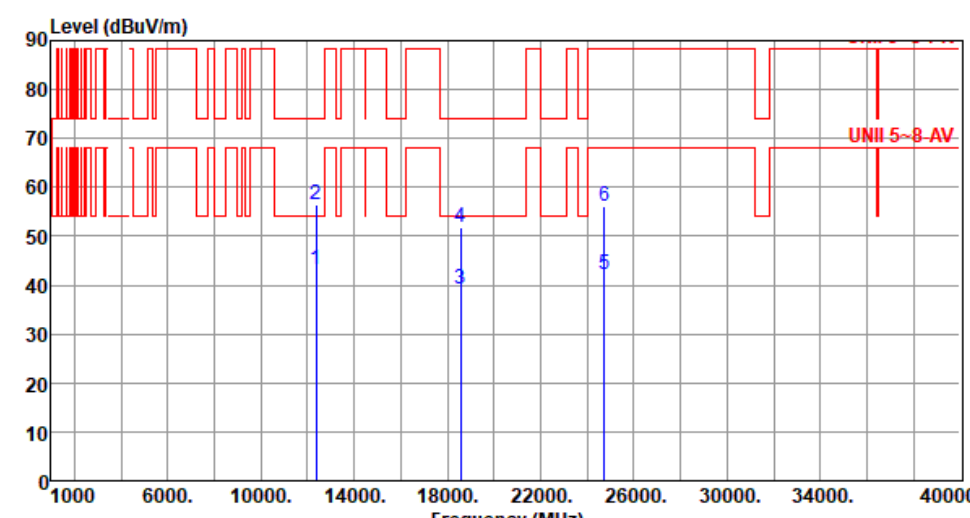


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>12370.00</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>37.11</td><td>6.17</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>2</td><td>12370.00</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>50.25</td><td>6.17</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>3</td><td>18555.00</td><td>39.08</td><td>54.00</td><td>-14.92</td><td>38.46</td><td>0.62</td><td>Average</td><td>100</td><td>14</td></tr><tr><td>4</td><td>18555.00</td><td>51.88</td><td>74.00</td><td>-22.12</td><td>51.26</td><td>0.62</td><td>Peak</td><td>100</td><td>14</td></tr><tr><td>5</td><td>24740.00</td><td>42.12</td><td>68.20</td><td>-26.08</td><td>34.52</td><td>7.60</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>6</td><td>24740.00</td><td>56.08</td><td>88.20</td><td>-32.12</td><td>48.48</td><td>7.60</td><td>Peak</td><td>100</td><td>213</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	12370.00	43.28	54.00	-10.72	37.11	6.17	Average	100	157	2	12370.00	56.42	74.00	-17.58	50.25	6.17	Peak	100	157	3	18555.00	39.08	54.00	-14.92	38.46	0.62	Average	100	14	4	18555.00	51.88	74.00	-22.12	51.26	0.62	Peak	100	14	5	24740.00	42.12	68.20	-26.08	34.52	7.60	Average	100	213	6	24740.00	56.08	88.20	-32.12	48.48	7.60	Peak	100	213
1	12370.00	43.28	54.00	-10.72	37.11	6.17	Average	100	157																																																						
2	12370.00	56.42	74.00	-17.58	50.25	6.17	Peak	100	157																																																						
3	18555.00	39.08	54.00	-14.92	38.46	0.62	Average	100	14																																																						
4	18555.00	51.88	74.00	-22.12	51.26	0.62	Peak	100	14																																																						
5	24740.00	42.12	68.20	-26.08	34.52	7.60	Average	100	213																																																						
6	24740.00	56.08	88.20	-32.12	48.48	7.60	Peak	100	213																																																						

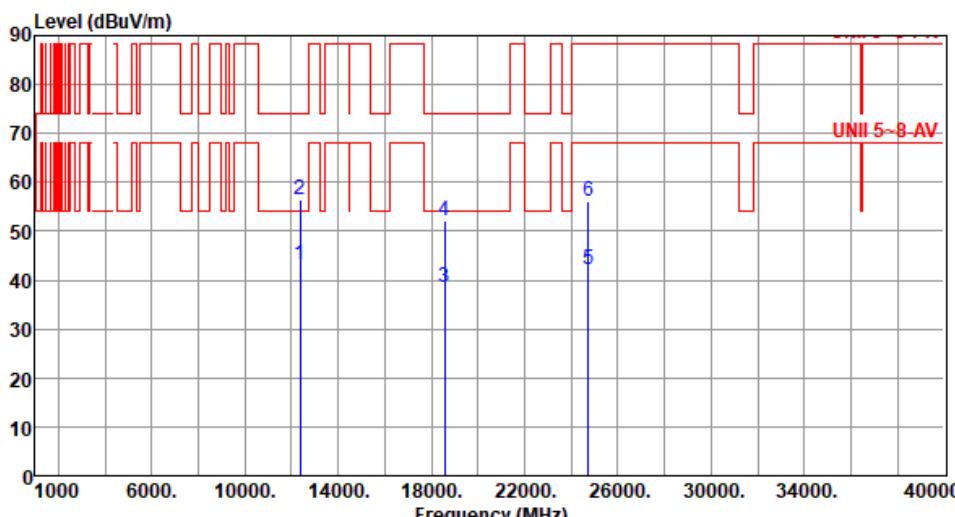


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12370.00</td><td>43.30</td><td>54.00</td><td>-10.70</td><td>37.13</td><td>6.17</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>2</td><td>12370.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>50.35</td><td>6.17</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>3</td><td>18555.00</td><td>38.65</td><td>54.00</td><td>-15.35</td><td>38.03</td><td>0.62</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>4</td><td>18555.00</td><td>52.03</td><td>74.00</td><td>-21.97</td><td>51.41</td><td>0.62</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>5</td><td>24740.00</td><td>42.02</td><td>68.20</td><td>-26.18</td><td>34.42</td><td>7.60</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>6</td><td>24740.00</td><td>56.23</td><td>88.20</td><td>-31.97</td><td>48.63</td><td>7.60</td><td>Peak</td><td>100</td><td>154</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	43.30	54.00	-10.70	37.13	6.17	Average	100	148	2	12370.00	56.52	74.00	-17.48	50.35	6.17	Peak	100	148	3	18555.00	38.65	54.00	-15.35	38.03	0.62	Average	100	241	4	18555.00	52.03	74.00	-21.97	51.41	0.62	Peak	100	241	5	24740.00	42.02	68.20	-26.18	34.42	7.60	Average	100	154	6	24740.00	56.23	88.20	-31.97	48.63	7.60	Peak	100	154
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12370.00	43.30	54.00	-10.70	37.13	6.17	Average	100	148																																																																
2	12370.00	56.52	74.00	-17.48	50.35	6.17	Peak	100	148																																																																
3	18555.00	38.65	54.00	-15.35	38.03	0.62	Average	100	241																																																																
4	18555.00	52.03	74.00	-21.97	51.41	0.62	Peak	100	241																																																																
5	24740.00	42.02	68.20	-26.18	34.42	7.60	Average	100	154																																																																
6	24740.00	56.23	88.20	-31.97	48.63	7.60	Peak	100	154																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

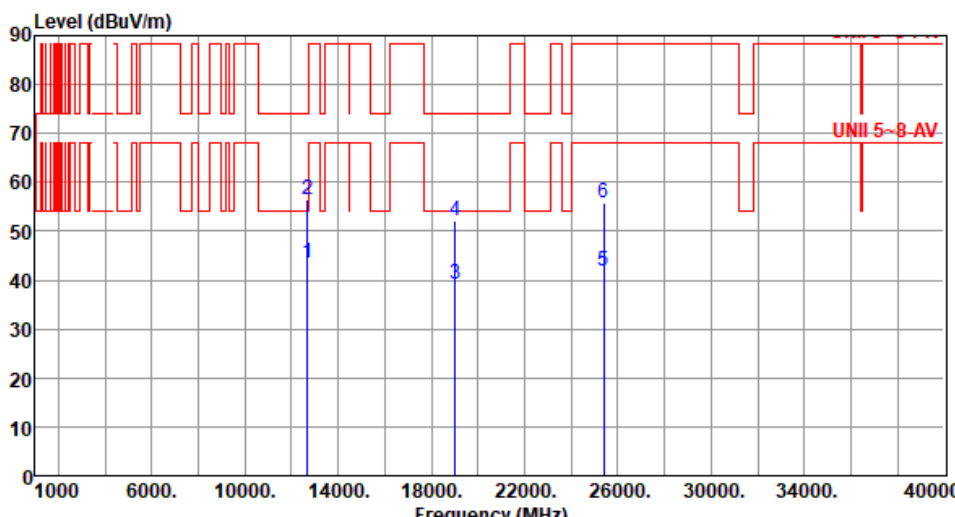


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12690.00</td><td>43.58</td><td>54.00</td><td>-10.42</td><td>37.45</td><td>6.13</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>2</td><td>12690.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>50.39</td><td>6.13</td><td>Peak</td><td>100</td><td>151</td></tr><tr><td>3</td><td>19035.00</td><td>39.32</td><td>54.00</td><td>-14.68</td><td>38.41</td><td>0.91</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>4</td><td>19035.00</td><td>52.13</td><td>74.00</td><td>-21.87</td><td>51.22</td><td>0.91</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>5</td><td>25380.00</td><td>41.69</td><td>68.20</td><td>-26.51</td><td>34.26</td><td>7.43</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>25380.00</td><td>55.68</td><td>88.20</td><td>-32.52</td><td>48.25</td><td>7.43</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	43.58	54.00	-10.42	37.45	6.13	Average	100	151	2	12690.00	56.52	74.00	-17.48	50.39	6.13	Peak	100	151	3	19035.00	39.32	54.00	-14.68	38.41	0.91	Average	100	271	4	19035.00	52.13	74.00	-21.87	51.22	0.91	Peak	100	271	5	25380.00	41.69	68.20	-26.51	34.26	7.43	Average	100	108	6	25380.00	55.68	88.20	-32.52	48.25	7.43	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	43.58	54.00	-10.42	37.45	6.13	Average	100	151																																																																
2	12690.00	56.52	74.00	-17.48	50.39	6.13	Peak	100	151																																																																
3	19035.00	39.32	54.00	-14.68	38.41	0.91	Average	100	271																																																																
4	19035.00	52.13	74.00	-21.87	51.22	0.91	Peak	100	271																																																																
5	25380.00	41.69	68.20	-26.51	34.26	7.43	Average	100	108																																																																
6	25380.00	55.68	88.20	-32.52	48.25	7.43	Peak	100	108																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

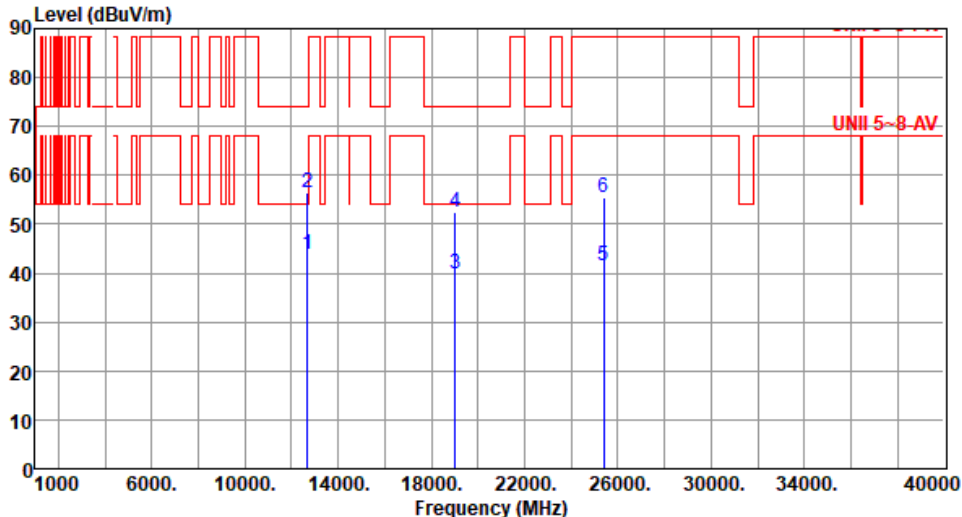

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12690.00</td><td>43.81</td><td>54.00</td><td>-10.19</td><td>37.68</td><td>6.13</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>2</td><td>12690.00</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>50.41</td><td>6.13</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>3</td><td>19035.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>38.82</td><td>0.91</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>4</td><td>19035.00</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>51.68</td><td>0.91</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>5</td><td>25380.00</td><td>41.59</td><td>68.20</td><td>-26.61</td><td>34.16</td><td>7.43</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>6</td><td>25380.00</td><td>55.56</td><td>88.20</td><td>-32.64</td><td>48.13</td><td>7.43</td><td>Peak</td><td>100</td><td>268</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	43.81	54.00	-10.19	37.68	6.13	Average	100	144	2	12690.00	56.54	74.00	-17.46	50.41	6.13	Peak	100	144	3	19035.00	39.73	54.00	-14.27	38.82	0.91	Average	100	271	4	19035.00	52.59	74.00	-21.41	51.68	0.91	Peak	100	271	5	25380.00	41.59	68.20	-26.61	34.16	7.43	Average	100	268	6	25380.00	55.56	88.20	-32.64	48.13	7.43	Peak	100	268
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	43.81	54.00	-10.19	37.68	6.13	Average	100	144																																																																
2	12690.00	56.54	74.00	-17.46	50.41	6.13	Peak	100	144																																																																
3	19035.00	39.73	54.00	-14.27	38.82	0.91	Average	100	271																																																																
4	19035.00	52.59	74.00	-21.41	51.68	0.91	Peak	100	271																																																																
5	25380.00	41.59	68.20	-26.61	34.16	7.43	Average	100	268																																																																
6	25380.00	55.56	88.20	-32.64	48.13	7.43	Peak	100	268																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

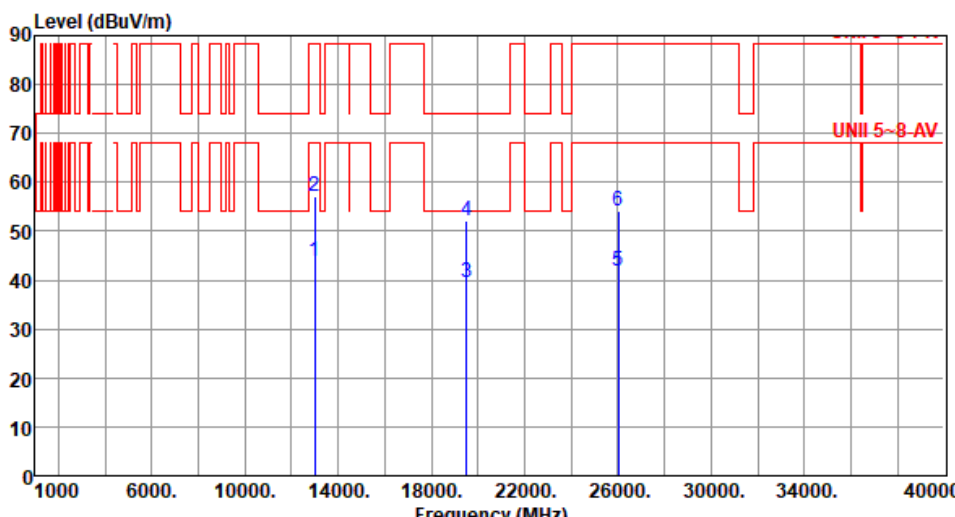


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13010.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>37.39</td><td>6.43</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>2</td><td>13010.00</td><td>57.03</td><td>88.20</td><td>-31.17</td><td>50.60</td><td>6.43</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>3</td><td>19515.00</td><td>39.40</td><td>54.00</td><td>-14.60</td><td>38.29</td><td>1.11</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>4</td><td>19515.00</td><td>52.31</td><td>74.00</td><td>-21.69</td><td>51.20</td><td>1.11</td><td>Peak</td><td>100</td><td>222</td></tr><tr><td>5</td><td>26020.00</td><td>41.73</td><td>68.20</td><td>-26.47</td><td>34.27</td><td>7.46</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>6</td><td>26020.00</td><td>53.99</td><td>88.20</td><td>-34.21</td><td>46.53</td><td>7.46</td><td>Peak</td><td>100</td><td>149</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13010.00	43.82	68.20	-24.38	37.39	6.43	Average	100	145	2	13010.00	57.03	88.20	-31.17	50.60	6.43	Peak	100	145	3	19515.00	39.40	54.00	-14.60	38.29	1.11	Average	100	222	4	19515.00	52.31	74.00	-21.69	51.20	1.11	Peak	100	222	5	26020.00	41.73	68.20	-26.47	34.27	7.46	Average	100	149	6	26020.00	53.99	88.20	-34.21	46.53	7.46	Peak	100	149
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13010.00	43.82	68.20	-24.38	37.39	6.43	Average	100	145																																																																
2	13010.00	57.03	88.20	-31.17	50.60	6.43	Peak	100	145																																																																
3	19515.00	39.40	54.00	-14.60	38.29	1.11	Average	100	222																																																																
4	19515.00	52.31	74.00	-21.69	51.20	1.11	Peak	100	222																																																																
5	26020.00	41.73	68.20	-26.47	34.27	7.46	Average	100	149																																																																
6	26020.00	53.99	88.20	-34.21	46.53	7.46	Peak	100	149																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13010.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>37.41</td><td>6.43</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>2</td><td>13010.00</td><td>57.09</td><td>88.20</td><td>-31.11</td><td>50.66</td><td>6.43</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>3</td><td>19515.00</td><td>39.40</td><td>54.00</td><td>-14.60</td><td>38.29</td><td>1.11</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>4</td><td>19515.00</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>51.25</td><td>1.11</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>5</td><td>26020.00</td><td>41.58</td><td>68.20</td><td>-26.62</td><td>34.12</td><td>7.46</td><td>Average</td><td>100</td><td>189</td></tr><tr><td>6</td><td>26020.00</td><td>53.76</td><td>88.20</td><td>-34.44</td><td>46.30</td><td>7.46</td><td>Peak</td><td>100</td><td>189</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13010.00	43.84	68.20	-24.36	37.41	6.43	Average	100	108	2	13010.00	57.09	88.20	-31.11	50.66	6.43	Peak	100	108	3	19515.00	39.40	54.00	-14.60	38.29	1.11	Average	100	241	4	19515.00	52.36	74.00	-21.64	51.25	1.11	Peak	100	241	5	26020.00	41.58	68.20	-26.62	34.12	7.46	Average	100	189	6	26020.00	53.76	88.20	-34.44	46.30	7.46	Peak	100	189
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13010.00	43.84	68.20	-24.36	37.41	6.43	Average	100	108																																																																
2	13010.00	57.09	88.20	-31.11	50.66	6.43	Peak	100	108																																																																
3	19515.00	39.40	54.00	-14.60	38.29	1.11	Average	100	241																																																																
4	19515.00	52.36	74.00	-21.64	51.25	1.11	Peak	100	241																																																																
5	26020.00	41.58	68.20	-26.62	34.12	7.46	Average	100	189																																																																
6	26020.00	53.76	88.20	-34.44	46.30	7.46	Peak	100	189																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

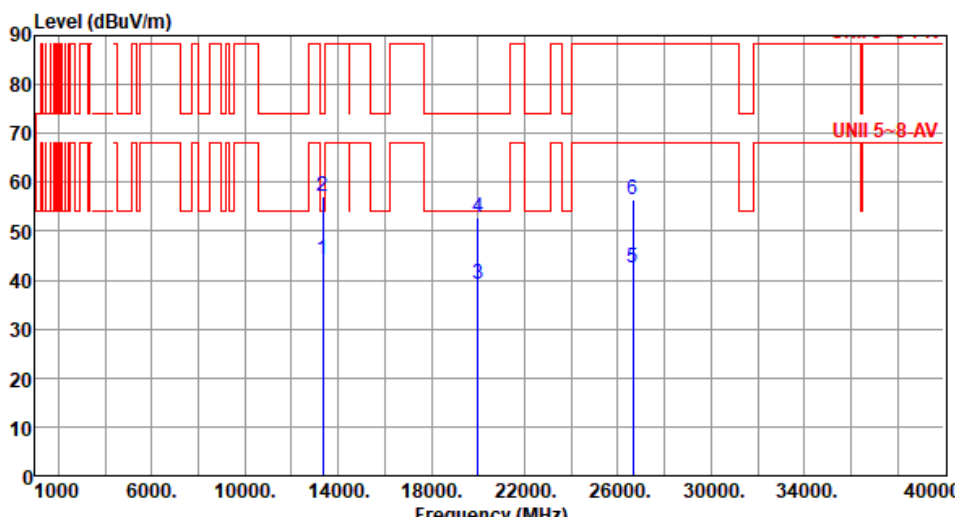


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13330.00	44.31	54.00	-9.69	38.43	5.88	Average	100	254
2	13330.00	57.10	74.00	-16.90	51.22	5.88	Peak	100	254
3	19995.00	39.25	54.00	-14.75	37.86	1.39	Average	100	310
4	19995.00	52.86	74.00	-21.14	51.47	1.39	Peak	100	310
5	26660.00	42.43	68.20	-25.77	34.26	8.17	Average	100	145
6	26660.00	56.49	88.20	-31.71	48.32	8.17	Peak	100	145
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

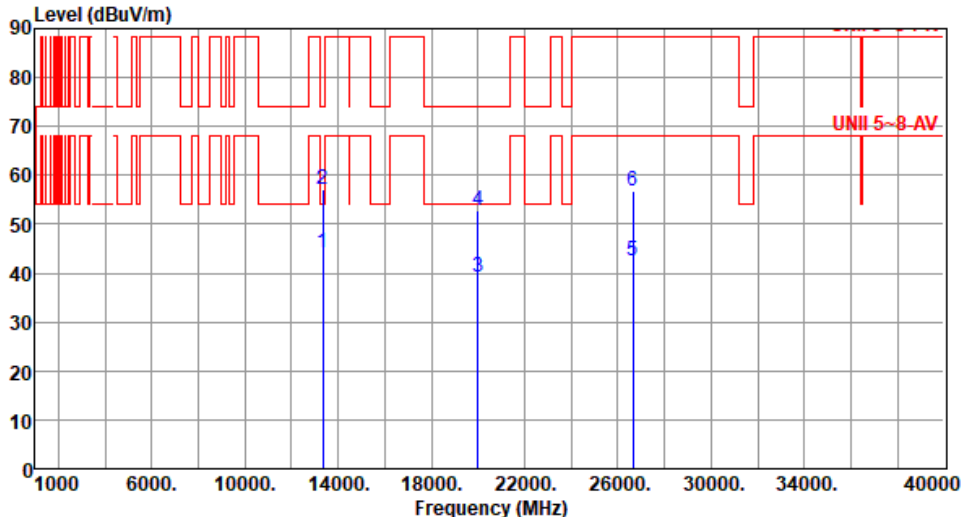

Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6665																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13330.00</td><td>44.12</td><td>54.00</td><td>-9.88</td><td>38.24</td><td>5.88</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>2</td><td>13330.00</td><td>57.25</td><td>74.00</td><td>-16.75</td><td>51.37</td><td>5.88</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>3</td><td>19995.00</td><td>39.31</td><td>54.00</td><td>-14.69</td><td>37.92</td><td>1.39</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>19995.00</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>51.57</td><td>1.39</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>26660.00</td><td>42.50</td><td>68.20</td><td>-25.70</td><td>34.33</td><td>8.17</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>26660.00</td><td>56.69</td><td>88.20</td><td>-31.51</td><td>48.52</td><td>8.17</td><td>Peak</td><td>100</td><td>117</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13330.00	44.12	54.00	-9.88	38.24	5.88	Average	100	152	2	13330.00	57.25	74.00	-16.75	51.37	5.88	Peak	100	152	3	19995.00	39.31	54.00	-14.69	37.92	1.39	Average	100	208	4	19995.00	52.96	74.00	-21.04	51.57	1.39	Peak	100	208	5	26660.00	42.50	68.20	-25.70	34.33	8.17	Average	100	117	6	26660.00	56.69	88.20	-31.51	48.52	8.17	Peak	100	117
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13330.00	44.12	54.00	-9.88	38.24	5.88	Average	100	152																																																																																										
2	13330.00	57.25	74.00	-16.75	51.37	5.88	Peak	100	152																																																																																										
3	19995.00	39.31	54.00	-14.69	37.92	1.39	Average	100	208																																																																																										
4	19995.00	52.96	74.00	-21.04	51.57	1.39	Peak	100	208																																																																																										
5	26660.00	42.50	68.20	-25.70	34.33	8.17	Average	100	117																																																																																										
6	26660.00	56.69	88.20	-31.51	48.52	8.17	Peak	100	117																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

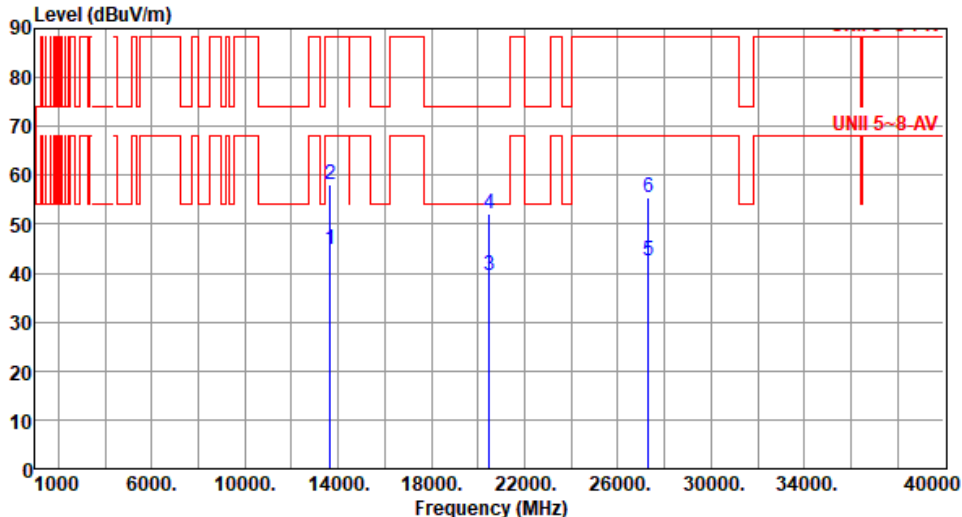


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13650.00</td><td>44.99</td><td>68.20</td><td>-23.21</td><td>38.75</td><td>6.24</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>2</td><td>13650.00</td><td>58.16</td><td>88.20</td><td>-30.04</td><td>51.92</td><td>6.24</td><td>Peak</td><td>100</td><td>174</td></tr><tr><td>3</td><td>20475.00</td><td>39.50</td><td>54.00</td><td>-14.50</td><td>37.57</td><td>1.93</td><td>Average</td><td>100</td><td>351</td></tr><tr><td>4</td><td>20475.00</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>50.12</td><td>1.93</td><td>Peak</td><td>100</td><td>351</td></tr><tr><td>5</td><td>27300.00</td><td>42.66</td><td>68.20</td><td>-25.54</td><td>34.70</td><td>7.96</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>6</td><td>27300.00</td><td>55.51</td><td>88.20</td><td>-32.69</td><td>47.55</td><td>7.96</td><td>Peak</td><td>100</td><td>15</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13650.00	44.99	68.20	-23.21	38.75	6.24	Average	100	174	2	13650.00	58.16	88.20	-30.04	51.92	6.24	Peak	100	174	3	20475.00	39.50	54.00	-14.50	37.57	1.93	Average	100	351	4	20475.00	52.05	74.00	-21.95	50.12	1.93	Peak	100	351	5	27300.00	42.66	68.20	-25.54	34.70	7.96	Average	100	15	6	27300.00	55.51	88.20	-32.69	47.55	7.96	Peak	100	15
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13650.00	44.99	68.20	-23.21	38.75	6.24	Average	100	174																																																																
2	13650.00	58.16	88.20	-30.04	51.92	6.24	Peak	100	174																																																																
3	20475.00	39.50	54.00	-14.50	37.57	1.93	Average	100	351																																																																
4	20475.00	52.05	74.00	-21.95	50.12	1.93	Peak	100	351																																																																
5	27300.00	42.66	68.20	-25.54	34.70	7.96	Average	100	15																																																																
6	27300.00	55.51	88.20	-32.69	47.55	7.96	Peak	100	15																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6825																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																			
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13650.00</td><td>44.72</td><td>68.20</td><td>-23.48</td><td>38.48</td><td>6.24</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>2</td><td>13650.00</td><td>58.16</td><td>88.20</td><td>-30.04</td><td>51.92</td><td>6.24</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>3</td><td>20475.00</td><td>39.60</td><td>54.00</td><td>-14.40</td><td>37.67</td><td>1.93</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>20475.00</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>50.00</td><td>1.93</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>27300.00</td><td>42.60</td><td>68.20</td><td>-25.60</td><td>34.64</td><td>7.96</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>6</td><td>27300.00</td><td>55.60</td><td>88.20</td><td>-32.60</td><td>47.64</td><td>7.96</td><td>Peak</td><td>100</td><td>154</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	13650.00	44.72	68.20	-23.48	38.48	6.24	Average	100	135	2	13650.00	58.16	88.20	-30.04	51.92	6.24	Peak	100	135	3	20475.00	39.60	54.00	-14.40	37.67	1.93	Average	100	208	4	20475.00	51.93	74.00	-22.07	50.00	1.93	Peak	100	208	5	27300.00	42.60	68.20	-25.60	34.64	7.96	Average	100	154	6	27300.00	55.60	88.20	-32.60	47.64	7.96	Peak	100	154
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																										
		dBUV/m			dBUV			cm	deg																																																																																										
1	13650.00	44.72	68.20	-23.48	38.48	6.24	Average	100	135																																																																																										
2	13650.00	58.16	88.20	-30.04	51.92	6.24	Peak	100	135																																																																																										
3	20475.00	39.60	54.00	-14.40	37.67	1.93	Average	100	208																																																																																										
4	20475.00	51.93	74.00	-22.07	50.00	1.93	Peak	100	208																																																																																										
5	27300.00	42.60	68.20	-25.60	34.64	7.96	Average	100	154																																																																																										
6	27300.00	55.60	88.20	-32.60	47.64	7.96	Peak	100	154																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

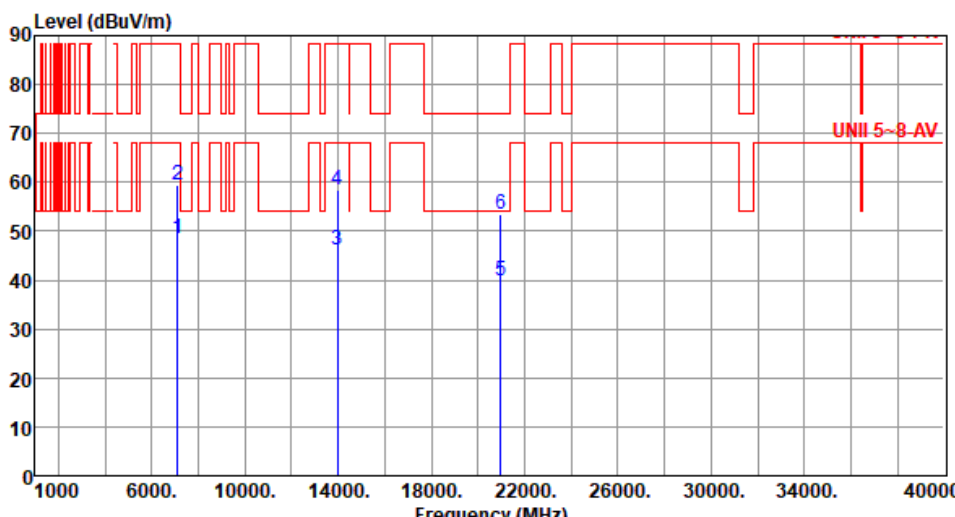

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.40</td><td>68.20</td><td>-19.80</td><td>43.62</td><td>4.78</td><td>Average</td><td>125</td><td>15</td></tr><tr><td>2</td><td>7125.00</td><td>59.46</td><td>88.20</td><td>-28.74</td><td>54.68</td><td>4.78</td><td>Peak</td><td>125</td><td>15</td></tr><tr><td>3</td><td>13970.00</td><td>46.14</td><td>68.20</td><td>-22.06</td><td>39.46</td><td>6.68</td><td>Average</td><td>100</td><td>276</td></tr><tr><td>4</td><td>13970.00</td><td>58.32</td><td>88.20</td><td>-29.88</td><td>51.64</td><td>6.68</td><td>Peak</td><td>100</td><td>276</td></tr><tr><td>5</td><td>20955.00</td><td>39.97</td><td>54.00</td><td>-14.03</td><td>37.12</td><td>2.85</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td>20955.00</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>50.46</td><td>2.85</td><td>Peak</td><td>100</td><td>105</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.40	68.20	-19.80	43.62	4.78	Average	125	15	2	7125.00	59.46	88.20	-28.74	54.68	4.78	Peak	125	15	3	13970.00	46.14	68.20	-22.06	39.46	6.68	Average	100	276	4	13970.00	58.32	88.20	-29.88	51.64	6.68	Peak	100	276	5	20955.00	39.97	54.00	-14.03	37.12	2.85	Average	100	105	6	20955.00	53.31	74.00	-20.69	50.46	2.85	Peak	100	105
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.40	68.20	-19.80	43.62	4.78	Average	125	15																																																																
2	7125.00	59.46	88.20	-28.74	54.68	4.78	Peak	125	15																																																																
3	13970.00	46.14	68.20	-22.06	39.46	6.68	Average	100	276																																																																
4	13970.00	58.32	88.20	-29.88	51.64	6.68	Peak	100	276																																																																
5	20955.00	39.97	54.00	-14.03	37.12	2.85	Average	100	105																																																																
6	20955.00	53.31	74.00	-20.69	50.46	2.85	Peak	100	105																																																																




Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6985																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>48.24</td><td>68.20</td><td>-19.96</td><td>43.46</td><td>4.78</td><td>Average</td><td>108</td><td>299</td></tr><tr><td>2</td><td>7125.00</td><td>59.04</td><td>88.20</td><td>-29.16</td><td>54.26</td><td>4.78</td><td>Peak</td><td>108</td><td>299</td></tr><tr><td>3</td><td>13970.00</td><td>46.26</td><td>68.20</td><td>-21.94</td><td>39.58</td><td>6.68</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>4</td><td>13970.00</td><td>58.25</td><td>88.20</td><td>-29.95</td><td>51.57</td><td>6.68</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>5</td><td>20955.00</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>36.98</td><td>2.85</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>20955.00</td><td>53.17</td><td>74.00</td><td>-20.83</td><td>50.32</td><td>2.85</td><td>Peak</td><td>100</td><td>118</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.24	68.20	-19.96	43.46	4.78	Average	108	299	2	7125.00	59.04	88.20	-29.16	54.26	4.78	Peak	108	299	3	13970.00	46.26	68.20	-21.94	39.58	6.68	Average	100	204	4	13970.00	58.25	88.20	-29.95	51.57	6.68	Peak	100	204	5	20955.00	39.83	54.00	-14.17	36.98	2.85	Average	100	118	6	20955.00	53.17	74.00	-20.83	50.32	2.85	Peak	100	118
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7125.00	48.24	68.20	-19.96	43.46	4.78	Average	108	299																																																																						
2	7125.00	59.04	88.20	-29.16	54.26	4.78	Peak	108	299																																																																						
3	13970.00	46.26	68.20	-21.94	39.58	6.68	Average	100	204																																																																						
4	13970.00	58.25	88.20	-29.95	51.57	6.68	Peak	100	204																																																																						
5	20955.00	39.83	54.00	-14.17	36.98	2.85	Average	100	118																																																																						
6	20955.00	53.17	74.00	-20.83	50.32	2.85	Peak	100	118																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

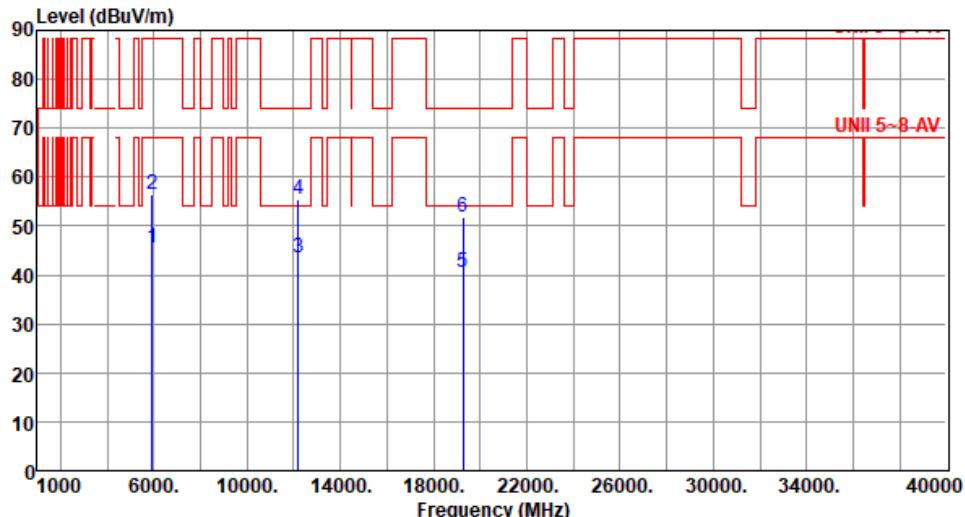


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>45.37</td><td>68.20</td><td>-22.83</td><td>44.18</td><td>1.19</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>5925.00</td><td>56.57</td><td>88.20</td><td>-31.63</td><td>55.38</td><td>1.19</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>12210.00</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>37.11</td><td>6.31</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>4</td><td>12210.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>49.27</td><td>6.31</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>5</td><td>19275.00</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>39.61</td><td>0.89</td><td>Average</td><td>100</td><td>331</td></tr><tr><td>6</td><td>19275.00</td><td>51.97</td><td>74.00</td><td>-22.03</td><td>51.08</td><td>0.89</td><td>Peak</td><td>100</td><td>331</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.37	68.20	-22.83	44.18	1.19	Average	100	204	2	5925.00	56.57	88.20	-31.63	55.38	1.19	Peak	100	204	3	12210.00	43.42	54.00	-10.58	37.11	6.31	Average	100	251	4	12210.00	55.58	74.00	-18.42	49.27	6.31	Peak	100	251	5	19275.00	40.50	54.00	-13.50	39.61	0.89	Average	100	331	6	19275.00	51.97	74.00	-22.03	51.08	0.89	Peak	100	331
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.37	68.20	-22.83	44.18	1.19	Average	100	204																																																																
2	5925.00	56.57	88.20	-31.63	55.38	1.19	Peak	100	204																																																																
3	12210.00	43.42	54.00	-10.58	37.11	6.31	Average	100	251																																																																
4	12210.00	55.58	74.00	-18.42	49.27	6.31	Peak	100	251																																																																
5	19275.00	40.50	54.00	-13.50	39.61	0.89	Average	100	331																																																																
6	19275.00	51.97	74.00	-22.03	51.08	0.89	Peak	100	331																																																																




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			

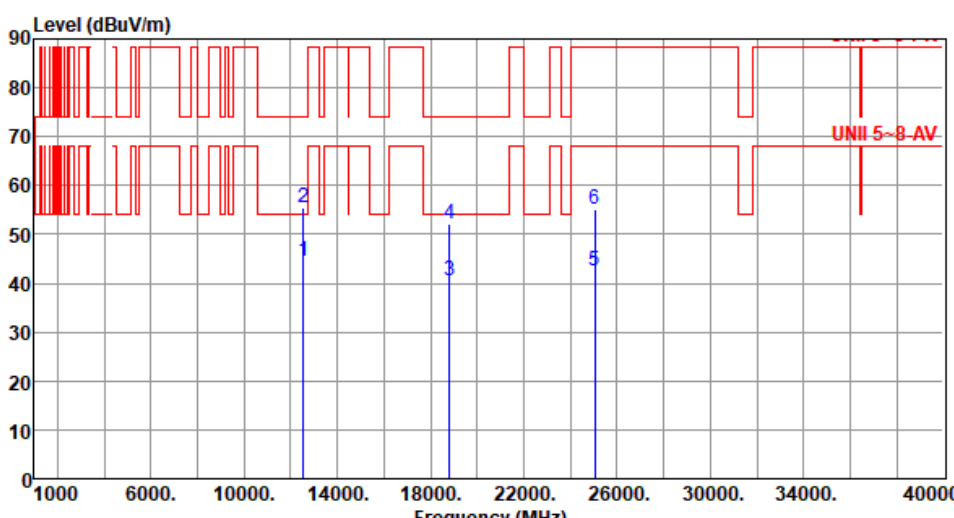


Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6265																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12530.00</td><td>44.54</td><td>54.00</td><td>-9.46</td><td>38.65</td><td>5.89</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>12530.00</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>49.73</td><td>5.89</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>18795.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>39.87</td><td>0.81</td><td>Average</td><td>100</td><td>266</td></tr><tr><td>4</td><td>18795.00</td><td>52.14</td><td>74.00</td><td>-21.86</td><td>51.33</td><td>0.81</td><td>Peak</td><td>100</td><td>266</td></tr><tr><td>5</td><td>25060.00</td><td>42.48</td><td>68.20</td><td>-25.72</td><td>34.97</td><td>7.51</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>6</td><td>25060.00</td><td>55.21</td><td>88.20</td><td>-32.99</td><td>47.70</td><td>7.51</td><td>Peak</td><td>100</td><td>109</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	12530.00	44.54	54.00	-9.46	38.65	5.89	Average	100	251	2	12530.00	55.62	74.00	-18.38	49.73	5.89	Peak	100	251	3	18795.00	40.68	54.00	-13.32	39.87	0.81	Average	100	266	4	18795.00	52.14	74.00	-21.86	51.33	0.81	Peak	100	266	5	25060.00	42.48	68.20	-25.72	34.97	7.51	Average	100	109	6	25060.00	55.21	88.20	-32.99	47.70	7.51	Peak	100	109
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	12530.00	44.54	54.00	-9.46	38.65	5.89	Average	100	251																																																																																										
2	12530.00	55.62	74.00	-18.38	49.73	5.89	Peak	100	251																																																																																										
3	18795.00	40.68	54.00	-13.32	39.87	0.81	Average	100	266																																																																																										
4	18795.00	52.14	74.00	-21.86	51.33	0.81	Peak	100	266																																																																																										
5	25060.00	42.48	68.20	-25.72	34.97	7.51	Average	100	109																																																																																										
6	25060.00	55.21	88.20	-32.99	47.70	7.51	Peak	100	109																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

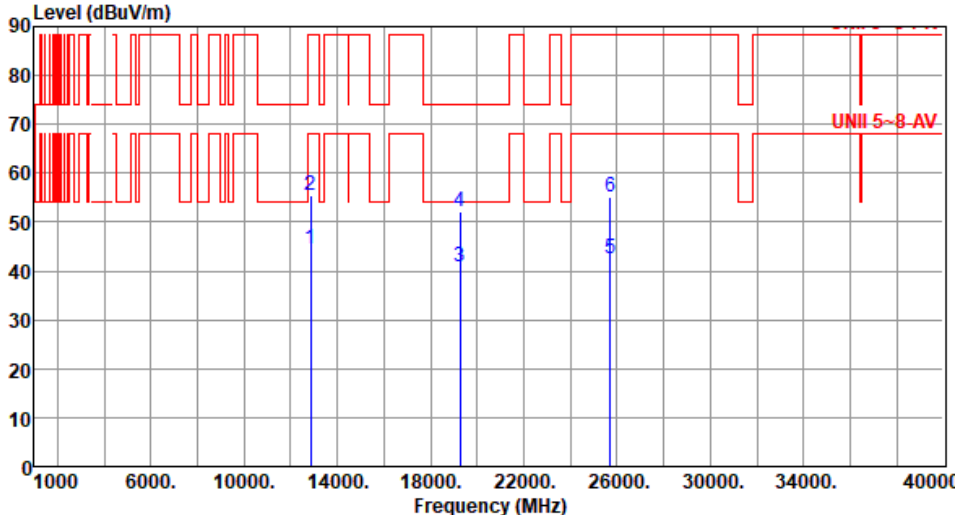

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12850.00</td><td>44.36</td><td>68.20</td><td>-23.84</td><td>38.00</td><td>6.36</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>2</td><td>12850.00</td><td>55.42</td><td>88.20</td><td>-32.78</td><td>49.06</td><td>6.36</td><td>Peak</td><td>100</td><td>165</td></tr><tr><td>3</td><td>19275.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>40.07</td><td>0.89</td><td>Average</td><td>100</td><td>235</td></tr><tr><td>4</td><td>19275.00</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>51.15</td><td>0.89</td><td>Peak</td><td>100</td><td>235</td></tr><tr><td>5</td><td>25700.00</td><td>42.54</td><td>68.20</td><td>-25.66</td><td>35.14</td><td>7.40</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>6</td><td>25700.00</td><td>55.26</td><td>88.20</td><td>-32.94</td><td>47.86</td><td>7.40</td><td>Peak</td><td>100</td><td>110</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12850.00	44.36	68.20	-23.84	38.00	6.36	Average	100	165	2	12850.00	55.42	88.20	-32.78	49.06	6.36	Peak	100	165	3	19275.00	40.96	54.00	-13.04	40.07	0.89	Average	100	235	4	19275.00	52.04	74.00	-21.96	51.15	0.89	Peak	100	235	5	25700.00	42.54	68.20	-25.66	35.14	7.40	Average	100	110	6	25700.00	55.26	88.20	-32.94	47.86	7.40	Peak	100	110
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12850.00	44.36	68.20	-23.84	38.00	6.36	Average	100	165																																																																
2	12850.00	55.42	88.20	-32.78	49.06	6.36	Peak	100	165																																																																
3	19275.00	40.96	54.00	-13.04	40.07	0.89	Average	100	235																																																																
4	19275.00	52.04	74.00	-21.96	51.15	0.89	Peak	100	235																																																																
5	25700.00	42.54	68.20	-25.66	35.14	7.40	Average	100	110																																																																
6	25700.00	55.26	88.20	-32.94	47.86	7.40	Peak	100	110																																																																

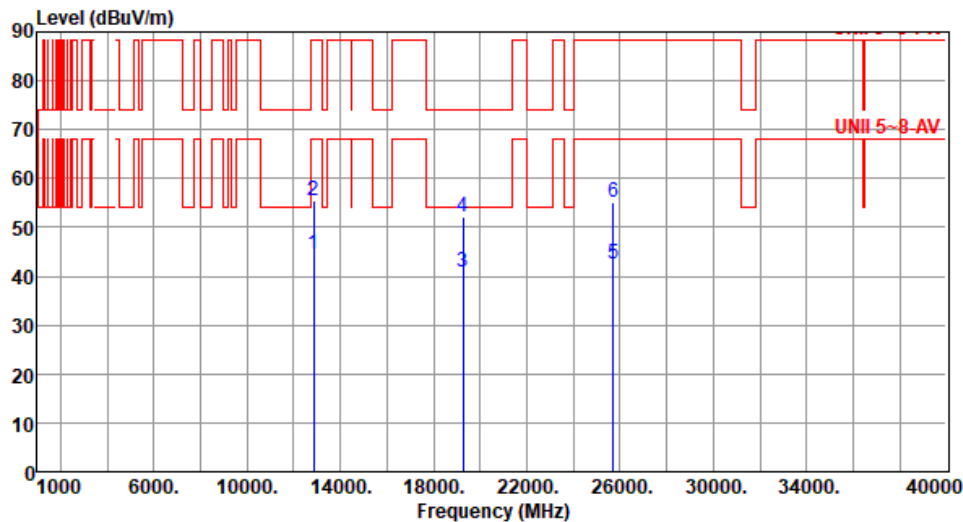

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12850.00</td><td>44.38</td><td>68.20</td><td>-23.82</td><td>38.02</td><td>6.36</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>2</td><td>12850.00</td><td>55.46</td><td>88.20</td><td>-32.74</td><td>49.10</td><td>6.36</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>3</td><td>19275.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>39.80</td><td>0.89</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>4</td><td>19275.00</td><td>52.13</td><td>74.00</td><td>-21.87</td><td>51.24</td><td>0.89</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>5</td><td>25700.00</td><td>42.35</td><td>68.20</td><td>-25.85</td><td>34.95</td><td>7.40</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>6</td><td>25700.00</td><td>55.09</td><td>88.20</td><td>-33.11</td><td>47.69</td><td>7.40</td><td>Peak</td><td>100</td><td>114</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12850.00	44.38	68.20	-23.82	38.02	6.36	Average	100	259	2	12850.00	55.46	88.20	-32.74	49.10	6.36	Peak	100	259	3	19275.00	40.69	54.00	-13.31	39.80	0.89	Average	100	264	4	19275.00	52.13	74.00	-21.87	51.24	0.89	Peak	100	264	5	25700.00	42.35	68.20	-25.85	34.95	7.40	Average	100	114	6	25700.00	55.09	88.20	-33.11	47.69	7.40	Peak	100	114
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12850.00	44.38	68.20	-23.82	38.02	6.36	Average	100	259																																																																
2	12850.00	55.46	88.20	-32.74	49.10	6.36	Peak	100	259																																																																
3	19275.00	40.69	54.00	-13.31	39.80	0.89	Average	100	264																																																																
4	19275.00	52.13	74.00	-21.87	51.24	0.89	Peak	100	264																																																																
5	25700.00	42.35	68.20	-25.85	34.95	7.40	Average	100	114																																																																
6	25700.00	55.09	88.20	-33.11	47.69	7.40	Peak	100	114																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13170.00</td><td>44.41</td><td>68.20</td><td>-23.79</td><td>38.46</td><td>5.95</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>2</td><td>13170.00</td><td>55.50</td><td>88.20</td><td>-32.70</td><td>49.55</td><td>5.95</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>3</td><td>19755.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>39.68</td><td>1.20</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>4</td><td>19755.00</td><td>51.98</td><td>74.00</td><td>-22.02</td><td>50.78</td><td>1.20</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>5</td><td>26340.00</td><td>42.44</td><td>68.20</td><td>-25.76</td><td>34.65</td><td>7.79</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>26340.00</td><td>55.18</td><td>88.20</td><td>-33.02</td><td>47.39</td><td>7.79</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13170.00	44.41	68.20	-23.79	38.46	5.95	Average	100	173	2	13170.00	55.50	88.20	-32.70	49.55	5.95	Peak	100	173	3	19755.00	40.88	54.00	-13.12	39.68	1.20	Average	100	242	4	19755.00	51.98	74.00	-22.02	50.78	1.20	Peak	100	242	5	26340.00	42.44	68.20	-25.76	34.65	7.79	Average	100	108	6	26340.00	55.18	88.20	-33.02	47.39	7.79	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13170.00	44.41	68.20	-23.79	38.46	5.95	Average	100	173																																																																
2	13170.00	55.50	88.20	-32.70	49.55	5.95	Peak	100	173																																																																
3	19755.00	40.88	54.00	-13.12	39.68	1.20	Average	100	242																																																																
4	19755.00	51.98	74.00	-22.02	50.78	1.20	Peak	100	242																																																																
5	26340.00	42.44	68.20	-25.76	34.65	7.79	Average	100	108																																																																
6	26340.00	55.18	88.20	-33.02	47.39	7.79	Peak	100	108																																																																



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13490.00</td><td>44.52</td><td>68.20</td><td>-23.68</td><td>38.32</td><td>6.20</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>2</td><td>13490.00</td><td>55.61</td><td>88.20</td><td>-32.59</td><td>49.41</td><td>6.20</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>3</td><td>20235.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>39.38</td><td>1.57</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>4</td><td>20235.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>50.59</td><td>1.57</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>5</td><td>26980.00</td><td>42.46</td><td>68.20</td><td>-25.74</td><td>34.53</td><td>7.93</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>6</td><td>26980.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>47.31</td><td>7.93</td><td>Peak</td><td>100</td><td>112</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13490.00	44.52	68.20	-23.68	38.32	6.20	Average	100	175	2	13490.00	55.61	88.20	-32.59	49.41	6.20	Peak	100	175	3	20235.00	40.95	54.00	-13.05	39.38	1.57	Average	100	248	4	20235.00	52.16	74.00	-21.84	50.59	1.57	Peak	100	248	5	26980.00	42.46	68.20	-25.74	34.53	7.93	Average	100	112	6	26980.00	55.24	88.20	-32.96	47.31	7.93	Peak	100	112
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13490.00	44.52	68.20	-23.68	38.32	6.20	Average	100	175																																																																
2	13490.00	55.61	88.20	-32.59	49.41	6.20	Peak	100	175																																																																
3	20235.00	40.95	54.00	-13.05	39.38	1.57	Average	100	248																																																																
4	20235.00	52.16	74.00	-21.84	50.59	1.57	Peak	100	248																																																																
5	26980.00	42.46	68.20	-25.74	34.53	7.93	Average	100	112																																																																
6	26980.00	55.24	88.20	-32.96	47.31	7.93	Peak	100	112																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13490.00</td><td>44.58</td><td>68.20</td><td>-23.62</td><td>38.38</td><td>6.20</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>2</td><td>13490.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>49.44</td><td>6.20</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>3</td><td>20235.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>39.14</td><td>1.57</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>4</td><td>20235.00</td><td>52.15</td><td>74.00</td><td>-21.85</td><td>50.58</td><td>1.57</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>5</td><td>26980.00</td><td>42.54</td><td>68.20</td><td>-25.66</td><td>34.61</td><td>7.93</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>26980.00</td><td>55.28</td><td>88.20</td><td>-32.92</td><td>47.35</td><td>7.93</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13490.00	44.58	68.20	-23.62	38.38	6.20	Average	100	259	2	13490.00	55.64	88.20	-32.56	49.44	6.20	Peak	100	259	3	20235.00	40.71	54.00	-13.29	39.14	1.57	Average	100	264	4	20235.00	52.15	74.00	-21.85	50.58	1.57	Peak	100	264	5	26980.00	42.54	68.20	-25.66	34.61	7.93	Average	100	108	6	26980.00	55.28	88.20	-32.92	47.35	7.93	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13490.00	44.58	68.20	-23.62	38.38	6.20	Average	100	259																																																																
2	13490.00	55.64	88.20	-32.56	49.44	6.20	Peak	100	259																																																																
3	20235.00	40.71	54.00	-13.29	39.14	1.57	Average	100	264																																																																
4	20235.00	52.15	74.00	-21.85	50.58	1.57	Peak	100	264																																																																
5	26980.00	42.54	68.20	-25.66	34.61	7.93	Average	100	108																																																																
6	26980.00	55.28	88.20	-32.92	47.35	7.93	Peak	100	108																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

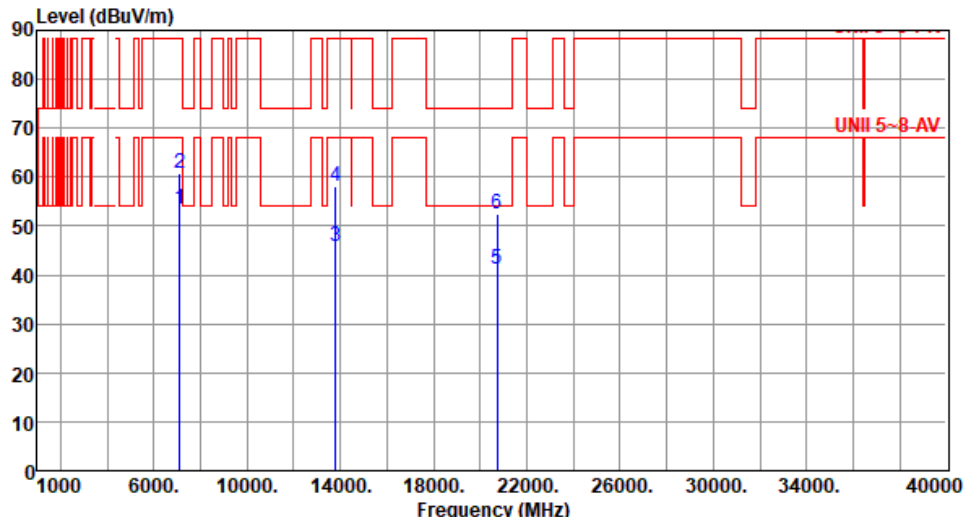

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	53.50	68.20	-14.70	48.72	4.78	Average	140	19
2	7125.00	60.62	88.20	-27.58	55.84	4.78	Peak	140	19
3	13810.00	45.84	68.20	-22.36	39.53	6.31	Average	100	123
4	13810.00	57.98	88.20	-30.22	51.67	6.31	Peak	100	123
5	20715.00	41.06	54.00	-12.94	38.80	2.26	Average	100	217
6	20715.00	52.40	74.00	-21.60	50.14	2.26	Peak	100	217
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

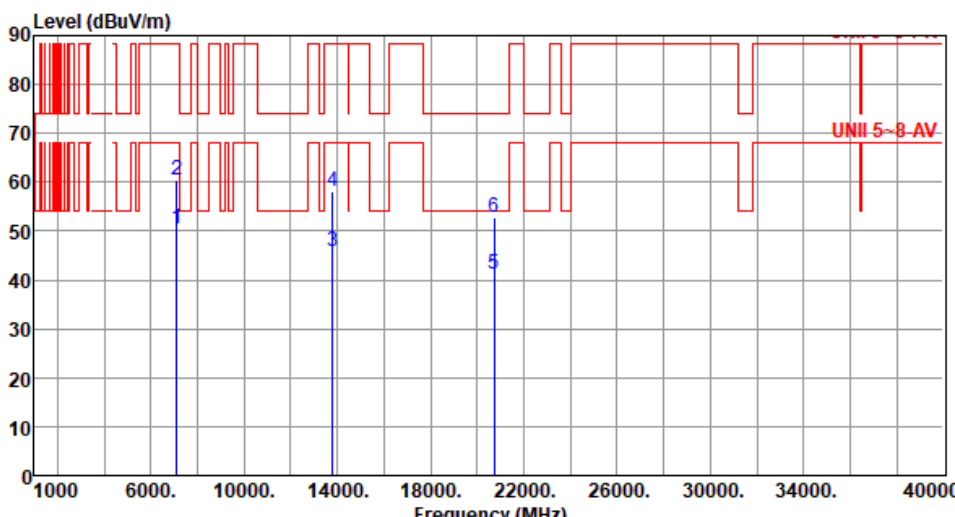

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>50.60</td><td>68.20</td><td>-17.60</td><td>45.82</td><td>4.78</td><td>Average</td><td>100</td><td>302</td></tr><tr><td>2</td><td>7125.00</td><td>60.46</td><td>88.20</td><td>-27.74</td><td>55.68</td><td>4.78</td><td>Peak</td><td>100</td><td>302</td></tr><tr><td>3</td><td>13810.00</td><td>45.94</td><td>68.20</td><td>-22.26</td><td>39.63</td><td>6.31</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>4</td><td>13810.00</td><td>58.07</td><td>88.20</td><td>-30.13</td><td>51.76</td><td>6.31</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>5</td><td>20715.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>38.82</td><td>2.26</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>6</td><td>20715.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>50.47</td><td>2.26</td><td>Peak</td><td>100</td><td>173</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	50.60	68.20	-17.60	45.82	4.78	Average	100	302	2	7125.00	60.46	88.20	-27.74	55.68	4.78	Peak	100	302	3	13810.00	45.94	68.20	-22.26	39.63	6.31	Average	100	271	4	13810.00	58.07	88.20	-30.13	51.76	6.31	Peak	100	271	5	20715.00	41.08	54.00	-12.92	38.82	2.26	Average	100	173	6	20715.00	52.73	74.00	-21.27	50.47	2.26	Peak	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	50.60	68.20	-17.60	45.82	4.78	Average	100	302																																																																
2	7125.00	60.46	88.20	-27.74	55.68	4.78	Peak	100	302																																																																
3	13810.00	45.94	68.20	-22.26	39.63	6.31	Average	100	271																																																																
4	13810.00	58.07	88.20	-30.13	51.76	6.31	Peak	100	271																																																																
5	20715.00	41.08	54.00	-12.92	38.82	2.26	Average	100	173																																																																
6	20715.00	52.73	74.00	-21.27	50.47	2.26	Peak	100	173																																																																

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	5.96099G	-12.35	5.925G	-62.28	-52.35	-9.93	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	5.96249G	-13.15	5.9903G	-62.48	-53.15	-9.33	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	5.97879G	-11.23	6.0392G	-60.23	-51.23	-9.00	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.02216G	-6.23	6.1454G	-59.18	-46.23	-12.95	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.3402G	-2.92	6.0954G	-51.55	-42.92	-8.63	2
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.3114G	0.20	5.5514G	-48.37	-39.80	-8.57	2
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.48249G	-12.24	6.4433G	-62.81	-52.24	-10.57	3
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.46991G	-12.70	6.428G	-62.87	-52.70	-10.17	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.45G	-11.12	6.5252G	-60.73	-51.12	-9.61	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.49617G	-5.69	6.305G	-58.44	-45.69	-12.75	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.52818G	-3.00	6.1842G	-51.72	-43.00	-8.72	1
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.433G	0.08	6.2618G	-22.23	-19.95	-2.28	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.87G	-12.95	6.9169G	-61.96	-52.95	-9.01	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.86601G	-13.36	6.9175G	-61.73	-53.36	-8.37	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.8808G	-11.10	6.9484G	-59.60	-51.10	-8.50	1
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.74944G	-6.43	6.625G	-58.38	-46.43	-11.95	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.63143G	-3.54	6.9522G	-51.51	-43.54	-7.97	1
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.7722G	0.94	6.137G	-42.13	-39.06	-3.07	4
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	7.0112G	-13.32	6.9813G	-61.59	-53.32	-8.27	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	7.0188G	-13.97	6.9826G	-61.82	-53.97	-7.85	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99881G	-11.80	6.94G	-59.73	-51.80	-7.93	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99583G	-6.58	6.9042G	-58.31	-46.58	-11.73	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.989G	-1.95	6.7402G	-50.18	-41.95	-8.23	2



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9528G	-12.30	5.9146G	-62.38	-52.30	-10.08	1
5955MHz	Pass	5.9575G	-11.56	5.9089G	-62.45	-51.56	-10.89	2
5955MHz	Pass	5.9506G	-11.84	5.9972G	-62.38	-51.84	-10.54	3
5955MHz	Pass	5.96099G	-12.35	5.925G	-62.28	-52.35	-9.93	4
6175MHz	Pass	6.1725G	-11.85	6.1329G	-62.86	-51.85	-11.01	1
6175MHz	Pass	6.1775G	-12.06	6.1377G	-62.92	-52.06	-10.86	2
6175MHz	Pass	6.18249G	-11.68	6.2147G	-63.00	-51.68	-11.32	3
6175MHz	Pass	6.16721G	-12.04	6.1348G	-62.94	-52.04	-10.90	4
6415MHz	Pass	6.4125G	-11.55	6.4474G	-62.82	-51.55	-11.27	1
6415MHz	Pass	6.4178G	-12.17	6.4521G	-62.74	-52.17	-10.57	2
6415MHz	Pass	6.40721G	-11.11	6.4607G	-62.71	-51.11	-11.60	3
6415MHz	Pass	6.42249G	-11.28	6.3746G	-62.93	-51.28	-11.65	4
6435MHz	Pass	6.44249G	-11.92	6.4657G	-62.88	-51.92	-10.96	1
6435MHz	Pass	6.42811G	-11.61	6.3948G	-62.90	-51.61	-11.29	2
6435MHz	Pass	6.4384G	-12.11	6.4653G	-62.90	-52.11	-10.79	3
6435MHz	Pass	6.4325G	-11.60	6.4719G	-62.96	-51.60	-11.36	4
6475MHz	Pass	6.4775G	-12.31	6.5165G	-62.96	-52.31	-10.65	1
6475MHz	Pass	6.46811G	-12.14	6.4298G	-62.99	-52.14	-10.85	2
6475MHz	Pass	6.48249G	-12.24	6.4433G	-62.81	-52.24	-10.57	3
6475MHz	Pass	6.48249G	-10.64	6.4444G	-62.73	-50.64	-12.09	4
6515MHz	Pass	6.5109G	-12.20	6.4807G	-62.98	-52.20	-10.78	1
6515MHz	Pass	6.5125G	-11.92	6.4781G	-62.92	-51.92	-11.00	2
6515MHz	Pass	6.5172G	-11.95	6.475G	-62.91	-51.95	-10.96	3
6515MHz	Pass	6.50721G	-11.63	6.4755G	-62.79	-51.63	-11.16	4
6535MHz	Pass	6.5325G	-11.96	6.4888G	-63.02	-51.96	-11.06	1
6535MHz	Pass	6.5328G	-11.85	6.5014G	-62.75	-51.85	-10.90	2
6535MHz	Pass	6.5375G	-11.95	6.4931G	-62.90	-51.95	-10.95	3
6535MHz	Pass	6.5381G	-11.93	6.4971G	-62.85	-51.93	-10.92	4
6715MHz	Pass	6.7103G	-12.89	6.7624G	-62.56	-52.89	-9.67	1
6715MHz	Pass	6.70751G	-12.23	6.7648G	-62.48	-52.23	-10.25	2
6715MHz	Pass	6.7172G	-13.06	6.7519G	-62.55	-53.06	-9.49	3
6715MHz	Pass	6.7175G	-12.08	6.7626G	-62.45	-52.08	-10.37	4
6855MHz	Pass	6.8525G	-12.99	6.8914G	-62.10	-52.99	-9.11	1
6855MHz	Pass	6.8525G	-12.19	6.8917G	-62.13	-52.19	-9.94	2
6855MHz	Pass	6.8584G	-12.56	6.8866G	-62.08	-52.56	-9.52	3
6855MHz	Pass	6.84811G	-12.21	6.8966G	-62.10	-52.21	-9.89	4
6875MHz Straddles UNII-7 and UNII-8	Pass	6.87G	-12.95	6.9169G	-61.96	-52.95	-9.01	1
6875MHz Straddles UNII-7 and UNII-8	Pass	6.8728G	-12.17	6.9113G	-61.91	-52.17	-9.74	2
6875MHz Straddles UNII-7 and UNII-8	Pass	6.8781G	-12.67	6.9246G	-61.82	-52.67	-9.15	3
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86811G	-12.32	6.9167G	-61.86	-52.32	-9.54	4
6895MHz	Pass	6.8975G	-12.78	6.9349G	-61.74	-52.78	-8.96	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.8928G	-11.74	6.935G	-61.59	-51.74	-9.85	2
6895MHz	Pass	6.8981G	-12.23	6.9347G	-61.75	-52.23	-9.52	3
6895MHz	Pass	6.88871G	-12.13	6.9297G	-61.68	-52.13	-9.55	4
7015MHz	Pass	7.0125G	-12.17	6.9777G	-61.68	-52.17	-9.51	1
7015MHz	Pass	7.02G	-12.52	6.9758G	-61.73	-52.52	-9.21	2
7015MHz	Pass	7.02249G	-12.54	6.9742G	-61.65	-52.54	-9.11	3
7015MHz	Pass	7.0112G	-13.32	6.9813G	-61.59	-53.32	-8.27	4
7095MHz	Pass	7.0909G	-12.18	7.0618G	-65.52	-52.18	-13.34	1
7095MHz	Pass	7.0981G	-11.85	7.0514G	-65.37	-51.85	-13.52	2
7095MHz	Pass	7.08721G	-12.13	7.0588G	-65.44	-52.13	-13.31	3
7095MHz	Pass	7.08721G	-12.32	7.0493G	-65.44	-52.32	-13.12	4
7115MHz	Pass	7.12089G	-11.00	7.08G	-65.42	-51.00	-14.42	1
7115MHz	Pass	7.12089G	-11.29	7.0796G	-65.52	-51.29	-14.23	2
7115MHz	Pass	7.1175G	-11.87	7.0655G	-65.54	-51.87	-13.67	3
7115MHz	Pass	7.1112G	-11.82	7.0685G	-65.50	-51.82	-13.68	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96249G	-13.15	5.9903G	-62.48	-53.15	-9.33	1
5955MHz	Pass	5.96039G	-12.48	5.9126G	-62.43	-52.48	-9.95	2
5955MHz	Pass	5.9587G	-12.15	5.921G	-62.53	-52.15	-10.38	3
5955MHz	Pass	5.9565G	-12.38	5.9856G	-62.28	-52.38	-9.90	4
6175MHz	Pass	6.1725G	-12.44	6.2159G	-62.94	-52.44	-10.50	1
6175MHz	Pass	6.17G	-12.56	6.1336G	-62.86	-52.56	-10.30	2
6175MHz	Pass	6.18379G	-11.96	6.1331G	-62.97	-51.96	-11.01	3
6175MHz	Pass	6.1742G	-12.14	6.2061G	-62.97	-52.14	-10.83	4
6415MHz	Pass	6.40881G	-12.43	6.4542G	-62.74	-52.43	-10.31	1
6415MHz	Pass	6.4138G	-12.12	6.4578G	-62.74	-52.12	-10.62	2
6415MHz	Pass	6.4101G	-11.68	6.4512G	-62.87	-51.68	-11.19	3
6415MHz	Pass	6.40721G	-12.00	6.4561G	-62.89	-52.00	-10.89	4
6435MHz	Pass	6.43G	-12.48	6.478G	-63.02	-52.48	-10.54	1
6435MHz	Pass	6.4325G	-11.92	6.4761G	-62.98	-51.92	-11.06	2
6435MHz	Pass	6.4338G	-12.38	6.4679G	-62.86	-52.38	-10.48	3
6435MHz	Pass	6.44119G	-11.30	6.4675G	-62.68	-51.30	-11.38	4
6475MHz	Pass	6.46741G	-12.63	6.5231G	-62.87	-52.63	-10.24	1
6475MHz	Pass	6.46991G	-12.70	6.428G	-62.87	-52.70	-10.17	2
6475MHz	Pass	6.4705G	-12.61	6.4404G	-62.89	-52.61	-10.28	3
6475MHz	Pass	6.4776G	-11.99	6.5124G	-62.95	-51.99	-10.96	4
6515MHz	Pass	6.52169G	-12.23	6.4816G	-62.70	-52.23	-10.47	1
6515MHz	Pass	6.5161G	-12.54	6.4741G	-62.87	-52.54	-10.33	2
6515MHz	Pass	6.52379G	-12.50	6.4719G	-62.90	-52.50	-10.40	3
6515MHz	Pass	6.5161G	-11.73	6.4687G	-62.92	-51.73	-11.19	4
6535MHz	Pass	6.52881G	-12.23	6.4986G	-62.71	-52.23	-10.48	1
6535MHz	Pass	6.52621G	-12.08	6.5019G	-62.68	-52.08	-10.60	2
6535MHz	Pass	6.54259G	-12.55	6.4988G	-62.81	-52.55	-10.26	3
6535MHz	Pass	6.52761G	-11.63	6.5652G	-62.95	-51.63	-11.32	4
6715MHz	Pass	6.7113G	-13.13	6.7571G	-62.54	-53.13	-9.41	1
6715MHz	Pass	6.7117G	-12.38	6.7628G	-62.26	-52.38	-9.88	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6715MHz	Pass	6.7174G	-12.95	6.7637G	-62.49	-52.95	-9.54	3
6715MHz	Pass	6.70641G	-11.16	6.7636G	-62.40	-51.16	-11.24	4
6855MHz	Pass	6.85G	-13.00	6.9008G	-62.05	-53.00	-9.05	1
6855MHz	Pass	6.8503G	-12.26	6.9036G	-62.03	-52.26	-9.77	2
6855MHz	Pass	6.84881G	-12.41	6.8882G	-62.01	-52.41	-9.60	3
6855MHz	Pass	6.84601G	-11.87	6.8116G	-62.05	-51.87	-10.18	4
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86601G	-13.36	6.9175G	-61.73	-53.36	-8.37	1
6875MHz Straddles UNII-7 and UNII-8	Pass	6.8712G	-12.23	6.9105G	-61.85	-52.23	-9.62	2
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86751G	-12.84	6.9212G	-61.79	-52.84	-8.95	3
6875MHz Straddles UNII-7 and UNII-8	Pass	6.8703G	-12.44	6.9233G	-61.75	-52.44	-9.31	4
6895MHz	Pass	6.90379G	-13.18	6.9371G	-61.62	-53.18	-8.44	1
6895MHz	Pass	6.88631G	-11.97	6.9447G	-61.63	-51.97	-9.66	2
6895MHz	Pass	6.88901G	-12.95	6.9344G	-61.70	-52.95	-8.75	3
6895MHz	Pass	6.88671G	-12.14	6.9386G	-61.61	-52.14	-9.47	4
7015MHz	Pass	7.02239G	-12.75	6.9703G	-61.59	-52.75	-8.84	1
7015MHz	Pass	7.02239G	-12.69	6.9662G	-61.69	-52.69	-9.00	2
7015MHz	Pass	7.0111G	-12.60	6.9657G	-61.67	-52.60	-9.07	3
7015MHz	Pass	7.0188G	-13.97	6.9826G	-61.82	-53.97	-7.85	4
7095MHz	Pass	7.08741G	-11.98	7.0583G	-65.30	-51.98	-13.32	1
7095MHz	Pass	7.0936G	-11.77	7.0594G	-65.17	-51.77	-13.40	2
7095MHz	Pass	7.08741G	-11.94	7.0578G	-65.32	-51.94	-13.38	3
7095MHz	Pass	7.0979G	-12.36	7.0615G	-65.40	-52.36	-13.04	4
7115MHz	Pass	7.12059G	-11.89	7.0685G	-65.31	-51.89	-13.42	1
7115MHz	Pass	7.12119G	-11.35	7.075G	-65.34	-51.35	-13.99	2
7115MHz	Pass	7.12399G	-12.40	7.0692G	-65.55	-52.40	-13.15	3
7115MHz	Pass	7.12099G	-12.07	7.0848G	-65.51	-52.07	-13.44	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97879G	-11.23	6.0392G	-60.23	-51.23	-9.00	1
5965MHz	Pass	5.97979G	-10.63	6.0524G	-60.19	-50.63	-9.56	2
5965MHz	Pass	5.9688G	-10.24	6.0512G	-60.13	-50.24	-9.89	3
5965MHz	Pass	5.964G	-10.01	5.8808G	-60.28	-50.01	-10.27	4
6165MHz	Pass	6.169G	-10.53	6.0714G	-60.74	-50.53	-10.21	1
6165MHz	Pass	6.1612G	-10.77	6.0974G	-60.78	-50.77	-10.01	2
6165MHz	Pass	6.15501G	-9.65	6.073G	-60.67	-49.65	-11.02	3
6165MHz	Pass	6.1676G	-10.47	6.0726G	-60.82	-50.47	-10.35	4
6405MHz	Pass	6.41599G	-10.19	6.4688G	-60.87	-50.19	-10.68	1
6405MHz	Pass	6.39881G	-10.22	6.4748G	-60.82	-50.22	-10.60	2
6405MHz	Pass	6.39021G	-9.33	6.474G	-60.80	-49.33	-11.47	3
6405MHz	Pass	6.39241G	-10.06	6.4746G	-60.80	-50.06	-10.74	4
6445MHz	Pass	6.45G	-11.12	6.5252G	-60.73	-51.12	-9.61	1
6445MHz	Pass	6.4424G	-10.68	6.5082G	-60.88	-50.68	-10.20	2
6445MHz	Pass	6.4488G	-10.94	6.5188G	-61.03	-50.94	-10.09	3
6445MHz	Pass	6.43641G	-10.47	6.509G	-60.97	-50.47	-10.50	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6485MHz	Pass	6.4828G	-10.35	6.405G	-60.97	-50.35	-10.62	1
6485MHz	Pass	6.46982G	-10.08	6.424G	-60.98	-50.08	-10.90	2
6485MHz	Pass	6.47121G	-10.50	6.4006G	-61.03	-50.50	-10.53	3
6485MHz	Pass	6.47381G	-9.63	6.4218G	-60.99	-49.63	-11.36	4
6525MHz Straddles UNII-6 and UNII-7	Pass	6.52G	-10.96	6.605G	-60.75	-50.96	-9.79	1
6525MHz Straddles UNII-6 and UNII-7	Pass	6.51761G	-10.82	6.6164G	-60.72	-50.82	-9.90	2
6525MHz Straddles UNII-6 and UNII-7	Pass	6.53379G	-10.84	6.625G	-60.67	-50.84	-9.83	3
6525MHz Straddles UNII-6 and UNII-7	Pass	6.521G	-9.89	6.6206G	-60.68	-49.89	-10.79	4
6565MHz	Pass	6.55681G	-10.65	6.6308G	-60.61	-50.65	-9.96	1
6565MHz	Pass	6.57099G	-10.34	6.626G	-60.59	-50.34	-10.25	2
6565MHz	Pass	6.55381G	-10.76	6.6302G	-60.62	-50.76	-9.86	3
6565MHz	Pass	6.55921G	-10.04	6.6328G	-60.58	-50.04	-10.54	4
6725MHz	Pass	6.71001G	-11.51	6.793G	-60.27	-51.51	-8.76	1
6725MHz	Pass	6.7204G	-10.81	6.7894G	-60.19	-50.81	-9.38	2
6725MHz	Pass	6.729G	-11.43	6.7976G	-60.26	-51.43	-8.83	3
6725MHz	Pass	6.71301G	-10.38	6.791G	-60.20	-50.38	-9.82	4
6845MHz	Pass	6.82962G	-11.07	6.9386G	-59.64	-51.07	-8.57	1
6845MHz	Pass	6.8488G	-9.87	6.9332G	-59.69	-49.87	-9.82	2
6845MHz	Pass	6.83141G	-10.68	6.9382G	-59.67	-50.68	-8.99	3
6845MHz	Pass	6.83641G	-9.98	6.9274G	-59.77	-49.98	-9.79	4
6885MHz Straddles UNII-7 and UNII-8	Pass	6.8808G	-11.10	6.9484G	-59.60	-51.10	-8.50	1
6885MHz Straddles UNII-7 and UNII-8	Pass	6.87101G	-9.84	6.9558G	-59.72	-49.84	-9.88	2
6885MHz Straddles UNII-7 and UNII-8	Pass	6.86882G	-10.85	6.945G	-59.75	-50.85	-8.90	3
6885MHz Straddles UNII-7 and UNII-8	Pass	6.86862G	-9.90	6.9466G	-59.63	-49.90	-9.73	4
6925MHz	Pass	6.90742G	-11.00	6.985G	-59.79	-51.00	-8.79	1
6925MHz	Pass	6.93G	-9.76	6.9884G	-59.88	-49.76	-10.12	2
6925MHz	Pass	6.92G	-10.44	6.9872G	-60.01	-50.44	-9.57	3
6925MHz	Pass	6.9202G	-10.63	6.9886G	-60.02	-50.63	-9.39	4
7005MHz	Pass	6.99661G	-10.76	6.9344G	-59.73	-50.76	-8.97	1
7005MHz	Pass	6.99261G	-10.84	6.9238G	-59.71	-50.84	-8.87	2
7005MHz	Pass	6.99121G	-10.97	6.9432G	-59.64	-50.97	-8.67	3
7005MHz	Pass	6.99881G	-11.80	6.94G	-59.73	-51.80	-7.93	4
7085MHz	Pass	7.07321G	-11.06	7.0132G	-64.49	-51.06	-13.43	1
7085MHz	Pass	7.07361G	-10.90	7.0224G	-64.23	-50.90	-13.33	2
7085MHz	Pass	7.09259G	-11.16	7.0238G	-64.31	-51.16	-13.15	3
7085MHz	Pass	7.06742G	-11.25	7.023G	-64.50	-51.25	-13.25	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5985MHz	Pass	6.02216G	-6.23	6.1454G	-59.18	-46.23	-12.95	1
5985MHz	Pass	6.02016G	-5.60	6.109G	-59.48	-45.60	-13.88	2
5985MHz	Pass	5.96902G	-5.31	6.105G	-59.48	-45.31	-14.17	3

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5985MHz	Pass	5.9822G	-5.07	6.1058G	-58.89	-45.07	-13.82	4
6145MHz	Pass	6.17977G	-5.31	5.985G	-59.24	-45.31	-13.93	1
6145MHz	Pass	6.17217G	-5.38	6.0242G	-59.38	-45.38	-14.00	2
6145MHz	Pass	6.1422G	-4.88	6.0226G	-59.42	-44.88	-14.54	3
6145MHz	Pass	6.1478G	-4.73	6.025G	-59.40	-44.73	-14.67	4
6385MHz	Pass	6.42016G	-5.18	6.2246G	-58.49	-45.18	-13.31	1
6385MHz	Pass	6.3826G	-5.47	6.2574G	-59.89	-45.47	-14.42	2
6385MHz	Pass	6.41377G	-4.62	6.2034G	-58.90	-44.62	-14.28	3
6385MHz	Pass	6.37621G	-5.42	6.2202G	-59.14	-45.42	-13.72	4
6465MHz	Pass	6.49617G	-5.69	6.305G	-58.44	-45.69	-12.75	1
6465MHz	Pass	6.44902G	-5.54	6.3394G	-58.98	-45.54	-13.44	2
6465MHz	Pass	6.49377G	-5.63	6.3438G	-59.08	-45.63	-13.45	3
6465MHz	Pass	6.47419G	-5.63	6.3438G	-59.37	-45.63	-13.74	4
6545MHz Straddles UNII-6 and UNII-7	Pass	6.56138G	-6.03	6.385G	-59.46	-46.03	-13.43	1
6545MHz Straddles UNII-6 and UNII-7	Pass	6.51903G	-5.72	6.4134G	-58.85	-45.72	-13.13	2
6545MHz Straddles UNII-6 and UNII-7	Pass	6.50904G	-5.79	6.425G	-59.09	-45.79	-13.30	3
6545MHz Straddles UNII-6 and UNII-7	Pass	6.52902G	-4.96	6.4202G	-59.92	-44.96	-14.96	4
6625MHz	Pass	6.61141G	-6.20	6.465G	-59.27	-46.20	-13.07	1
6625MHz	Pass	6.64898G	-5.50	6.5022G	-59.49	-45.50	-13.99	2
6625MHz	Pass	6.61261G	-5.74	6.5026G	-59.55	-45.74	-13.81	3
6625MHz	Pass	6.61501G	-5.36	6.4794G	-58.93	-45.36	-13.57	4
6705MHz	Pass	6.67903G	-6.46	6.5446G	-58.55	-46.46	-12.09	1
6705MHz	Pass	6.72898G	-5.70	6.5078G	-59.10	-45.70	-13.40	2
6705MHz	Pass	6.67903G	-5.78	6.5082G	-59.29	-45.78	-13.51	3
6705MHz	Pass	6.67983G	-5.29	6.5186G	-59.17	-45.29	-13.88	4
6785MHz	Pass	6.74944G	-6.43	6.625G	-58.38	-46.43	-11.95	1
6785MHz	Pass	6.77901G	-5.49	6.6646G	-58.27	-45.49	-12.78	2
6785MHz	Pass	6.74904G	-5.47	6.647G	-58.92	-45.47	-13.45	3
6785MHz	Pass	6.75983G	-4.83	6.6446G	-58.61	-44.83	-13.78	4
6865MHz Straddles UNII-7 and UNII-8	Pass	6.84022G	-6.35	6.7046G	-58.82	-46.35	-12.47	1
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83023G	-5.33	6.7446G	-58.41	-45.33	-13.08	2
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83783G	-5.49	6.7434G	-58.48	-45.49	-12.99	3
6865MHz Straddles UNII-7 and UNII-8	Pass	6.85021G	-4.97	6.745G	-58.33	-44.97	-13.36	4
6945MHz	Pass	6.91463G	-6.27	6.785G	-58.40	-46.27	-12.13	1
6945MHz	Pass	6.97497G	-5.15	6.8182G	-58.10	-45.15	-12.95	2
6945MHz	Pass	6.91983G	-5.38	6.8222G	-58.19	-45.38	-12.81	3
6945MHz	Pass	6.93021G	-5.57	6.823G	-58.37	-45.57	-12.80	4
7025MHz	Pass	6.99383G	-5.84	6.865G	-58.10	-45.84	-12.26	1
7025MHz	Pass	6.99863G	-5.78	6.9046G	-58.08	-45.78	-12.30	2
7025MHz	Pass	6.99183G	-5.50	6.9022G	-58.14	-45.50	-12.64	3


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7025MHz	Pass	6.99583G	-6.58	6.9042G	-58.31	-46.58	-11.73	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6025MHz	Pass	6.07855G	-3.31	6.2714G	-52.53	-43.31	-9.22	1
6025MHz	Pass	6.09773G	-2.72	6.2754G	-52.45	-42.72	-9.73	2
6025MHz	Pass	6.07775G	-2.18	6.2738G	-52.39	-42.18	-10.21	3
6025MHz	Pass	6.06736G	-2.06	6.273G	-52.40	-42.06	-10.34	4
6185MHz	Pass	6.20178G	-3.12	5.9258G	-51.98	-43.12	-8.86	1
6185MHz	Pass	6.16742G	-2.78	5.9402G	-51.91	-42.78	-9.13	2
6185MHz	Pass	6.19779G	-2.19	5.9378G	-51.91	-42.19	-9.72	3
6185MHz	Pass	6.16902G	-2.46	5.9298G	-52.05	-42.46	-9.59	4
6345MHz	Pass	6.42012G	-2.38	6.0666G	-51.45	-42.38	-9.07	1
6345MHz	Pass	6.3402G	-2.92	6.0954G	-51.55	-42.92	-8.63	2
6345MHz	Pass	6.33941G	-2.63	6.0914G	-51.43	-42.63	-8.80	3
6345MHz	Pass	6.36978G	-2.98	6.0498G	-51.68	-42.98	-8.70	4
6505MHz Straddles UNII-6 and UNII-7	Pass	6.52818G	-3.00	6.1842G	-51.72	-43.00	-8.72	1
6505MHz Straddles UNII-6 and UNII-7	Pass	6.46984G	-2.85	6.221G	-51.82	-42.85	-8.97	2
6505MHz Straddles UNII-6 and UNII-7	Pass	6.49061G	-2.96	6.217G	-51.85	-42.96	-8.89	3
6505MHz Straddles UNII-6 and UNII-7	Pass	6.47383G	-2.46	6.7754G	-51.99	-42.46	-9.53	4
6665MHz	Pass	6.63143G	-3.54	6.9522G	-51.51	-43.54	-7.97	1
6665MHz	Pass	6.74092G	-3.11	6.957G	-51.50	-43.11	-8.39	2
6665MHz	Pass	6.69137G	-3.18	6.9482G	-51.44	-43.18	-8.26	3
6665MHz	Pass	6.58908G	-2.55	6.9434G	-51.47	-42.55	-8.92	4
6825MHz Straddles UNII-7and UNII-8	Pass	6.74828G	-3.46	6.5042G	-51.61	-43.46	-8.15	1
6825MHz Straddles UNII-7and UNII-8	Pass	6.80982G	-2.63	6.4882G	-51.70	-42.63	-9.07	2
6825MHz Straddles UNII-7and UNII-8	Pass	6.80822G	-2.59	6.4938G	-51.83	-42.59	-9.24	3
6825MHz Straddles UNII-7and UNII-8	Pass	6.77865G	-2.30	6.445G	-51.56	-42.30	-9.26	4
6985MHz	Pass	6.95143G	-3.12	6.7394G	-51.44	-43.12	-8.32	1
6985MHz	Pass	6.989G	-1.95	6.7402G	-50.18	-41.95	-8.23	2
6985MHz	Pass	6.95143G	-2.36	6.7338G	-51.12	-42.36	-8.76	3
6985MHz	Pass	6.93865G	-2.09	6.6458G	-50.42	-42.09	-8.33	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1338G	0.57	6.5946G	-48.54	-39.43	-9.11	1
6105MHz	Pass	6.1578G	0.83	5.5434G	-48.56	-39.17	-9.39	2
6105MHz	Pass	6.1306G	0.69	5.5354G	-48.53	-39.31	-9.22	3
6105MHz	Pass	6.0586G	1.04	5.561G	-48.54	-38.96	-9.58	4
6265MHz	Pass	6.2986G	1.25	5.5466G	-48.37	-38.75	-9.62	1
6265MHz	Pass	6.3114G	0.20	5.5514G	-48.37	-39.80	-8.57	2
6265MHz	Pass	6.3322G	0.87	5.5578G	-48.36	-39.13	-9.23	3
6265MHz	Pass	6.2922G	1.95	5.537G	-48.39	-38.05	-10.34	4

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.433G	0.08	6.2618G	-22.23	-19.95	-2.28	1
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.3898G	-0.47	6.5882G	-23.24	-20.50	-2.74	2
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.4522G	0.81	6.2618G	-22.01	-19.21	-2.80	3
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.3914G	0.70	6.2618G	-21.68	-19.33	-2.35	4
6585MHz Straddles UNII-6 and UNII-7	Pass	6.5978G	-0.10	5.9626G	-48.00	-40.10	-7.90	1
6585MHz Straddles UNII-6 and UNII-7	Pass	6.5498G	0.14	5.9578G	-47.45	-39.86	-7.59	2
6585MHz Straddles UNII-6 and UNII-7	Pass	6.5994G	-0.01	5.9642G	-46.62	-40.01	-6.61	3
6585MHz Straddles UNII-6 and UNII-7	Pass	6.457G	0.91	5.9834G	-48.15	-39.09	-9.06	4
6745MHz Straddles UNII-7and UNII-8	Pass	6.6922G	-0.69	6.2538G	-46.83	-40.69	-6.14	1
6745MHz Straddles UNII-7and UNII-8	Pass	6.721G	-0.13	5.953G	-46.64	-40.13	-6.51	2
6745MHz Straddles UNII-7and UNII-8	Pass	6.6954G	-0.93	5.9626G	-46.80	-40.93	-5.87	3
6745MHz Straddles UNII-7and UNII-8	Pass	6.5914G	0.54	6.257G	-46.85	-39.47	-7.38	4
6905MHz Straddles UNII-7and UNII-8	Pass	6.857G	-0.68	6.1626G	-46.28	-40.68	-5.60	1
6905MHz Straddles UNII-7and UNII-8	Pass	7.0122G	0.23	6.3498G	-45.61	-39.78	-5.83	2
6905MHz Straddles UNII-7and UNII-8	Pass	6.8906G	-0.34	6.3418G	-46.36	-40.34	-6.02	3
6905MHz Straddles UNII-7and UNII-8	Pass	6.7722G	0.94	6.137G	-42.13	-39.06	-3.07	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


5955MHz_TX

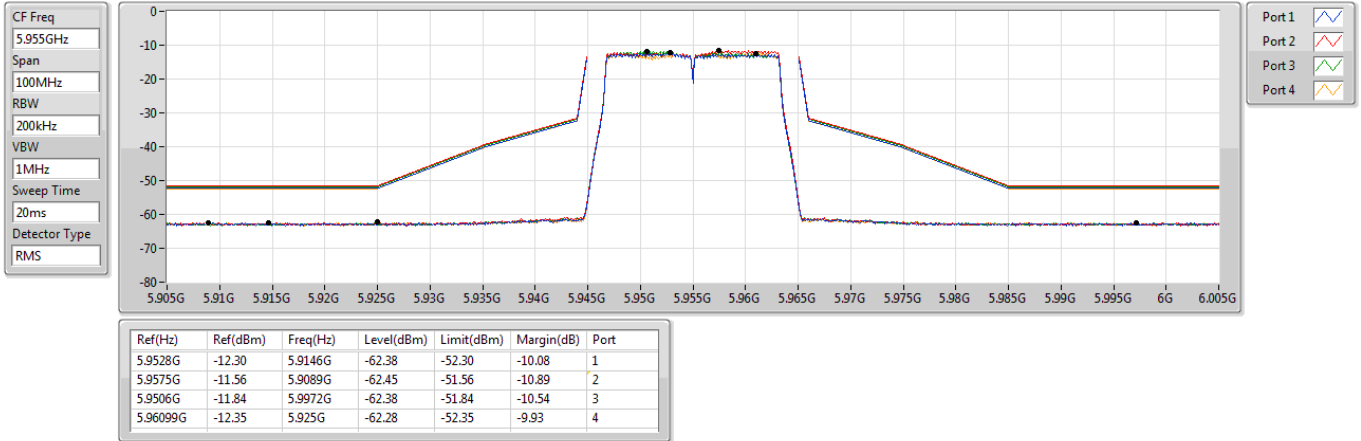

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6175MHz_TX

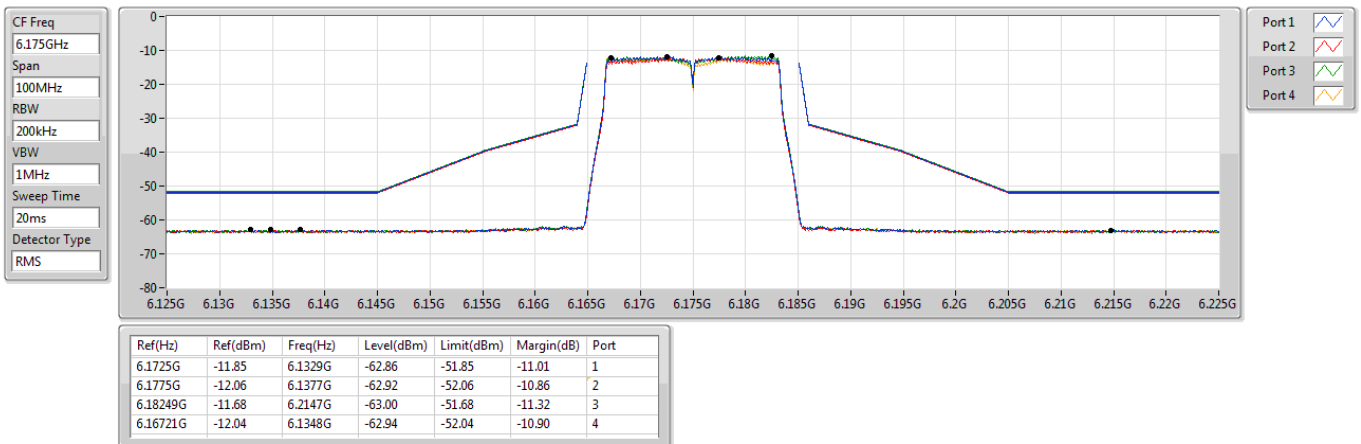

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK

6415MHz_TX

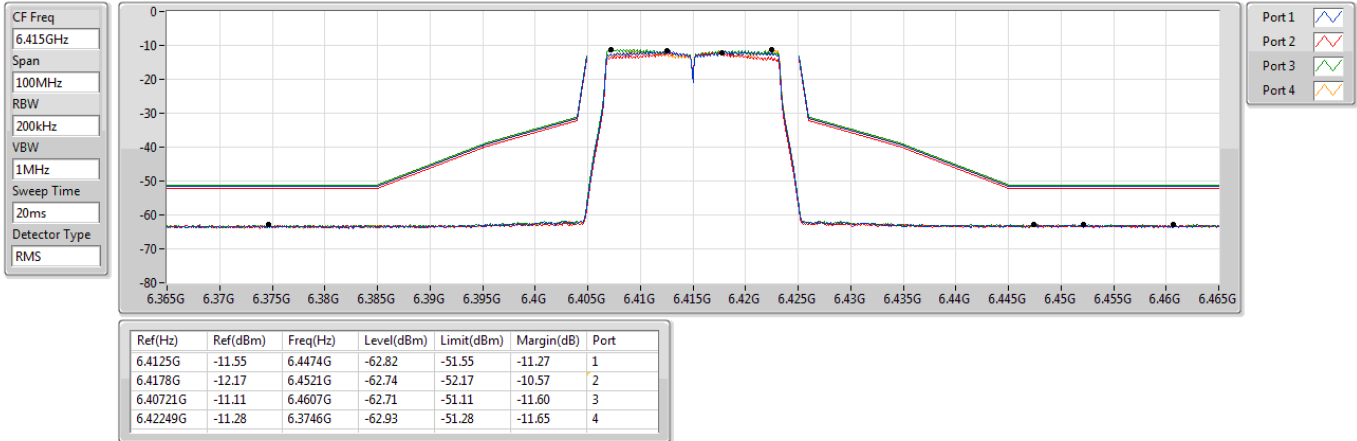

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK

6435MHz_TX

