

FCC TEST REPORT

Client Name : Shenzhen Intellirocks Tech. Co., Ltd.

Address : No.2901-2904, 3002, Block C, Section 1, Chuangzhi
Yuncheng Building, Liuxian Avenue, Xili Community, Xili
Street, Nanshan District, Shenzhen, Guangdong, China

Product Name : LED Bulb String Lights

Date : Jul. 13, 2021

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Maximum Peak Output Power Test.....	25
5.1. Test Standard and Limit.....	25
5.2. Test Setup.....	25
5.3. Test Procedure.....	25
5.4. Test Data.....	25
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	28
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	28
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28

TEST REPORT

Applicant : Shenzhen Intellirocks Tech. Co., Ltd.
Manufacturer : Shenzhen Intellirocks Tech. Co., Ltd.
Product Name : LED Bulb String Lights
Model No. : H7011, H7010
Trade Mark : Govee
Rating(s) : Input: DC24V, 1A(via adapter input: AC 100-240, 50/60Hz,0.8A; Output: DC 24V,1A)

Test Standard(s) : FCC Part15 Subpart C, Section 15.247

Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Jun. 08, 2021

Date of Test

Jun. 08~22, 2021

Prepared by

Ella Liang

(Ella Liang)

Reviewer

Kingkong Jin

(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Intellirocks Tech. Co., Ltd.
Address	:	No.2901-2904, 3002, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Manufacturer	:	Shenzhen Intellirocks Tech. Co., Ltd.
Address	:	No.2901-2904, 3002, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	LED Bulb String Lights	
Model No.	:	H7011, H7010 (Note: All samples are the same except the appearance, so we prepare “H7011” for test only.)	
Trade Mark	:	Govee	
Test Power Supply	:	AC 120V, 60Hz for adapter/ AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2402-2480MHz
		Transfer Rate:	1 Mbits/s
		Number of Channel:	40 Channels
		Modulation Type:	GFSK
		Antenna Type:	PCB Antenna
		Antenna Gain(Peak):	1.5 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH00	TX Only
Mode 2	CH19	
Mode 3	CH39	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps for radiated emission due to the highest RF output power.



1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.6. Description Of Test Setup

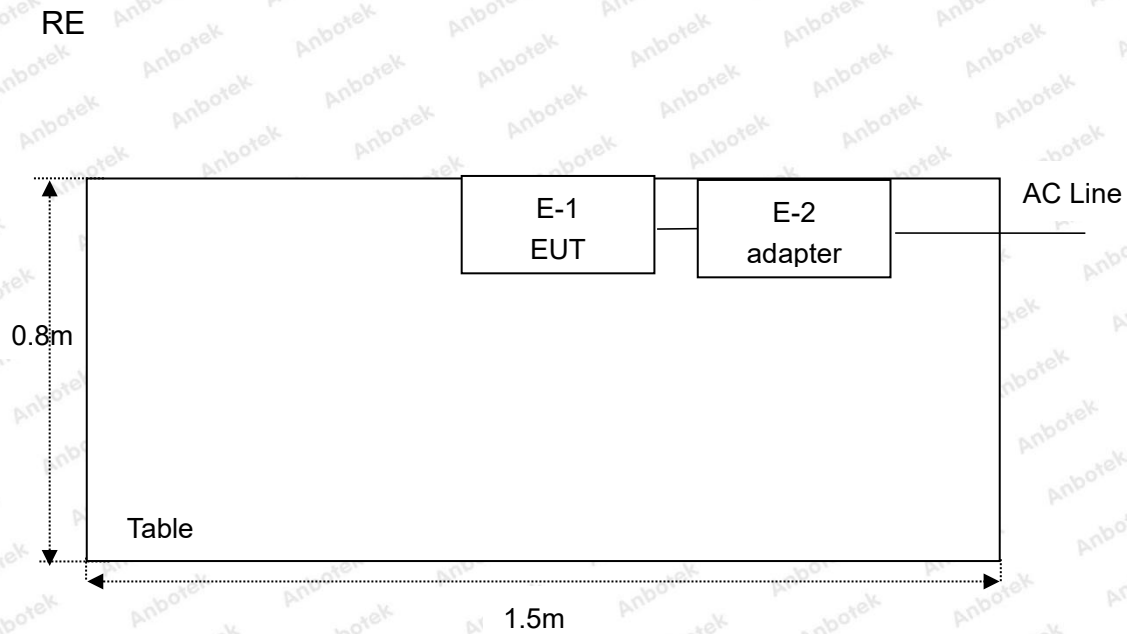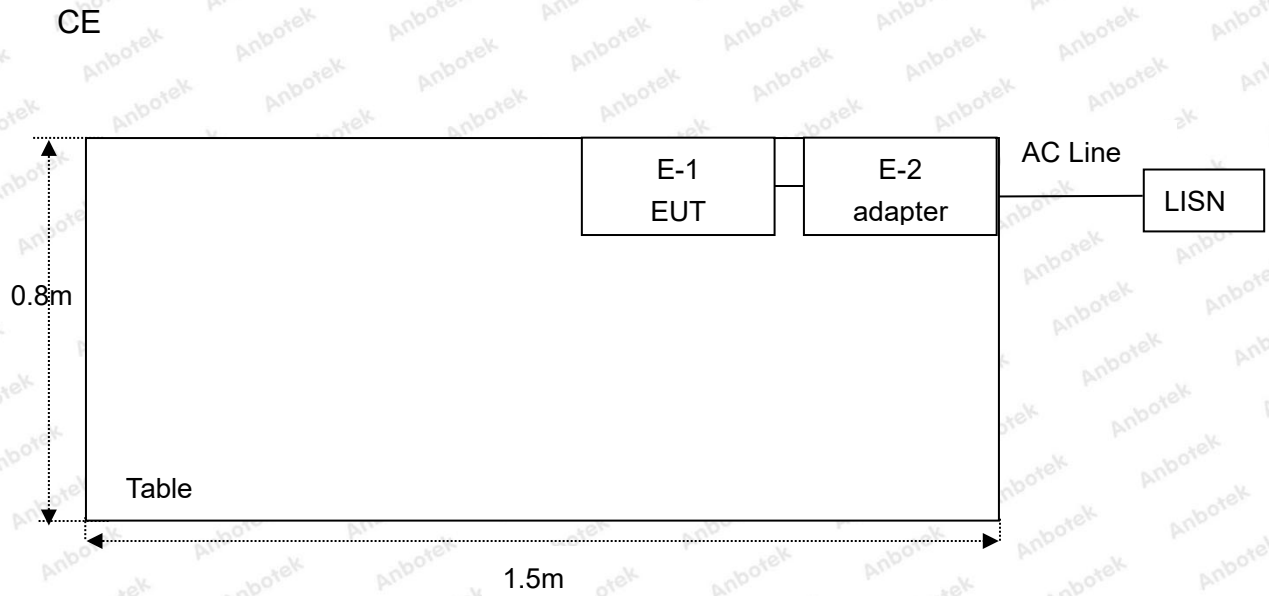

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

This is a Class II application of the device, the difference between the original device and current one described as following:

(1) Changing the adapter and the light board in the bulb.

Based on the change made to the device, the spurious emission test items were performed and the conducted power quotes the data of the original report 18220WC10044701.

3. Conducted Emission Test


3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

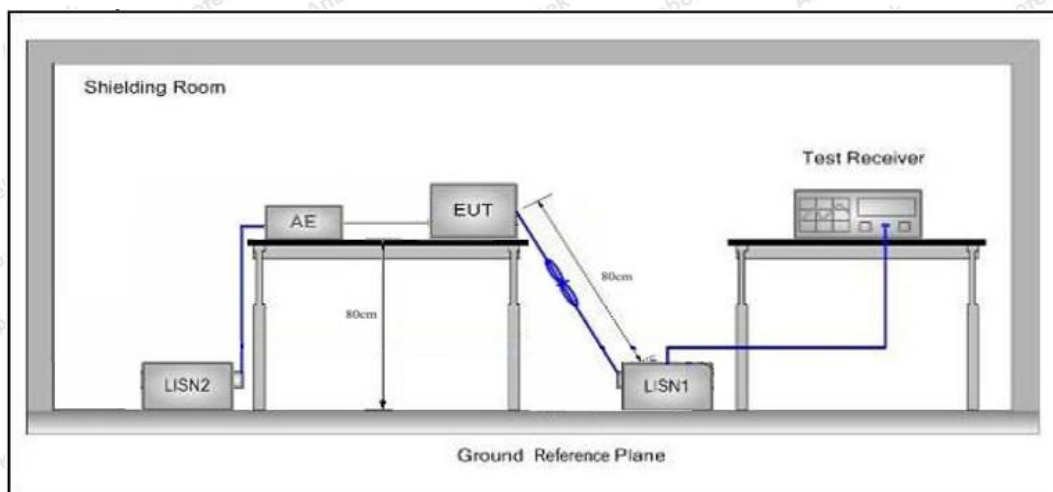

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, and found the “Low CH” which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz
 Comment: Live Line
 Tem.: 23.6°C Hum.: 48%

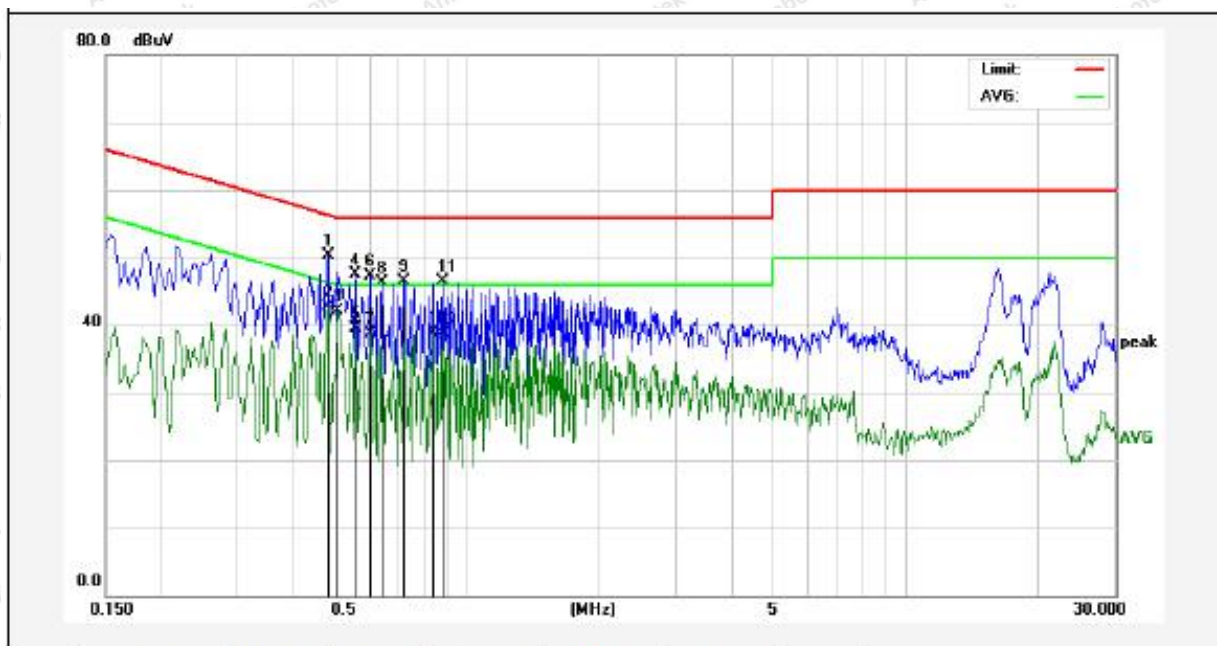

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4820	30.32	19.97	50.29	56.30	-6.01	QP	
2	0.4820	22.74	19.97	42.71	46.30	-3.59	AVG	
3	0.5100	22.14	19.98	42.12	46.00	-3.88	AVG	
4	0.5580	27.47	20.00	47.47	56.00	-8.53	QP	
5	0.5580	19.43	20.00	39.43	46.00	-6.57	AVG	
6	0.6020	27.38	20.01	47.39	56.00	-8.61	QP	
7	0.6020	18.75	20.01	38.76	46.00	-7.24	AVG	
8	0.6419	26.37	20.02	46.39	56.00	-9.61	QP	
9	0.7180	26.55	20.04	46.59	56.00	-9.41	QP	
10	0.8380	18.75	20.08	38.83	46.00	-7.17	AVG	
11	0.8820	26.38	20.09	46.47	56.00	-9.53	QP	
12	0.8820	18.61	20.09	38.70	46.00	-7.30	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz
 Comment: Neutral Line
 Tem.: 23.6°C Hum.: 48%

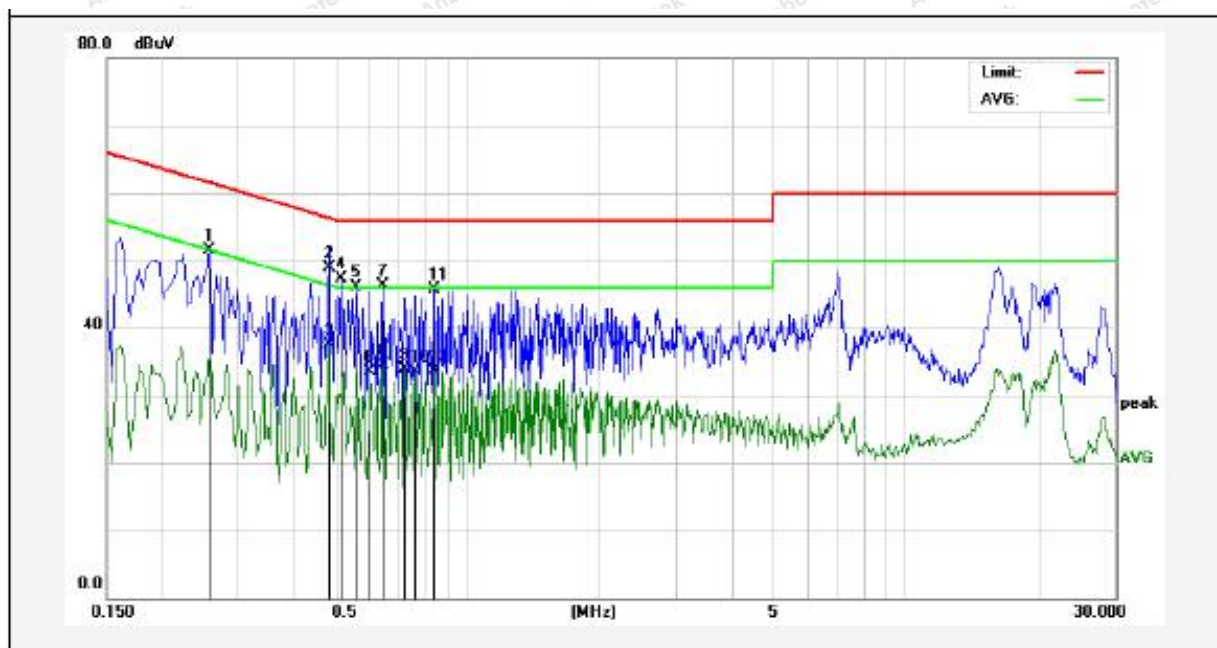

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2580	31.64	19.89	51.53	61.49	-9.96	QP	
2	0.4820	28.96	19.97	48.93	56.30	-7.37	QP	
3	0.4820	17.61	19.97	37.58	46.30	-8.72	AVG	
4	0.5140	27.32	19.98	47.30	56.00	-8.70	QP	
5	0.5580	26.19	20.00	46.19	56.00	-9.81	QP	
6	0.5980	13.59	20.01	33.60	46.00	-12.40	AVG	
7	0.6419	26.23	20.02	46.25	56.00	-9.75	QP	
8	0.6419	14.51	20.02	34.53	46.00	-11.47	AVG	
9	0.7180	13.92	20.04	33.96	46.00	-12.04	AVG	
10	0.7620	13.49	20.06	33.55	46.00	-12.45	AVG	
11	0.8380	25.68	20.08	45.76	56.00	-10.24	QP	
12	0.8380	13.55	20.08	33.63	46.00	-12.37	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz
Comment: Live Line
Tem.: 23.6°C Hum.: 48%

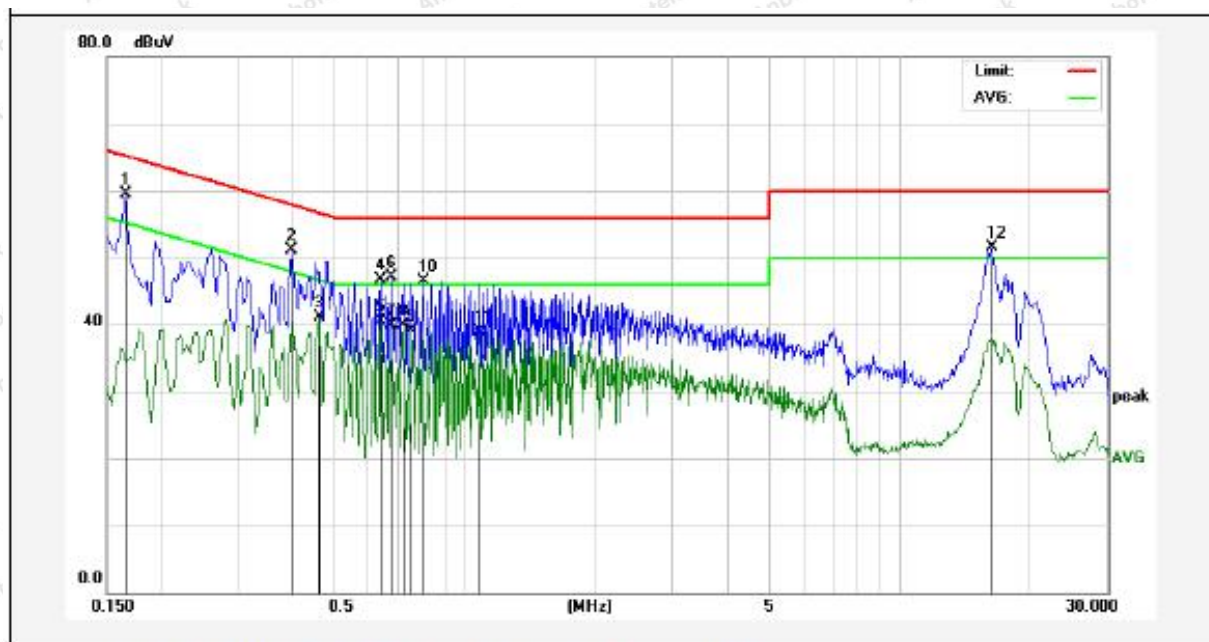

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1660	39.65	19.90	59.55	65.15	-5.60	QP	
2	0.3980	31.23	19.93	51.16	57.89	-6.73	QP	
3	0.4620	21.14	19.96	41.10	46.66	-5.56	AVG	
4	0.6419	26.73	20.02	46.75	56.00	-9.25	QP	
5	0.6419	20.47	20.02	40.49	46.00	-5.51	AVG	
6	0.6780	27.14	20.03	47.17	56.00	-8.83	QP	
7	0.6780	19.89	20.03	39.92	46.00	-6.08	AVG	
8	0.7220	19.79	20.05	39.84	46.00	-6.16	AVG	
9	0.7580	19.04	20.06	39.10	46.00	-6.90	AVG	
10	0.8020	26.48	20.07	46.55	56.00	-9.45	QP	
11	1.0820	18.88	20.12	39.00	46.00	-7.00	AVG	
12	16.2900	31.27	20.28	51.55	60.00	-8.45	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Tem.: 23.6°C Hum.: 48%

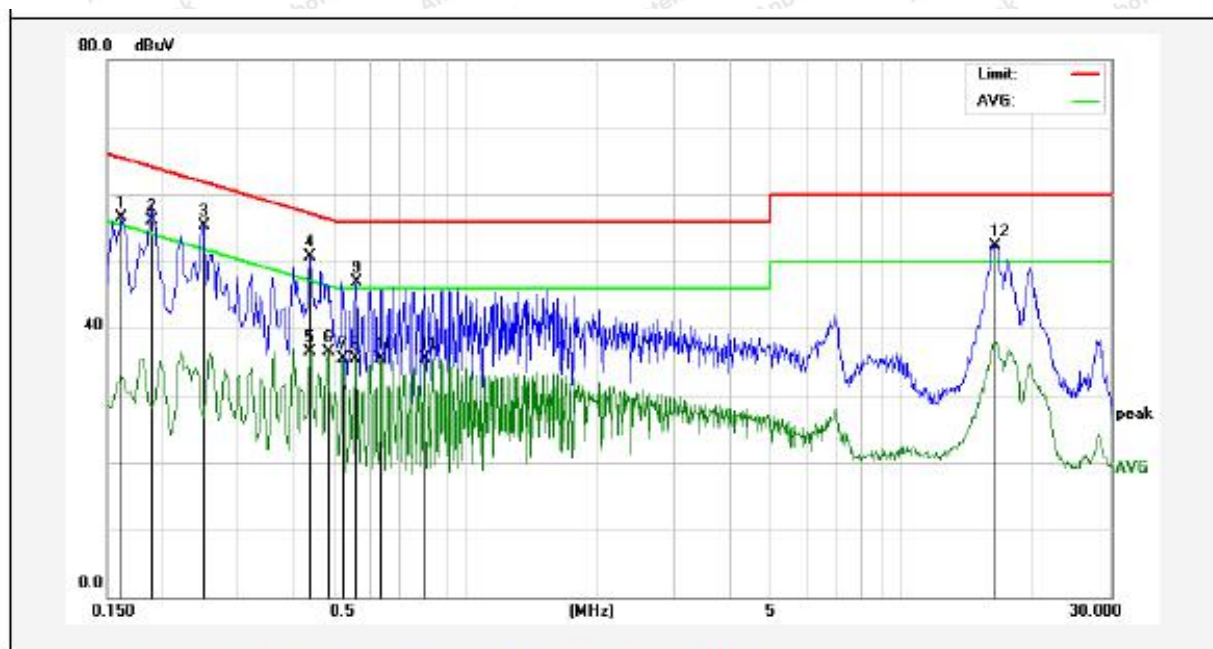

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	36.57	19.90	56.47	65.36	-8.89	QP	
2	0.1900	36.23	19.90	56.13	64.03	-7.90	QP	
3	0.2500	35.51	19.89	55.40	61.75	-6.35	QP	
4	0.4380	30.76	19.95	50.71	57.10	-6.39	QP	
5	0.4380	16.46	19.95	36.41	47.10	-10.69	AVG	
6	0.4820	16.52	19.97	36.49	46.30	-9.81	AVG	
7	0.5220	15.53	19.99	35.52	46.00	-10.48	AVG	
8	0.5580	15.49	20.00	35.49	46.00	-10.51	AVG	
9	0.5620	26.96	20.00	46.96	56.00	-9.04	QP	
10	0.6419	15.49	20.02	35.51	46.00	-10.49	AVG	
11	0.8020	15.48	20.07	35.55	46.00	-10.45	AVG	
12	16.3540	32.10	20.28	52.38	60.00	-7.62	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

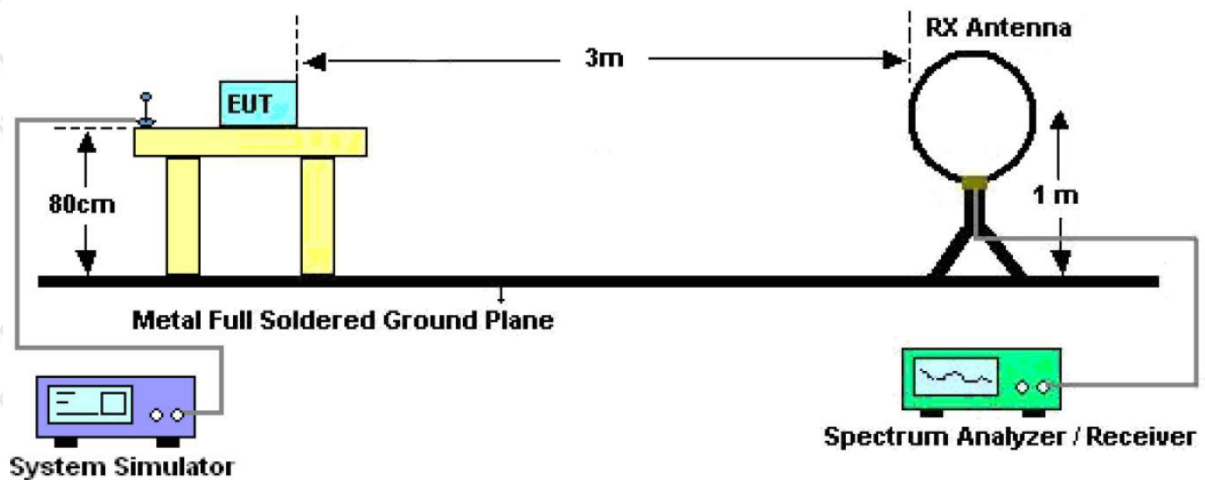


Figure 1. Below 30MHz

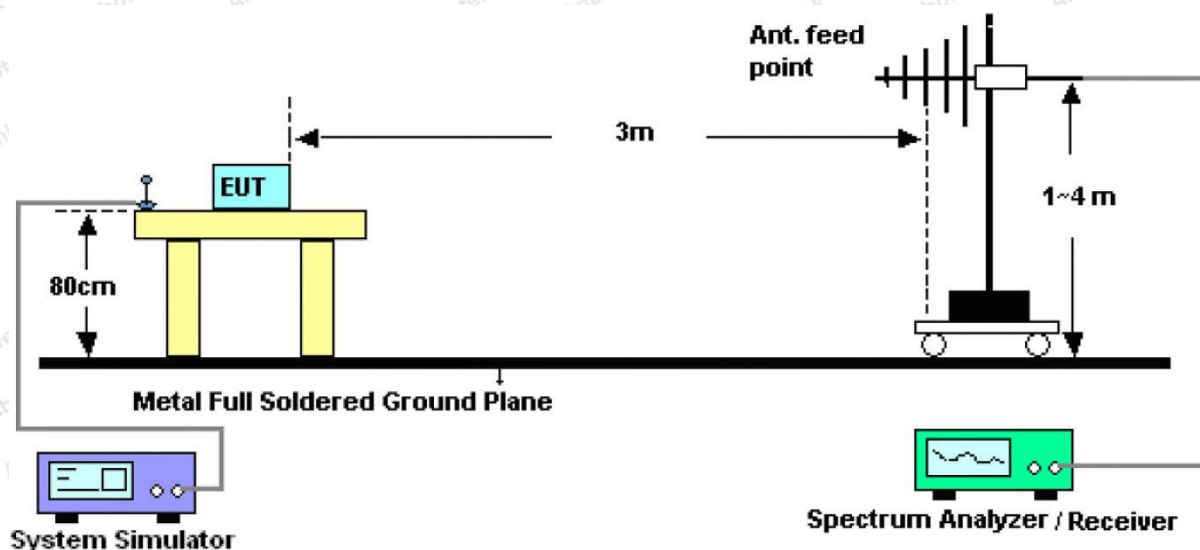


Figure 2. 30MHz to 1GHz

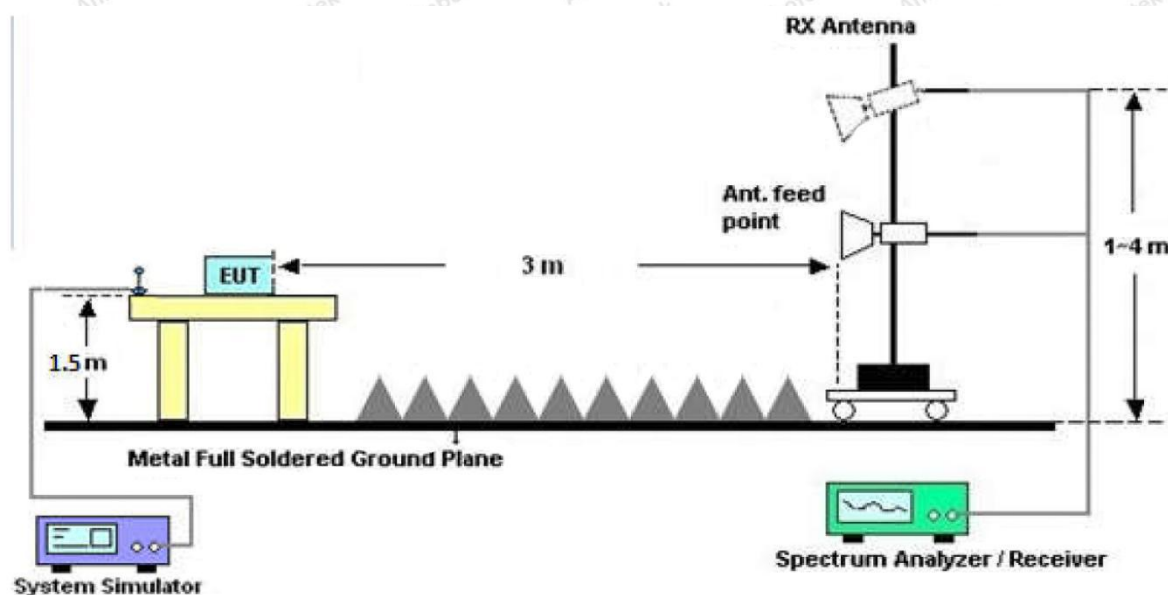


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, pre-scan all the modes, and found the "Low CH" (TX) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Test Results (30~1000MHz)

Test Mode: Mode 1

Power Source: AC 120V/60Hz

Polarization: Horizontal

Temp.(°C)/Hum.(%RH): 24.3°C Hum.: 46%

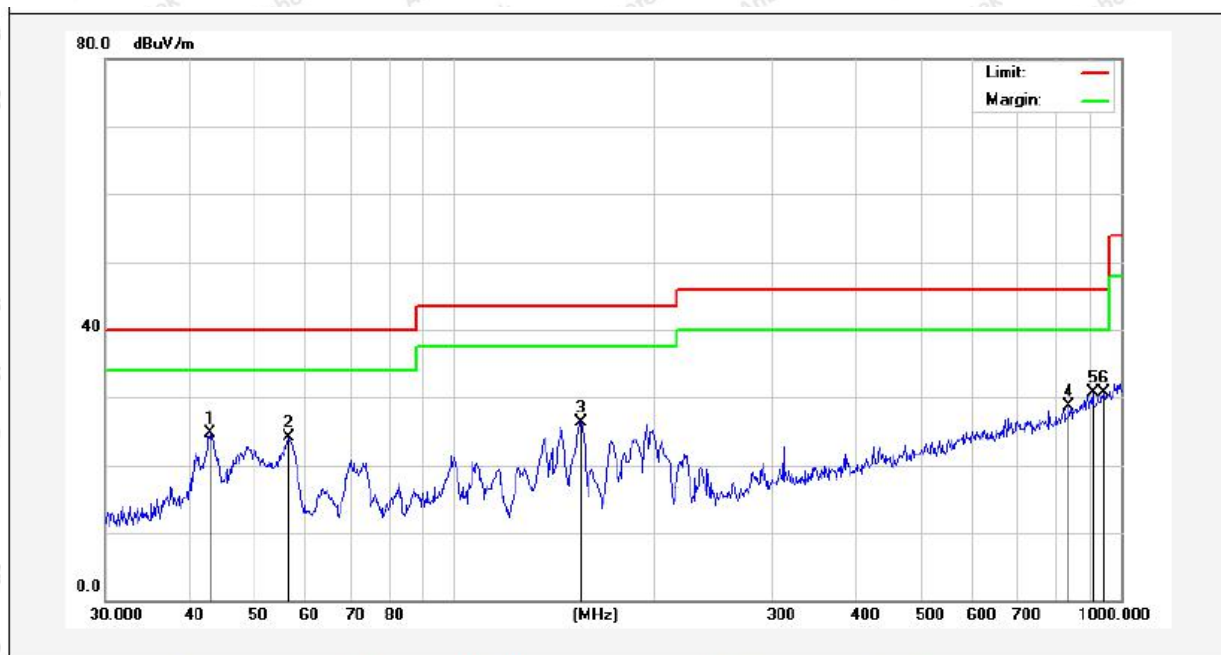

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.0505	39.22	-14.57	24.65	40.00	-15.35	peak			
2	56.5929	40.45	-16.42	24.03	40.00	-15.97	peak			
3	155.3644	47.66	-21.27	26.39	43.50	-17.11	peak			
4	836.2443	32.06	-3.45	28.61	46.00	-17.39	peak			
5	906.4824	32.26	-1.59	30.67	46.00	-15.33	peak			
6	942.1305	31.67	-0.98	30.69	46.00	-15.31	peak			

Test Results (30~1000MHz)

Test Mode: Mode 1

Power Source: AC 120V/60Hz

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 24.3°C Hum.: 46%



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.3534	47.72	-13.93	33.79	40.00	-6.21	QP	100	360	
2	49.1865	48.36	-14.73	33.63	40.00	-6.37	peak			
3	70.0903	42.16	-18.55	23.61	40.00	-16.39	peak			
4	99.5281	39.93	-14.74	25.19	43.50	-18.31	peak			
5	143.8295	46.64	-20.00	26.64	43.50	-16.86	peak			
6	942.1305	32.11	-0.98	31.13	46.00	-14.87	peak			

Test Results (1GHz-25GHz)

Test Mode: CH00					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	38.14	34.04	6.58	34.09	44.67	74.00	-29.33	V
7206.00	32.38	37.11	7.73	34.50	42.72	74.00	-31.28	V
9608.00	31.96	39.31	9.23	34.79	45.71	74.00	-28.29	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	42.60	34.04	6.58	34.09	49.13	74.00	-24.87	H
7206.00	34.21	37.11	7.73	34.50	44.55	74.00	-29.45	H
9608.00	31.46	39.31	9.23	34.79	45.21	74.00	-28.79	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	26.80	34.04	6.58	34.09	33.33	54.00	-20.67	V
7206.00	20.98	37.11	7.73	34.50	31.32	54.00	-22.68	V
9608.00	20.00	39.31	9.23	34.79	33.75	54.00	-20.25	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	31.12	34.04	6.58	34.09	37.65	54.00	-16.35	H
7206.00	23.20	37.11	7.73	34.50	33.54	54.00	-20.46	H
9608.00	19.80	39.31	9.23	34.79	33.55	54.00	-20.45	H
12010.00	*					54.00		H
14412.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: CH19					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	36.86	34.38	6.69	34.09	43.84	74.00	-30.16	V
7320.00	31.54	37.22	7.78	34.53	42.01	74.00	-31.99	V
9760.00	31.21	39.46	9.35	34.80	45.22	74.00	-28.78	V
12200.00	*					74.00		V
14640.00	*					74.00		V
4880.00	41.06	34.38	6.69	34.09	48.04	74.00	-25.96	H
7320.00	33.25	37.22	7.78	34.53	43.72	74.00	-30.28	H
9760.00	30.59	39.46	9.35	34.80	44.60	74.00	-29.40	H
12200.00	*					74.00		H
14640.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	25.77	34.38	6.69	34.09	32.75	54.00	-21.25	V
7320.00	20.28	37.22	7.78	34.53	30.75	54.00	-23.25	V
9760.00	19.38	39.46	9.35	34.80	33.39	54.00	-20.61	V
12200.00	*					54.00		V
14640.00	*					54.00		V
4880.00	29.95	34.38	6.69	34.09	36.93	54.00	-17.07	H
7320.00	22.43	37.22	7.78	34.53	32.90	54.00	-21.10	H
9760.00	19.08	39.46	9.35	34.80	33.09	54.00	-20.91	H
12200.00	*					54.00		H
14640.00	*					54.00		H


Test Results (1GHz-25GHz)


Test Mode: CH39					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	36.45	34.72	6.79	34.09	43.87	74.00	-30.13	V
7440.00	31.26	37.34	7.82	34.57	41.85	74.00	-32.15	V
9920.00	30.96	39.62	9.46	34.81	45.23	74.00	-28.77	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	40.56	34.72	6.79	34.09	47.98	74.00	-26.02	H
7440.00	32.94	37.34	7.82	34.57	43.53	74.00	-30.47	H
9920.00	30.31	39.62	9.46	34.81	44.58	74.00	-29.42	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.49	34.72	6.79	34.09	32.91	54.00	-21.09	V
7440.00	20.09	37.34	7.82	34.57	30.68	54.00	-23.32	V
9920.00	19.21	39.62	9.46	34.81	33.48	54.00	-20.52	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	29.63	34.72	6.79	34.09	37.05	54.00	-16.95	H
7440.00	22.21	37.34	7.82	34.57	32.80	54.00	-21.20	H
9920.00	18.88	39.62	9.46	34.81	33.15	54.00	-20.85	H
12400.00	*					54.00		H
14880.00	*					54.00		H

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

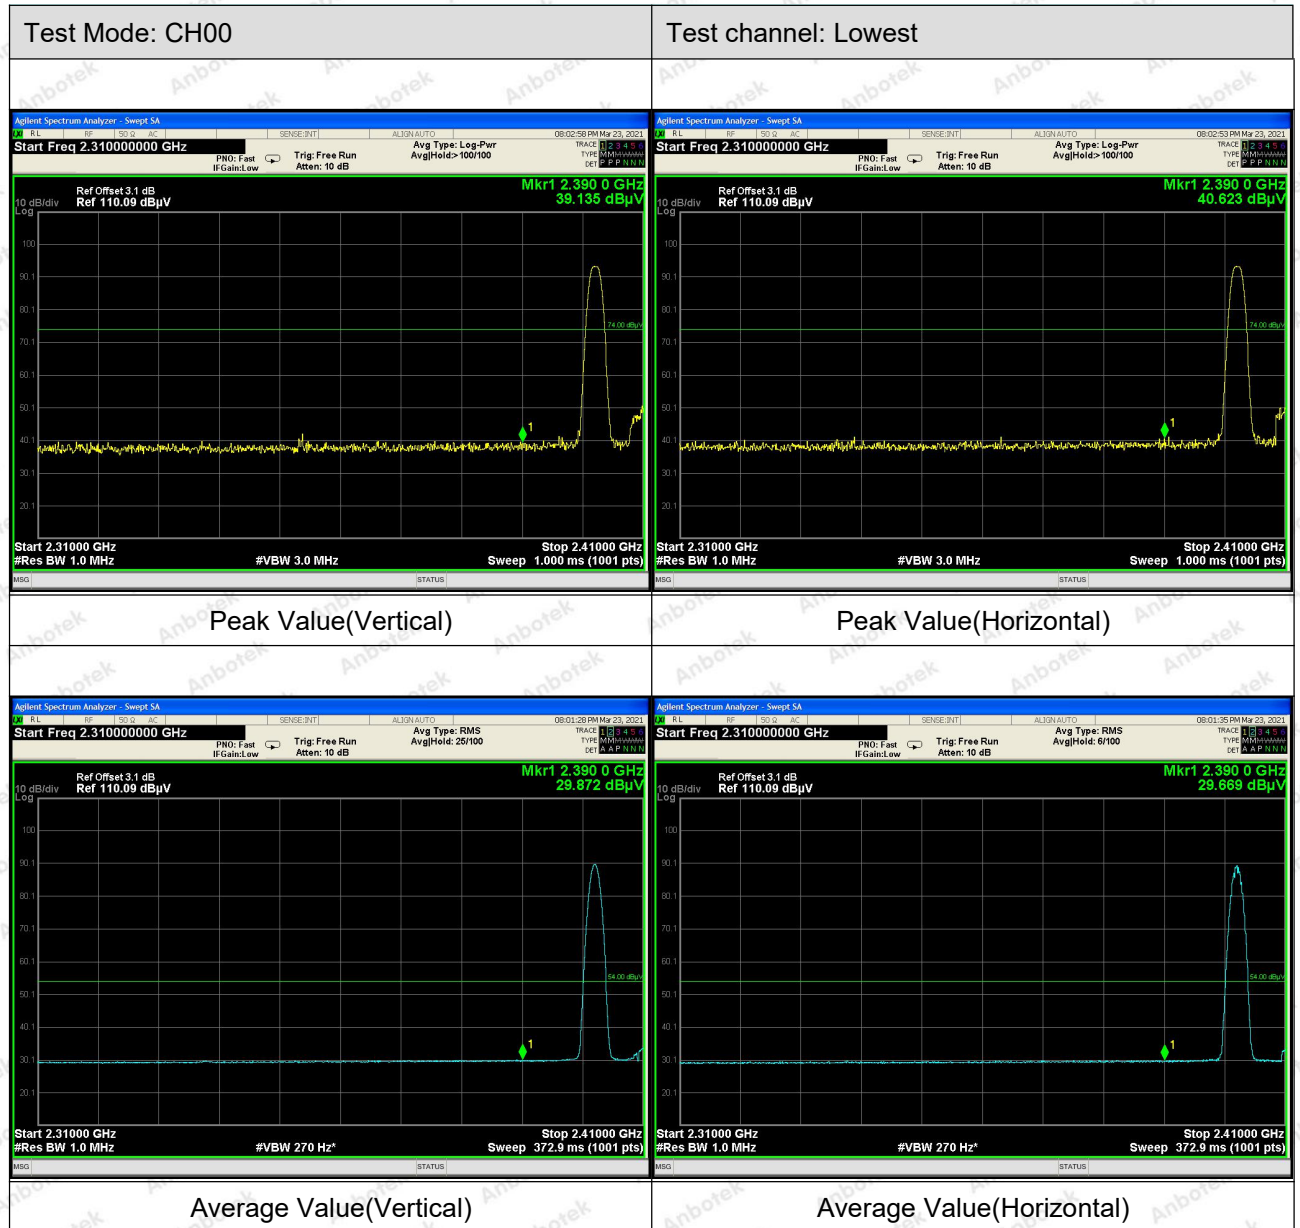

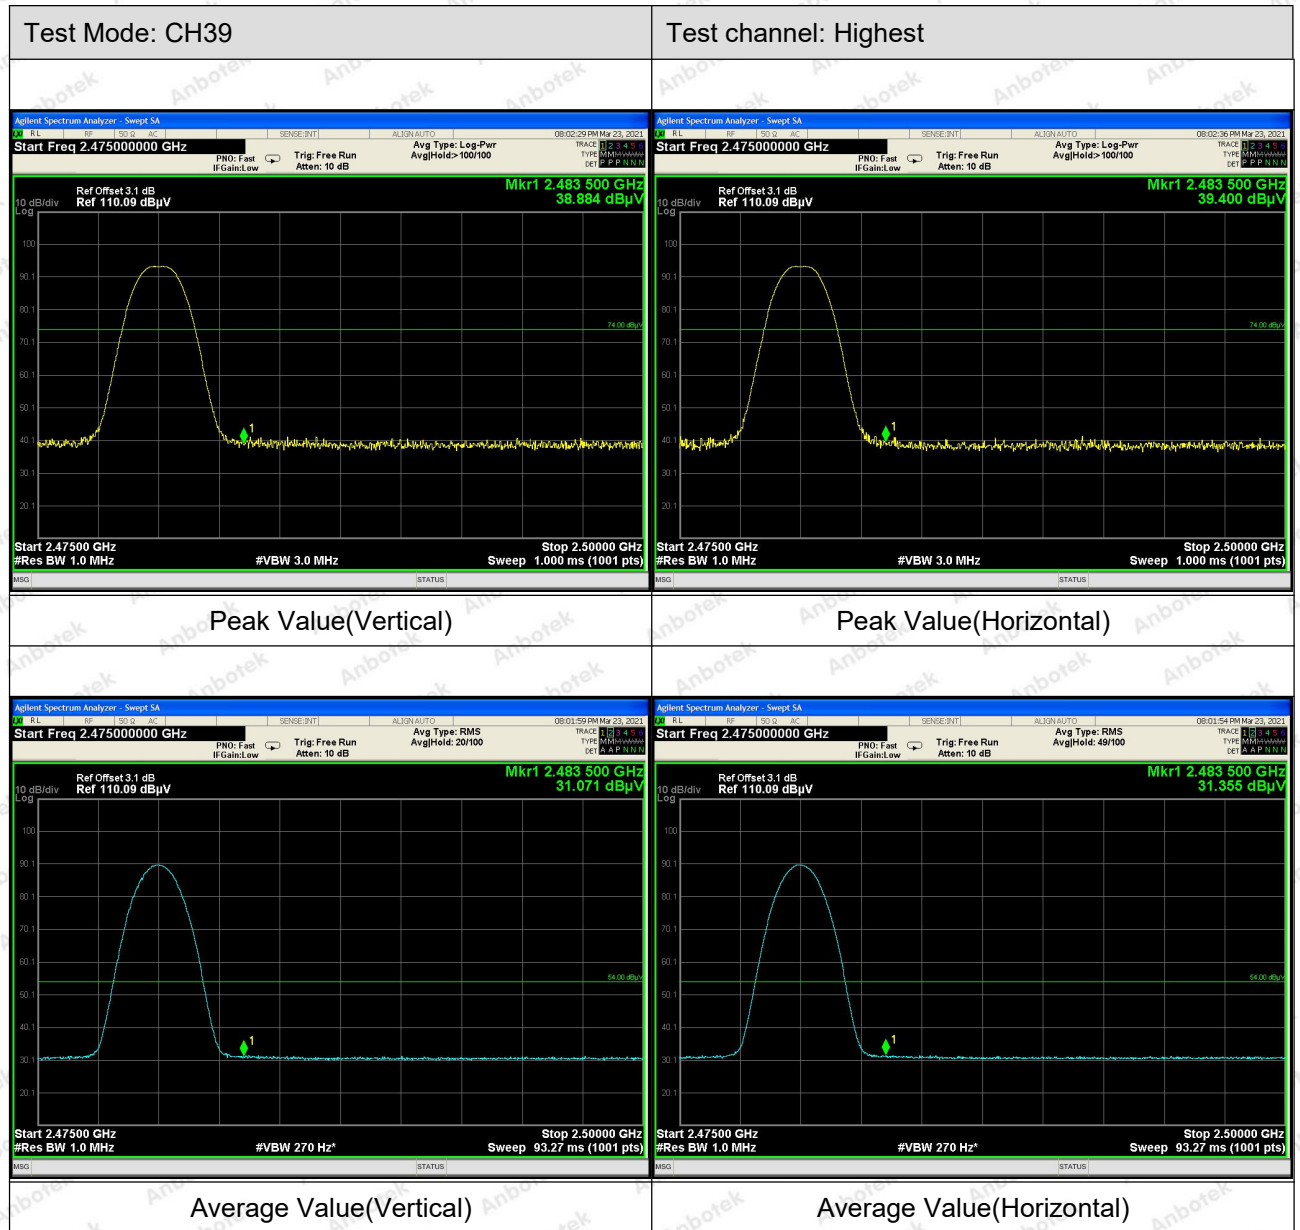

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW $\geq$ DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data


Test Item	:	Max. peak output power
Test Voltage	:	AC 120V, 60Hz for adapter
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	25°C
Humidity	:	55%RH


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
2402	-0.749	30	PASS
2440	-2.128	30	PASS
2480	-0.297	30	PASS



CH: Low

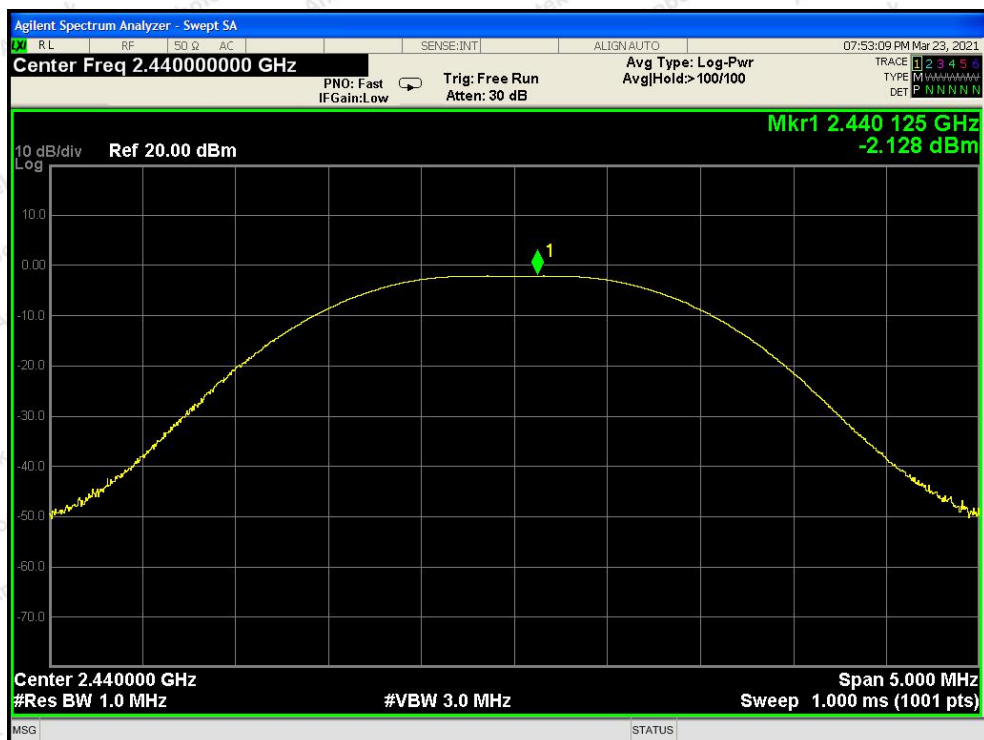

CH: Middle

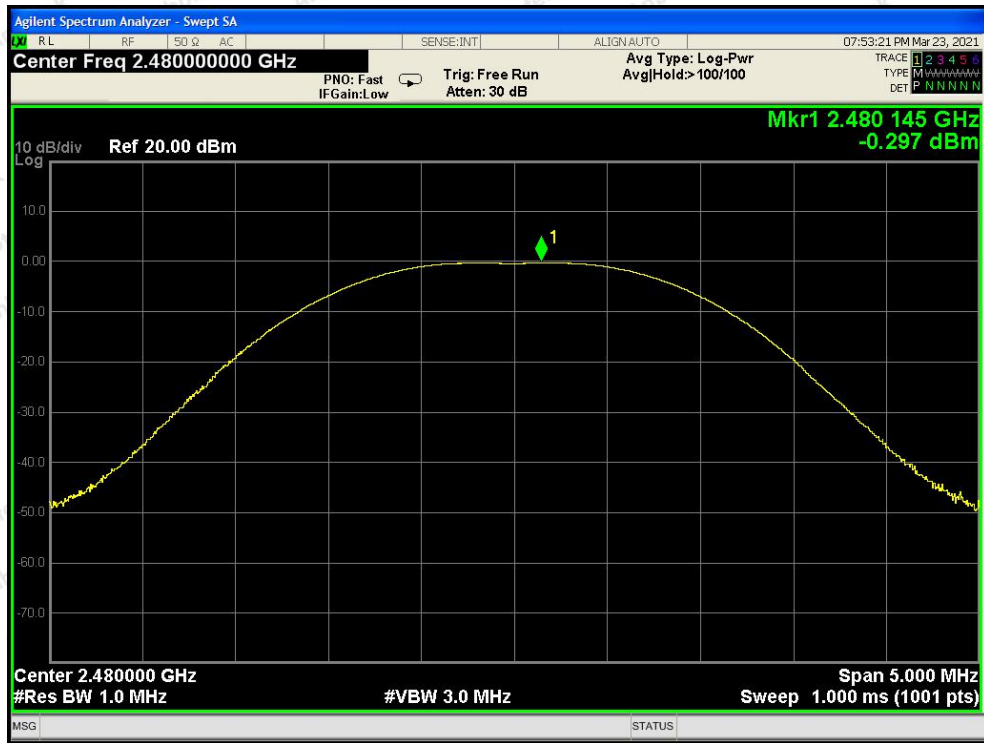

CH: High

APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files for Test Setup Photos of the EUT.

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files for External Photos of the EUT.

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files for Internal Photos of the EUT.

----- End of Report -----

