



Report No.: TW2107059-01E File Reference No.: 2021-07-28

Applicant: SHENZHEN JINGWEIXIAN TECHNOLOGY CO., LTD

Product: Screen Protector Film Cutter

Model No.: Mini 8, Mini 9, Mini 10, Mini 11, Mini 12, Mini 13, Mini 14,

Mini 15, Mini 16, Mini 17, Mini 18, Mini 19, Mini 20

Trademark: SKYCUT

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: July 28, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2107059-01E

Date: 2021-07-28



Page 2 of 98

## **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## **Industry Canada (IC)** — **Registration No.:5205A**

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## **A2LA (Certification Number:5013.01)**

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



# **Test Report Conclusion**

## Content

| 1.0  | General Details                     | 4  |
|------|-------------------------------------|----|
| 1.1  | Test Lab Details.                   | 4  |
| 1.2  | Applicant Details                   | 4  |
| 1.3  | Description of EUT                  | 4  |
| 1.4  | Submitted Sample                    | 5  |
| 1.5  | Test Duration.                      | 5  |
| 1.6  | Test Uncertainty.                   | 5  |
| 1.7  | Test By                             | 5  |
| 2.0  | List of Measurement Equipment       | 6  |
| 3.0  | Technical Details                   | 8  |
| 3.1  | Summary of Test Results             | 8  |
| 3.2  | Test Standards.                     | 8  |
| 4.0  | EUT Modification.                   | 8  |
| 5.0  | Power Line Conducted Emission Test. | 9  |
| 5.1  | Schematics of the Test.             | 9  |
| 5.2  | Test Method and Test Procedure.     | 9  |
| 5.3  | Configuration of the EUT            | 9  |
| 5.4  | EUT Operating Condition.            | 10 |
| 5.5  | Conducted Emission Limit.           | 10 |
| 5.6  | Test Result.                        | 10 |
| 6.0  | Radiated Emission test              | 13 |
| 5.1  | Test Method and Test Procedure.     | 13 |
| 6.2  | Configuration of the EUT            | 14 |
| 5.3  | EUT Operation Condition.            | 14 |
| 5.4  | Radiated Emission Limit             | 14 |
| 7.0  | 6dB Bandwidth Measurement           | 24 |
| 8.0  | Maximum Output Power                | 44 |
| 9.0  | Power Spectral Density Measurement. | 47 |
| 10.0 | Out of Band Measurement             | 65 |
| 11.0 | Antenna Requirement.                | 83 |
| 12.0 | FCC ID Label.                       | 84 |
| 13.0 | Photo of Test Setup and EUT View    | 85 |

Report No.: TW2107059-01E

Date: 2021-07-28



Page 4 of 98

#### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: SHENZHEN JINGWEIXIAN TECHNOLOGY CO.,LTD

Address: Building C, XinHang Technology Park, No. 229 Qingshui Road, Longgang District,

Shenzhen, 518116, China

Telephone: 13823176591 Fax: 0755-84565855

#### 1.3 Description of EUT

Product: Screen Protector Film Cutter

Manufacturer: SHENZHEN JINGWEIXIAN TECHNOLOGY CO.,LTD

Address: Building C, XinHang Technology Park, No. 229 Qingshui Road, Longgang

District, Shenzhen, 518116, China

Brand Name: SKYCUT
Model Number: Mini 8

Additional Model Number: Mini 9, Mini 10, Mini 11, Mini 12, Mini 13, Mini 14, Mini 15, Mini 16, Mini 17,

Mini 18, Mini 19, Mini 20

Hardware Version: V9.0810 Software Version: V21.0710

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20, HT40

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs7

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2107059-01E

Date: 2021-07-28



Page 5 of 98

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; EEE 802.11n (HT40): 7 Channels;

Antenna: PCB antenna used. The gain of the antennas is 2.5dBi (get from the antenna

specification provided the applicant)

Input Voltage: DC24V, 2.75A

Power Supply: Model: GM60-240275-F; Input: 100-240V, 50/60Hz, 2.0A;

Output: DC24V, 2.75A, 66W

1.4 Submitted Sample: 4 Samples

1.5 Test Duration

2021-07-05 to 2021-07-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Report No.: TW2107059-01E Page 6 of 98

Date: 2021-07-28



| 2.0 Test Equipment |              |                      |              |              |            |  |
|--------------------|--------------|----------------------|--------------|--------------|------------|--|
| Instrument Type    | Manufacturer | Model                | Serial No.   | Date of Cal. | Due Date   |  |
| ESPI Test Receiver | R&S          | ESPI 3               | 100379       | 2021-06-18   | 2022-06-17 |  |
| Impuls-Begrenzer   | R&S          | ESH3-Z2              | 100281       | 2021-06-18   | 2022-06-17 |  |
| Loop Antenna       | EMCO         | 6507                 | 00078608     | 2021-06-18   | 2024-06-17 |  |
| Spectrum           | R&S          | FSIQ26               | 100292       | 2021-06-18   | 2022-06-17 |  |
| Horn Antenna       | A-INFO       | LB-180400-KF         | J211060660   | 2021-07-02   | 2024-07-01 |  |
| Horn Antenna       | R&S          | BBHA 9120D           | 9120D-631    | 2021-07-02   | 2024-07-01 |  |
| Power meter        | Anritsu      | ML2487A              | 6K00003613   | 2021-06-18   | 2022-06-17 |  |
| Power sensor       | Anritsu      | MA2491A              | 32263        | 2021-06-18   | 2022-06-17 |  |
| Bilog Antenna      | Schwarebeck  | VULB9163             | 9163/340     | 2018-07-04   | 2021-07-03 |  |
| 9*6*6 Anechoic     |              |                      | N/A          | 2021-07-02   | 2022-07-01 |  |
| EMI Test Receiver  | RS           | ESVB                 | 826156/011   | 2021-06-18   | 2022-06-17 |  |
| EMI Test Receiver  | RS           | ESH3                 | 860904/006   | 2021-06-18   | 2022-06-17 |  |
| Spectrum           | HP/Agilent   | ESA-L1500A           | US37451154   | 2021-06-18   | 2022-06-17 |  |
| Spectrum           | HP/Agilent   | E4407B               | MY50441392   | 2021-06-18   | 2022-06-17 |  |
| Spectrum           | RS           | FSP                  | 1164.4391.38 | 2020-01-16   | 2021-01-15 |  |
| RF Cable           | Zhengdi      | ZT26-NJ-NJ-8<br>M/FA |              | 2021-06-18   | 2022-06-17 |  |
| RF Cable           | Zhengdi      | 7m                   |              | 2021-06-18   | 2022-06-17 |  |
| RF Switch          | EM           | EMSW18               | 060391       | 2021-06-18   | 2022-06-17 |  |
| Pre-Amplifier      | Schwarebeck  | BBV9743              | #218         | 2021-06-18   | 2022-06-17 |  |
| Pre-Amplifier      | HP/Agilent   | 8449B                | 3008A00160   | 2021-06-18   | 2022-06-17 |  |
| LISN               | SCHAFFNER    | NNB42                | 00012        | 2021-01-06   | 2022-01-05 |  |

#### 2.2 Automation Test Software

## For Conducted Emission Test

| Name   | Version           |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

### For Radiated Emissions

| Name  | Version |
|---|---------|
| EMI Test Software BL410-EV18.91                 | V18.905 |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06  |

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2107059-01E

Date: 2021-07-28



Page 7 of 98

#### 3. DESCRIPTION OF TEST MODES

## IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low     | 2412            |
| Middle  | 2437            |
| High    | 2462            |

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

### IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low     | 2422            |
| Middle  | 2437            |
| High    | 2452            |

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing

Note: during the test, the duty cycle was set up to 100%.

Page 8 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

| The EUT has been tested ac                            | cording to the following speci   | tications: |          |
|---|--|------------|----------|
| Standard  | Test Type  | Result     | Notes    |
| FCC Part 15, Paragraph 15.207                         | <b>Conducted Emission Test</b>   | PASS       | Complies |
| FCC Part 15 Subpart C<br>Paragraph 15.247(a)(2) Limit | Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz   | PASS       | Complies |
| FCC Part 15, Paragraph<br>15.247(b)                   | Maximum peak output<br>power<br>Limit: max. 30dBm  | PASS       | Complies |
| FCC Part 15, Paragraph 15.205<br>& 15.209             | Transmitter Radiated Emission Limit: Table 15.209  | PASS       | Complies |
| FCC Part 15, Paragraph<br>15.247(e)                   | Power Spectral Density<br>Limit: max. 8dBm   | PASS       | Complies |
| FCC Part 15, Paragraph<br>15.247(d)                   | Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209 | PASS       | Complies |

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 9 of 98


Report No.: TW2107059-01E

Date: 2021-07-28



#### 5.0 Power Line Conducted Emission Test

### 5.1 Schematics of the test

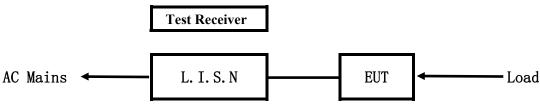


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

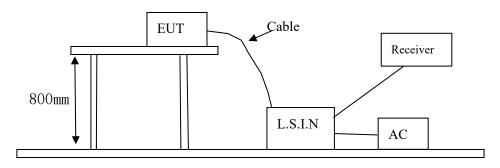

### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

| Device                          | Manufacturer                                | Model   | FCC ID           |
|---------------------------------|---|---|------------------|
| Screen Protector<br>Film Cutter | SHENZHEN JINGWEIXIAN<br>TECHNOLOGY CO., LTD | Mini 8, Mini 9, Mini 10,<br>Mini 11, Mini 12, Mini 13,<br>Mini 14, Mini 15, Mini 16,<br>Mini 17, Mini 18, Mini 19,<br>Mini 20 | 2AVGR-MINI8MINI9 |

### B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A    |              |       |            |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2107059-01E

Date: 2021-07-28



Page 10 of 98

#### C. Peripherals

| Device | Manufacturer | Model | Rating |
|--------|--------------|-------|--------|
|        |              |       |        |

#### 5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

#### 5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency           | Limits (c        | lB μ V)       |
|---------------------|------------------|---------------|
| (MHz)               | Quasi-peak Level | Average Level |
| $0.15 \sim 0.50$    | 66.0~56.0*       | 56.0~46.0*    |
| $0.50 \sim 5 00$    | 56.0             | 46.0          |
| $5.00 \sim 30 \ 00$ | 60.0             | 50.           |

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: TW2107059-01E Page 11 of 98

Date: 2021-07-28



## A: Conducted Emission on Live Terminal (150kHz to 30MHz)


## **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

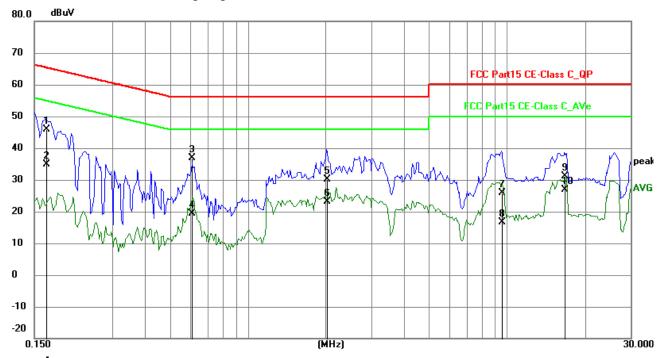

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.1659             | 35.99             | 9.77           | 45.76           | 65.16           | -19.40         | QP       | Р   |
| 2   | 0.1659             | 25.04             | 9.77           | 34.81           | 55.16           | -20.35         | AVG      | Р   |
| 3   | 0.6102             | 27.14             | 9.78           | 36.92           | 56.00           | -19.08         | QP       | Р   |
| 4   | 0.6102             | 9.63              | 9.78           | 19.41           | 46.00           | -26.59         | AVG      | Р   |
| 5   | 2.0181             | 20.43             | 9.80           | 30.23           | 56.00           | -25.77         | QP       | Р   |
| 6   | 2.0181             | 13.38             | 9.80           | 23.18           | 46.00           | -22.82         | AVG      | Р   |
| 7   | 9.5403             | 15.81             | 10.14          | 25.95           | 60.00           | -34.05         | QP       | Р   |
| 8   | 9.5403             | 6.61              | 10.14          | 16.75           | 50.00           | -33.25         | AVG      | Р   |
| 9   | 16.7007            | 20.76             | 10.48          | 31.24           | 60.00           | -28.76         | QP       | Р   |
| 10  | 16.7007            | 16.29             | 10.48          | 26.77           | 50.00           | -23.23         | AVG      | Р   |

Page 12 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



#### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

**EUT set Condition: Keep WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

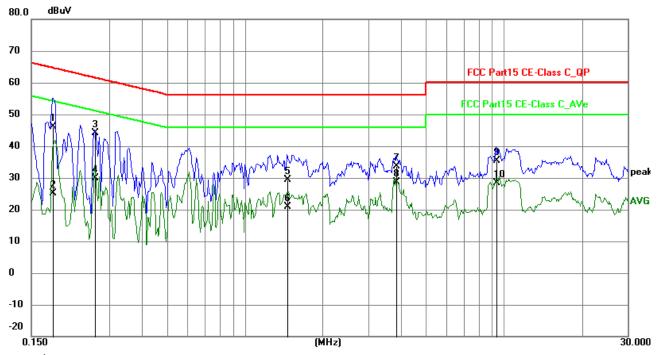

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1   | 0.1812             | 36.30             | 9.76           | 46.06           | 64.43           | -18.37         | QP       | Р   |
| 2   | 0.1812             | 15.27             | 9.76           | 25.03           | 54.43           | -29.40         | AVG      | Р   |
| 3   | 0.2631             | 34.26             | 9.75           | 44.01           | 61.33           | -17.32         | QP       | Р   |
| 4   | 0.2631             | 20.14             | 9.75           | 29.89           | 51.33           | -21.44         | AVG      | Р   |
| 5   | 1.4565             | 19.62             | 9.79           | 29.41           | 56.00           | -26.59         | QP       | Р   |
| 6   | 1.4565             | 11.21             | 9.79           | 21.00           | 46.00           | -25.00         | AVG      | Р   |
| 7   | 3.8399             | 23.67             | 9.88           | 33.55           | 56.00           | -22.45         | QP       | Р   |
| 8   | 3.8399             | 18.67             | 9.88           | 28.55           | 46.00           | -17.45         | AVG      | Р   |
| 9   | 9.3414             | 25.37             | 10.13          | 35.50           | 60.00           | -24.50         | QP       | Р   |
| 10  | 9.3414             | 18.26             | 10.13          | 28.39           | 50.00           | -21.61         | AVG      | Р   |

Report No.: TW2107059-01E

Date: 2021-07-28




## Page 13 of 98

#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

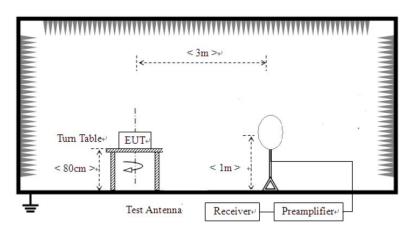


Report No.: TW2107059-01E


Date: 2021-07-28



For radiated emissions from 30MHz to1GHz

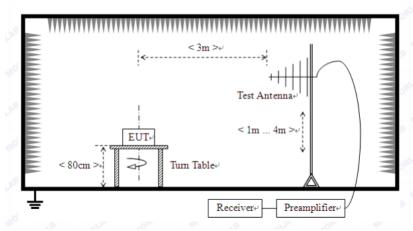

For radiated emissions above 1GHz

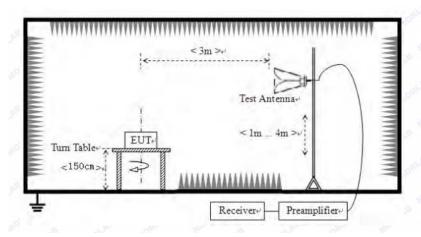

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 15 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## Frequencies in restricted band are complied to limit on Paragraph 15.209

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|---------------------------|
| 30-88                 | 3            | 40.0                      |
| 88-216                | 3            | 43.5                      |
| 216-960               | 3            | 46.0                      |
| Above 960             | 3            | 54.0                      |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11b was the worst case.

Page 16 of 98

Report No.: TW2107059-01E

Date: 2021-07-28




## Test result General Radiated Emission Data and Harmonics Radiated Emission Data

## Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 

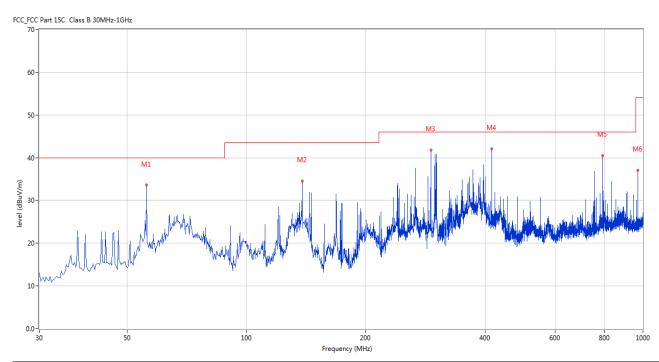

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |            |         |
| 1   | 55.941    | 33.55    | -12.00 | 40.0     | -6.45      | Peak     | 357.00    | 100    | Horizontal | Pass    |
| 2   | 138.128   | 34.54    | -17.29 | 43.5     | -8.96      | Peak     | 300.00    | 100    | Horizontal | Pass    |
| 3   | 291.835   | 41.77    | -11.25 | 46.0     | -4.23      | Peak     | 302.00    | 100    | Horizontal | Pass    |
| 4   | 415.236   | 42.00    | -8.27  | 46.0     | -4.00      | Peak     | 359.00    | 100    | Horizontal | Pass    |
| 5   | 791.987   | 40.52    | -3.10  | 46.0     | -5.48      | Peak     | 307.00    | 100    | Horizontal | Pass    |
| 6   | 970.907   | 36.99    | -1.52  | 54.0     | -17.01     | Peak     | 300.00    | 100    | Horizontal | Pass    |

Page 17 of 98

Report No.: TW2107059-01E

Date: 2021-07-28




## Test result General Radiated Emission Data and Harmonics Radiated Emission Data

## Radiated Emission In Vertical (30MHz----1000MHz)

**EUT set Condition: Keep Transmitting** 

**Results: Pass** 

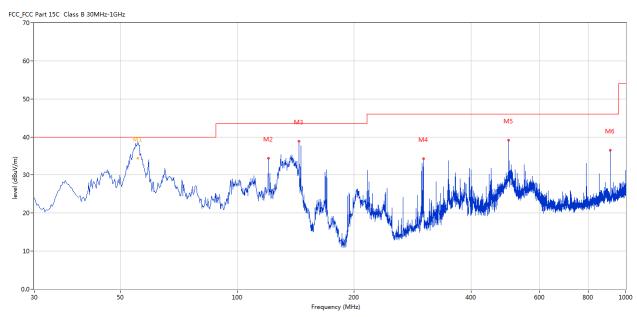

| No. | Frequency | Results  | Factor | Limit    | Over   | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|--------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | Limit  |          |           | (cm)   |          |         |
|     |           |          |        |          | (dB)   |          |           |        |          |         |
| 1   | 55.456    | 38.71    | -11.89 | 40.0     | -1.29  | Peak     | 68.00     | 100    | Vertical | Pass    |
| 1*  | 55.456    | 34.45    | -11.89 | 40.0     | -5.55  | QP       | 68.00     | 100    | Vertical | Pass    |
| 2   | 120.187   | 34.41    | -15.39 | 43.5     | -9.09  | Peak     | 5.00      | 100    | Vertical | Pass    |
| 3   | 144.189   | 38.91    | -17.09 | 43.5     | -4.59  | Peak     | 5.00      | 100    | Vertical | Pass    |
| 4   | 301.290   | 34.23    | -11.00 | 46.0     | -11.77 | Peak     | 90.00     | 100    | Vertical | Pass    |
| 5   | 500.090   | 39.21    | -6.91  | 46.0     | -6.79  | Peak     | 11.00     | 100    | Vertical | Pass    |
| 6   | 911.995   | 36.46    | -1.80  | 46.0     | -9.54  | Peak     | 72.00     | 100    | Vertical | Pass    |


Report No.: TW2107059-01E Page 18 of 98

Date: 2021-07-28



Please refer to the following test plots for details:

## CH01 for 11b at 1Mbps: Horizontal

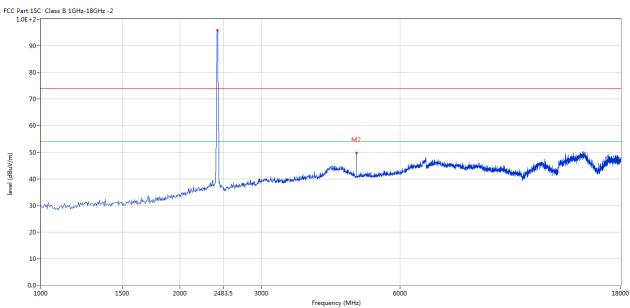


| Ī | No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT        | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
|   |     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |            |         |
| ſ | 2   | 4824.044  | 49.78    | 3.14   | 74.0     | -24.22     | Peak     | 308.00    | 100    | Horizontal | Pass    |

Report No.: TW2107059-01E Page 19 of 98

Date: 2021-07-28



## CH01 for 11b at 1Mbps: Vertical

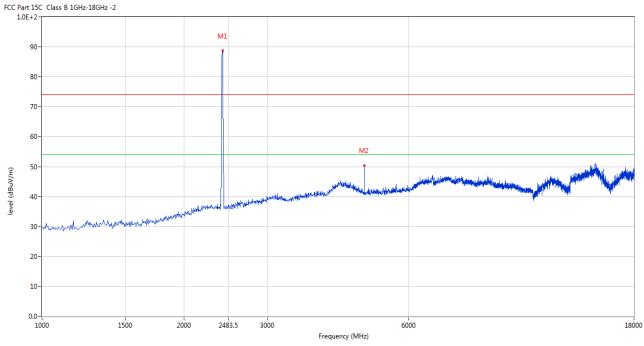


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |          |         |
| 2   | 4824.044  | 50.25    | 3.14   | 74.0     | -23.75     | Peak     | 323.00    | 100    | Vertical | Pass    |

Report No.: TW2107059-01E Page 20 of 98

Date: 2021-07-28



## CH06 for 11b at 1Mbps: Vertical

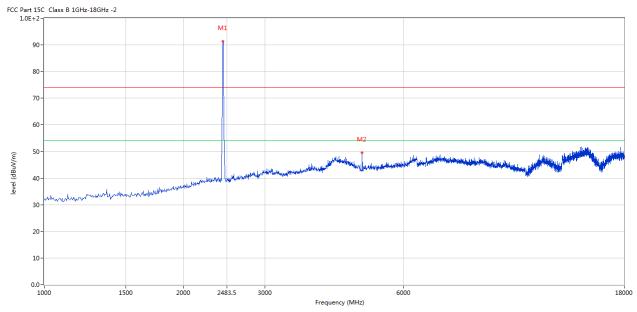


| 1 | No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT      | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|   |     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |          |         |
| 2 | 2   | 4875.031  | 49.56    | 3.19   | 74.0     | -24.44     | Peak     | 351.00    | 100    | Vertical | Pass    |

Report No.: TW2107059-01E Page 21 of 98

Date: 2021-07-28



## CH06 for 11b at 1Mbps: Horizontal

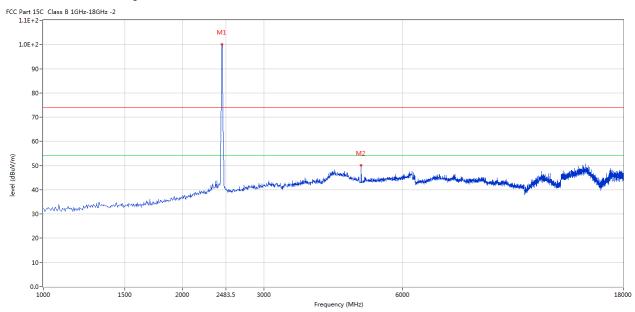


| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |            |         |
| 2   | 4875.031  | 50.12    | 3.19   | 74.0     | -23.88     | Peak     | 291.00    | 100    | Horizontal | Pass    |

Report No.: TW2107059-01E Page 22 of 98

Date: 2021-07-28



## CH11 for 11b at 1Mbps: Vertical

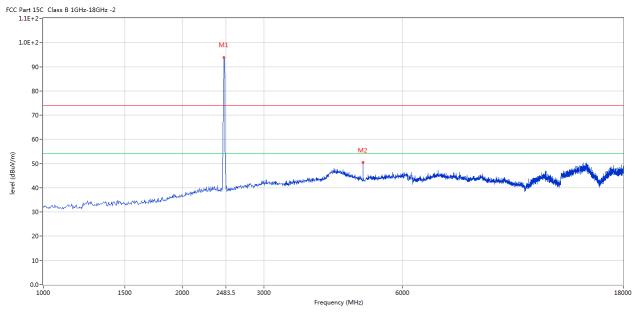


| Ī | No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT      | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|   |     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |          |         |
|   | 2   | 4921.770  | 50.61    | 3.27   | 74.0     | -23.39     | Peak     | 353.00    | 100    | Vertical | Pass    |

Page 23 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## CH11 for 11g at 6Mbps: Horizontal

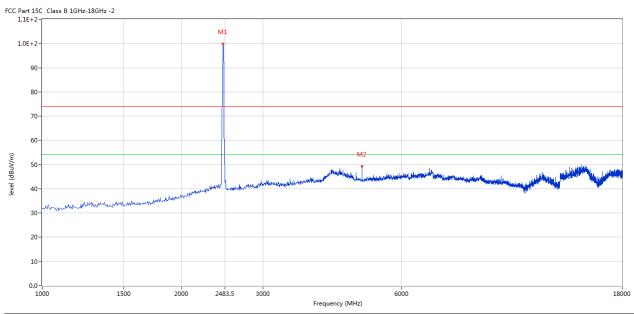

| No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           | (cm)   |            |         |
| 2   | 4921.770  | 49.85    | 3.27   | 74.0     | -24.15     | Peak     | 293.00    | 100    | Horizontal | Pass    |

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz, it is only the floor noise.

5. The peak value less than the AV limit, no necessary to take down the AV measurement result.


Report No.: TW2107059-01E Page 24 of 98

Date: 2021-07-28



## 7.0 6dB Bandwidth Measurement

## 7.1 Test Setup



### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth  $(VBW) \ge 3 \times RBW$ .
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.4 Test Result

Page 25 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 6dB Occupied Bandwidth


| EUT      |                         | Screen Pro | tector Film               | Cutter                  | Mod       | lel  | Mi                | ni 8       |
|----------|-------------------------|------------|---------------------------|-------------------------|-----------|------|-------------------|------------|
| Mode     |                         | 8          | 302.11b                   |                         | Input Vol | tage | 12                | 0V~        |
| Temperat | ure                     | 24         | 4 deg. C,                 |                         | Humidity  | ,    | 56%               | 6 RH       |
| Channel  | Channel Frequency (MHz) |            | Data Transfer Rate (Mbps) | 6 dB Bandwidth<br>(MHz) |           |      | mum Limit<br>MHz) | Pass/ Fail |
| 1        |                         | 2412       | 1                         | 10                      | .04       |      | 0.5               | Pass       |
| 6        |                         | 2437       | 1                         | 10                      | .04       |      | 0.5               | Pass       |
| 11       |                         | 2462       | 1                         | 10                      | .04       |      | 0.5               | Pass       |
| 1        |                         | 2412       | 11                        | 9.                      | 92        | 0.5  |                   | Pass       |
| 6        |                         | 2437       | 11                        | 9.                      | 86        |      | 0.5               | Pass       |
| 11       |                         | 2462       | 11                        | 10                      | .64       |      | 0.5               | Pass       |

Page 26 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 1. 802.11b at 1Mbps of CH01

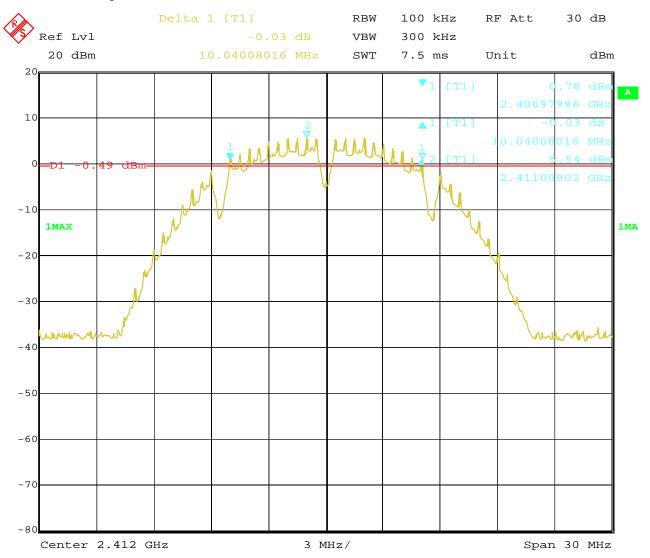


27.JUL.2021 17:04:34 Date:

Page 27 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 2. 802.11b at 1Mbps of CH06

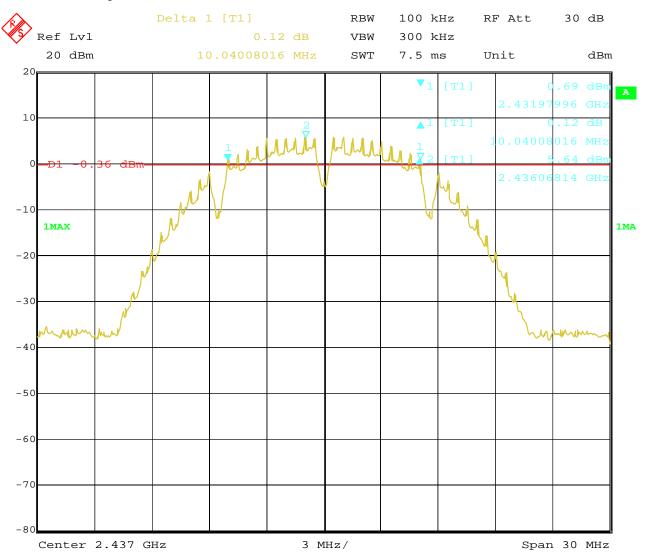


27.JUL.2021 17:15:49 Date:

Page 28 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 3. 802.11b at 1Mbps of CH11

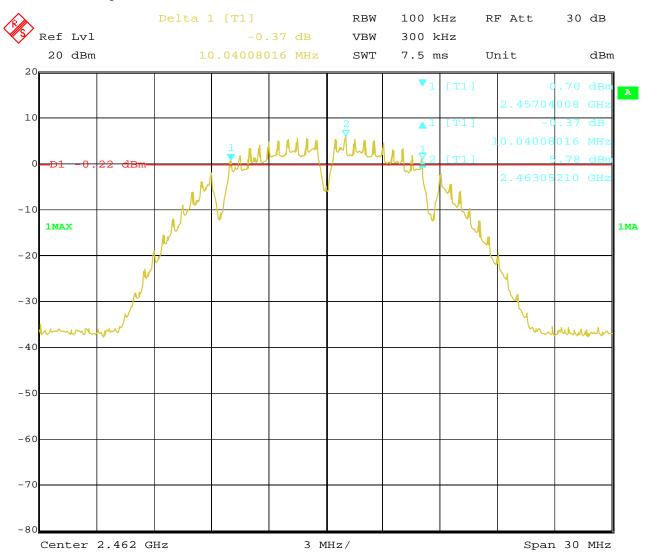


27.JUL.2021 17:24:34 Date:

Page 29 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 4. 802.11b at 11Mbps of CH01

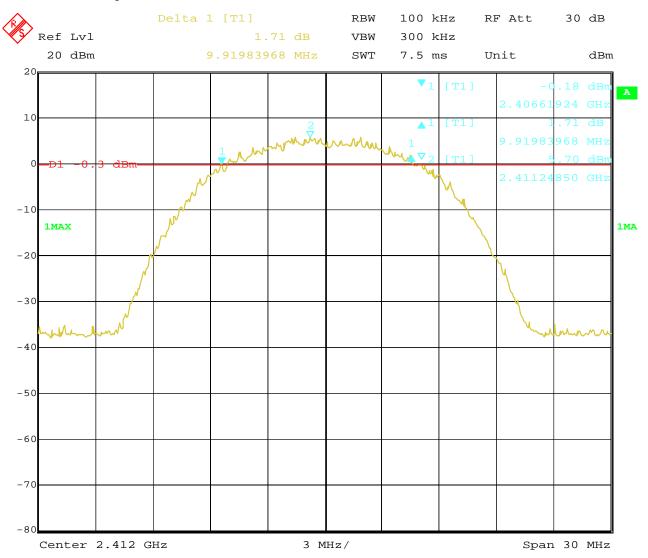


27.JUL.2021 17:07:37 Date:

Page 30 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 5. 802.11b at 11Mbps of CH06

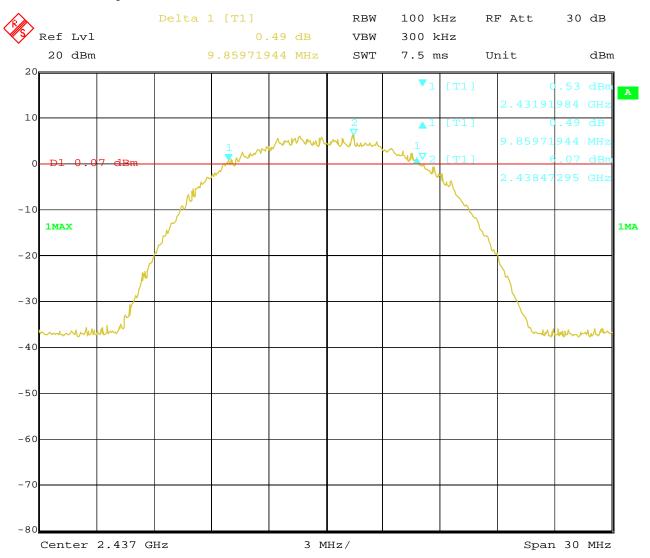


27.JUL.2021 17:13:39 Date:

Page 31 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 6. 802.11b at 11Mbps of CH11

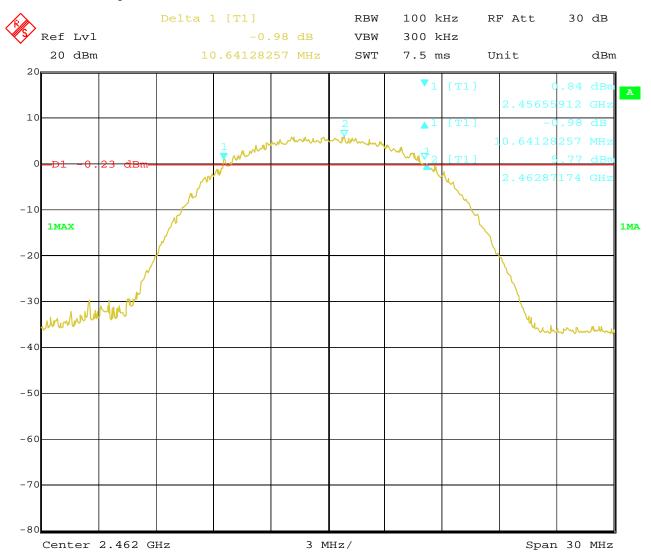

27.JUL.2021 17:39:20 Date:

Report No.: TW2107059-01E Page 32 of 98

Date: 2021-07-28



## 6dB Occupied Bandwidth

| EUT      |     | Screen Pro            | tector Film               | Cutter | Mod             | lel  | -                 | Mini 8     |
|----------|-----|-----------------------|---------------------------|--------|-----------------|------|-------------------|------------|
| Mode     |     | 8                     | 302.11g                   |        | Input Vol       | tage |                   | 120V~      |
| Temperat | ure | 24                    | 4 deg. C,                 |        | Humidity        | ,    | 5                 | 6% RH      |
| Channel  |     | el Frequency<br>(MHz) | Data Transfer Rate (Mbps) |        | andwidth<br>Hz) |      | num Limit<br>MHz) | Pass/ Fail |
| 1        |     | 2412                  | 6                         | 16     | 5.41            |      | 0.5               | Pass       |
| 6        |     | 2437                  | 6                         | 16     | 5.41            | 0.5  |                   | Pass       |
| 11       |     | 2462                  | 6                         | 16     | 5.41            | 0.5  |                   | Pass       |


Page 33 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



#### **Test Plots:**

## 1. 802.11g at 6Mbps of CH01

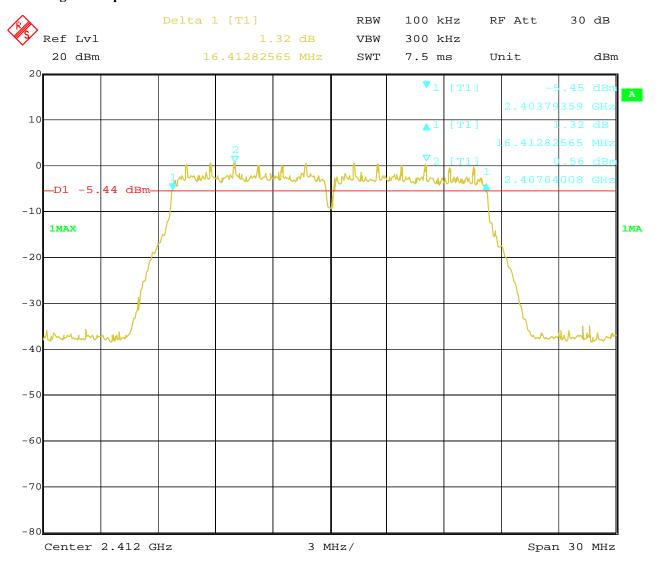


Date: 27.JUL.2021 17:09:26

Page 34 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 2. 802.11g at 6Mbps of CH06

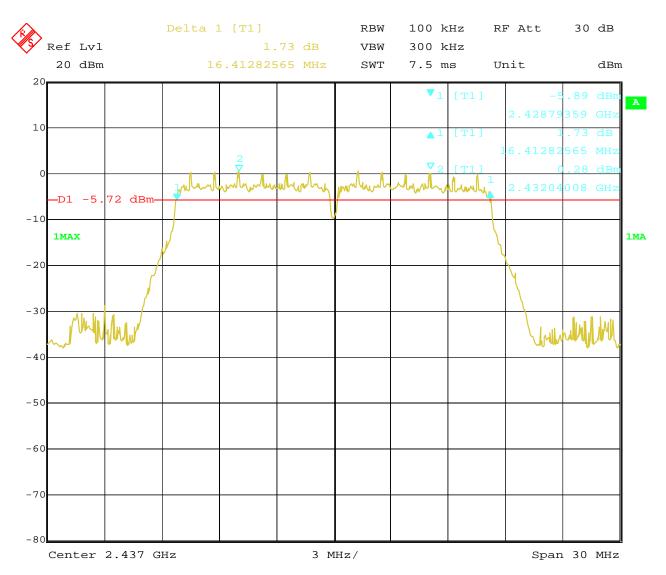


Date: 27.JUL.2021 17:11:03

Page 35 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



## 3. 802.11g at 6Mbps of CH11

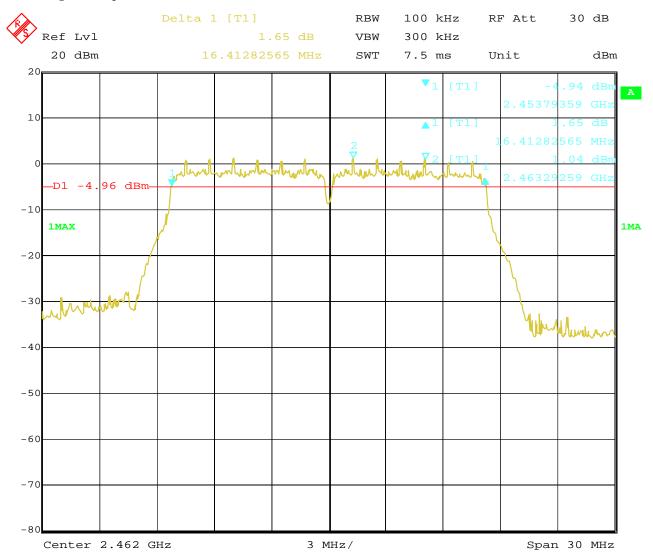

Date: 27.JUL.2021 17:42:25 Report No.: TW2107059-01E Page 36 of 98

Date: 2021-07-28



## 6dB Occupied Bandwidth

| EUT         |                         | Screen Protector Film Cutter |                           |                         | Model         |                        | Mini 8 |            |
|-------------|-------------------------|------------------------------|---------------------------|-------------------------|---------------|------------------------|--------|------------|
| Mode        |                         | 802.11n HT20                 |                           |                         | Input Voltage |                        | 120V~  |            |
| Temperature |                         | 24 deg. C,                   |                           |                         | Humidity      |                        | 56% RH |            |
| Channel     | Channel Frequency (MHz) |                              | Data Transfer Rate (Mbps) | 6 dB Bandwidth<br>(MHz) |               | Minimum Limit<br>(MHz) |        | Pass/ Fail |
| 1           | 2412                    |                              | mcs0                      | 17.56                   |               | 0.5                    |        | Pass       |
| 6           |                         | 2437                         | mcs0                      | 17.56                   |               | 0.5                    |        | Pass       |
| 11          |                         | 2462                         | mcs0                      | 17.68                   |               | 0.5                    |        | Pass       |


Report No.: TW2107059-01E Page 37 of 98

Date: 2021-07-28



#### **Test Plots:**

# 1. 802.11n at HT20 of CH01

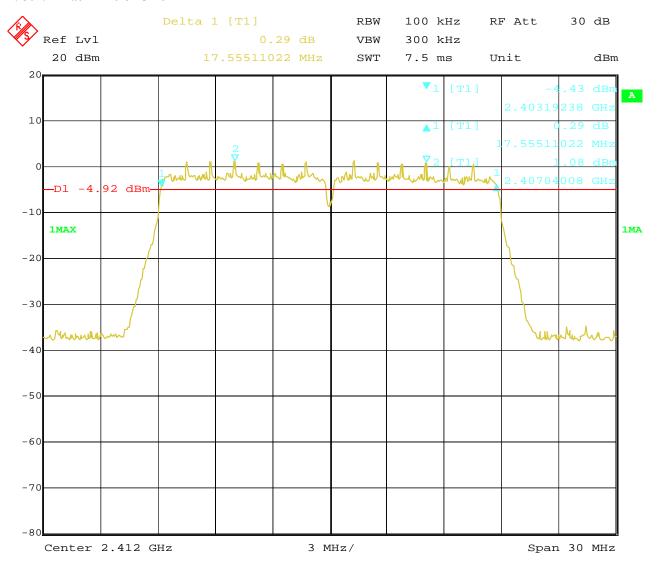


Date: 27.JUL.2021 17:53:31

Page 38 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 2. 802.11n at HT20 of CH06

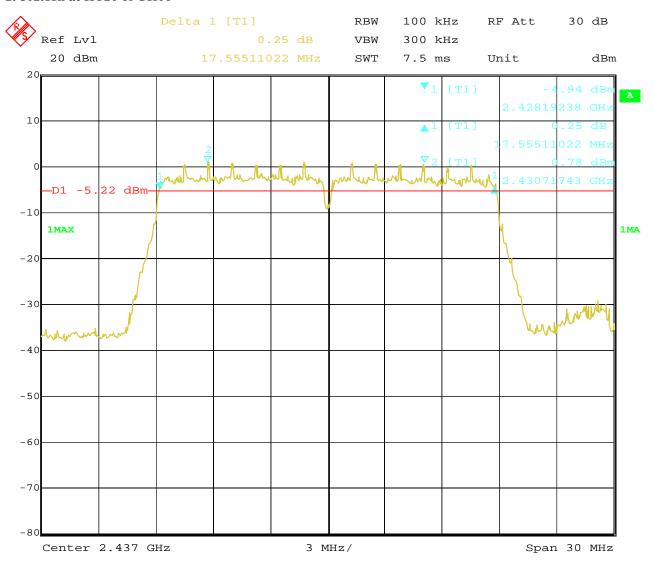


Date: 27.JUL.2021 17:50:03

Page 39 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 3. 802.11n at HT20 of CH11

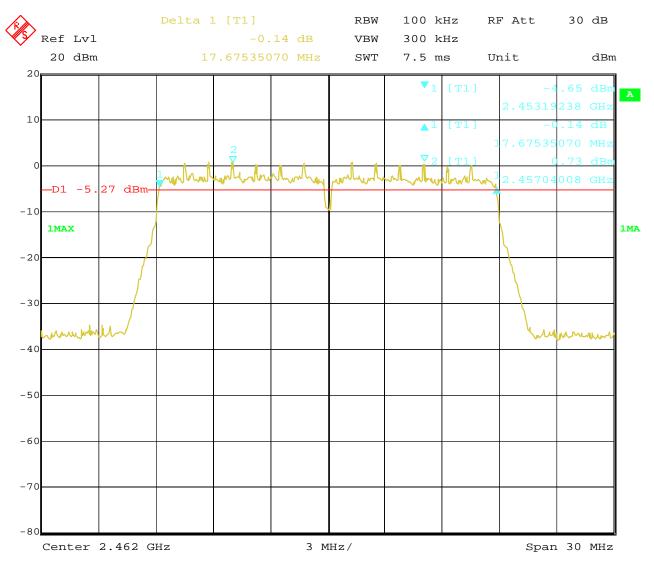

Date: 27.JUL.2021 17:45:46 Report No.: TW2107059-01E Page 40 of 98

Date: 2021-07-28



# 6dB Occupied Bandwidth

| EUT      |          | Screen Pro            | otector Film Cutter       |    | Model          |  | Mini 8            |            |
|----------|----------|-----------------------|---------------------------|----|----------------|--|-------------------|------------|
| Mode     | Mode 802 |                       | .11n HT40                 |    | Input Voltage  |  | 120V~             |            |
| Temperat | ure      | 24                    | 4 deg. C,                 |    | Humidity       |  | 56% RH            |            |
| Channel  |          | el Frequency<br>(MHz) | Data Transfer Rate (Mbps) |    | ndwidth<br>Hz) |  | mum Limit<br>MHz) | Pass/ Fail |
| 3        |          | 2422                  | mcs0                      | 36 | .19            |  | 0.5               | Pass       |
| 6        |          | 2437                  | mcs0                      | 36 | .20            |  | 0.5               | Pass       |
| 9        |          | 2452                  | mcs0                      | 36 | .03            |  | 0.5               | Pass       |


Report No.: TW2107059-01E Page 41 of 98

Date: 2021-07-28



#### **Test Plots:**

# 1. 802.11n at HT40 of CH03

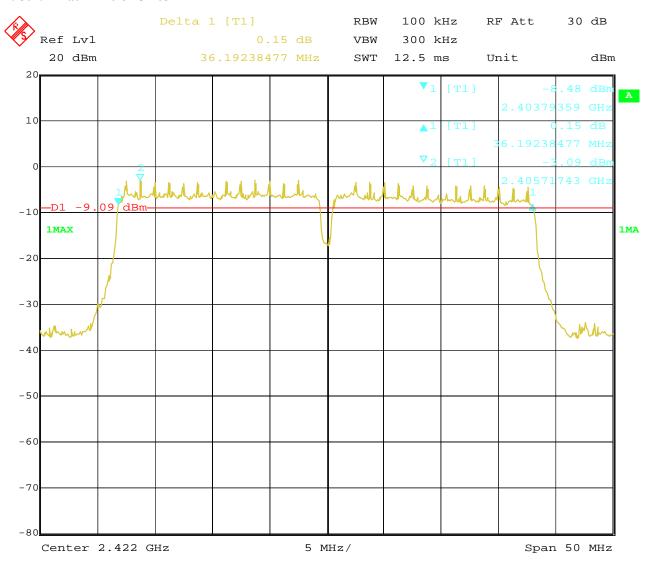


Date: 27.JUL.2021 17:59:24

Page 42 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 2. 802.11n at HT40 of CH06

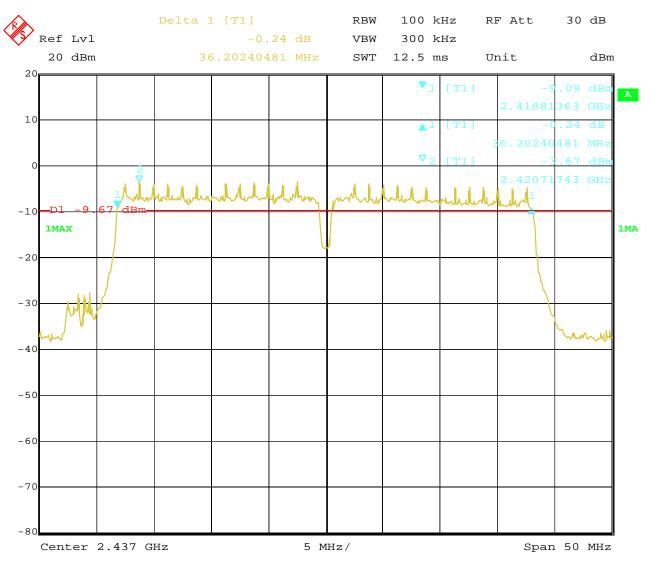


18:00:50 Date: 27.JUL.2021

Page 43 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 3. 802.11n at HT40 of CH09

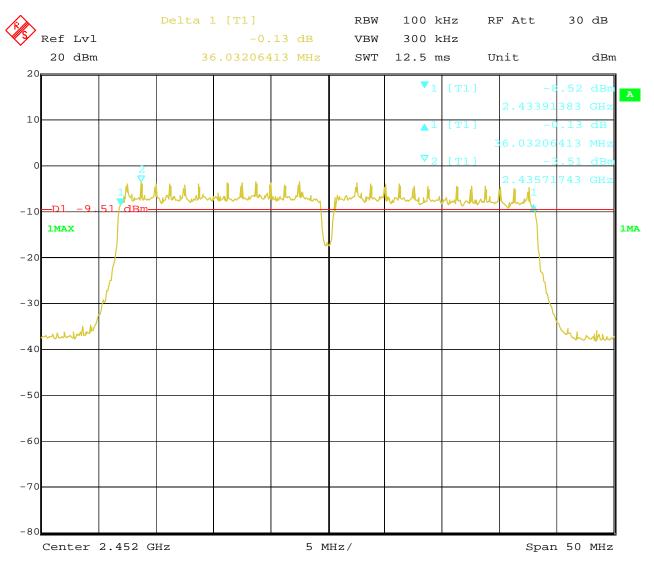

27.JUL.2021 18:02:45 Date:

Report No.: TW2107059-01E


Date: 2021-07-28



Page 44 of 98

# 8. Maximum Output Power

# 8.1 Test Setup



### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Report No.: TW2107059-01E Page 45 of 98

Date: 2021-07-28



#### **8.4Test Results**

| EUT      |               | Screen Protector Film Cutter |           | Model           | Mini 8            |            |
|----------|---------------|------------------------------|-----------|-----------------|-------------------|------------|
| Mode     |               |                              | 802.11b   | Input Voltage   | 120V~             |            |
| Temperat | ure           | 24 deg. C,                   |           | Humidity        | 56% RH            |            |
| Channel  | Frequency (MH | uency<br>z)                  | Max. Powe | er Output (dBm) | Power Limit (dBm) | Pass/ Fail |
| 1        | 2412          |                              |           | 19.77           | 30                | Pass       |
| 6        | 2437          |                              | 2         | 20.18           | 30                | Pass       |
| 11       | 2462          |                              |           | 20.48           | 30                | Pass       |

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

| EUT      |               | Scr         | reen Protector Film Cutter | Model          | Min               | i 8        |
|----------|---------------|-------------|----------------------------|----------------|-------------------|------------|
| Mode     |               |             | 802.11g                    | Input Voltage  | 120V~             |            |
| Temperat | ure           | 24 deg. C,  |                            | Humidity       | 56% RH            |            |
| Channel  | Frequency (MH | uency<br>z) | Max. Power                 | r Output (dBm) | Power Limit (dBm) | Pass/ Fail |
| 1        | 2412          | ,           | 2                          | 0.14           | 30                | Pass       |
| 6        | 2437          | ,           | 2                          | 0.09           | 30                | Pass       |
| 11       | 2462          | r           | 2                          | 0.43           | 30                | Pass       |

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 46 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



| EUT      |              | Screen Protector Film<br>Cutter |                         | Model         | Mini 8            |            |
|----------|--------------|---------------------------------|-------------------------|---------------|-------------------|------------|
| Mode     |              |                                 | 802.11n (HT20)          | Input Voltage | 120V~             |            |
| Temperat | ure          | 24 deg. C,                      |                         | Humidity      | 56% RH            |            |
| Channel  | Frequ<br>(MH | uency<br>z)                     | Max. Power Output (dBm) |               | Power Limit (dBm) | Pass/ Fail |
| 1        | 2412         |                                 | 2                       | 20.04         | 30                | Pass       |
| 6        | 2437         |                                 |                         | 19.12         | 30                | Pass       |
| 11       | 2462         |                                 |                         | 19.95         | 30                | Pass       |

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

| EUT      |               | Screen Protector Film<br>Cutter |                | Model           | Min               | i 8        |
|----------|---------------|---------------------------------|----------------|-----------------|-------------------|------------|
| Mode     |               |                                 | 802.11n (HT40) | Input Voltage   | 120V~             |            |
| Temperat | ure           | 24 deg. C,                      |                | Humidity        | 56% RH            |            |
| Channel  | Frequency (MH | uency<br>z)                     | Max. Powe      | er Output (dBm) | Power Limit (dBm) | Pass/ Fail |
| 3        | 2422          |                                 |                | 19.02           | 30                | Pass       |
| 6        | 2437          |                                 |                | 19.24           | 30                | Pass       |
| 9        | 2452          |                                 |                | 18.77           | 30                | Pass       |

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: TW2107059-01E


Date: 2021-07-28



# Page 47 of 98

# 9. Power Spectral Density Measurement

# 9.1 Test Setup



### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8 \text{ dBm/3kHz}$ .

Report No.: TW2107059-01E Page 48 of 98

Date: 2021-07-28



### 9.4Test Result

| EUT      |     | Screen Protector File | m Cutter Model |                                   | Mini 8           |            |
|----------|-----|-----------------------|----------------|-----------------------------------|------------------|------------|
| Mode     |     | 802.11b 11Mb          | pps            | Input Voltage                     | 120V~            |            |
| Temperat | ure | 24 deg. C,            |                | Humidity                          | 56% RH           |            |
| Channel  | F   | requency (MHz)        |                | r Spectral Density<br>(dBm/10kHz) | Limit (dBm/3kHz) | Pass/ Fail |
| 1        |     | 2412                  |                | -6.00                             | 8                | Pass       |
| 6        |     | 2437                  |                | -4.40                             | 8                | Pass       |
| 11       |     | 2462                  |                | -4.76                             | 8                | Pass       |

| EUT      |     | Screen Protector File    | m Cutter | Model                             | Mini 8           |            |
|----------|-----|--------------------------|----------|-----------------------------------|------------------|------------|
| Mode     |     | 802.11b 1Mb <sub>l</sub> | ps       | Input Voltage                     | 120V~            |            |
| Temperat | ure | 24 deg. C,               |          | Humidity                          | 56% RH           |            |
| Channel  | F   | requency (MHz)           |          | r Spectral Density<br>(dBm/10kHz) | Limit (dBm/3kHz) | Pass/ Fail |
| 1        |     | 2412                     |          | -3.24                             | 8                | Pass       |
| 6        |     | 2437                     |          | -4.11                             | 8                | Pass       |
| 11       |     | 2462                     |          | -7.55                             | 8                | Pass       |

| EUT      |     | Screen Protector Film Cutter |               | Model                            | Mini 8           |            |
|----------|-----|------------------------------|---------------|----------------------------------|------------------|------------|
| Mode     |     | 802.11g 6Mb <sub>l</sub>     | 802.11g 6Mbps |                                  | 120V~            |            |
| Temperat | ure | 24 deg. C,                   |               | Humidity                         | 56% RH           |            |
| Channel  | F   | requency (MHz)               |               | r Spectral Density<br>dBm/10kHz) | Limit (dBm/3kHz) | Pass/ Fail |
| 1        |     | 2412                         |               | -7.74                            | 8                | Pass       |
| 6        |     | 2437                         |               | -7.45                            | 8                | Pass       |
| 11       |     | 2462                         |               | -6.55                            | 8                | Pass       |

Report No.: TW2107059-01E Page 49 of 98

Date: 2021-07-28



| EUT      |      | Screen Protector Film Cutter |   | Model                          | Mini 8           |               |       |  |
|----------|------|------------------------------|---|--------------------------------|------------------|---------------|-------|--|
| Mode     |      | 802.11n HT20 mcs0            |   | 802.11n HT20 mcs0 Input Vo     |                  | Input Voltage | 120V~ |  |
| Temperat | ure  | 24 deg. C                    | , | Humidity                       | 56% RH           |               |       |  |
| Channel  | Fr   | requency (MHz)               |   | Spectral Density<br>lBm/10kHz) | Limit (dBm/3kHz) | Pass/ Fail    |       |  |
| 1        |      | 2412                         |   | -8.00                          | 8                | Pass          |       |  |
| 6        | 2437 |                              |   | -7.05                          | 8                | Pass          |       |  |
| 11       |      | 2462                         |   | -7.84                          | 8                | Pass          |       |  |

| EUT      |      | Screen Protector Film Cutter |      | Model                          | Mini 8           |            |
|----------|------|------------------------------|------|--------------------------------|------------------|------------|
| Mode     |      | 802.11n HT40                 | mcs0 | Input Voltage                  | 120V~            |            |
| Temperat | ure  | 24 deg. C                    | ,    | Humidity                       | 56% RH           |            |
| Channel  | Fr   | requency (MHz)               |      | Spectral Density<br>lBm/10kHz) | Limit (dBm/3kHz) | Pass/ Fail |
| 3        |      | 2422                         |      | -11.63                         | 8                | Pass       |
| 6        | 2437 |                              |      | -11.94                         | 8                | Pass       |
| 9        | 2452 |                              |      | -12.23                         | 8                | Pass       |


Page 50 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



# 9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

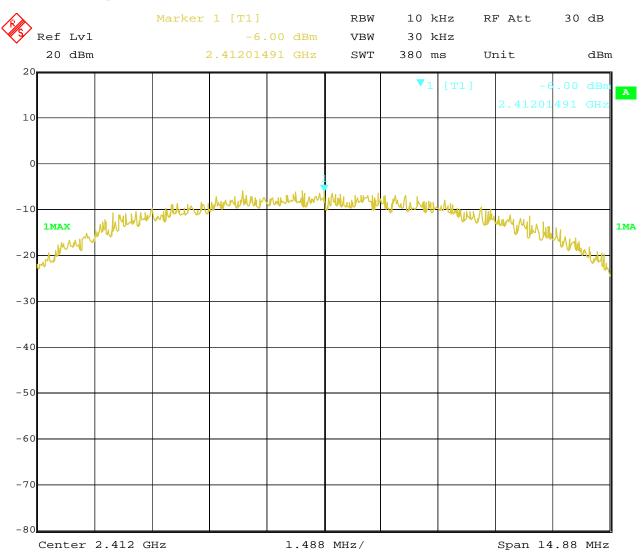


Date: 27.JUL.2021 18:47:05

Page 51 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



# 2. 802.11b at 11Mbps at CH06

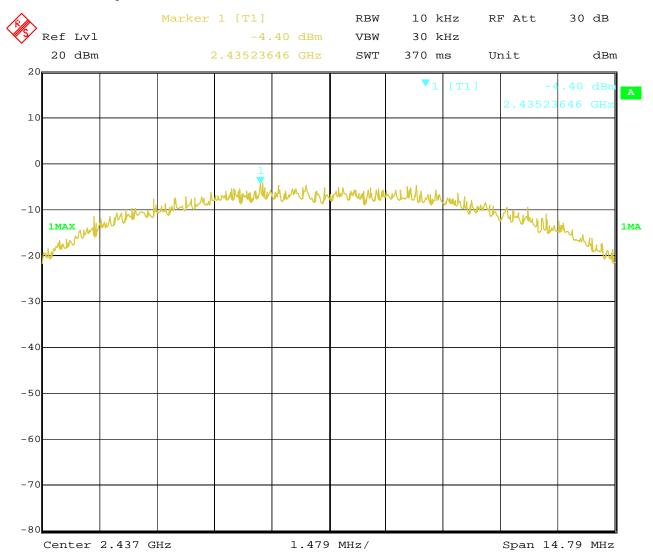


27.JUL.2021 18:48:44 Date:

Page 52 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



# 3. 802.11b at 11Mbps of CH11

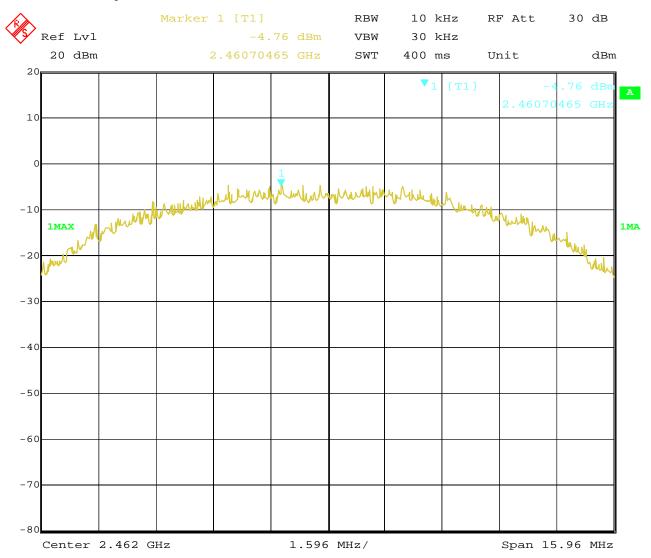


27.JUL.2021 18:49:30 Date:

Page 53 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



# 4. 802.11b at 1Mbps of CH1

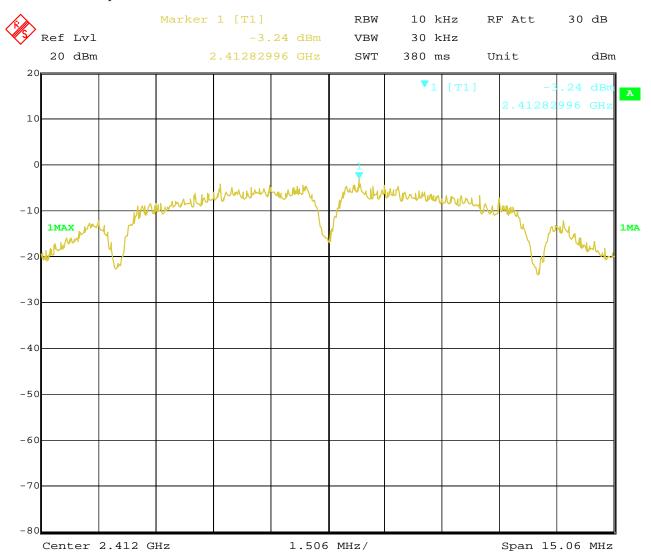

27.JUL.2021 19:01:22 Date:


Page 54 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



# 5. 802.11b at 1Mbps of CH6

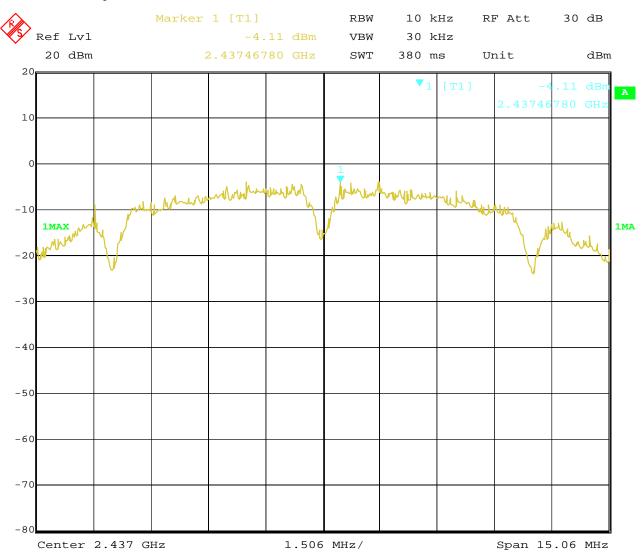

27.JUL.2021 19:00:53 Date:


Page 55 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



# 6. 802.11b at 1Mbps of CH11

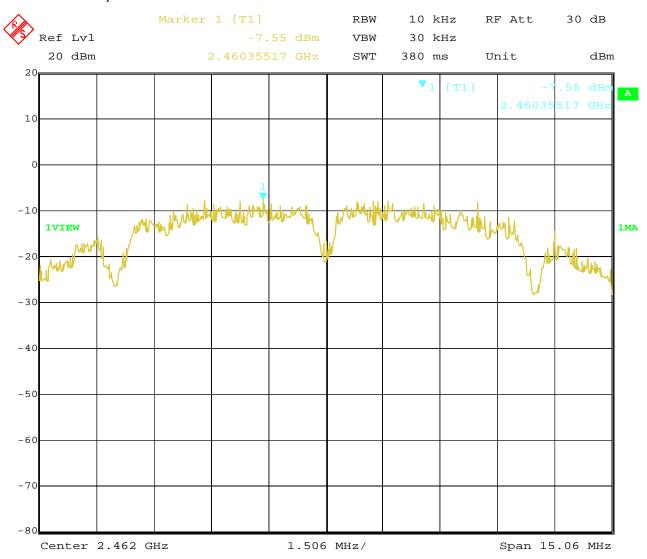


28.JUL.2021 10:48:00 Date:

Page 56 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



# 7. 802.11g at 6Mbps of CH1

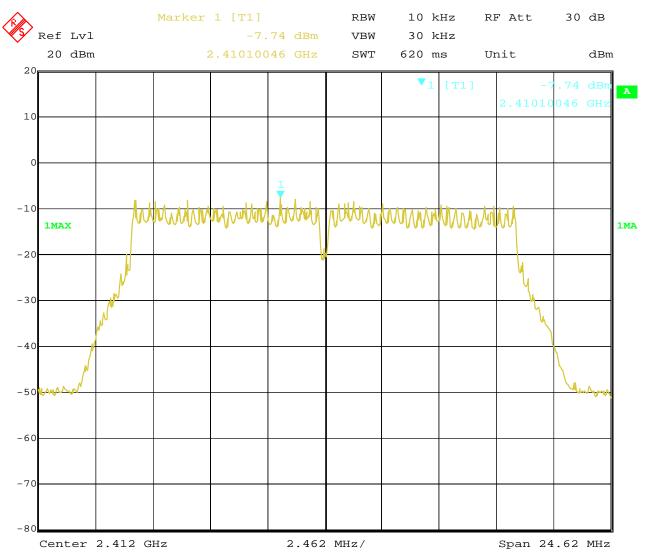

27.JUL.2021 18:59:15 Date:


Page 57 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



# 8. 802.11g at 6Mbps of CH6

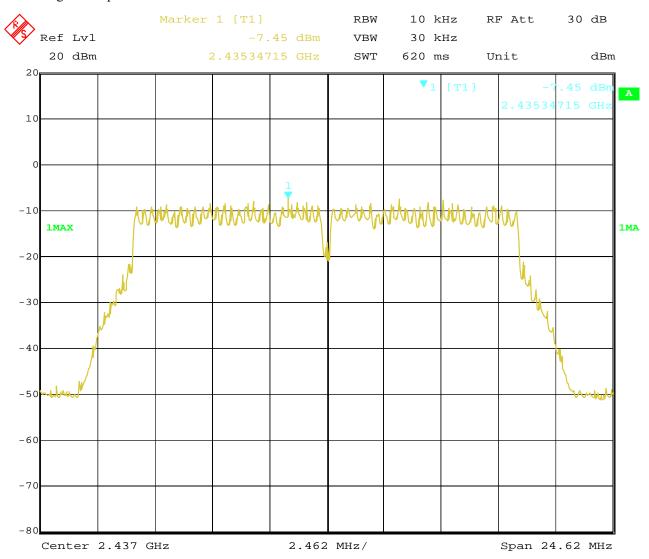

27.JUL.2021 18:56:40 Date:


Page 58 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



# 9. 802.11g at 6Mbps of CH11

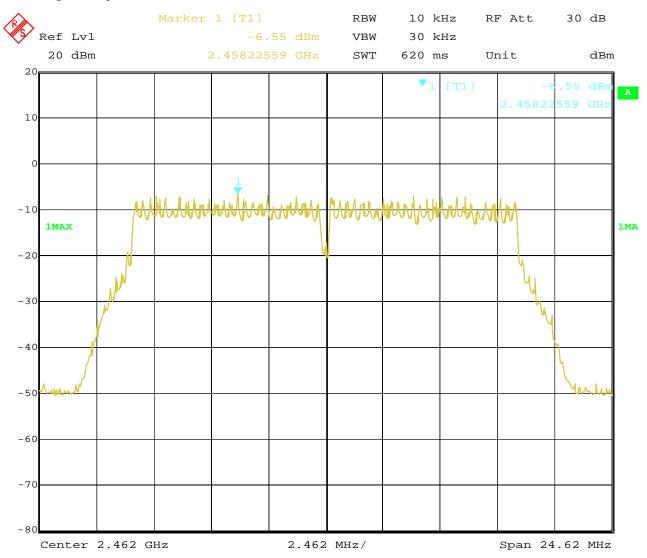

27.JUL.2021 18:54:49 Date:


Page 59 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



### 10. 802.11n at HT20 of CH01

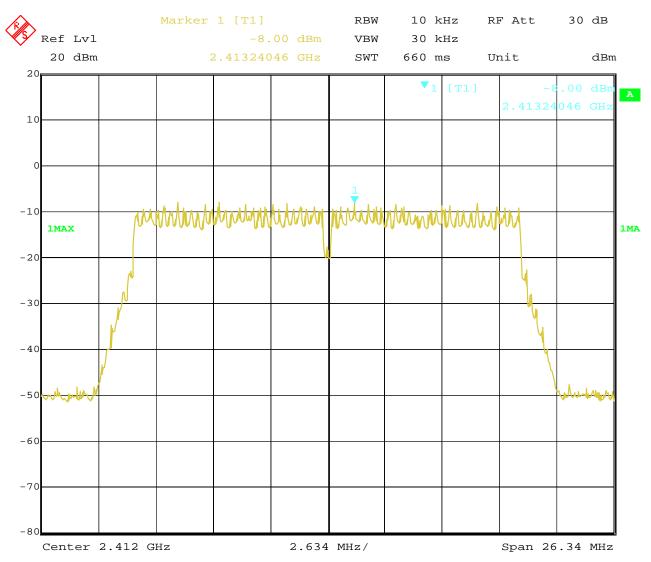


27.JUL.2021 19:13:32 Date:

Page 60 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 11. 802.11n at HT20 of CH06

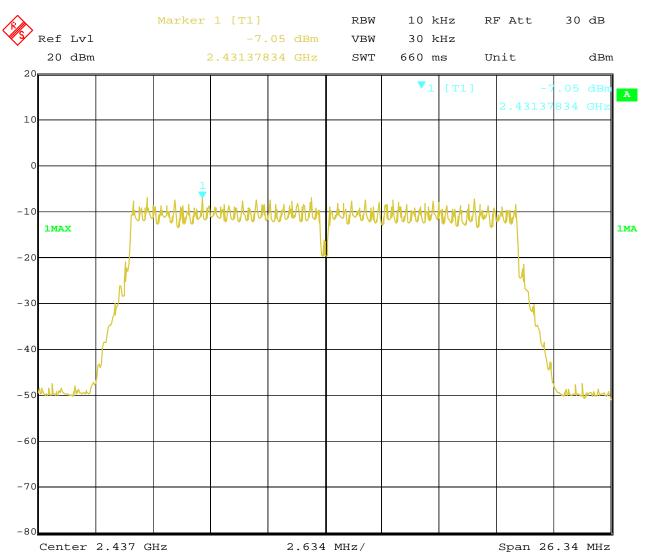


27.JUL.2021 19:11:49 Date:

Page 61 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 12. 802.11n at HT20 of CH11

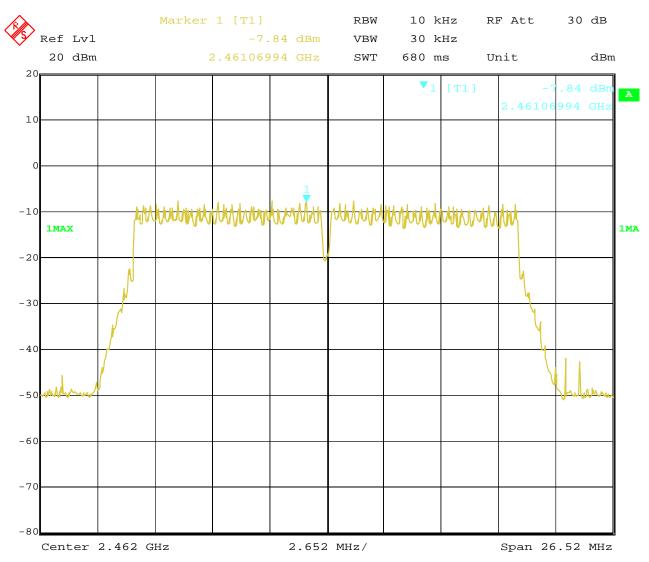


27.JUL.2021 19:06:00 Date:

Page 62 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 13. 802.11n at HT40 of CH01

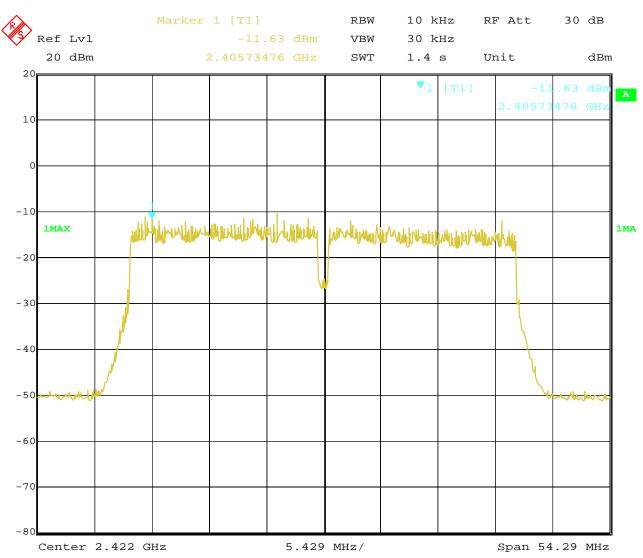


27.JUL.2021 19:15:35 Date:

Page 63 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 14. 802.11n at HT40 of CH04

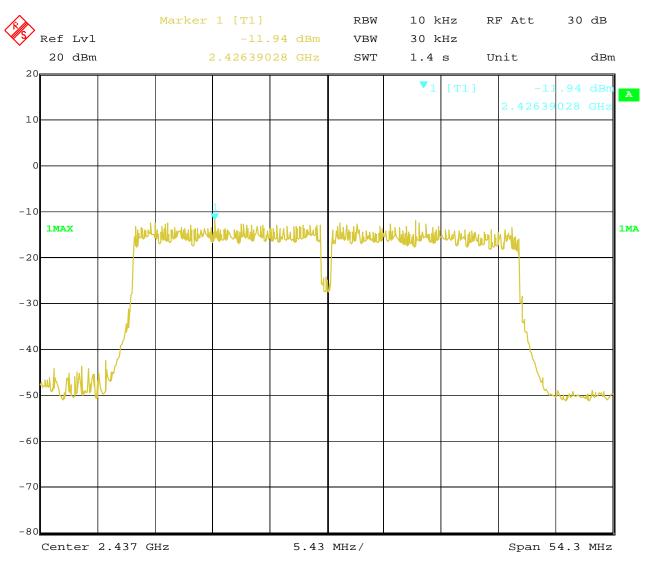


27.JUL.2021 19:18:02 Date:

Page 64 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



### 15. 802.11n at HT40 of CH07

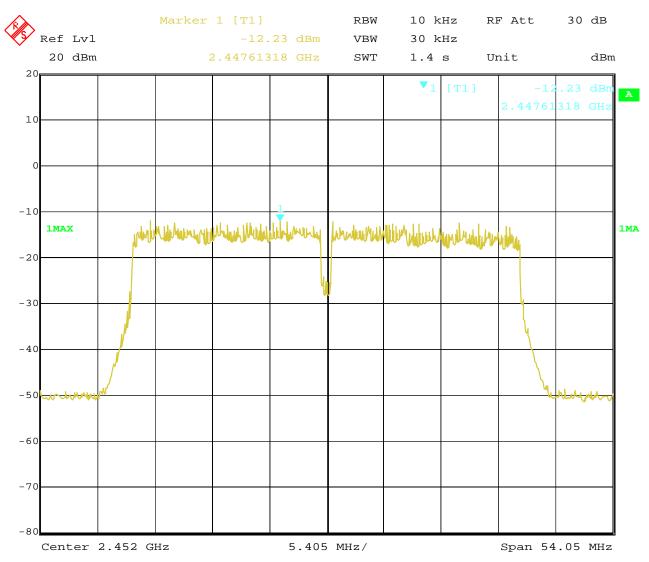


Date: 27.JUL.2021 19:20:25 Report No.: TW2107059-01E

Date: 2021-07-28



# Page 65 of 98

# 10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

#### 10.4 Test Result

Please see next pages

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 66 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




# For 802.11b mode

CH01 at 1Mbps

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

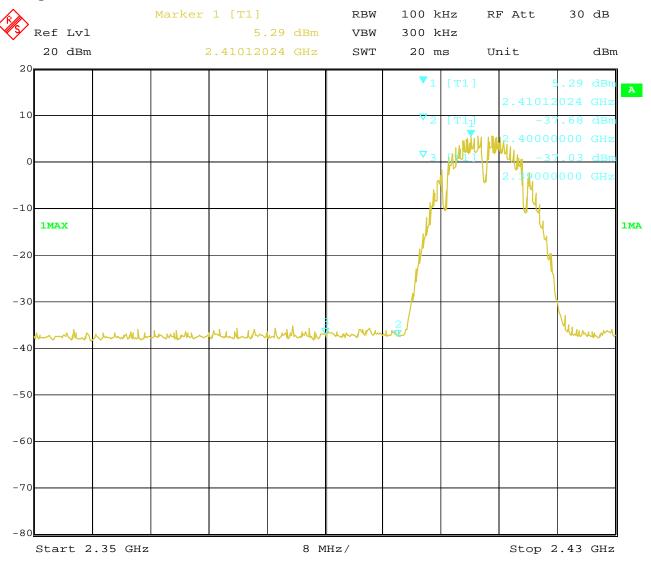

27.JUL.2021 19:23:43 Date:

Page 67 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




### CH11 at 1Mbps

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

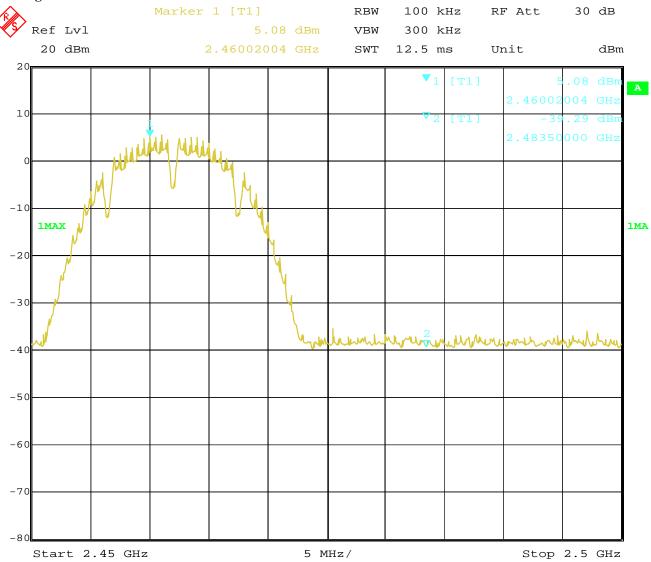

27.JUL.2021 19:29:44 Date:

Page 68 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




# For 802.11b mode

CH01 at 11Mbps

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

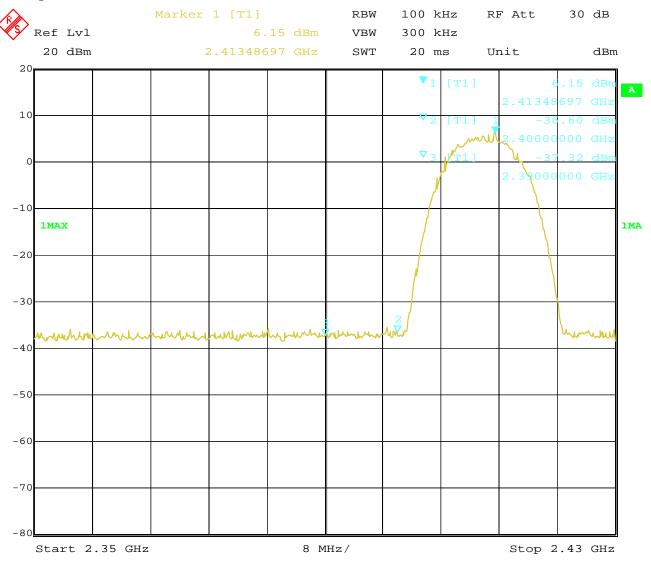

27.JUL.2021 19:25:46 Date:

Page 69 of 98

Report No.: TW2107059-01E

Date: 2021-07-28




### CH11 at 11Mbps

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

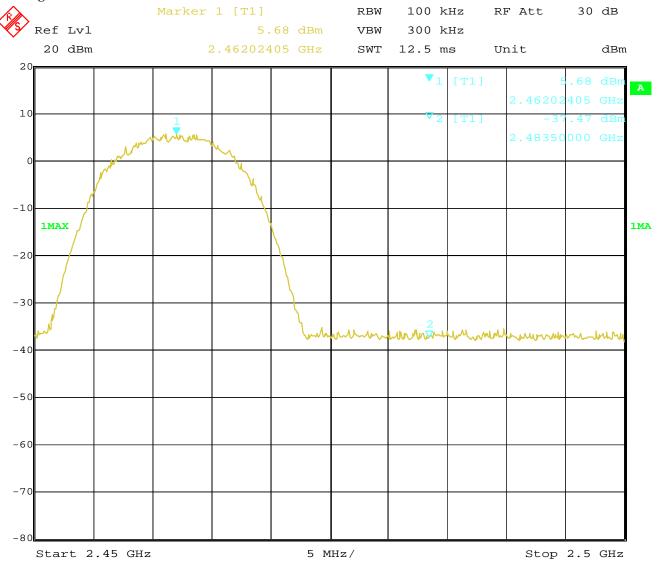

27.JUL.2021 19:28:39 Date:

Page 70 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




# For 802.11g mode

CH01 at 6Mbps

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

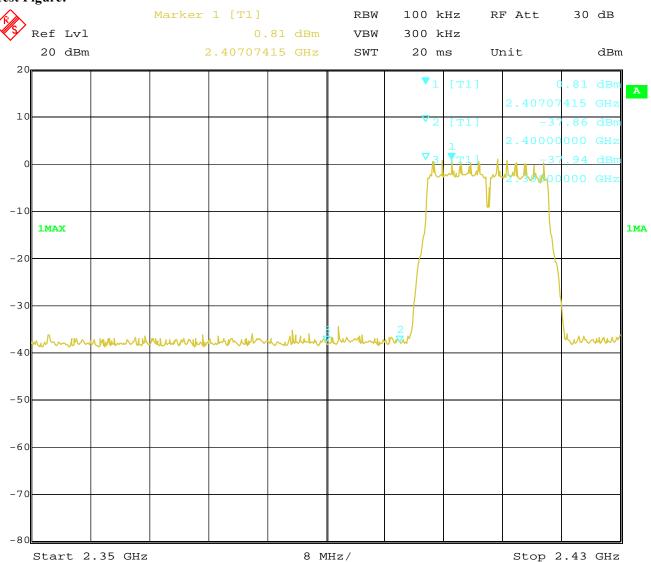

27.JUL.2021 Date: 19:24:24

Page 71 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




### CH11 at 6Mbps

#### Band-edge Measurement 10.4

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

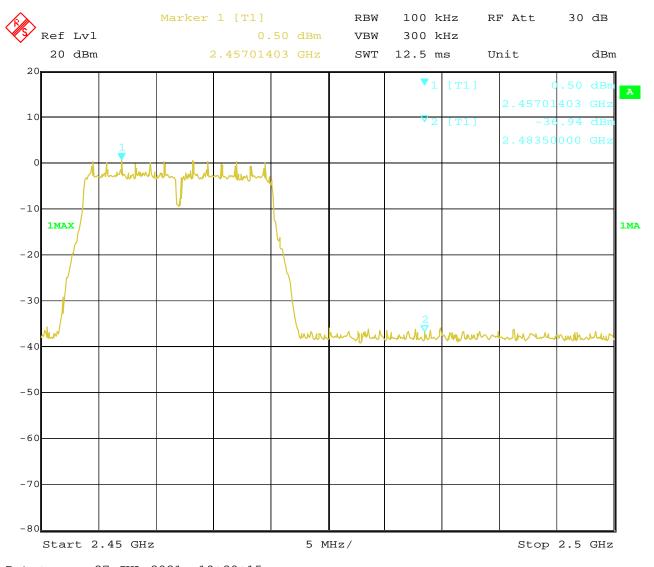

27.JUL.2021 19:29:15 Date:

Page 72 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




# For 802.11n (HT20) mode

CH01 at mcs0

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

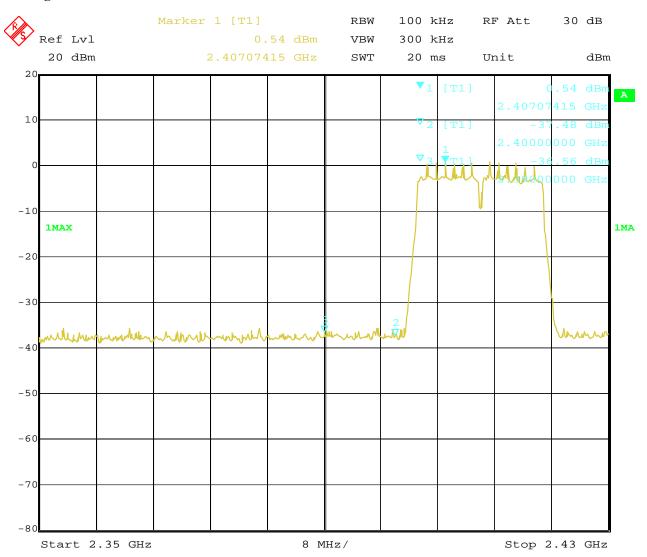

27.JUL.2021 19:22:24 Date:

Report No.: TW2107059-01E

Date: 2021-07-28




Page 73 of 98

### CH11 at mcs0

#### 10.4 Band-edge Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

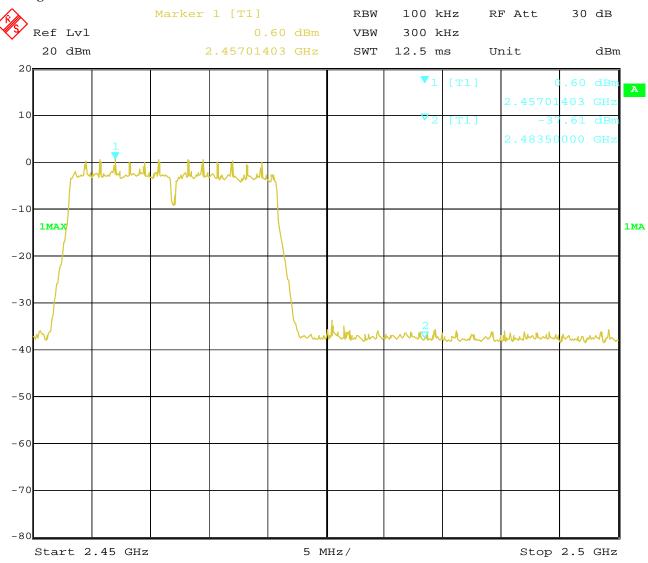

27.JUL.2021 Date: 19:30:52

Page 74 of 98 Report No.: TW2107059-01E

Date: 2021-07-28




## For 802.11n (HT40) mode

CH03 at msc0

#### Band-edge and Restricted band Measurement 10.4

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

## **Test Figure:**

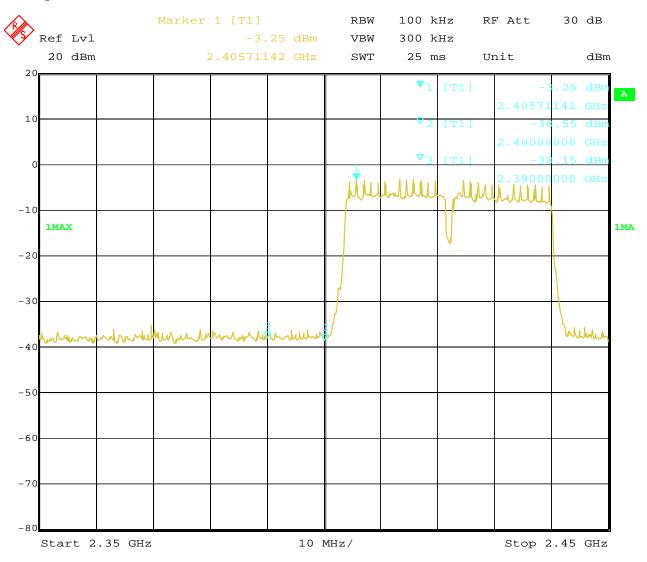

27.JUL.2021 19:21:38 Date:

Report No.: TW2107059-01E

Date: 2021-07-28




Page 75 of 98

## CH09 at msc0

#### 10.4 Band-edge and Restricted band Measurement

| EUT          | Screen Protector Film Cutter | Model         | Mini 8 |
|--------------|------------------------------|---------------|--------|
| Mode         | Keeping Transmitting         | Input Voltage | 120V~  |
| Temperature  | 24 deg. C,                   | Humidity      | 56% RH |
| Test Result: | Pass                         | Detector      | PK     |

# **Test Figure:**

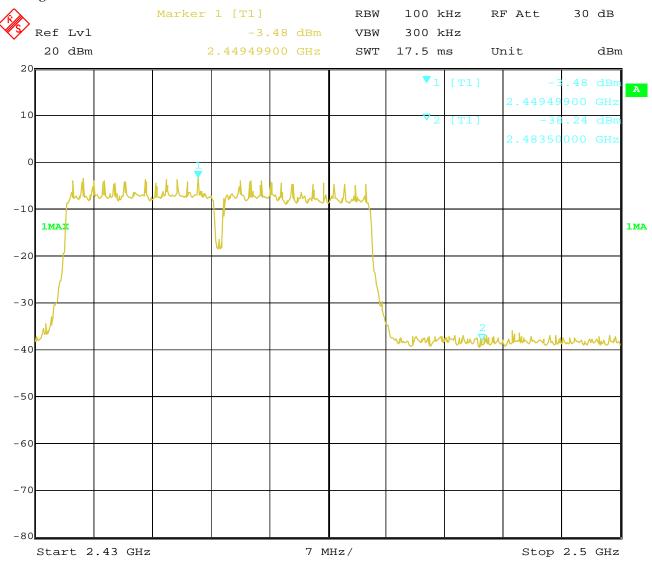

27.JUL.2021 19:20:55 Date:

Report No.: TW2107059-01E Page 76 of 98

Date: 2021-07-28



#### 10.5 Restricted band Measurement

| EUT          | Screen Prot            | ector Film Cutter   | Model              | Mini 8          |  |  |  |  |  |
|--------------|------------------------|---------------------|--------------------|-----------------|--|--|--|--|--|
| Mode         | Keeping                | Transmitting        | Input Voltage      | 120V~           |  |  |  |  |  |
| Temperature  | 24                     | deg. C,             | Humidity           | 56% RH          |  |  |  |  |  |
| Test Result: |                        | Pass                | Detector           | PK              |  |  |  |  |  |
|              |                        | 802.11b mode, Low C | Channel, Horizonta | 1               |  |  |  |  |  |
| 2390         | PK (dBμV/m)            | 48.51               | T ::4              | $74(dB\mu V/m)$ |  |  |  |  |  |
|              | AV (dBμV/m)            |                     | Limit              | 54(dBμV/m)      |  |  |  |  |  |
|              | 802.11b mode, Vertical |                     |                    |                 |  |  |  |  |  |
| 2390         | PK (dBμV/m)            | 45.58               | Limit              | 74(dBμV/m)      |  |  |  |  |  |
|              | AV (dBμV/m)            |                     | Limit              | 54(dBμV/m)      |  |  |  |  |  |

| EUT                                    | Screen Prot | ector Film Cutter | Model         | Mini 8          |  |  |  |  |
|--|-------------|-------------------|---------------|-----------------|--|--|--|--|
| Mode                                   | Keeping     | Transmitting      | Input Voltage | 120V~           |  |  |  |  |
| Temperature                            | 24          | deg. C,           | Humidity      | 56% RH          |  |  |  |  |
| Test Result:                           |             | Pass              | Detector      | PK              |  |  |  |  |
| 802.11b mode, High Channel, Horizontal |             |                   |               |                 |  |  |  |  |
| 2483.5                                 | PK (dBµV/m) | 46.85             | T ' '/        | $74(dB\mu V/m)$ |  |  |  |  |
|  | AV (dBμV/m) |                   | Limit         | 54(dBμV/m)      |  |  |  |  |
| 802.11b mode, High Channel, Vertical   |             |                   |               |                 |  |  |  |  |
| 2483.5                                 | PK (dBµV/m) | 44.23             | т,            | 74(dBμV/m)      |  |  |  |  |
|  | AV (dBμV/m) |                   | Limit         | $54(dB\mu V/m)$ |  |  |  |  |

Report No.: TW2107059-01E Page 77 of 98

Date: 2021-07-28



#### 10.5 Restricted band Measurement

| EUT          | Screen Prot            | ector Film Cutter   | Model              | Mini 8          |  |  |  |  |  |  |
|--------------|------------------------|---------------------|--------------------|-----------------|--|--|--|--|--|--|
| Mode         | Keeping                | Transmitting        | Input Voltage      | 120V~           |  |  |  |  |  |  |
| Temperature  | 24                     | deg. C,             | Humidity           | 56% RH          |  |  |  |  |  |  |
| Test Result: |                        | Pass                | Detector           | PK              |  |  |  |  |  |  |
|              |                        | 802.11g mode, Low C | Channel, Horizonta | 1               |  |  |  |  |  |  |
| 2390         | PK (dBµV/m)            | 49.67               | T : :/             | $74(dB\mu V/m)$ |  |  |  |  |  |  |
|              | AV (dBμV/m)            |                     | Limit              | $54(dB\mu V/m)$ |  |  |  |  |  |  |
|              | 802.11g mode, Vertical |                     |                    |                 |  |  |  |  |  |  |
| 2390         | PK (dBμV/m)            | 46.52               | Limit              | $74(dB\mu V/m)$ |  |  |  |  |  |  |
|              | AV (dBμV/m)            |                     | Limit              | $54(dB\mu V/m)$ |  |  |  |  |  |  |

| 10.5 Restricted | band Measuremen                      |                    |                   |                 |  |  |  |  |  |  |
|-----------------|--------------------------------------|--------------------|-------------------|-----------------|--|--|--|--|--|--|
| EUT             | Screen Prot                          | ector Film Cutter  | Model             | Mini 8          |  |  |  |  |  |  |
| Mode            | Keeping                              | g Transmitting     | Input Voltage     | 120V~           |  |  |  |  |  |  |
| Temperature     | 24                                   | deg. C,            | Humidity          | 56% RH          |  |  |  |  |  |  |
| Test Result:    |                                      | Pass               | Detector          | PK              |  |  |  |  |  |  |
|                 |                                      | 802.11g mode, High | Channel, Horizont | al              |  |  |  |  |  |  |
| 2483.5          | PK (dBμV/m)                          | 48.82              | T ' '4            | $74(dB\mu V/m)$ |  |  |  |  |  |  |
|                 | AV (dBμV/m)                          |                    | Limit             | $54(dB\mu V/m)$ |  |  |  |  |  |  |
|                 | 802.11g mode, High Channel, Vertical |                    |                   |                 |  |  |  |  |  |  |
| 2483.5          | PK (dBμV/m)                          | 47.09              | T ::4             | $74(dB\mu V/m)$ |  |  |  |  |  |  |
|                 | AV (dBμV/m)                          |                    | Limit             | $54(dB\mu V/m)$ |  |  |  |  |  |  |

Report No.: TW2107059-01E Page 78 of 98

Date: 2021-07-28



#### 10.5 Restricted band Measurement

| EUT          | Screen Prot                                | ector Film Cutter | Model         | Mini 8          |  |  |  |  |  |
|--------------|--|-------------------|---------------|-----------------|--|--|--|--|--|
| Mode         | Keeping                                    | Transmitting      | Input Voltage | 120V~           |  |  |  |  |  |
| Temperature  | 24   | deg. C,           | Humidity      | 56% RH          |  |  |  |  |  |
| Test Result: |  | Pass              | Detector      | PK              |  |  |  |  |  |
|              | 802.11n HT20 mode, Low Channel, Horizontal |                   |               |                 |  |  |  |  |  |
| 2390         | PK (dBµV/m)                                | 50.13             | T ::4         | $74(dB\mu V/m)$ |  |  |  |  |  |
|              | AV (dBμV/m)                                |                   | Limit         | 54(dBµV/m)      |  |  |  |  |  |
|              | 802.11n HT20 mode, Low Channel, Vertical   |                   |               |                 |  |  |  |  |  |
| 2390         | PK (dBμV/m)                                | 47.96             | Limit         | 74(dBµV/m)      |  |  |  |  |  |
|              | AV (dBμV/m)                                |                   | Limit         | $54(dB\mu V/m)$ |  |  |  |  |  |

| EUT   | Screen Prot                               | ector Film Cutter | Model         | Mini 8          |  |  |  |  |  |
|---|---|-------------------|---------------|-----------------|--|--|--|--|--|
| Mode  | Keeping                                   | Transmitting      | Input Voltage | 120V~           |  |  |  |  |  |
| Temperature                                 | 24  | deg. C,           | Humidity      | 56% RH          |  |  |  |  |  |
| Test Result:                                |   | Pass              | Detector      | PK              |  |  |  |  |  |
| 802.11n HT20 mode, High Channel, Horizontal |   |                   |               |                 |  |  |  |  |  |
| 2483.5                                      | PK (dBµV/m)                               | 49.70             | T :!4         | $74(dB\mu V/m)$ |  |  |  |  |  |
|   | AV (dBμV/m)                               |                   | Limit         | $54(dB\mu V/m)$ |  |  |  |  |  |
|   | 802.11n HT20 mode, High Channel, Vertical |                   |               |                 |  |  |  |  |  |
| 2483.5                                      | PK (dBμV/m)                               | 48.12             | Limit         | 74(dBμV/m)      |  |  |  |  |  |
|   | AV (dBμV/m)                               |                   | Limit         | $54(dB\mu V/m)$ |  |  |  |  |  |

Report No.: TW2107059-01E Page 79 of 98

Date: 2021-07-28



| EUT          | Screen Prot                                | ector Film Cutter | Model         | Mini 8          |  |  |  |  |  |
|--------------|--|-------------------|---------------|-----------------|--|--|--|--|--|
| Mode         | Keeping                                    | Transmitting      | Input Voltage | 120V~           |  |  |  |  |  |
| Temperature  | 24   | deg. C,           | Humidity      | 56% RH          |  |  |  |  |  |
| Test Result: |  | Pass              | Detector      | PK              |  |  |  |  |  |
|              | 802.11n HT40 mode, Low Channel, Horizontal |                   |               |                 |  |  |  |  |  |
| 2390         | PK (dBμV/m)                                | 52.73             | Limit         | $74(dB\mu V/m)$ |  |  |  |  |  |
|              | AV (dBμV/m)                                |                   | Limit         | $54(dB\mu V/m)$ |  |  |  |  |  |
|              | 802.11n HT40 mode, Low Channel, Vertical   |                   |               |                 |  |  |  |  |  |
| 2390         | PK (dBμV/m)                                | 49.86             | I imit        | 74(dBμV/m)      |  |  |  |  |  |
|              | AV (dBμV/m)                                |                   | Limit         | 54(dBμV/m)      |  |  |  |  |  |




| No. | Frequency | Results  | Factor | Limit    | Over       | Detector | Table (o) | Height | ANT        | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|------------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | Limit (dB) |          |           | (cm)   |            |         |
| 3   | 2390.265  | 52.73    | -3.52  | 74.0     | -21.27     | Peak     | 304.00    | 100    | Horizontal | Pass    |

Page 80 of 98

Report No.: TW2107059-01E



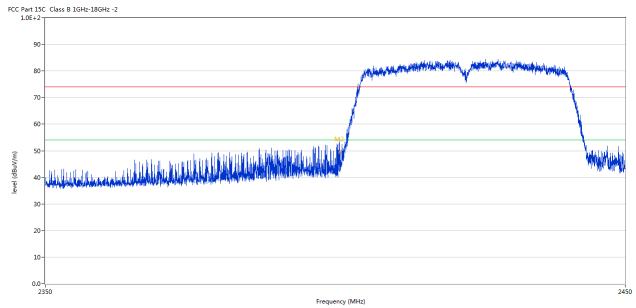


| No. | Frequency | Results  | Factor | Limit    | Over       | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | Limit (dB) |          |           | (cm)   |          |         |
| 3   | 2390.515  | 49.86    | -3.52  | 74.0     | -24.14     | Peak     | 345.00    | 100    | Vertical | Pass    |

Page 81 of 98 Report No.: TW2107059-01E

Date: 2021-07-28



| EUT   | Screen Pro  | tector Film Cutter | Model         | Mini 8          |  |  |  |  |  |
|---|-------------|--------------------|---------------|-----------------|--|--|--|--|--|
| Mode  | Keeping     | g Transmitting     | Input Voltage | 120V~           |  |  |  |  |  |
| Temperature                                 | 24          | l deg. C,          | Humidity      | 56% RH          |  |  |  |  |  |
| Test Result:                                |             | Pass               | Detector      | PK              |  |  |  |  |  |
| 802.11n HT40 mode, High Channel, Horizontal |             |                    |               |                 |  |  |  |  |  |
| 2483.5                                      | PK (dBµV/m) | 50.38              | T ' '4        | $74(dB\mu V/m)$ |  |  |  |  |  |
|   | AV (dBμV/m) |                    | Limit         | 54(dBµV/m)      |  |  |  |  |  |
| 802.11n HT40 mode, High Channel, Vertical   |             |                    |               |                 |  |  |  |  |  |
| 2483.5                                      | PK (dBμV/m) | 48.72              | Limit         | 74(dBμV/m)      |  |  |  |  |  |
|   | AV (dBμV/m) |                    | Limit         | $54(dB\mu V/m)$ |  |  |  |  |  |

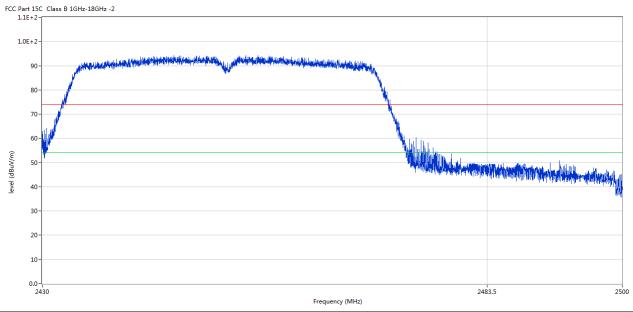


| Ī | No. | Frequency | Results  | Factor | Limit    | Over Limit | Detector | Table (o) | Height (cm) | ANT        | Verdict |
|---|-----|-----------|----------|--------|----------|------------|----------|-----------|-------------|------------|---------|
|   |     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | (dB)       |          |           |             |            |         |
|   | 2   | 2483.467  | 50.38    | -3.57  | 74.0     | -23.62     | Peak     | 291.00    | 100         | Horizontal | Pass    |

Page 82 of 98

Report No.: TW2107059-01E



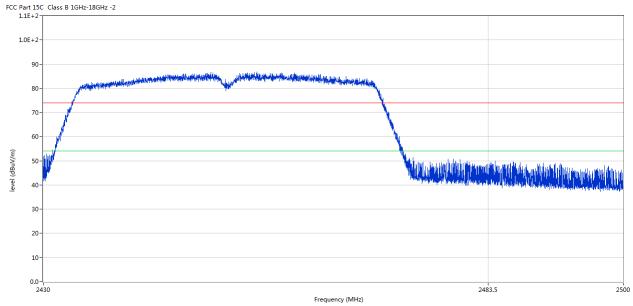

| No. | Frequency | Results  | Factor | Limit    | Over       | Detector | Table (o) | Height | ANT      | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
|     | (MHz)     | (dBuV/m) | (dB)   | (dBuV/m) | Limit (dB) |          |           | (cm)   |          |         |
| 2   | 2483.459  | 48.72    | -3.57  | 74.0     | -25.28     | Peak     | 352.00    | 100    | Vertical | Pass    |

Report No.: TW2107059-01E

Date: 2021-07-28



Page 83 of 98

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 11.2 Antenna Connected construction

PCB antenna used. The gain of 2.5dBi.

Report No.: TW2107059-01E Page 84 of 98

Date: 2021-07-28



### 12.0 FCC ID Label

# FCC ID: 2AVGR-MINI8MINI9

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### Mark Location:



Page 85 of 98


Report No.: TW2107059-01E

Date: 2021-07-28



#### 13.0 **Photo of testing**

Conducted Emission Test Setup:

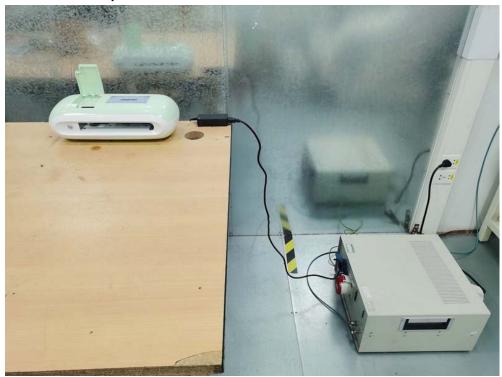


Page 86 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



## Radiated Emission Test Setup:

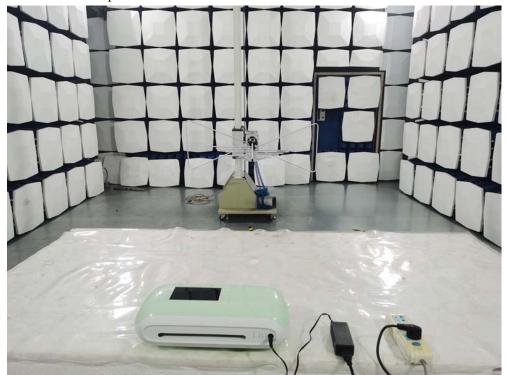



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2107059-01E

Date: 2021-07-28



# Photographs - EUT

# Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 88 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 89 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



Outside View



The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2107059-01E Page 90 of 98



Outside View




Page 91 of 98

Report No.: TW2107059-01E

Date: 2021-07-28





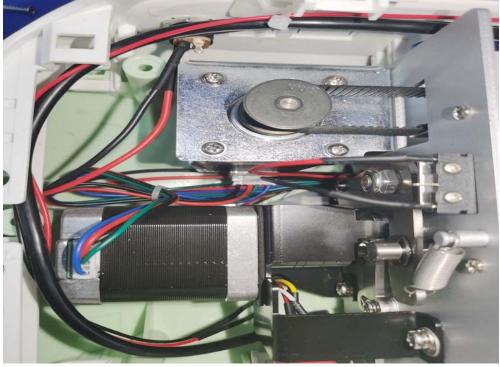

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 92 of 98

Report No.: TW2107059-01E



Inside view



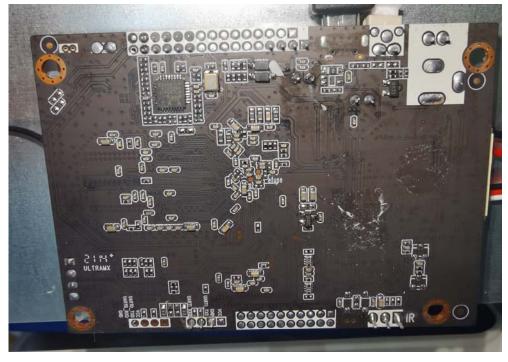



Page 93 of 98

Report No.: TW2107059-01E



Inside view

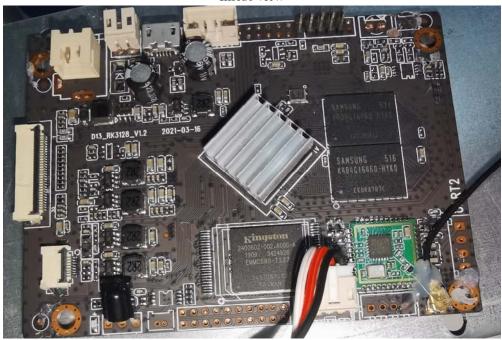

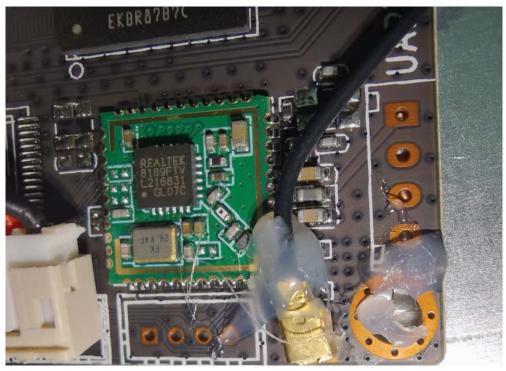

Page 94 of 98

Report No.: TW2107059-01E

Date: 2021-07-28



Inside view







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2107059-01E Page 95 of 98

Date: 2021-07-28



## Inside view




Page 96 of 98

Report No.: TW2107059-01E



Inside view



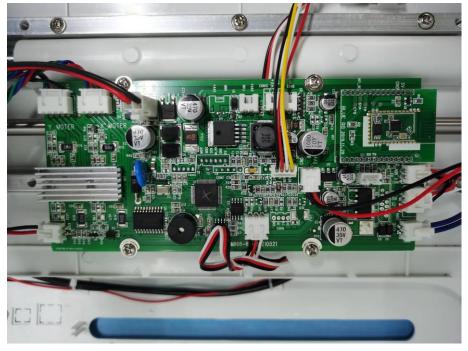


Page 97 of 98

Report No.: TW2107059-01E



Inside view



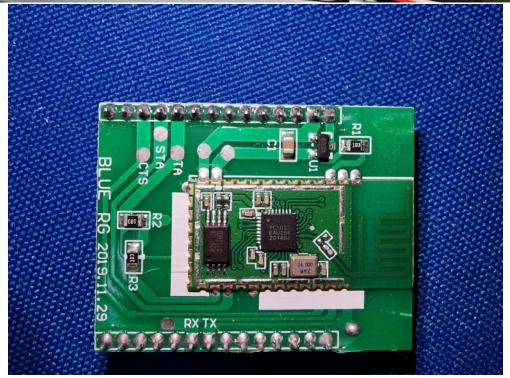

Page 98 of 98 Report No.: TW2107059-01E



Inside view



End of the report