

# FCC Part 15 EMI TEST REPORT of

E.U.T. : XS WIRELESS  
MODEL : EM-XSW1  
FCC ID. : DMOEMXSW1  
Frequency Range : 2433MHz~2473MHz

for

APPLICANT : Sennheiser Electric Corp.  
ADDRESS : 1 Enterprise Drive, Old Lyme, CT 06371, USA

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**  
NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,  
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.  
TEL : (02)26023052 FAX: (02)26010910

http : // [www.etc.org.tw](http://www.etc.org.tw); e-mail : [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 16-08-RBF-015-06

# TEST REPORT CERTIFICATION

Applicant : Sennheiser Electric Corp.  
1 Enterprise Drive, Old Lyme, CT 06371, USA

Manufacturer : MASCOT ELECTRIC CO., LTD  
NO. 85, CHANGXING 1ST ST., RENDE DIST., TAINAN CITY 717,  
TAIWAN

Description of EUT

a) Type of EUT : XS WIRELESS

b) Trade Name : SENNHEISER

c) Model No. : SK-XSW

d) Power Supply : AC/DC Adapter  
(1) Model: FW8002/16  
I/P: AC100-240V, 50-60Hz, 110mA  
O/P: 12Vdc, 400mA  
(2) Model: NT12-5CW  
I/P: AC100-240V, 50/60Hz, 0.2A  
O/P: 12Vdc, 0.5A, 6W

e) Frequency Range : 2433MHz~2473MHz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

## Summary of Tests

| Test                  | Results     |
|-----------------------|-------------|
| Radiated Emission     | <b>Pass</b> |
| Conducted Emission    | <b>Pass</b> |
| Band Edge Requirement | <b>Pass</b> |
| Duty Cycle            | <b>N.A.</b> |
| 20dB Bandwidth        | <b>Pass</b> |

Date Test Item Received : Aug. 09, 2016

Date Test Campaign Completed : Sep. 07, 2016

Date of Issue : Sep. 22, 2016

Test Engineer : Brian Huang  
(Brian Huang, Engineer )

Approve & Authorized Signer :

S. S. Liou  
S. S. Liou, Section Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN



| <b>Table of Contents</b>                      | <b>Page</b> |
|-----------------------------------------------|-------------|
| Cover Page.....                               | I           |
| TEST REPORT CERTIFICATION.....                | II          |
| Table of Contents.....                        | IV          |
| <b>1 GENERAL INFORMATION .....</b>            | <b>1</b>    |
| 1.1 Product Description.....                  | 1           |
| 1.2 Characteristics of Device .....           | 1           |
| 1.3 Test Methodology .....                    | 1           |
| 1.4 Test Facility.....                        | 1           |
| <b>2 PROVISIONS APPLICABLE .....</b>          | <b>2</b>    |
| 2.1 Definition .....                          | 2           |
| 2.2 Requirement for Compliance .....          | 3           |
| 2.3 Restricted Bands of Operation .....       | 5           |
| 2.4 Labeling Requirement.....                 | 5           |
| 2.5 User Information .....                    | 6           |
| <b>3. SYSTEM TEST CONFIGURATION .....</b>     | <b>7</b>    |
| 3.1 Justification .....                       | 7           |
| 3.2 Devices for Tested System.....            | 7           |
| <b>4 RADIATED EMISSION MEASUREMENT.....</b>   | <b>8</b>    |
| 4.1 Applicable Standard.....                  | 8           |
| 4.2 Measurement Procedure.....                | 8           |
| 4.3 Measuring Instrument .....                | 10          |
| 4.4 Radiated Emission Data .....              | 11          |
| 4.4.1 RF Portion.....                         | 11          |
| 4.4.2 Other Emissions .....                   | 17          |
| 4.5 Field Strength Calculation .....          | 21          |
| 4.6 Photos of Radiation Measuring Setup.....  | 22          |
| <b>5 CONDUCTED EMISSION MEASUREMENT .....</b> | <b>24</b>   |
| 5.1 Standard Applicable .....                 | 24          |
| 5.2 Measurement Procedure.....                | 24          |
| 5.3 Conducted Emission Data .....             | 25          |
| 5.4 Result Data Calculation .....             | 29          |
| 5.5 Conducted Measurement Equipment .....     | 29          |
| 5.6 Photos of Conduction Measuring Setup..... | 30          |
| <b>6 ANTENNA REQUIREMENT .....</b>            | <b>31</b>   |
| 6.1 Standard Applicable .....                 | 31          |

|                                       |           |
|---------------------------------------|-----------|
| 6.2 Antenna Construction.....         | 31        |
| <b>7 BAND EDGES MEASUREMENT .....</b> | <b>32</b> |
| 7.1 Standard Applicable .....         | 32        |
| 7.2 Measurement Procedure.....        | 32        |
| 7.3 Measurement Equipment .....       | 33        |
| 7.4 Measurement Data .....            | 33        |
| <b>8. DUTY CYCLE.....</b>             | <b>36</b> |
| 8.1 Standard Applicable .....         | 36        |
| 8.2 Measurement Equipment .....       | 36        |
| 8.3 Measurement Data .....            | 36        |
| <b>9. BANDWIDTH OF EMISSION.....</b>  | <b>38</b> |
| 9.1 Applicable Standard .....         | 38        |
| 9.2 Measurement Procedure.....        | 38        |
| 9.3 Measurement Equipment .....       | 39        |
| 9.4 Measurement Data .....            | 39        |

# 1 GENERAL INFORMATION

## 1.1 Product Description

- a) Type of EUT : XS WIRELESS
- b) Trade Name : SENNHEISER
- c) Model No. : EM-XSW1
- d) Power Supply : AC/DC Adapter
  - (1) Model: FW8002/16
    - I/P: AC100-240V, 50-60Hz, 110mA
    - O/P: 12Vdc, 400mA
  - (2) Model: NT12-5CW
    - I/P: AC100-240V, 50/60Hz, 0.2A
    - O/P: 12Vdc, 0.5A, 6W
- e) Frequency Range : 2433MHz~2473MHz

## 1.2 Characteristics of Device

The EUT is a Wireless Microphone Receiver with 2.4GHz SYNC function.

## 1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details.

Instead of 0.8m EUT height above 1GHz, 1.5m was allowed by FCC December 2014 TCB Conference call.

Measurement Software

| Software | Version           | Note                    |
|----------|-------------------|-------------------------|
| e3       | Version 6.100618b | Radiated Emission Test  |
| e3       | Version 6.100421  | Conducted Emission Test |

## 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

This site is FCC 2.948 listed and accepted in a letter dated Jan. 29, 2014.

Registration Number: 90589

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50MH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency<br>MHz | Quasi Peak<br>dB $\mu$ V | Average<br>dB $\mu$ V |
|------------------|--------------------------|-----------------------|
| 0.15 - 0.5       | 66-56                    | 56-46                 |
| 0.5 - 5.0        | 56                       | 46                    |
| 5.0 - 30.0       | 60                       | 50                    |

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency<br>MHz | Distance<br>Meters | Radiated<br>dB $\mu$ V/m | Radiated<br>$\mu$ V/m |
|------------------|--------------------|--------------------------|-----------------------|
| 30 - 88          | 3                  | 40.0                     | 100                   |
| 88 - 216         | 3                  | 43.5                     | 150                   |
| 216 - 960        | 3                  | 46.0                     | 200                   |
| Above 960        | 3                  | 54.0                     | 500                   |

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

For intentional radiator device, per §15.249(a), the field strength of emissions shall comply with the following :

| Frequency<br>MHz | Distance<br>Meters | Fundamental  |      | Harmonic     |           |
|------------------|--------------------|--------------|------|--------------|-----------|
|                  |                    | dB $\mu$ V/m | mV/m | dB $\mu$ V/m | $\mu$ V/m |
| 902 - 928        | 3                  | 94           | 50   | 54           | 500       |
| 2400 - 2483.5    | 3                  | 94           | 50   | 54           | 500       |
| 5725 - 5875      | 3                  | 94           | 50   | 54           | 500       |
| 24000 - 24250    | 3                  | 108          | 250  | 68           | 2500      |

In accordance with §15.249(e), limits shown in above table are based on average limits for frequencies above 1000 MHz, and frequencies below 1000 MHz are based on quasi peak. However, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20 dB.

### (3) Spurious in Out Band Requirement

For intentional device, according to §15.249 (d), emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits in §15.209.

### (4) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz               | MHz                   | MHz           | GHz         |
|-------------------|-----------------------|---------------|-------------|
| 0.090 - 0.110     | 16.42-16.423          | 399.9-410     | 4.5-5.25    |
| 0.495 - 0.505 **  | 16.69475 - 16.69525   | 608-614       | 5.35-5.46   |
| 2.1735 - 2.1905   | 16.80425 - 16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67            | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25            | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6               | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2             | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94            | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138               | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05          | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475 - 156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9           | 2655-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17       | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2          | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285               | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4             | 3360-4400     | Above 38.6  |
| 13.36-13.41       |                       |               |             |

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation.

All measurement were intentional to maximum the emissions from EUT by varying the connection cables(if applicable), therefore, the test result is sure to meet the applicable requirement.

#### 3.2 Devices for Tested System

| Device       | Manufacturer             | Model / FCC ID    | Description |
|--------------|--------------------------|-------------------|-------------|
| XS WIRELESS* | MASCOT ELECTRIC CO., LTD | SK-XSW / DMOSKXSW | ---         |

Remark “\*” means equipment under test.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For intentional radiators, according to §15.249 (a), the fundamental field strength shall not exceed 94 dB $\mu$ V/m and the harmonics shall not exceed 54 dB $\mu$ V/m. For out band emission except for harmonics shall be comply with §15.209 or at least attenuated by 50 dB below the level of the fundamental.

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


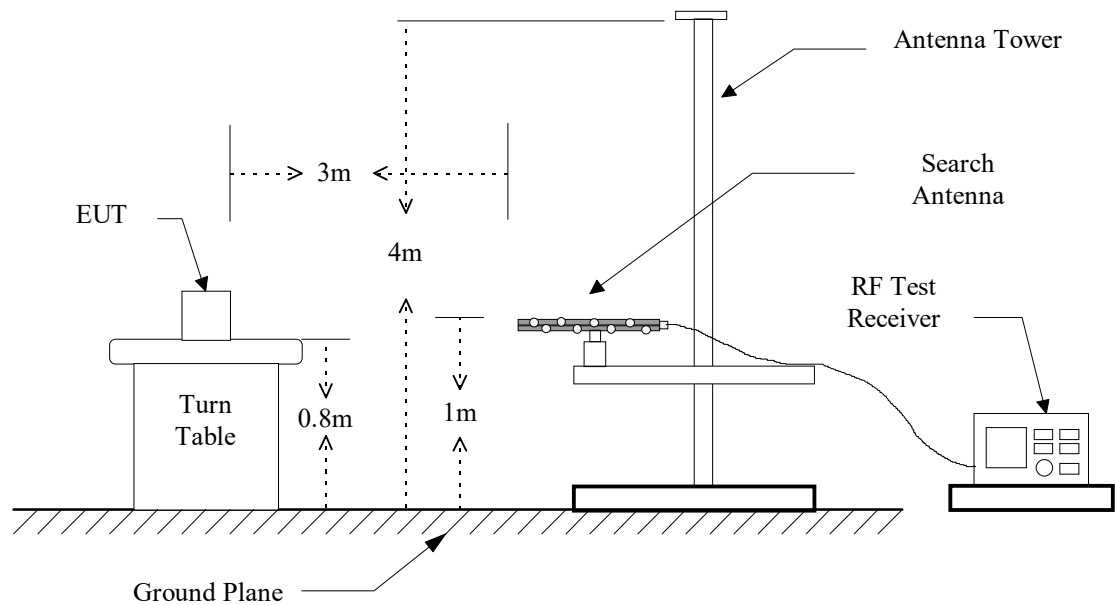


Figure 2 : Frequencies measured above 1 GHz configuration

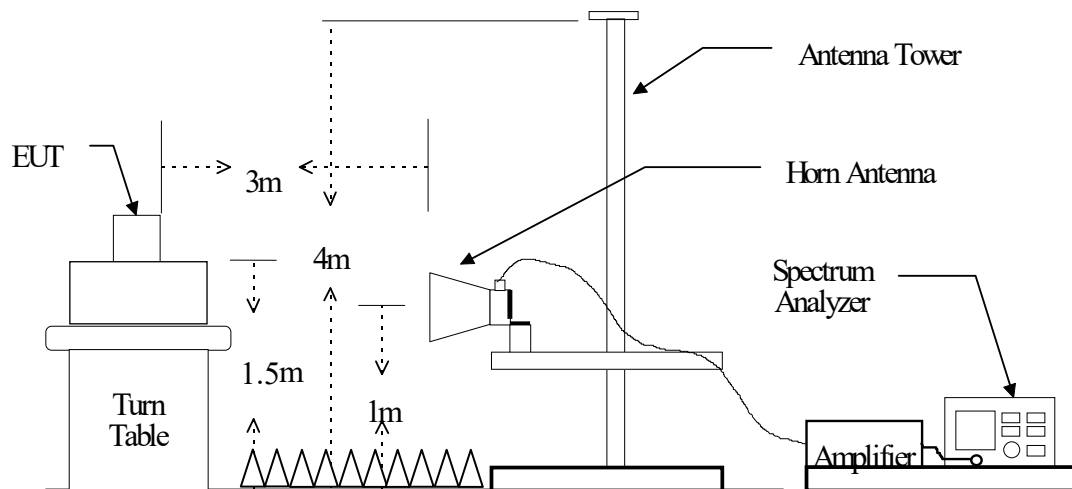

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

| Equipment                           | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------------------------|-----------------|-----------|------------------|----------------|
| Test Receiver                       | Rohde & Schwarz | ESVS30    | 2015/12/05       | 2016/12/04     |
| EMI Test Receiver                   | Rohde & Schwarz | ESL       | 2016/03/26       | 2017/03/25     |
| Bi-Log Antenna                      | ETC             | MCTD 2786 | 2016/07/15       | 2017/07/14     |
| Log-periodic Antenna                | EMCO            | 3146      | 2015/11/17       | 2016/11/16     |
| Double Ridged Guide<br>Horn Antenna | EMCO            | 3116      | 2015/10/12       | 2016/10/11     |
| Biconical Antenna                   | EMCO            | 3110      | 2015/11/17       | 2016/11/16     |
| Double Ridged<br>Antenna            | EMCO            | 3115      | 2015/10/08       | 2016/10/07     |
| Double Ridged<br>Antenna            | EMCO            | 3115      | 2015/10/06       | 2016/10/05     |
| Amplifier                           | HP              | 8449B     | 2016/07/18       | 2017/07/17     |
| Amplifier                           | HP              | 83051A    | 2015/12/17       | 2016/12/16     |
| Amplifier                           | HP              | 8447D     | 2015/10/07       | 2016/10/06     |
| EMI Test Receiver                   | Rohde & Schwarz | ESU 40    | 2015/12/05       | 2016/12/04     |
| LOOP Antenna                        | EMCO            | 6512      | 2015/10/01       | 2016/09/30     |

Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band<br>(MHz) | Instrument        | Function   | Resolution<br>bandwidth | Video<br>Bandwidth                 |
|-------------------------|-------------------|------------|-------------------------|------------------------------------|
| 30 to 1000              | RF Test Receiver  | Quasi-Peak | 120 kHz                 | N/A                                |
|                         | Spectrum Analyzer | Peak       | 100 kHz                 | 100 kHz                            |
| Above 1000              | Spectrum Analyzer | Peak       | 1 MHz                   | 1 MHz                              |
|                         | Spectrum Analyzer | Average    | 1 MHz                   | 10 Hz or<br>$\geq 1/T$<br>(Note 1) |


Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW  $\geq 1/T$ , when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

## 4.4 Radiated Emission Data

### 4.4.1 RF Portion

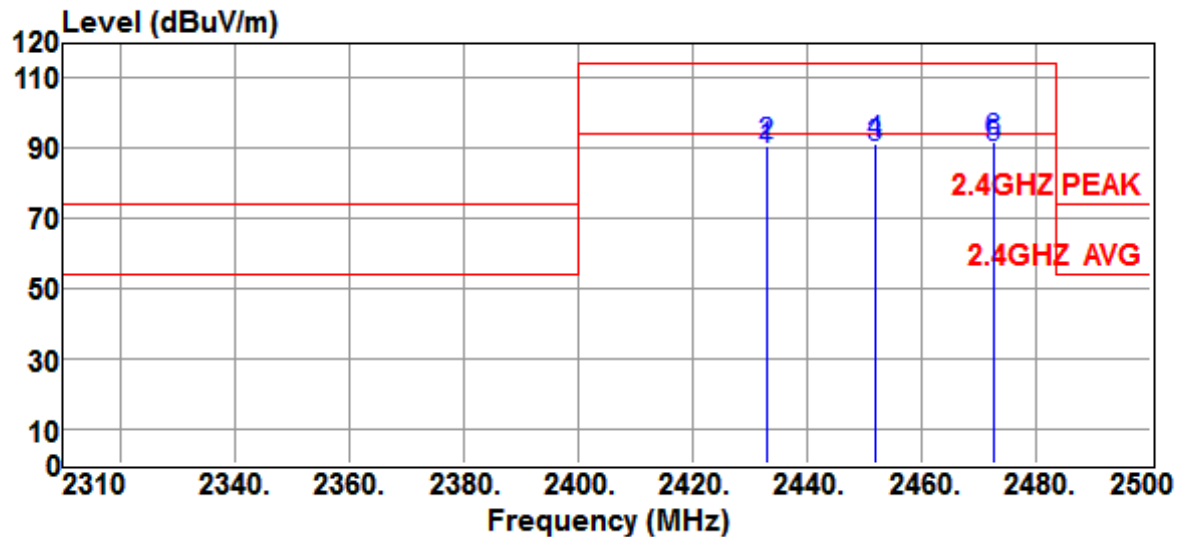


|              |                                       |           |             |
|--------------|---------------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                           | Date      | :2016-08-23 |
| Limit        | :2.4GHZ PEAK                          | Ant. Pol. | :HORIZONTAL |
| EUT          | :XS WIRELESS                          | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                          | Temp.     | :25°C       |
| Engineer     | :Brian Huang                          | Humi.     | :68 %       |
| Test Mode    | :TX -LO 2433 - MI 2452 - HI 2472.8MHz |           |             |

| Freq<br>MHz | Reading<br>dB $\mu$ V | Correction<br>Factor<br>dB | Result<br>dB $\mu$ V/m | Limits<br>dB $\mu$ V/m | Over limit<br>dB | Detector |
|-------------|-----------------------|----------------------------|------------------------|------------------------|------------------|----------|
| 2433.0000   | 95.4                  | -5.8                       | 89.6                   | 94.0                   | -4.4             | Average  |
| 2433.0000   | 96.6                  | -5.8                       | 90.8                   | 114.0                  | -23.2            | Peak     |
| 2452.0000   | 95.9                  | -5.8                       | 90.1                   | 94.0                   | -3.9             | Average  |
| 2452.0000   | 97.1                  | -5.8                       | 91.3                   | 114.0                  | -22.7            | Peak     |
| 2472.8000   | 96.1                  | -5.7                       | 90.4                   | 94.0                   | -3.6             | Average  |
| 2472.8000   | 97.4                  | -5.7                       | 91.7                   | 114.0                  | -22.3            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

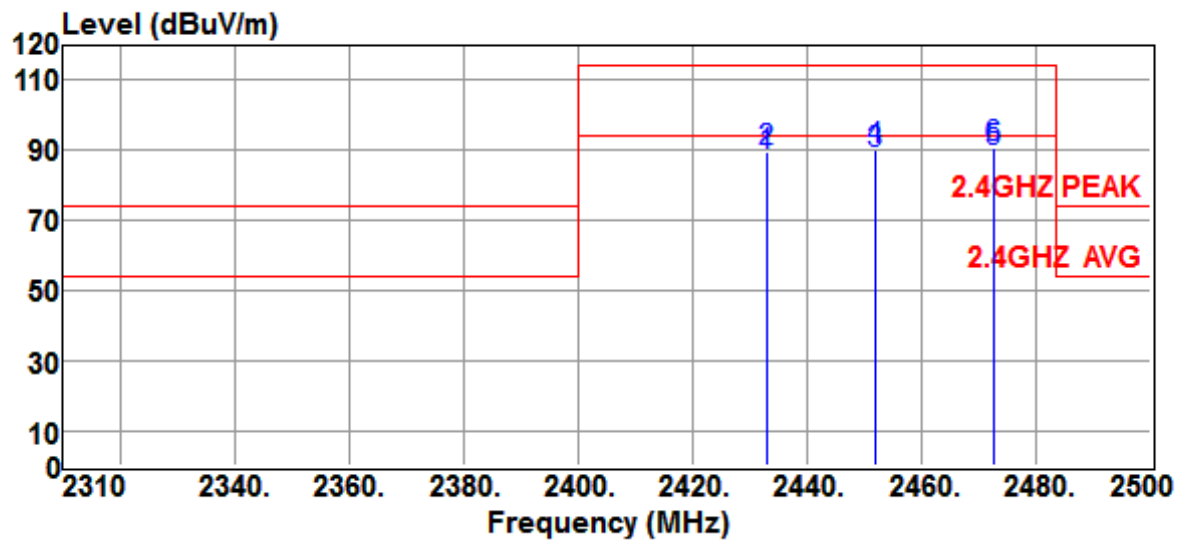


|              |                                       |           |             |
|--------------|---------------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                           | Date      | :2016-08-23 |
| Limit        | :2.4GHZ PEAK                          | Ant. Pol. | :VERTICAL   |
| EUT          | :XS WIRELESS                          | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                          | Temp.     | :25°C       |
| Engineer     | :Brian Huang                          | Humi.     | :68 %       |
| Test Mode    | :TX -LO 2433 - MI 2452 - HI 2472.8MHz |           |             |

| Freq<br>MHz | Reading<br>dB $\mu$ V | Correction<br>Factor<br>dB | Result<br>dB $\mu$ V/m | Limits<br>dB $\mu$ V/m | Over limit<br>dB | Detector |
|-------------|-----------------------|----------------------------|------------------------|------------------------|------------------|----------|
| 2433.0000   | 94.5                  | -5.8                       | 88.7                   | 94.0                   | -5.3             | Average  |
| 2433.0000   | 95.6                  | -5.8                       | 89.8                   | 114.0                  | -24.2            | Peak     |
| 2452.0000   | 94.8                  | -5.8                       | 89.0                   | 94.0                   | -5.0             | Average  |
| 2452.0000   | 96.0                  | -5.8                       | 90.2                   | 114.0                  | -23.8            | Peak     |
| 2472.8000   | 95.4                  | -5.7                       | 89.7                   | 94.0                   | -4.3             | Average  |
| 2472.8000   | 96.5                  | -5.7                       | 90.8                   | 114.0                  | -23.2            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

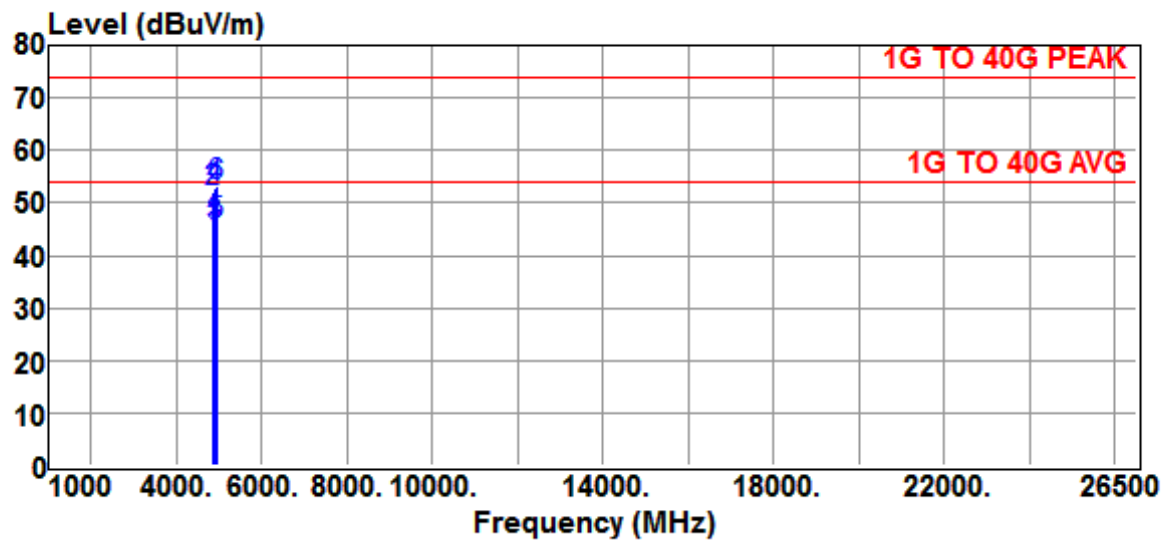


|              |                                       |           |             |
|--------------|---------------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                           | Date      | :2016-08-23 |
| Limit        | :1G TO 40G PEAK                       | Ant. Pol. | :HORIZONTAL |
| EUT          | :XS WIRELESS                          | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                          | Temp.     | :25°C       |
| Engineer     | :Brian Huang                          | Humi.     | :68 %       |
| Test Mode    | :TX -LO 2433 - MI 2452 - HI 2472.8MHz |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4866.0000   | 43.7            | 1.4                        | 45.1             | 54.0             | -8.9             | Average  |
| 4866.0000   | 50.8            | 1.4                        | 52.2             | 74.0             | -21.8            | Peak     |
| 4904.0000   | 44.1            | 1.5                        | 45.6             | 54.0             | -8.4             | Average  |
| 4904.0000   | 51.2            | 1.5                        | 52.7             | 74.0             | -21.3            | Peak     |
| 4945.6000   | 44.3            | 1.6                        | 45.9             | 54.0             | -8.1             | Average  |
| 4945.6000   | 51.5            | 1.6                        | 53.1             | 74.0             | -20.9            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

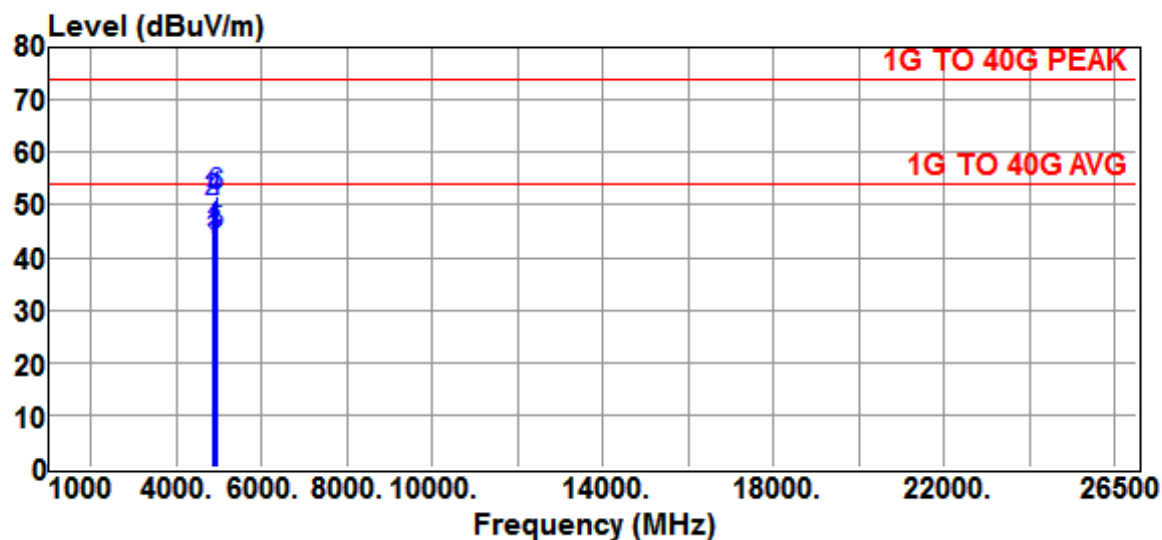


|              |                                       |           |             |
|--------------|---------------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                           | Date      | :2016-08-23 |
| Limit        | :1G TO 40G PEAK                       | Ant. Pol. | :VERTICAL   |
| EUT          | :XS WIRELESS                          | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                          | Temp.     | :25°C       |
| Engineer     | :Brian Huang                          | Humi.     | :68 %       |
| Test Mode    | :TX -LO 2433 - MI 2452 - HI 2472.8MHz |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 4866.0000   | 42.0            | 1.4                        | 43.4             | 54.0             | -10.6            | Average  |
| 4866.0000   | 49.1            | 1.4                        | 50.5             | 74.0             | -23.5            | Peak     |
| 4904.0000   | 42.4            | 1.5                        | 43.9             | 54.0             | -10.1            | Average  |
| 4904.0000   | 49.5            | 1.5                        | 51.0             | 74.0             | -23.0            | Peak     |
| 4945.6000   | 42.7            | 1.6                        | 44.3             | 54.0             | -9.7             | Average  |
| 4945.6000   | 49.9            | 1.6                        | 51.5             | 74.0             | -22.5            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

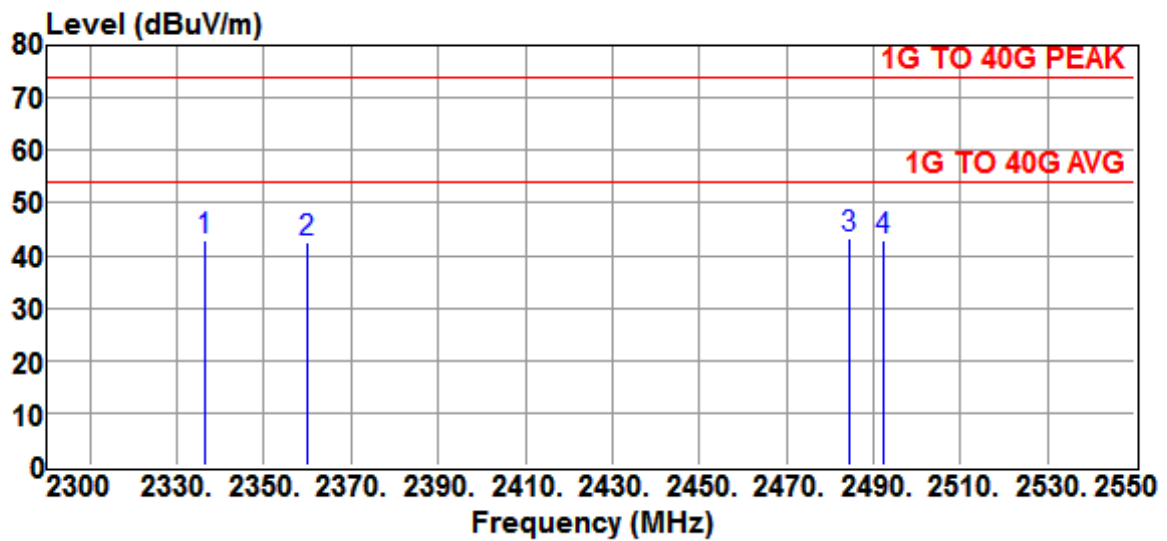


|              |                                |           |             |
|--------------|--------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                    | Date      | :2016-08-23 |
| Limit        | :1G TO 40G PEAK                | Ant. Pol. | :HORIZONTAL |
| EUT          | :XS WIRELESS                   | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                   | Temp.     | :25°C       |
| Engineer     | :Brian Huang                   | Humi.     | :68 %       |
| Test Mode    | :CH LO & HI - Restricted Bands |           |             |
| Test Mode    | :OPERATION MODE                |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>(AVG)<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|---------------------------|------------------|----------|
| 2336.5000   | 48.8            | -5.9                       | 42.9             | 74.0                      | -31.1            | Peak     |
| 2360.0000   | 48.4            | -5.9                       | 42.5             | 74.0                      | -31.5            | Peak     |
| 2484.5000   | 49.0            | -5.7                       | 43.3             | 74.0                      | -30.7            | Peak     |
| 2492.5000   | 48.4            | -5.7                       | 42.7             | 74.0                      | -31.3            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

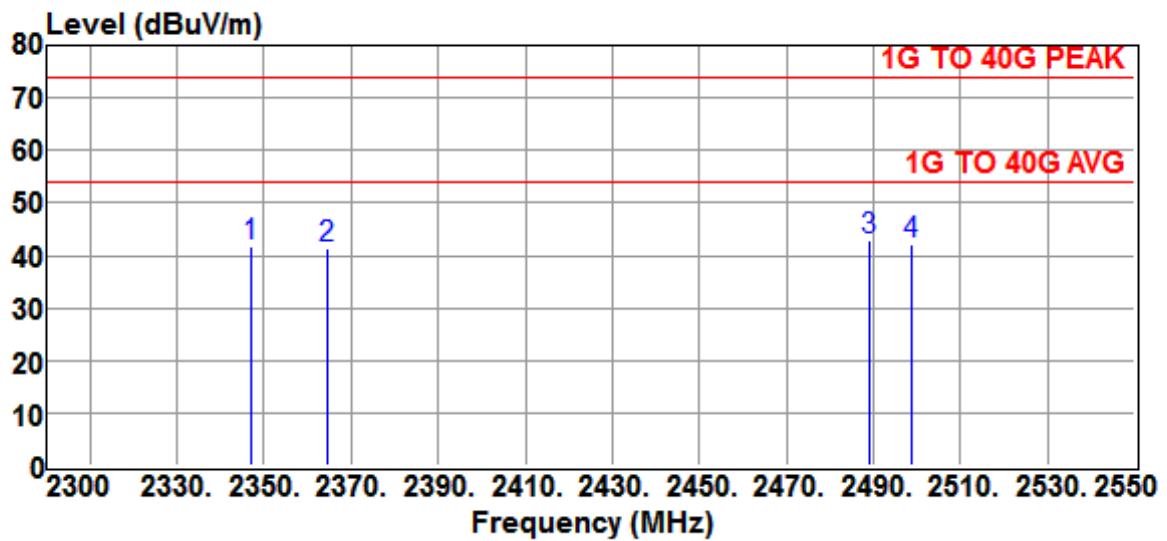

|              |                                |           |             |
|--------------|--------------------------------|-----------|-------------|
| Site         | :CHAMBER #2                    | Date      | :2016-08-23 |
| Limit        | :1G TO 40G PEAK                | Ant. Pol. | :VERTICAL   |
| EUT          | :XS WIRELESS                   | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                   | Temp.     | :25°C       |
| Engineer     | :Brian Huang                   | Humi.     | :68 %       |
| Test Mode    | :CH LO & HI - Restricted Bands |           |             |
| Test Mode    | :OPERATION MODE                |           |             |

| Freq<br>MHz | Reading<br>dB $\mu$ V | Correction<br>Factor<br>dB | Result<br>dB $\mu$ V/m | Limits<br>(AVG)<br>dB $\mu$ V/m | Over limit<br>dB | Detector |
|-------------|-----------------------|----------------------------|------------------------|---------------------------------|------------------|----------|
| 2347.0000   | 47.8                  | -6.0                       | 41.8                   | 74.0                            | -32.2            | Peak     |
| 2364.5000   | 47.1                  | -5.9                       | 41.2                   | 74.0                            | -32.8            | Peak     |
| 2489.0000   | 48.7                  | -5.7                       | 43.0                   | 74.0                            | -31.0            | Peak     |
| 2499.0000   | 47.7                  | -5.7                       | 42.0                   | 74.0                            | -32.0            | Peak     |


Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**4.4.2 Other Emissions**

a) Emission frequencies below 1 GHz

Operation Mode : Operation

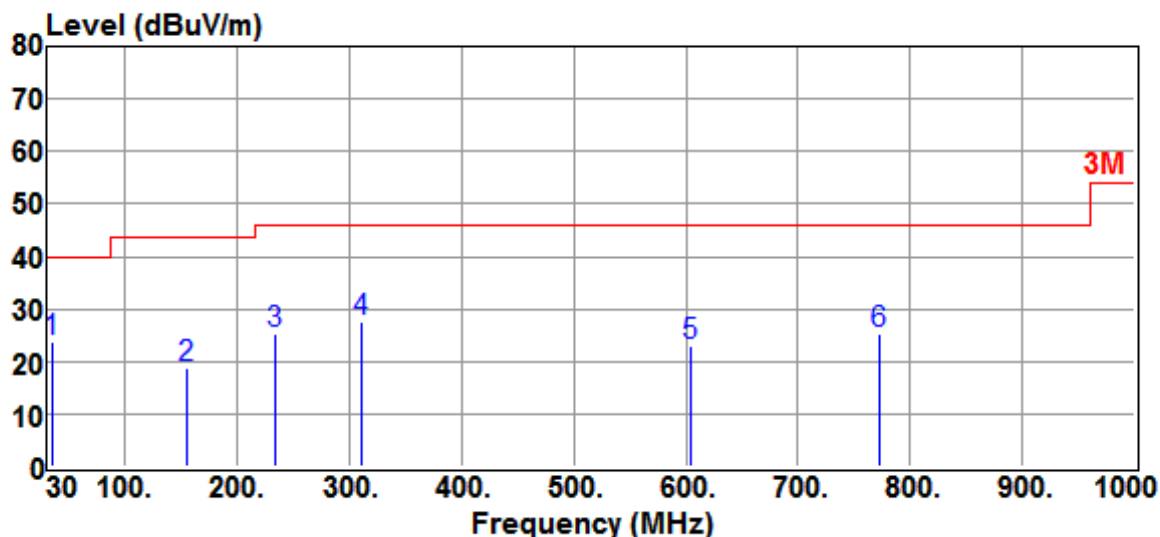
Test Date : Aug. 25, 2016      Temperature : 25 °C      Humidity : 53 %

|              |                                 |           |             |
|--------------|---------------------------------|-----------|-------------|
| Site         | :CHAMBER#2                      | Date      | :2016-08-25 |
| Limit        | :3M                             | Ant. Pol. | :HORIZONTAL |
| EUT          | :XS WIRELESS                    | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                    | Temp.     | :25°C       |
| Engineer     | :Brian Huang                    | Humi.     | :53 %       |
| Test Mode    | :OPERATION MODE (AD1#FW8006/12) |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 34.8500     | 33.7            | -10.0                      | 23.7             | 40.0             | -16.3            | QP       |
| 155.1300    | 32.1            | -13.4                      | 18.7             | 43.5             | -24.8            | QP       |
| 233.7000    | 38.7            | -13.5                      | 25.2             | 46.0             | -20.8            | QP       |
| 311.3000    | 36.7            | -9.1                       | 27.6             | 46.0             | -18.4            | QP       |
| 605.2100    | 28.4            | -5.2                       | 23.2             | 46.0             | -22.8            | QP       |
| 773.0200    | 27.9            | -2.8                       | 25.1             | 46.0             | -20.9            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

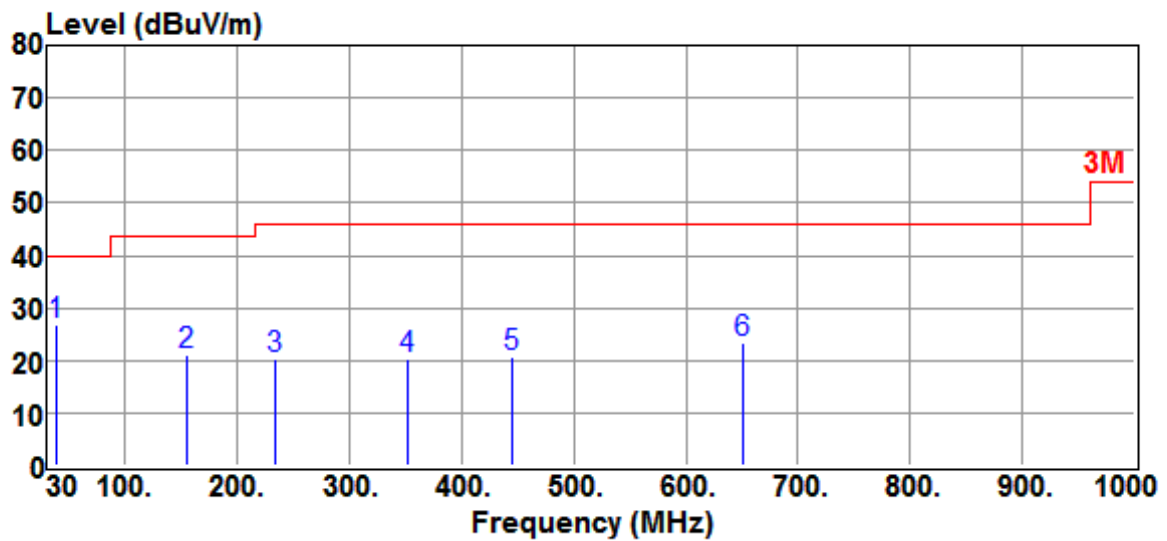


|              |                                 |           |             |
|--------------|---------------------------------|-----------|-------------|
| Site         | :CHAMBER#2                      | Date      | :2016-08-25 |
| Limit        | :3M                             | Ant. Pol. | :VERTICAL   |
| EUT          | :XS WIRELESS                    | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                    | Temp.     | :25°C       |
| Engineer     | :Brian Huang                    | Humi.     | :53 %       |
| Test Mode    | :OPERATION MODE (AD1#FW8006/12) |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 39.7000     | 38.8            | -12.2                      | 26.6             | 40.0             | -13.4            | QP       |
| 155.1300    | 34.4            | -13.4                      | 21.0             | 43.5             | -22.5            | QP       |
| 233.7000    | 33.8            | -13.5                      | 20.3             | 46.0             | -25.7            | QP       |
| 352.0400    | 28.3            | -7.9                       | 20.4             | 46.0             | -25.6            | QP       |
| 445.1600    | 27.8            | -7.3                       | 20.5             | 46.0             | -25.5            | QP       |
| 651.7700    | 27.6            | -4.3                       | 23.3             | 46.0             | -22.7            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

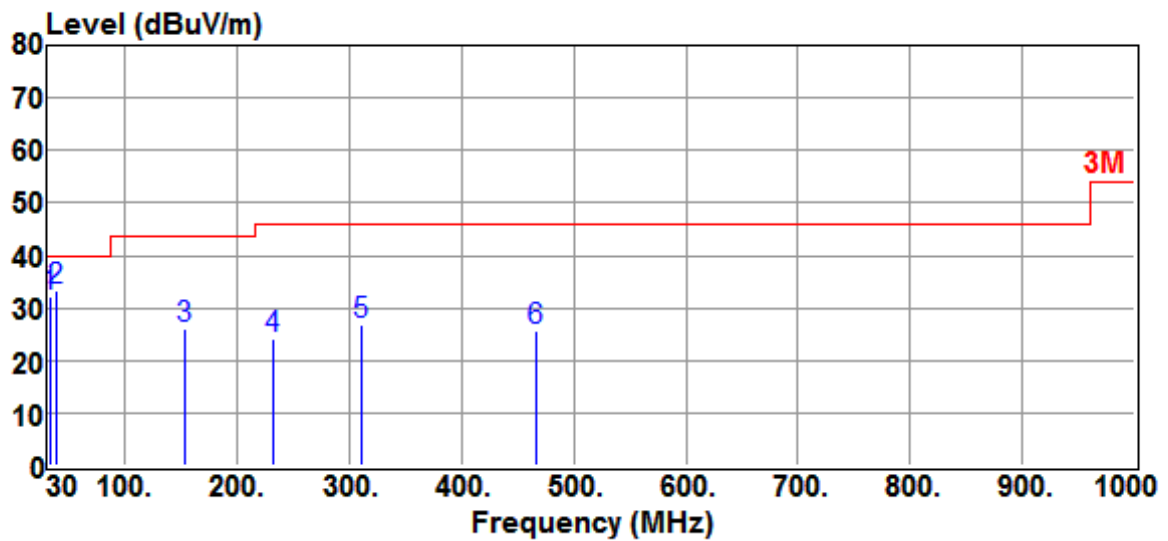


|              |                                 |           |             |
|--------------|---------------------------------|-----------|-------------|
| Site         | :CHAMBER#2                      | Date      | :2016-08-25 |
| Limit        | :3M                             | Ant. Pol. | :HORIZONTAL |
| EUT          | :XS WIRELESS                    | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                    | Temp.     | :25°C       |
| Engineer     | :Brian Huang                    | Humi.     | :53 %       |
| Test Mode    | :OPERATION MODE (AD2# NT12-5CW) |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 33.8800     | 41.6            | -9.6                       | 32.0             | 40.0             | -8.0             | QP       |
| 39.7000     | 45.5            | -12.2                      | 33.3             | 40.0             | -6.7             | QP       |
| 154.1600    | 39.2            | -13.3                      | 25.9             | 43.5             | -17.6            | QP       |
| 231.7600    | 38.0            | -13.7                      | 24.3             | 46.0             | -21.7            | QP       |
| 311.3000    | 35.9            | -9.1                       | 26.8             | 46.0             | -19.2            | QP       |
| 466.5000    | 32.6            | -7.1                       | 25.5             | 46.0             | -20.5            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

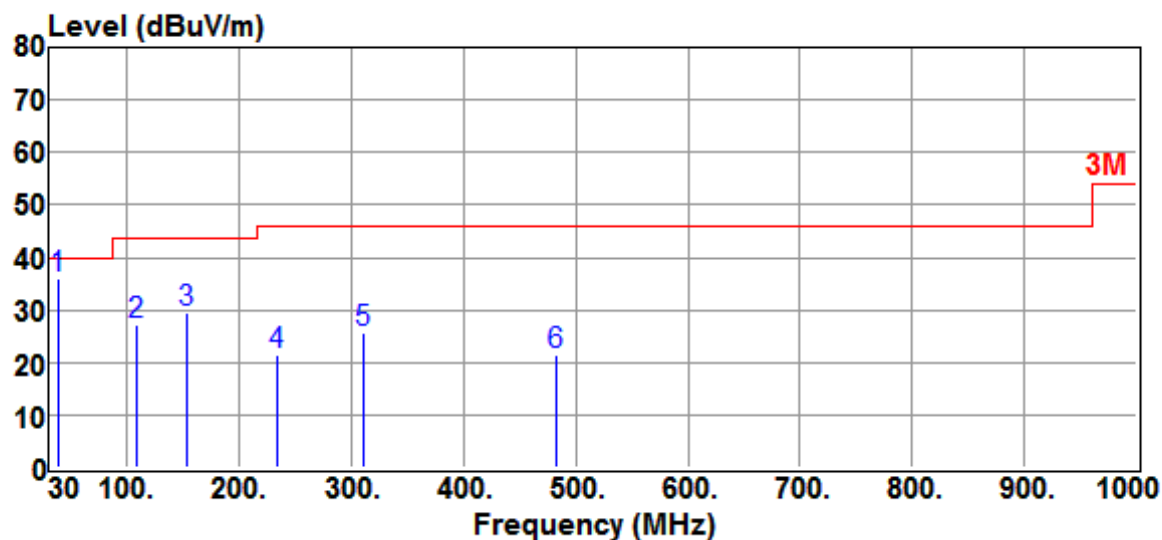

|              |                                 |           |             |
|--------------|---------------------------------|-----------|-------------|
| Site         | :CHAMBER#2                      | Date      | :2016-08-25 |
| Limit        | :3M                             | Ant. Pol. | :VERTICAL   |
| EUT          | :XS WIRELESS                    | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz                    | Temp.     | :25°C       |
| Engineer     | :Brian Huang                    | Humi.     | :53 %       |
| Test Mode    | :OPERATION MODE (AD2# NT12-5CW) |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 39.7000     | 48.1            | -12.2                      | 35.9             | 40.0             | -4.1             | QP       |
| 109.5400    | 42.5            | -15.2                      | 27.3             | 43.5             | -16.2            | QP       |
| 154.1600    | 42.7            | -13.3                      | 29.4             | 43.5             | -14.1            | QP       |
| 233.7000    | 35.0            | -13.5                      | 21.5             | 46.0             | -24.5            | QP       |
| 311.3000    | 34.8            | -9.1                       | 25.7             | 46.0             | -20.3            | QP       |
| 482.0200    | 28.2            | -6.9                       | 21.3             | 46.0             | -24.7            | QP       |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

## b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 26.5 GHz were too low to be measured with a pre-amplifier of 35 dB.

## c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\textbf{Result} = \textbf{Reading} + \textbf{Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

#### 4.6 Photos of Radiation Measuring Setup





## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively. Both Limits are identical specification.


### 5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

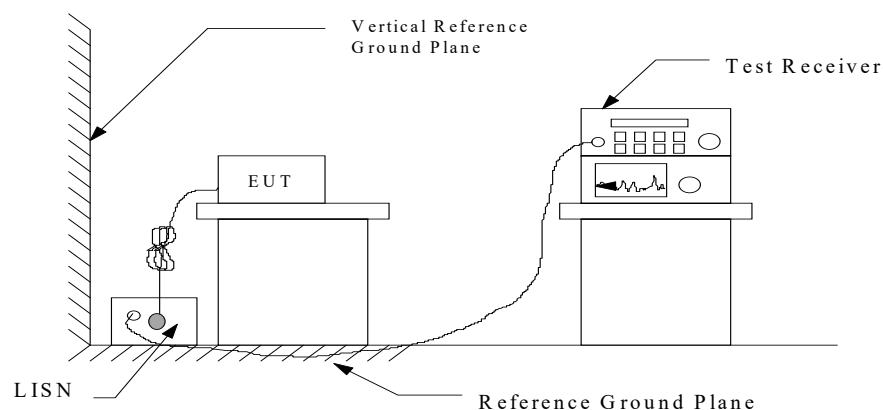

### 5.3 Conducted Emission Data

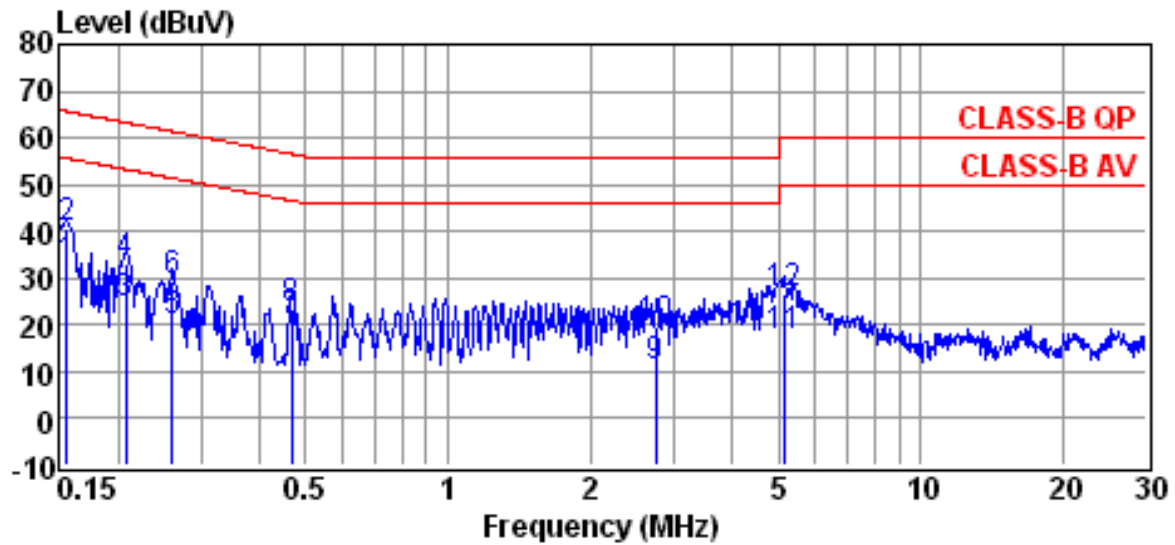


Site : conducted #1 Date : 08-25-2016  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode  
 EUT : XS WIRELESS Power Rating : AC 120V60Hz  
 Memo : AD1#FW8006/12

| Freq (MHz) | Reading (dBμV) | Factor (dB) | Emission Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1557     | 22.15          | 10.19       | 32.34                 | 55.69             | -23.35          | Average |
| 0.1557     | 30.39          | 10.19       | 40.58                 | 65.69             | -25.11          | QP      |
| 0.2083     | 14.52          | 10.19       | 24.71                 | 53.27             | -28.56          | Average |
| 0.2083     | 23.13          | 10.19       | 33.32                 | 63.27             | -29.95          | QP      |
| 0.2616     | 10.58          | 10.20       | 20.78                 | 51.38             | -30.60          | Average |
| 0.2616     | 18.96          | 10.20       | 29.16                 | 61.38             | -32.22          | QP      |
| 0.4661     | 10.30          | 10.23       | 20.53                 | 46.58             | -26.05          | Average |
| 0.4661     | 13.24          | 10.23       | 23.47                 | 56.58             | -33.11          | QP      |
| 2.7500     | 0.69           | 10.35       | 11.04                 | 46.00             | -34.96          | Average |
| 2.7500     | 9.43           | 10.35       | 19.78                 | 56.00             | -36.22          | QP      |
| 5.1660     | 6.99           | 10.47       | 17.46                 | 50.00             | -32.54          | Average |
| 5.1660     | 16.19          | 10.47       | 26.66                 | 60.00             | -33.34          | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

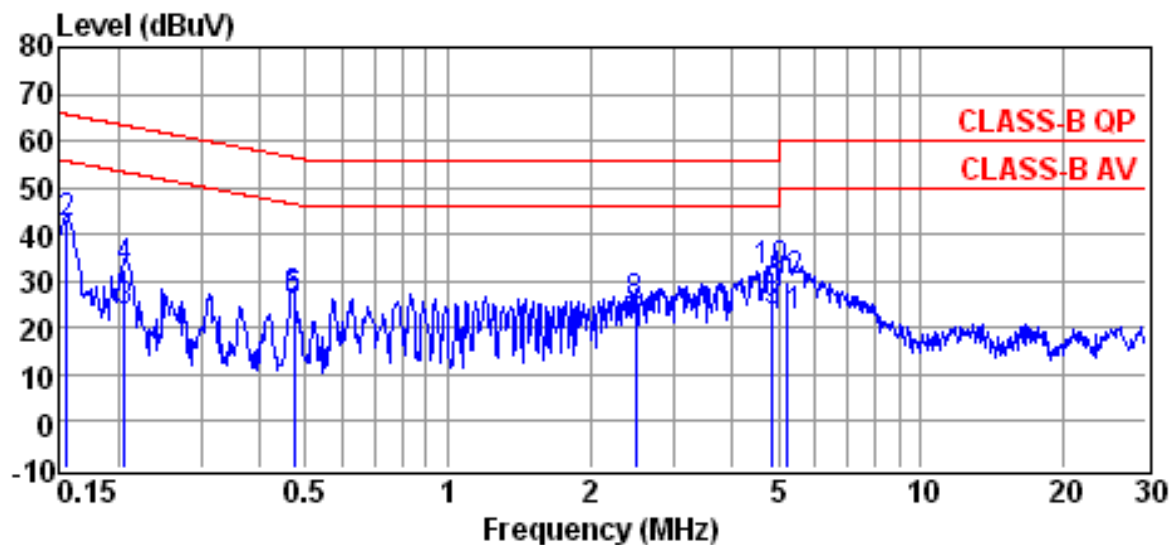


Site : conducted #1 Date : 08-25-2016  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode  
 EUT : XS WIRELESS Power Rating : AC 120V60Hz  
 Memo : AD1#FW8006/12

| Freq (MHz) | Reading (dBμV) | Factor (dB) | Emission Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1565     | 25.93          | 10.19       | 36.12                 | 55.65             | -19.53          | Average |
| 0.1565     | 32.10          | 10.19       | 42.29                 | 65.65             | -23.36          | QP      |
| 0.2072     | 13.40          | 10.20       | 23.60                 | 53.32             | -29.72          | Average |
| 0.2072     | 22.12          | 10.20       | 32.32                 | 63.32             | -31.00          | QP      |
| 0.4711     | 15.60          | 10.24       | 25.84                 | 46.49             | -20.65          | Average |
| 0.4711     | 16.05          | 10.24       | 26.29                 | 56.49             | -30.20          | QP      |
| 2.5000     | 10.09          | 10.35       | 20.44                 | 46.00             | -25.56          | Average |
| 2.5000     | 14.44          | 10.35       | 24.79                 | 56.00             | -31.21          | QP      |
| 4.8480     | 12.97          | 10.47       | 23.44                 | 46.00             | -22.56          | Average |
| 4.8480     | 21.50          | 10.47       | 31.97                 | 56.00             | -24.03          | QP      |
| 5.2210     | 11.86          | 10.49       | 22.35                 | 50.00             | -27.65          | Average |
| 5.2210     | 19.32          | 10.49       | 29.81                 | 60.00             | -30.19          | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

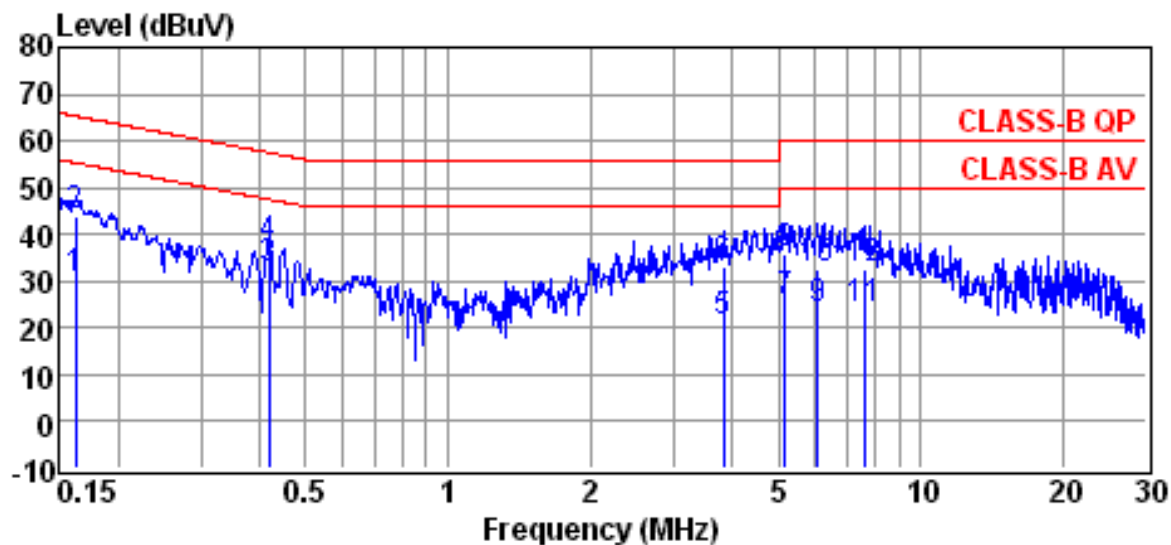


Site : conducted #1 Date : 08-25-2016  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode  
 EUT : XS WIRELESS Power Rating : AC 120V60Hz  
 Memo : AD2# NT12-5CW

| Freq (MHz) | Reading (dBμV) | Factor (dB) | Emission Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1633     | 20.42          | 10.19       | 30.61                 | 55.30             | -24.69          | Average |
| 0.1633     | 33.93          | 10.19       | 44.12                 | 65.30             | -21.18          | QP      |
| 0.4171     | 22.54          | 10.22       | 32.76                 | 47.51             | -14.75          | Average |
| 0.4171     | 27.09          | 10.22       | 37.31                 | 57.51             | -20.20          | QP      |
| 3.8200     | 10.87          | 10.40       | 21.27                 | 46.00             | -24.73          | Average |
| 3.8200     | 22.63          | 10.40       | 33.03                 | 56.00             | -22.97          | QP      |
| 5.1660     | 15.23          | 10.47       | 25.70                 | 50.00             | -24.30          | Average |
| 5.1660     | 25.21          | 10.47       | 35.68                 | 60.00             | -24.32          | QP      |
| 6.0560     | 13.49          | 10.51       | 24.00                 | 50.00             | -26.00          | Average |
| 6.0560     | 22.17          | 10.51       | 32.68                 | 60.00             | -27.32          | QP      |
| 7.6060     | 13.41          | 10.59       | 24.00                 | 50.00             | -26.00          | Average |
| 7.6060     | 21.90          | 10.59       | 32.49                 | 60.00             | -27.51          | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

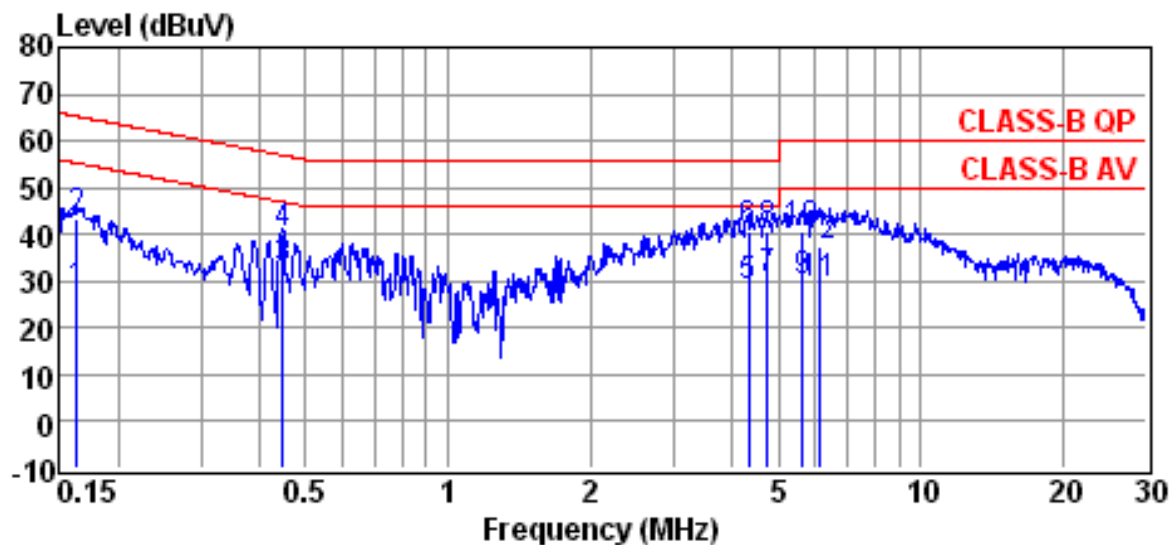

Site : conducted #1 Date : 08-25-2016  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 25 °C / 52% Test Mode : Operation Mode  
 EUT : XS WIRELESS Power Rating : AC 120V60Hz  
 Memo : AD2# NT12-5CW

| Freq (MHz) | Reading (dBμV) | Factor (dB) | Emission Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Remark  |
|------------|----------------|-------------|-----------------------|-------------------|-----------------|---------|
| 0.1641     | 17.75          | 10.19       | 27.94                 | 55.25             | -27.31          | Average |
| 0.1641     | 33.16          | 10.19       | 43.35                 | 65.25             | -21.90          | QP      |
| 0.4468     | 22.51          | 10.23       | 32.74                 | 46.93             | -14.19          | Average |
| 0.4468     | 29.67          | 10.23       | 39.90                 | 56.93             | -17.03          | QP      |
| 4.3380     | 18.15          | 10.44       | 28.59                 | 46.00             | -17.41          | Average |
| 4.3380     | 30.23          | 10.44       | 40.67                 | 56.00             | -15.33          | QP      |
| 4.7460     | 19.92          | 10.46       | 30.38                 | 46.00             | -15.62          | Average |
| 4.7460     | 30.23          | 10.46       | 40.69                 | 56.00             | -15.31          | QP      |
| 5.6230     | 19.29          | 10.52       | 29.81                 | 50.00             | -20.19          | Average |
| 5.6230     | 30.38          | 10.52       | 40.90                 | 60.00             | -19.10          | QP      |
| 6.1210     | 18.92          | 10.54       | 29.46                 | 50.00             | -20.54          | Average |
| 6.1210     | 27.06          | 10.54       | 37.60                 | 60.00             | -22.40          | QP      |

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB $\mu$ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB $\mu$ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB}\mu\text{V}$$


$$\begin{aligned} \text{Level in } \mu\text{V} &= \text{Common Antilogarithm}[(22.6 \text{ dB}\mu\text{V})/20] \\ &= 13.48 \mu\text{V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver | Rohde & Schwarz | ESCI      | 2015/12/05       | 2016/12/04     |
| LISN              | EMCO            | 3625/2    | 2015/10/28       | 2016/10/26     |
| LISN              | Rohde & Schwarz | ESH2-Z5   | 2016/05/05       | 2017/05/04     |

## 5.6 Photos of Conduction Measuring Setup

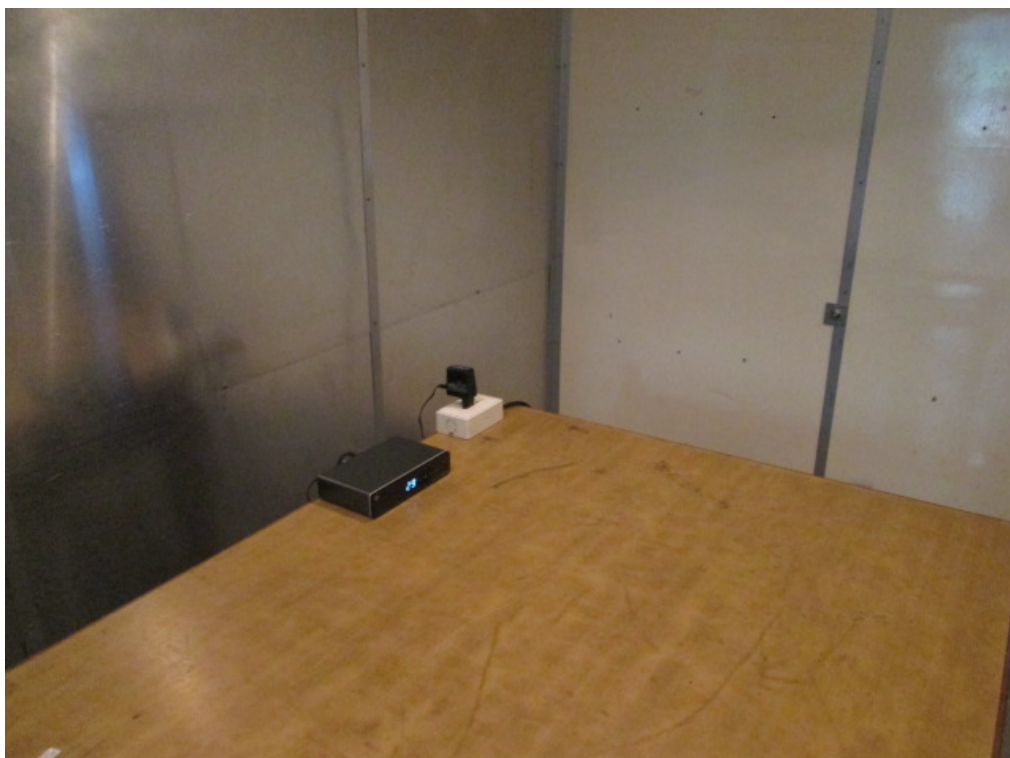

## **6 ANTENNA REQUIREMENT**

### **6.1 Standard Applicable**

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 Antenna Construction**

The device is equipped with the permanently attached on-board PCB antenna. No consideration of replacement. Please refer to the construction Photo for details.

## 7 BAND EDGES MEASUREMENT

### 7.1 Standard Applicable

According to 15.249(d), out band emission except for harmonics shall be comply with §15.209 or at least attenuated by 50 dB below the level of the fundamental.

### 7.2 Measurement Procedure

#### A) 50 dB attenuation method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

#### B) Radiated Emission method

1. Following the measurement procedures in section 4.2 with the EUT set to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
2. Measure the highest amplitude appearing on spectral displayed.
3. Repeat above procedures until all measured frequencies were complete.

Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band (MHz) | Instrument        | Function   | Resolution bandwidth | Video Bandwidth                 |
|----------------------|-------------------|------------|----------------------|---------------------------------|
| 30 to 1000           | RF Test Receiver  | Quasi-Peak | 120 kHz              | N/A                             |
|                      | Spectrum Analyzer | Peak       | 100 kHz              | 100 kHz                         |
| Above 1000           | Spectrum Analyzer | Peak       | 1 MHz                | 1 MHz                           |
|                      | Spectrum Analyzer | Average    | 1 MHz                | 10 Hz or $\geq 1/T$<br>(Note 1) |

Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.

$VBW \geq 1/T$ , when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 7.3 Measurement Equipment

#### A) 50 dB attenuation method

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver | Rohde & Schwarz | ESU 40    | 2015/10/07       | 2016/10/06     |


#### B) Radiated Emission method

| Equipment                           | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------------------------|-----------------|-----------|------------------|----------------|
| Test Receiver                       | Rohde & Schwarz | ESCI      | 2015/12/05       | 2016/12/04     |
| EMI Test Receiver                   | Rohde & Schwarz | ESL       | 2016/03/26       | 2017/03/25     |
| Bi-Log Antenna                      | ETC             | MCTD 2786 | 2016/07/15       | 2017/07/14     |
| Log-periodic Antenna                | EMCO            | 3146      | 2015/11/17       | 2016/11/16     |
| Double Ridged Guide<br>Horn Antenna | EMCO            | 3116      | 2015/10/12       | 2016/10/11     |
| Biconical Antenna                   | EMCO            | 3110      | 2015/11/17       | 2016/11/16     |
| Double Ridged<br>Antenna            | EMCO            | 3115      | 2015/10/08       | 2016/10/07     |
| Amplifier                           | HP              | 8449B     | 2015/10/06       | 2016/10/05     |
| Amplifier                           | HP              | 83051A    | 2016/07/18       | 2017/07/17     |
| Amplifier                           | HP              | 8447D     | 2015/12/17       | 2016/12/16     |
| EMI Test Receiver                   | Rohde & Schwarz | ESU 40    | 2015/10/07       | 2016/10/06     |

### 7.4 Measurement Data

#### ***Test Result: (Radiated Emission method)***

*The radiated emission test results of the lower and the upper band edges were comply with §15.209. Please refer to the following pages for test results.*

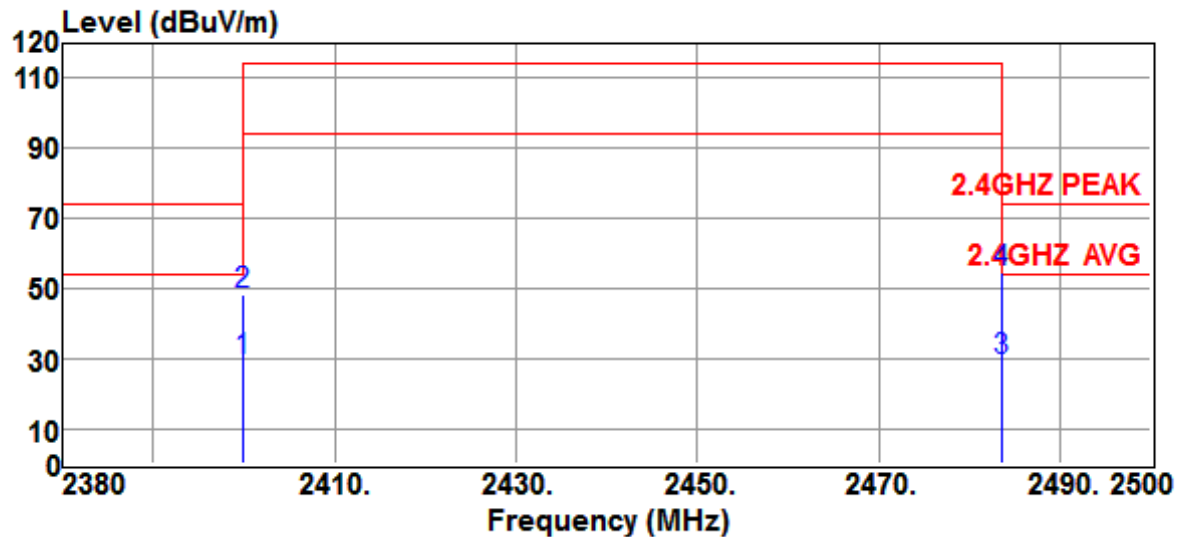
**Radiated Emission Test Results of the Band Edges**

|              |                        |           |             |
|--------------|------------------------|-----------|-------------|
| Site         | :CHAMBER #2            | Date      | :2016-08-23 |
| Limit        | :2.4GHZ PEAK           | Ant. Pol. | :HORIZONTAL |
| EUT          | :XS WIRELESS           | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz           | Temp.     | :25°C       |
| Engineer     | :Brian Huang           | Humi.     | :68 %       |
| Test Mode    | :CH LO & HI - BANDEDGE |           |             |

| Freq<br>MHz | Reading<br>dBμV | Correction<br>Factor<br>dB | Result<br>dBμV/m | Limits<br>dBμV/m | Over limit<br>dB | Detector |
|-------------|-----------------|----------------------------|------------------|------------------|------------------|----------|
| 2400.0000   | 35.0            | -5.8                       | 29.2             | 54.0             | -24.8            | Average  |
| 2400.0000   | 53.8            | -5.8                       | 48.0             | 74.0             | -26.0            | Peak     |
| 2483.5000   | 35.1            | -5.7                       | 29.4             | 54.0             | -24.6            | Average  |
| 2483.5000   | 60.4            | -5.7                       | 54.7             | 74.0             | -19.3            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

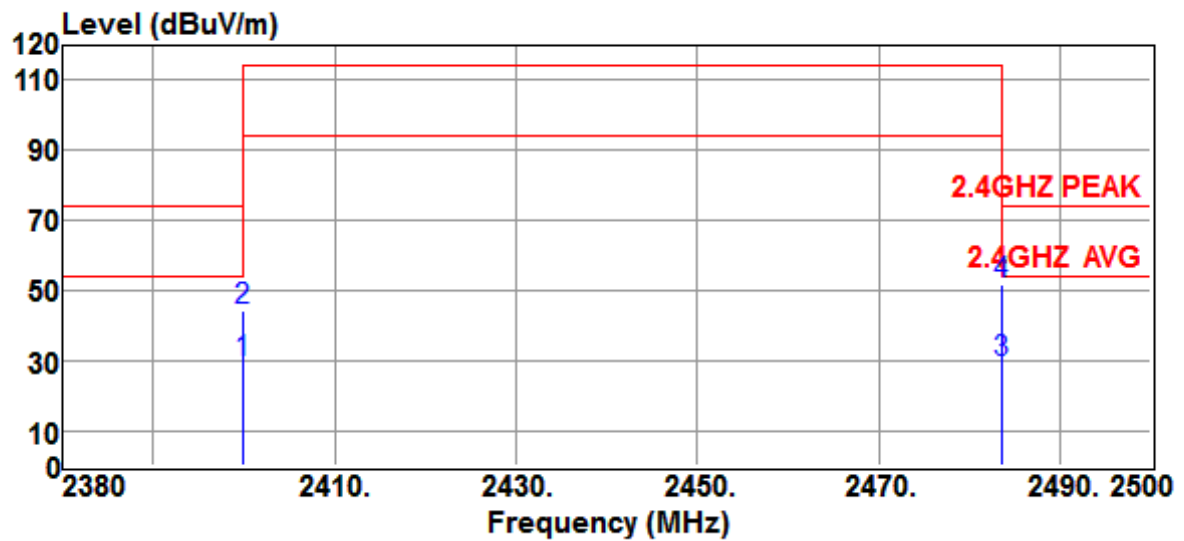

|              |                        |           |             |
|--------------|------------------------|-----------|-------------|
| Site         | :CHAMBER #2            | Date      | :2016-08-23 |
| Limit        | :2.4GHZ PEAK           | Ant. Pol. | :VERTICAL   |
| EUT          | :XS WIRELESS           | Model     | :EM-XSW1    |
| Power Rating | :AC120V/60Hz           | Temp.     | :25°C       |
| Engineer     | :Brian Huang           | Humi.     | :68 %       |
| Test Mode    | :CH LO & HI - BANDEDGE |           |             |

| Freq<br>MHz | Reading<br>dB $\mu$ V | Correction<br>Factor<br>dB | Result<br>dB $\mu$ V/m | Limits<br>dB $\mu$ V/m | Over limit<br>dB | Detector |
|-------------|-----------------------|----------------------------|------------------------|------------------------|------------------|----------|
| 2400.0000   | 34.9                  | -5.8                       | 29.1                   | 54.0                   | -24.9            | Average  |
| 2400.0000   | 50.3                  | -5.8                       | 44.5                   | 74.0                   | -29.5            | Peak     |
| 2483.5000   | 35.0                  | -5.7                       | 29.3                   | 54.0                   | -24.7            | Average  |
| 2483.5000   | 57.6                  | -5.7                       | 51.9                   | 74.0                   | -22.1            | Peak     |

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.

## 8. DUTY CYCLE

### 8.1 Standard Applicable

None. Reference only.

### 8.2 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver | Rohde & Schwarz | ESU 40    | 2015/10/07       | 2016/10/06     |

### 8.3 Measurement Data

Test Date : Aug. 23, 2016      Temperature : 25 °C      Humidity : 68 %

#### Duty Cycle Calculation

Period = 6.736410ms

Transmission duration (T) = 1.576154ms + 2.403846ms = 3.98ms

Duty Cycle (%) =  $(3.98 / 6.736410) * 100 \% = 59.1 \%$


The duty cycle is less than 98%. For the average measurement of the radiated emission test, the VBW setting is  $>1/T$  where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

$1/T = 1 / 1.576154\text{ms} = 634.5 \text{ Hz}$



Hence the VBW setting for the average measurement is 1kHz.

Refer to the following page for data plots..

## Period

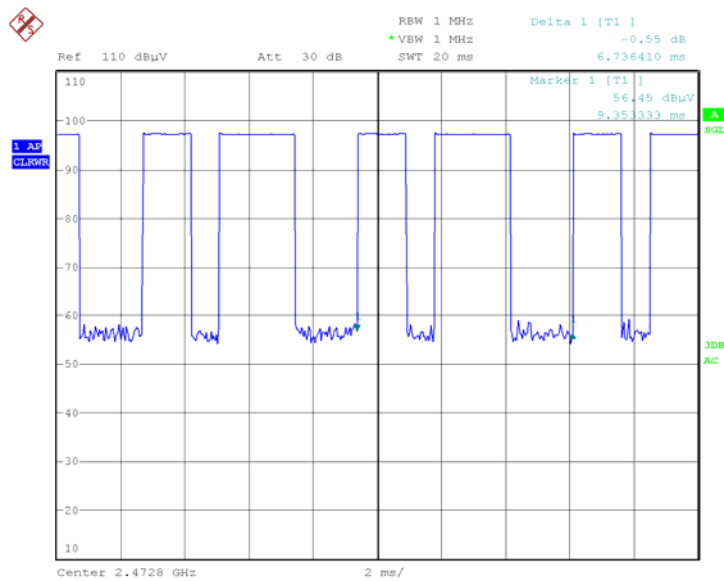

## Transmission duration (T)

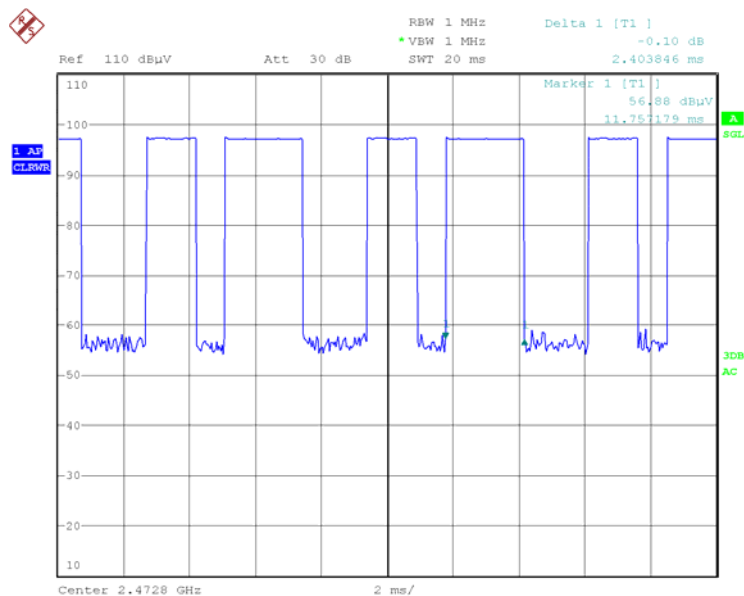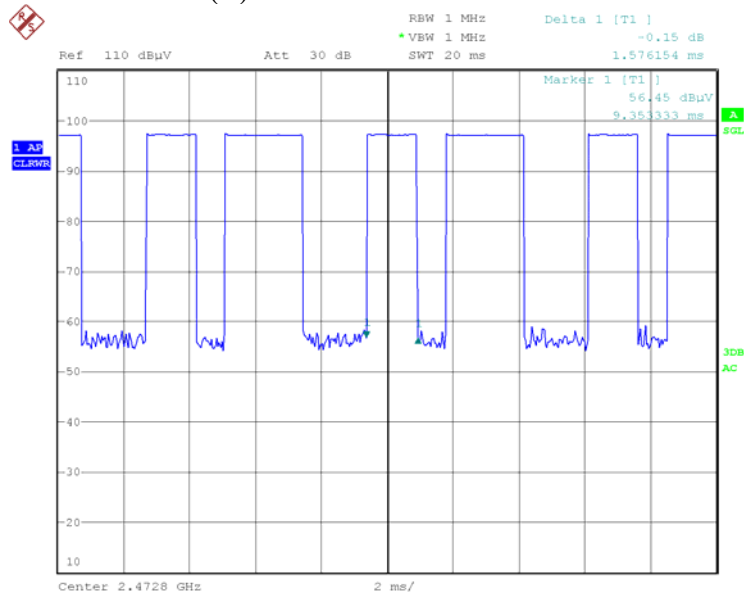

## 9. BANDWIDTH OF EMISSION

### 9.1 Applicable Standard

Per FCC rule §15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. The settings of spectrum analyzer is as followings.
  - 1) Set RBW in the range of 1% to 5% of the OBW.
  - 2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - 3) Detector = Peak.
  - 4) Trace mode = max hold.
  - 5) Sweep = auto couple.
  - 6) Allow the trace to stabilize.
  - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. Alternatively, use the -20 dB bandwidth function of the spectrum analyzer.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



### 9.3 Measurement Equipment

| Equipment         | Manufacturer    | Model No. | Calibration Date | Next Cal. Date |
|-------------------|-----------------|-----------|------------------|----------------|
| EMI Test Receiver | Rohde & Schwarz | ESU 40    | 2015/10/07       | 2016/10/06     |


### 9.4 Measurement Data

Test Date : Aug. 23, 2016      Temperature : 25 °C      Humidity : 68 %

- a) Lower Band Edge : The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.
- b) Upper Band Edge : The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.


**Note : The expanded uncertainty:  $\text{frequency} \times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).**

## Lower band edge / -20dB BW plot of the lowest channel

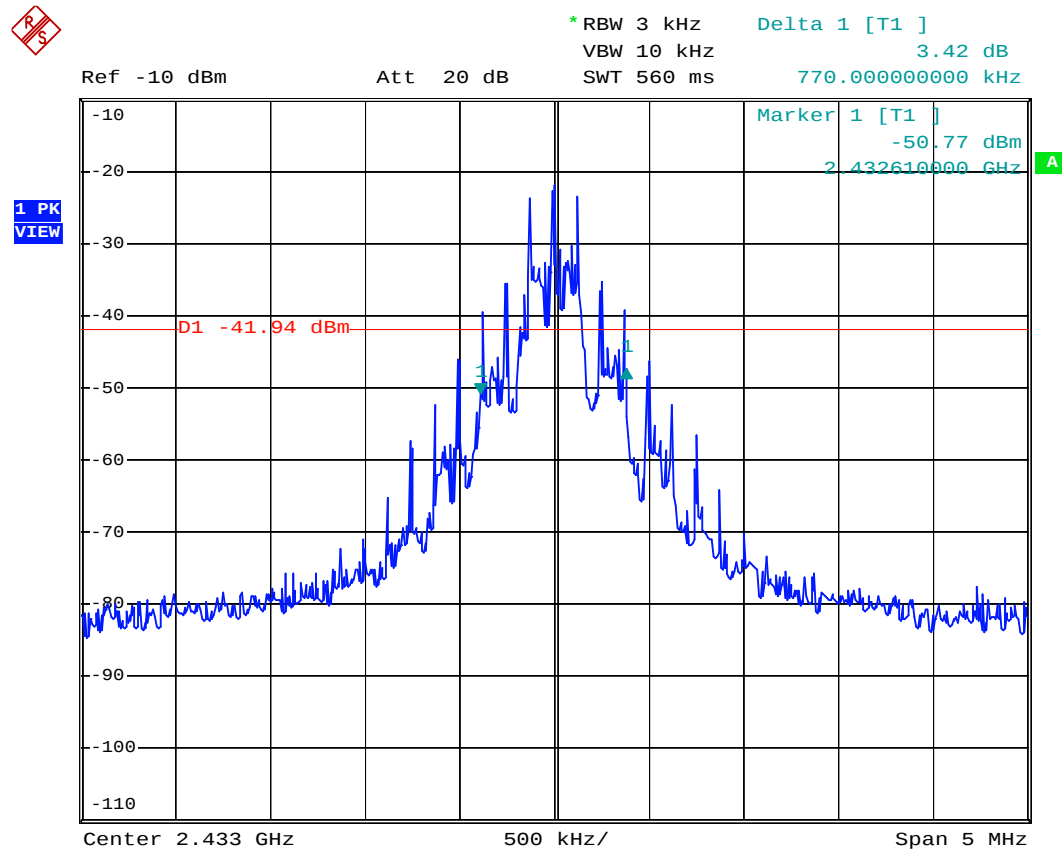

The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.

Upper band edge / -20dB BW plot of the highest channel

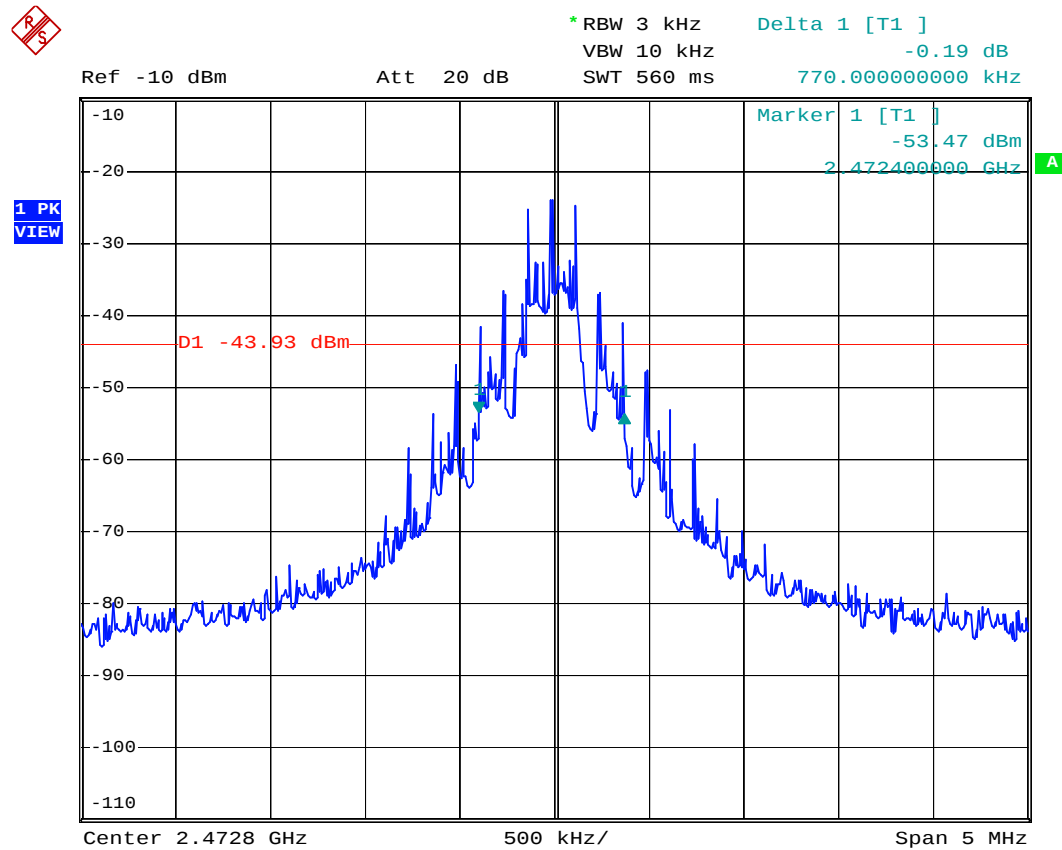

The 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section 15.249.