

802.11n(HT40)




802.11ac(HT20)



CH38




CH36

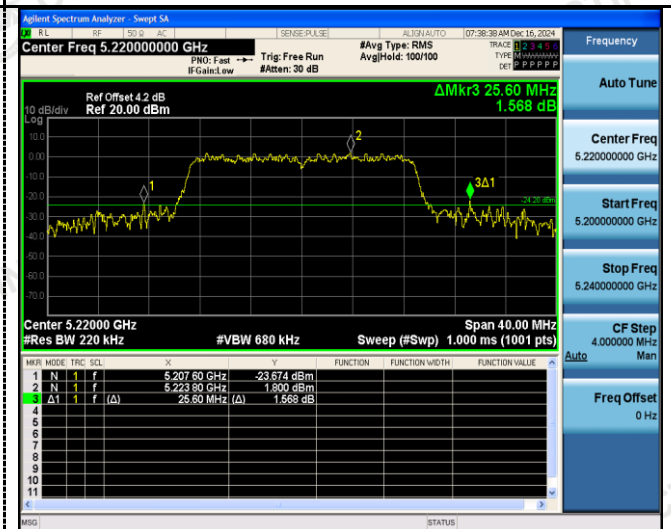

CH46




CH40

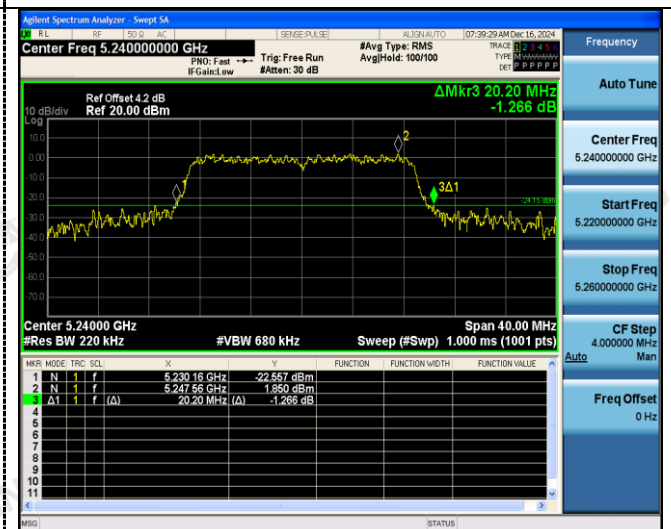

CH48

802.11ac(HT40)

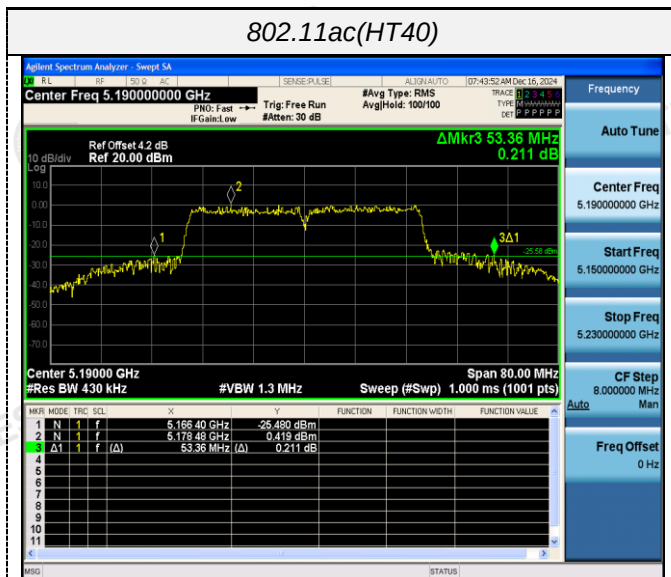

CH38



CH46

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration




Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.280	≥500KHz	Pass
		157	16.280		
		165	16.320		
802.11n(HT20)	U-NII 3	149	16.840		
		157	16.960		
		165	17.120		
802.11n(HT40)	U-NII 3	151	35.200		
		159	35.200		
802.11ac(HT20)	U-NII 3	149	16.600		
		157	16.840		
		165	17.120		
802.11ac(HT40)	U-NII 3	151	35.360		
		159	35.280		

Test plot as follows:


802.11a

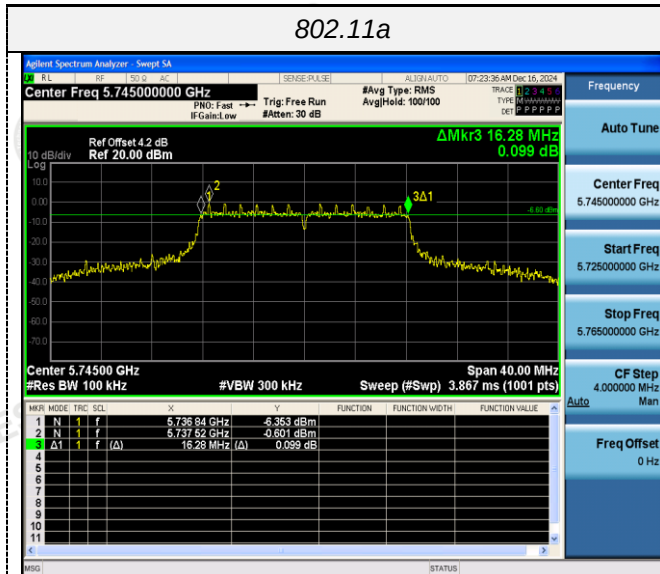


802.11n(HT20)

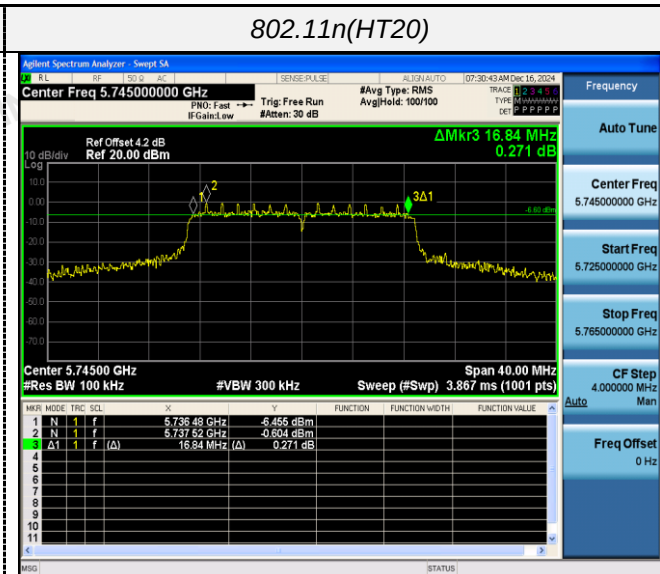


CH149

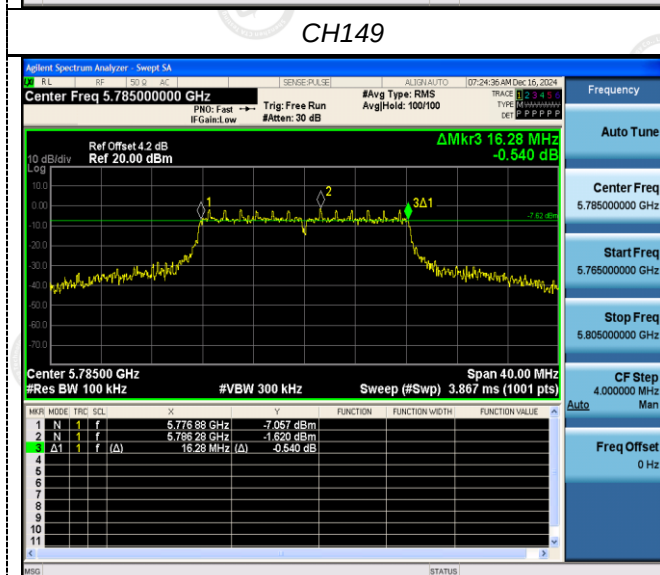


CH149

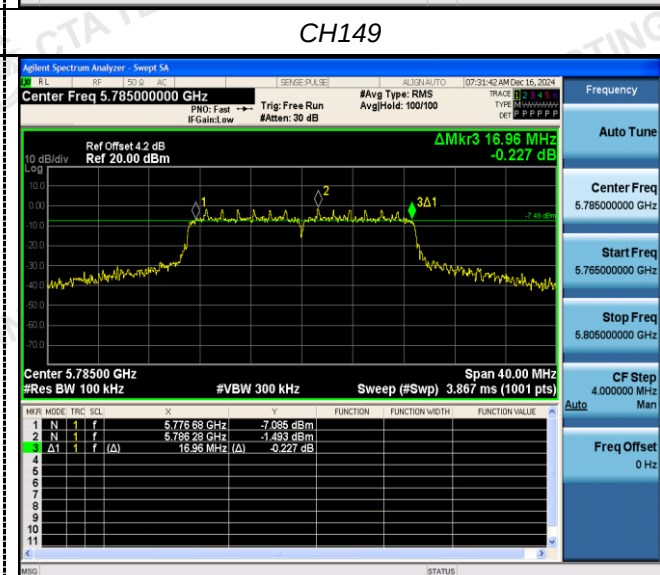


CH157

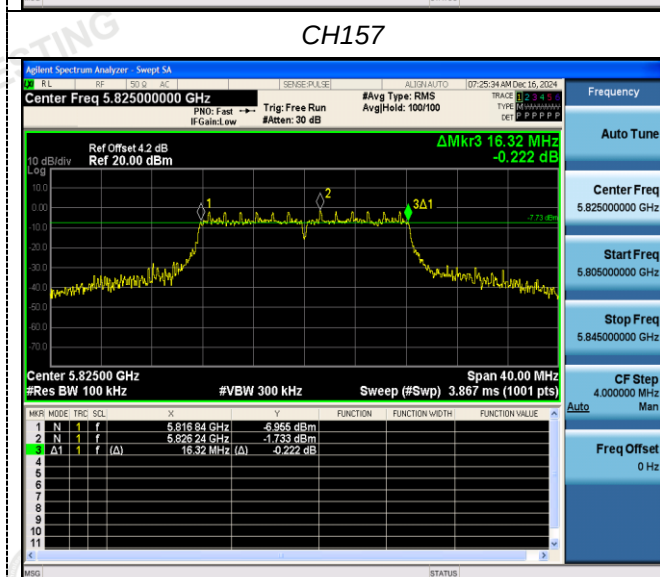


CH157

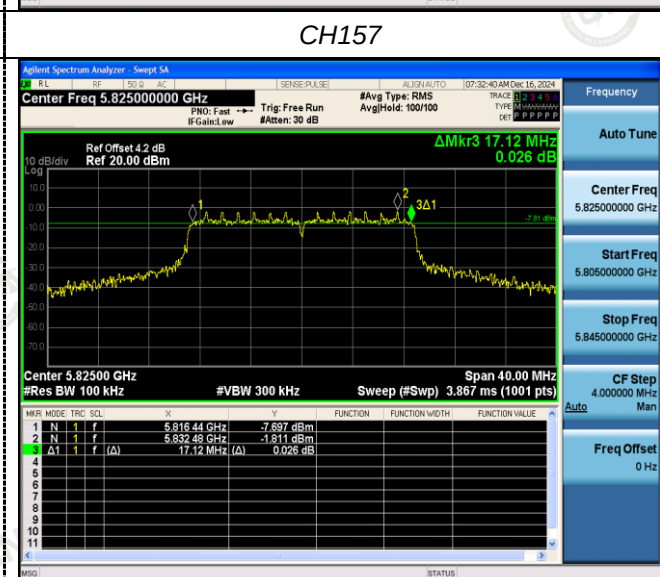


CH165




CH165




802.11n(HT40)

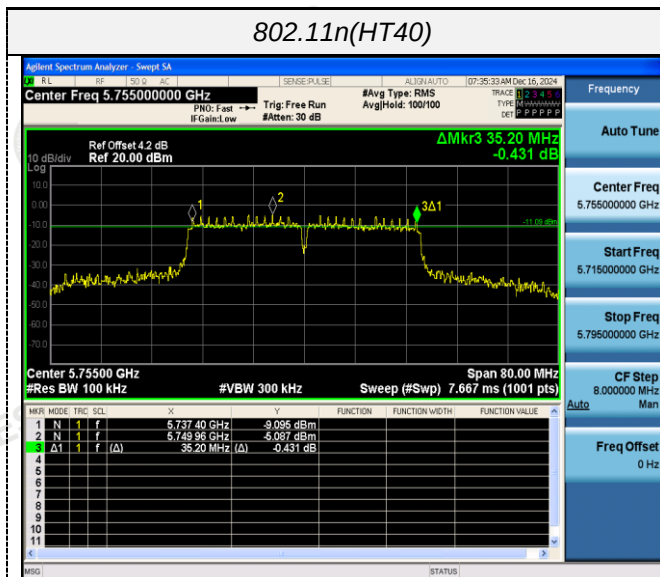


802.11ac(HT20)

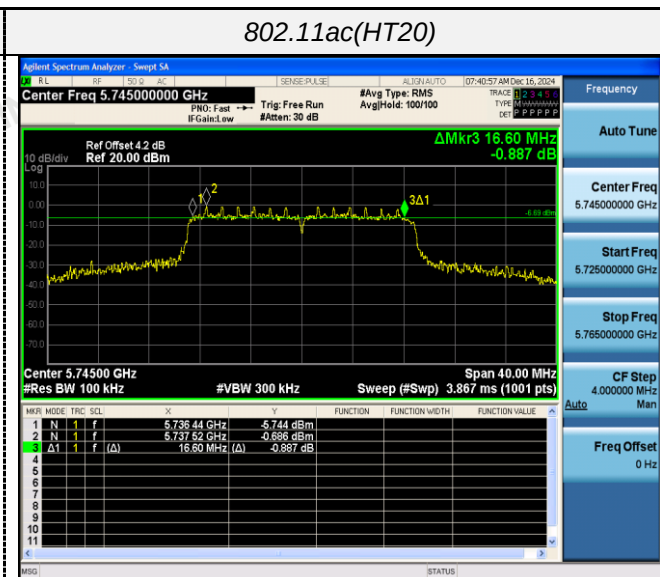


CH151

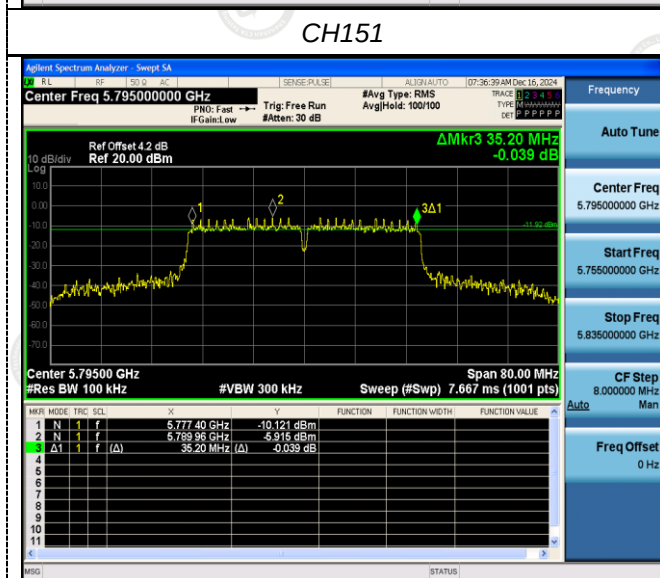


CH149

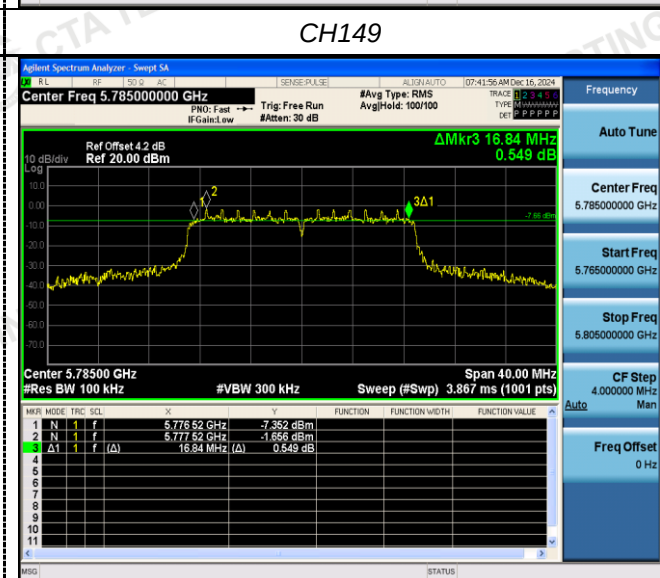



CH159

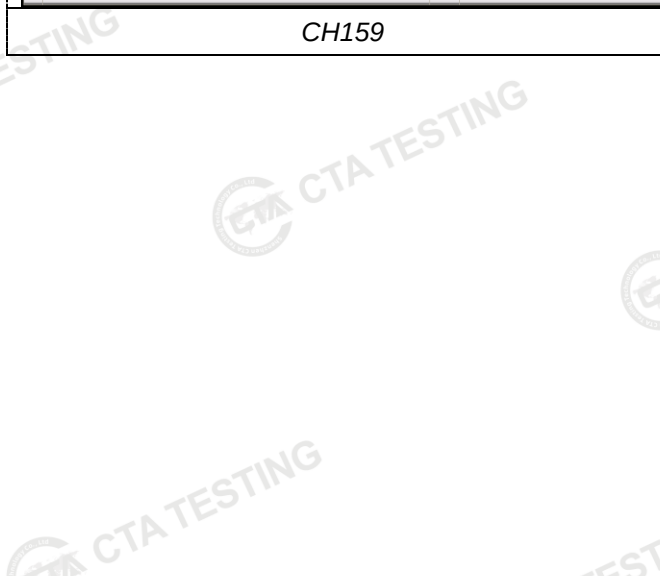

CH157

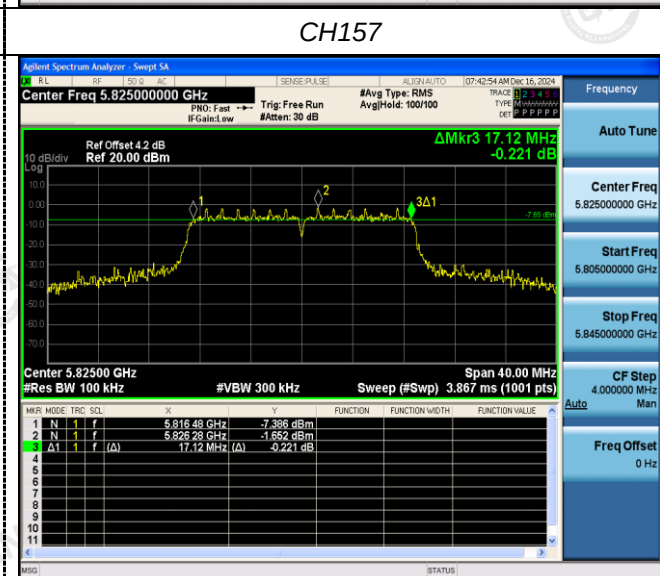

CH165

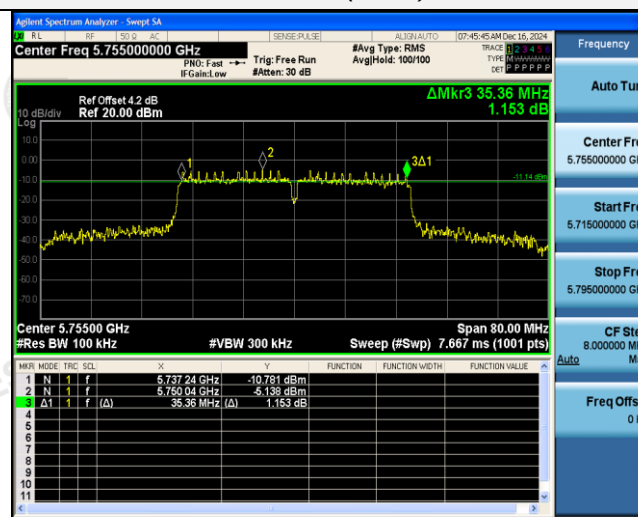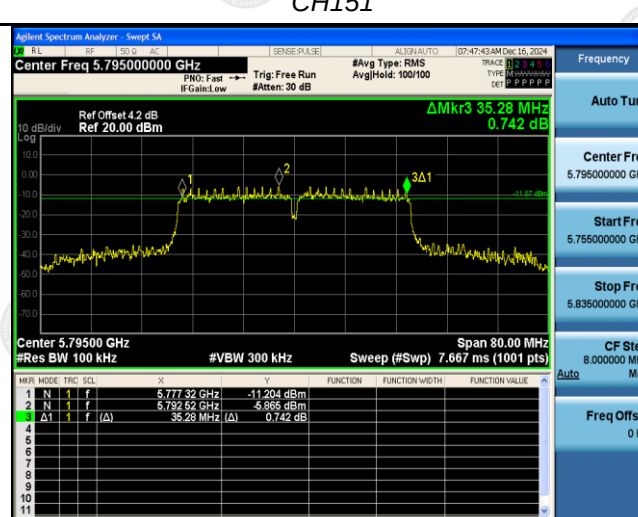
802.11ac(HT40)																																																																																																													
 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>5.73724 GHz</td><td>-10.781 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>5.75004 GHz</td><td>-5.138 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>Δ1</td><td>1</td><td>f (Δ)</td><td>35.36 MHz</td><td>1.153 dB</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>		MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	5.73724 GHz	-10.781 dBm				2	N	1	f	5.75004 GHz	-5.138 dBm				3	Δ1	1	f (Δ)	35.36 MHz	1.153 dB				4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	5.73724 GHz	-10.781 dBm																																																																																																								
2	N	1	f	5.75004 GHz	-5.138 dBm																																																																																																								
3	Δ1	1	f (Δ)	35.36 MHz	1.153 dB																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
CH151																																																																																																													
 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>5.77732 GHz</td><td>-11.204 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>5.79252 GHz</td><td>-5.865 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>Δ1</td><td>1</td><td>f (Δ)</td><td>35.28 MHz</td><td>0.742 dB</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>		MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	5.77732 GHz	-11.204 dBm				2	N	1	f	5.79252 GHz	-5.865 dBm				3	Δ1	1	f (Δ)	35.28 MHz	0.742 dB				4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	5.77732 GHz	-11.204 dBm																																																																																																								
2	N	1	f	5.79252 GHz	-5.865 dBm																																																																																																								
3	Δ1	1	f (Δ)	35.28 MHz	0.742 dB																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
CH159	CH159																																																																																																												

4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

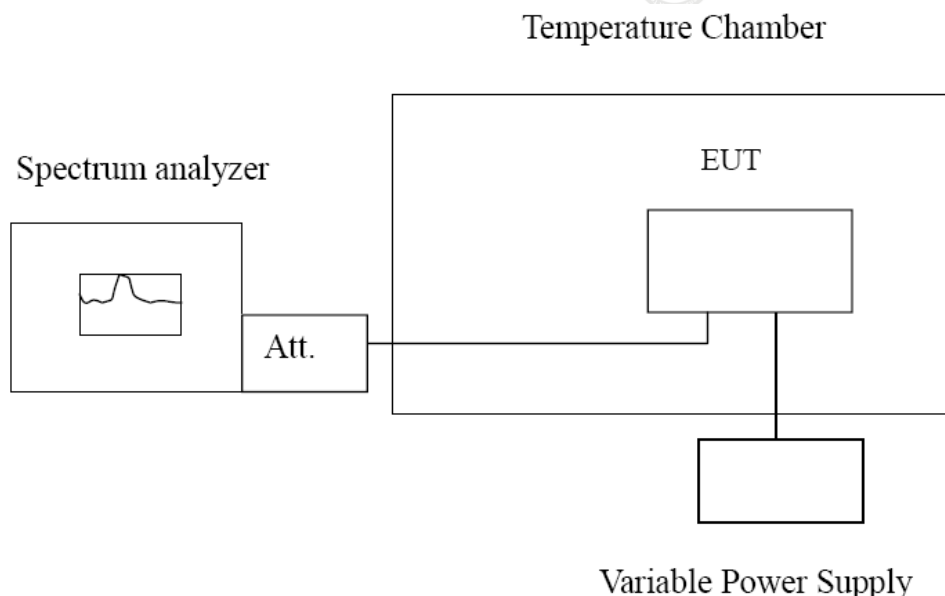

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.


TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.80	-30	110.35	0.021303	Within the band of operation	Pass
	-20	174.67	0.033720		
	-10	145.61	0.028110		
	0	146.59	0.028299		
	10	146.08	0.028201		
	20	99.74	0.019255		
	30	167.31	0.032299		
	40	129.45	0.024990		
	50	128.56	0.024819		
DC 4.2	25	195.58	0.037757	Within the band of operation	Pass
DC 3.4	25	118.77	0.022929		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.80	-30	135.53	0.023591	Within the band of operation	Pass
	-20	129.57	0.022554		
	-10	167.48	0.029152		
	0	169.88	0.029570		
	10	136.70	0.023795		
	20	144.49	0.025151		
	30	116.68	0.020310		
	40	168.21	0.029279		
	50	160.66	0.027965		
DC 4.2	25	150.89	0.026265	Within the band of operation	Pass
DC 3.4	25	129.88	0.022607		

5 Test Setup Photos of the EUT

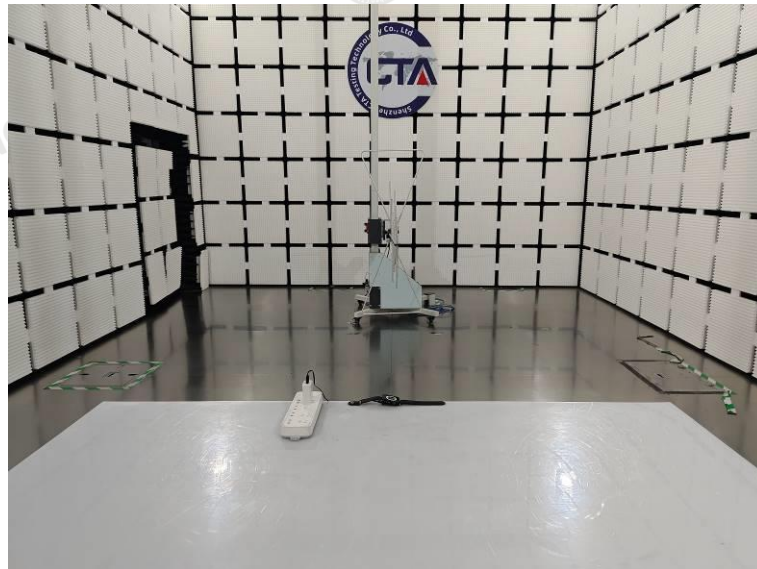

6 External and Internal Photos of the EUT

Reference to the test report No. CTA24121000201.

***** End of Report *****