



Full

TEST REPORT

No. I18D00212-SRD07

For

Client : Hisense International Co., Ltd.

Production : Mobile Phone

Model Name : KS907

Brand Name : Hisense

FCC ID : 2ADOBKS907

Hardware Version: V1.00

Software Version: Hisense_F17_4G_40_S02_20181018

Issued date: 2018-12-13

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

The standards accredited by A2LA except KDB 789033.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I18D00212-SRD07	00	2018-12-04	Initial creation of test report
I18D00212-SRD07	01	2018-12-11	Second creation of test report
I18D00212-SRD07	02	2018-12-13	Third creation of test report

CONTENTS

1.	TEST LABORATORY	5
1.1.	TESTING LOCATION	5
1.2.	TESTING ENVIRONMENT	5
1.3.	PROJECT DATA	5
1.4.	SIGNATURE	5
2.	CLIENT INFORMATION	6
2.1.	APPLICANT INFORMATION	6
2.2.	MANUFACTURER INFORMATION	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1.	ABOUT EUT	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4.	THE DIFFERENCE BETWEEN TWO MODELS	7
4.	REFERENCE DOCUMENTS	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
5.	SUMMARY OF TEST RESULTS	10
5.1.	NOTES	11
5.2.	STATEMENTS	11
6.	TEST RESULT	12
6.1.	MEASUREMENT METHOD	12
6.2.	MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	13
6.3.	PEAK POWER SPECTRAL DENSITY (CONDUCTED)	14
6.4.	OCCUPIED 6DB BANDWIDTH(CONDUCTED)	18
6.5.	TRANSMITTER SPURIOUS EMISSION	21
6.6.	BAND EDGES COMPLIANCE	40

6.7.	AC POWERLINE CONDUCTED EMISSION.....	48
7.	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	51
8.	TEST ENVIRONMENT	52
9.	MEASUREMENT UNCERTAINTY	53
ANNEX A.	ACCREDITATION CERTIFICATE	54

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
FCC registration No	958356

1.2. Testing Environment

Normal Temperature:	15-35℃
Extreme Temperature:	-30/+50℃
Relative Humidity:	20-75%

1.3. Project data


Project Leader:	Xu Yuting
Testing Start Date:	2018-11-01
Testing End Date:	2018-11-29

1.4. Signature




Yang Dejun

(Prepared this test report)



Shi Hongqi

(Reviewed this test report)



Zheng Zhongbin

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Hisense International Co., Ltd.
Address: Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
Telephone: /
Postcode: /

2.2. Manufacturer Information

Company Name: Hisense Communications Co., Ltd.
Address: 218 Qianwangang Road, Qingdao Economic & Technological
Development Zone, Qingdao, China
Telephone: /
Postcode: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	Mobile Phone
Model name	KS907
GSM Frequency Band	GSM850/GSM900/GSM1900
UMTS Frequency Band	Band 1/2/5
CDMA Frequency Band	N/A
LTE Frequency Band	Band 2/4/5/7/28
Additional Communication Function	BT/BLE/2.4G WLAN 802.11 b/g/n20/5G WLAN 802.11 a/n20
WLAN Frequency Range(5.8G)	ISM Bands: 5725MHz-5850MHz
WLAN type of modulation	OFDM
Extreme Temperature	-30/+50°C
Nominal Voltage	3.8V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.5V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	Model Name	SN or IMEI	HW Version	SW Version	Date of receipt
N29	KS907	8688060301 89949	V1.00	Hisense_F17_4G_40_S 02_20181018	2018-10 -29
N24	KS907	8688060301 89576	V1.00	Hisense_F17_4G_40_S 02_20181018	2018-10 -29
N34	KS907	/	V1.00	Hisense_F17_4G_40_S 02_20181018	2018-11 -26

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---

*AE ID: is used to identify the test sample in the lab internally.

3.4. The difference between two models

Main supply is same as Secondary supply, the two samples are only different on the supplier of TP/LCM/Front and Real CAM/Flash.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; Subpart E—Unlicensed National Information Infrastructure Devices	2017/10/1
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033	Information Infrastructure (U-NII) Devices - Part 15, Subpart E	2017

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Verdict
Maximum Output Power	15.407	P
Power Spectral Density	15.407	P
Occupied 6dB Bandwidth	15.403	P
Band edge compliance	15.407	P
Transmitter Spurious Emission - Conducted	15.407	P
Transmitter Spurious Emission - Radiated	15.407	P
AC Powerline Conducted Emission	15.407	P
Frequency Stability	15.407	NA
Automatically Discontinue Transmission	15.407	NA

Please refer to section 6 for detail.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	3.8V
Humidity	Hnom	47%

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

5.2. Statements

The KS907, supporting GSM/GPRS/EDGE/WCDMA/LTE/BT/BLE/WLAN, manufactured by Hisense Communications Co., Ltd., which is a new product for testing.

Note: The product has two prototypes, the two samples are only different on the supplier of TP/LCM/Front and Real CAM/Flash. In this report, we test all cases about main supply, and we only test worse case about secondary supply.


ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Measurement Method

6.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

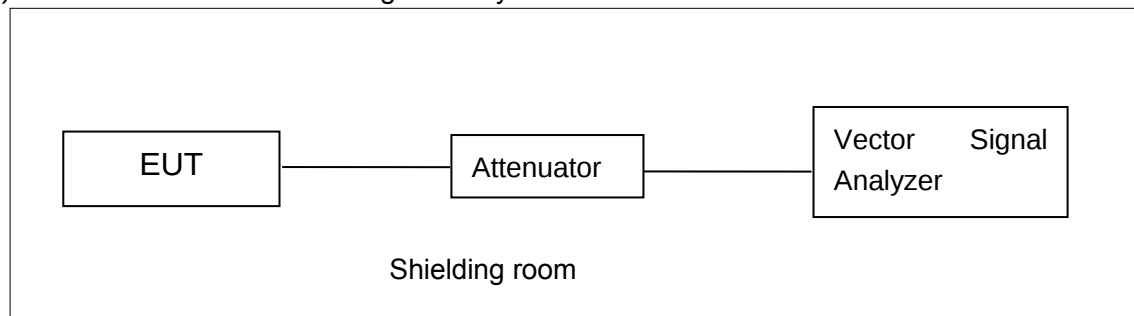


6.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

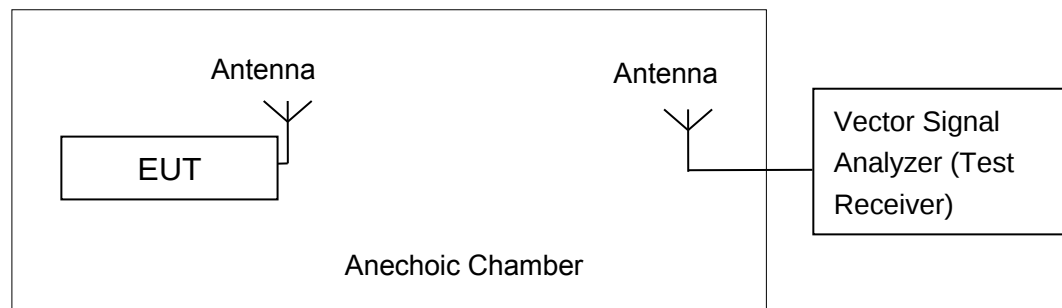

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

6.2. Maximum Average Output Power-Conducted**Measurement Limit and Method:**

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1**Set the spectrum analyzer in the following:**

Detector: RMS.

RBW=1MHz.

VBW=3MHz.

Sweep time = AUTO.

Span:30MHz (for 20MHz); 50MHz (for 40MHz).

802.11a mode**U-NII-3**

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		5745MHz(Ch149)	5785MHz(Ch157)	5825MHz(Ch165)
802.11a	6	11.16	10.34	10.77

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode**U-NII-3**

Mode	Data Rate(Index)	Teat Result(dBm)		
		5745MHz(Ch149)	5785MHz(Ch157)	5825MHz(Ch165)
802.11n(20MHz)	MCS0	8.28	7.81	7.11

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

6.3. Peak Power Spectral Density (conducted)

Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Results:


Mode	Channel	Power Spectral Density (dBm/500kHz)		Conclusion
802.11a	149	Fig.1	-1.981	P
	157	Fig.2	-1.769	P
	165	Fig.3	-1.46	P
802.11n HT20	149	Fig.4	-6.439	P
	157	Fig.5	-6.282	P
	165	Fig.6	-5.847	P

Conclusion: PASS

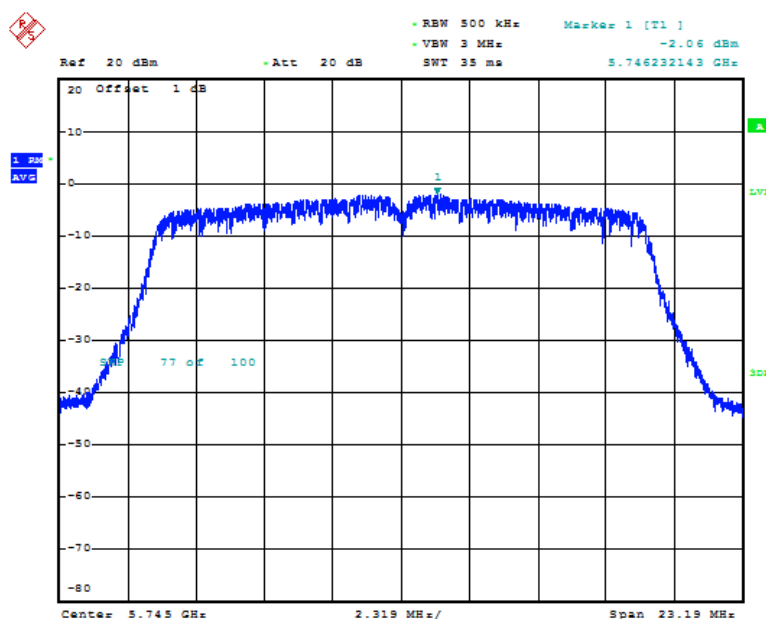


Date: 12.NOV.2018 15:57:17

Fig. 1 Power Spectral Density (802.11a, Ch 149)

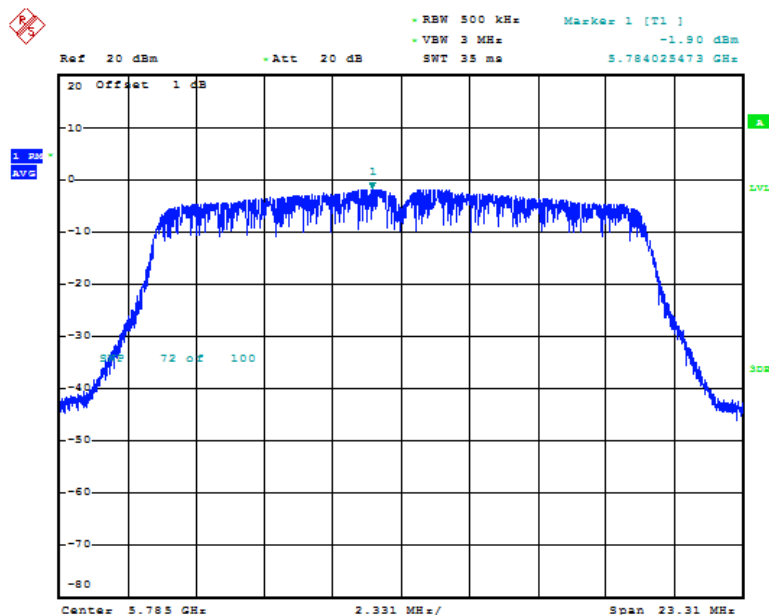


Date: 12.NOV.2018 15:58:08

Fig. 2 Power Spectral Density (802.11a, Ch 157)

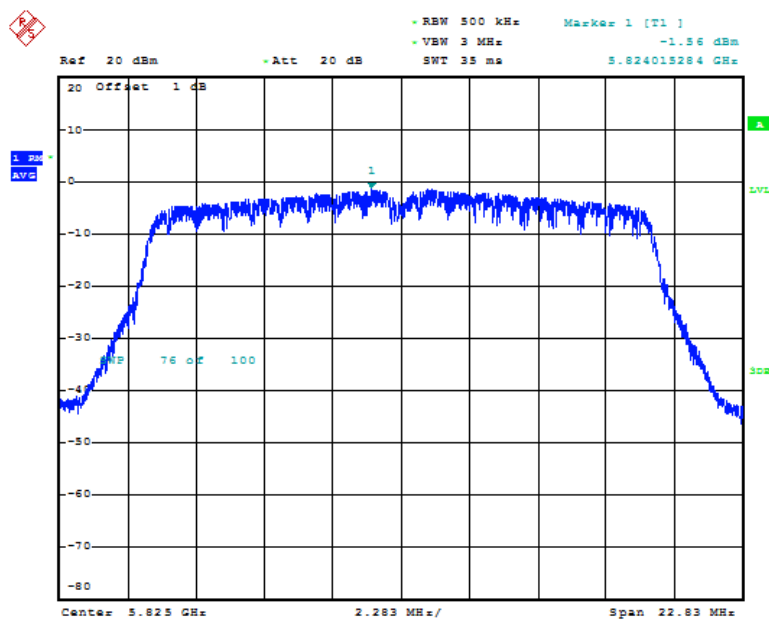


Date: 12.NOV.2018 15:58:44

Fig. 3 Power Spectral Density (802.11a, Ch 165)

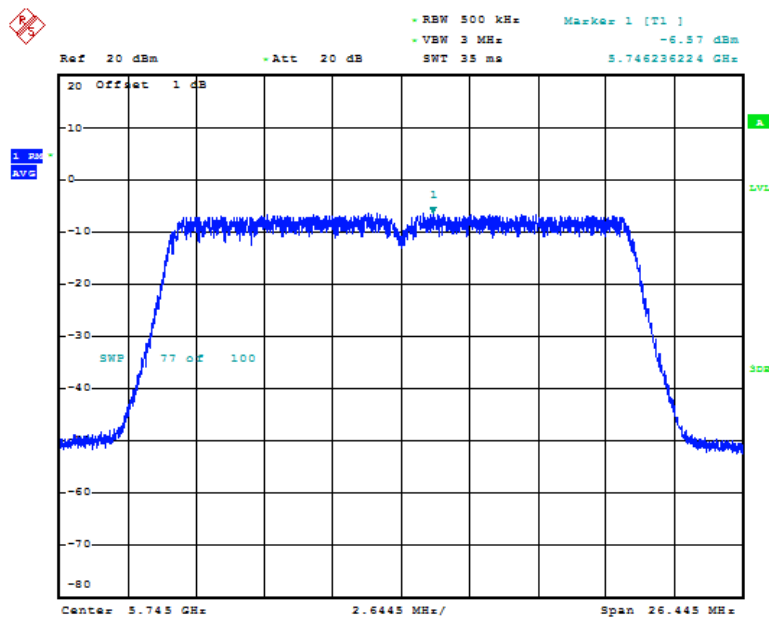


Date: 12.NOV.2018 16:01:42

Fig. 4 Power Spectral Density (802.11n-HT20, Ch 149)

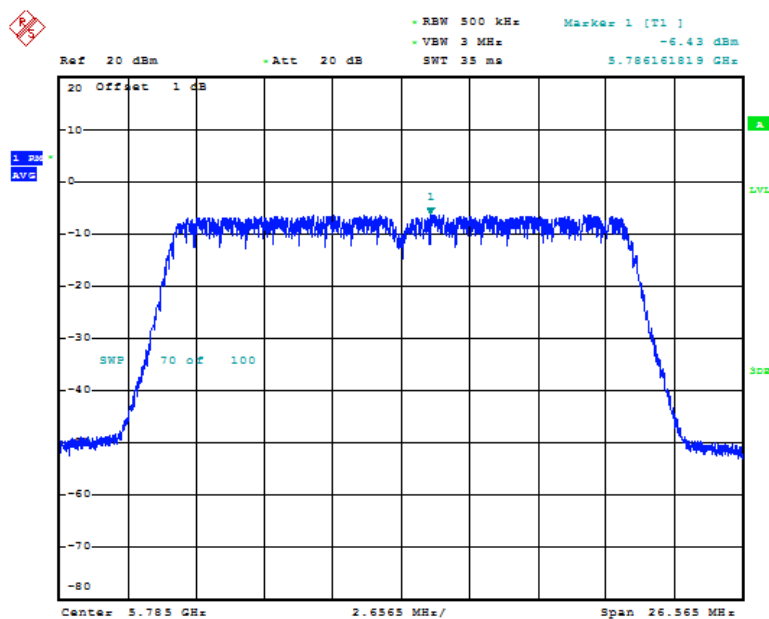

Date: 12.NOV.2018 16:03:32

Fig. 5 Power Spectral Density (802.11n-HT20, Ch 157)

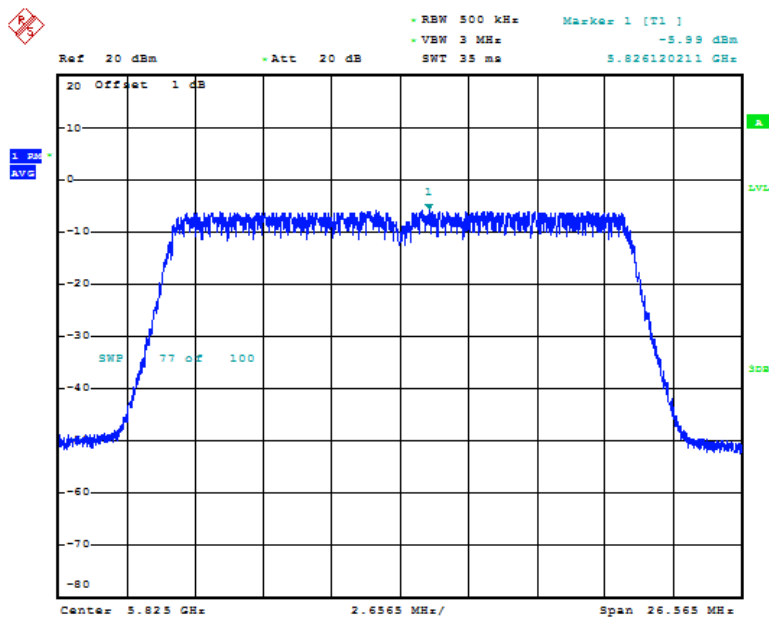

Date: 12.NOV.2018 16:04:17

Fig. 6 Power Spectral Density (802.11n-HT20, Ch 165)

6.4. Occupied 6dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/


The measurement is made according to KDB 789033

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11a	149	Fig.7	15.46	P
	157	Fig.8	15.54	P
	165	Fig.9	15.22	P
802.11n HT20	149	Fig.10	17.63	P
	157	Fig.11	17.71	P
	165	Fig.12	17.71	P


Conclusion: PASS

Test graphs as below:

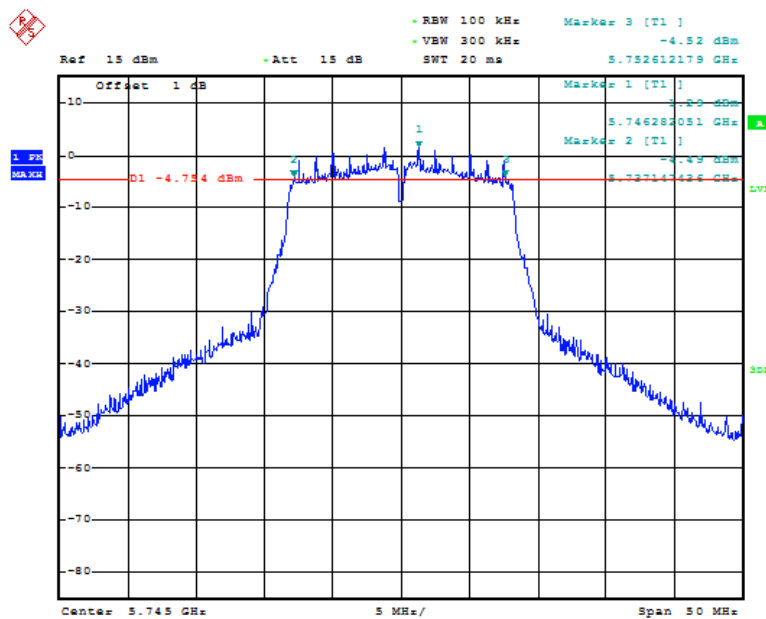


Date: 12.NOV.2018 15:47:46

Fig. 7 Occupied 6dB Bandwidth (802.11a, Ch 149)

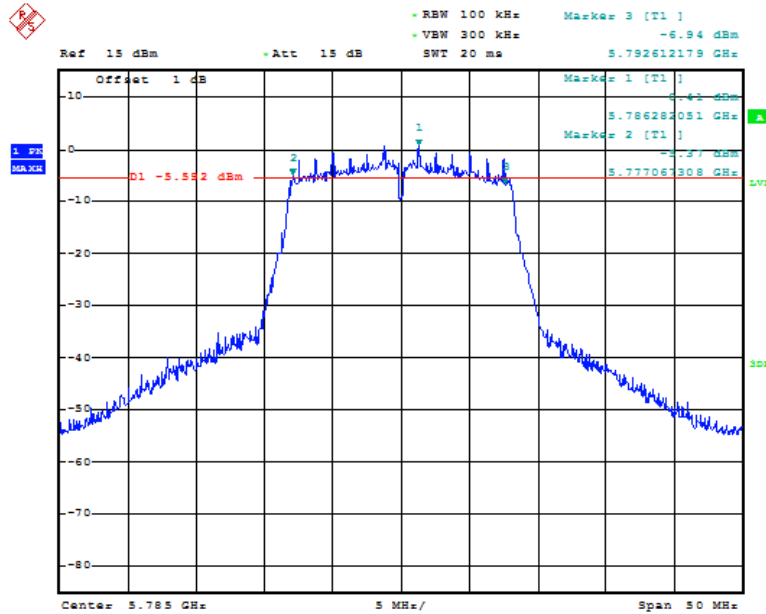


Date: 12.NOV.2018 15:49:51

Fig. 8 Occupied 6dB Bandwidth (802.11a, Ch 157)

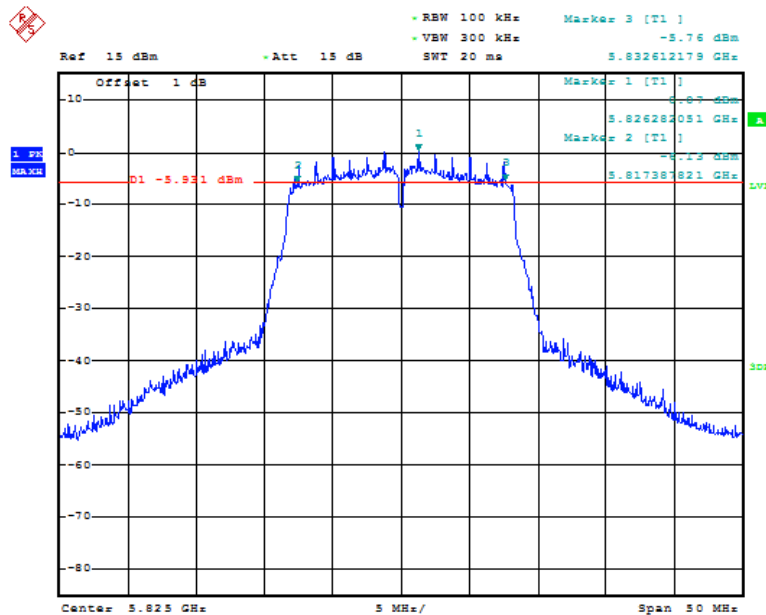


Date: 12.NOV.2018 15:51:49

Fig. 9 Occupied 6dB Bandwidth (802.11a, Ch 165)

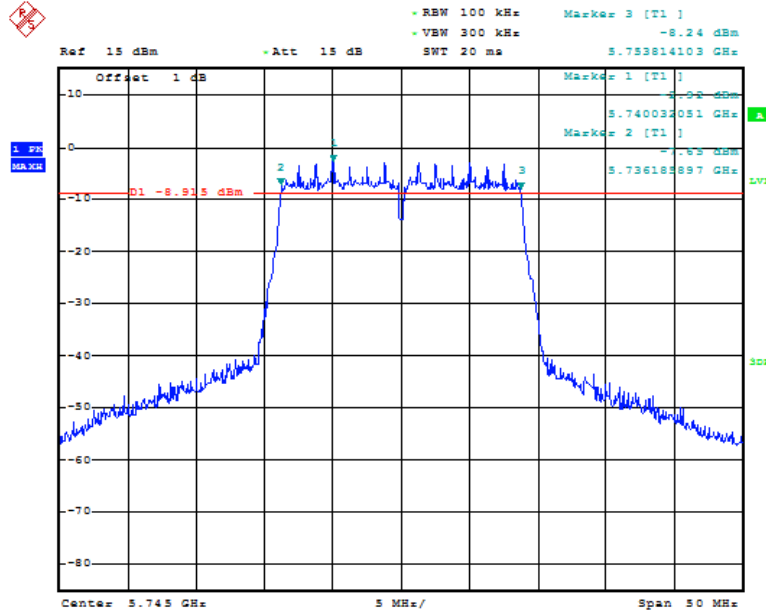


Date: 12.NOV.2018 15:52:56

Fig. 10 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

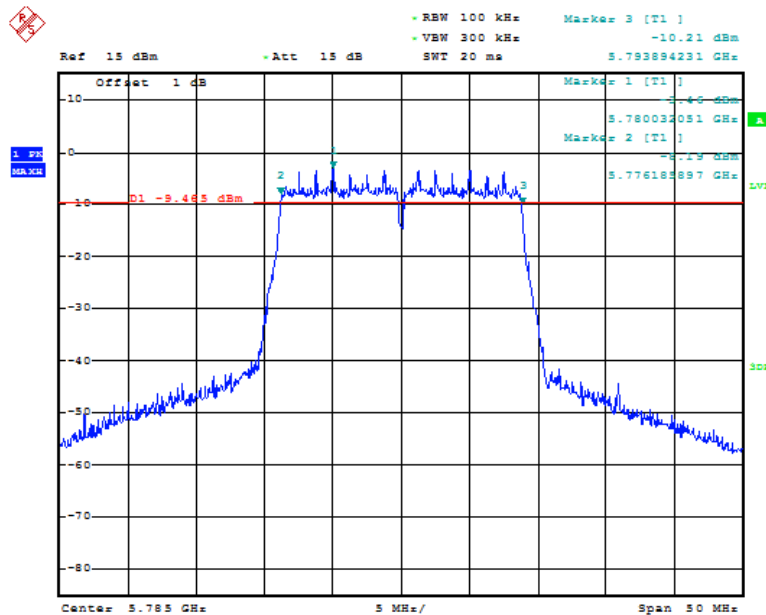

Date: 12.NOV.2018 15:54:19

Fig. 11 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

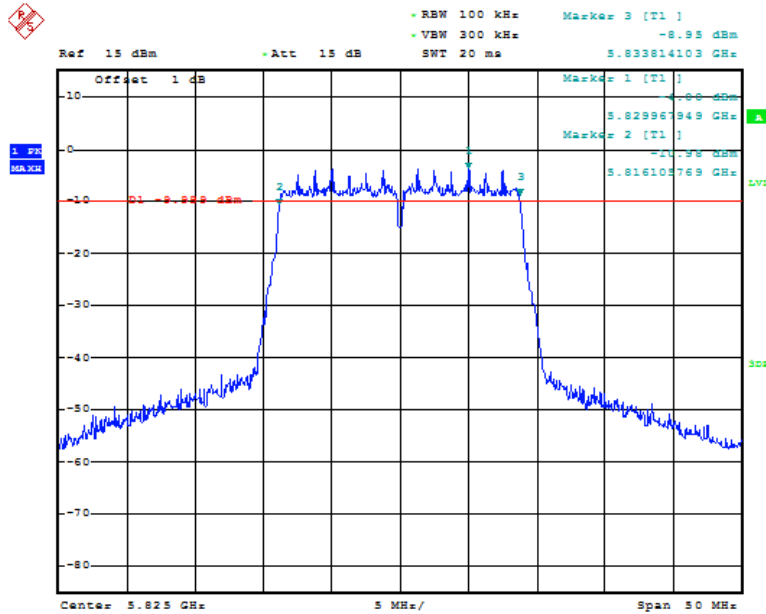

Date: 12.NOV.2018 15:55:59

Fig. 12 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

6.5. Transmitter Spurious Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009-0.490	2400/F(kHz)	/
0.490-1.705	24000/F(kHz)	/
1.705-30	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 1GHz	0.63
1GHz ≤ f ≤ 5.6GHz	1.55

5.6GHz ≤ f ≤ 40GHz	1.86
--------------------	------

6.5.1 Transmitter Spurious Emission – Conducted

Modulation type and data rate tested (worse case):

Mode	Data rate	Channel
802.11a	6Mbps	149(5745MHz)
802.11n-HT20	MCS0	149(5745MHz)

Measurement Results:

802.11a mode


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149(5745MHz)	30 MHz ~ 1 GHz	Fig.13	P
		1 GHz ~ 5.6 GHz	Fig.14	P
		5.9 GHz ~ 40 GHz	Fig.15	P

802.11n-HT20 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149(5745MHz)	30 MHz ~ 1 GHz	Fig.16	P
		1 GHz ~ 5.6 GHz	Fig.17	P
		5.9 GHz ~ 40 GHz	Fig.18	P


Conclusion: PASS

Test graphs as below:

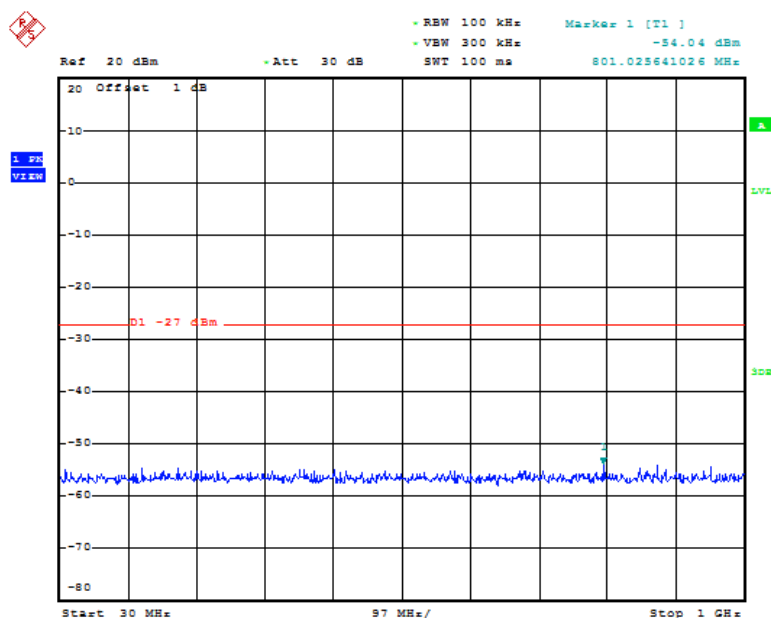


Date: 13.NOV.2018 08:14:30

Fig. 13 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

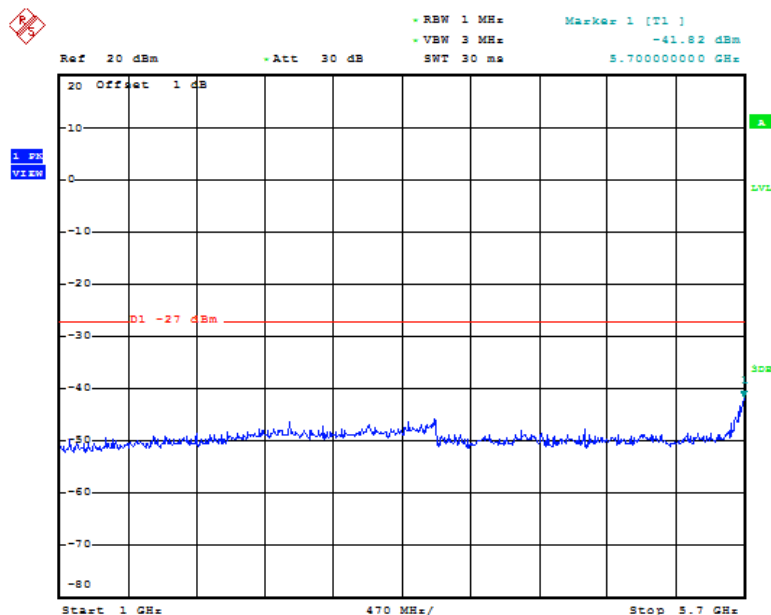


Date: 13.NOV.2018 08:14:59

Fig. 14 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -5.7 GHz)

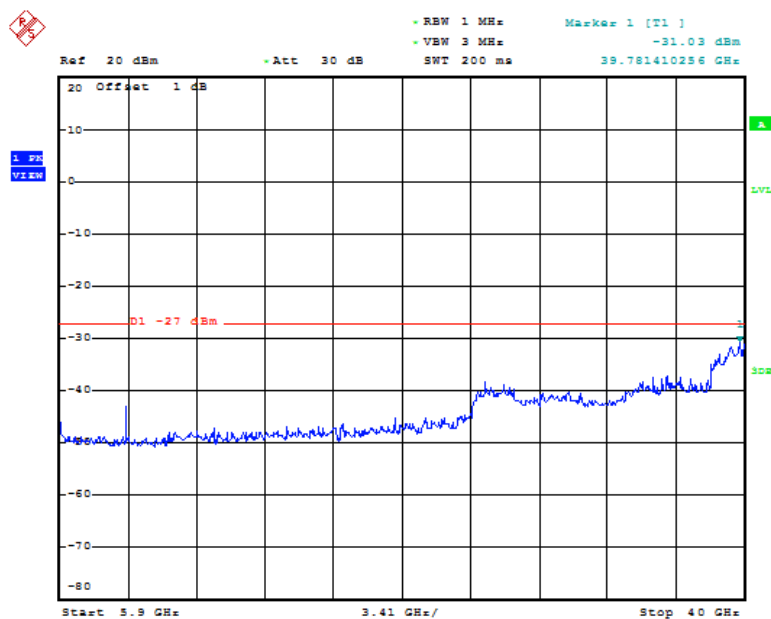


Date: 13.NOV.2018 08:15:28

Fig. 15 Conducted Spurious Emission (802.11a, Ch149, 5.9 GHz-40 GHz)

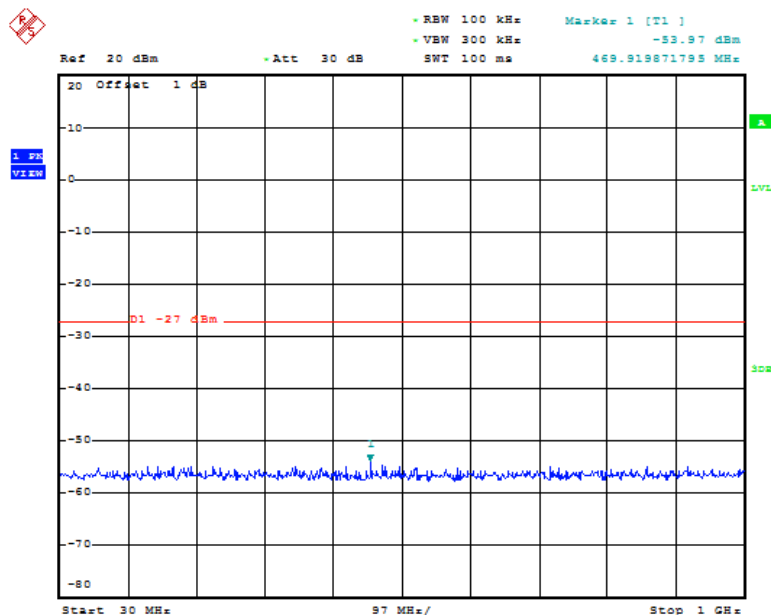


Date: 13.NOV.2018 08:24:04

Fig. 16 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

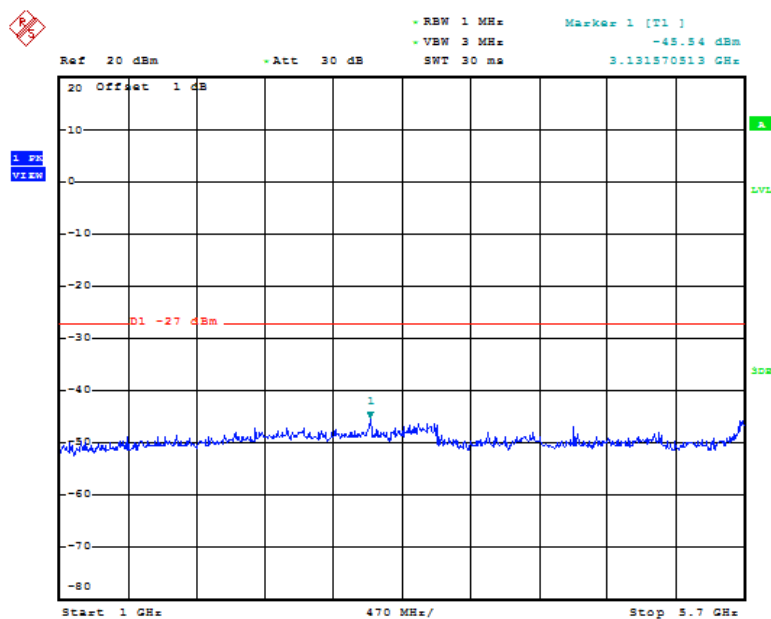

Date: 13.NOV.2018 08:24:33

Fig. 17 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -5.7 GHz)

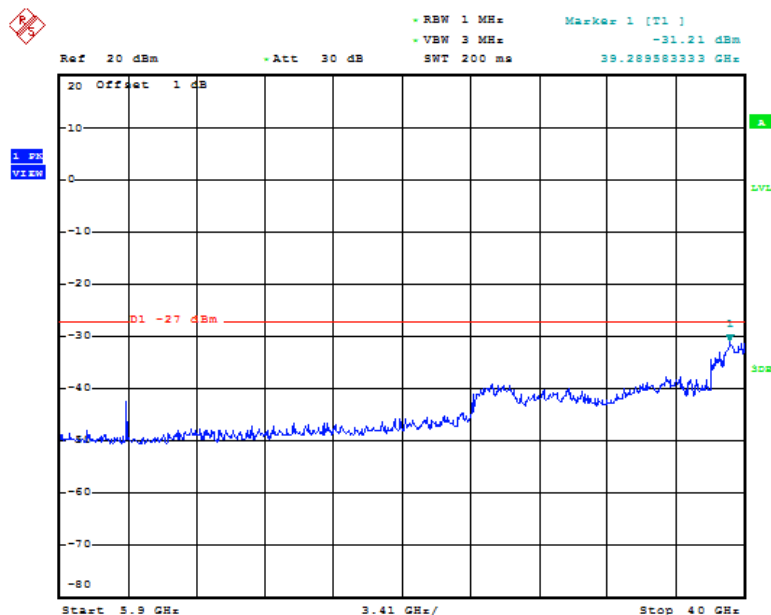

Date: 13. NOV. 2018 08:25:02

Fig. 18 Conducted Spurious Emission (802.11n-HT20, Ch149, 5.9 GHz-40 GHz)

6.5.2 Transmitter Spurious Emission - Radiated

Modulation type and data rate tested (worse case):

N24 (Main supply) :

Mode	Data rate	Channel
802.11a	6Mbps	149(5745MHz)
802.11n-HT20	MCS0	149(5745MHz)

N34 (Secondary supply) :

Mode	Data rate	Channel
802.11a	6Mbps	149(5745MHz)

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
$f \leq 1\text{GHz}$	3.9
$f > 1\text{GHz}$	4.3

Measurement Results:

N24 (Main supply) :

802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
------	---------	-----------------	--------------	------------

802.11a	149(5745MHz)	30 MHz ~1 GHz	Fig.19	P
		1 GHz ~ 8 GHz	Fig.20	P
		8 GHz ~ 18 GHz	Fig.21	P
		18 GHz ~ 26.5 GHz	Fig.22	P
		26.5 GHz~ 40 GHz	Fig.23	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149(5745MHz)	30 MHz ~1 GHz	Fig.24	P
		1 GHz ~ 8 GHz	Fig.25	P
		8 GHz ~ 18 GHz	Fig.26	P
		18 GHz ~ 26.5 GHz	Fig.27	P
		26.5 GHz~ 40 GHz	Fig.28	P

N34 (Secondary supply) :
802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149(5745MHz)	30 MHz ~1 GHz	Fig.29	P
		1 GHz ~ 8 GHz	Fig.30	P
		8 GHz ~ 18 GHz	Fig.31	P
		18 GHz ~ 26.5 GHz	Fig.32	P
		26.5 GHz~ 40 GHz	Fig.33	P

Radiated Spurious Emission (9kHz-30MHz)

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149(5745MHz)	9kHz ~ 30 MHz	Fig.34	P

Conclusion: PASS
Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

N24 (Main supply) :
802.11a

Channel 149 (30MHz ~ 1GHz)

Frequency (MHz)	Result (dB μ V/m)	A_{Rpl} (dB)	P_{Mea} (dB μ V/m)	Polarity
34.0	24.54	-22	46.54	V
34.9	23.38	-22	45.38	V

41.5	25.74	-20.7	46.44	V
83.4	28.1	-26.6	54.7	H
92.4	31.71	-24.8	56.51	H
189.9	33.61	-25.1	58.71	V

Channel 149 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
6092.8	45.11	4.8	40.31	V
6339.8	45.28	5.6	39.68	V
6705.6	46.69	6.6	40.09	V
7023.0	46.98	7.3	39.68	V
7272.4	46.37	7.3	39.07	V
7665.6	46.73	7.9	38.83	V

Channel 149 (8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
9190.8	48.79	10.4	38.39	V
15713.0	55.34	21.9	33.44	V
16054.6	56.58	22.5	34.08	V
16992.0	57.17	23.7	33.47	V
17224.8	56.19	24.2	31.99	V
17670.2	56.87	24.4	32.47	H

Channel 149 (8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
15713.0	43.43	21.9	21.53	V
16054.6	44.16	22.5	21.66	V
16992.0	44.83	23.7	21.13	V
17224.8	44.4	24.2	20.2	V
17670.2	44.49	24.4	20.09	H

Channel 149 (18GHz ~ 26.5GHz)

Frequency	Result	ARpl (dB)	PMea	Polarity
-----------	--------	-----------	------	----------

(MHz)	(dBμV/m)		(dBμV/m)	
18701.2	40.13	-5.6	45.73	H
20100.4	40.71	-4.8	45.51	V
21261.4	44.26	-3.7	47.96	H
23005.6	44.25	-3	47.25	H
24151.4	44.52	-2.8	47.32	V
26066.5	46.25	-2	48.25	V

Channel 149 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27323.5	44.22	-1	45.22	V
30208.4	43.92	-0.9	44.82	H
32742.4	44.01	0.5	43.51	V
34573.0	46.01	0.7	45.31	V
36934.2	46.68	1.7	44.98	V
39577.4	51.38	4.4	46.98	V

802.11n-HT20

Channel 149 (30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
33.9	38.45	-22	60.45	V
35.2	35.86	-21.9	57.76	V
41.8	25.34	-20.7	46.04	V
85.5	26.8	-26.1	52.9	H
216.0	16.13	-23.9	40.03	H
714.6	26.96	-12.7	39.66	H

Channel 149 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
5980.4	45.48	4.6	40.88	V
6348.6	46.01	5.6	40.41	V
6712.6	46.58	6.6	39.98	V

7041.6	46.67	7.3	39.37	V
7370.8	46.49	7.3	39.19	V
7756.8	47.49	8.4	39.09	V

Channel 149 (8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
15384.4	53.56	21	32.56	H
15771.2	54.98	22	32.98	H
16061.4	56.14	22.5	33.64	H
16888.4	55.71	23.3	32.41	V
17163.2	56.76	24.1	32.66	H
17510.0	57.75	24.5	33.25	V

Channel 149 (8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
15771.2	43.11	22	21.11	H
16061.4	44.08	22.5	21.58	H
16888.4	43.57	23.3	20.27	V
17163.2	44.55	24.1	20.45	H
17510.0	44.8	24.5	20.3	V

Channel 149 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
18710.6	40.13	-5.6	45.73	H
19961.8	40.51	-4.9	45.41	V
21720.4	44.96	-3.4	48.36	H
22875.6	45.01	-2.9	47.91	H
24162.5	45.5	-2.8	48.3	H
26054.6	46.37	-2	48.37	V

Channel 149 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27168.2	44.62	-1	45.62	H

29702.2	43.01	-1	44.01	V
31157.5	44.13	0.6	43.53	H
33370.2	43.91	1.1	42.81	V
35242.6	45.03	0.9	44.13	H
39021.2	49.99	4.1	45.89	H

N34 (Secondary supply) :
802.11a

Channel 149 (30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
33.8	11.23	-22	33.23	V
34.2	14.77	-22	36.77	V
36.5	12.6	-21.6	34.2	V
71.7	7	-25.4	32.4	V
187.9	7.63	-25.2	32.83	V
306.2	11.74	-21.7	33.44	V

Channel 149 (1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
6276.0	45.92	5.5	40.42	H
6431.0	46.62	5.8	40.82	H
6733.4	47.52	6.7	40.82	H
6986.8	46.97	7.2	39.77	H
7260.4	46.51	7.3	39.21	H
7531.0	47.79	7.5	40.29	H

Channel 149 (8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
15698.8	55.89	21.8	34.09	H
16118.2	56.14	22.4	33.74	H
16508.6	55.92	22.7	33.22	H
16787.0	55.73	23.4	32.33	H

17186.8	56.19	24.1	32.09	H
17522.0	57.36	24.5	32.86	H

Channel 149 (8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
15698.8	43.66	21.8	21.86	H
16118.2	44.32	22.4	21.92	H
16508.6	43.24	22.7	20.54	H
16787.0	43.69	23.4	20.29	H
17186.8	44.5	24.1	20.4	H
17522.0	44.99	24.5	20.49	H

Channel 149 (18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
18671.5	38.88	-5.6	44.48	H
20187.0	40.71	-4.8	45.51	H
21680.5	43.07	-3.4	46.47	H
23023.5	45.02	-3	48.02	V
24821.2	44	-2.3	46.3	H
26008.7	47.03	-1.9	48.93	V

Channel 149 (26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27786.6	44.2	-0.5	44.7	H
30123.4	43.11	-1.1	44.21	V
32199.7	45.23	0.5	44.73	H
34415.0	46.43	1.3	45.13	H
36893.6	46.28	1.9	44.38	H
39883.9	52.47	5.6	46.87	H

Test graphs as below:

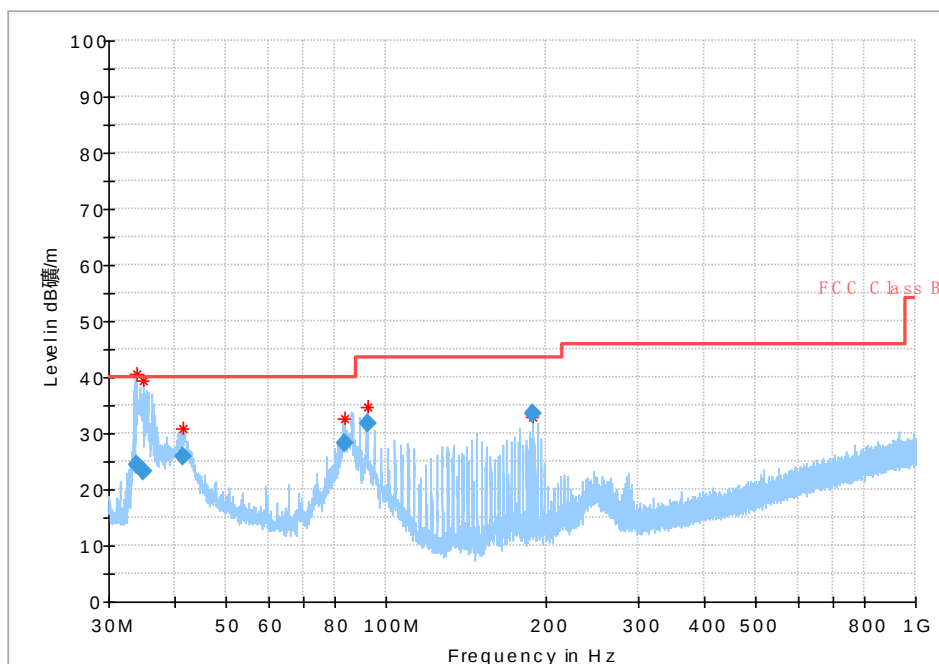


Fig. 19 Radiated Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

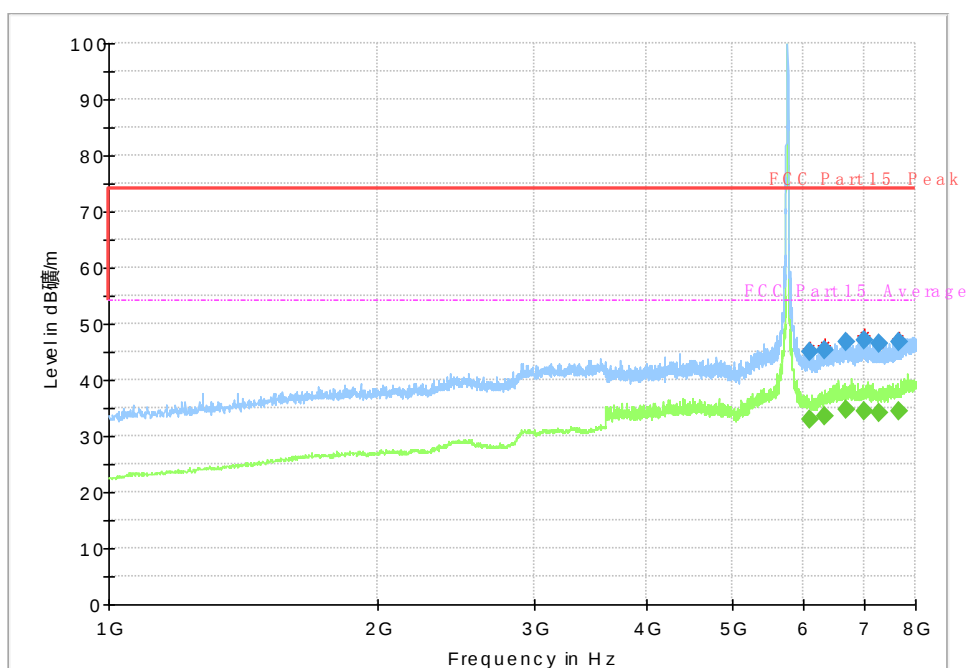


Fig. 20 Radiated Spurious Emission (802.11a, Ch149, 1 GHz-8 GHz)

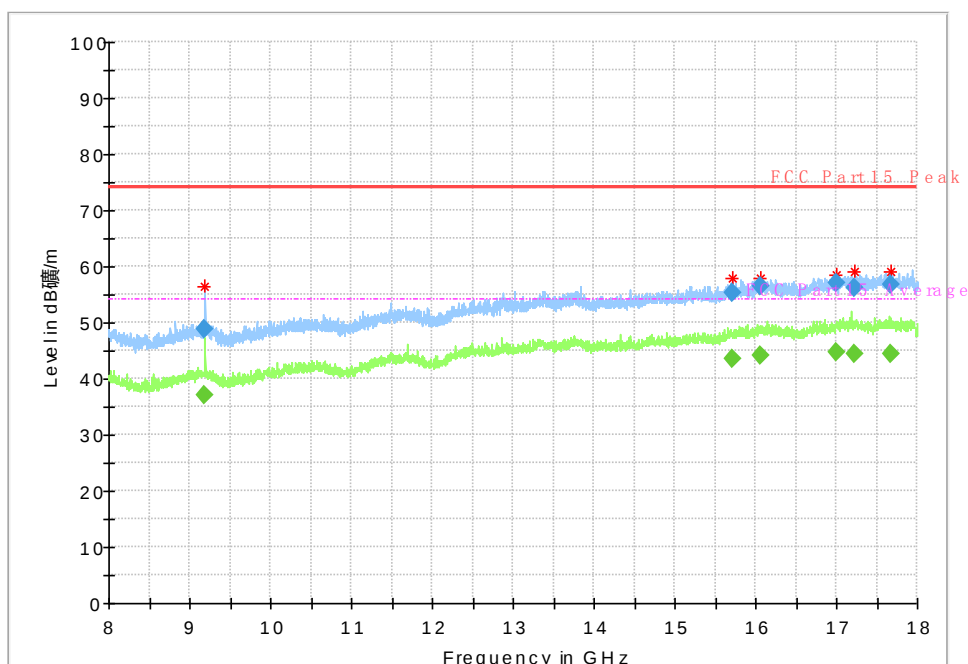


Fig. 21 Radiated Spurious Emission (802.11a, Ch149, 8 GHz-18 GHz)

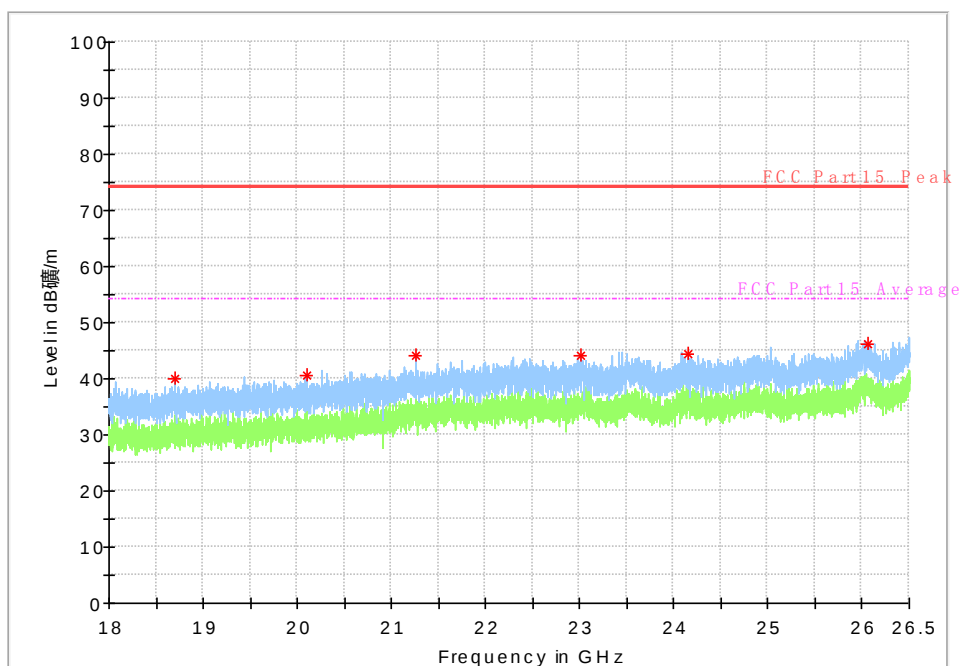


Fig. 22 Radiated Spurious Emission (802.11a, C149, 18 GHz-26.5 GHz)

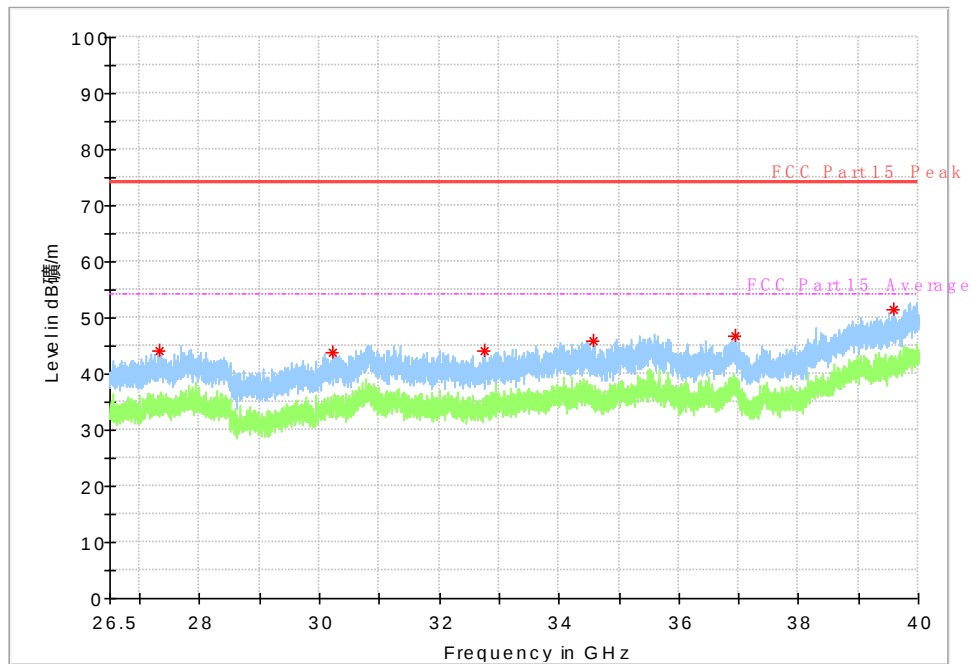


Fig. 23 Radiated emission: 802.11n, (802.11a, Ch149, 26.5 GHz - 40 GHz)

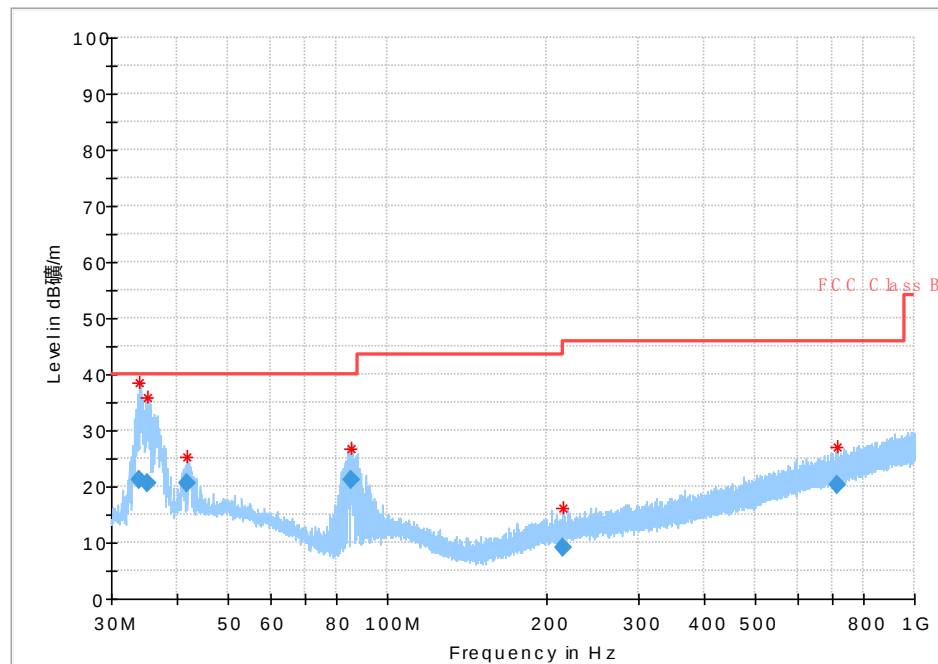


Fig. 24 Radiated Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

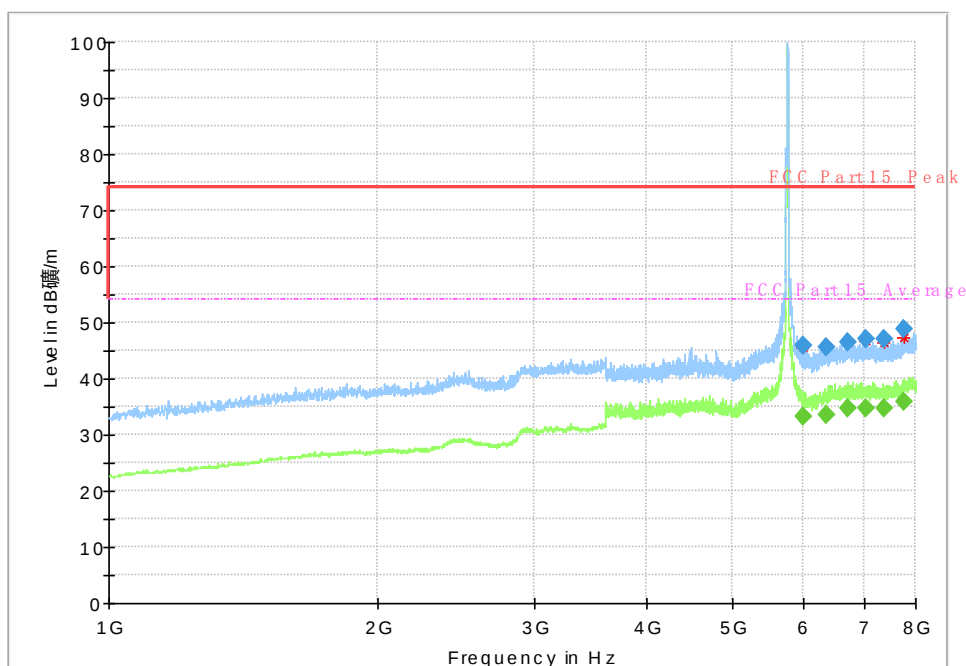


Fig. 25 Radiated Spurious Emission (802.11n-HT20, Ch149, 1 GHz-8 GHz)

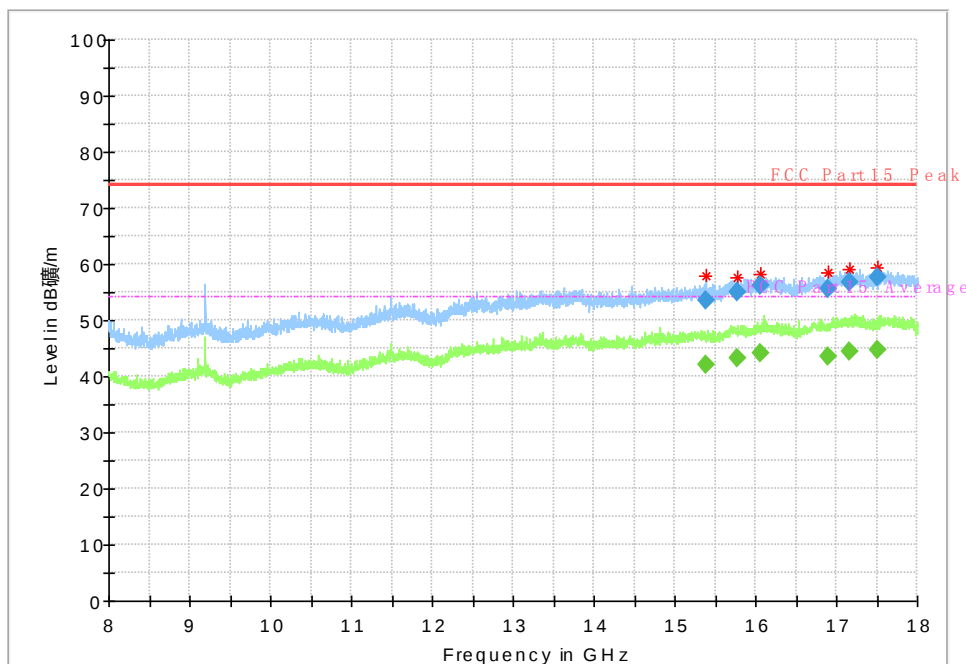


Fig. 26 Radiated Spurious Emission (802.11n-HT20, Ch149, 8 GHz-18 GHz)

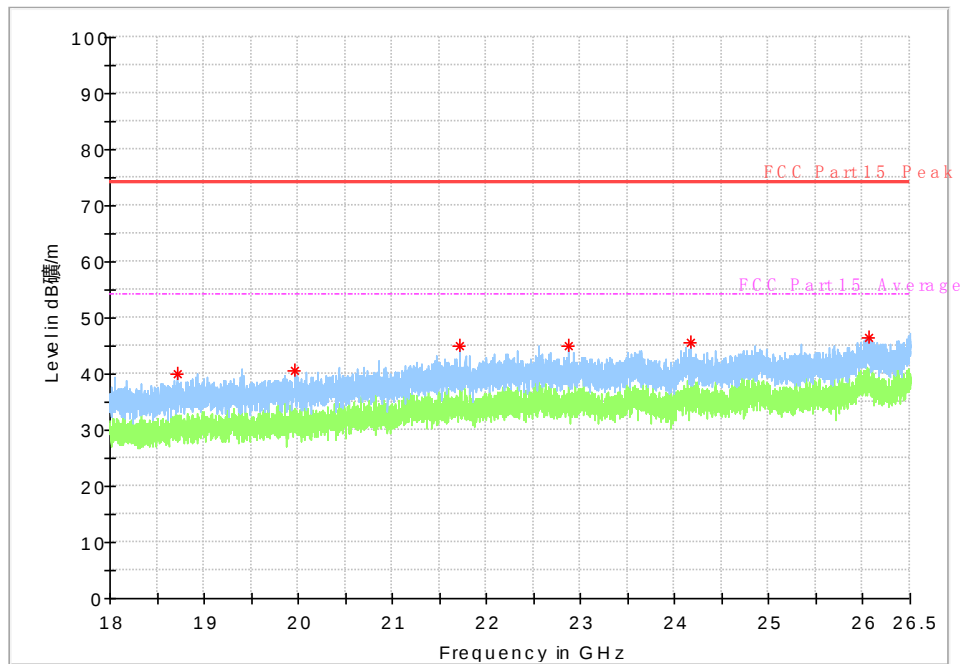


Fig. 27 Radiated Spurious Emission (802.11n-HT20, Ch149, 18 GHz-26.5 GHz)

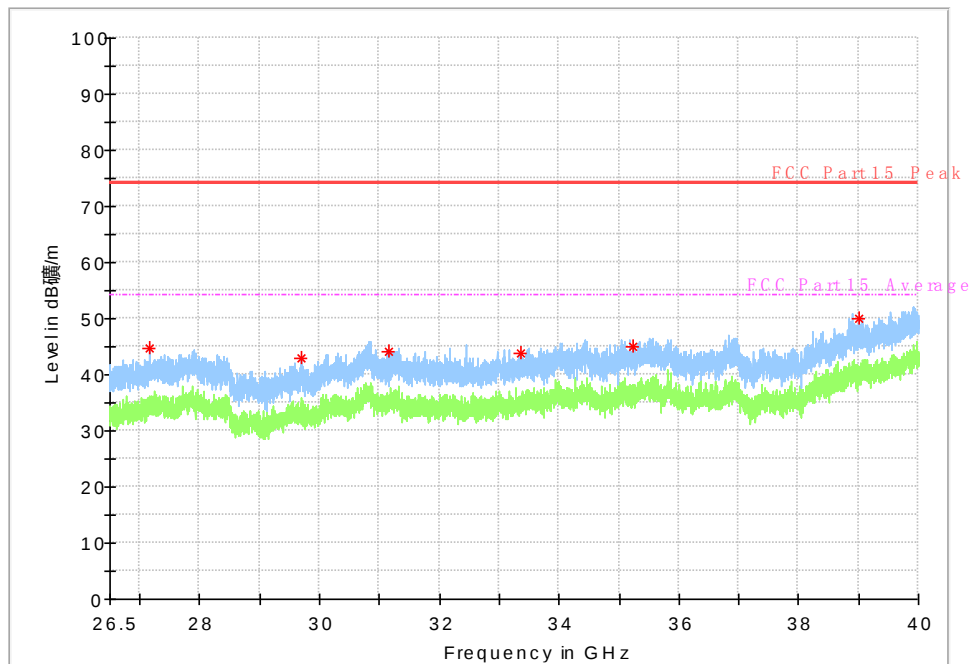


Fig. 28 Radiated emission: 802.11n, (802.11n-HT20, Ch149, 26.5 GHz - 40 GHz)

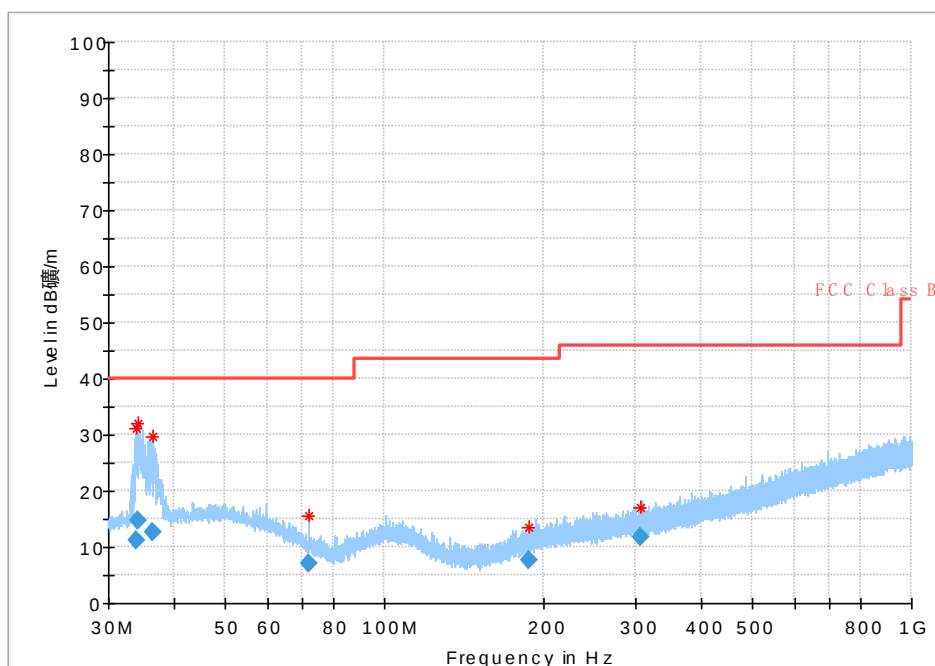


Fig. 29 Radiated Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

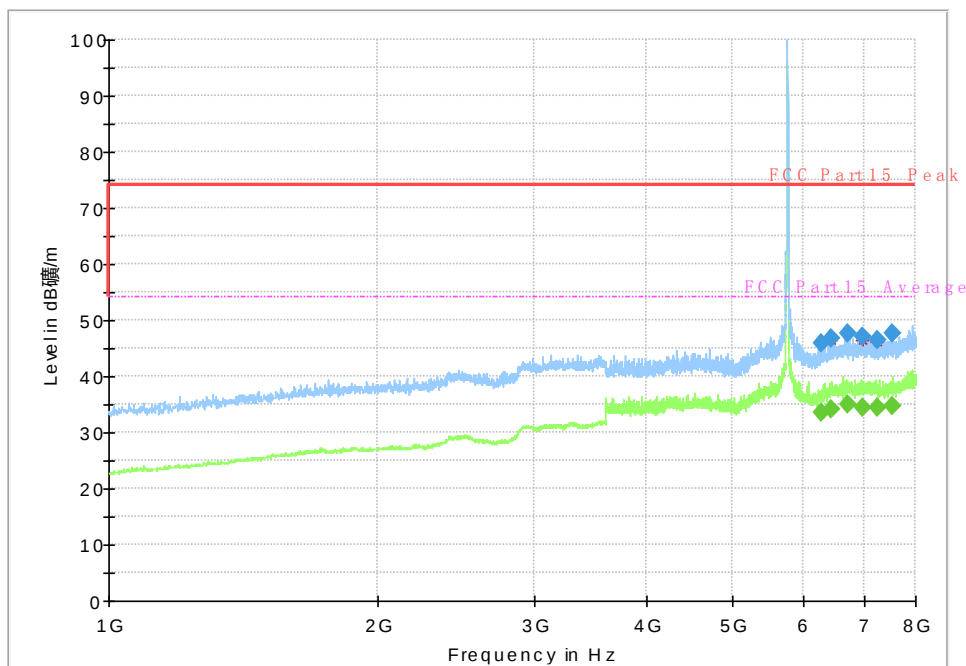


Fig. 30 Radiated Spurious Emission (802.11a, Ch149, 1 GHz-8 GHz)

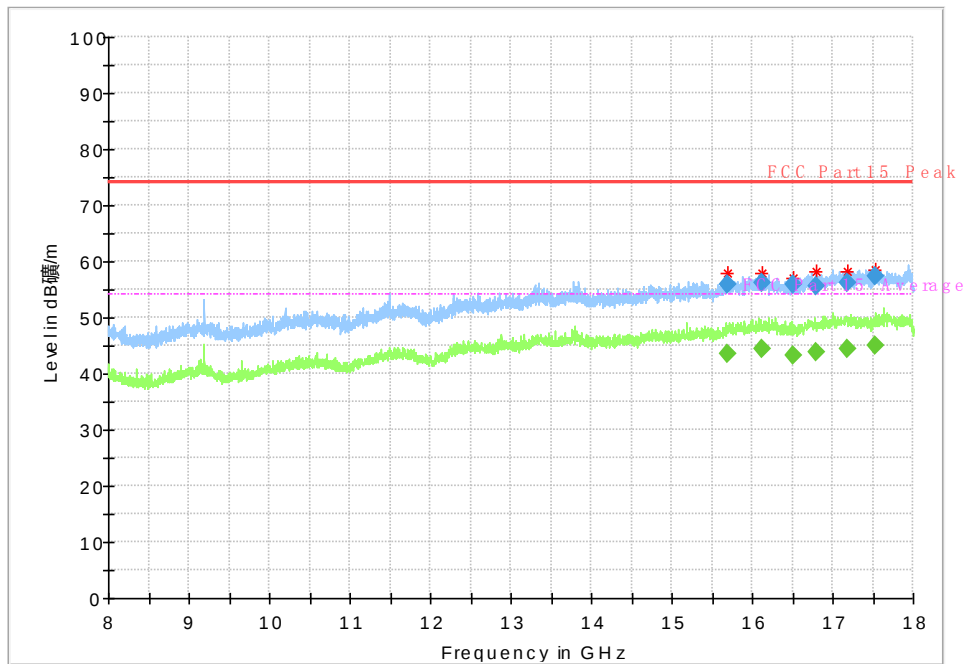


Fig. 31 Radiated Spurious Emission (802.11a, Ch149, 8 GHz-18 GHz)

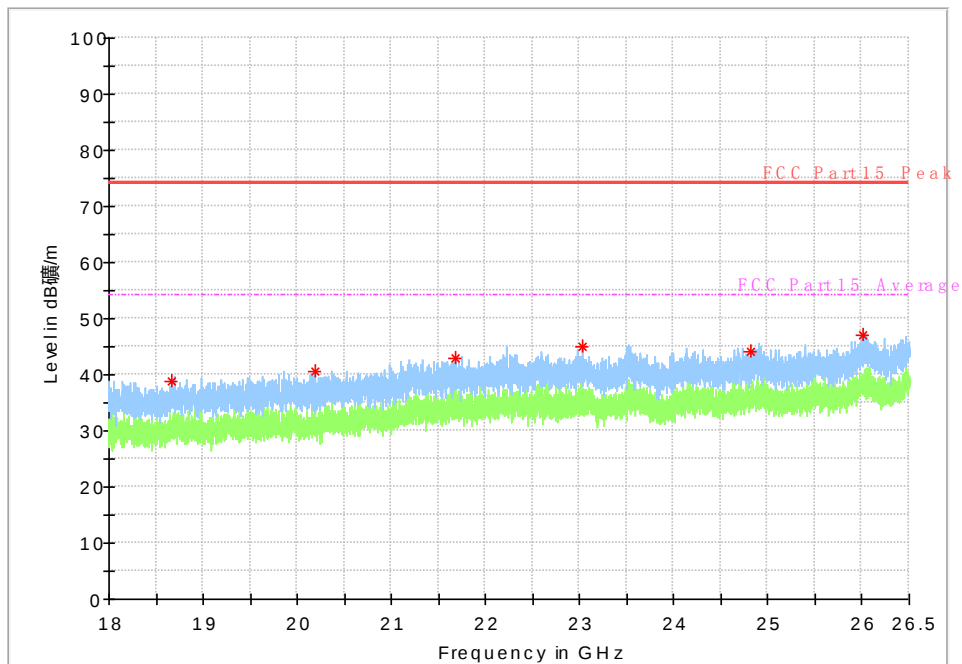


Fig. 32 Radiated Spurious Emission (802.11a, C149, 18 GHz-26.5 GHz)

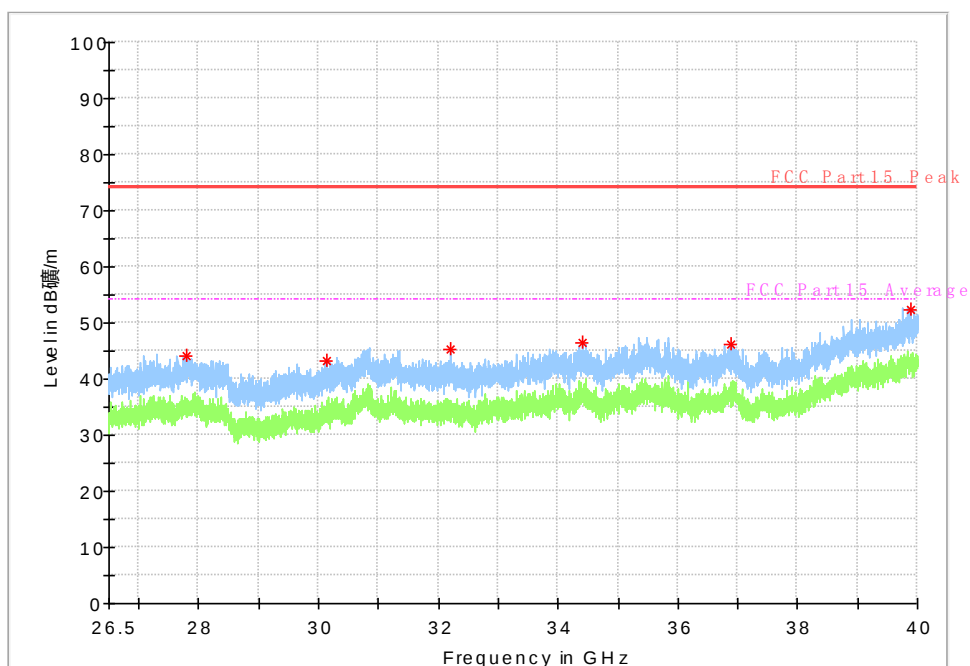


Fig. 33 Radiated emission: 802.11n, (802.11a, Ch149, 26.5 GHz - 40 GHz)

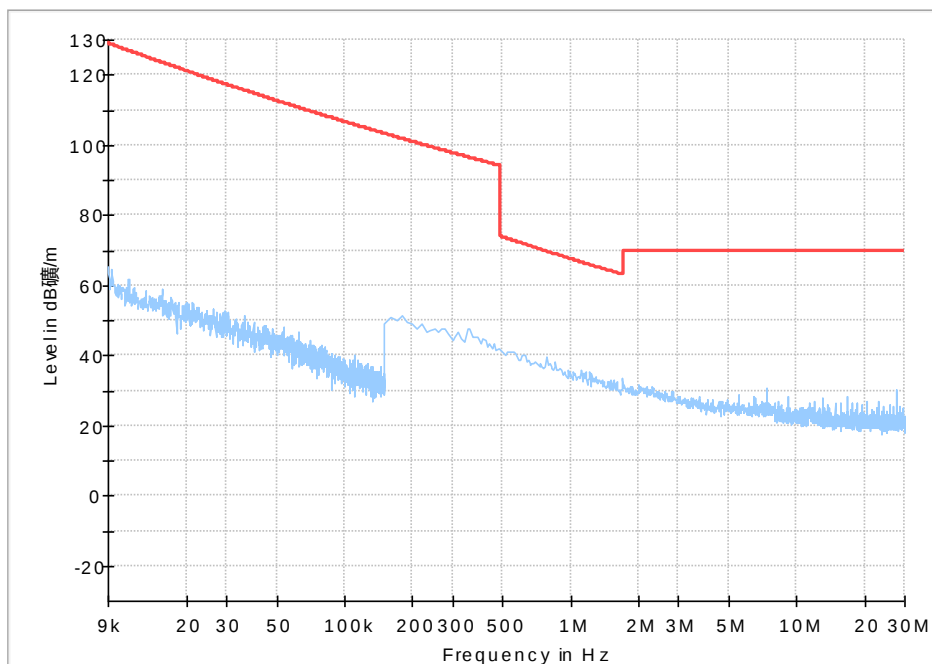


Fig. 34 Radiated Spurious Emission (9kHz-30MHz)

6.6. Band Edges Compliance

Band Edges - Radiated

Measurement Limit:

- (1) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Set the spectrum analyzer in the following:

- (a) Sweep mode :SweepAnalyzer6db.
- (b) PEAK: RBW=1MHz / VBW=3MHz / Sweep=2.5ms, Sweep point;5001
- (c) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=2.5ms, Sweep point;5001

Measurement Result:

N24 (Main supply) :


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.35	P
	5825 MHz	Fig.36	P
802.11n HT20	5745 MHz	Fig.37	P
	5825 MHz	Fig.38	P

N34 (Secondary supply) :


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.39	P
	5825 MHz	Fig.40	P

Conclusion: PASS

Test graphs as below:

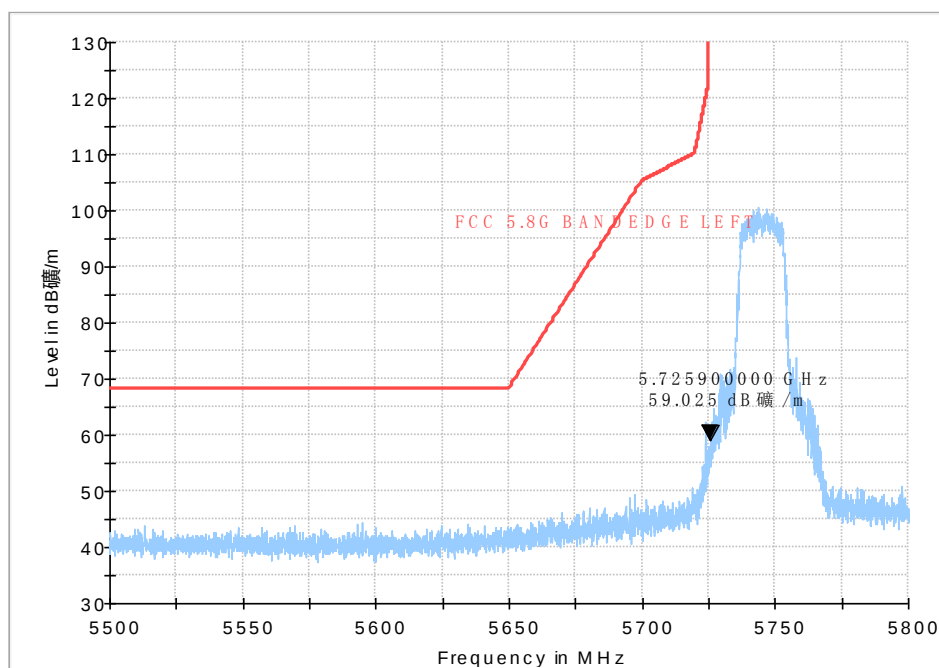


Peak

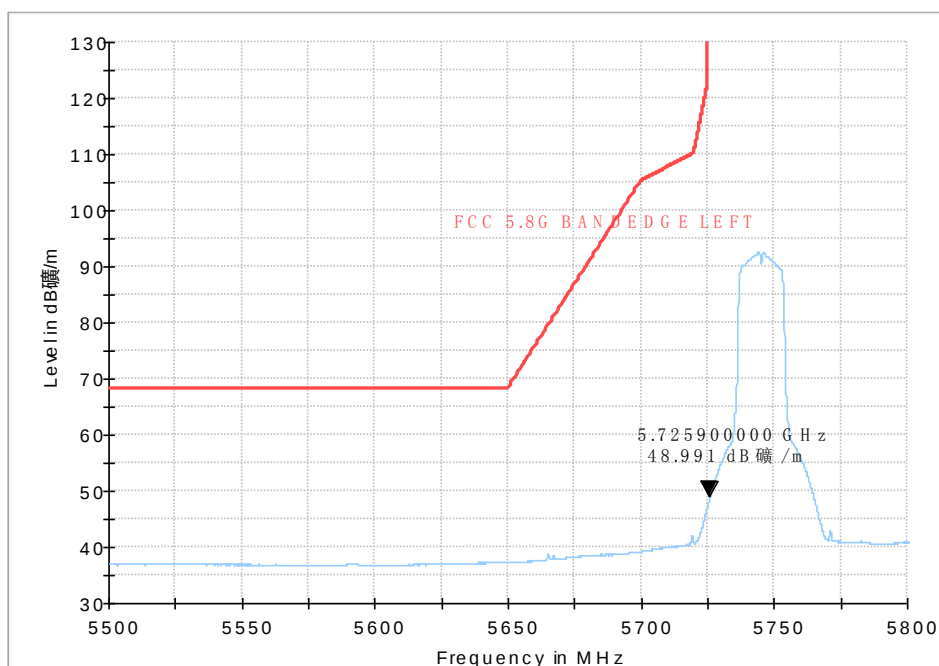


Average

Fig. 35 Band Edges (802.11a, 5745MHz)

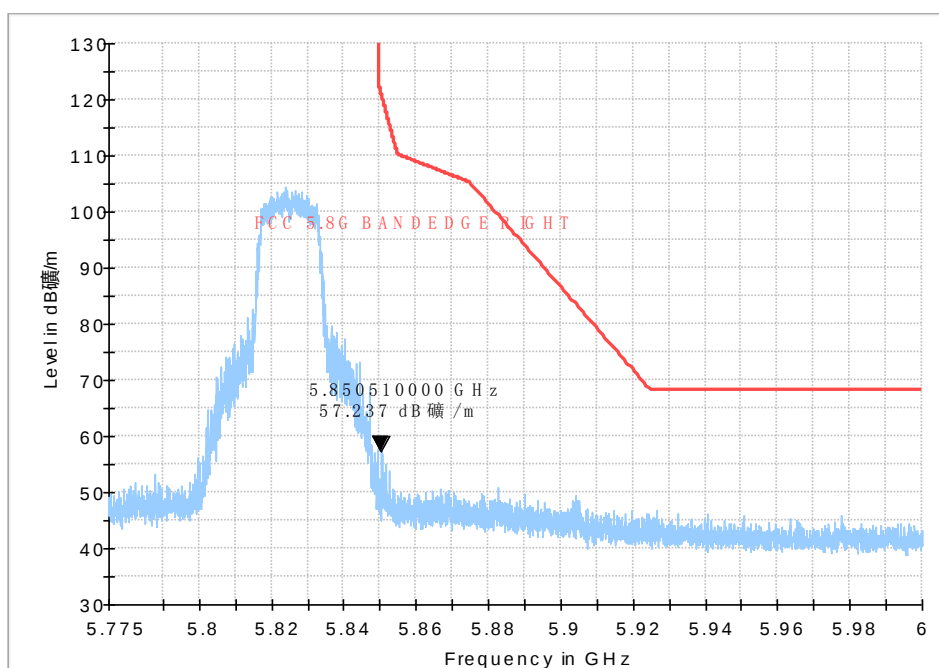


Peak

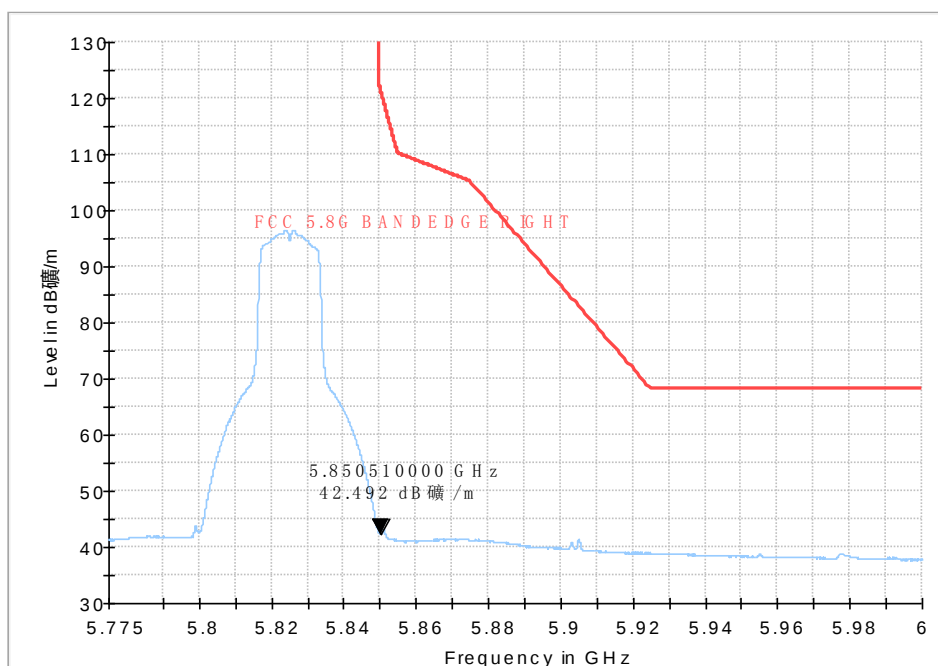


Average

Fig. 36 Band Edges (802.11a, 5825MHz)

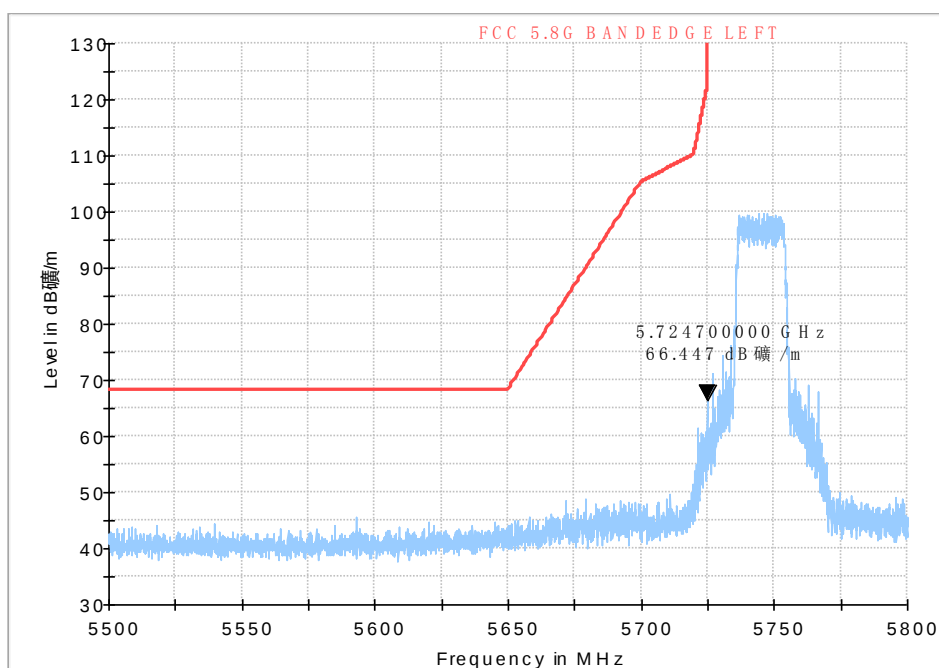


Peak

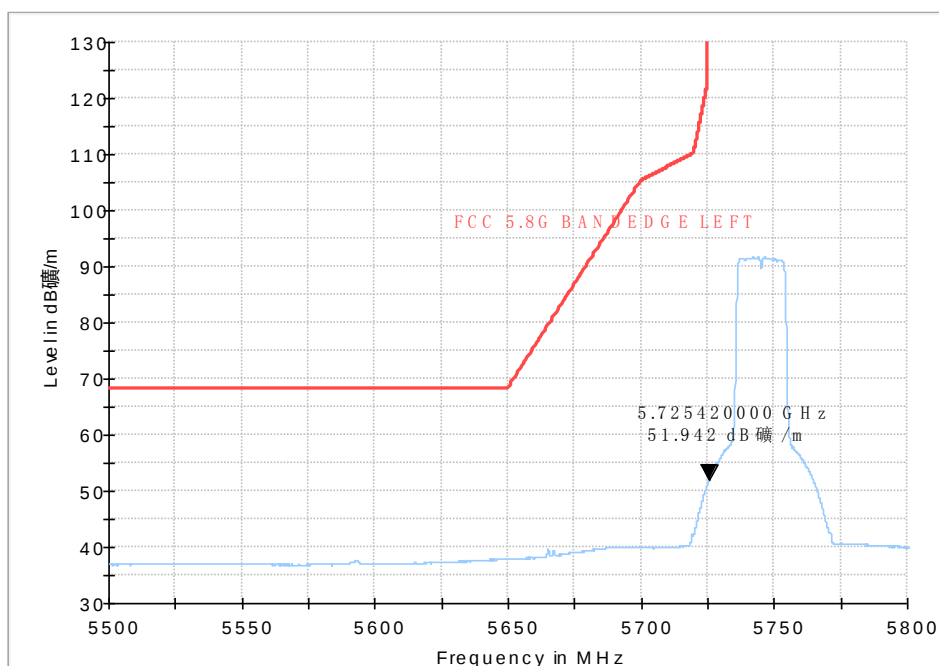


Average

Fig. 37 Band Edges (802.11n-HT20, 5745MHz)

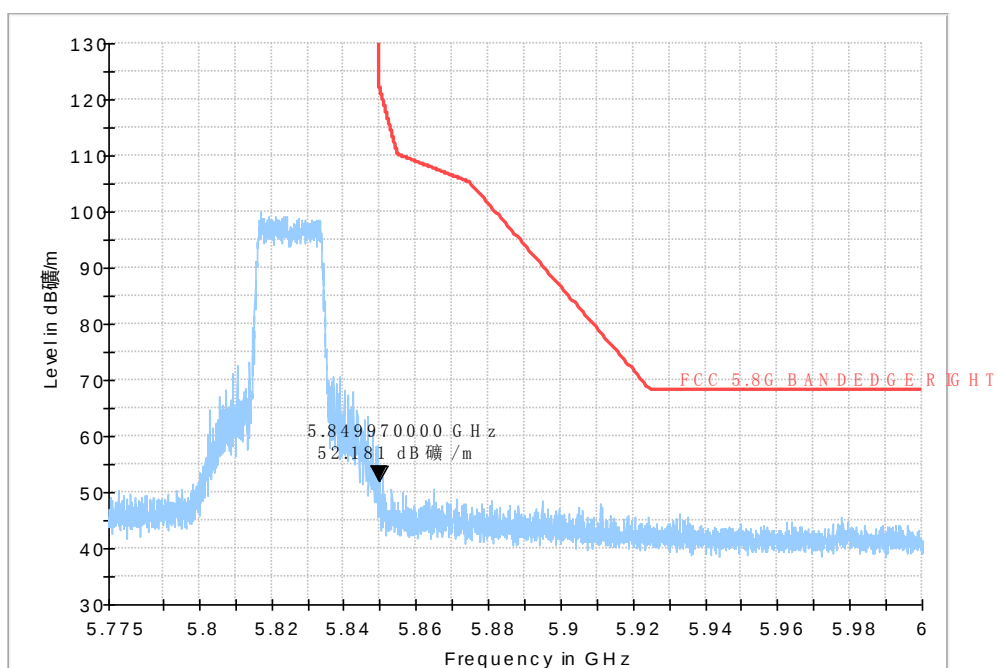


Peak

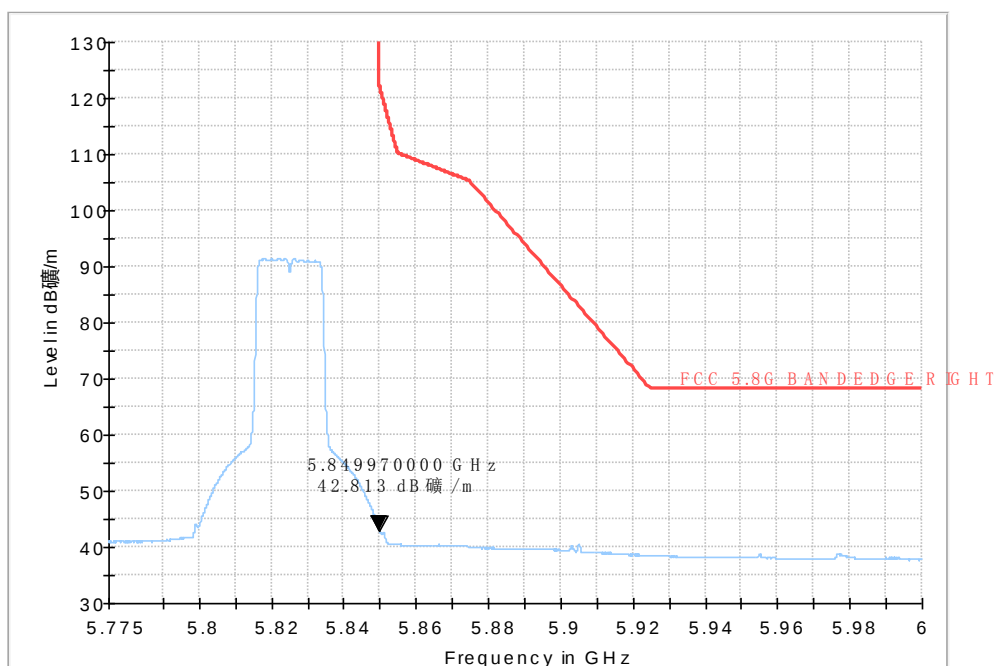


Average

Fig. 38 Band Edges (802.11n-HT20, 5825MHz)

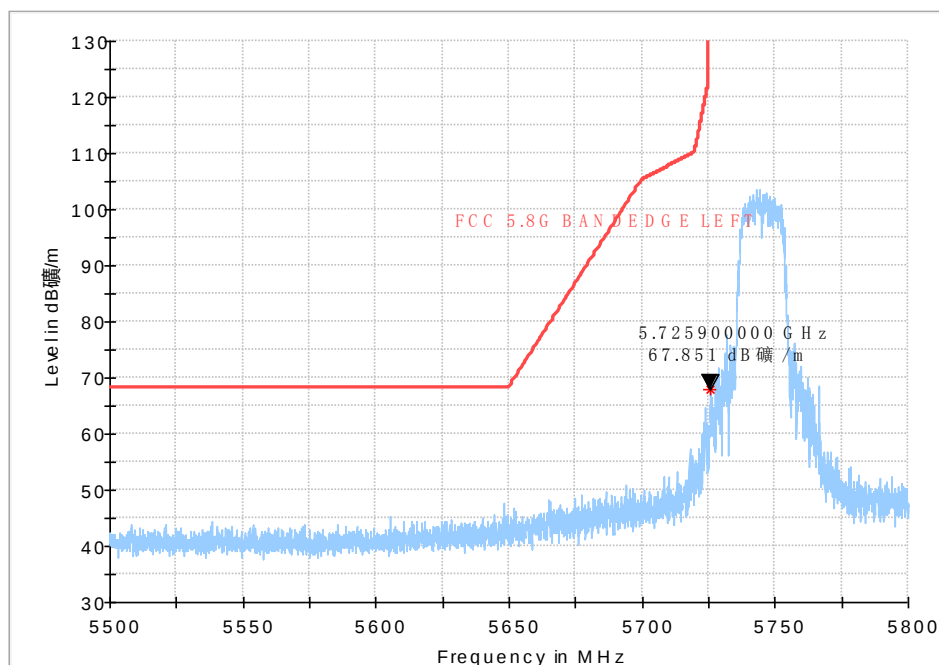


Peak

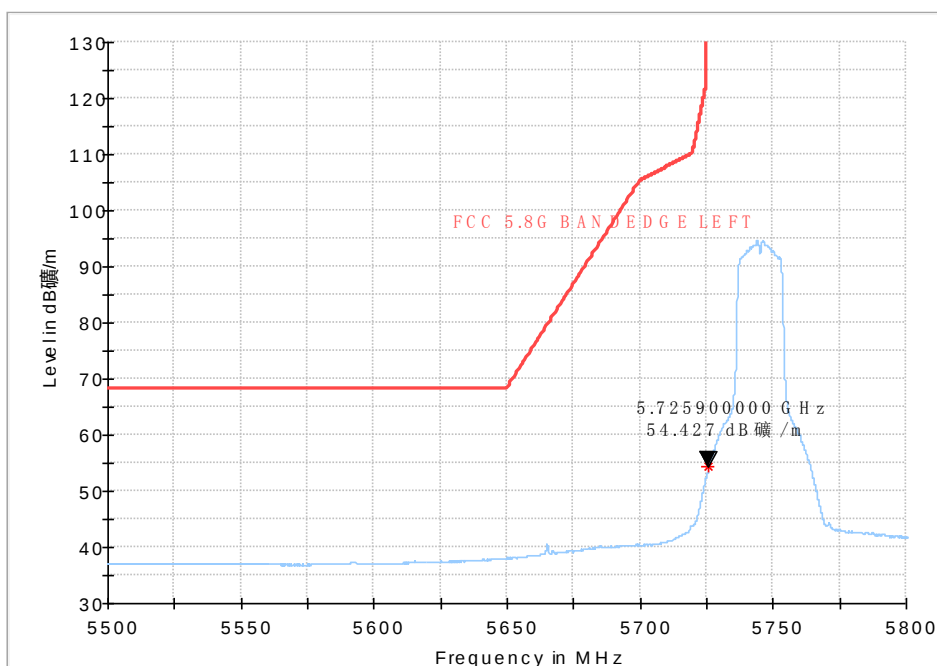


Average

Fig. 39 Band Edges (802.11a, 5745MHz)

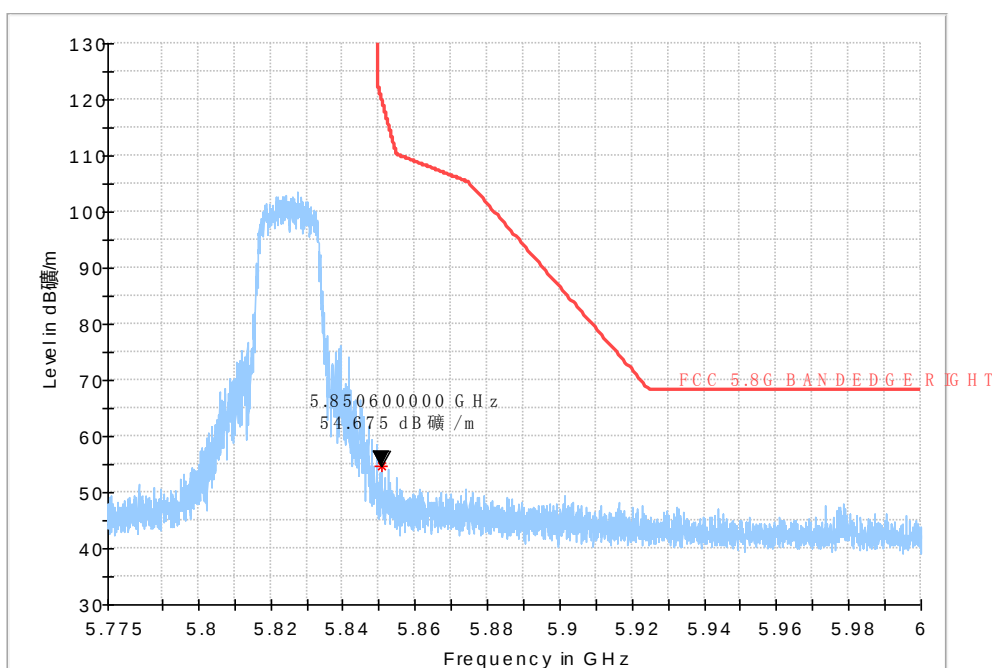

Peak

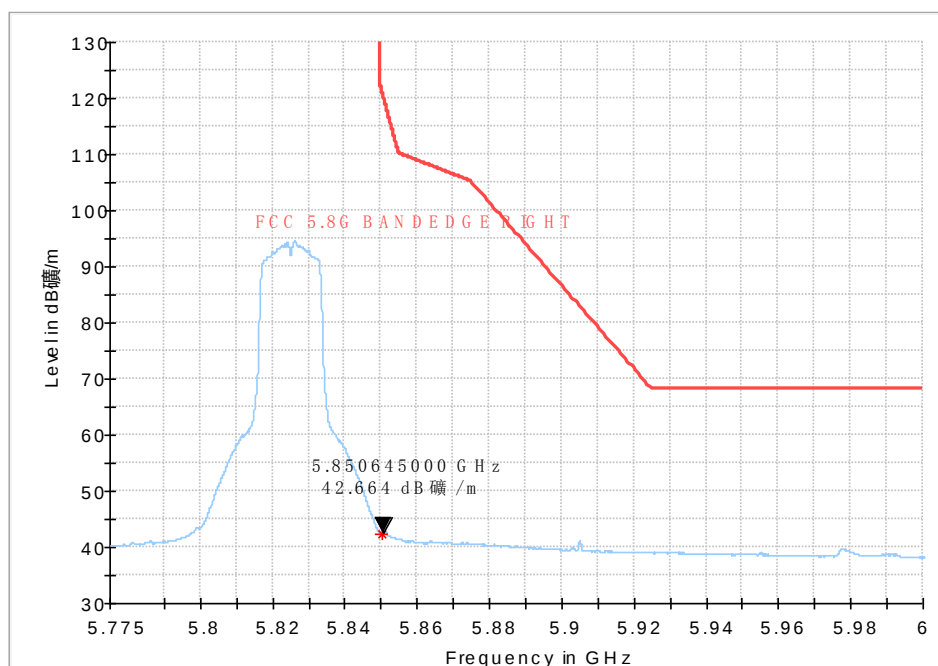

Average

Fig. 40 Band Edges (802.11a, 5825MHz)

6.7. AC Powerline Conducted Emission
Test Condition:

Voltage (V)	Frequency (Hz)
110	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.41		P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.41		P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS
Test graphs as below:

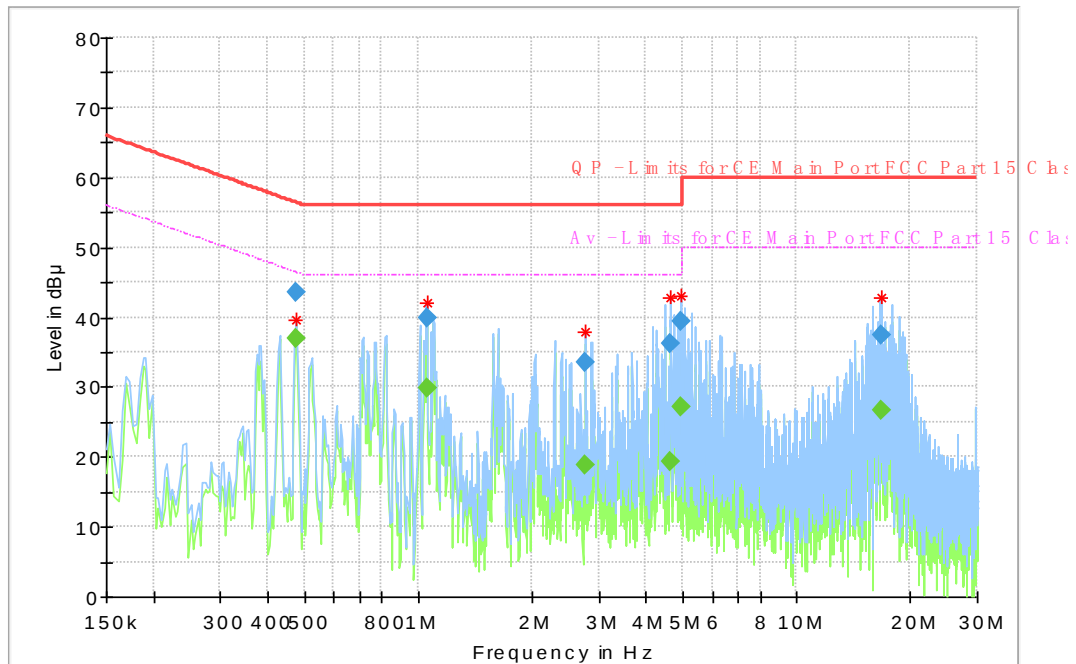


Fig. 41 AC Powerline Conducted Emission-802.11a

Measurement Result 1:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.478350	---	37.00	46.37	9.37	1000.	9.000	L1	ON	9.7
0.478350	43.48	---	56.37	12.88	1000.	9.000	L1	ON	9.7
1.052963	---	29.86	46.00	16.14	1000.	9.000	L1	ON	9.7
1.052963	39.84	---	56.00	16.16	1000.	9.000	L1	ON	9.7
2.765606	---	18.80	46.00	27.20	1000.	9.000	L1	ON	9.7
2.765606	33.56	---	56.00	22.44	1000.	9.000	L1	ON	9.7
4.623769	---	19.35	46.00	26.65	1000.	9.000	L1	ON	9.8
4.623769	36.17	---	56.00	19.83	1000.	9.000	L1	ON	9.8
4.970775	---	27.05	46.00	18.95	1000.	9.000	L1	ON	9.8
4.970775	39.45	---	56.00	16.55	1000.	9.000	L1	ON	9.8
16.746600	---	26.60	50.00	23.40	1000.	9.000	L1	ON	9.9
16.746600	37.48	---	60.00	22.52	1000.	9.000	L1	ON	9.9

6.8. Frequency Stability

Manufacturers ensured the EUT meet the requirement of frequency stability, such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.9. Automatically discontinue transmission**6.9.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

6.9.2 Test Result of Automatically Discontinue Transmission

Once the process halted for operational failure, corresponding data stream will be closed. The device periodically scans surrounding pair devices to update pair devices list when RF module is turned on and will not transmit useless packet.

7. Test Equipment and Ancillaries Used For Tests

The test equipment and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal Analyzer	FSQ40	200063	Rohde&Schwarz	2017-12-17	1 Year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2018-05-11	1 Year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2018-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2018-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2018-05-11	1 Year
6	Loop Antenna	AL-130R	121083	COM-POWER	2016-11-21	3 Year

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

9. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty to see the column, k=2

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	3600MHz-8000MHz	95%	$\pm 0.92\text{db}$
EBW and VBW	3600MHz-8000MHz	95%	$\pm 0.031\text{MHz}$
Transmitter Spurious Emission-Conducted	9KHz-10000MHz	95%	$\pm 4.56\text{db}$
Transmitter Spurious Emission-Conducted	10000 MHz -40000MHz	95%	$\pm 5.34\text{db}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{db}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{db}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{db}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{db}$
AC Power line Conducted Emission	0.15MHz-30MHz	95%	$\pm 5.66\text{ db}$
Peak Power Spectral Density	3600MHz-8000MHz	95%	$\pm 0.92\text{db}$

ANNEX A. Accreditation Certificate

*****END OF REPORT*****