



TEST REPORT

APPLICANT : Shanghai SenseRobot Intelligent
Technology Co., Ltd.

PRODUCT NAME : SenseRobot Go Professional/
SenseRobot Chess

MODEL NAME : RC3G-I, RC3G-P, RC3G-M, RC3G-E,
RC3G-N, RG2W-I, RG2W-P, RG2W-M,
RG2W-E, RG2W-N

BRAND NAME : SenseRobot

FCC ID : 2BLUE-RC3G-I

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2024-10-18

TEST DATE : 2024-11-01 to 2024-11-12

ISSUE DATE : 2025-03-11

Edited by:

Su Xiaoxian

Su Xiaoxian (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Duty Cycle of Test Signal	16
3.3. Maximum Conducted Output Power	17
3.4. Emission Bandwidth	18
3.5. Peak Power Spectral Density	20
3.6. Frequency Stability	21
3.7. Conducted Emission	22
3.8. Restricted Frequency Bands	23
3.9. Radiated Emission	25
Annex A Test Data and Result	27



REPORT No.: SZ24100167W02

Change History		
Version	Date	Reason for change
1.0	2025-03-11	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of the Test Signal	Nov. 07, 2024	Li Zikai	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Nov. 07, 2024	Li Zikai	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Nov. 07, 2024	Li Zikai	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Nov. 07, 2024	Li Zikai	PASS	No deviation
6	15.407(g)	Frequency Stability	Nov. 07, 2024	Li Zikai	PASS	No deviation
7	15.207	Conducted Emission	Nov. 02, 2024	Fan Shengquan	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Nov. 2-Nov. 12, 2024	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Nov. 2-Nov. 4, 2024	Gao Jianrou	PASS	No deviation

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB 789033 D02 v02r01.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
Power Sensor	MY54180008	U2021XA	Agilent	2024.09.11	2025.09.10
Temperature Chamber	12108015	DTL-003S101	YOMA	2024.09.11	2025.09.10
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Attenuator	MTJ6004-10	10dB	MTJ cooperation	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01
Notebook	N/A	A1370	APPLE	N/A	N/A
Notebook Adapter	N/A	A1374	APPLE	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.07.03	2025.07.02
Notch Filter	N/A	WRCG-5150-5350	Wainwright	N/A	N/A
Notch Filter	N/A	WRCG-5725-5850	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Shanghai SenseRobot Intelligent Technology Co., Ltd.
Applicant Address	Unit 6-77, 6th Floor, No. 1900 Hongmei Road, Xuhui District, Shanghai, China
Manufacturer	Shanghai SenseRobot Intelligent Technology Co., Ltd.
Manufacturer Address	Unit 6-77, 6th Floor, No. 1900 Hongmei Road, Xuhui District, Shanghai, China

2.2. Information of EUT

Product Name:	SenseRobot Go Professional/ SenseRobot Chess	
Sample No.:	2#,3#,4#	
Hardware Version:	V1	
Software Version:	V1.0.6 R3	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40) 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80)	
Operating Frequency Range:	5180MHz-5240MHz; 5745MHz-5825MHz	
Antenna Type:	Dipole Antenna	
Antenna Gain:	6.3dBi	
Accessory Information:	AC Adapter	
	Brand Name:	N/A
	Model No.:	KA3601A-1203000DE
	Serial No.:	N/A
	Rated Input:	100-240V~ 50-60Hz, <1A
	Rated Output:	11.4V ~ 12.6V=3A
	Manufacturer:	Shenzhen Keyu Power Supply Technology Co.,Ltd.

Note 1: According to the certificate holder, they declared that the product name: SenseRobot Chess/ SenseRobot Go Professional, with model name: RC3G-I, RC3G-P, RC3G-M, RC3G-E, RC3G-N, RG2W-I, RG2W-P, RG2W-M, RG2W-E, RG2W-N, they have the following differences:

Product name	HVIN	Model name
SenseRobot Go Professional/	RG2W-I	RG2W-I, RG2W-P, RG2W-M, RG2W-E, RG2W-N

SenseRobot Chess	RC3G-I	RC3G-I, RC3G-P, RC3G-M, RC3G-E, RC3G-N
------------------	--------	--

The difference between the two products is only the robotic arm and the software.

The 5 models name of the two products are the same product. These five models only different in model name and color. Their electrical circuit design, layout, components used and internal wiring are identical.

RG2W-I_robotic arm photo	RC3G-I_robotic arm photo
	

The main measuring model is RC3G-I, only the results for RC3G-I were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5755	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate
802.11a	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps
			QPSK	
			16QAM	
			64QAM	
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7
			QPSK	
			16QAM	
			64QAM	
802.11ac	20/40/80 (VHT20/40/80)	OFDM	BPSK	MCS0~MCS9
			QPSK	
			16QAM	
			64QAM	
			256QAM	


Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

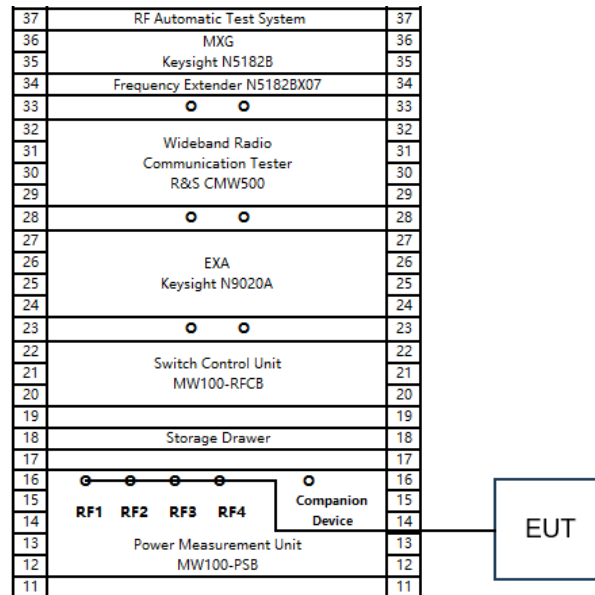


2.6.2. Conducted Emission Measurement

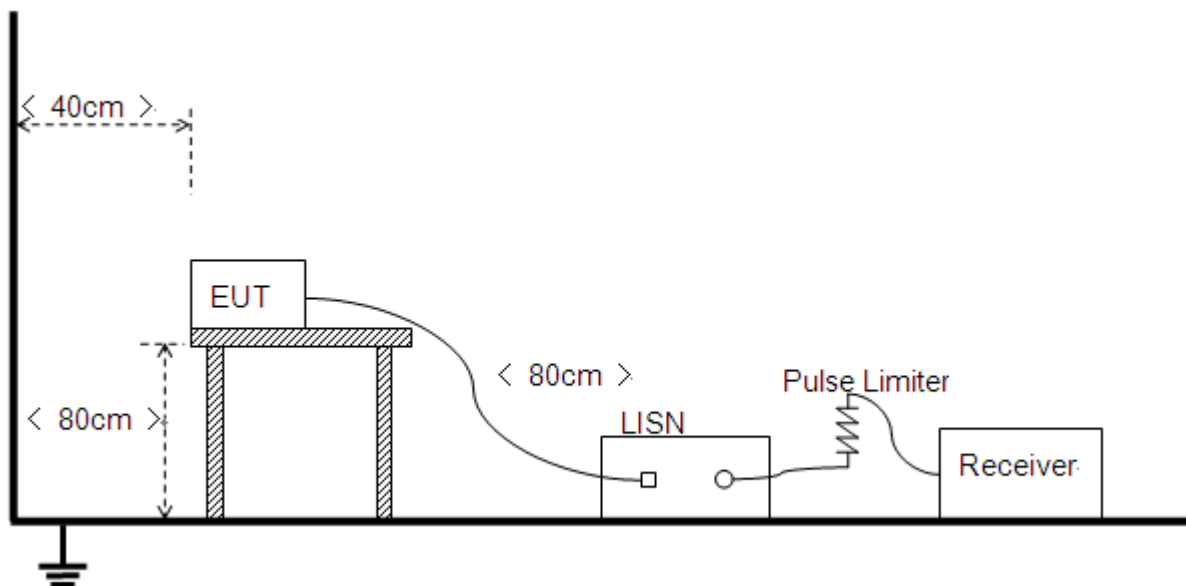


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

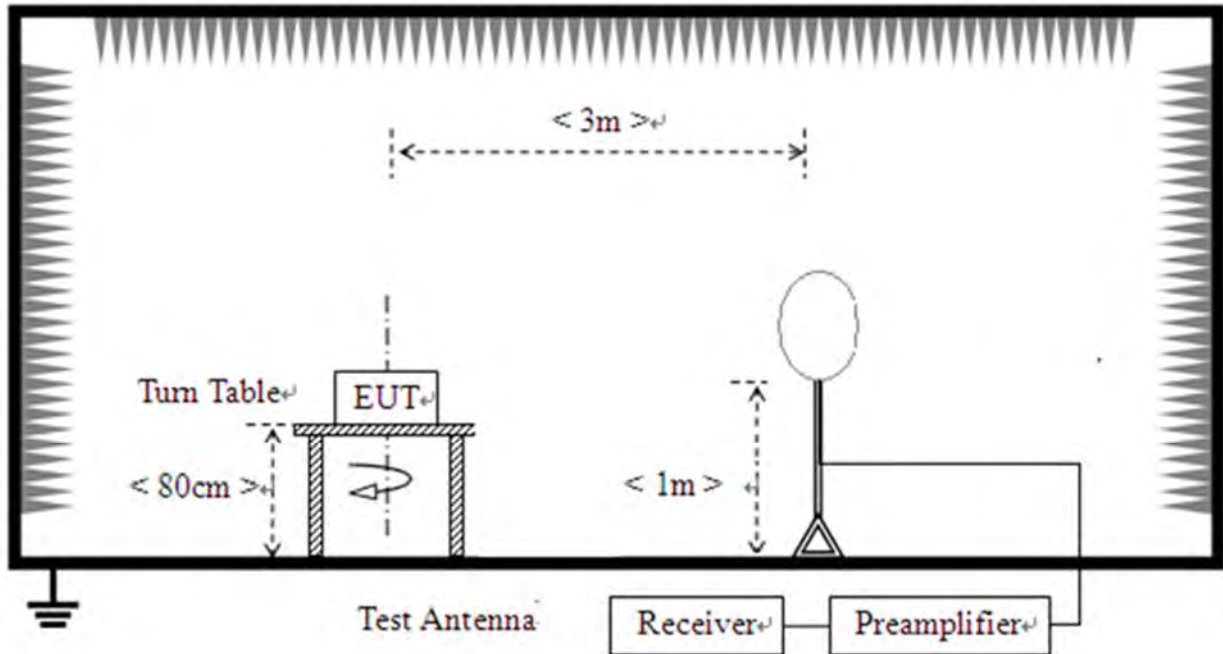

2) For radiated emissions from 30MHz to 1GHz

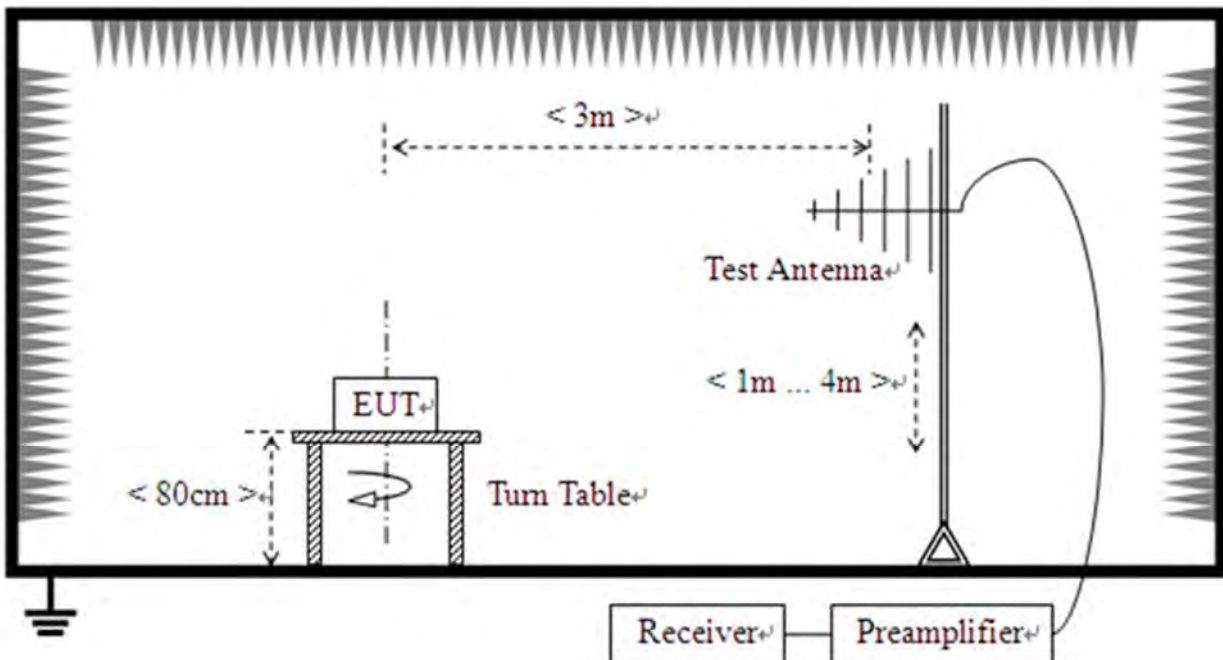

3) For radiated emissions above 1GHz

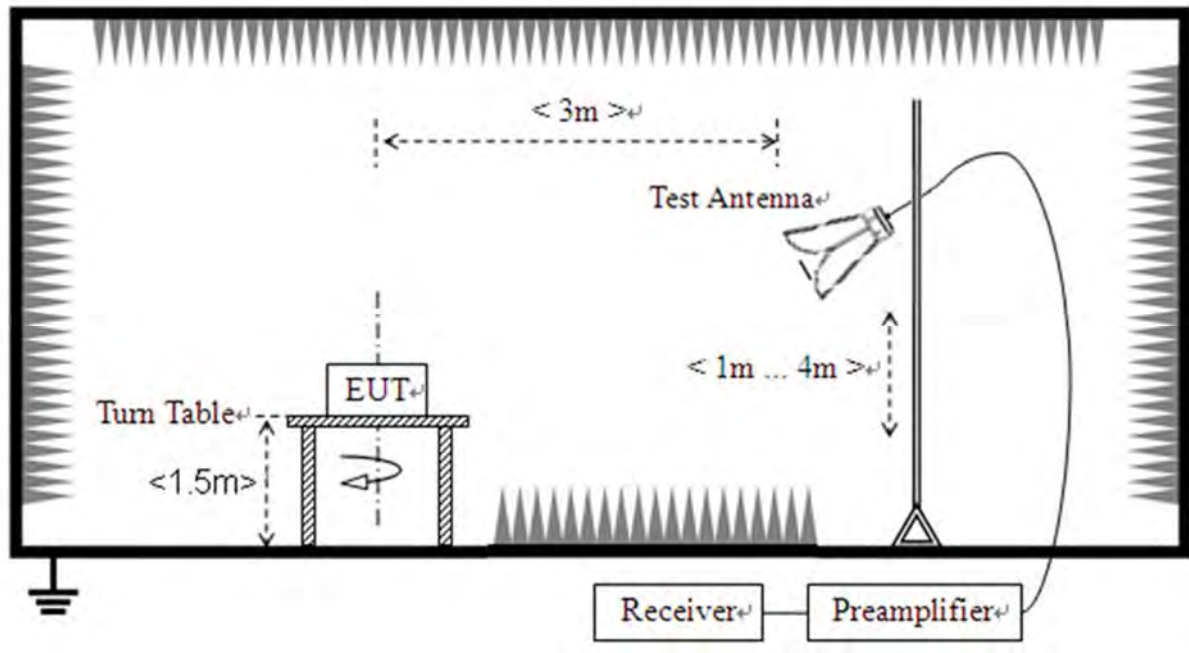



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☒ Dipole Antenna ☐ PCB Antenna ☐ PIFA Antenna	☒ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☐ Layout



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Conducted Output Power

3.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.3.2. Test Procedures

Based on method PM-G in Section II.E.3.b) of KDB 789033 D02.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Emission Bandwidth

3.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.4.1. Test Procedures

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

 - a) Set RBW = 100 kHz.
 - b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



REPORT No.: SZ24100167W02

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.3 in this report.



3.5. Peak Power Spectral Density

3.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.5.2. Test Procedures

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
 - 2) Set RBW = 1MHz. Set VBW $\geq$ 3MHz
 - 3) Number of points in sweep $\geq$ 2 Span / RBW. Sweep time = auto
 - 4) Detector = Average
 - 5) Trace mode=Max hold
- Record the max value

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.4 in this report.



3.6. Frequency Stability

3.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2. Test Procedures

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

3.6.3. Test Result

Refer to Annex A.5 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.6 in this report.

3.8. Restricted Frequency Bands

3.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m



Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.7 in this report.

3.9. Radiated Emission

3.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.8 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	94.09	0.26	0.48
NVNT	a	5220	Ant1	94.06	0.27	0.49
NVNT	a	5240	Ant1	96.28	0.16	0.48
NVNT	a	5745	Ant1	92.79	0.32	0.49
NVNT	a	5785	Ant1	94.09	0.26	0.48
NVNT	a	5825	Ant1	96.73	0.14	0.48
NVNT	n20	5180	Ant1	60.53	2.18	4.35
NVNT	n20	5220	Ant1	69.7	1.57	4.35
NVNT	n20	5240	Ant1	85.19	0.7	4.35
NVNT	n20	5745	Ant1	57.89	2.37	4.55
NVNT	n20	5785	Ant1	61.11	2.14	4.55
NVNT	n20	5825	Ant1	74.19	1.3	4.35
NVNT	n40	5190	Ant1	52	2.84	7.69
NVNT	n40	5230	Ant1	61.9	2.08	7.69
NVNT	n40	5755	Ant1	50	3.01	7.69
NVNT	n40	5795	Ant1	65	1.87	7.69
NVNT	ac20	5180	Ant1	58.82	2.3	5
NVNT	ac20	5220	Ant1	57.14	2.43	5
NVNT	ac20	5240	Ant1	58.82	2.3	5
NVNT	ac20	5745	Ant1	64.52	1.9	5
NVNT	ac20	5785	Ant1	83.33	0.79	5
NVNT	ac20	5825	Ant1	68.97	1.61	5
NVNT	ac40	5190	Ant1	50	3.01	9.09
NVNT	ac40	5230	Ant1	42.31	3.74	9.09
NVNT	ac40	5755	Ant1	41.38	3.83	8.33
NVNT	ac40	5795	Ant1	44	3.57	9.09
NVNT	ac80	5210	Ant1	43.75	3.59	14.29
NVNT	ac80	5775	Ant1	40	3.98	12.5

Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

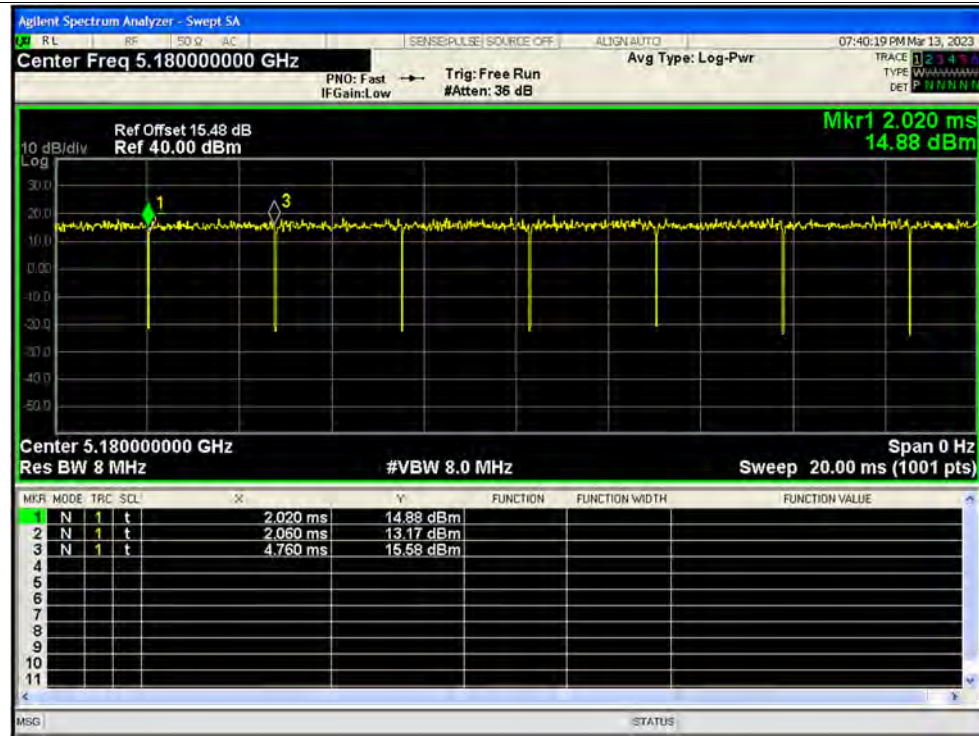


Duty Cycle NVNT a 5220MHz Ant1

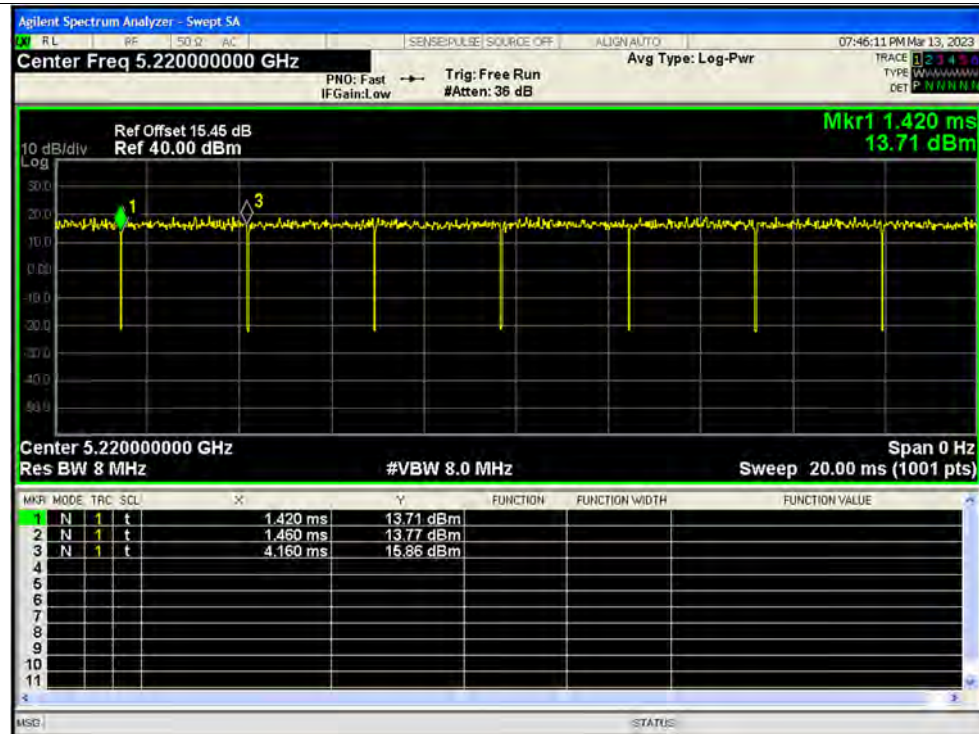




Duty Cycle NVNT a 5240MHz Ant1

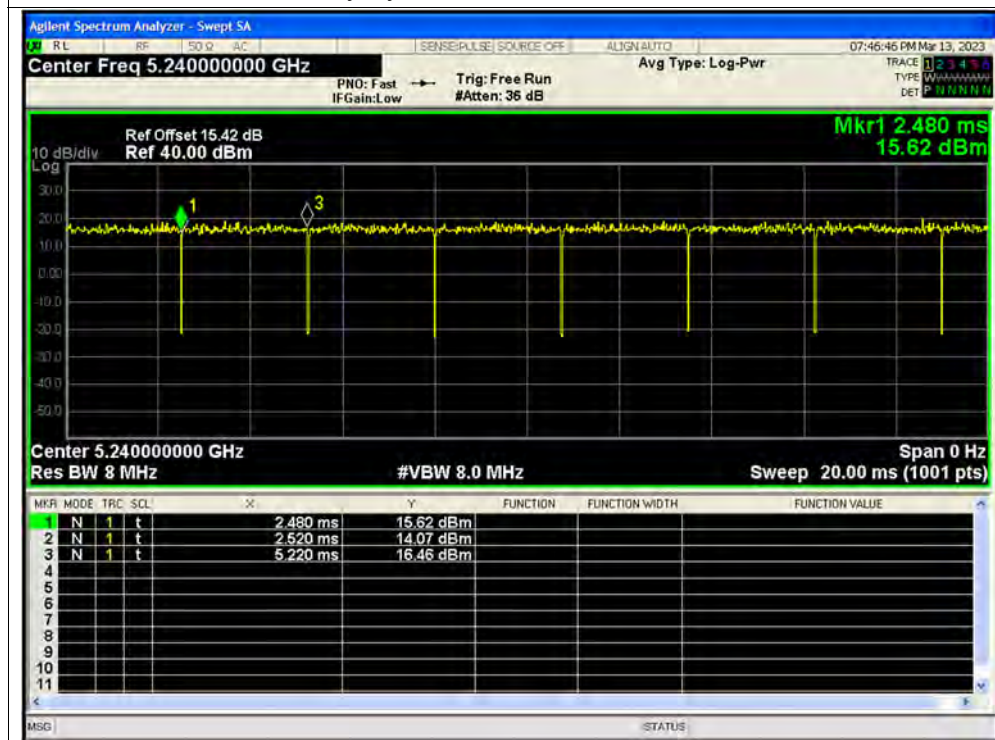


Duty Cycle NVNT a 5745MHz Ant1

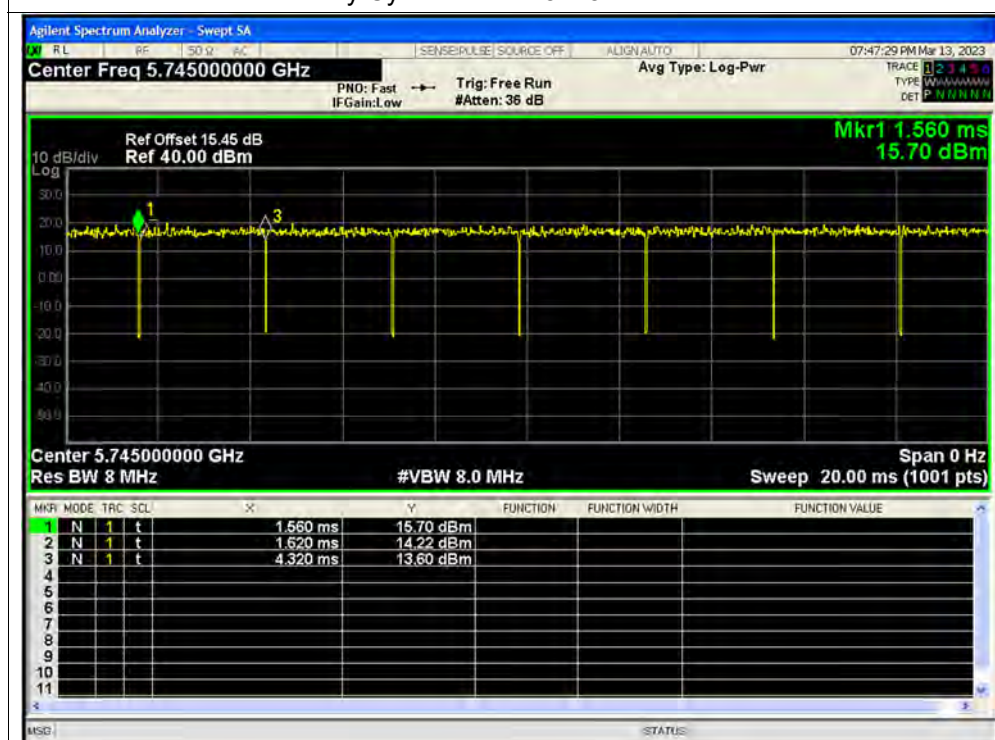





Duty Cycle NVNT a 5785MHz Ant1

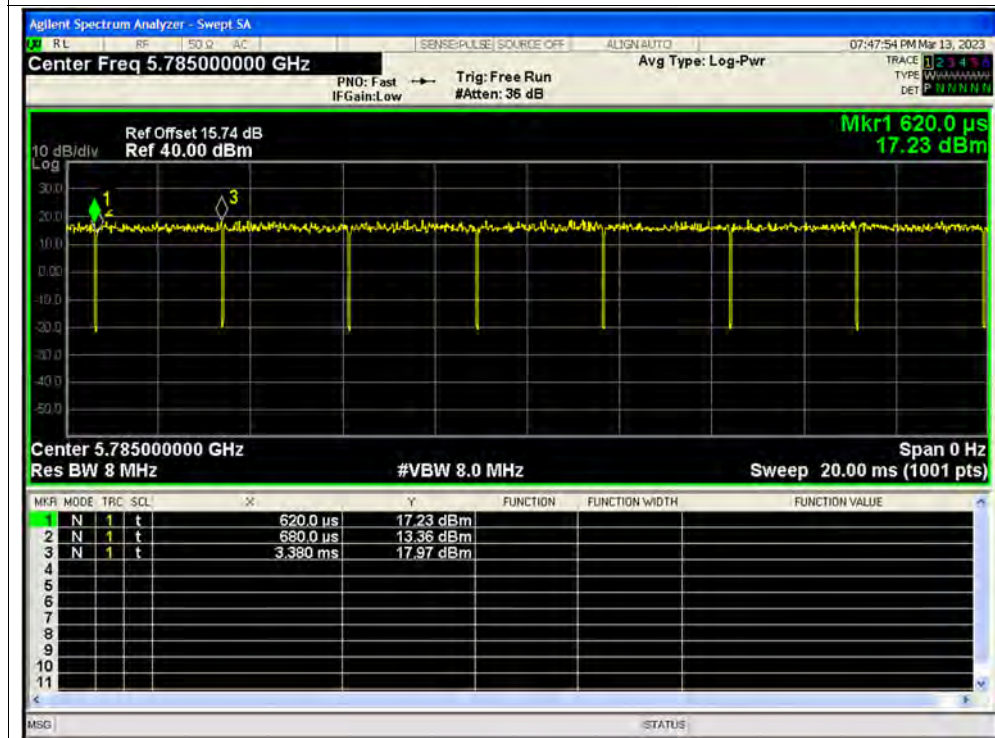


Duty Cycle NVNT a 5825MHz Ant1

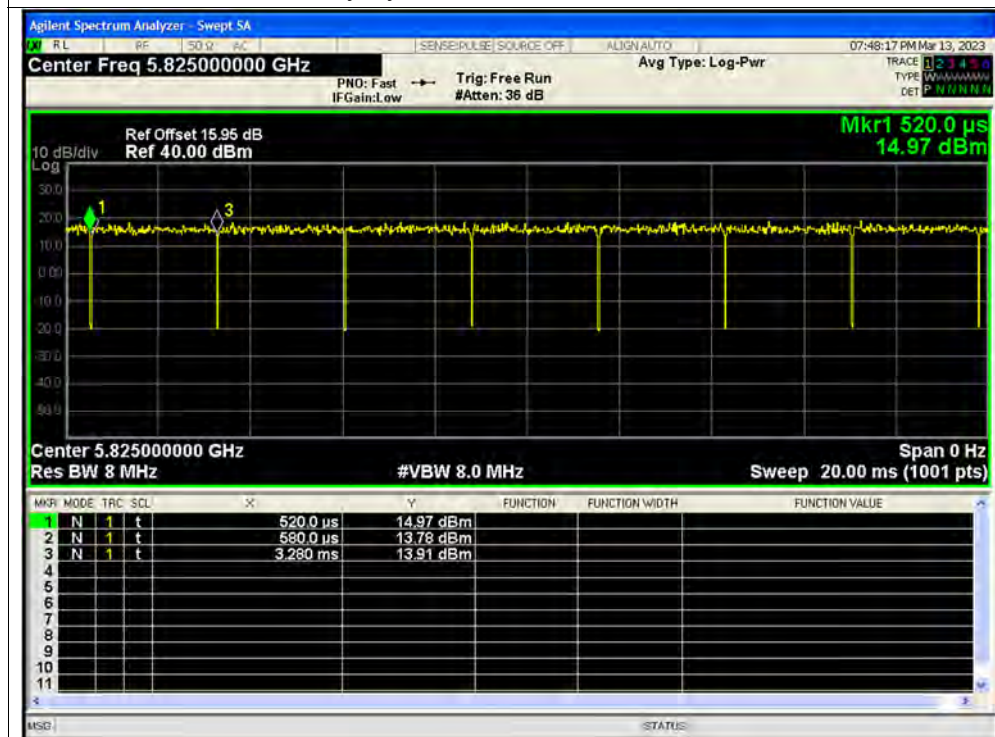


Duty Cycle NVNT n20 5180MHz Ant1

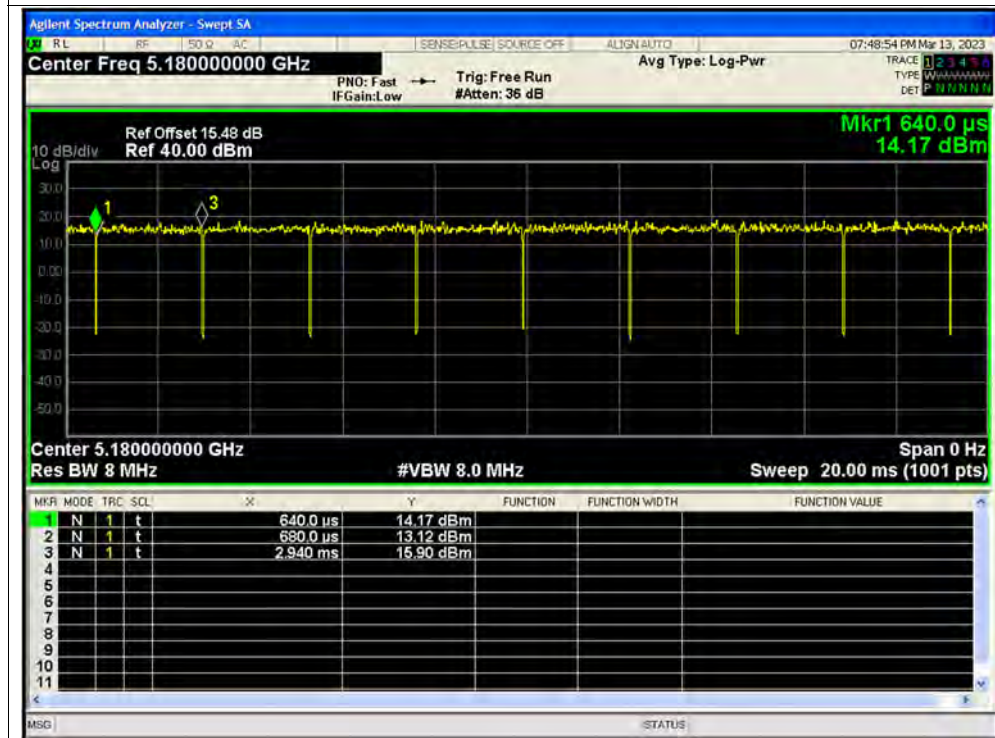


Duty Cycle NVNT n20 5220MHz Ant1

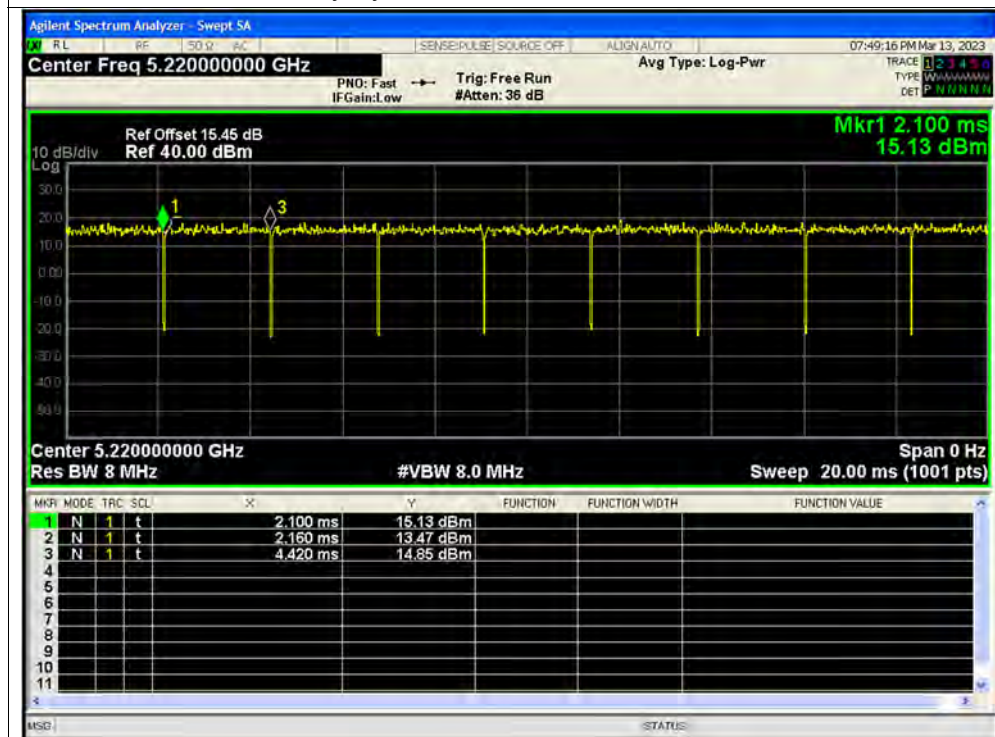

Duty Cycle NVNT n20 5240MHz Ant1

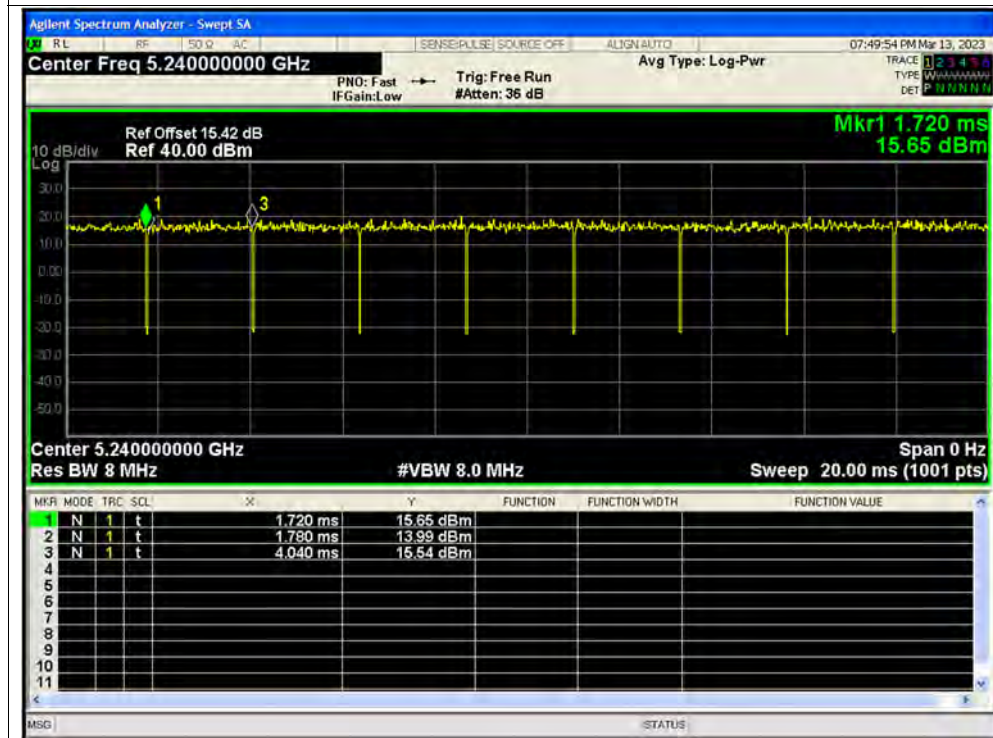


Duty Cycle NVNT n20 5745MHz Ant1

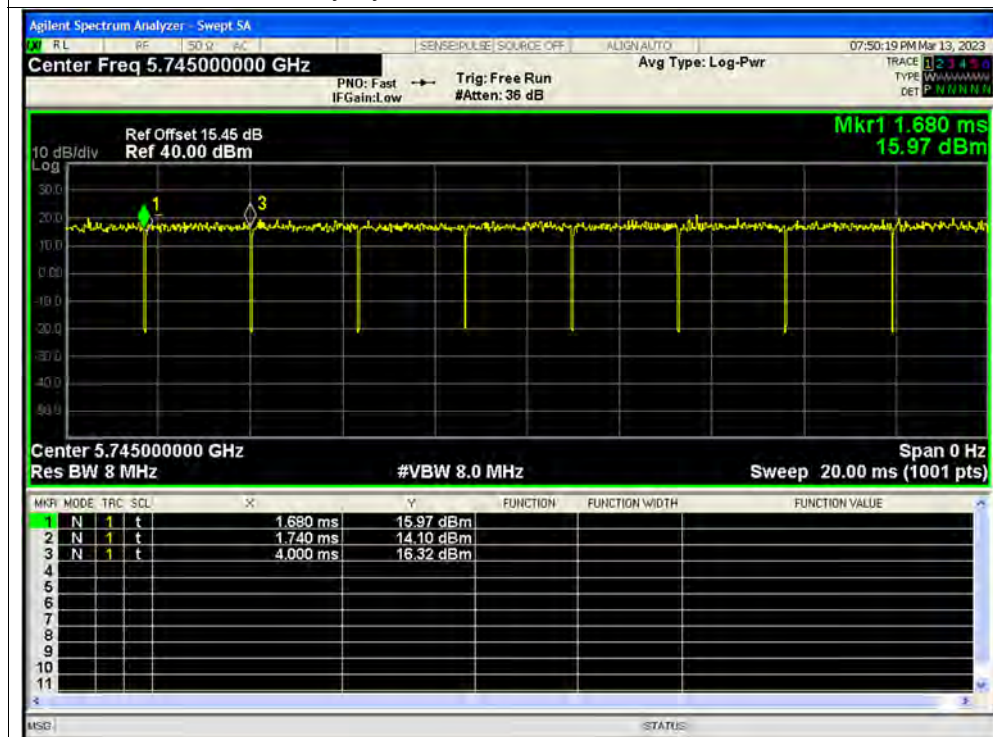




Duty Cycle NVNT n20 5785MHz Ant1

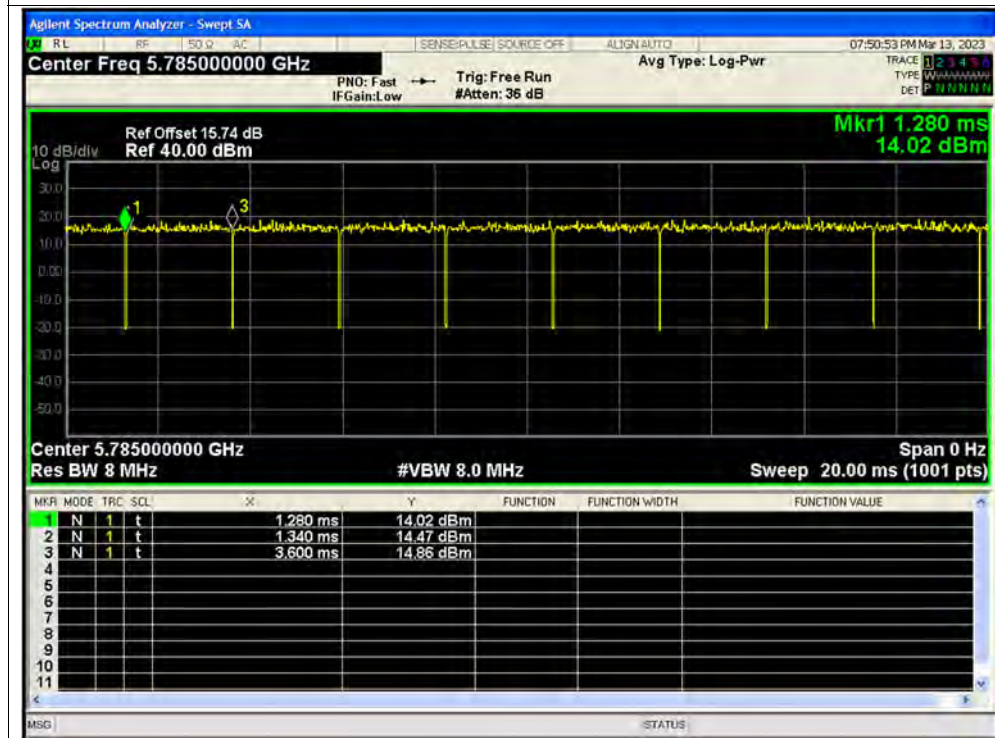


Duty Cycle NVNT n20 5825MHz Ant1

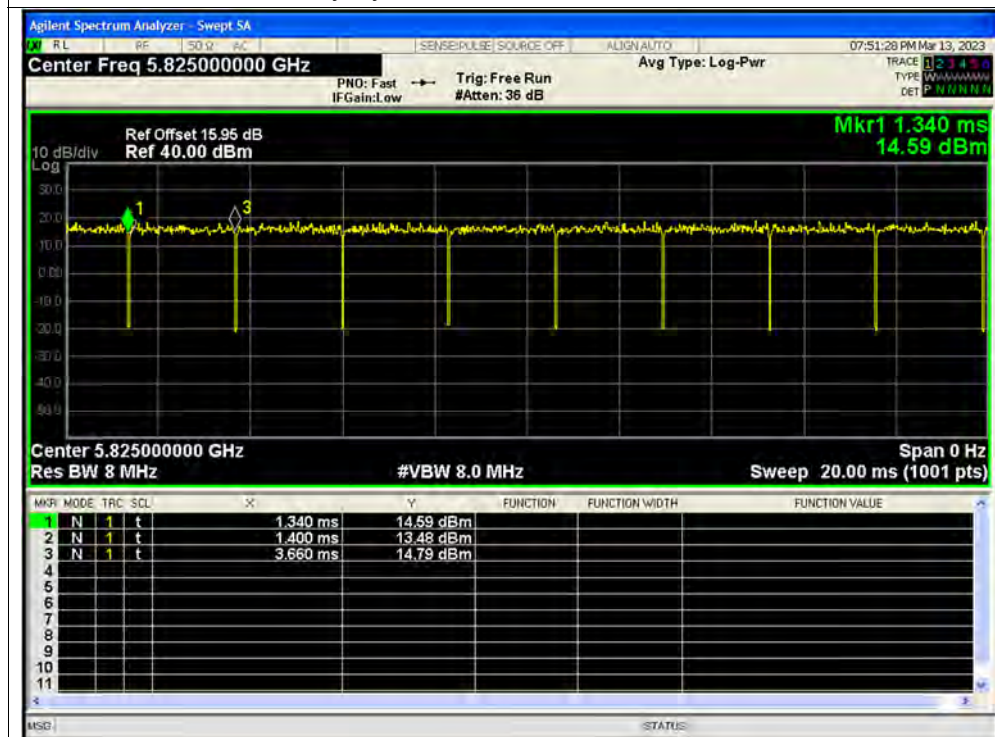





Duty Cycle NVNT n40 5190MHz Ant1

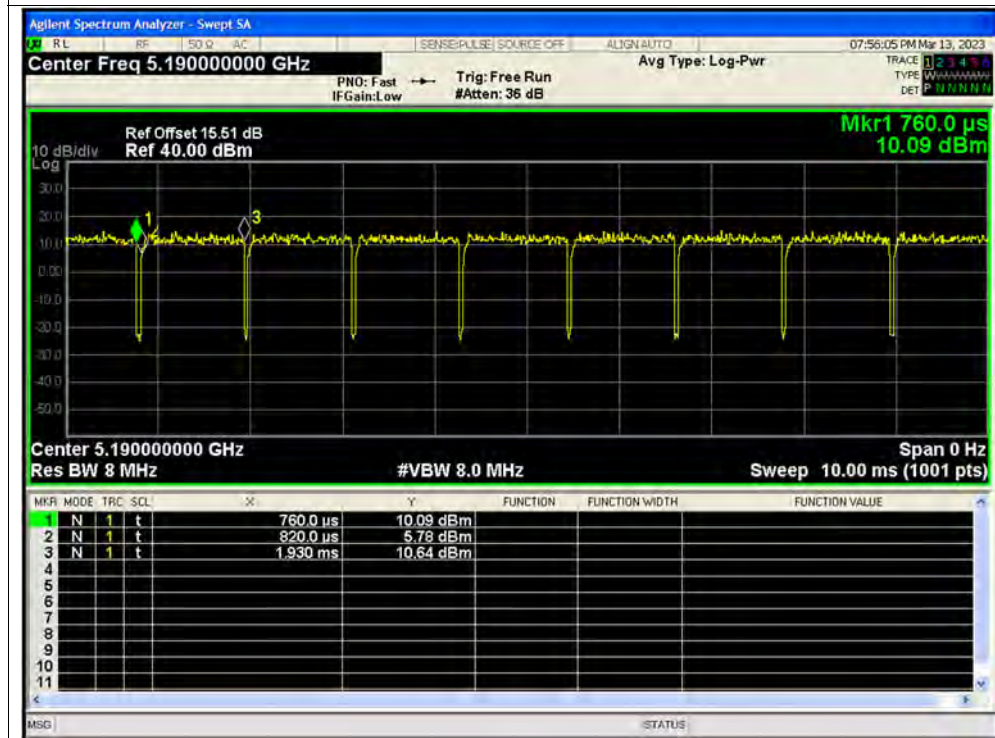


Duty Cycle NVNT n40 5230MHz Ant1

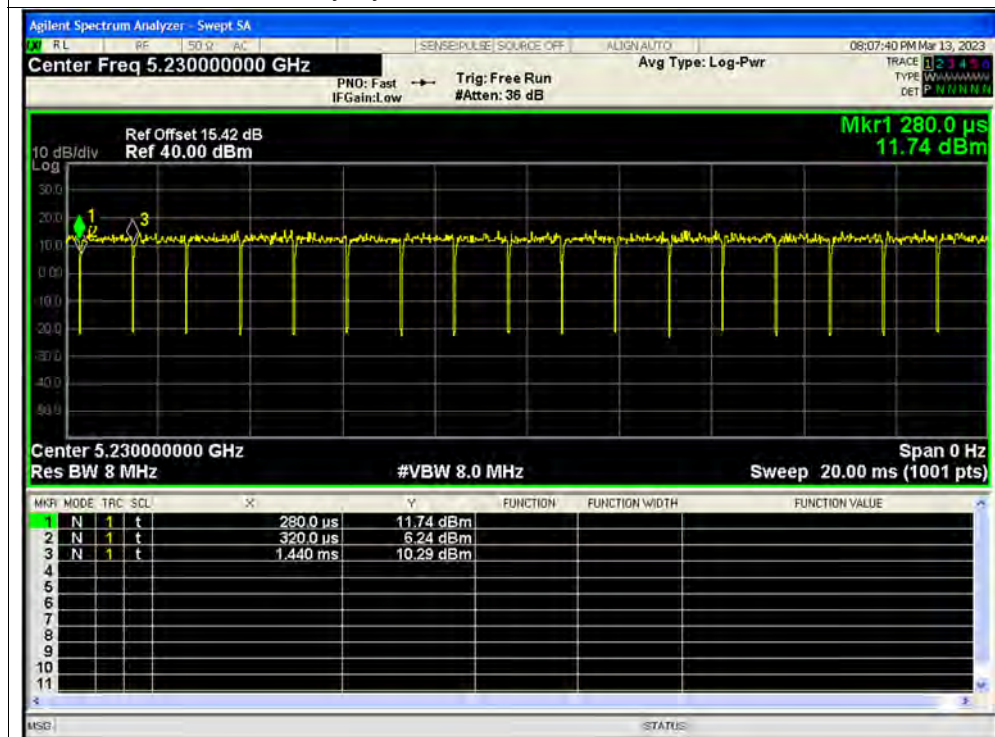

Duty Cycle NVNT n40 5755MHz Ant1

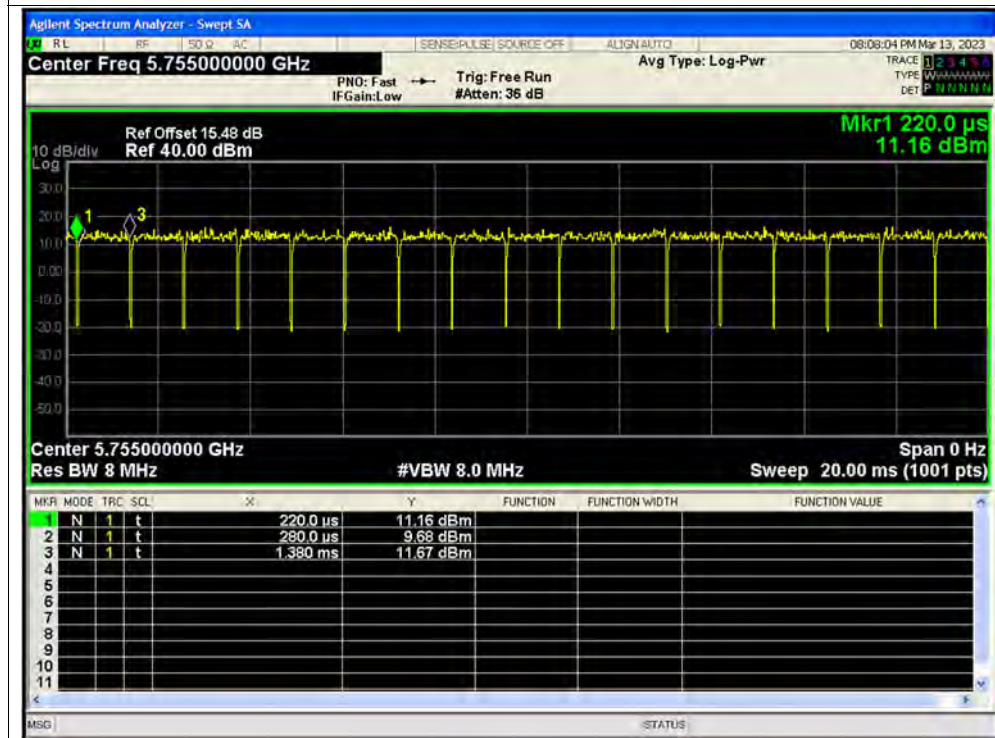


Duty Cycle NVNT n40 5795MHz Ant1

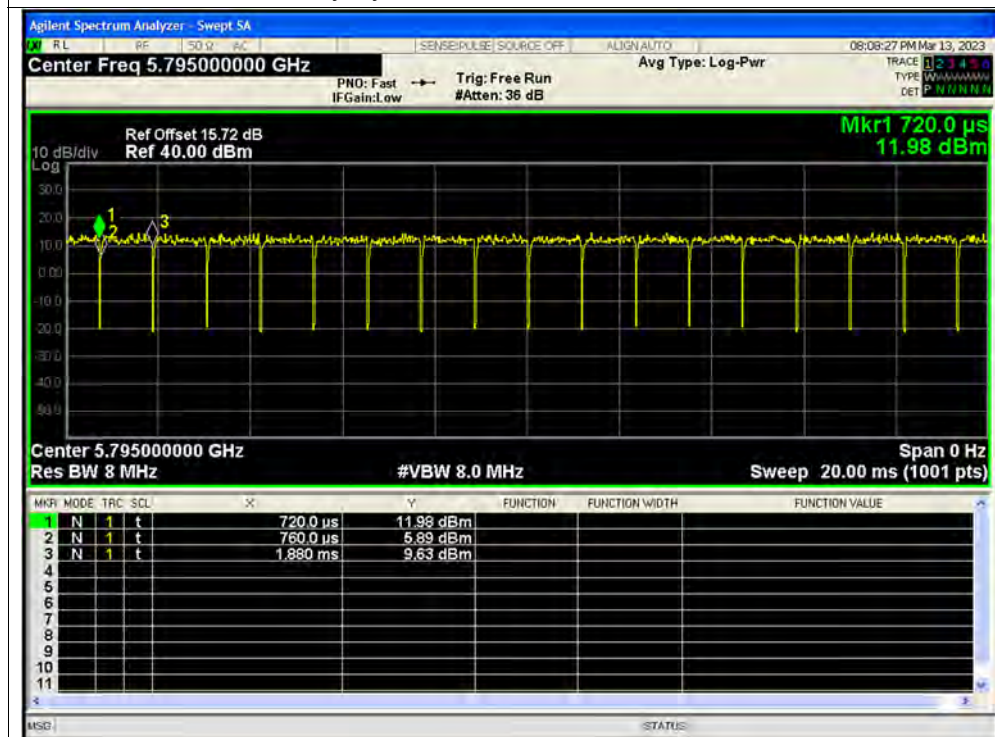





Duty Cycle NVNT ac20 5180MHz Ant1

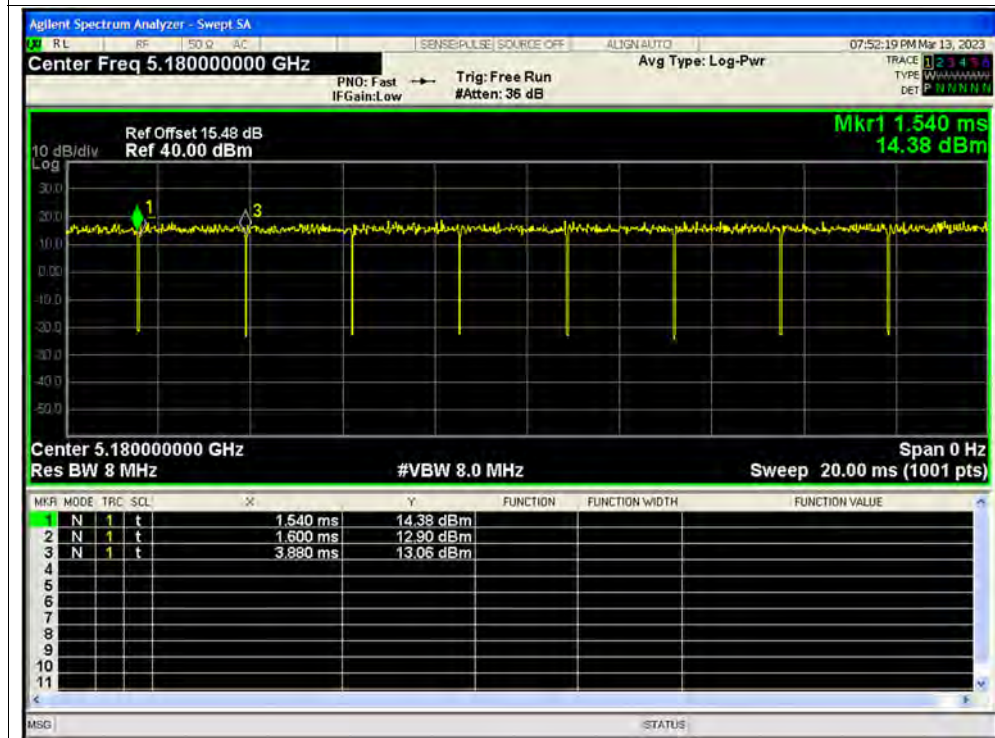


Duty Cycle NVNT ac20 5220MHz Ant1

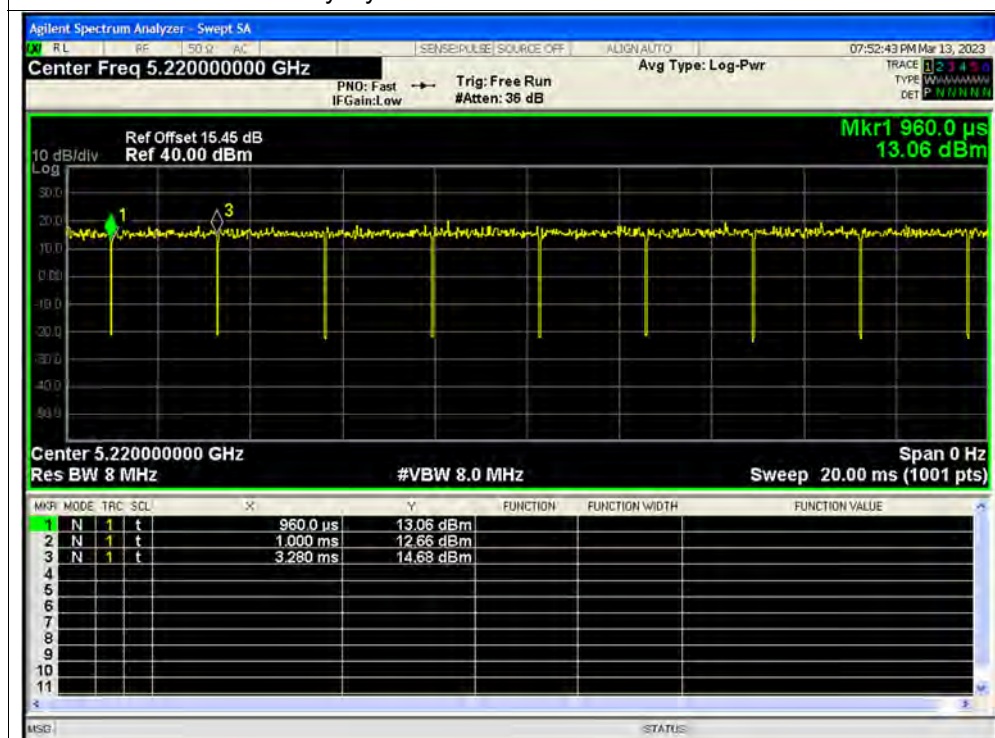

Duty Cycle NVNT ac20 5240MHz Ant1

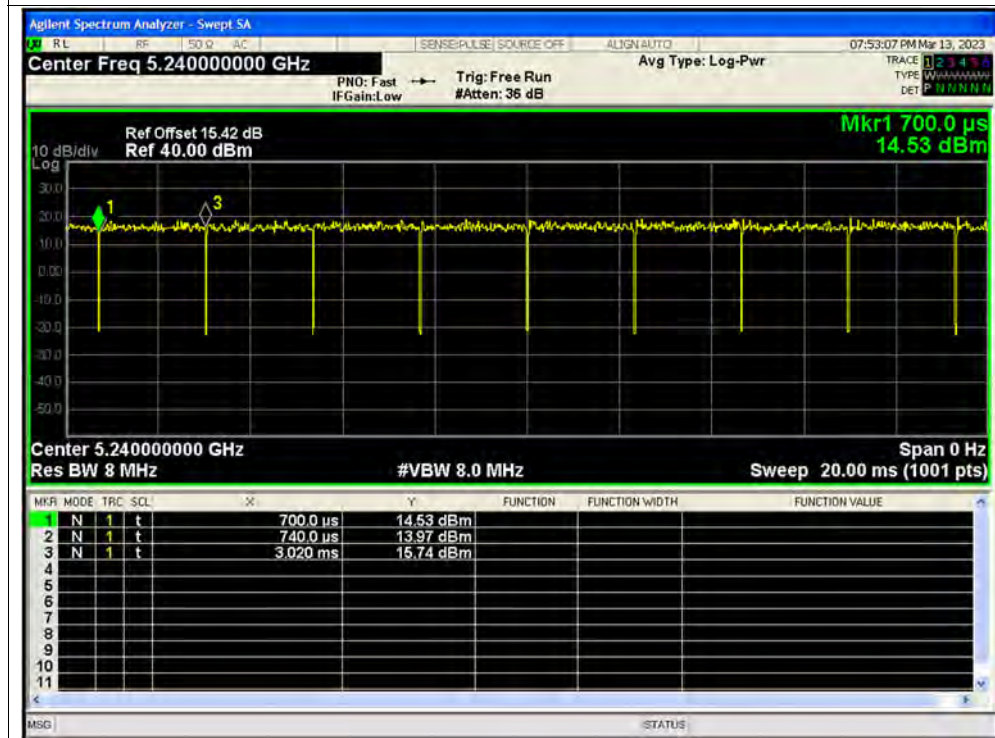


Duty Cycle NVNT ac20 5745MHz Ant1

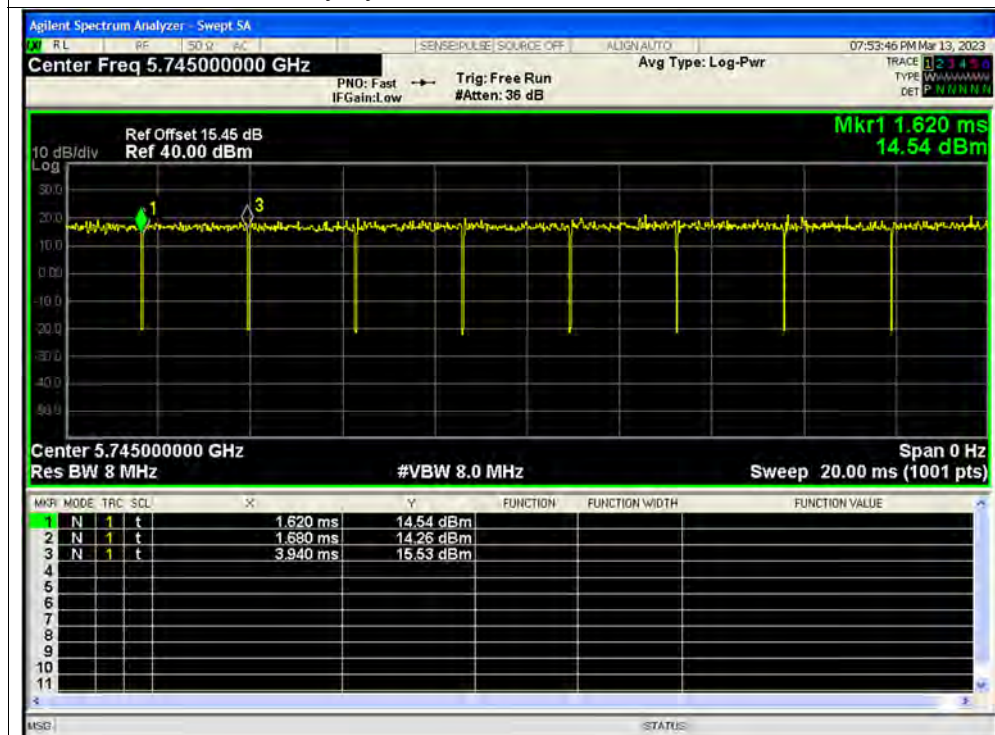




Duty Cycle NVNT ac20 5785MHz Ant1

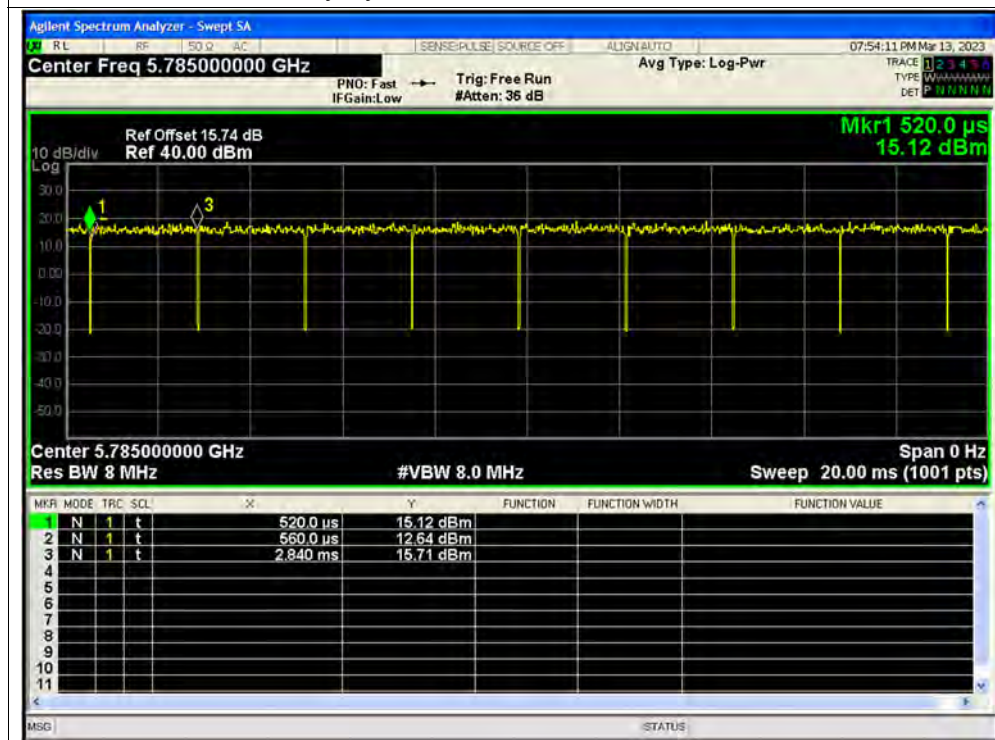


Duty Cycle NVNT ac20 5825MHz Ant1

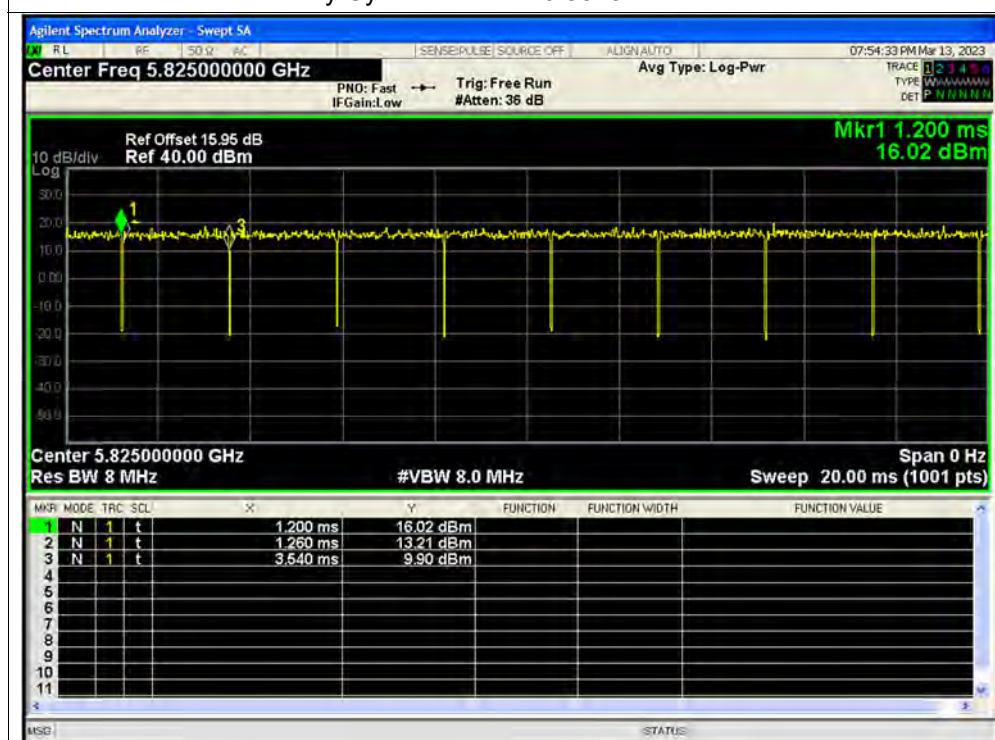




Duty Cycle NVNT ac40 5190MHz Ant1

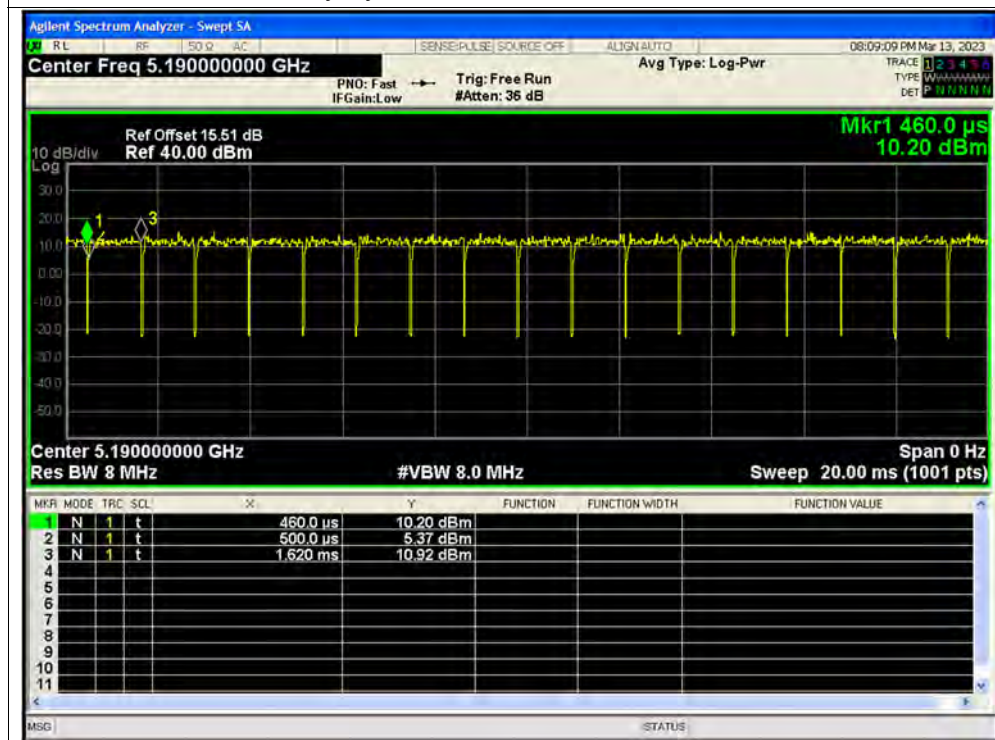


Duty Cycle NVNT ac40 5230MHz Ant1

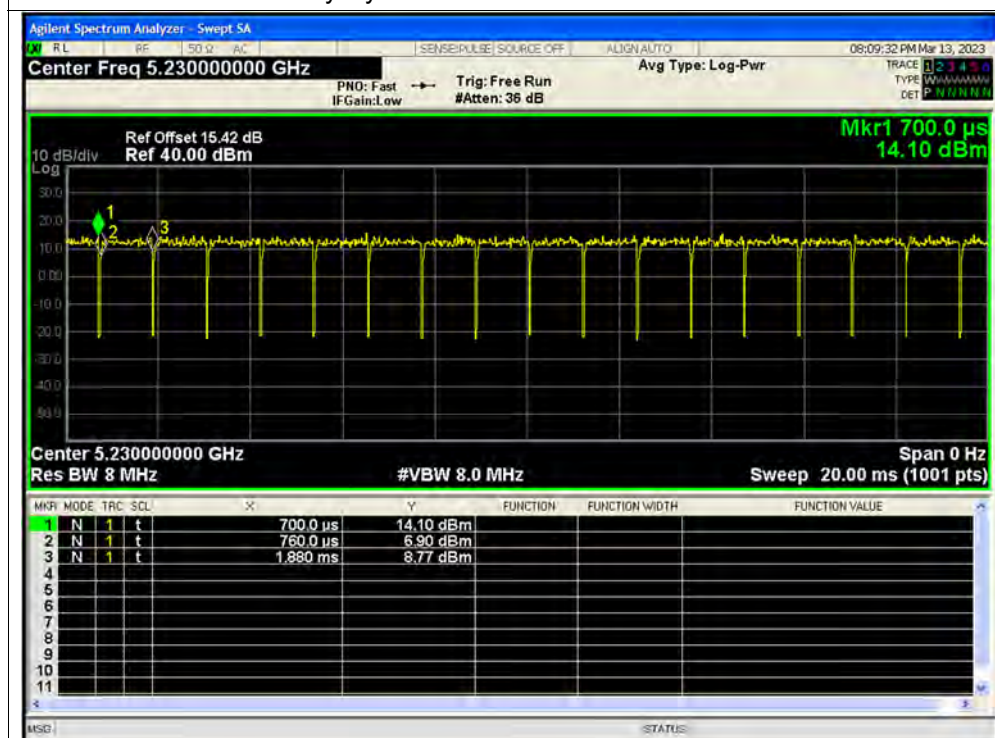




Duty Cycle NVNT ac40 5755MHz Ant1

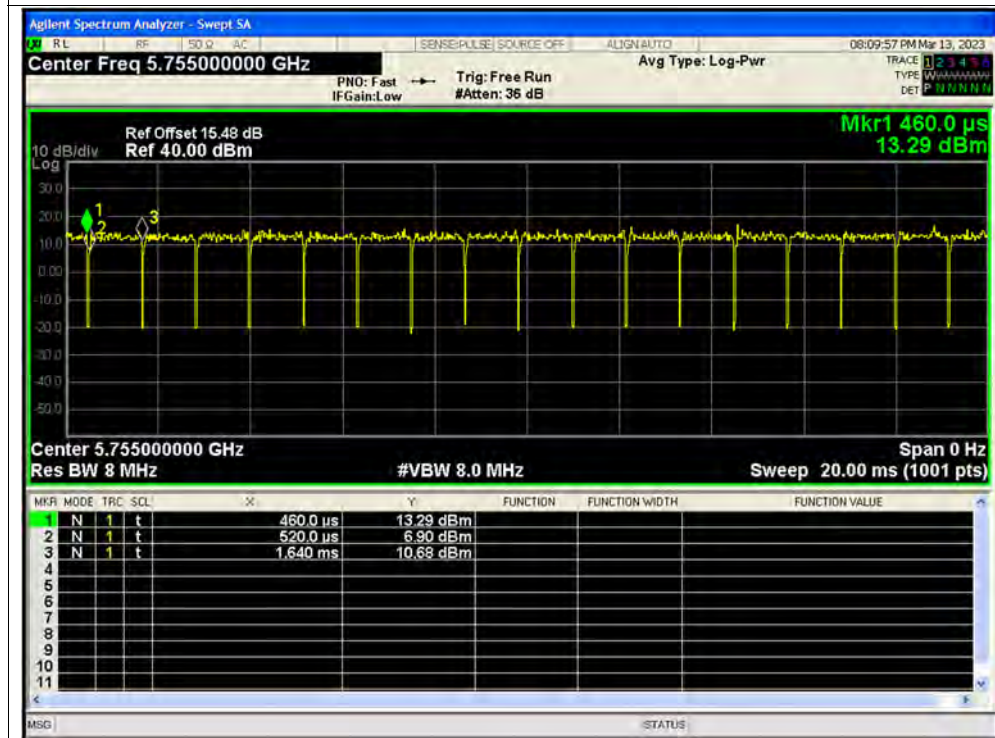


Duty Cycle NVNT ac40 5795MHz Ant1

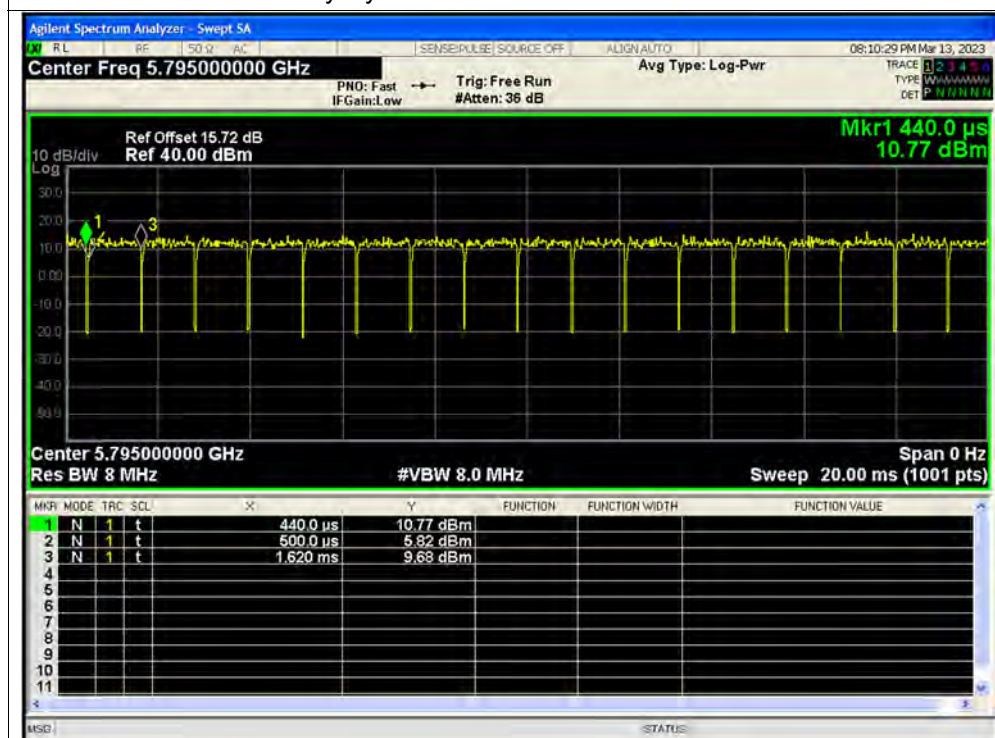




Duty Cycle NVNT ac80 5210MHz Ant1

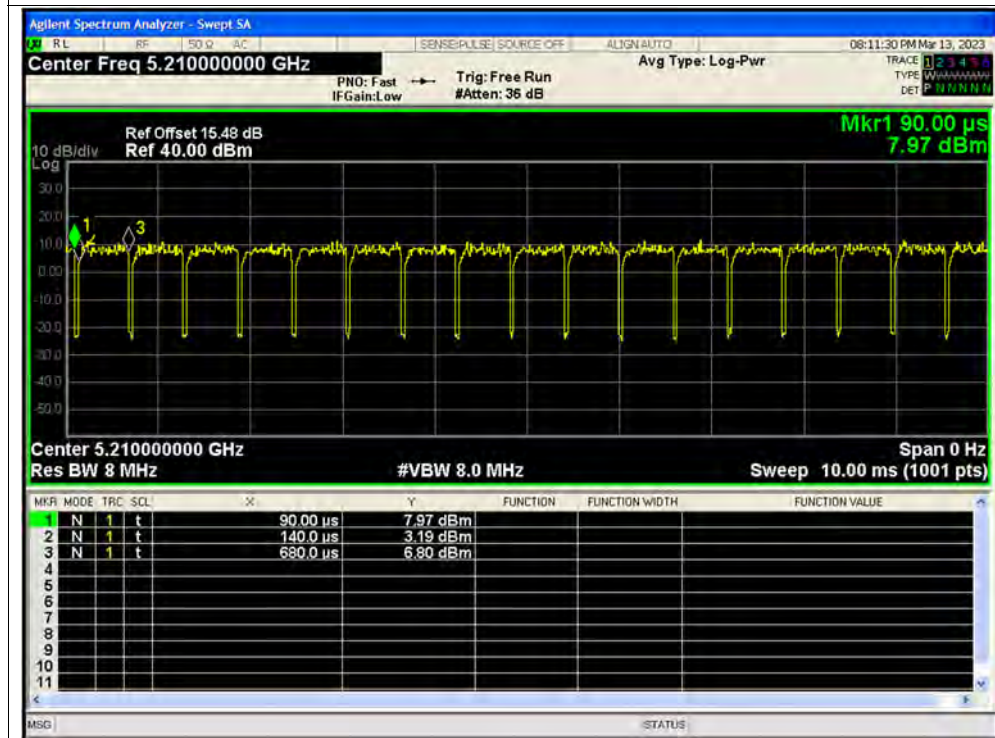

Duty Cycle NVNT ac80 5775MHz Ant1

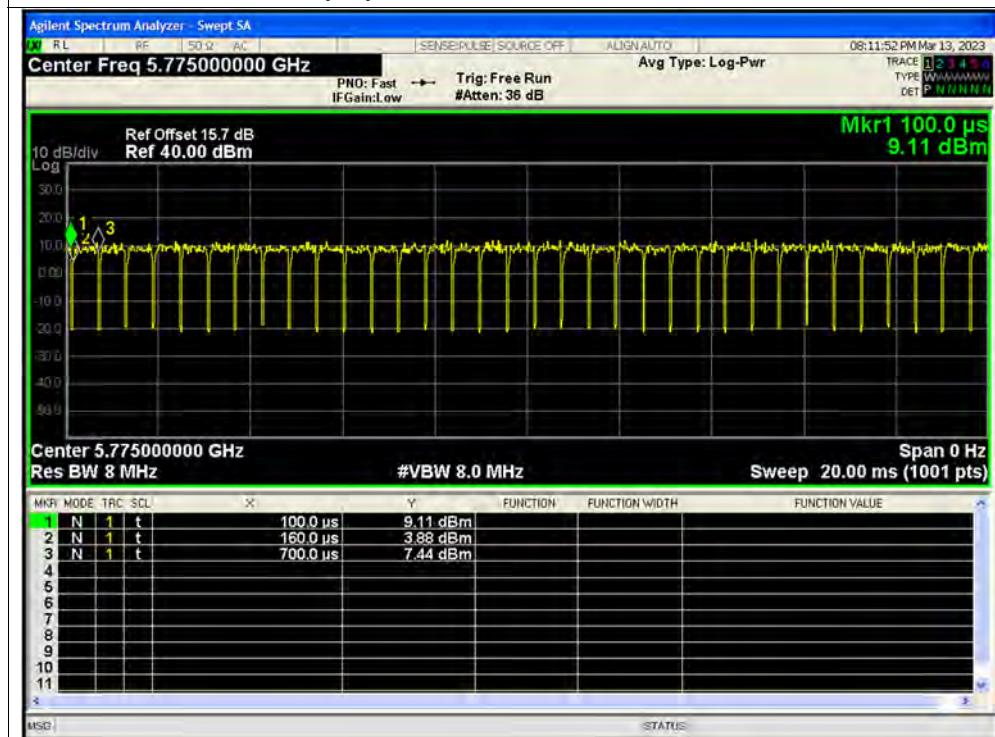

**A.2. Maximum Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	15.57	0.03606	23.7	Pass
NVNT	a	5220	Ant1	14.58	0.02871	23.7	Pass
NVNT	a	5240	Ant1	14.35	0.02723	23.7	Pass
NVNT	a	5745	Ant1	19.01	0.07962	29.7	Pass
NVNT	a	5785	Ant1	18.58	0.07211	29.7	Pass
NVNT	a	5825	Ant1	18.28	0.0673	29.7	Pass
NVNT	n20	5180	Ant1	12.61	0.01824	23.7	Pass
NVNT	n20	5220	Ant1	11.63	0.01455	23.7	Pass
NVNT	n20	5240	Ant1	11.48	0.01406	23.7	Pass
NVNT	n20	5745	Ant1	16.63	0.04603	29.7	Pass
NVNT	n20	5785	Ant1	16.12	0.04093	29.7	Pass
NVNT	n20	5825	Ant1	15.95	0.03936	29.7	Pass
NVNT	n40	5190	Ant1	13.1	0.02042	23.7	Pass
NVNT	n40	5230	Ant1	12.12	0.01629	23.7	Pass
NVNT	n40	5755	Ant1	17.36	0.05445	29.7	Pass
NVNT	n40	5795	Ant1	16.69	0.04667	29.7	Pass
NVNT	ac20	5180	Ant1	10.79	0.01199	23.7	Pass
NVNT	ac20	5220	Ant1	9.79	0.00953	23.7	Pass
NVNT	ac20	5240	Ant1	9.79	0.00953	23.7	Pass
NVNT	ac20	5745	Ant1	15.01	0.0317	29.7	Pass
NVNT	ac20	5785	Ant1	14.58	0.02871	29.7	Pass
NVNT	ac20	5825	Ant1	14.47	0.02799	29.7	Pass
NVNT	ac40	5190	Ant1	11.44	0.01393	23.7	Pass
NVNT	ac40	5230	Ant1	10.15	0.01035	23.7	Pass
NVNT	ac40	5755	Ant1	15.72	0.03733	29.7	Pass
NVNT	ac40	5795	Ant1	15.12	0.03251	29.7	Pass
NVNT	ac80	5210	Ant1	10.39	0.01094	23.7	Pass
NVNT	ac80	5775	Ant1	14.85	0.03055	29.7	Pass


**A.3. Emission Bandwidth****a) 26 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.928	0.5	Pass
NVNT	a	5220	Ant1	21.001	0.5	Pass
NVNT	a	5240	Ant1	20.468	0.5	Pass
NVNT	n20	5180	Ant1	20.265	0.5	Pass
NVNT	n20	5220	Ant1	20.637	0.5	Pass
NVNT	n20	5240	Ant1	20.829	0.5	Pass
NVNT	n40	5190	Ant1	40.628	0.5	Pass
NVNT	n40	5230	Ant1	40.909	0.5	Pass
NVNT	ac20	5180	Ant1	20.891	0.5	Pass
NVNT	ac20	5220	Ant1	21.15	0.5	Pass
NVNT	ac20	5240	Ant1	21.118	0.5	Pass
NVNT	ac40	5190	Ant1	42.009	0.5	Pass
NVNT	ac40	5230	Ant1	42.105	0.5	Pass
NVNT	ac80	5210	Ant1	83.106	0.5	Pass



Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

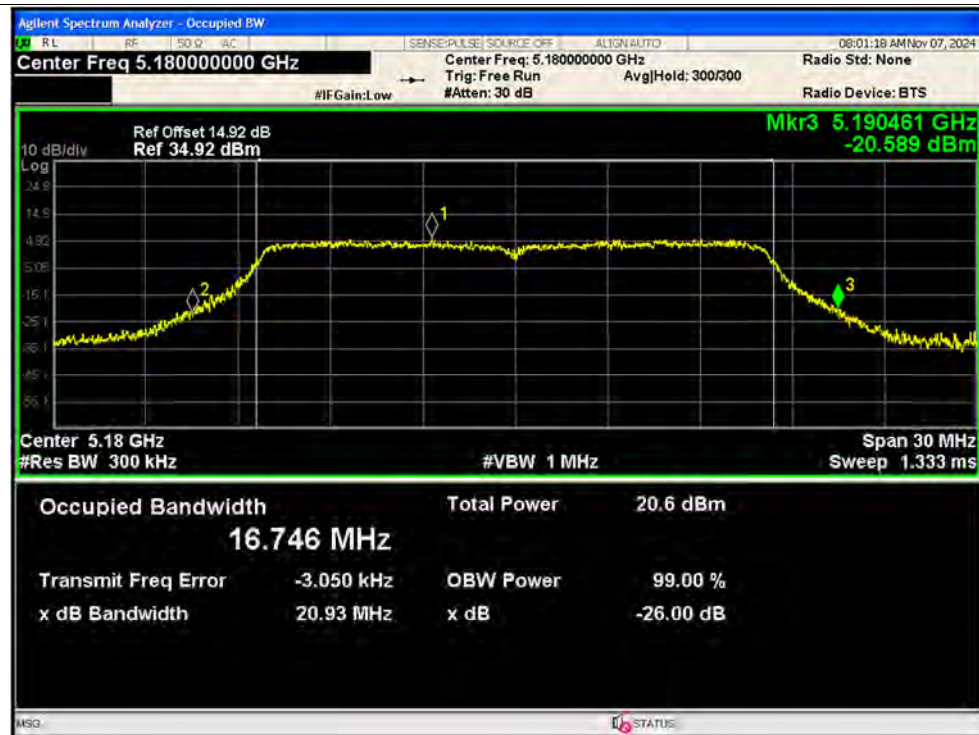

-26dB Bandwidth NVNT a 5220MHz Ant1



-26dB Bandwidth NVNT a 5240MHz Ant1



-26dB Bandwidth NVNT n20 5180MHz Ant1




-26dB Bandwidth NVNT n20 5220MHz Ant1




-26dB Bandwidth NVNT n20 5240MHz Ant1




-26dB Bandwidth NVNT n40 5190MHz Ant1

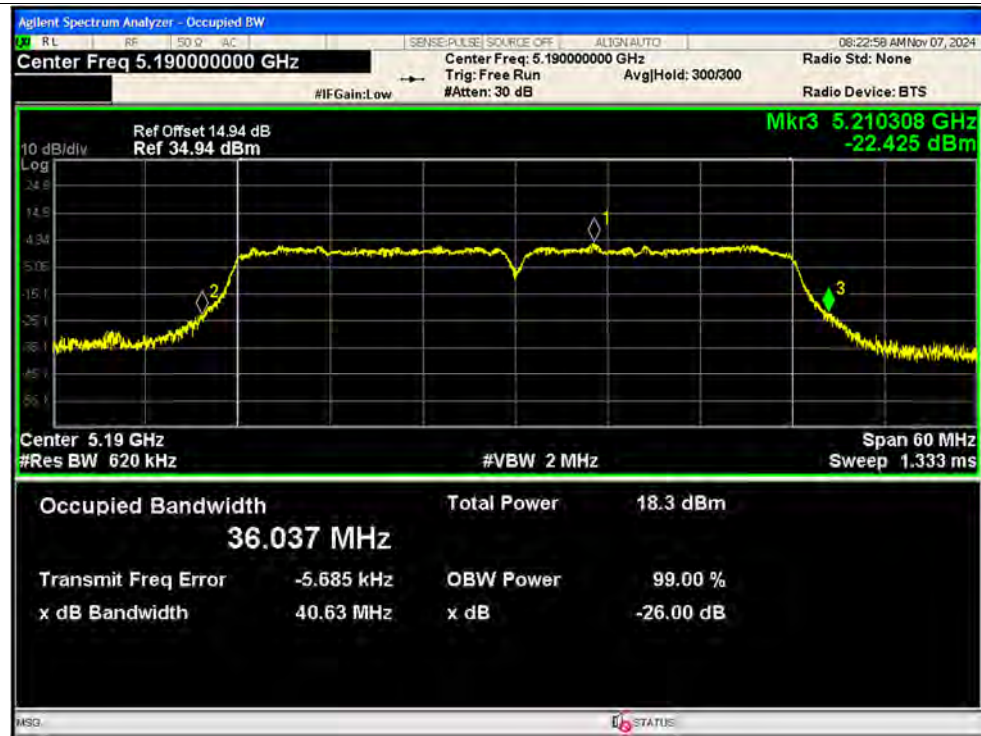


-26dB Bandwidth NVNT n40 5230MHz Ant1

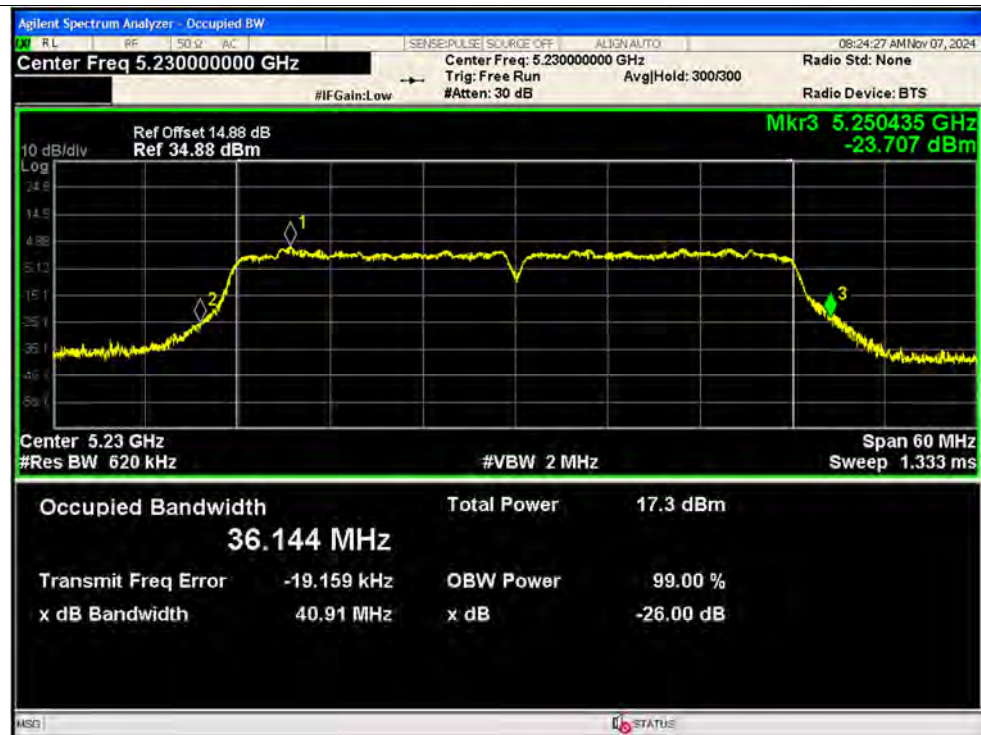


-26dB Bandwidth NVNT ac20 5180MHz Ant1

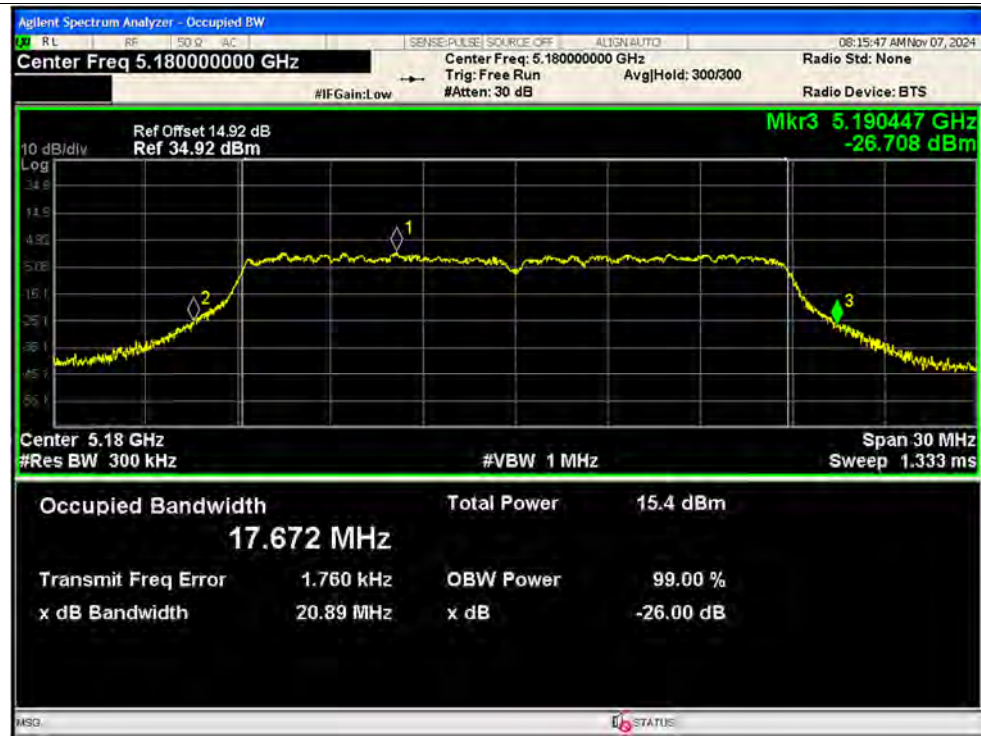


-26dB Bandwidth NVNT ac20 5220MHz Ant1

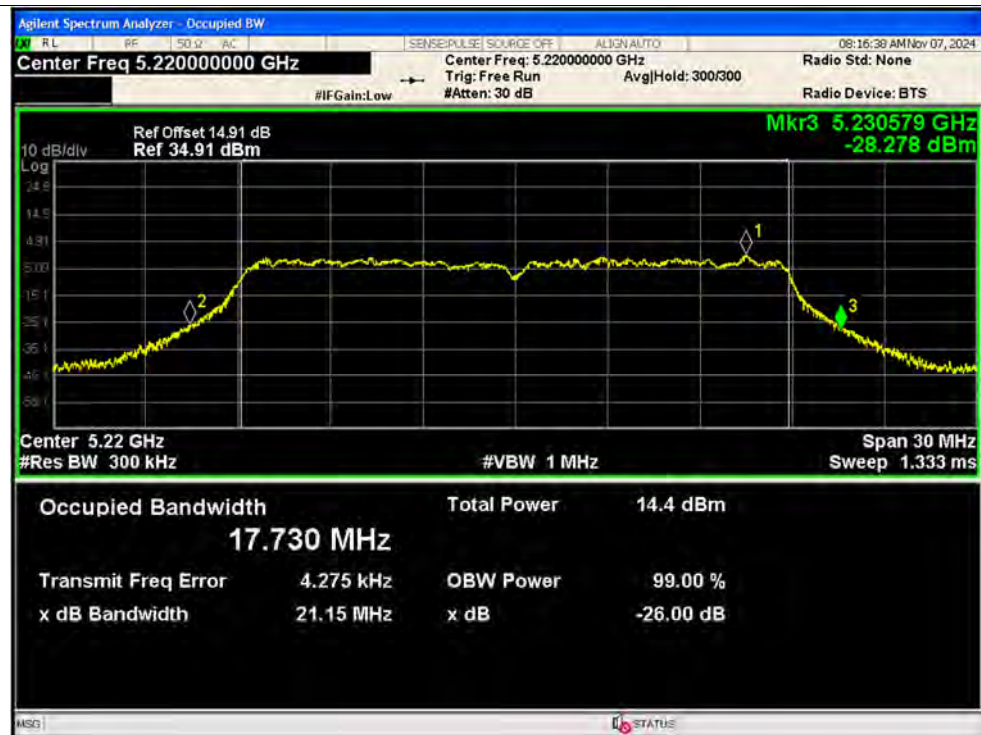


-26dB Bandwidth NVNT ac20 5240MHz Ant1

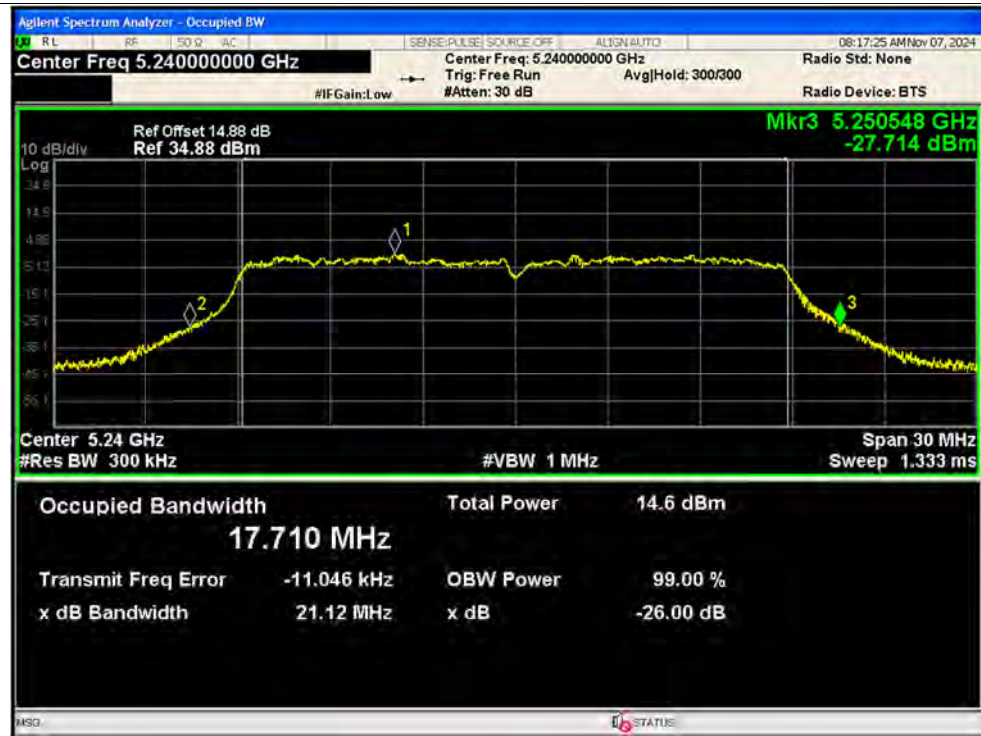


-26dB Bandwidth NVNT ac40 5190MHz Ant1

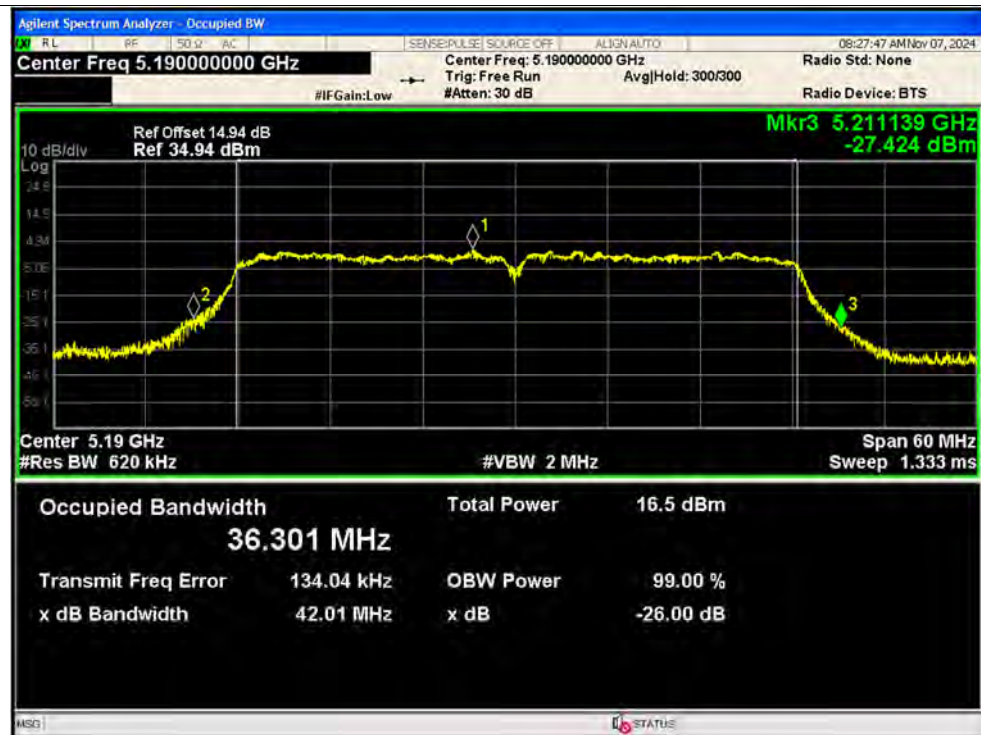

-26dB Bandwidth NVNT ac40 5230MHz Ant1

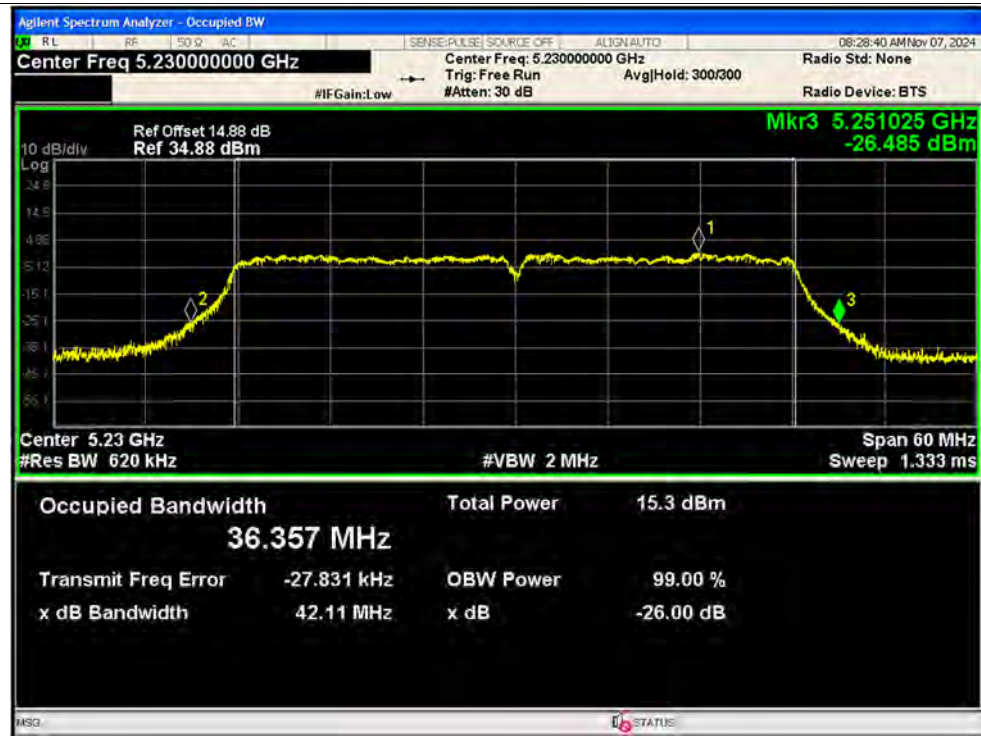

-26dB Bandwidth NVNT ac80 5210MHz Ant1

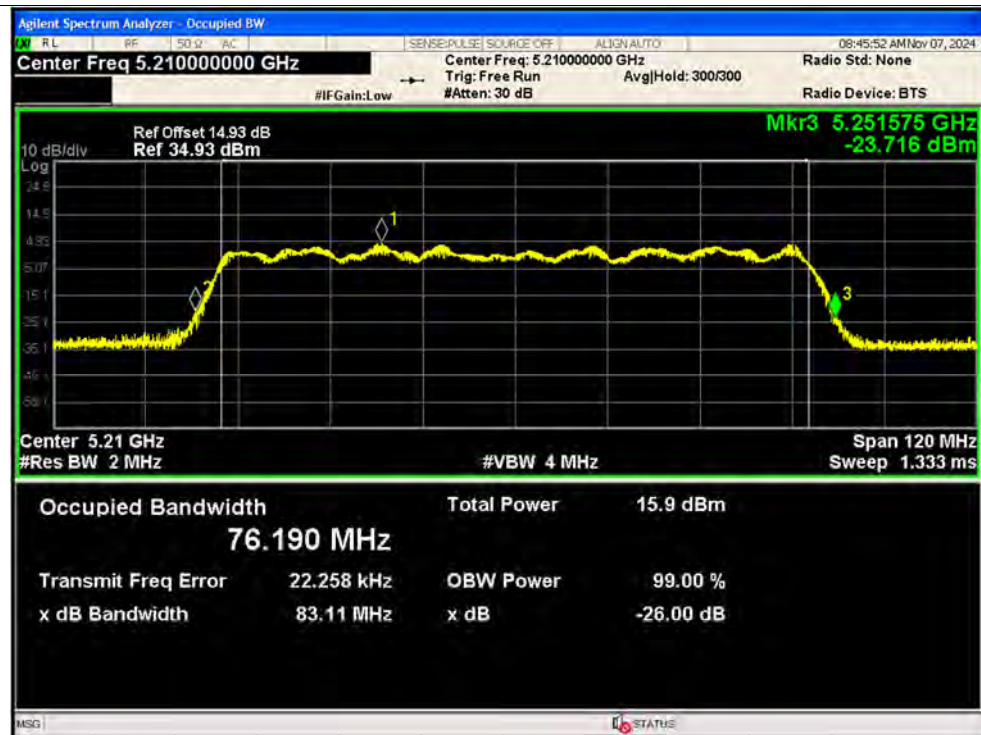


**b) 6 dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.329	0.5	Pass
NVNT	a	5785	Ant1	16.28	0.5	Pass
NVNT	a	5825	Ant1	16.263	0.5	Pass
NVNT	n20	5745	Ant1	17.617	0.5	Pass
NVNT	n20	5785	Ant1	17.591	0.5	Pass
NVNT	n20	5825	Ant1	17.573	0.5	Pass
NVNT	n40	5755	Ant1	35.794	0.5	Pass
NVNT	n40	5795	Ant1	35.416	0.5	Pass
NVNT	ac20	5745	Ant1	17.611	0.5	Pass
NVNT	ac20	5785	Ant1	17.574	0.5	Pass
NVNT	ac20	5825	Ant1	17.049	0.5	Pass
NVNT	ac40	5755	Ant1	35.421	0.5	Pass
NVNT	ac40	5795	Ant1	36.115	0.5	Pass
NVNT	ac80	5775	Ant1	75.141	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

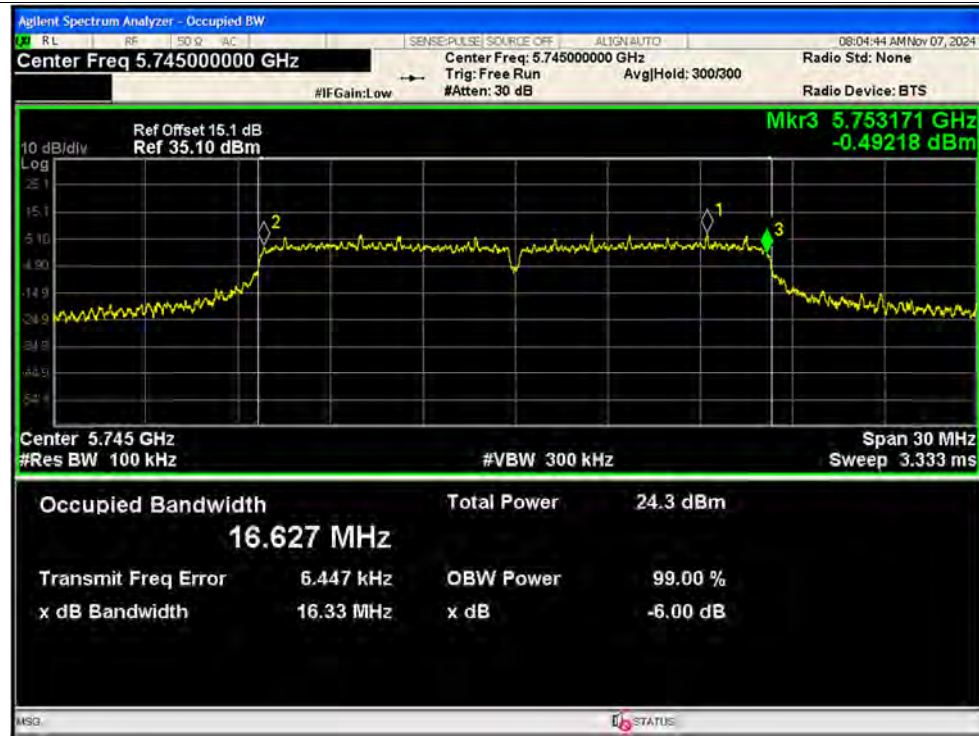


-6dB Bandwidth NVNT a 5785MHz Ant1

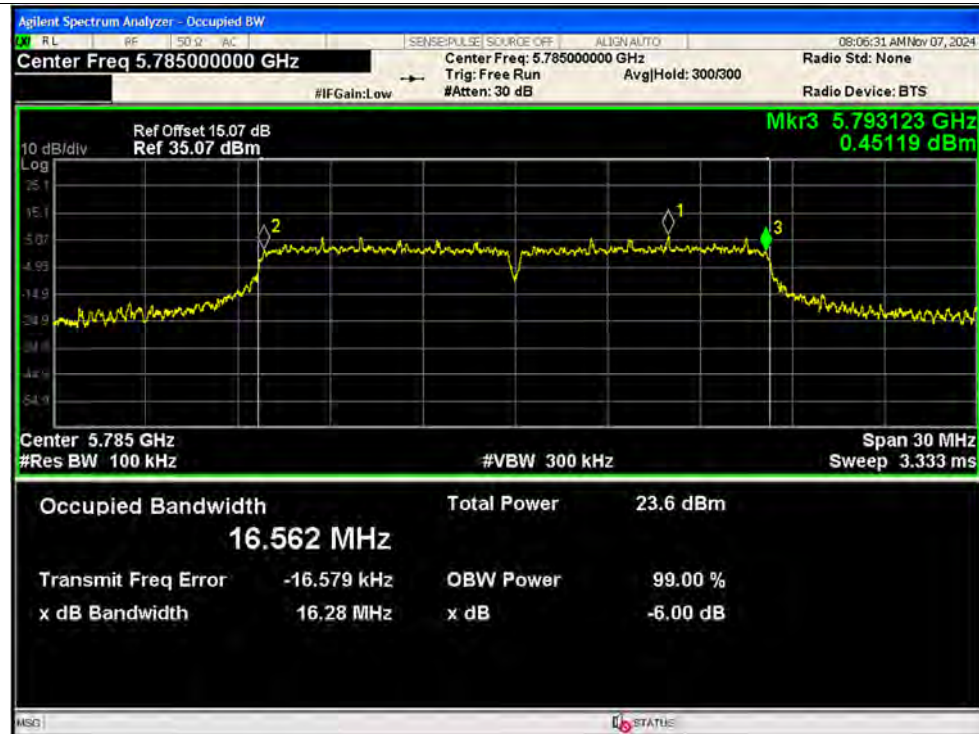


-6dB Bandwidth NVNT a 5825MHz Ant1

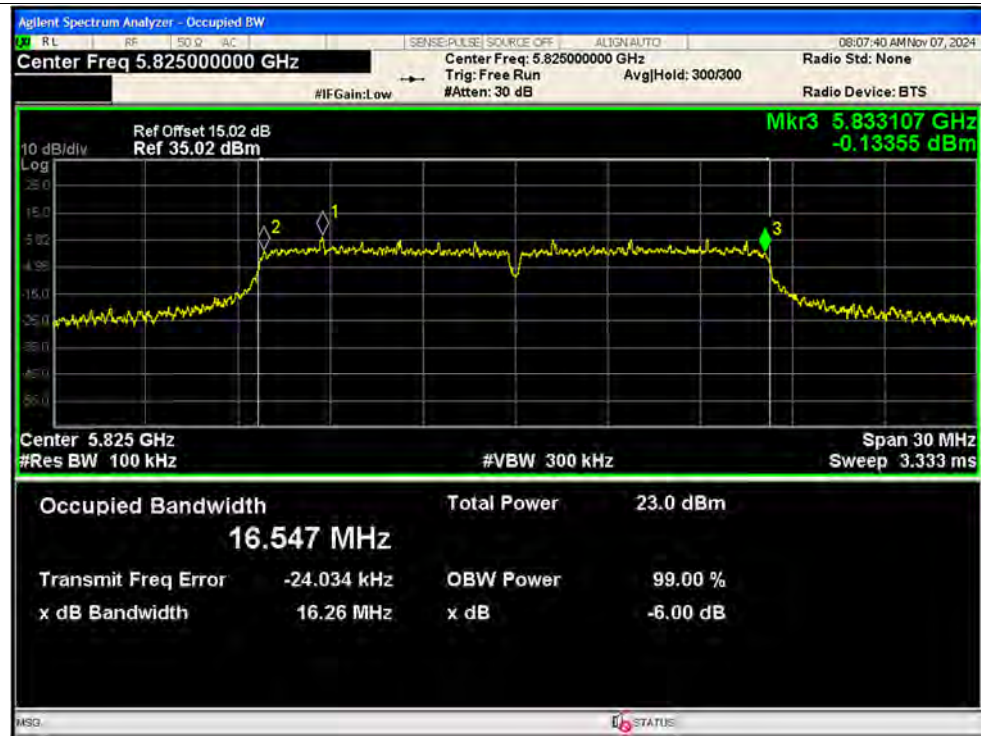


-6dB Bandwidth NVNT n20 5745MHz Ant1

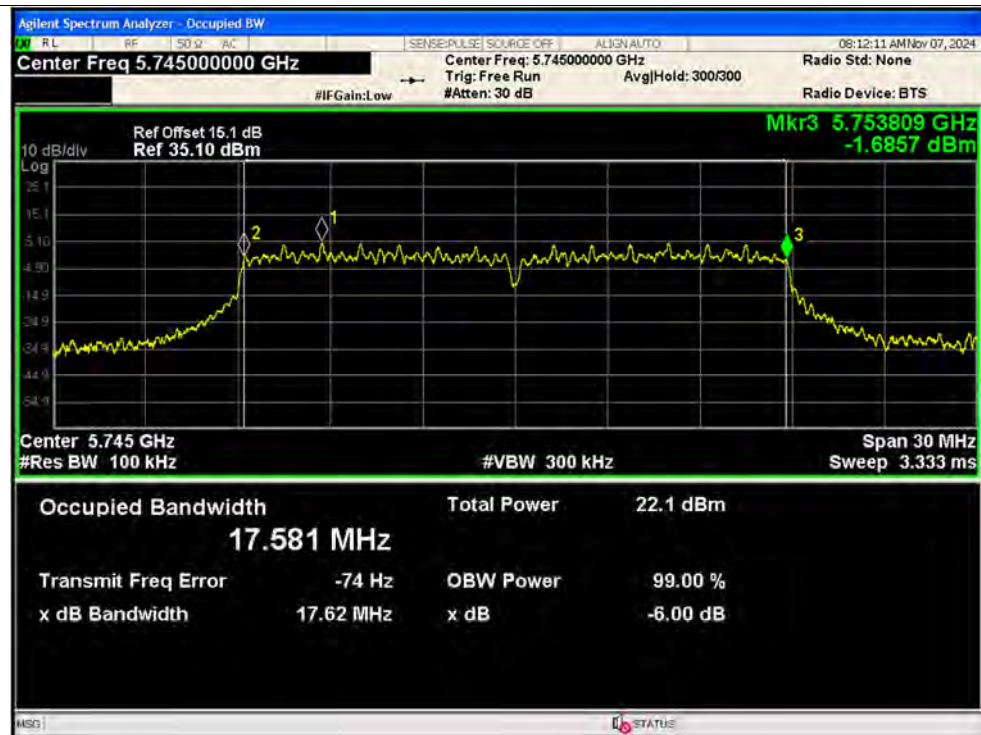

-6dB Bandwidth NVNT n20 5785MHz Ant1

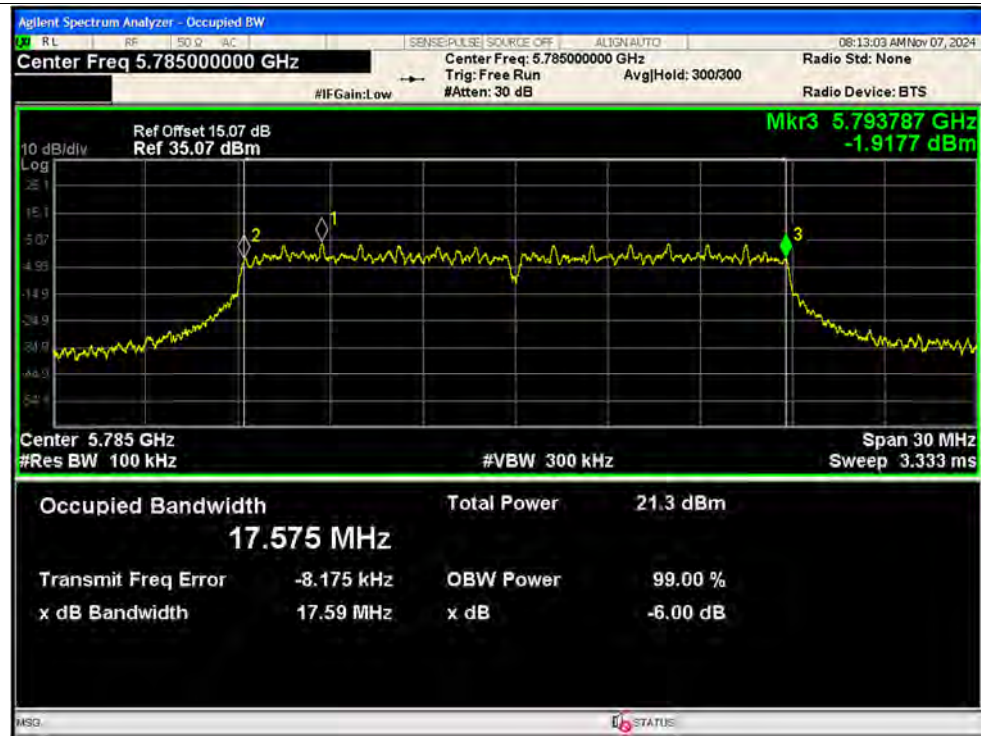


-6dB Bandwidth NVNT n20 5825MHz Ant1

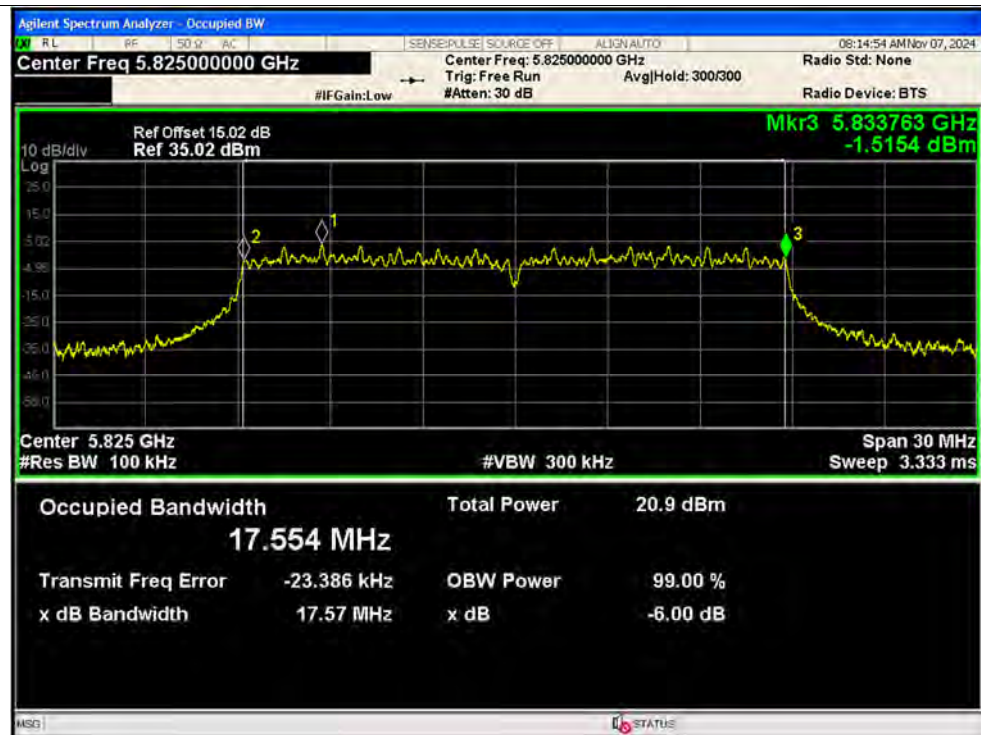





-6dB Bandwidth NVNT n40 5755MHz Ant1

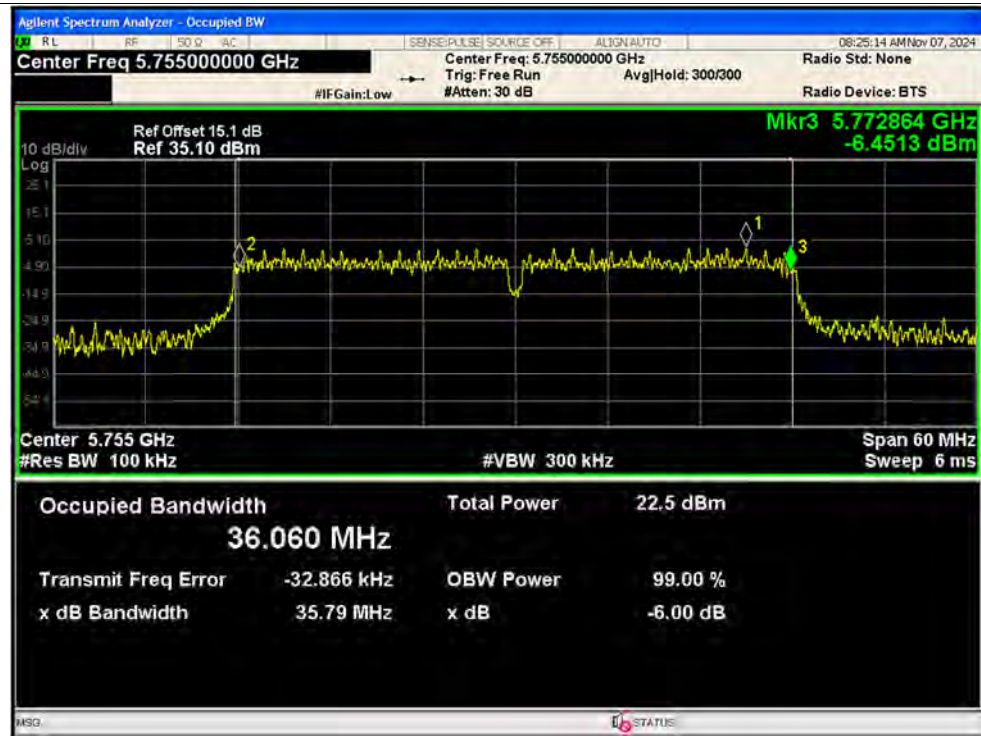


-6dB Bandwidth NVNT n40 5795MHz Ant1

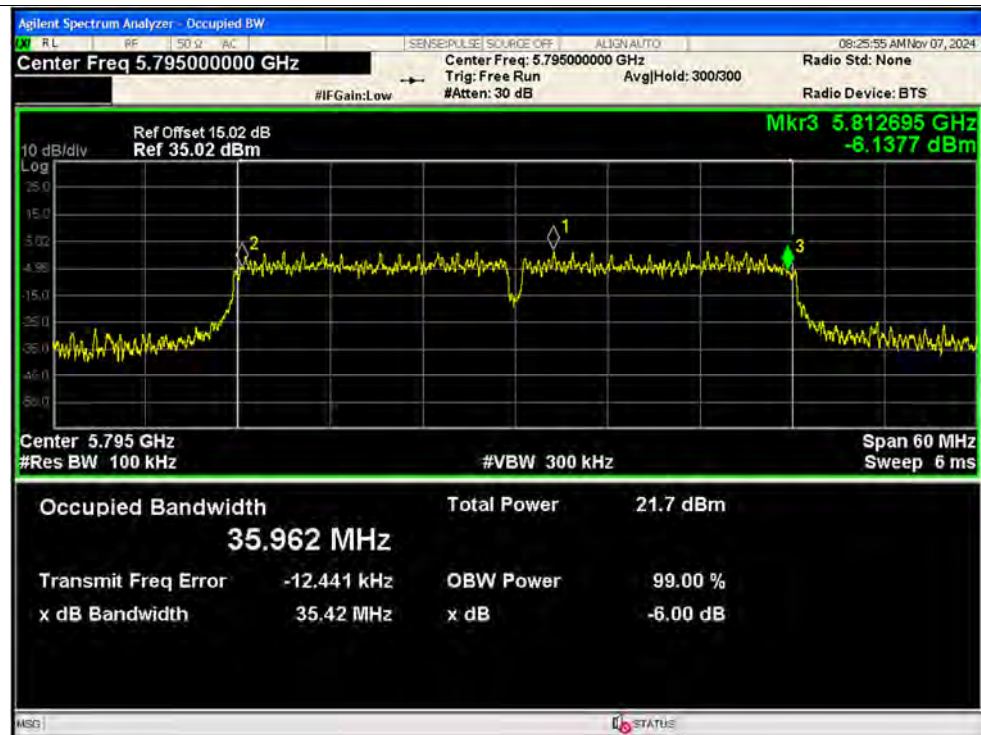


-6dB Bandwidth NVNT ac20 5745MHz Ant1

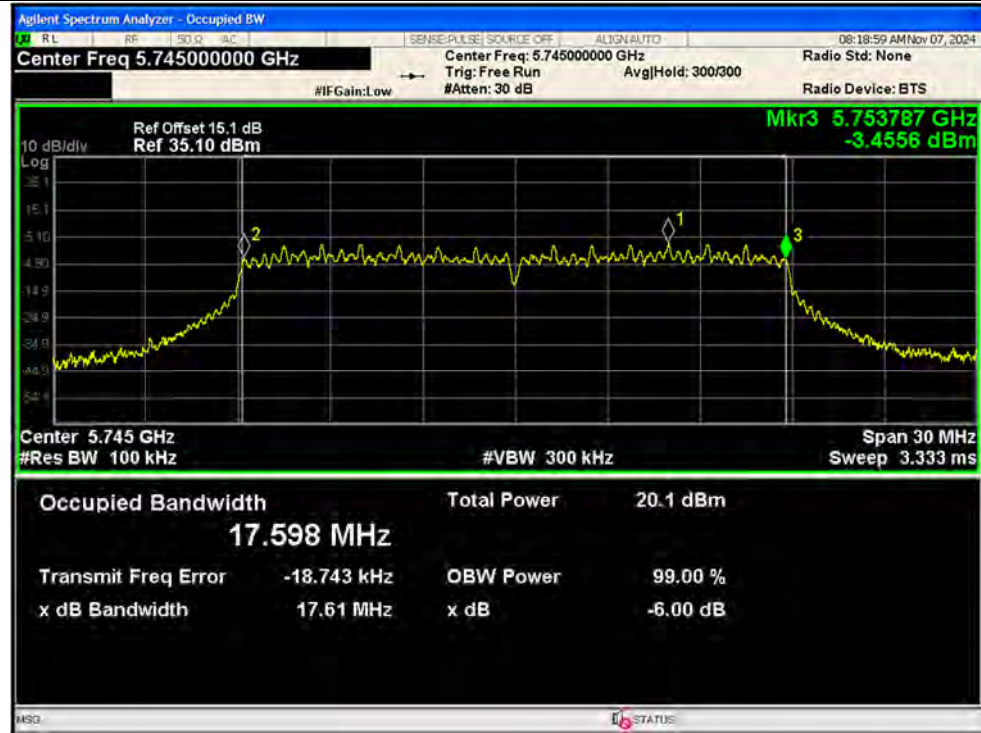


-6dB Bandwidth NVNT ac20 5785MHz Ant1

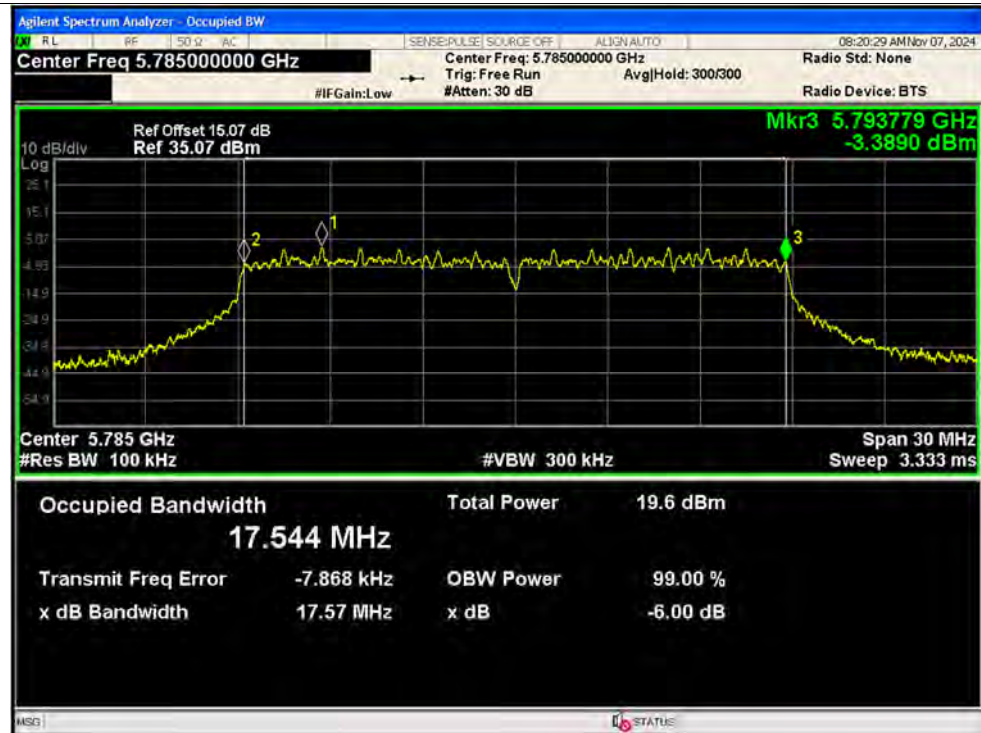


-6dB Bandwidth NVNT ac20 5825MHz Ant1

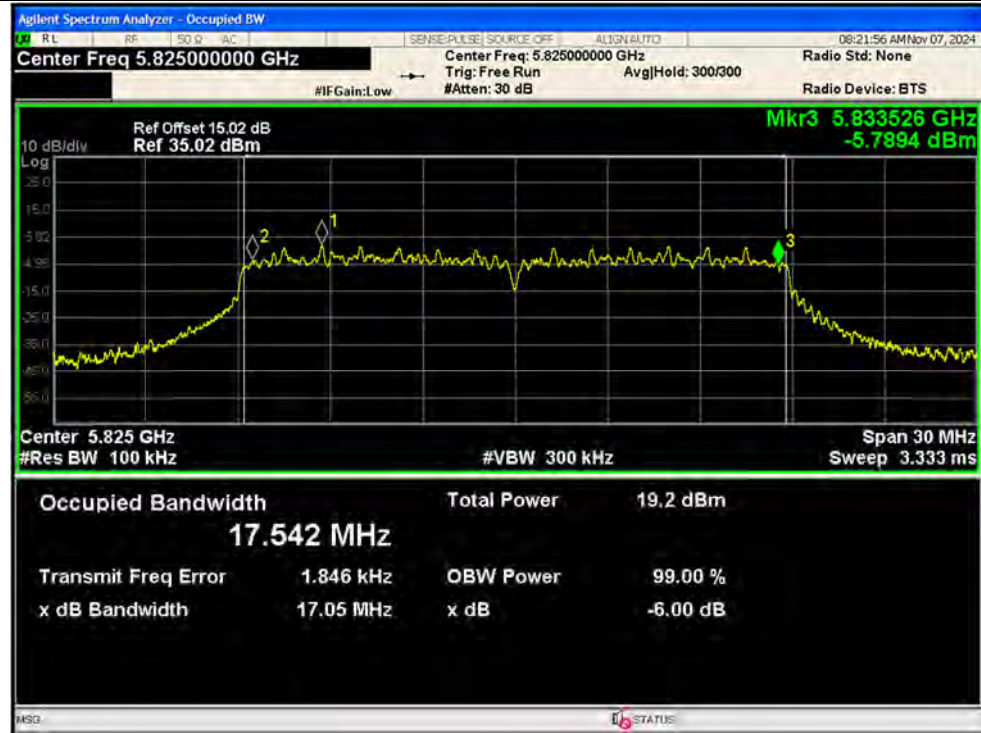


-6dB Bandwidth NVNT ac40 5755MHz Ant1

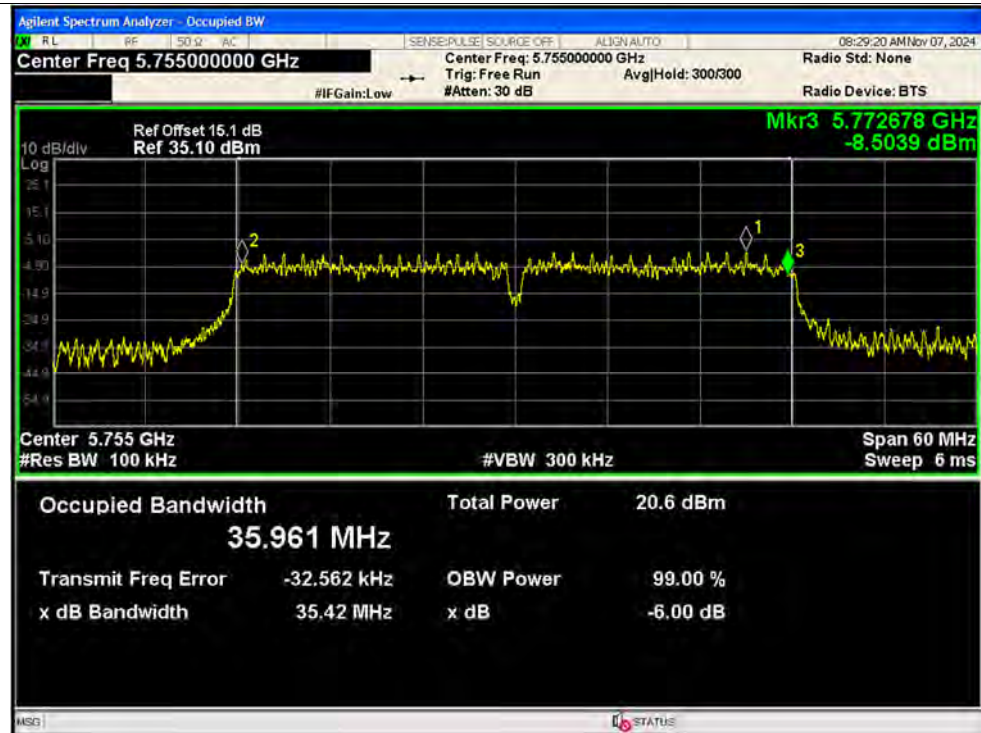

-6dB Bandwidth NVNT ac40 5795MHz Ant1

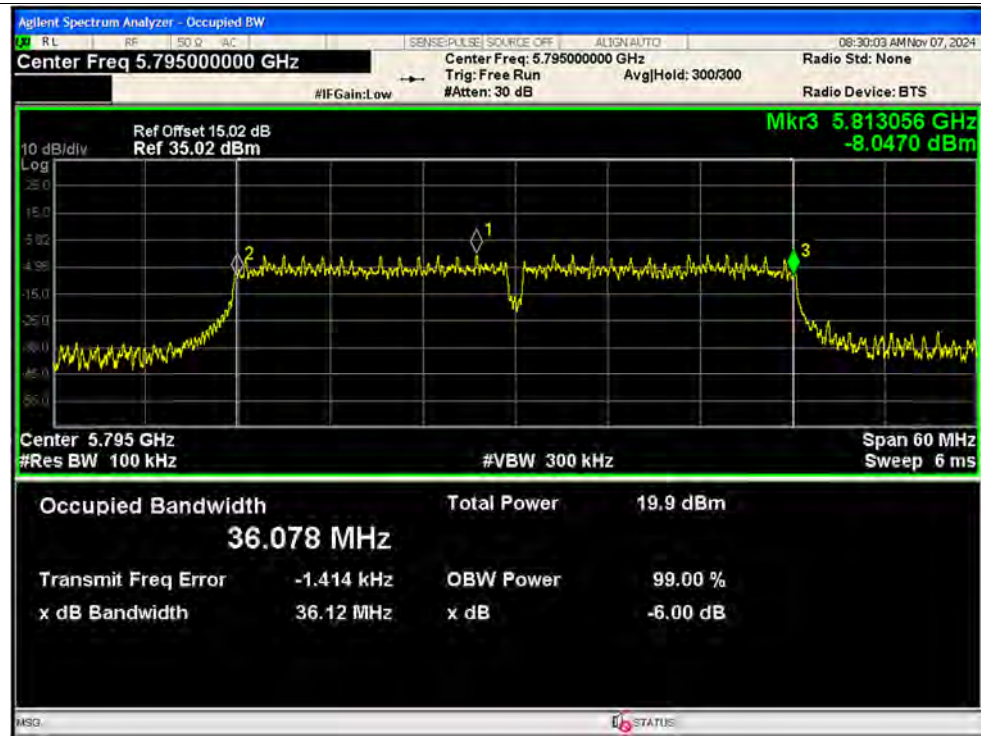

-6dB Bandwidth NVNT ac80 5775MHz Ant1

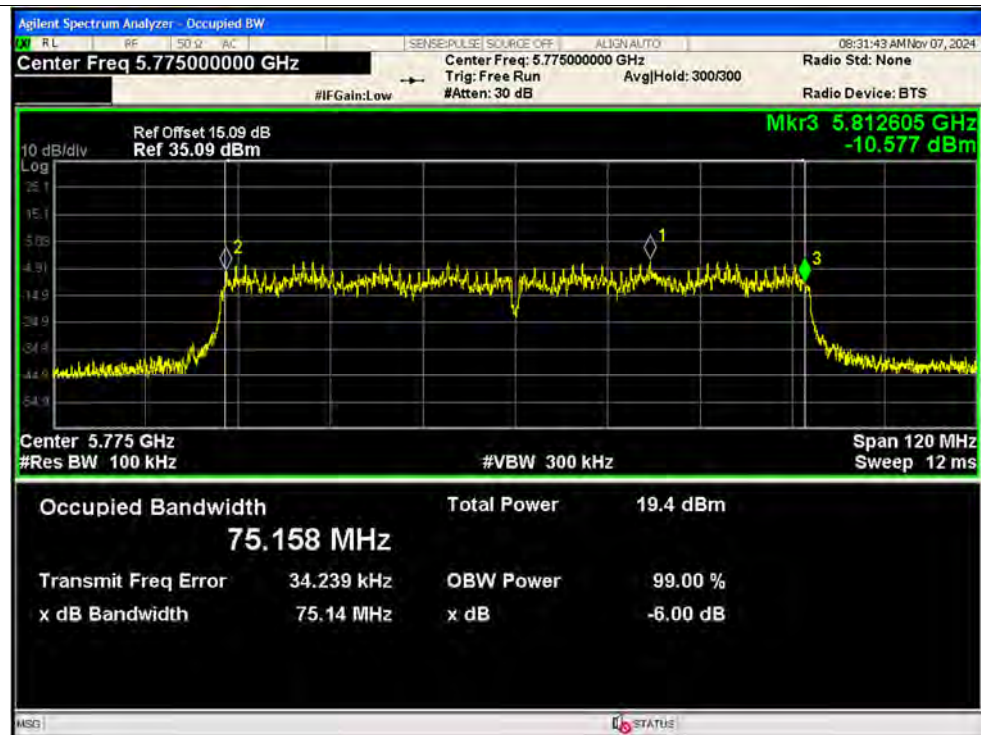

**A.4. Peak Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz) (dBm/500kHz @U-NII-3)	Duty Factor (dB)	Total Conducted PSD (dBm/MHz) (dBm/500kHz @ U-NII-3)	Limit Conducted (dBm/MHz) (dBm/500kHz @ U-NII-3)	Verdict
NVNT	a	5180	Ant1	3.04	0.26	3.3	10.7	Pass
NVNT	a	5220	Ant1	1.93	0.27	2.2	10.7	Pass
NVNT	a	5240	Ant1	1.87	0.16	2.03	10.7	Pass
NVNT	a	5745	Ant1	3.76	0.32	4.08	29.7	Pass
NVNT	a	5785	Ant1	3.08	0.26	3.34	29.7	Pass
NVNT	a	5825	Ant1	2.63	0.14	2.77	29.7	Pass
NVNT	n20	5180	Ant1	-1.32	2.18	0.86	10.7	Pass
NVNT	n20	5220	Ant1	-2.52	1.57	-0.95	10.7	Pass
NVNT	n20	5240	Ant1	-2.48	0.7	-1.78	10.7	Pass
NVNT	n20	5745	Ant1	-0.15	2.37	2.22	29.7	Pass
NVNT	n20	5785	Ant1	-0.84	2.14	1.3	29.7	Pass
NVNT	n20	5825	Ant1	-0.78	1.3	0.52	29.7	Pass
NVNT	n40	5190	Ant1	-4.75	2.84	-1.91	10.7	Pass
NVNT	n40	5230	Ant1	-5.97	2.08	-3.89	10.7	Pass
NVNT	n40	5755	Ant1	-3.22	3.01	-0.21	29.7	Pass
NVNT	n40	5795	Ant1	-3.94	1.87	-2.07	29.7	Pass
NVNT	ac20	5180	Ant1	-3.42	2.3	-1.12	10.7	Pass
NVNT	ac20	5220	Ant1	-4.65	2.43	-2.22	10.7	Pass
NVNT	ac20	5240	Ant1	-4.42	2.3	-2.12	10.7	Pass
NVNT	ac20	5745	Ant1	-1.25	1.9	0.65	29.7	Pass
NVNT	ac20	5785	Ant1	-2.28	0.79	-1.49	29.7	Pass
NVNT	ac20	5825	Ant1	-3.1	1.61	-1.49	29.7	Pass
NVNT	ac40	5190	Ant1	-6.55	3.01	-3.54	10.7	Pass
NVNT	ac40	5230	Ant1	-7.91	3.74	-4.17	10.7	Pass
NVNT	ac40	5755	Ant1	-4.79	3.83	-0.96	29.7	Pass
NVNT	ac40	5795	Ant1	-5.67	3.57	-2.1	29.7	Pass
NVNT	ac80	5210	Ant1	-10.48	3.59	-6.89	10.7	Pass
NVNT	ac80	5775	Ant1	-8.12	3.98	-4.14	29.7	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1



PSD NVNT a 5220MHz Ant1




PSD NVNT a 5240MHz Ant1




PSD NVNT a 5745MHz Ant1



PSD NVNT a 5785MHz Ant1

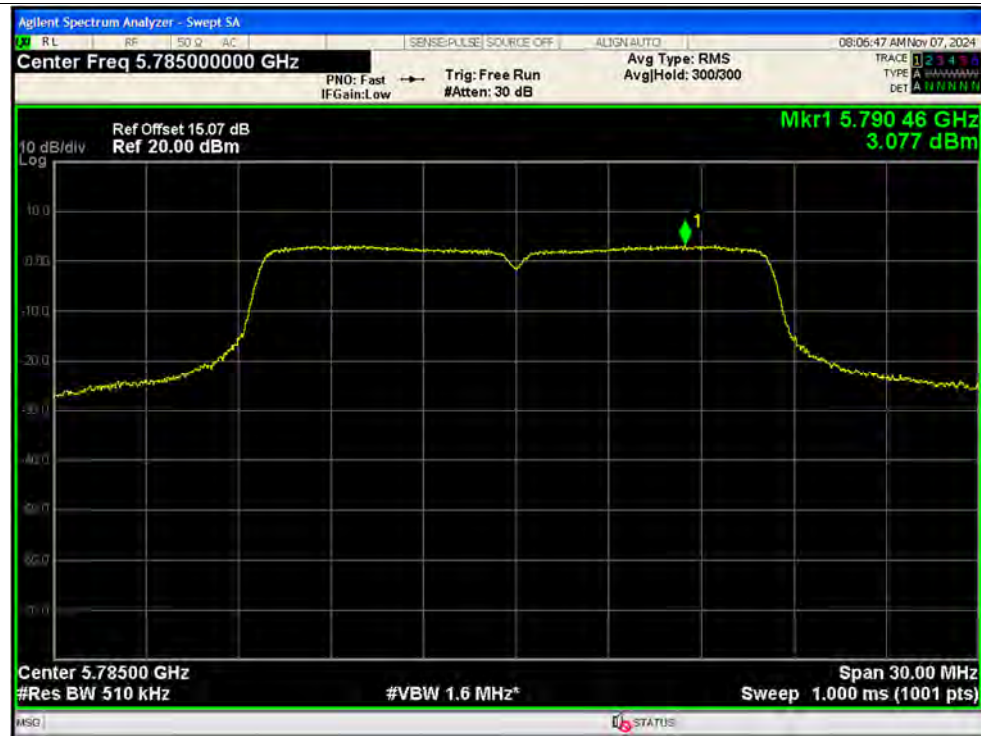

PSD NVNT a 5825MHz Ant1

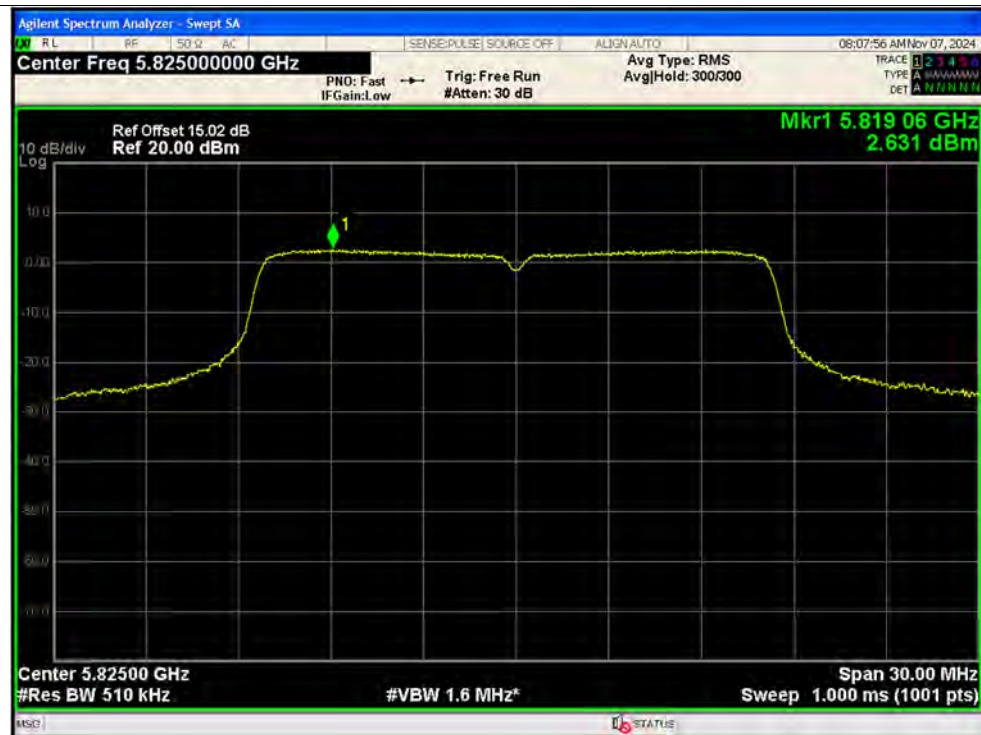



PSD NVNT n20 5180MHz Ant1



PSD NVNT n20 5220MHz Ant1



PSD NVNT n20 5240MHz Ant1



PSD NVNT n20 5745MHz Ant1





PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1





PSD NVNT n40 5190MHz Ant1



PSD NVNT n40 5230MHz Ant1





PSD NVNT n40 5755MHz Ant1



PSD NVNT n40 5795MHz Ant1



PSD NVNT ac20 5180MHz Ant1



PSD NVNT ac20 5220MHz Ant1



PSD NVNT ac20 5240MHz Ant1



PSD NVNT ac20 5745MHz Ant1





PSD NVNT ac20 5785MHz Ant1



PSD NVNT ac20 5825MHz Ant1



PSD NVNT ac40 5190MHz Ant1



PSD NVNT ac40 5230MHz Ant1



PSD NVNT ac40 5755MHz Ant1



PSD NVNT ac40 5795MHz Ant1



PSD NVNT ac80 5210MHz Ant1



PSD NVNT ac80 5775MHz Ant1



**A.5. Frequency Stability**

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 9V	CW	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 12V	CW	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 15V	CW	5180	Ant1	5179.98	-20000	-3.86	25	Pass
0C 12V	CW	5180	Ant1	5179.96	-40000	-7.72	25	Pass
10C 12V	CW	5180	Ant1	5179.98	-20000	-3.86	25	Pass
30C 12V	CW	5180	Ant1	5179.98	-20000	-3.86	25	Pass
40C 12V	CW	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 9V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass
20C 12V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass
20C 15V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass
0C 12V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass
10C 12V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass
30C 12V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass
40C 12V	CW	5745	Ant1	5744.98	-20000	-3.48	25	Pass



A.6. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Data line+Router+WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

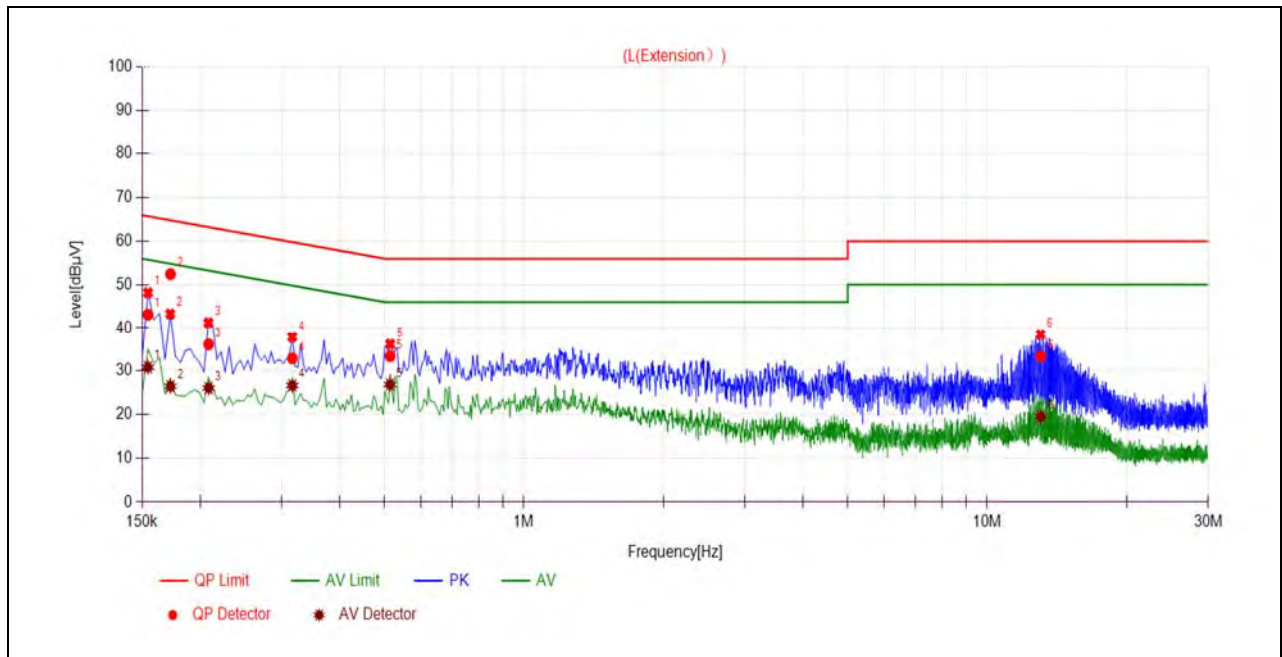

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	44.91	33.41	65.76	55.76	Line	PASS
2	0.2220	34.09	26.11	62.74	52.74		PASS
3	0.7664	26.64	21.04	56.00	46.00		PASS
4	1.5404	25.77	20.30	56.00	46.00		PASS
5	6.6166	29.02	23.36	60.00	50.00		PASS
6	16.3844	40.11	35.78	60.00	50.00		PASS

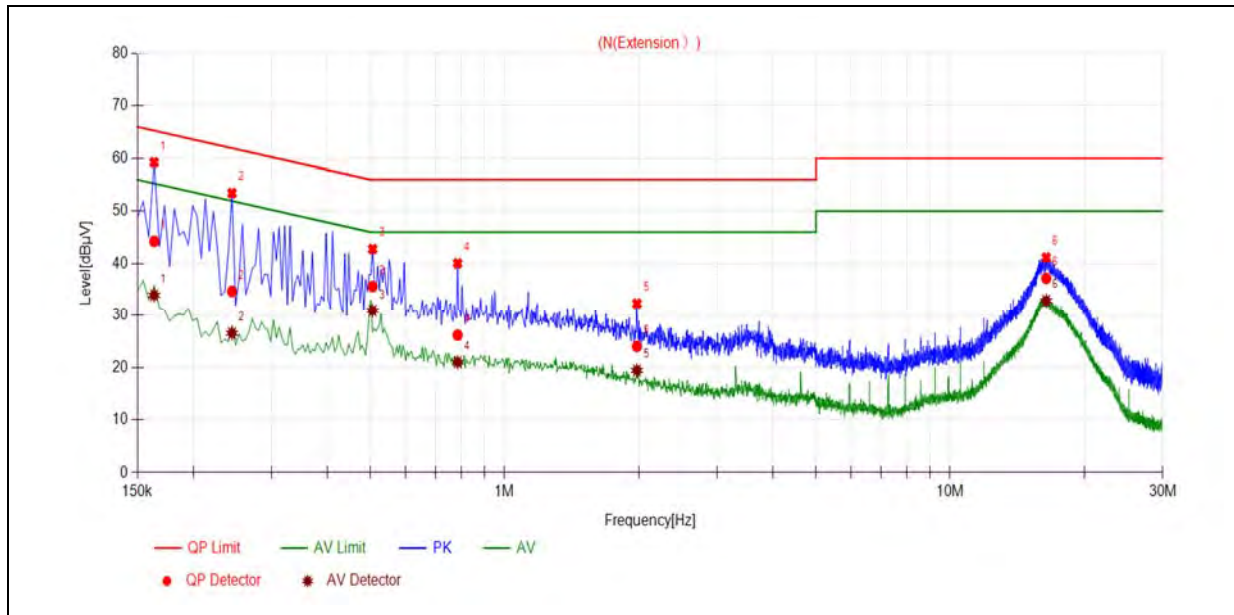

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1635	44.25	33.94	65.28	55.28	Neutral	PASS
2	0.2445	34.68	26.53	61.94	51.94		PASS
3	0.5055	35.61	30.94	56.00	46.00		PASS
4	0.7846	26.17	20.97	56.00	46.00		PASS
5	1.9813	24.01	19.40	56.00	46.00		PASS
6	16.4326	37.17	32.88	60.00	50.00		PASS



A.7. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11a Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@ 3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/ m)	Verdict
		PK/ AV						
36	5146.00	PK	39.46	-16.90	33.10	55.66	74	PASS
36	5150.00	AV	28.56	-16.90	33.10	44.76	54	PASS
48	5363.20	PK	37.43	-16.90	33.10	53.63	74	PASS
48	5350.00	AV	26.57	-16.90	33.10	42.77	54	PASS
149	5725.00	PK	39.14	-14.70	33.50	57.94	122.23	PASS
165	5850.00	PK	36.82	-14.70	33.50	55.62	122.23	PASS

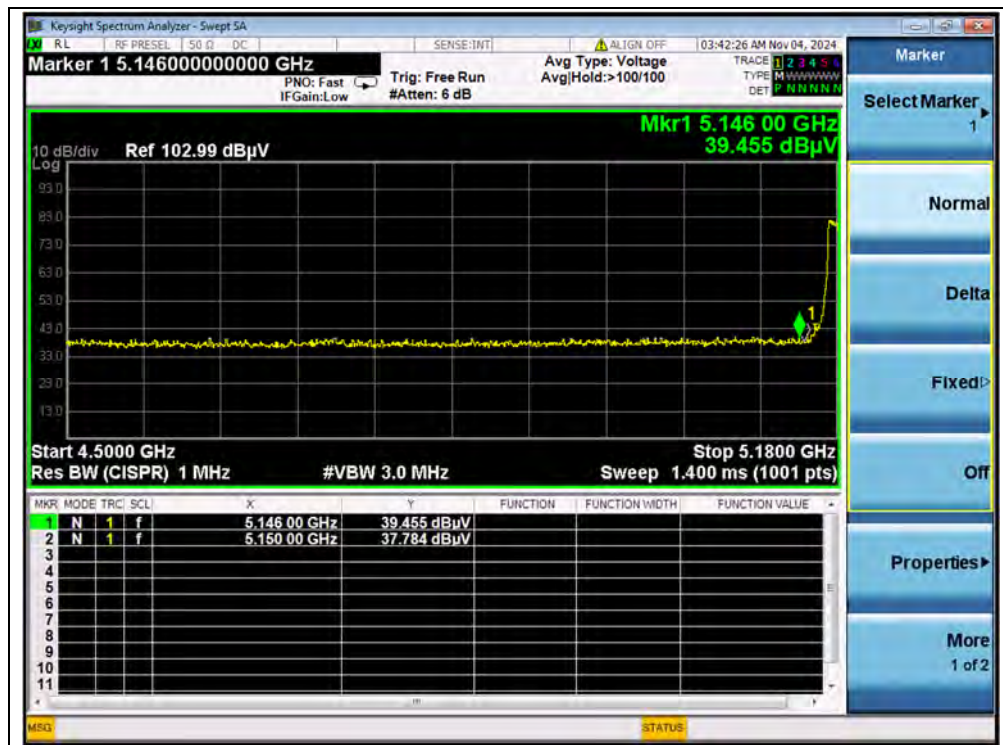


(PEAK, Channel 36, 802.11a)

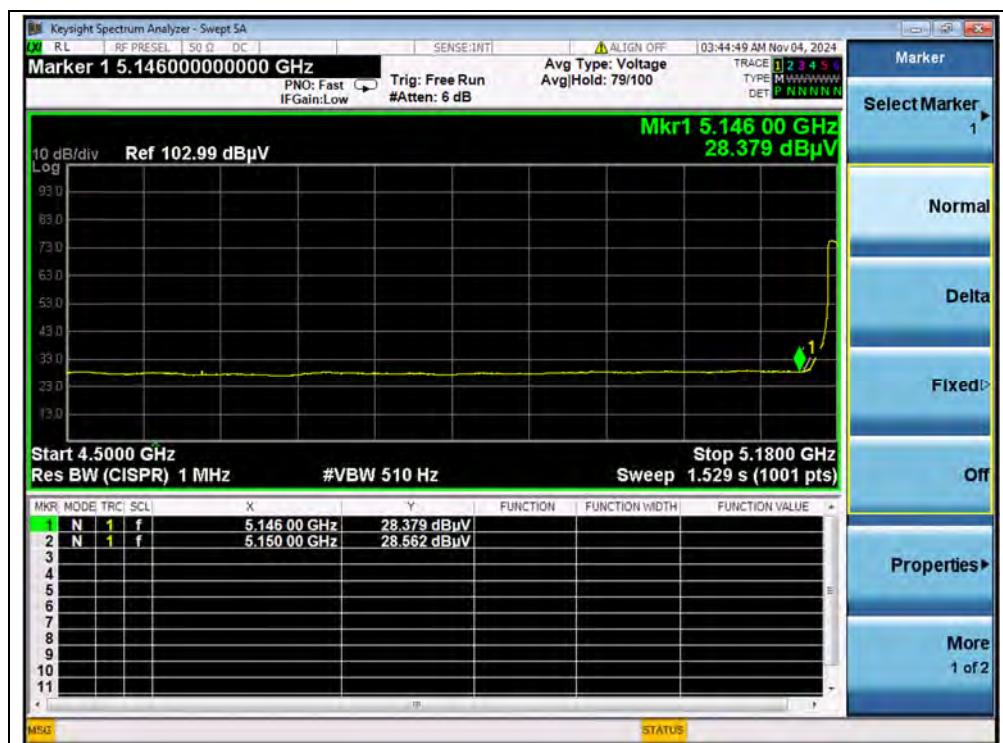


(AVERAGE, Channel 36, 802.11a)

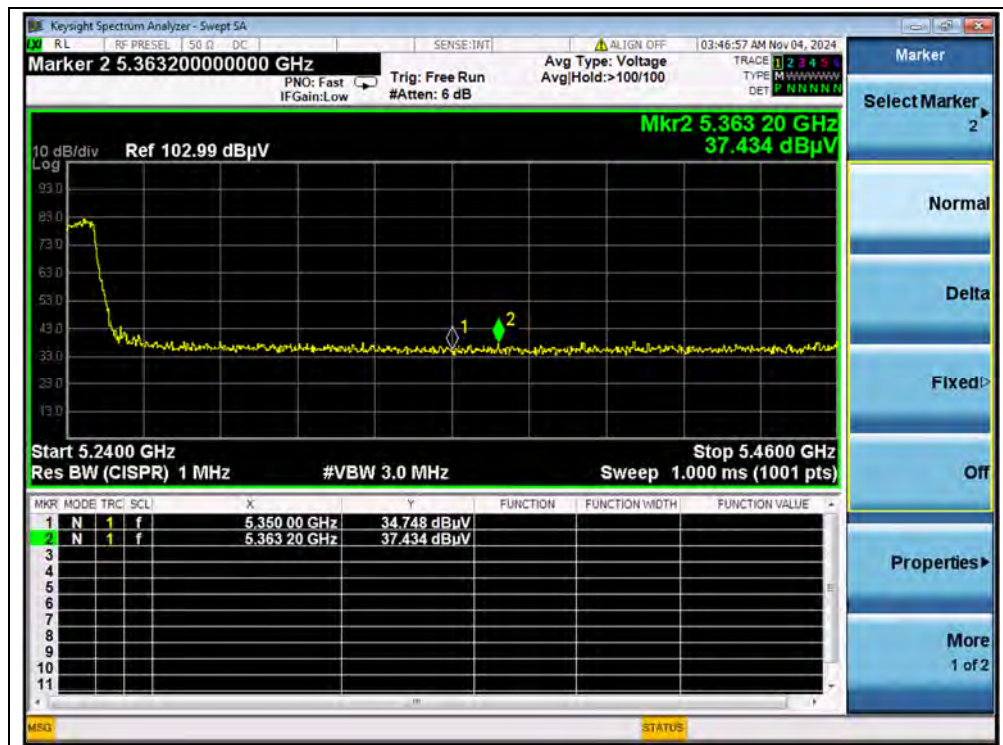


(PEAK, Channel 48, 802.11a)

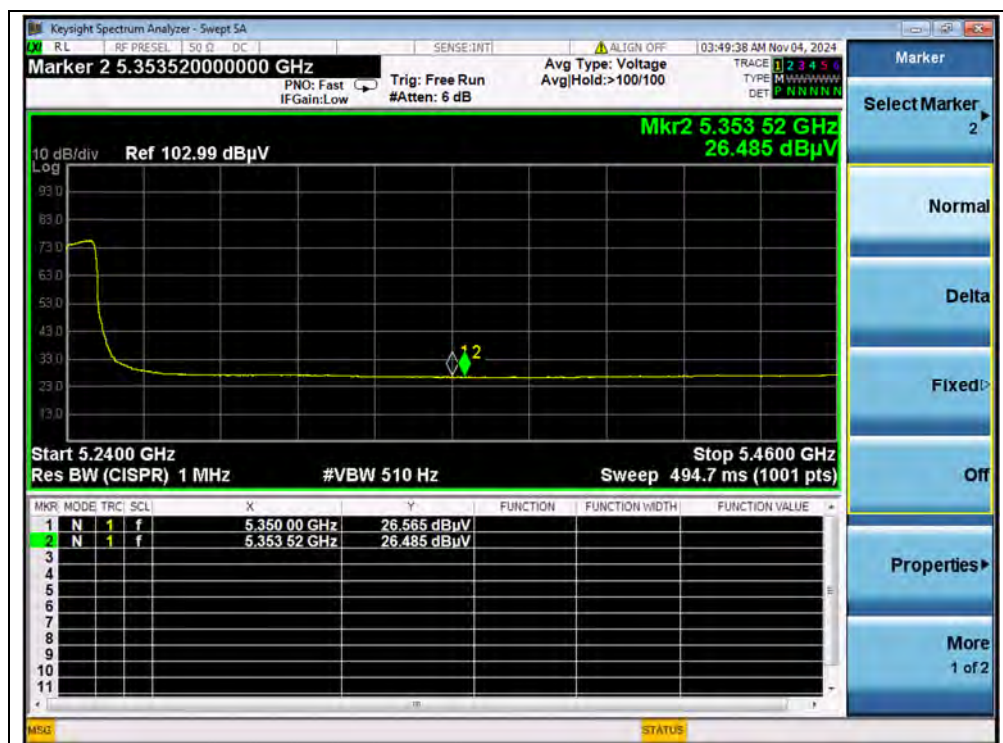

(AVERAGE, Channel 48, 802.11a)

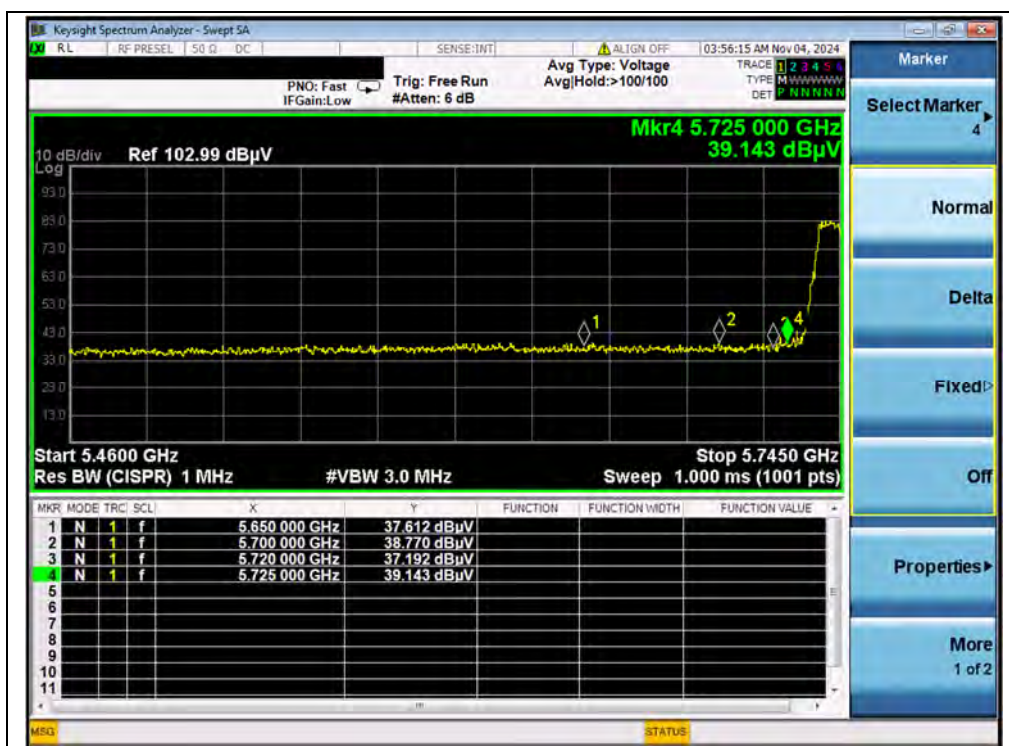


(PEAK, Channel 149, 802.11a)

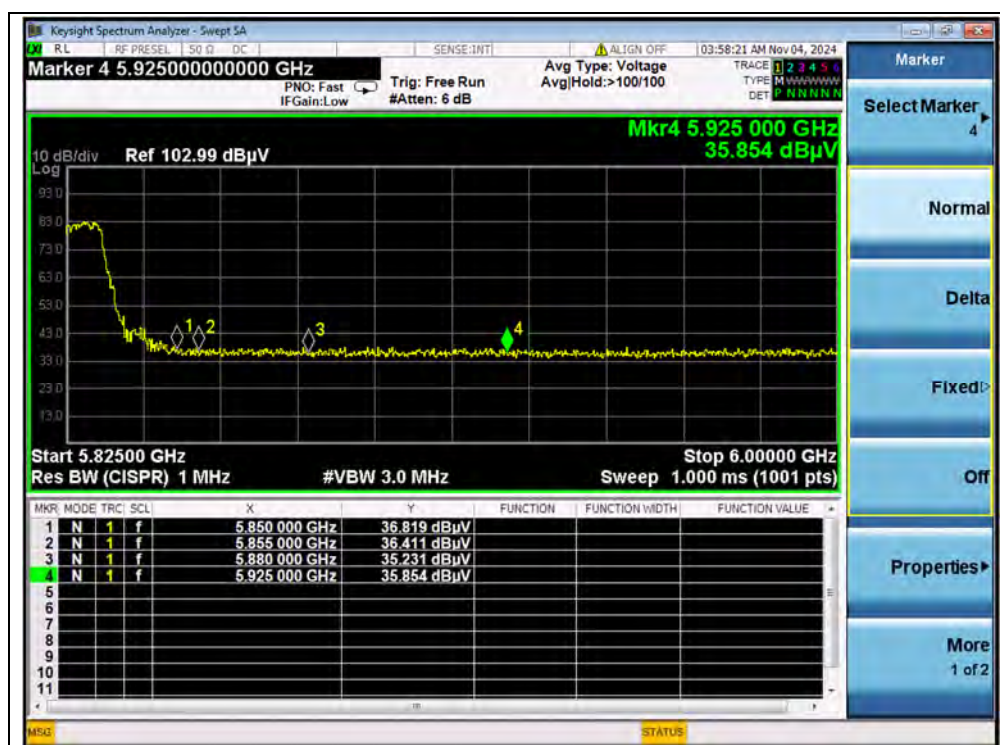


(PEAK, Channel 165, 802.11a)

**802.11n (HT40) Mode**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
38	5078.24	PK	40.28	- 16.90	33.10	56.48	74	PASS
38	5150.00	AV	32.64	- 16.90	33.10	48.84	54	PASS
46	5356.04	PK	38.37	- 16.90	33.10	54.57	74	PASS
46	5365.70	AV	28.97	- 16.90	33.10	45.17	54	PASS
151	5700.00	PK	37.90	- 14.70	33.50	56.70	105.23	PASS
159	5925.00	PK	36.43	- 14.70	33.50	55.23	68.23	PASS

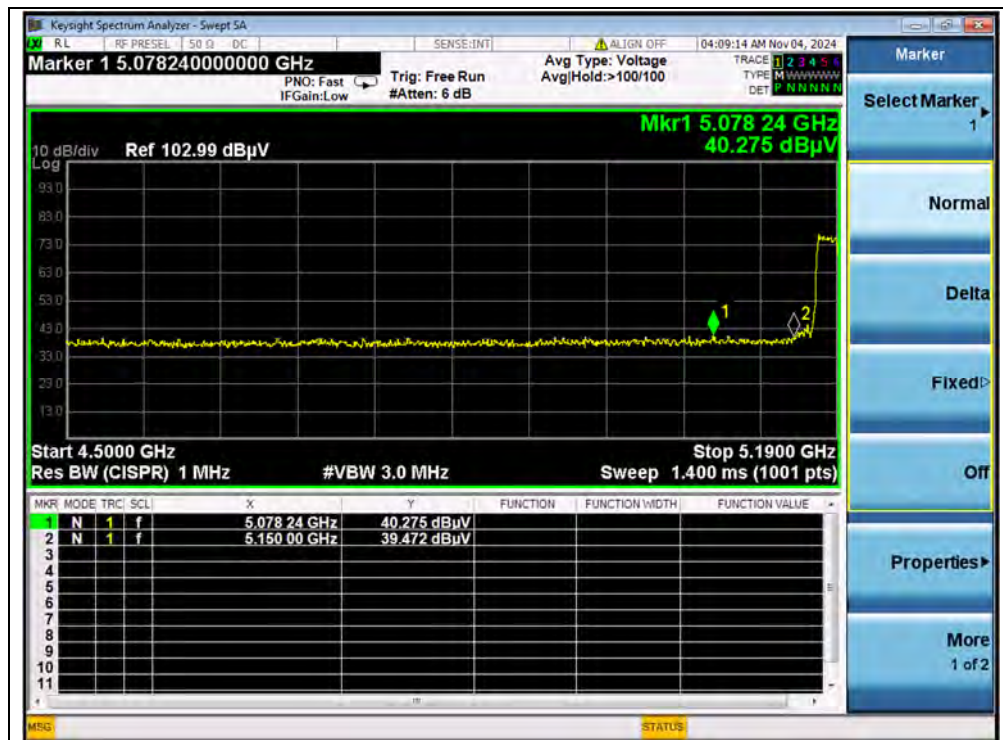


(PEAK, Channel 38, 802.11n (HT40))

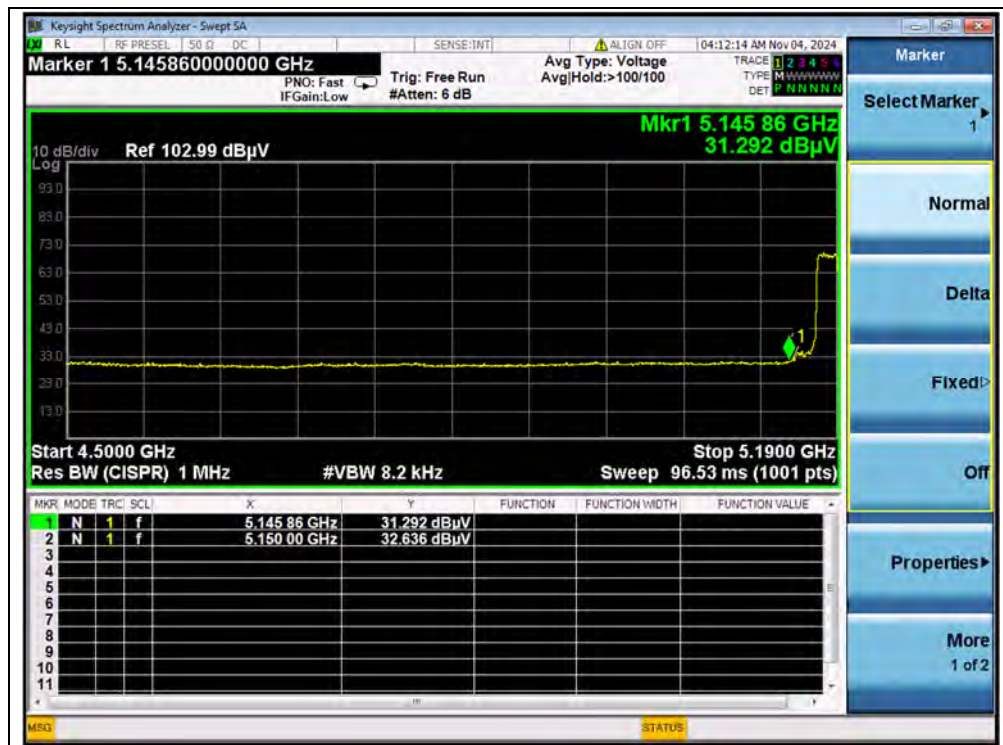


(AVERAGE, Channel 38, 802.11n (HT40))

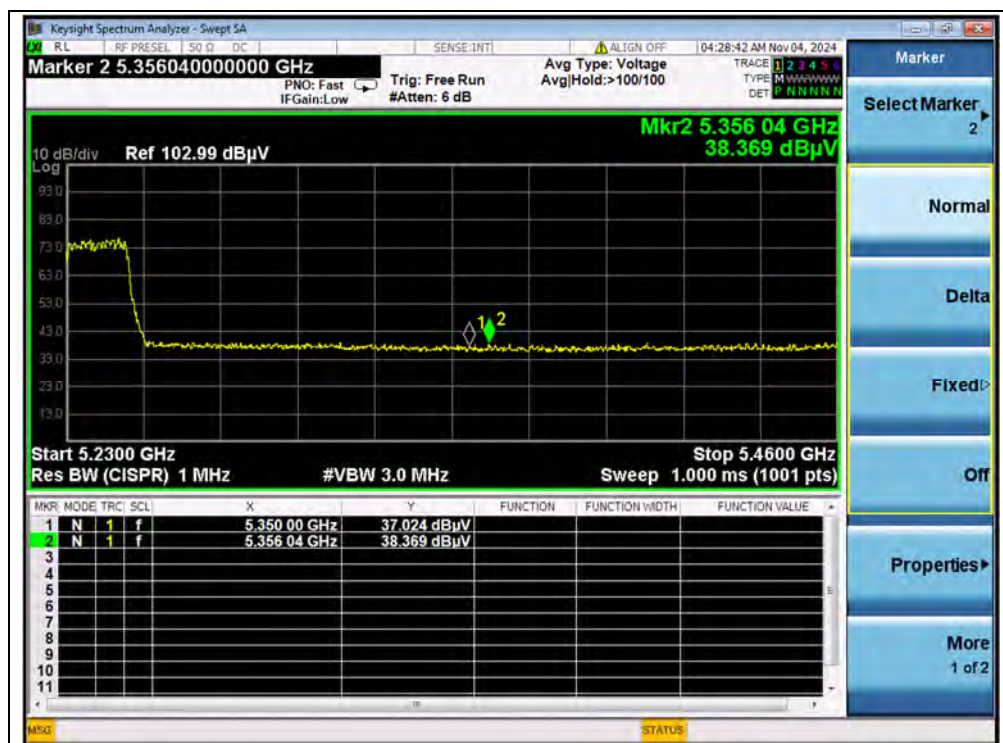


(PEAK, Channel 46, 802.11n (HT40))

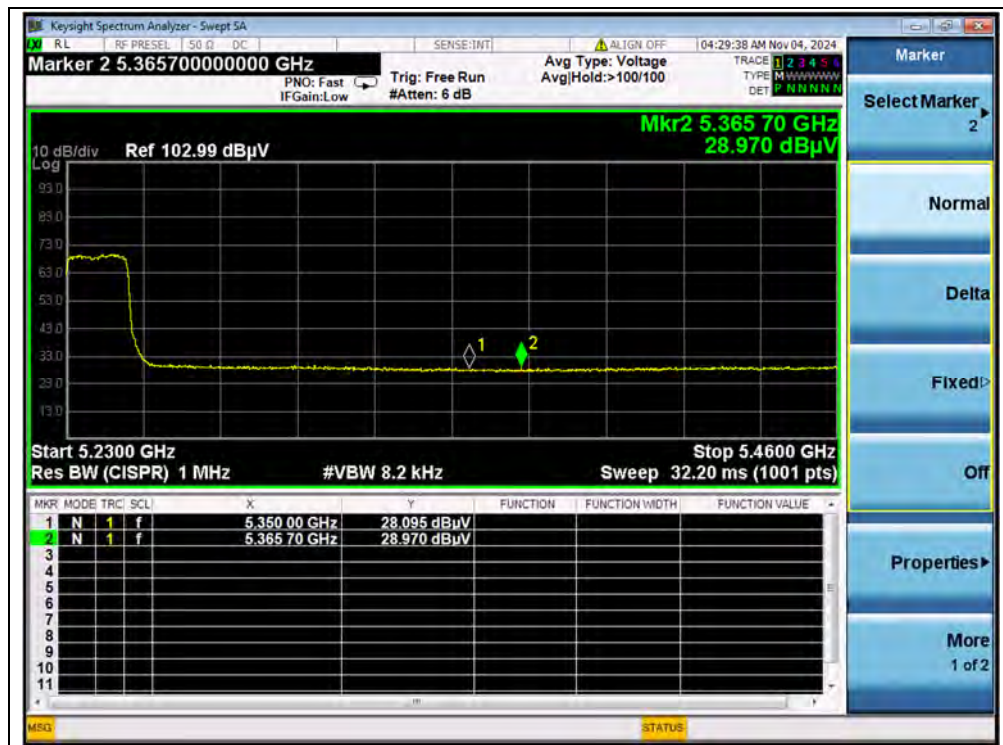

(AVERAGE, Channel 46, 802.11n (HT40))

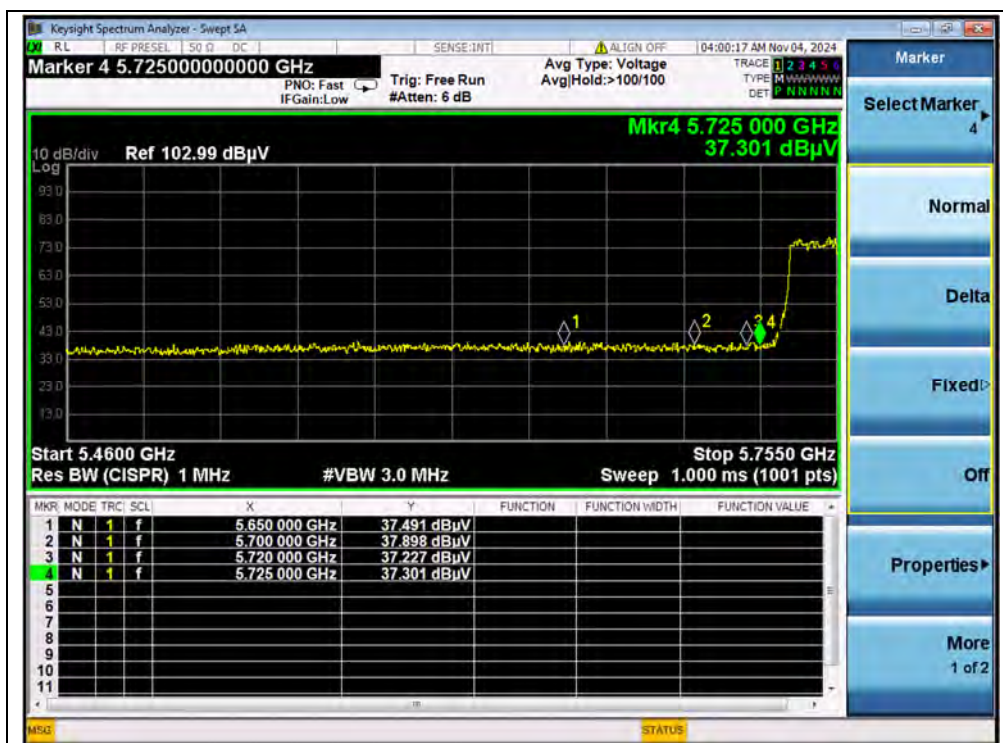

(PEAK, Channel 151, 802.11n (HT40))

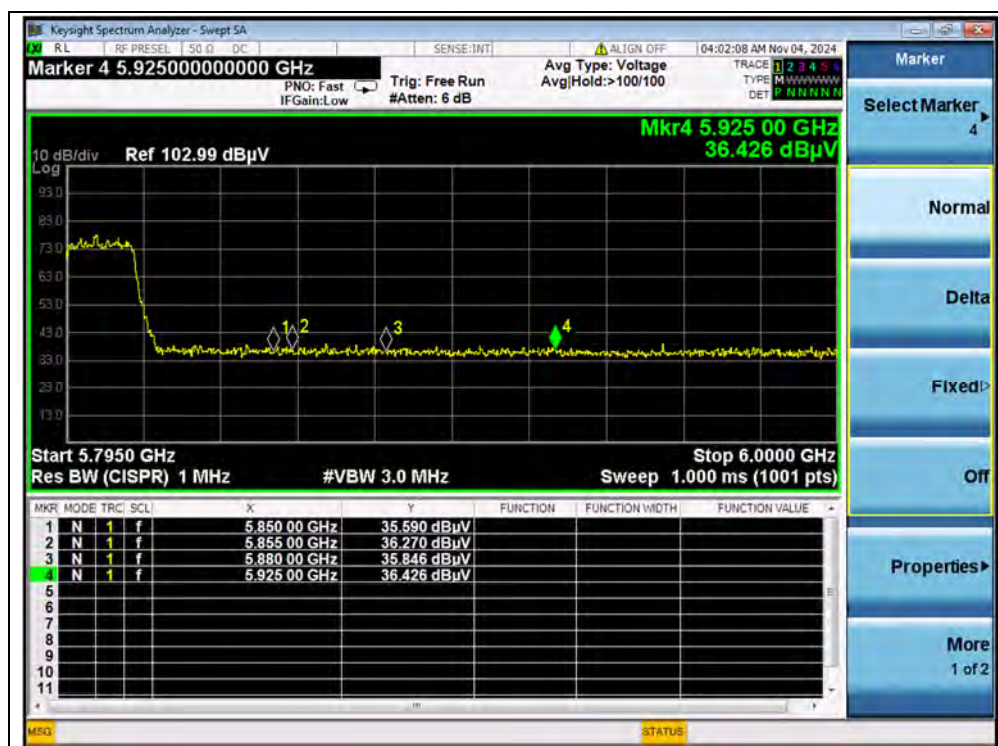


(PEAK, Channel 159, 802.11n (HT40))




802.11ac (VHT80) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
42	5135.00	PK	39.61	-16.90	33.10	55.81	74	PASS
42	5143.40	AV	31.55	-16.90	33.10	47.75	54	PASS
42	5381.60	PK	36.98	-16.90	33.10	53.18	74	PASS
42	5364.20	AV	29.25	-16.90	33.10	45.45	54	PASS
155	5720.00	PK	37.47	-14.70	33.50	56.27	110.83	PASS
155	5850.00	PK	37.71	-14.70	33.50	56.51	122.23	PASS

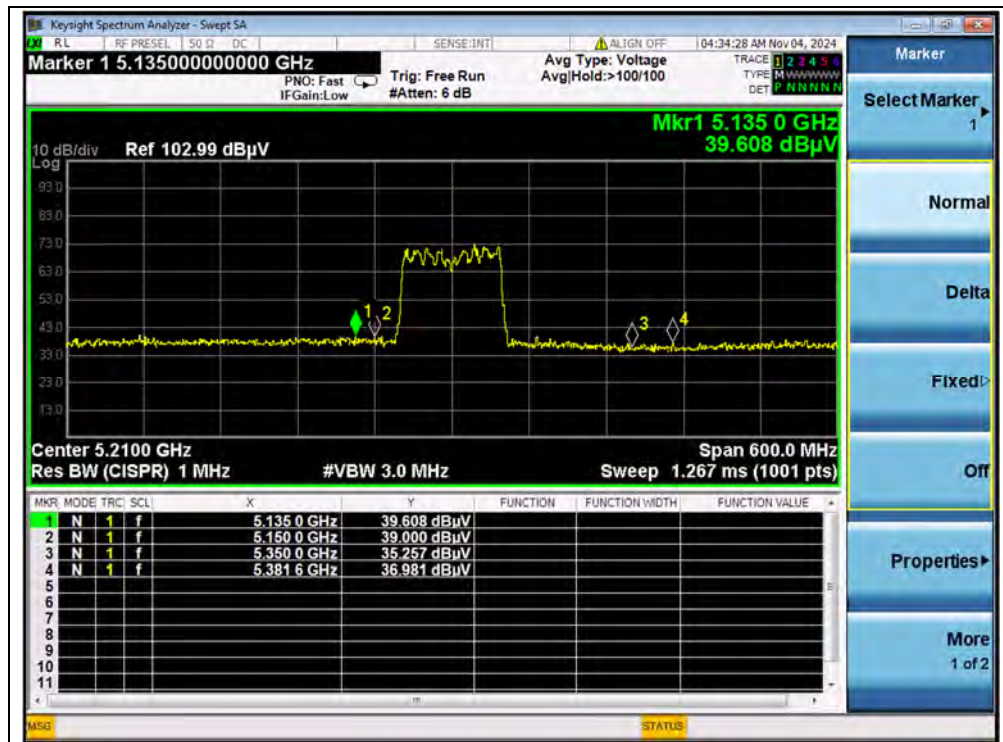

(Channel 42, PEAK, 802.11ac (VHT80))

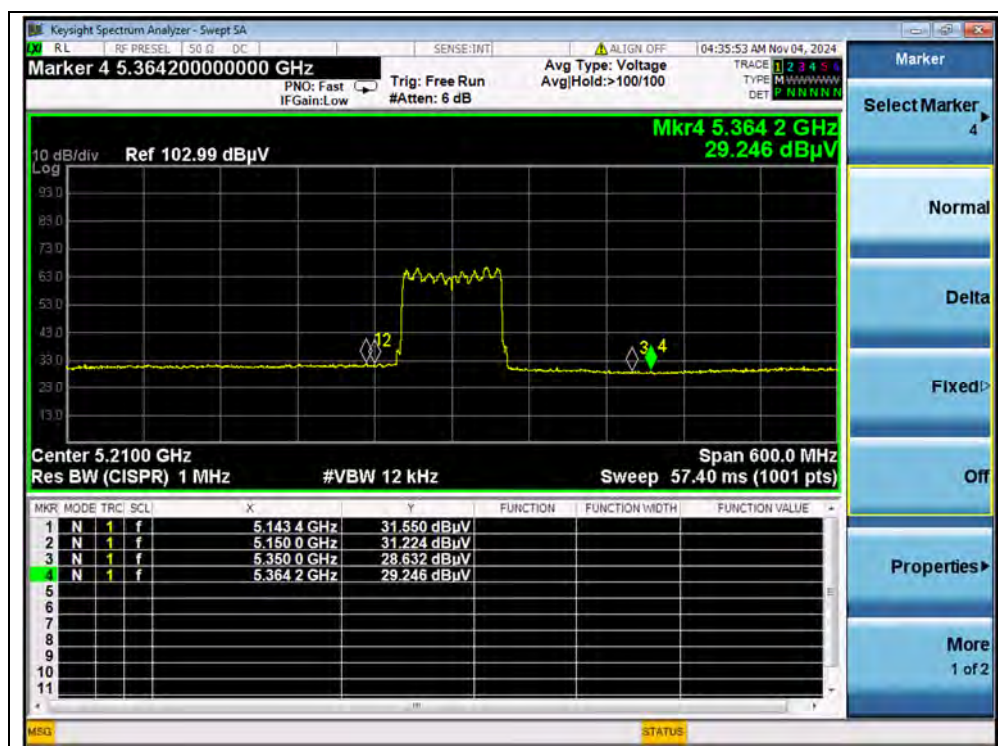

(Channel 42, AVG, 802.11ac (VHT80))

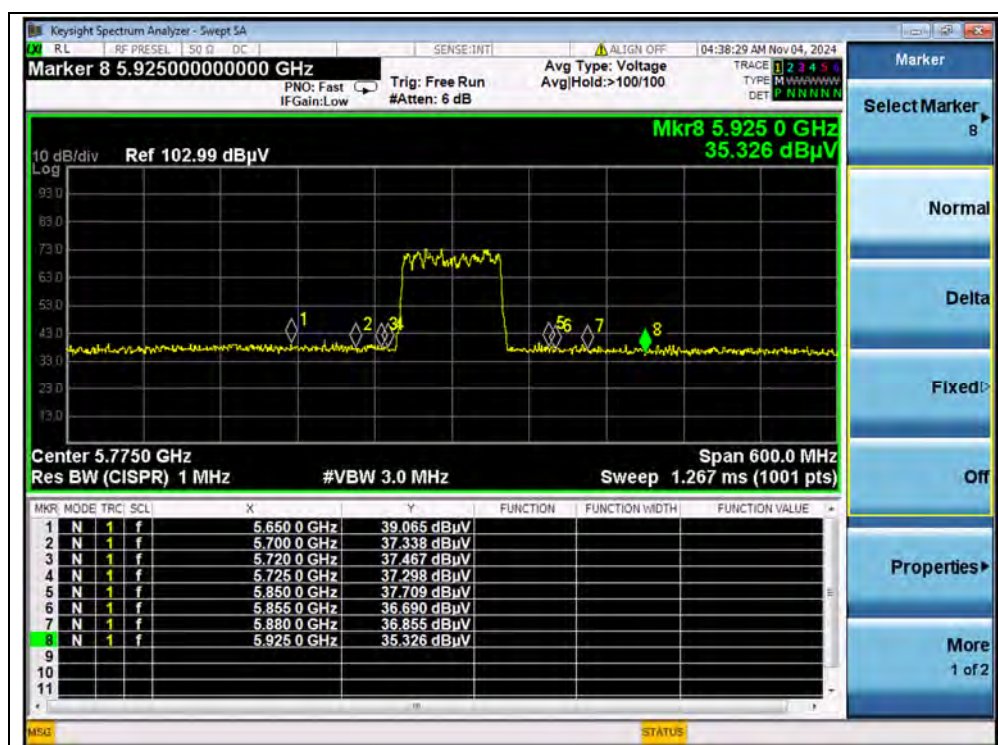

(Channel 155, PEAK, 802.11ac (VHT80))



A.8. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 40GHz harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.




802.11a Mode

Plot for Channel 40

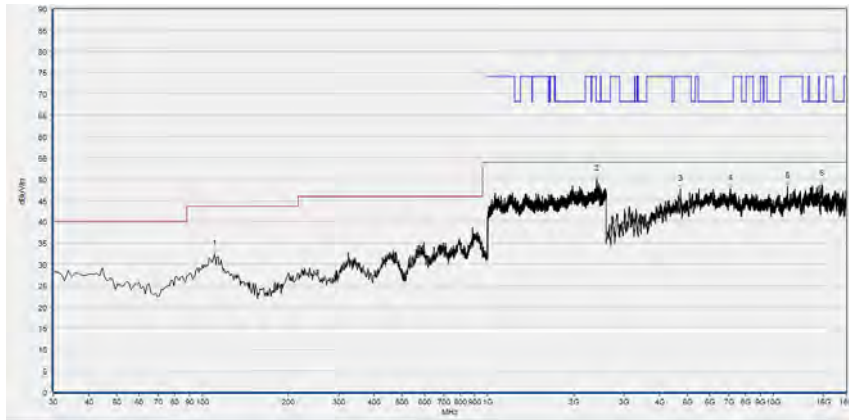

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	32.32	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2405.333	49.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4734.440	47.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7069.080	47.81	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11205.520	48.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14784.480	48.73	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

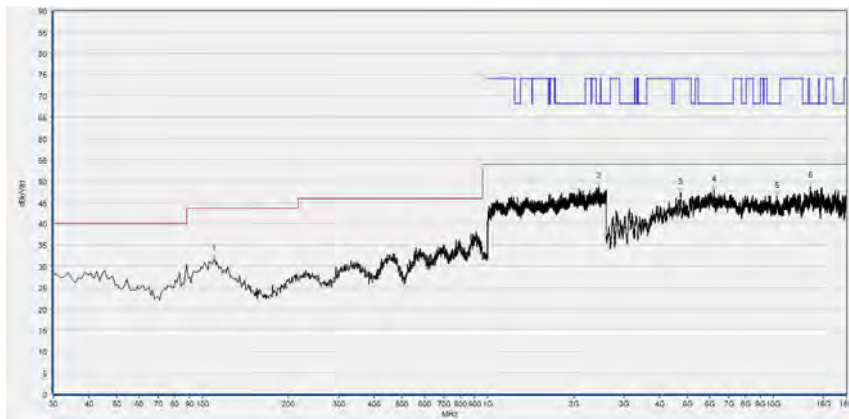


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	31.68	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2451.200	48.62	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4734.440	47.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6182.040	47.96	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10281.520	46.49	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
13457.000	48.85	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 157

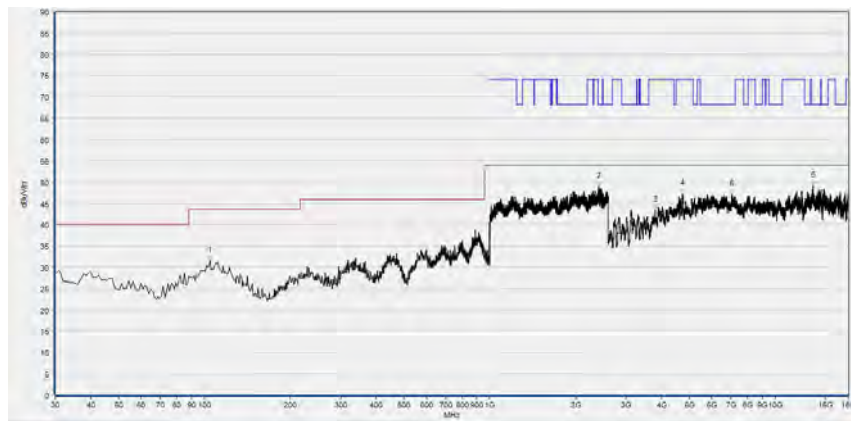

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	31.43	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2410.133	49.00	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
3791.960	43.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4734.440	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7044.440	47.14	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
13589.440	49.10	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

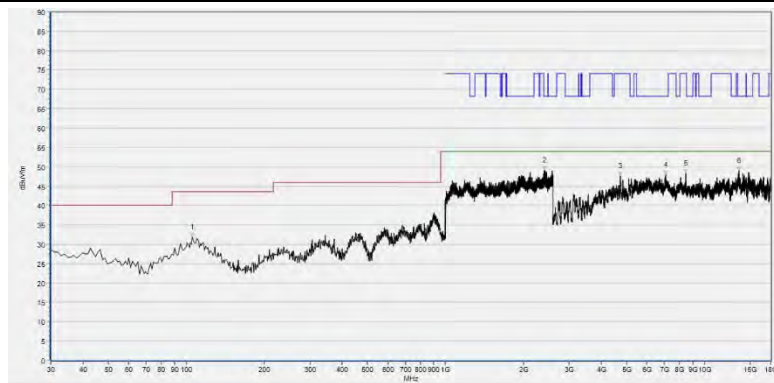

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	31.87	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2402.667	49.07	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4734.440	47.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7059.840	48.01	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8467.400	48.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13592.520	48.89	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT