



FCC AND ISED CERTIFICATION TEST REPORT

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Wireless Subwoofer
Model No.	:	ENCHANT SUB
HVIN	:	SUB2
FCC ID	:	APIENCHANTSUB2
IC	:	6132A-ENCHANTSUB2
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24081429-2E01
Issue Date	:	2024/10/15
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	10
2.3.	Block diagram of EUT configuration for test.....	10
2.4.	Decision of final test mode	10
2.5.	Deviations of test standard	11
2.6.	Test environment conditions.....	11
2.7.	Test laboratory	12
2.8.	Measurement uncertainty	12
3.	Equipment Used During Conductive Test	13
4.	6dB Bandwidth.....	14
4.1.	Block diagram of test setup	14
4.2.	Limits.....	14
4.3.	Test procedure.....	14
4.4.	Test result	15
4.5.	Test graphs	16
5.	99% Bandwidth	28
5.1.	Block diagram of test setup	28
5.2.	Limits.....	28
5.3.	Test procedure.....	28
5.4.	Test result	29
5.5.	Test graphs	30
6.	Conducted Output Power	42
6.1.	Block diagram of test setup	42
6.2.	Limits.....	42
6.3.	Test procedure.....	42
6.4.	Test result average	43
7.	Power Spectral Density	46
7.1.	Block diagram of test setup	46
7.2.	Limits.....	46
7.3.	Test procedure.....	46
7.4.	Test result	47
7.5.	Test graphs	50
8.	Band Edge Compliance (Conducted Method).....	86
8.1.	Block diagram of test setup	86

8.2.	Limits.....	86
8.3.	Test procedure.....	86
8.4.	Test result	87
8.5.	Test graphs.....	88
9.	RF Conducted Spurious Emissions.....	96
9.1.	Block diagram of test setup	96
9.2.	Limits.....	96
9.3.	Test procedure.....	96
9.4.	Test result	97
9.5.	Test graphs.....	98
10.	Duty Cycle.....	134
10.1.	Block diagram of test setup	134
10.2.	Limit.....	134
10.3.	Test procedure.....	134
10.4.	Test result	134
10.5.	Test graphs.....	138
11.	Antenna Requirements	174
11.1.	Limit.....	174
11.2.	Result.....	174
12.	Radiated Emission.....	175
12.1.	Test equipment	175
12.2.	Block diagram of test setup	176
12.3.	Limits.....	177
12.4.	Assistant equipment used for test	179
12.5.	Test procedure.....	179
12.6.	Test result	180
12.7.	Test data	181
13.	Band Edge Compliance	189
13.1.	Test equipment	189
13.2.	Block diagram of test setup	190
13.3.	Limits.....	190
13.4.	Assistant equipment used for test	190
13.5.	Test procedure.....	190
13.6.	Test result	190
13.7.	Test data	191
14.	Power Line Conducted Emissions.....	227
14.1.	Test equipment	227
14.2.	Block diagram of test setup	227

14.3. Limits..... 227

14.4. Assistant equipment used for test 227

14.5. Test procedure..... 227

14.6. Test result 228

14.7. Test data 229

15. Test Setup Photograph..... 231

16. Photos of the EUT 233

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Wireless Subwoofer
Model No.	:	ENCHANT SUB
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24081429-2E01		
Date of Receipt:	2024/08/26	Date of Test:	2024/08/26 - 2024/10/15

Prepared By:**Bobo Chen/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/10/15	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 5.2(a), RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 5.4(d)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 5.2(b)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
8	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: Wireless Subwoofer
Model Number	: ENCHANT SUB
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 100-240V ~ 50/60Hz 100W

Note: This EUT support 2.4 GHz WLAN, 5 GHz WLAN, this report only for 2.4 GHz WLAN.

Radio Technology	: IEEE 802.11b/g/n/ax
Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz IEEE 802.11ax HE20: 2412MHz-2462MHz IEEE 802.11ax HE40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna information			
Antenna Type		FPC	
/		Ant1 gain	Ant2 gain
Max Antenna Gain(dBi)	IEEE 802.11b	1.79	1.76
	IEEE 802.11g	1.79	1.76
	IEEE 802.11n HT20	1.79	1.76
	IEEE 802.11n HT40	1.79	1.76
	IEEE 802.11ax HE20	1.79	1.76
	IEEE 802.11ax HE40	1.79	1.76

Note: This product does not support beamforming.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Operating Mode	Resource Unit	26 Tone(2M)	
IEEE 802.11ax(HE20)	Specific Resource Unit	0	
		1	
		2	
		3	
		4	
		5	
		6	
		7	
		8	
	Resource Unit	52 Tone(4M)	
	Specific Resource Unit	37	
		38	
		39	
		40	
	Resource Unit	106 Tone(8M)	
	Specific Resource Unit	53	
		54	
	Resource Unit	242 Tone(20M)	
	Specific Resource Unit	61	
Operating Mode	Resource Unit	26 Tone(2M)	
IEEE 802.11ax(HE40)	Specific Resource Unit	0	9
		1	10
		2	11
		3	12
		4	13
		5	14
		6	15
		7	16
		8	17
	Resource Unit	52 Tone(4M)	
	Specific Resource Unit	37	41
		38	42
		39	43
		40	44
	Resource Unit	106 Tone(8M)	
	Specific Resource Unit	53	55
		54	56
	Resource Unit	242 Tone(20M)	

	Specific Resource Unit	61	62
	Resource Unit	484 Tone(40M)	
	Specific Resource Unit	65	


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
AC Cable	Harman	N/A	Length: 1.50m, unshielded

2.3. Block diagram of EUT configuration for test

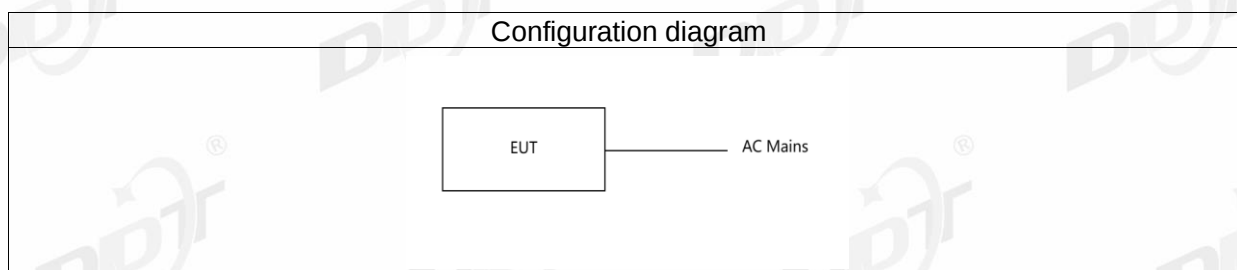

2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: adb.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information					
Mode	Setting Tx Power		Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	Default	Default	1	LCH: CH1	2412
	Default	Default	1	MCH: CH6	2437
	Default	Default	1	HCH: CH11	2462
IEEE 802.11g	10	10	6	LCH: CH1	2412
	10	10	6	MCH: CH6	2437
	10	10	6	HCH: CH11	2462
IEEE 802.11n HT20	8	8	MCS 8	LCH: CH1	2412
	8	8	MCS 8	MCH: CH6	2437
	8	8	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	10	10	MCS 8	LCH: CH3	2422
	10	10	MCS 8	MCH: CH6	2437
	10	10	MCS 8	HCH: CH9	2452
IEEE 802.11ax HE20	SU: 8 RU: Default	SU: 8 RU: Default	MCS 0	LCH: CH1	2412
	SU: 8 RU: Default	SU: 8 RU: Default	MCS 0	MCH: CH6	2437
	SU: 8 RU: Default	SU: 8 RU: Default	MCS 0	HCH: CH11	2462
IEEE 802.11ax HE40	SU: 10 RU: Default	SU: 10 RU: Default	MCS 0	LCH: CH3	2422
	SU: 10 RU: Default	SU: 10 RU: Default	MCS 0	MCH: CH6	2437
	SU: 10 RU: Default	SU: 10 RU: Default	MCS 0	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 3#)				
SIGNAL ANALYZER	R&S	FSV40	101407	2025/07/08
Wideband Radio Communication Tester	R&S	CMW500	117491	2025/03/31
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	2025/07/08
MXG Vector Signal Generator	Agilent	N5182A	MY48180912	2025/03/31
RF Control Unit	Tonscend	JS0806-2	20C8060230	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

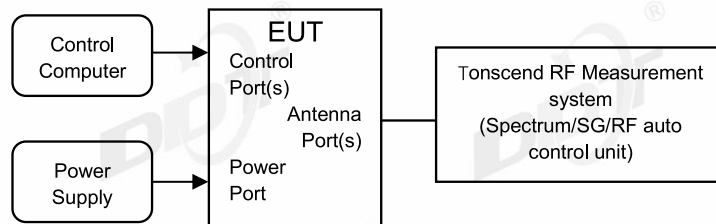

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result

Test Engineer:	Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.6-27.5℃,42.9-48.7%RH	Test Date:	2024.09.05-2024.09.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24081429-001


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	7.12	2408.44	2415.56	0.5	PASS
	Ant2	2412	8.08	2407.96	2416.04	0.5	PASS
	Ant1	2437	8.08	2432.96	2441.04	0.5	PASS
	Ant2	2437	8.04	2433.00	2441.04	0.5	PASS
	Ant1	2462	8.08	2457.96	2466.04	0.5	PASS
	Ant2	2462	8.08	2457.96	2466.04	0.5	PASS
11G	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
	Ant2	2412	15.08	2404.48	2419.56	0.5	PASS
	Ant1	2437	15.80	2429.08	2444.88	0.5	PASS
	Ant2	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant1	2462	15.48	2454.08	2469.56	0.5	PASS
	Ant2	2462	15.48	2454.08	2469.56	0.5	PASS
11N20MIMO	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
	Ant2	2412	15.72	2404.44	2420.16	0.5	PASS
	Ant1	2437	15.44	2429.44	2444.88	0.5	PASS
	Ant2	2437	16.52	2428.84	2445.36	0.5	PASS
	Ant1	2462	15.44	2454.44	2469.88	0.5	PASS
	Ant2	2462	17.52	2453.24	2470.76	0.5	PASS
11N40MIMO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS
11AX20MIMO	Ant1	2412	17.08	2404.00	2421.08	0.5	PASS
	Ant2	2412	18.24	2403.00	2421.24	0.5	PASS
	Ant1	2437	16.68	2428.24	2444.92	0.5	PASS
	Ant2	2437	18.60	2427.64	2446.24	0.5	PASS
	Ant1	2462	18.44	2452.84	2471.28	0.5	PASS
	Ant2	2462	17.28	2453.24	2470.52	0.5	PASS
11AX40MIMO	Ant1	2422	37.28	2403.44	2440.72	0.5	PASS
	Ant2	2422	37.04	2403.52	2440.56	0.5	PASS
	Ant1	2437	37.52	2418.36	2455.88	0.5	PASS
	Ant2	2437	36.80	2418.84	2455.64	0.5	PASS
	Ant1	2452	36.88	2433.52	2470.40	0.5	PASS
	Ant2	2452	35.20	2434.40	2469.60	0.5	PASS

4.5. Test graphs

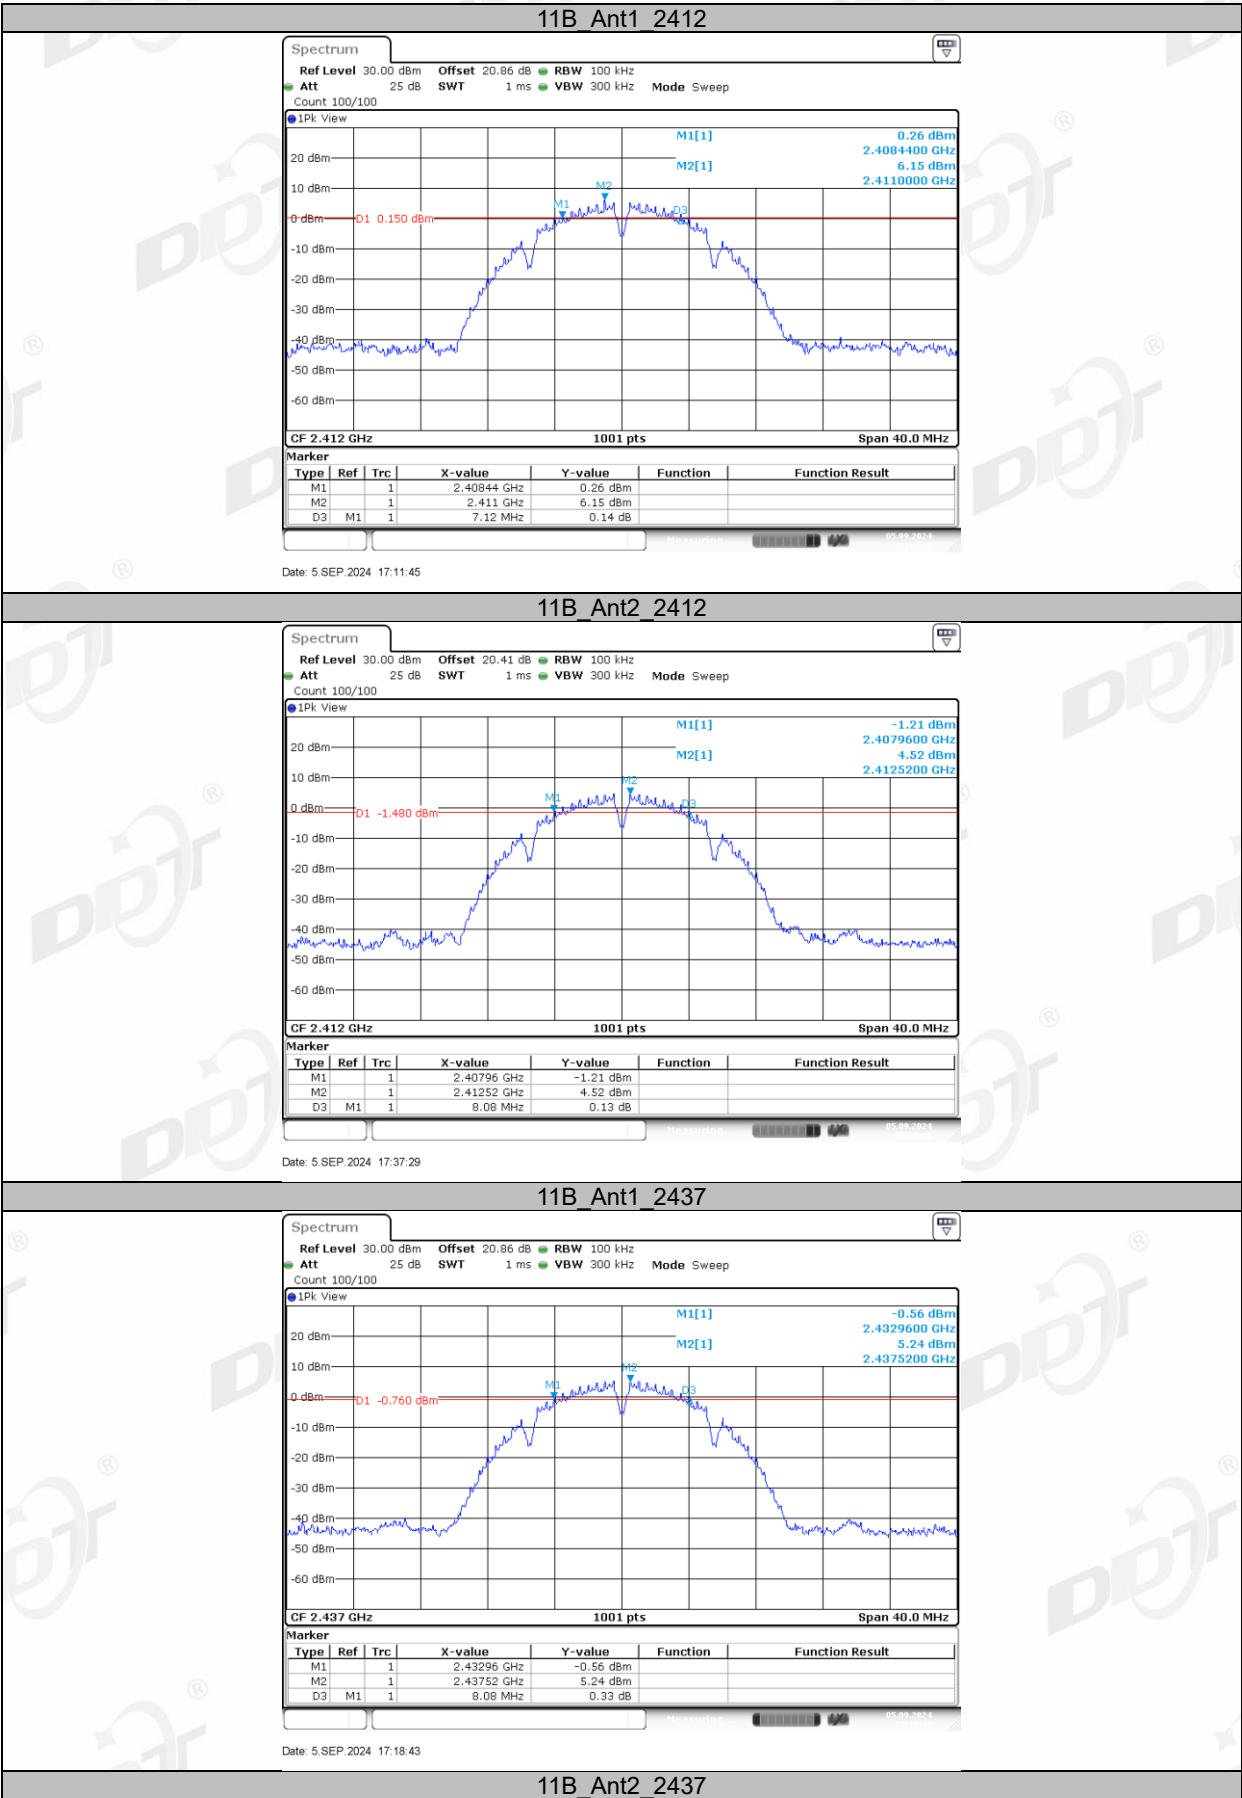


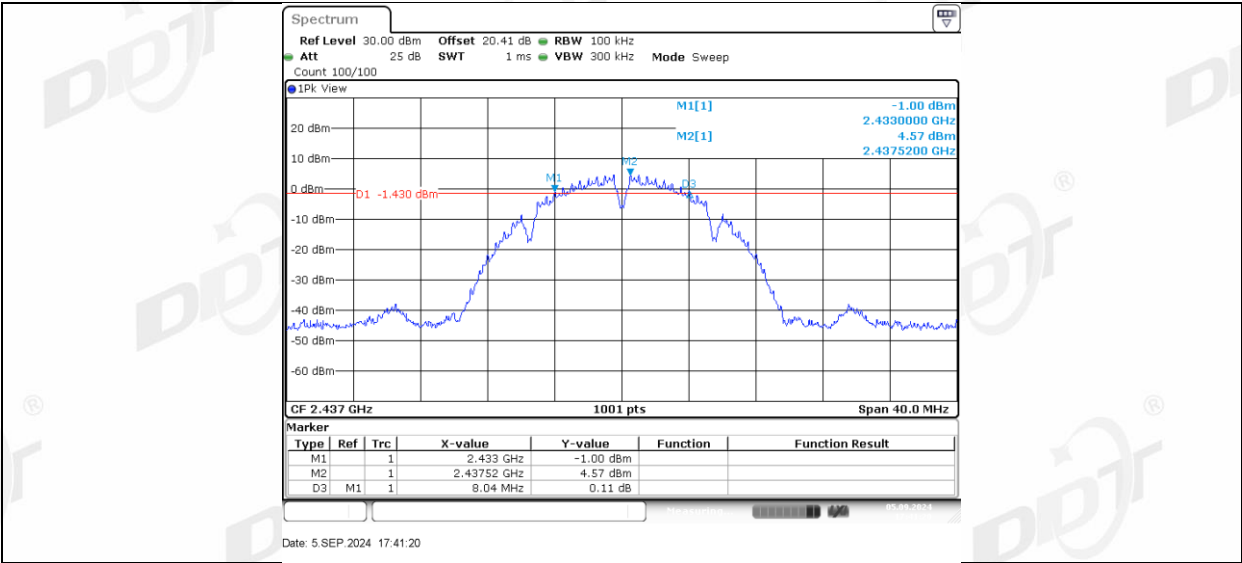


11B_Ant1_2462

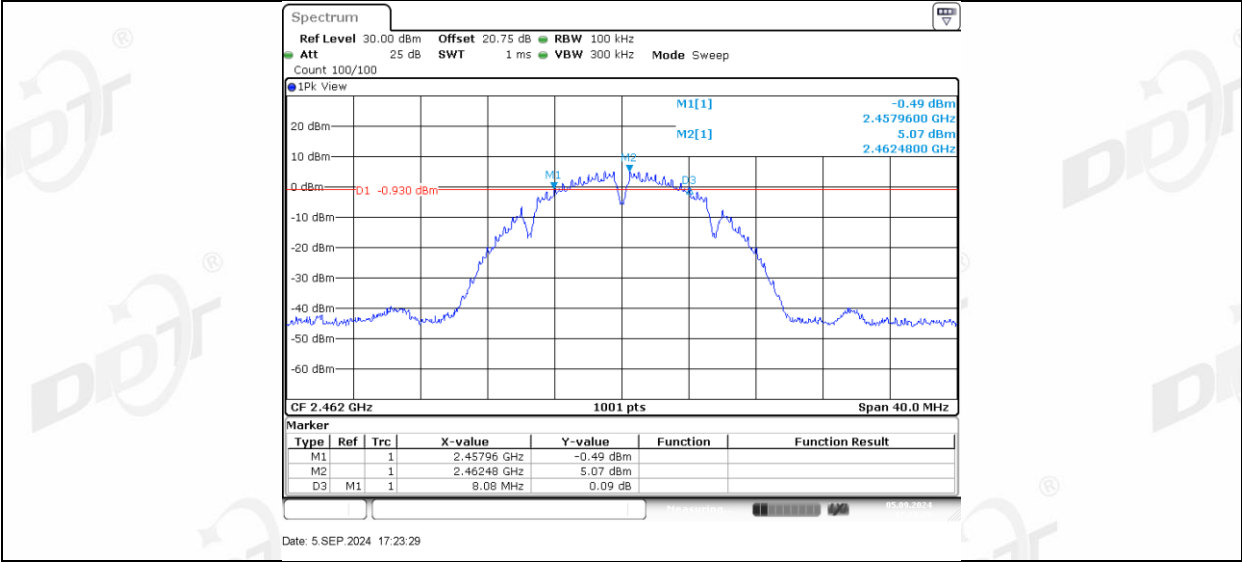


11B_Ant2_2462

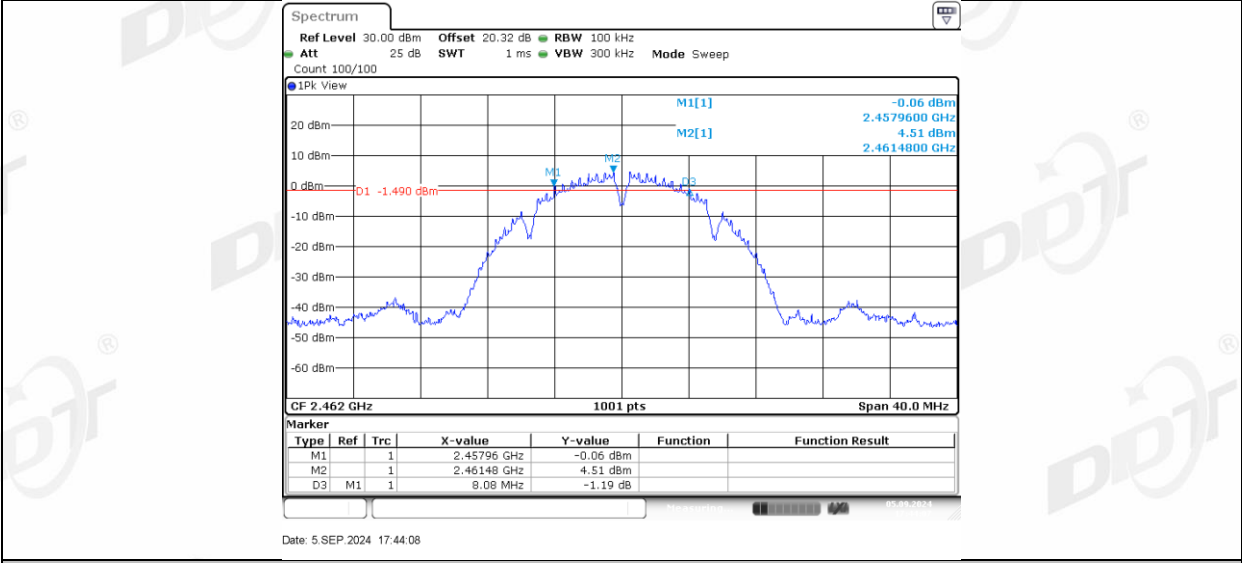


11G_Ant1_2412

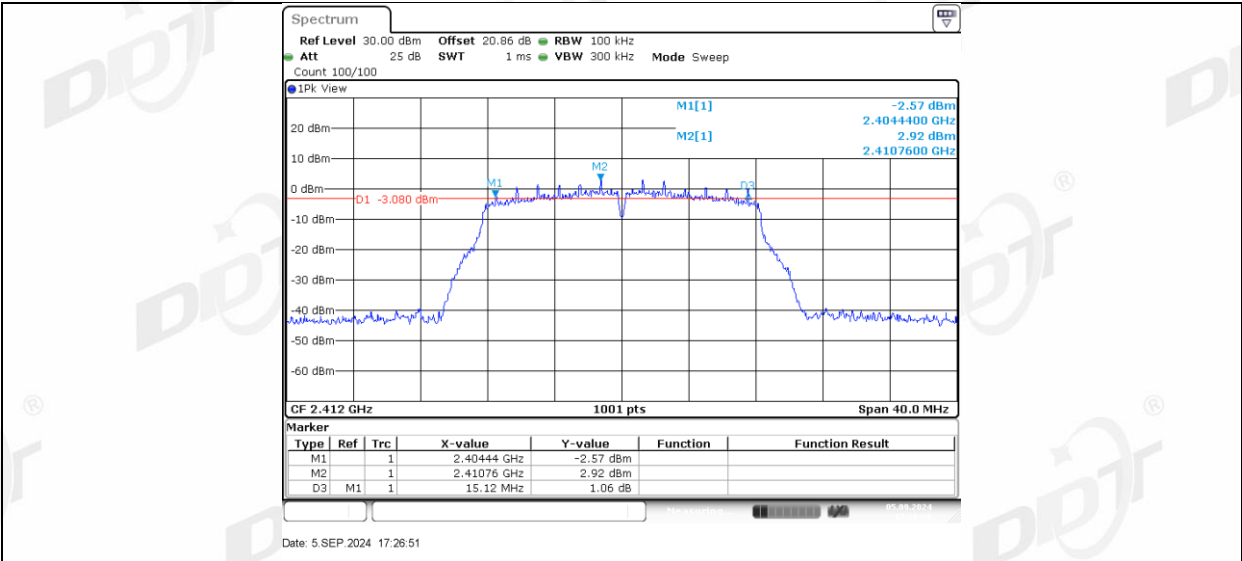


11G Ant2_2412

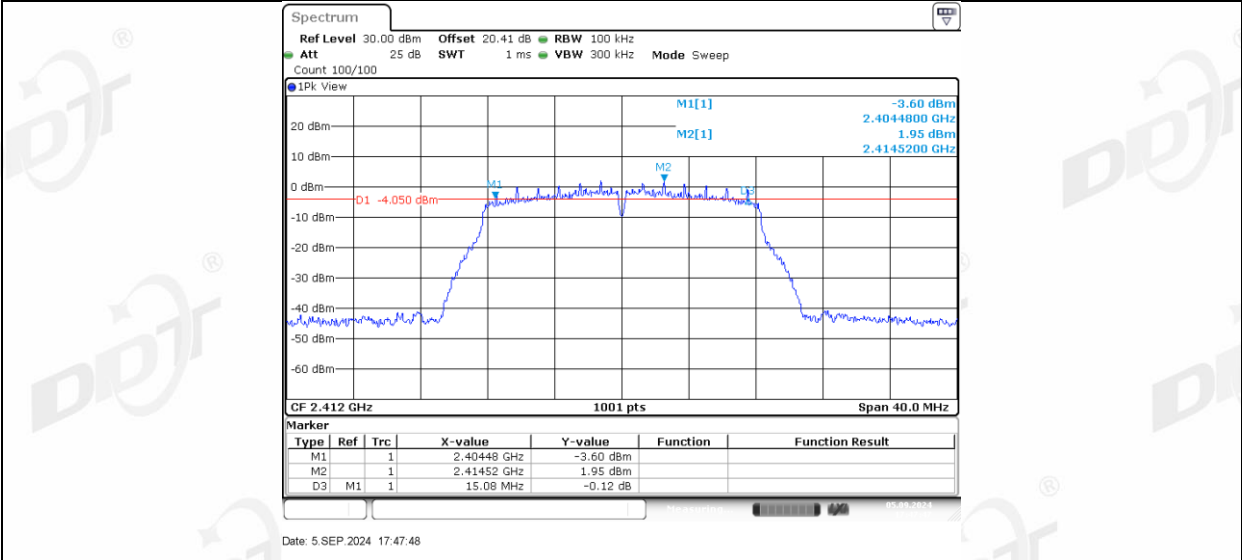


11G Ant1_2437

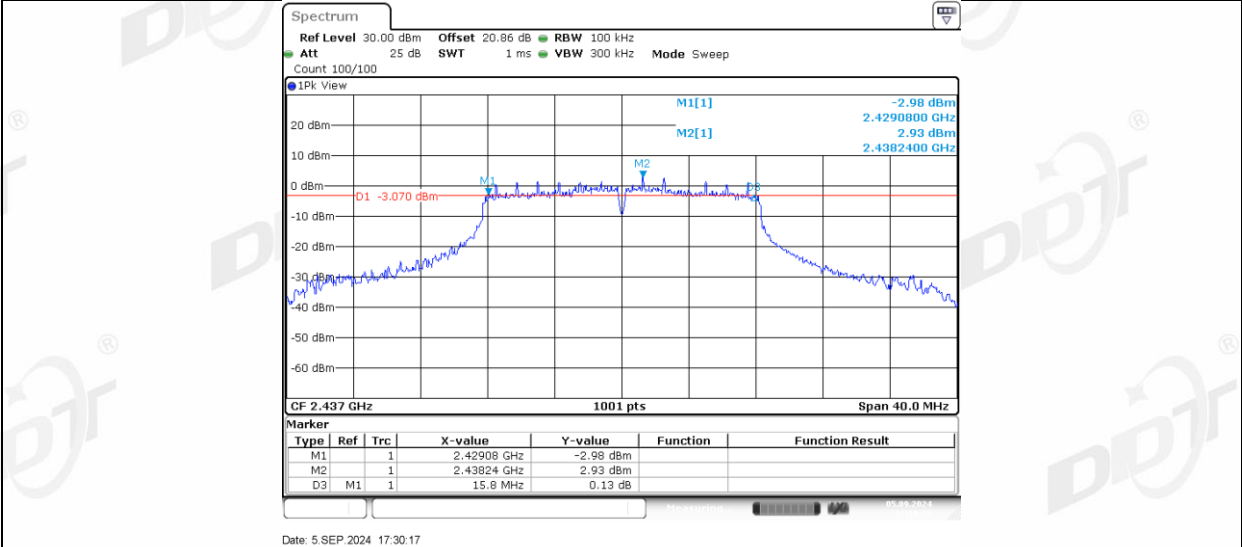


11G Ant2_2437

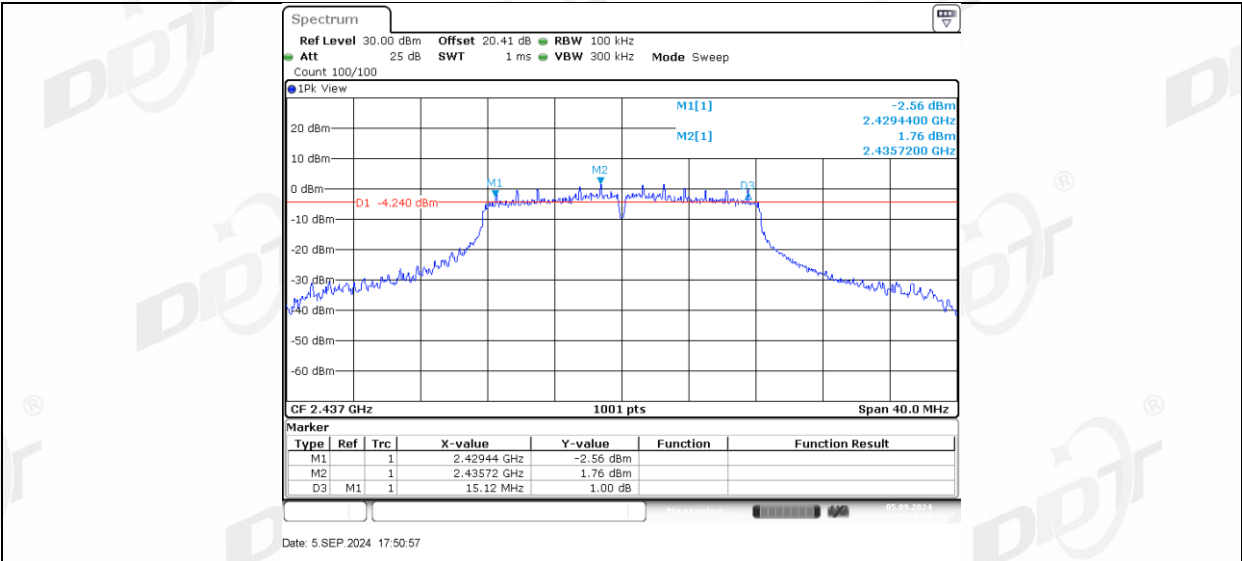


11G Ant1_2462

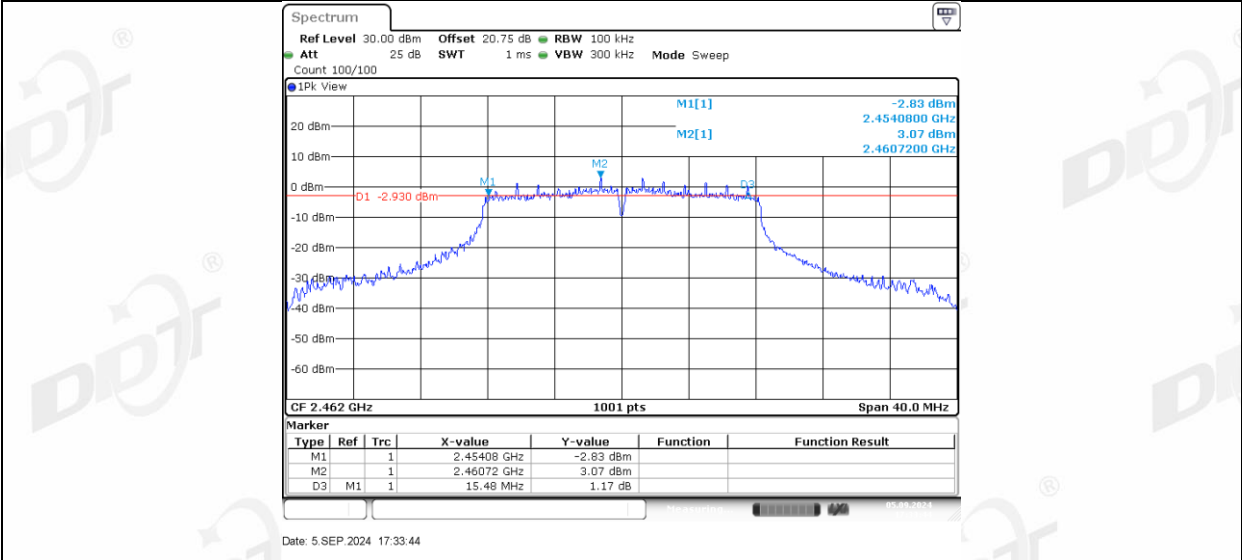


11G Ant2_2462

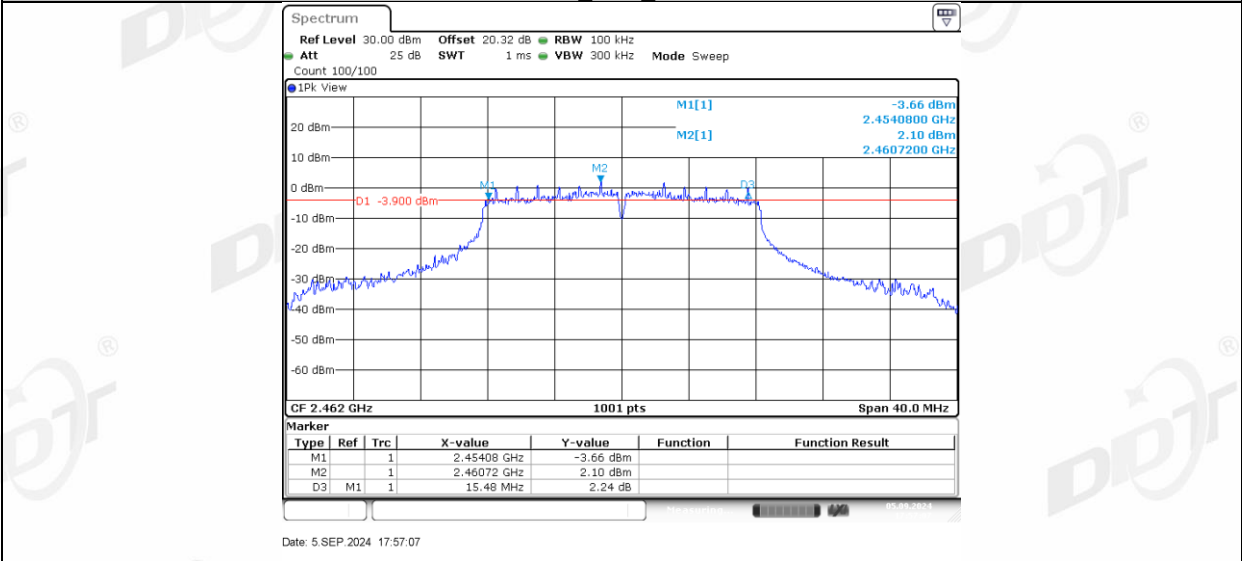


11N20MIMO_Ant1_2412

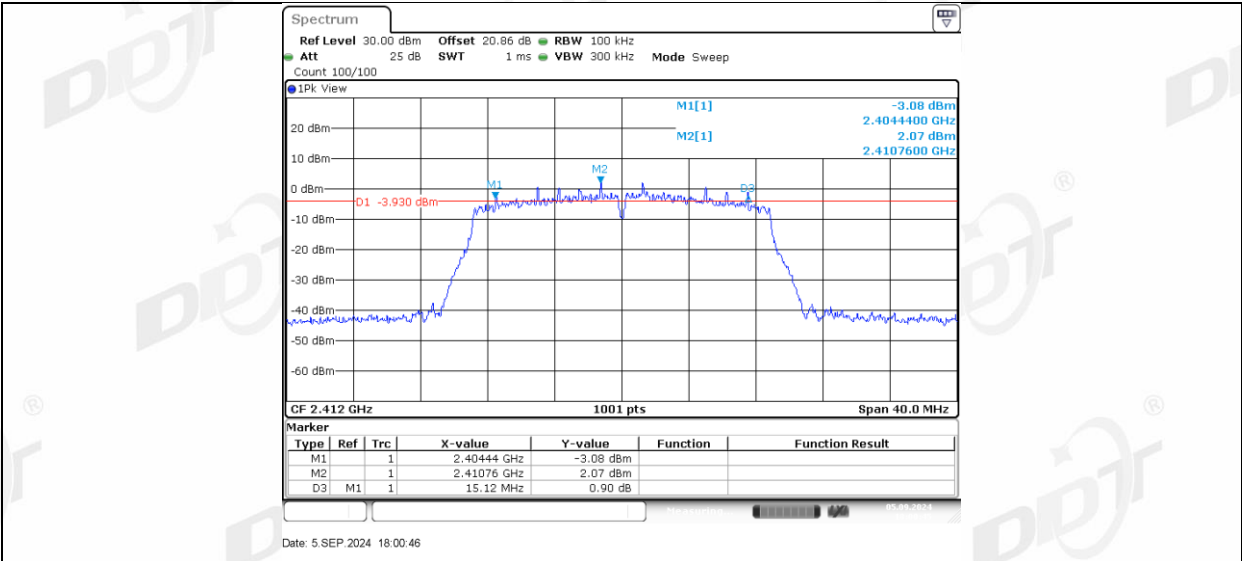


11N20MIMO_Ant2_2412

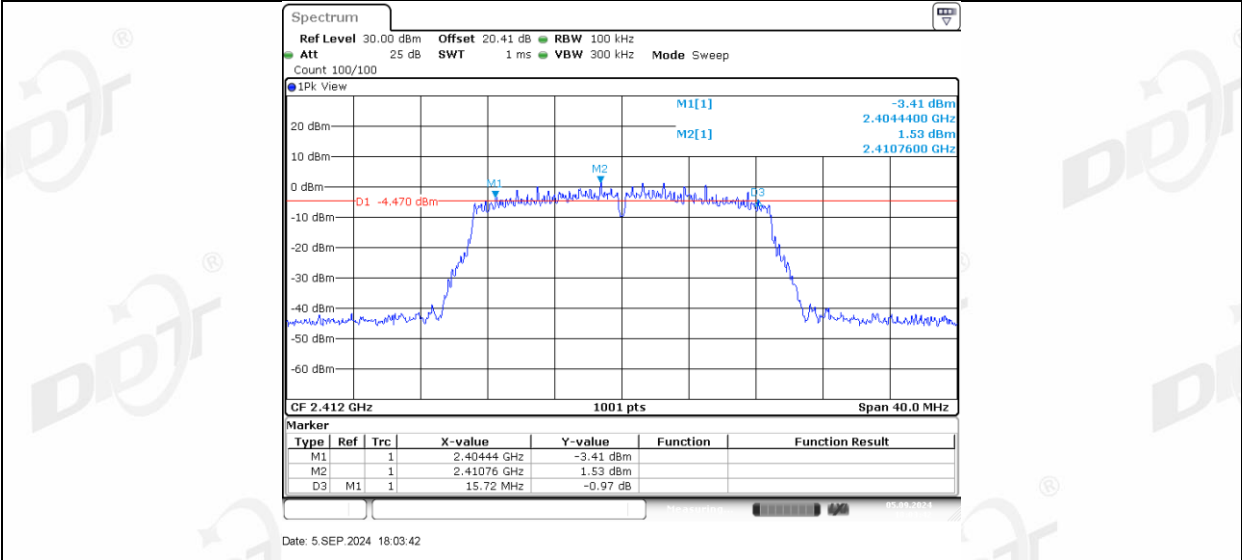


11N20MIMO_Ant1_2437

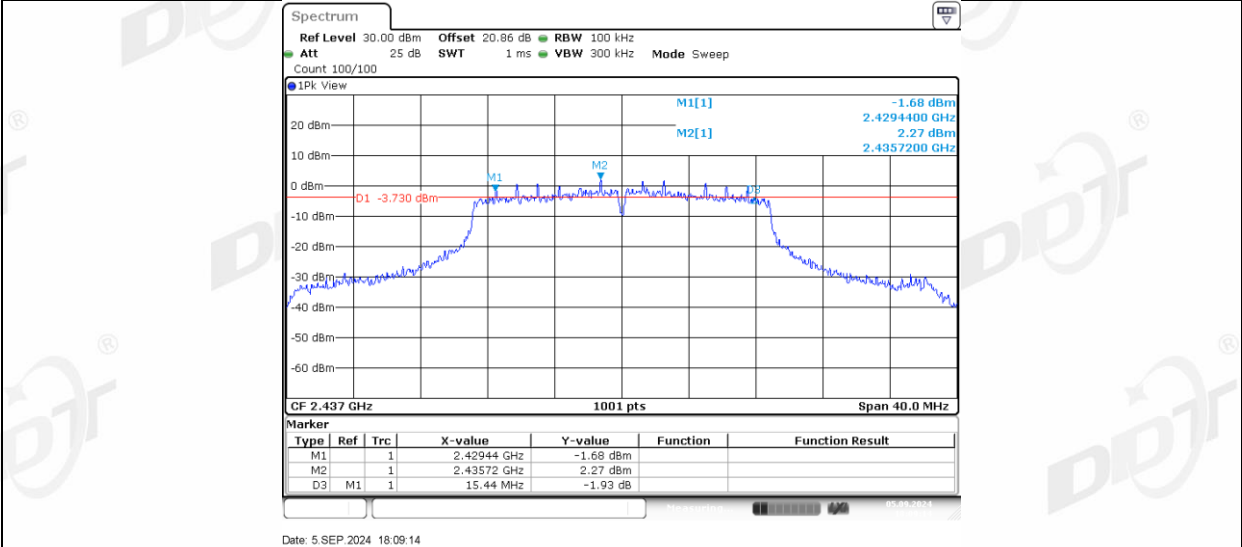


11N20MIMO_Ant2_2437

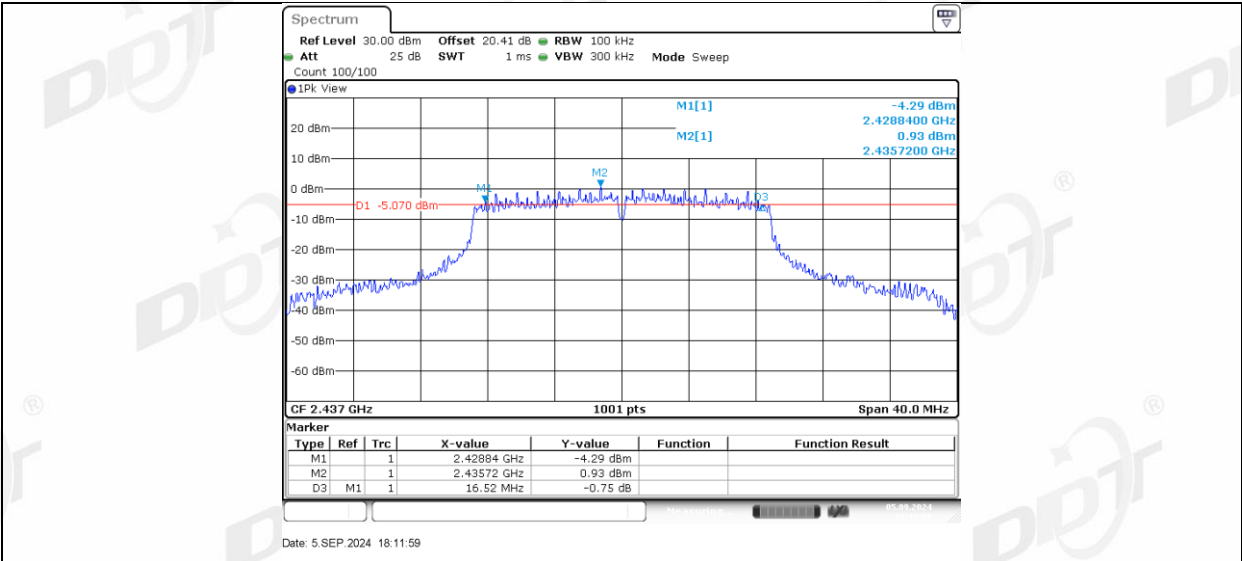


11N20MIMO_Ant1_2462

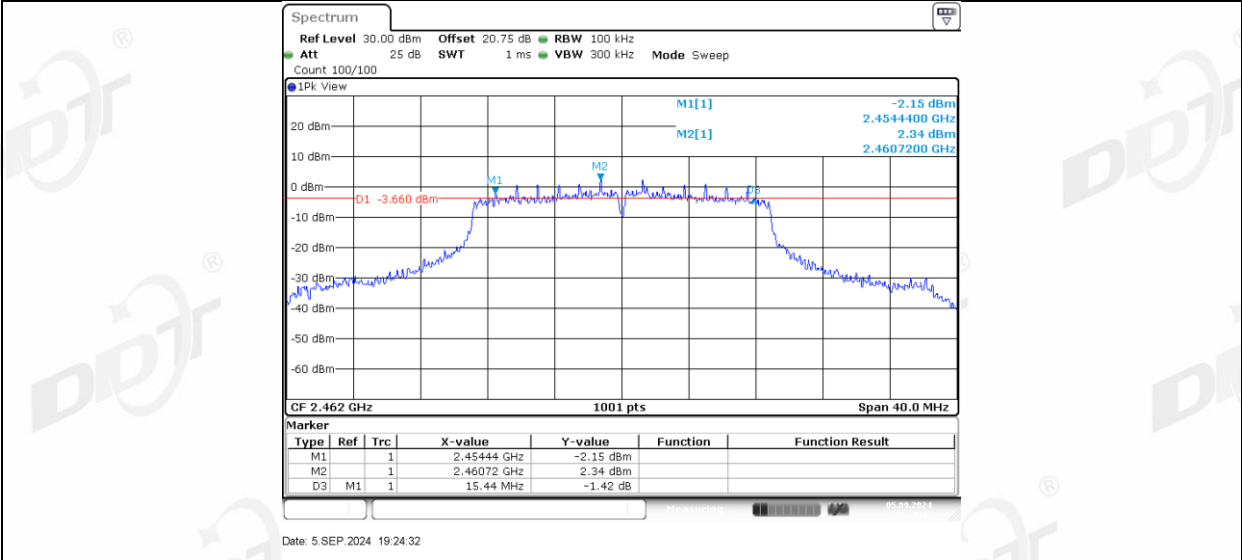


11N20MIMO_Ant2_2462

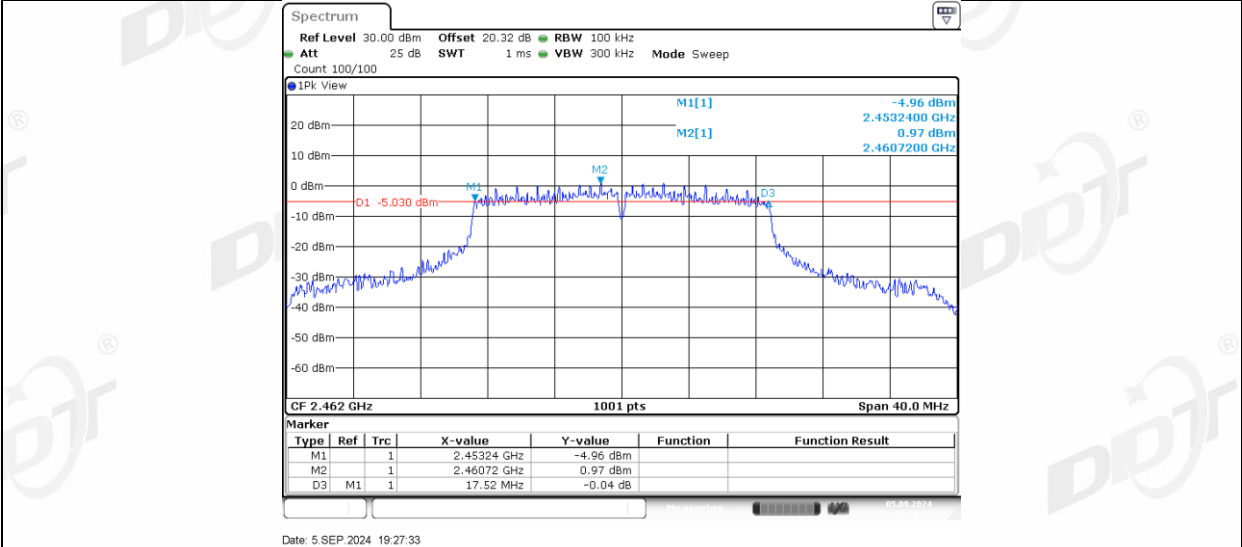


11N40MIMO_Ant1_2422

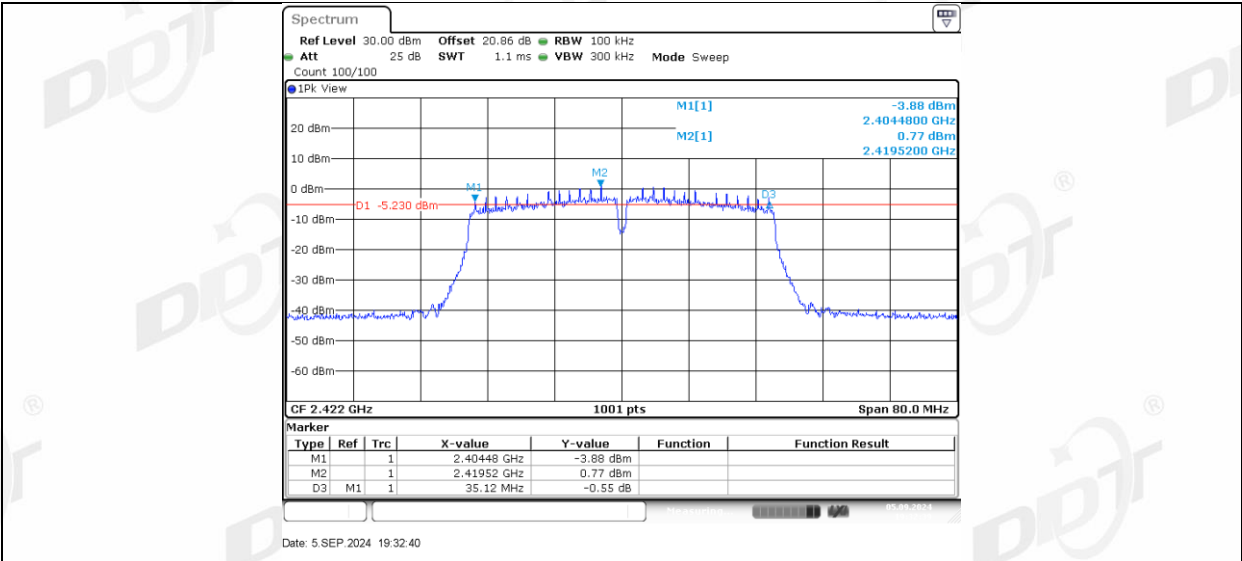


11N40MIMO_Ant2_2422

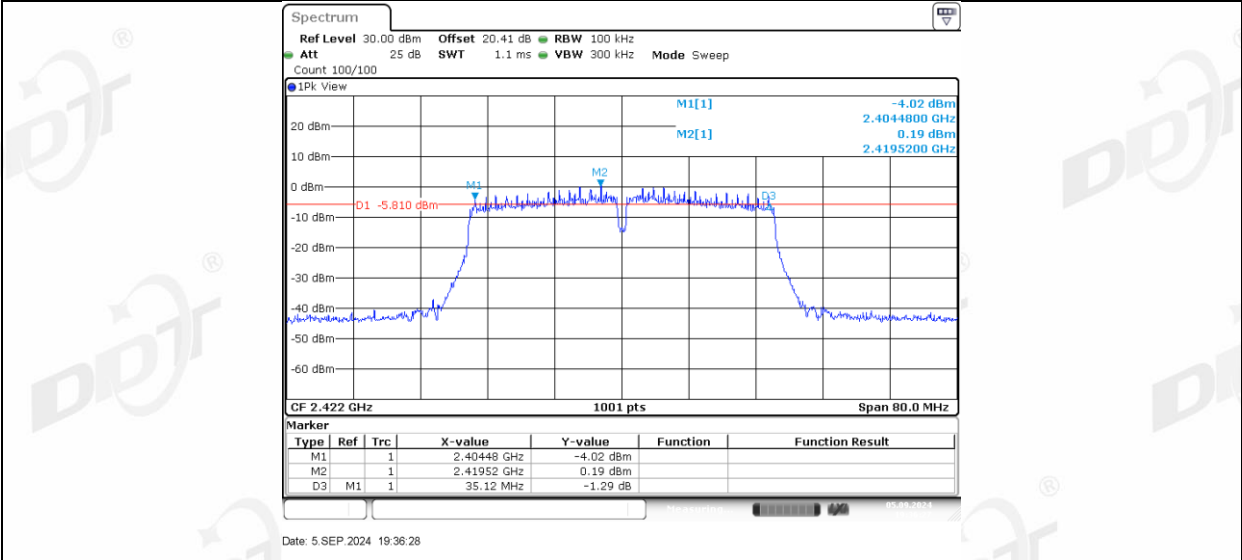


11N40MIMO_Ant1_2437

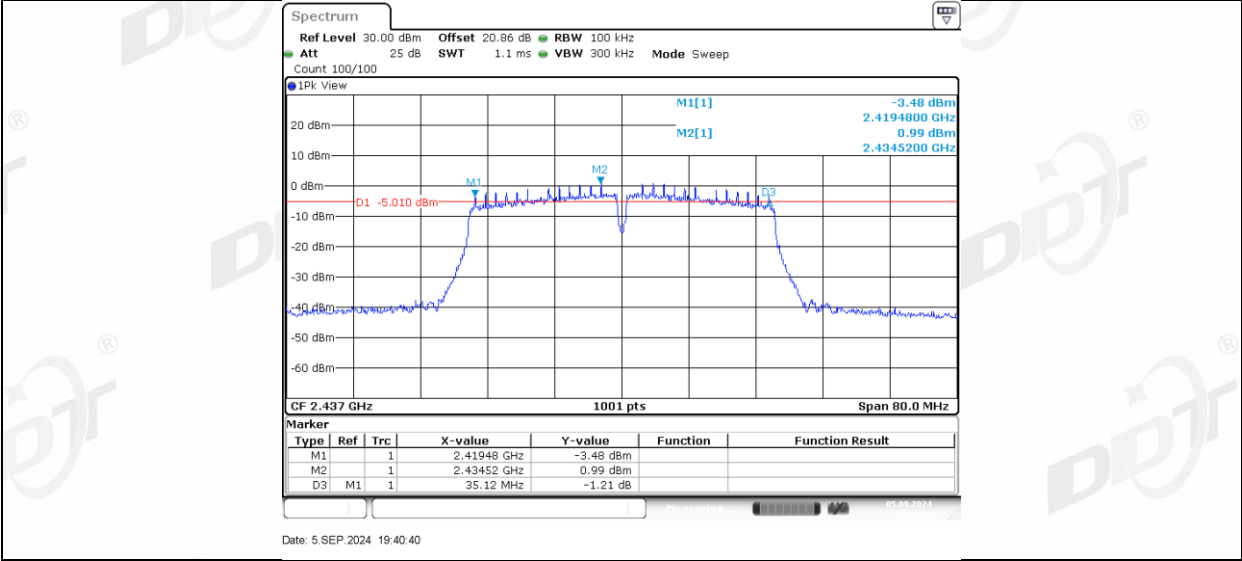


11N40MIMO_Ant2_2437

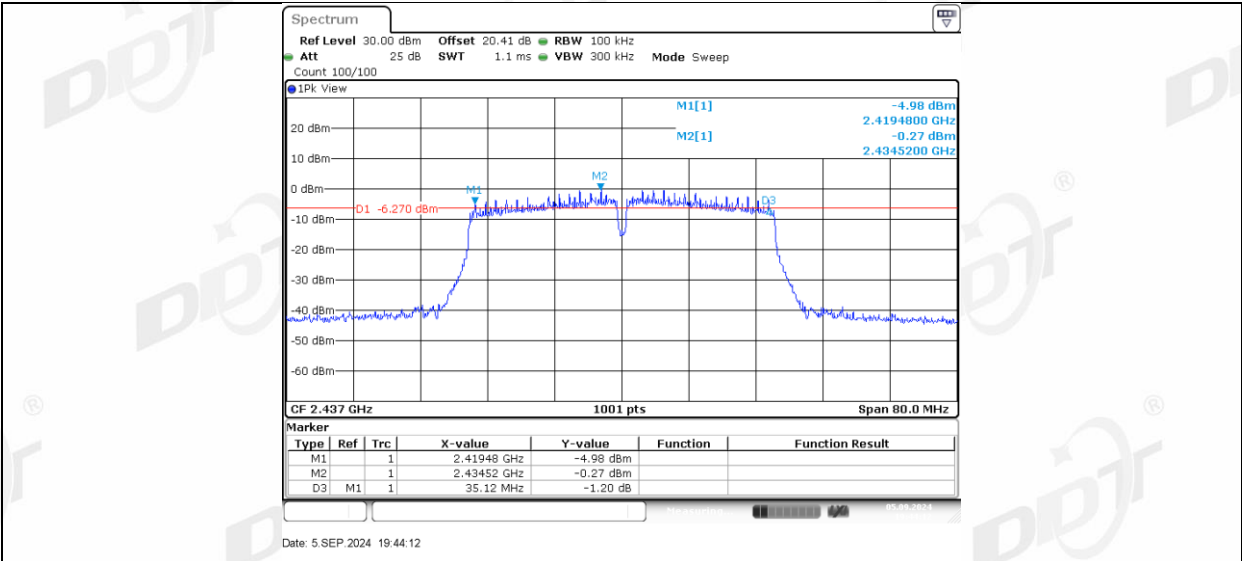


11N40MIMO_Ant1_2452

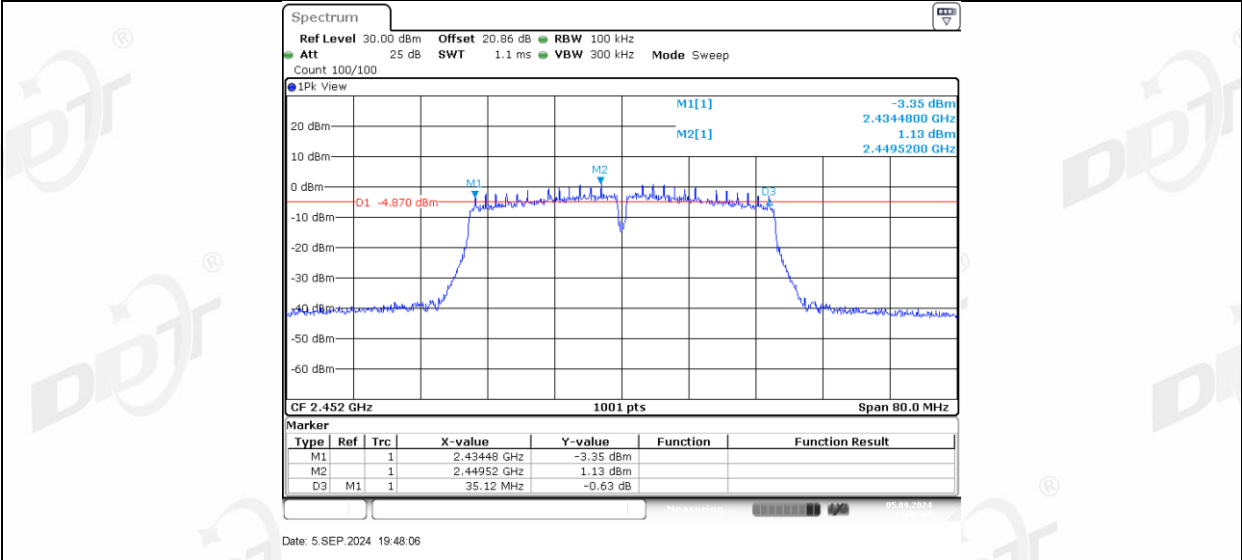


11N40MIMO_Ant2_2452

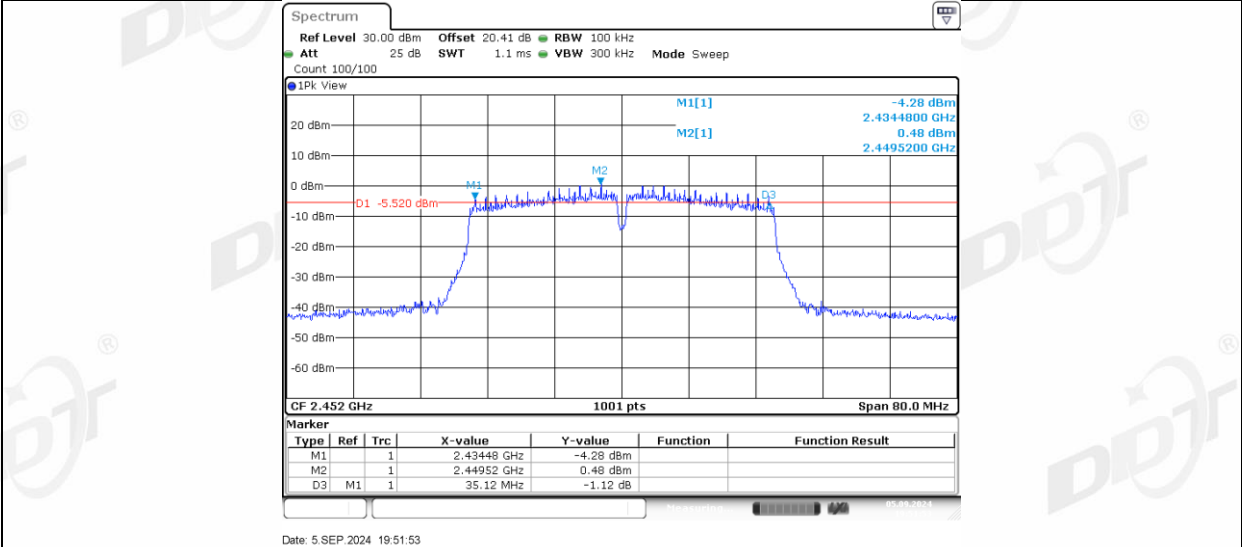


11AX20MIMO_Ant1_2412

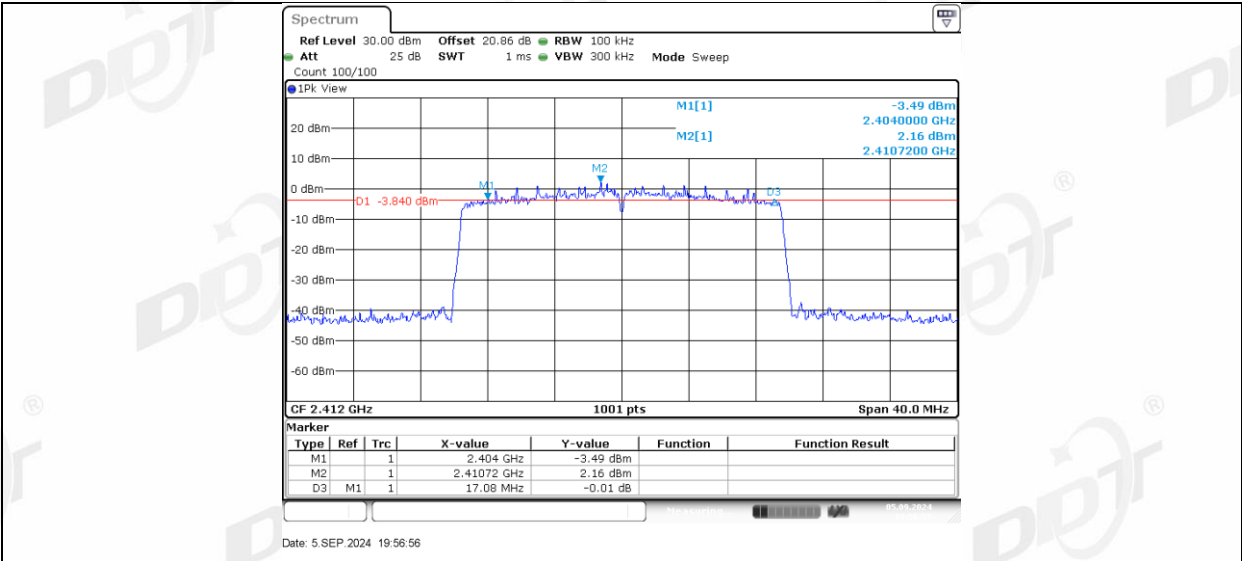


11AX20MIMO_Ant2_2412

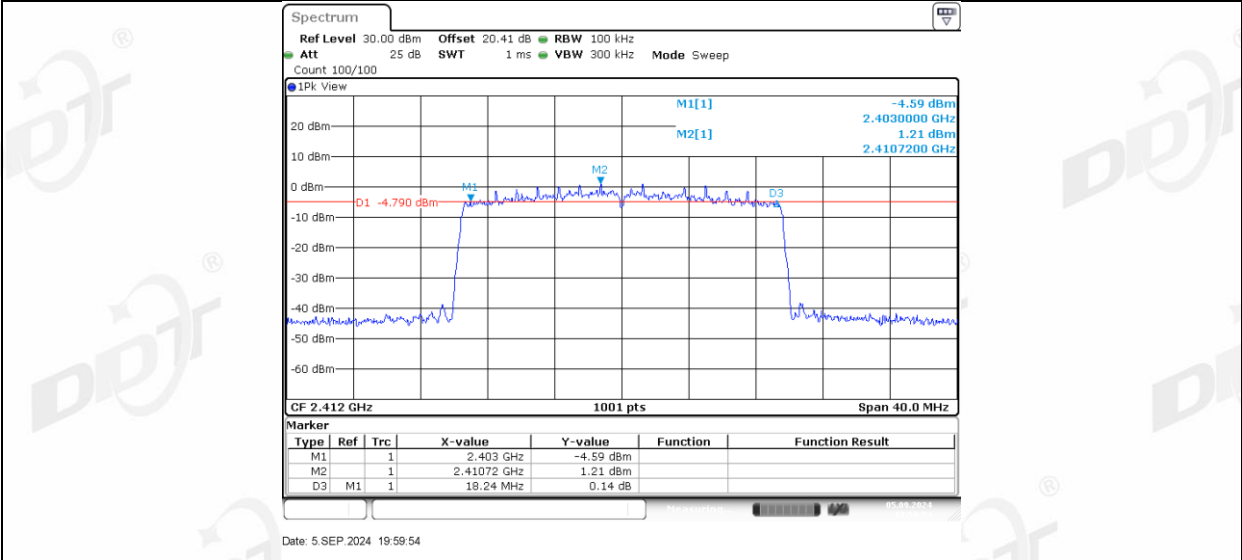


11AX20MIMO_Ant1_2437

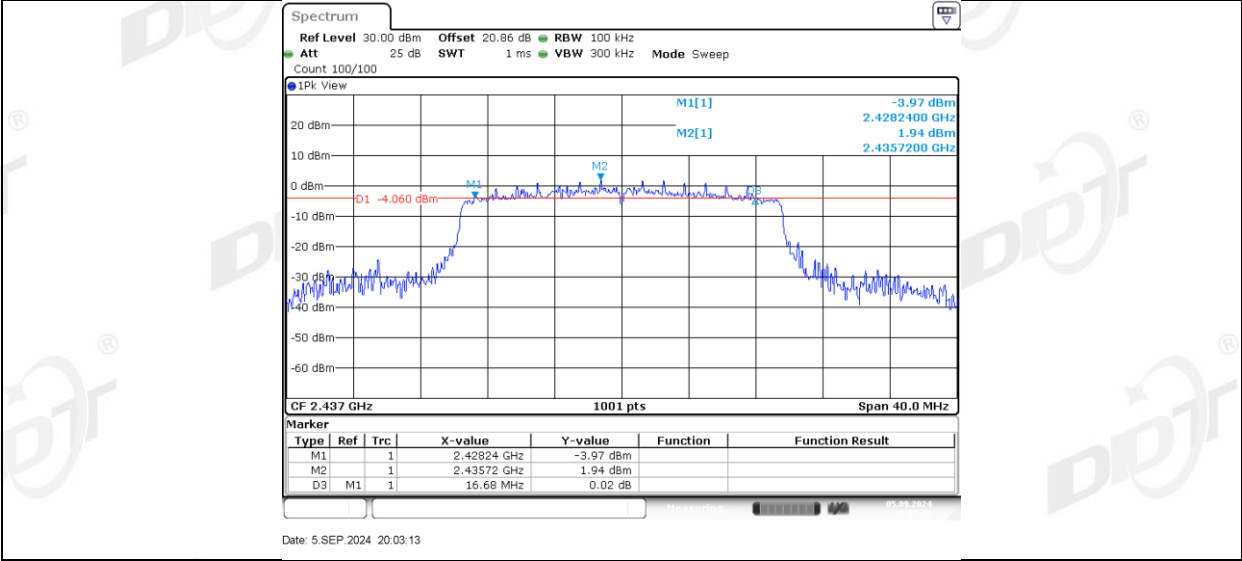


11AX20MIMO_Ant2_2437

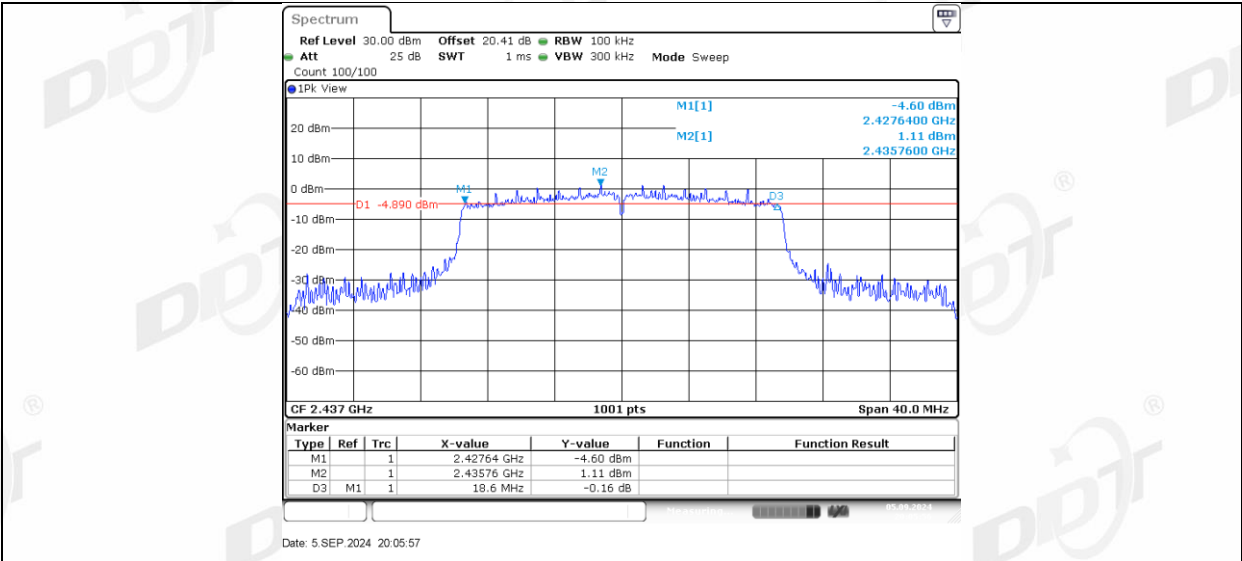


11AX20MIMO_Ant1_2462

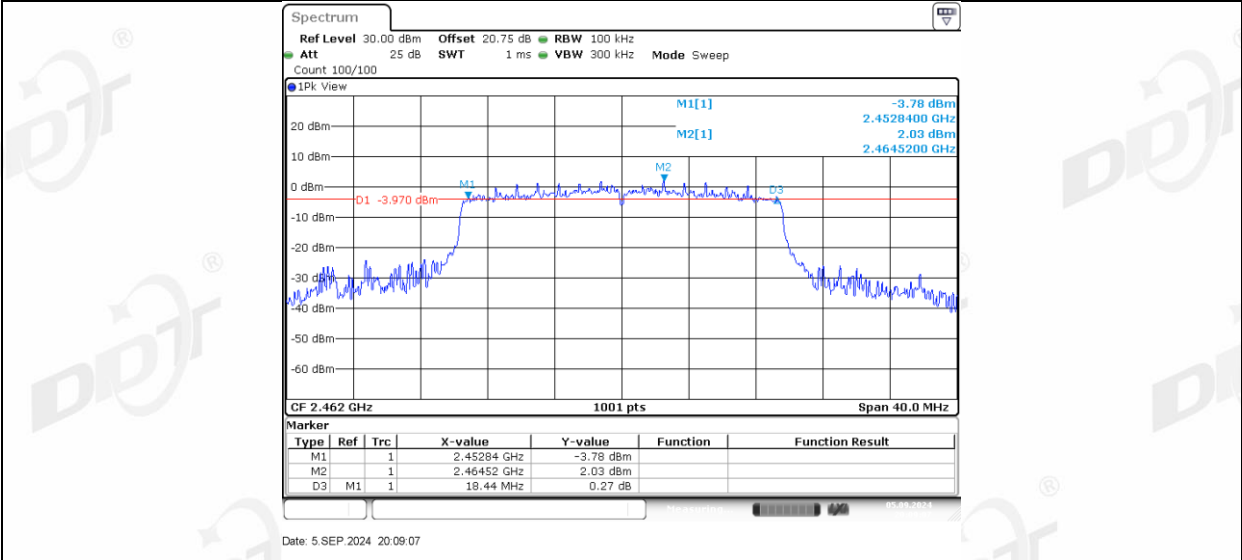


11AX20MIMO_Ant2_2462

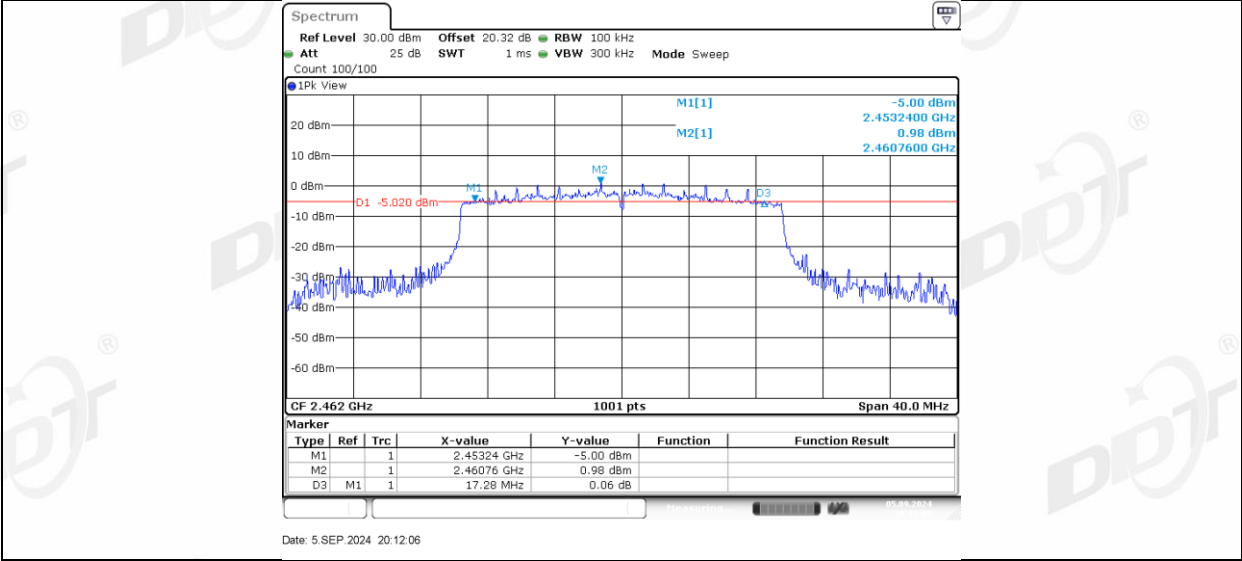


11AX40MIMO_Ant1_2422

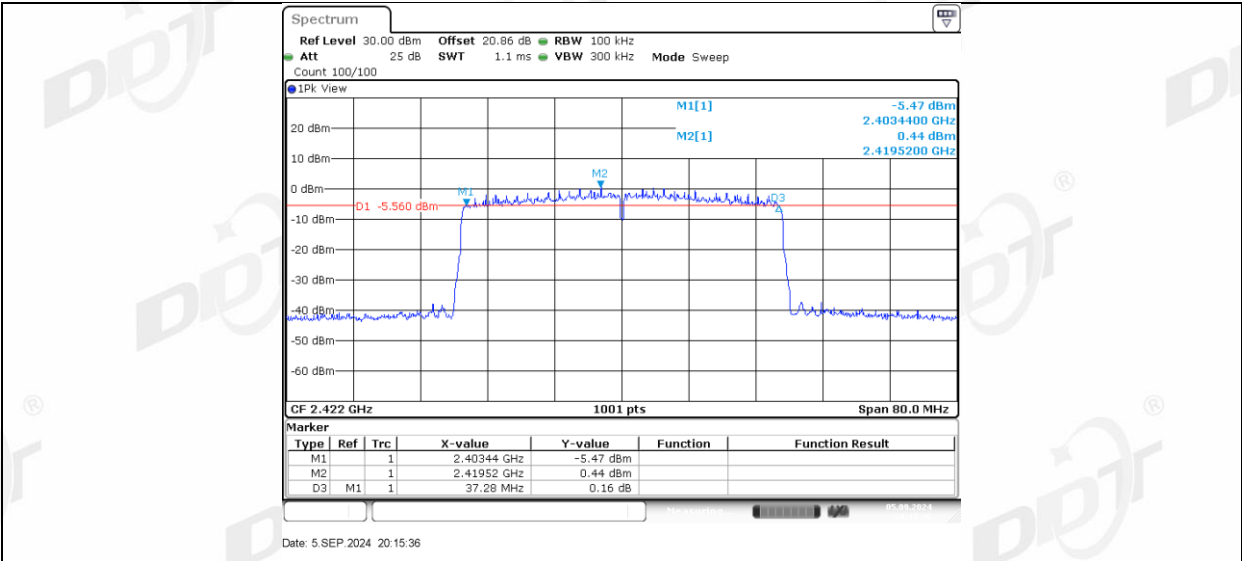


11AX40MIMO_Ant2_2422

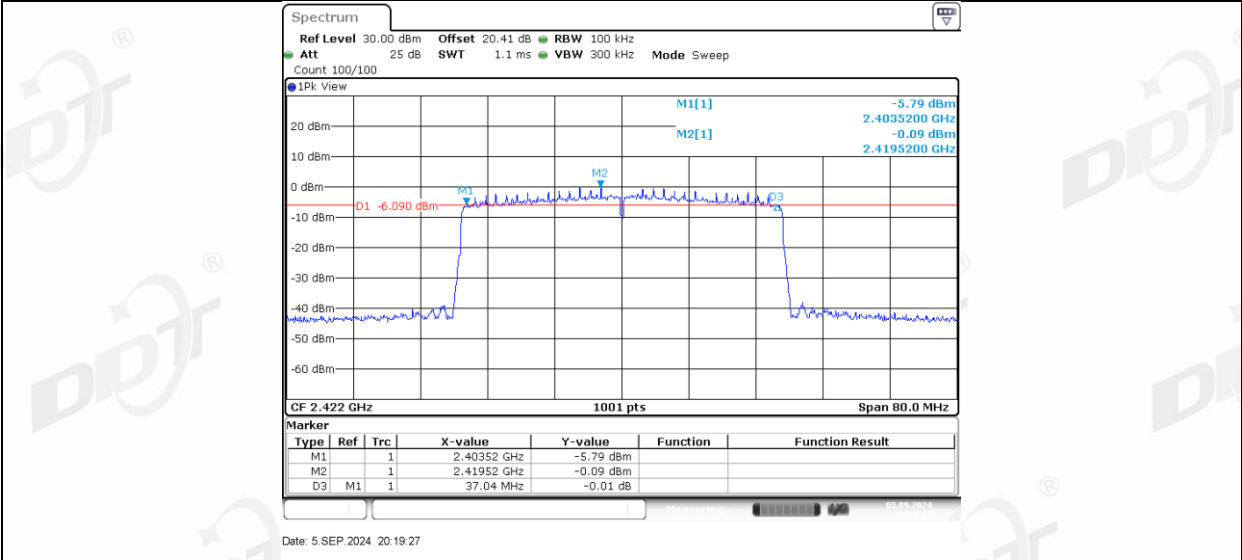


11AX40MIMO_Ant1_2437

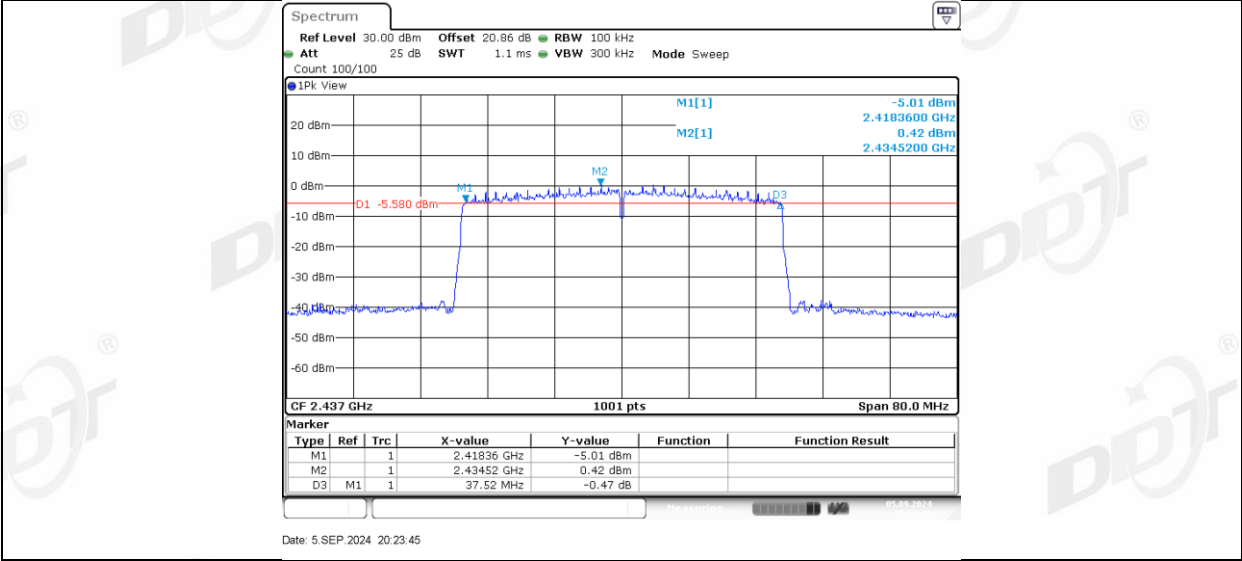


11AX40MIMO_Ant2_2437

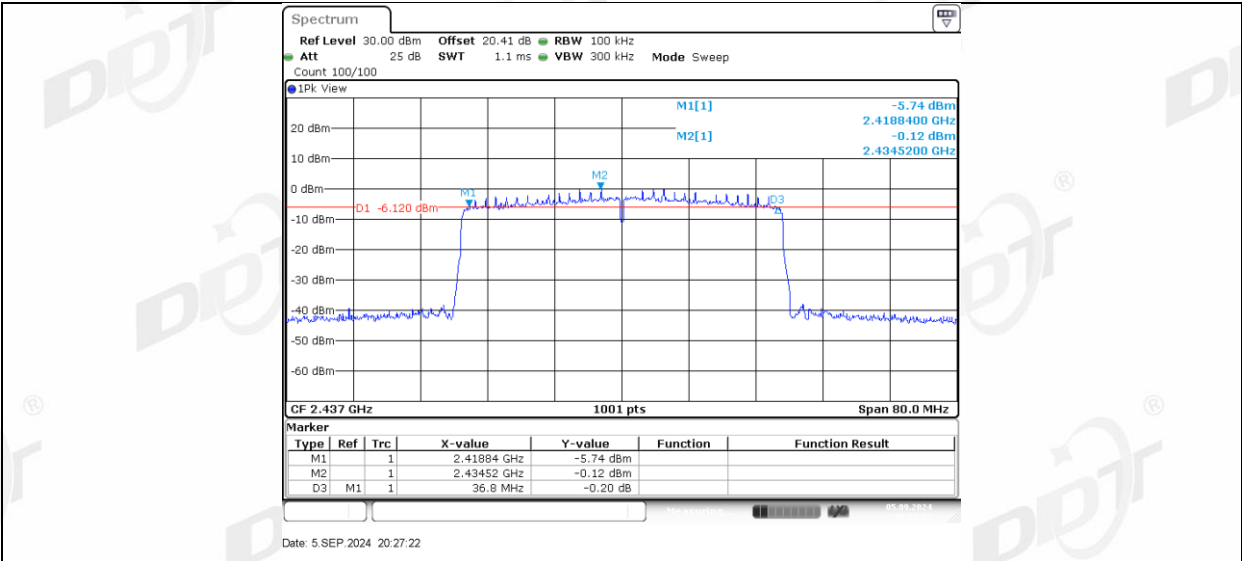

11AX40MIMO_Ant1_2452

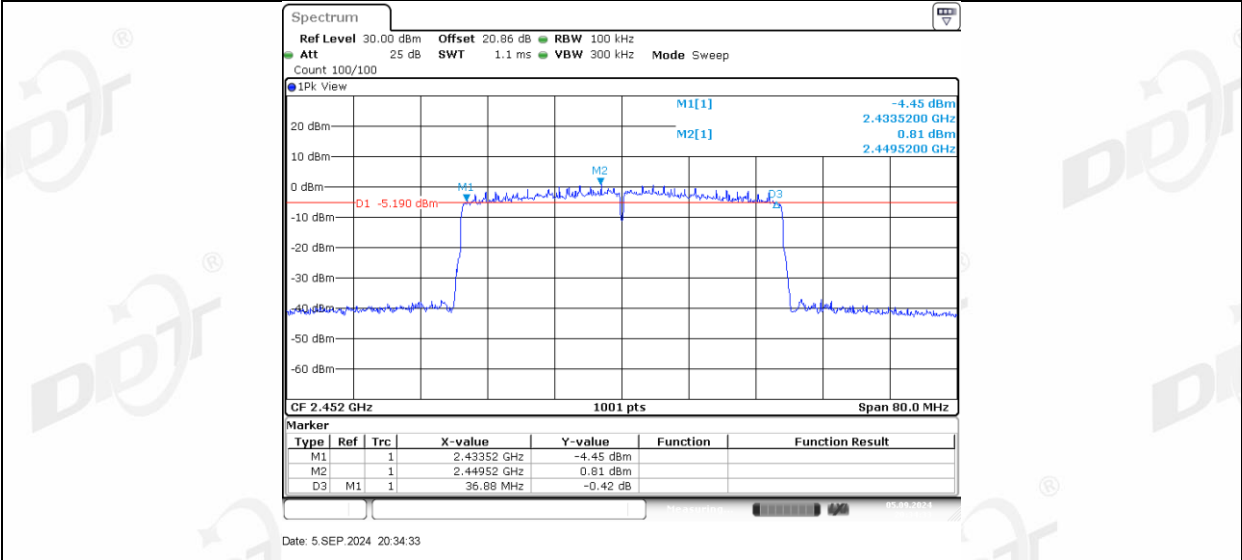


11AX40MIMO_Ant2_2452

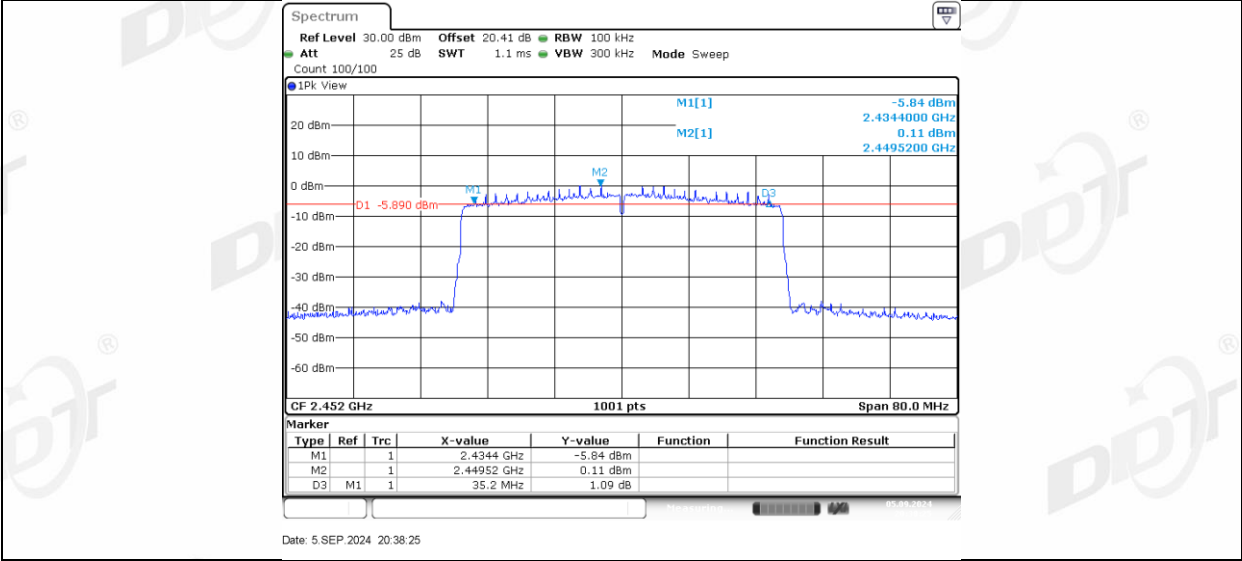

5. 99% Bandwidth

5.1. Block diagram of test setup

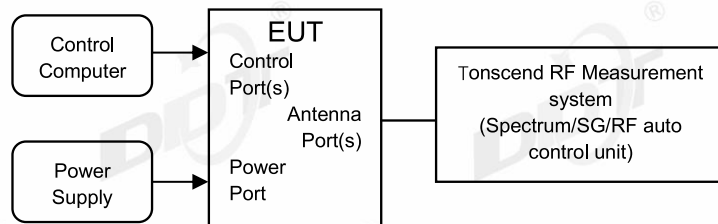

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold

Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.6-27.5℃,42.9-48.7%RH	Test Date:	2024.09.05-2024.09.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24081429-001


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.627	2405.6863	2418.3137	---	---
	Ant2	2412	12.388	2405.8062	2418.1938	---	---
	Ant1	2437	12.547	2430.7263	2443.2737	---	---
	Ant2	2437	12.388	2430.8462	2443.2338	---	---
	Ant1	2462	12.547	2455.7263	2468.2737	---	---
	Ant2	2462	12.348	2455.8062	2468.1538	---	---
11G	Ant1	2412	17.103	2403.4086	2420.5115	---	---
	Ant2	2412	17.103	2403.4086	2420.5115	---	---
	Ant1	2437	19.061	2427.3696	2446.4306	---	---
	Ant2	2437	19.061	2427.4496	2446.5105	---	---
	Ant1	2462	19.101	2452.3297	2471.4306	---	---
	Ant2	2462	19.101	2452.2498	2471.3506	---	---
11N20MI MO	Ant1	2412	17.862	2403.0490	2420.9111	---	---
	Ant2	2412	17.542	2403.2088	2420.7512	---	---
	Ant1	2437	19.62	2427.1698	2446.7902	---	---
	Ant2	2437	18.262	2427.9291	2446.1908	---	---
	Ant1	2462	19.700	2452.1299	2471.8302	---	---
	Ant2	2462	18.262	2452.8492	2471.1109	---	---
11N40MI MO	Ant1	2422	36.124	2403.9381	2440.0619	---	---
	Ant2	2422	36.444	2403.7782	2440.2218	---	---
	Ant1	2437	36.124	2418.9381	2455.0619	---	---
	Ant2	2437	36.364	2418.8581	2455.2218	---	---
	Ant1	2452	36.044	2433.9381	2469.9820	---	---
	Ant2	2452	36.284	2433.8581	2470.1419	---	---
11AX20M IMO	Ant1	2412	18.861	2402.5694	2421.4306	---	---
	Ant2	2412	18.861	2402.5694	2421.4306	---	---
	Ant1	2437	19.381	2427.2897	2446.6703	---	---
	Ant2	2437	19.261	2427.3696	2446.6304	---	---
	Ant1	2462	19.301	2452.3297	2471.6304	---	---
	Ant2	2462	19.261	2452.3297	2471.5904	---	---
11AX40M IMO	Ant1	2422	37.722	2403.1389	2440.8611	---	---
	Ant2	2422	37.882	2403.0589	2440.9411	---	---
	Ant1	2437	37.802	2418.0589	2455.8611	---	---
	Ant2	2437	37.802	2418.1389	2455.9411	---	---
	Ant1	2452	37.722	2433.1389	2470.8611	---	---
	Ant2	2452	37.722	2433.1389	2470.8611	---	---

5.5. Test graphs




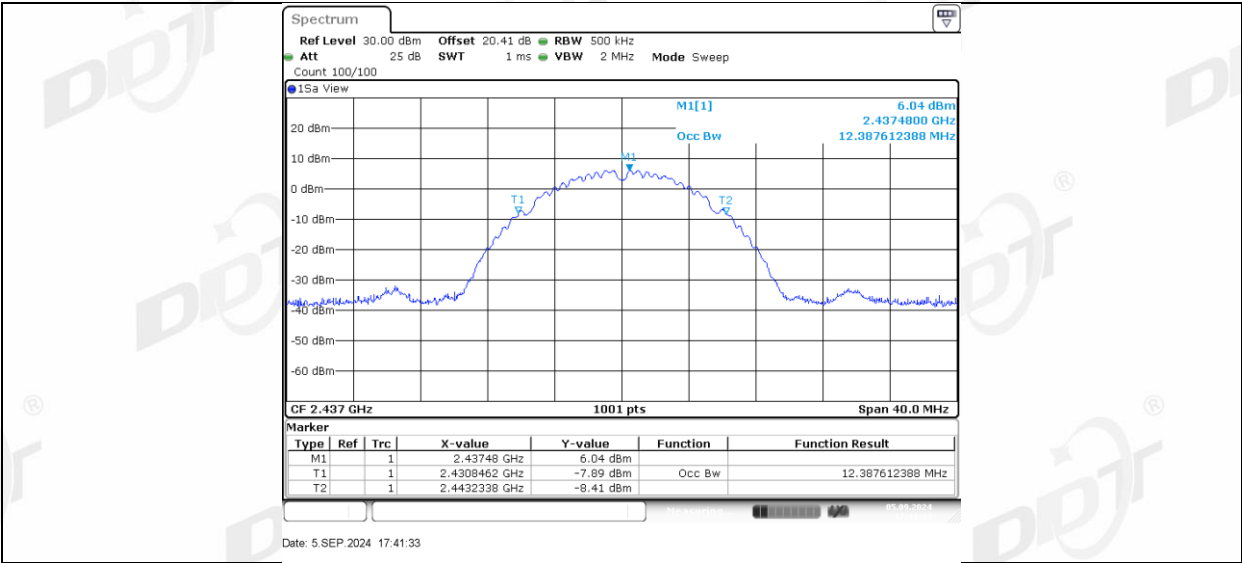


11B_Ant1_2462

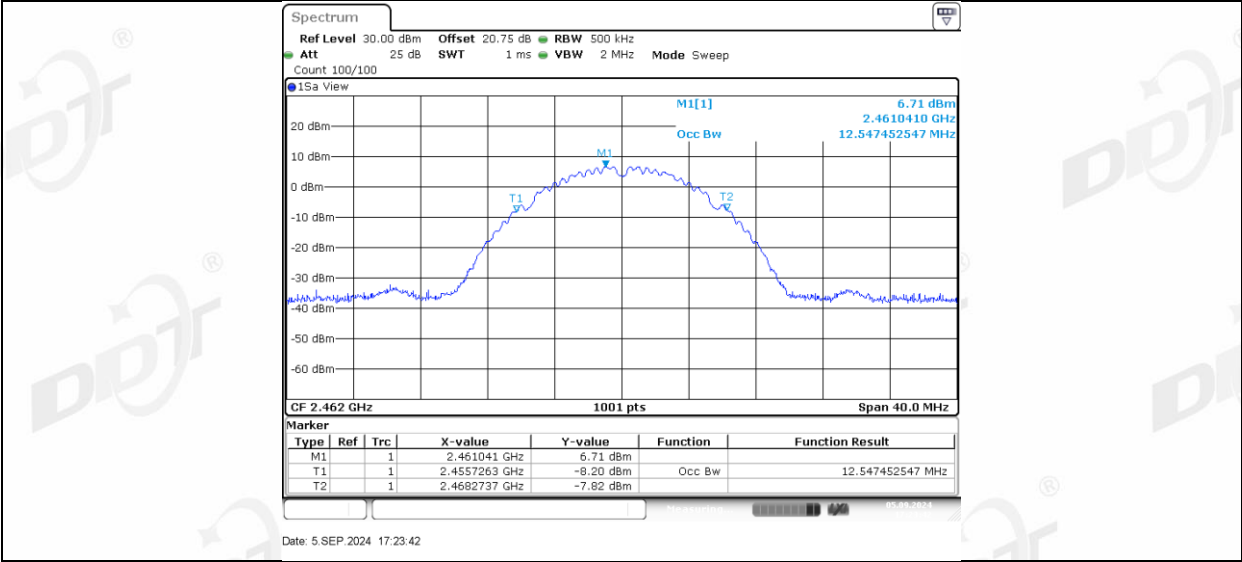


11B_Ant2_2462

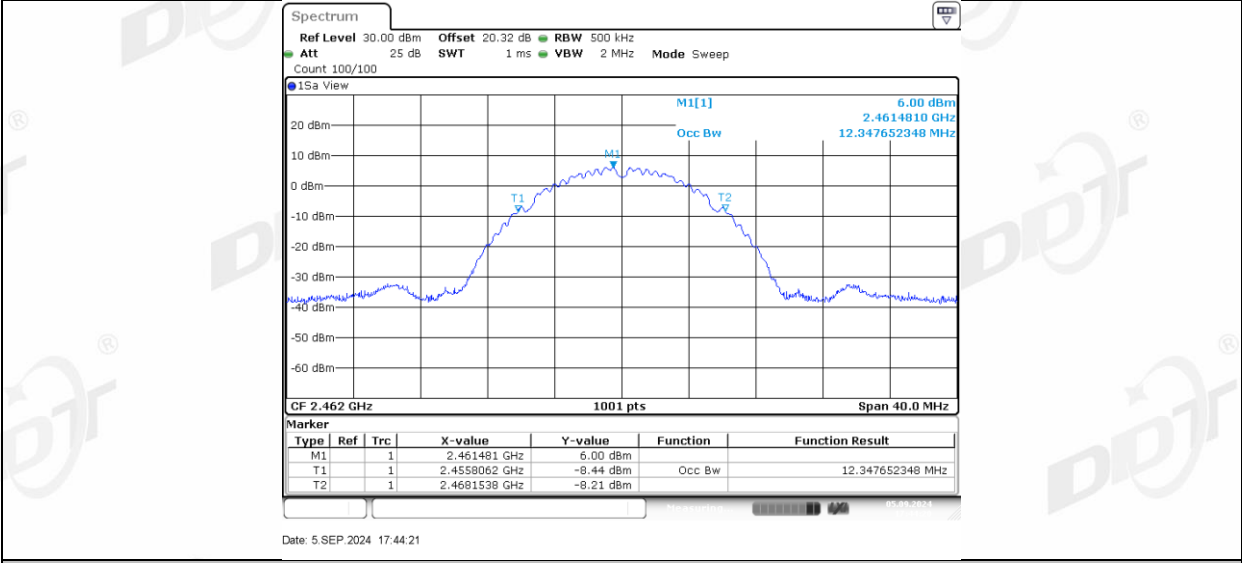


11G_Ant1_2412

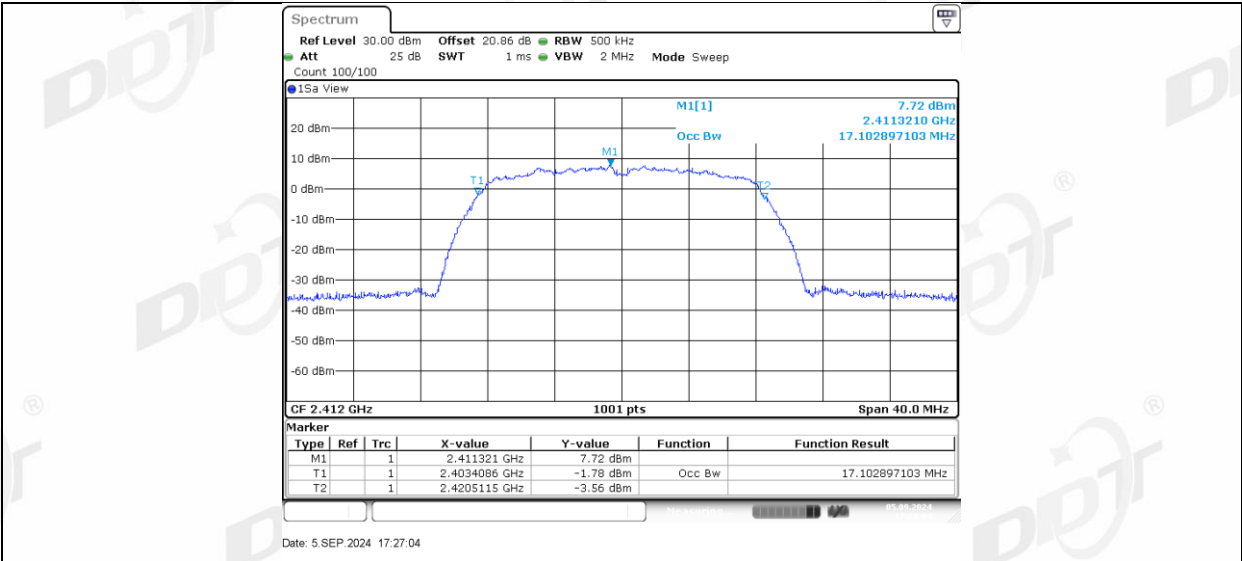


11G Ant2_2412

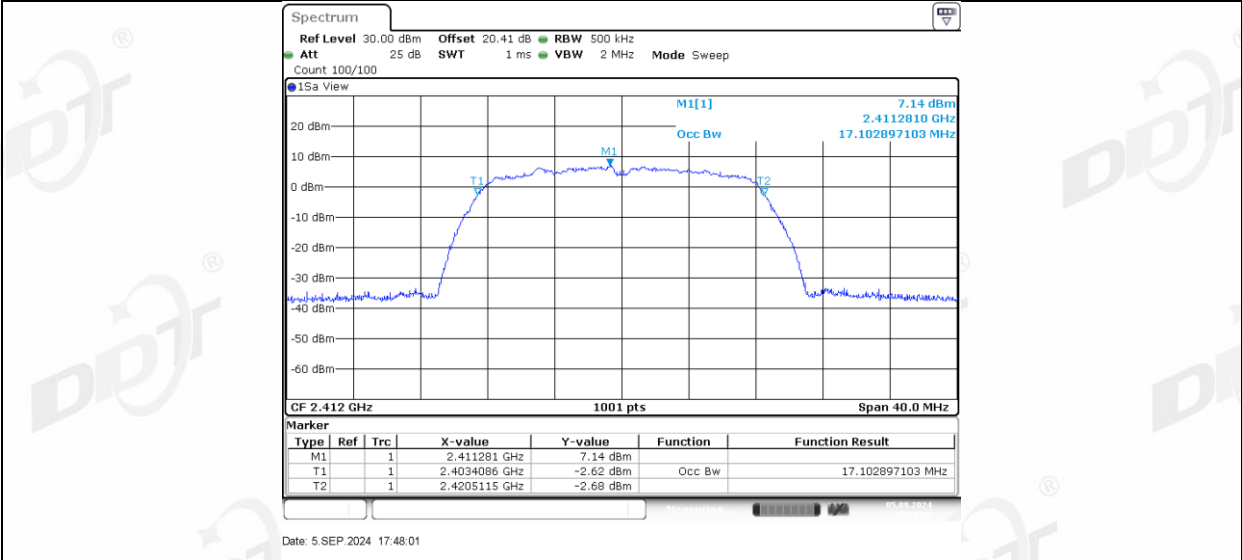


11G Ant1_2437

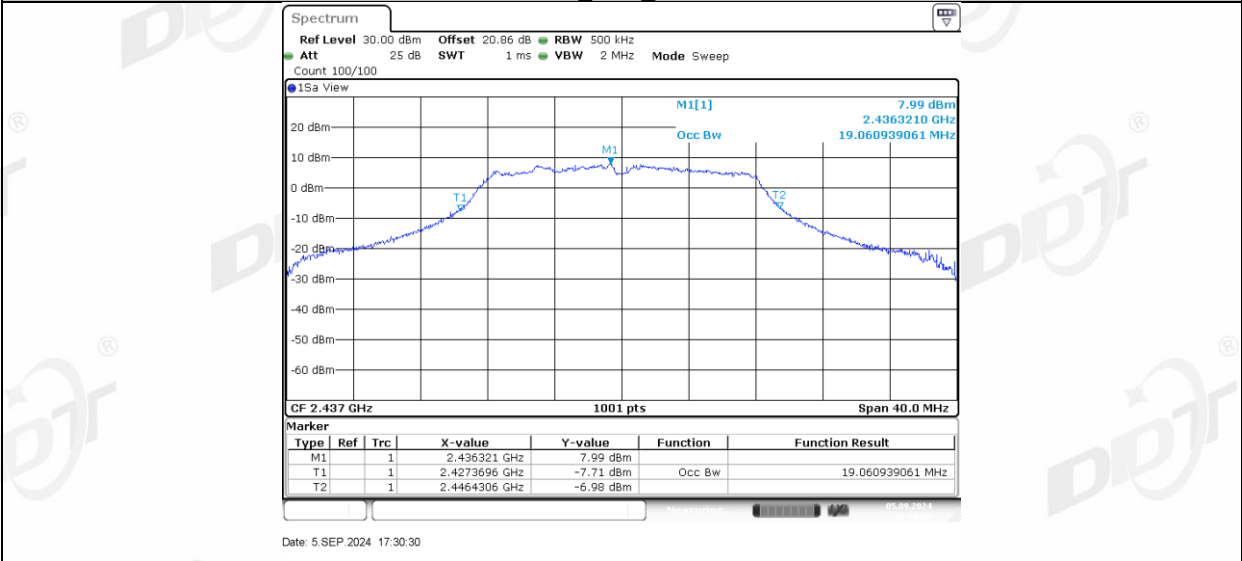


11G Ant2_2437

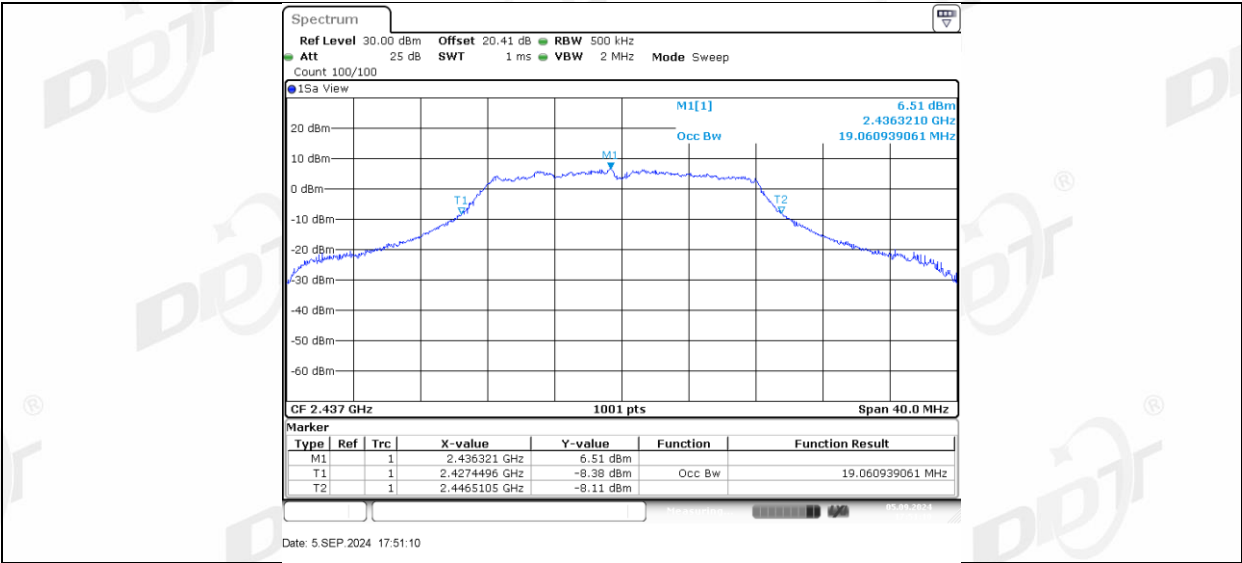


11G Ant1_2462

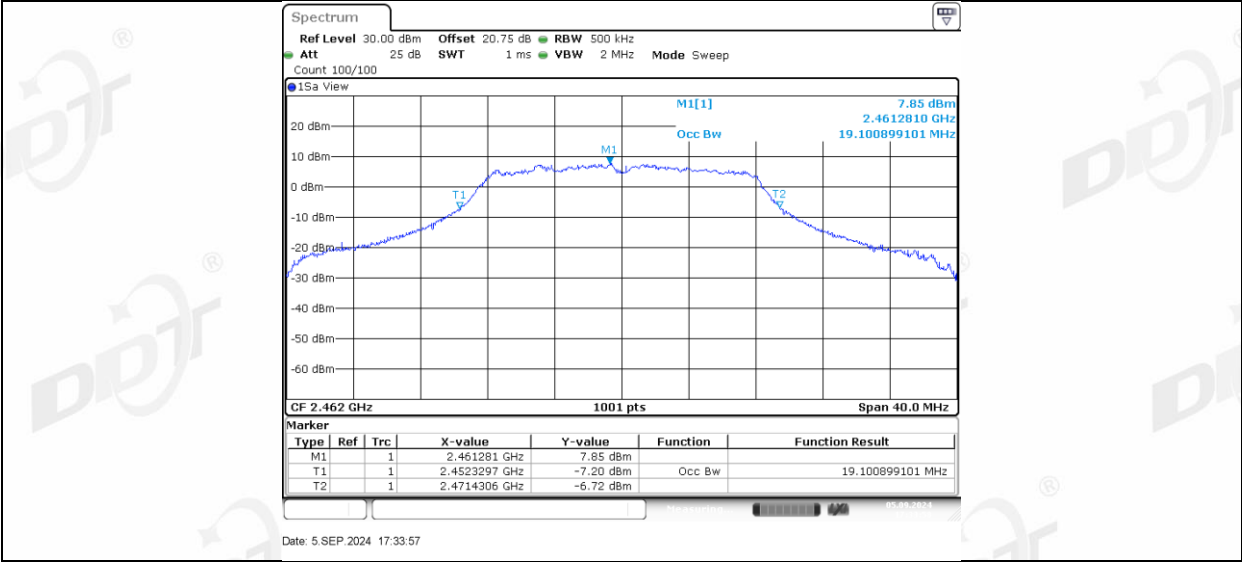


11G Ant2_2462

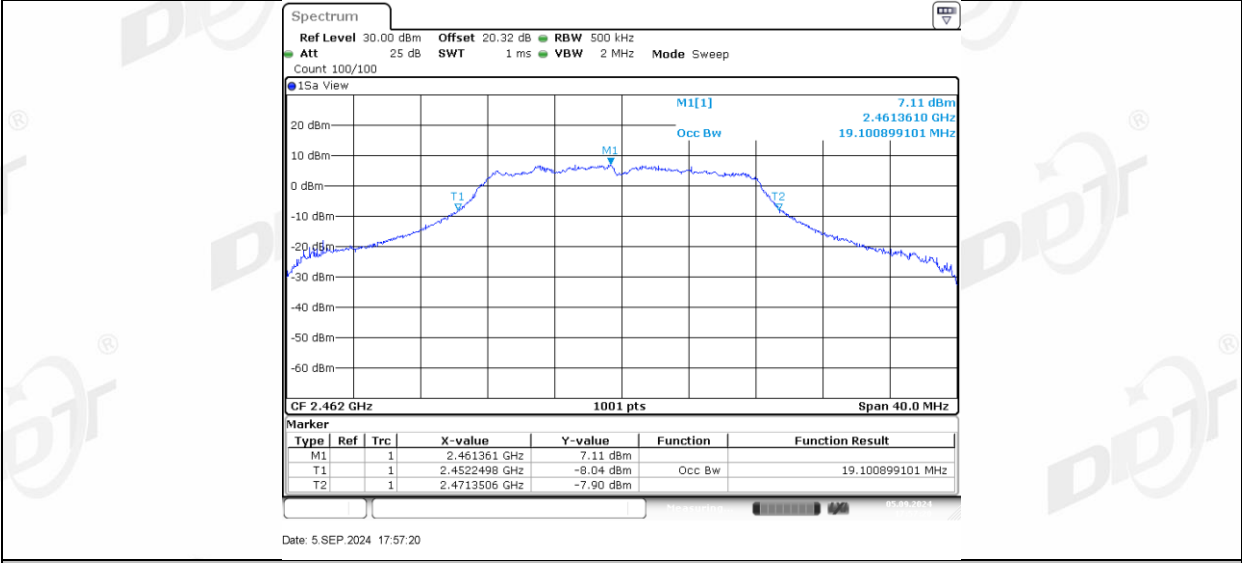


11N20MIMO_Ant1_2412

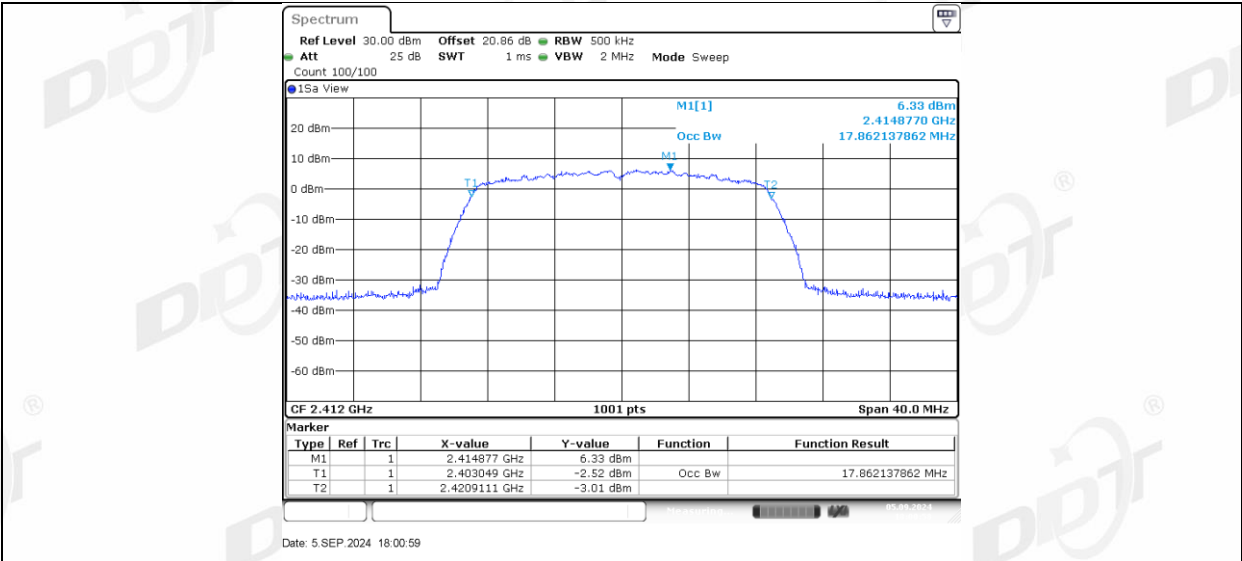


11N20MIMO_Ant2_2412

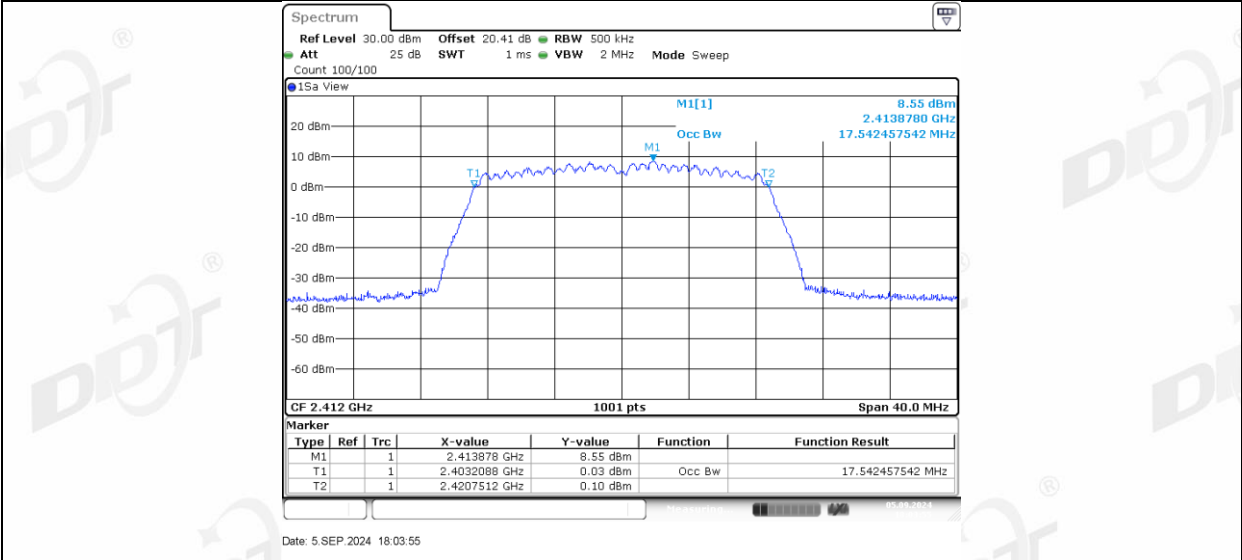


11N20MIMO_Ant1_2437

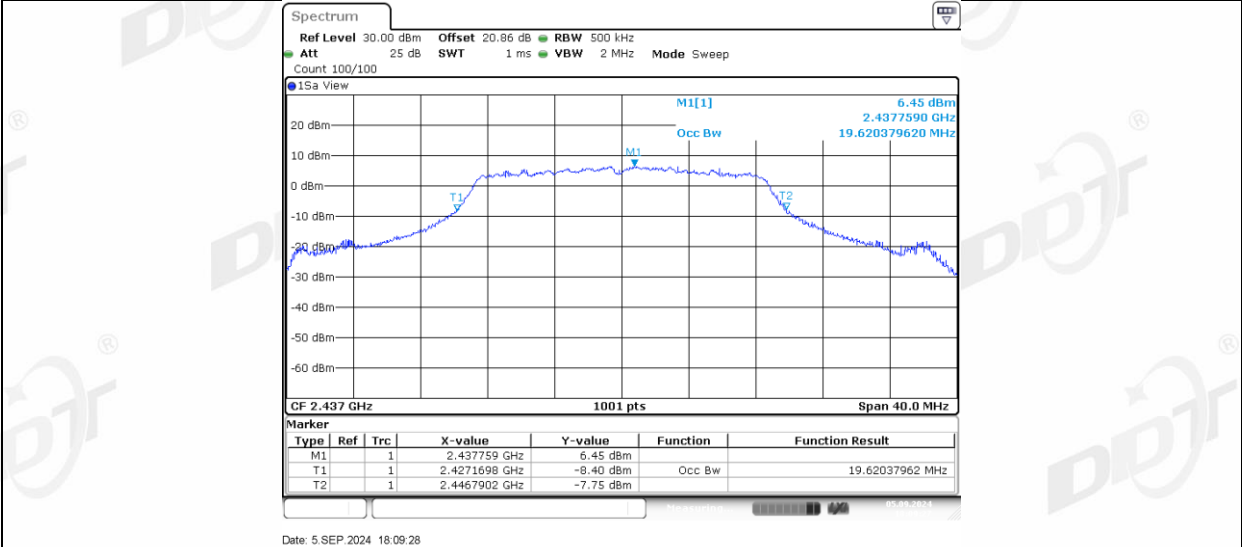


11N20MIMO_Ant2_2437

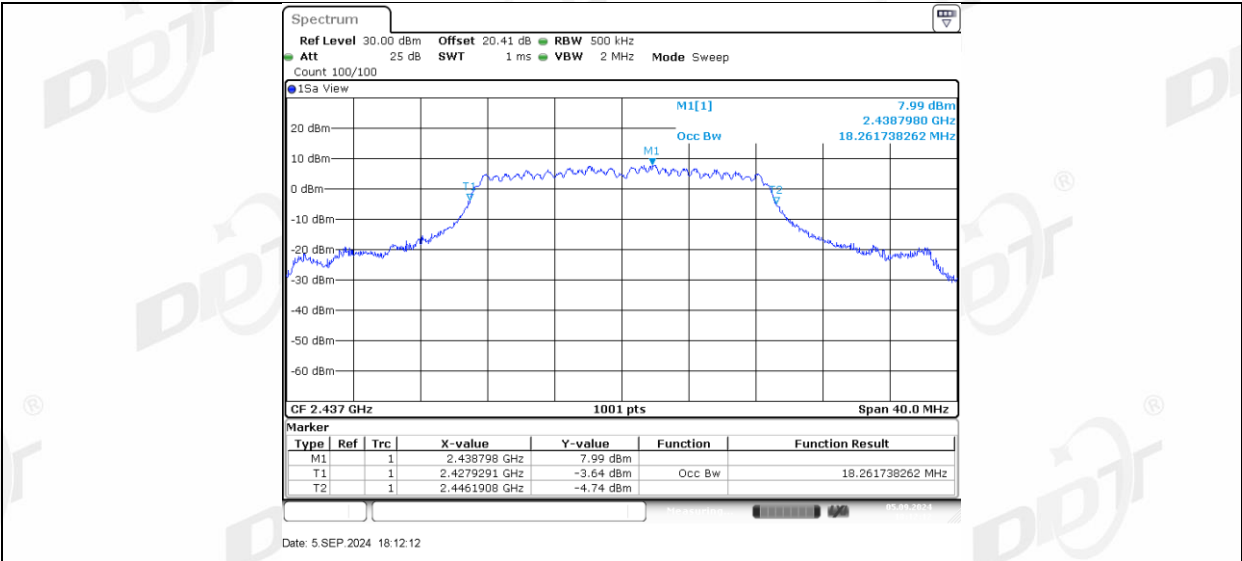


11N20MIMO_Ant1_2462

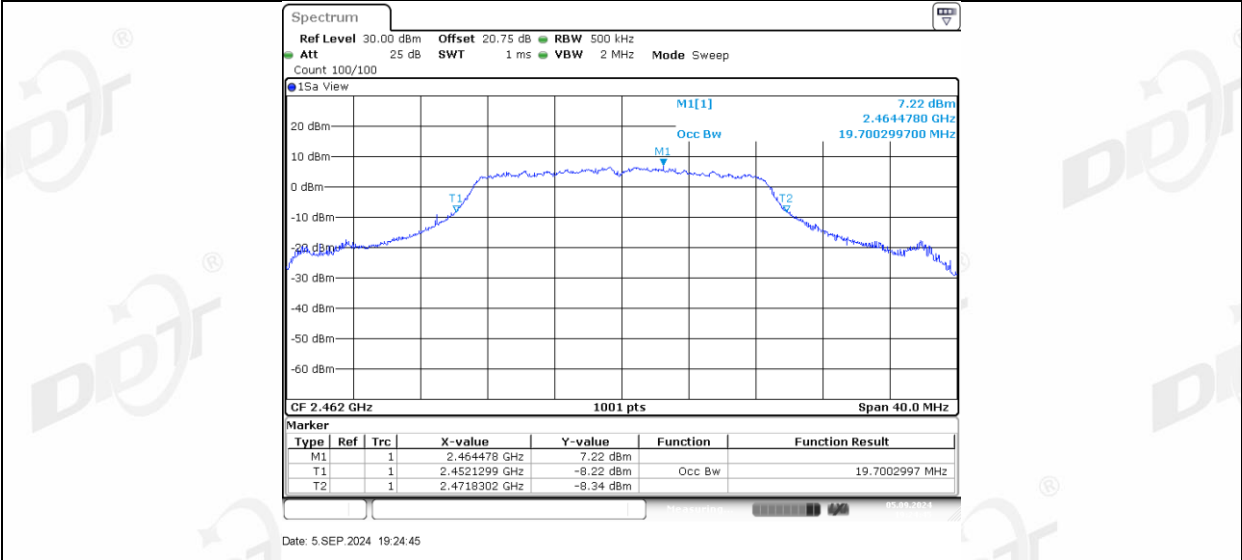


11N20MIMO_Ant2_2462

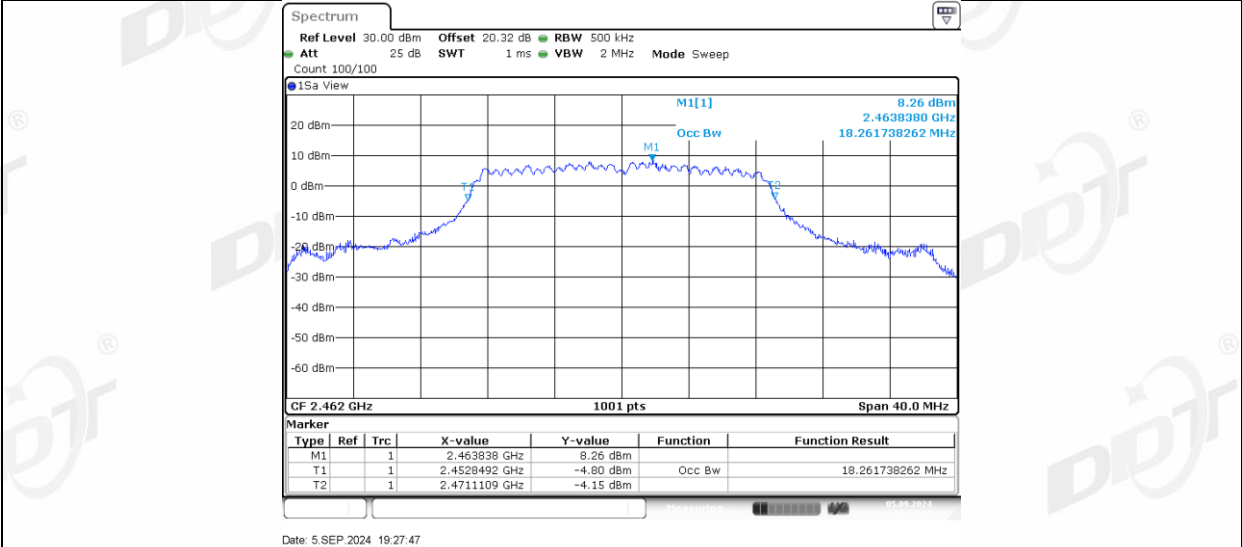


11N40MIMO_Ant1_2422

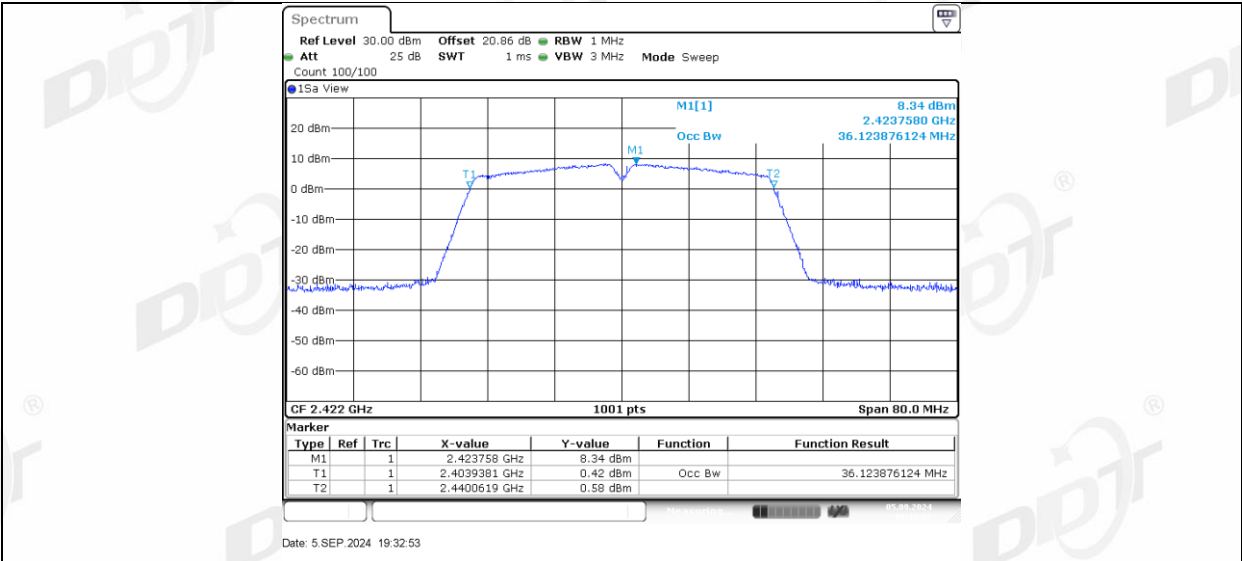


11N40MIMO_Ant2_2422

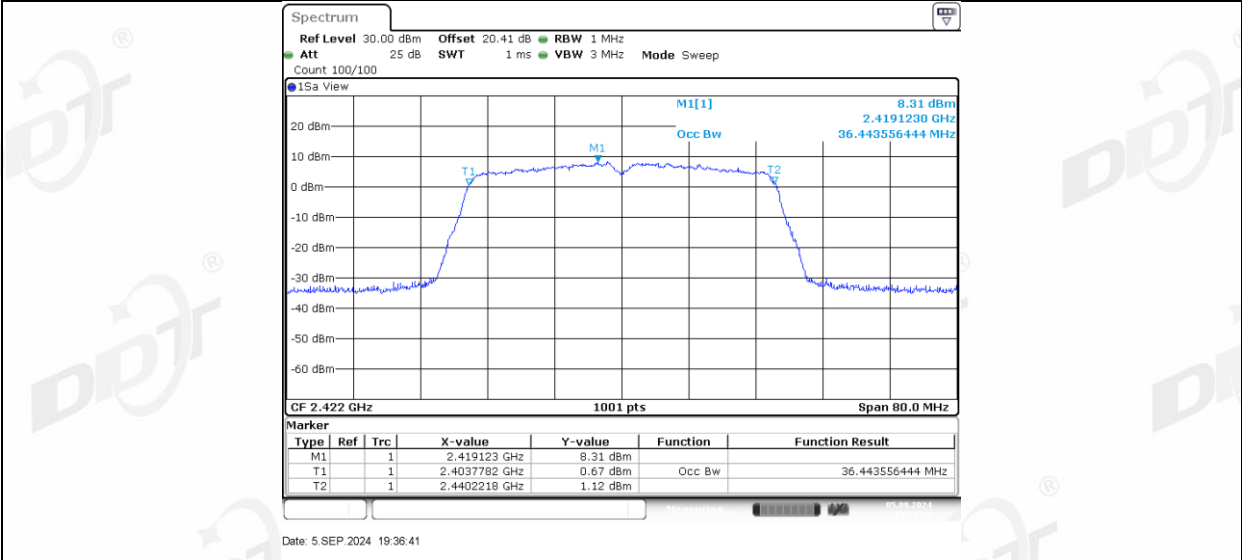


11N40MIMO_Ant1_2437

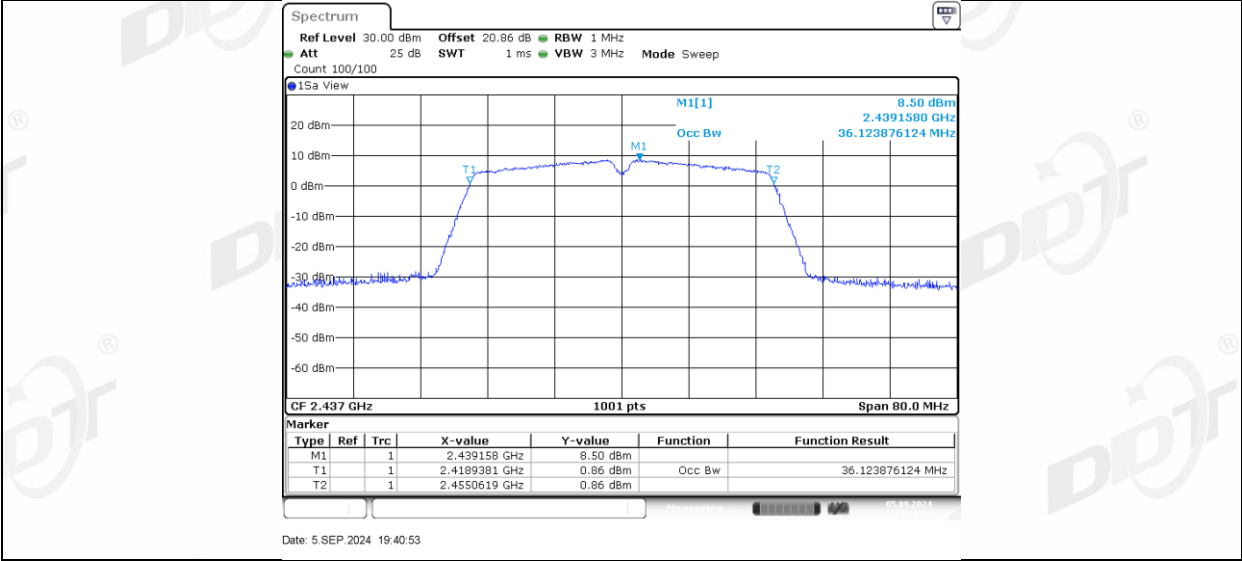


11N40MIMO_Ant2_2437

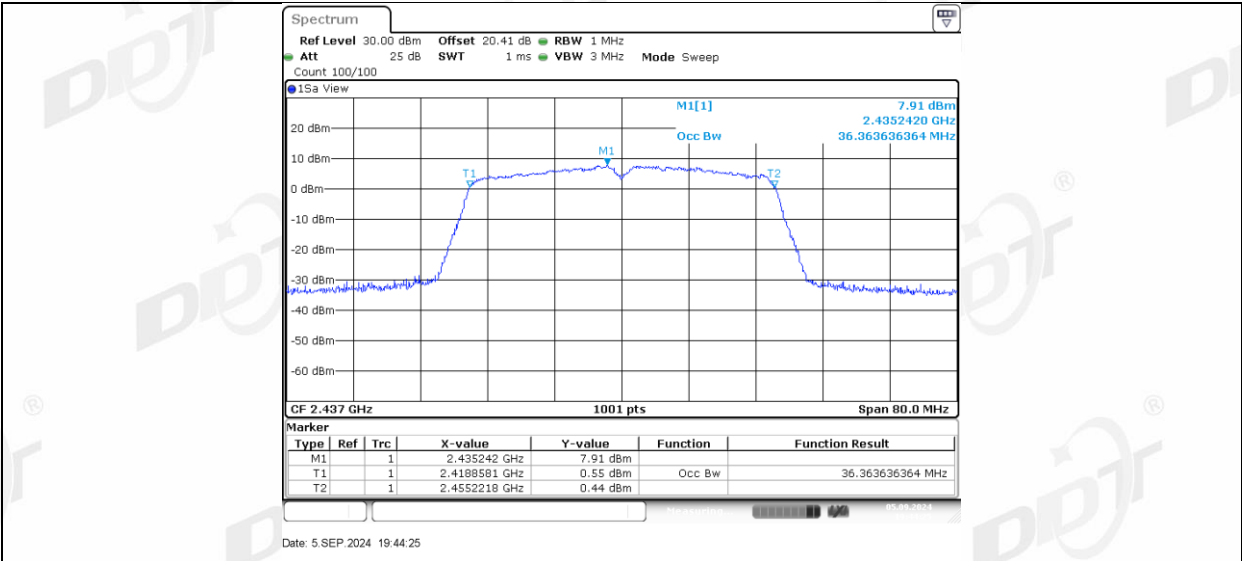


11N40MIMO_Ant1_2452

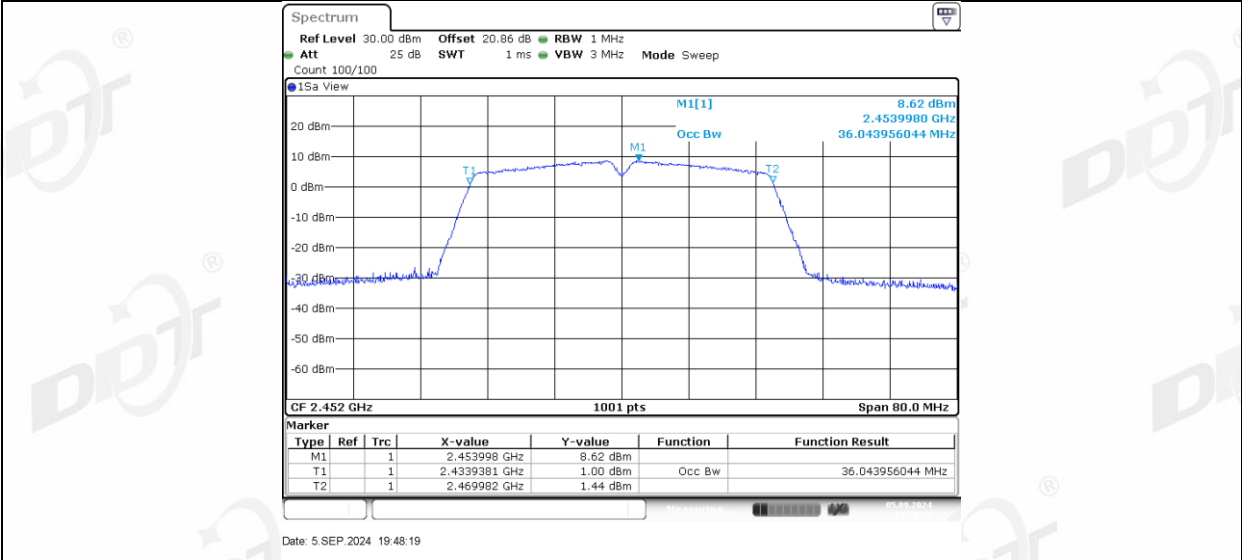


11N40MIMO_Ant2_2452

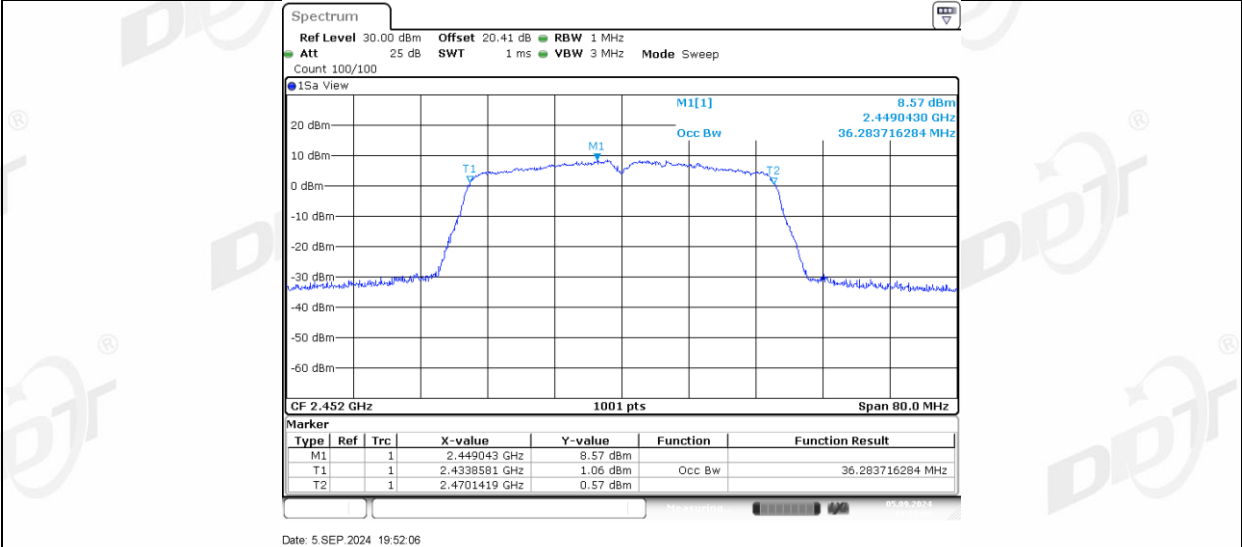


11AX20MIMO_Ant1_2412

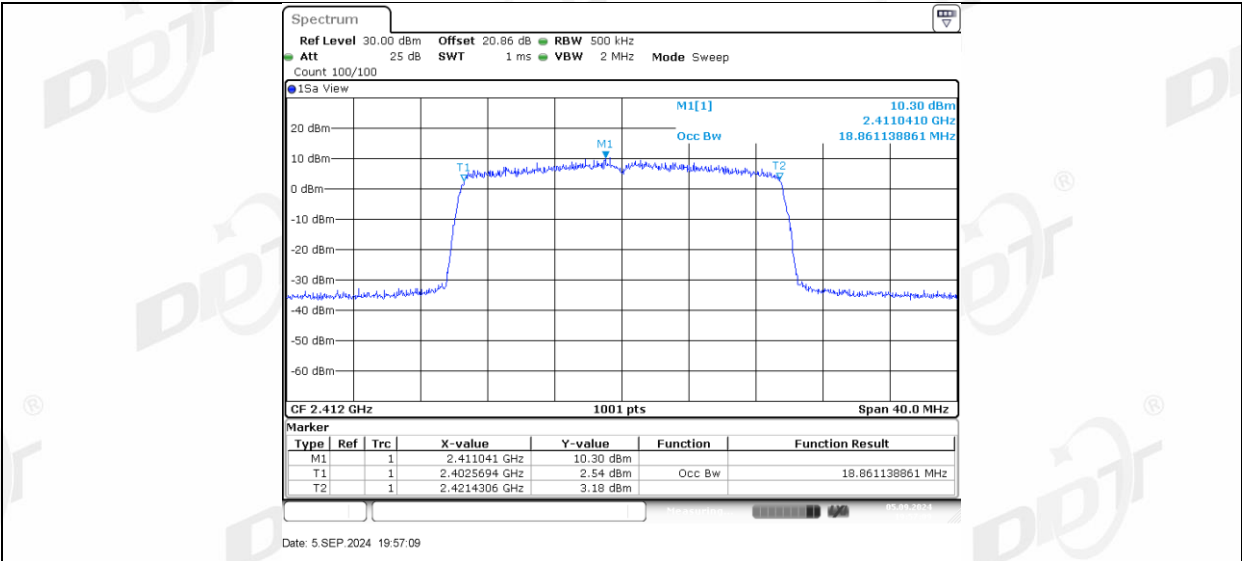


11AX20MIMO_Ant2_2412

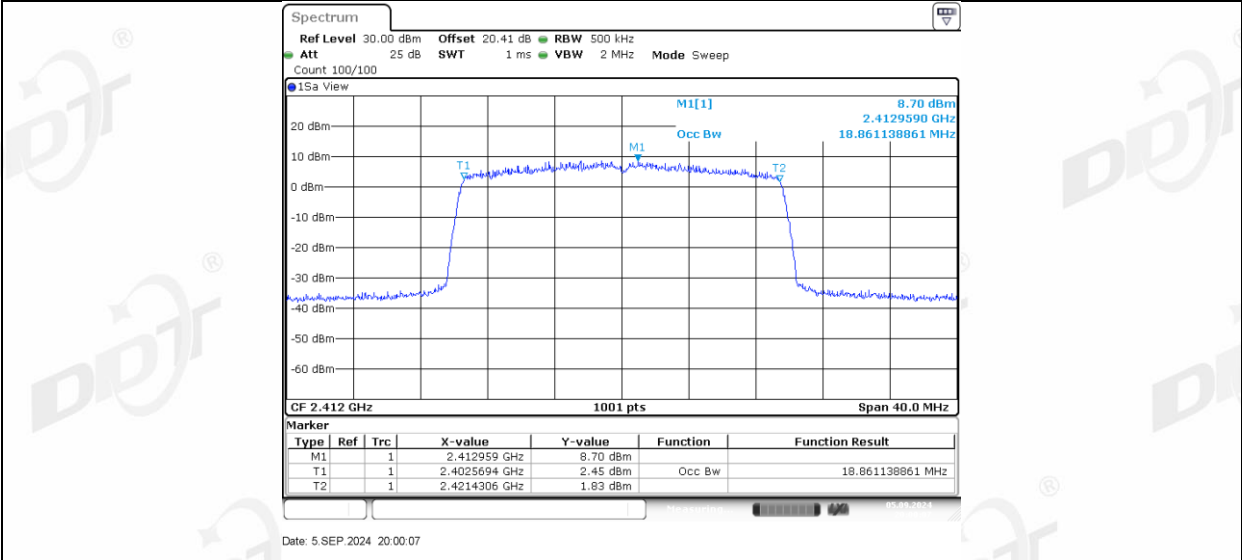


11AX20MIMO_Ant1_2437

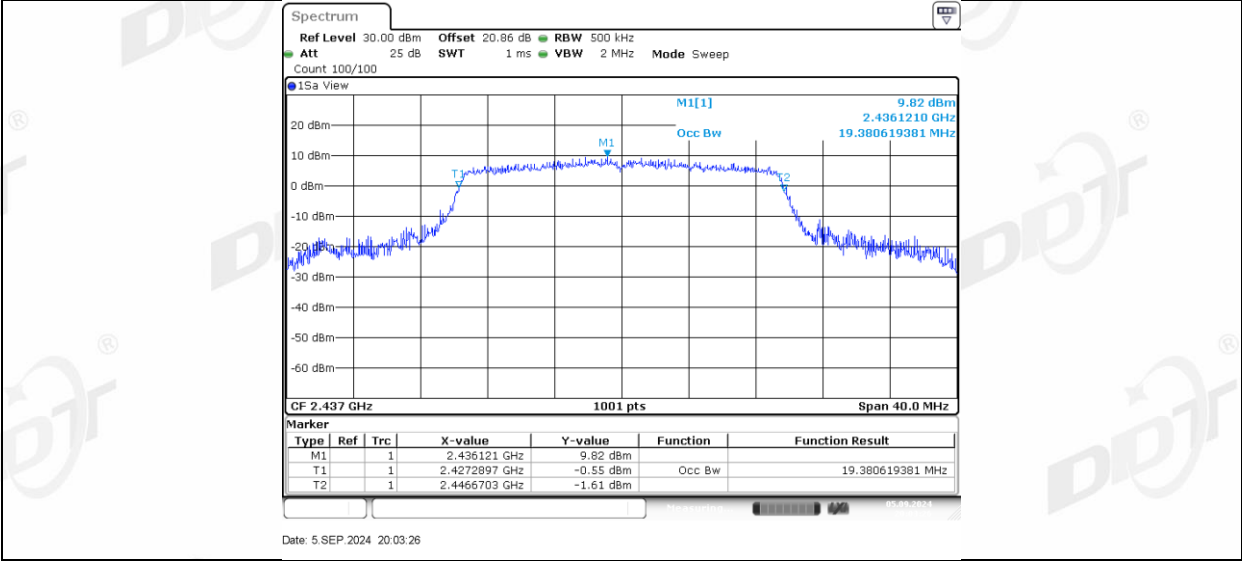


11AX20MIMO_Ant2_2437

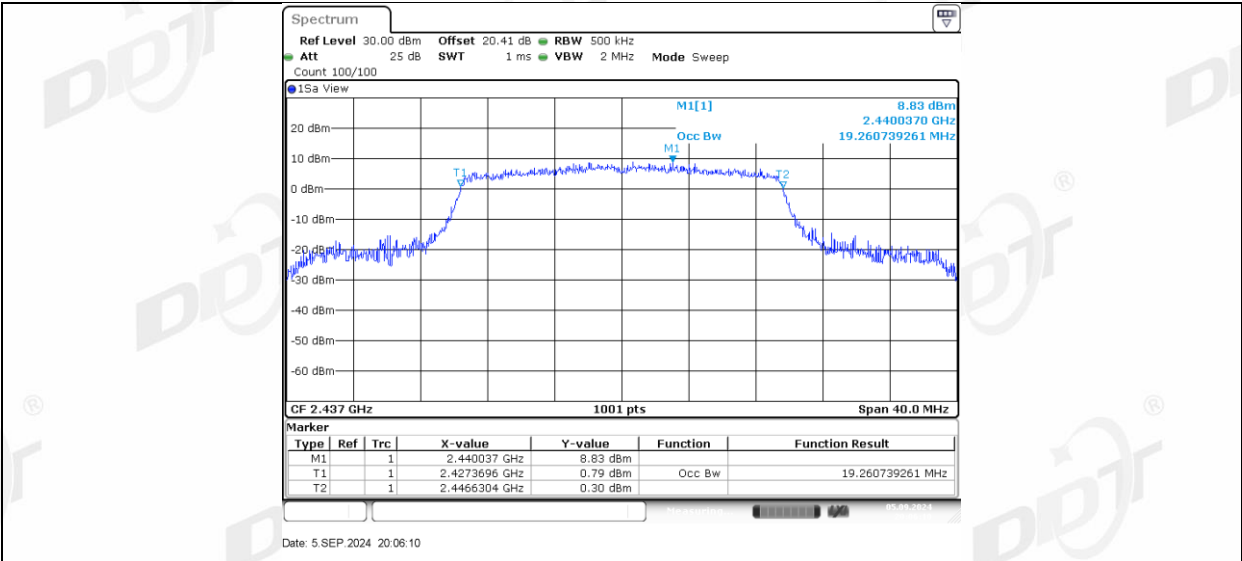


11AX20MIMO_Ant1_2462

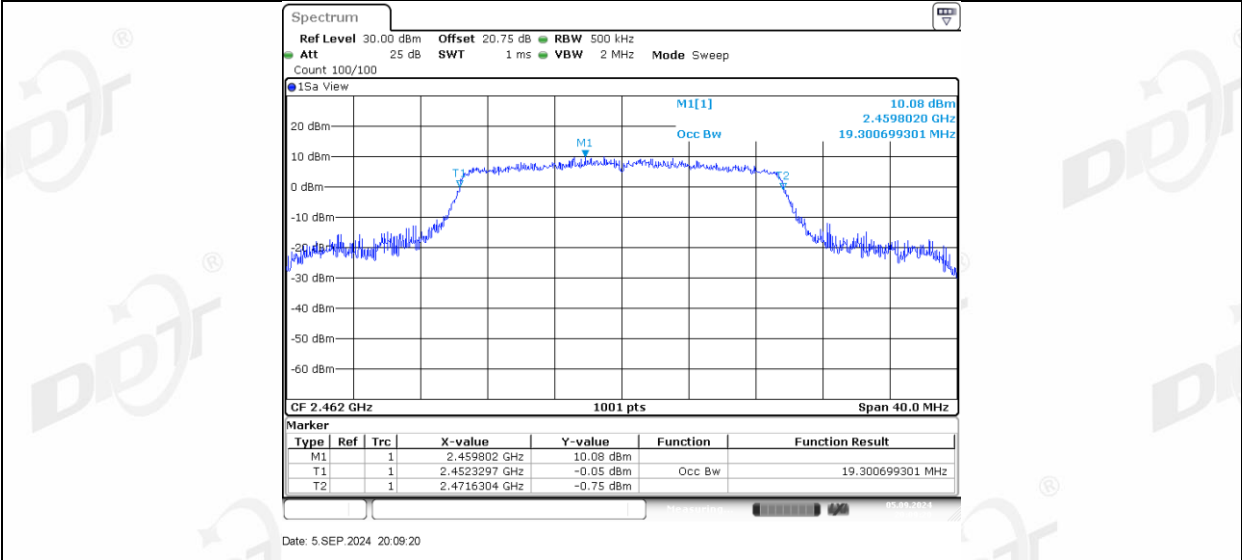


11AX20MIMO_Ant2_2462

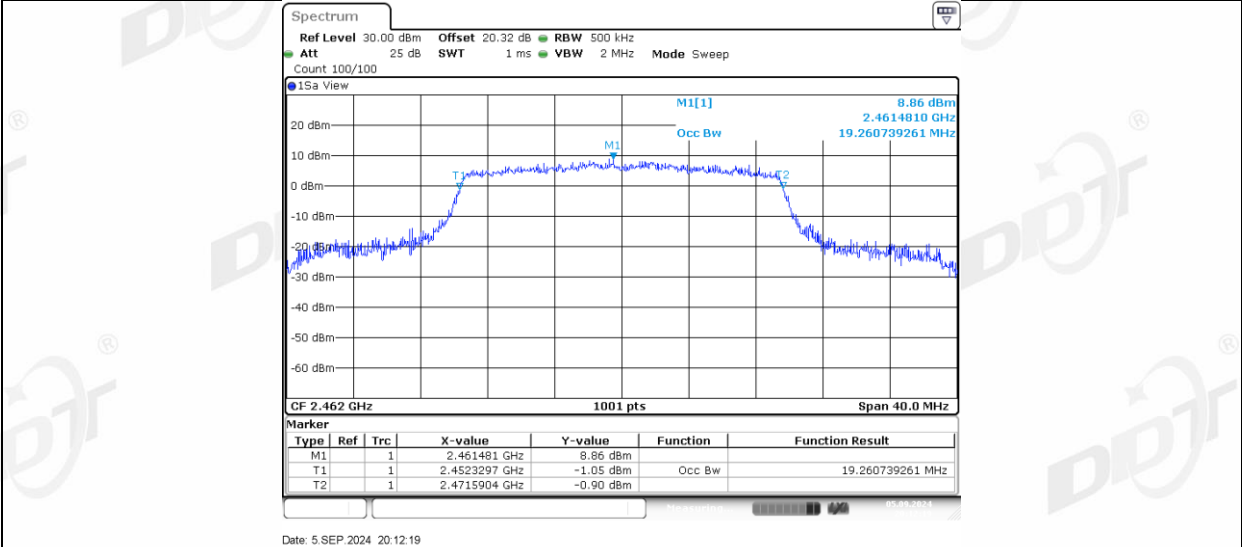


11AX40MIMO_Ant1_2422

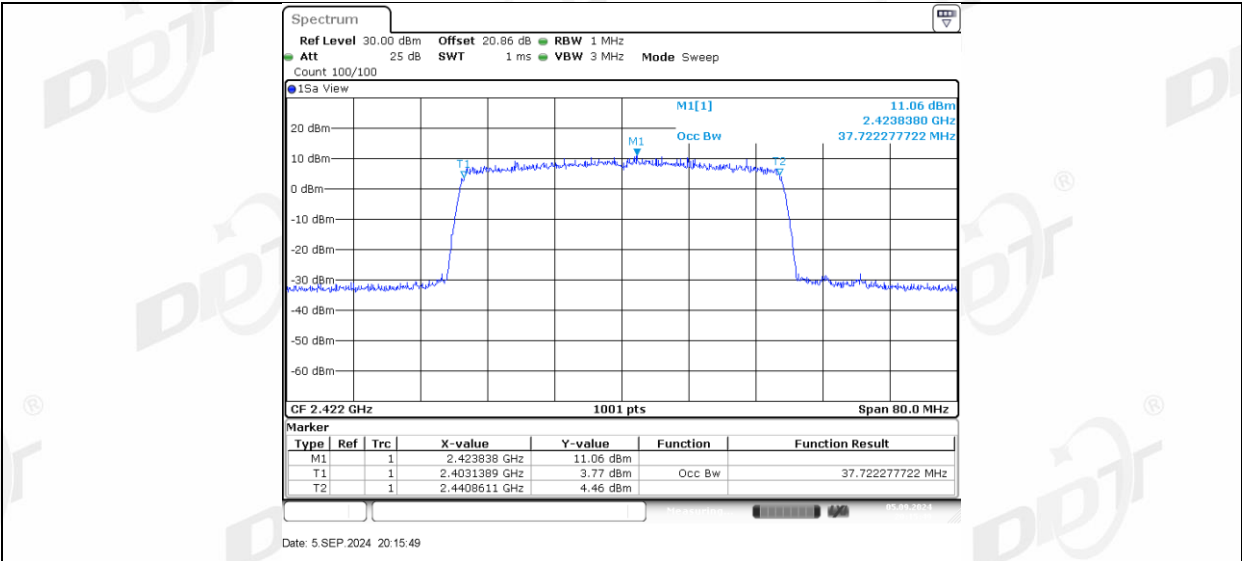


11AX40MIMO_Ant2_2422

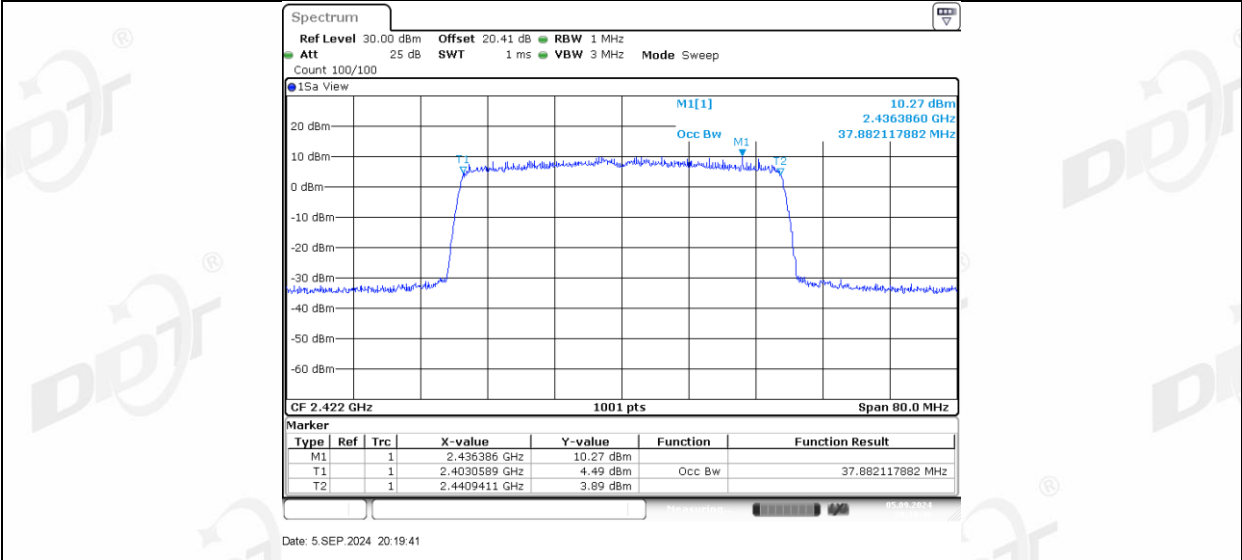


11AX40MIMO_Ant1_2437

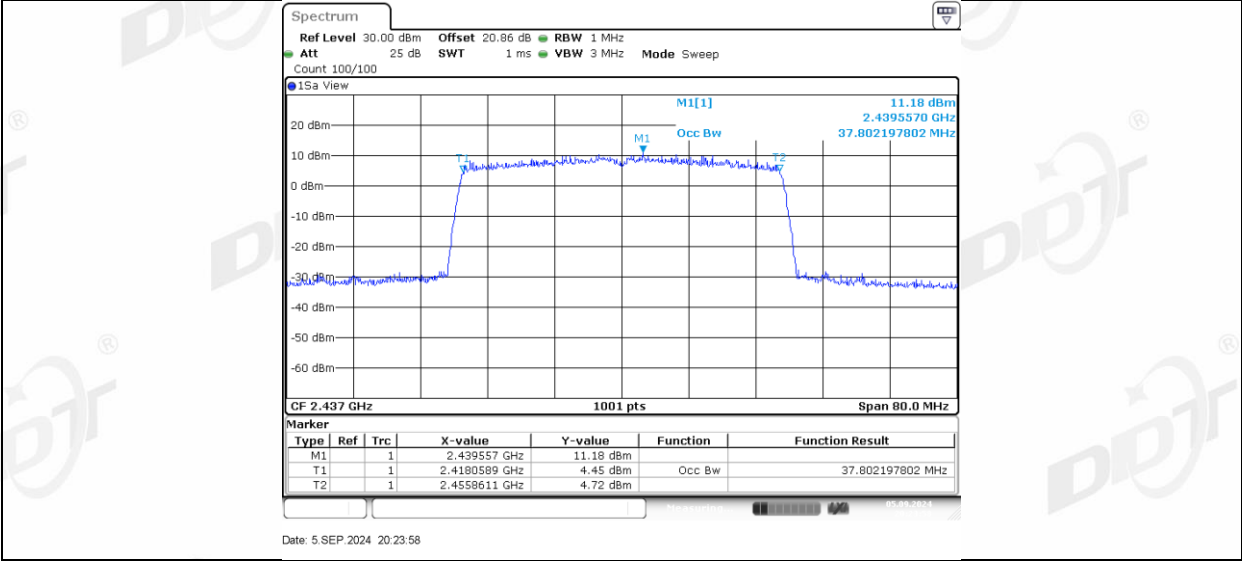


11AX40MIMO_Ant2_2437

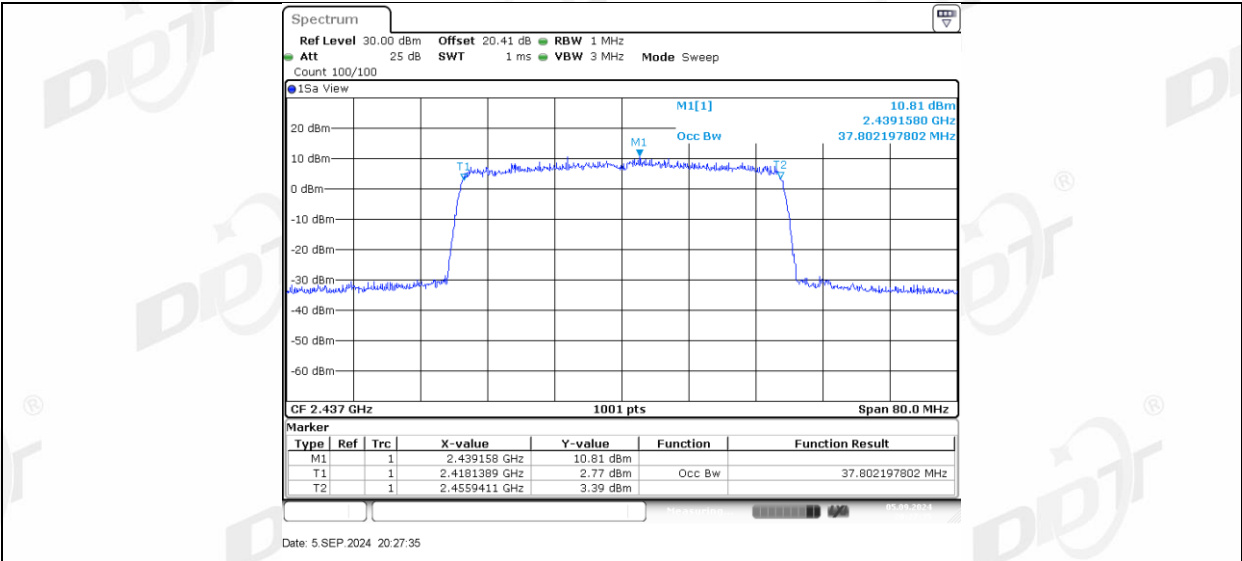

11AX40MIMO_Ant1_2452

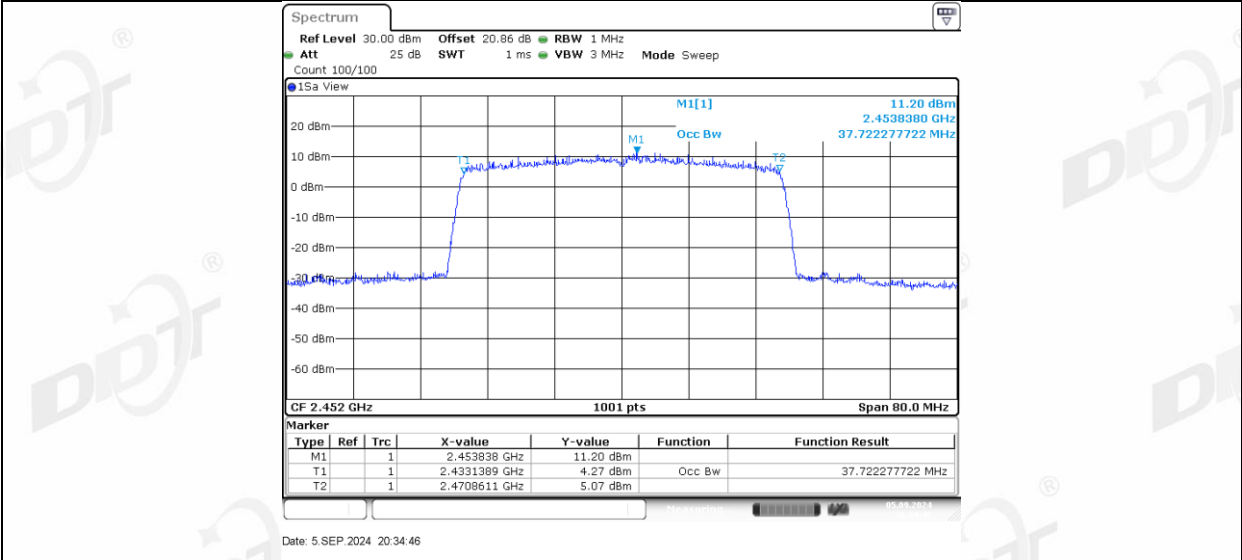


11AX40MIMO_Ant2_2452

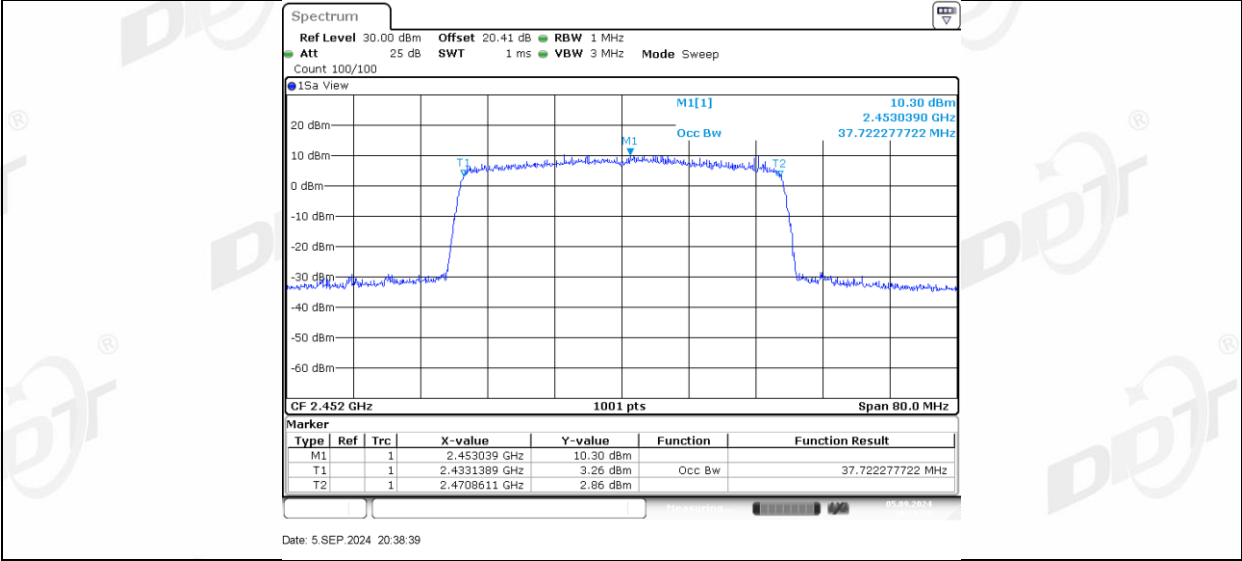

6. Conducted Output Power

6.1. Block diagram of test setup

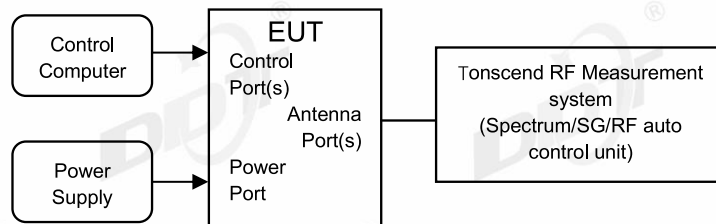

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average

Test Engineer:	Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.6-27.5℃,42.9-48.7%RH	Test Date:	2024.09.05-2024.09.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24081429-001

Test Mode	Ant.	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	15.39	99.64	0.02	15.41	≤30.00	17.20	≤36.00	PASS
	Ant2	2412	14.62	99.64	0.02	14.64	≤30.00	16.40	≤36.00	PASS
	Ant1	2437	15.30	99.64	0.02	15.32	≤30.00	17.11	≤36.00	PASS
	Ant2	2437	14.61	99.64	0.02	14.63	≤30.00	16.39	≤36.00	PASS
	Ant1	2462	15.21	99.64	0.02	15.23	≤30.00	17.02	≤36.00	PASS
	Ant2	2462	14.51	99.64	0.02	14.53	≤30.00	16.29	≤36.00	PASS
11G	Ant1	2412	12.50	97.90	0.09	12.59	≤30.00	14.38	≤36.00	PASS
	Ant2	2412	11.75	97.20	0.12	11.87	≤30.00	13.63	≤36.00	PASS
	Ant1	2437	12.29	97.20	0.12	12.41	≤30.00	14.20	≤36.00	PASS
	Ant2	2437	11.48	97.20	0.12	11.60	≤30.00	13.36	≤36.00	PASS
	Ant1	2462	12.19	97.90	0.09	12.28	≤30.00	14.07	≤36.00	PASS
	Ant2	2462	11.78	97.20	0.12	11.90	≤30.00	13.66	≤36.00	PASS
11N20MI MO	Ant1	2412	10.27	97.74	0.10	10.37	≤30.00	12.16	≤36.00	PASS
	Ant2	2412	9.48	97.01	0.13	9.61	≤30.00	11.37	≤36.00	PASS
	total	2412	---	---	---	13.02	≤30.00	14.79	≤36.00	PASS
	Ant1	2437	10.31	97.74	0.10	10.41	≤30.00	12.20	≤36.00	PASS
	Ant2	2437	9.59	97.74	0.10	9.69	≤30.00	11.45	≤36.00	PASS
	total	2437	---	---	---	13.08	≤30.00	14.85	≤36.00	PASS
	Ant1	2462	10.20	97.74	0.10	10.30	≤30.00	12.09	≤36.00	PASS
	Ant2	2462	9.64	97.01	0.13	9.77	≤30.00	11.53	≤36.00	PASS
	total	2462	---	---	---	13.05	≤30.00	14.83	≤36.00	PASS
	total	2412	---	---	---	13.02	≤30.00	14.79	≤36.00	PASS
11N40MI MO	Ant1	2422	9.89	94.12	0.26	10.15	≤30.00	11.94	≤36.00	PASS
	Ant2	2422	9.09	94.12	0.26	9.35	≤30.00	11.11	≤36.00	PASS
	total	2422	---	---	---	12.78	≤30.00	14.56	≤36.00	PASS
	Ant1	2437	9.89	94.12	0.26	10.15	≤30.00	11.94	≤36.00	PASS
	Ant2	2437	9.08	95.59	0.20	9.28	≤30.00	11.04	≤36.00	PASS
	total	2437	---	---	---	12.75	≤30.00	14.52	≤36.00	PASS
	Ant1	2452	9.86	95.59	0.20	10.06	≤30.00	11.85	≤36.00	PASS
	Ant2	2452	9.12	95.59	0.20	9.32	≤30.00	11.08	≤36.00	PASS
	total	2452	---	---	---	12.72	≤30.00	14.49	≤36.00	PASS
	total	2422	---	---	---	12.78	≤30.00	14.56	≤36.00	PASS
11AX20MI MO	Ant1	2412	10.50	96.19	0.17	10.67	≤30.00	12.46	≤36.00	PASS
	Ant2	2412	9.75	96.19	0.17	9.92	≤30.00	11.68	≤36.00	PASS
	total	2412	---	---	---	13.32	≤30.00	15.10	≤36.00	PASS
	Ant1	2437	10.55	97.14	0.13	10.68	≤30.00	12.47	≤36.00	PASS
	Ant2	2437	9.82	96.23	0.17	9.99	≤30.00	11.75	≤36.00	PASS
	total	2437	---	---	---	13.36	≤30.00	15.14	≤36.00	PASS
	Ant1	2462	10.45	96.23	0.17	10.62	≤30.00	12.41	≤36.00	PASS
	Ant2	2462	9.88	97.14	0.13	10.01	≤30.00	11.77	≤36.00	PASS
	total	2462	---	---	---	13.34	≤30.00	15.11	≤36.00	PASS
	total	2412	---	---	---	13.32	≤30.00	15.10	≤36.00	PASS
11AX40MI MO	Ant1	2422	10.31	94.74	0.23	10.54	≤30.00	12.33	≤36.00	PASS
	Ant2	2422	9.53	92.98	0.32	9.85	≤30.00	11.61	≤36.00	PASS
	total	2422	---	---	---	13.22	≤30.00	15.00	≤36.00	PASS
	Ant1	2437	10.31	94.74	0.23	10.54	≤30.00	12.33	≤36.00	PASS
	Ant2	2437	9.54	92.98	0.32	9.86	≤30.00	11.62	≤36.00	PASS
	total	2437	---	---	---	13.22	≤30.00	15.00	≤36.00	PASS
	Ant1	2452	10.30	92.98	0.32	10.62	≤30.00	12.41	≤36.00	PASS
	Ant2	2452	9.52	92.98	0.32	9.84	≤30.00	11.60	≤36.00	PASS
	total	2452	---	---	---	13.26	≤30.00	15.03	≤36.00	PASS
	total	2422	---	---	---	13.22	≤30.00	15.00	≤36.00	PASS


Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

Test Mode	Antenna	Frequency [MHz]	Ru Size	Ru Index	Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20MI MO	Ant1	2412	26Tone	RU0	13.67	≤30.00	15.46	≤36.00	PASS
				RU4	13.52	≤30.00	15.31	≤36.00	PASS
				RU8	12.95	≤30.00	14.74	≤36.00	PASS
			52Tone	RU37	13.94	≤30.00	15.73	≤36.00	PASS
				RU39	13.33	≤30.00	15.12	≤36.00	PASS
				RU40	13.20	≤30.00	14.99	≤36.00	PASS
			106Tone	RU53	14.13	≤30.00	15.92	≤36.00	PASS
				RU54	13.56	≤30.00	15.35	≤36.00	PASS
				RU0	13.72	≤30.00	15.48	≤36.00	PASS
	Ant2	2412	26Tone	RU4	13.09	≤30.00	14.85	≤36.00	PASS
				RU8	11.96	≤30.00	13.72	≤36.00	PASS
				RU37	14.01	≤30.00	15.77	≤36.00	PASS
			52Tone	RU39	12.33	≤30.00	14.09	≤36.00	PASS
				RU40	12.50	≤30.00	14.26	≤36.00	PASS
				RU53	13.87	≤30.00	15.63	≤36.00	PASS
			106Tone	RU54	13.00	≤30.00	14.76	≤36.00	PASS
				RU0	16.71	≤30.00	18.48	≤36.00	PASS
	total	2412	26Tone	RU4	16.32	≤30.00	18.10	≤36.00	PASS
				RU8	15.49	≤30.00	17.27	≤36.00	PASS
				RU37	16.99	≤30.00	18.76	≤36.00	PASS
			52Tone	RU39	15.87	≤30.00	17.65	≤36.00	PASS
				RU40	15.87	≤30.00	17.65	≤36.00	PASS
				RU53	17.01	≤30.00	18.79	≤36.00	PASS
			106Tone	RU54	16.30	≤30.00	18.08	≤36.00	PASS
				RU0	13.22	≤30.00	15.01	≤36.00	PASS
	Ant1	2437	26Tone	RU4	13.38	≤30.00	15.17	≤36.00	PASS
				RU8	13.35	≤30.00	15.14	≤36.00	PASS
				RU37	13.47	≤30.00	15.26	≤36.00	PASS
			52Tone	RU39	13.54	≤30.00	15.33	≤36.00	PASS
				RU40	13.43	≤30.00	15.22	≤36.00	PASS
				RU53	13.47	≤30.00	15.26	≤36.00	PASS
			106Tone	RU54	13.74	≤30.00	15.53	≤36.00	PASS
				RU0	12.60	≤30.00	14.36	≤36.00	PASS
	Ant2	2437	26Tone	RU4	12.89	≤30.00	14.65	≤36.00	PASS
				RU8	12.98	≤30.00	14.74	≤36.00	PASS
				RU37	12.83	≤30.00	14.59	≤36.00	PASS
			52Tone	RU39	13.16	≤30.00	14.92	≤36.00	PASS
				RU40	12.98	≤30.00	14.74	≤36.00	PASS
				RU53	13.15	≤30.00	14.91	≤36.00	PASS
			106Tone	RU54	13.24	≤30.00	15.00	≤36.00	PASS
				RU0	15.93	≤30.00	17.71	≤36.00	PASS
	total	2437	26Tone	RU4	16.15	≤30.00	17.93	≤36.00	PASS
				RU8	16.18	≤30.00	17.95	≤36.00	PASS
				RU37	16.17	≤30.00	17.95	≤36.00	PASS
			52Tone	RU39	16.36	≤30.00	18.14	≤36.00	PASS
				RU40	16.22	≤30.00	18.00	≤36.00	PASS
				RU53	16.32	≤30.00	18.10	≤36.00	PASS
			106Tone	RU54	16.51	≤30.00	18.28	≤36.00	PASS
				RU0	13.51	≤30.00	15.30	≤36.00	PASS
	Ant1	2462	26Tone	RU4	13.61	≤30.00	15.40	≤36.00	PASS
				RU8	13.40	≤30.00	15.19	≤36.00	PASS
				RU37	13.61	≤30.00	15.40	≤36.00	PASS
			52Tone	RU39	13.59	≤30.00	15.38	≤36.00	PASS
				RU40	13.75	≤30.00	15.54	≤36.00	PASS
				RU53	13.73	≤30.00	15.52	≤36.00	PASS
			106Tone	RU54	13.60	≤30.00	15.39	≤36.00	PASS
				RU0	13.01	≤30.00	14.77	≤36.00	PASS
	Ant2	2462	26Tone	RU4	13.11	≤30.00	14.87	≤36.00	PASS
				RU8	12.88	≤30.00	14.64	≤36.00	PASS
				RU37	13.22	≤30.00	14.98	≤36.00	PASS
			52Tone	RU39	13.35	≤30.00	15.11	≤36.00	PASS
				RU40	13.11	≤30.00	14.87	≤36.00	PASS
				RU53	13.48	≤30.00	15.24	≤36.00	PASS
			106Tone	RU54	13.45	≤30.00	15.21	≤36.00	PASS
				RU0	16.28	≤30.00	18.05	≤36.00	PASS
	total	2462	26Tone	RU4	16.38	≤30.00	18.15	≤36.00	PASS
				RU8	16.16	≤30.00	17.93	≤36.00	PASS
			52Tone	RU37	16.43	≤30.00	18.21	≤36.00	PASS
				RU39	16.48	≤30.00	18.26	≤36.00	PASS

11AX40MI MO			106Tone	RU40	16.45	≤30.00	18.23	≤36.00	PASS
				RU53	16.62	≤30.00	18.39	≤36.00	PASS
				RU54	16.54	≤30.00	18.31	≤36.00	PASS
	Ant1	2422	106Tone	RU53	13.76	≤30.00	15.55	≤36.00	PASS
				RU56	13.59	≤30.00	15.38	≤36.00	PASS
		242Tone		RU61	13.88	≤30.00	15.67	≤36.00	PASS
				RU62	13.96	≤30.00	15.75	≤36.00	PASS
	Ant2	2422	106Tone	RU53	13.29	≤30.00	15.05	≤36.00	PASS
				RU56	13.43	≤30.00	15.19	≤36.00	PASS
		242Tone		RU61	13.82	≤30.00	15.58	≤36.00	PASS
				RU62	13.64	≤30.00	15.40	≤36.00	PASS
	total	2422	106Tone	RU53	16.54	≤30.00	18.32	≤36.00	PASS
				RU56	16.52	≤30.00	18.30	≤36.00	PASS
		242Tone		RU61	16.86	≤30.00	18.64	≤36.00	PASS
				RU62	16.81	≤30.00	18.59	≤36.00	PASS
	Ant1	2437	106Tone	RU53	13.62	≤30.00	15.41	≤36.00	PASS
				RU56	13.48	≤30.00	15.27	≤36.00	PASS
		242Tone		RU61	13.97	≤30.00	15.76	≤36.00	PASS
				RU62	14.12	≤30.00	15.91	≤36.00	PASS
	Ant2	2437	106Tone	RU53	13.05	≤30.00	14.81	≤36.00	PASS
				RU56	13.01	≤30.00	14.77	≤36.00	PASS
		242Tone		RU61	13.48	≤30.00	15.24	≤36.00	PASS
				RU62	13.47	≤30.00	15.23	≤36.00	PASS
	total	2437	106Tone	RU53	16.35	≤30.00	18.13	≤36.00	PASS
				RU56	16.26	≤30.00	18.04	≤36.00	PASS
		242Tone		RU61	16.74	≤30.00	18.52	≤36.00	PASS
				RU62	16.82	≤30.00	18.59	≤36.00	PASS
	Ant1	2452	106Tone	RU53	13.59	≤30.00	15.38	≤36.00	PASS
				RU56	13.47	≤30.00	15.26	≤36.00	PASS
		242Tone		RU61	14.05	≤30.00	15.84	≤36.00	PASS
				RU62	13.84	≤30.00	15.63	≤36.00	PASS
	Ant2	2452	106Tone	RU53	12.68	≤30.00	14.44	≤36.00	PASS
				RU56	12.72	≤30.00	14.48	≤36.00	PASS
		242Tone		RU61	12.92	≤30.00	14.68	≤36.00	PASS
				RU62	12.77	≤30.00	14.53	≤36.00	PASS
	total	2452	106Tone	RU53	16.17	≤30.00	17.95	≤36.00	PASS
				RU56	16.12	≤30.00	17.90	≤36.00	PASS
		242Tone		RU61	16.53	≤30.00	18.31	≤36.00	PASS
				RU62	16.35	≤30.00	18.13	≤36.00	PASS

7. Power Spectral Density

7.1. Block diagram of test setup

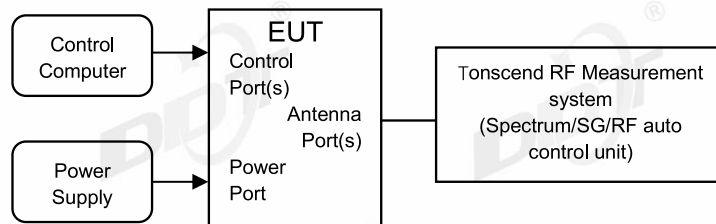

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
 - (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
 - (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
 - (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.
 - (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result

Test Engineer:	Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.6-27.5℃,42.9-48.7%RH	Test Date:	2024.09.05-2024.09.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24081429-001


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-15.11	≤8.00	PASS
	Ant2	2412	-13.32	≤8.00	PASS
	Ant1	2437	-13.60	≤8.00	PASS
	Ant2	2437	-13.29	≤8.00	PASS
	Ant1	2462	-15.00	≤8.00	PASS
	Ant2	2462	-13.81	≤8.00	PASS
11G	Ant1	2412	-19.37	≤8.00	PASS
	Ant2	2412	-19.77	≤8.00	PASS
	Ant1	2437	-19.42	≤8.00	PASS
	Ant2	2437	-19.80	≤8.00	PASS
	Ant1	2462	-19.73	≤8.00	PASS
	Ant2	2462	-19.86	≤8.00	PASS
11N20MIMO	Ant1	2412	-22.31	≤8.00	PASS
	Ant2	2412	-23.00	≤8.00	PASS
	total	2412	-19.63	≤8.00	PASS
	Ant1	2437	-22.06	≤8.00	PASS
	Ant2	2437	-23.10	≤8.00	PASS
	total	2437	-19.54	≤8.00	PASS
	Ant1	2462	-22.64	≤8.00	PASS
	Ant2	2462	-22.83	≤8.00	PASS
	total	2462	-19.72	≤8.00	PASS
	Ant1	2422	-27.43	≤8.00	PASS
11N40MIMO	Ant2	2422	-27.87	≤8.00	PASS
	total	2422	-24.63	≤8.00	PASS
	Ant1	2437	-27.40	≤8.00	PASS
	Ant2	2437	-27.79	≤8.00	PASS
	total	2437	-24.58	≤8.00	PASS
	Ant1	2452	-27.53	≤8.00	PASS
	Ant2	2452	-27.52	≤8.00	PASS
	total	2452	-24.51	≤8.00	PASS
	Ant1	2412	-21.38	≤8.00	PASS
	Ant2	2412	-22.54	≤8.00	PASS
11AX20MIMO	total	2412	-18.91	≤8.00	PASS
	Ant1	2437	-21.46	≤8.00	PASS
	Ant2	2437	-23.03	≤8.00	PASS
	total	2437	-19.16	≤8.00	PASS
	Ant1	2462	-21.92	≤8.00	PASS
	Ant2	2462	-22.12	≤8.00	PASS
	total	2462	-19.01	≤8.00	PASS
	Ant1	2422	-25.76	≤8.00	PASS
	Ant2	2422	-25.29	≤8.00	PASS
	total	2422	-22.51	≤8.00	PASS
11AX40MIMO	Ant1	2437	-25.55	≤8.00	PASS
	Ant2	2437	-26.46	≤8.00	PASS
	total	2437	-22.97	≤8.00	PASS
	Ant1	2452	-25.52	≤8.00	PASS
	Ant2	2452	-25.85	≤8.00	PASS
	total	2452	-22.67	≤8.00	PASS


Test ode	Antenna	Frequency [MHz]	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20 MIMO	Ant1	2412	26Tone	RU0	-10.05	≤8.00	PASS
				RU4	-9.75	≤8.00	PASS
				RU8	-10.11	≤8.00	PASS
			52Tone	RU37	-11.56	≤8.00	PASS
				RU39	-13.54	≤8.00	PASS
				RU40	-12.07	≤8.00	PASS
			106Tone	RU53	-14.34	≤8.00	PASS
				RU54	-13.93	≤8.00	PASS
	Ant2	2412	26Tone	RU0	-9.63	≤8.00	PASS
				RU4	-9.70	≤8.00	PASS
				RU8	-10.97	≤8.00	PASS
			52Tone	RU37	-12.10	≤8.00	PASS
				RU39	-14.60	≤8.00	PASS
				RU40	-13.16	≤8.00	PASS
			106Tone	RU53	-14.49	≤8.00	PASS
				RU54	-14.31	≤8.00	PASS
	total	2412	26Tone	RU0	-6.82	≤8.00	PASS
				RU4	-6.71	≤8.00	PASS
				RU8	-7.51	≤8.00	PASS
			52Tone	RU37	-8.81	≤8.00	PASS
				RU39	-11.03	≤8.00	PASS
				RU40	-9.57	≤8.00	PASS
			106Tone	RU53	-11.40	≤8.00	PASS
				RU54	-11.11	≤8.00	PASS
	Ant1	2437	26Tone	RU0	-10.33	≤8.00	PASS
				RU4	-10.58	≤8.00	PASS
				RU8	-9.69	≤8.00	PASS
			52Tone	RU37	-13.19	≤8.00	PASS
				RU39	-13.68	≤8.00	PASS
				RU40	-12.19	≤8.00	PASS
			106Tone	RU53	-14.79	≤8.00	PASS
				RU54	-12.91	≤8.00	PASS
	Ant2	2437	26Tone	RU0	-10.37	≤8.00	PASS
				RU4	-10.18	≤8.00	PASS
				RU8	-9.26	≤8.00	PASS
			52Tone	RU37	-12.68	≤8.00	PASS
				RU39	-13.16	≤8.00	PASS
				RU40	-12.06	≤8.00	PASS
			106Tone	RU53	-14.92	≤8.00	PASS
				RU54	-13.02	≤8.00	PASS
	total	2437	26Tone	RU0	-7.34	≤8.00	PASS
				RU4	-7.37	≤8.00	PASS
				RU8	-6.46	≤8.00	PASS
			52Tone	RU37	-9.92	≤8.00	PASS
				RU39	-10.40	≤8.00	PASS
				RU40	-9.11	≤8.00	PASS
			106Tone	RU53	-11.84	≤8.00	PASS
				RU54	-9.95	≤8.00	PASS
	Ant1	2462	26Tone	RU0	-9.82	≤8.00	PASS
				RU4	-10.39	≤8.00	PASS
				RU8	-9.37	≤8.00	PASS
			52Tone	RU37	-12.10	≤8.00	PASS
				RU39	-13.47	≤8.00	PASS
				RU40	-12.07	≤8.00	PASS
			106Tone	RU53	-13.71	≤8.00	PASS
				RU54	-13.29	≤8.00	PASS
	Ant2	2462	26Tone	RU0	-9.89	≤8.00	PASS
				RU4	-10.03	≤8.00	PASS
				RU8	-11.00	≤8.00	PASS
			52Tone	RU37	-12.86	≤8.00	PASS
				RU39	-12.94	≤8.00	PASS
				RU40	-11.72	≤8.00	PASS

	total	2462	106Tone	RU53	-15.15	≤8.00	PASS
				RU54	-12.95	≤8.00	PASS
			26Tone	RU0	-6.84	≤8.00	PASS
				RU4	-7.20	≤8.00	PASS
				RU8	-7.10	≤8.00	PASS
			52Tone	RU37	-9.45	≤8.00	PASS
				RU39	-10.19	≤8.00	PASS
				RU40	-8.88	≤8.00	PASS
			106Tone	RU53	-11.36	≤8.00	PASS
				RU54	-10.11	≤8.00	PASS
11AX40 MIMO	Ant1	2422	106Tone	RU53	-14.48	≤8.00	PASS
				RU56	-12.35	≤8.00	PASS
			242Tone	RU61	-16.37	≤8.00	PASS
				RU62	-15.15	≤8.00	PASS
	Ant2	2422	106Tone	RU53	-13.36	≤8.00	PASS
				RU56	-12.23	≤8.00	PASS
			242Tone	RU61	-15.57	≤8.00	PASS
				RU62	-14.06	≤8.00	PASS
	total	2422	106Tone	RU53	-10.87	≤8.00	PASS
				RU56	-9.28	≤8.00	PASS
			242Tone	RU61	-12.94	≤8.00	PASS
				RU62	-11.56	≤8.00	PASS
	Ant1	2437	106Tone	RU53	-13.03	≤8.00	PASS
				RU56	-12.91	≤8.00	PASS
			242Tone	RU61	-15.93	≤8.00	PASS
				RU62	-15.22	≤8.00	PASS
	Ant2	2437	106Tone	RU53	-13.86	≤8.00	PASS
				RU56	-12.65	≤8.00	PASS
			242Tone	RU61	-15.41	≤8.00	PASS
				RU62	-15.01	≤8.00	PASS
	total	2437	106Tone	RU53	-10.41	≤8.00	PASS
				RU56	-9.77	≤8.00	PASS
			242Tone	RU61	-12.65	≤8.00	PASS
				RU62	-12.10	≤8.00	PASS
	Ant1	2452	106Tone	RU53	-13.30	≤8.00	PASS
				RU56	-12.20	≤8.00	PASS
			242Tone	RU61	-16.32	≤8.00	PASS
				RU62	-16.11	≤8.00	PASS
	Ant2	2452	106Tone	RU53	-13.80	≤8.00	PASS
				RU56	-12.05	≤8.00	PASS
			242Tone	RU61	-15.72	≤8.00	PASS
				RU62	-16.10	≤8.00	PASS
	total	2452	106Tone	RU53	-10.53	≤8.00	PASS
				RU56	-9.11	≤8.00	PASS
			242Tone	RU61	-13.00	≤8.00	PASS
				RU62	-13.09	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

7.5. Test graphs

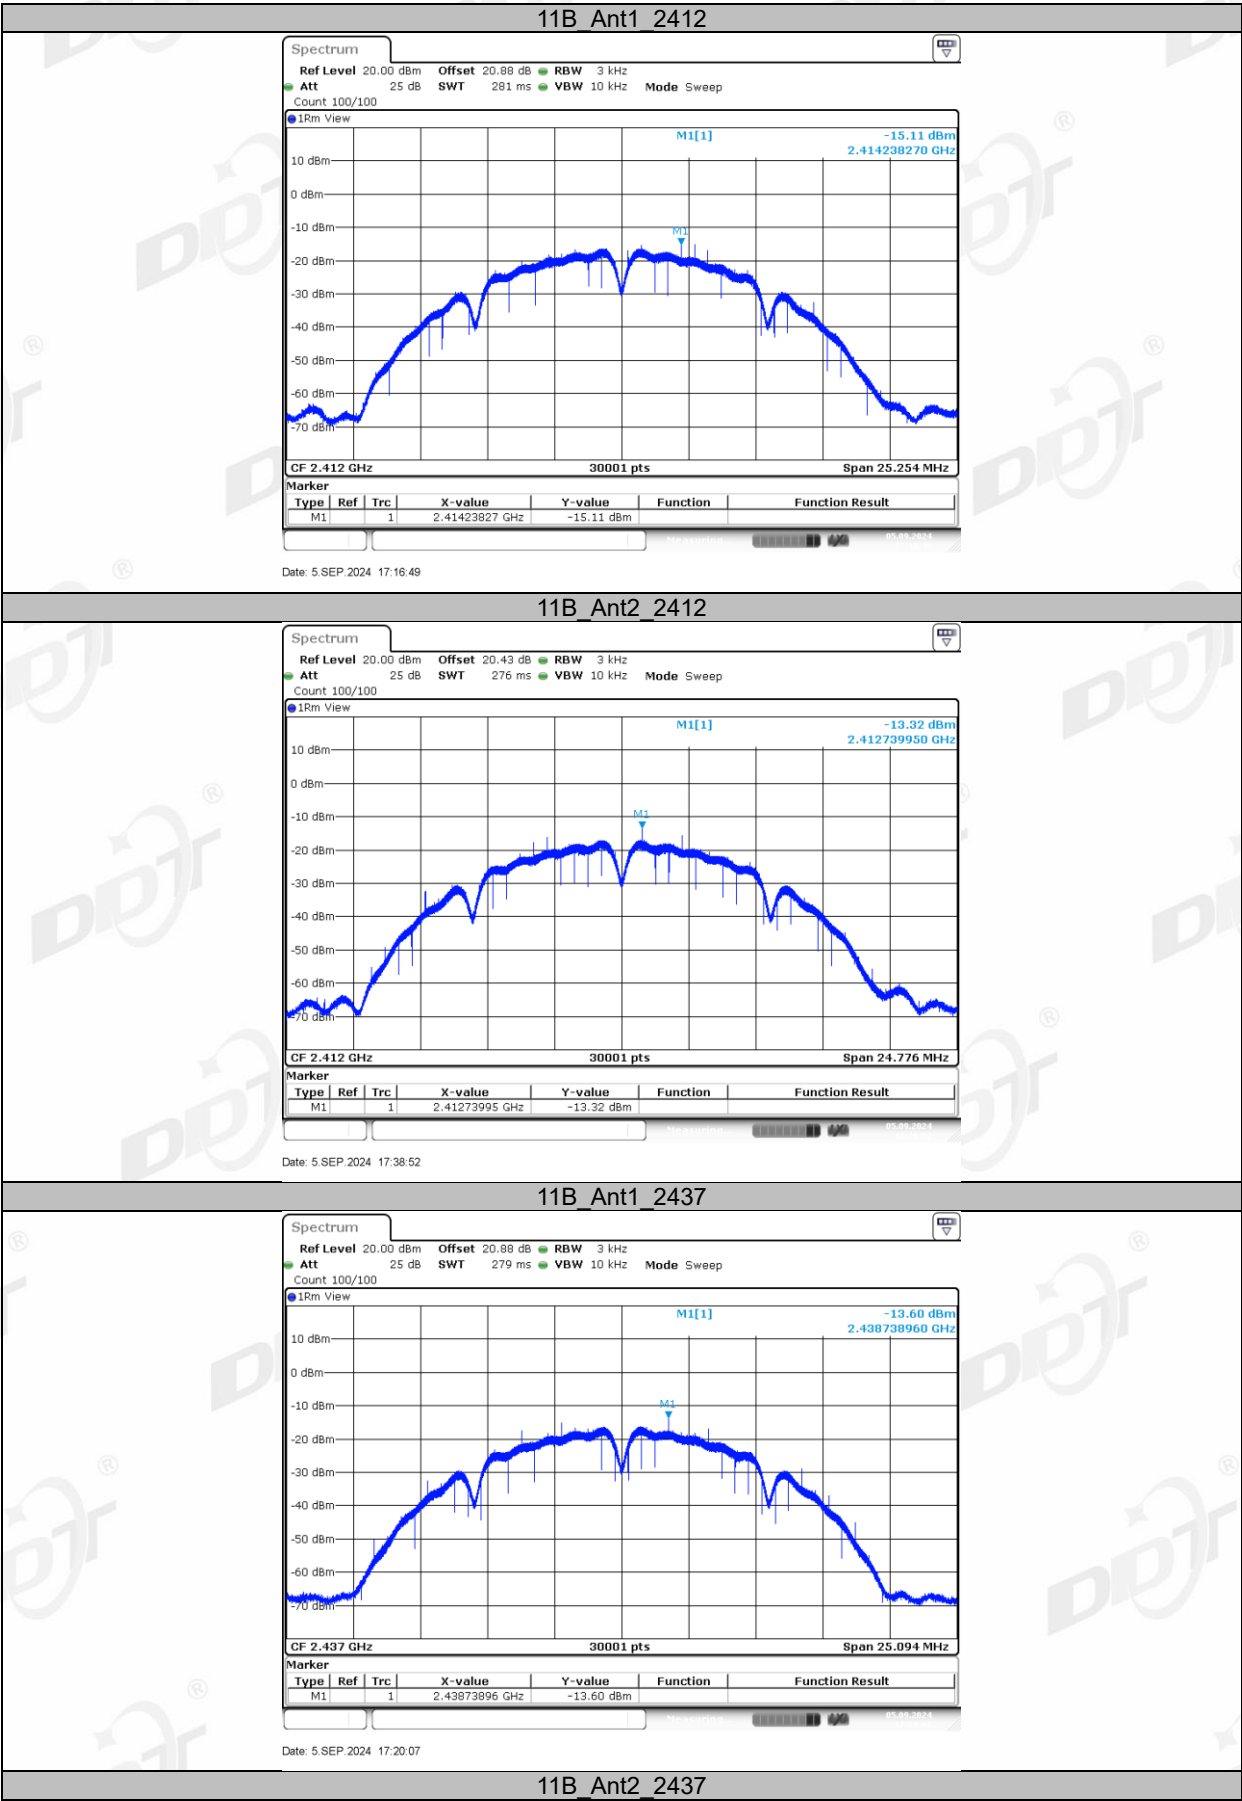


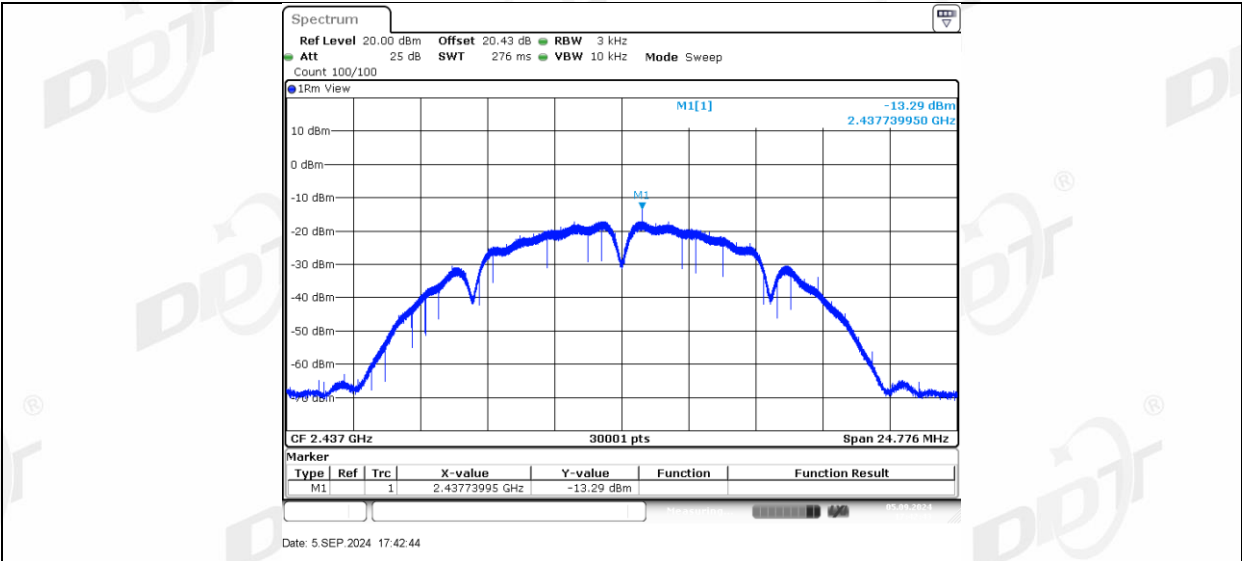


11B_Ant1_2462

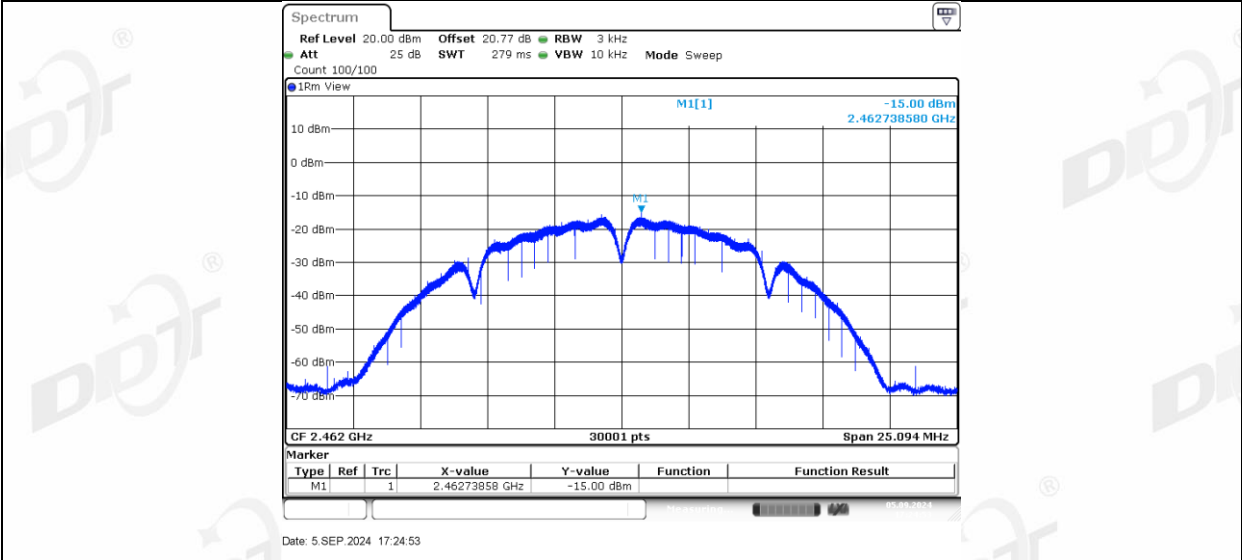


11B_Ant2_2462

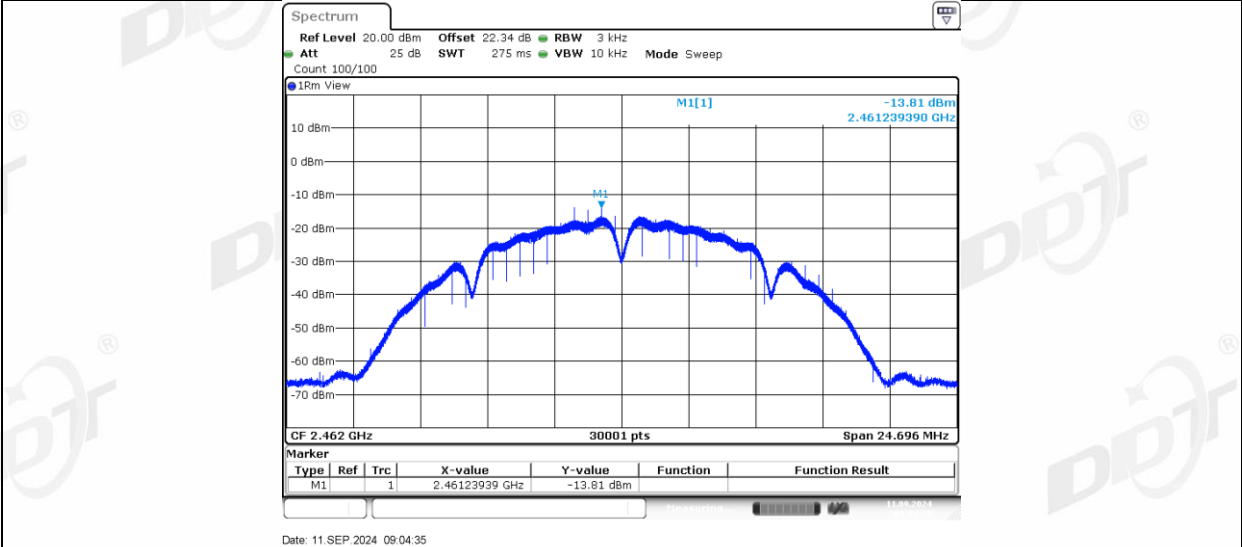


11G_Ant1_2412

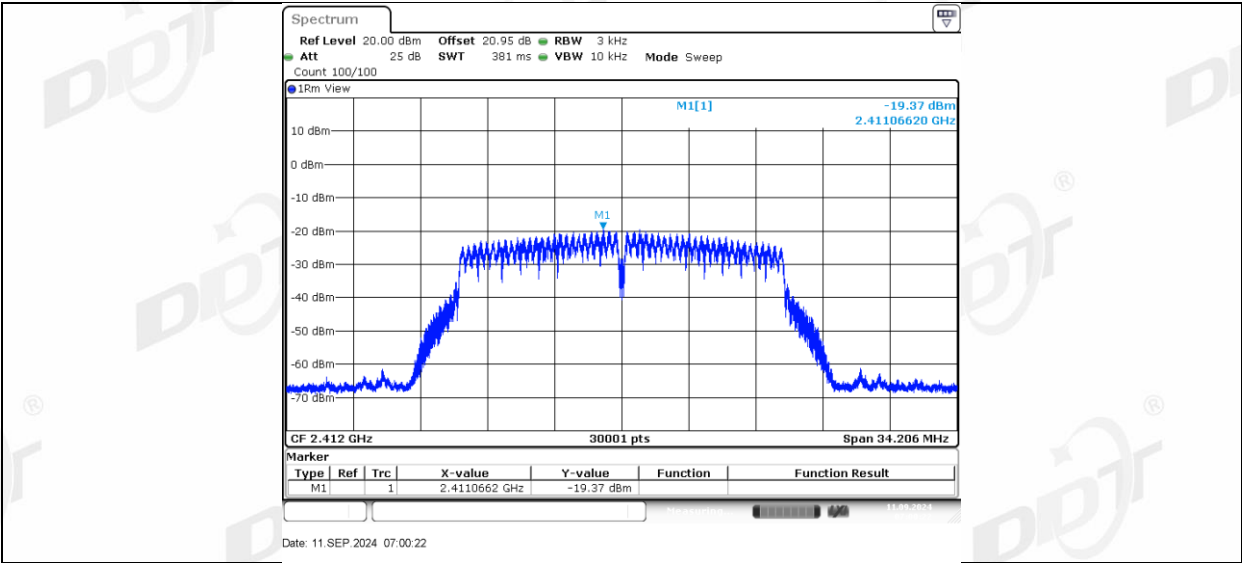


11G_Ant2_2412

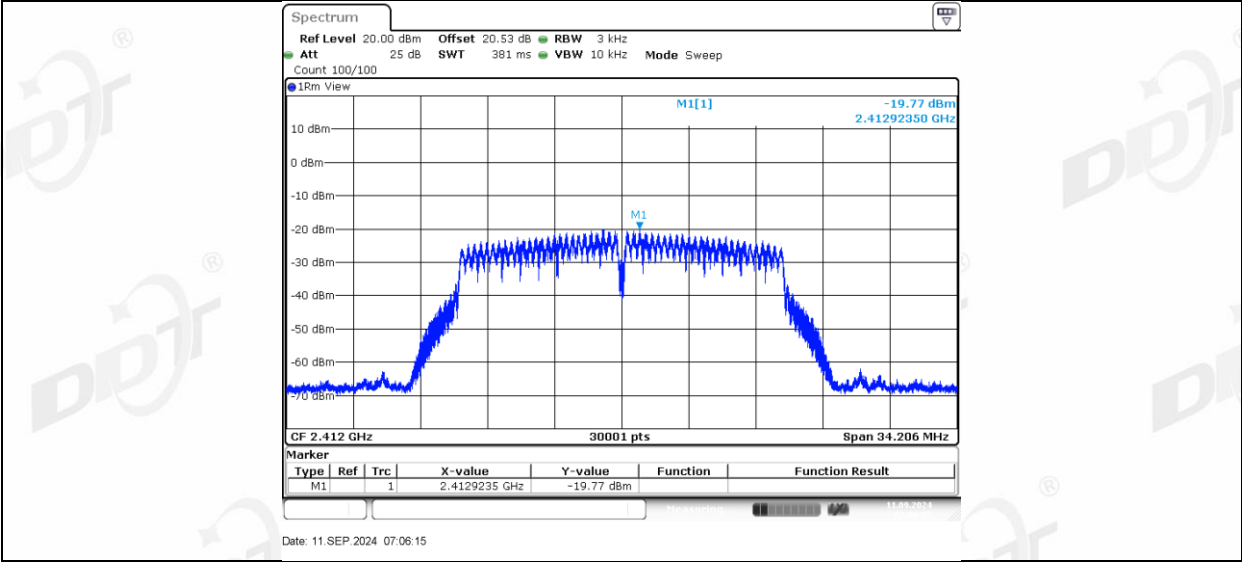


11G_Ant1_2437

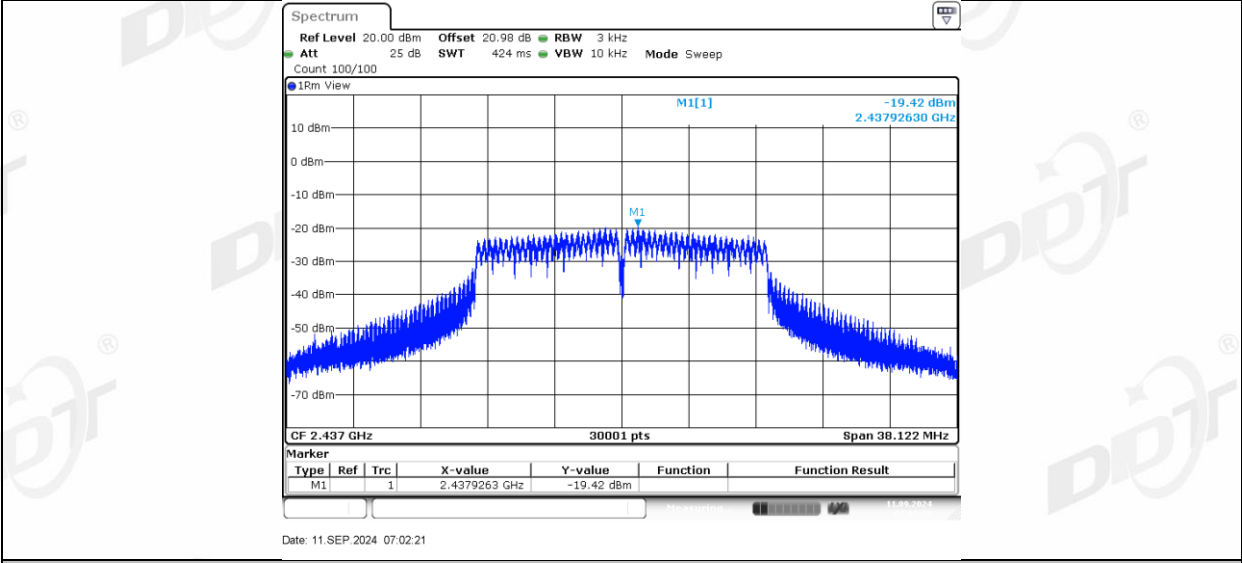


11G_Ant2_2437

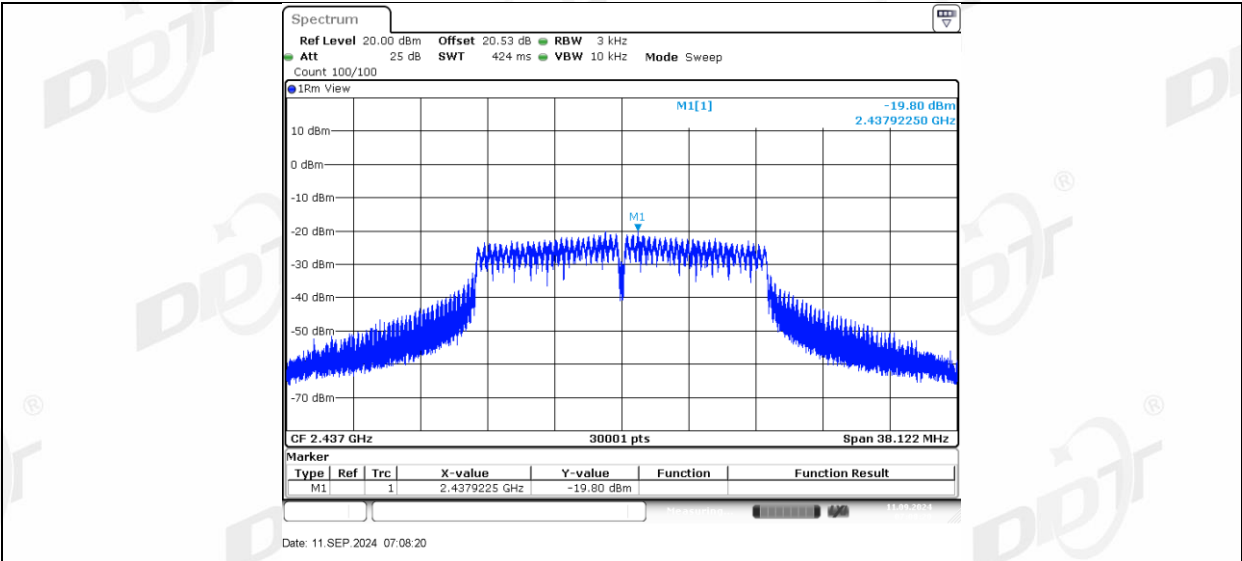

11G Ant1_2462

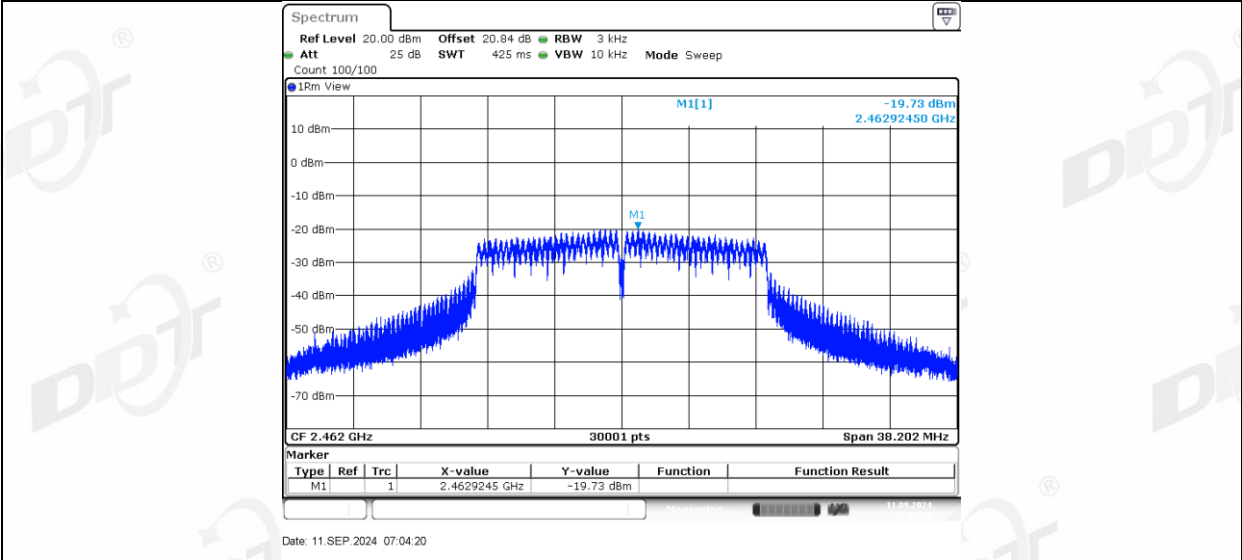

11G Ant2_2462

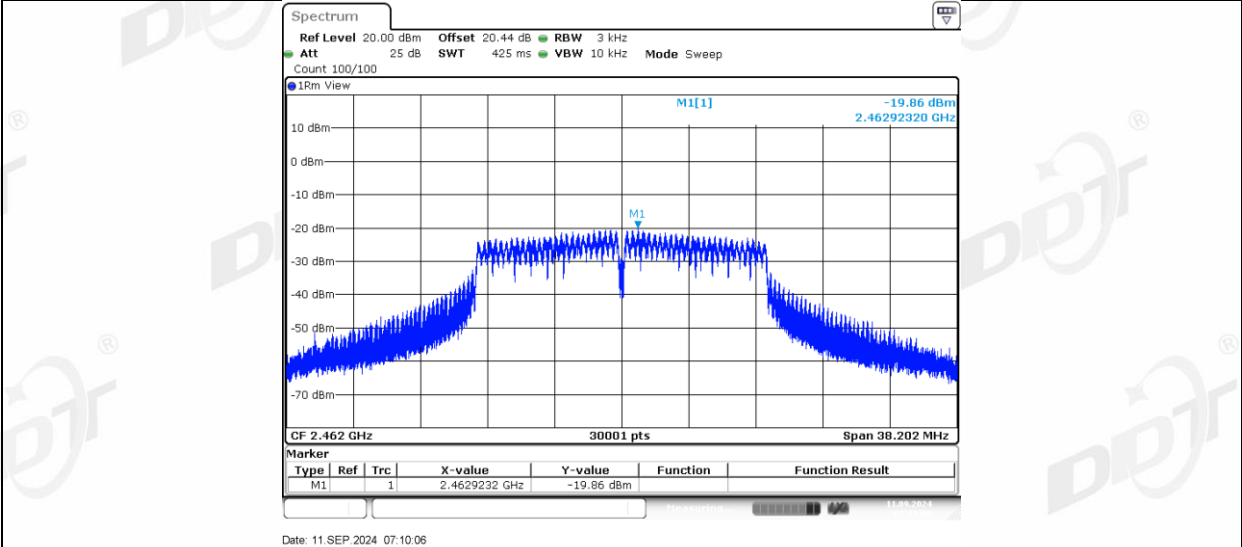

11N20MIMO_Ant1_2412