



Neutron Engineering Inc.

FCC Radio Test Report

FCC ID: Q3N-9700

This report concerns (check one) : ☒ Original Grant ☐ Class II Change

Issued Date : Apr. 24, 2014
Project No. : 1404142
Equipment : Mobile Computer
Model Name : 9700

Applicant : CIPHERLAB CO., LTD.
Address : 12F, 333, Dunhua S. Rd., Sec. 2, Taipei,
Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Apr. 09, 2014
Date of Test: Apr. 09, 2014 ~ Apr. 23, 2014

Testing Engineer : Josh Lin
(Josh Lin)

Technical Manager : Jeff Yang
(Jeff Yang)

Authorized Signatory : Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	15
4 CONDUCTED EMISSION	16
4.1 LIMIT	16
4.2 MEASUREMENT INSTRUMENTS LIST	16
4.3 TEST PROCEDURES	17
4.4 TEST SETUP LAYOUT	17
4.5 DEVIATION FROM TEST STANDARD	17
4.6 EUT OPERATING CONDITIONS	18
4.7 TEST RESULTS	19
5 ANTENNA CONDUCTED SPURIOUS EMISSION	21
5.1 LIMIT	21
5.2 MEASUREMENT INSTRUMENTS LIST	21
5.3 TEST PROCEDURES	21
5.4 TEST SETUP LAYOUT	21
5.5 DEVIATION FROM TEST STANDARD	21
5.6 EUT OPERATING CONDITIONS	21
5.7 TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND	22
5.8 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	32
6 26 DB BANDWIDTH	40
6.1 LIMIT	40
6.2 MEASUREMENT INSTRUMENTS LIST	40
6.3 MEASURING INSTRUMENTS SETTING	40
6.4 TEST PROCEDURES	40
6.5 TEST SETUP LAYOUT	40
6.6 DEVIATION FROM TEST STANDARD	40
6.7 EUT OPERATING CONDITIONS	40
6.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	41
6.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	45
6.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	49



Table of Contents

7	MAXIMUM PEAK CONDUCTED OUTPUT POWER	53
7.1	LIMIT	53
7.2	MEASUREMENT INSTRUMENTS LIST	53
7.3	MEASURING INSTRUMENTS SETTING	53
7.4	TEST PROCEDURES	53
7.5	TEST SETUP LAYOUT	53
7.6	DEVIATION FROM TEST STANDARD	53
7.7	EUT OPERATING CONDITIONS	54
7.8	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	55
7.9	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	59
7.10	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	63
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	67
8.1	LIMIT	67
8.2	MEASUREMENT INSTRUMENTS LIST	68
8.3	MEASURING INSTRUMENTS SETTING	68
8.4	TEST PROCEDURES	69
8.5	DEVIATION FROM TEST STANDARD	69
8.6	TEST SETUP LAYOUT	69
8.7	EUT OPERATING CONDITIONS	70
8.8	TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND	71
8.9	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	73
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	75
9.1	LIMIT	75
9.2	MEASUREMENT INSTRUMENTS LIST	76
9.3	MEASURING INSTRUMENTS SETTING	76
9.4	TEST PROCEDURES	77
9.5	DEVIATION FROM TEST STANDARD	77
9.6	TEST SETUP LAYOUT	77
9.7	EUT OPERATING CONDITIONS	78
9.8	TEST RESULTS - 5180 MHZ TO 5350 MHZ BAND	79
9.9	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	127
9.10	TEST RESULTS (RESTRICTED BANDS) - 4500 MHZ TO 5150 MHZ	151
9.11	TEST RESULTS (RESTRICTED BANDS) - 5350 MHZ TO 5460 MHZ BAND	155
10	POWER SPECTRAL DENSITY	163
10.1	LIMIT	163
10.2	MEASUREMENT INSTRUMENTS LIST	163
10.3	MEASURING INSTRUMENTS SETTING	163
10.4	TEST PROCEDURES	163
10.5	TEST SETUP LAYOUT	163



Table of Contents

10.6	DEVIATION FROM TEST STANDARD	163
10.7	EUT OPERATING CONDITIONS	164
10.8	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	165
10.9	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	169
10.10	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	173
11	PEAK EXCURSION	177
11.1	LIMIT	177
11.2	MEASUREMENT INSTRUMENTS LIST	177
11.3	MEASURING INSTRUMENTS SETTING	177
11.4	TEST PROCEDURES	177
11.5	TEST SETUP LAYOUT	177
11.6	DEVIATION FROM TEST STANDARD	178
11.7	EUT OPERATING CONDITIONS	178
11.8	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	179
11.9	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	183
11.10	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	187
12	FREQUENCY STABILITY	191
12.1	LIMIT	191
12.2	MEASUREMENT INSTRUMENTS LIST	191
12.3	MEASURING INSTRUMENTS SETTING	191
12.4	TEST PROCEDURES	191
12.5	TEST SETUP LAYOUT	191
12.6	DEVIATION FROM TEST STANDARD	191
12.7	EUT OPERATING CONDITIONS	192
12.8	TEST RESULTS	193
13	EUT TEST PHOTO	194



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FCCP-2-1404142	Original Issue.	Apr. 24, 2014



1 CERTIFICATION

Equipment : Mobile Computer
Brand Name : CIPHERLAB
Model Name : 9700
Applicant : CIPHERLAB CO., LTD.
Date of Test : Apr. 09, 2014 ~ Apr. 23, 2014
Standard(s) : FCC Part 15, Subpart E: 2013
ANSI C63.4: 2009
FCC KDB 789033 D01 General UNII Test Procedures v01r03

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-2-1404142) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

Standard Clause	Test Item	Result
15.207	Conducted Emission	PASS
15.407 (a)	Antenna conducted Spurious Emission	PASS
15.407 (a)	26 dB Bandwidth	PASS
15.407 (a)	Maximum Peak Conducted Output Power	PASS
15.407 (a)	Radiated Spurious Emission	PASS
15.407 (a)	Power Spectral Density	PASS
15.407 (a)	Peak Excursion	PASS
15.407 (b)	Band Edge Emissions	PASS
15.407 (b)	Frequency Stability	PASS
15.205	Restricted Bands	PASS
15.203	Antenna Requirement	PASS

NOTE:

- (1) N/A: denotes test is not applicable in this test report.
- (2) Portable device; SAR report is required.
- (3) This test report only covers radio operating bands: 5150-5250 MHz, 5250-5350 MHz and 5470-5725 MHz (IEEE 802.11a/n).
The test for radio operating bands: 2400-2483.5 MHz (IEEE 802.11b/g/n) and 5725-5825 MHz (IEEE 802.11a/n) is covered in another test report: NEI-FCCP-1-1404142.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C02: (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U , (dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
		Horizontal Polarization	200 - 1000MHz	3.11 dB
		Horizontal Polarization	1 - 18GHz	3.97 dB
		Horizontal Polarization	18 - 40GHz	4.01 dB
	Vertical Polarization	Vertical Polarization	30 - 200MHz	3.22 dB
		Vertical Polarization	200 - 1000MHz	3.24 dB
		Vertical Polarization	1 - 18GHz	4.05 dB
		Vertical Polarization	18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above.

These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Computer	
Brand Name	CIPHERLAB	
Model Name	9700	
OEM Brand/Model Name	N/A	
Model Difference	N/A	
Product Description	Operation Frequency	5180 MHz to 5240 MHz, 5260 MHz to 5320 MHz, 5500 MHz to 5700 MHz
	Modulation Type	DBPSK, DQPSK, CCK, BPSK, QPSK, 16QAM, 64QAM, MIMO IEEE 802.11a: OFDM IEEE 802.11n: BPSK (1 TX & 1 RX)
	Bit Rate of Transmitter	IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: HT20: 6.5, 7.2, 13.0, 14.4, 19.5, 21.7, 26.0, 28.9, 39.0, 43.3, 52.0, 57.8, 58.5, 65.0, 72.2 Mbps
	Maximum Peak Conducted Output Power:	5180 MHz to 5240 MHz Band: IEEE 802.11a: 13.51 dBm (0.0224 W) IEEE 802.11n(20 MHz): 13.19 dBm (0.0208 W) 5260 MHz to 5320 MHz Band: IEEE 802.11a: 14.16 dBm (0.0261 W) IEEE 802.11n(20 MHz): 13.78 dBm (0.0239 W) 5500 MHz to 5700 MHz Band: IEEE 802.11a: 15.00 dBm (0.0316 W) IEEE 802.11n(20 MHz): 14.20 dBm (0.0263 W)
Power Source	1. Battery supplied. 2. DC Voltage supplied from External Power Supply.	
Power Rating	1. Li-ion BATTERY PACK: 3.7V 2. External Power Supply: I/P: AC 100-240V 47-63Hz 0.58A MAX / O/P: DC 5V 4A 20W MAX	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	1 * Keypad (optional): 53 Keys, 38 Keys or 30 Keys 1 * Li-ion BATTERY PACK (optional): (1) CIPHERLAB, BA-0083A6, 3.7V 3600mAh, 13.32Wh (2) CIPHERLAB, BA-0085A4, 3.7V 5400mAh, 19.98Wh 1 * Reader (optional): SE-4500+PL4507, SE-4500, SE-955, EX25 or SE-1524. 1 * Snap-On Cable (optional): (1) RS-232 Type (2) USB Type 1 * External Power Supply: ADAPTER TECH., STD-05040T 1 * Pistol (optional)	
EUT Modification(s)	N/A	



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

5180 MHz to 5240 MHz Band (IEEE 802.11a/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

5260 MHz to 5320 MHz Band (IEEE 802.11a/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		
56	5280	64	5320		

5500 MHz to 5700 MHz Band (IEEE 802.11a/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	112	5560	140	5700
104	5520	116	5580		
108	5540	136	5680		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	CIPHERLAB	KX00000060113	Main Antenna	N/A	2.52	TX
2	CIPHERLAB	KX00000060122	Div Antenna	N/A	3.11	RX

4. The EUT provides 1 completed transmitter and 1 receiver (1T1R).

Modulated type	TX Function
IEEE 802.11a	1 TX
IEEE 802.11n (20MHz)	1 TX



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	IEEE	Mode	Data Rate	Channel	Note
Conducted Emission	802.11a	OFDM	6 Mbps	---	
Antenna conducted Spurious Emission	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS0	36/40/48/52/60/64/100/116/140	
26 dB Bandwidth	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS0	36/40/48/52/60/64/100/116/140	
Maximum Peak Conducted Output Power	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS0	36/40/48/52/60/64/100/116/140	
Radiated Spurious Emission (30 MHz to 1 GHz)	802.11a	OFDM	6 Mbps	40	
	802.11n (20 MHz)	BPSK	MCS0	60/116	
Radiated Spurious Emission (above 1 GHz)	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS0	36/40/48/52/60/64/100/116/140	
Restricted Bands	802.11a	OFDM	6 Mbps	36/48/52/64/100/140	
	802.11n (20 MHz)	BPSK	MCS0	36/48/52/64/100/140	
Power Spectral Density	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS0	36/40/48/52/60/64/100/116/140	
Peak Excursion	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS0	36/40/48/52/60/64/100/116/140	
Band Edge Emissions	802.11a	OFDM	6 Mbps	36/64/100	
	802.11n (20 MHz)	BPSK	MCS0	36/64/100	
Frequency Stability	802.11a	OFDM	6 Mbps	40	
Antenna Requirement	---	---	---	---	

NOTE: The measurements are performed at the highest, middle, lowest available channels.



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


5180 MHz to 5240 MHz Band						
IEEE	802.11a			802.11n (20 MHz)		
Test software Version	SRU v3.03.10			SRU v3.03.10		
Frequency	5180 MHz	5200 MHz	5240 MHz	5180 MHz	5200 MHz	5240 MHz
Parameter	100	100	100	100	100	100

5260 MHz to 5320 MHz Band						
IEEE	802.11a			802.11n (20 MHz)		
Test software Version	SRU v3.03.10			SRU v3.03.10		
Frequency	5260 MHz	5300 MHz	5320 MHz	5260 MHz	5300 MHz	5320 MHz
Parameter	100	100	100	100	100	100

5500 MHz to 5700 MHz Band						
IEEE	802.11a			802.11n (20 MHz)		
Test software Version	SRU v3.03.10			SRU v3.03.10		
Frequency	5500 MHz	5580 MHz	5700 MHz	5500 MHz	5580 MHz	5700 MHz
Parameter	100	100	100	100	100	100



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED





3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Mobile Computer	CIPHERLAB	9700	Q3N-9700	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	-

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



4 CONDUCTED EMISSION

4.1 LIMIT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

NOTE:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value

4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	Schwarzbeck	NSLK 8127	8127685	Jan. 08, 2015
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 16, 2014
3	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jun. 20, 2014
4	Measurement Software	EZ	EZ_EMC (Version NB-02A)	N/A	N/A

NOTE: N/A: denotes no modelname, no serial No. or no calibration specified.




4.3 TEST PROCEDURES

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

- Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

4.4 TEST SETUP LAYOUT

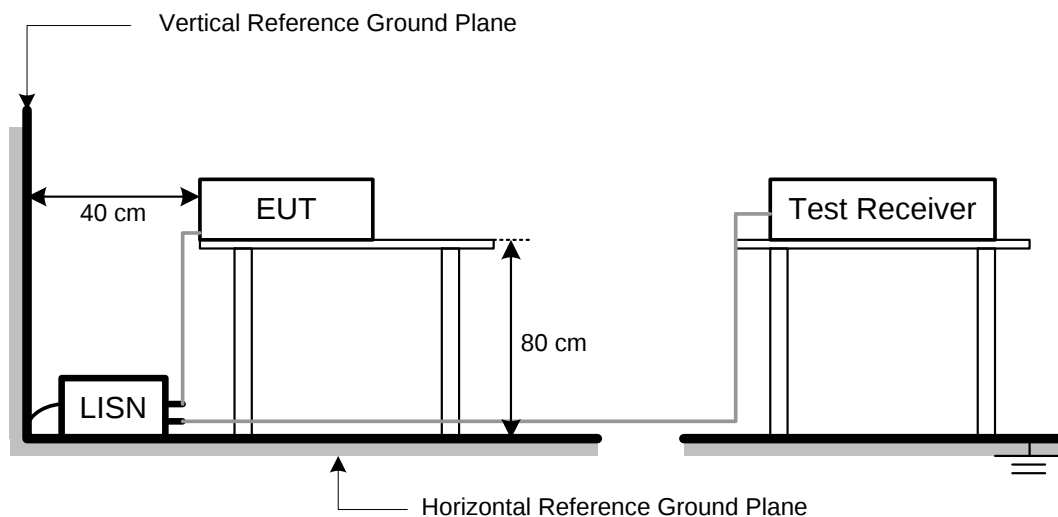

4.5 DEVIATION FROM TEST STANDARD

No deviation



4.6 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.7 TEST RESULTS

EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	5320 MHz		

Phase: Line

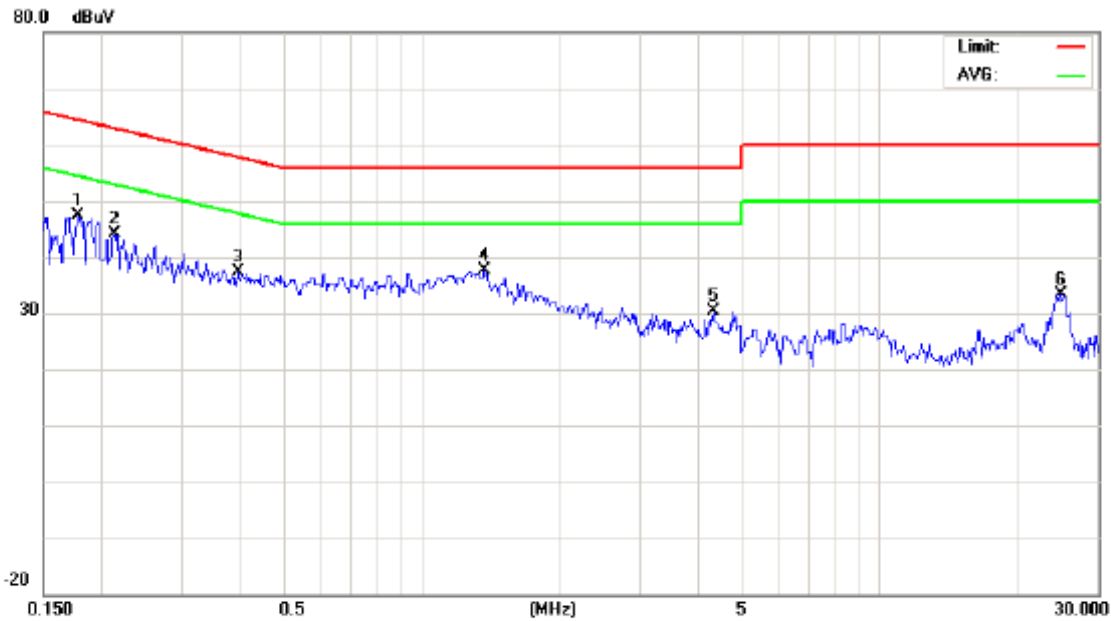


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1785	38.28	9.01	47.29	64.56	-17.27	peak	
2		0.2136	34.97	9.22	44.19	63.06	-18.87	peak	
3		0.3963	28.52	8.90	37.42	57.93	-20.51	peak	
4		1.3729	28.44	9.07	37.51	56.00	-18.49	peak	
5		4.3250	20.81	9.68	30.49	56.00	-25.51	peak	
6		24.6999	23.15	10.22	33.37	60.00	-26.63	peak	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	5320 MHz		

Phase: Neutral

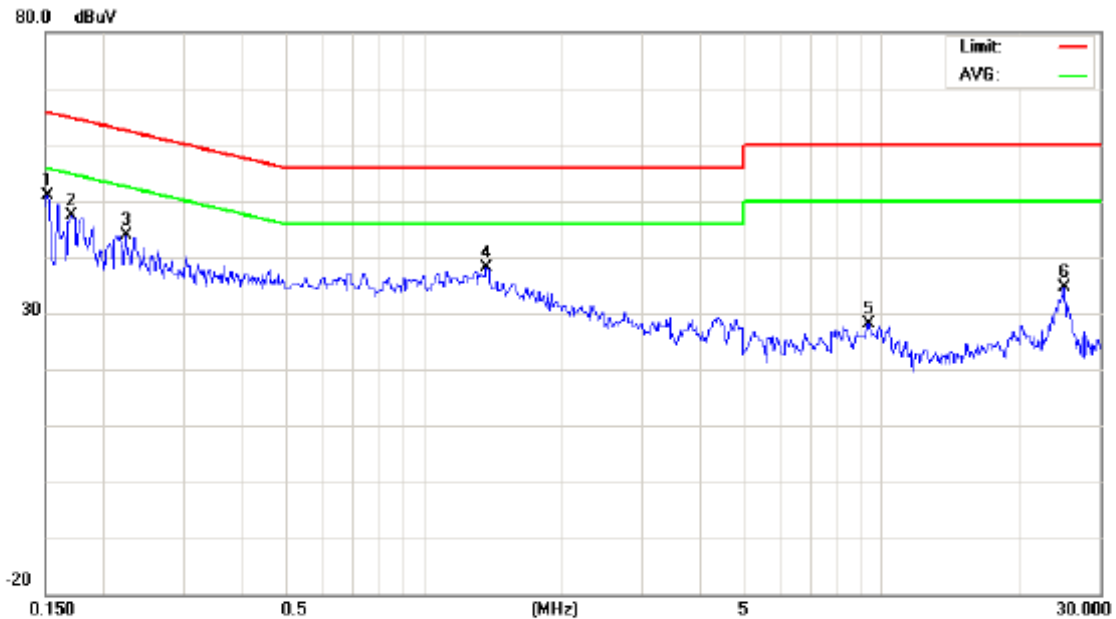

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1513	42.16	8.64	50.80	65.93	-15.13	peak	
2		0.1702	38.56	8.90	47.46	64.95	-17.49	peak	
3		0.2234	34.75	9.16	43.91	62.69	-18.78	peak	
4		1.3729	29.07	9.07	38.14	56.00	-17.86	peak	
5		9.3500	18.29	9.93	28.22	60.00	-31.78	peak	
6		24.9499	24.49	10.23	34.72	60.00	-25.28	peak	



5 ANTENNA CONDUCTED SPURIOUS EMISSION

5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-40000	20 dB less than the peak value of fundamental frequency

5.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: N/A: denotes no modelname, no serial No. or no calibration specified.

5.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW = 1000 kHz, VBW = 1000 kHz, Sweep time = Auto.

5.4 TEST SETUP LAYOUT

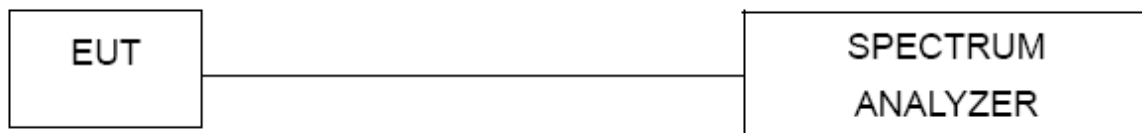

5.5 DEVIATION FROM TEST STANDARD

No deviation

5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest and highest channel frequencies individually.




5.7 TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a		

Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5149.80	-30.02	5350.60	-28.84
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			




IEEE 802.11a/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

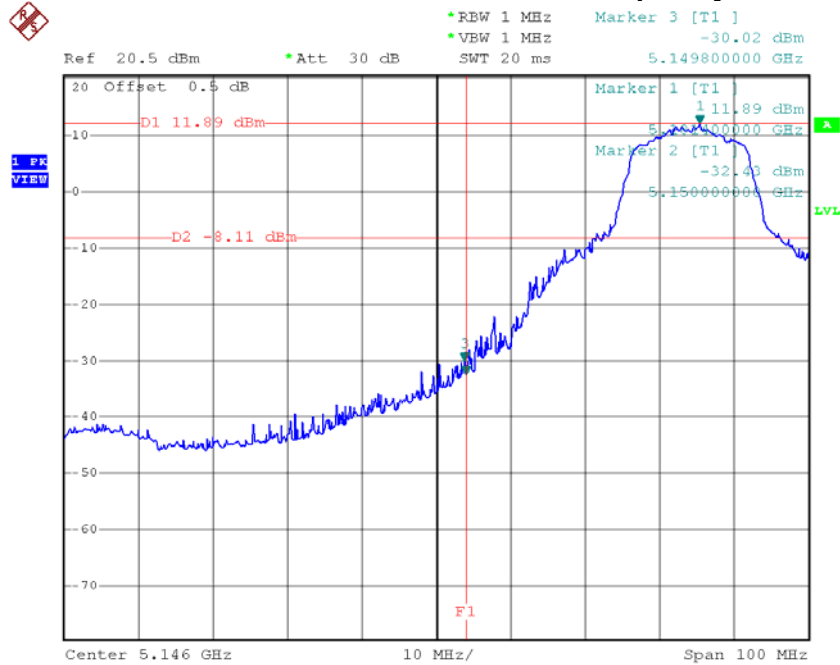

Date: 15.APR.2014 17:49:11


IEEE 802.11a/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

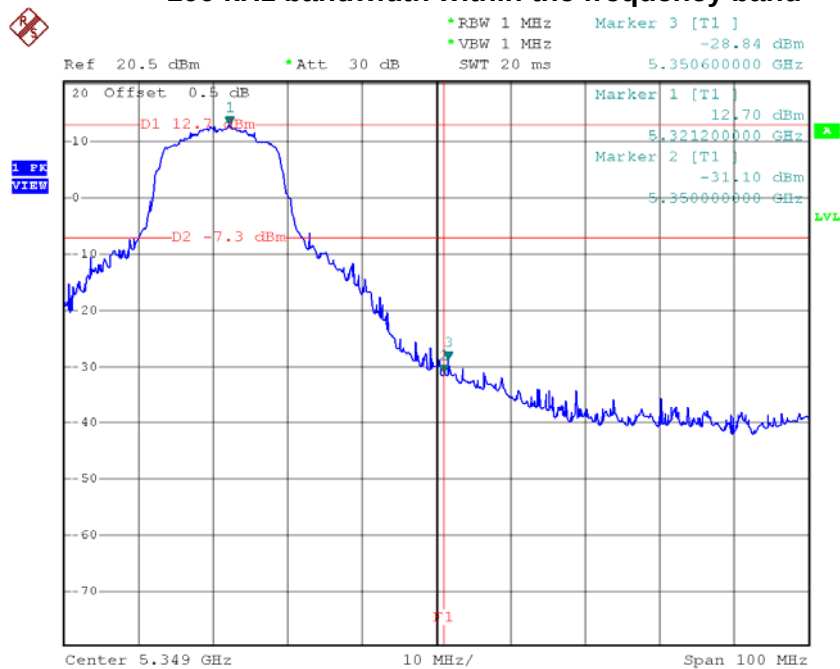

Date: 15.APR.2014 17:54:08




IEEE 802.11a/5180 MHz/10 Harmonic of the frequency

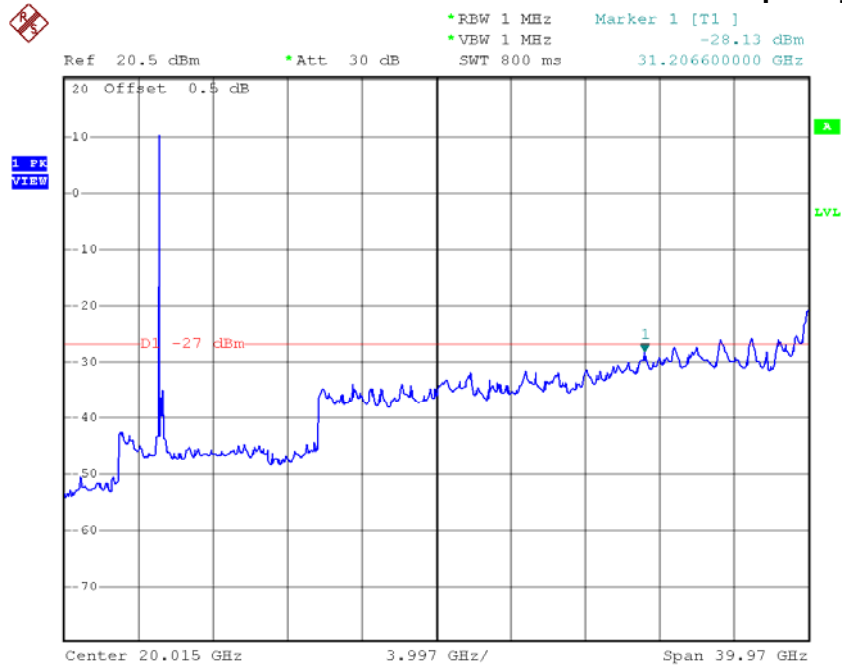

Date: 15.APR.2014 16:10:21


IEEE 802.11a/5200 MHz/10 Harmonic of the frequency

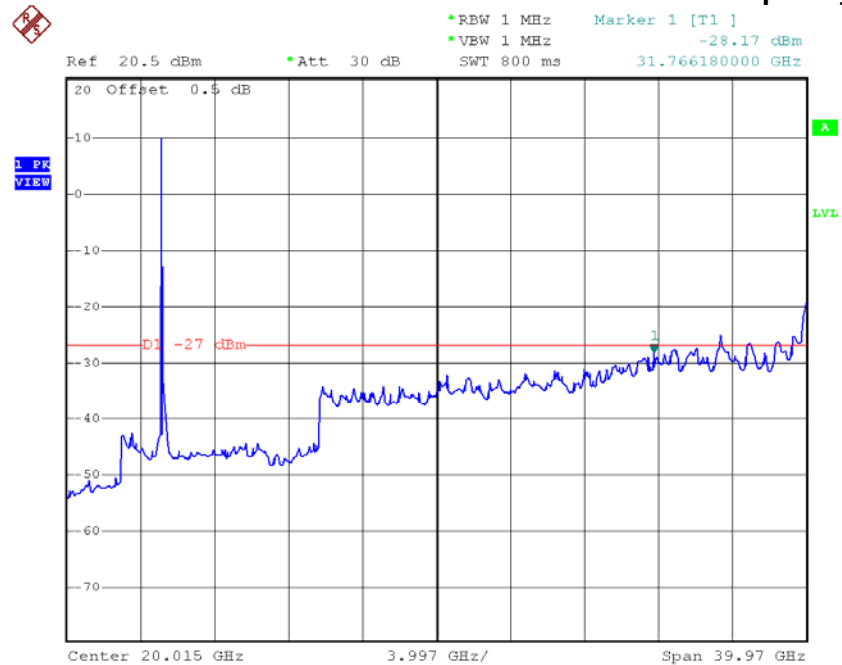

Date: 15.APR.2014 16:06:18




IEEE 802.11a/5240 MHz/10 Harmonic of the frequency

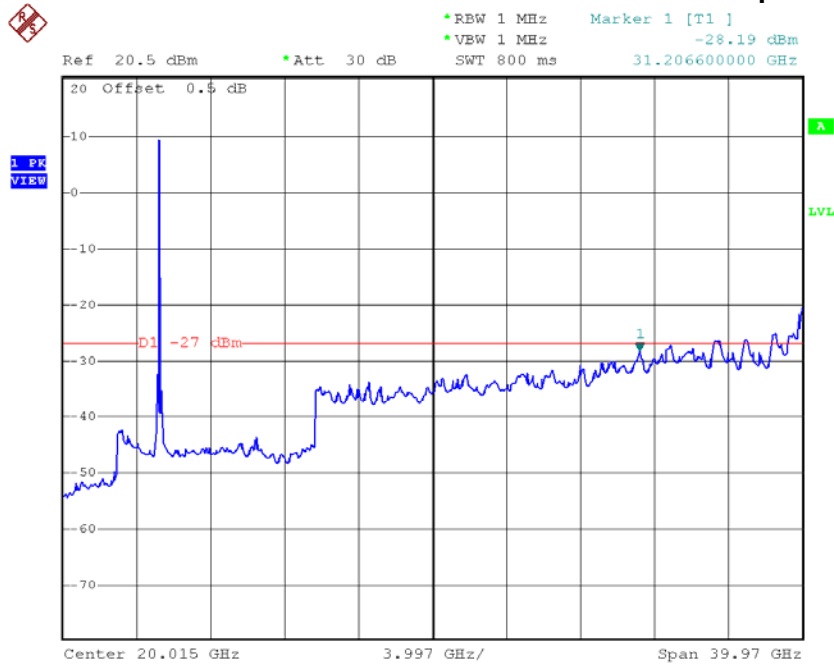

Date: 15.APR.2014 15:58:37


IEEE 802.11a/5260 MHz/10 Harmonic of the frequency

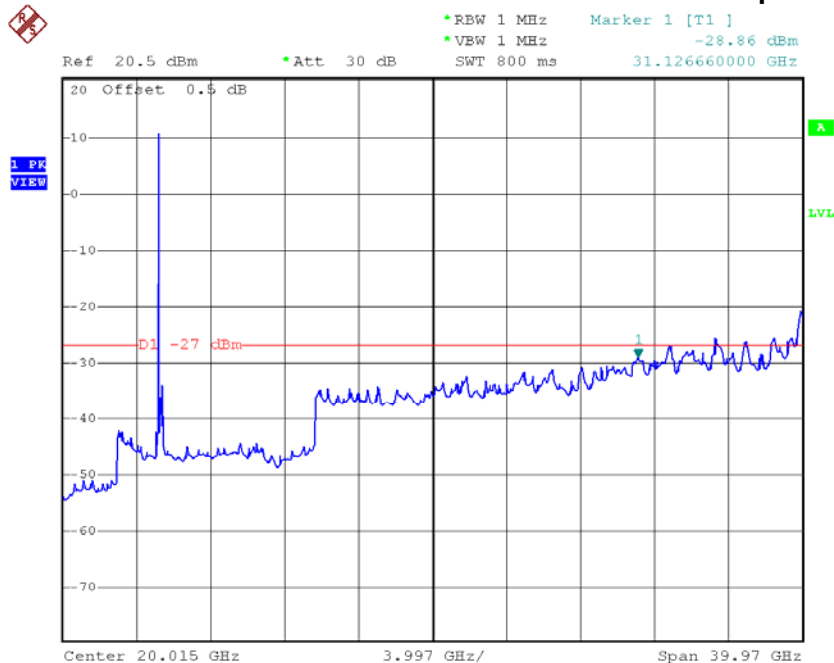

Date: 15.APR.2014 16:11:37




IEEE 802.11a/5300 MHz/10 Harmonic of the frequency

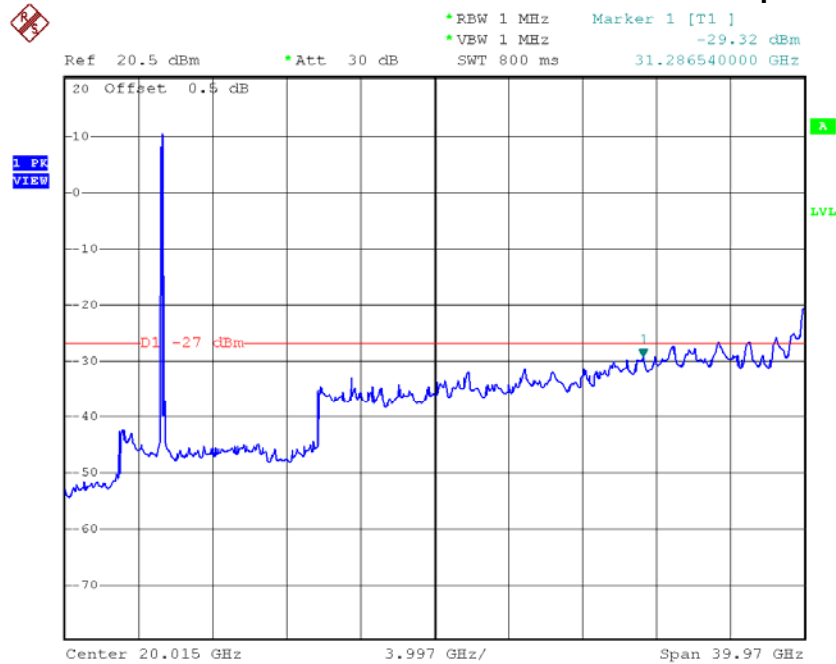

Date: 15.APR.2014 16:12:29

IEEE 802.11a/5320 MHz/10 Harmonic of the frequency

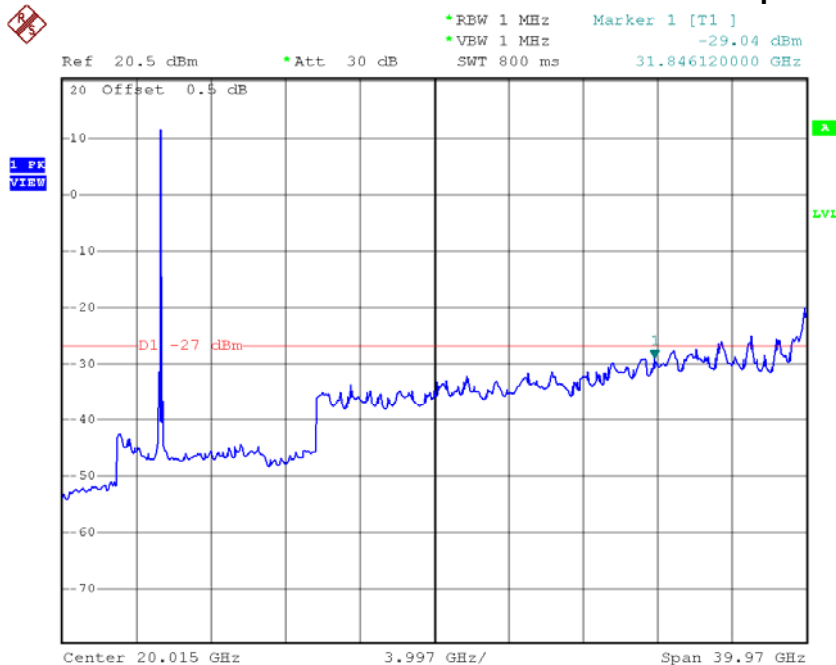

Date: 15.APR.2014 16:13:25




EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		

Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5149.00	-31.51	5351.40	-30.98
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			




IEEE 802.11n (20 MHz)/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

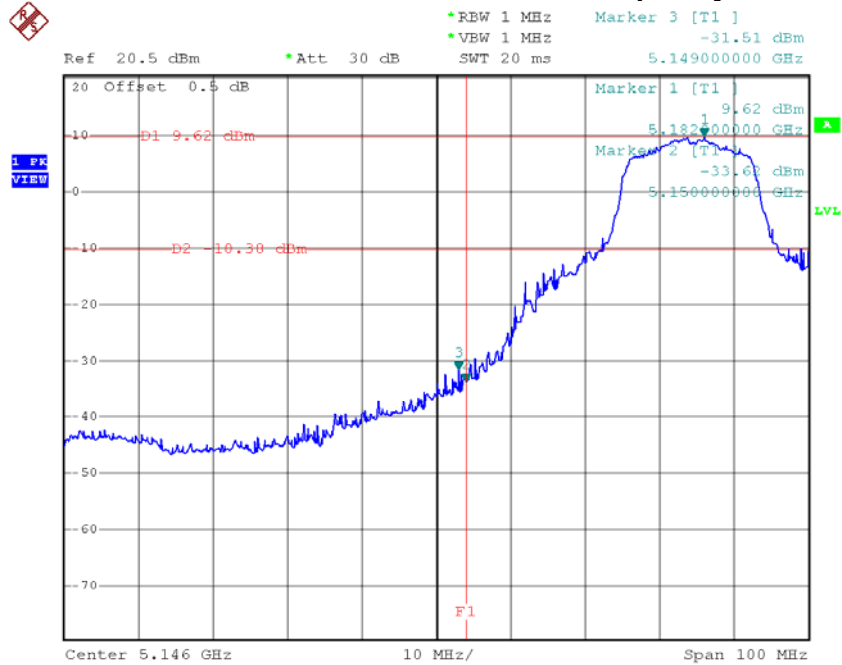

Date: 16.APR.2014 17:13:09


IEEE 802.11n (20 MHz)/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

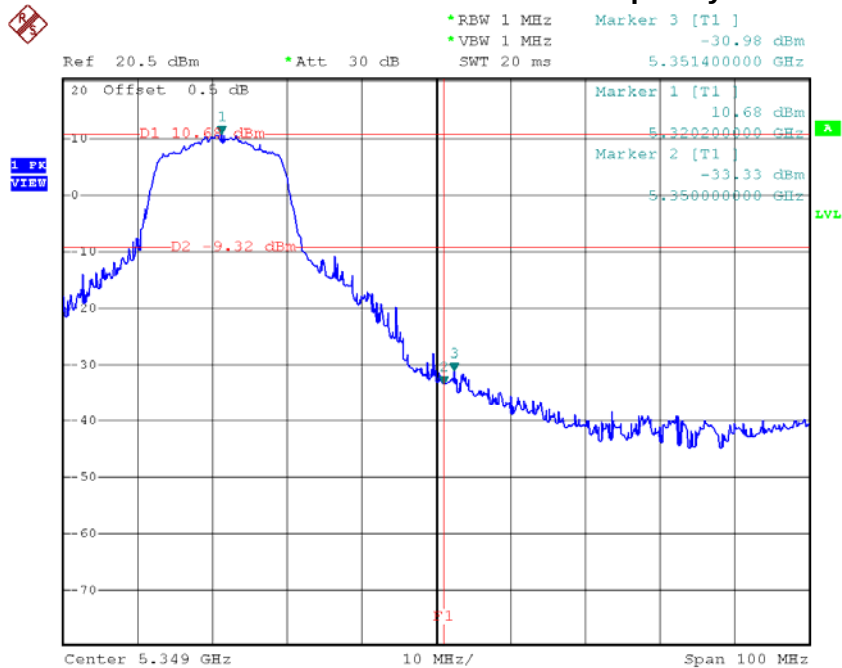

Date: 16.APR.2014 17:11:14




IEEE 802.11n (20 MHz)/5180 MHz/10 Harmonic of the frequency

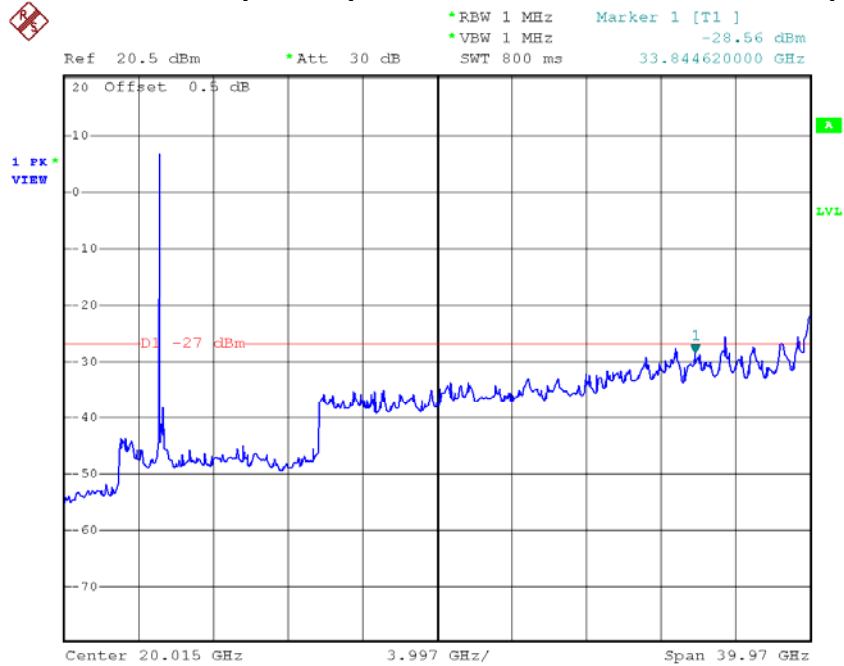

Date: 16.APR.2014 16:32:46


IEEE 802.11n (20 MHz)/5200 MHz/10 Harmonic of the frequency

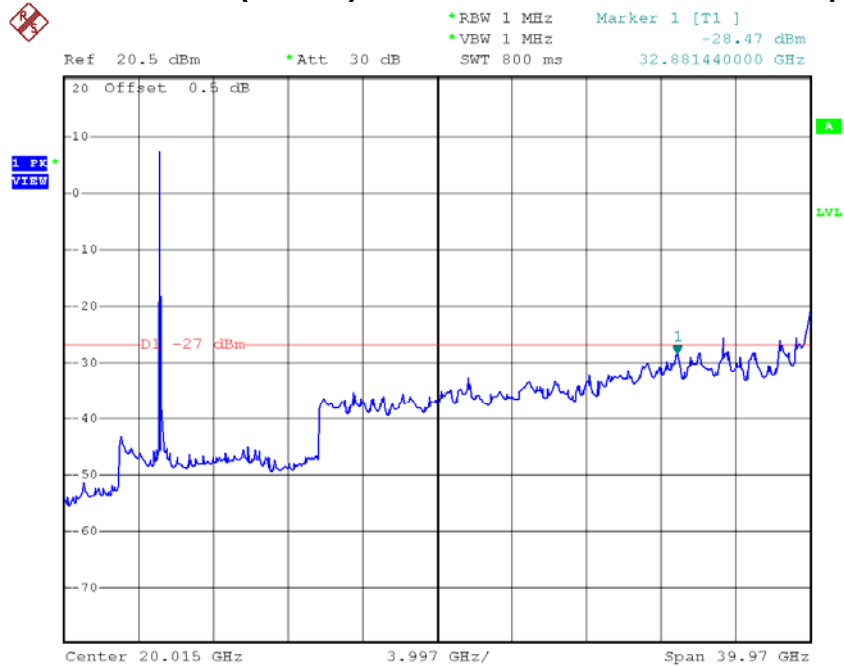

Date: 16.APR.2014 16:35:18




IEEE 802.11n (20 MHz)/5240 MHz/10 Harmonic of the frequency

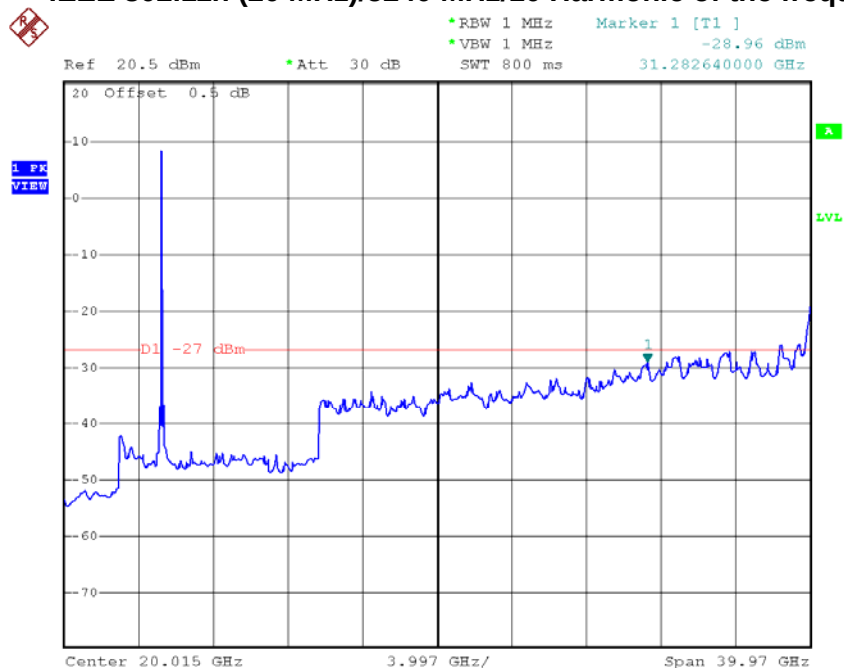

Date: 16.APR.2014 16:36:10


IEEE 802.11n (20 MHz)/5260 MHz/10 Harmonic of the frequency

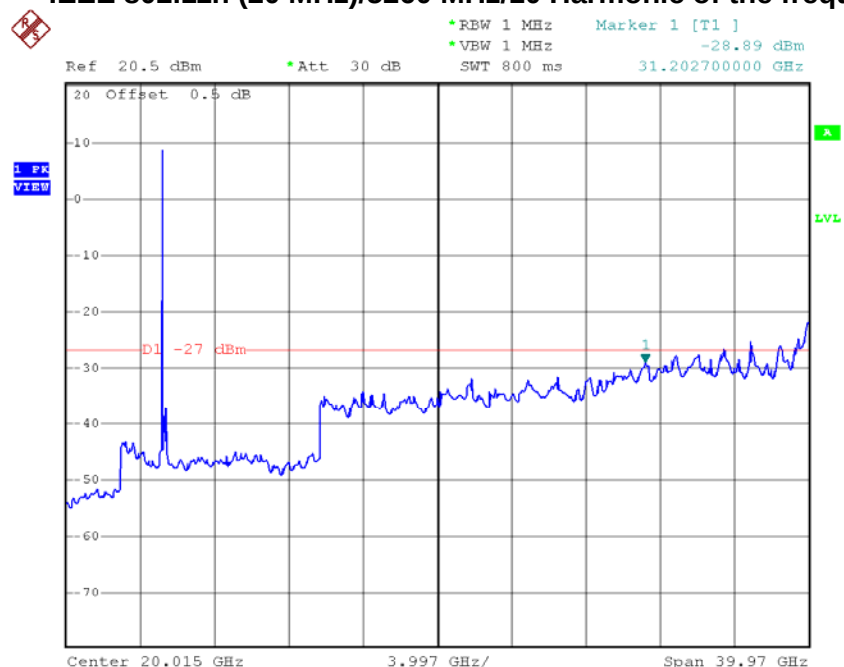

Date: 16.APR.2014 16:36:54




IEEE 802.11n (20 MHz)/5300 MHz/10 Harmonic of the frequency

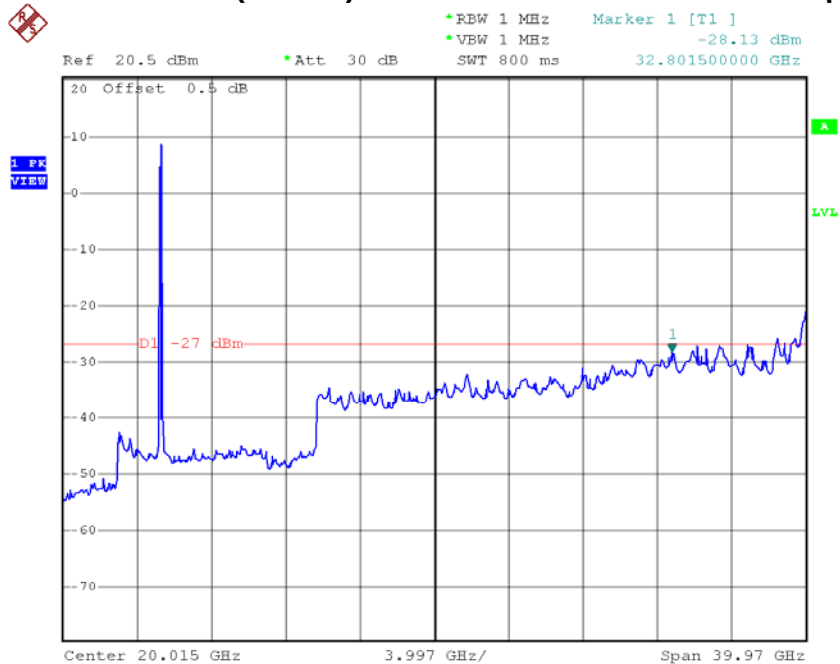

Date: 16.APR.2014 16:39:27

IEEE 802.11n (20 MHz)/5320 MHz/10 Harmonic of the frequency

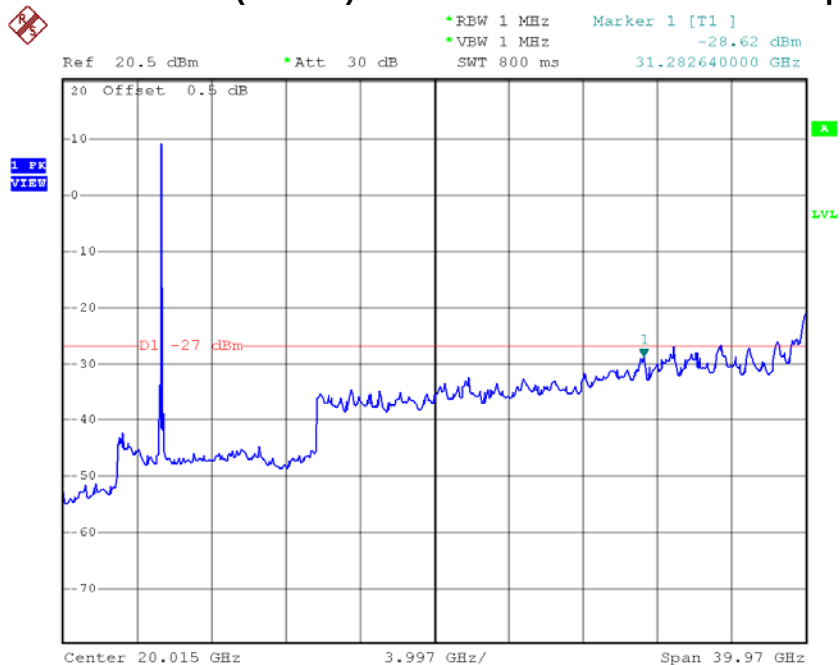

Date: 16.APR.2014 16:40:27




5.8 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a		

Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5469.60	-24.51	5725.40	-25.69
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			




IEEE 802.11a/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

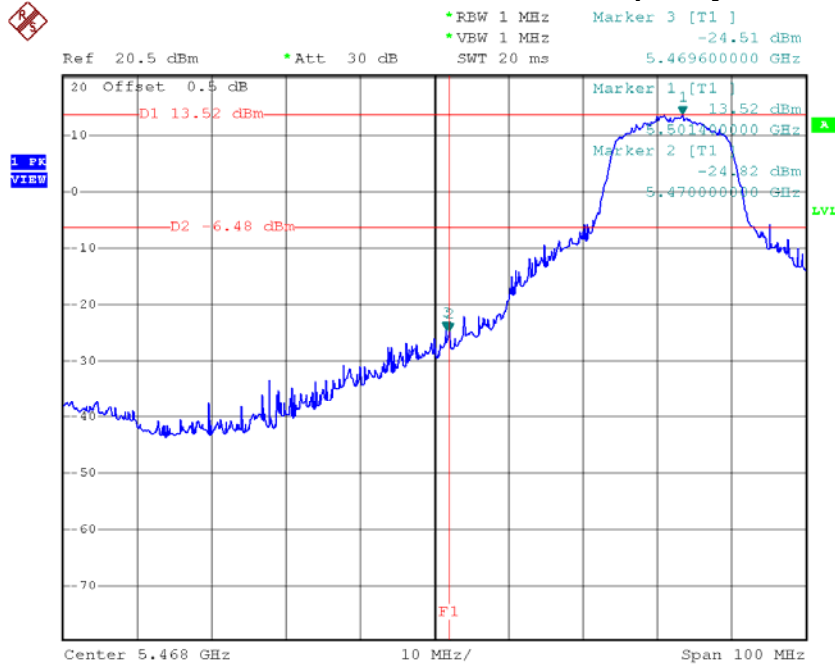

Date: 15.APR.2014 17:59:44


IEEE 802.11a/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

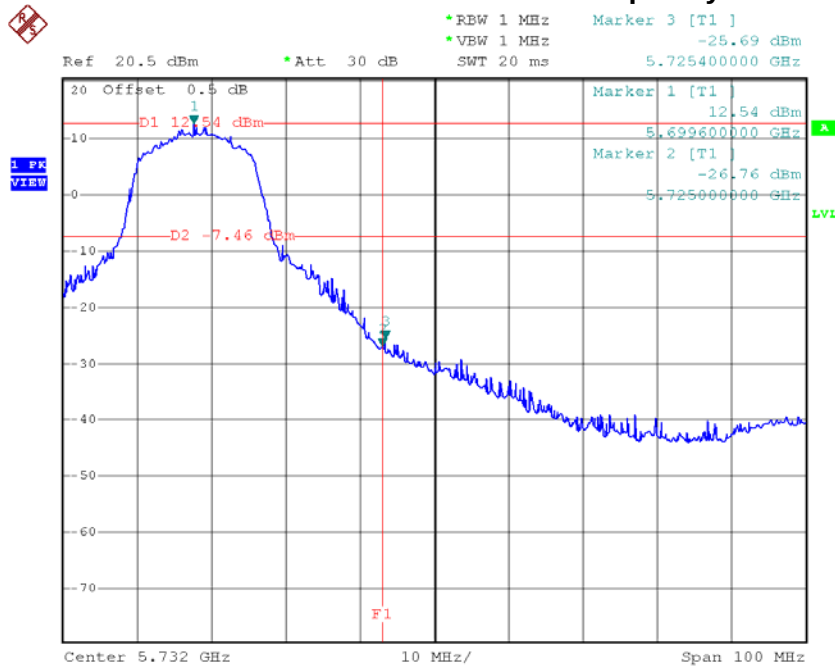

Date: 15.APR.2014 18:01:39




IEEE 802.11a/5500 MHz/10 Harmonic of the frequency

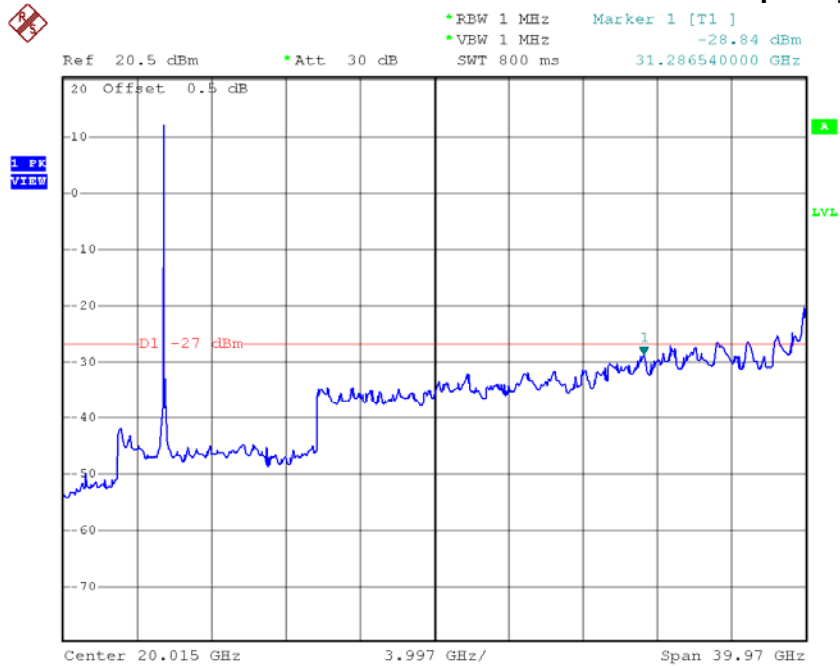

Date: 15.APR.2014 16:14:20


IEEE 802.11a/5580 MHz/10 Harmonic of the frequency

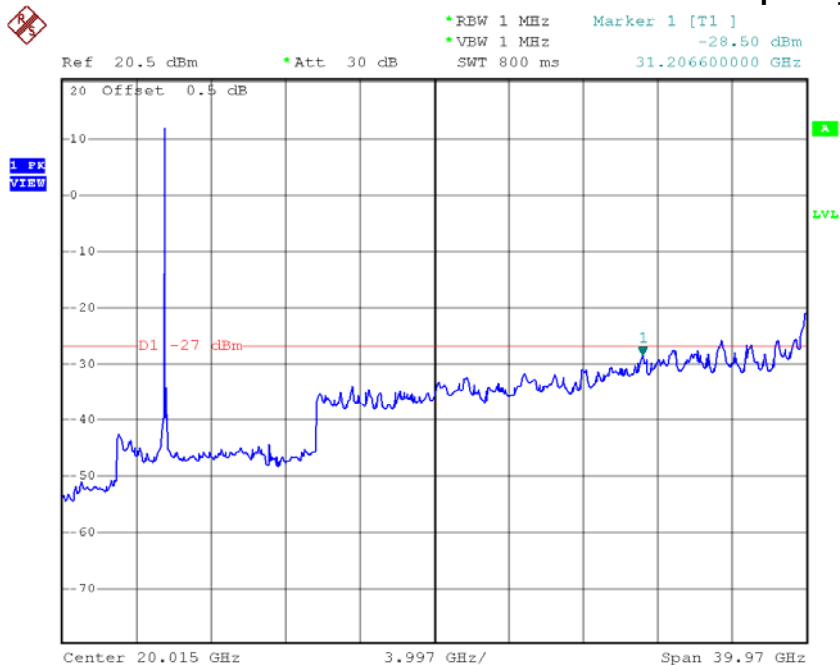

Date: 15.APR.2014 16:15:14



IEEE 802.11a/5700 MHz/10 Harmonic of the frequency

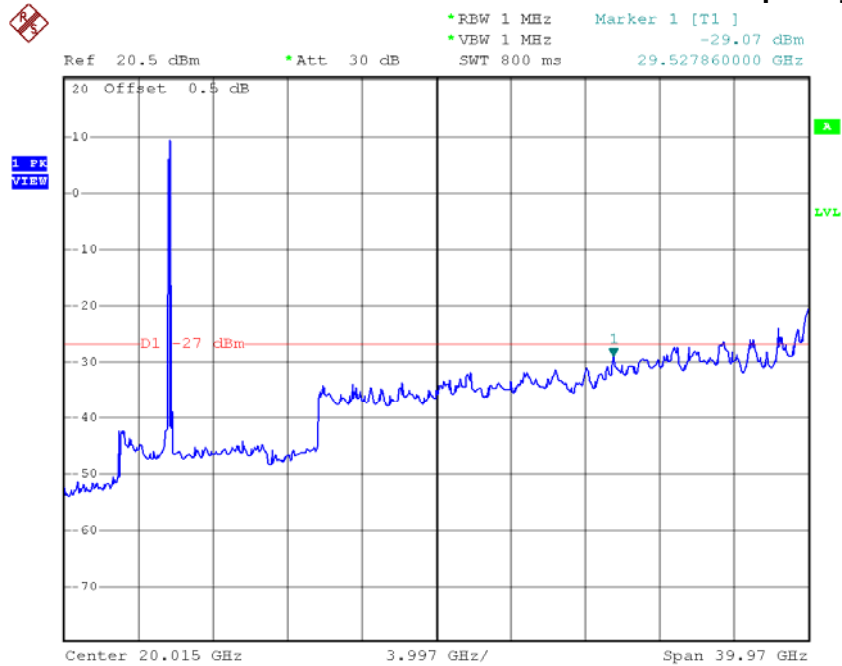

Date: 15.APR.2014 16:16:22




EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)		

Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5468.20	-27.30	5725.00	-26.04
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			




IEEE 802.11n (20 MHz)/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

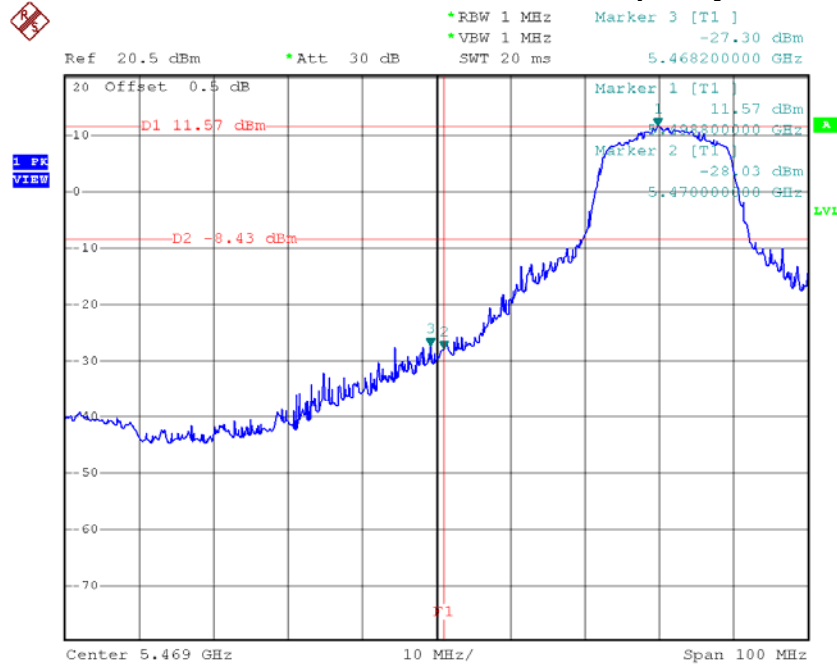

Date: 16.APR.2014 17:15:26


IEEE 802.11n (20 MHz)/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

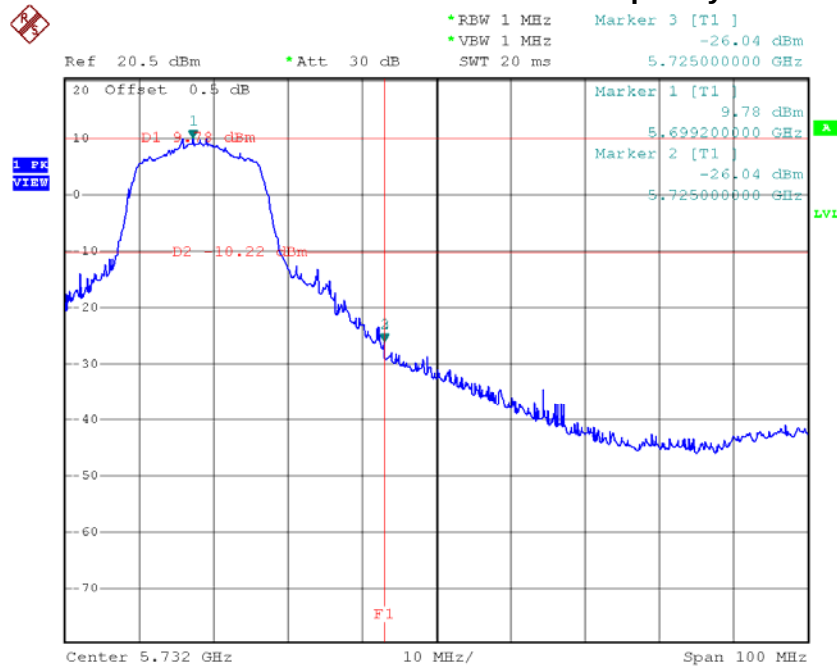

Date: 16.APR.2014 17:18:15




IEEE 802.11n (20 MHz)/5500 MHz/10 Harmonic of the frequency

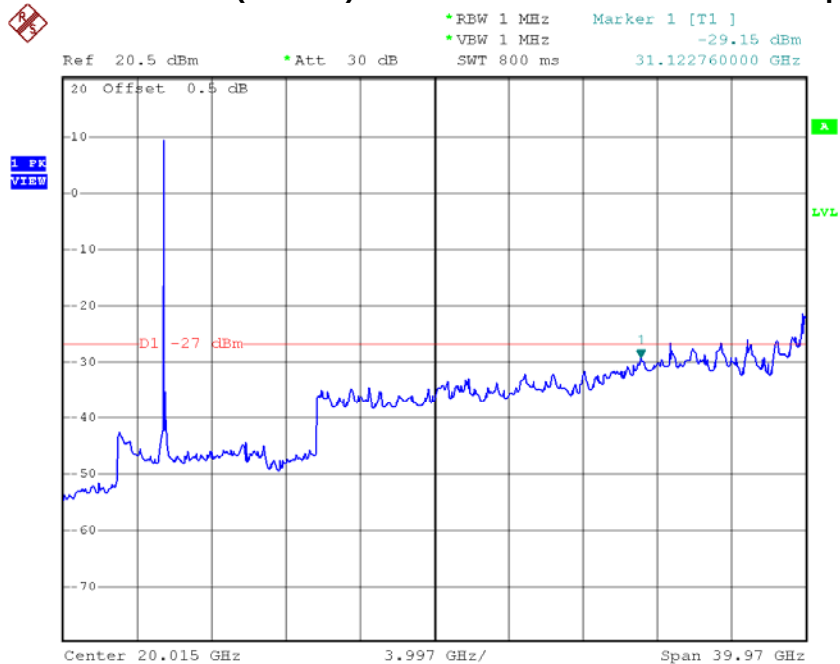

Date: 16.APR.2014 16:41:03


IEEE 802.11n (20 MHz)/5580 MHz/10 Harmonic of the frequency

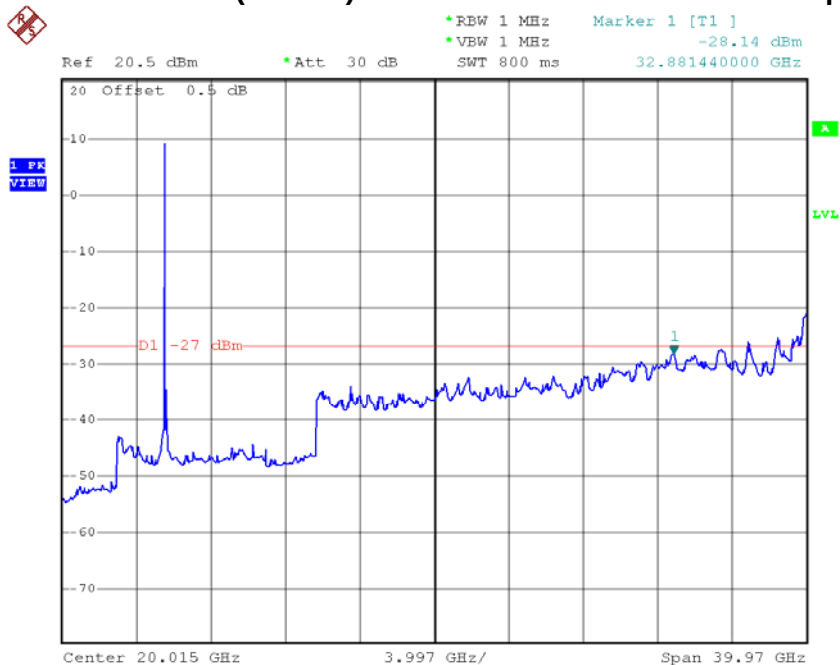

Date: 16.APR.2014 16:41:56



IEEE 802.11n (20 MHz)/5700 MHz/10 Harmonic of the frequency

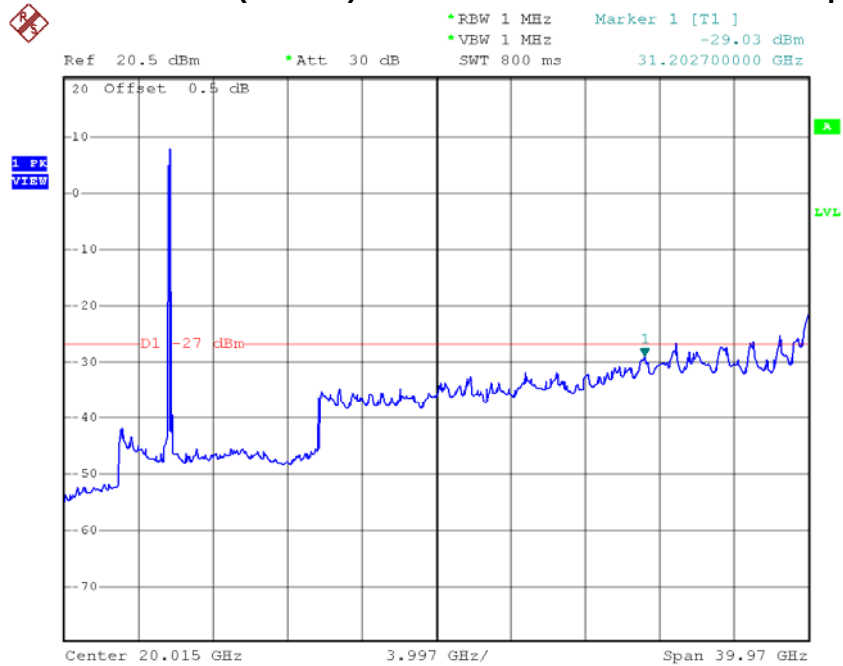

Date: 16.APR.2014 16:42:44



6 26 DB BANDWIDTH

6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
26 dB Bandwidth	5150 - 5250	---
	5250 - 5350	
	5470 - 5725	
	5725 - 5825	

6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: N/A: denotes no modelname, no serial No. or no calibration specified.

6.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.4 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Measured the spectrum width with power higher than 26 dB below carrier.

6.5 TEST SETUP LAYOUT



6.6 DEVIATION FROM TEST STANDARD

No deviation

6.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.




6.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180 MHz	35.44	19.60
5200 MHz	34.40	19.84
5240 MHz	32.88	19.20


IEEE 802.11a/5180 MHz/26 dB and 99% Occupied Bandwidth

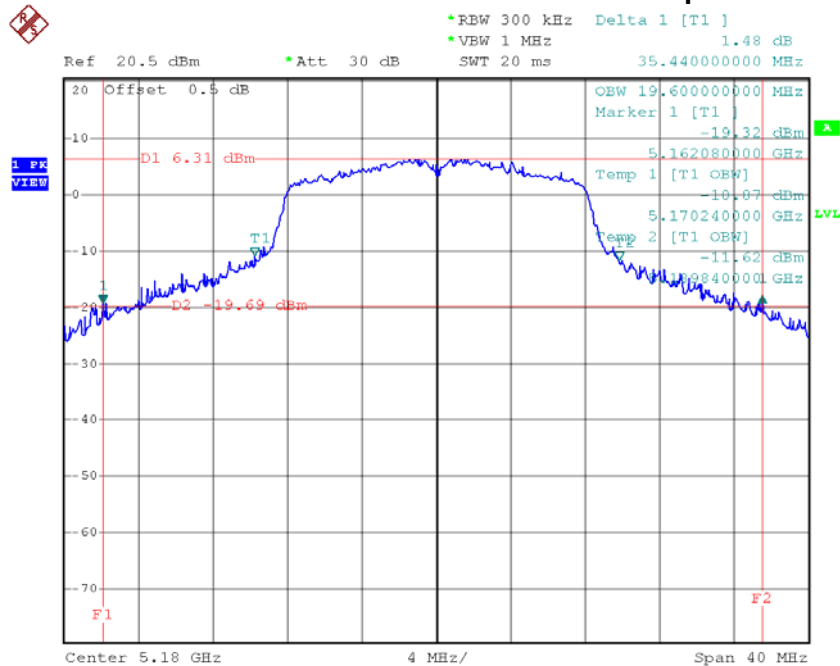

Date: 15.APR.2014 16:37:05




IEEE 802.11a/5200 MHz/26 dB and 99% Occupied Bandwidth

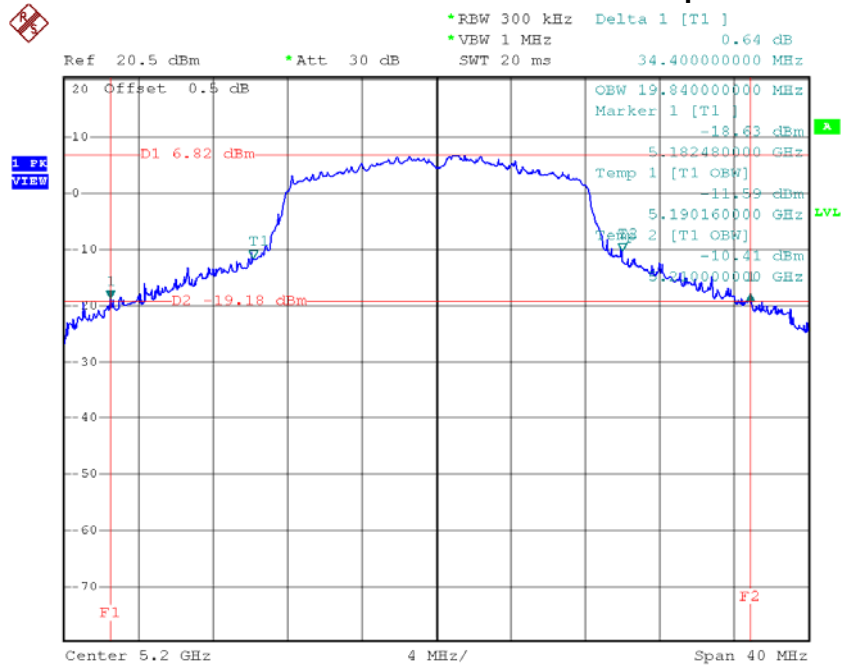

Date: 15.APR.2014 16:41:04

IEEE 802.11a/5240 MHz/26 dB and 99% Occupied Bandwidth

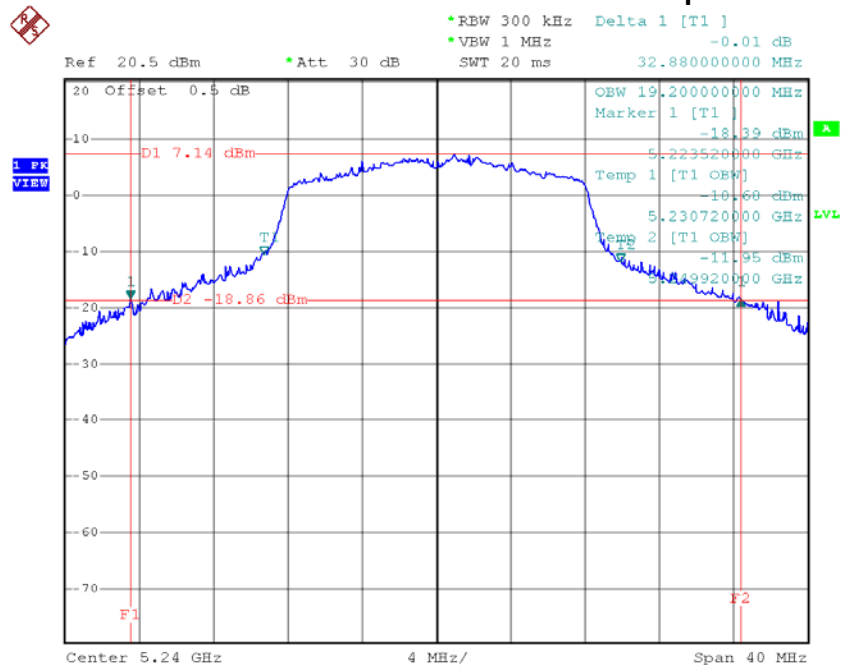


Date: 15.APR.2014 16:46:25



EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180 MHz	35.44	19.28
5200 MHz	35.44	19.28
5240 MHz	32.16	18.56

IEEE 802.11n (20 MHz)/5180 MHz/26 dB and 99% Occupied Bandwidth

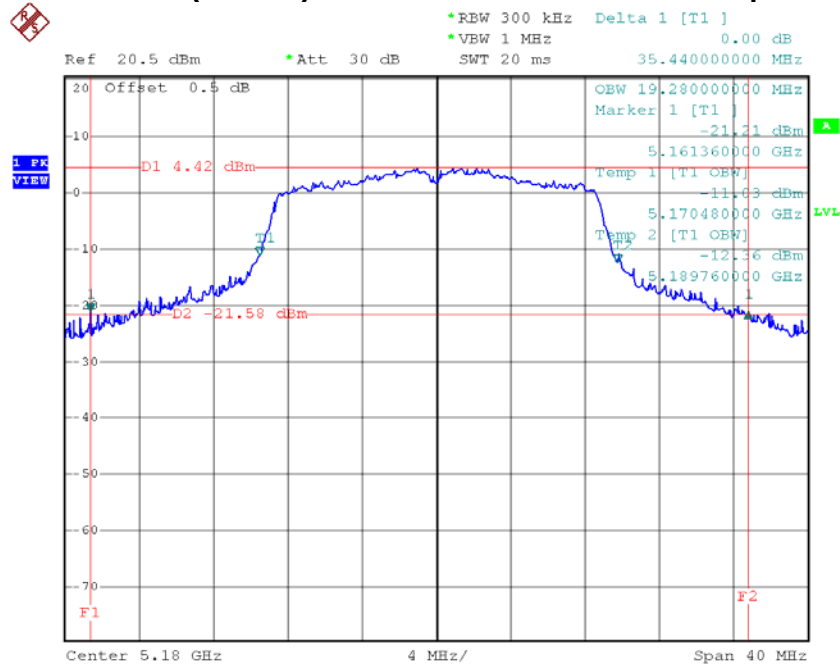

Date: 16.APR.2014 16:46:52



1-FCCP-2-1404142




6.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260 MHz	31.36	18.56
5300 MHz	31.36	17.44
5320 MHz	30.16	18.08

IEEE 802.11a/5260 MHz/26 dB and 99% Occupied Bandwidth

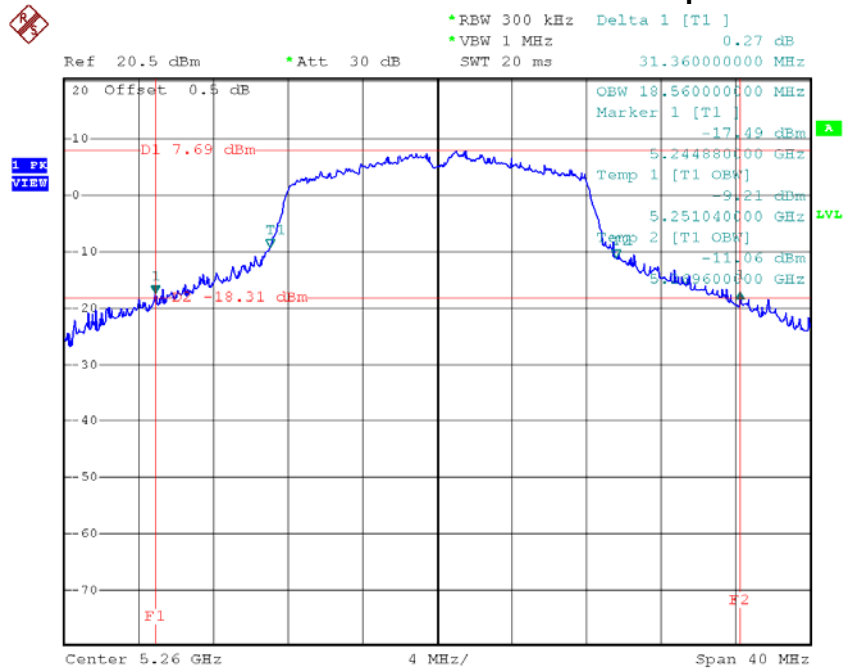

Date: 15.APR.2014 16:49:29




Page 46 of 195



EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260 MHz	30.80	18.56
5300 MHz	28.80	18.24
5320 MHz	28.48	18.40

IEEE 802.11n (20 MHz)/5260 MHz/26 dB and 99% Occupied Bandwidth

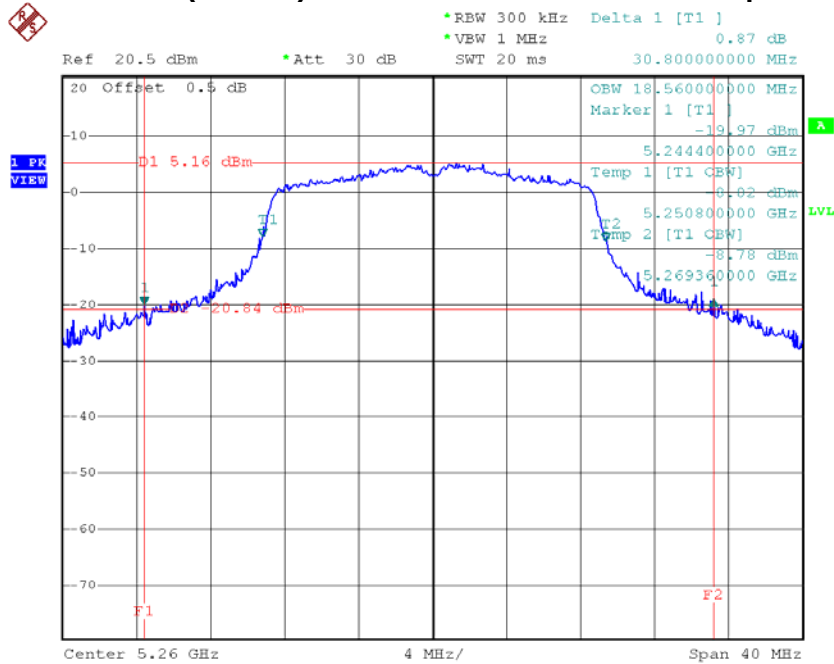

Date: 16.APR.2014 16:53:41






6.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500 MHz	31.60	17.76
5580 MHz	29.68	17.52
5700 MHz	28.64	17.12


IEEE 802.11a/5500 MHz/26 dB and 99% Occupied Bandwidth

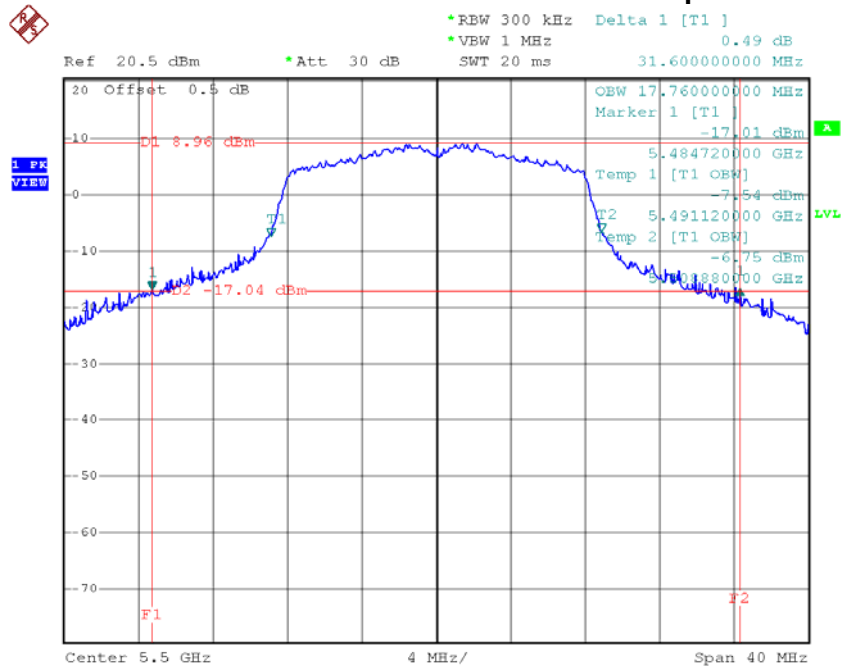

Date: 15.APR.2014 17:32:15




IEEE 802.11a/5580 MHz/26 dB and 99% Occupied Bandwidth

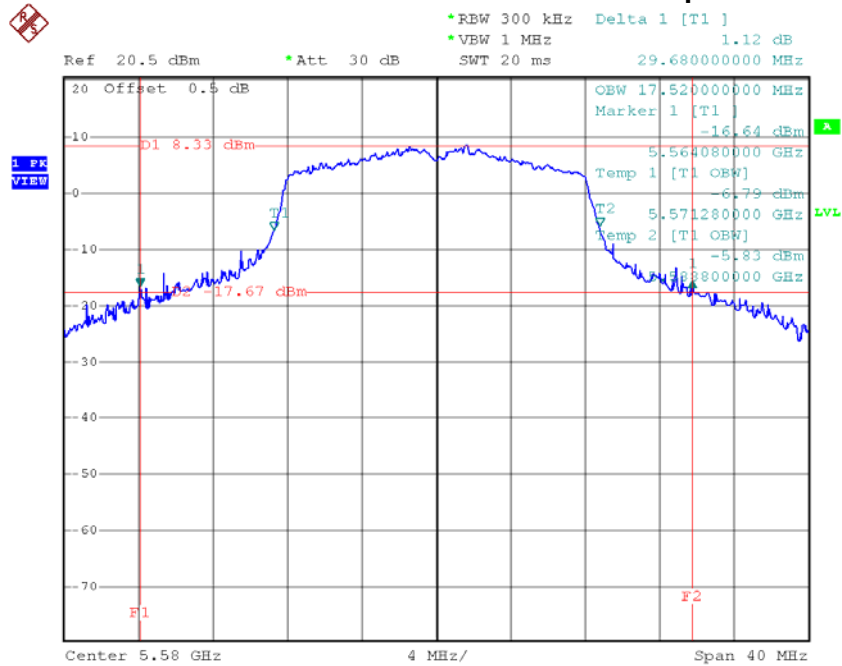

Date: 15.APR.2014 17:35:11

IEEE 802.11a/5700 MHz/26 dB and 99% Occupied Bandwidth

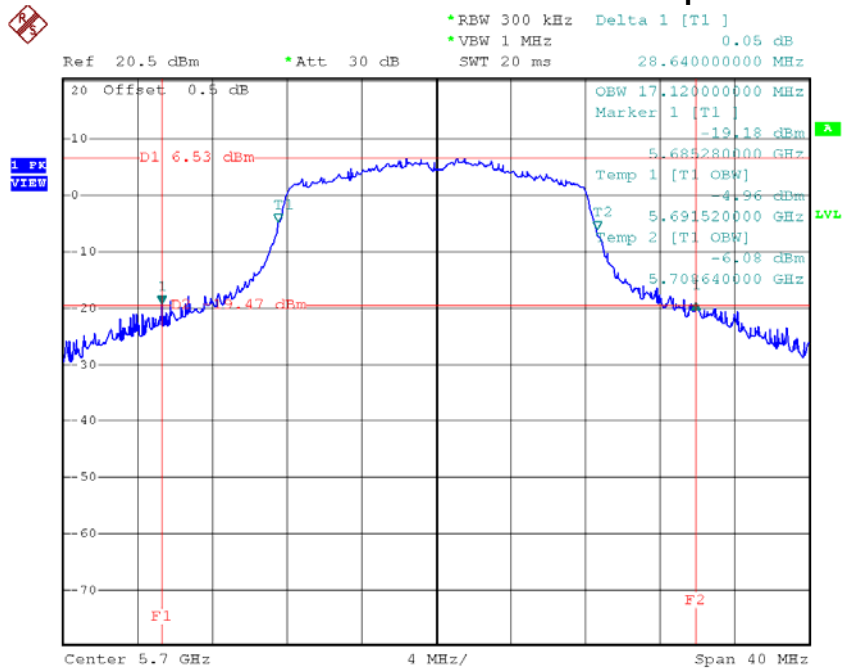


Date: 15.APR.2014 17:37:38



EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500 MHz	30.80	18.32
5580 MHz	30.32	18.32
5700 MHz	29.52	18.32

IEEE 802.11n (20 MHz)/5500 MHz/26 dB and 99% Occupied Bandwidth

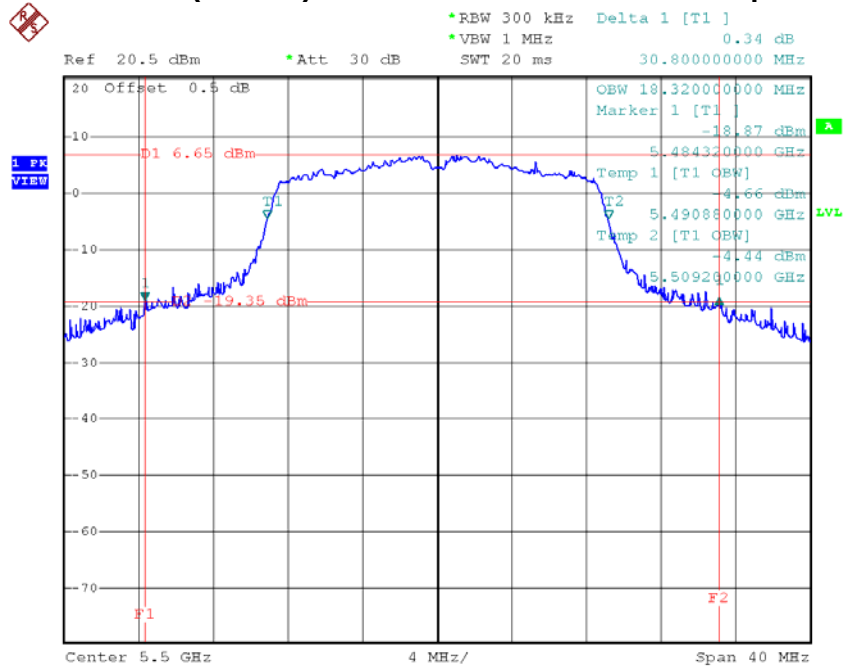

Date: 16.APR.2014 16:59:42



1-FCCP-2-1404142



7 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	5150 - 5250	not exceed the lesser of 50 mW (17 dBm) or 4 dBm + 10log B
	5250 - 5350	not exceed the lesser of 250 mW (24 dBm) or 11 dBm + 10log B
	5470 - 5725	not exceed the lesser of 250 mW (24 dBm) or 11 dBm + 10log B
	5725 - 5825	not exceed the lesser of 1 W (30 dBm) or 17 dBm + 10log B.

7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: N/A: denotes no modelname, no serial No. or no calibration specified.

7.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	AUTO

7.4 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Test was performed in accordance with Method SA-1 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.

7.5 TEST SETUP LAYOUT



7.6 DEVIATION FROM TEST STANDARD

No deviation



7.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



7.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz, 5200 MHz, 5240 MHz		


Frequency	Peak Output Power		Limit		Result
	(dBm)	(W)	(dBm)	(W)	
5180 MHz	12.73	0.0187	17.00	0.0501	PASS
5200 MHz	13.01	0.0200	17.00	0.0501	PASS
5240 MHz	13.51	0.0224	17.00	0.0501	PASS



IEEE 802.11a/5180 MHz/Maximum Peak Conducted Output Power



1 RM
VIEW

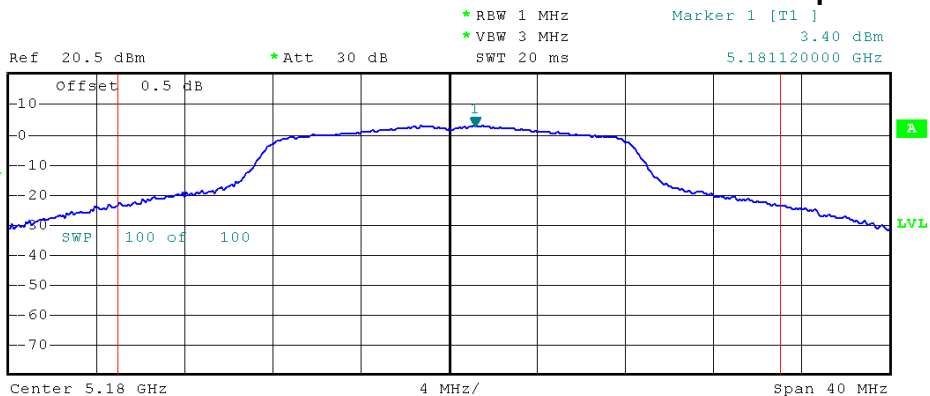

Tx Channel

Bandwidth

30 MHz


Power

12.73 dBm

IEEE 802.11a/5200 MHz/Maximum Peak Conducted Output Power



1 RM
VIEW

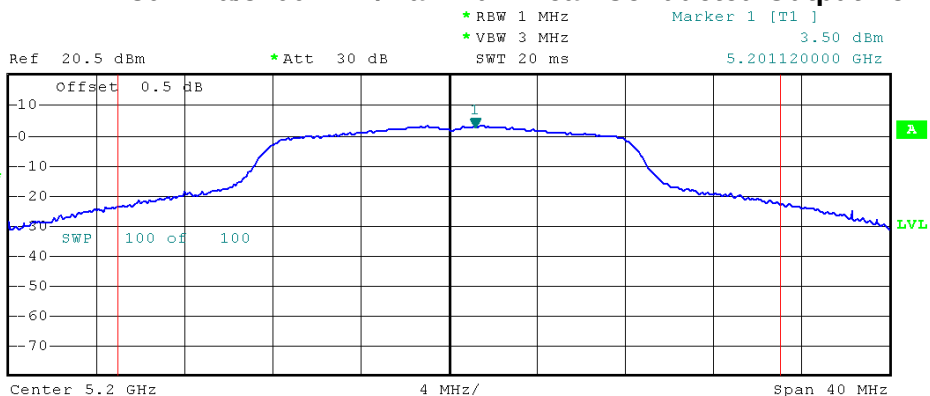

Tx Channel

Bandwidth

30 MHz


Power

13.01 dBm

IEEE 802.11a/5240 MHz/Maximum Peak Conducted Output Power



1 RM
VIEW

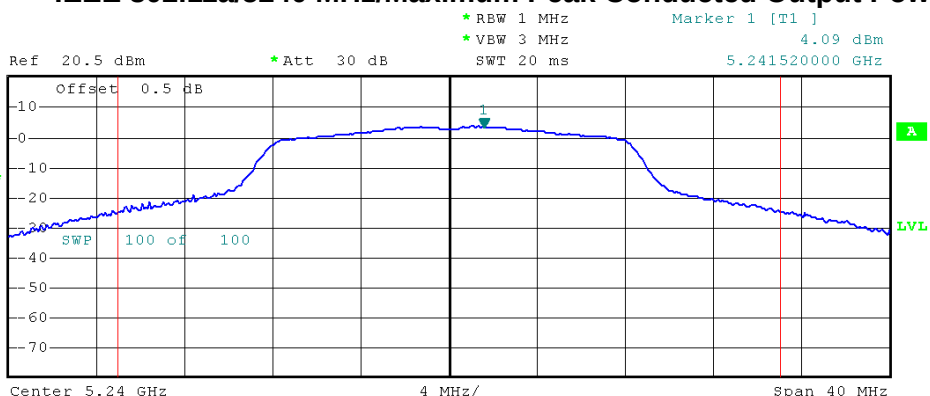

Tx Channel

Bandwidth

30 MHz

Power

13.51 dBm




EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz, 5200 MHz, 5240 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5180 MHz	12.21	0.0166	17.00	0.0501	PASS
5200 MHz	12.57	0.0181	17.00	0.0501	PASS
5240 MHz	13.19	0.0208	17.00	0.0501	PASS




IEEE 802.11n (20 MHz)/5180 MHz/Maximum Peak Conducted Output Power

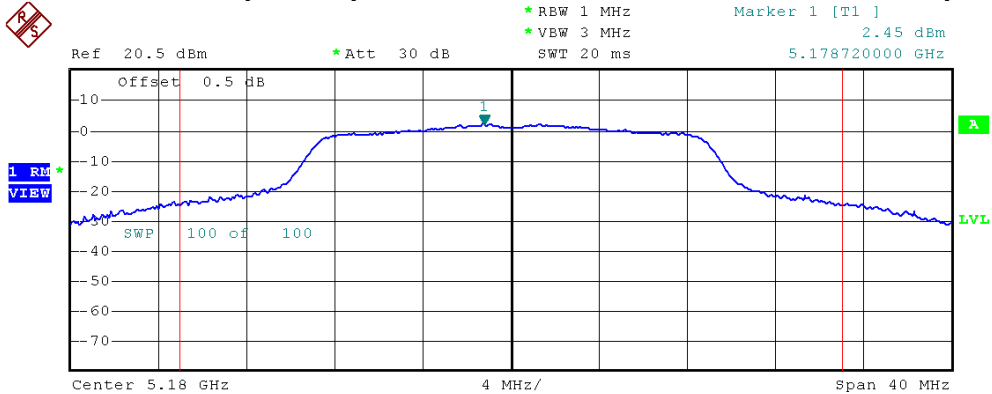

IEEE 802.11n (20 MHz)/5200 MHz/Maximum Peak Conducted Output Power

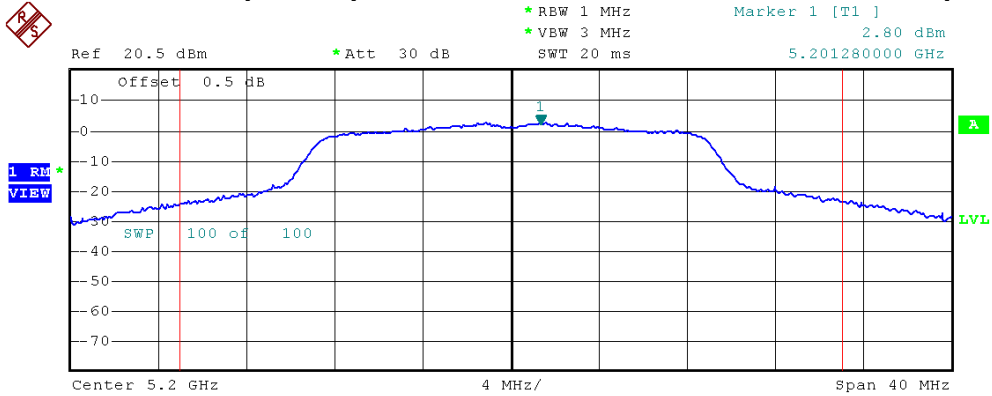

IEEE 802.11n (20 MHz)/5240 MHz/Maximum Peak Conducted Output Power

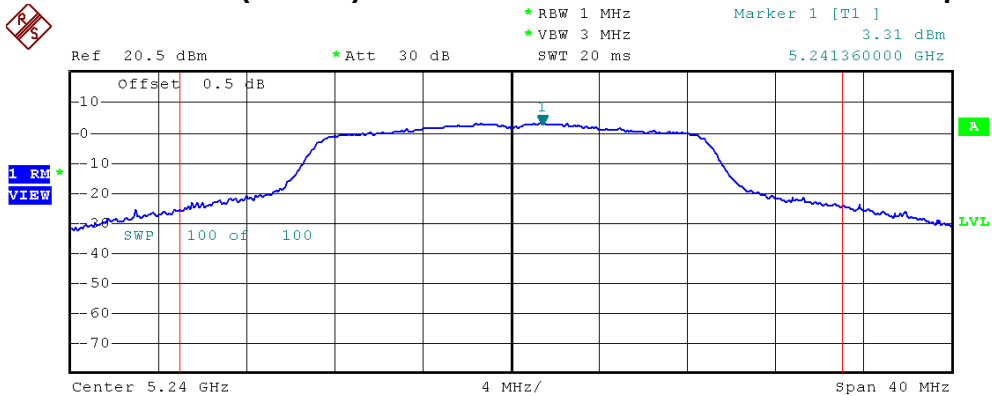




7.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz, 5300 MHz, 5320 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5260 MHz	13.50	0.0224	24.00	0.2512	PASS
5300 MHz	13.08	0.0203	24.00	0.2512	PASS
5320 MHz	14.16	0.0261	24.00	0.2512	PASS




IEEE 802.11a/5260 MHz/Maximum Peak Conducted Output Power

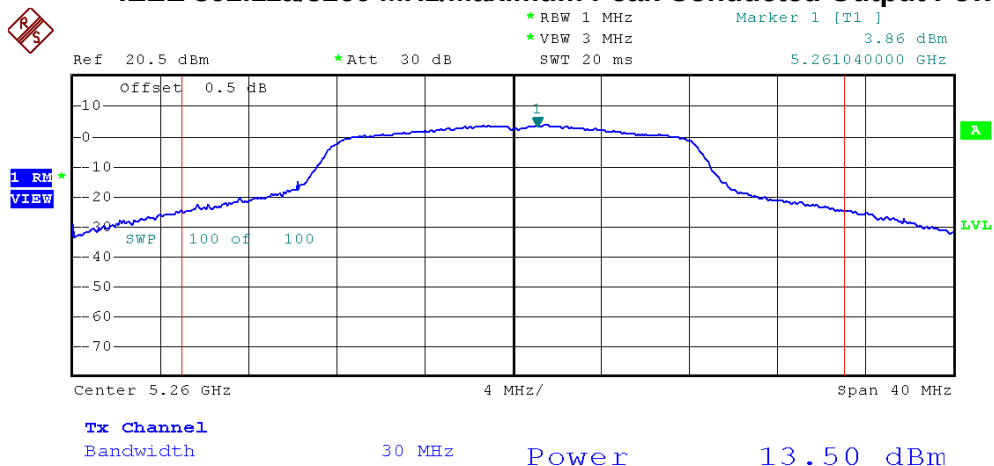

IEEE 802.11a/5300 MHz/Maximum Peak Conducted Output Power

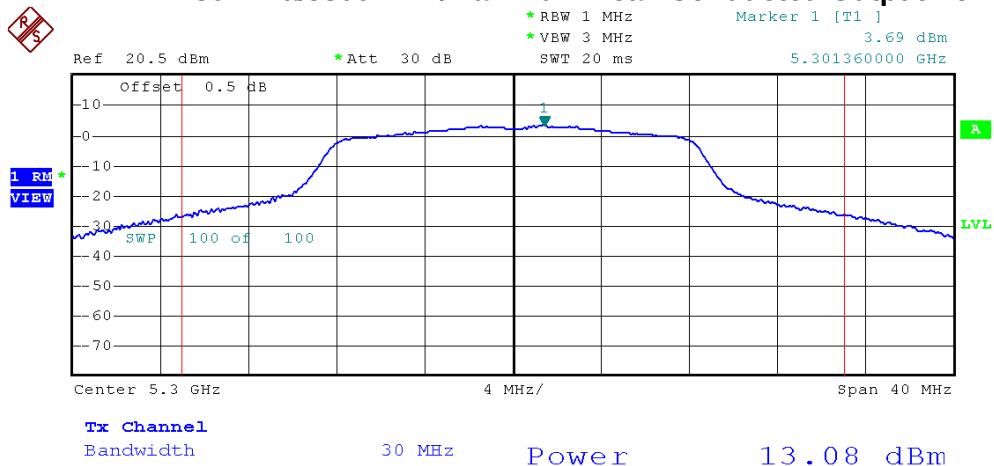

IEEE 802.11a/5320 MHz/Maximum Peak Conducted Output Power

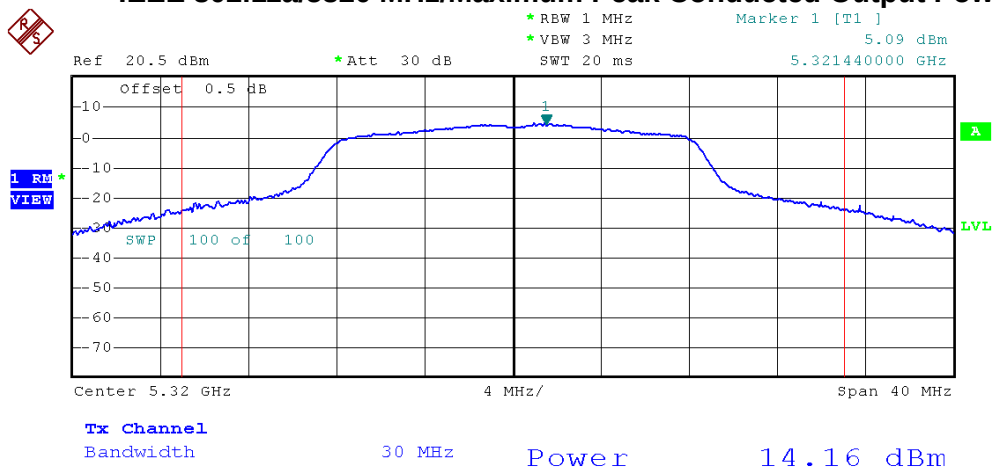




EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz, 5300 MHz, 5320 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5260 MHz	12.95	0.0197	24.00	0.2512	PASS
5300 MHz	12.51	0.0178	24.00	0.2512	PASS
5320 MHz	13.78	0.0239	24.00	0.2512	PASS




IEEE 802.11n (20 MHz)/5260 MHz/Maximum Peak Conducted Output Power

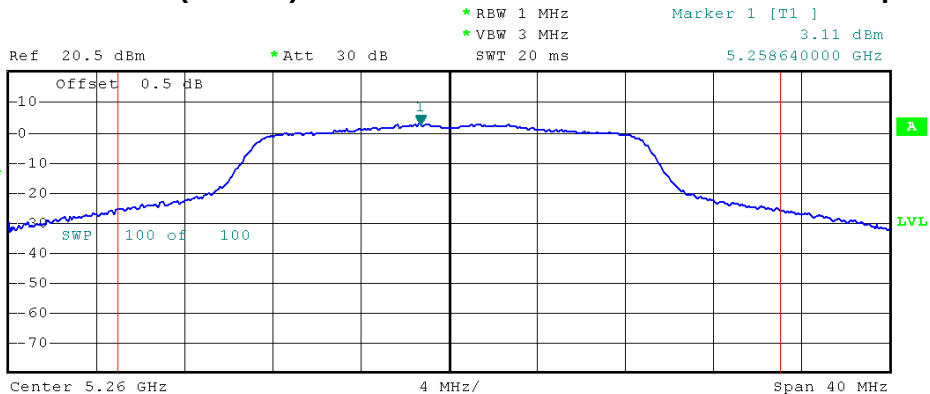

IEEE 802.11n (20 MHz)/5300 MHz/Maximum Peak Conducted Output Power

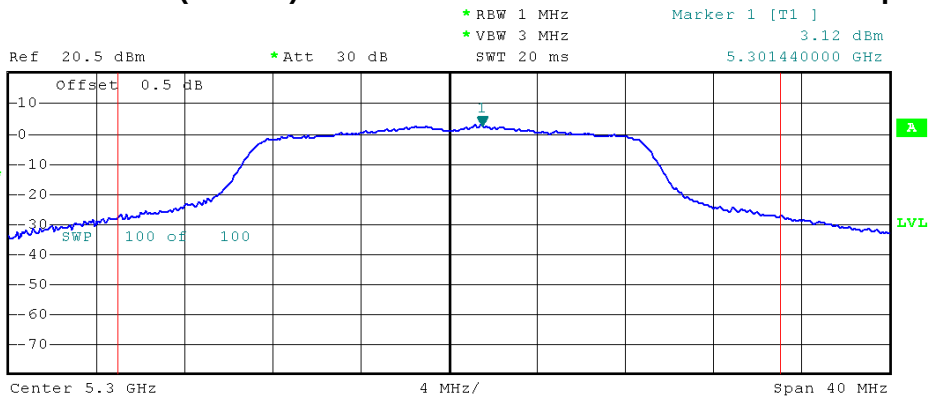

IEEE 802.11n (20 MHz)/5320 MHz/Maximum Peak Conducted Output Power

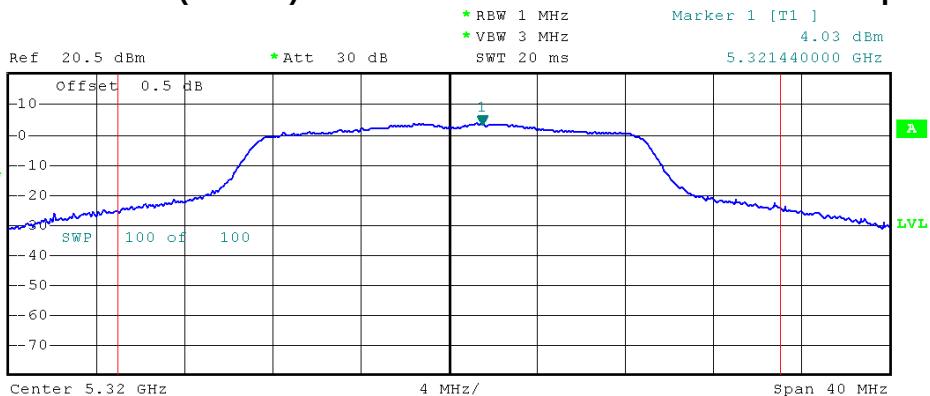




7.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz, 5580 MHz, 5700 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5500 MHz	15.00	0.0316	24.00	0.2512	PASS
5580 MHz	14.41	0.0276	24.00	0.2512	PASS
5700 MHz	12.09	0.0162	24.00	0.2512	PASS




IEEE 802.11a/5500 MHz/Maximum Peak Conducted Output Power

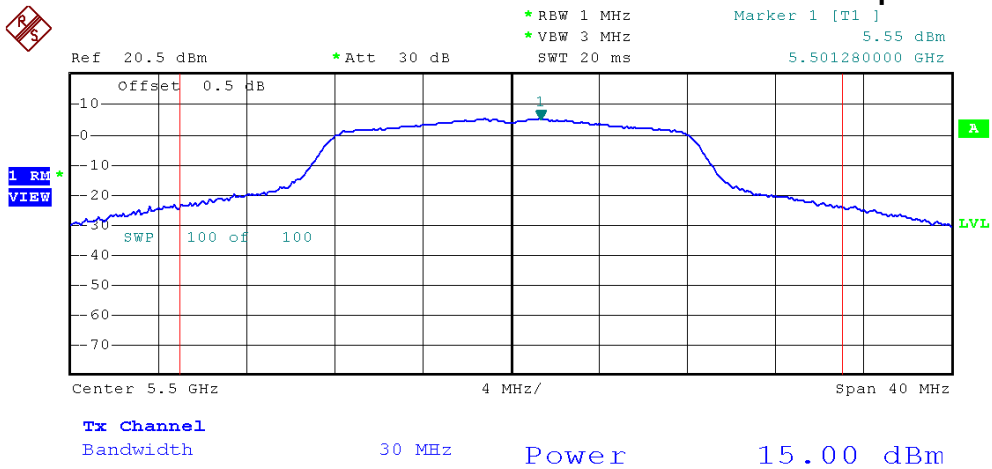

IEEE 802.11a/5580 MHz/Maximum Peak Conducted Output Power

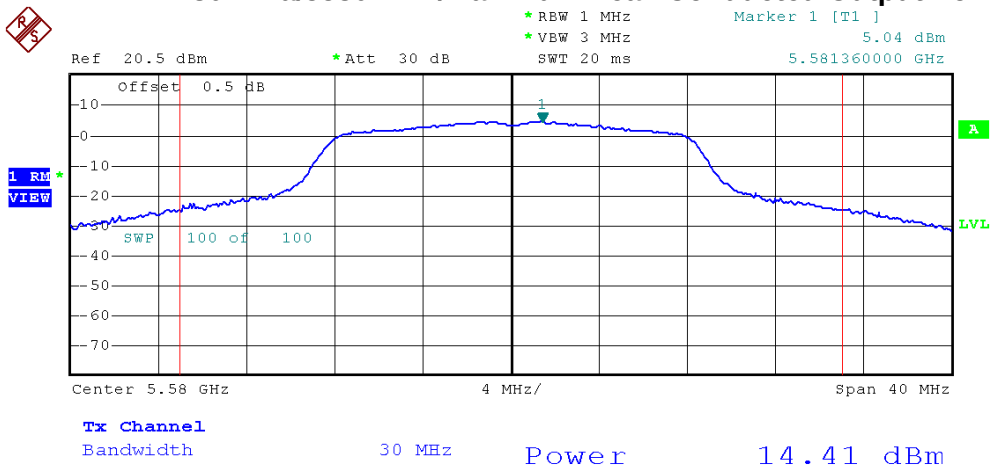

IEEE 802.11a/5700 MHz/Maximum Peak Conducted Output Power

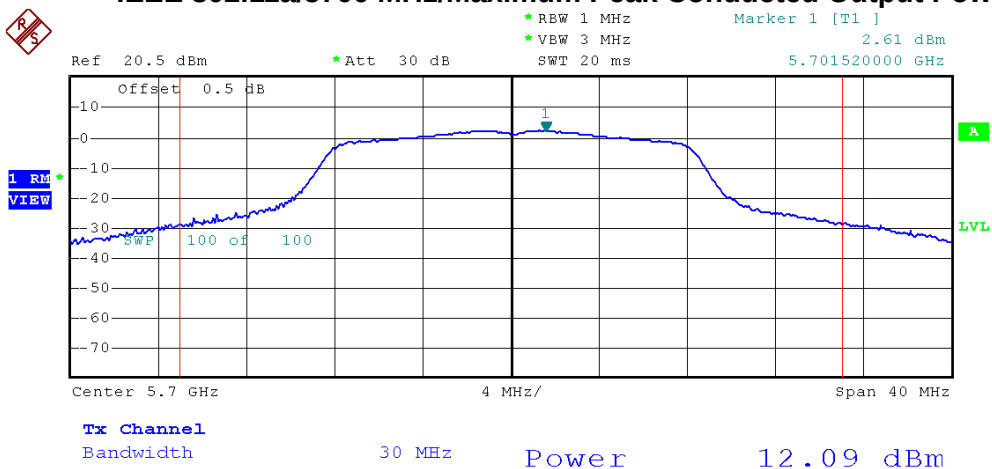




EUT	Mobile Computer	Model Name	9700
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz, 5580 MHz, 5700 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5500 MHz	14.20	0.0263	24.00	1.0000	PASS
5580 MHz	13.71	0.0235	24.00	1.0000	PASS
5700 MHz	11.96	0.0157	24.00	1.0000	PASS




IEEE 802.11n (20 MHz)/5500 MHz/Maximum Peak Conducted Output Power

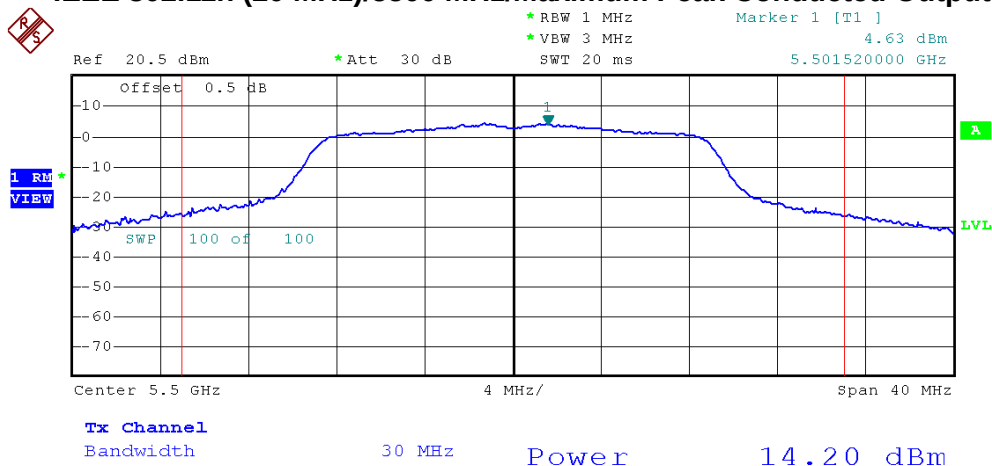

IEEE 802.11n (20 MHz)/5580 MHz/Maximum Peak Conducted Output Power

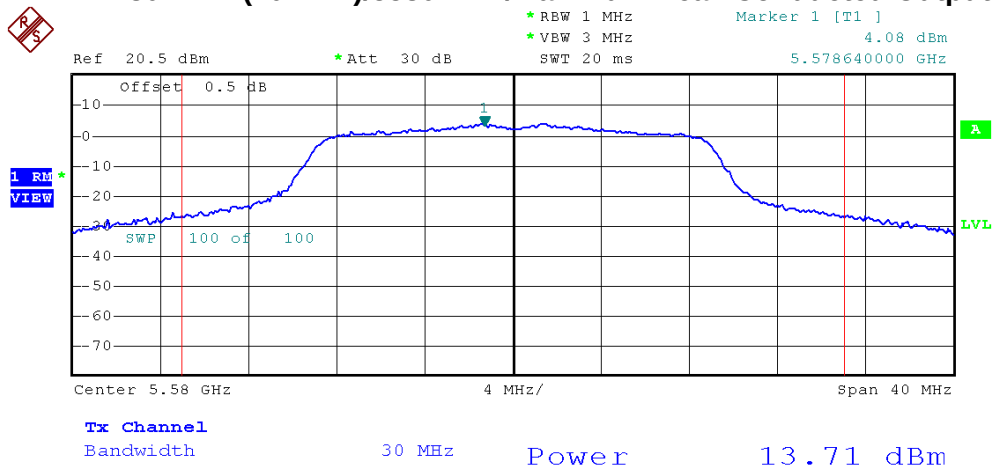

IEEE 802.11n (20 MHz)/5700 MHz/Maximum Peak Conducted Output Power

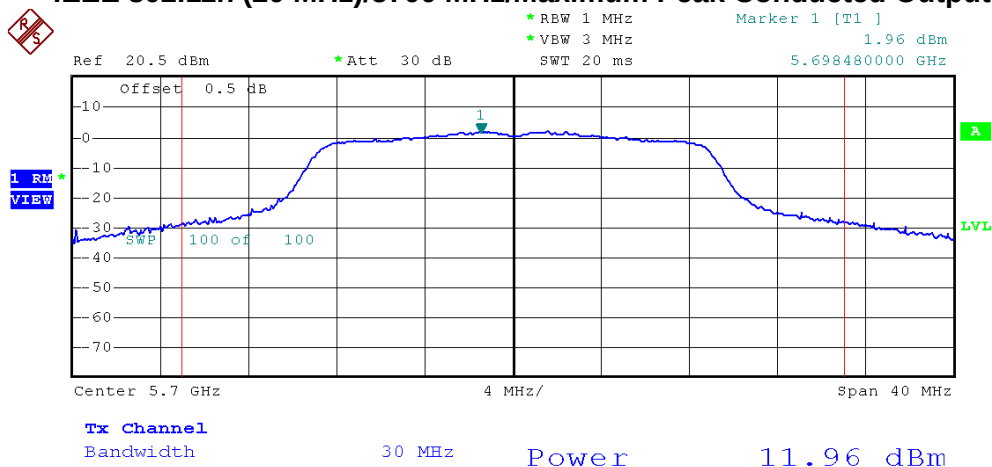



8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)

8.1 LIMIT

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 14, 2015
3	Microwave Pre-amplifier	Agilent	8449B	3008A01714	Apr. 15, 2015
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2014
5	Microflex Cable	EMC	S104-SMA	8m	May. 13, 2014
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2014
7	Test Cable	LMR	LMR-400	12m	May. 14, 2014
8	Test Cable	LMR	LMR-400	3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014

Remark: N/A: denotes no modelname, no serial No. or no calibration specified.

8.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz ~ 150 kHz / RB 200 Hz for QP
Start ~ Stop Frequency	150 kHz ~ 30 MHz / RB 9 kHz for QP
Start ~ Stop Frequency	30 MHz ~ 1000 MHz / RB 120 kHz for QP



8.4 TEST PROCEDURES

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC KDB 789033 D01 General UNII Test Procedures v01r03 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

8.5 DEVIATION FROM TEST STANDARD

No deviation

8.6 TEST SETUP LAYOUT

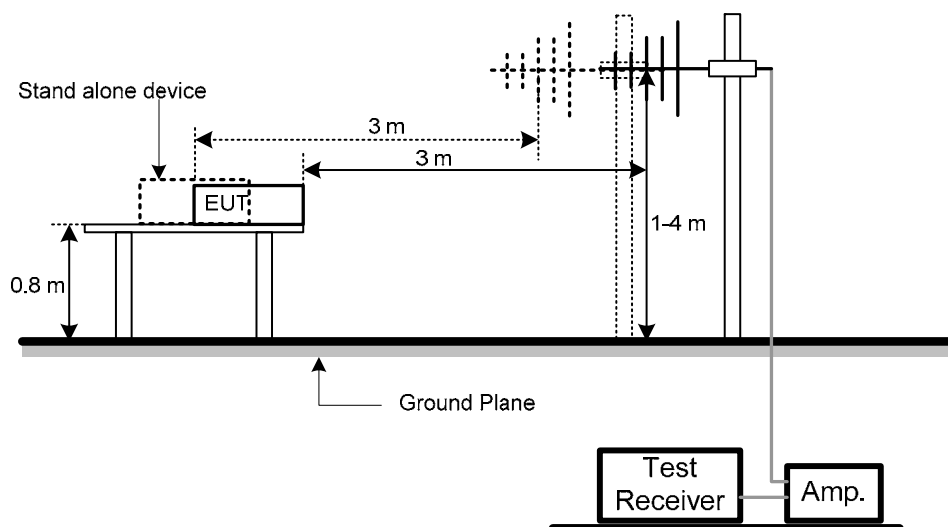



8.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.8 TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Vertical

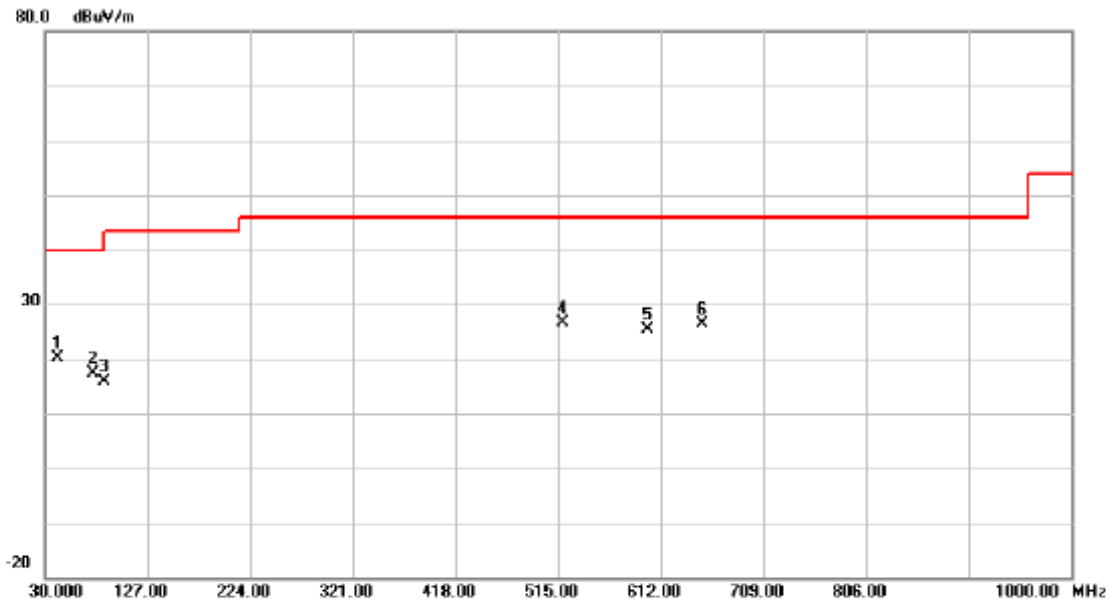


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	42.1250	34.49	-14.24	20.25	40.00	-19.75	peak	
2	76.0750	35.04	-17.75	17.29	40.00	-22.71	peak	
3	85.7750	35.58	-19.62	15.96	40.00	-24.04	peak	
4 *	519.8500	35.56	-8.99	26.57	46.00	-19.43	peak	
5	599.8750	32.12	-6.76	25.36	46.00	-20.64	peak	
6	650.8000	33.31	-6.88	26.43	46.00	-19.57	peak	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Horizontal

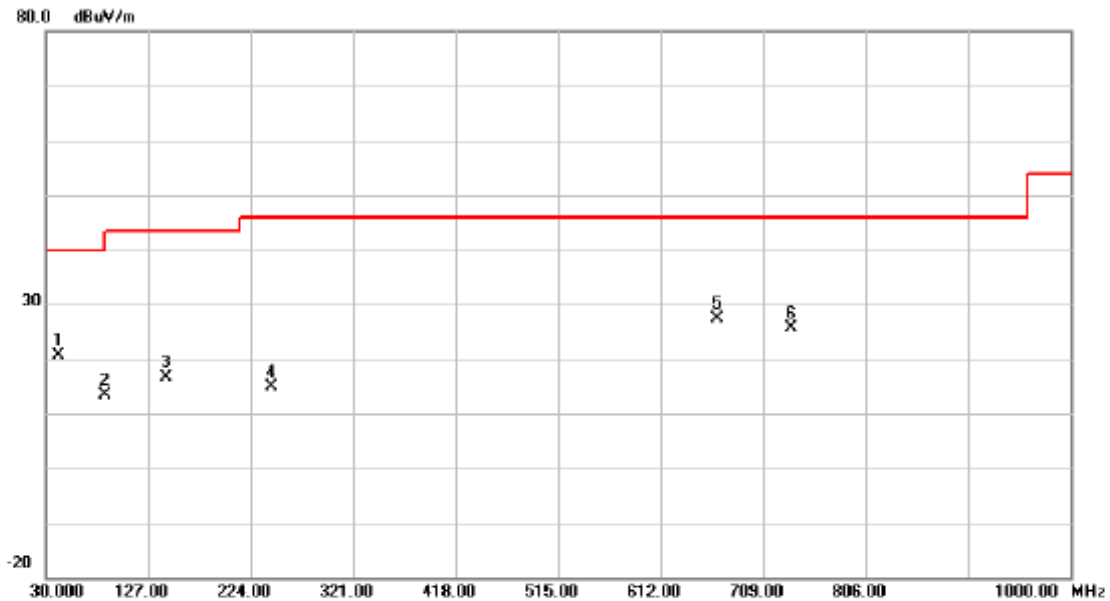


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	42.1250	34.93	-14.24	20.69	40.00	-19.31	peak	
2	85.7750	33.04	-19.62	13.42	40.00	-26.58	peak	
3	143.9750	31.03	-14.43	16.60	43.50	-26.90	peak	
4	243.4000	30.06	-15.29	14.77	46.00	-31.23	peak	
5 *	665.3500	34.08	-6.76	27.32	46.00	-18.68	peak	
6	735.6750	31.40	-5.67	25.73	46.00	-20.27	peak	



8.9 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Vertical

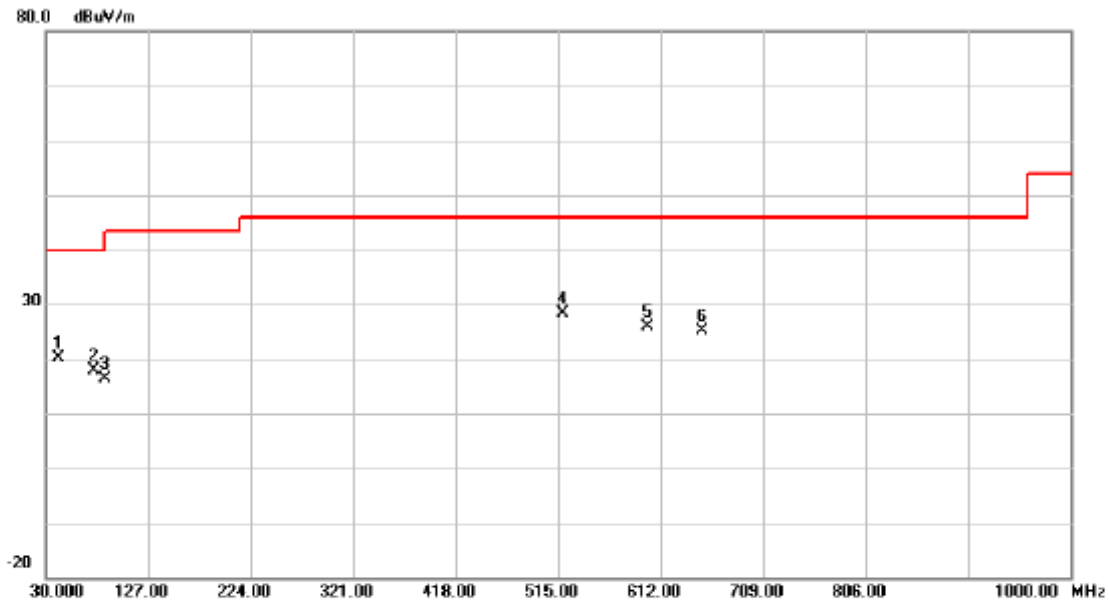


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		42.1250	34.31	-14.24	20.07	40.00	-19.93	peak	
2		76.0750	35.65	-17.75	17.90	40.00	-22.10	peak	
3		85.7750	35.96	-19.62	16.34	40.00	-23.66	peak	
4	*	519.8500	37.37	-8.99	28.38	46.00	-17.62	peak	
5		599.8750	32.60	-6.76	25.84	46.00	-20.16	peak	
6		650.8000	32.03	-6.88	25.15	46.00	-20.85	peak	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Horizontal

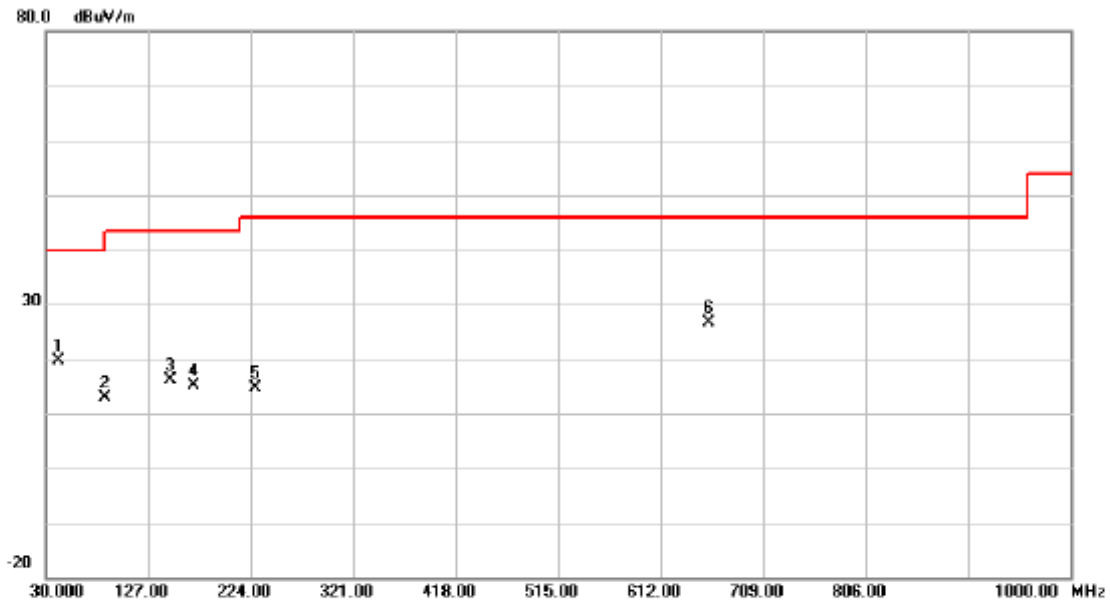

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		42.1250	33.82	-14.24	19.58	40.00	-20.42	peak	
2		85.7750	32.52	-19.62	12.90	40.00	-27.10	peak	
3		148.8250	30.26	-14.17	16.09	43.50	-27.41	peak	
4		170.6500	29.61	-14.58	15.03	43.50	-28.47	peak	
5		228.8500	30.98	-16.36	14.62	46.00	-31.38	peak	
6	*	658.0750	33.45	-6.82	26.63	46.00	-19.37	peak	



9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

9.1 LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 14, 2015
3	Microwave Pre-amplifier	Agilent	8449B	3008A01714	Apr. 15, 2015
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2014
5	Microflex Cable	EMC	S104-SMA	8m	May. 13, 2014
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2014
7	Test Cable	LMR	LMR-400	12m	May. 14, 2014
8	Test Cable	LMR	LMR-400	3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014

Remark: N/A: denotes no modelname, no serial No. or no calibration specified.

9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10 Hz for Average
RB / VB (other emission)	1 MHz / 1 MHz for Peak, 1 MHz / 10 Hz for Average



9.4 TEST PROCEDURES

- The measuring distance of at 1 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC KDB 789033 D01 General UNII Test Procedures v01r03 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

9.5 DEVIATION FROM TEST STANDARD

No deviation

9.6 TEST SETUP LAYOUT

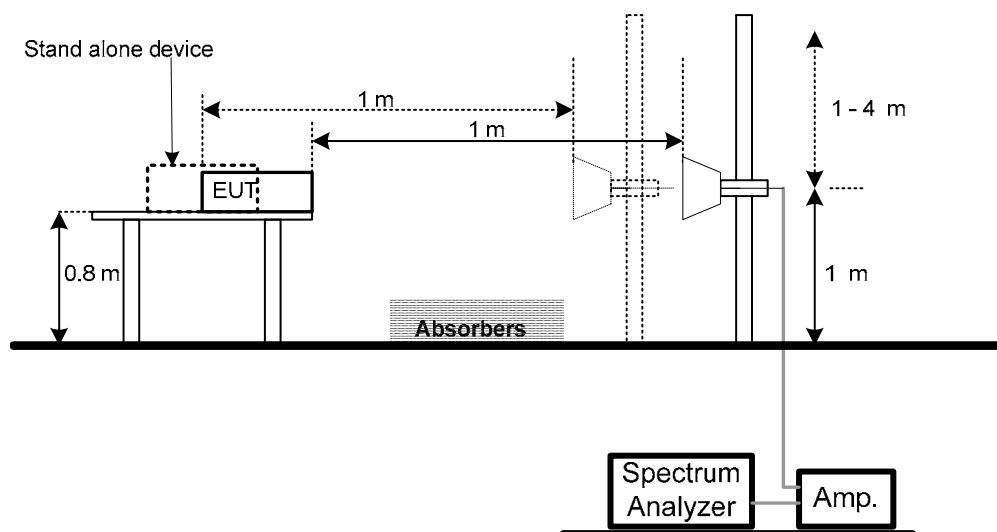



9.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.8 TEST RESULTS - 5180 MHZ TO 5350 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Vertical

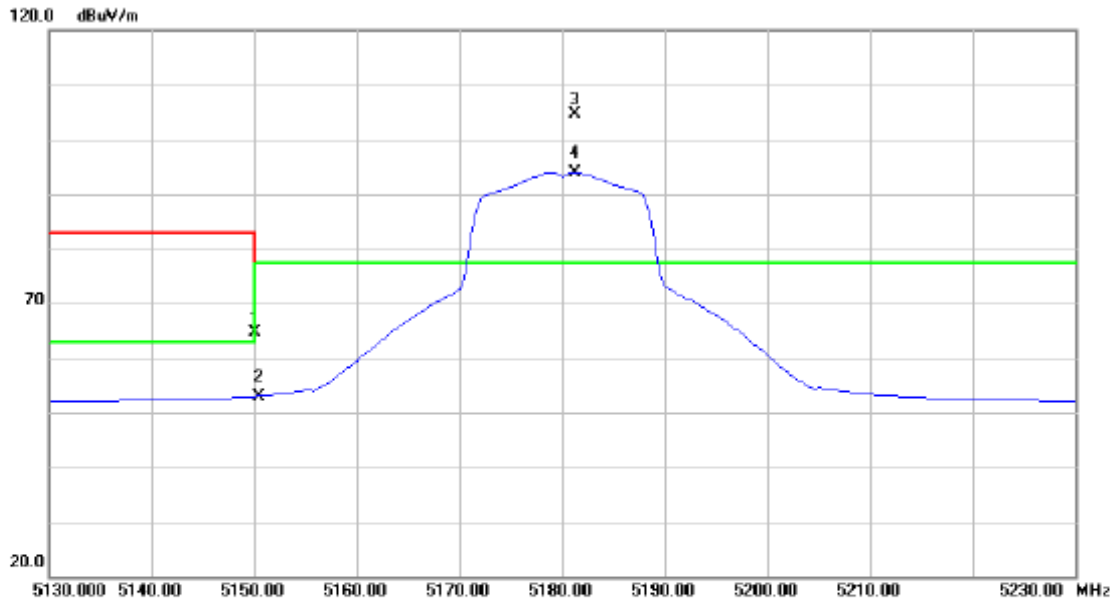


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.000	26.40	38.33	64.73	77.30	-12.57	peak	
2	5150.000	14.63	38.33	52.96	63.00	-10.04	AVG	
3 *	5181.250	66.27	38.38	104.65	77.30	27.35	peak	
4 X	5181.250	55.55	38.38	93.93	77.30	16.63	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Vertical

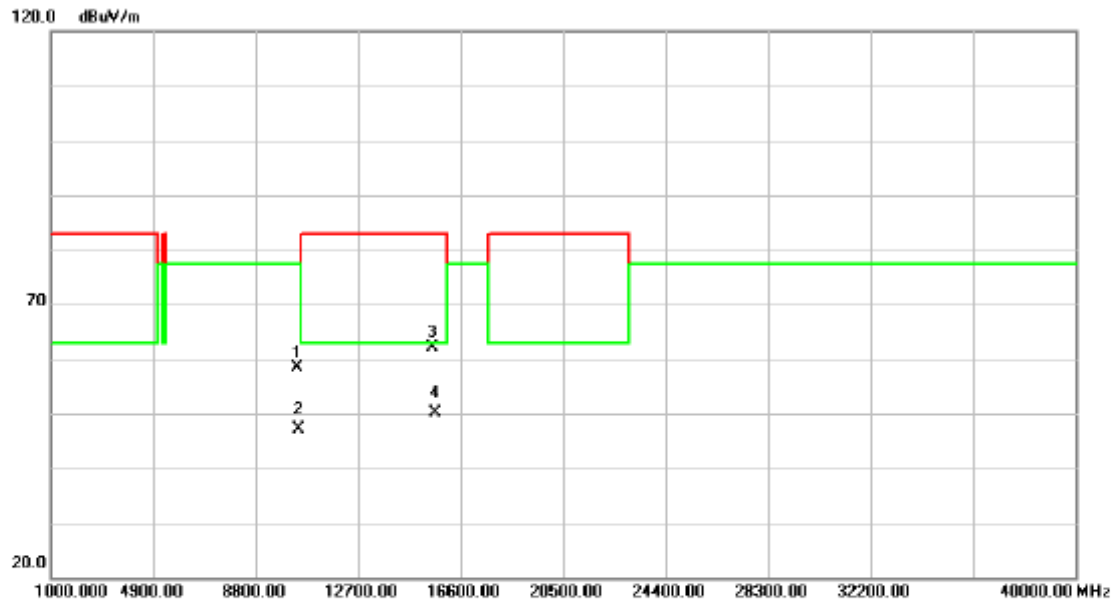


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.06	42.71	15.79	58.50	77.30	-18.80	peak	
2	10360.06	31.39	15.79	47.18	77.30	-30.12	AVG	
3	15540.39	42.91	19.21	62.12	83.00	-20.88	peak	
4 *	15540.39	30.86	19.21	50.07	63.00	-12.93	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Horizontal

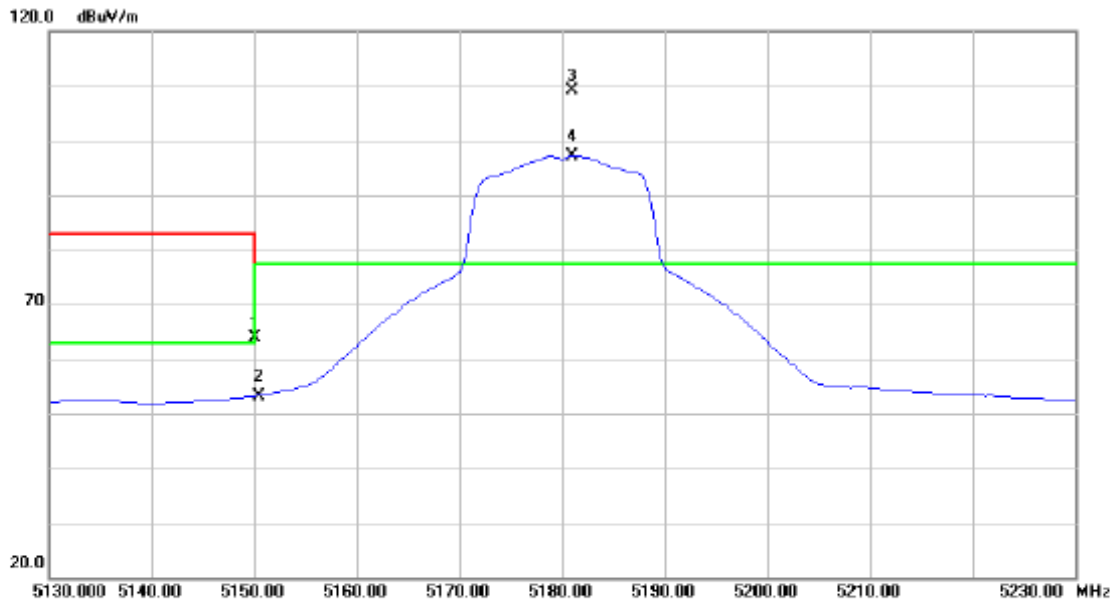


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	25.59	38.33	63.92	77.30	-13.38	peak	
2		5150.000	14.83	38.33	53.16	63.00	-9.84	AVG	
3	*	5181.000	70.87	38.38	109.25	77.30	31.95	peak	
4	X	5181.000	58.79	38.38	97.17	77.30	19.87	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Horizontal

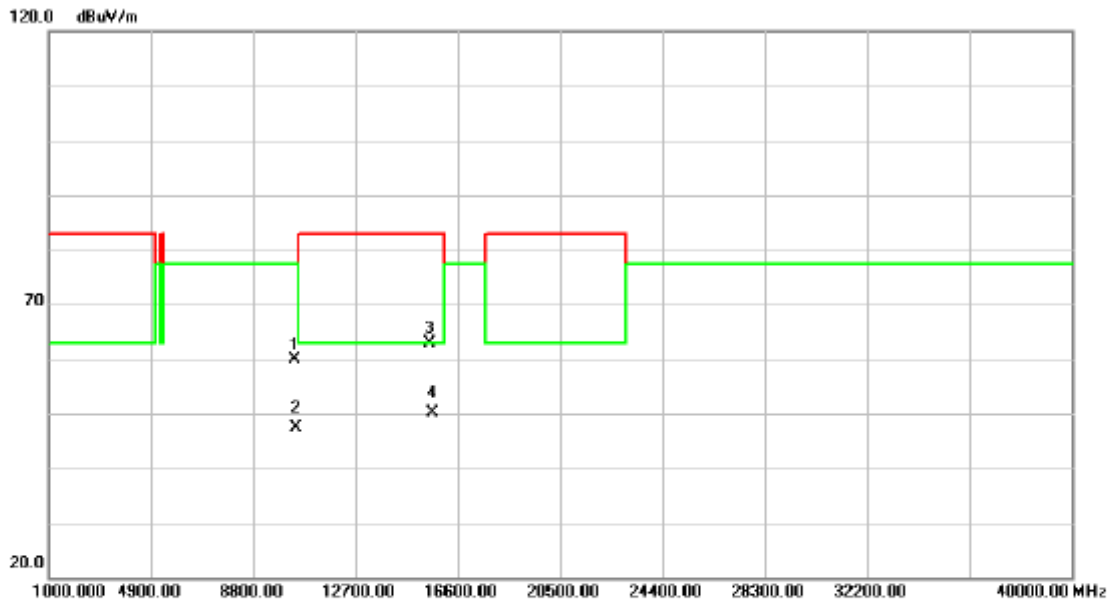


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10360.00	44.06	15.79	59.85	77.30	-17.45	peak	
2		10360.00	31.63	15.79	47.42	77.30	-29.88	AVG	
3		15539.27	43.73	19.21	62.94	83.00	-20.06	peak	
4	*	15539.27	30.98	19.21	50.19	63.00	-12.81	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5200 MHz		

Polarization: Vertical

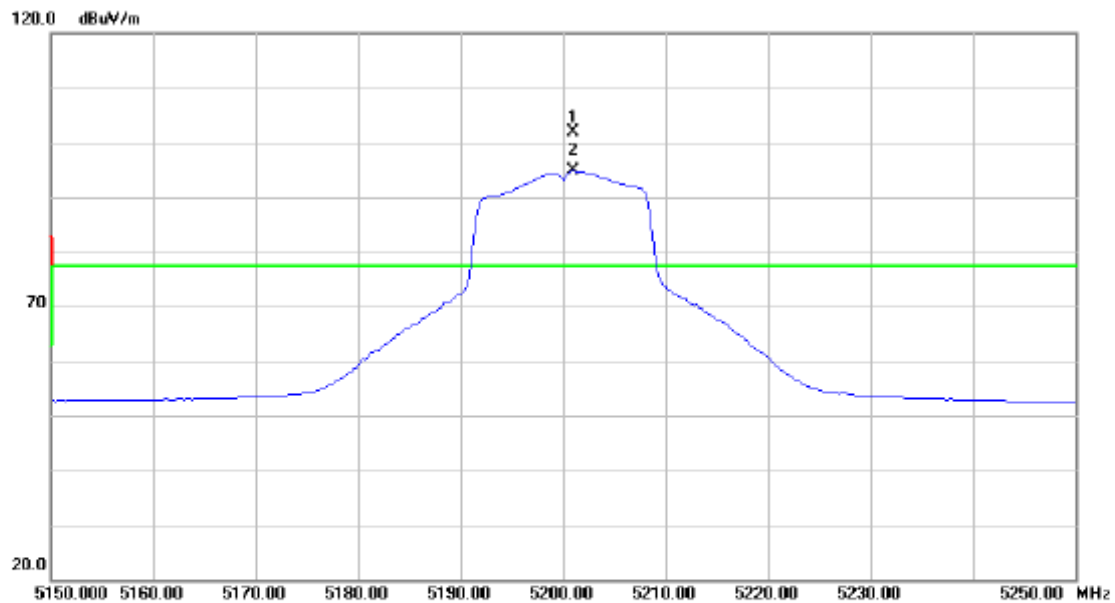


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5201.000	62.77	39.21	101.98	77.30	24.68	peak	
2	X	5201.000	55.57	39.21	94.78	77.30	17.48	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5200 MHz		

Polarization: Vertical

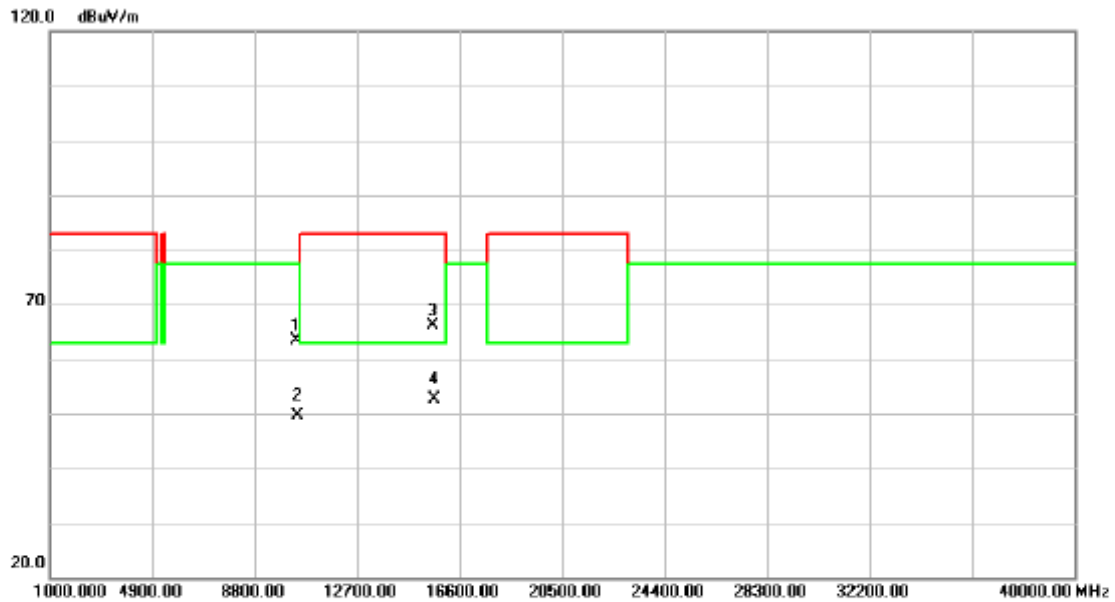


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.05	46.59	16.82	63.41	77.30	-13.89	peak	
2	10400.05	32.78	16.82	49.60	77.30	-27.70	AVG	
3	15600.86	45.85	20.37	66.22	83.00	-16.78	peak	
4 *	15600.86	32.28	20.37	52.65	63.00	-10.35	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5200 MHz		

Polarization: Horizontal

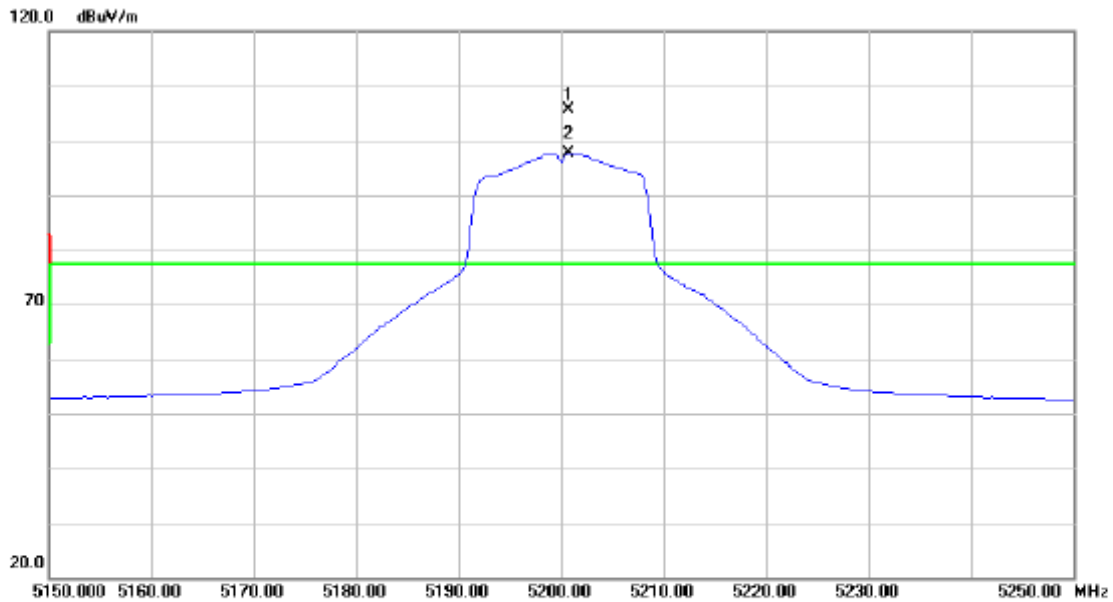


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5200.750	66.39	39.21	105.60	77.30	28.30	peak	
2	X	5200.750	58.42	39.21	97.63	77.30	20.33	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5200 MHz		

Polarization: Horizontal

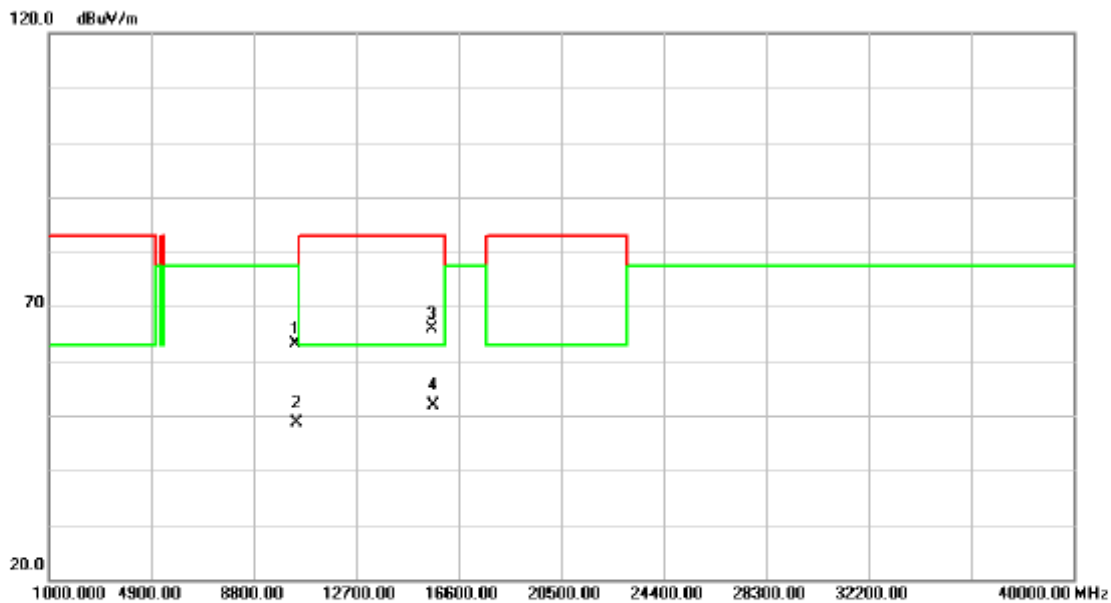


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10399.94	46.25	16.82	63.07	77.30	-14.23	peak	
2		10399.94	31.88	16.82	48.70	77.30	-28.60	AVG	
3		15599.94	45.39	20.37	65.76	83.00	-17.24	peak	
4	*	15599.94	31.42	20.37	51.79	63.00	-11.21	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Vertical

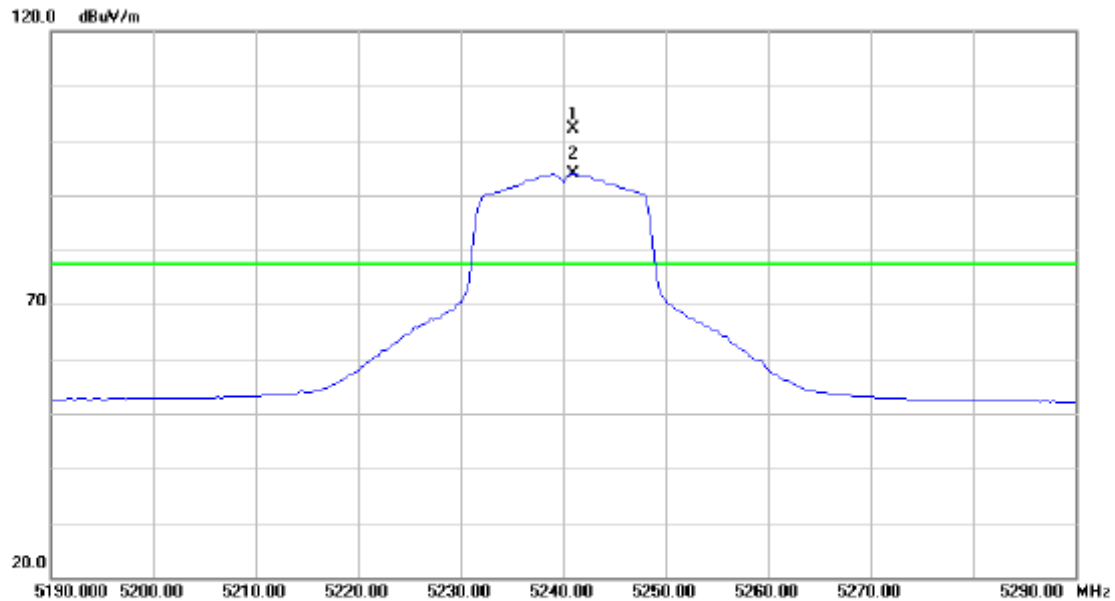


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5241.000	62.85	39.20	102.05	77.30	24.75	peak	
2	X	5241.000	54.59	39.20	93.79	77.30	16.49	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Vertical

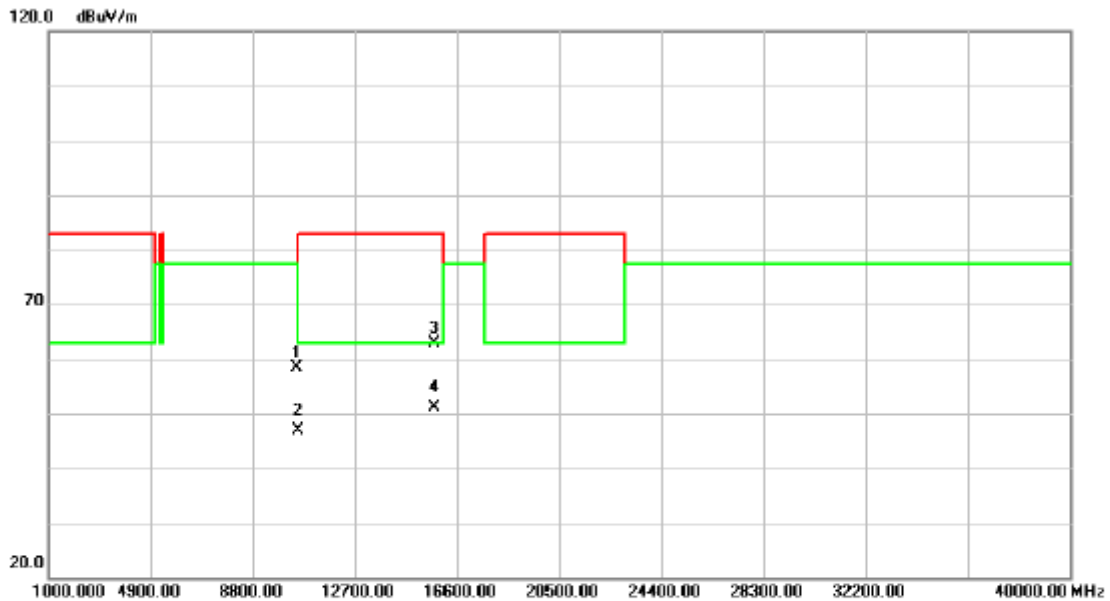


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10479.66	41.50	16.90	58.40	77.30	-18.90	peak	
2		10479.66	30.00	16.90	46.90	77.30	-30.40	AVG	
3		15720.61	42.61	20.31	62.92	83.00	-20.08	peak	
4	*	15720.61	30.80	20.31	51.11	63.00	-11.89	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Horizontal

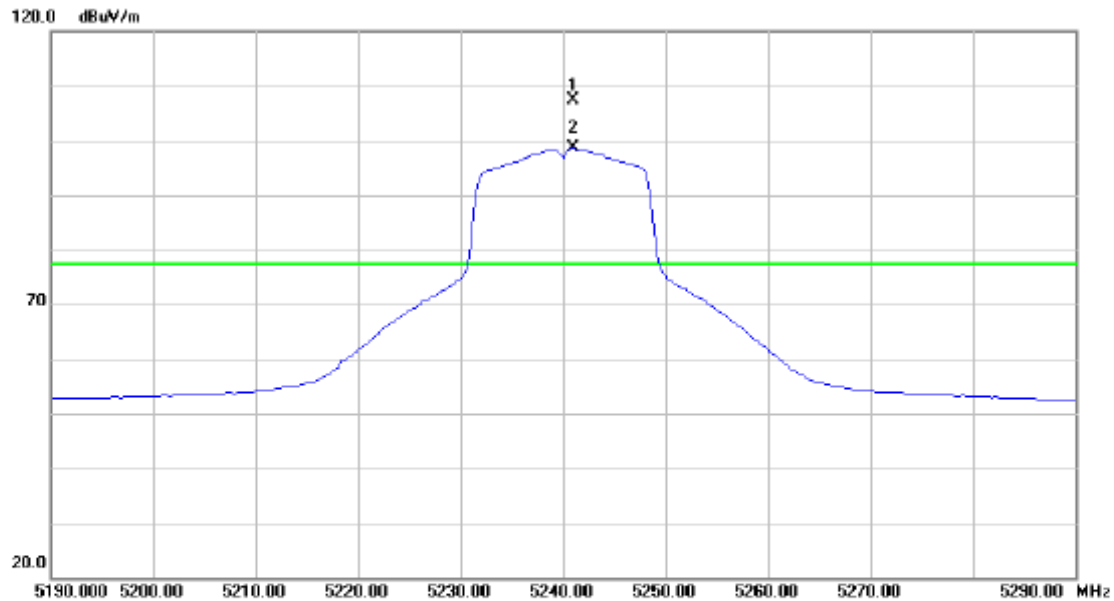


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5241.000	68.13	39.20	107.33	77.30	30.03	peak	
2	X	5241.000	59.42	39.20	98.62	77.30	21.32	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Horizontal

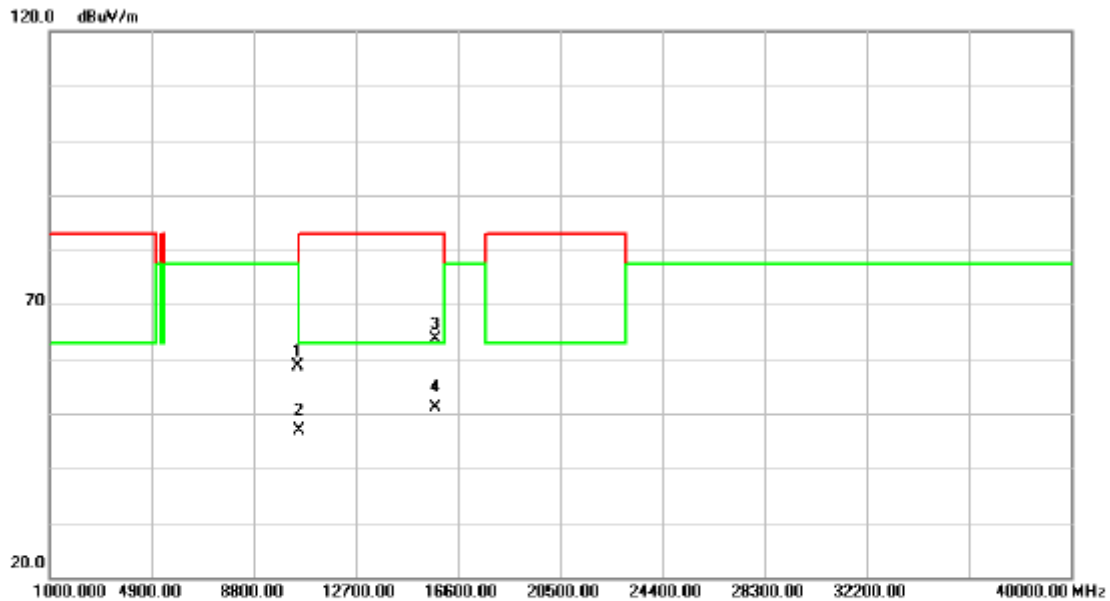


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10480.20	41.73	16.90	58.63	77.30	-18.67	peak	
2		10480.20	30.05	16.90	46.95	77.30	-30.35	AVG	
3		15720.69	43.23	20.31	63.54	83.00	-19.46	peak	
4	*	15720.69	30.77	20.31	51.08	63.00	-11.92	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Vertical

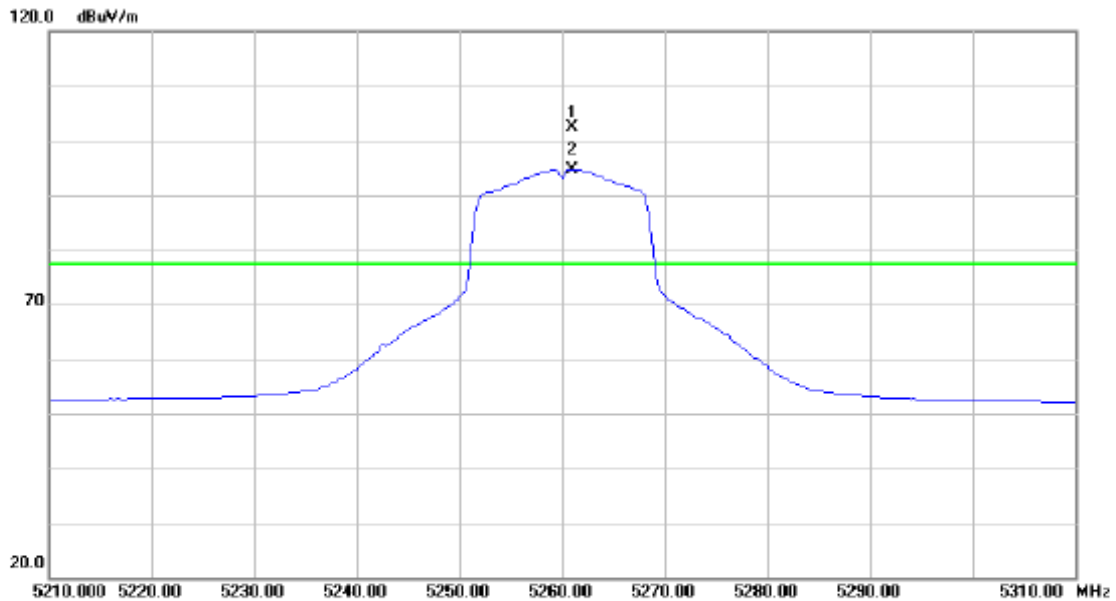


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5261.000	63.17	39.19	102.36	77.30	25.06	peak	
2	X	5261.000	55.54	39.19	94.73	77.30	17.43	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Vertical

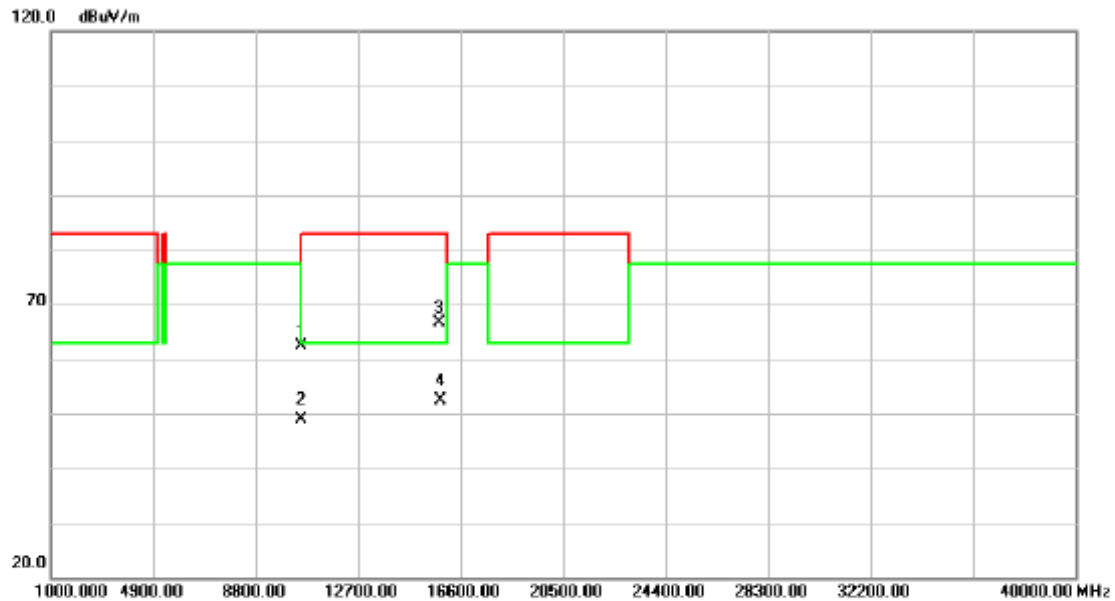


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10519.02	45.15	17.11	62.26	77.30	-15.04	peak	
2	10519.02	31.75	17.11	48.86	77.30	-28.44	AVG	
3	15779.82	46.56	20.04	66.60	83.00	-16.40	peak	
4 *	15779.82	32.35	20.04	52.39	63.00	-10.61	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Horizontal

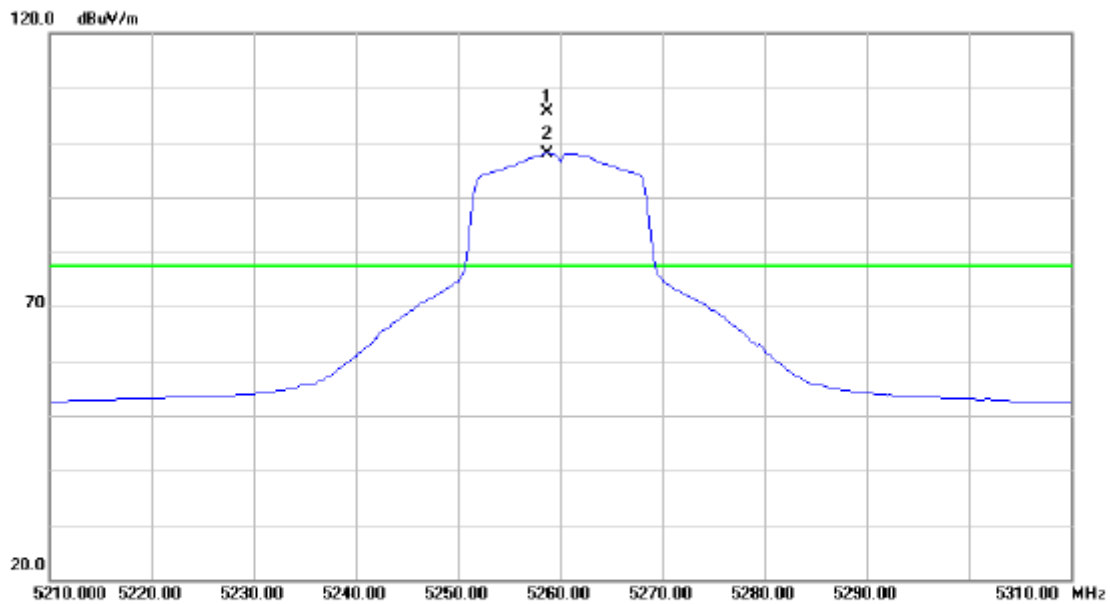


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5258.750	66.34	39.19	105.53	77.30	28.23	peak	
2	X	5258.750	58.81	39.19	98.00	77.30	20.70	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz		

Polarization: Horizontal

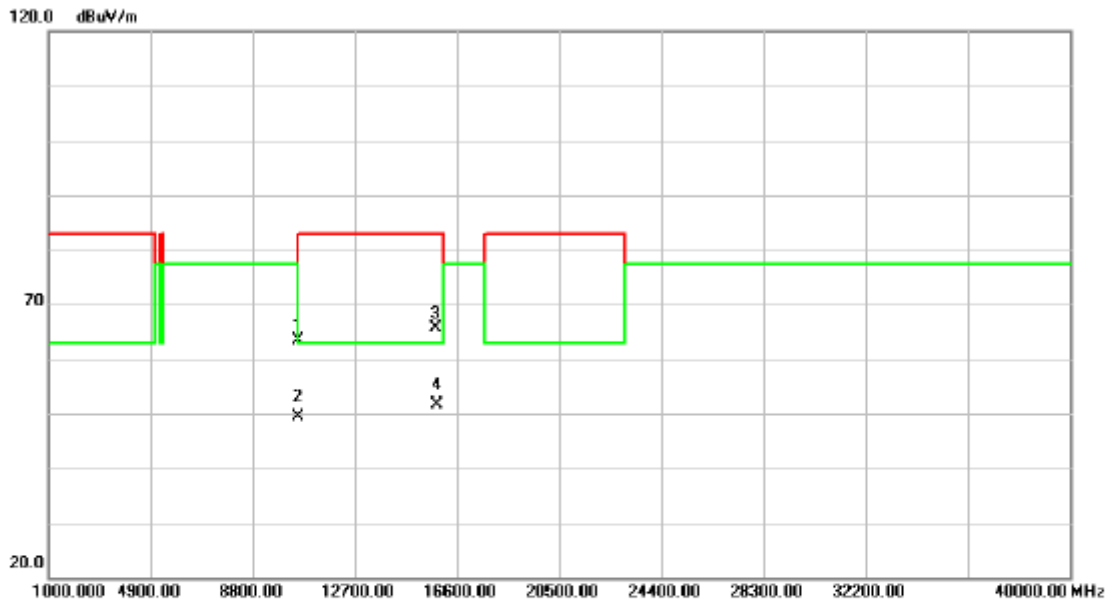


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10519.93	46.25	17.13	63.38	77.30	-13.92	peak	
2	10519.93	32.32	17.13	49.45	77.30	-27.85	AVG	
3	15780.14	45.50	20.04	65.54	83.00	-17.46	peak	
4 *	15780.14	31.65	20.04	51.69	63.00	-11.31	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Vertical

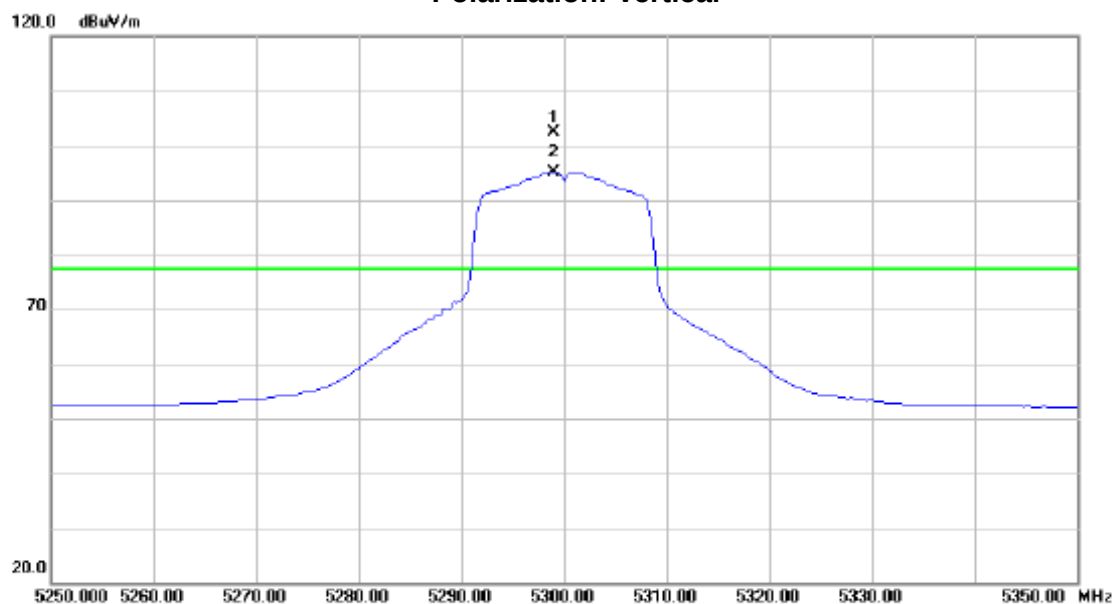


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5299.000	63.12	39.18	102.30	77.30	25.00	peak	
2	X	5299.000	56.01	39.18	95.19	77.30	17.89	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Vertical

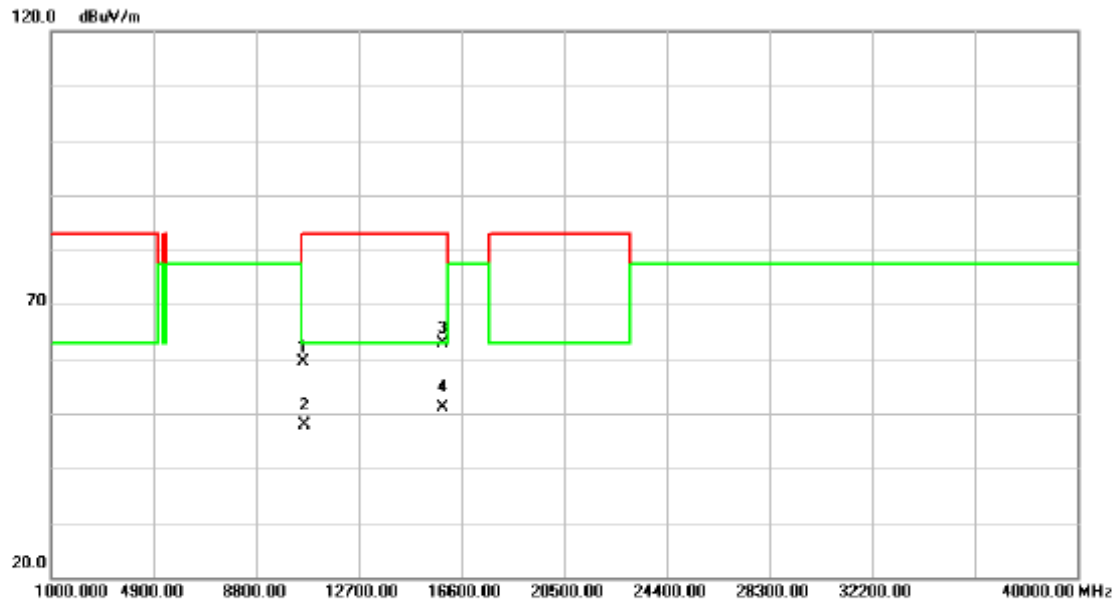


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10599.88	41.99	17.31	59.30	77.30	-18.00	peak	
2	10599.88	30.53	17.31	47.84	77.30	-29.46	AVG	
3	15900.28	42.58	20.27	62.85	83.00	-20.15	peak	
4 *	15900.28	30.88	20.27	51.15	63.00	-11.85	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Horizontal

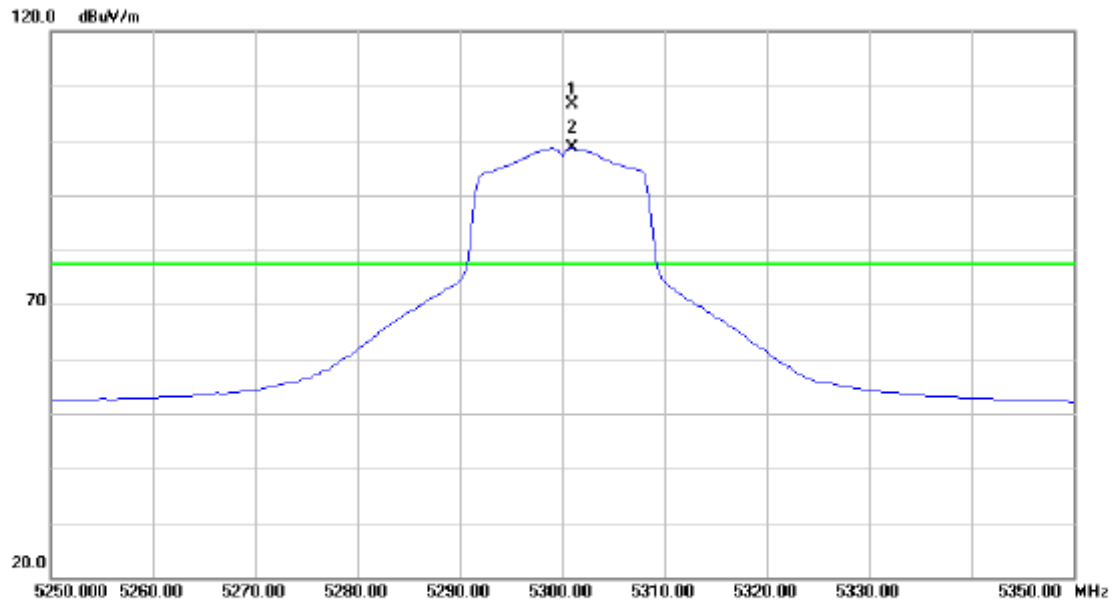


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5301.000	67.46	39.18	106.64	77.30	29.34	peak	
2	X	5301.000	59.36	39.18	98.54	77.30	21.24	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5300 MHz		

Polarization: Horizontal

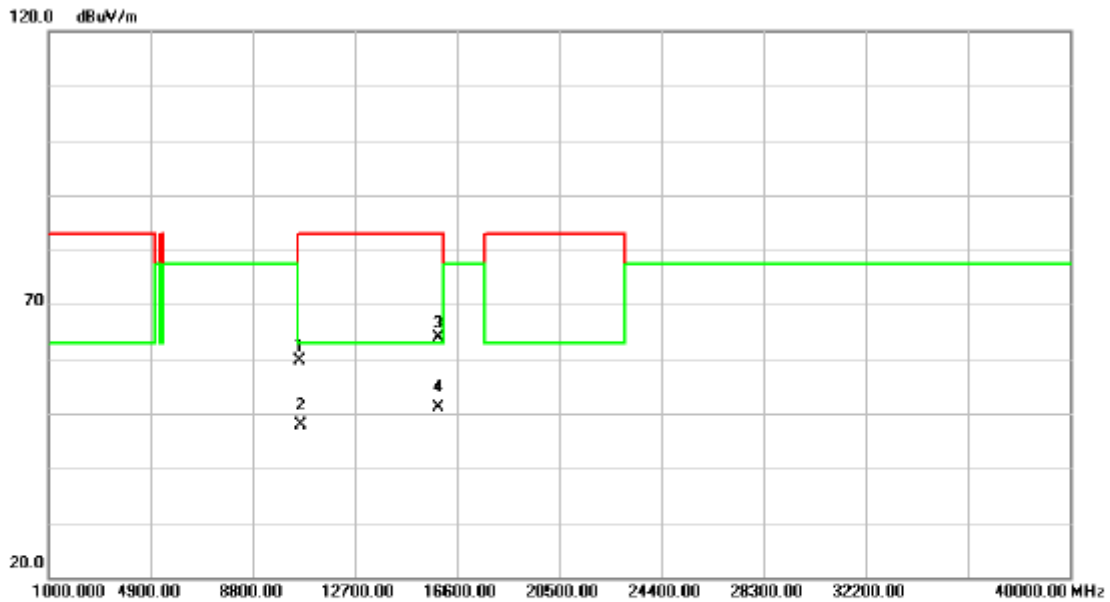


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10599.40	42.26	17.31	59.57	77.30	-17.73	peak	
2	10599.40	30.46	17.31	47.77	77.30	-29.53	AVG	
3	15899.84	43.67	20.27	63.94	83.00	-19.06	peak	
4 *	15899.84	30.88	20.27	51.15	63.00	-11.85	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Vertical

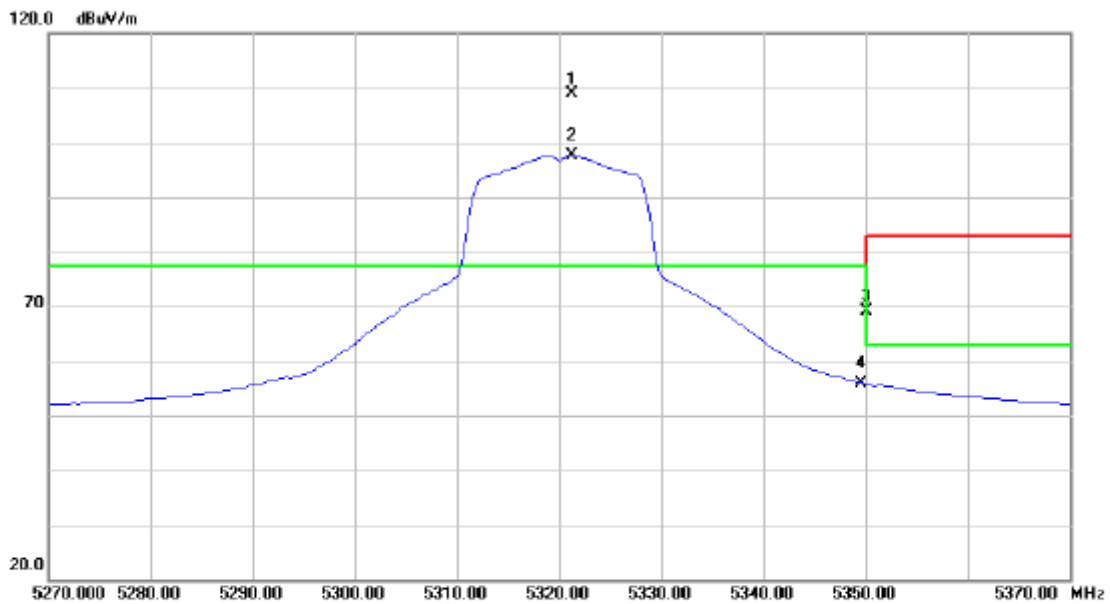


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5321.250	70.35	38.61	108.96	77.30	31.66	peak	
2	X	5321.250	58.92	38.61	97.53	77.30	20.23	AVG	
3		5350.000	30.57	38.66	69.23	77.30	-8.07	peak	
4		5350.000	17.10	38.66	55.76	63.00	-7.24	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Vertical

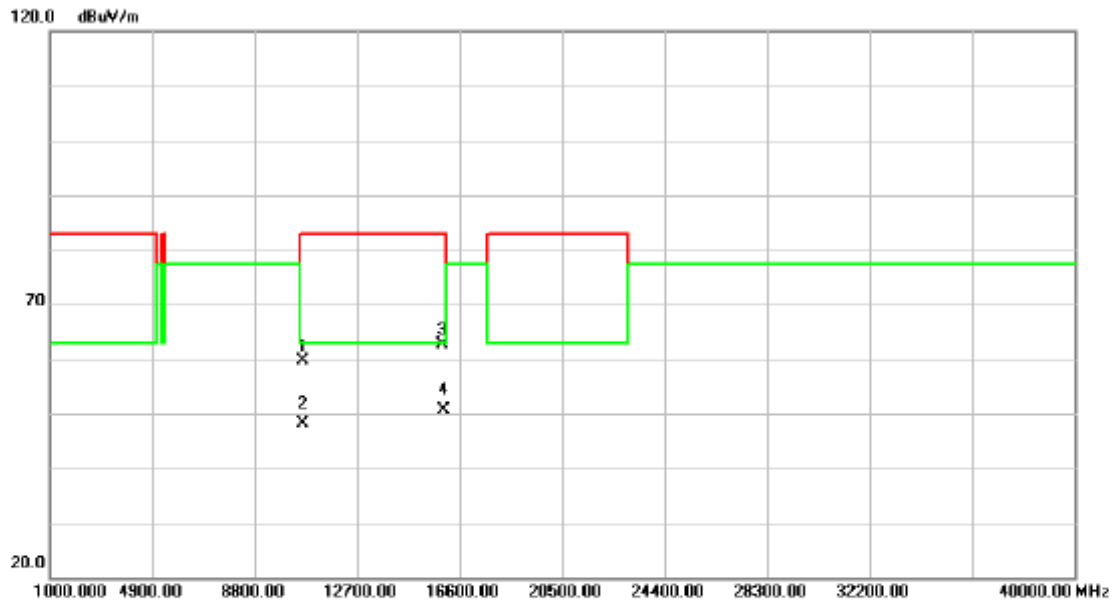


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10639.76	42.23	17.46	59.69	83.00	-23.31	peak	
2	10639.76	30.55	17.46	48.01	63.00	-14.99	AVG	
3	15960.77	42.43	20.25	62.68	83.00	-20.32	peak	
4 *	15960.77	30.49	20.25	50.74	63.00	-12.26	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Horizontal

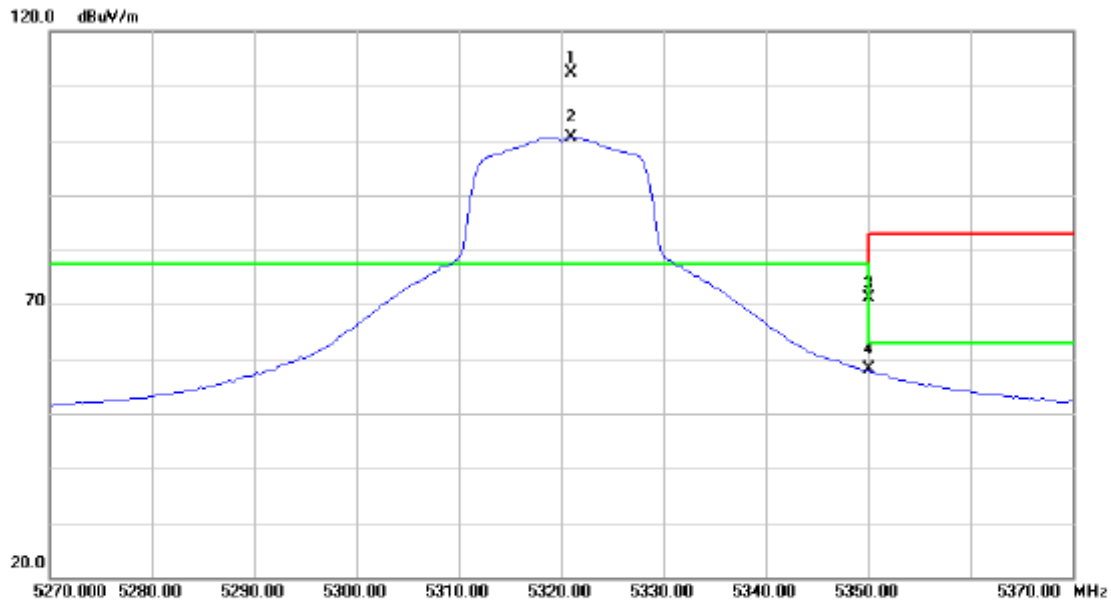


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5321.000	73.74	38.61	112.35	77.30	35.05	peak	
2	X	5321.000	62.00	38.61	100.61	77.30	23.31	AVG	
3		5350.000	32.47	38.66	71.13	77.30	-6.17	peak	
4		5350.000	19.35	38.66	58.01	63.00	-4.99	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Horizontal

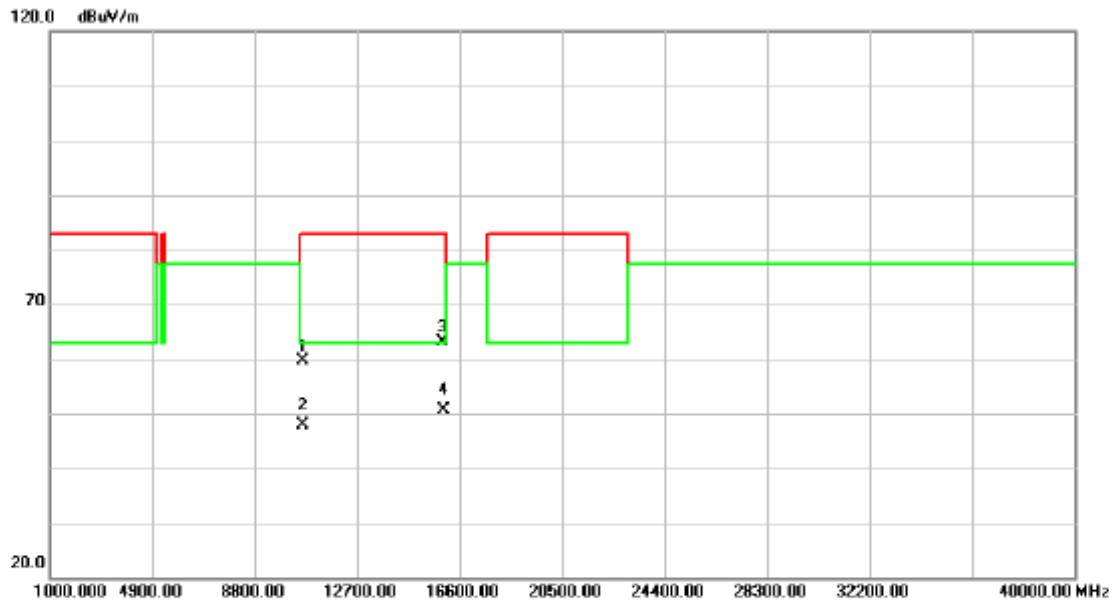


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10639.42	42.26	17.46	59.72	83.00	-23.28	peak	
2	10639.42	30.49	17.46	47.95	63.00	-15.05	AVG	
3	15959.85	42.76	20.25	63.01	83.00	-19.99	peak	
4 *	15959.85	30.49	20.25	50.74	63.00	-12.26	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		

Polarization: Vertical

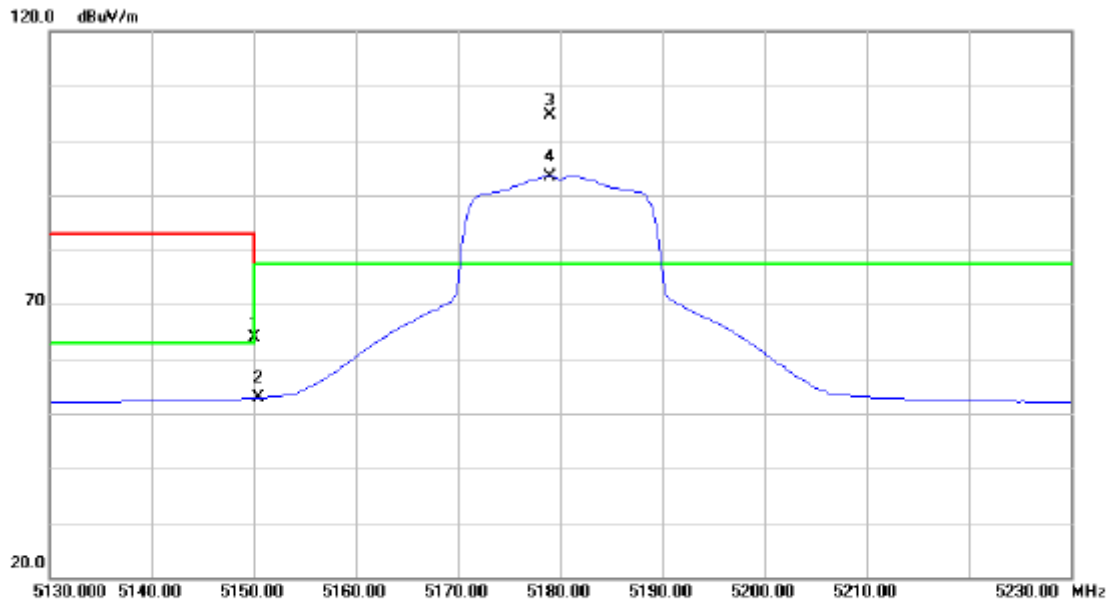


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	25.45	38.33	63.78	77.30	-13.52	peak	
2		5150.000	14.50	38.33	52.83	63.00	-10.17	AVG	
3	*	5179.000	66.13	38.38	104.51	77.30	27.21	peak	
4	X	5179.000	55.02	38.38	93.40	77.30	16.10	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		

Polarization: Vertical

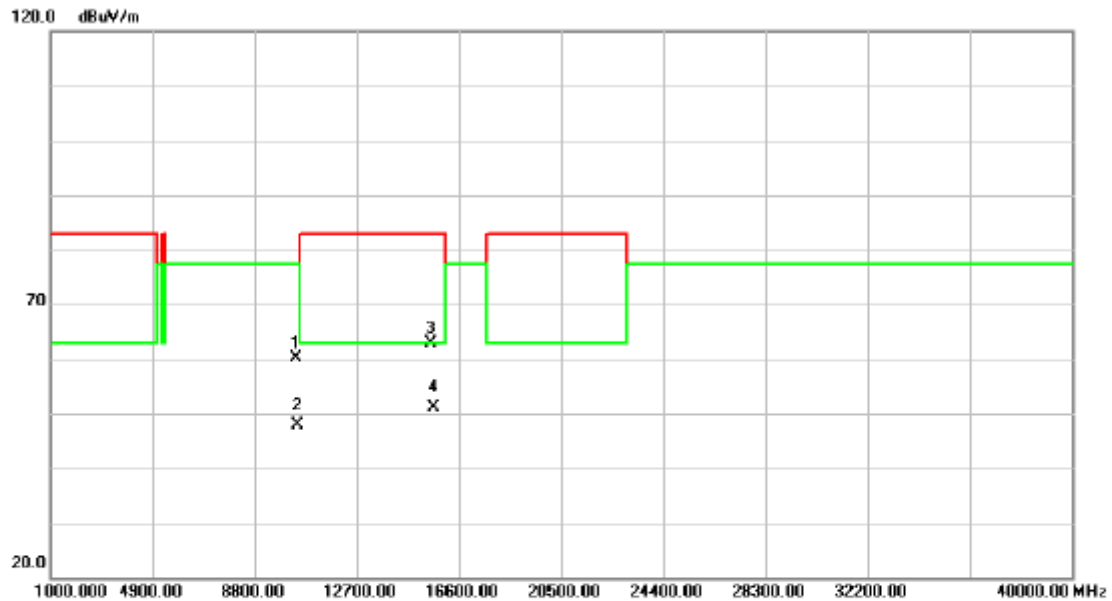


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.07	43.37	16.75	60.12	77.30	-17.18	peak	
2	10360.07	31.20	16.75	47.95	77.30	-29.35	AVG	
3	15540.24	42.44	20.35	62.79	83.00	-20.21	peak	
4 *	15540.24	30.67	20.35	51.02	63.00	-11.98	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		

Polarization: Horizontal

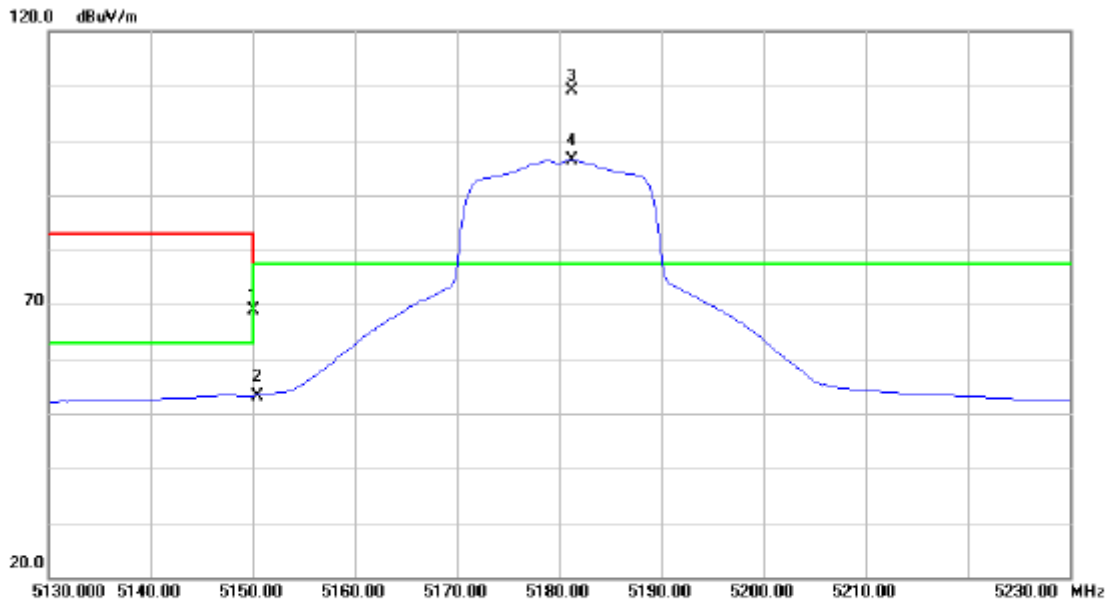


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	30.67	38.33	69.00	77.30	-8.30	peak	
2		5150.000	14.89	38.33	53.22	63.00	-9.78	AVG	
3	*	5181.250	70.77	38.38	109.15	77.30	31.85	peak	
4	X	5181.250	58.04	38.38	96.42	77.30	19.12	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		

Polarization: Horizontal

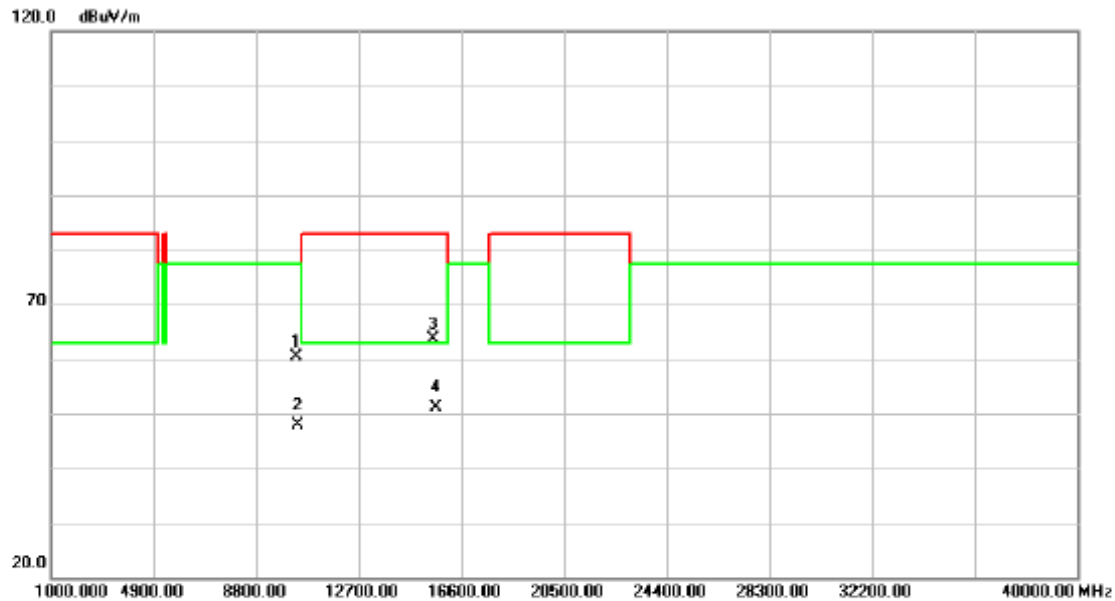


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10359.62	43.60	16.75	60.35	77.30	-16.95	peak	
2		10359.62	31.20	16.75	47.95	77.30	-29.35	AVG	
3		15539.70	43.18	20.35	63.53	83.00	-19.47	peak	
4	*	15539.70	30.73	20.35	51.08	63.00	-11.92	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5200 MHz		

Polarization: Vertical

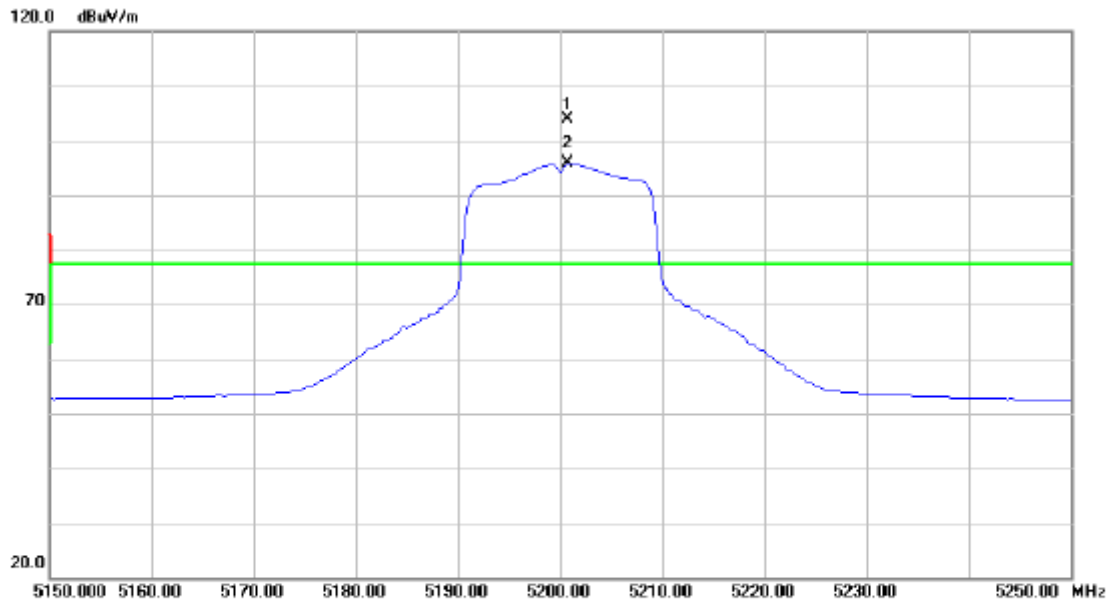


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5200.750	64.76	39.21	103.97	77.30	26.67	peak	
2	X	5200.750	56.58	39.21	95.79	77.30	18.49	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5200 MHz		

Polarization: Vertical

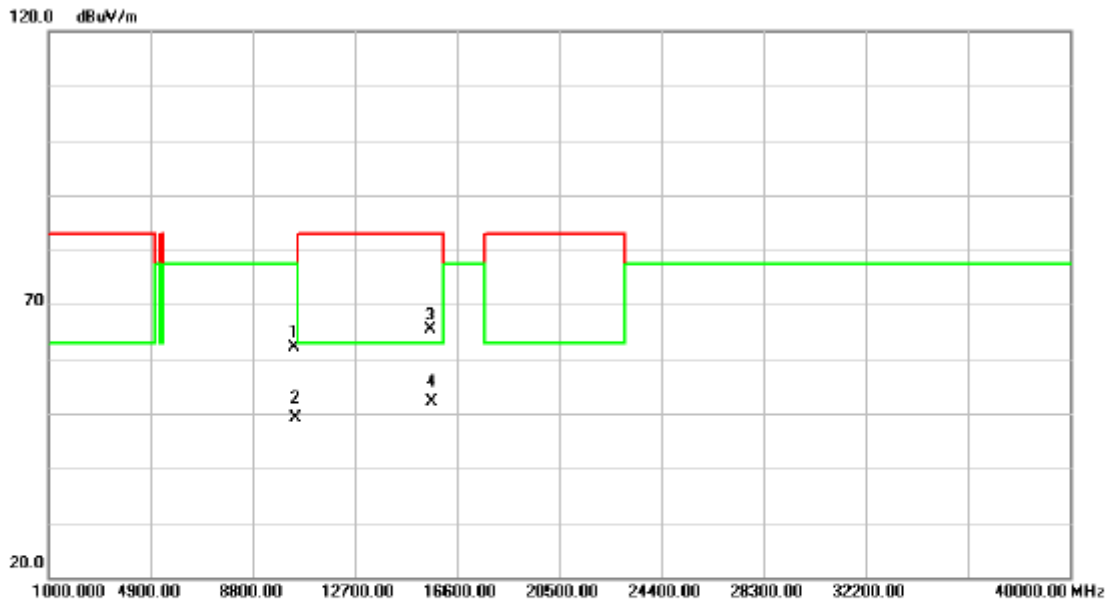


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10399.94	45.25	16.82	62.07	77.30	-15.23	peak	
2		10399.94	32.40	16.82	49.22	77.30	-28.08	AVG	
3		15600.08	45.02	20.37	65.39	83.00	-17.61	peak	
4	*	15600.08	31.83	20.37	52.20	63.00	-10.80	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5200 MHz		

Polarization: Horizontal

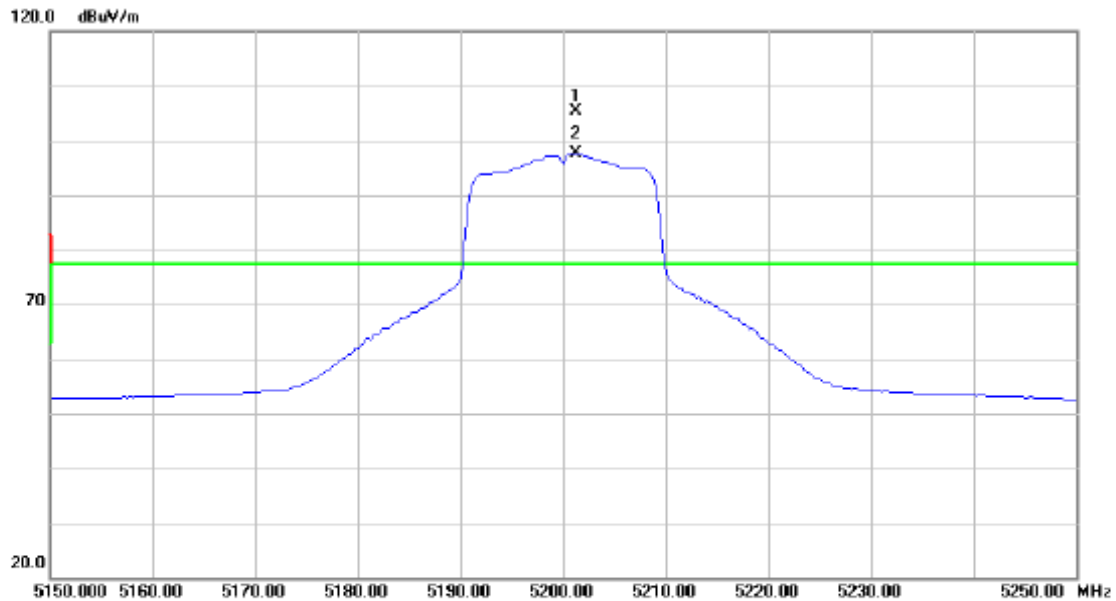


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5201.250	66.10	39.21	105.31	77.30	28.01	peak	
2	X	5201.250	58.33	39.21	97.54	77.30	20.24	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5200 MHz		

Polarization: Horizontal

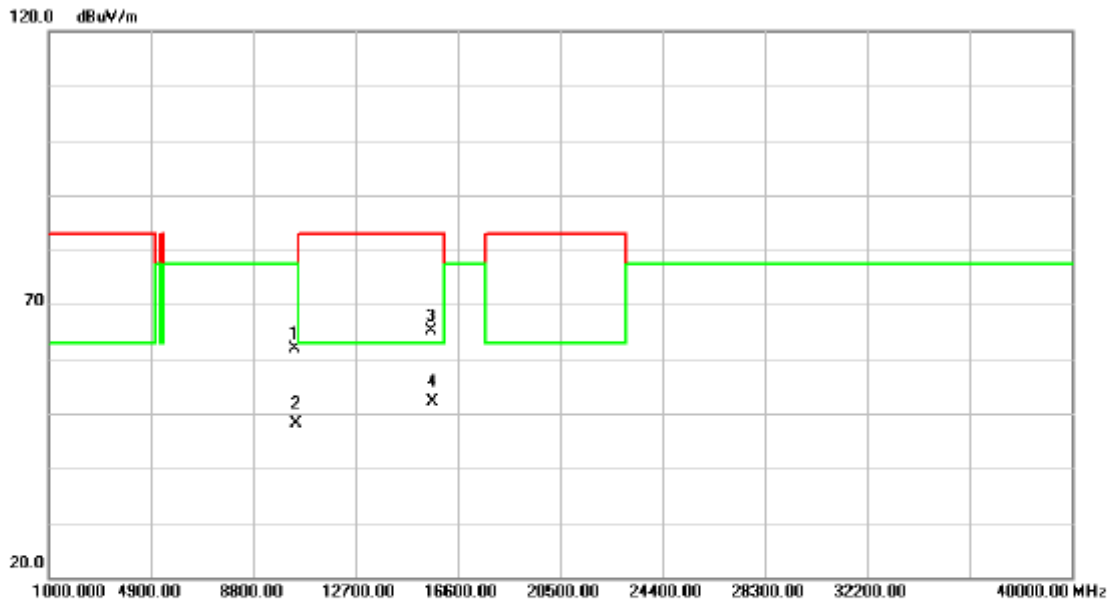


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.34	45.12	16.82	61.94	77.30	-15.36	peak	
2	10400.34	31.37	16.82	48.19	77.30	-29.11	AVG	
3	15599.98	44.72	20.37	65.09	83.00	-17.91	peak	
4 *	15599.98	31.87	20.37	52.24	63.00	-10.76	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5240 MHz		

Polarization: Vertical

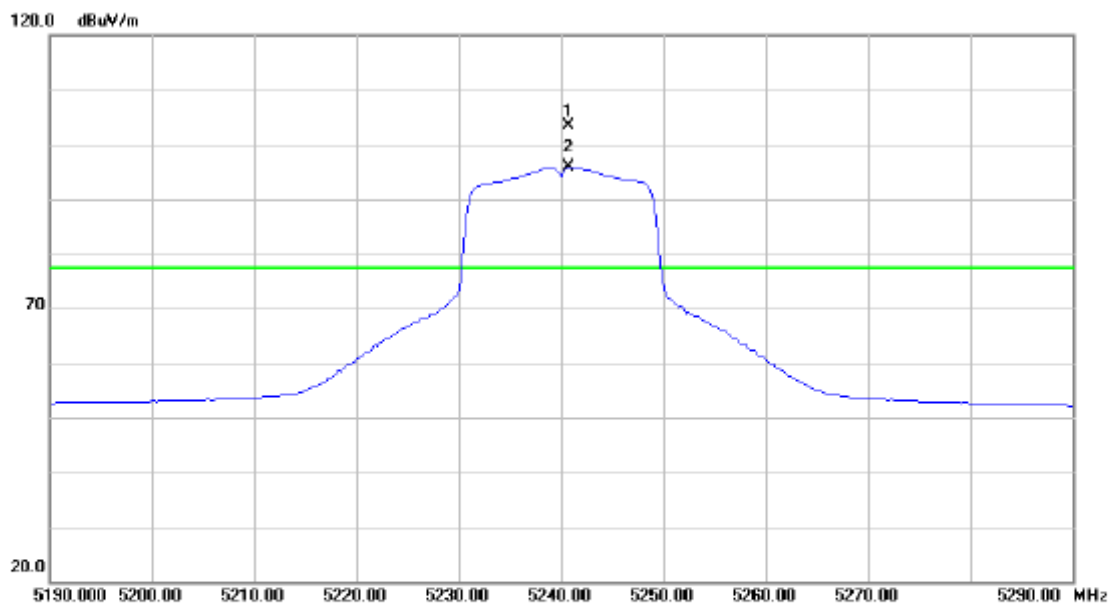


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5240.750	64.23	39.20	103.43	77.30	26.13	peak	
2	X	5240.750	56.65	39.20	95.85	77.30	18.55	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5240 MHz		

Polarization: Vertical

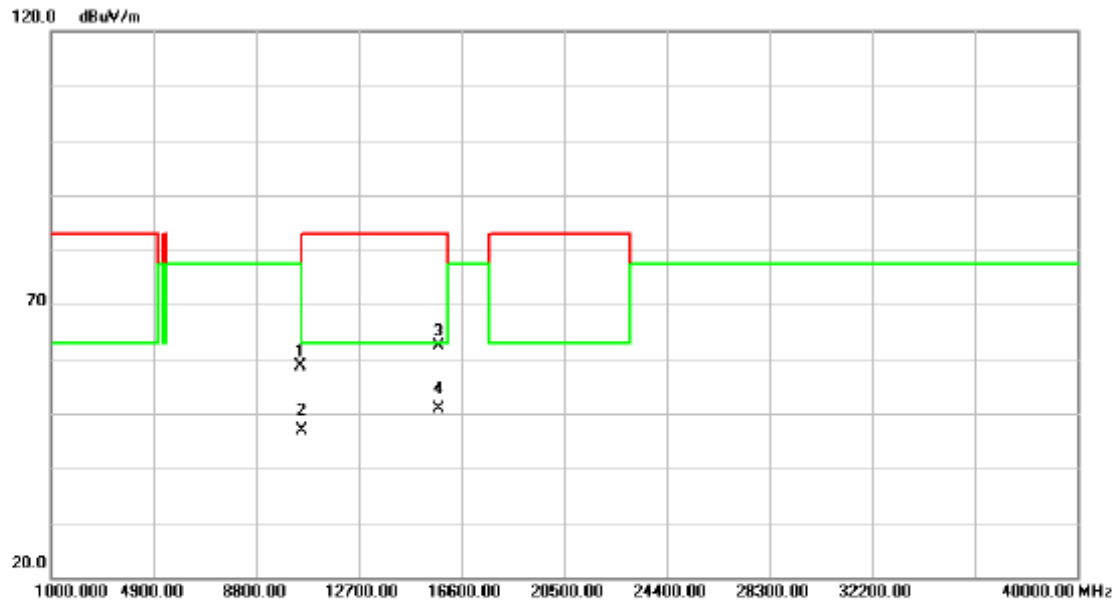


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.21	41.63	16.90	58.53	77.30	-18.77	peak	
2	10480.21	29.88	16.90	46.78	77.30	-30.52	AVG	
3	15720.40	42.15	20.31	62.46	83.00	-20.54	peak	
4 *	15720.40	30.68	20.31	50.99	63.00	-12.01	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5240 MHz		

Polarization: Horizontal

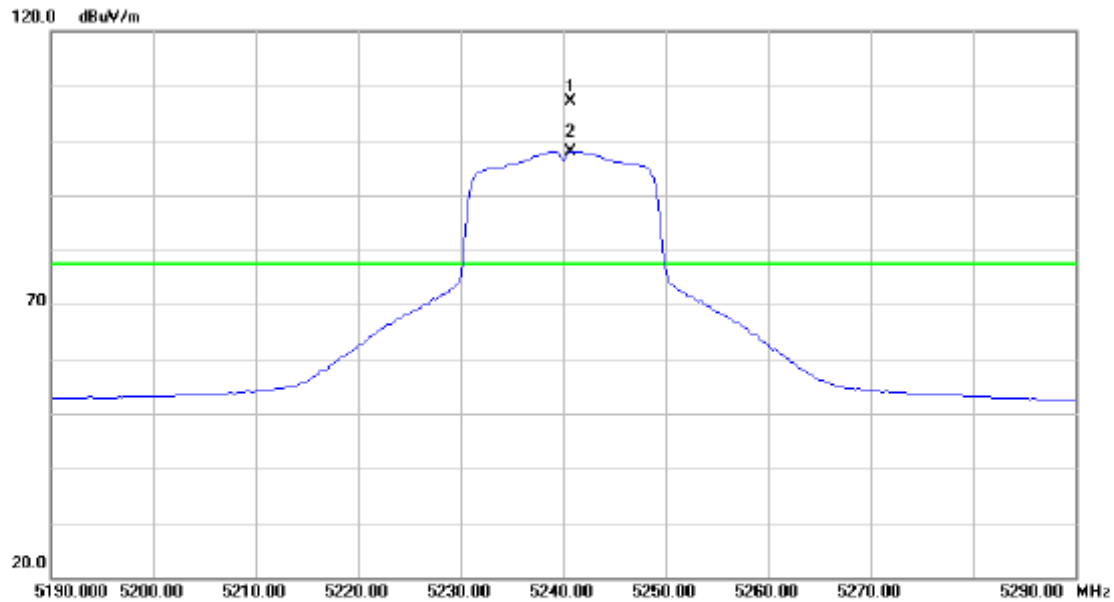


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5240.750	67.89	39.20	107.09	77.30	29.79	peak	
2	X	5240.750	58.74	39.20	97.94	77.30	20.64	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5240 MHz		

Polarization: Horizontal

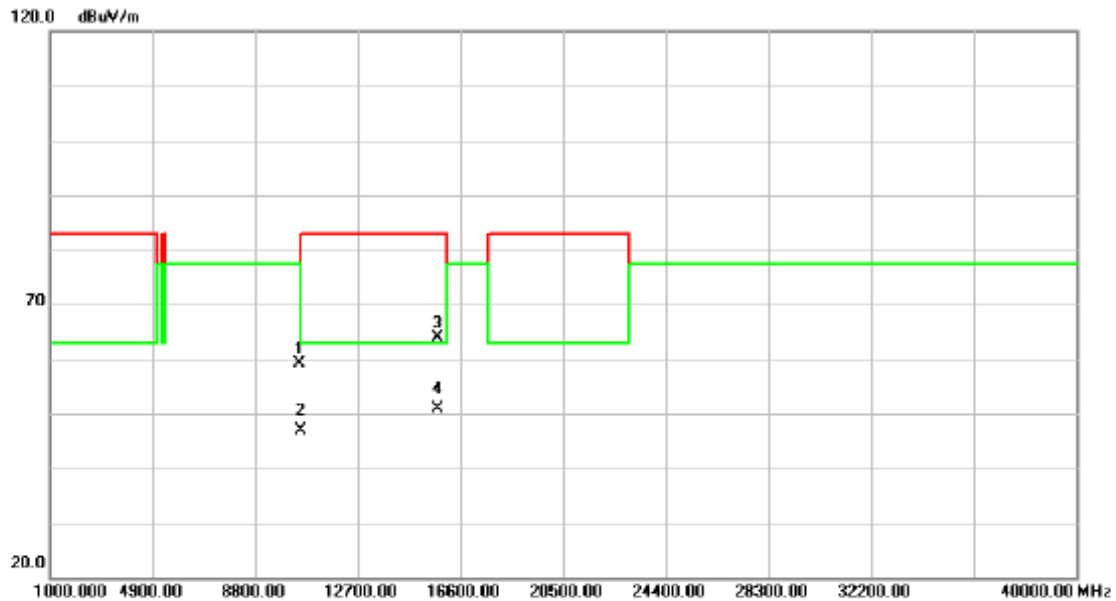


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10479.38	42.18	16.90	59.08	77.30	-18.22	peak	
2	10479.38	29.96	16.90	46.86	77.30	-30.44	AVG	
3	15720.80	43.68	20.31	63.99	83.00	-19.01	peak	
4 *	15720.80	30.63	20.31	50.94	63.00	-12.06	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Vertical

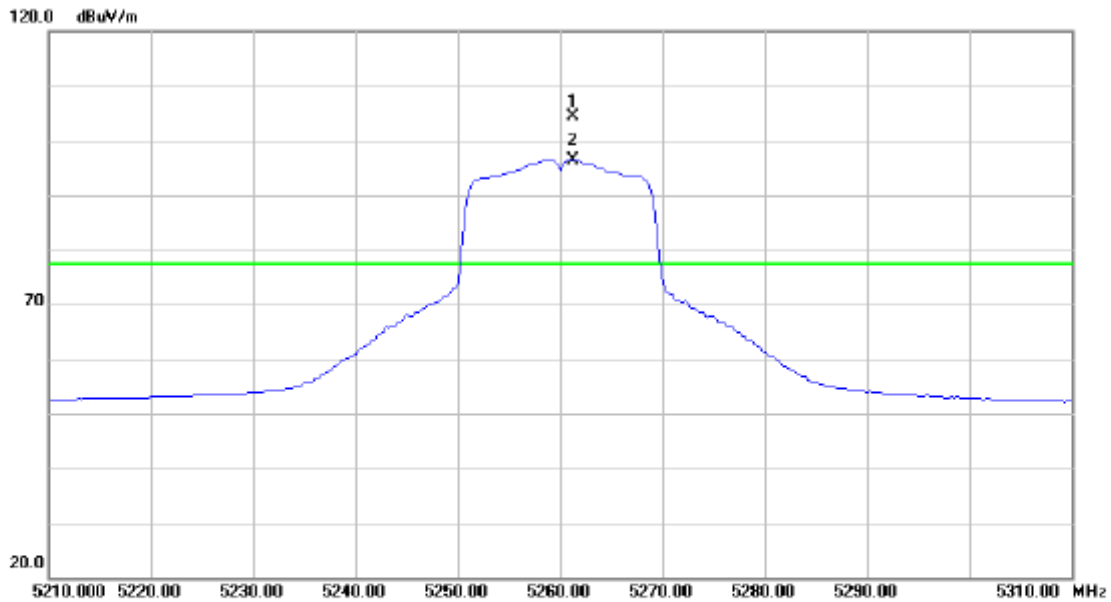


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5261.250	65.10	39.19	104.29	77.30	26.99	peak	
2	X	5261.250	57.29	39.19	96.48	77.30	19.18	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Vertical

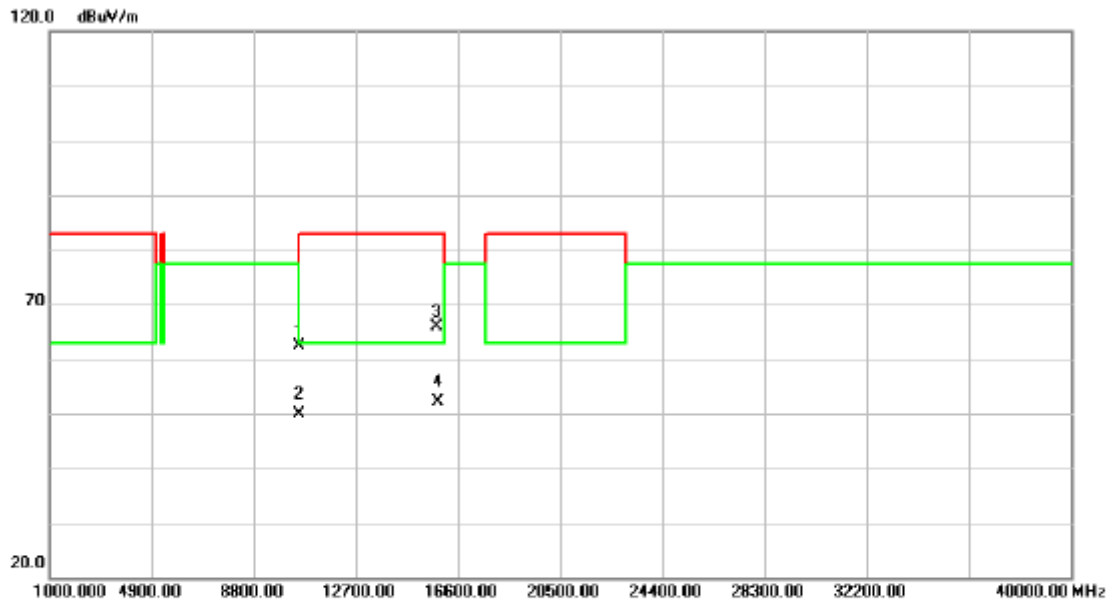


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10520.04	45.21	17.13	62.34	77.30	-14.96	peak	
2		10520.04	32.82	17.13	49.95	77.30	-27.35	AVG	
3		15778.34	45.78	20.05	65.83	83.00	-17.17	peak	
4	*	15778.34	32.17	20.05	52.22	63.00	-10.78	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Horizontal

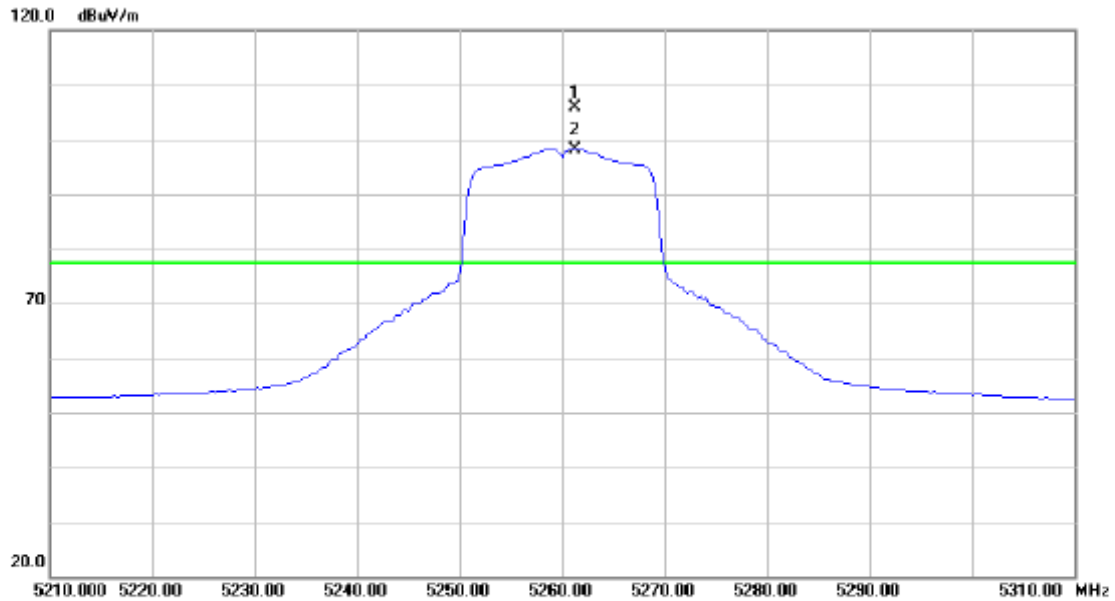


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5261.250	66.62	39.19	105.81	77.30	28.51	peak	
2 X	5261.250	59.06	39.19	98.25	77.30	20.95	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz		

Polarization: Horizontal

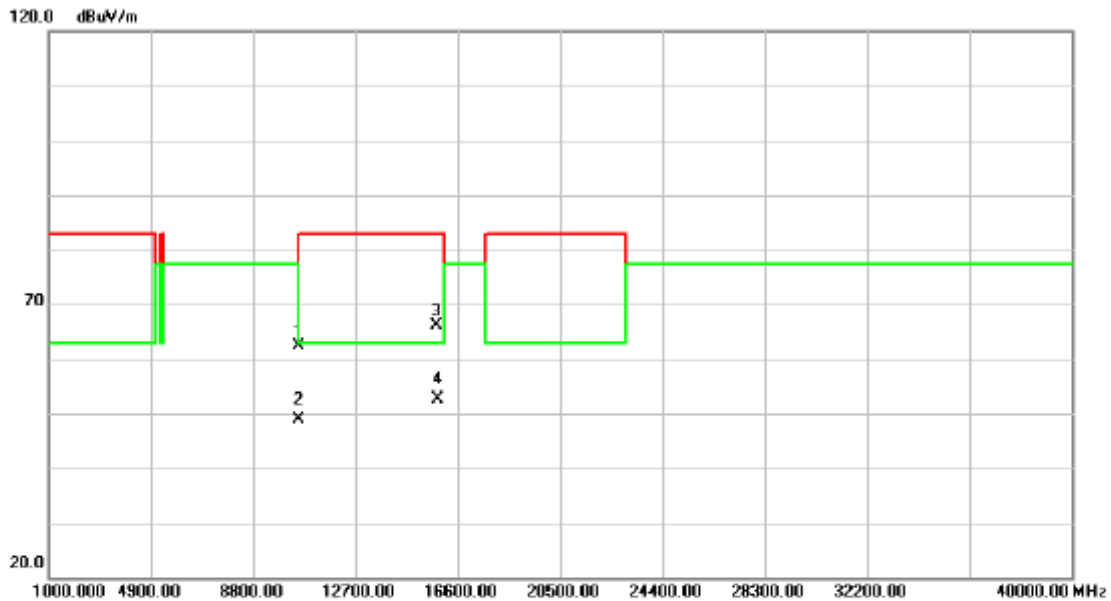


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10520.08	45.25	17.13	62.38	77.30	-14.92	peak	
2		10520.08	31.70	17.13	48.83	77.30	-28.47	AVG	
3		15780.13	46.01	20.04	66.05	83.00	-16.95	peak	
4	*	15780.13	32.58	20.04	52.62	63.00	-10.38	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Vertical

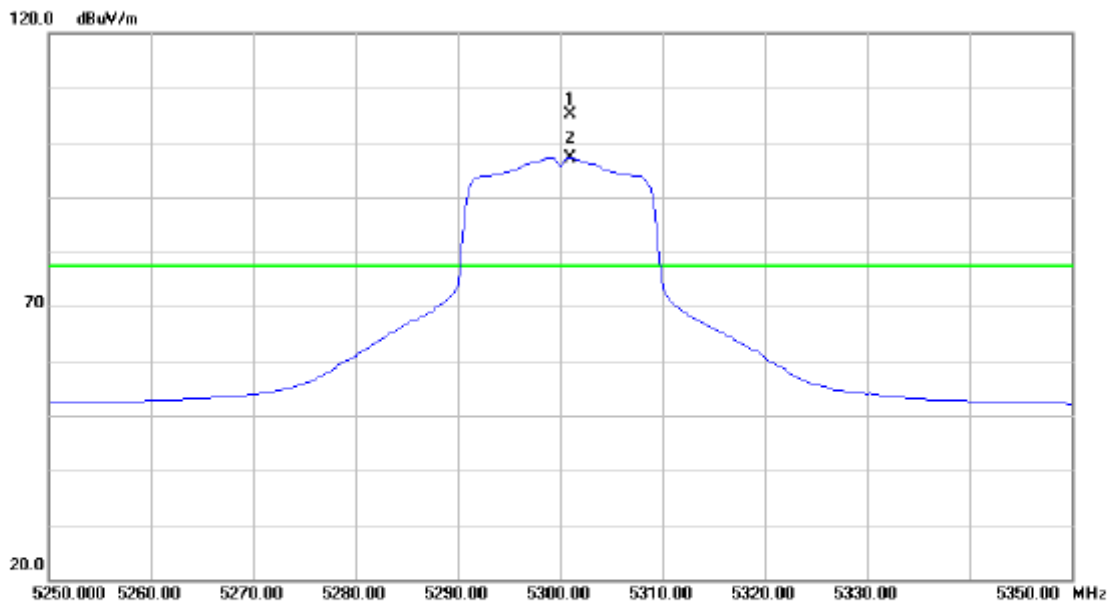


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5301.000	65.96	39.18	105.14	77.30	27.84	peak	
2	X	5301.000	57.89	39.18	97.07	77.30	19.77	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Vertical

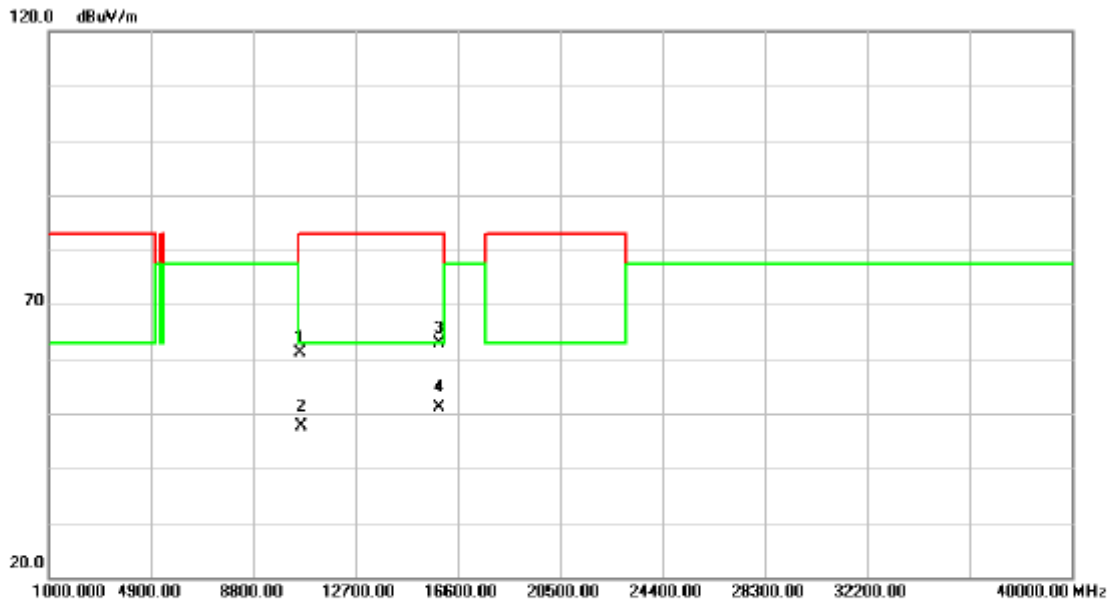


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10599.31	43.76	17.31	61.07	77.30	-16.23	peak	
2	10599.31	30.37	17.31	47.68	77.30	-29.62	AVG	
3	15899.76	42.57	20.27	62.84	83.00	-20.16	peak	
4 *	15899.76	30.92	20.27	51.19	63.00	-11.81	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Horizontal

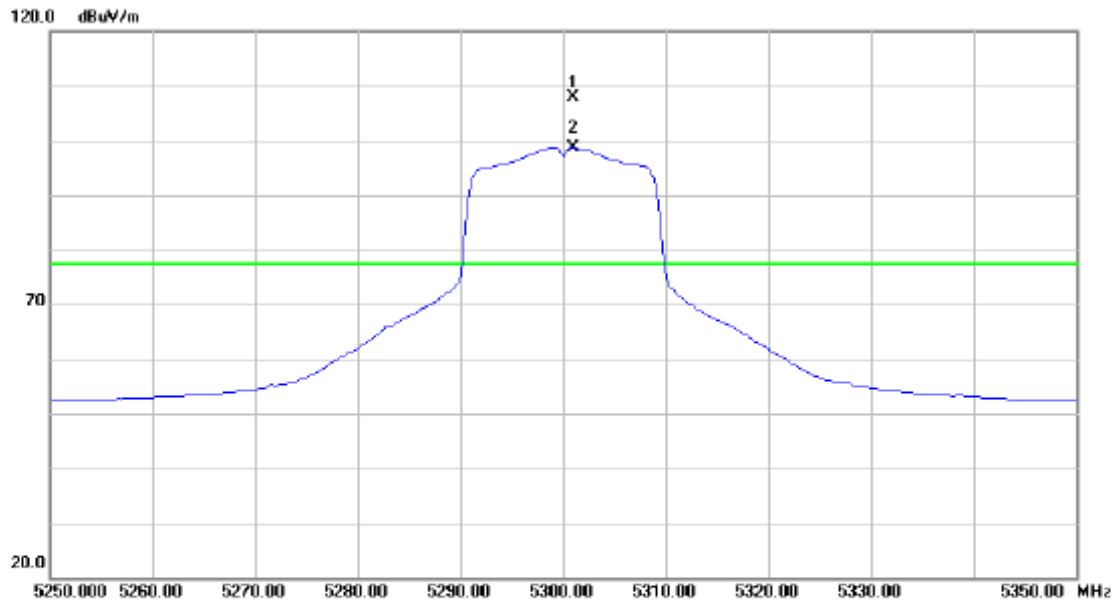


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5301.000	68.79	39.18	107.97	77.30	30.67	peak	
2	X	5301.000	59.39	39.18	98.57	77.30	21.27	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5300 MHz		

Polarization: Horizontal

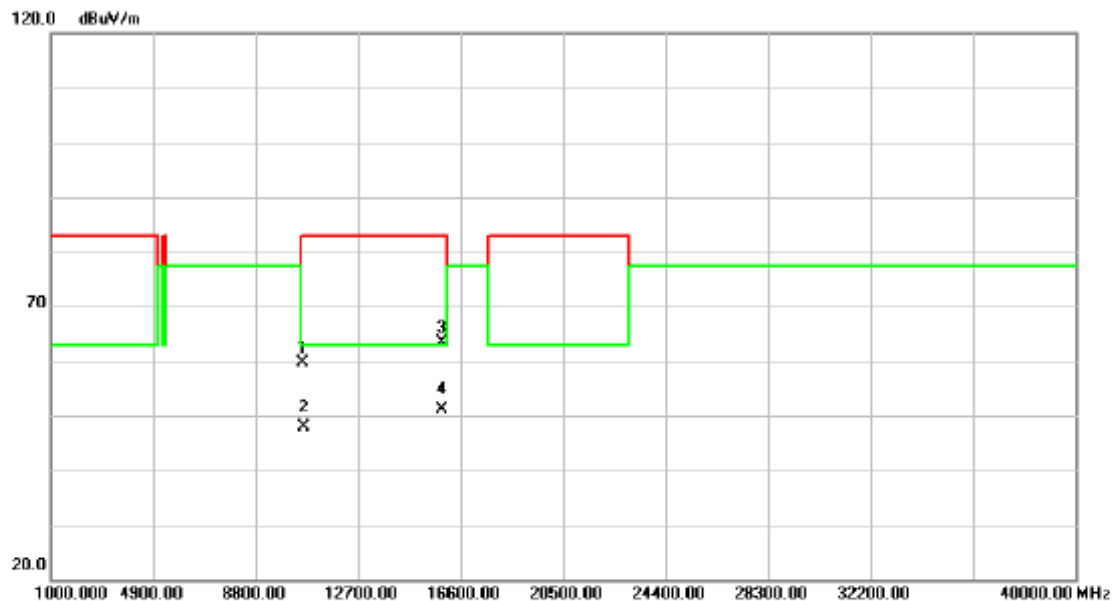


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10600.75	42.28	17.31	59.59	83.00	-23.41	peak	
2	10600.75	30.61	17.31	47.92	63.00	-15.08	AVG	
3	15899.82	43.01	20.27	63.28	83.00	-19.72	peak	
4 *	15899.82	30.86	20.27	51.13	63.00	-11.87	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Vertical

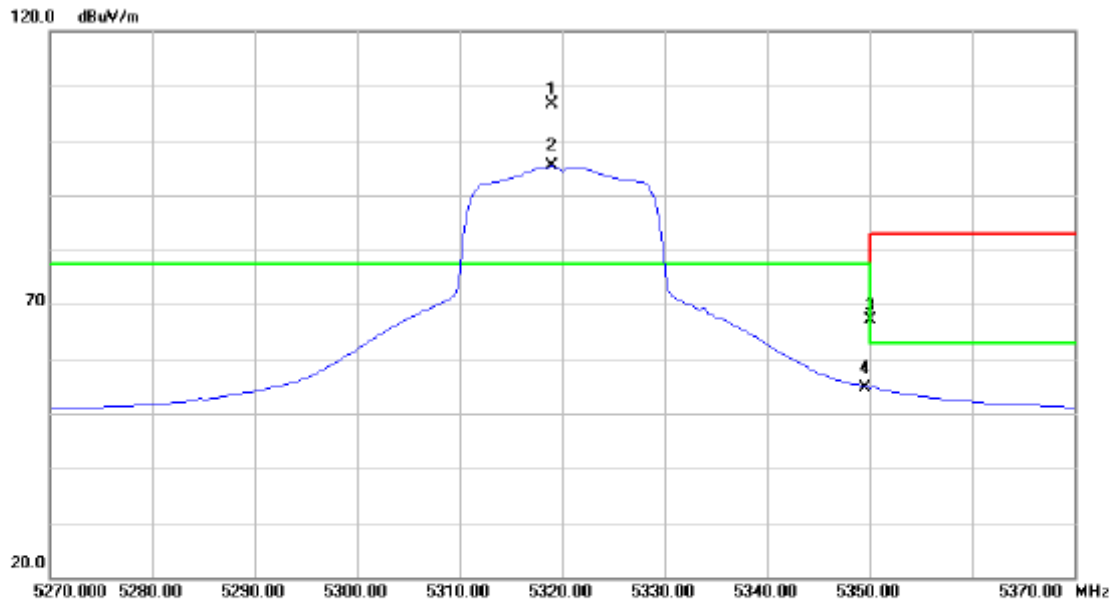


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5319.000	67.99	38.61	106.60	77.30	29.30	peak	
2	X	5319.000	56.65	38.61	95.26	77.30	17.96	AVG	
3		5350.000	28.57	38.66	67.23	77.30	-10.07	peak	
4		5350.000	16.08	38.66	54.74	63.00	-8.26	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Vertical

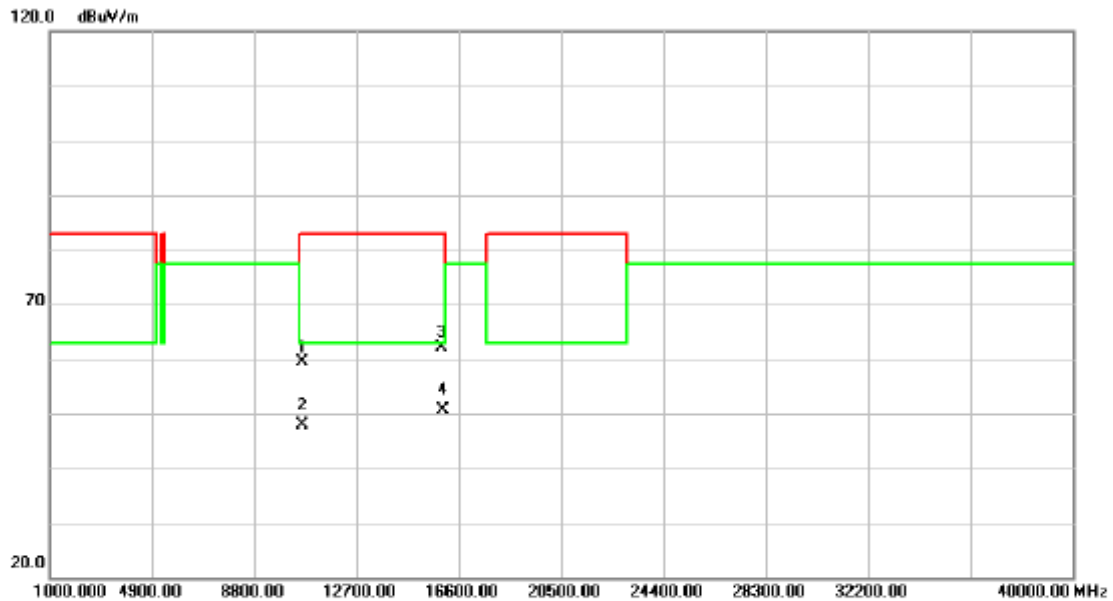


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10639.89	41.90	17.46	59.36	83.00	-23.64	peak	
2		10639.89	30.44	17.46	47.90	63.00	-15.10	AVG	
3		15959.77	41.86	20.25	62.11	83.00	-20.89	peak	
4	*	15959.77	30.40	20.25	50.65	63.00	-12.35	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Horizontal

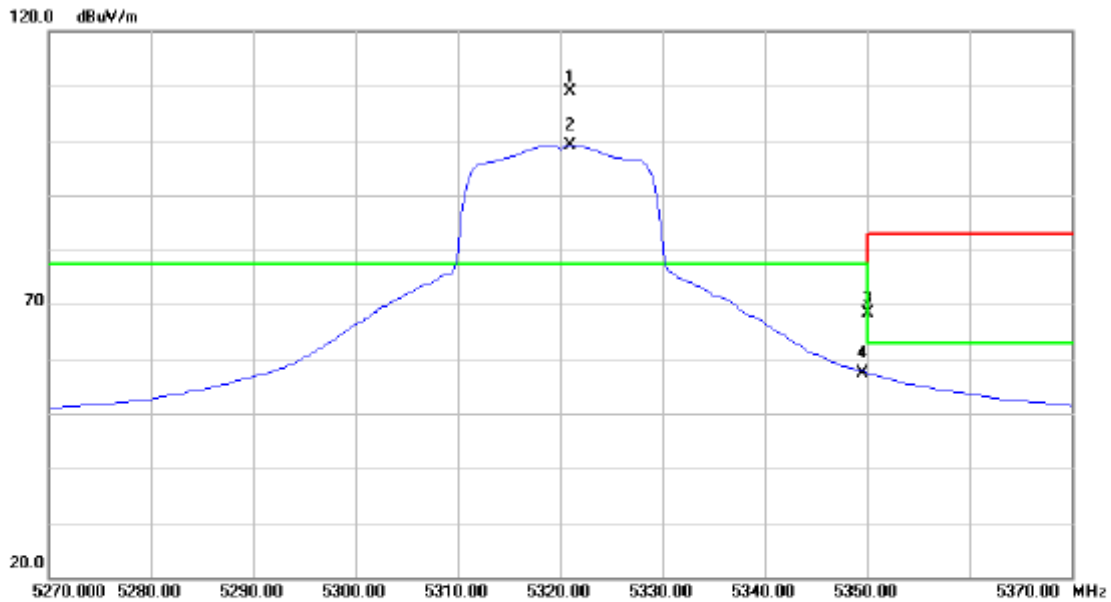


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5321.000	70.36	38.61	108.97	77.30	31.67	peak	
2	X	5321.000	60.57	38.61	99.18	77.30	21.88	AVG	
3		5350.000	29.68	38.66	68.34	77.30	-8.96	peak	
4		5350.000	18.82	38.66	57.48	63.00	-5.52	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		

Polarization: Horizontal

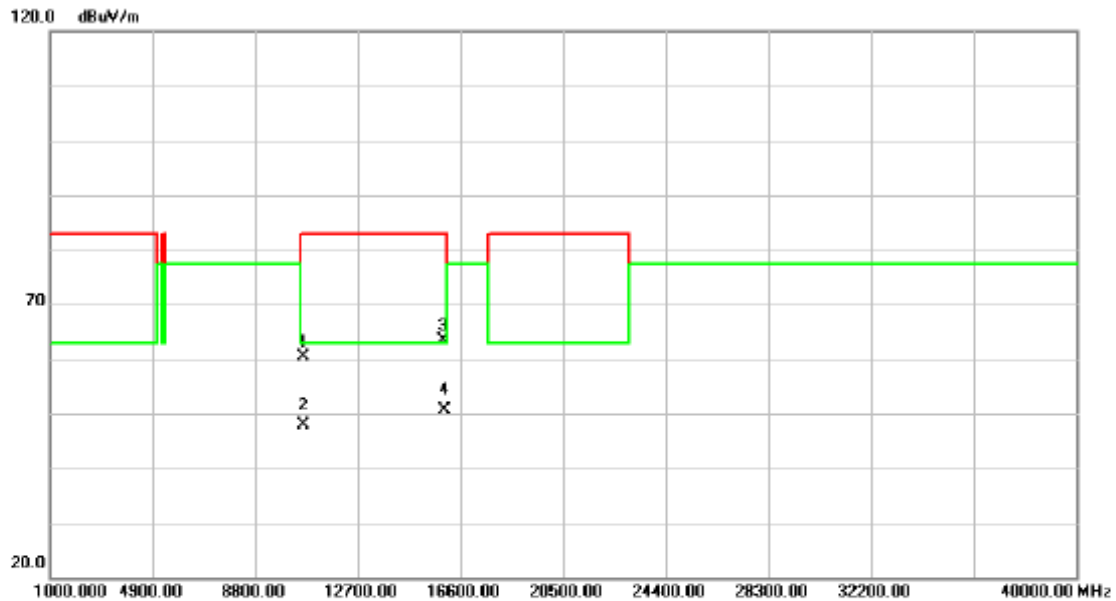


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10639.75	42.85	17.46	60.31	83.00	-22.69	peak	
2	10639.75	30.42	17.46	47.88	63.00	-15.12	AVG	
3	15959.88	43.16	20.25	63.41	83.00	-19.59	peak	
4 *	15959.88	30.43	20.25	50.68	63.00	-12.32	AVG	



9.9 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Vertical

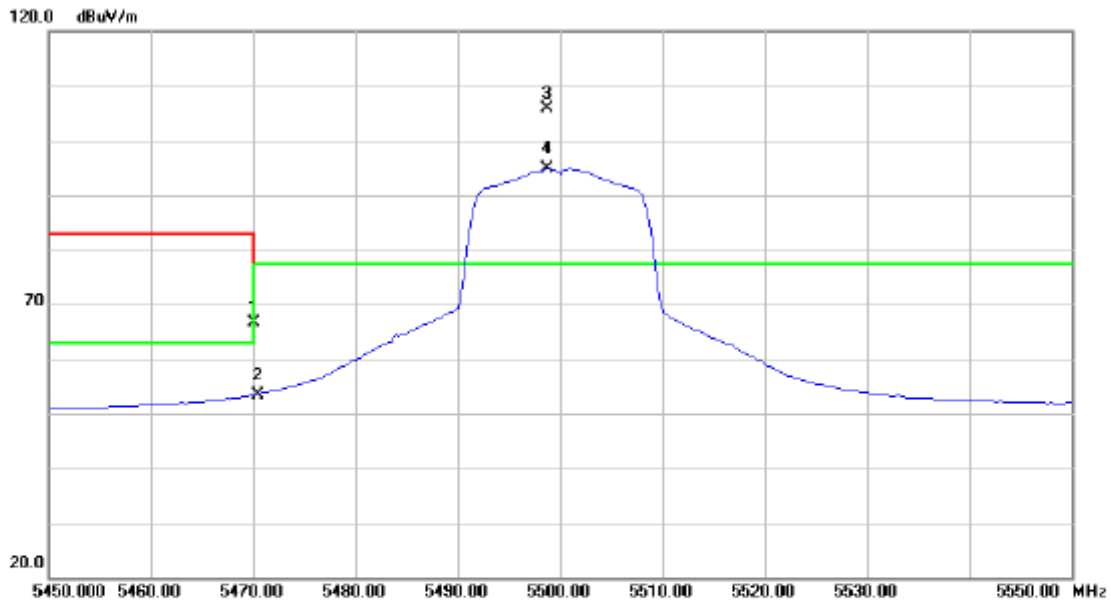


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	27.86	38.86	66.72	77.30	-10.58	peak	
2		5470.000	14.49	38.86	53.35	63.00	-9.65	AVG	
3	*	5498.750	66.85	38.91	105.76	77.30	28.46	peak	
4	X	5498.750	55.87	38.91	94.78	77.30	17.48	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Vertical

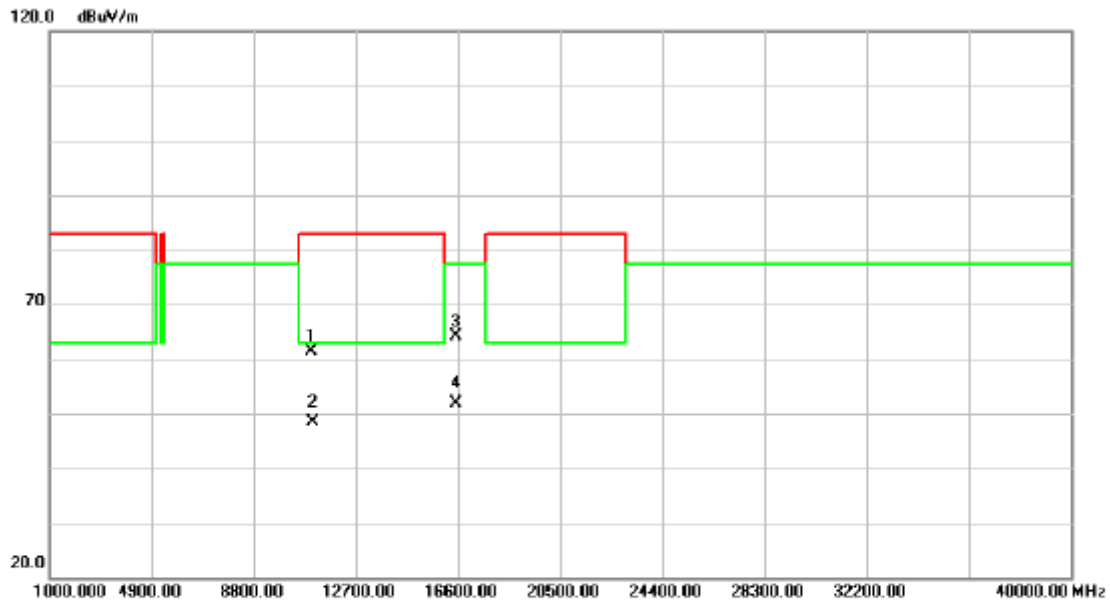


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10999.17	42.62	18.86	61.48	83.00	-21.52	peak	
2		10999.17	29.64	18.86	48.50	63.00	-14.50	AVG	
3	*	16499.71	43.37	20.74	64.11	77.30	-13.19	peak	
4		16499.71	31.26	20.74	52.00	77.30	-25.30	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Horizontal

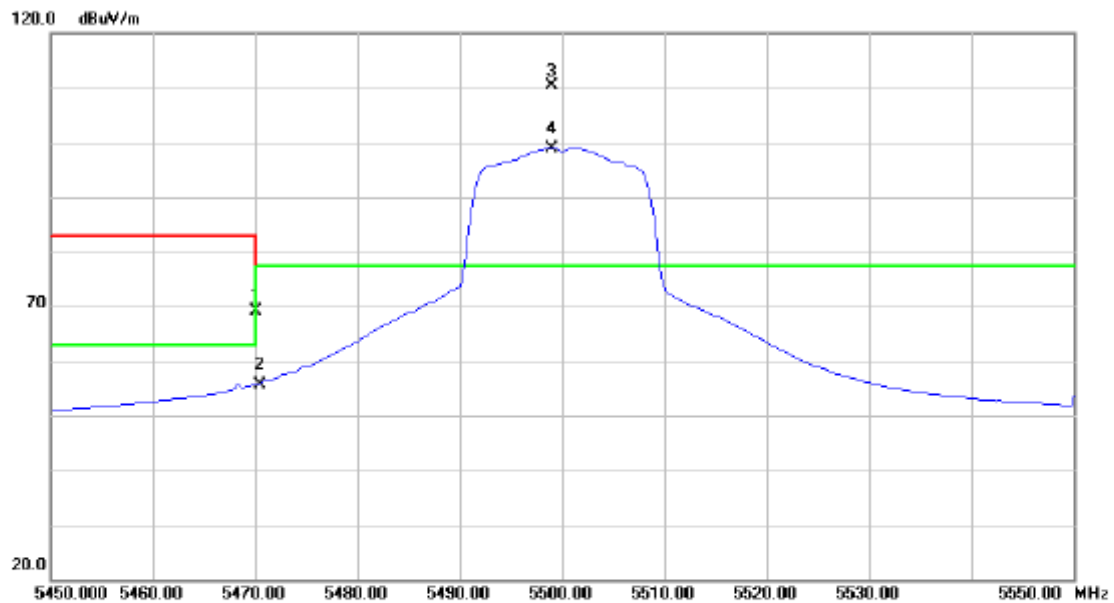


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	30.38	38.86	69.24	77.30	-8.06	peak	
2		5470.000	16.87	38.86	55.73	63.00	-7.27	AVG	
3	*	5499.000	71.36	38.91	110.27	77.30	32.97	peak	
4	X	5499.000	60.07	38.91	98.98	77.30	21.68	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		

Polarization: Horizontal

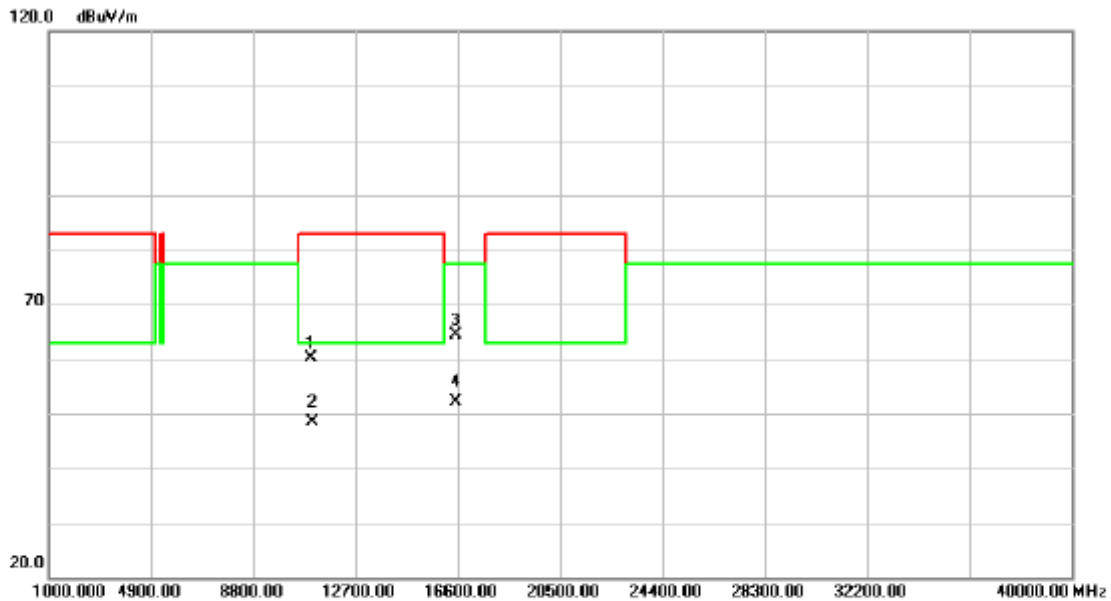


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10999.79	41.18	18.86	60.04	83.00	-22.96	peak	
2		10999.79	29.54	18.86	48.40	63.00	-14.60	AVG	
3	*	16499.98	43.59	20.74	64.33	77.30	-12.97	peak	
4		16499.98	31.28	20.74	52.02	77.30	-25.28	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Vertical

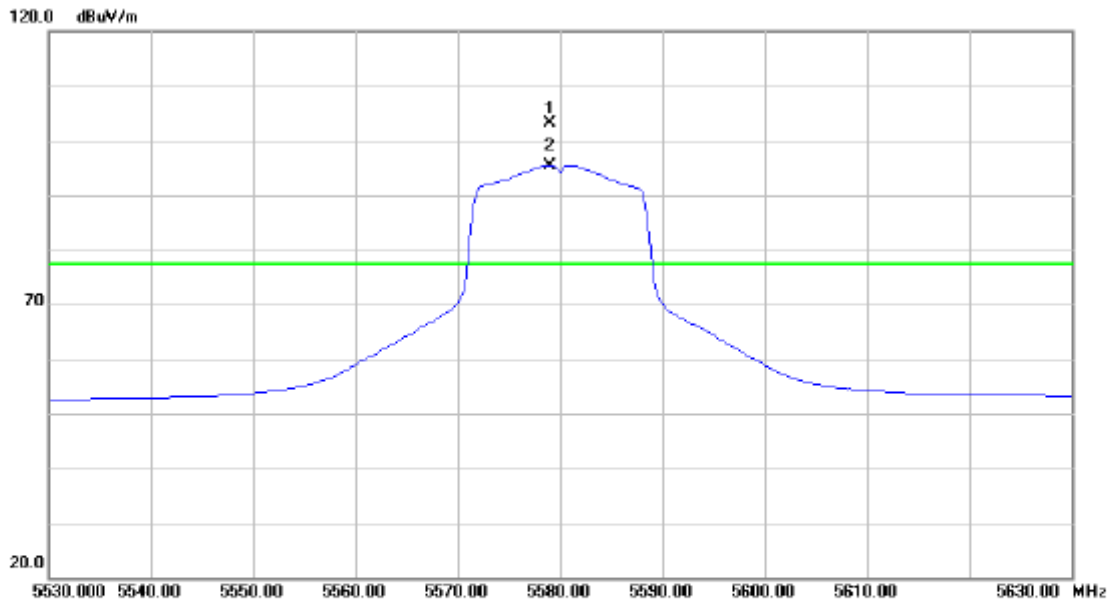


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5579.000	63.88	39.30	103.18	77.30	25.88	peak	
2	X	5579.000	56.20	39.30	95.50	77.30	18.20	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Vertical

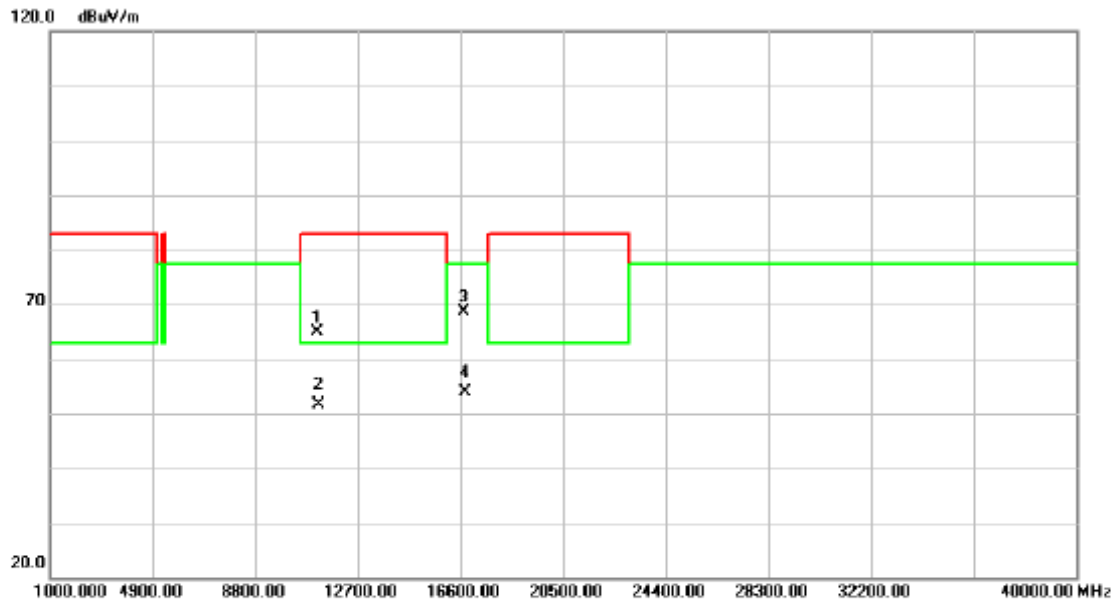


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11159.93	45.45	19.37	64.82	83.00	-18.18	peak	
2	11159.93	32.23	19.37	51.60	63.00	-11.40	AVG	
3 *	16740.08	47.25	21.49	68.74	77.30	-8.56	peak	
4	16740.08	32.50	21.49	53.99	77.30	-23.31	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Horizontal

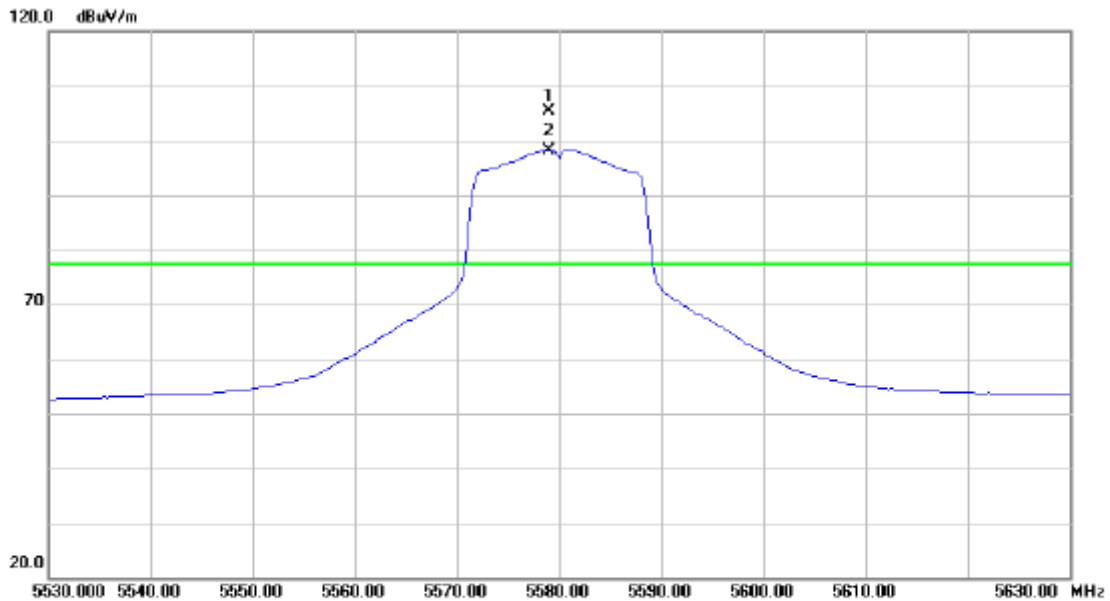


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5579.000	66.17	39.30	105.47	77.30	28.17	peak	
2	X	5579.000	58.92	39.30	98.22	77.30	20.92	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Horizontal

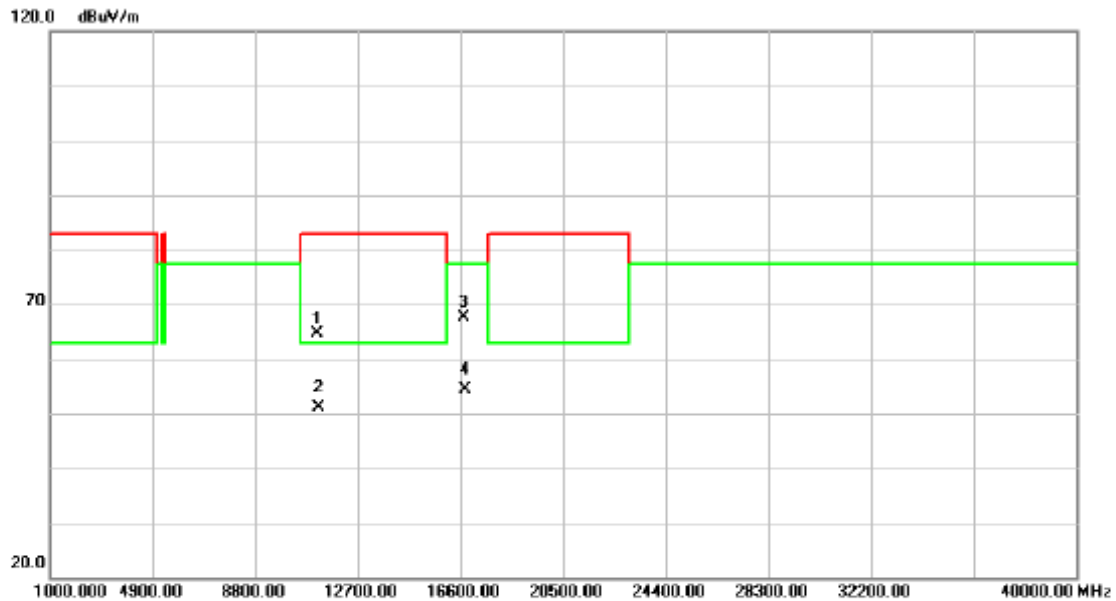


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11159.87	45.26	19.37	64.63	83.00	-18.37	peak	
2	11159.87	31.75	19.37	51.12	63.00	-11.88	AVG	
3 *	16739.83	46.26	21.49	67.75	77.30	-9.55	peak	
4	16739.83	32.79	21.49	54.28	77.30	-23.02	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Vertical

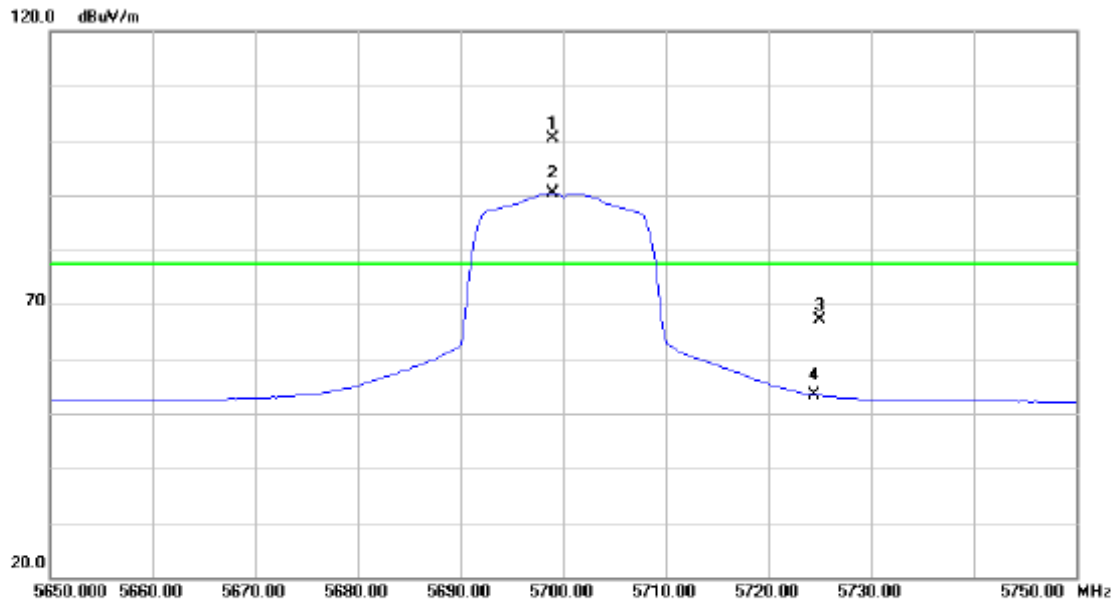


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5699.000	61.27	39.11	100.38	77.30	23.08	peak	
2	X	5699.000	51.36	39.11	90.47	77.30	13.17	AVG	
3		5725.000	27.87	39.14	67.01	77.30	-10.29	peak	
4		5725.000	14.16	39.14	53.30	77.30	-24.00	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Vertical

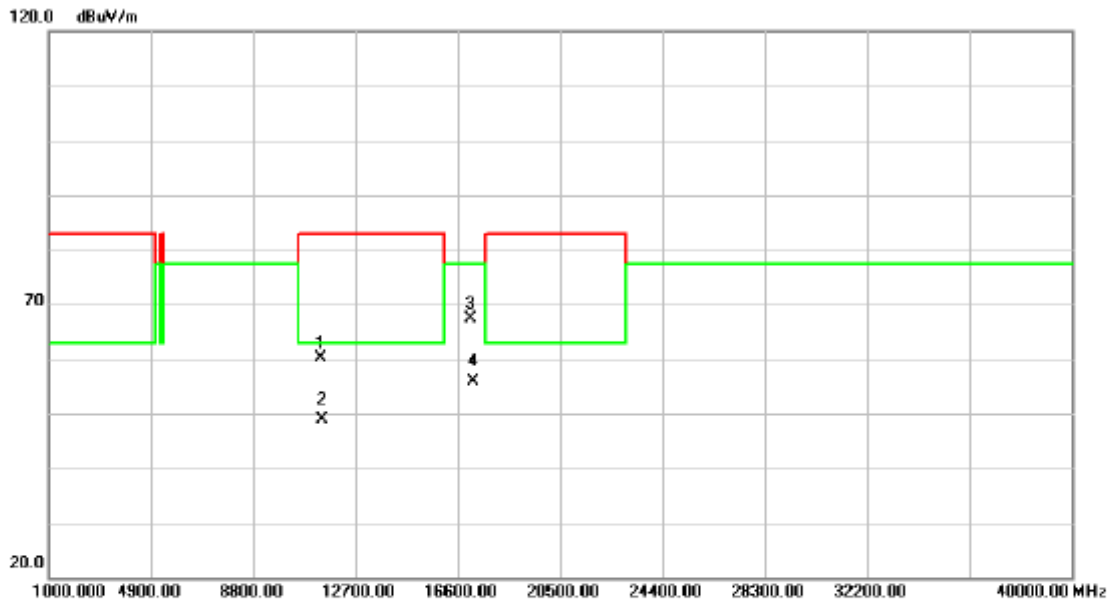


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11399.70	41.78	18.39	60.17	83.00	-22.83	peak	
2		11399.70	30.44	18.39	48.83	63.00	-14.17	AVG	
3	*	17099.83	43.08	24.34	67.42	77.30	-9.88	peak	
4		17099.83	31.49	24.34	55.83	77.30	-21.47	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Horizontal

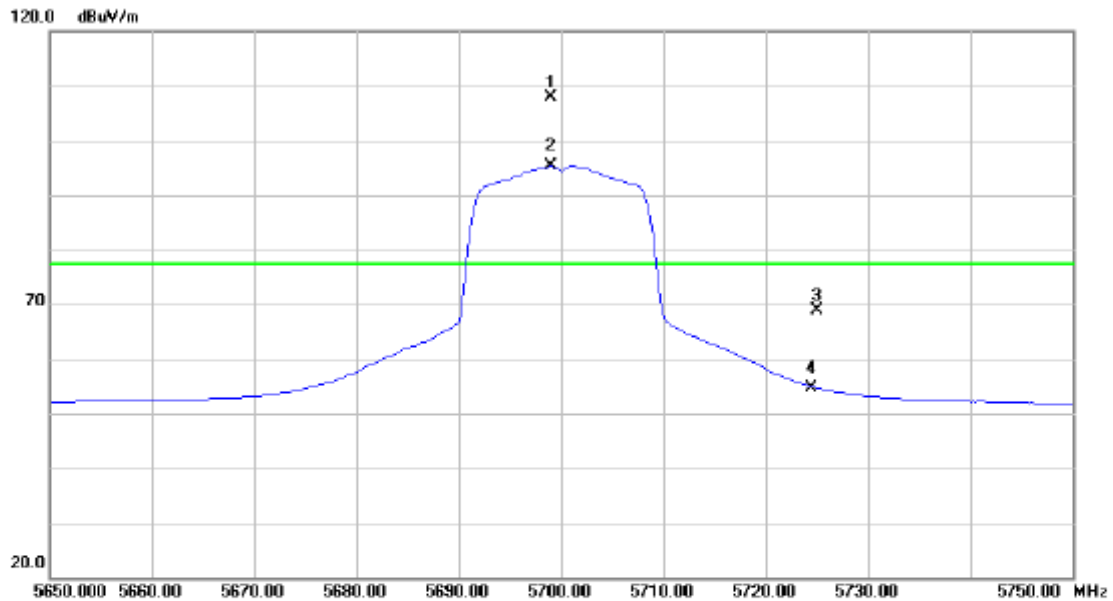


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5699.000	68.79	39.11	107.90	77.30	30.60	peak	
2	X	5699.000	56.16	39.11	95.27	77.30	17.97	AVG	
3		5725.000	29.76	39.14	68.90	77.30	-8.40	peak	
4		5725.000	15.49	39.14	54.63	77.30	-22.67	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5700 MHz		

Polarization: Horizontal

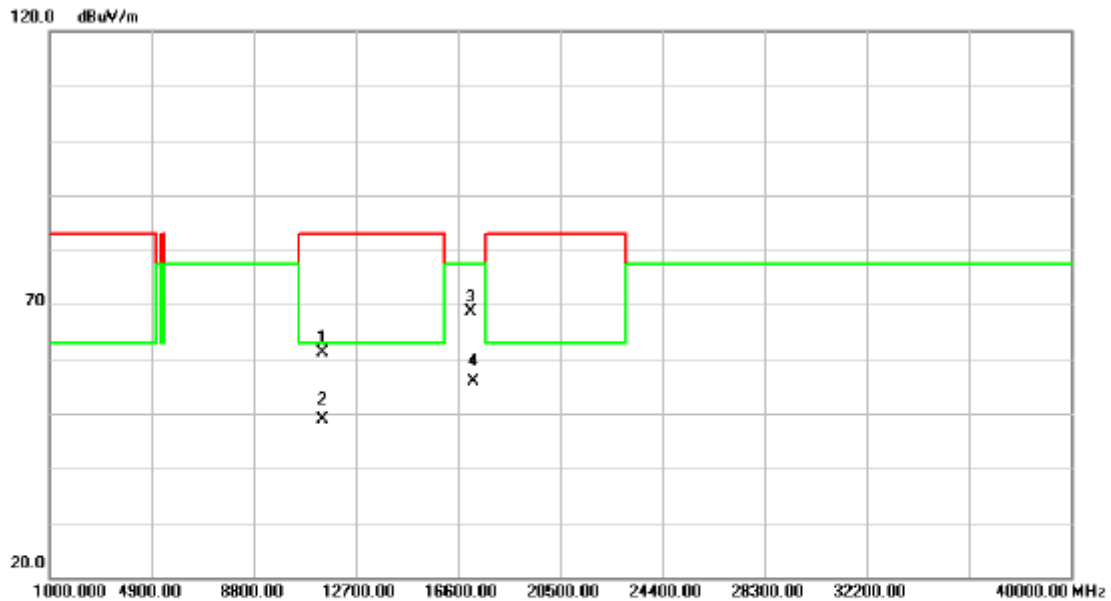


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.21	42.64	18.39	61.03	83.00	-21.97	peak	
2		11400.21	30.38	18.39	48.77	63.00	-14.23	AVG	
3	*	17099.16	44.22	24.34	68.56	77.30	-8.74	peak	
4		17099.16	31.52	24.34	55.86	77.30	-21.44	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Vertical

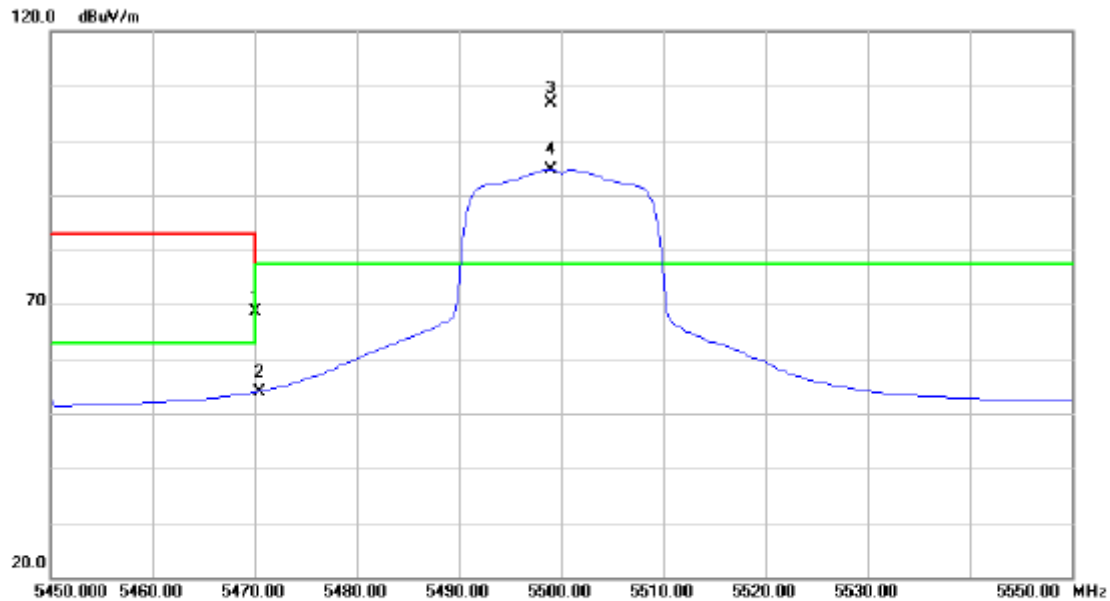


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5470.000	29.86	38.86	68.72	77.30	-8.58	peak	
2	5470.000	15.05	38.86	53.91	63.00	-9.09	AVG	
3 *	5499.000	67.88	38.91	106.79	77.30	29.49	peak	
4 X	5499.000	55.74	38.91	94.65	77.30	17.35	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Vertical

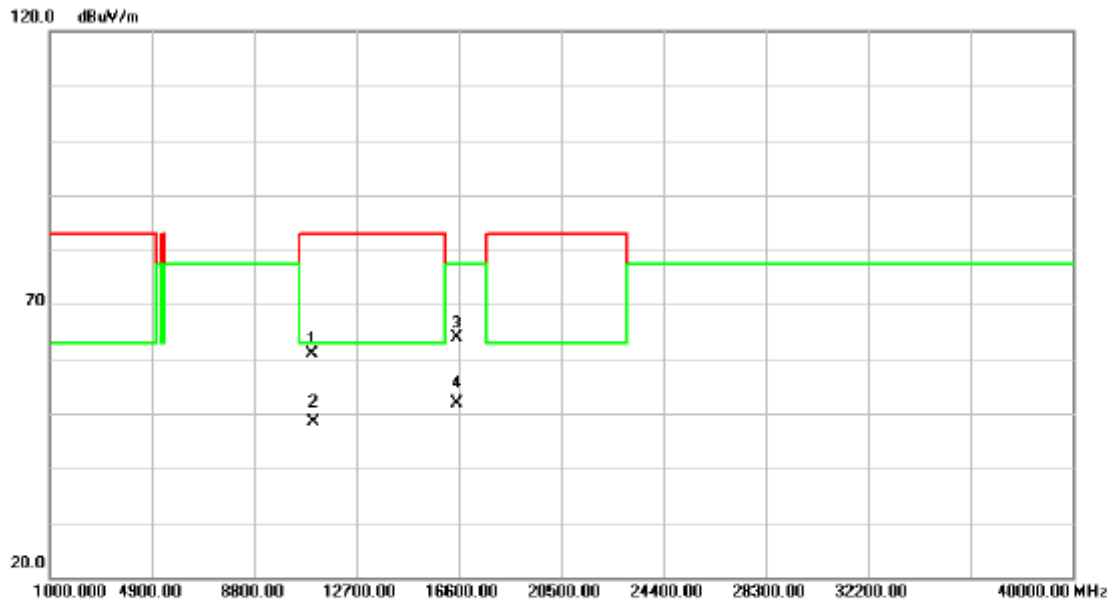


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.10	41.94	18.86	60.80	83.00	-22.20	peak	
2		11000.10	29.58	18.86	48.44	63.00	-14.56	AVG	
3	*	16499.48	43.25	20.74	63.99	77.30	-13.31	peak	
4		16499.48	31.26	20.74	52.00	77.30	-25.30	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Horizontal

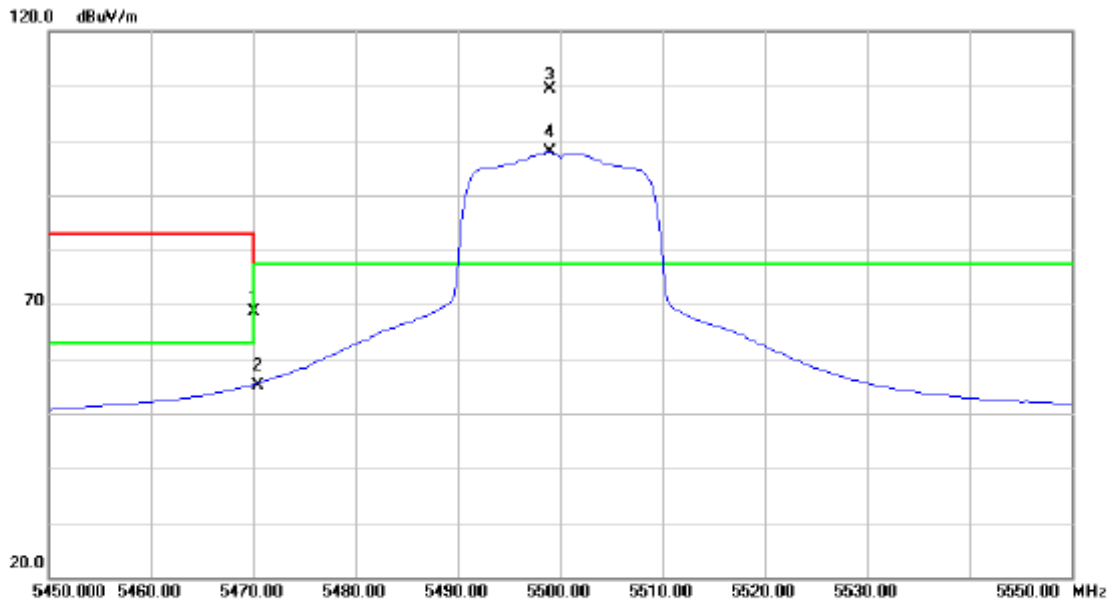


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5470.000	29.75	38.86	68.61	77.30	-8.69	peak	
2		5470.000	16.39	38.86	55.25	63.00	-7.75	AVG	
3	*	5499.000	70.39	38.91	109.30	77.30	32.00	peak	
4	X	5499.000	58.88	38.91	97.79	77.30	20.49	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		

Polarization: Horizontal

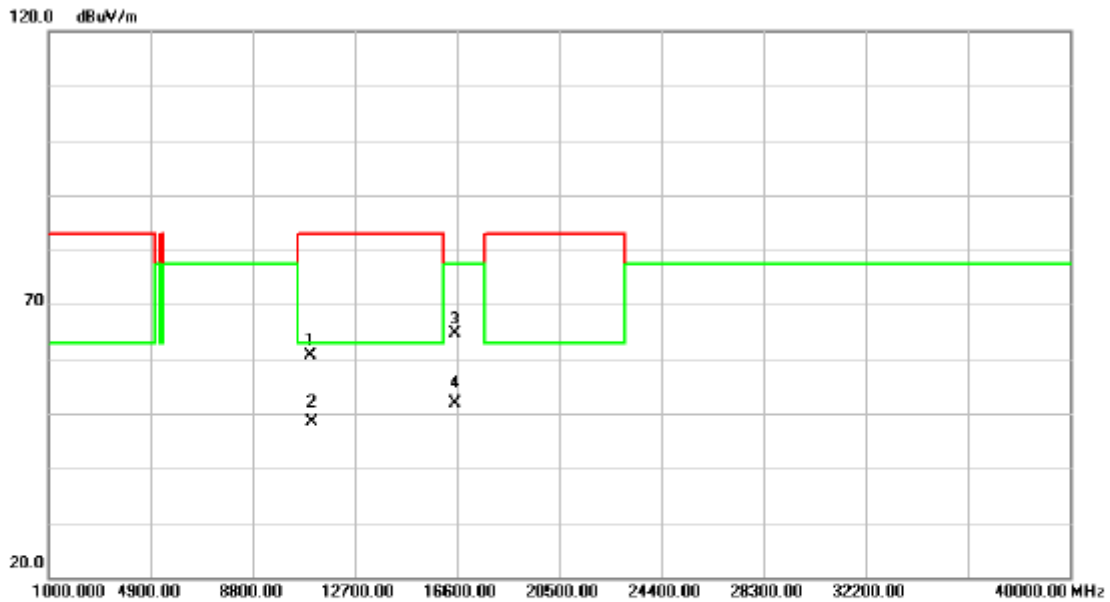


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10999.17	41.68	18.86	60.54	83.00	-22.46	peak	
2	10999.17	29.55	18.86	48.41	63.00	-14.59	AVG	
3 *	16499.73	43.94	20.74	64.68	77.30	-12.62	peak	
4	16499.73	31.25	20.74	51.99	77.30	-25.31	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Vertical

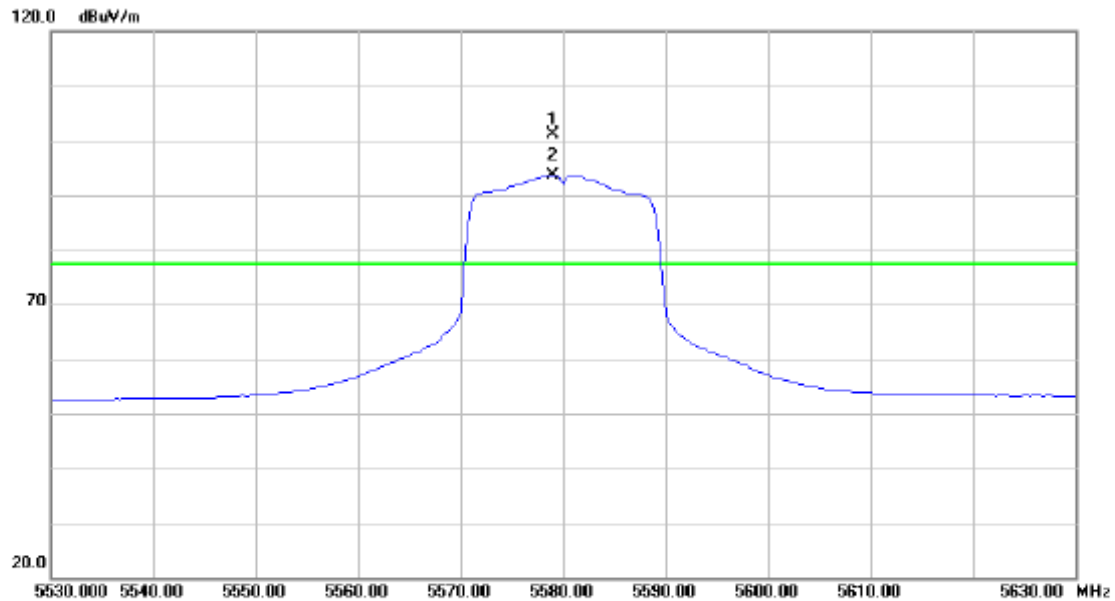


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5579.000	61.80	39.30	101.10	77.30	23.80	peak	
2	X	5579.000	54.34	39.30	93.64	77.30	16.34	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Vertical

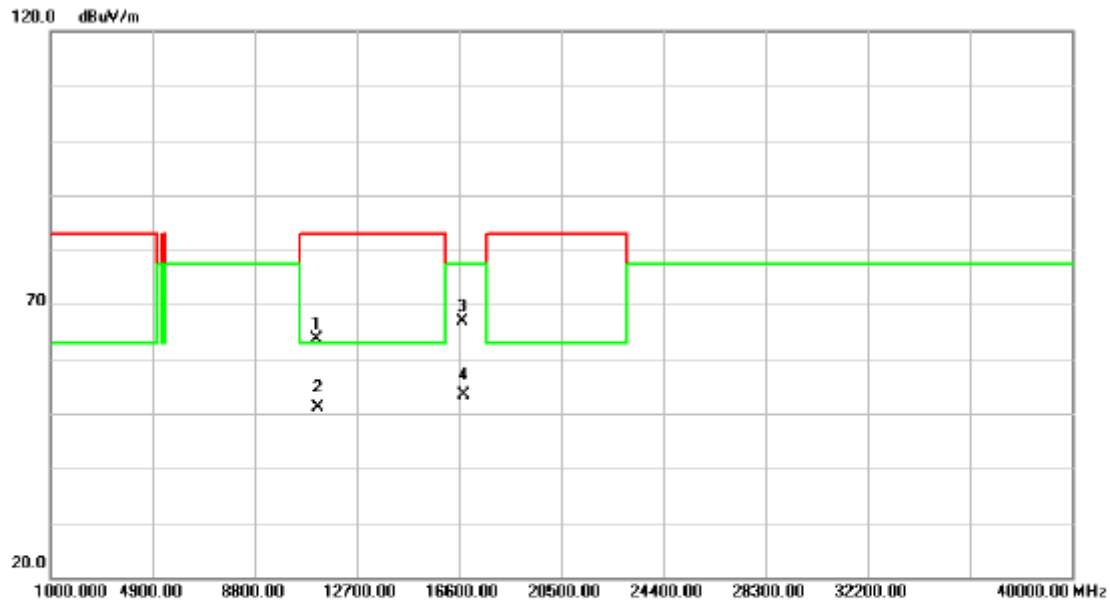


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11159.93	44.26	19.37	63.63	83.00	-19.37	peak	
2	11159.93	31.79	19.37	51.16	63.00	-11.84	AVG	
3 *	16740.12	45.27	21.49	66.76	77.30	-10.54	peak	
4	16740.12	31.86	21.49	53.35	77.30	-23.95	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Horizontal

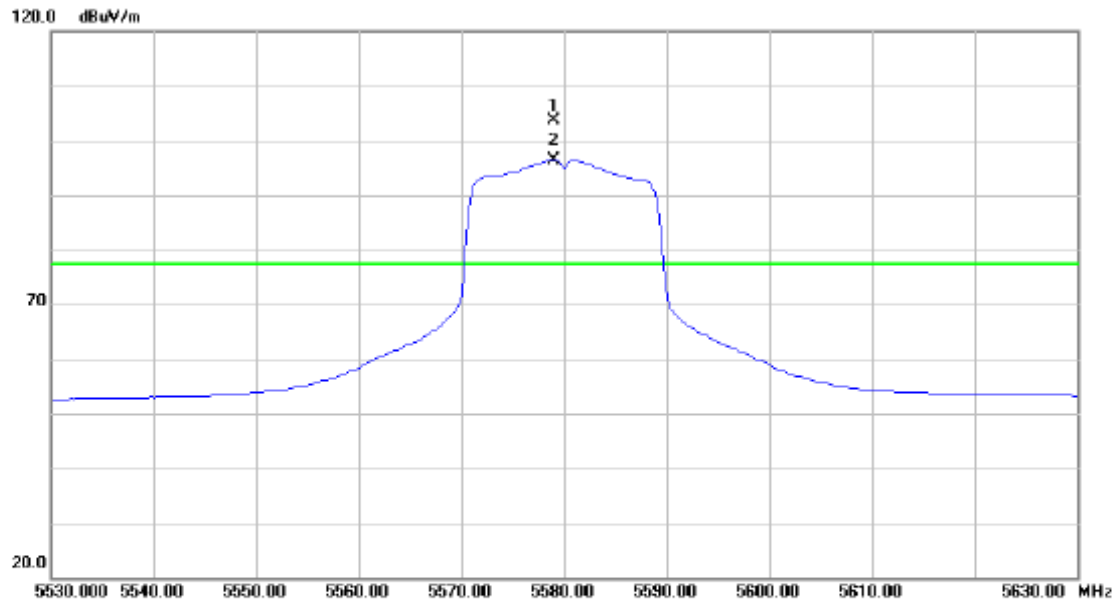


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5579.000	64.43	39.30	103.73	77.30	26.43	peak	
2	X	5579.000	57.06	39.30	96.36	77.30	19.06	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5580 MHz		

Polarization: Horizontal

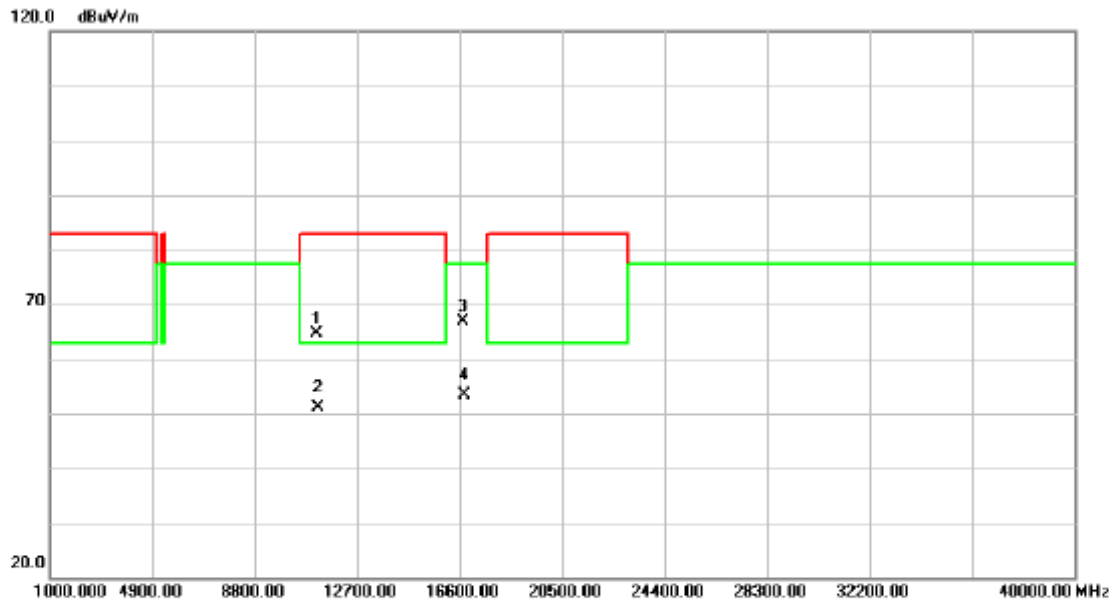


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11159.94	45.28	19.37	64.65	83.00	-18.35	peak	
2		11159.94	31.79	19.37	51.16	63.00	-11.84	AVG	
3	*	16740.06	45.29	21.49	66.78	77.30	-10.52	peak	
4		16740.06	31.79	21.49	53.28	77.30	-24.02	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Vertical

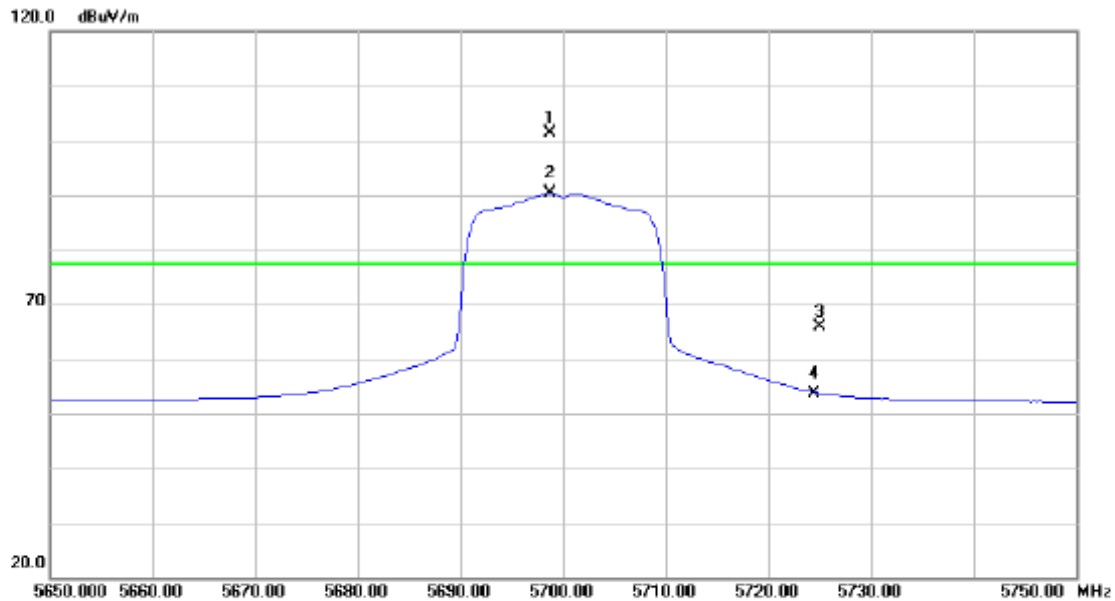


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5698.750	62.26	39.11	101.37	77.30	24.07	peak	
2	X	5698.750	51.18	39.11	90.29	77.30	12.99	AVG	
3		5725.000	26.86	39.14	66.00	77.30	-11.30	peak	
4		5725.000	14.56	39.14	53.70	77.30	-23.60	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Vertical

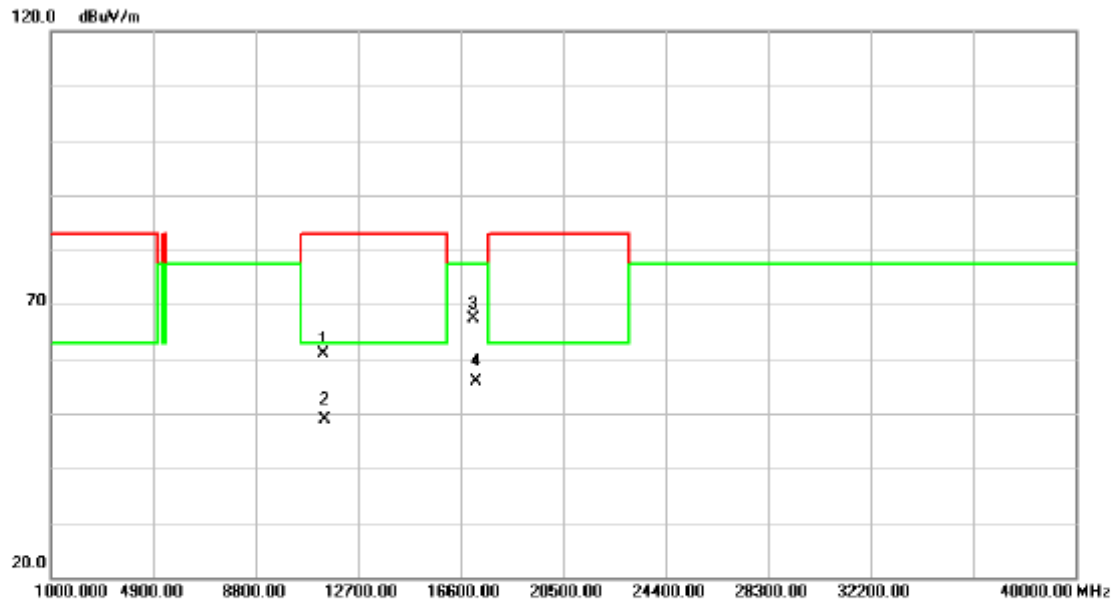


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11399.23	42.42	18.39	60.81	83.00	-22.19	peak	
2	11399.23	30.39	18.39	48.78	63.00	-14.22	AVG	
3 *	17100.13	43.16	24.34	67.50	77.30	-9.80	peak	
4	17100.13	31.50	24.34	55.84	77.30	-21.46	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Horizontal

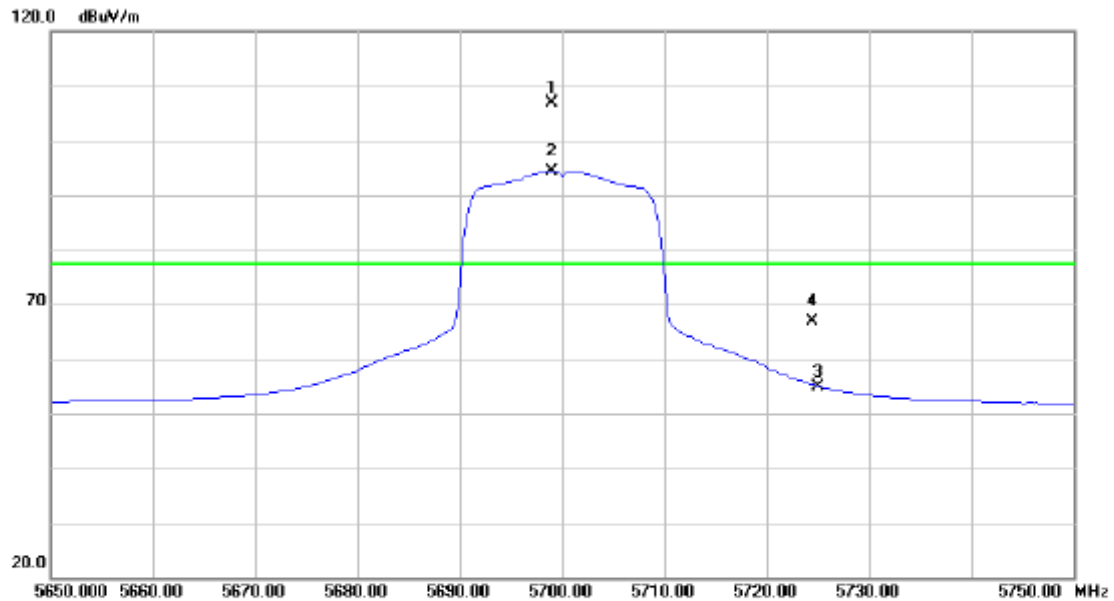


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5699.000	67.80	39.11	106.91	77.30	29.61	peak	
2	X	5699.000	55.30	39.11	94.41	77.30	17.11	AVG	
3		5725.000	15.86	39.14	55.00	77.30	-22.30	peak	
4		5725.000	27.84	39.14	66.98	77.30	-10.32	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5700 MHz		

Polarization: Horizontal

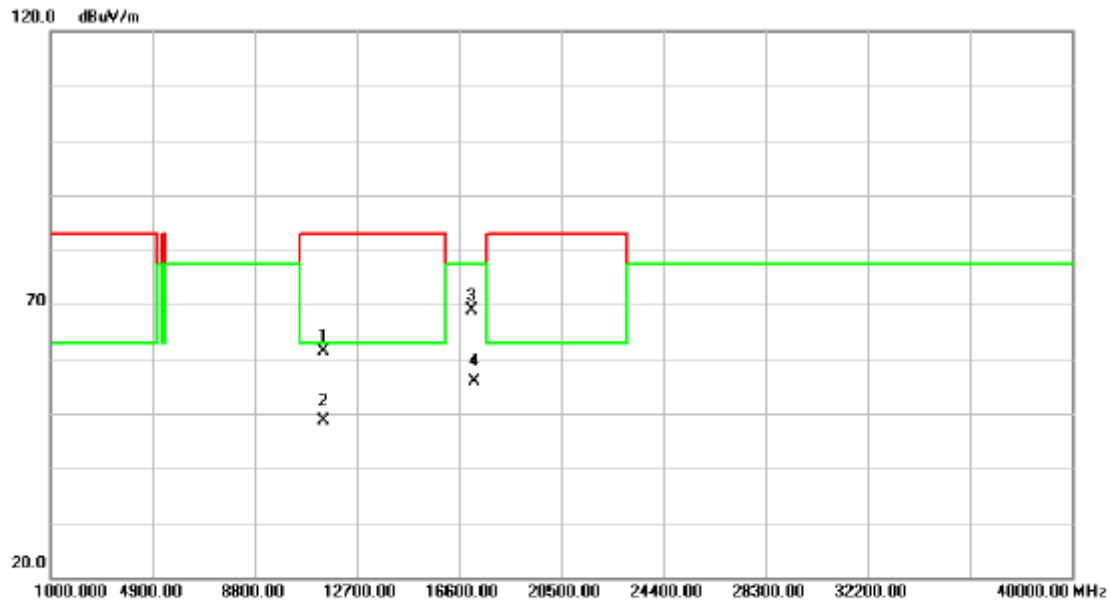


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.22	42.87	18.39	61.26	83.00	-21.74	peak	
2	11400.22	30.34	18.39	48.73	63.00	-14.27	AVG	
3 *	17100.33	44.42	24.34	68.76	77.30	-8.54	peak	
4	17100.33	31.55	24.34	55.89	77.30	-21.41	AVG	



9.10 TEST RESULTS (RESTRICTED BANDS) - 4500 MHZ TO 5150 MHZ

EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Vertical

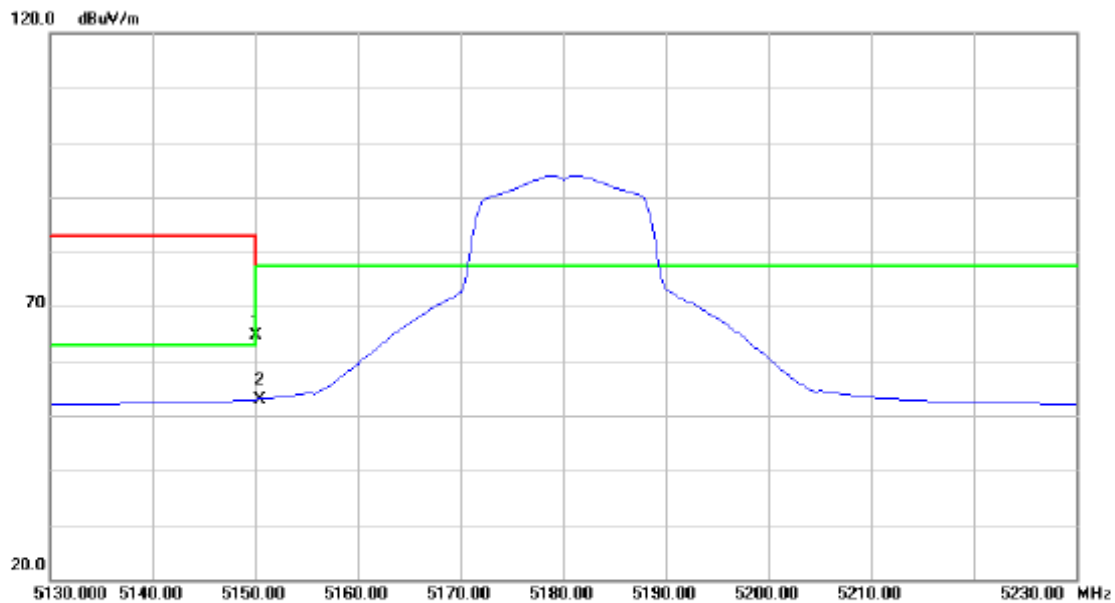


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.000	26.40	38.33	64.73	77.30	-12.57	peak	
2 *	5150.000	14.63	38.33	52.96	63.00	-10.04	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Horizontal

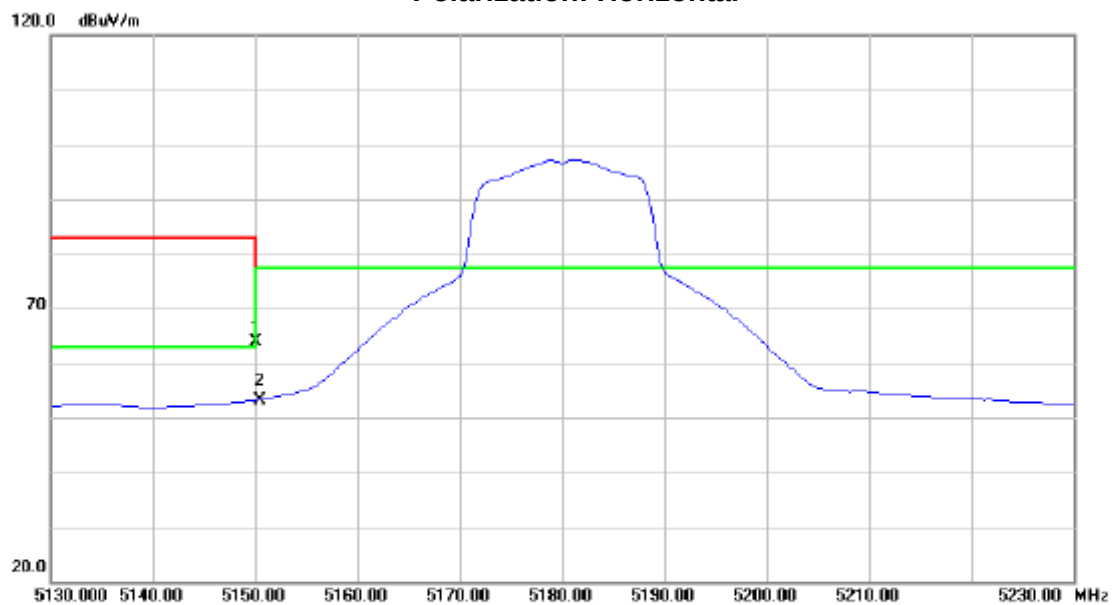


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.000	25.59	38.33	63.92	77.30	-13.38	peak	
2 *	5150.000	14.83	38.33	53.16	63.00	-9.84	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Vertical

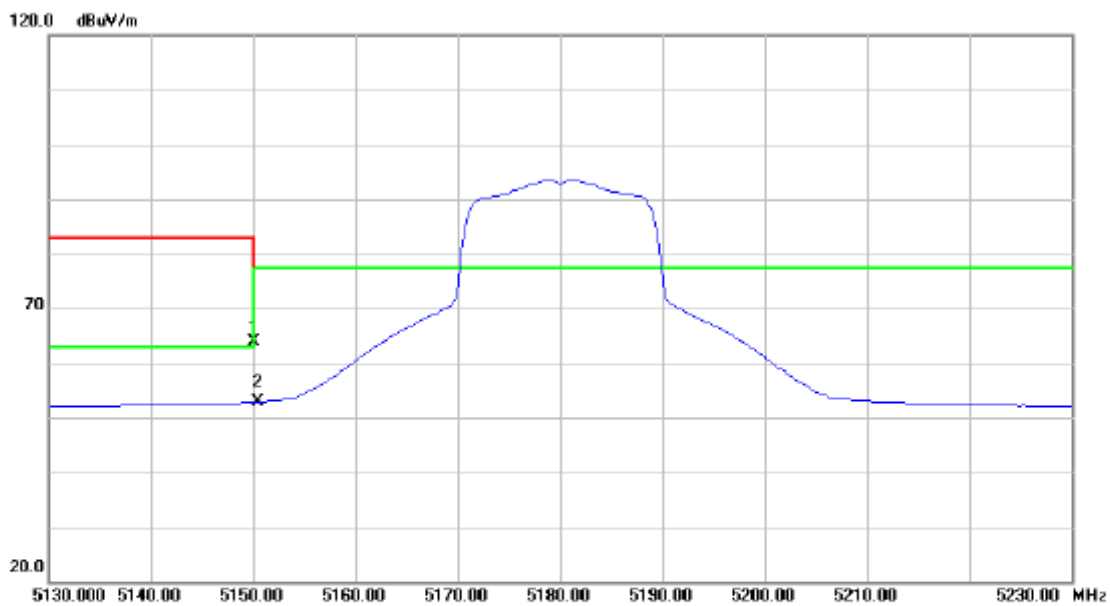


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.000	25.45	38.33	63.78	77.30	-13.52	peak	
2 *	5150.000	14.50	38.33	52.83	63.00	-10.17	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 4500-5150 MHz.		

Polarization: Horizontal

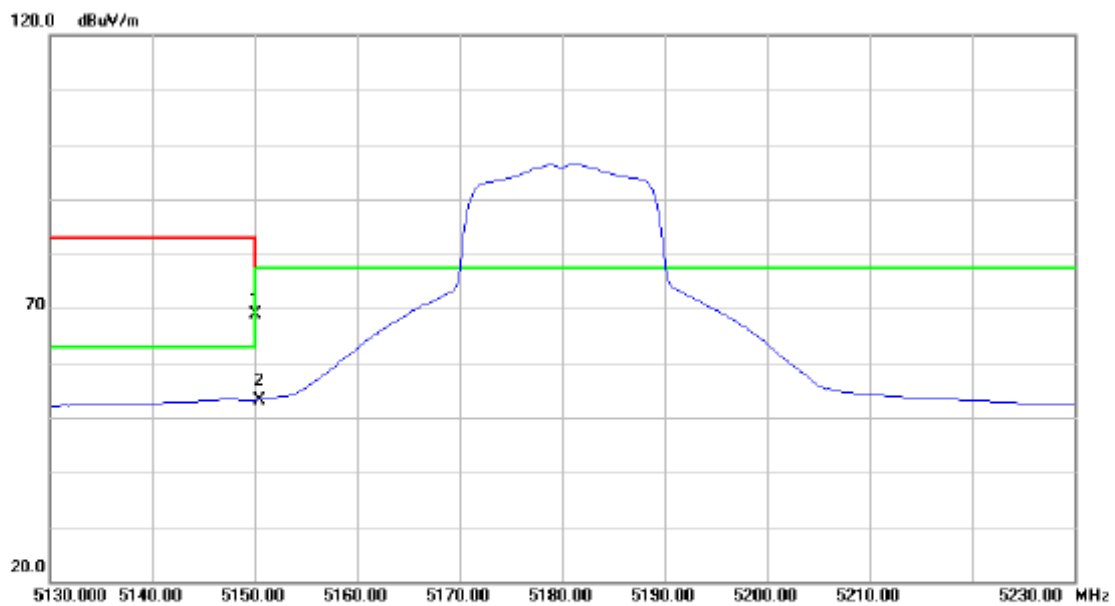


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	5150.000	30.67	38.33	69.00	77.30	-8.30	peak	
2	5150.000	14.89	38.33	53.22	63.00	-9.78	AVG	



9.11 TEST RESULTS (RESTRICTED BANDS) - 5350 MHZ TO 5460 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

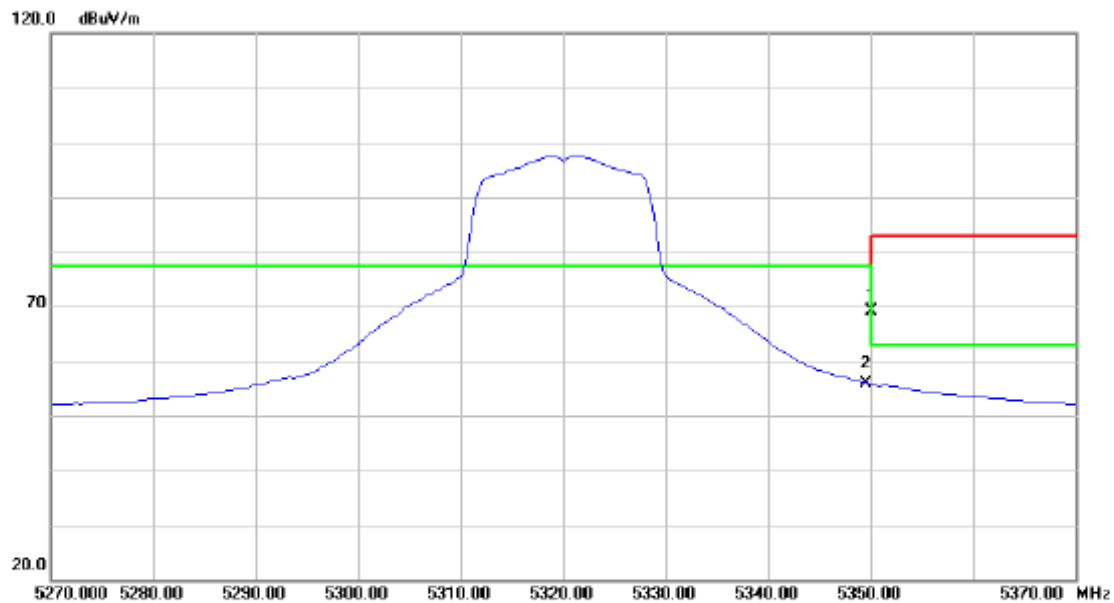


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5350.000	30.57	38.66	69.23	77.30	-8.07	peak	
2 *	5350.000	17.10	38.66	55.76	63.00	-7.24	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

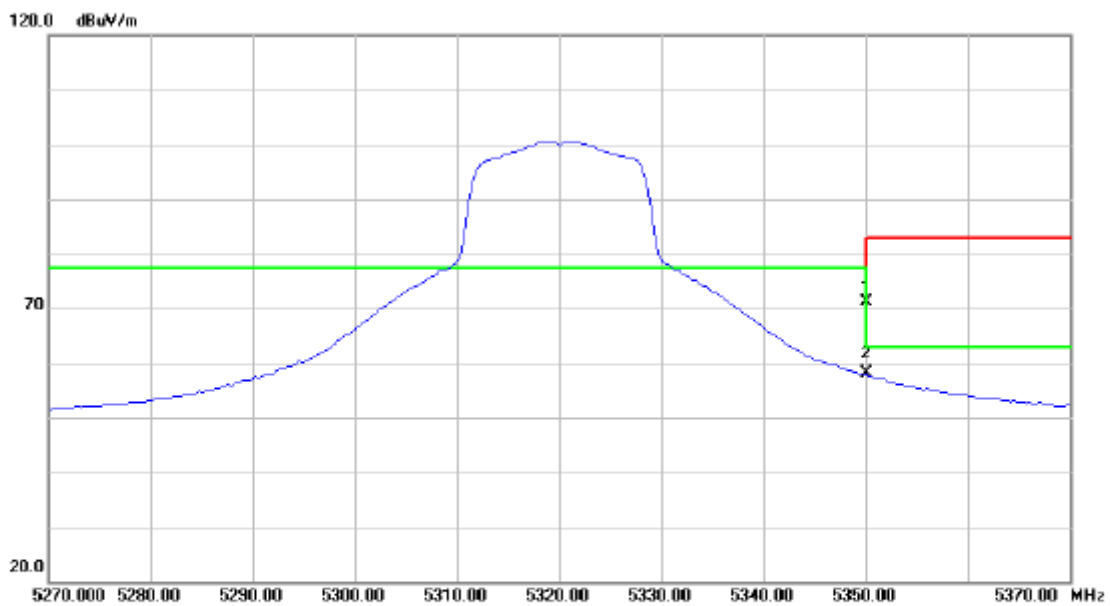


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5350.000	32.47	38.66	71.13	77.30	-6.17	peak	
2 *	5350.000	19.35	38.66	58.01	63.00	-4.99	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

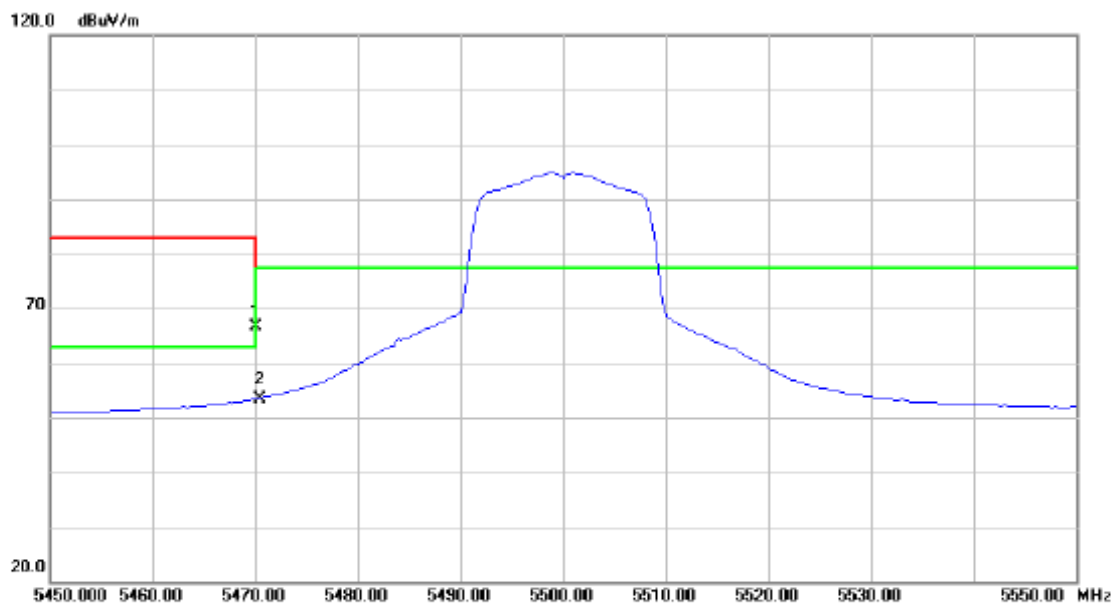


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5470.000	27.86	38.86	66.72	77.30	-10.58	peak	
2 *	5470.000	14.49	38.86	53.35	63.00	-9.65	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

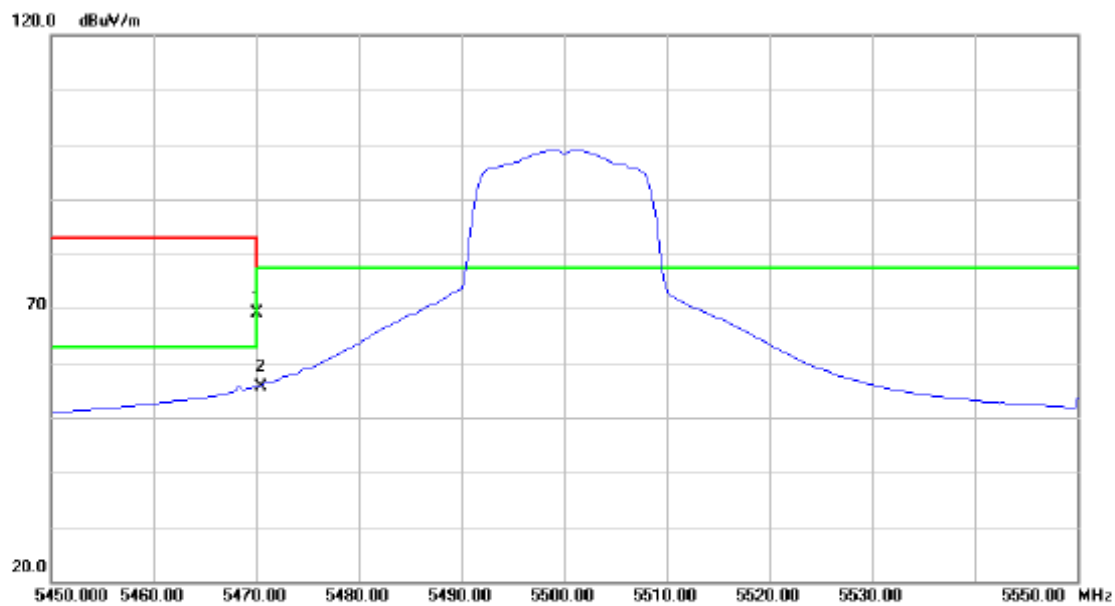


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5470.000	30.38	38.86	69.24	77.30	-8.06	peak	
2 *	5470.000	16.87	38.86	55.73	63.00	-7.27	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

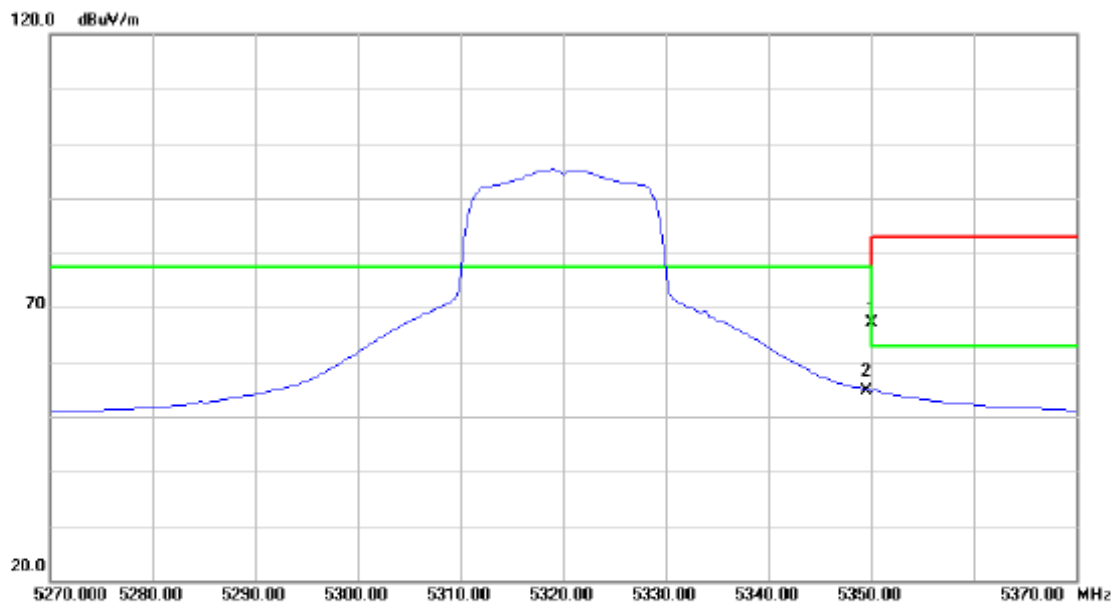


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5350.000	28.57	38.66	67.23	77.30	-10.07	peak	
2	*	5350.000	16.08	38.66	54.74	63.00	-8.26	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5320 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

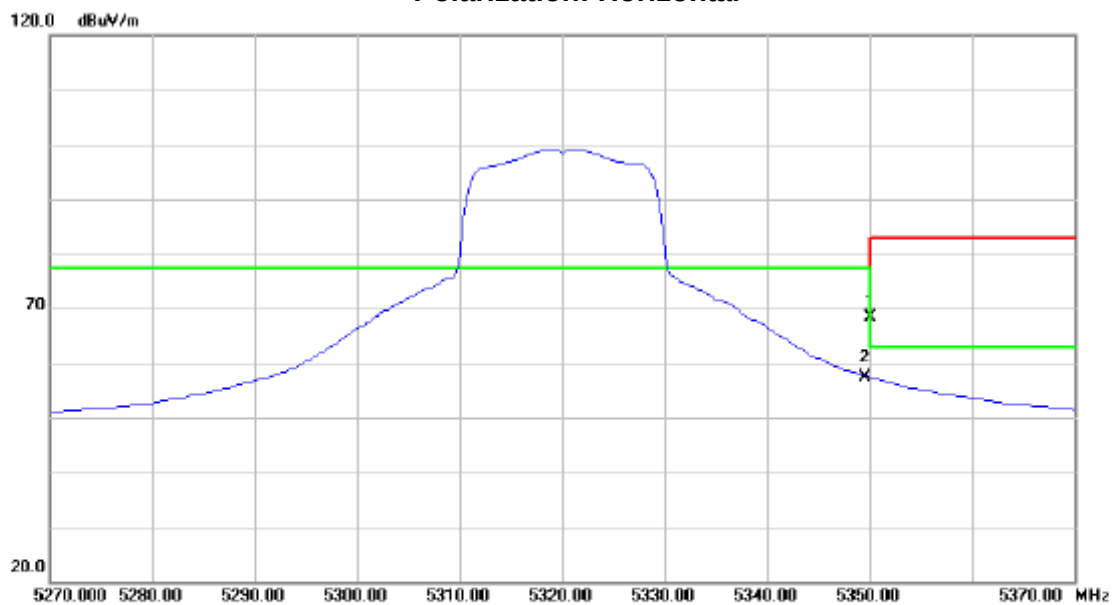


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5350.000	29.68	38.66	68.34	77.30	-8.96	peak	
2 *	5350.000	18.82	38.66	57.48	63.00	-5.52	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

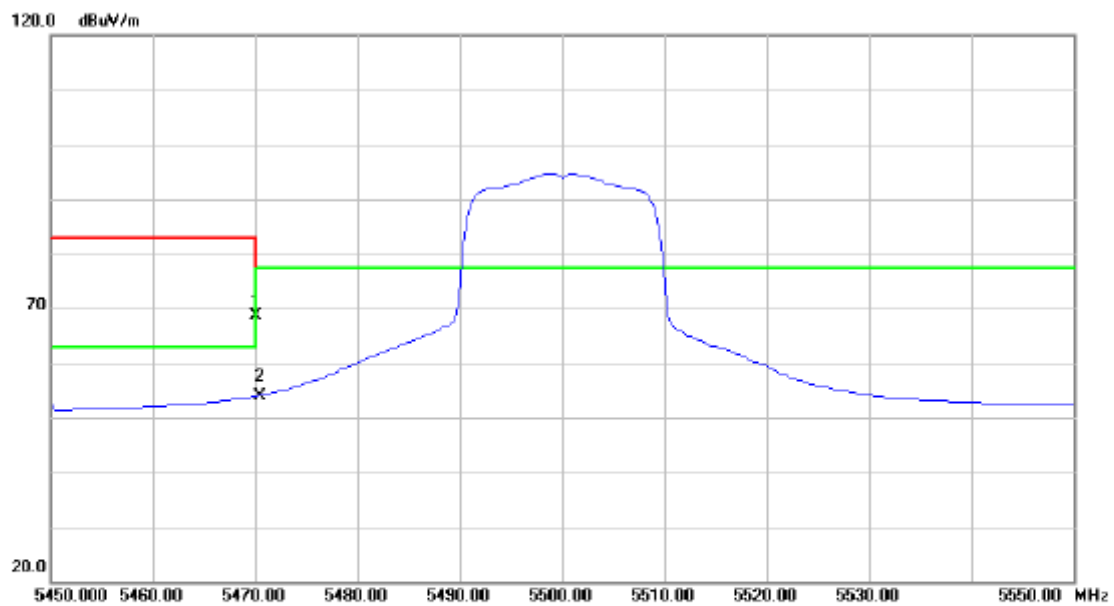


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	5470.000	29.86	38.86	68.72	77.30	-8.58	peak	
2	5470.000	15.05	38.86	53.91	63.00	-9.09	AVG	



EUT	Mobile Computer	Model Name	9700
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 5350-5460 MHz.		

Polarization: Horizontal

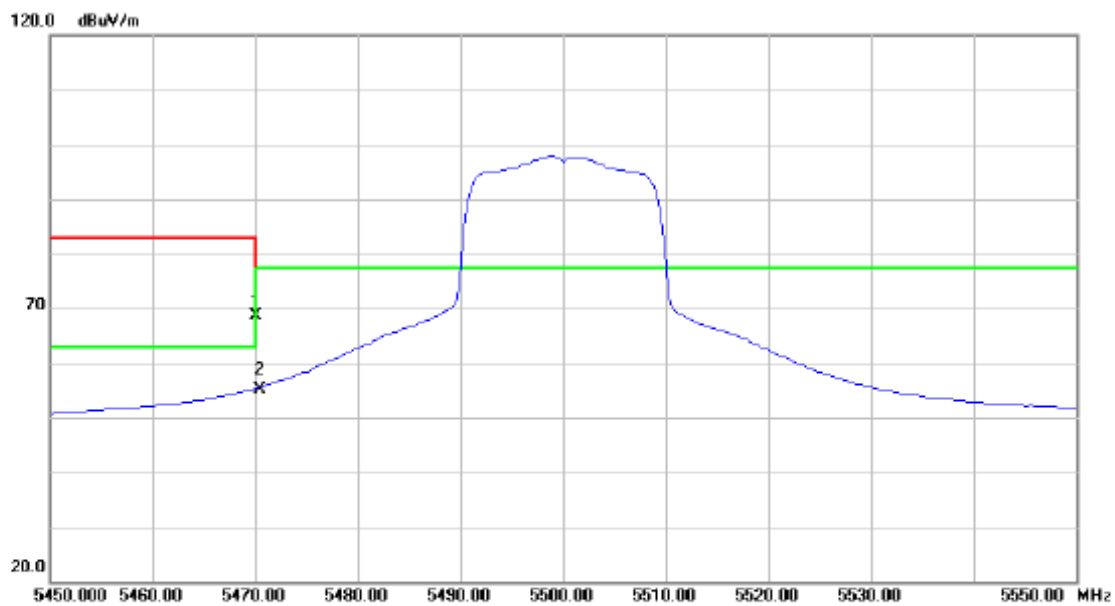

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5470.000	29.75	38.86	68.61	77.30	-8.69	peak	
2 *	5470.000	16.39	38.86	55.25	63.00	-7.75	AVG	



10 POWER SPECTRAL DENSITY

10.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Power Spectral Density	5150 - 5250	4 dBm
	5250 - 5350	11 dBm
	5470 - 5725	11 dBm
	5725 - 5825	17 dBm

10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: N/A: denotes no model name, no serial No. or no calibration specified.

10.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

10.4 TEST PROCEDURES

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

10.5 TEST SETUP LAYOUT



10.6 DEVIATION FROM TEST STANDARD

No deviation



10.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



10.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz, 5200 MHz, 5240 MHz		


Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
5180 MHz	0.96	4.00	PASS
5200 MHz	1.95	4.00	PASS
5240 MHz	1.54	4.00	PASS

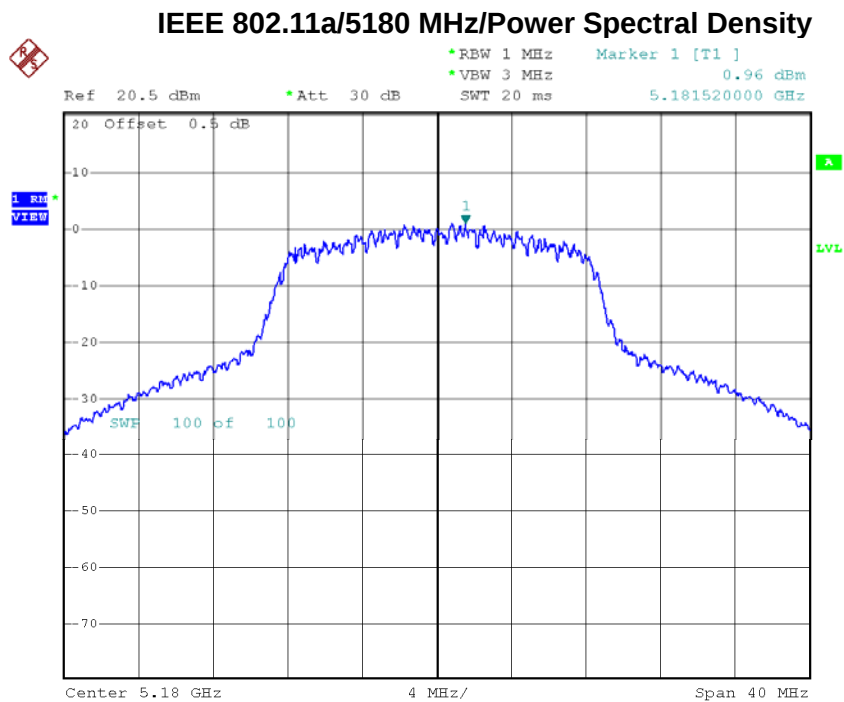

Date: 16.APR.2014 19:56:49




IEEE 802.11a/5200 MHz/Power Spectral Density

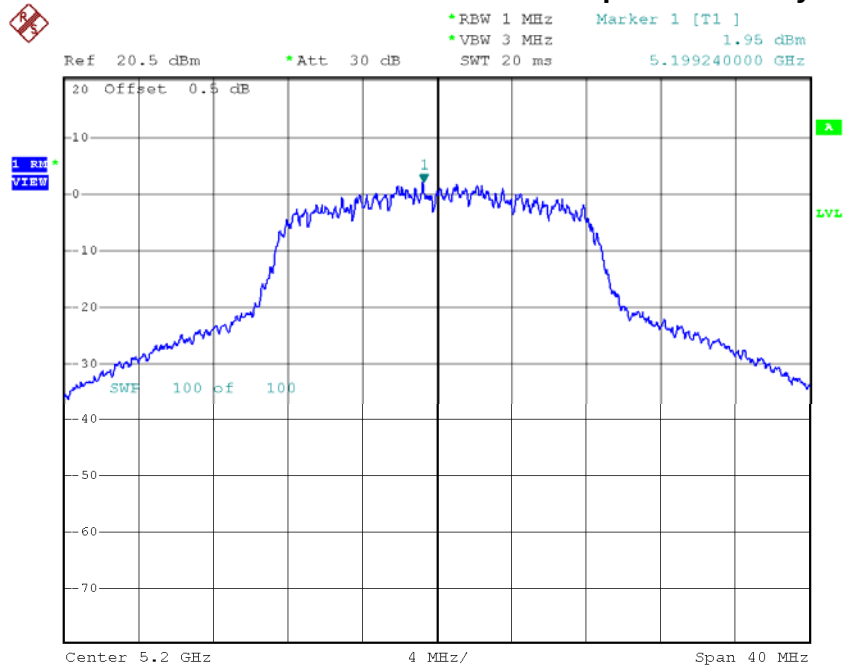

Date: 16.APR.2014 19:57:42

IEEE 802.11a/5240 MHz/Power Spectral Density

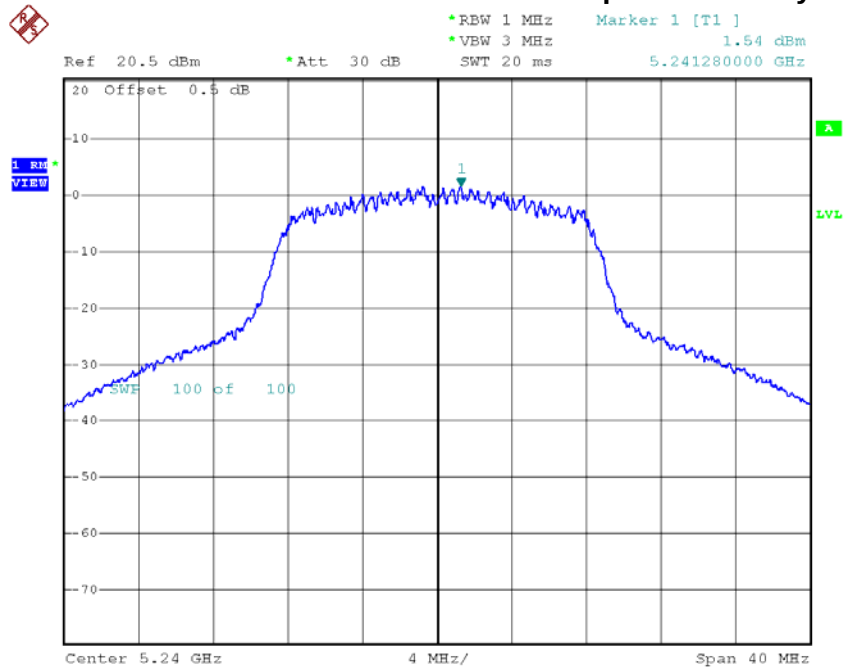


Date: 16.APR.2014 19:58:47



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
5180 MHz	0.47	4.00	PASS
5200 MHz	1.02	4.00	PASS
5240 MHz	0.43	4.00	PASS


IEEE 802.11n (20 MHz)/5180 MHz/Power Spectral Density

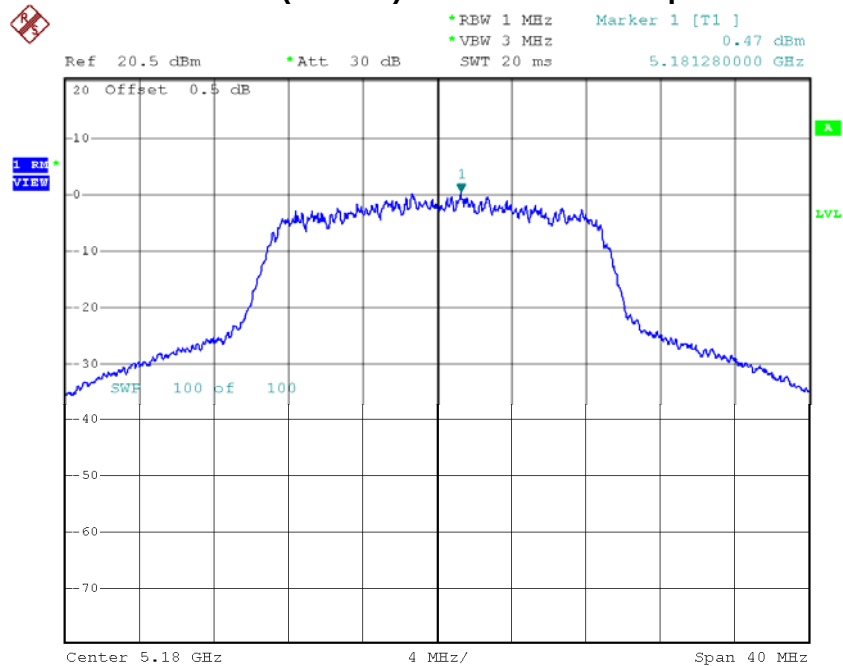

Date: 16.APR.2014 20:07:09




IEEE 802.11n (20 MHz)/5200 MHz/Power Spectral Density

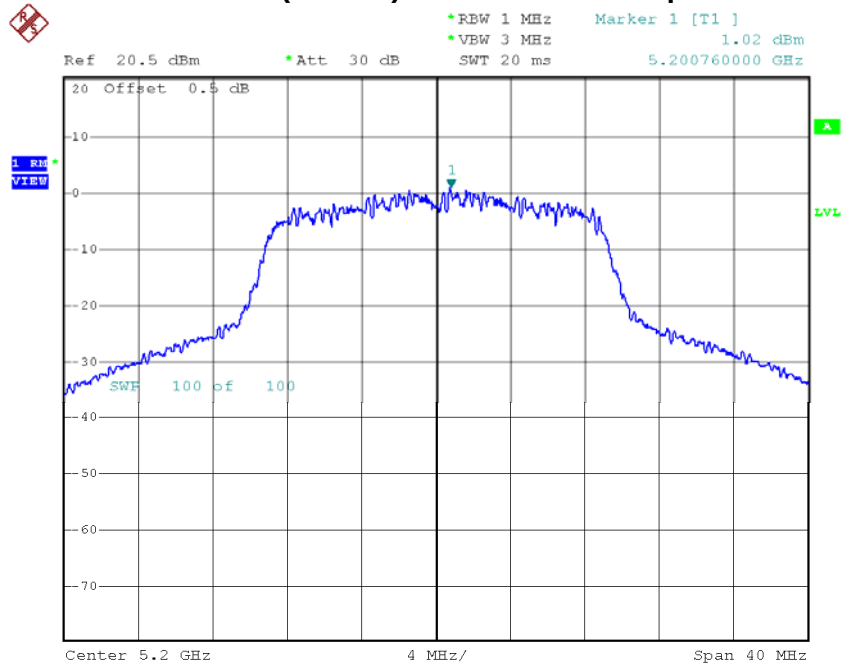

Date: 16.APR.2014 20:07:54

IEEE 802.11n (20 MHz)/5240 MHz/Power Spectral Density

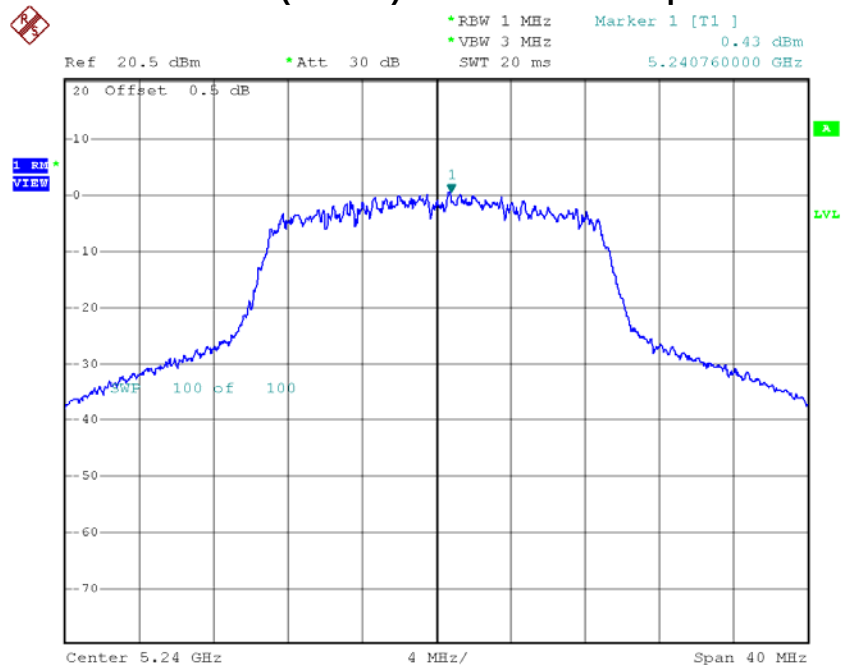

Date: 16.APR.2014 20:08:52




10.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
5260 MHz	1.73	11.00	PASS
5300 MHz	1.17	11.00	PASS
5320 MHz	1.77	11.00	PASS


IEEE 802.11a/5260 MHz/Power Spectral Density

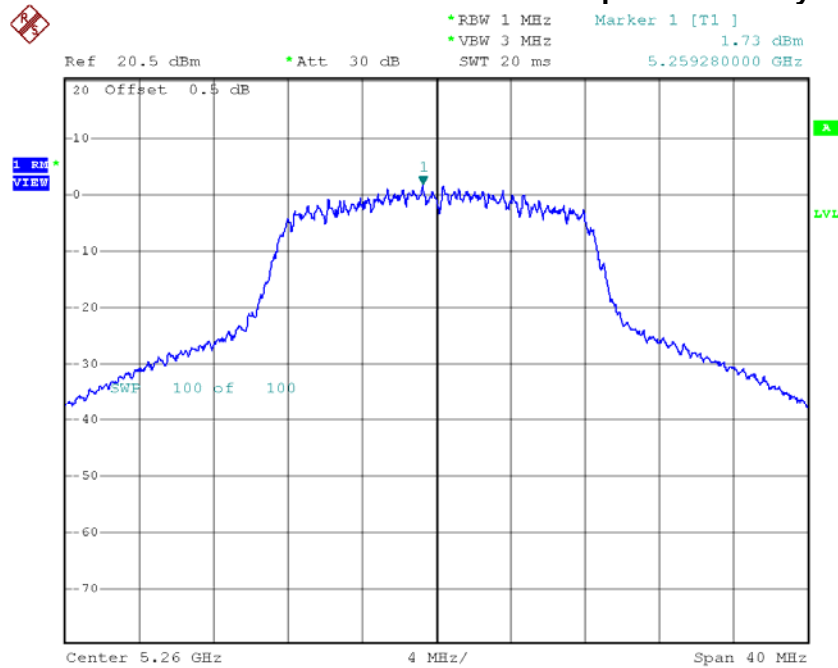

Date: 16.APR.2014 19:59:34




IEEE 802.11a/5300 MHz/Power Spectral Density

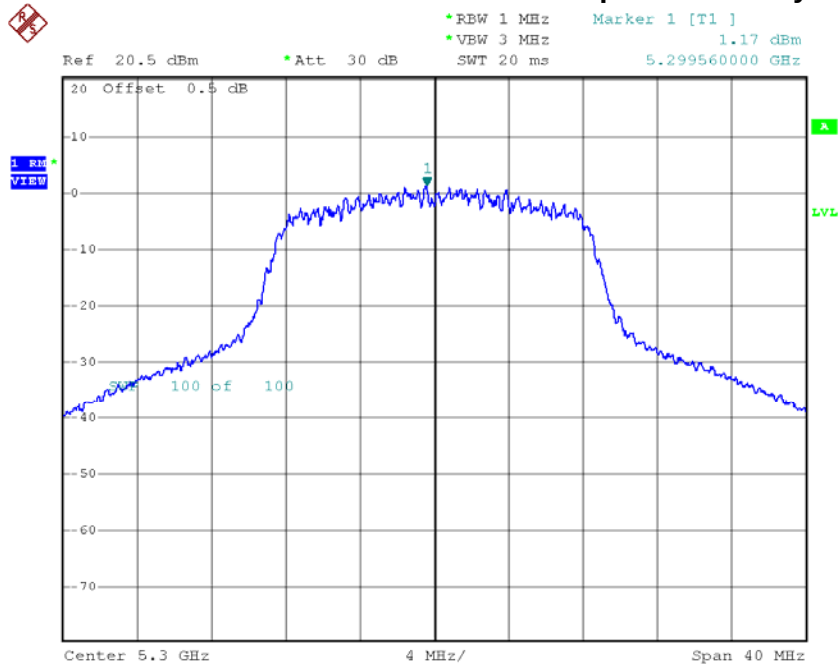

Date: 16.APR.2014 20:00:56

IEEE 802.11a/5320 MHz/Power Spectral Density

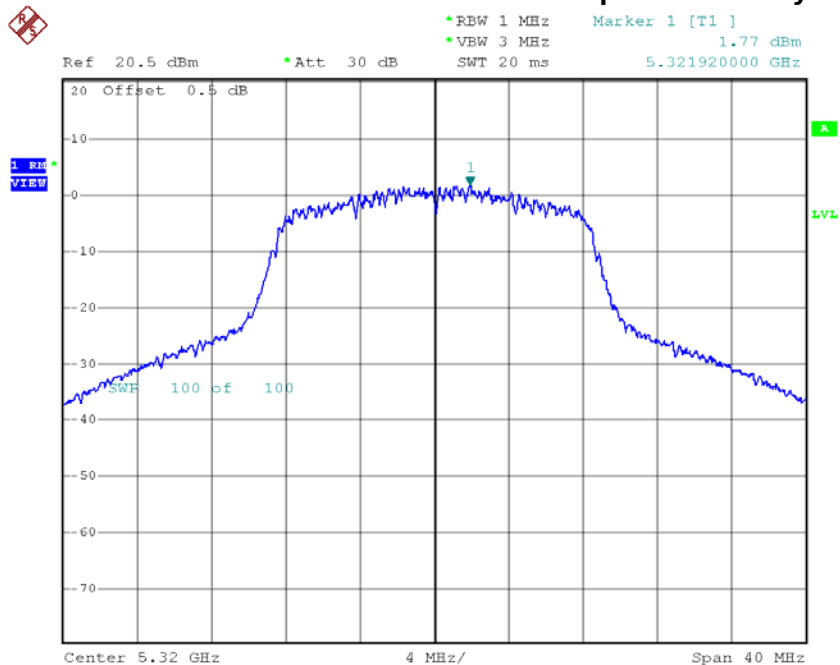


Date: 16.APR.2014 20:01:43



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
5260 MHz	1.02	11.00	PASS
5300 MHz	0.58	11.00	PASS
5320 MHz	0.90	11.00	PASS


IEEE 802.11n (20 MHz)/5260 MHz/Power Spectral Density

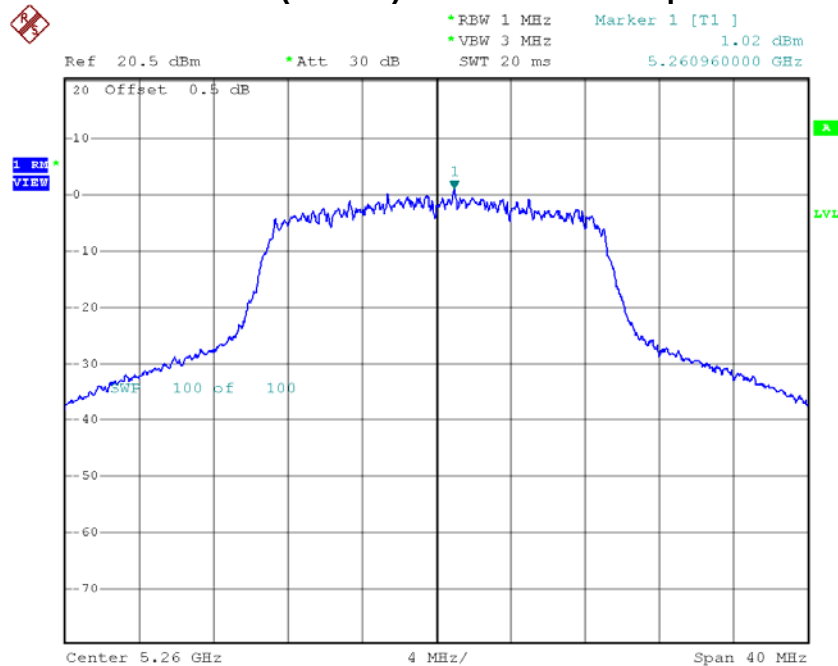

Date: 16.APR.2014 20:09:51




IEEE 802.11n (20 MHz)/5300 MHz/Power Spectral Density

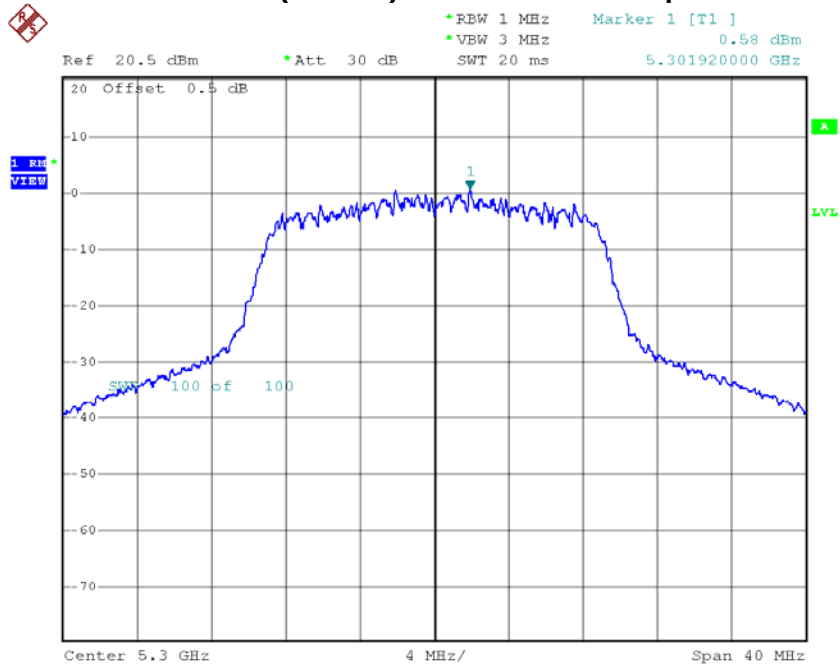

Date: 16.APR.2014 20:11:02

IEEE 802.11n (20 MHz)/5320 MHz/Power Spectral Density

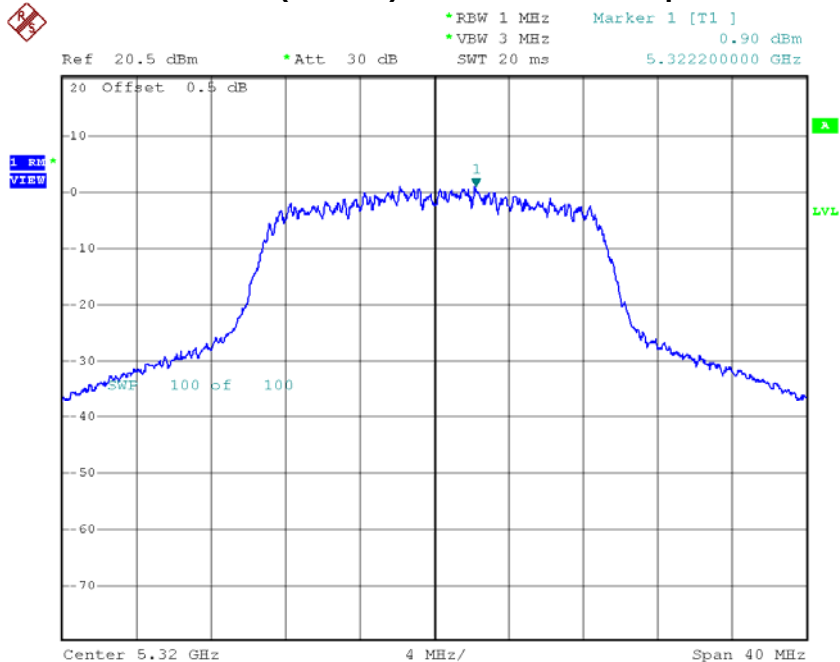

Date: 16.APR.2014 20:11:52




10.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
5500 MHz	4.10	11.00	PASS
5580 MHz	4.01	11.00	PASS
5700 MHz	1.47	11.00	PASS


IEEE 802.11a/5500 MHz/Power Spectral Density

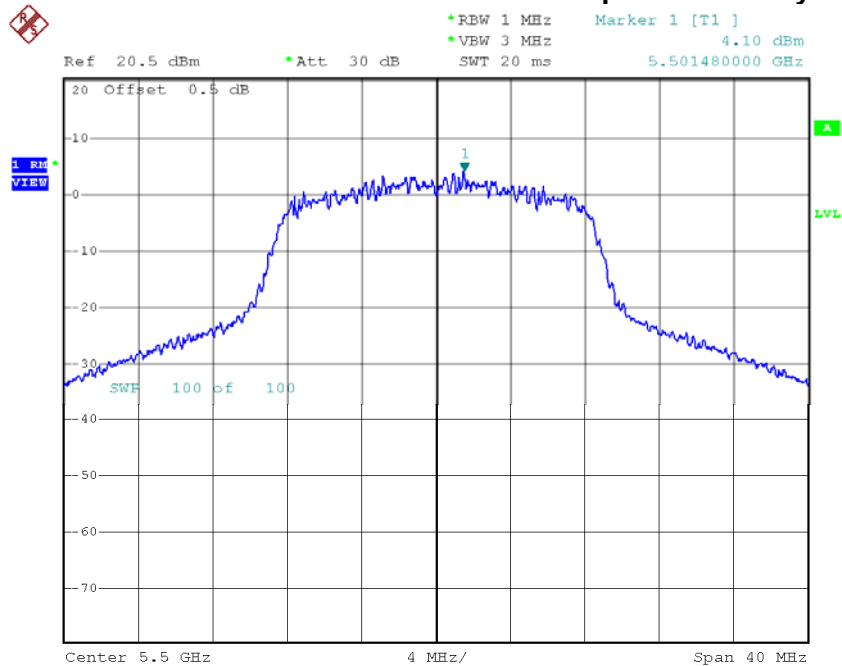

Date: 16.APR.2014 20:02:56




IEEE 802.11a/5580 MHz/Power Spectral Density

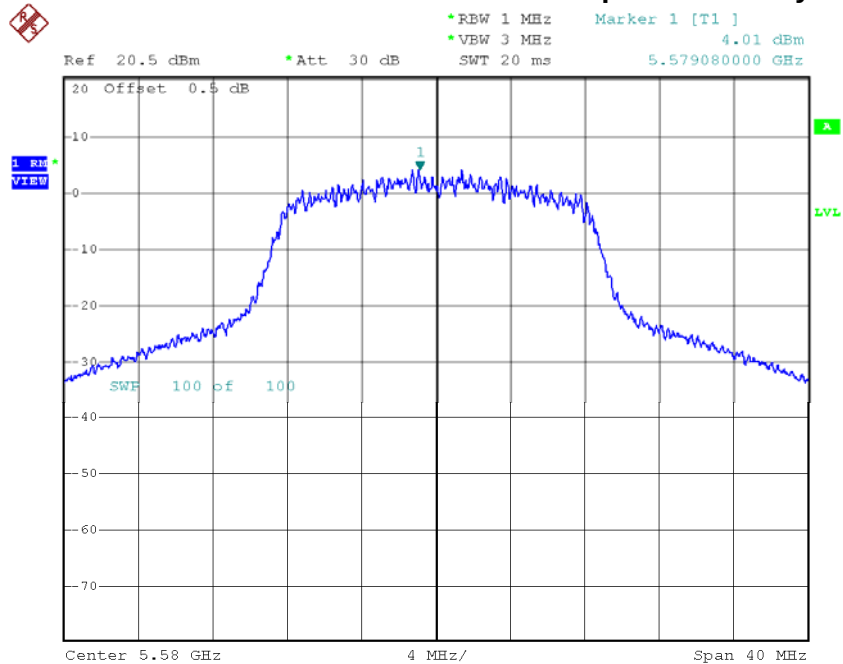

Date: 16.APR.2014 20:03:55

IEEE 802.11a/5700 MHz/Power Spectral Density

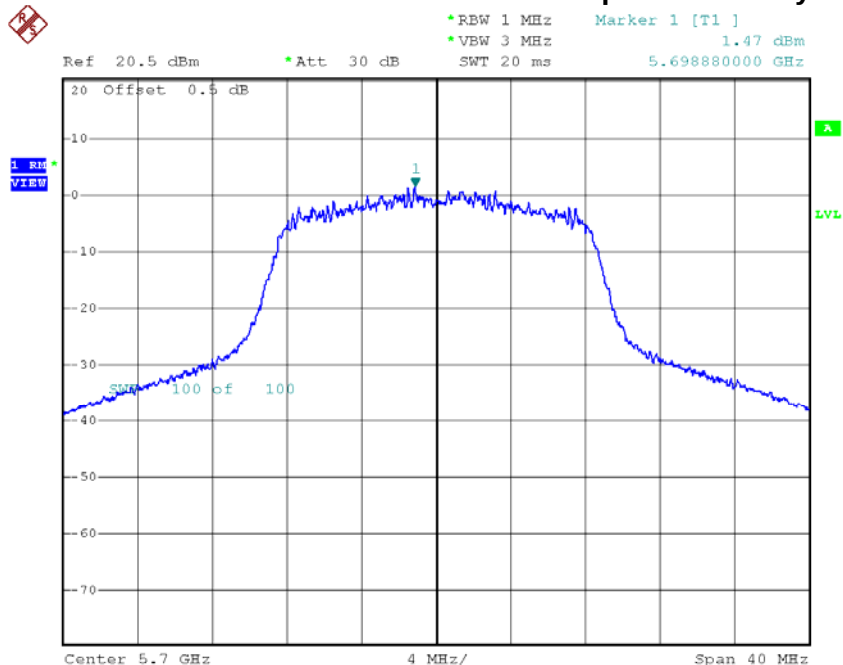


Date: 16.APR.2014 20:04:54



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	Power Spectral Density (dBm)	Limit (dBm)	Result
5500 MHz	1.77	11.00	PASS
5580 MHz	2.18	11.00	PASS
5700 MHz	0.79	11.00	PASS


IEEE 802.11n (20 MHz)/5500 MHz/Power Spectral Density

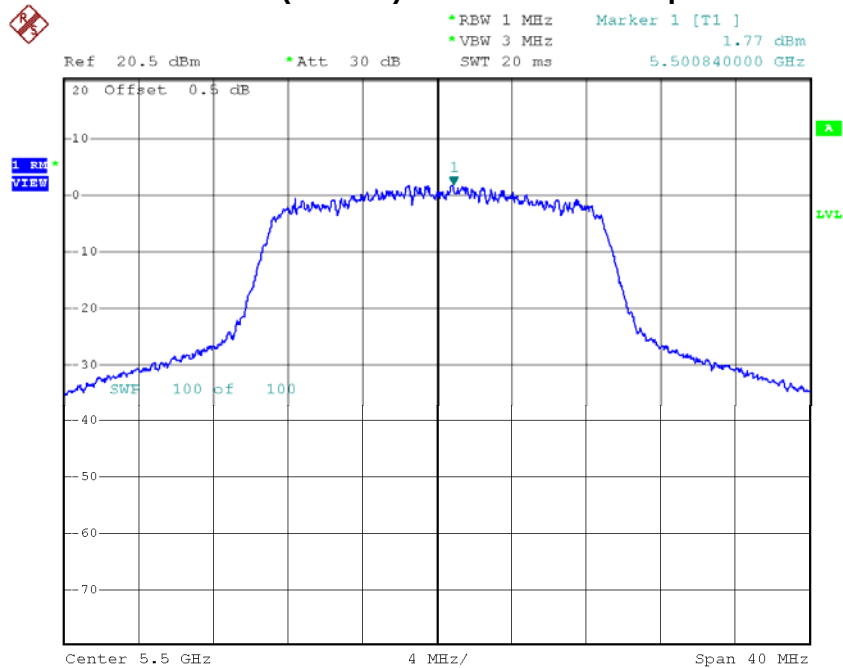

Date: 16.APR.2014 20:12:40




IEEE 802.11n (20 MHz)/5580 MHz/Power Spectral Density

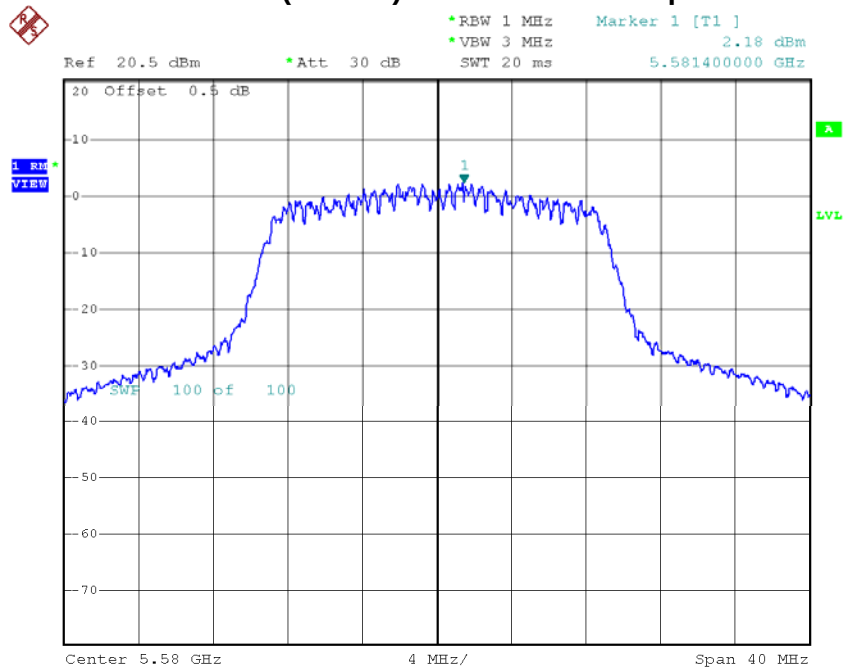

Date: 16.APR.2014 20:13:26

IEEE 802.11n (20 MHz)/5700 MHz/Power Spectral Density

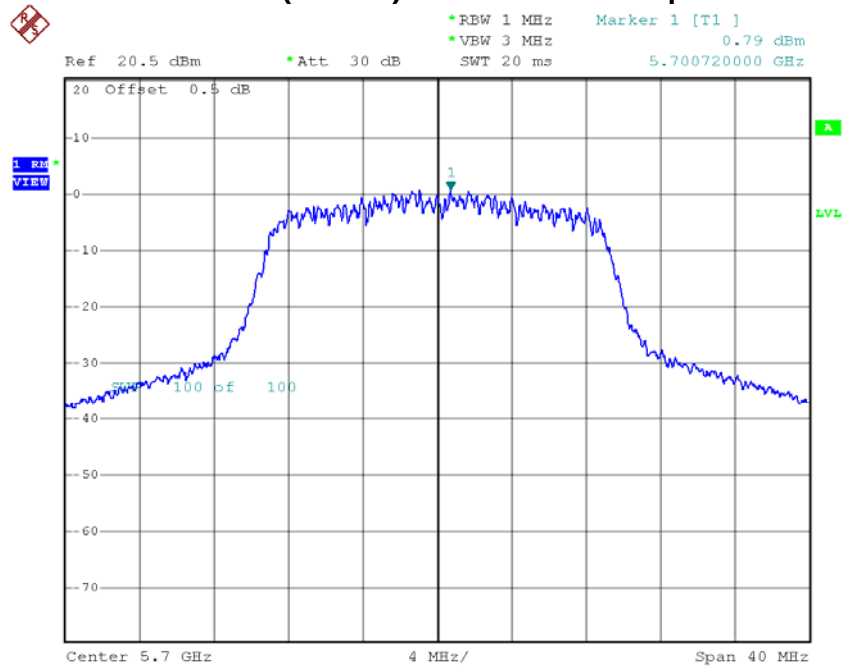

Date: 16.APR.2014 20:14:22

**11 PEAK EXCURSION****11.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Peak Excursion	5150 - 5250	13 dB
	5250 - 5350	
	5470 - 5725	
	5725 - 5825	

11.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: N/A: denotes no model name, no serial No. or no calibration specified.

11.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 3000 kHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Max Hold
Sweep Time	AUTO

11.4 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Peak Trace: Set RBW = 1 MHz, VBW $\geq$ 3 MHz with peak detector and maxhold settings.
- Average Trace: set RBW=1MHz, VBW=3MHz with RMS detector and trace average across 100 traces in power averaging mode.

11.5 TEST SETUP LAYOUT



11.6 DEVIATION FROM TEST STANDARD

No deviation

11.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



11.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5180 MHz, 5200 MHz, 5240 MHz		


Frequency	Peak Excursion (dB)	Limit (dB)	Result
5180 MHz	8.16	13	PASS
5200 MHz	8.06	13	PASS
5240 MHz	8.04	13	PASS

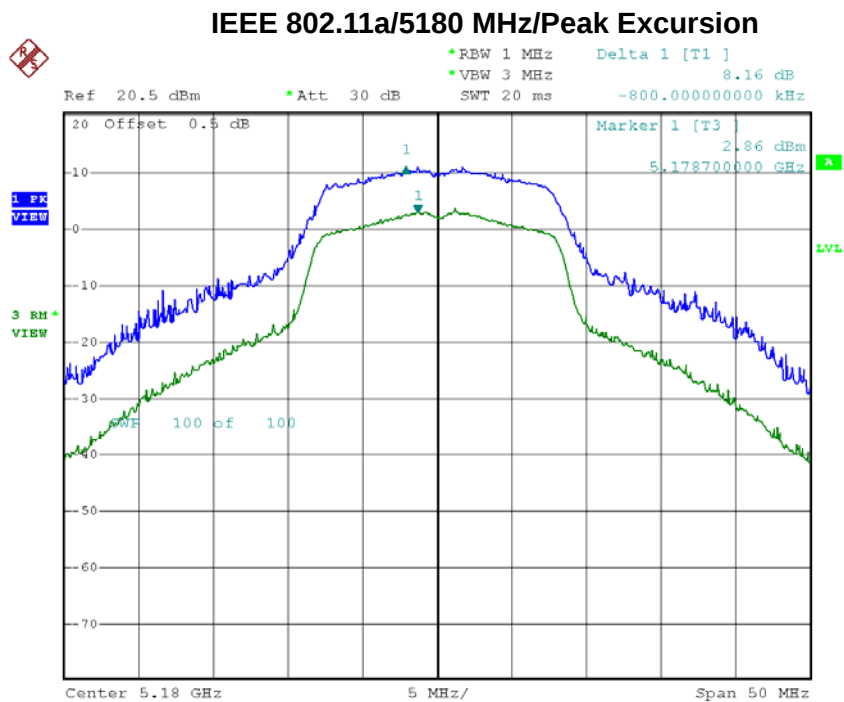

Date: 16.APR.2014 09:34:23




IEEE 802.11a/5200 MHz/Peak Excursion

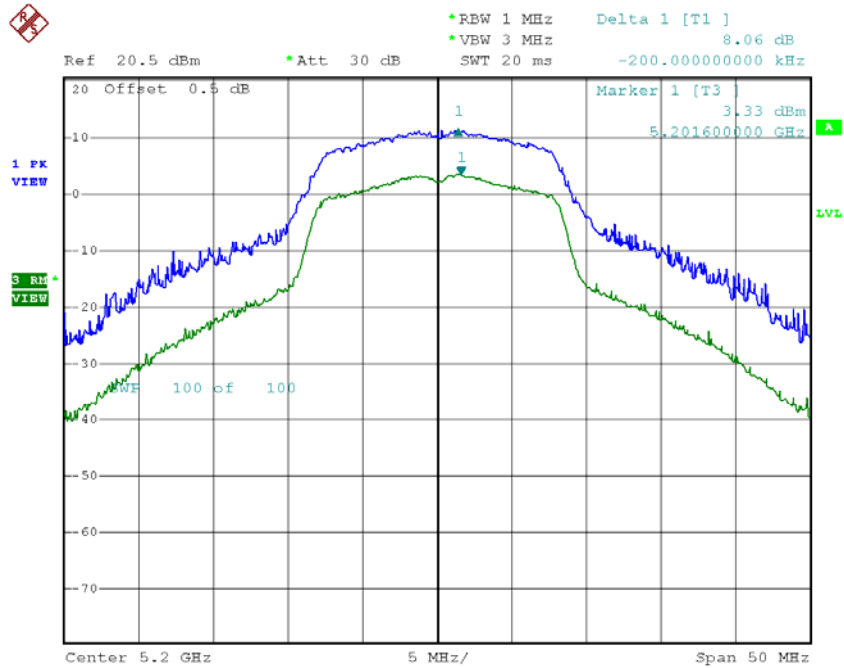

Date: 16.APR.2014 09:40:46

IEEE 802.11a/5240 MHz/Peak Excursion

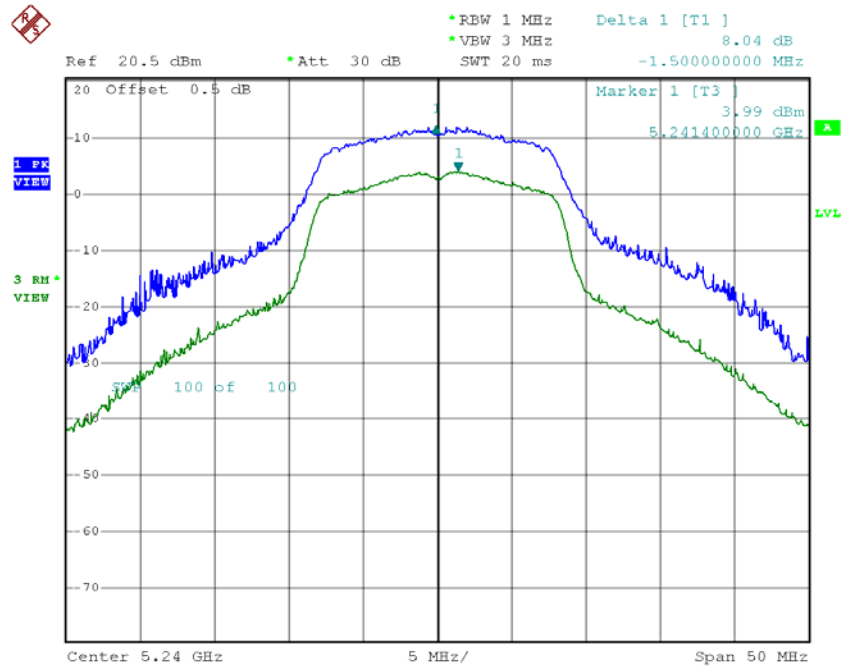


Date: 16.APR.2014 09:37:08



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	Peak Excursion (dB)	Limit (dB)	Result
5180 MHz	7.61	13	PASS
5200 MHz	7.20	13	PASS
5240 MHz	7.62	13	PASS


IEEE 802.11n (20 MHz)/5180 MHz/Peak Excursion

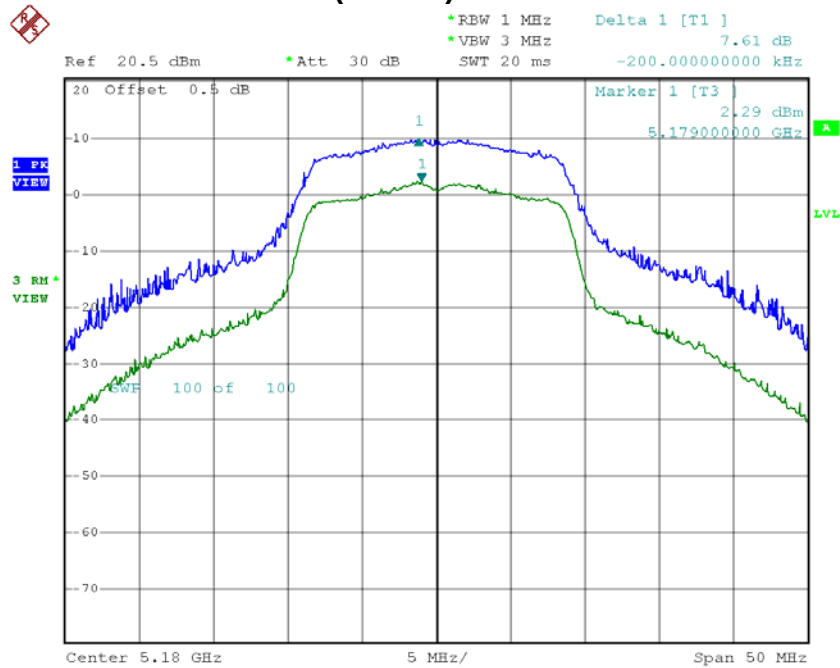

Date: 16.APR.2014 09:47:49




IEEE 802.11n (20 MHz)/5200 MHz/Peak Excursion

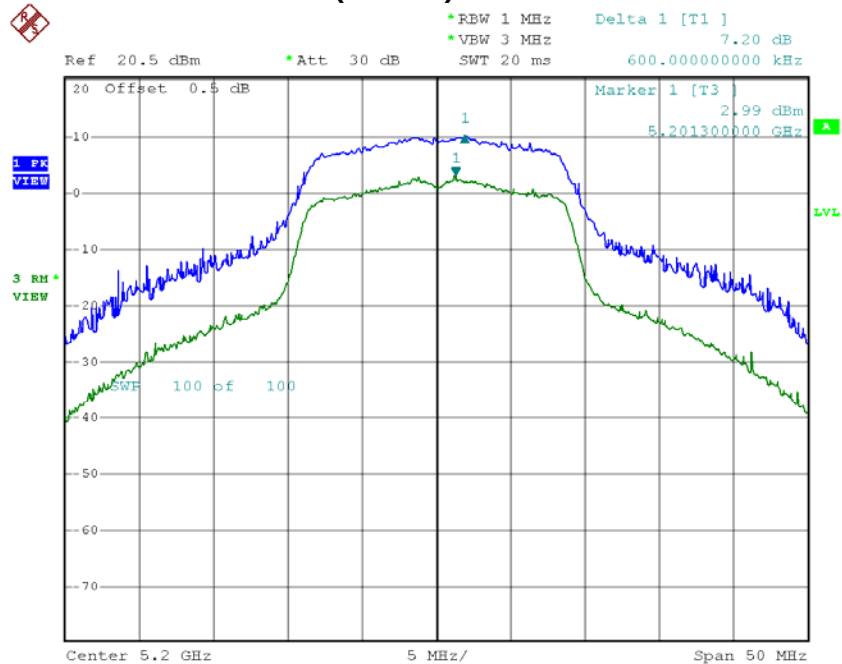

Date: 16.APR.2014 09:49:37

IEEE 802.11n (20 MHz)/5240 MHz/Peak Excursion

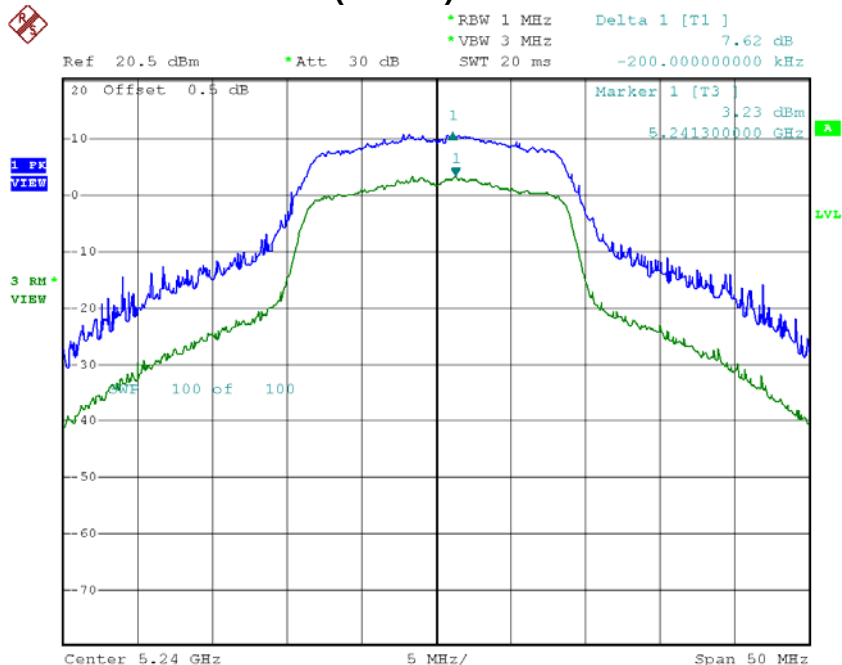


Date: 16.APR.2014 09:50:30



11.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5260 MHz, 5300 MHz, 5320 MHz		


Frequency	Peak Excursion (dB)	Limit (dB)	Result
5260 MHz	7.84	13	PASS
5300 MHz	8.15	13	PASS
5320 MHz	7.88	13	PASS

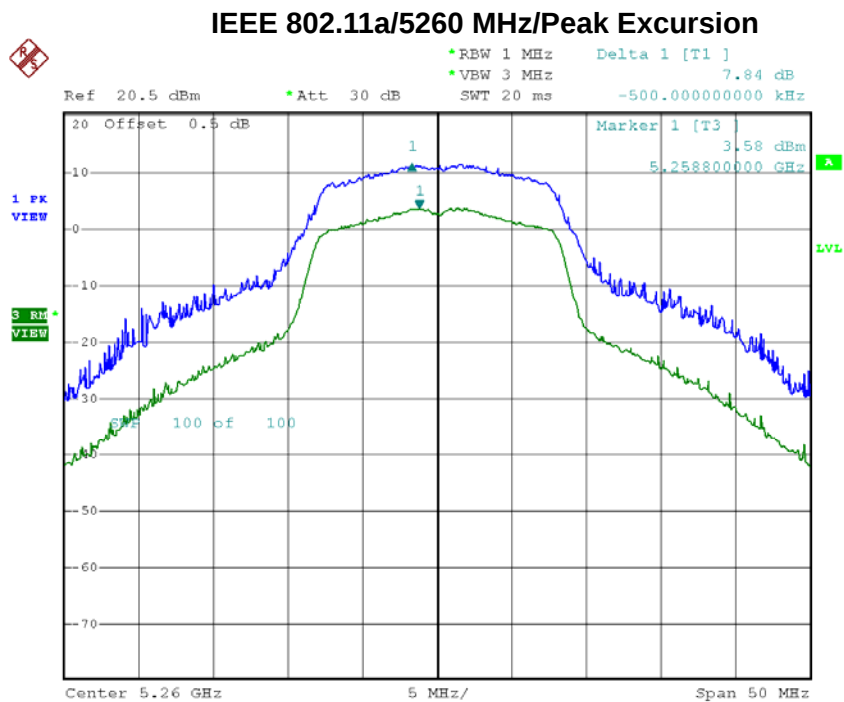

Date: 16.APR.2014 09:39:11




IEEE 802.11a/5300 MHz/Peak Excursion

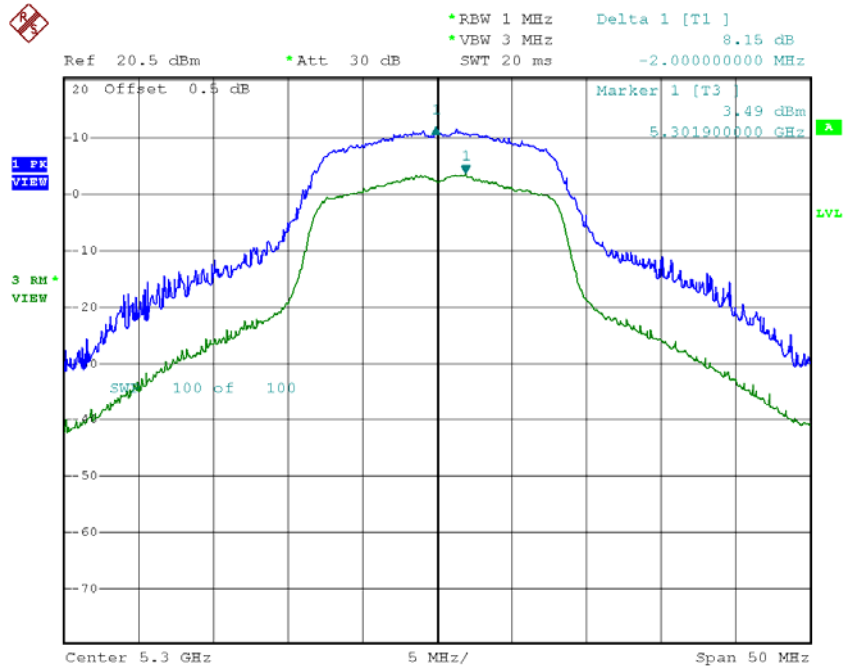

Date: 16.APR.2014 09:41:52

IEEE 802.11a/5320 MHz/Peak Excursion

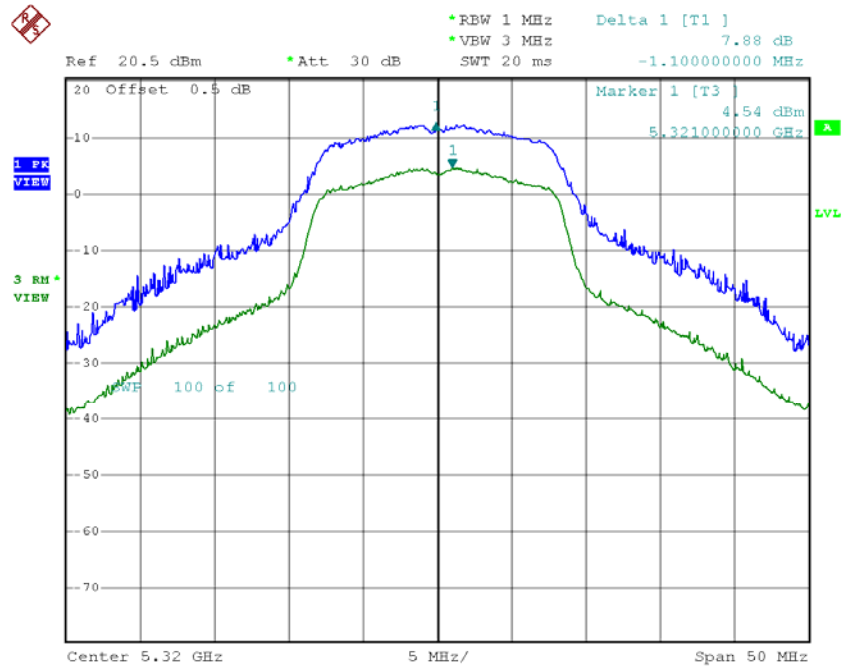


Date: 16.APR.2014 09:42:53



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	Peak Excursion (dB)	Limit (dB)	Result
5260 MHz	6.98	13	PASS
5300 MHz	7.77	13	PASS
5320 MHz	7.40	13	PASS


IEEE 802.11n (20 MHz)/5260 MHz/Peak Excursion

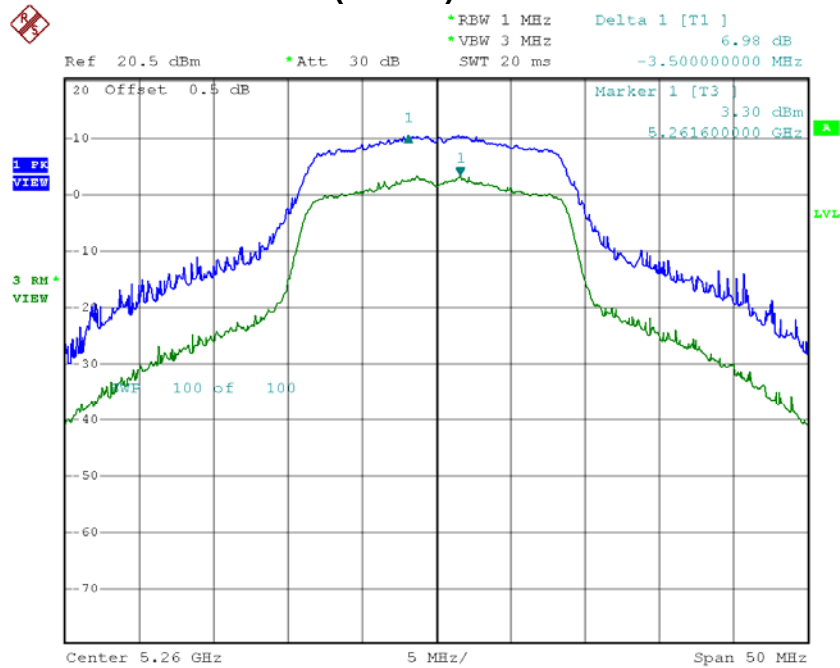

Date: 16.APR.2014 09:51:22




IEEE 802.11n (20 MHz)/5300 MHz/Peak Excursion

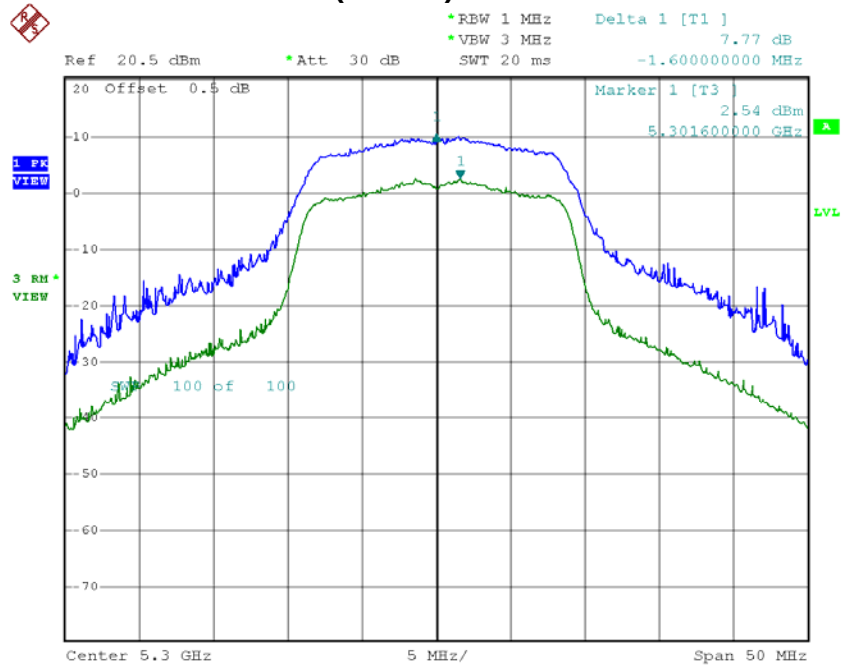

Date: 16.APR.2014 09:52:31

IEEE 802.11n (20 MHz)/5320 MHz/Peak Excursion

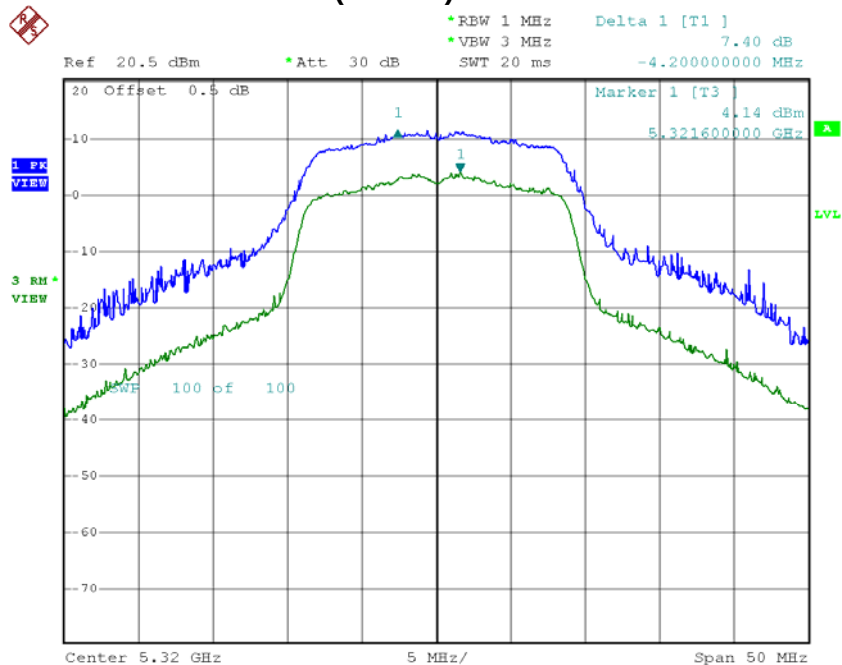


Date: 16.APR.2014 09:53:29



11.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11a/5500 MHz, 5580 MHz, 5700 MHz		


Frequency	Peak Excursion (dB)	Limit (dB)	Result
5500 MHz	7.89	13	PASS
5580 MHz	7.73	13	PASS
5700 MHz	7.49	13	PASS

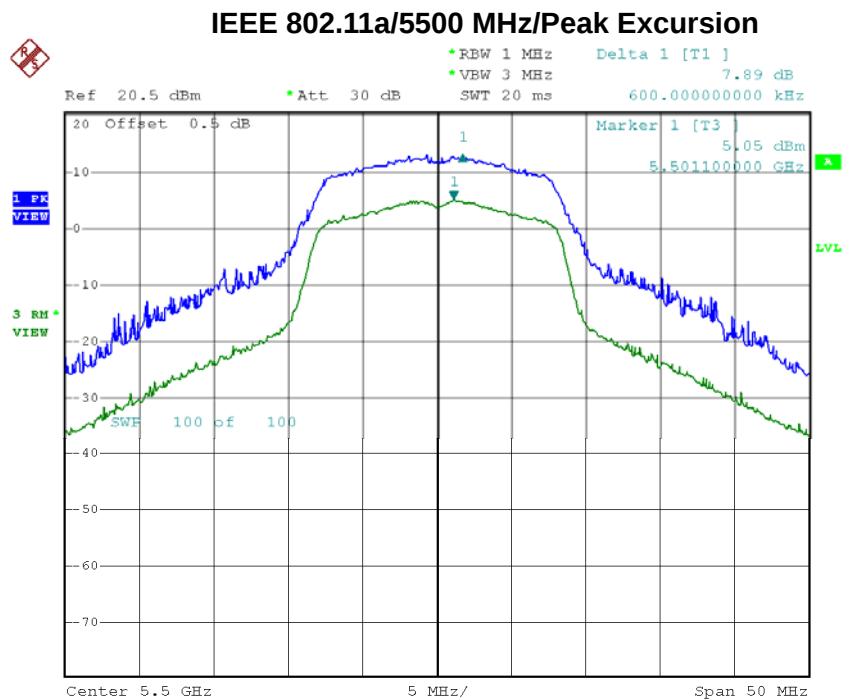

Date: 16.APR.2014 09:43:49




IEEE 802.11a/5580 MHz/Peak Excursion

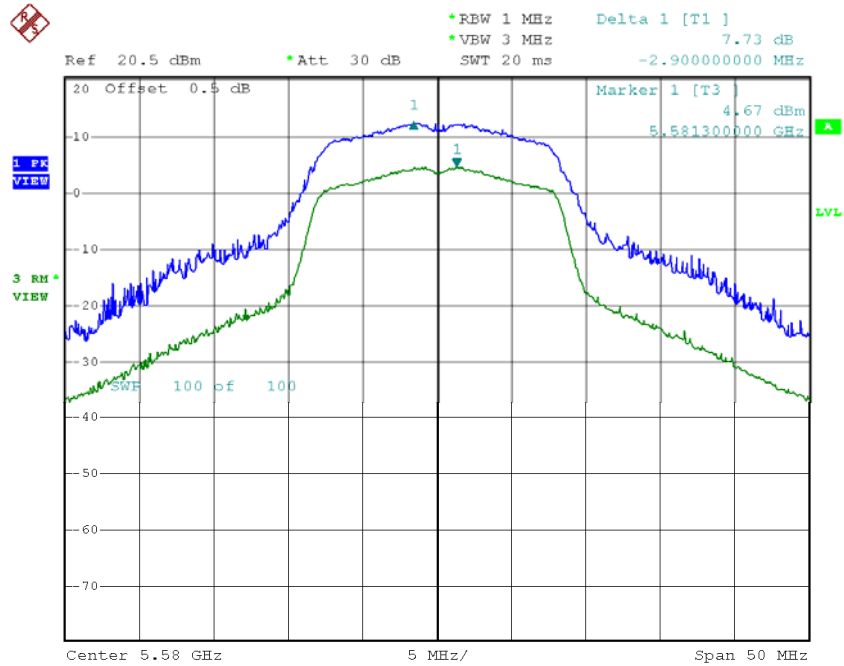

Date: 16.APR.2014 09:44:49

IEEE 802.11a/5700 MHz/Peak Excursion

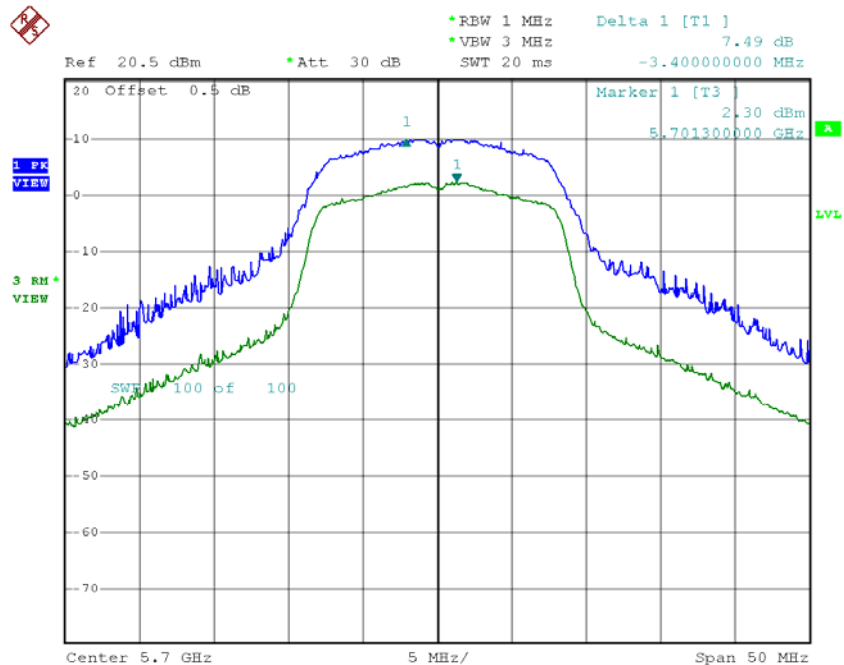


Date: 16.APR.2014 09:46:16



EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	AC 120V/60Hz		
Test Mode	IEEE 802.11n (20 MHz)/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	Peak Excursion (dB)	Limit (dB)	Result
5500 MHz	7.32	13	PASS
5580 MHz	7.39	13	PASS
5700 MHz	7.36	13	PASS


IEEE 802.11n (20 MHz)/5500 MHz/Peak Excursion

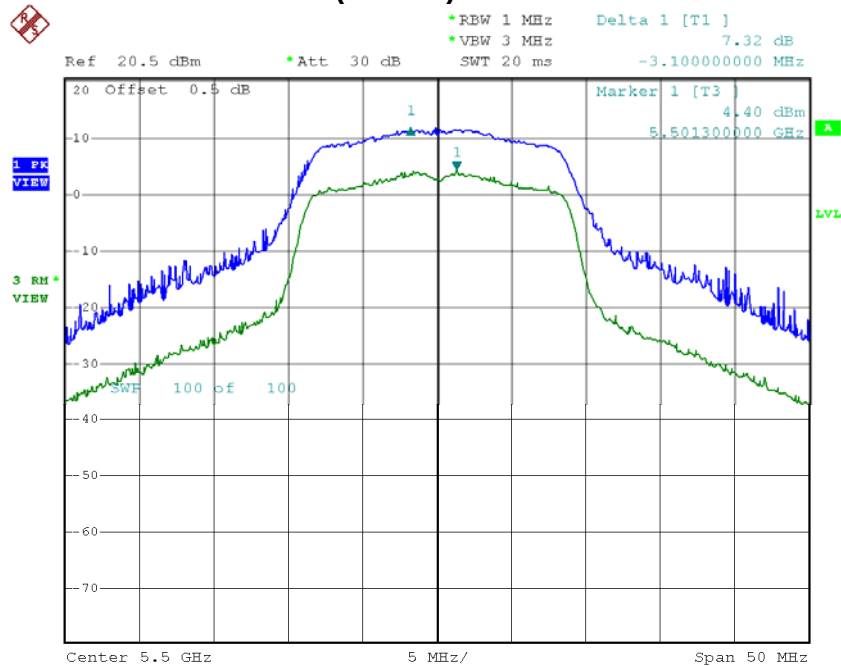

Date: 16.APR.2014 09:54:26




IEEE 802.11n (20 MHz)/5580 MHz/Peak Excursion

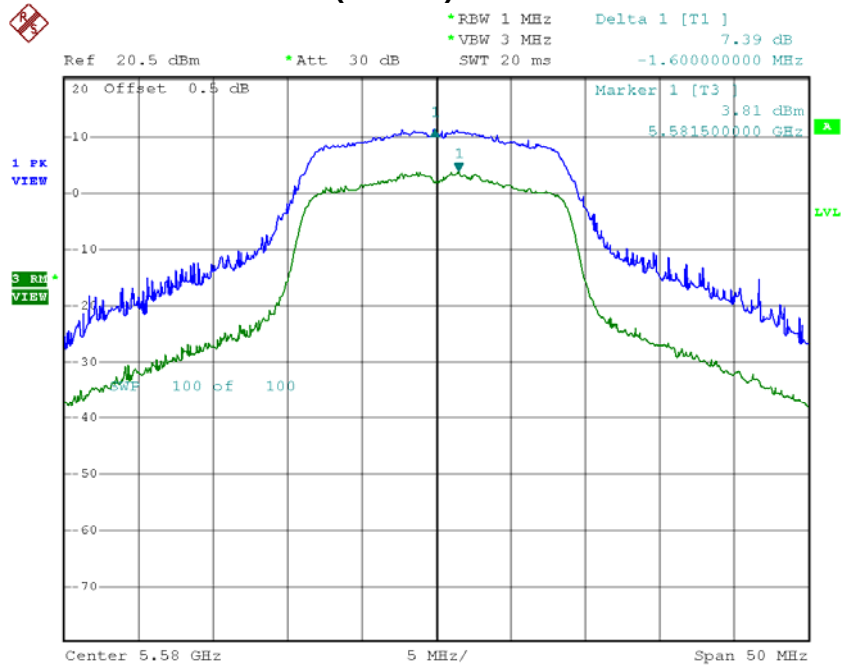

Date: 16.APR.2014 09:55:20

IEEE 802.11n (20 MHz)/5700 MHz/Peak Excursion

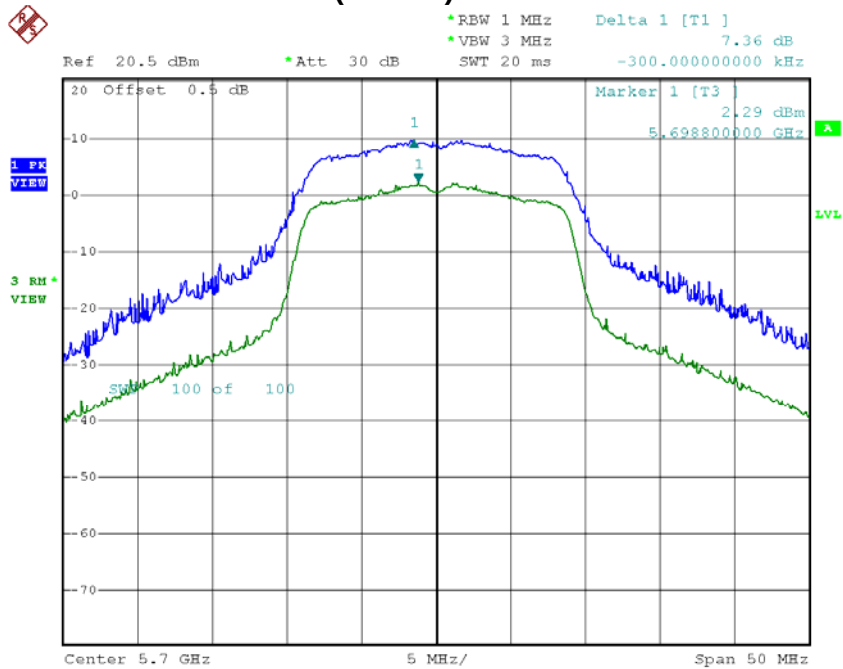

Date: 16.APR.2014 09:56:32



12 FREQUENCY STABILITY

12.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Frequency Stability	5150 - 5250	specified in the user's manual or ± 20 ppm (IEEE 802.11a specification)
	5250 - 5350	
	5470 – 5725	
	5725 - 5825	

12.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-30	100854	Sep. 08, 2014

NOTE: N/A: denotes no modelname, no serial No. or no calibration specified.

12.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

12.4 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- Extreme temperature rule is -30°C~50°C.

12.5 TEST SETUP LAYOUT



12.6 DEVIATION FROM TEST STANDARD

No deviation



12.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



12.8 TEST RESULTS

EUT	Mobile Computer	Model Name	9700
Temperature	25°C	Relative Humidity	62%
Test Voltage	DC 3.7V		
Test Mode	IEEE 802.11a/5200 MHz		

Voltage vs. Frequency Stability		
Voltage	Measurement Frequency (MHz)	
(V)	5320	-
4.255	5320.075000	
3.7	5320.080000	
3.145	5320.095000	
Max. Deviation (MHz)	0.095000	
Max. Deviation (ppm)	17.86	

Temperature vs. Frequency Stability		
Temperature	Measurement Frequency (MHz)	
(°C)	5320	-
-20	5320.020000	
-10	5320.024000	
0	5320.070000	
10	5320.075000	
20	5320.080000	
30	5320.080000	
40	5320.090000	
50	5320.095000	
Max. Deviation (MHz)	0.095000	
Max. Deviation (ppm)	17.86	



13 EUT TEST PHOTO

Conducted emission test photos



Radiated spurious emission test photos

