

Echelon Fitness Multimedia LLC

TEST REPORT

SCOPE OF WORK

FCC TESTING – ECH-STRENGTHPR

REPORT NUMBER

230724037SZN-001

ISSUE DATE

04 September 2024

[REVISED DATE]

[-----]

PAGES

25

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



Echelon Fitness Multimedia LLC

Application
For
Certification

FCC ID: 2AWD4-ECHL807T

STRENGTH PRO

Model: ECH-STRENGTHPR

Brand Name: echelon

2.4GHz Transceiver

Report No.: 230724037SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-23]

Prepared and Checked by:

Approved by:

Tenet Cao
Assistant Engineer

Johnny Wang
Project Engineer
Date: 04 September 2024

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:) Original Grant X Class II Change _____

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-23 Edition] provision.

Report prepared by:

Tenet Cao
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, ShenZhen,
P.R. China
Tel / Fax: 86-755-8614 0743/86-755-8601 6661

Table of Contents

1.	Summary of Test Result	4
2.	General Description	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants.....	5
2.3	Test Methodology.....	5
2.4	Test Facility	5
3.	System Test Configuration	6
3.1	Justification	6
3.2	EUT Exercising Software	6
3.3	Special Accessories	7
3.4	Equipment Modification.....	7
3.5	Measurement Uncertainty	7
3.6	Support Equipment List and Description.....	7
4.	Emission Results	8
4.1	Radiated Test Results.....	8
4.1.1	Field Strength Calculation.....	8
4.1.2	Radiated Emission Configuration Photograph	9
4.1.3	Radiated Emissions	9
4.1.4	Transmitter Spurious Emissions (Radiated).....	12
4.2	Conducted Emission Configuration Photograph	15
4.2.1	Conducted Emission	15
5.	Equipment Photographs	18
6.	Product Labelling	18
7.	Technical Specifications	18
8.	Instruction Manual	18
9.	Miscellaneous Information	19
9.1	Bandedge Plot.....	19
9.2	20dB bandwidth.....	22
9.3	Discussion of Pulse Desensitization	23
9.4	Calculation of Average Factor.....	23
9.5	Emissions Test Procedures	24
10.	Test Equipment List	25

1. Summary of Test Result

Applicant: Echelon Fitness Multimedia LLC

Applicant Address: 605 Chestnut Street Suite 700 Chattanooga, TN 37450 United States

Manufacturer: Echelon Fitness Multimedia LLC

Manufacturer Address: 605 Chestnut Street Suite 700 Chattanooga, TN 37450 United States

MODEL: ECH-STRENGTHPR

FCC ID: 2AWD4-ECHL807T

Test Specification	Reference	Results
Transmitter Radiated Emission	15.249 &15.209 &15.205	Pass
Conducted Emission	15.207	Pass
Bandedge	15.249 &15.209 &15.205	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Built-in rod Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2. General Description

2.1 Product Description

The Equipment Under Test (EUT) is a STRENGTH PRO with 2.4GWi-Fi function operating at 2412-2462MHz and 5GWi-Fi function operating at 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz and Bluetooth 5.0 (Dual Mode: BR/EDR+BLE) function operating at 2402-2480MHz. The EUT is powered by AC AC120V/60Hz. For more detailed features description, please refer to the user's manual.

Antenna Type: Built-in rod antenna

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

Antenna Gain: 1.42dBi Max

Bluetooth Version: 5.0 (Dual Mode)

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the STRENGTH PRO which has Bluetooth (BR/EDR) function.

For the Bluetooth (BLE) function was tested and demonstrated in report 230724037SZN-002.

For the 2.4GHz WIFI function was tested and demonstrated in report 230724037SZN-003.

For the 5GHz WIFI function was tested and demonstrated in report 230724037SZN-004.

For the other function was tested and demonstrated in FCC SDoC report 230724037SZN-006.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3. System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by AC120V/60Hz during the test, only the worst data was reported in this report.

All packets DH1, DH3 & DH5 mode in modulation type GFSK, $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.1m. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The EUT and transmitting antenna was centered on the turntable.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

All modes (BT, BT+2.4G WIFI, BT+5G WIFI) are tested only the worst data was reported in this report.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Testing Software: BK32xx RF Test, Version: V1.8.2

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Echelon Fitness Multimedia LLC will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

Description	Manufacturer	Remark
Portable computer (Provided by Intertek)	DELL	Latitude 3480

4. Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
288.000000 MHz

Judgement: Passed by 1.6 dB

TEST PERSONNEL:

Sign on file

Tenet Cao, Project Engineer
Typed/Printed Name

27 February 2024
Date


Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR

Date of Test: 27 February 2024

Worst Case Operating Mode: Simultaneous Transmission

ANT Polarity: Horizontal

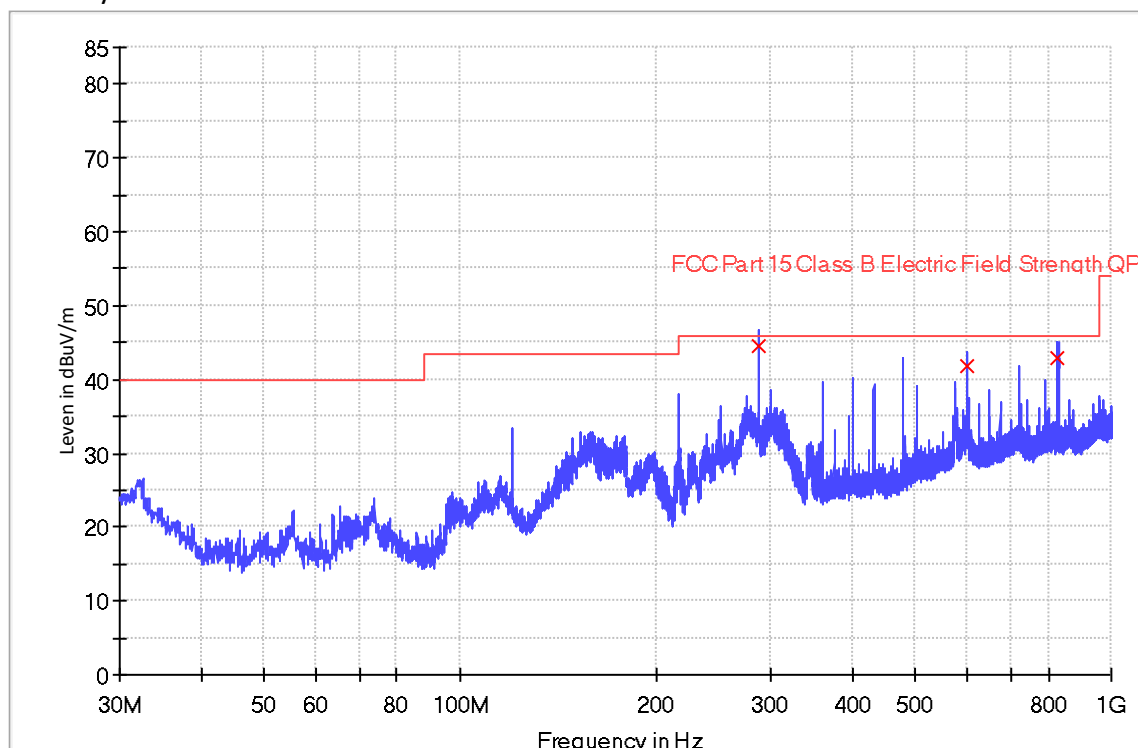

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
288.000000	44.4	1000.0	120.000	H	19.9	1.6	46.0
600.004333	41.7	1000.0	120.000	H	29.1	4.3	46.0
826.143667	42.8	1000.0	120.000	H	31.9	3.2	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Limit Line (dBuV/m) – Level (dBuV/m)


Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR

Date of Test: 27 February 2024

Worst Case Operating Mode: Simultaneous Transmission

ANT Polarity: Vertical

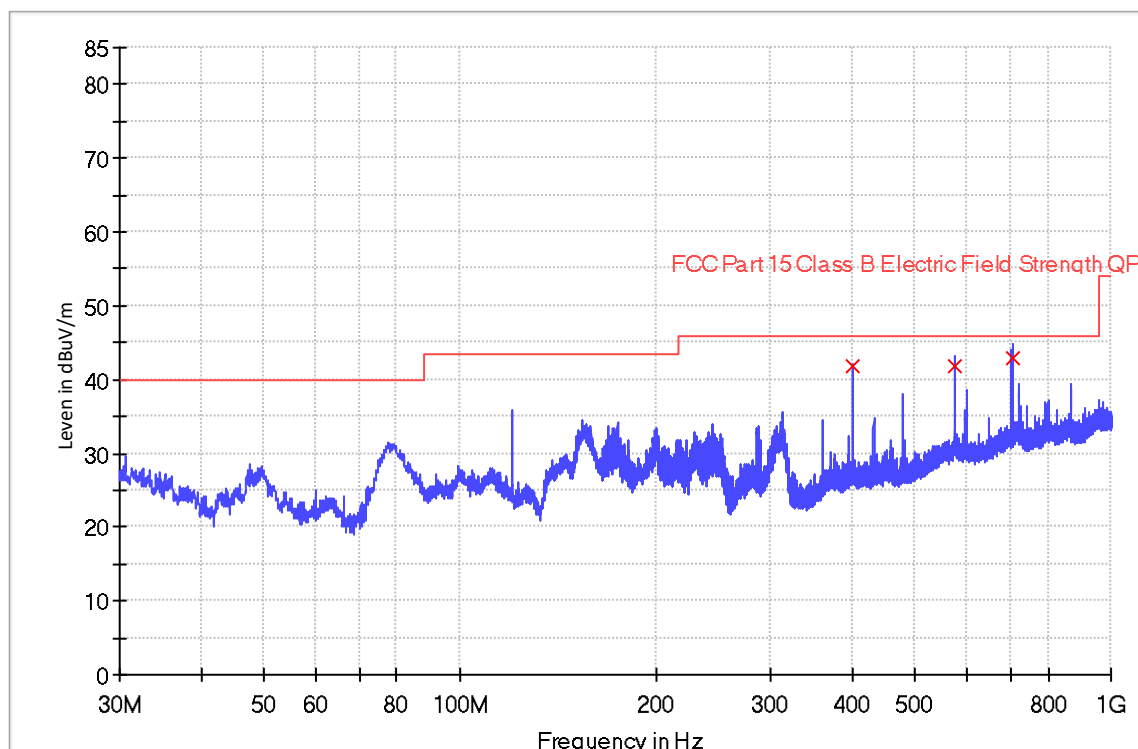

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
399.990333	41.9	1000.0	120.000	V	25.4	4.1	46.0
575.980667	41.7	1000.0	120.000	V	29.0	4.3	46.0
704.926000	42.8	1000.0	120.000	V	30.9	3.2	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Limit Line(dBμV/m) – Level (dBμV/m)

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
2402.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 11.5 dB

TEST PERSONNEL:

Sign on file

Tenet Cao, Project Engineer

Typed/Printed Name

28 August 2023

Date

Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR

Date of Test: 28 August 2023

Worst Case Operating Mode: Transmitting

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2402.000	111.1	36.7	28.1	102.5	114.0	-11.5
Vertical	4804.000	62.7	36.7	35.5	61.5	74.0	-12.5
Vertical	7206.000	49.1	36.1	36.5	49.5	74.0	-24.5
Vertical	9608.000	48.0	36.3	38.0	49.7	74.0	-24.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2402.000	111.1	36.7	28.1	22.5	80.0	94.0	-14.0
Vertical	4804.000	62.7	36.7	35.5	22.5	39.0	54.0	-15.0
Vertical	7206.000	49.1	36.1	36.5	22.5	27.0	54.0	-27.0
Vertical	9608.000	48.0	36.3	38.0	22.5	27.2	54.0	-26.8

(2441MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2441.000	108.6	36.7	28.1	100.0	114.0	-14.0
Vertical	4882.000	61.5	36.7	35.5	60.3	74.0	-13.7
Vertical	7323.000	48.3	36.1	37.2	49.4	74.0	-24.6
Vertical	9764.000	48.7	36.2	37.0	49.5	74.0	-24.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2441.000	108.6	36.7	28.1	22.5	77.5	94.0	-16.5
Vertical	4882.000	61.5	36.7	35.5	22.5	37.8	54.0	-16.2
Vertical	7323.000	48.3	36.1	37.2	22.5	26.9	54.0	-27.1
Vertical	9764.000	48.7	36.2	37.0	22.5	27.0	54.0	-27.0

(2480MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2480.000	109.3	36.7	28.1	100.7	114.0	-13.3
Vertical	4960.000	49.5	36.7	35.5	48.3	74.0	-25.7
Vertical	7440.000	50.3	36.1	37.2	51.4	74.0	-22.6
Vertical	9920.000	47.7	36.3	38.9	50.3	74.0	-23.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2480.000	109.3	36.7	28.1	22.5	78.2	94.0	-15.8
Vertical	4960.000	49.5	36.7	35.5	22.5	25.8	54.0	-28.2
Vertical	7440.000	50.3	36.1	37.2	22.5	28.9	54.0	-25.1
Vertical	9920.000	47.7	36.3	38.9	22.5	27.8	54.0	-26.2

Notes:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Tenet Cao

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case conducted emission configuration photographs are saved with filename: conducted photos.pdf.

4.2.1 Conducted Emission

Worst Case Conducted Configuration

at

3.478000MHz

Judgement: Passed by 10.5dB margin

TEST PERSONNEL:

Sign on file

Tenet Cao, Project Engineer

Typed/Printed Name

27 February 2024

Date

Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR


Date of Test: 27 February 2024

Worst Case Operating Mode: Simultaneous transmission

Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

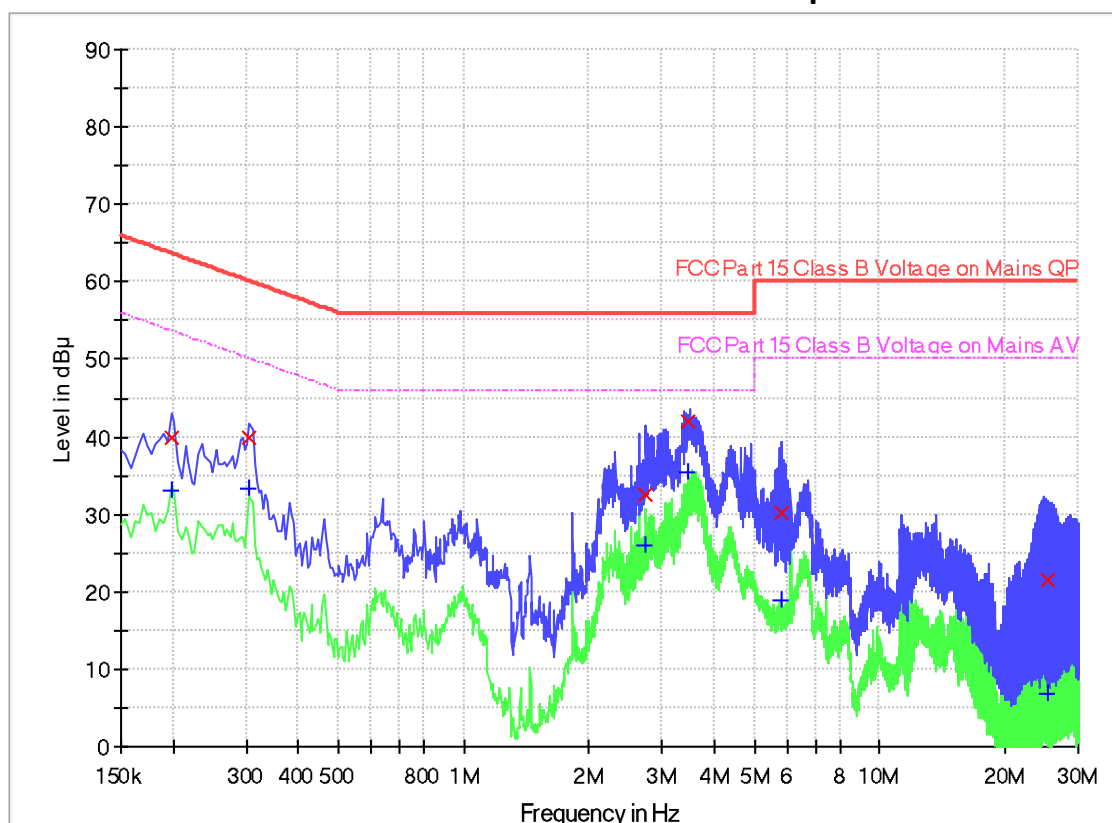

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.198000	40.0	9.000	L1	9.6	23.7	63.7
0.306000	39.9	9.000	L1	9.7	20.2	60.1
2.742000	32.6	9.000	L1	9.7	23.4	56.0
3.478000	42.0	9.000	L1	9.8	14.0	56.0
5.810000	30.1	9.000	L1	9.8	29.9	60.0
25.226000	21.6	9.000	L1	10.9	38.4	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.198000	33.1	9.000	L1	9.6	20.6	53.7
0.306000	33.2	9.000	L1	9.7	16.9	50.1
2.742000	26.0	9.000	L1	9.7	20.0	46.0
3.478000	35.5	9.000	L1	9.8	10.5	46.0
5.810000	19.0	9.000	L1	9.8	31.0	50.0
25.226000	6.7	9.000	L1	10.9	43.3	50.0

Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR


Date of Test: 27 February 2024

Worst Case Operating Mode: Simultaneous transmission

Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

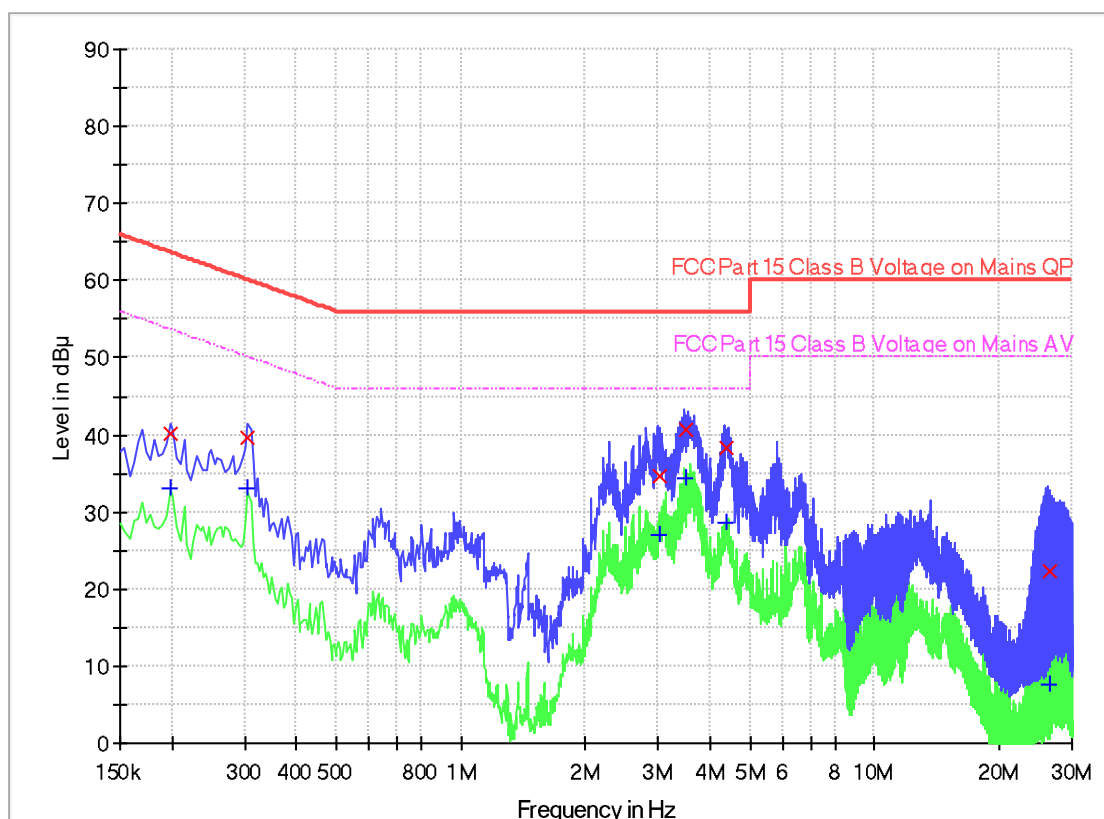

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.198000	40.1	9.000	N	9.6	23.6	63.7
0.306000	39.7	9.000	N	9.6	20.4	60.1
3.026000	34.6	9.000	N	9.7	21.4	56.0
3.510000	40.7	9.000	N	9.7	15.3	56.0
4.366000	38.2	9.000	N	9.8	17.8	56.0
26.462000	22.3	9.000	N	10.9	37.7	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.198000	33.2	9.000	N	9.6	20.5	53.7
0.306000	33.0	9.000	N	9.6	17.1	50.1
3.026000	27.1	9.000	N	9.7	18.9	46.0
3.510000	34.4	9.000	N	9.7	11.6	46.0
4.366000	28.5	9.000	N	9.8	17.5	46.0
26.462000	7.7	9.000	N	10.9	42.3	50.0

5. Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6. Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7. Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8. Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9. Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Bandedge Plot

The test plots are attached as below. For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bw.pdf. From the plot, the field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges are attenuated at least 50dB below the level of the unmodulated carrier. It fulfil the requirement of 15.249(d).

From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lowest frequency channel (2402MHz):

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 102.50 \text{ dB}\mu\text{v/m} - 48.83 \text{ dB} \\ &= 53.67 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 80.00 \text{ dB}\mu\text{v/m} - 48.83 \text{ dB} \\ &= 31.17 \text{ dB}\mu\text{v/m} \end{aligned}$$

(ii) Highest frequency channel (2480MHz)

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 100.70 \text{ dB}\mu\text{v/m} - 48.63 \text{ dB} \\ &= 52.07 \text{ dB}\mu\text{v/m} \end{aligned}$$


Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 78.20 \text{ dB}\mu\text{v/m} - 48.63 \text{ dB} \\ &= 29.57 \text{ dB}\mu\text{v/m} \end{aligned}$$


The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

Hopping function off


Lowest frequency Channel

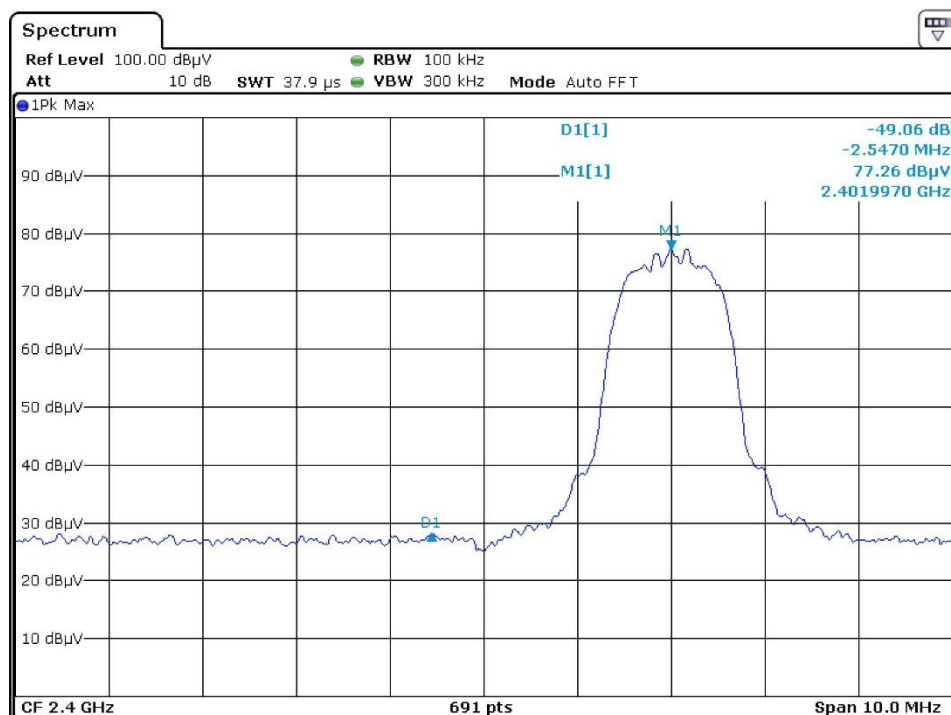


Highest frequency Channel

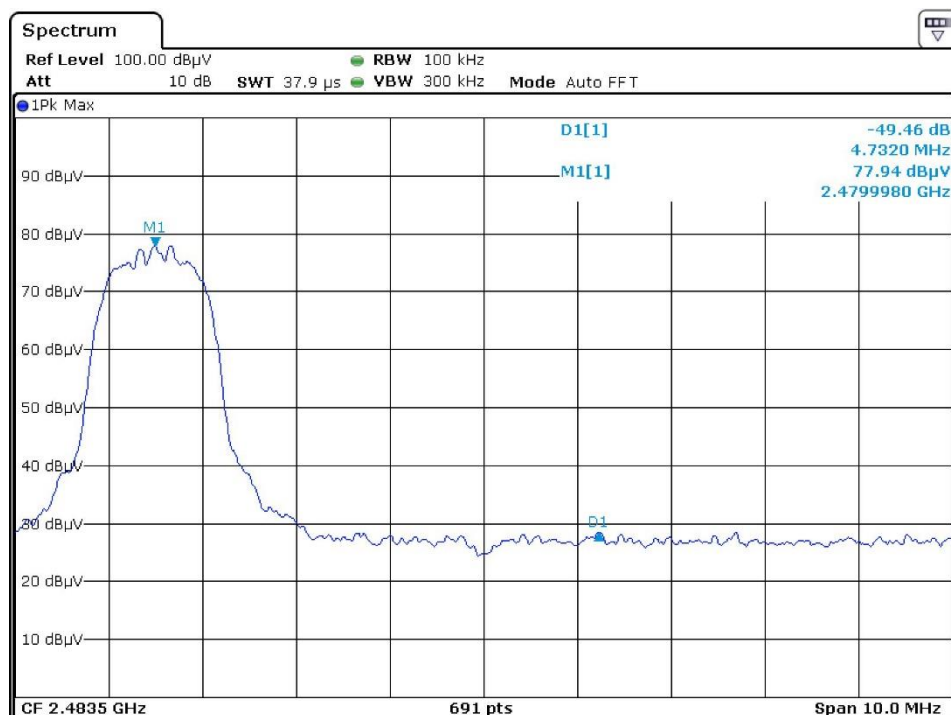

Hopping function on Lowest frequency Channel


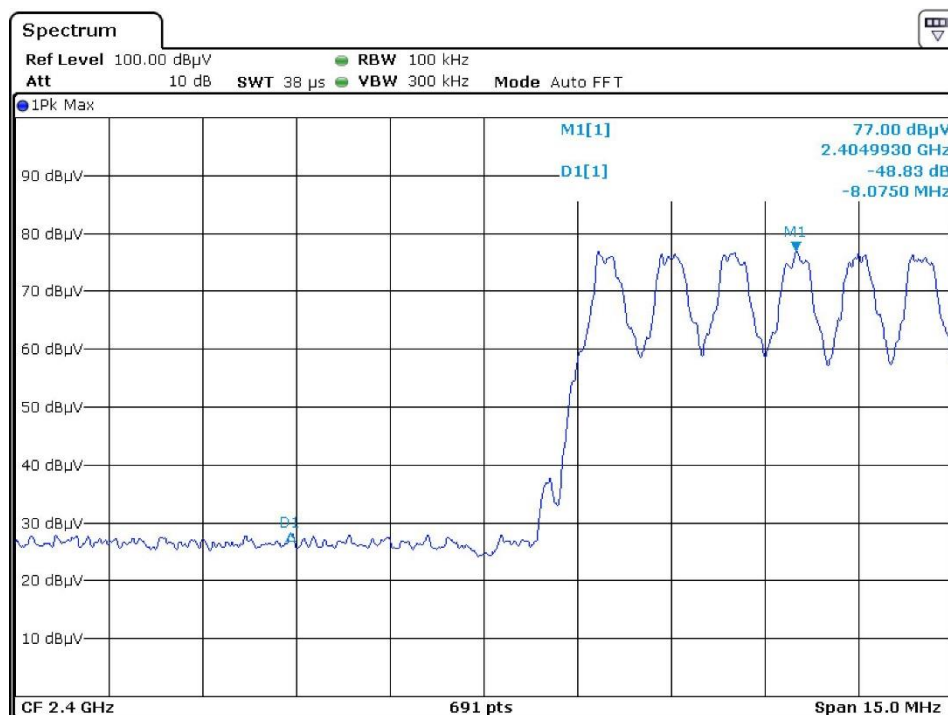


Highest frequency Channel

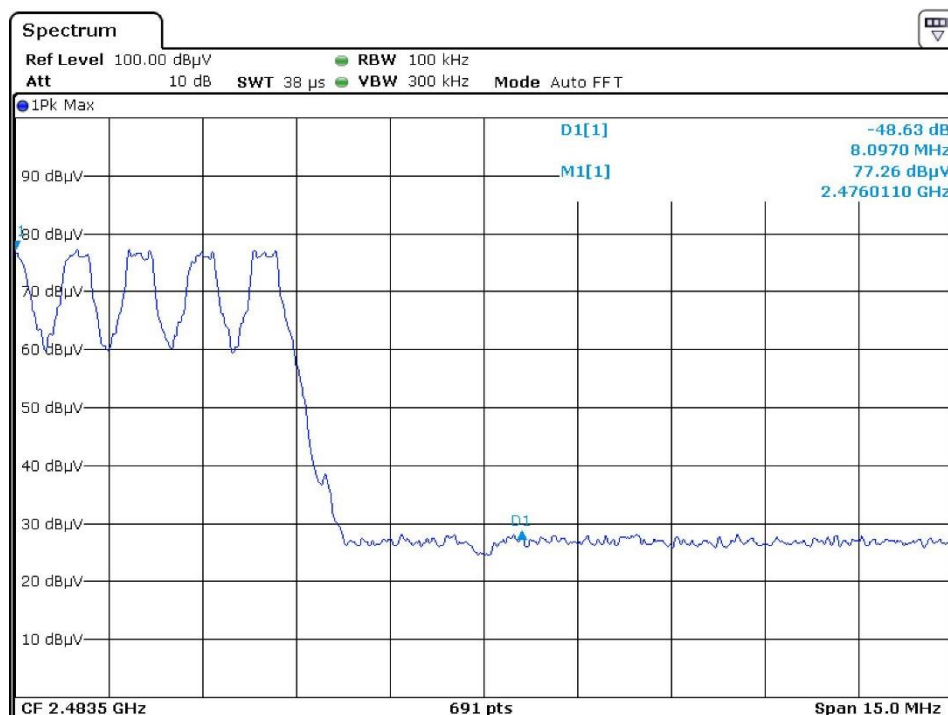

9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

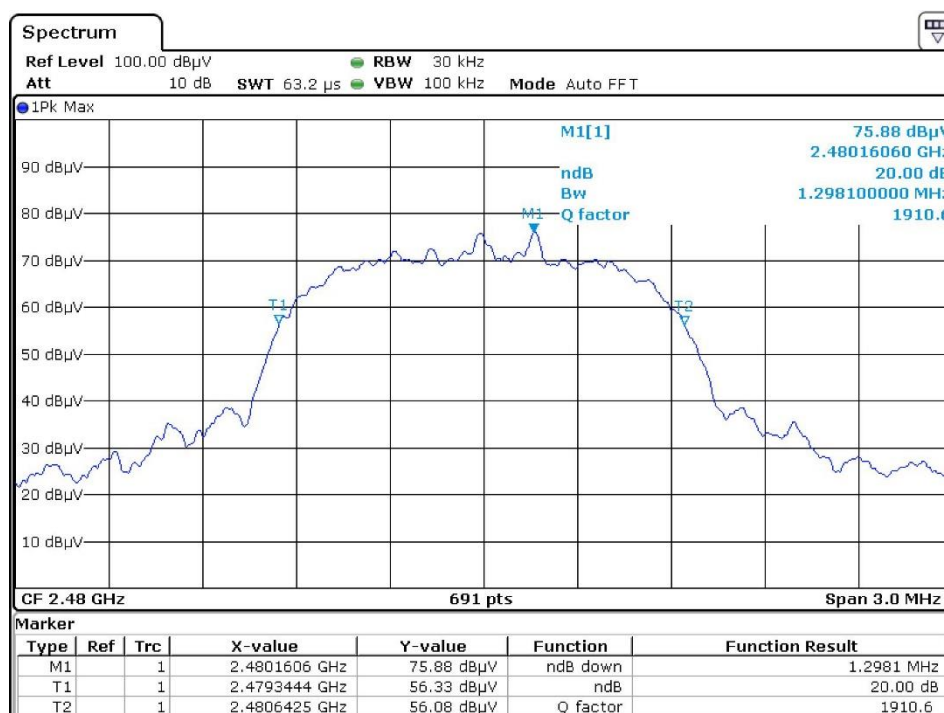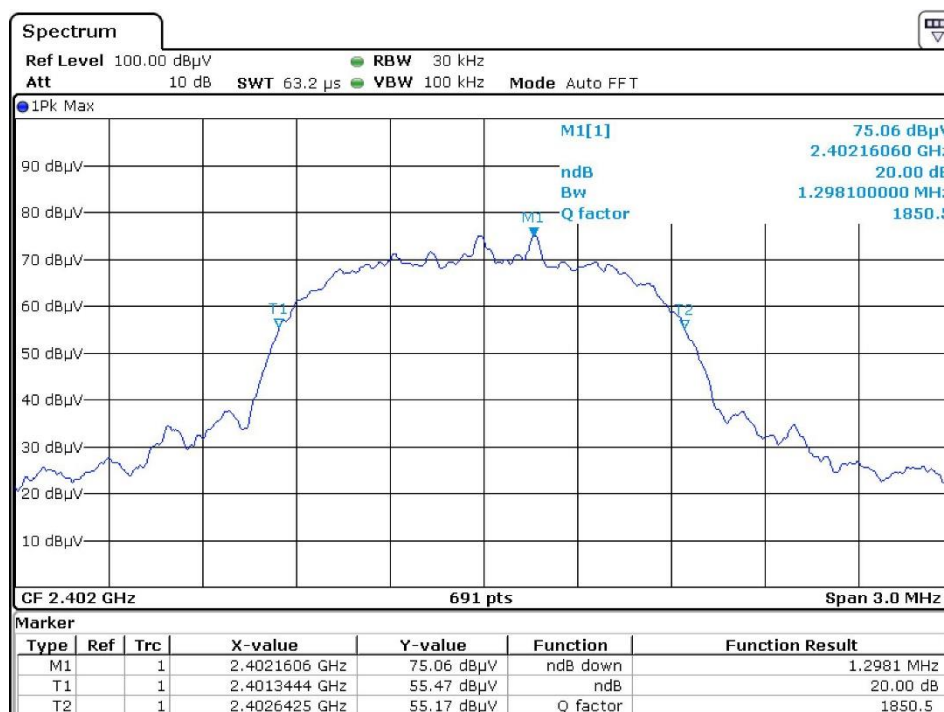

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 625µs for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

9.4 Calculation of Average Factor

Based on the Bluetooth Specification Version 5.0 (EDR mode) and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop = $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$

Time to cycle through all channels = $7.5 \times 20 \text{ channels} = 150 \text{ ms}$

Number of times transmitter hits on one channel = $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$

Worst case dwell time = 7.5 ms

Duty cycle connection factor = $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10. Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	2022-12-19 2023-12-13	2023-12-19 2024-12-13
SZ062-10	RF Cable	Bedeia	RG 58	--	2023-05-01 2023-11-01	2023-11-01 2024-05-01
SZ056-08	Signal Analyzer	R&S	FSV 40	101430	2022-12-19 2023-12-13	2023-12-19 2024-12-13
SZ185-03	EMI Receiver	R&S	ESR7	101975	2023-04-27	2024-04-27
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2024-05-18
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	2021-08-04	2024-08-04
SZ061-09	Double-Ridged Waveguide Horn Antenna	ETS	3115	00092347	2022-10-14	2025-10-14
SZ061-15	Double-Ridged Waveguide Horn Antenna	ETS	3116C-PA	00224718	2021-07-06	2024-07-06
SZ181-08	Microwave System Amplifier	Agilent	83017A	MY57280108	2023-07-27	2024-07-27
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	CT001880-Q1391	2021-05-25	2024-05-25
SZ062-23	RF Cable	RADIAL	SF104PE	MY4262/4PE	2022-10-17 2023-09-26	2023-10-17 2024-09-26
SZ062-35	RF Cable	Rebes	A50-3.5M3.5M-8M	19100879	2022-11-17 2023-11-14	2023-11-17 2024-11-14
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	015	2023-04-27	2024-04-27
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2023-07-11	2024-07-11
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	2022-10-24 2023-10-18	2023-10-24 2024-10-18
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	2023-04-27	2024-04-27
SZ188-03	Shielding Room	ETS	RFD-100	4100	2022-12-20	2025-12-20

***** End of Report*****