

FCC Test Report

Report No.: AGC02294220803FE10

FCC ID	:	2AJGM-UV9G
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	GMRS Two way radio
BRAND NAME	:	BAOFENG, POFUNG
MODEL NAME	:	UV-9G, GMRS-9R, GM-56, GM-57WP, P52UV
APPLICANT	:	PO FUNG ELECTRONIC (HK) INTERNATONAL GROUP COMPANY LIMITED
DATE OF ISSUE	:	Sep. 21, 2022
STANDARD(S)	:	FCC Part 95 Rules
REPORT VERSION	:	V 1.0







REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 21, 2022	Valid	Initial Release



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	7
2.3 RELATED SUBMITTAL(S) / GRANT (S)	8
2.4 TEST METHODOLOGY	8
2.5 CALCULATION OF EMISSION INDICATORS	8
2.6 SPECIAL ACCESSORIES	8
2.7 EQUIPMENT MODIFICATIONS	8
2.8 ANTENNA REQUIREMENT	9
3. TEST ENVIRONMENT	10
3.1 ADDRESS OF THE TEST LABORATORY	
3.2 TEST FACILITY	
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	11
3.5 LIST OF EQUIPMENTS USED	
4. SYSTEM TEST CONFIGURATION	13
4.1 EUT CONFIGURATION	
4.2 EUT EXERCISE	
4.3 CONFIGURATION OF TESTED SYSTEM	
4.4 EQUIPMENT USED IN TESTED SYSTEM	
4.5 SUMMARY OF TEST RESULTS	14
5. DESCRIPTION OF TEST MODES	
6. FREQUENCY STABILITY	
6.1 PROVISIONS APPLICABLE	
6.2 MEASUREMENT PROCEDURE	
6.3 MEASUREMENT SETUP	
6.4 MEASUREMENT RESULTS	
7. EMISSION BANDWIDTH	
7.1 PROVISIONS APPLICABLE	
7.2 MEASUREMENT PROCEDURE	
7.3 MEASUREMENT SETUP	
7.4 MEASUREMENT RESULTS	
8. SPURIOUS RATIATED EMISSION	
8.1 PROVISIONS APPLICABLE	



	8.2 MEASUREMENT PROCEDURE	22
	8.3 MEASUREMENT SETUP	23
	8.4 MEASUREMENT RESULTS	25
	8.5 EMISSION MASK PLOT	30
9.M	ODULATION CHARACTERISTICS	33
	9.1 PROVISIONS APPLICABLE	33
	9.2 MEASUREMENT METHOD	33
	9.3 MEASUREMENT SETUP	33
	9.4 MEASUREMENT RESULTS	34
10.	MAXIMUMN TRANSMITTER POWER	38
	10.1 PROVISIONS APPLICABLE	38
	10.2 MEASUREMENT METHOD	38
	10.3 MEASUREMENT SETUP	39
	10.4 MEASUREMENT RESULTS	41
11.	SPURIOUS EMISSION ON ANTENNA PORT	43
	11.1 PROVISIONS APPLICABLE	43
	11.2 MEASUREMENT METHOD	43
	11.3 MEASUREMENT SETUP	43
	11.4 MEASUREMENT RESULTS	44
12.	AUDIO LOW PASS FILTER RESPONSE	47
	12.1 PROVISIONS APPLICABLE	47
	12.2 MEASUREMENT METHOD	47
	12.3 MEASUREMENT SETUP	47
	12.4 MEASURET RESULTS	48
AP	PENDIX I: PHOTOGRAPHS OF TEST SETUP	50
AP	PENDIX II: PHOTOGRAPHS OF TEST EUT	50



1. GENERAL INFORMATION

Applicant	PO FUNG ELECTRONIC (HK) INTERNATONAL GROUP COMPANY LIMITED		
Address	Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong		
Address	Kong		
Manufacturer	PO FUNG ELECTRONIC (HK) INTERNATONAL GROUP COMPANY LIMITED		
Address	Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong		
Audie35	Kong		
Factory	PO FUNG ELECTRONIC (HK) INTERNATONAL GROUP COMPANY LIMITED		
Address	Room 1508, 15/F, Office Tower II, Grand Plaza, 625 Nathan Road, Kowloon, Hong		
Address	Kong		
Product Designation	GMRS Two way radio		
Brand Name	BAOFENG, POFUNG		
Test Model	UV-9G		
Series Model(s)	GMRS-9R, GM-56, GM-57WP, P52UV		
	The same electromagnetic emissions and electromagnetic compatibility		
Difference Description	characteristics. UV-9G, GMRS-9R, GM-56, GM-57WP, P52UV are just different		
	model name &Brand name & appearance outside speaker, the rest are the same.		
Deviation from Standard No any deviation from the test method.			
Date of Receipt	Aug. 09, 2022		
Date of Test	Aug. 09, 2022~Sep. 21, 2022		
Test Result	Pass		

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Bibo shang Prepared By **Bibo Zhang** Sep. 21, 2022 (Project Engineer) alvin Lin u er) Reviewed By Calvin Liu Sep. 21, 2022 (Reviewer) Approved By Max Zhang Sep. 21, 2022 Authorized Officer

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V02		
Software Version	V1.0		
Power Supply	DC 7.4V 1800mAh by battery		
Adapter Information	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 10V 1A		
Communication Type	Voice / Tone only		
Operation Frequency Range	462.5500MHz-462.7250MHz (GMRS 462 MHz main channels) 462.5625MHz-462.7125MHz (GMRS 462 MHz interstitial channels) 467.5500MHz-467.7250MHz (GMRS 467 MHz main channels) 467.5625MHz-467.7125MHz (GMRS 467 MHz interstitial channels)		
Modulation Type	FM		
Channel Separation	12.5 KHz/25 KHz		
Emission Bandwidth	10.19KHz(4W-12.5KHz), 10.50 kHz(0.5W-12.5KHz) 15.61 KHz(4W-25KHz)		
Emission Designator	11K0F3E/16K0F3E		
Number of Channels:	30 Channels		
Rated Output Power 0.5W/4W (It was fixed by the manufacturer, any individual can't arbitraril)			
	GMRS: 35.28dBm (4W-12.5KHz) GMRS: 26.94dBm (0.5W-12.5KHz)		
Maximum Transmitter Power	GMRS: 35.87dBm (4W-25KHz)		
Antenna Designation	Detachable Antenna		
Antenna Gain	0.8dBi		
Frequency Tolerance	1.093ppm		



2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Channel. No	CH. Freq	Rated Power	CH. No	CH. Freq	Rated Power
1	462.5625		15	462.5500	
2	462.5875		16	462.5750	
3	462.6125		17	462.6000	
4	462.6375	4W	18	462.6250	4W
5	462.6625		19	462.6500	400
6	462.6875		20	462.6750	
7	462.7125		21	462.7000	
8	467.5625		22	462.7250	
9	467.5875		23	467.5500	
10	467.6125		24	467.5750	
11	467.6375	0.5W	25	467.6000	
12	467.6625		26	467.6250	4W
13	467.6875	Ē	27	467.6500	400
14	467.7125		28	467.6750	
	-		29	467.7000	
			30	467.7250	



2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AJGM-UV9G**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	Personal Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01

2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz = 11K0

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation. $BW = 2(M+D) = 2^*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$ F3E portion of the designator represents an FM voice transmission. Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



2.8 ANTENNA REQUIREMENT

Excerpt from §95.1787 of the FCC Rules/Regulations:

The antenna of each GMRS transmitter type must meet the following requirements. (1) The antenna must be a non-removable integral part of the GMRS transmitter type.

- This GMRS device has a fixed antenna port
- This GMRS equipment is a mobile station or a fixed station, which can be connected to an external antenna

Conclusion: The unit complies with the requirement of §95.1787.



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS		
Temperature range (°C)	15 - 35	-30 - 50		
Relative humidty range	20 % - 75 %	20 % - 75 %		
Pressure range (kPa)	86 - 106	86 - 106		
Power supply	DC 7.4V	LV 6.29V /HV 8.51V		
Note: The Extreme Temperature and Extreme Valence deployed by the manufacturer				

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 18, 2021	Aug. 17, 2022
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 16, 2022	Aug. 15, 2023
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 07, 2021	Oct. 06, 2022
preamplifier	ChengYi	EMC184045SE	980508	Sep. 21, 2021	Sep. 20, 2022
preamplifier	ChengYi	EMC184045SE	980508	Sep. 19, 2022	Sep. 18, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 05, 2022	Jun. 04, 2023
HORN ANTENNA	EM	EM-AH-10180	/	Feb. 24, 2022	Feb. 23, 2023
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Mar. 04, 2022	Mar. 03, 2023
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 05, 2022	Jun. 04, 2023
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Apr. 28, 2021	Apr. 27, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Modulation Domain Analyzer	HP	53310A	3121A02467	Jun. 08, 2022	Jun. 07, 2023
Small environmental tester	ESPEC	SH-242		Aug. 03, 2022	Aug. 02, 2024
RF Communication Test Set	HP	8920B	US35010161	Aug. 03, 2022	Aug. 02, 2023
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 24, 2021	Oct. 23, 2022
RF Cable	R&S	1#		Each time	N/A
RF Cable	R&S	2#		Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 07, 2022	May 06, 2023



4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

Test Accessories Come From The Laboratory

☑ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	GMRS Two way radio	UV-9G	FCC ID: 2AJGM-UV9G	EUT
2	Battery	BL-9	DC 7.4V 1800mAh	Accessories
3	Back clip	N/A	N/A	Accessories
4	Adapter	BF-1001000	Input: 100-240V, 50/60Hz, 0.5A Output: DC 10V 1A	Accessories
5	Charger	CHR-9700	Input: DC 10V 1A Output: DC 8.4V 0.4A	Accessories



4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test R	
1	FCC 47 CFR PART 95	Antenna Equipment	Pass
2	§ 95.1767& 2.1046(a)	Maximum Transmitter Power	Pass
3	§95.1755& 2.1047(a) (b)	Modulation Limit	Pass
4	§95.1755& 2.1047(a)	Audio Frequency Response	Pass
4	§95.1755(e)	Audio Low Pass Filter Response	Pass
5	§95.1779& 2.1049	Emission Bandwidth Pass	
6	§95.1779& 2.1049	Emission Mask Pass	
7	§95.1765& 2.1055(a) (1)	Frequency Stability	Pass
9	§95.1779& 2.1051	Spurious Emission on Antenna Port	Pass
10	§95.1779& 2.1053	Spurious Ratiated Emission	Pass

2) The antenna of the EUT is detachable.



5. DESCRIPTION OF TEST MODES

The EUT (**GMRS Two way radio**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	GMRS TX CHANNEL 4	12.5 kHz/25 kHz
2	GMRS TX CHANNEL 11	12.5 kHz
3	GMRS TX CHANNEL 19	12.5 kHz/25 kHz
4	GMRS TX CHANNEL 27	12.5 kHz/25 kHz

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



6. FREQUENCY STABILITY

6.1 PROVISIONS APPLICABLE

Standard Applicable [Part 95.1765] The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

GMRS: The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm

The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm


6.2 MEASUREMENT PROCEDURE

6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50 °C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10[°]C decreased per stage until the lowest temperature -30[°]C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15[°]C to 25[°]C. Otherwise, an environment chamber set for a temperature of 20[°]C shall be used. The EUT shall be powered by DC 7.4V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

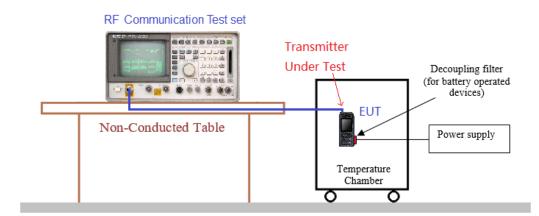

6.3 MEASUREMENT SETUP



6.4 MEASUREMENT RESULTS

	12.5 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS						
Test c	Test conditions Frequency error (ppm)			Limit			
Voltage	Temp		Test Frequ	est Frequency (MHz)			Result
(V)	(°C)	462.6375	462.6500	467.6500	467.6375	(ppm)	
	-30	0.915	0.653	0.519	0.503		
	-20	0.814	0.658	0.651	0.872		
	-10	0.952	0.914	0.688	0.830		
	0	0.826	0.998	1.016	0.336		
7.40	10	0.690	0.604	0.743	0.648		
	20	0.878	0.941	0.627	0.833	2.5	Pass
	30	0.947	0.674	0.788	0.908		
	40	0.714	1.032	0.727	0.367		
	50	0.517	1.093	0.591	0.901		
8.51	20	0.981	0.550	0.889	0.655		
6.29	20	0.946	0.824	0.883	0.356		

25 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS						
Test conditions Frequency error (ppm)						
Voltage	Temp		Test Frequency (M	Hz)	Limit (ppm)	Result
(V)	(°C)	462.6375	462.6500	467.6500		
	-30	0.717	0.852	0.726		
	-20	1.018	0.634	0.844]	
	-10	0.934	0.648	1.079	1	
	0	0.540	0.896	0.529]	
7.40	10	0.662	0.638	0.555]	
	20	0.721	0.962	0.514	5	Pass
	30	0.585	0.926	0.865]	
	40	0.920	0.976	0.889	1	
	50	0.767	1.082	0.883	1	
8.51	20	0.739	1.076	0.587]	
6.29	20	0.632	0.528	0.772		



7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE

FCC Part 95.1773: GMRS: Main channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.

Interstitial channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels.

Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

7.2 MEASUREMENT PROCEDURE

1. The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.


Rated system deviation is 2.5 kHz for 12.5kHz or 25kHz channel spacing).

2.Spectrum set as follow:

Centre frequency = fundamental frequency, span=50kHz for 12.5kHz or 25kHz channel spacing, RBW=100Hz or 300Hz, VBW=300Hz or 1KHz, Sweep = auto,

Detector function = peak, Trace = max hold

- 3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 4. Measure and record the results in the test report.

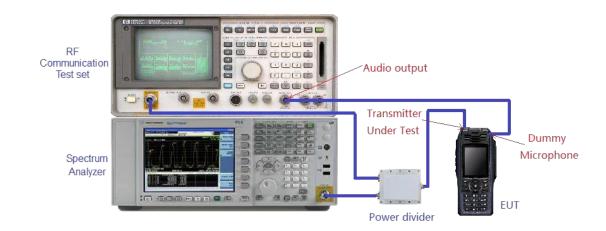

7.3 MEASUREMENT SETUP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




7.4 MEASUREMENT RESULTS

Emission Bandwidth Measurement Result-GMRS					
Operating Frequency		12.5 kHz Channel Sepa	paration		
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result	
462.6375 MHz	9.985 kHz	10.19 kHz	20.0 kHz	Pass	
462.6500 MHz	9.986 kHz	10.18 kHz	20.0 kHz	Pass	
467.6500 MHz	9.985 kHz	10.19 kHz	20.0 kHz	Pass	
467.6375 MHz	9.957 kHz	10.50 kHz	12.5 kHz	Pass	


Emission Bandwidth Measurement Result-GMRS					
Operating Frequency	25 kHz Channel Separation				
Operating Frequency	Occupied Bandwidth Emission Bandwidth Limits Result				
462.6375 MHz	14.994 kHz	15.60 kHz	20.0 kHz	Pass	
462.6500 MHz	14.997 kHz	15.61 kHz	20.0 kHz	Pass	
467.6500 MHz	15.011 kHz	15.61 kHz	20.0 kHz	Pass	



Test plot as follows:

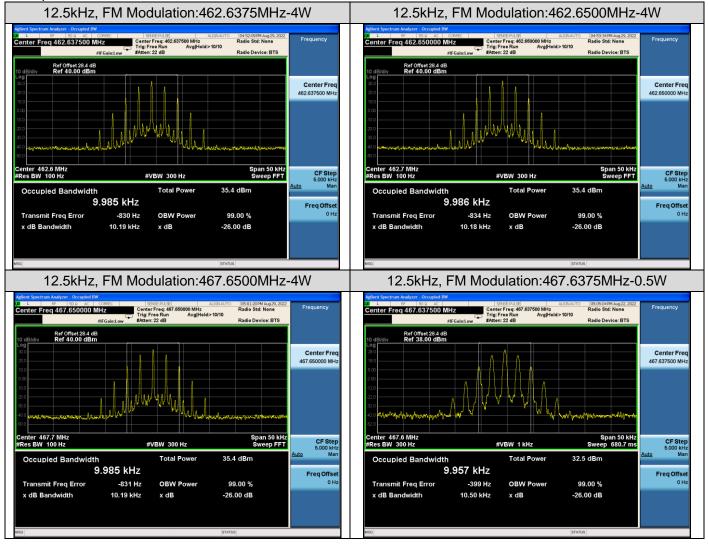



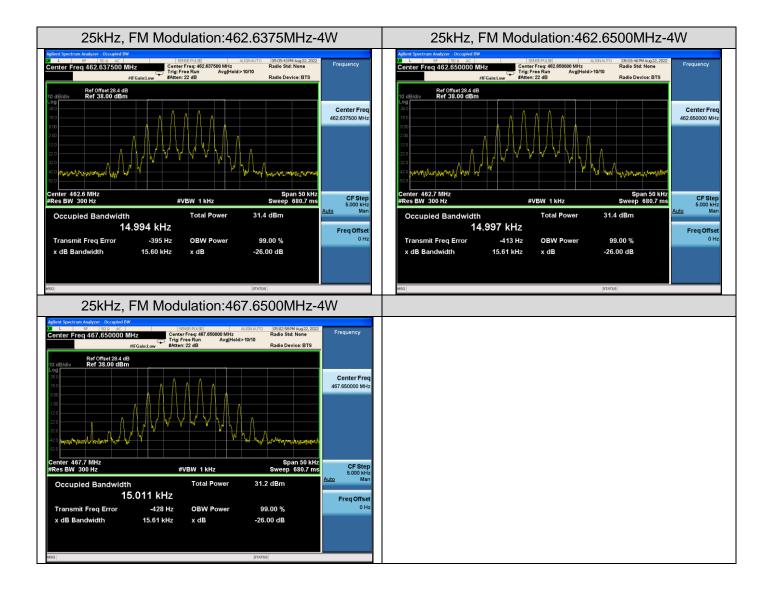



8. SPURIOUS RATIATED EMISSION

8.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.1779] According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least 43+10 log (Transmit Power) dB

8.2 MEASUREMENT PROCEDURE

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.

a) Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

- 1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- 2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
- 1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than100% up to and including 250% of the authorized bandwidth.
- 3) 83 log (fd ÷ 5) dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz up to and including 10 kHz.
- 4) 116 log (fd ÷ 6.1) dB or 50 + 10 log (P) dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
- 5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
- 6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
- 43 + 10 log (P) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.




DETAILED OVERVIEW OF THE TEST METHOD IS AS FOLLOWS:


- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6) The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel

8.3 MEASUREMENT SETUP




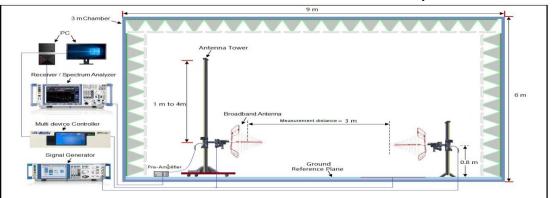


Radiated Emissions 30MHz to 1GHz Test setup

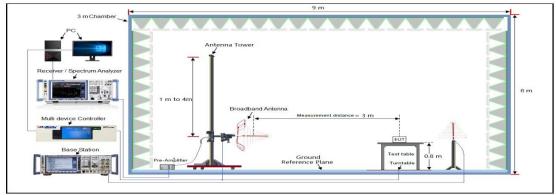

Radiated Emissions Above 1GHz Test setup

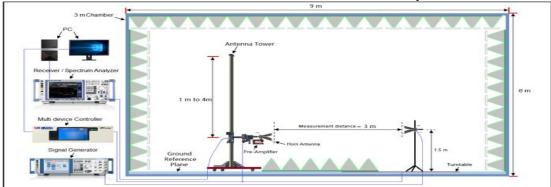

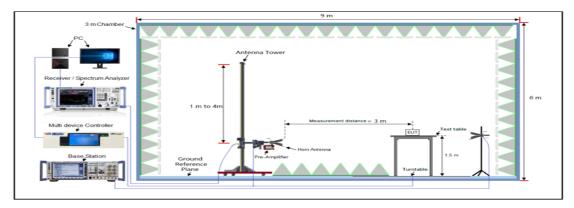

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



8.4 MEASUREMENT RESULTS


Preliminary calculation	Final Result
At least 43+10 log (P) =43+10log (4) =49.02 (dB)	Limit=P- Preliminary calculation=36.02-49.02=-13 dBm
At least 43+10 log (P) =43+10log (0.5) =39.99 (dB)	Limit=P- Preliminary calculation=26.99-39.99=-13 dBm

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)


2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)

3. Margin=Limit-Level




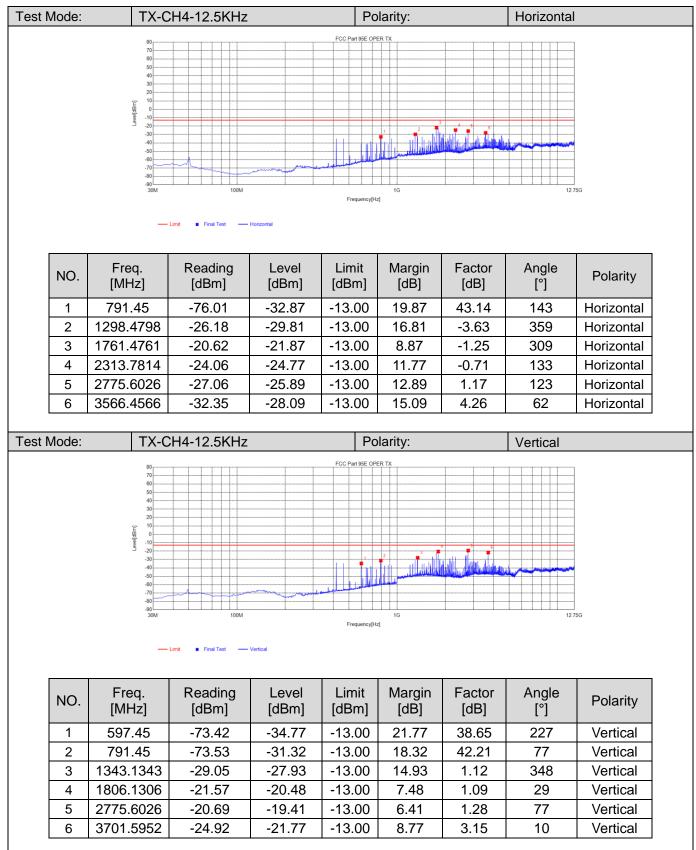




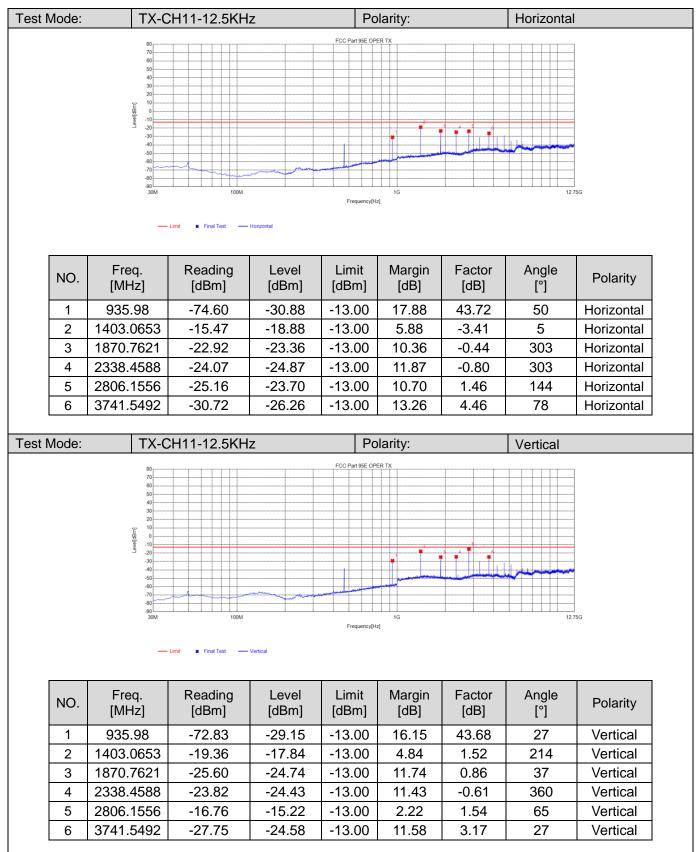



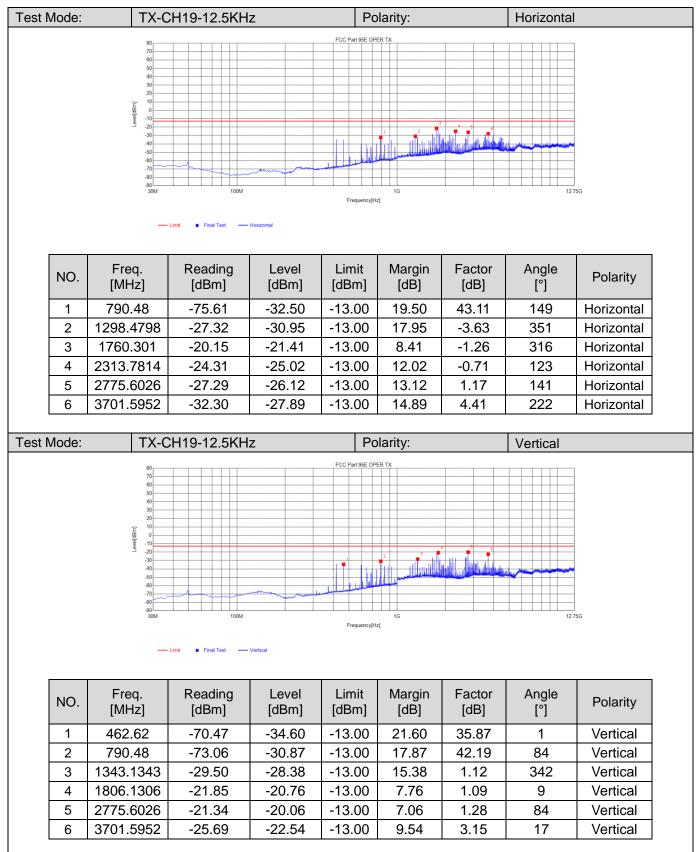



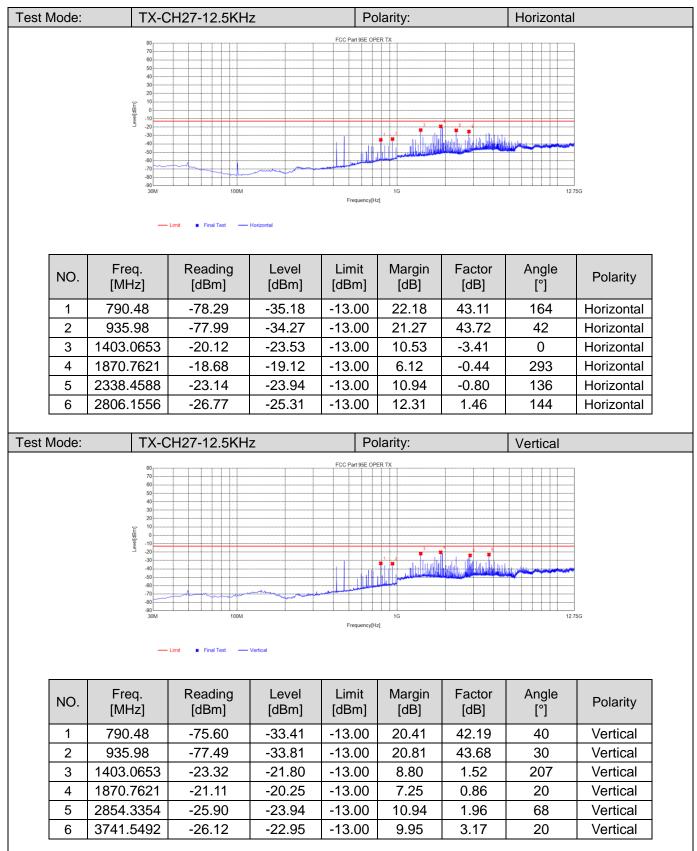




8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

-Connect the equipment as illustrated.


-Spectrum set as follow:

- Centre frequency = fundamental frequency, Span=150kHz for 12.5kHz and 25kHz channel spacing, RBW=300Hz, VBW=1000Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing). The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 5. Measure and record the results in the test report.

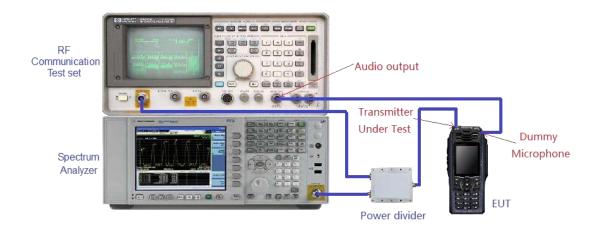




Test plot as follows:

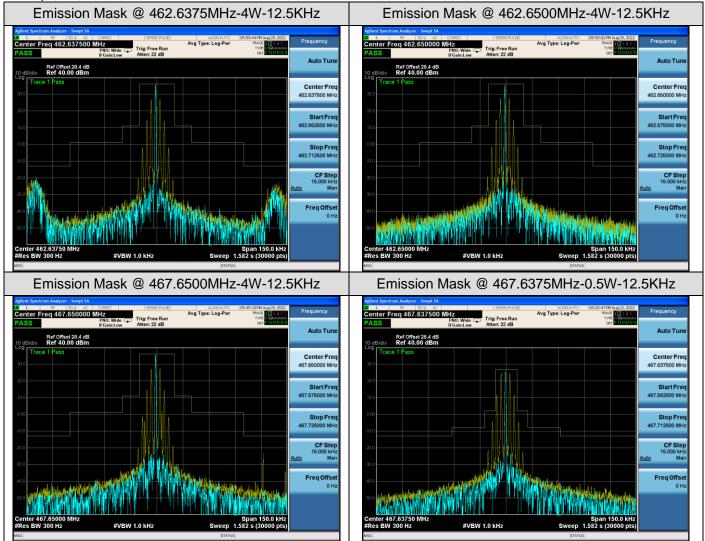



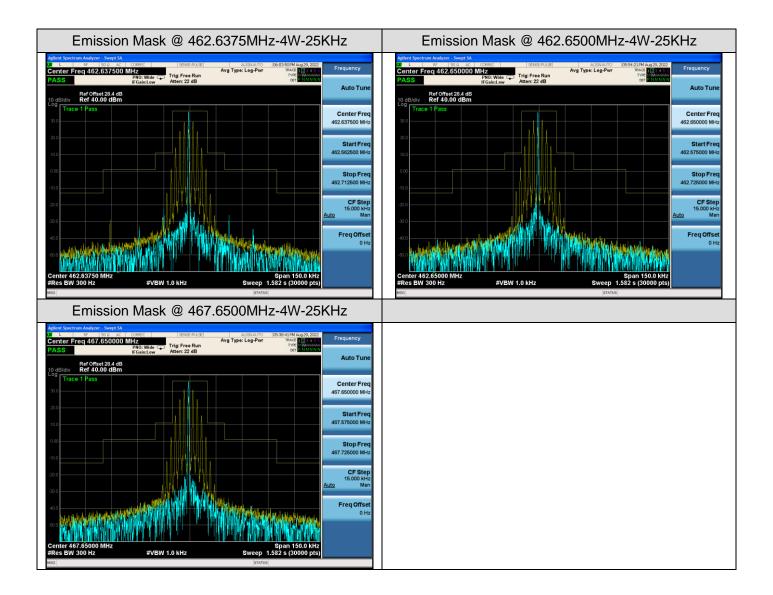



9.MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §95.1775, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Each GMRS transmitter type must be designed to satisfy the modulation requirements in this section. Operation of GMRS stations must also be in compliance with these requirements.

(a) Main channels. The peak frequency deviation for emissions to be transmitted on the main channels must not exceed \pm 5 kHz.

(b) 462 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 462 MHz interstitial channels must not exceed \pm 5 kHz.

(c) 467 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 467 MHz interstitial channels must not exceed \pm 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

9.2 MEASUREMENT METHOD


9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 kHz reference).

9.3 MEASUREMENT SETUP

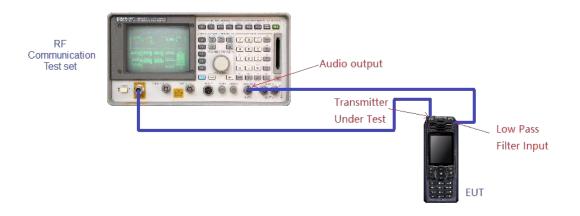

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




9.4 MEASUREMENT RESULTS

(A). MODULATION LIMIT:

12	12.5kHz, FM modulation, Assigned Frequency:462.6500MHz-4W					
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)		
-20	0.21	0.45	0.62	0.86		
-15	0.45	0.69	0.89	1.25		
-10	0.62	0.88	1.13	1.48		
-5	0.77	1.09	1.28	1.53		
0	0.83	1.13	1.35	1.66		
+5	0.92	1.28	1.48	1.71		
+10	0.99	1.34	1.69	1.8		
+15	1.12	1.47	1.72	1.86		
+20	1.11	1.45	1.65	1.82		

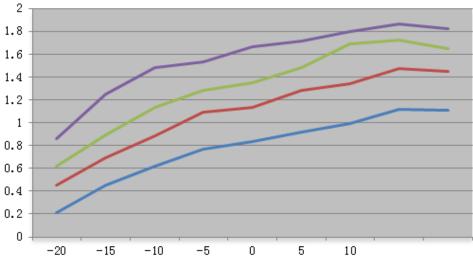


Note: All the modes had been tested, but only the worst data recorded in the report





25	25kHz, FM modulation, Assigned Frequency:462.6500MHz-4W					
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 2500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)		
-20	0.16	0.28	0.49	0.88		
-15	0.31	0.52	0.72	1.09		
-10	0.44	0.69	1.03	1.25		
-5	0.61	0.97	1.15	1.32		
0	0.75	1.11	1.21	1.44		
+5	0.82	1.19	1.37	1.55		
+10	1.02	1.25	1.58	1.72		
+15	1.16	1.36	1.69	1.82		
+20	1.13	1.32	1.62	1.79		

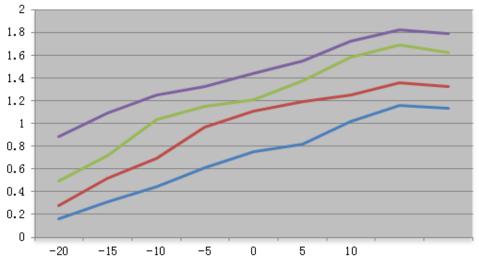


Note: All the modes had been tested, but only the worst data recorded in the report



(B). AUDIO FREQUENCY RESPONSE:


12.5kHz, Analog modulation, Assigned Frequency:462.6500MHz-4W				
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)		
100				
200				
300	0.17	-12.89		
400	0.23	-10.27		
500	0.35	-6.62		
600	0.41	-5.25		
700	0.45	-4.44		
800	0.53	-3.02		
900	0.61	-1.79		
1000	0.75	0.00		
1200	0.77	0.23		
1400	0.89	1.49		
1600	0.99	2.41		
1800	1.22	4.23		
2000	1.34	5.04		
2400	1.45	5.73		
2500	1.63	6.74		
2800	1.74	7.31		
3000	1.85	7.84		

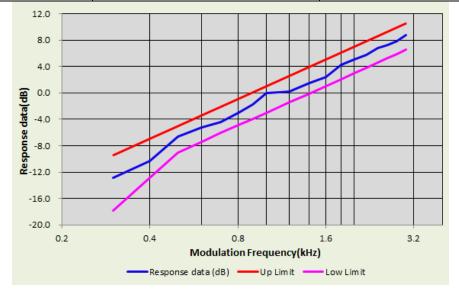

Note: All the modes had been tested, but only the worst data recorded in the report.



25kHz, Analog modulation, Assigned Frequency:462.6500MHz-4W				
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)		
100				
200				
300	0.19	-13.01		
400	0.26	-10.29		
500	0.38	-6.99		
600	0.46	-5.33		
700	0.55	-3.78		
800	0.63	-2.60		
900	0.72	-1.44		
1000	0.85	0.00		
1200	0.89	0.40		
1400	0.96	1.06		
1600	1.13	2.47		
1800	1.36	4.08		
2000	1.45	4.64		
2400	1.55	5.22		
2500	1.63	5.66		
2800	1.82	6.61		
3000	1.97	7.30		

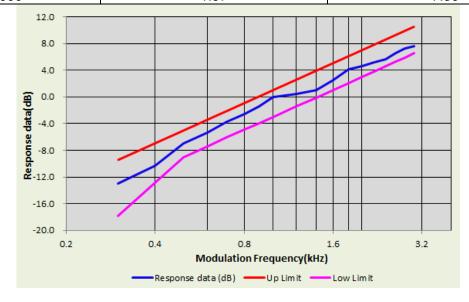

Note: All the modes had been tested, but only the worst data recorded in the report.



10. MAXIMUMN TRANSMITTER POWER

10.1 PROVISIONS APPLICABLE

FCC Part 95.1767 For GMRS, the maximum permissible transmitter output power effective radiated power (e.r.p.) as follows.

This section contains transmitting power limits for GMRS stations. The maximum transmitting power depends on which channels are being used and the type of station.

462/467 MHz main channels. The limits in this paragraph apply to stations transmitting on any of the 462 MHz main channels or any of the 467 MHz main channels. Each GMRS transmitter type must be capable of operating within the allowable power range. GMRS licensees are responsible for ensuring that their GMRS stations operate in compliance with these limits.

The transmitter output power of mobile, repeater and base stations must not exceed 50 Watts. The transmitter output power of fixed stations must not exceed 15 Watts.

462 MHz interstitial channels. The effective radiated power (ERP) of mobile, hand-held portable and base stations transmitting on the 462 MHz interstitial channels must not exceed 5 Watts.

(467 MHz interstitial channels. The effective radiated power (ERP) of hand-held portable units transmitting on the 467 MHz interstitial channels must not exceed 0.5 Watt. Each GMRS transmitter type capable of transmitting on these channels must be designed such that the ERP does not exceed 0.5 Watt.

10.2 MEASUREMENT METHOD

- 10) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 11) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 12) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 13) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the lovel of the signal generator autput until the value of the receiver reach




the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 14) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 15) The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 16) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 17) ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 18) Test the EUT in the lowest channel, the middle channel the Highest channel

10.3 MEASUREMENT SETUP


Conducted Output Power:

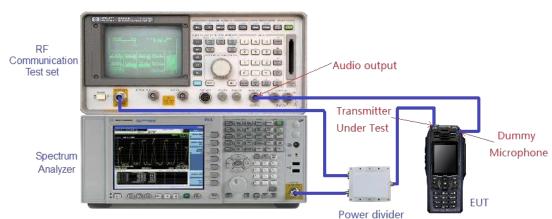


Effective Radiated Power:





Radiated Below 1GHz

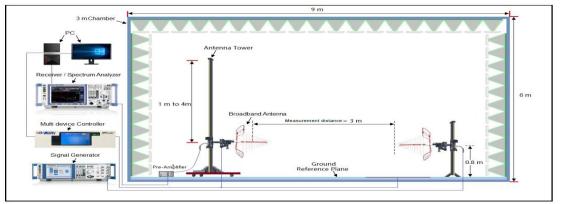

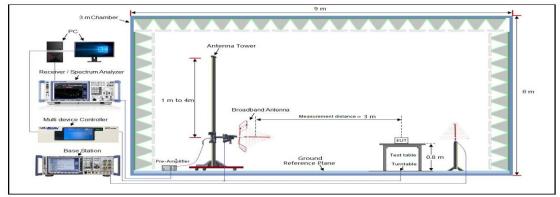

Radiated Above 1 GHz

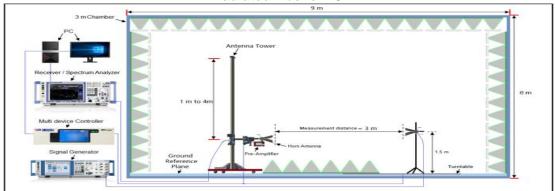

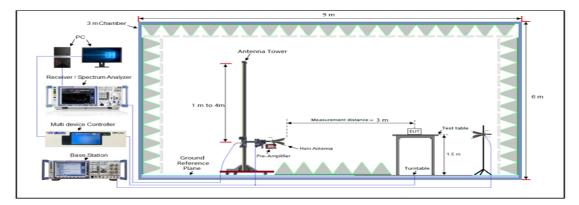

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



10.4 MEASUREMENT RESULTS

ERP RESULT:

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)
	ChannelSeparation:12.5KHz								
462.6375	103.92	V	30.70	0.38	6.6	34.91	3.10	5	1.90
462.6375	103.90	Н	30.65	0.38	6.6	34.89	3.08	5	1.92
462.6500	104.13	V	30.68	0.38	6.6	35.12	3.25	50	46.75
462.6500	104.02	Н	30.62	0.38	6.6	35.01	3.17	50	46.83
467.6500	103.99	V	30.65	0.38	6.6	34.98	3.15	50	46.85
467.6500	103.96	Н	30.61	0.38	6.6	34.95	3.13	50	46.87
467.6375	95.90	V	20.72	0.38	6.6	26.89	0.49	0.5	0.01
467.6375	95.82	Н	20.59	0.38	6.6	26.81	0.48	0.5	0.02
	ChannelSeparation:25KHz								
462.6375	104.83	V	25.91	0.38	6.6	35.82	3.82	5	1.18
462.6375	104.78	Н	25.89	0.38	6.6	35.77	3.78	5	1.22
462.6500	104.31	V	25.87	0.38	6.6	35.30	3.39	50	46.61
462.6500	104.26	Н	25.80	0.38	6.6	35.25	3.35	50	46.65
467.6500	104.35	V	26.09	0.38	6.6	35.34	3.42	50	46.58
467.6500	104.28	Н	26.02	0.38	6.6	35.27	3.37	50	46.63

NOTE:1. Calculation Formula: Emission Level(dBm) = S.G. (dBm)- Cable Loss(dB)+ Ant.Gain(dBi) The Ant. Gain including the correct factor 2.15 Margin (dB) = Limit(dBm)- Emission Level(dBm)



CONDUCTED POWER RESULT:

The maximum Power (CP) for UHF is Analog: 4W/0.5W for 12.5 KHz Channel Separation Calculation Formula: CP = R + A + L * Note:

CP: The final Conducted Power

R : The reading value from spectrum analyzer

- A: The attenuation value of the used attenuator
- L: The loss of all connection cables

Conducted Power Measurement Results				
Mode	Channel Separation	Test Channel	Measurement Result (dBm)	
GMRS TX	12.5 kHz	462.6375 MHz	34.94	
		462.6500 MHz	35.28	
		467.6500 MHz	35.02	
		467.6375 MHz	26.94	
GMRS TX	25 kHz	462.6375 MHz	35.87	
		462.6500 MHz	35.38	
		467.6500 MHz	35.39	



11. SPURIOUS EMISSION ON ANTENNA PORT

11.1 PROVISIONS APPLICABLE

Please refer to FCC 47 CFR 2.1051, 2.1057, 22.359 & 90.210 for specification details. Emissions shall be attenuated below the mean output power of the transmitter as follows:


FCC Rules	Attenuation Limit (dBc)
§ 95.1779	At least 43 + 10 log (P) dB

43 + 10 log (Pwatts)

Calculation: Limit (dBm) =EL-43-10log10 (TP) Notes: EL is the emission level of the Output Power expressed in dBm, In this application, the EL is P(dBm). Limit (dBm) = P(dBm)-43-10 log (Pwatts) = -13 dBm

11.2 MEASUREMENT METHOD

- 1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
- 2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th . Harmonic for the lower and the highest frequency range.
- 3. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz.VBW=3MHz from the 1GHz to 10th Harmonic.
- 4. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.

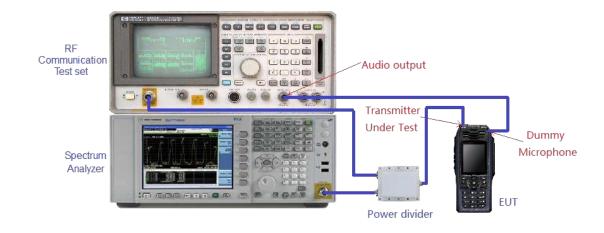

11.3 MEASUREMENT SETUP



11.4 MEASUREMENT RESULTS

