



ITEM	DESCRIPTION	QTY
1	Connector - 50 ohm Hirose H.FL-LP-DFS111(01)	1
2	Coaxial Cable - 50 ohm GORE CX2571	1

ECN	REV	DESCRIPTION	DATE	APPROVED
	1	PRE-RELEASE	28APR05	
C10442	2	INITIAL AGILE RELEASE	02MAY05	
C11119	3	OVERALL LENGTH REDUCED	13JUN05	
C12185	A	AGILE PRODUCTION RELEASE	31AUG05	

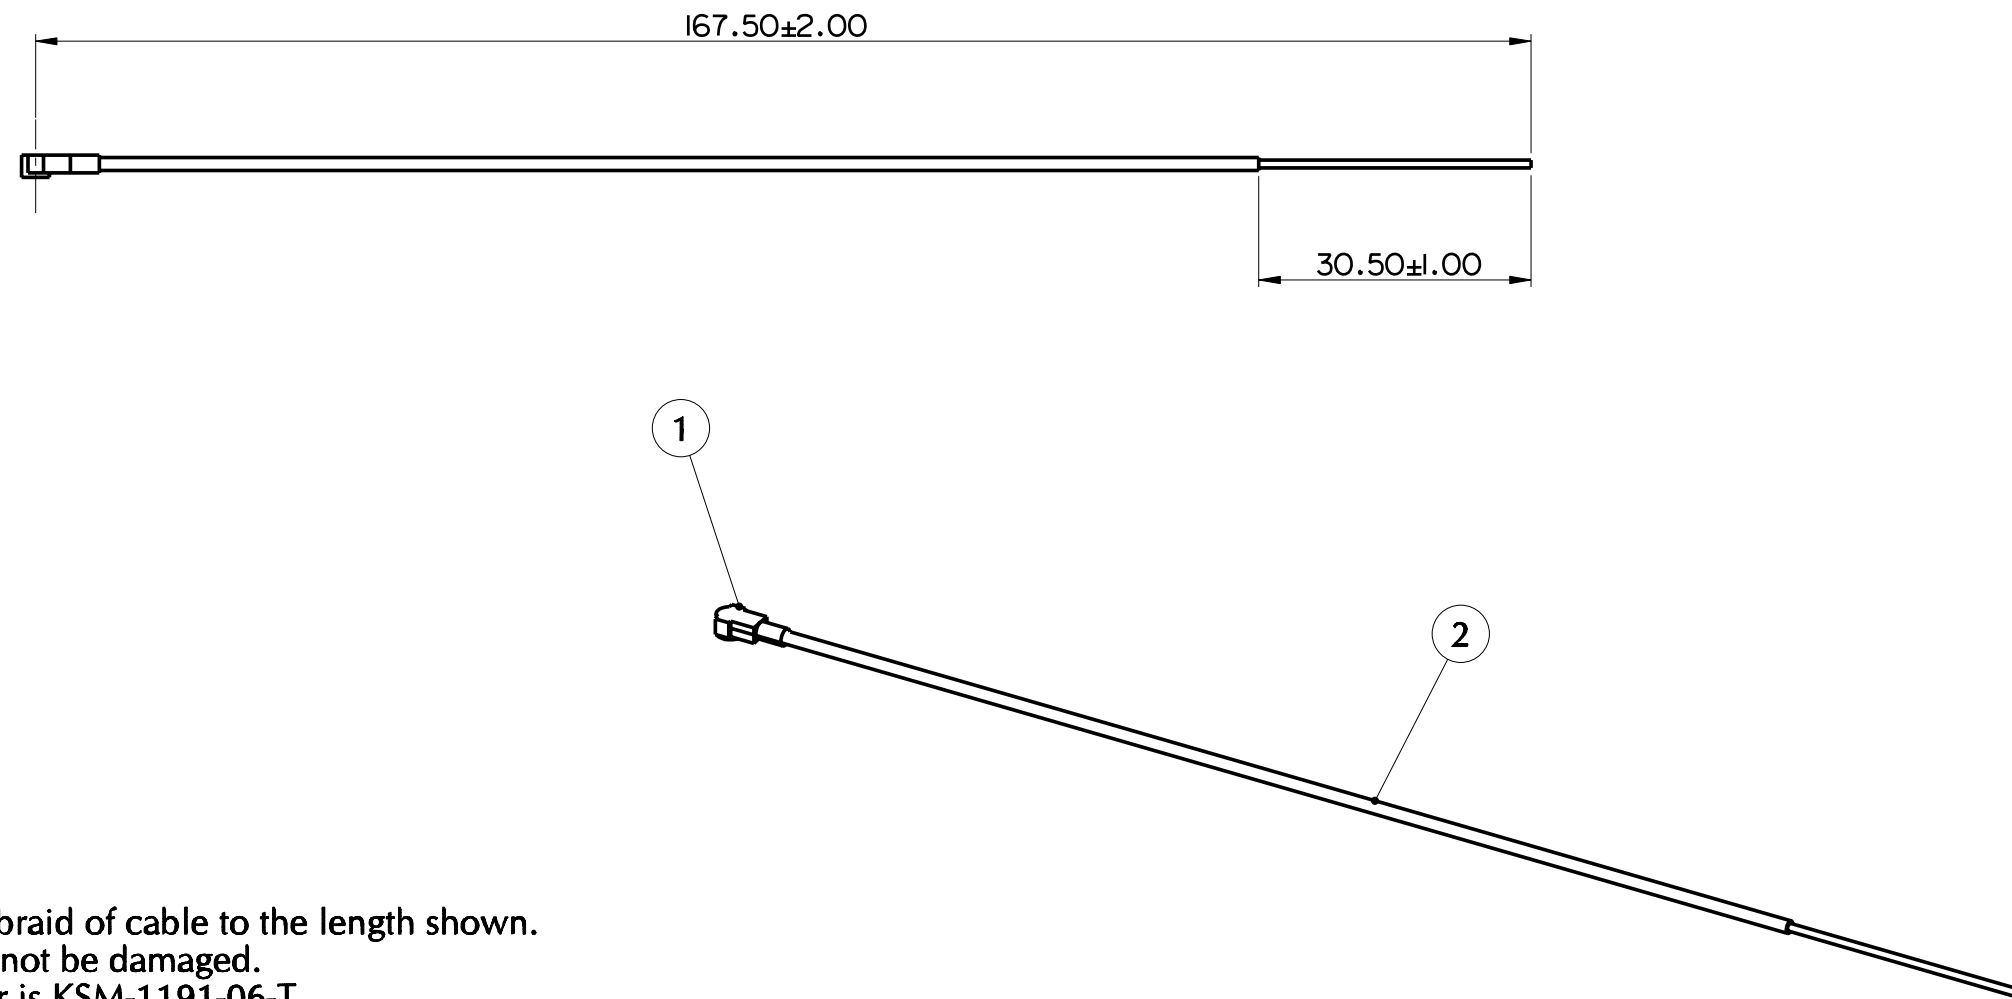

NOTES:

1. Strip outer sheath and braid of cable to the length shown.
Internal dielectric must not be damaged.
2. Supplier's Part Number is KSM-1191-06-T.
3. PACKAGING: Part to be packaged in an ESD safe bag.
Bag must be labelled with Part Number, Revision and Quantity.

MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES TOLERANCES ARE:	APPROVALS	DATE	 Trimble Navigation Limited Proprietary & Confidential	TITLE		
SEE NOTES	DECIMALS .X ± 0.500 .XX ± 0.200 .XXX ± 0.050	APPROVED BY			ANTENNA WIFI CLARK		
FINISH	ANGLES ± 0.500	ENGINEERED BY Tom Keen	28APR05		SIZE	DWG NO.	REV
SEE NOTES	THIRD ANGLE PROJECTION	DRAWN BY Tom Keen	28APR05		B	61244	A
DO NOT SCALE DRAWING		CHECKED BY		TEXT	SCALE	1.250	SHEET 1 OF 1

Product Specification

Mica 2.4 GHz SMD Antenna



TABLE OF CONTENT

1. Features	2
2. Description	2
3. Application	2
4. Model name	3
5. General data	3
6. Electrical characteristics	3
7. Electrical performance	4
7.1 Voltage Standing Wave Ratio	4
7.2 3D-Radiation	4
7.3 Radiation patterns	4
8. Antenna Dimensions	5
9. Antenna Foot print	5
10. Electrical interface	6
10.1 Transmission line and matching	6
10.2 Test board dimensions	6
10.3 Test board matching	6
11. Soldering	6
11.1 Recommended soldering conditions	6
11.2 Leadfree soldering	6
12. Reliability	7
12.1 Temperature and Humidity	7
12.2 Mechanical	7
12.3 Miscellaneous	7
12.4 Judgement standard	7
13. Hazardous Material Regulation Conformance	7
14. Application example	8
15. Packaging	9
15.1 Shelf storage recommendation	9
15.2 Tape characteristics	9
15.3 Reel dimension	9
15.4 Box dimension	9
15.5 Bag properties	9
15.6 Reel label information	9
16. Contact information	10

1. FEATURES

- Designed for 2.4 GHz applications [Bluetooth™, WiFi™ (802.11b/g), Zigbee™, WiMedia™ etc.]
- Intended for SMD mounting
- Supplied in tape on reel

2. DESCRIPTION

The Mica antenna is intended for use with all 2.4 GHz applications. The antenna requires a groundplane, i.e your device acts as an active part of the antenna and thus demand careful consideration concerning its placement

3. APPLICATION

- Mobile phones
- PDAs
- Headsets
- Laptops
- Medical equipment
- Automotive

4.MODEL NAME

30	30	A5645 - 01	
			Drawing No.
			Technology
			-PCB
			Antenna Family
			-SMD

5. GENERAL DATA


Product Name	Mica 2.4 GHz
Article No.	3030A5645-01
Frequency	2.4-2.5 GHz
Polarization	Linear
Operating temperature	-40 to + 85 degC
Impedance	50 Ohm
Weight	0.4 gram
Antenna type	SMD

6. ELECTRICAL CHARACTERISTICS


	Characteristics			Conditions*
	Min	Typ	Max	
Peak Gain	0.8 dBi	1.2 dBi	1.9 dBi	Frequency 2.4-2.5 GHz, Measured in 3D chamber (near field)
Efficiency	70%	75%	79%	
VSWR	1.0:1	1.5:1	1.9:1	Frequency 2.4-2.5 GHz, Measured in Network Analyzer
*Note all data provided in this table are based on the gigaAnt reference board				

7. ELECTRICAL PERFORMANCE


7.1 Voltage Standing Wave Ratio

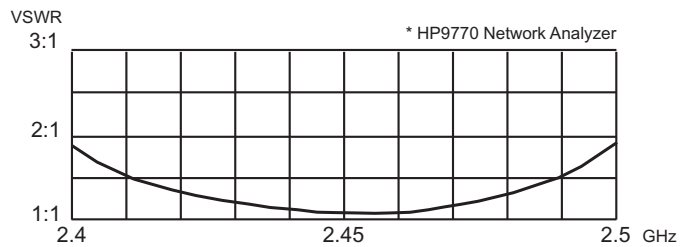


7.2 3D-Radiation

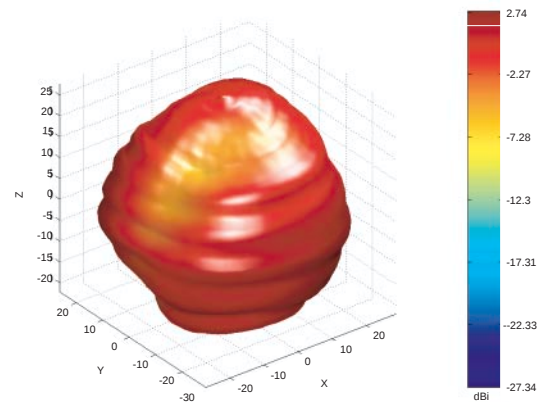


7.3 Radiation patterns



XY- Plane






XZ- Plane






YZ- Plane




Total polarization

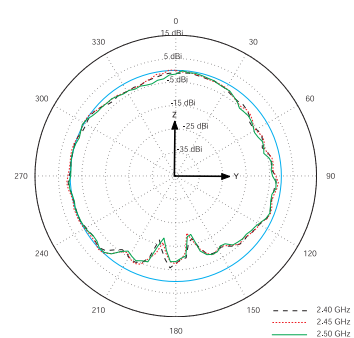


Vertical polarization



Horizontal polarization




8. ANTENNA DIMENSIONS

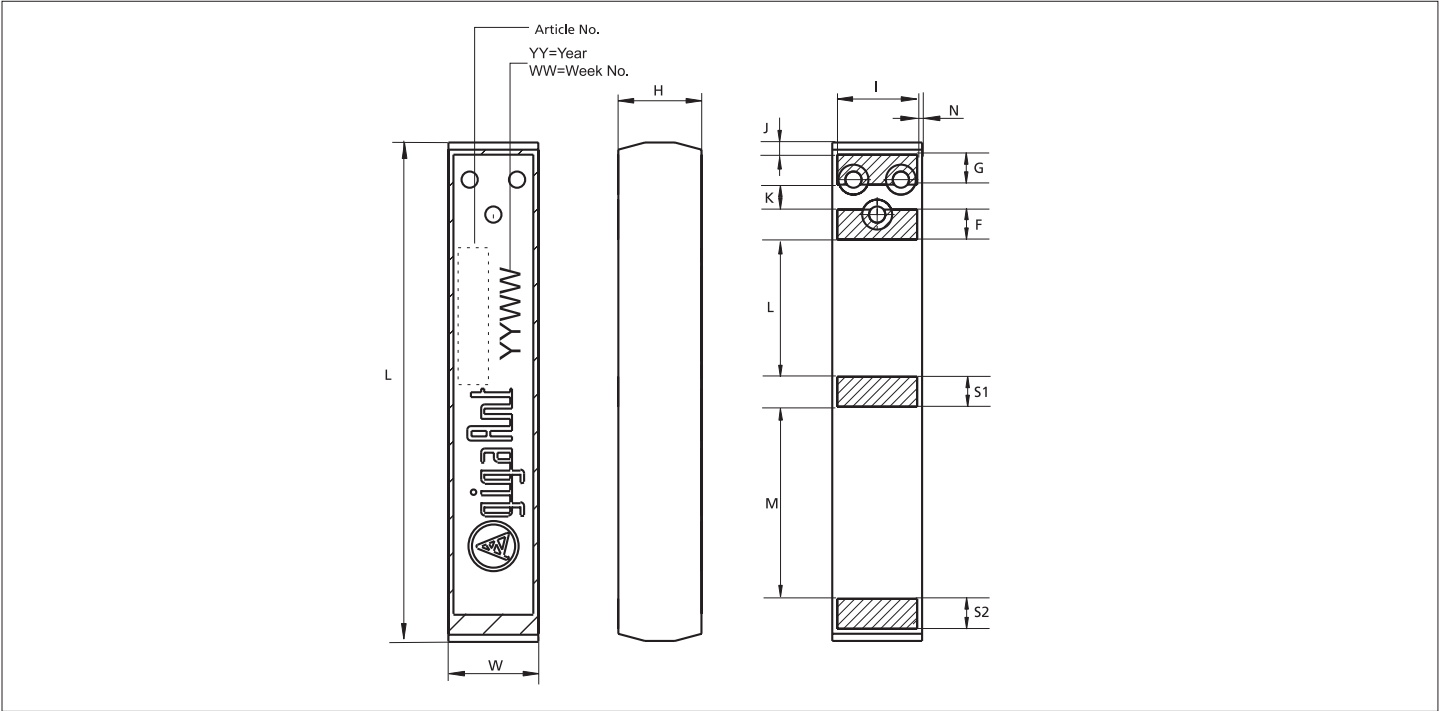

L	W	H	G	F	S1, S2	I	J	K	L	M	N
Length	Width	Height	Ground	Feed	Solder	Feed	Feed				
20.5 ±0.2	3.6 ±0.1	3.3±0.2	1.2±0.1	1.2±0.1	1.2±0.1	3.2±0.1	0.55±0.25	1.0±0.1	5.5±0.1	7.7±0.1	0.2±0.1
Dimensions in millimeter											


9. ANTENNA FOOT PRINT

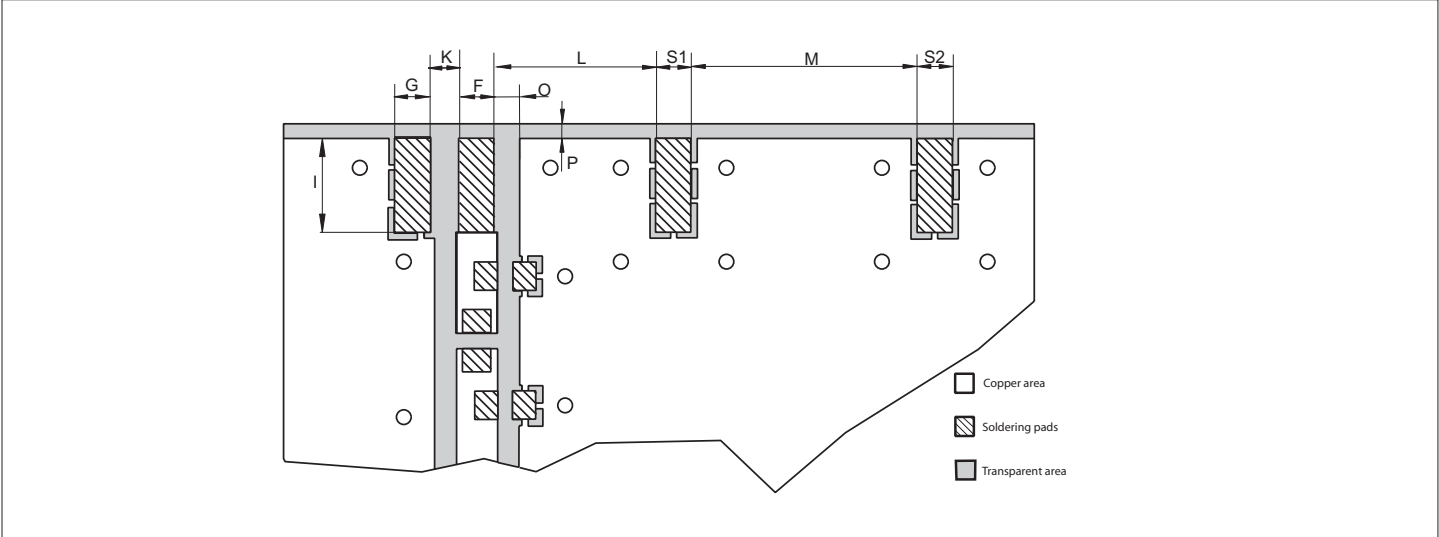


G	F	S1	S2	I	K	L	M	O	P
Ground	Feed	Solder	Solder						
1.2±0.1	1.2±0.1	1.2±0.1	1.2±0.1	3.2±0.1	1.0±0.1	5.5±0.1	7.7±0.1	0.5±0.1	0.5±0.1
Dimensions in millimeters									

10. ELECTRICAL INTERFACE

10.1 Transmission line and matching

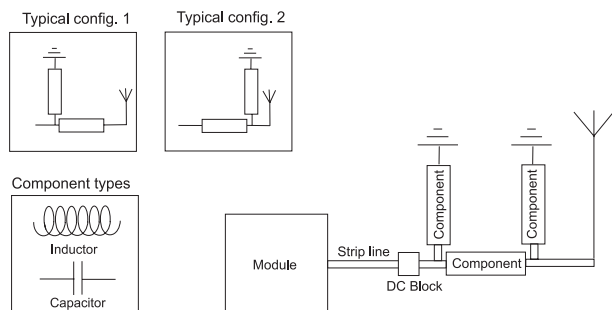


The matching network has to be individually designed using one, two or three components.

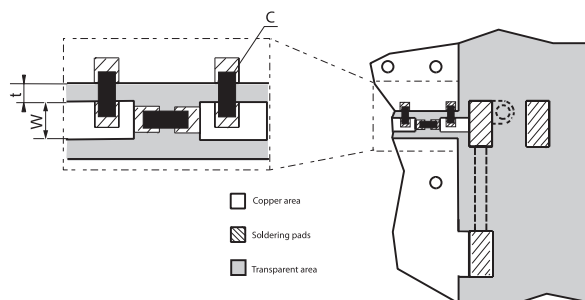

t, w = Unique dimensioning according to your PCB *
C = Inductor and capacitor values according to your specific device*


* gigaAnt provides this service upon request

10.2 Test board dimensions

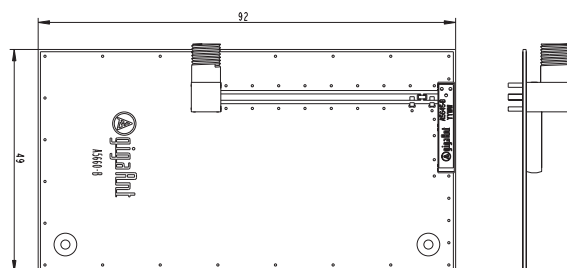

The testboard is designed for evaluation purposes for Mica 2.4 GHz SMD antenna. The board has the same size as a typical PCMCIA card and is fitted with an SMA connector.


10.3 Test board matching

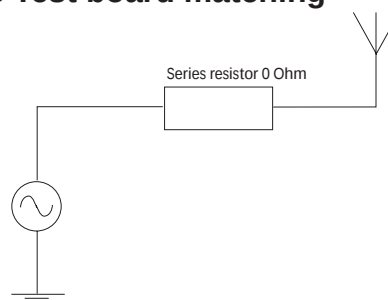

The testboard is matched with above specified component. Note! The component value(s) will vary depending on size of PCB, surrounding components etc.


11. SOLDERING

11.1 Recommended soldering conditions

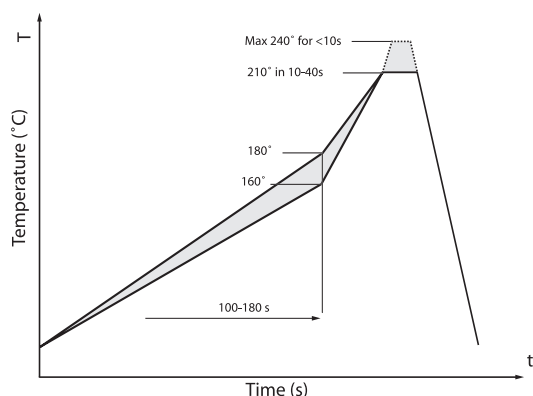

11.2 Leadfree soldering

The antenna has been tested and approved for leadfree soldering. The reflow curve and solder paste used is listed below.

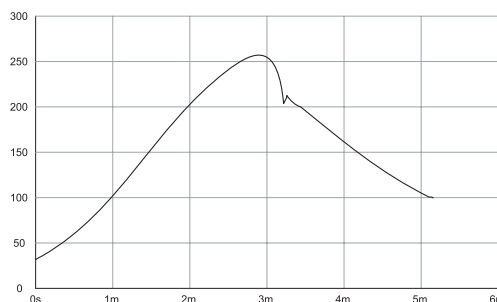

Solder paste: KOKI S3X58-M405

12. RELIABILITY

12.1 Temperature and Humidity

Item	Standard	Low	High	Duration
Operating temperature	EN/IEC 60068-2-2, Test Bd: Dry heat	-30 degC	+90 degC	-
Temperature cycling	EN/IEC 60068-2-14, Test Na: Change of temperature	-40 degC	+90 degC	500 cycles / 10 min
Storage life Humidity	EN/IEC 60068-2-1, Test Ca: Damp heat	+60 degC / 90% RH		500 h
Storage life Low temperature	EN/IEC 60068-2-1, Test Ad: Cold	-55 degC	-	500 h
Storage life High temperature	EN/IEC 60068-2-2, Test Bb: Dry heat	-	+125 degC	500 h

12.2 Mechanical

Item	Standard	Low	High	Duration
Bending	IEC 60068-2-21, Test Ue1: Bending	Bending 1 mm at a rate of 1 mm/s with support at end of PCB 1mm depth on reference board		
Shear	IEC 60068-2-21, Test Ue3: Shear	Force of 5 N applied to the side of the antenna.		
Drop test		Dummy weight: 150g Height: 170cm		One drop at each side, total drops: 6
Vibration	EN/IEC 60068-2-6, Test Fc (sinusoidal)	Acceleration spectral density: 10-1000Hz Acceleration: 20m/s ² Number of axes: 3 mutually perpendicular		5 cycles per axis

12.3 Miscellaneous

Item	Standard	Low	High	Duration
Solderability	EN/IEC 60068-2-58, Test Td	Visual inspection of soldering pads. Estimation of how many % of the pads that are well tin plated.		

12.4 Judgement standard


The judgement of the above tests should be made as follows:

1. Visual inspection - Normal appearance with no obvious cracking, peeling-off.
2. Electrical inspection - The DUT satisfies the VSWR specification throughout the 2.4-2.5 GHz band

13. HAZARDOUS MATERIAL REGULATION CONFORMANCE

Cadmium and cadmium compound	Lead and lead compound
Organic brominated compound (PBB, PBDE)	Mercury and mercury compound
Polychlorinated biphenyl (PCB)	Sesquivalent chrome compound
Polychlorinated naphthalene (PCN)	Chlorinated paraffin (CP)
Organic tin compound	Mirex
Asbestos	Formaldehyde
Azo compound	Tetra-bromo-bisphenol-A-bis (TBBP-A-bis)

14. APPLICATION EXAMPLE

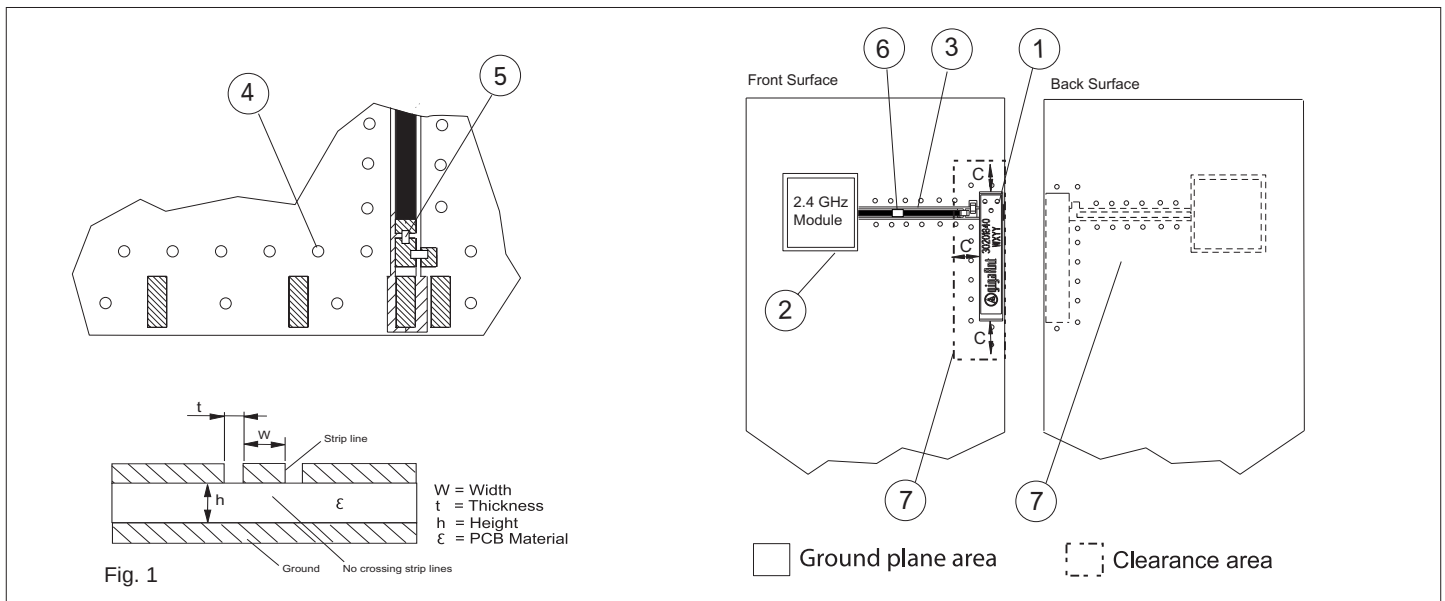

General

The antenna is of a quarter wave type and is dependent on the groundplane area to complete the antenna function. The antenna performance is also dependent on the size of the groundplane.

1. Placement of the antenna

The antenna shall be placed on a groundplane area, preferably at the edge of the PCB oriented as above.

2. Placement of 2.4 GHz module

To avoid losses in the strip line, the module shall be placed as close to the antenna as possible.

3. Strip line

The strip line must be dimensioned according to your specific PCB. (see fig 1). No crossing strip lines are allowed between the strip line and its ground plane.

4. Via connections

To avoid spurious effects, via connections must be made to analogue ground.

5. Component matching

Component values are depending on antenna placement, PCB dimensions and location of other components.

6. DC Block

Might be needed depending on RF Module configuration.

7. Clearance

Front surface: Minimum clearance to other components, C = 2-5 mm

Back surface: Components allowed.

8. Casing material

No metal casing or plastics using metal flakes shall be used, avoid also metallic based paint or laquer.


**Note ! Incorrect implementation of the antenna will affect the performance.
Contact gigaAnt for implementation services.**

15. PACKAGING

15.1 Shelf storage recommendation

Temperature	-10 to +40 degree C
Humidity	Less than 75% RH
Shelf Life	18 Months
Storage place	Away from corrosive gas and direct sunlight

15.2 Tape characteristics

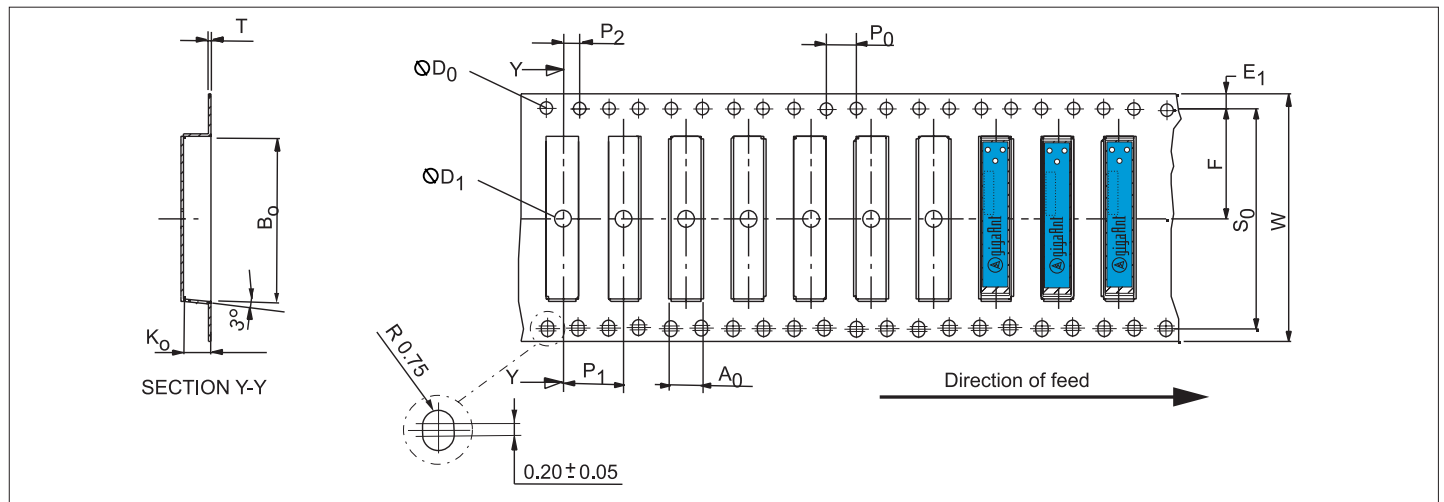


W	S ₀	F	E ₁	P ₀	P ₁	P ₂	A ₀	B ₀	K ₀	T	D ₀	D ₁
32±0.3	28.4±0.3	14.2±0.1	1.75±0.1	4.0±0.1	8.0±0.1	2.0±0.1	4.0±0.1	21±0.1	3.7±0.1	0.3±0.05	1.5±0.1	Min 2.0


Dimensions in millimeter

Quantity	Leading space	Trailing space
2000 Pcs / reel	50 blank antenna holders	37 blank antenna holders

15.3 Reel dimension

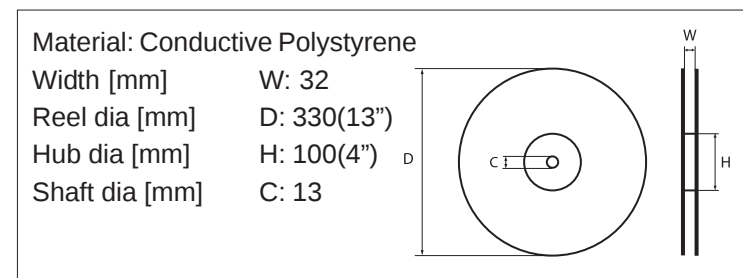

15.4 Box dimension

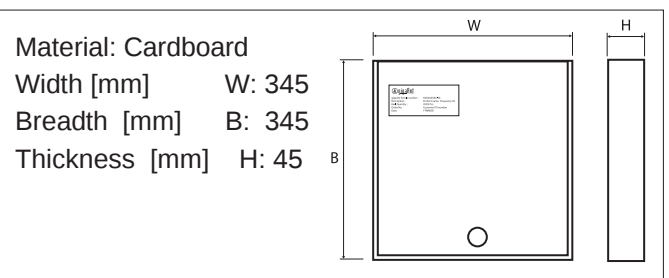

15.5 Bag properties

Antistatic Aluminium Moisture Barrier Bag	 gigaAnt Article number : XXXXAXXX-XX Description : Product name, Frequency Hz Reel Quantity : XXXX Pcs. Order No: Customer PO number Date: YYMMDD
Thickness [mil] T: 3.2	

15.6 Reel label information

16. CONTACT INFORMATION**www.gigaAnt.com**Europe & Africae-mail: info.EU@gigaAnt.com

Tel: +46 46 286 4177

Americae-mail: info.US@gigaAnt.com

Tel: +1 817 430 7291

Asia and Pacifice-mail: info.ASIA@gigaAnt.com

Tel: +656 890 6200

Or your local gigaAnt representative