

# TEST REPORT

**Applicant:** Huizhou Desay SV Automotive Co., Ltd.

**Address of Applicant:** 103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial Development Zone, Huizhou, Guangdong 516006, China

**Manufacturer/Factory:** Huizhou Desay SV Automotive Co., Ltd.

**Address of Manufacturer/Factory:** 103, Hechang 5th Road West, Zhongkai National Hi-tech Industrial Development Zone, Huizhou, Guangdong 516006, China

**Equipment Under Test (EUT)**

Product Name: Ford ICA2 AHU

Model No.: NV9051/70

**FCC ID:** 2AEQT-NV905170

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407

**Date of sample receipt:** December 17, 2020

**Date of Test:** December 18, 2020-January 26, 2021

**Date of report issued:** January 26, 2021

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular blue ink stamp from GTS Global United Technology Services Co., Ltd. is visible. The stamp contains the text 'GTS', 'GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD.', and 'EST. 2010'. A handwritten signature in blue ink is written over the stamp.

**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

| Version No. | Date             | Description |
|-------------|------------------|-------------|
| 00          | January 26, 2021 | Original    |
|             |                  |             |
|             |                  |             |
|             |                  |             |
|             |                  |             |

Prepared By:



Date:

January 26, 2021

Project Engineer

Check By:

  
Reviewer

Date:

January 26, 2021

## 3 Contents

|                                                        | Page |
|--------------------------------------------------------|------|
| 1 COVER PAGE .....                                     | 1    |
| 2 VERSION .....                                        | 2    |
| 3 CONTENTS .....                                       | 3    |
| 4 TEST SUMMARY .....                                   | 4    |
| 4.1 MEASUREMENT UNCERTAINTY .....                      | 4    |
| 5 GENERAL INFORMATION .....                            | 5    |
| 5.1 GENERAL DESCRIPTION OF EUT .....                   | 5    |
| 5.2 TEST MODE .....                                    | 7    |
| 5.3 DESCRIPTION OF SUPPORT UNITS .....                 | 7    |
| 5.4 TEST FACILITY .....                                | 7    |
| 5.5 TEST LOCATION .....                                | 7    |
| 5.6 ADDITIONAL INSTRUCTIONS .....                      | 7    |
| 6 TEST INSTRUMENTS LIST .....                          | 8    |
| 7 TEST RESULTS AND MEASUREMENT DATA .....              | 10   |
| 7.1 ANTENNA REQUIREMENT .....                          | 10   |
| 7.2 CONDUCTED PEAK OUTPUT POWER .....                  | 11   |
| 7.3 CHANNEL BANDWIDTH AND 99% OCCUPIED BANDWIDTH ..... | 12   |
| 7.4 POWER SPECTRAL DENSITY .....                       | 13   |
| 7.5 BAND EDGE .....                                    | 14   |
| 7.5.1 Radiated Emission Method .....                   | 14   |
| 7.6 SPURIOUS EMISSION .....                            | 21   |
| 7.6.1 Radiated Emission Method .....                   | 21   |
| 7.7 FREQUENCY STABILITY .....                          | 28   |
| 8 TEST SETUP PHOTO .....                               | 29   |
| 9 EUT CONSTRUCTIONAL DETAILS .....                     | 29   |

## 4 Test Summary

| Test Item                                    | Section                             | Result |
|----------------------------------------------|-------------------------------------|--------|
| Antenna requirement                          | FCC part 15.203                     | Pass   |
| AC Power Line Conducted Emission             | FCC part 15.207                     | N/A    |
| Conducted Peak Output Power                  | FCC part 15.407(a)(3)               | Pass   |
| Channel Bandwidth and 99% Occupied Bandwidth | FCC part 15.407(e)                  | Pass   |
| Power Spectral Density                       | FCC part 15.407(a)(3)               | Pass   |
| Band Edge                                    | FCC part 15.407(b)(4)               | Pass   |
| Spurious Emission                            | FCC part 15.205/15.209/15.407(b)(4) | Pass   |
| Frequency Stability                          | FCC part 15.407(g)                  | Pass   |

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

### 4.1 Measurement Uncertainty

| Test Item                        | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                | 30MHz-200MHz    | 3.8039dB                | (1)   |
| Radiated Emission                | 200MHz-1GHz     | 3.9679dB                | (1)   |
| Radiated Emission                | 1GHz-18GHz      | 4.29dB                  | (1)   |
| Radiated Emission                | 18GHz-40GHz     | 3.30dB                  | (1)   |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | 3.44dB                  | (1)   |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

|                        |                                                                                                             |
|------------------------|-------------------------------------------------------------------------------------------------------------|
| Product Name:          | Ford ICA2 AHU                                                                                               |
| Model No.:             | NV9051/70                                                                                                   |
| Serial No.:            | N/A                                                                                                         |
| Hardware Version:      | 006                                                                                                         |
| Software Version:      | DCV4                                                                                                        |
| Test sample(s) ID:     | GTS202012000188-1                                                                                           |
| Sample(s) Status:      | Engineer sample                                                                                             |
| Operation Frequency:   | 802.11a/802.11n(HT20)/802.11ac(HT20): 5745MHz ~ 5825MHz<br>802.11n(HT40)/ 802.11ac(HT40): 5755MHz ~ 5795MHz |
| Channel numbers:       | 802.11a/802.11n(HT20)/802.11ac(HT20): 5<br>802.11n(HT40)/ 802.11ac(HT40): 2                                 |
| Channel bandwidth:     | 802.11a/802.11n(HT20)/802.11ac(HT20): 20MHz<br>802.11n(HT40)/802.11ac(HT40): 40MHz                          |
| Modulation technology: | Orthogonal Frequency Division Multiplexing (OFDM)                                                           |
| Antenna Type:          | Integral Antenna                                                                                            |
| Antenna gain:          | 0dBi(declare by applicant)                                                                                  |
| Power supply:          | DC 12V                                                                                                      |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 149                                 | 5745MHz   | 151     | 5755MHz   | 153     | 5765MHz   | 155     | 5775MHz   |
| 157                                 | 5785MHz   | 159     | 5795MHz   | 161     | 5805MHz   | 163     | 5815MHz   |
| 165                                 | 5825MHz   |         |           |         |           |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Test channel    | Frequency (MHz)     |                   |  |
|-----------------|---------------------|-------------------|--|
|                 | 802.11 a/n/ac(HT20) | 802.11 n/ac(HT40) |  |
| Lowest channel  | 5745                | 5755              |  |
| Middle channel  | 5785                |                   |  |
| Highest channel | 5825                | 5795              |  |

## 5.2 Test mode

|                   |                                                |
|-------------------|------------------------------------------------|
| Transmitting mode | Keep the EUT in continuously transmitting mode |
|-------------------|------------------------------------------------|

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

| Mode             | Data rate | Mode             | Data rate |
|------------------|-----------|------------------|-----------|
| 802.11a          | 6Mbps     | 802.11n/ac(HT40) | 13Mbps    |
| 802.11n/ac(HT20) | 6.5Mbps   |                  |           |

## 5.3 Description of Support Units

| Manufacturer | Description       | Model      | Serial Number |
|--------------|-------------------|------------|---------------|
| GS           | Lead-Acid battery | S5D26R-MFZ | 9442804454    |
| Lenovo       | Notebook PC       | E40        | N/A           |

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • FCC —Registration No.: 381383

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

### • IC —Registration No.: 9079A

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

### • CNAS (No. CNAS L5775)

CNAS has accredited Global United Technology Services Co., Ltd., to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, sBaoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 5.6 Additional Instructions

|                   |                                               |
|-------------------|-----------------------------------------------|
| Test Software     | Special test command provided by manufacturer |
| Power level setup | Default                                       |

## 6 Test Instruments list

| Radiated Emission: |                                     |                                |                             |               |                     |                         |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                      | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | July. 02 2020       | July. 01 2025           |
| 2                  | Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | EMI Test Receiver                   | Rohde & Schwarz                | ESU26                       | GTS203        | June. 25 2020       | June. 24 2021           |
| 4                  | BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | June. 25 2020       | June. 24 2021           |
| 5                  | Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D                 | GTS208        | June. 25 2020       | June. 24 2021           |
| 6                  | Horn Antenna                        | ETS-LINDGREN                   | 3160                        | GTS217        | June. 25 2020       | June. 24 2021           |
| 7                  | EMI Test Software                   | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 8                  | Coaxial Cable                       | GTS                            | N/A                         | GTS213        | June. 25 2020       | June. 24 2021           |
| 9                  | Coaxial Cable                       | GTS                            | N/A                         | GTS211        | June. 25 2020       | June. 24 2021           |
| 10                 | Coaxial cable                       | GTS                            | N/A                         | GTS210        | June. 25 2020       | June. 24 2021           |
| 11                 | Coaxial Cable                       | GTS                            | N/A                         | GTS212        | June. 25 2020       | June. 24 2021           |
| 12                 | Amplifier(100kHz-3GHz)              | HP                             | 8347A                       | GTS204        | June. 25 2020       | June. 24 2021           |
| 13                 | Amplifier(2GHz-20GHz)               | HP                             | 84722A                      | GTS206        | June. 25 2020       | June. 24 2021           |
| 14                 | Amplifier (18-26GHz)                | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June. 25 2020       | June. 24 2021           |
| 15                 | Band filter                         | Amindeon                       | 82346                       | GTS219        | June. 25 2020       | June. 24 2021           |
| 16                 | Power Meter                         | Anritsu                        | ML2495A                     | GTS540        | June. 25 2020       | June. 24 2021           |
| 17                 | Power Sensor                        | Anritsu                        | MA2411B                     | GTS541        | June. 25 2020       | June. 24 2021           |
| 18                 | Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                      | GTS575        | June. 25 2020       | June. 24 2021           |
| 19                 | Splitter                            | Agilent                        | 11636B                      | GTS237        | June. 25 2020       | June. 24 2021           |
| 20                 | Loop Antenna                        | ZHINAN                         | ZN30900A                    | GTS534        | June. 25 2020       | June. 24 2021           |
| 21                 | Breitband hornantenne               | SCHWARZBECK                    | BBHA 9170                   | GTS579        | Oct. 18 2020        | Oct. 17 2021            |
| 22                 | Amplifier                           | TDK                            | PA-02-02                    | GTS574        | Oct. 18 2020        | Oct. 17 2021            |
| 23                 | Amplifier                           | TDK                            | PA-02-03                    | GTS576        | Oct. 18 2020        | Oct. 17 2021            |
| 24                 | PSA Series Spectrum Analyzer        | Rohde & Schwarz                | FSP                         | GTS578        | June. 25 2020       | June. 24 2021           |

| RF Conducted Test: |                                                |              |                  |            |                        |                            |
|--------------------|------------------------------------------------|--------------|------------------|------------|------------------------|----------------------------|
| Item               | Test Equipment                                 | Manufacturer | Model No.        | Serial No. | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1                  | MXA Signal Analyzer                            | Agilent      | N9020A           | GTS566     | June. 25 2020          | June. 24 2021              |
| 2                  | EMI Test Receiver                              | R&S          | ESCI 7           | GTS552     | June. 25 2020          | June. 24 2021              |
| 3                  | Spectrum Analyzer                              | Agilent      | E4440A           | GTS533     | June. 25 2020          | June. 24 2021              |
| 4                  | MXG vector Signal Generator                    | Agilent      | N5182A           | GTS567     | June. 25 2020          | June. 24 2021              |
| 5                  | ESG Analog Signal Generator                    | Agilent      | E4428C           | GTS568     | June. 25 2020          | June. 24 2021              |
| 6                  | USB RF Power Sensor                            | DARE         | RPR3006W         | GTS569     | June. 25 2020          | June. 24 2021              |
| 7                  | RF Switch Box                                  | Shongyi      | RFSW3003328      | GTS571     | June. 25 2020          | June. 24 2021              |
| 8                  | Programmable Constant Temp & Humi Test Chamber | WEWON        | WHTH-150L-40-880 | GTS572     | June. 25 2020          | June. 24 2021              |

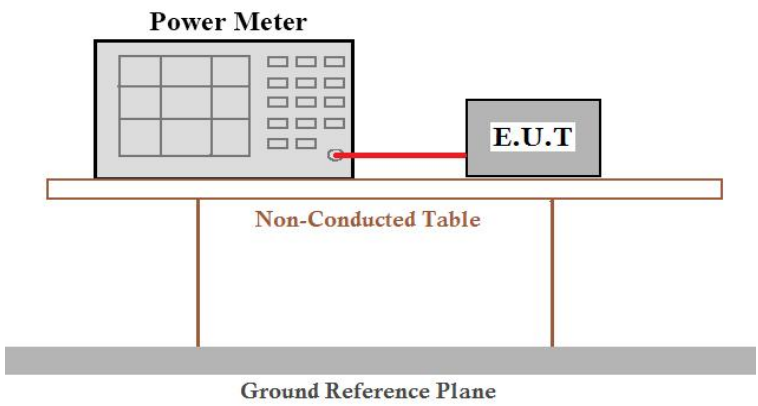
| General used equipment: |                                 |              |           |               |                        |                            |
|-------------------------|---------------------------------|--------------|-----------|---------------|------------------------|----------------------------|
| Item                    | Test Equipment                  | Manufacturer | Model No. | Inventory No. | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
| 1                       | Humidity/ Temperature Indicator | KTJ          | TA328     | GTS243        | June. 25 2020          | June. 24 2021              |
| 2                       | Barometer                       | ChangChun    | DYM3      | GTS255        | June. 25 2020          | June. 24 2021              |

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

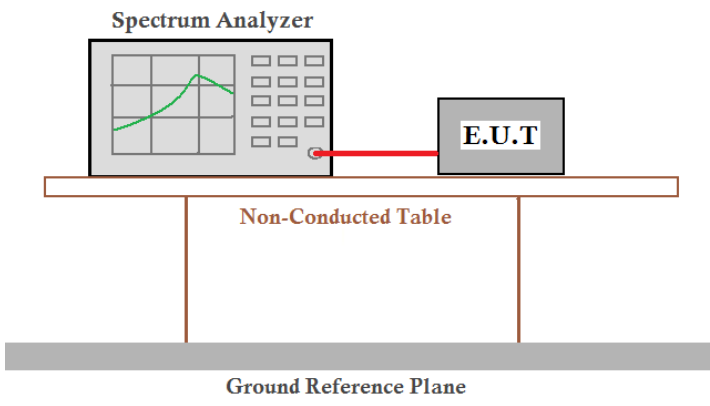
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 |
| <i>15.203 requirement:</i><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                             |
| <b>E.U.T Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                             |
| <i>The antenna is integral antenna, the best case gain of the antenna is 0dBi, reference to the appendix II for details</i>                                                                                                                                                                                                                                                                                                                                                      |                             |

## 7.2 Conducted Peak Output Power

|                   |                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 E Section 15.407(a)(3)                                                                                                                                                                                                                                                                                                                                |
| Test Method:      | ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01                                                                                                                                                                                                                                                                               |
| Limit:            | 30dBm                                                                                                                                                                                                                                                                                                                                                            |
| Test setup:       |  <p>The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T.' (Equipment Under Test) via a red cable. Both components are placed on a 'Non-Conducted Table'. The table is supported by two vertical legs and sits on a 'Ground Reference Plane'.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                 |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                 |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                             |

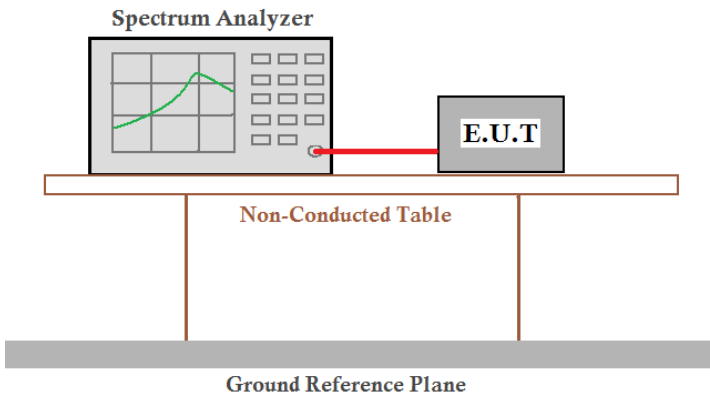
**Measurement Data:** The detailed test data see Appendix for WIFI 5.8G

## 7.3 Channel Bandwidth and 99% Occupied Bandwidth

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 E Section 15.407(e)                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Method:      | ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01                                                                                                                                                                                                                                                                                                                                                                                               |
| Limit:            | >500KHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer, showing a frequency spectrum on its screen, is connected to an E.U.T. (Equipment Under Test) by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a Non-Conducted Table. This table is supported by a Ground Reference Plane, which is represented by a thick grey bar at the bottom of the setup.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

**Measurement Data:** The detailed test data see Appendix for WIFI 5.8G

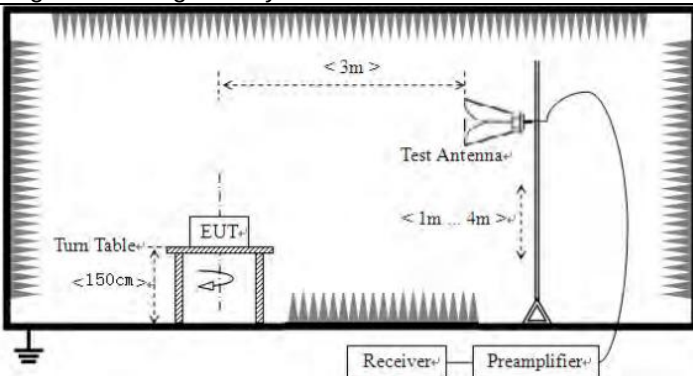
## 7.4 Power Spectral Density

|                   |                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 E Section 15.407(a)(3)                                                                                                                                                                                                                                                                                                                        |
| Test Method:      | ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01                                                                                                                                                                                                                                                                       |
| Limit:            | 30dBm/500kHz                                                                                                                                                                                                                                                                                                                                             |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                     |

**Measurement Data:** The detailed test data see Appendix for WIFI 5.8G

## 7.5 Band edge

### 7.5.1 Radiated Emission Method

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |      |       |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------|------|-------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |          |      |      |       |
| Test Method:          | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |      |      |       |
| Test Frequency Range: | 9kHz to 40GHz, only worse case is reported                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |          |      |      |       |
| Test site:            | Measurement Distance: 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |          |      |      |       |
| Receiver setup:       | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Detector | RBW  | VBW  | Value |
|                       | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Peak     | 1MHz | 3MHz | Peak  |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | RMS      | 1MHz | 3MHz | RMS   |
| Limit:                | All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |          |      |      |       |
| Test setup:           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |          |      |      |       |
| Test Procedure:       | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol> |          |      |      |       |
| Test Instruments:     | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |      |      |       |

|               |                                  |
|---------------|----------------------------------|
| Test mode:    | Refer to section 5.2 for details |
| Test results: | Pass                             |

*Remarks:*

1. Only the worst case Main Antenna test data..
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02v02r01 section G) 1) d),for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:  
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$   
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$

## Measurement data:

| IEEE 802.11a    |                   |                       |                 |                          |                |                     |                 |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Peak value:     |                   |                       |                 |                          |                |                     |                 |              |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 5650.00         | 27.59             | 32.36                 | 9.72            | 23.83                    | 45.84          | 68.2                | -22.36          | Horizontal   |
| 5700.00         | 28.17             | 32.5                  | 9.79            | 23.84                    | 46.62          | 105.2               | -58.58          | Horizontal   |
| 5720.00         | 29.38             | 32.53                 | 9.81            | 23.85                    | 47.87          | 110.8               | -62.93          | Horizontal   |
| 5725.00         | 27.24             | 32.53                 | 9.83            | 23.86                    | 45.74          | 122.2               | -76.46          | Horizontal   |
| 5850.00         | 25.65             | 32.7                  | 9.99            | 23.87                    | 44.47          | 122.2               | -77.73          | Horizontal   |
| 5855.00         | 28.32             | 32.72                 | 9.99            | 23.88                    | 47.15          | 110.8               | -63.65          | Horizontal   |
| 5875.00         | 27.36             | 32.74                 | 10.04           | 23.89                    | 46.25          | 105.2               | -58.95          | Horizontal   |
| 5925.00         | 25.08             | 32.8                  | 10.11           | 23.9                     | 44.09          | 68.2                | -24.11          | Horizontal   |
| 5650.00         | 27.47             | 32.36                 | 9.72            | 23.83                    | 45.72          | 68.2                | -22.48          | Vertical     |
| 5700.00         | 26.87             | 32.5                  | 9.79            | 23.84                    | 45.32          | 105.2               | -59.88          | Vertical     |
| 5720.00         | 28.63             | 32.53                 | 9.81            | 23.85                    | 47.12          | 110.8               | -63.68          | Vertical     |
| 5725.00         | 29.28             | 32.53                 | 9.83            | 23.86                    | 47.78          | 122.2               | -74.42          | Vertical     |
| 5850.00         | 29.12             | 32.7                  | 9.99            | 23.87                    | 47.94          | 122.2               | -74.26          | Vertical     |
| 5855.00         | 29.4              | 32.72                 | 9.99            | 23.88                    | 48.23          | 110.8               | -62.57          | Vertical     |
| 5875.00         | 26.21             | 32.74                 | 10.04           | 23.89                    | 45.1           | 105.2               | -60.1           | Vertical     |
| 5925.00         | 28.98             | 32.8                  | 10.11           | 23.9                     | 47.99          | 68.2                | -20.21          | Vertical     |

| IEEE 802.11n HT20 |                   |                       |                 |                          |                |                     |                 |              |
|-------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Peak value:       |                   |                       |                 |                          |                |                     |                 |              |
| Frequency (MHz)   | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 5650.00           | 27.08             | 32.36                 | 9.72            | 23.83                    | 45.33          | 68.2                | -22.87          | Horizontal   |
| 5700.00           | 29.97             | 32.5                  | 9.79            | 23.84                    | 48.42          | 105.2               | -56.78          | Horizontal   |
| 5720.00           | 26.17             | 32.53                 | 9.81            | 23.85                    | 44.66          | 110.8               | -66.14          | Horizontal   |
| 5725.00           | 26.34             | 32.53                 | 9.83            | 23.86                    | 44.84          | 122.2               | -77.36          | Horizontal   |
| 5850.00           | 27.69             | 32.7                  | 9.99            | 23.87                    | 46.51          | 122.2               | -75.69          | Horizontal   |
| 5855.00           | 25.66             | 32.72                 | 9.99            | 23.88                    | 44.49          | 110.8               | -66.31          | Horizontal   |
| 5875.00           | 27.48             | 32.74                 | 10.04           | 23.89                    | 46.37          | 105.2               | -58.83          | Horizontal   |
| 5925.00           | 28.23             | 32.8                  | 10.11           | 23.9                     | 47.24          | 68.2                | -20.96          | Horizontal   |
| 5650.00           | 27.45             | 32.36                 | 9.72            | 23.83                    | 45.7           | 68.2                | -22.5           | Vertical     |
| 5700.00           | 28.12             | 32.5                  | 9.79            | 23.84                    | 46.57          | 105.2               | -58.63          | Vertical     |
| 5720.00           | 27.59             | 32.53                 | 9.81            | 23.85                    | 46.08          | 110.8               | -64.72          | Vertical     |
| 5725.00           | 27.06             | 32.53                 | 9.83            | 23.86                    | 45.56          | 122.2               | -76.64          | Vertical     |
| 5850.00           | 29.54             | 32.7                  | 9.99            | 23.87                    | 48.36          | 122.2               | -73.84          | Vertical     |
| 5855.00           | 28.15             | 32.72                 | 9.99            | 23.88                    | 46.98          | 110.8               | -63.82          | Vertical     |
| 5875.00           | 25.24             | 32.74                 | 10.04           | 23.89                    | 44.13          | 105.2               | -61.07          | Vertical     |
| 5925.00           | 29.62             | 32.8                  | 10.11           | 23.9                     | 48.63          | 68.2                | -19.57          | Vertical     |

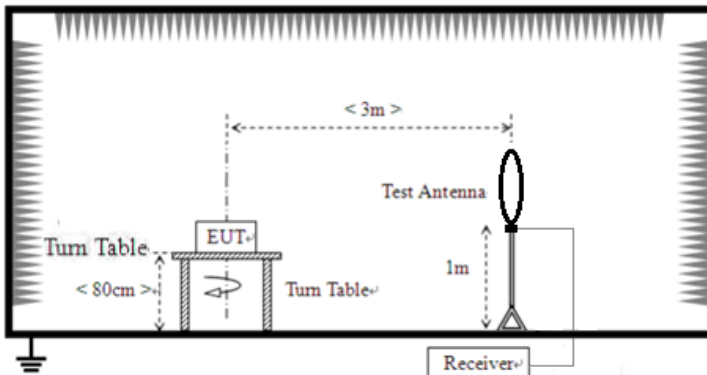
| <b>IEEE 802.11ac HT20</b> |                   |                       |                 |                          |                |                     |                 |              |
|---------------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| <b>Peak value:</b>        |                   |                       |                 |                          |                |                     |                 |              |
| Frequency (MHz)           | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 5650.00                   | 25.47             | 32.36                 | 9.72            | 23.83                    | 43.72          | 68.2                | -24.48          | Horizontal   |
| 5700.00                   | 26.72             | 32.5                  | 9.79            | 23.84                    | 45.17          | 105.2               | -60.03          | Horizontal   |
| 5720.00                   | 26.83             | 32.53                 | 9.81            | 23.85                    | 45.32          | 110.8               | -65.48          | Horizontal   |
| 5725.00                   | 25.67             | 32.53                 | 9.83            | 23.86                    | 44.17          | 122.2               | -78.03          | Horizontal   |
| 5850.00                   | 28.88             | 32.7                  | 9.99            | 23.87                    | 47.7           | 122.2               | -74.5           | Horizontal   |
| 5855.00                   | 29.52             | 32.72                 | 9.99            | 23.88                    | 48.35          | 110.8               | -62.45          | Horizontal   |
| 5875.00                   | 29.18             | 32.74                 | 10.04           | 23.89                    | 48.07          | 105.2               | -57.13          | Horizontal   |
| 5925.00                   | 28.53             | 32.8                  | 10.11           | 23.9                     | 47.54          | 68.2                | -20.66          | Horizontal   |
| 5650.00                   | 26.02             | 32.36                 | 9.72            | 23.83                    | 44.27          | 68.2                | -23.93          | Vertical     |
| 5700.00                   | 29.43             | 32.5                  | 9.79            | 23.84                    | 47.88          | 105.2               | -57.32          | Vertical     |
| 5720.00                   | 26.43             | 32.53                 | 9.81            | 23.85                    | 44.92          | 110.8               | -65.88          | Vertical     |
| 5725.00                   | 26.51             | 32.53                 | 9.83            | 23.86                    | 45.01          | 122.2               | -77.19          | Vertical     |
| 5850.00                   | 26.23             | 32.7                  | 9.99            | 23.87                    | 45.05          | 122.2               | -77.15          | Vertical     |
| 5855.00                   | 27.64             | 32.72                 | 9.99            | 23.88                    | 46.47          | 110.8               | -64.33          | Vertical     |
| 5875.00                   | 27.1              | 32.74                 | 10.04           | 23.89                    | 45.99          | 105.2               | -59.21          | Vertical     |
| 5925.00                   | 27.07             | 32.8                  | 10.11           | 23.9                     | 46.08          | 68.2                | -22.12          | Vertical     |

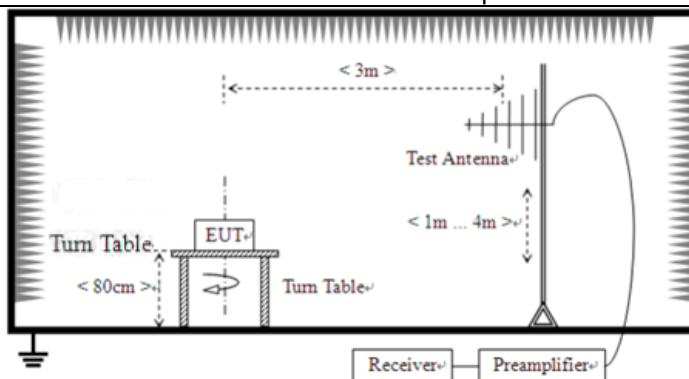
| IEEE 802.11n HT40 |                   |                       |                 |                          |                |                     |                 |              |
|-------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| Peak value:       |                   |                       |                 |                          |                |                     |                 |              |
| Frequency (MHz)   | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 5650.00           | 26.02             | 32.36                 | 9.72            | 23.83                    | 44.27          | 68.2                | -23.93          | Horizontal   |
| 5700.00           | 26.56             | 32.5                  | 9.79            | 23.84                    | 45.01          | 105.2               | -60.19          | Horizontal   |
| 5720.00           | 29.56             | 32.53                 | 9.81            | 23.85                    | 48.05          | 110.8               | -62.75          | Horizontal   |
| 5725.00           | 25.54             | 32.53                 | 9.83            | 23.86                    | 44.04          | 122.2               | -78.16          | Horizontal   |
| 5850.00           | 28.77             | 32.7                  | 9.99            | 23.87                    | 47.59          | 122.2               | -74.61          | Horizontal   |
| 5855.00           | 28.41             | 32.72                 | 9.99            | 23.88                    | 47.24          | 110.8               | -63.56          | Horizontal   |
| 5875.00           | 25.86             | 32.74                 | 10.04           | 23.89                    | 44.75          | 105.2               | -60.45          | Horizontal   |
| 5925.00           | 29.63             | 32.8                  | 10.11           | 23.9                     | 48.64          | 68.2                | -19.56          | Horizontal   |
| 5650.00           | 29.05             | 32.36                 | 9.72            | 23.83                    | 47.3           | 68.2                | -20.9           | Vertical     |
| 5700.00           | 25.43             | 32.5                  | 9.79            | 23.84                    | 43.88          | 105.2               | -61.32          | Vertical     |
| 5720.00           | 28.34             | 32.53                 | 9.81            | 23.85                    | 46.83          | 110.8               | -63.97          | Vertical     |
| 5725.00           | 25.95             | 32.53                 | 9.83            | 23.86                    | 44.45          | 122.2               | -77.75          | Vertical     |
| 5850.00           | 28.13             | 32.7                  | 9.99            | 23.87                    | 46.95          | 122.2               | -75.25          | Vertical     |
| 5855.00           | 25.02             | 32.72                 | 9.99            | 23.88                    | 43.85          | 110.8               | -66.95          | Vertical     |
| 5875.00           | 27.03             | 32.74                 | 10.04           | 23.89                    | 45.92          | 105.2               | -59.28          | Vertical     |
| 5925.00           | 26.38             | 32.8                  | 10.11           | 23.9                     | 45.39          | 68.2                | -22.81          | Vertical     |

| <b>IEEE 802.11ac HT40</b> |                   |                       |                 |                          |                |                     |                 |              |
|---------------------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| <b>Peak value:</b>        |                   |                       |                 |                          |                |                     |                 |              |
| Frequency (MHz)           | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 5650.00                   | 26.56             | 32.36                 | 9.72            | 23.83                    | 44.81          | 68.2                | -23.39          | Horizontal   |
| 5700.00                   | 27.59             | 32.5                  | 9.79            | 23.84                    | 46.04          | 105.2               | -59.16          | Horizontal   |
| 5720.00                   | 25.24             | 32.53                 | 9.81            | 23.85                    | 43.73          | 110.8               | -67.07          | Horizontal   |
| 5725.00                   | 26.3              | 32.53                 | 9.83            | 23.86                    | 44.8           | 122.2               | -77.4           | Horizontal   |
| 5850.00                   | 29.13             | 32.7                  | 9.99            | 23.87                    | 47.95          | 122.2               | -74.25          | Horizontal   |
| 5855.00                   | 28.29             | 32.72                 | 9.99            | 23.88                    | 47.12          | 110.8               | -63.68          | Horizontal   |
| 5875.00                   | 28.62             | 32.74                 | 10.04           | 23.89                    | 47.51          | 105.2               | -57.69          | Horizontal   |
| 5925.00                   | 25.14             | 32.8                  | 10.11           | 23.9                     | 44.15          | 68.2                | -24.05          | Horizontal   |
| 5650.00                   | 28.32             | 32.36                 | 9.72            | 23.83                    | 46.57          | 68.2                | -21.63          | Vertical     |
| 5700.00                   | 25.16             | 32.5                  | 9.79            | 23.84                    | 43.61          | 105.2               | -61.59          | Vertical     |
| 5720.00                   | 27.38             | 32.53                 | 9.81            | 23.85                    | 45.87          | 110.8               | -64.93          | Vertical     |
| 5725.00                   | 28.92             | 32.53                 | 9.83            | 23.86                    | 47.42          | 122.2               | -74.78          | Vertical     |
| 5850.00                   | 27.45             | 32.7                  | 9.99            | 23.87                    | 46.27          | 122.2               | -75.93          | Vertical     |
| 5855.00                   | 27.14             | 32.72                 | 9.99            | 23.88                    | 45.97          | 110.8               | -64.83          | Vertical     |
| 5875.00                   | 26.48             | 32.74                 | 10.04           | 23.89                    | 45.37          | 105.2               | -59.83          | Vertical     |
| 5925.00                   | 29.23             | 32.8                  | 10.11           | 23.9                     | 48.24          | 68.2                | -19.96          | Vertical     |

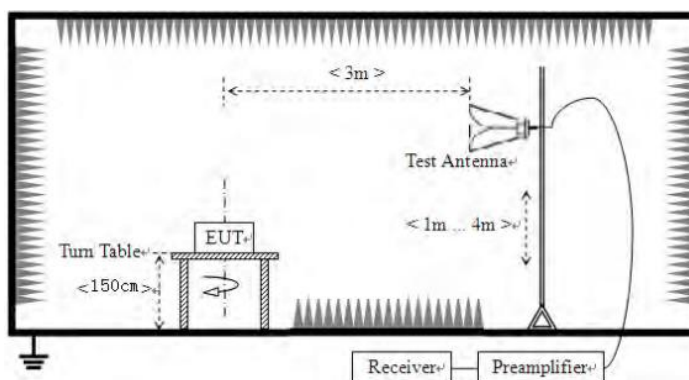
## 7.6 Spurious Emission

### 7.6.1 Radiated Emission Method

|                       |                                                                                                 |            |                 |               |                      |
|-----------------------|-------------------------------------------------------------------------------------------------|------------|-----------------|---------------|----------------------|
| Test Requirement:     | FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)                                      |            |                 |               |                      |
| Test Method:          | ANSI C63.10:2013                                                                                |            |                 |               |                      |
| Test Frequency Range: | 9kHz to 40GHz                                                                                   |            |                 |               |                      |
| Test site:            | Measurement Distance: 3m                                                                        |            |                 |               |                      |
| Receiver setup:       | Frequency                                                                                       | Detector   | RBW             | VBW           | Value                |
|                       | 9kHz-150KHz                                                                                     | Quasi-peak | 200Hz           | 1kHz          | Quasi-peak Value     |
|                       | 150kHz-30MHz                                                                                    | Quasi-peak | 9kHz            | 30kHz         | Quasi-peak Value     |
|                       | 30MHz-1GHz                                                                                      | Quasi-peak | 120KHz          | 300KHz        | Quasi-peak Value     |
|                       | Above 1GHz                                                                                      | Peak       | 1MHz            | 3MHz          | Peak Value           |
| AV                    |                                                                                                 | 1MHz       | 3MHz            | Average Value |                      |
| Limit:                | Frequency                                                                                       |            | Limit (uV/m)    | Value         | Measurement Distance |
|                       | 0.009MHz-0.490MHz                                                                               |            | 2400/F(KHz)     | QP            | 300m                 |
|                       | 0.490MHz-1.705MHz                                                                               |            | 24000/F(KHz)    | QP            | 30m                  |
|                       | 1.705MHz-30MHz                                                                                  |            | 30              | QP            | 30m                  |
|                       | 30MHz-88MHz                                                                                     |            | 100             | QP            | 3m                   |
|                       | 88MHz-216MHz                                                                                    |            | 150             | QP            |                      |
|                       | 216MHz-960MHz                                                                                   |            | 200             | QP            |                      |
|                       | 960MHz-1GHz                                                                                     |            | 500             | QP            |                      |
|                       | Frequency                                                                                       |            | Limit (dBm/MHz) |               | Remark               |
|                       | Above 1GHz                                                                                      |            | -27.0           |               | Peak Value           |
| Test setup:           | For radiated emissions from 9kHz to 30MHz                                                       |            |                 |               |                      |
|                       | <div></div> |            |                 |               |                      |
|                       | For radiated emissions from 30MHz to 1GHz                                                       |            |                 |               |                      |



For radiated emissions above 1GHz



## Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

|                   |                                  |       |         |     |         |          |
|-------------------|----------------------------------|-------|---------|-----|---------|----------|
| Test Instruments: | Refer to section 6.0 for details |       |         |     |         |          |
| Test mode:        | Refer to section 5.2 for details |       |         |     |         |          |
| Test environment: | Temp.:                           | 25 °C | Humid.: | 52% | Press.: | 1012mbar |
| Test voltage:     | AC 120V, 60Hz                    |       |         |     |         |          |
| Test results:     | Pass                             |       |         |     |         |          |

**Remarks:**

1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

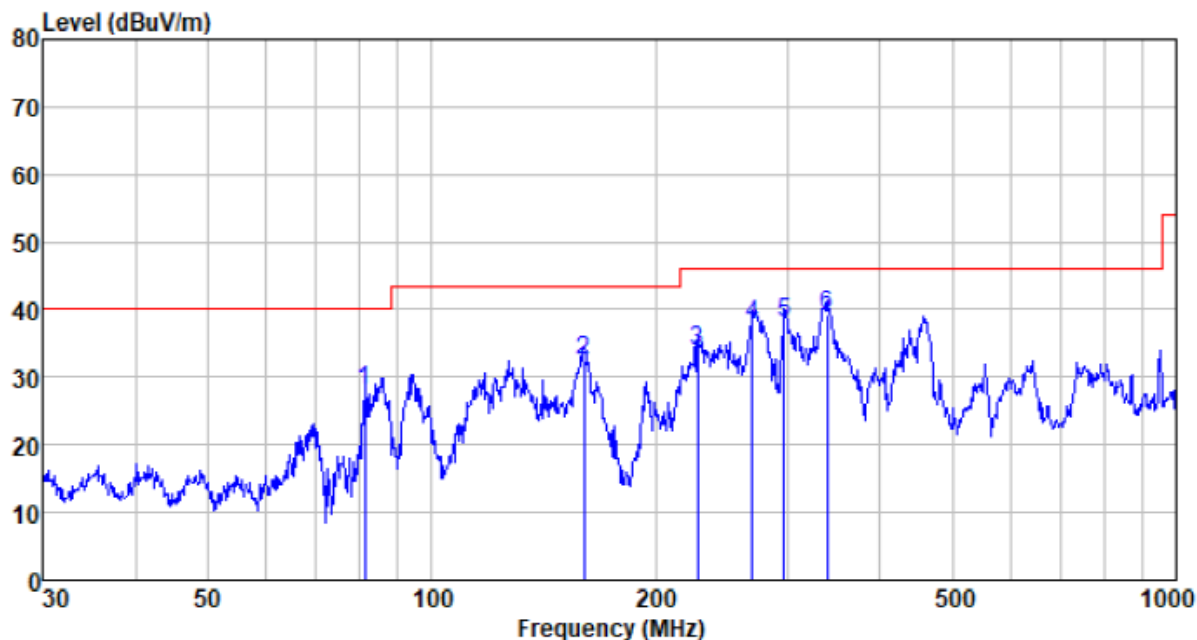
**Measurement Data:****9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

## Below 1GHz

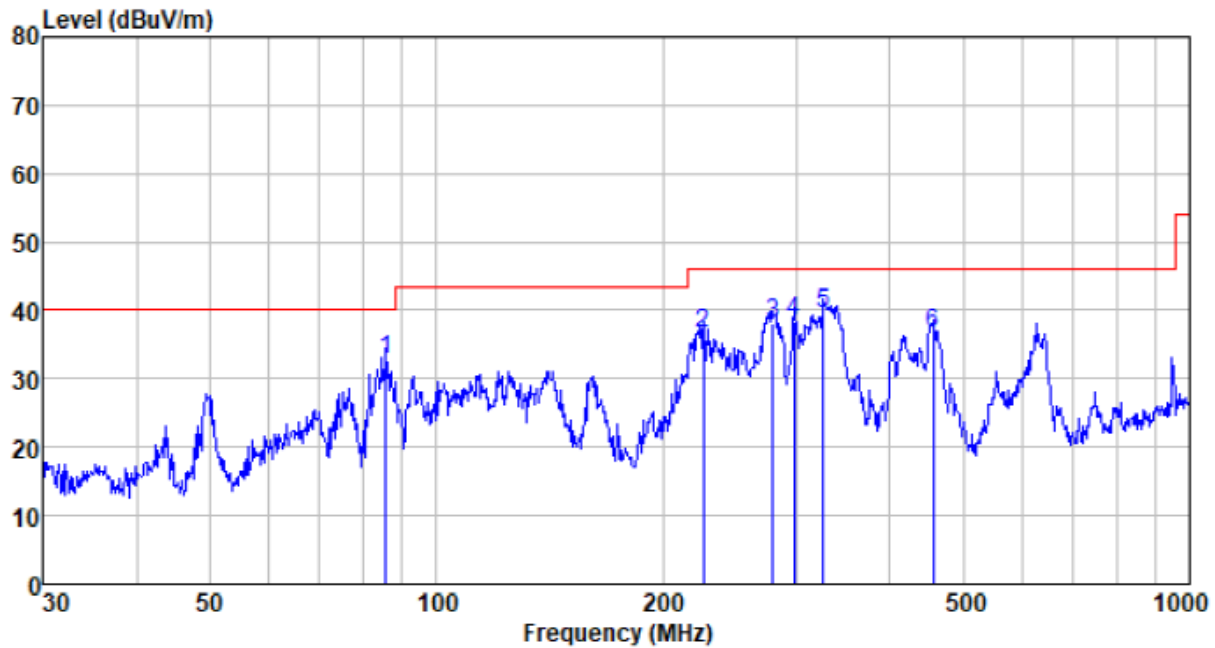
Pre-scan all test modes, found worst case at 802.11ac(HT80) 5775MHz, and so only show the test result of 802.11ac(HT80) 5775MHz

## Horizontal:



| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 81.212      | 55.79                    | 7.78                      | 1.04                | 36.56                  | 28.05           | 40.00                    | -11.95              | QP     |
| 160.346     | 59.69                    | 8.31                      | 1.63                | 37.14                  | 32.49           | 43.50                    | -11.01              | QP     |
| 227.691     | 57.91                    | 11.42                     | 2.01                | 37.36                  | 33.98           | 46.00                    | -12.02              | QP     |
| 269.428     | 60.22                    | 12.76                     | 2.22                | 37.40                  | 37.80           | 46.00                    | -8.20               | QP     |
| 297.224     | 59.71                    | 13.53                     | 2.35                | 37.42                  | 38.17           | 46.00                    | -7.83               | QP     |
| 339.589     | 59.83                    | 14.34                     | 2.57                | 37.46                  | 39.28           | 46.00                    | -6.72               | QP     |

Vertical:



| Freq<br>MHz | Reading<br>level<br>dBuV | Antenna<br>factor<br>dB/m | Cable<br>loss<br>dB | Preamp<br>factor<br>dB | level<br>dBuV/m | Limit<br>level<br>dBuV/m | Over<br>limit<br>dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 85.598      | 58.91                    | 9.30                      | 1.07                | 36.60                  | 32.68           | 40.00                    | -7.32               | QP     |
| 226.099     | 60.48                    | 11.38                     | 1.99                | 37.36                  | 36.49           | 46.00                    | -9.51               | QP     |
| 280.024     | 60.02                    | 13.05                     | 2.27                | 37.40                  | 37.94           | 46.00                    | -8.06               | QP     |
| 298.268     | 60.02                    | 13.56                     | 2.35                | 37.42                  | 38.51           | 46.00                    | -7.49               | QP     |
| 326.740     | 60.31                    | 14.12                     | 2.50                | 37.45                  | 39.48           | 46.00                    | -6.52               | QP     |
| 455.906     | 54.57                    | 16.48                     | 3.11                | 37.51                  | 36.65           | 46.00                    | -9.35               | QP     |

## Above 1GHz:

802.11a,11n(HT20),11ac(HT20),11n(HT40),11ac(HT40), all have been tested, only show the worst case

| Test mode:      |                   | 802.11ac(HT20)        |                 | Test channel:      |                |                     | lowest          |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 11490           | 35.48             | 39.4                  | 8.73            | 36.3               | 47.31          | 68.2                | -20.89          | Vertical     |
| 17235           | 30.22             | 41                    | 11.37           | 36.28              | 46.31          | 68.2                | -21.89          | Vertical     |
| 11490           | 31.95             | 39.4                  | 8.73            | 36.3               | 43.78          | 68.2                | -24.42          | Horizontal   |
| 17235           | 30.45             | 41                    | 11.37           | 36.28              | 46.54          | 68.2                | -21.66          | Horizontal   |

| Test mode:      |                   | 802.11ac(HT20)        |                 | Test channel:      |                |                     | Middle          |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 11570           | 30.8              | 39.28                 | 8.77            | 36.29              | 42.56          | 68.2                | -25.64          | Vertical     |
| 17355           | 30.66             | 41.52                 | 11.48           | 36.26              | 47.4           | 68.2                | -20.8           | Vertical     |
| 11570           | 34.11             | 39.28                 | 8.77            | 36.29              | 45.87          | 68.2                | -22.33          | Horizontal   |
| 17355           | 30.56             | 41.52                 | 11.48           | 36.26              | 47.3           | 68.2                | -20.9           | Horizontal   |

| Test mode:      |                   | 802.11ac(HT20)        |                 | Test channel:      |                |                     | Highest         |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 11650           | 35.63             | 39.16                 | 8.79            | 36.27              | 47.31          | 68.2                | -20.89          | Vertical     |
| 17475           | 33.29             | 36.75                 | 6.81            | 35.55              | 41.3           | 68.2                | -26.9           | Vertical     |
| 11650           | 33.33             | 39.16                 | 8.79            | 36.27              | 45.01          | 68.2                | -23.19          | Horizontal   |
| 17475           | 31.9              | 36.75                 | 6.81            | 35.55              | 39.91          | 68.2                | -28.29          | Horizontal   |

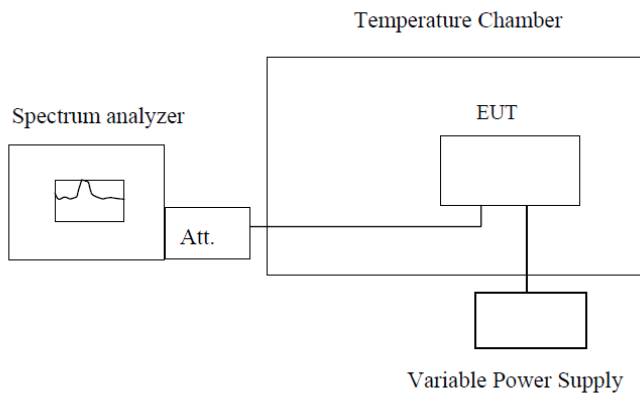
| Test mode:      |                   | 802.11ac(HT40)        |                 | Test channel:      |                |                     | Lowest          |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 11510           | 35.9              | 39.4                  | 8.74            | 36.3               | 47.74          | 68.2                | -20.46          | Vertical     |
| 17265           | 30.34             | 41.26                 | 11.4            | 36.27              | 46.73          | 68.2                | -21.47          | Vertical     |
| 11510           | 34.07             | 39.4                  | 8.74            | 36.3               | 45.91          | 68.2                | -22.29          | Horizontal   |
| 17265           | 31.48             | 41.26                 | 11.4            | 36.27              | 47.87          | 68.2                | -20.33          | Horizontal   |

| Test mode:      |                   | 802.11ac(HT40)        |                 | Test channel:      |                |                     | Highest         |              |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
| 11590           | 35.45             | 39.22                 | 8.77            | 36.28              | 47.16          | 68.2                | -21.04          | Vertical     |
| 17385           | 30.78             | 41.78                 | 11.51           | 36.26              | 47.81          | 68.2                | -20.39          | Vertical     |
| 11590           | 30.05             | 39.22                 | 8.77            | 36.28              | 41.76          | 68.2                | -26.44          | Horizontal   |
| 17385           | 30.39             | 41.78                 | 11.51           | 36.26              | 47.42          | 68.2                | -20.78          | Horizontal   |

## Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. If the test result on peak is lower than the limit more than 20dB, then average measurement needn't be performed.

## 7.7 Frequency stability

|                   |                                                                                                                                                                                                       |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.407(g)                                                                                                                                                                        |
| Test Method:      | ANSI C63.10:2013, FCC Part 2.1055                                                                                                                                                                     |
| Limit:            | Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified |
| Test Procedure:   | The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.                                                                                            |
| Test setup:       |  <p><b>Note :</b> Measurement setup for testing on Antenna connector</p>                                           |
| Test Instruments: | Refer to section 6 for details                                                                                                                                                                        |
| Test mode:        | Refer to section 5.2 for details                                                                                                                                                                      |
| Test results:     | Pass                                                                                                                                                                                                  |

**Measurement data:** The detailed test data see Appendix for WIFI 5.8G

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----