

TEST REPORT

Applicant Name: APPOTRONICS CO., LTD
Address: 20F to 22F, High-Tech Zone Union Tower, NO.63 Xuefu Road, Nanshan District, Shenzhen, 518055 China
Report Number: 2401W44381E-RF-00B
FCC ID: 2ALQL-APPO-FA01-G

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Laser Display Projector
Model No.: APPO-FA01-G
Multiple Model(s) No.: N/A
Trade Mark: APPOTRONICS
Date Received: 2024/09/03
Issue Date: 2024/10/17

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	8
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	14
APPLICABLE STANDARD	14
RESULT	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
FACTOR & OVER LIMIT CALCULATION.....	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS	23
APPLICABLE STANDARD	23
EUT SETUP	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	25
FACTOR & OVER LIMIT/MARGIN CALCULATION	25
TEST DATA	25
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....	101
APPLICABLE STANDARD	101
TEST PROCEDURE	101
TEST DATA	101

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	102
APPLICABLE STANDARD	102
TEST PROCEDURE	102
TEST DATA	103
FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	104
APPLICABLE STANDARD	104
TEST PROCEDURE	104
TEST DATA	104
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	105
APPLICABLE STANDARD	105
TEST PROCEDURE	105
TEST DATA	105
EUT PHOTOGRAPHS.....	106
TEST SETUP PHOTOGRAPHS	107
APPENDIX – BLE.....	108
APPENDIX A: DTS BANDWIDTH	108
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	111
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	114
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	117
APPENDIX E: BAND EDGE MEASUREMENTS.....	120
APPENDIX F: DUTY CYCLE	122
APPENDIX – WI-FI.....	123
APPENDIX A: DTS BANDWIDTH	123
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	136
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	149
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	150
APPENDIX E: BAND EDGE MEASUREMENTS.....	163
APPENDIX F: DUTY CYCLE	171

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401W44381E-RF-00B	Original Report	2024/10/17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Laser Display Projector
Tested Model	APPO-FA01-G
Multiple Model(s)	N/A
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Output Peak Power	BLE: 7.13dBm Wi-Fi: 24.00dBm
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification [#]	2.4G Wi-Fi: ANT 1: 2.34dBi; ANT 2: 2.00dBi; BLE: 2.11dBi (provided by the applicant)
Voltage Range	DC 20V from adapter
Sample serial number	2QXF-1 for Conducted and Radiated Emissions Test 2QXF-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: P6514I Input: 100-240V~50/60Hz 1.5A Output: 5.0V/9.0V/12.0V15.0V, 3.0A or 20.0V, 3.25A 65.0W Max

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.
802.11n-HT40 mode was tested with Channel 3, 6 and 9.

Note:

According to the manufacturer,

For 802.11 b/g modes, the device only support SISO mode.

For 802.11 n modes, the device support SISO and MIMO mode, the SISO and MIMO modes share the same power level setting under the same modulation. So the worst mode MIMO was selected to test.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“QA Tool_Dbg”[#] exercise software was used and the power level as below. The software and power level was provided by the manufacturer.

The worst case was performed under:

Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	18	18	18
802.11g	6Mbps	18	18	18
802.11n-HT20	MCS0	18	18	18
802.11n-HT40	MCS0	18	18	18
BLE 1M	1Mbps	Default	Default	Default
BLE 2M	2Mbps	Default	Default	Default
Note: For Wi-Fi, all the antenna ports have the same power level.				

Duty cycle

Test Result: Compliant. Please refer to the Appendix.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Xiao mi	Earphone	Unknown	Unknown
Kingston	U disk	Unknown	Unknown
Lenovo	PC	TIANYI510Pro-18ICB	R3NO28B21001

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded Un-Detachable DC Cable	1.0	EUT	Adapter
Un-shielded Detachable HDMI cable	1.6	EUT	PC
Un-shielded Detachable Audio cable	1.2	EUT	Earphone


Block Diagram of Test Setup

For conducted emission

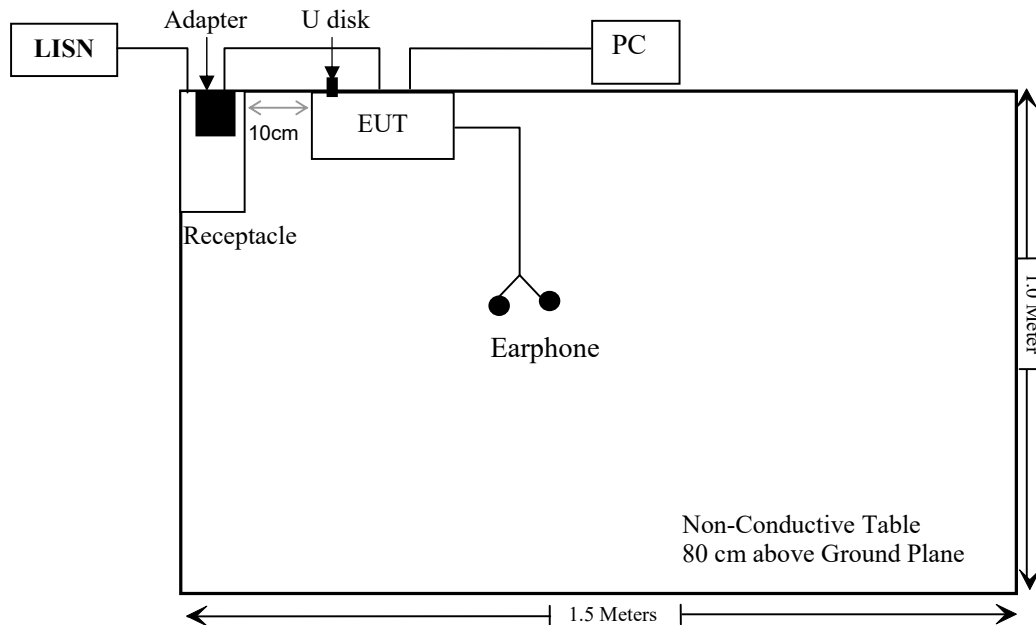


For Radiated Emissions:

Below 1GHz

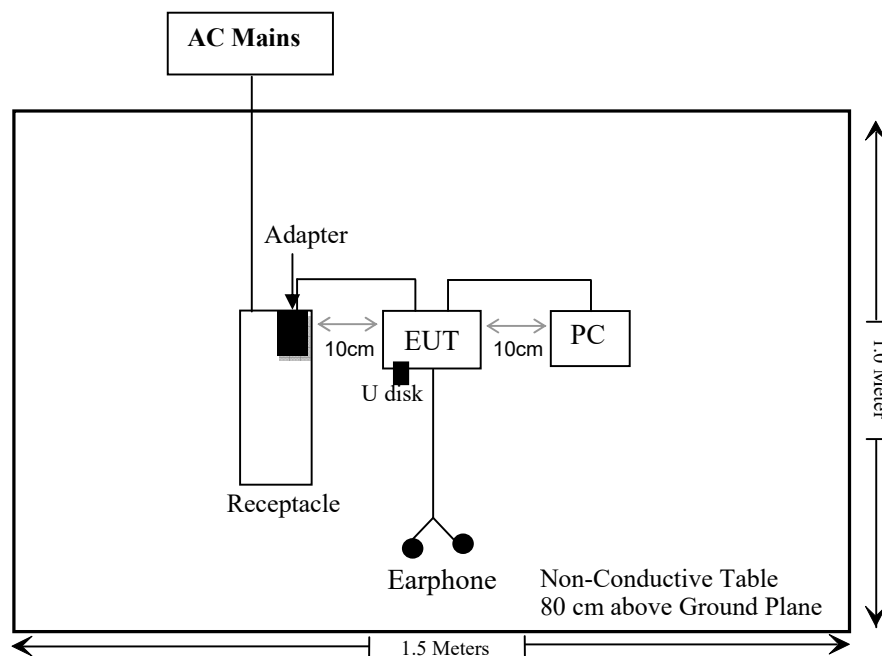

Above 1GHz

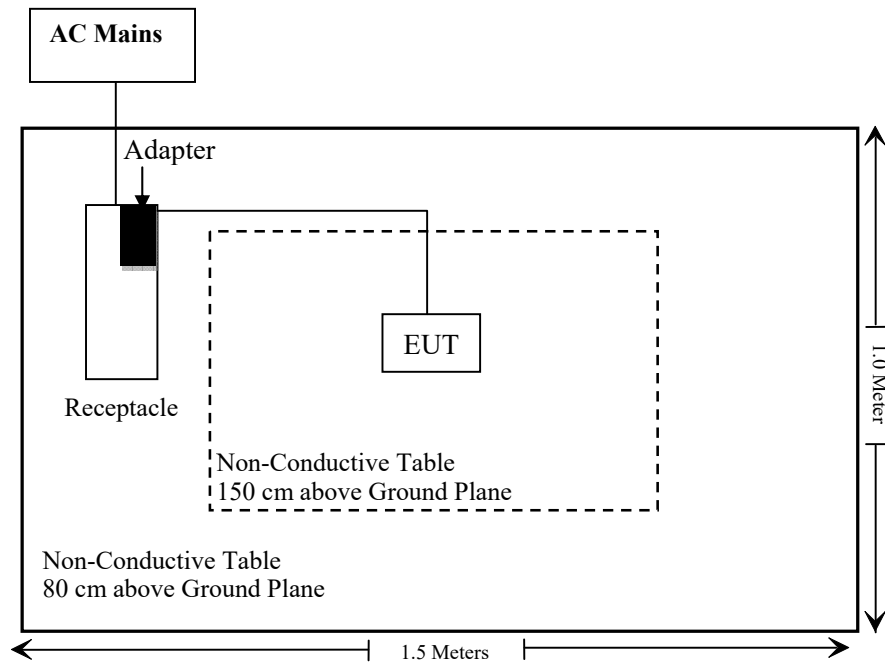

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM065	2024/06/27	2025/06/26
Micro-Tronics	RF Cable	8082135	W1113	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(3)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	12.0	2.11	-0.04	11.96	15.70	0.2	768
BLE	2402-2480	8.0	2.11	-0.04	7.96	6.25	0.2	768
2.4G Wi-Fi	2412-2462	24.5	2.34	0.19	24.69	294.44	0.2	768
5.2G Wi-Fi	5180-5240	16.0	3.19	1.04	17.04	50.58	0.2	768
5.3G Wi-Fi	5260-5320	16.5	3.19	1.04	17.54	56.75	0.2	768
5.6G Wi-Fi	5500-5720	17.0	3.19	1.04	18.04	63.68	0.2	768
5.8G Wi-Fi	5745-5825	17.0	3.19	1.04	18.04	63.68	0.2	768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.
 2. The BT and Wi-Fi can transmit at same time. The 2.4G and 5G Wi-Fi cannot transmit at same time.
 3. 0dBd=2.15dBi

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{BT}/limit + ERP_{2.4G\ Wi-Fi}/limit = 15.70/768 + 294.44/768 = 0.404 < 1.0$,
 so simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BLE, and two internal antennas arrangement for Wi-Fi, which were permanently attached, the antenna gain[#] as below table, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna	Antenna Type	Antenna Gain [#]	Impedance	Frequency Range
BLE ANT	FPC	2.11dBi	50Ω	2.4~2.5GHz
Wi-Fi ANT1	FPC	2.34dBi	50Ω	2.4~2.5GHz
Wi-Fi ANT2	FPC	2.00dBi	50Ω	2.4~2.5GHz


Result: Compliant

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

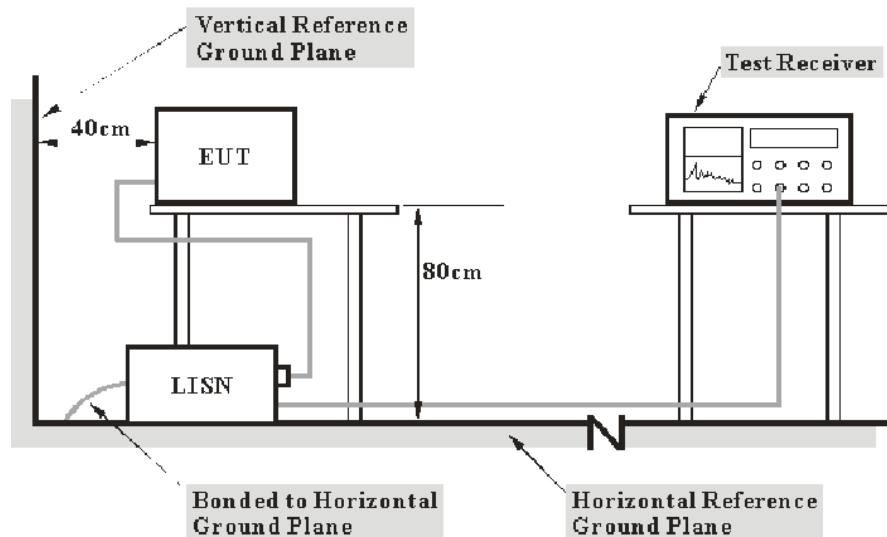

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Macy Shi on 2024-09-11.

EUT operation mode: Transmitting

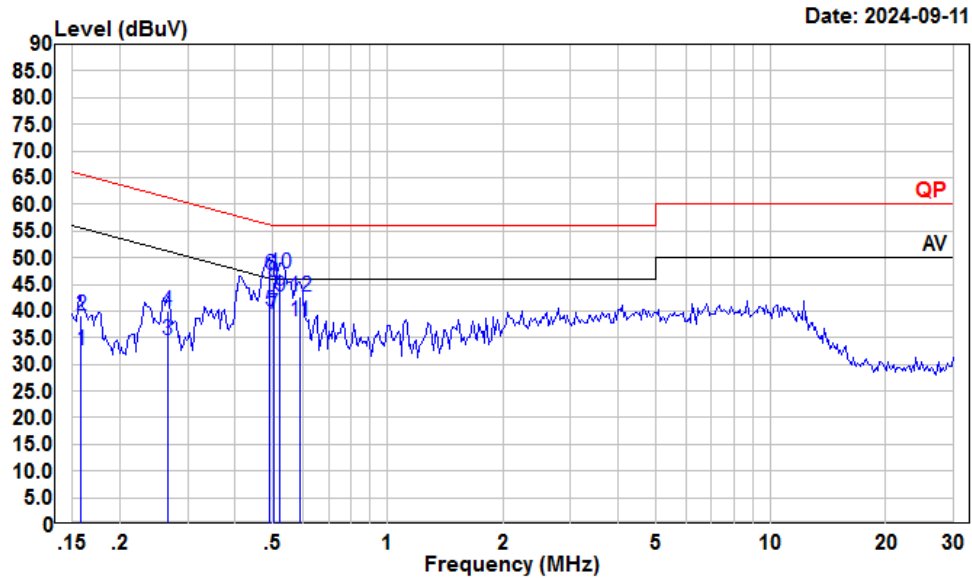BLE: (Maximum output power mode, BLE 1M Low Channel)**AC 120V/60 Hz, Line**

Condition: Line


Project : 2401W44381E-RF

tester : Macy.shi

Note : BLE transmitting

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.158	11.61	32.61	10.88	10.12	55.56	-22.95	Average
2	0.158	18.13	39.13	10.88	10.12	65.56	-26.43	QP
3	0.266	13.85	34.65	10.71	10.09	51.25	-16.60	Average
4	0.266	19.27	40.07	10.71	10.09	61.25	-21.18	QP
5	0.491	19.38	40.03	10.51	10.14	46.14	-6.11	Average
6	0.491	26.26	46.91	10.51	10.14	56.14	-9.23	QP
7	0.502	18.88	39.52	10.50	10.14	46.00	-6.48	Average
8	0.502	24.79	45.43	10.50	10.14	56.00	-10.57	QP
9	0.524	22.10	42.74	10.50	10.14	46.00	-3.26	Average
10	0.524	26.30	46.94	10.50	10.14	56.00	-9.06	QP
11	0.589	17.40	38.02	10.50	10.12	46.00	-7.98	Average
12	0.589	22.00	42.62	10.50	10.12	56.00	-13.38	QP

AC 120V/60 Hz, Neutral

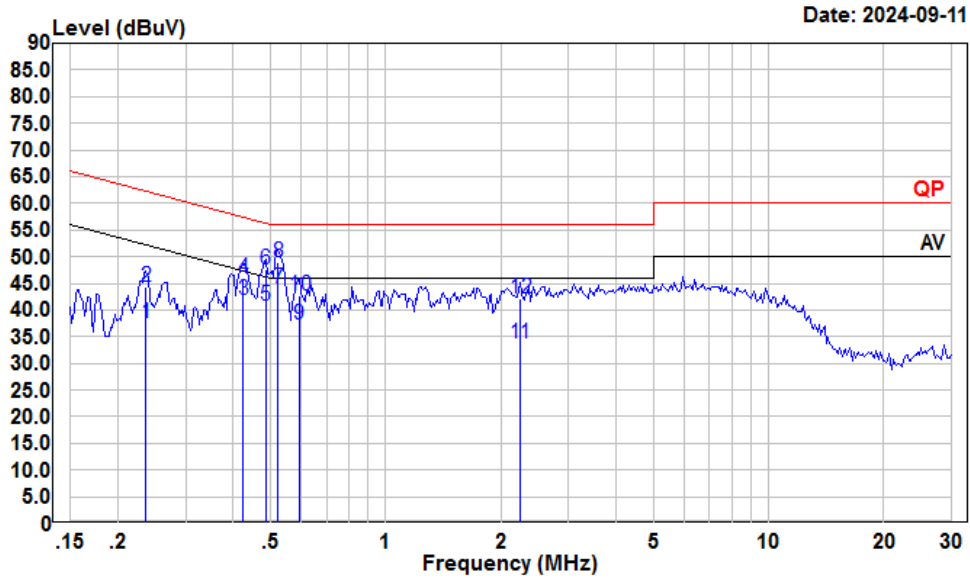


Condition: Neutral

Project : 2401W44381E-RF

tester : Macy.shi

Note : BLE transmitting

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.237	16.93	37.46	10.45	10.08	52.22	-14.76	Average
2	0.237	23.70	44.23	10.45	10.08	62.22	-17.99	QP
3	0.424	21.00	41.76	10.65	10.11	47.37	-5.61	Average
4	0.424	25.30	46.06	10.65	10.11	57.37	-11.31	QP
5	0.486	20.02	40.84	10.69	10.13	46.23	-5.39	Average
6	0.486	26.73	47.55	10.69	10.13	56.23	-8.68	QP
7	0.524	23.12	43.96	10.70	10.14	46.00	-2.04	Average
8	0.524	27.99	48.83	10.70	10.14	56.00	-7.17	QP
9	0.595	16.40	37.22	10.70	10.12	46.00	-8.78	Average
10	0.595	21.80	42.62	10.70	10.12	56.00	-13.38	QP
11	2.237	13.21	33.79	10.40	10.18	46.00	-12.21	Average
12	2.237	21.68	42.26	10.40	10.18	56.00	-13.74	QP

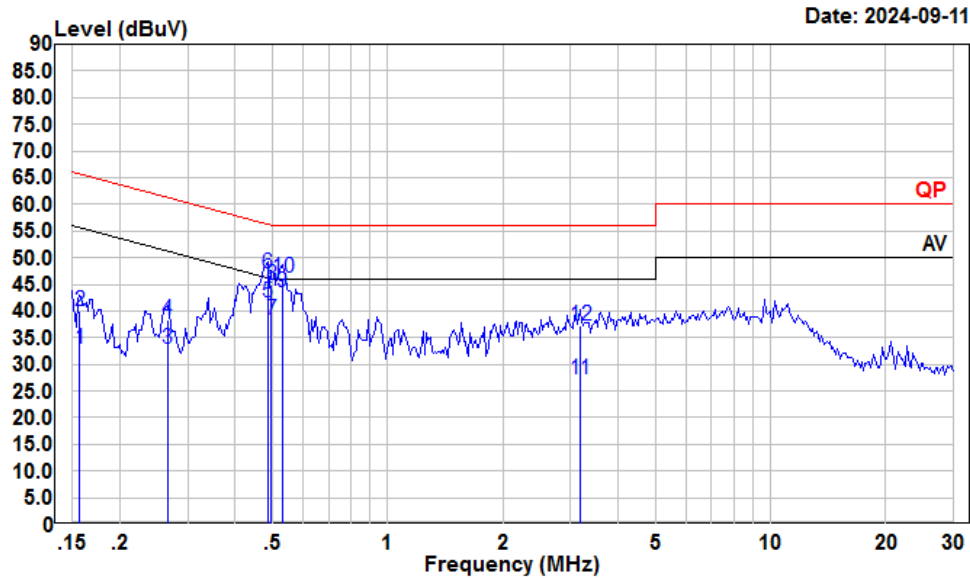2.4G Wi-Fi: (Maximum output power mode, 802.11n40 Low Channel)**AC 120V/60 Hz, Line**

Condition: Line


Project : 2401W44381E-RF

tester : Macy.shi

Note : 2.4G Wi-Fi transmitting

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	11.91	32.92	10.89	10.12	55.65	-22.73	Average
2	0.156	19.03	40.04	10.89	10.12	65.65	-25.61	QP
3	0.266	12.08	32.88	10.71	10.09	51.25	-18.37	Average
4	0.266	17.50	38.30	10.71	10.09	61.25	-22.95	QP
5	0.486	21.09	41.73	10.51	10.13	46.23	-4.50	Average
6	0.486	26.52	47.16	10.51	10.13	56.23	-9.07	QP
7	0.497	17.80	38.44	10.50	10.14	46.05	-7.61	Average
8	0.497	24.30	44.94	10.50	10.14	56.05	-11.11	QP
9	0.529	22.93	43.56	10.50	10.13	46.00	-2.44	Average
10	0.529	25.63	46.26	10.50	10.13	56.00	-9.74	QP
11	3.173	6.62	27.21	10.40	10.19	46.00	-18.79	Average
12	3.173	16.75	37.34	10.40	10.19	56.00	-18.66	QP

AC 120V/60 Hz, Neutral

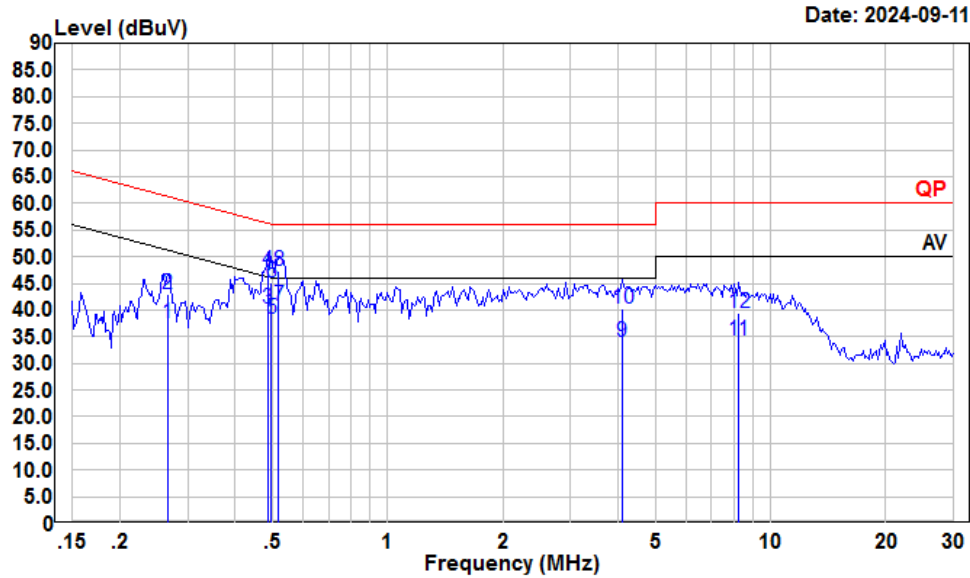

Condition: Neutral

Project : 2401W44381E-RF

tester : Macy.shi

Note : 2.4G Wi-Fi transmitting

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.266	17.04	37.62	10.49	10.09	51.25	-13.63	Average
2	0.266	22.27	42.85	10.49	10.09	61.25	-18.40	QP
3	0.486	19.56	40.38	10.69	10.13	46.23	-5.85	Average
4	0.486	26.57	47.39	10.69	10.13	56.23	-8.84	QP
5	0.497	17.40	38.24	10.70	10.14	46.05	-7.81	Average
6	0.497	24.40	45.24	10.70	10.14	56.05	-10.81	QP
7	0.518	20.06	40.90	10.70	10.14	46.00	-5.10	Average
8	0.518	26.45	47.29	10.70	10.14	56.00	-8.71	QP
9	4.092	13.31	33.93	10.41	10.21	46.00	-12.07	Average
10	4.092	19.69	40.31	10.41	10.21	56.00	-15.69	QP
11	8.235	13.19	34.14	10.75	10.20	50.00	-15.86	Average
12	8.235	18.38	39.33	10.75	10.20	60.00	-20.67	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

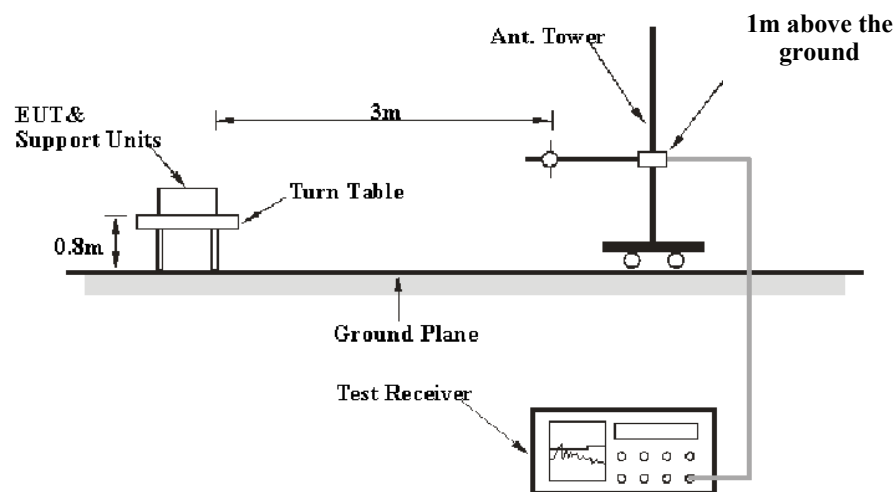

30MHz-1GHz:

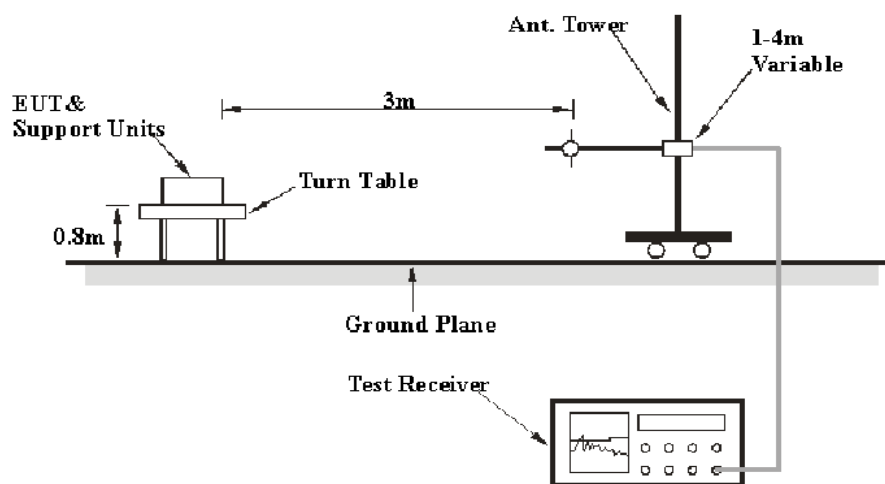

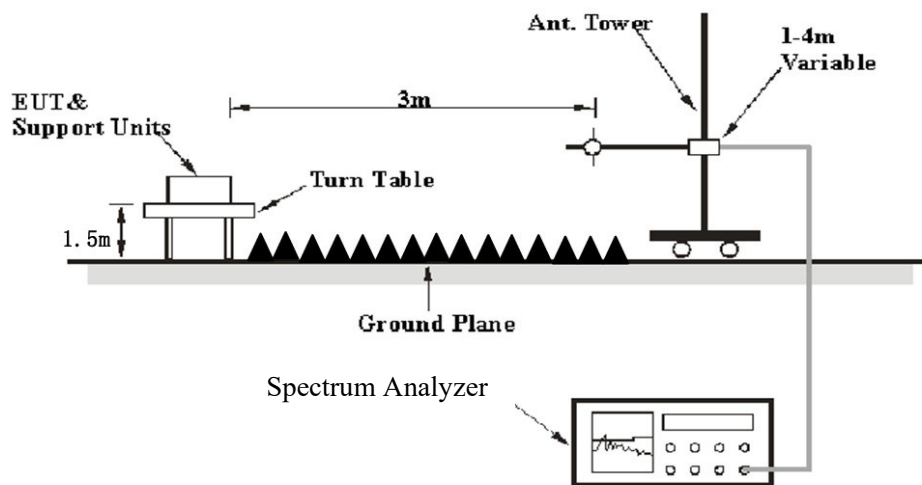Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~54 %
ATM Pressure:	101.0 kPa

The testing was performed by Anson Su on 2024-09-18 for below 1GHz and Zenos Qiao on 2024-09-07 and 2024-09-08 for above 1GHz.

EUT operation mode: Transmitting


9 kHz-30MHz: *(Maximum output power mode, 802.11n40 Low Channel)*

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.

30MHz-1GHz:

BLE (Maximum output power mode, BLE 1M Low Channel)


Horizontal

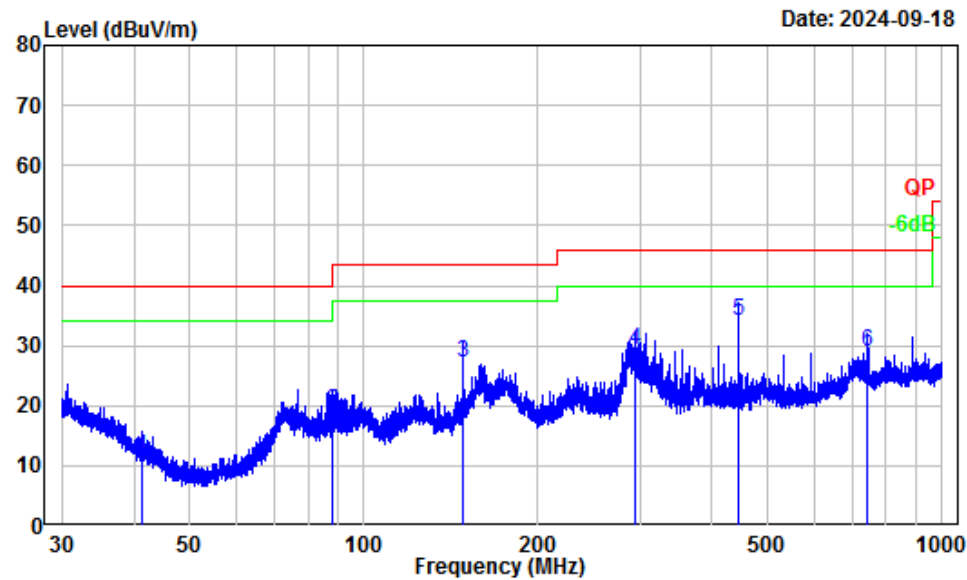

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401W44381E-RF
Test Mode : BLE Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.26	-13.28	24.88	11.60	40.00	-28.40	QP
2	88.11	-18.07	37.20	19.13	43.50	-24.37	QP
3	148.31	-12.37	39.66	27.29	43.50	-16.21	QP
4	293.60	-11.21	40.48	29.27	46.00	-16.73	QP
5	445.24	-7.51	41.71	34.20	46.00	-11.80	QP
6	741.61	-2.96	32.01	29.05	46.00	-16.95	QP

Vertical

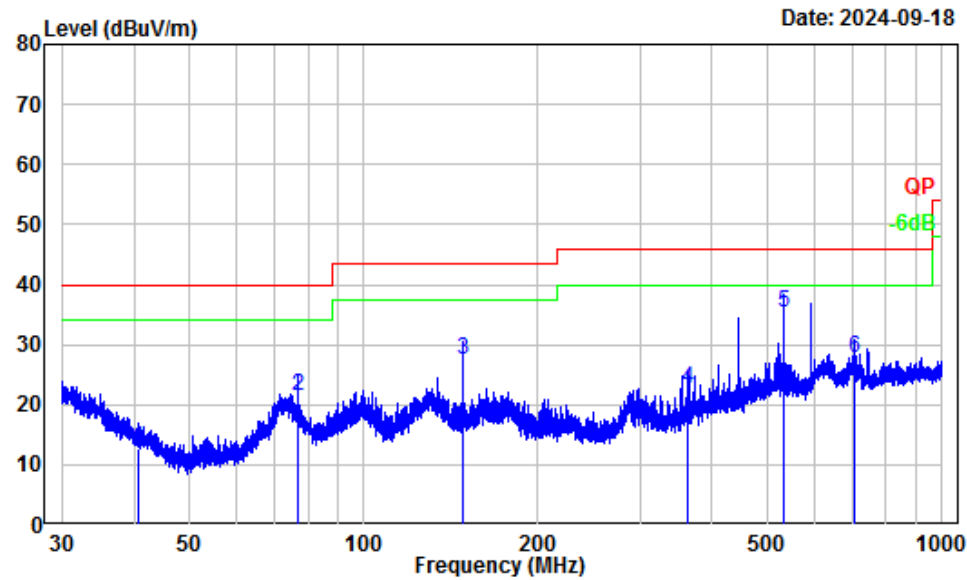


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401W44381E-RF
Test Mode : BLE Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.76	-12.90	25.64	12.74	40.00	-27.26	QP
2	76.85	-17.82	39.23	21.41	40.00	-18.59	QP
3	148.38	-12.36	39.75	27.39	43.50	-16.11	QP
4	364.26	-9.69	32.22	22.53	46.00	-23.47	QP
5	532.90	-5.75	41.19	35.44	46.00	-10.56	QP
6	703.30	-3.45	31.09	27.64	46.00	-18.36	QP

2.4G Wi-Fi (Maximum output power mode, 802.11n40 Low Channel)


Horizontal

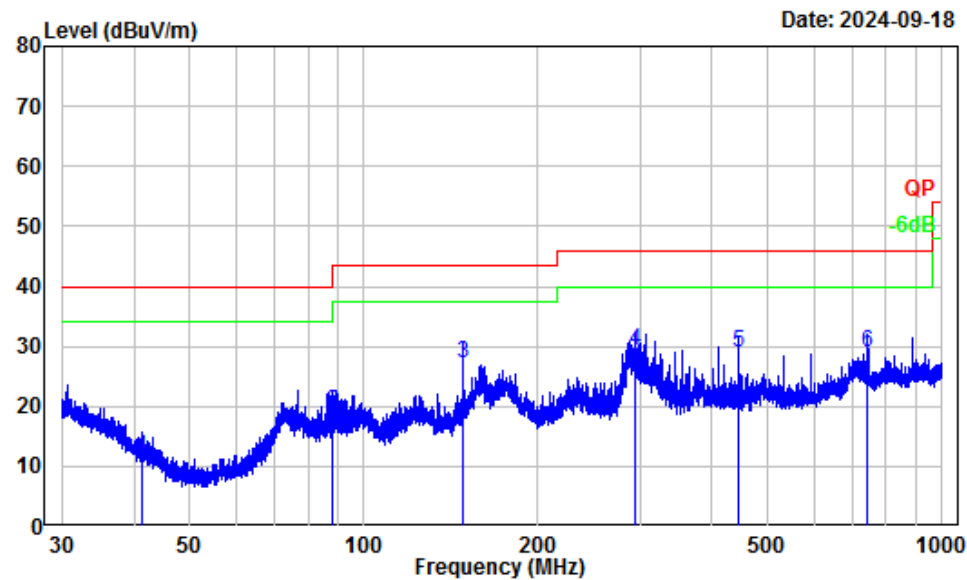

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401W44381E-RF
Test Mode : 2.4G WIFI Transmitting
Tester : Anson Su

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.26	-13.28	24.88	11.60	40.00	-28.40 QP
2	88.11	-18.07	37.20	19.13	43.50	-24.37 QP
3	148.31	-12.37	39.66	27.29	43.50	-16.21 QP
4	293.60	-11.21	40.48	29.27	46.00	-16.73 QP
5	445.44	-7.51	36.35	28.84	46.00	-17.16 QP
6	741.61	-2.96	32.01	29.05	46.00	-16.95 QP

Vertical

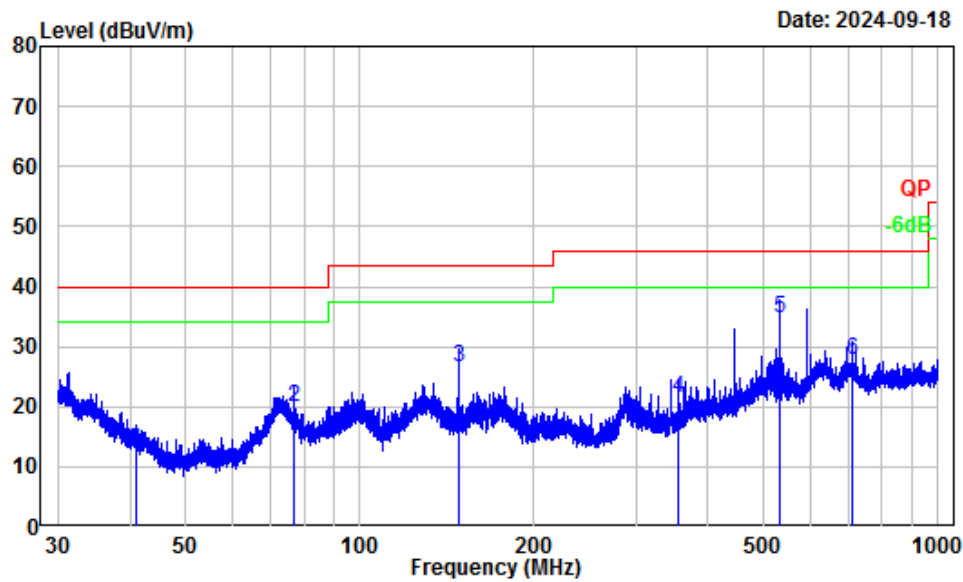

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401W44381E-RF
Test Mode : 2.4G WIFI Transmitting
Tester : Anson Su

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.95	-13.05	25.79	12.74	40.00	-27.26	QP
2	76.78	-17.82	37.77	19.95	40.00	-20.05	QP
3	148.31	-12.37	38.87	26.50	43.50	-17.00	QP
4	355.27	-10.01	31.39	21.38	46.00	-24.62	QP
5	531.73	-5.77	40.56	34.79	46.00	-11.21	QP
6	711.05	-3.39	31.20	27.81	46.00	-18.19	QP

1-25 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
BLE 1M							
Low Channel 2402MHz							
4804.00	47.39	PK	H	2.42	49.81	74	-24.19
4804.00	33.25	AV	H	2.42	35.67	54	-18.33
4804.00	47.16	PK	V	2.42	49.58	74	-24.42
4804.00	33.12	AV	V	2.42	35.54	54	-18.46
Middle Channel 2440MHz							
4880.00	46.60	PK	H	2.58	49.18	74	-24.82
4880.00	32.79	AV	H	2.58	35.37	54	-18.63
4880.00	46.38	PK	V	2.58	48.96	74	-25.04
4880.00	32.67	AV	V	2.58	35.25	54	-18.75
High Channel 2480MHz							
4960.00	46.92	PK	H	2.68	49.60	74	-24.40
4960.00	32.76	AV	H	2.68	35.44	54	-18.56
4960.00	47.34	PK	V	2.68	50.02	74	-23.98
4960.00	33.29	AV	V	2.68	35.97	54	-18.03
BLE 2M							
Low Channel 2402MHz							
4804.00	47.04	PK	H	2.42	49.46	74	-24.54
4804.00	33.43	AV	H	2.42	35.85	54	-18.15
4804.00	47.25	PK	V	2.42	49.67	74	-24.33
4804.00	33.58	AV	V	2.42	36.00	54	-18.00
Middle Channel 2440MHz							
4880.00	46.97	PK	H	2.58	49.55	74	-24.45
4880.00	33.38	AV	H	2.58	35.96	54	-18.04
4880.00	47.16	PK	V	2.58	49.74	74	-24.26
4880.00	33.49	AV	V	2.58	36.07	54	-17.93
High Channel 2480MHz							
4960.00	47.12	PK	H	2.68	49.80	74	-24.20
4960.00	33.45	AV	H	2.68	36.13	54	-17.87
4960.00	47.37	PK	V	2.68	50.05	74	-23.95
4960.00	33.69	AV	V	2.68	36.37	54	-17.63

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


Test plots for Band Edge Measurements (Radiated):

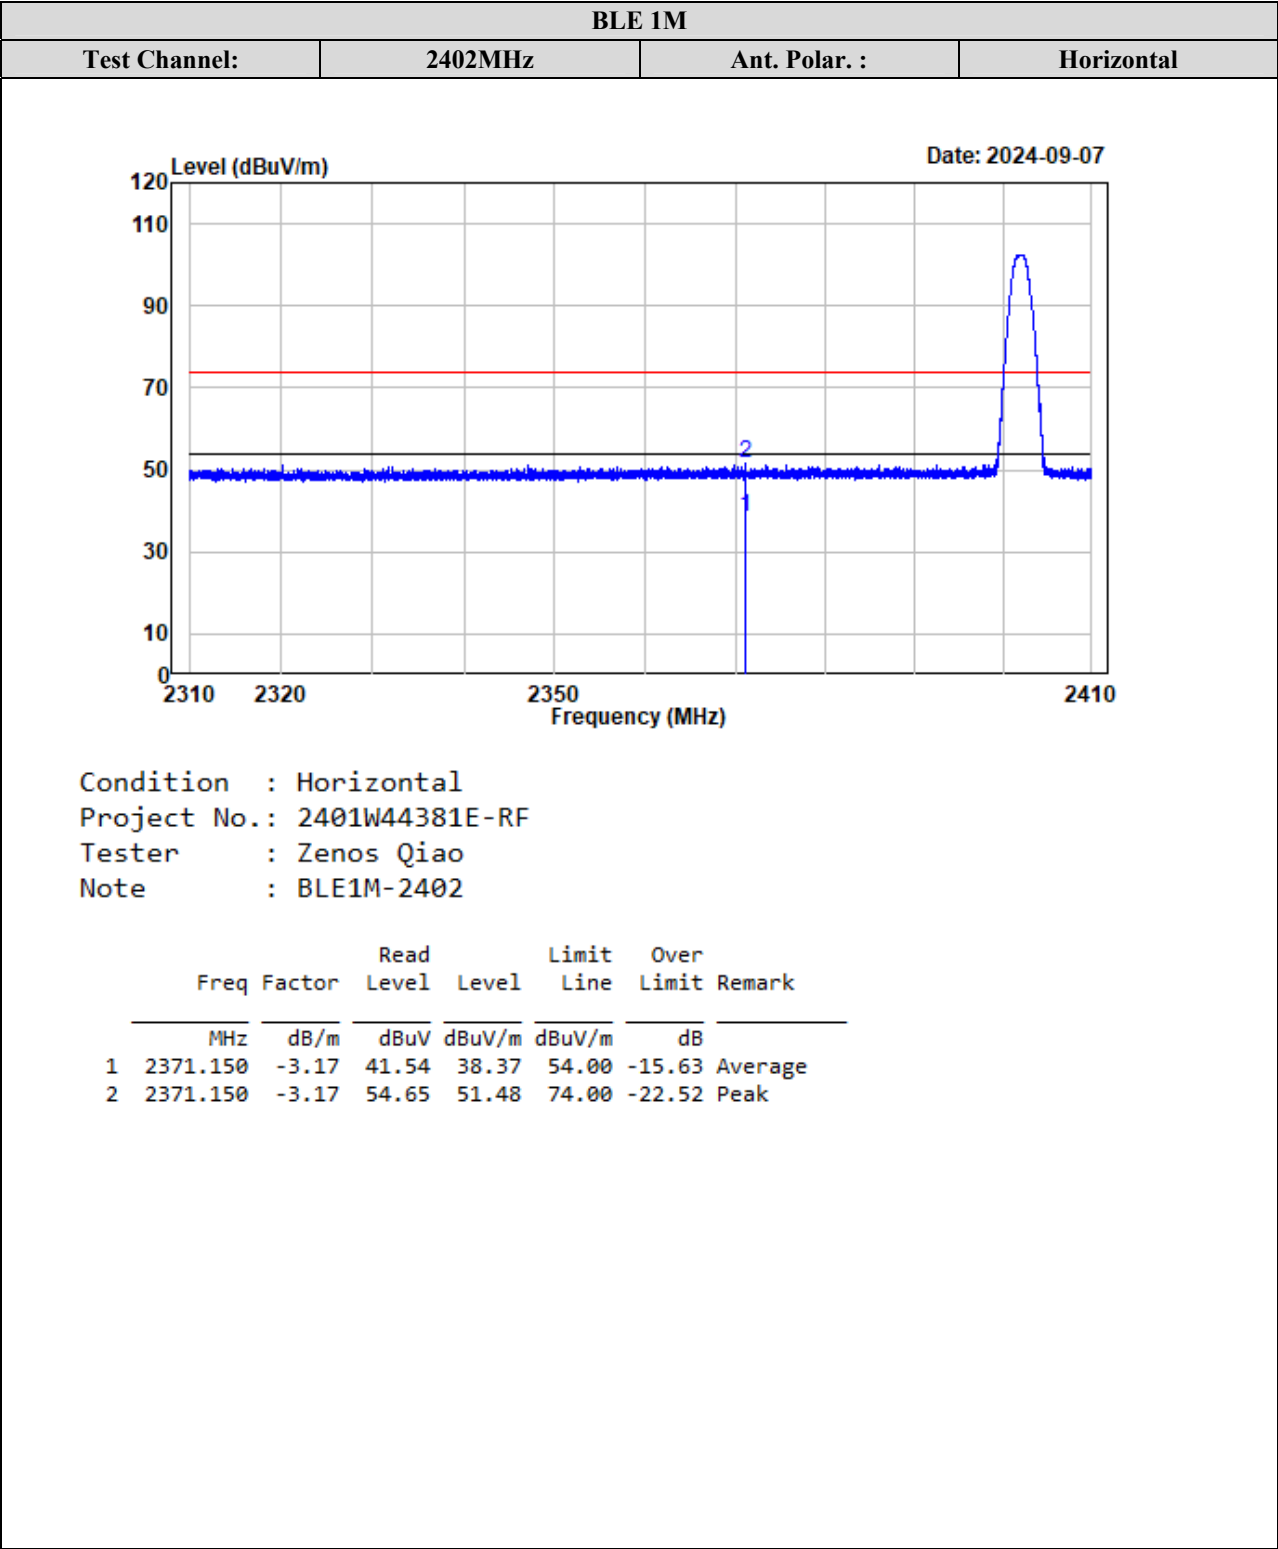


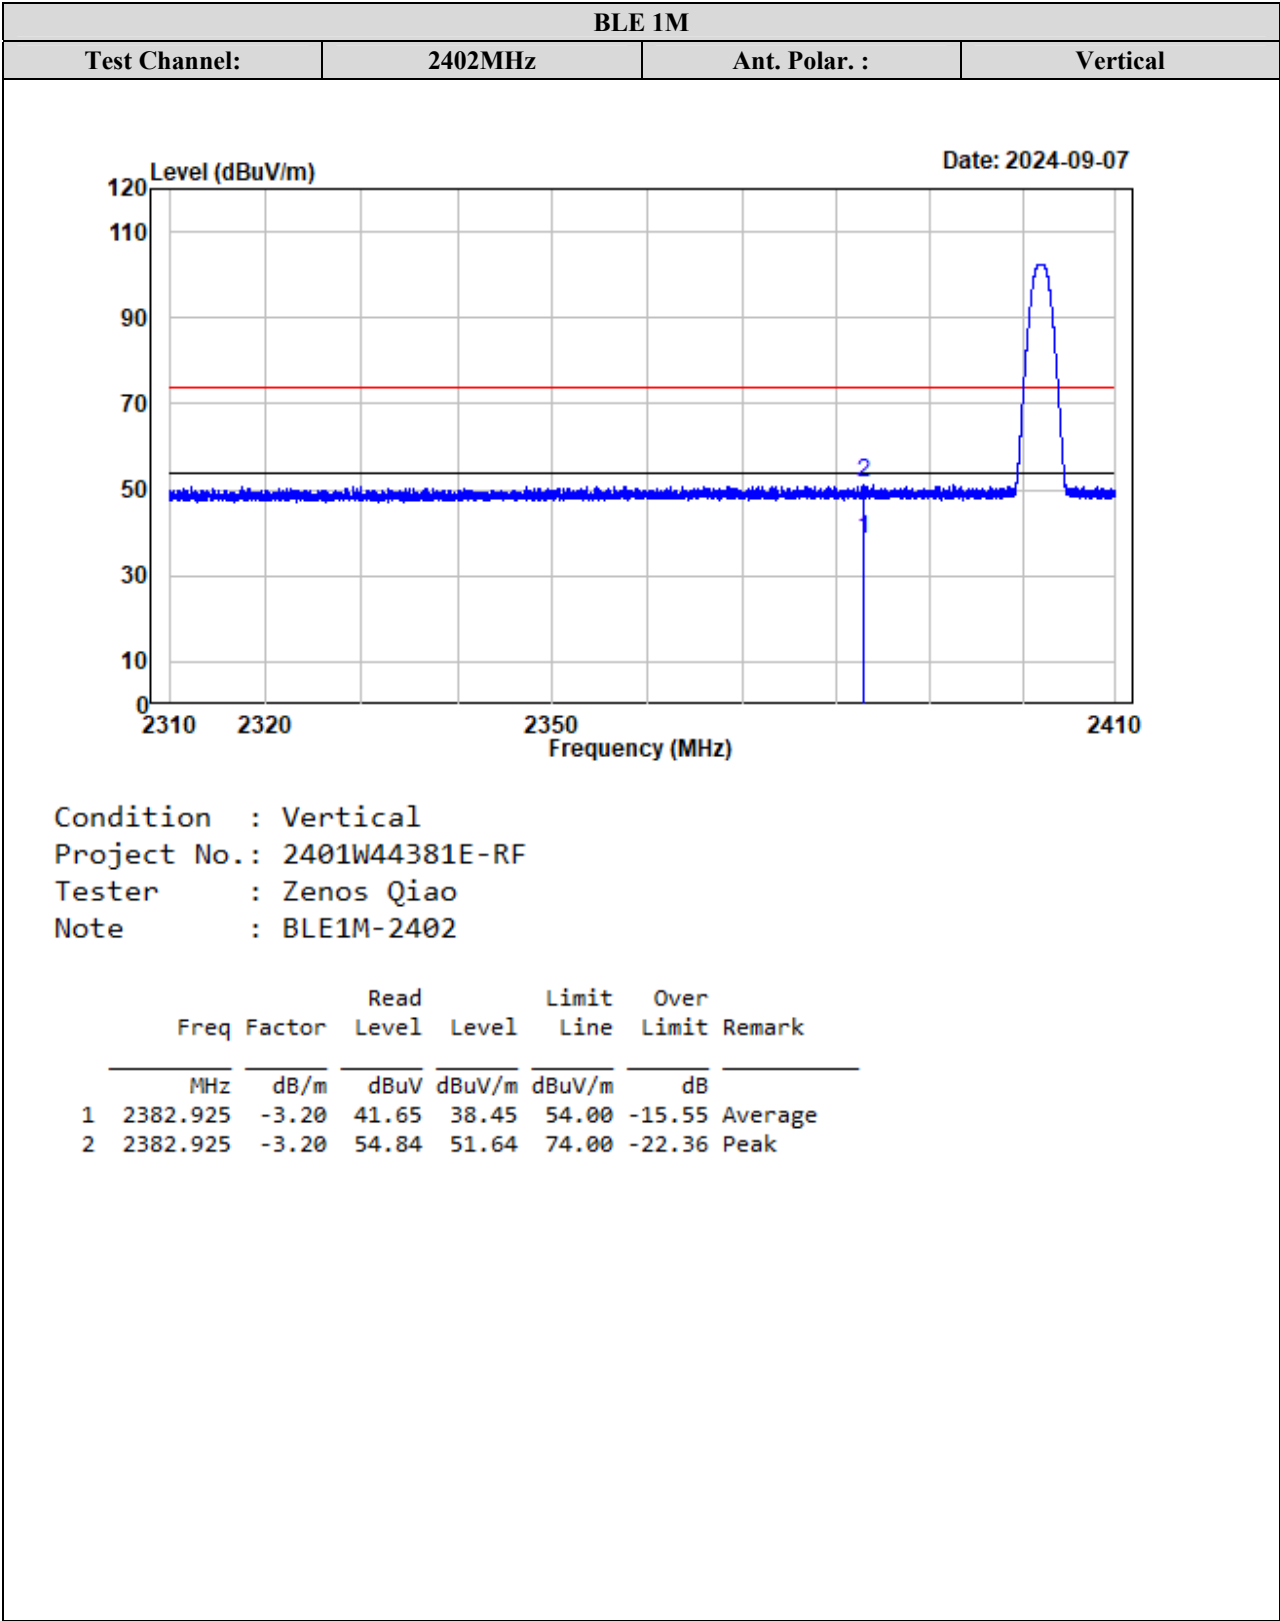


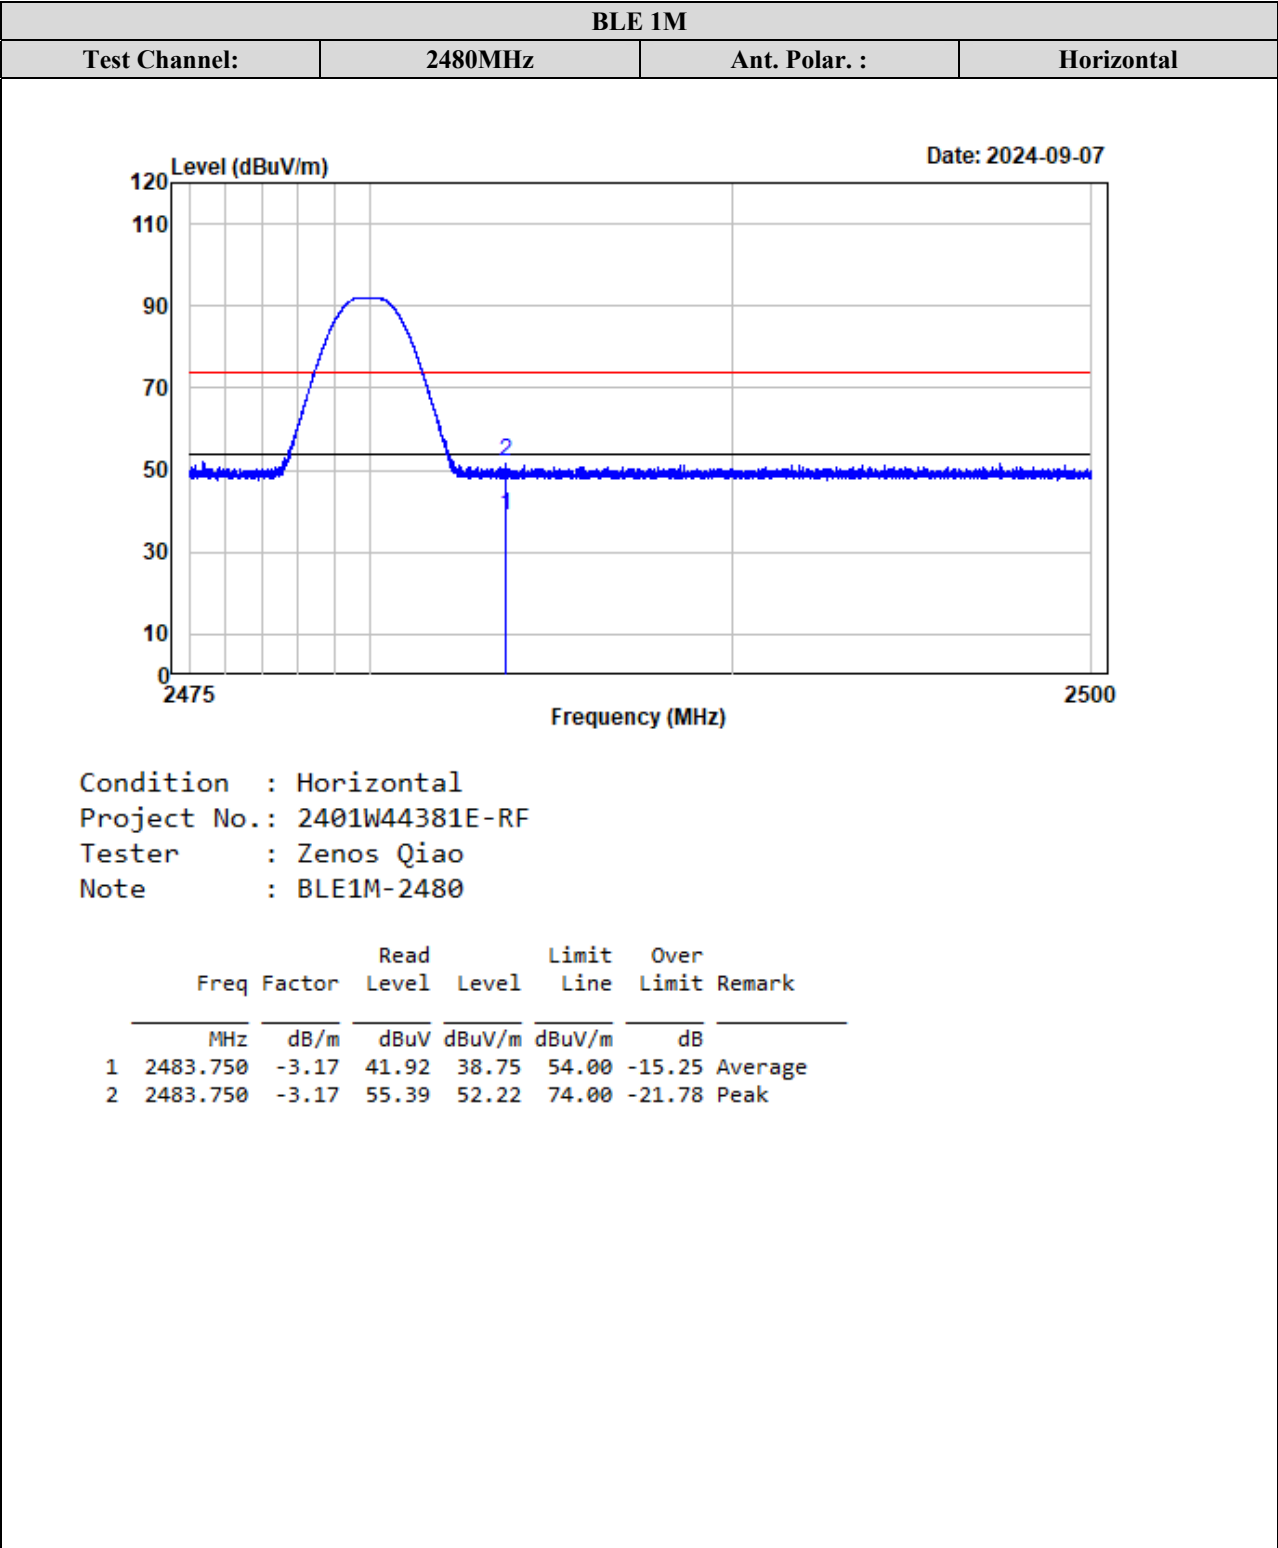


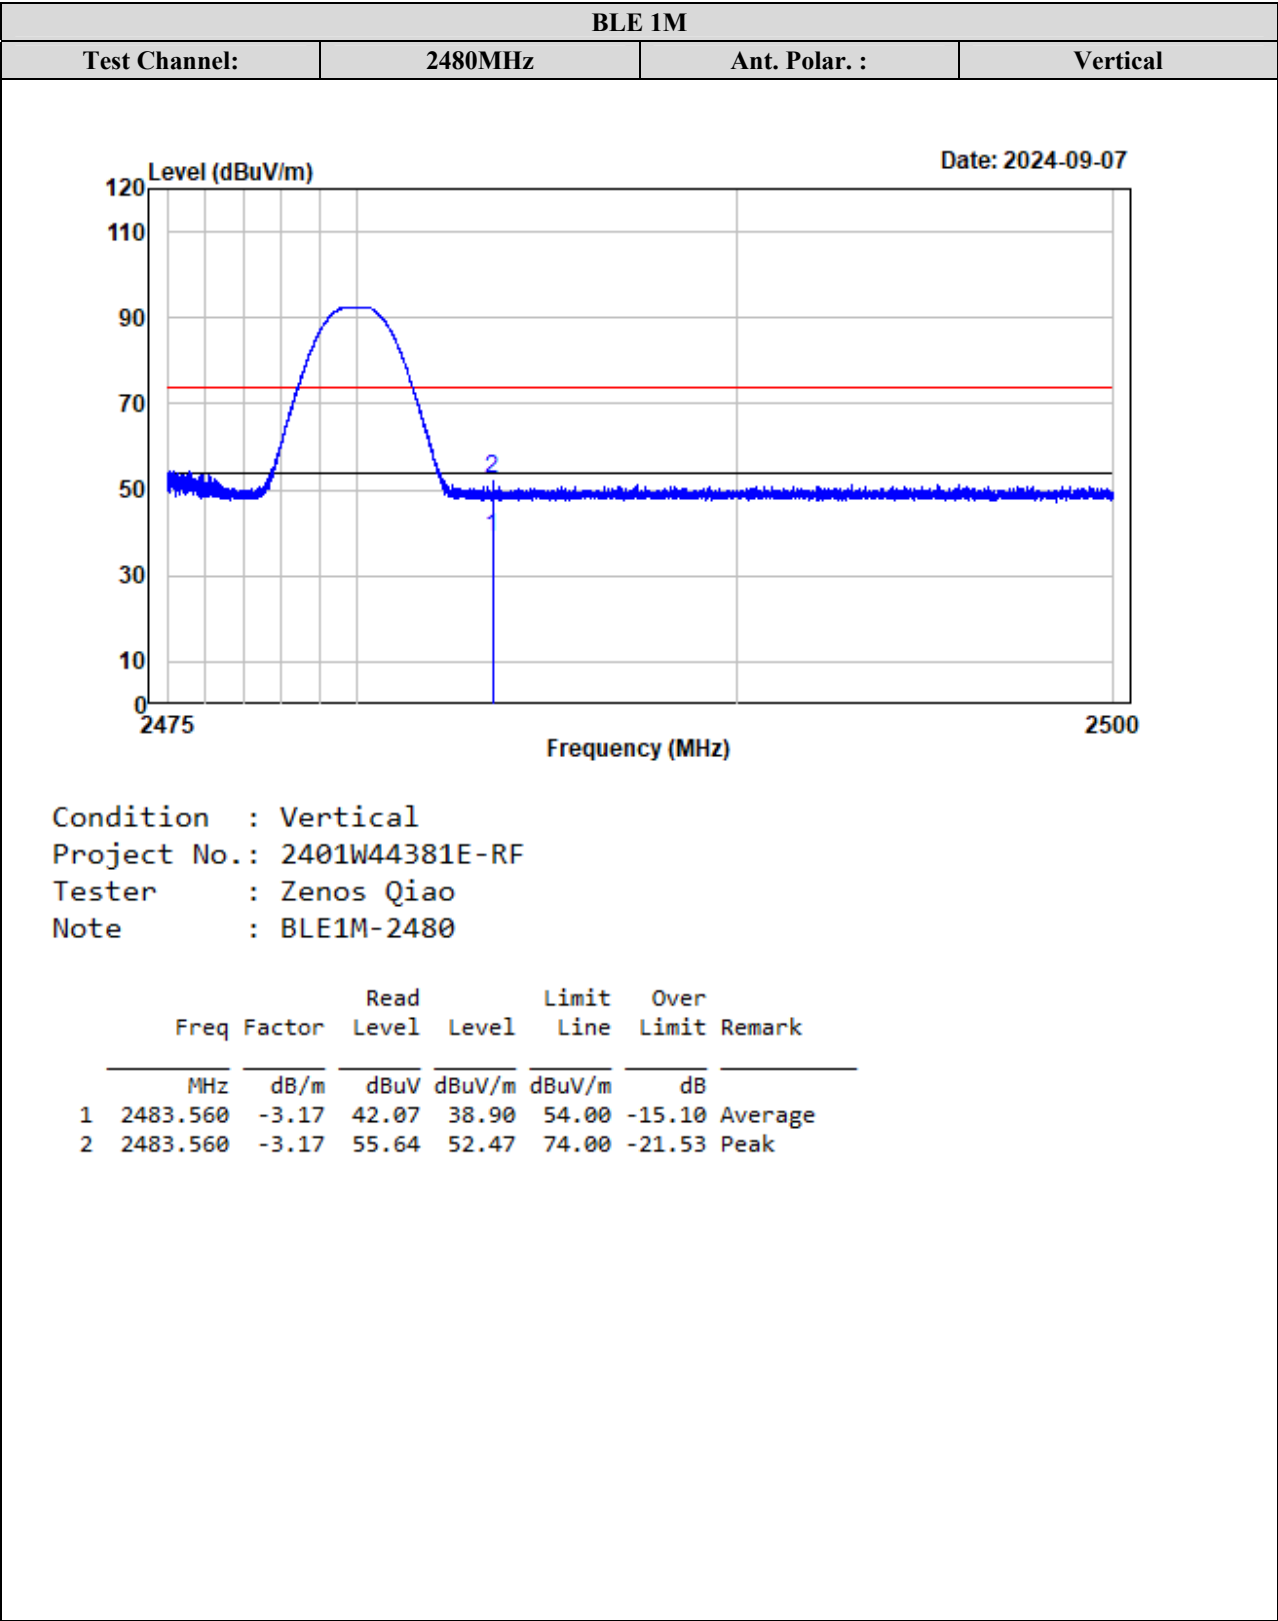

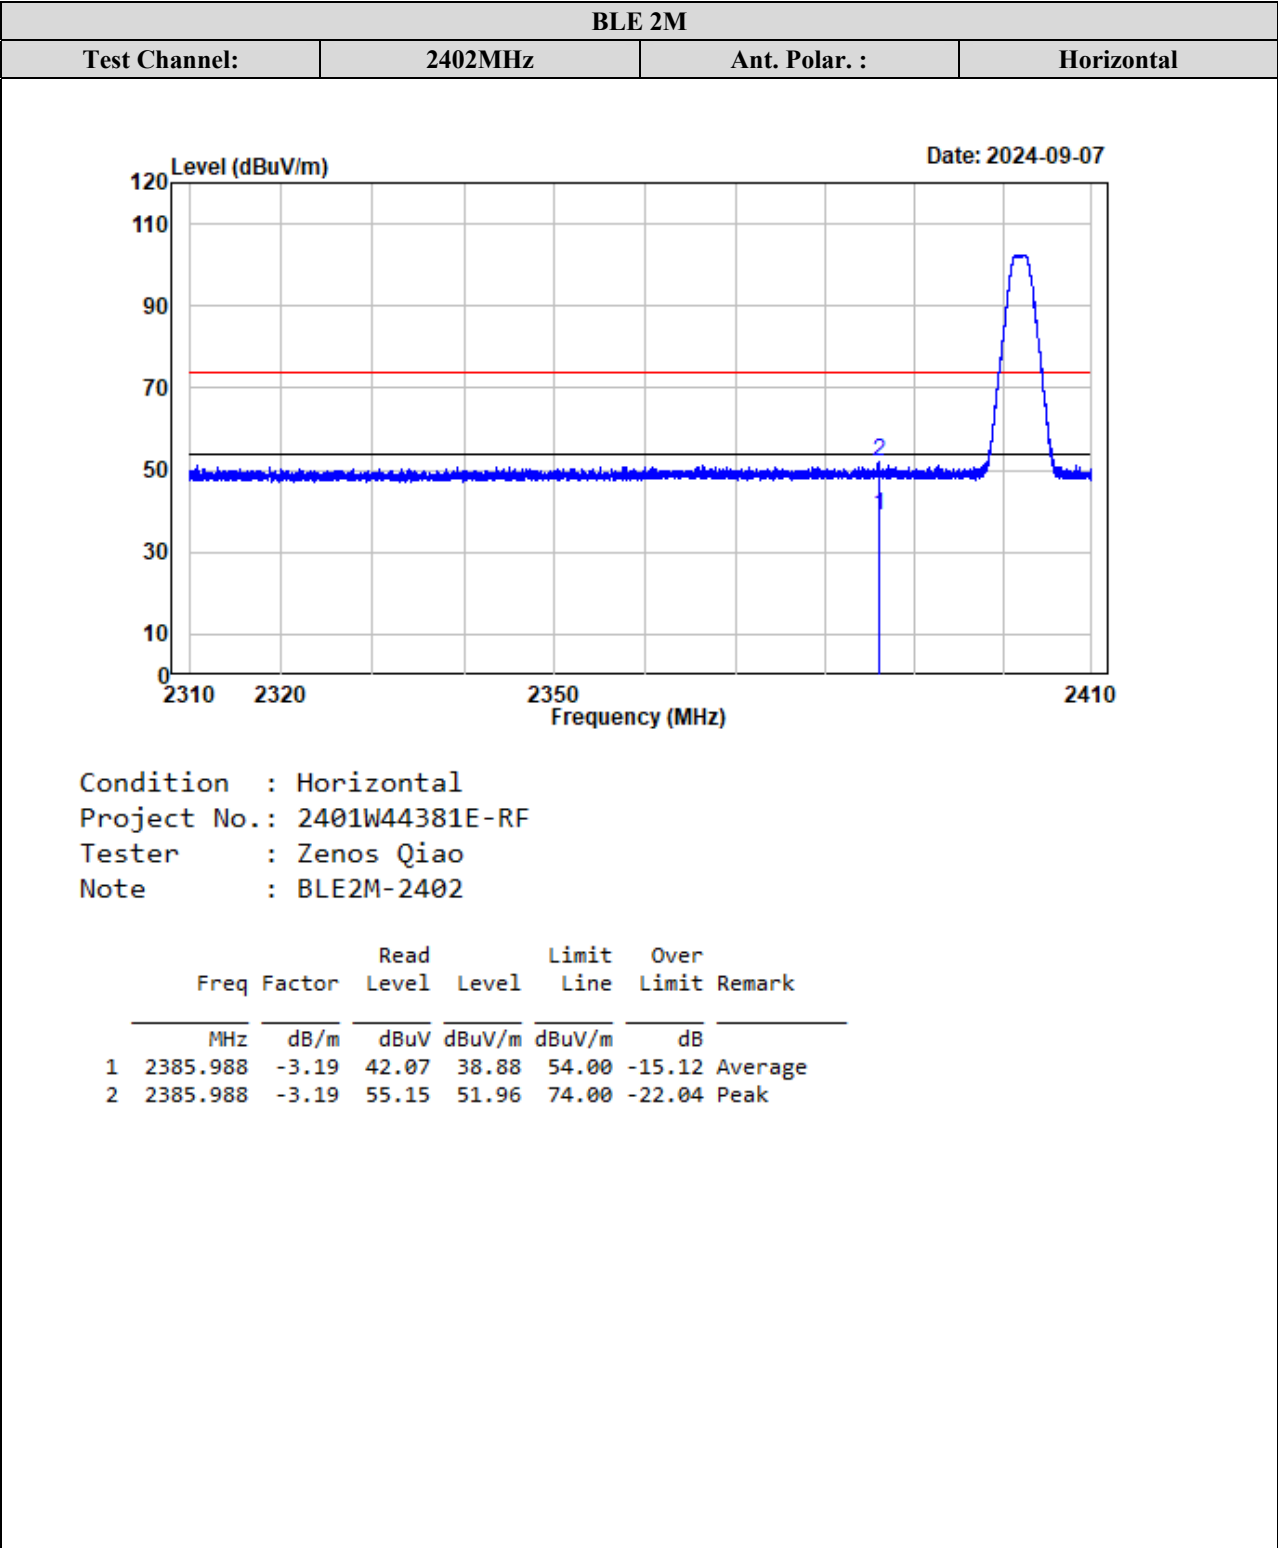

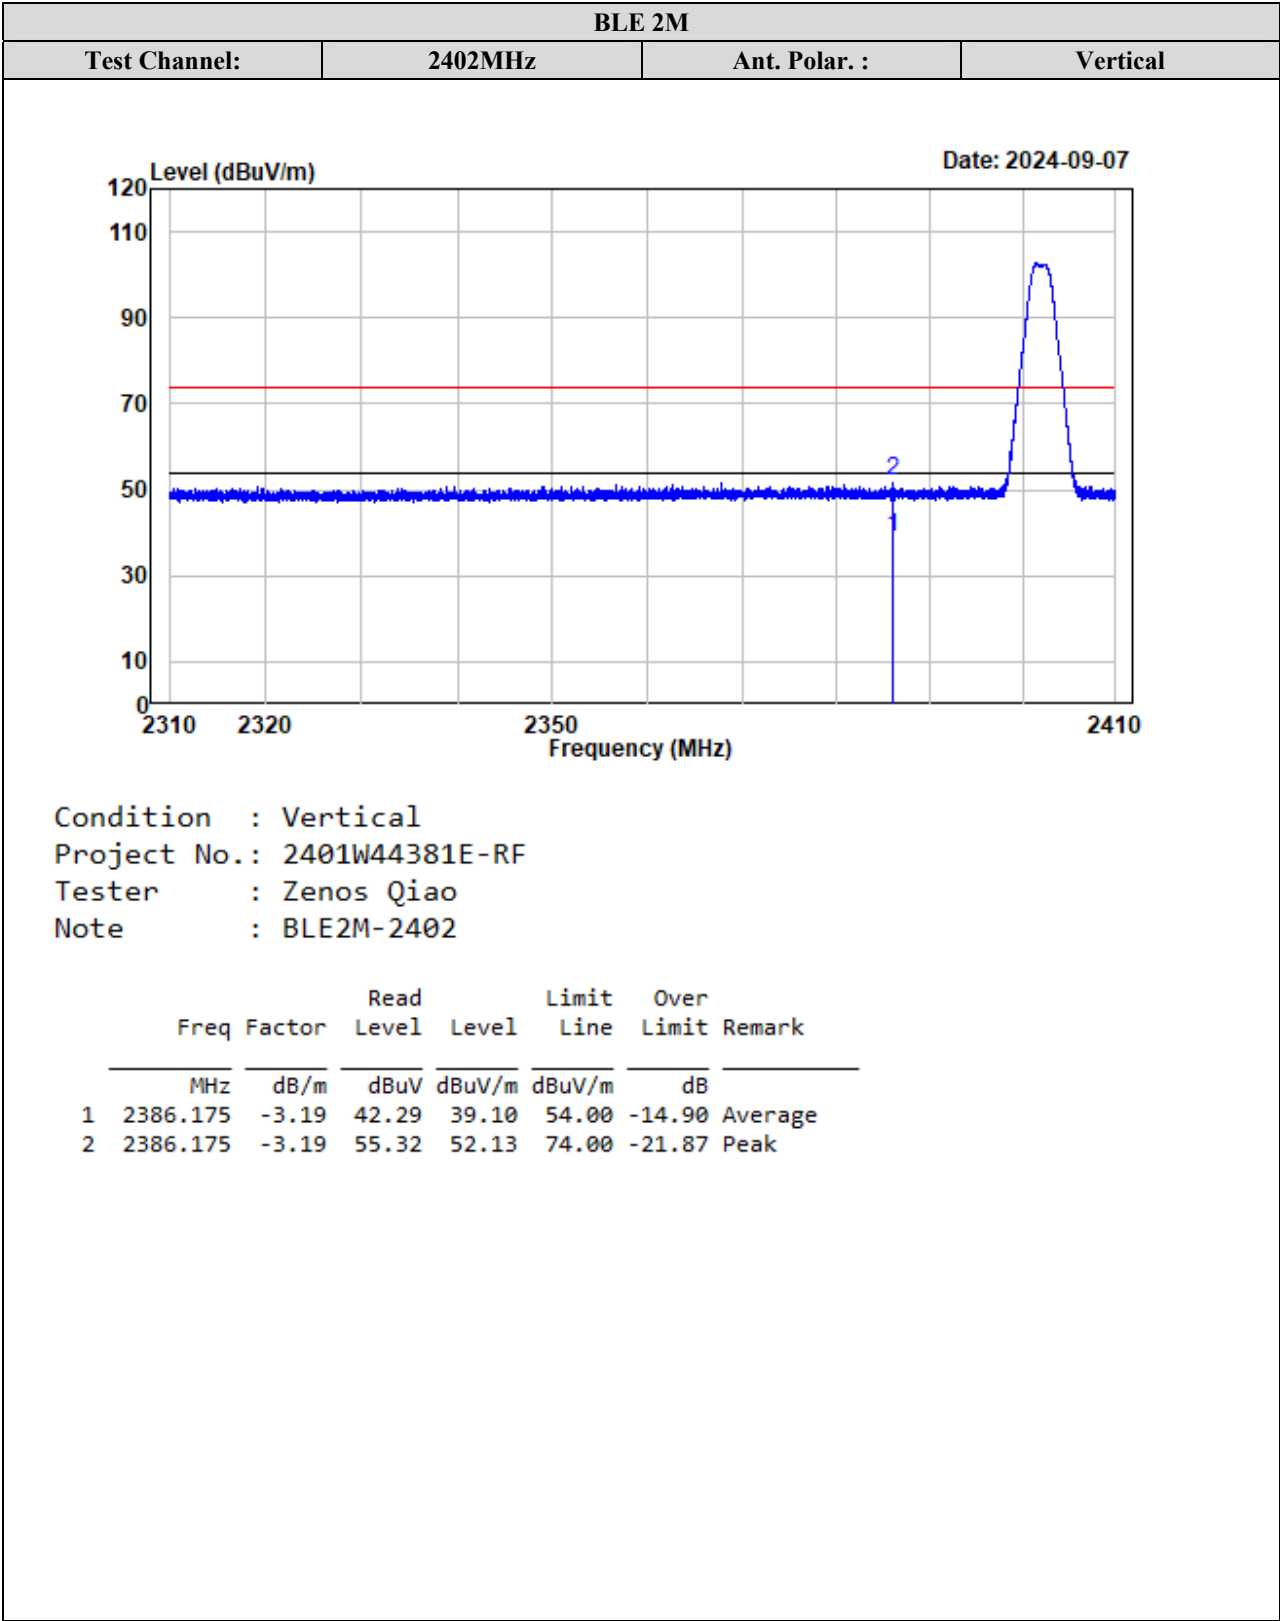

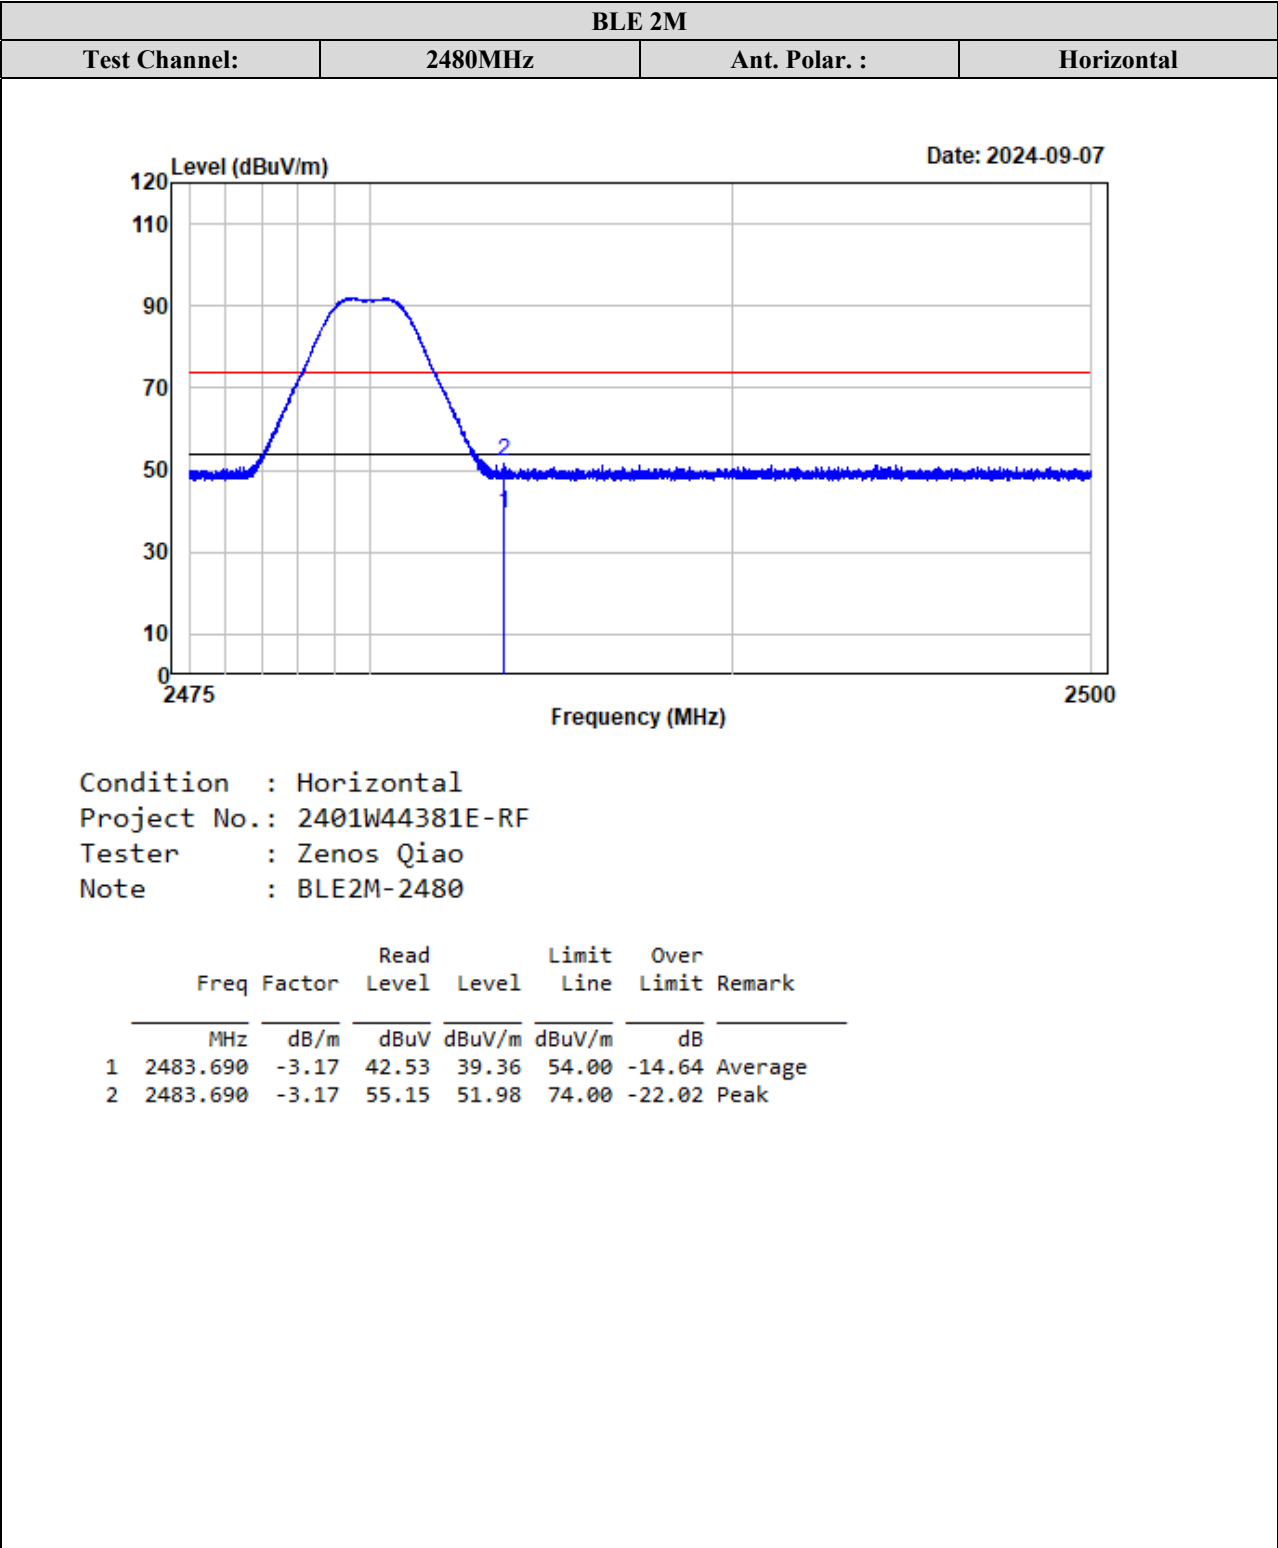


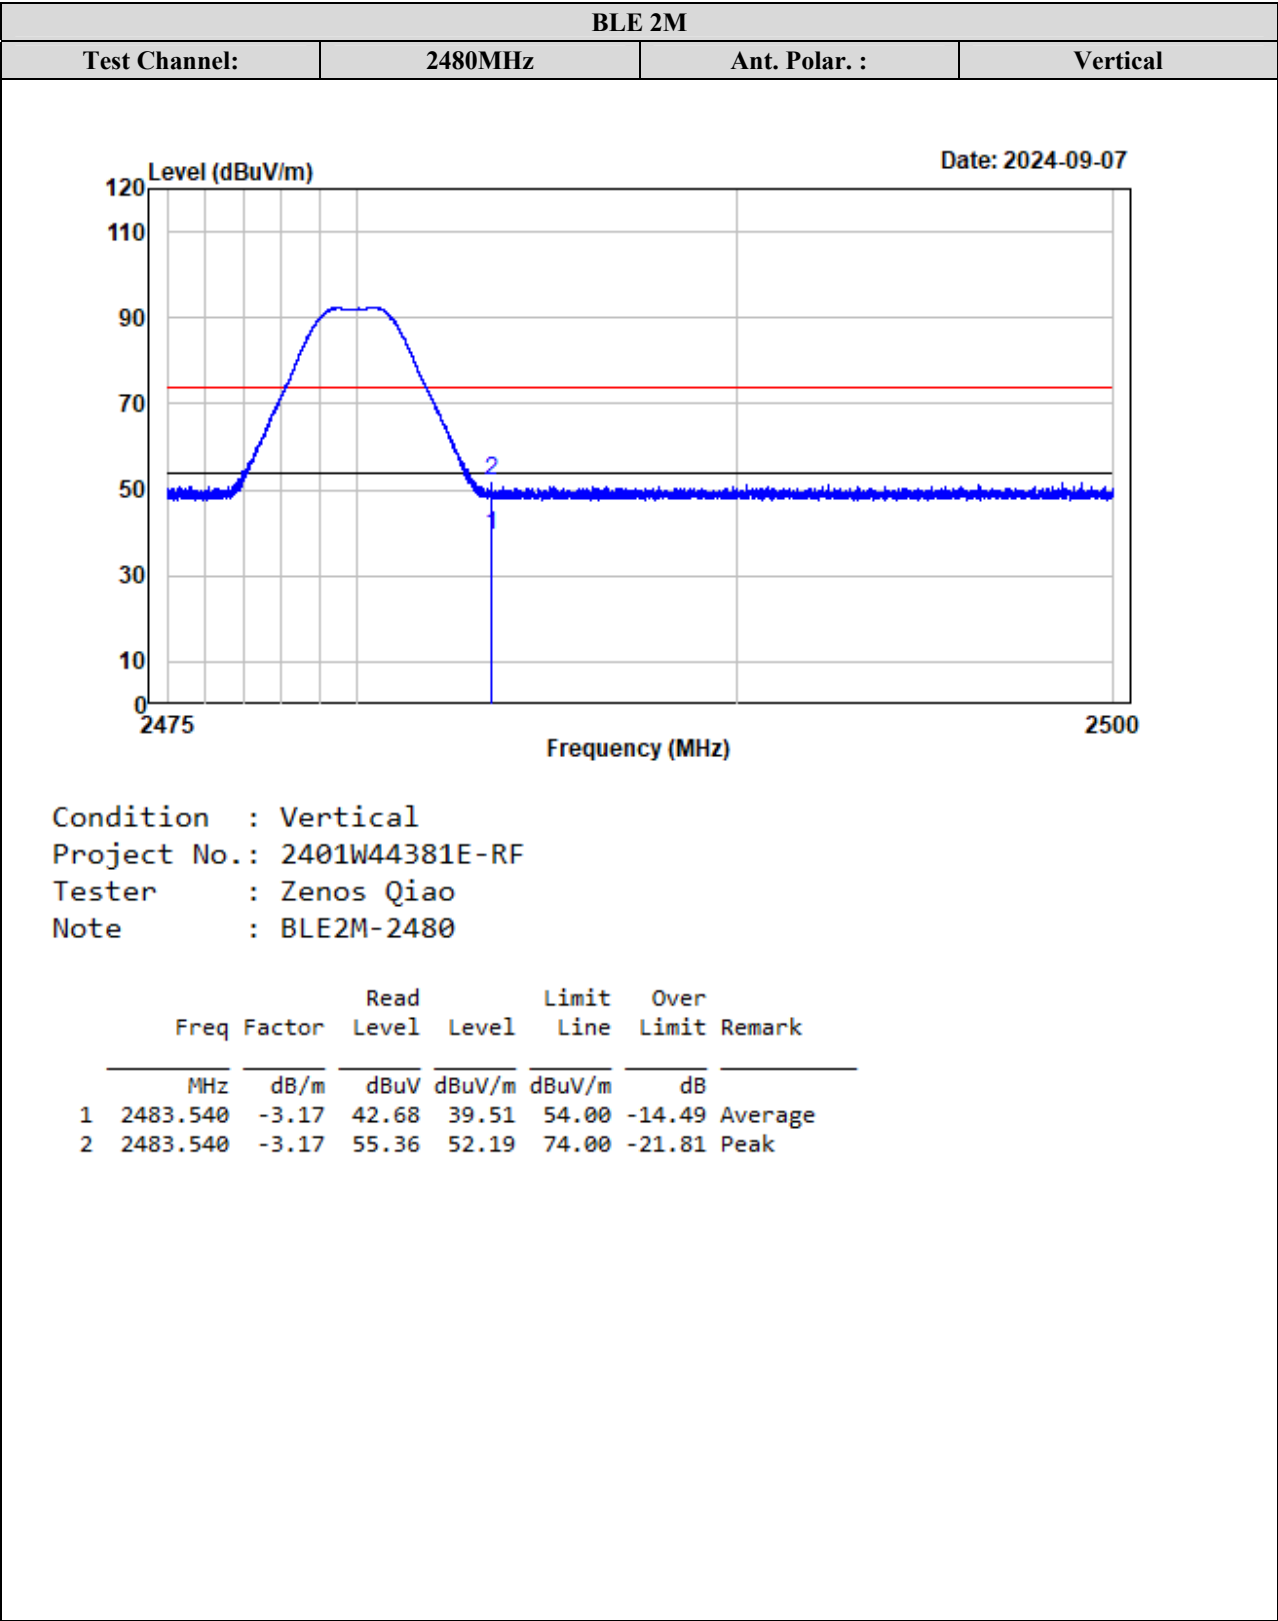



Listed with the worst harmonic margin test plot:


BLE 1M

Horizontal

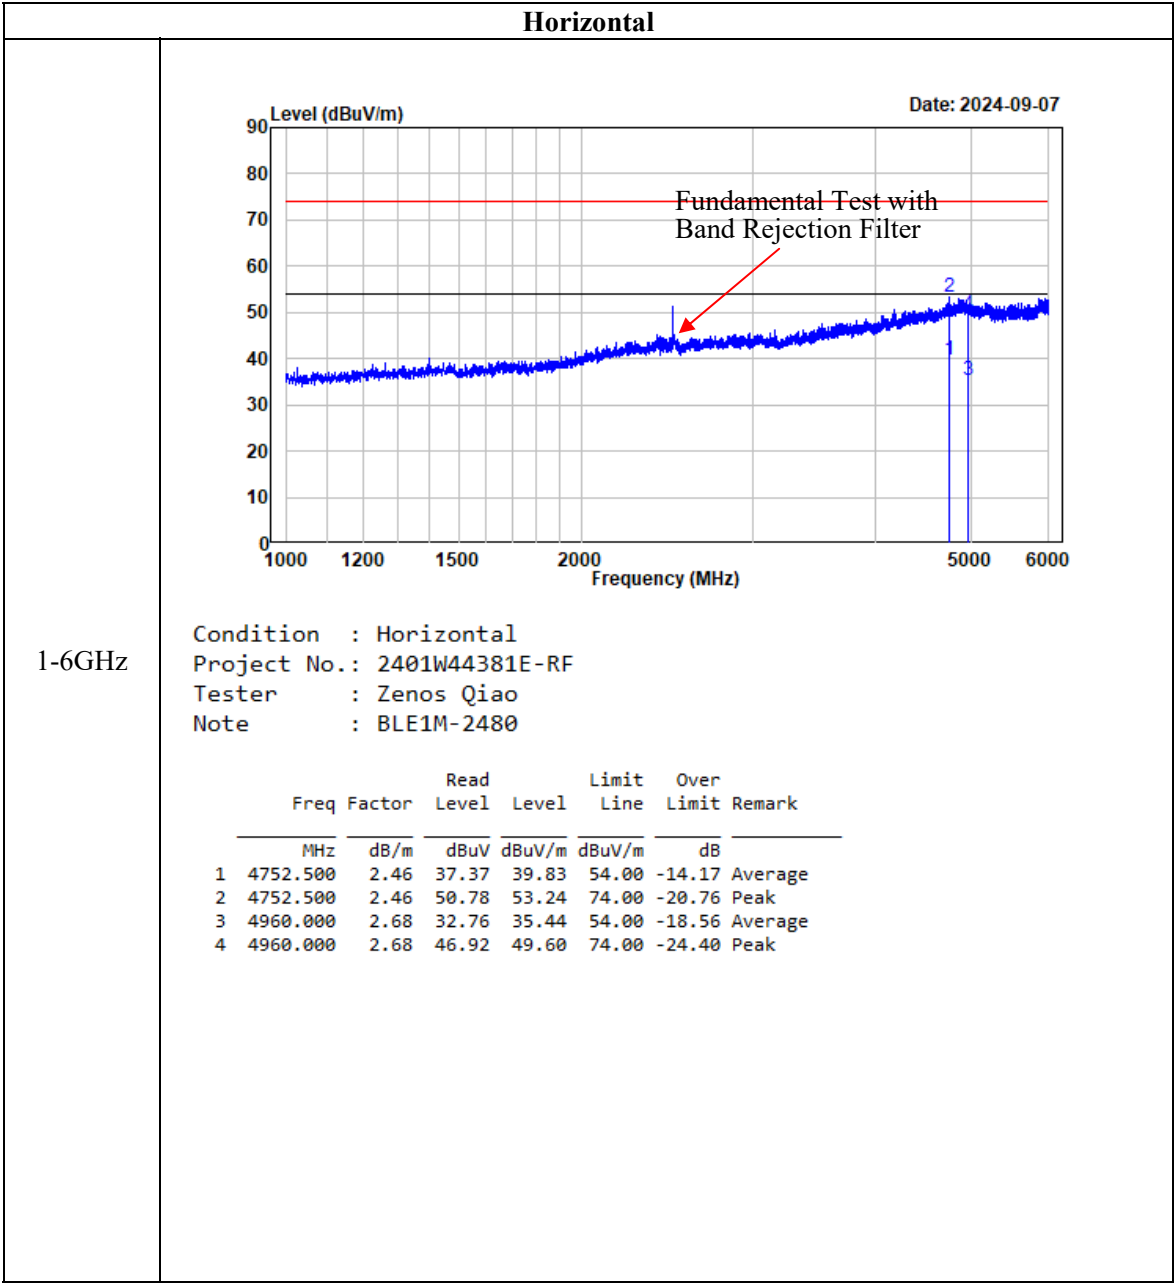

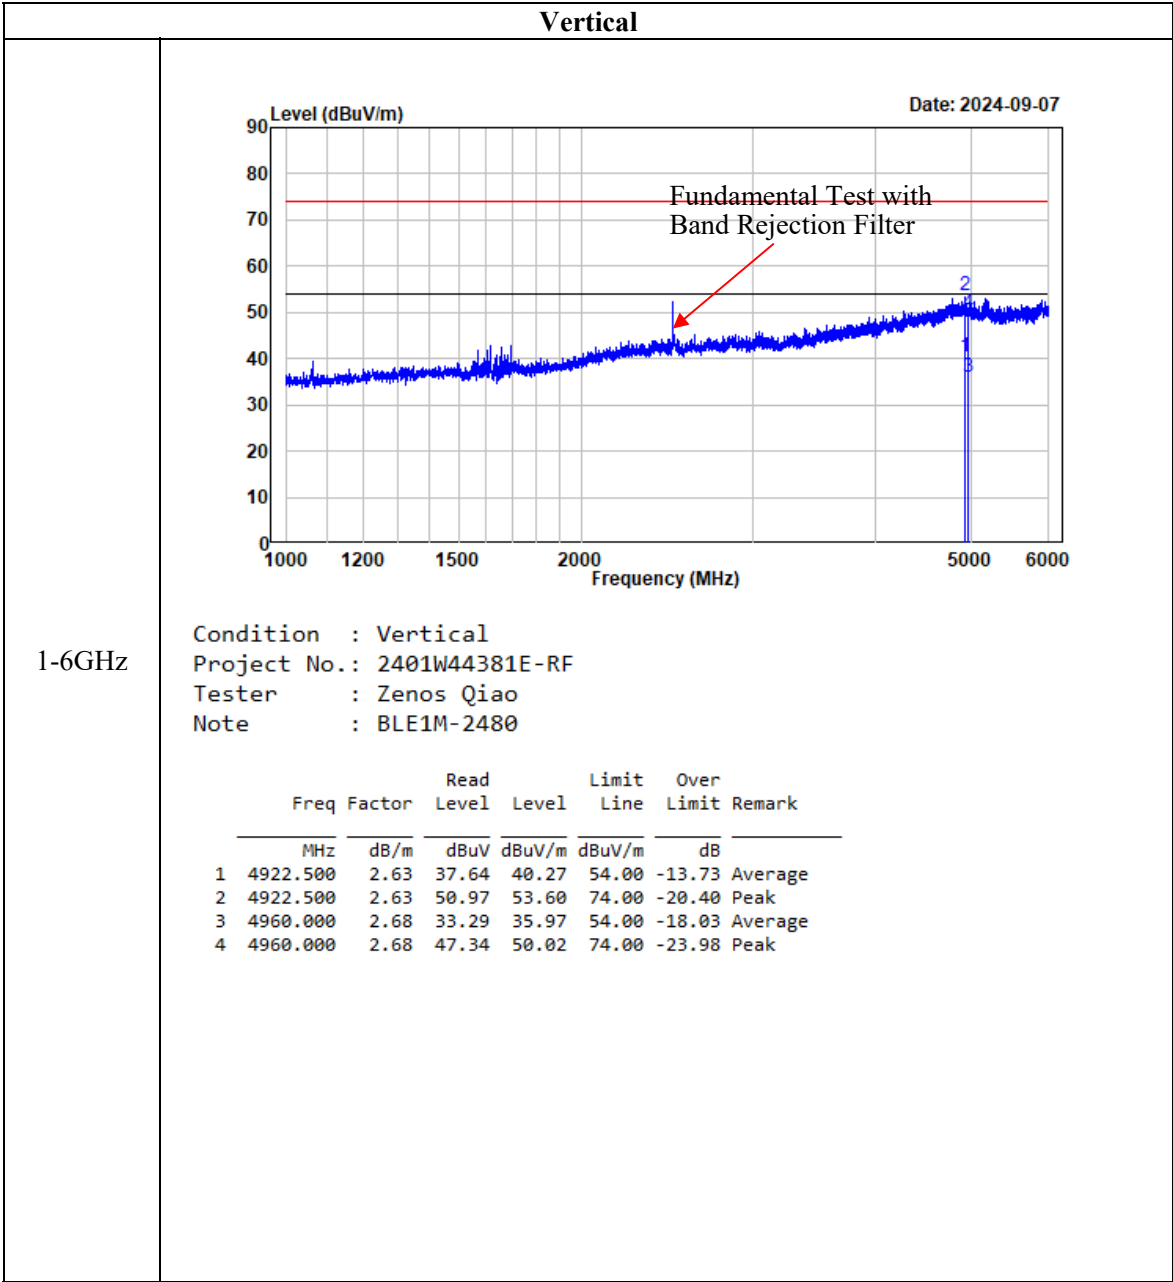

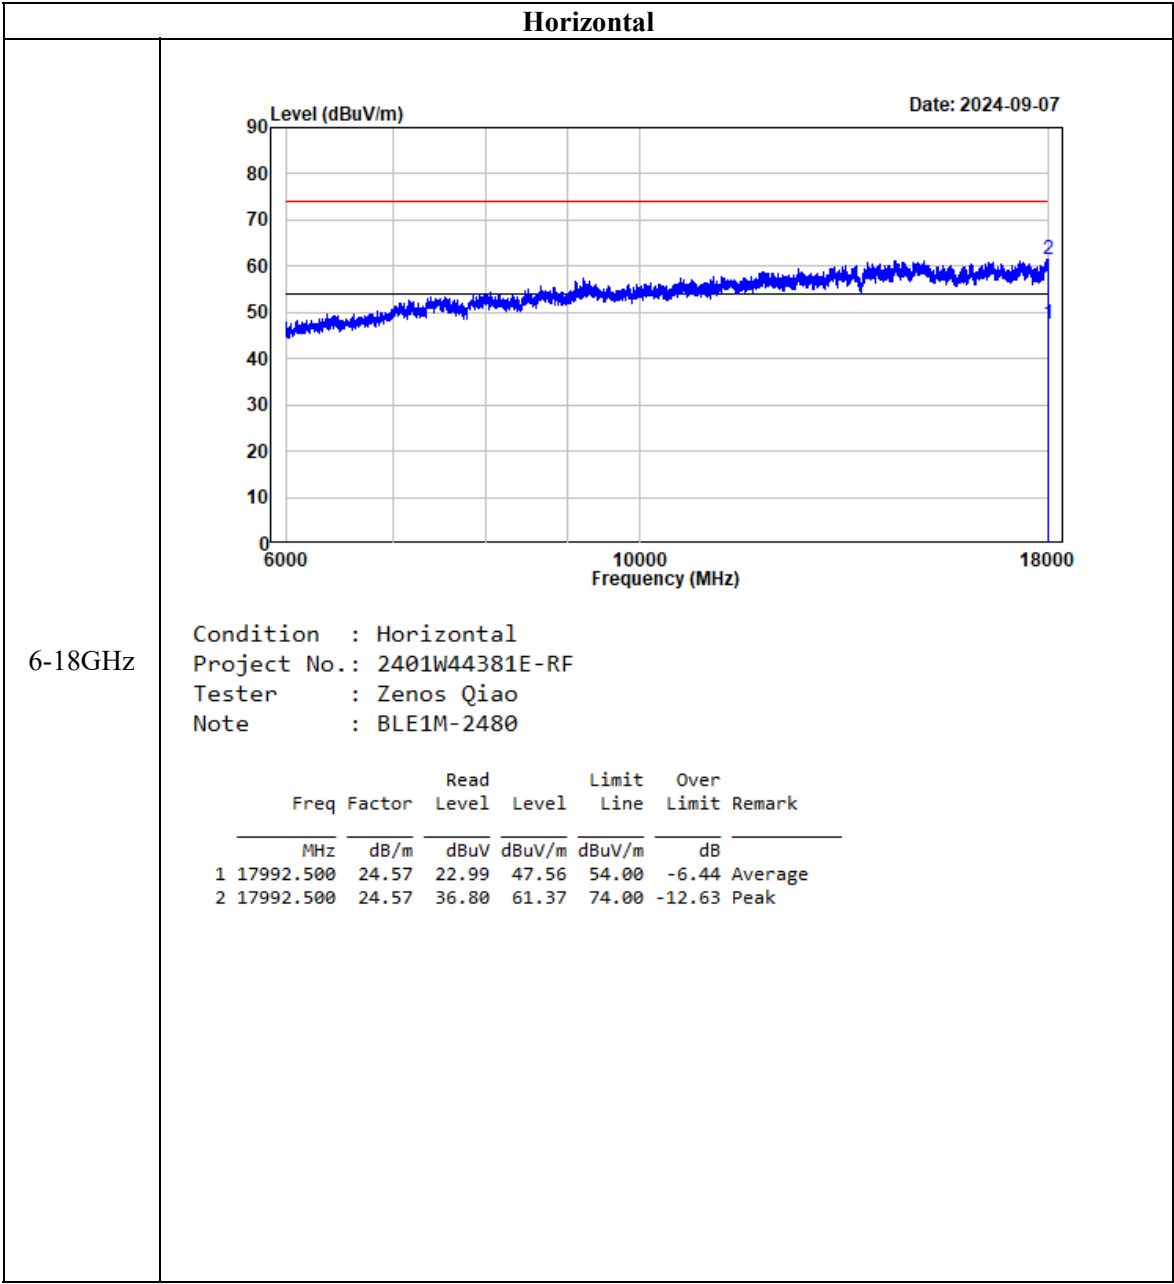


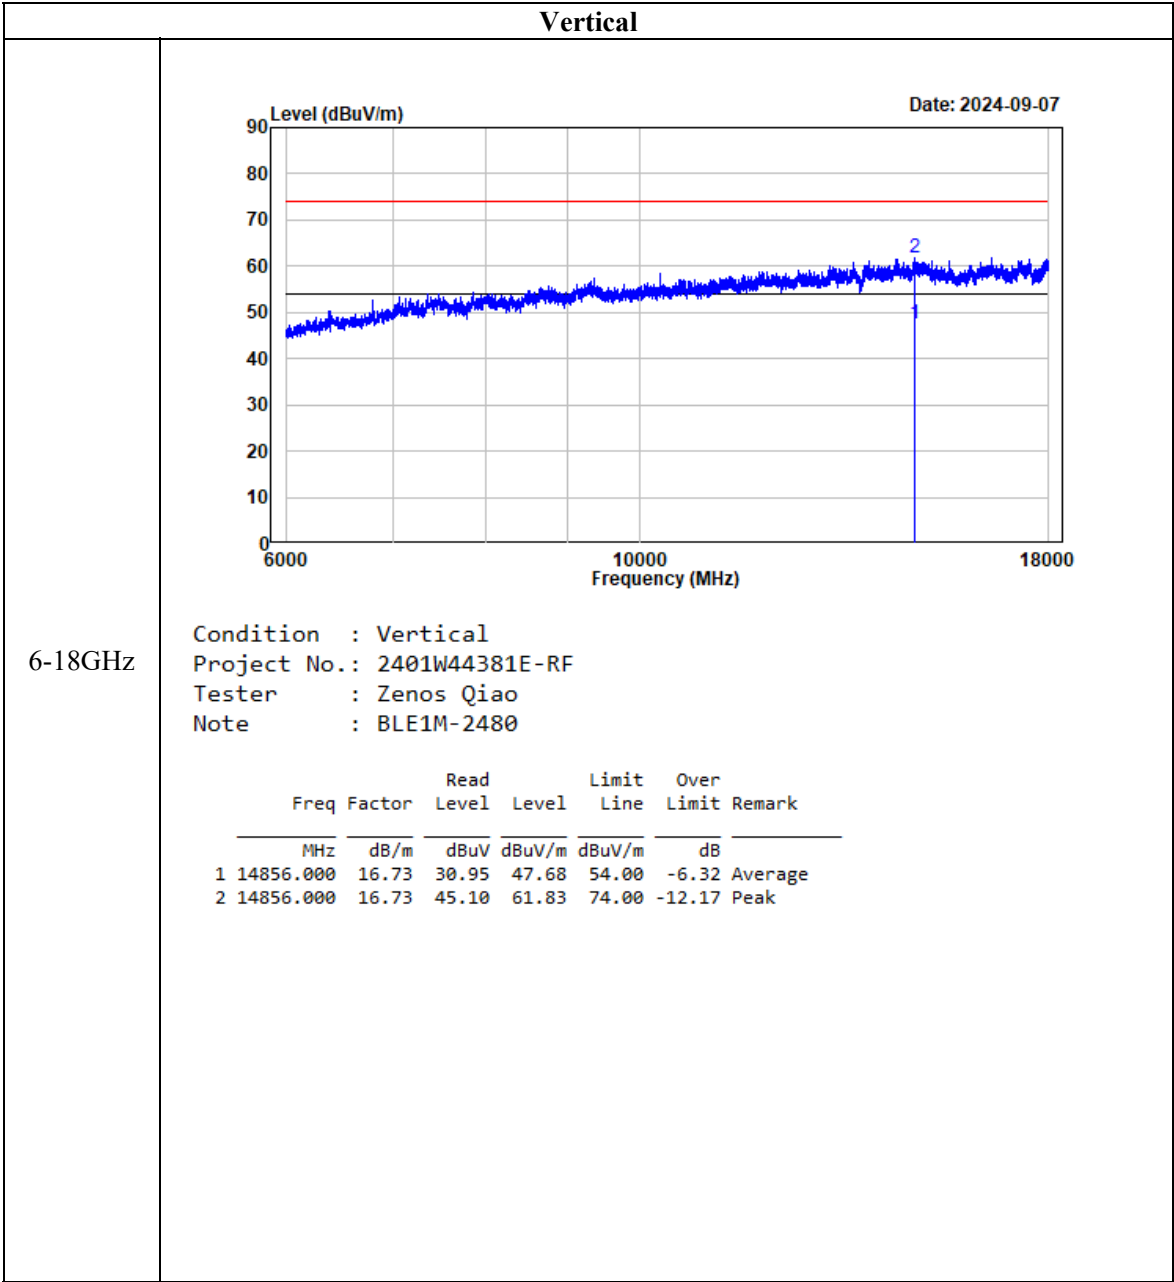

BLE 2M


Horizontal


1-6GHz

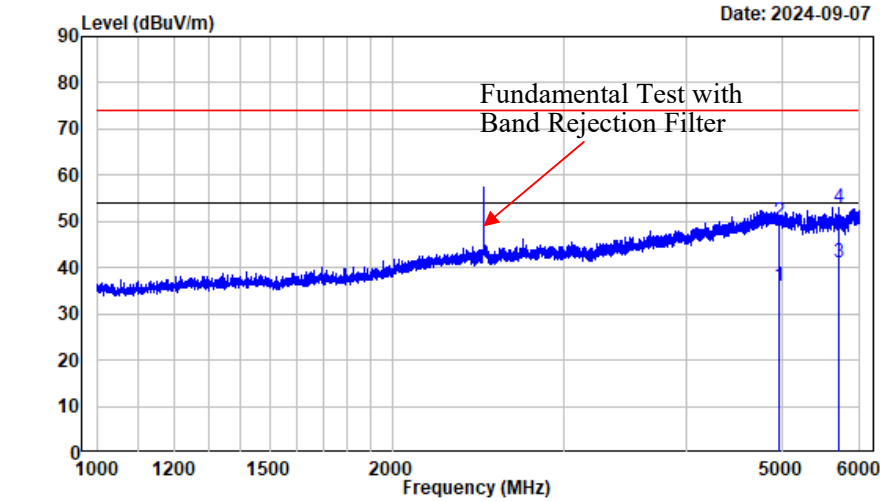


Condition : Horizontal
Project No.: 2401W44381E-RF
Tester : Zenos Qiao
Note : BLE2M-2480

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4960.000	2.68	33.45	36.13	54.00	-17.87 Average
2	4960.000	2.68	47.12	49.80	74.00	-24.20 Peak
3	5723.125	3.48	37.45	40.93	54.00	-13.07 Average
4	5723.125	3.48	49.41	52.89	74.00	-21.11 Peak

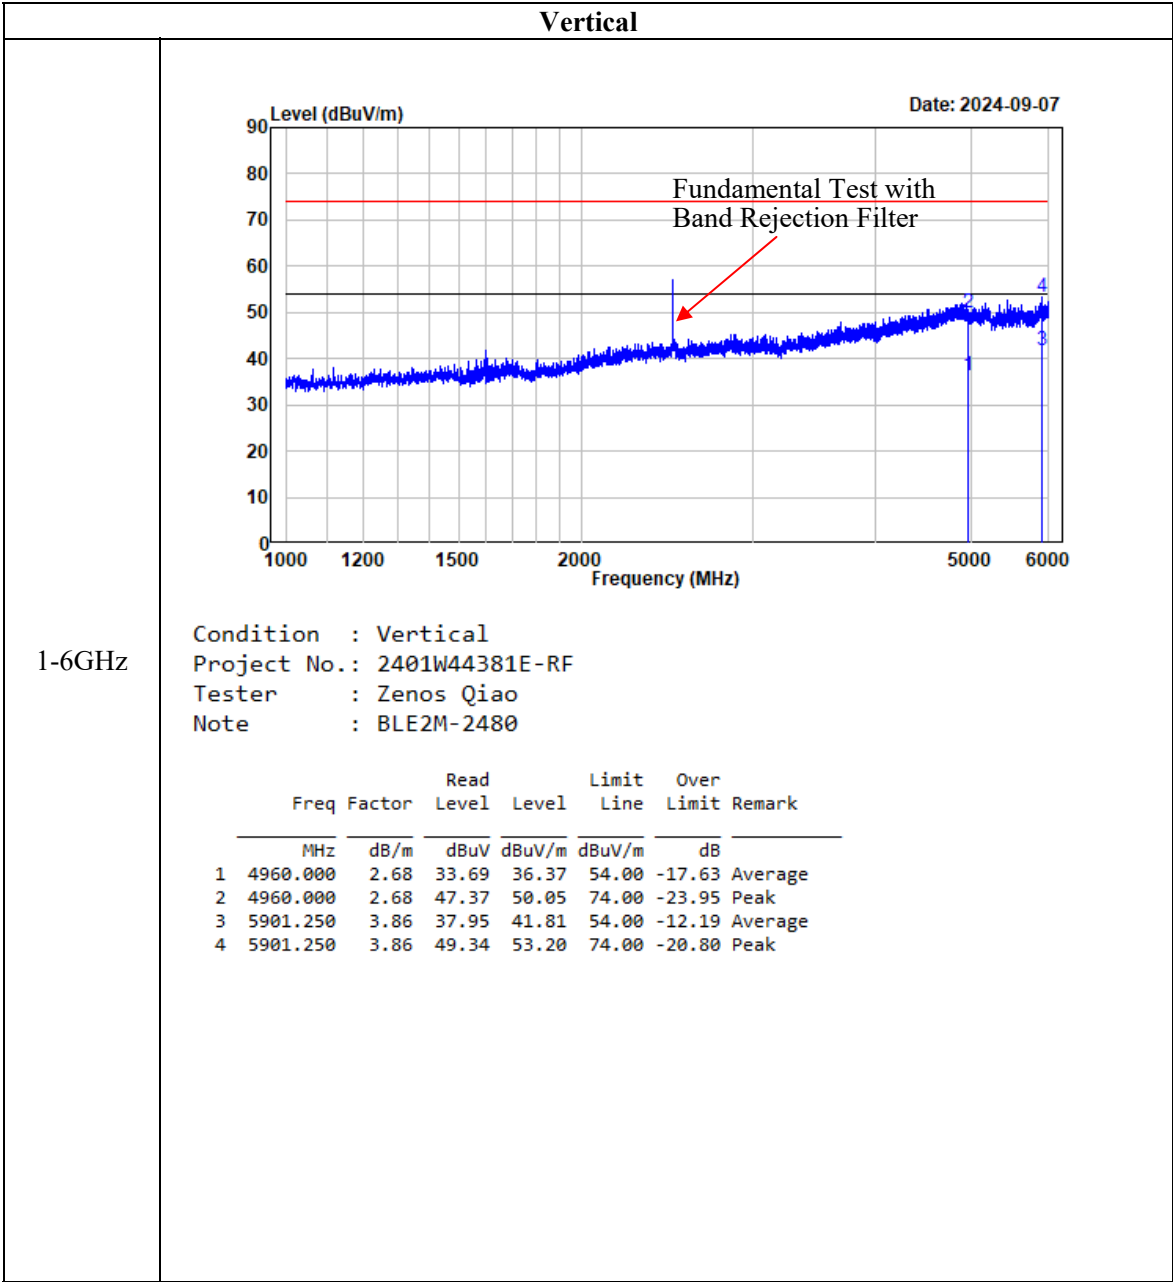

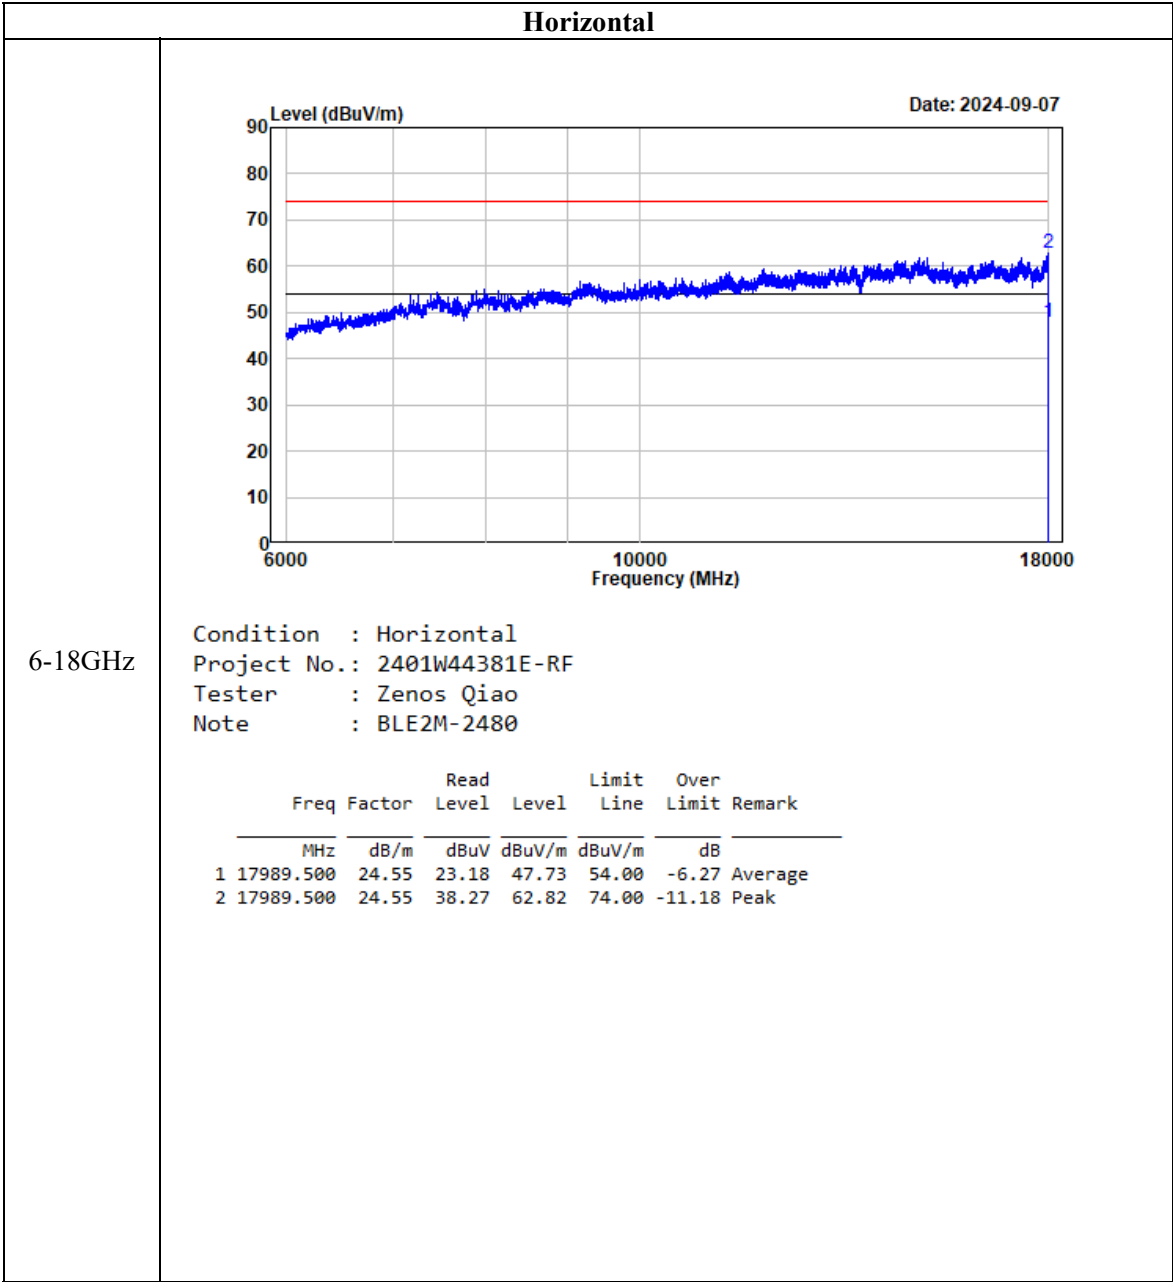

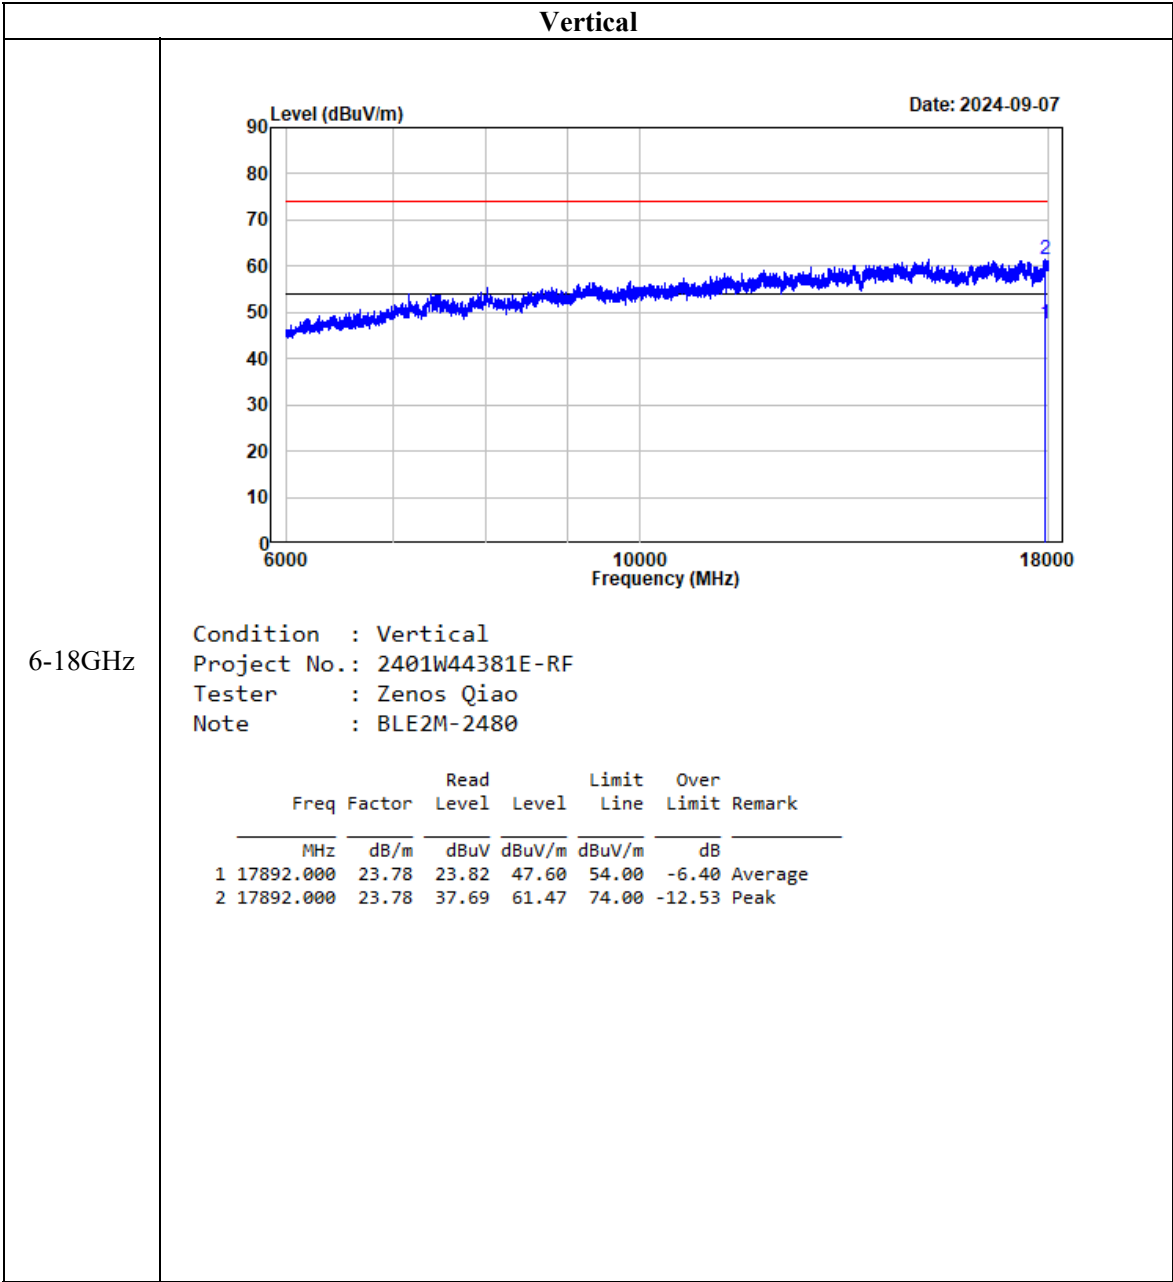

2.4G Wi-Fi

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11b (ANT1)							
Low Channel 2412MHz							
4824.00	46.90	PK	H	2.45	49.35	74	-24.65
4824.00	32.32	AV	H	2.45	34.77	54	-19.23
4824.00	47.68	PK	V	2.45	50.13	74	-23.87
4824.00	32.84	AV	V	2.45	35.29	54	-18.71
Middle Channel 2437MHz							
4874.00	46.41	PK	H	2.56	48.97	74	-25.03
4874.00	31.84	AV	H	2.56	34.40	54	-19.60
4874.00	47.08	PK	V	2.56	49.64	74	-24.36
4874.00	32.37	AV	V	2.56	34.93	54	-19.07
High Channel 2462MHz							
4924.00	46.67	PK	H	2.63	49.30	74	-24.70
4924.00	32.06	AV	H	2.63	34.69	54	-19.31
4924.00	47.39	PK	V	2.63	50.02	74	-23.98
4924.00	32.55	AV	V	2.63	35.18	54	-18.82
802.11b (ANT2)							
Low Channel 2412MHz							
4824.00	50.37	PK	H	2.45	52.82	74	-21.18
4824.00	43.80	AV	H	2.45	46.25	54	-7.75
4824.00	51.59	PK	V	2.45	54.04	74	-19.96
4824.00	44.63	AV	V	2.45	47.08	54	-6.92
Middle Channel 2437MHz							
4874.00	51.22	PK	H	2.56	53.78	74	-20.22
4874.00	44.51	AV	H	2.56	47.07	54	-6.93
4874.00	52.46	PK	V	2.56	55.02	74	-18.98
4874.00	45.35	AV	V	2.56	47.91	54	-6.09
High Channel 2462MHz							
4924.00	51.68	PK	H	2.63	54.31	74	-19.69
4924.00	44.94	AV	H	2.63	47.57	54	-6.43
4924.00	52.89	PK	V	2.63	55.52	74	-18.48
4924.00	45.76	AV	V	2.63	48.39	54	-5.61

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11g (ANT1)							
Low Channel 2412MHz							
4824.00	46.96	PK	H	2.45	49.41	74	-24.59
4824.00	32.35	AV	H	2.45	34.80	54	-19.20
4824.00	47.28	PK	V	2.45	49.73	74	-24.27
4824.00	32.59	AV	V	2.45	35.04	54	-18.96
Middle Channel 2437MHz							
4874.00	46.75	PK	H	2.56	49.31	74	-24.69
4874.00	32.17	AV	H	2.56	34.73	54	-19.27
4874.00	47.08	PK	V	2.56	49.64	74	-24.36
4874.00	32.36	AV	V	2.56	34.92	54	-19.08
High Channel 2462MHz							
4924.00	47.36	PK	H	2.63	49.99	74	-24.01
4924.00	32.61	AV	H	2.63	35.24	54	-18.76
4924.00	47.57	PK	V	2.63	50.20	74	-23.80
4924.00	32.78	AV	V	2.63	35.41	54	-18.59
802.11g (ANT2)							
Low Channel 2412MHz							
4824.00	47.95	PK	H	2.45	50.40	74	-23.60
4824.00	33.88	AV	H	2.45	36.33	54	-17.67
4824.00	48.69	PK	V	2.45	51.14	74	-22.86
4824.00	34.47	AV	V	2.45	36.92	54	-17.08
Middle Channel 2437MHz							
4874.00	48.32	PK	H	2.56	50.88	74	-23.12
4874.00	34.25	AV	H	2.56	36.81	54	-17.19
4874.00	49.13	PK	V	2.56	51.69	74	-22.31
4874.00	34.78	AV	V	2.56	37.34	54	-16.66
High Channel 2462MHz							
4924.00	49.28	PK	H	2.63	51.91	74	-22.09
4924.00	34.84	AV	H	2.63	37.47	54	-16.53
4924.00	50.09	PK	V	2.63	52.72	74	-21.28
4924.00	35.36	AV	V	2.63	37.99	54	-16.01

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11n20							
Low Channel 2412MHz							
4824.00	47.45	PK	H	2.45	49.90	74	-24.10
4824.00	33.64	AV	H	2.45	36.09	54	-17.91
4824.00	48.28	PK	V	2.45	50.73	74	-23.27
4824.00	34.19	AV	V	2.45	36.64	54	-17.36
Middle Channel 2437MHz							
4874.00	47.03	PK	H	2.56	49.59	74	-24.41
4874.00	33.21	AV	H	2.56	35.77	54	-18.23
4874.00	47.80	PK	V	2.56	50.36	74	-23.64
4874.00	33.76	AV	V	2.56	36.32	54	-17.68
High Channel 2462MHz							
4924.00	48.24	PK	H	2.63	50.87	74	-23.13
4924.00	34.31	AV	H	2.63	36.94	54	-17.06
4924.00	49.05	PK	V	2.63	51.68	74	-22.32
4924.00	34.82	AV	V	2.63	37.45	54	-16.55
802.11n40							
Low Channel 2422MHz							
4844.00	46.60	PK	H	2.45	49.05	74	-24.95
4844.00	32.59	AV	H	2.45	35.04	54	-18.96
4844.00	47.11	PK	V	2.45	49.56	74	-24.44
4844.00	33.08	AV	V	2.45	35.53	54	-18.47
Middle Channel 2437MHz							
4874.00	46.09	PK	H	2.56	48.65	74	-25.35
4874.00	32.47	AV	H	2.56	35.03	54	-18.97
4874.00	46.51	PK	V	2.56	49.07	74	-24.93
4874.00	32.78	AV	V	2.56	35.34	54	-18.66
High Channel 2452MHz							
4904.00	46.94	PK	H	2.64	49.58	74	-24.42
4904.00	33.01	AV	H	2.64	35.65	54	-18.35
4904.00	47.48	PK	V	2.64	50.12	74	-23.88
4904.00	33.55	AV	V	2.64	36.19	54	-17.81

Note:


Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


Test plots for Band Edge Measurements (Radiated):

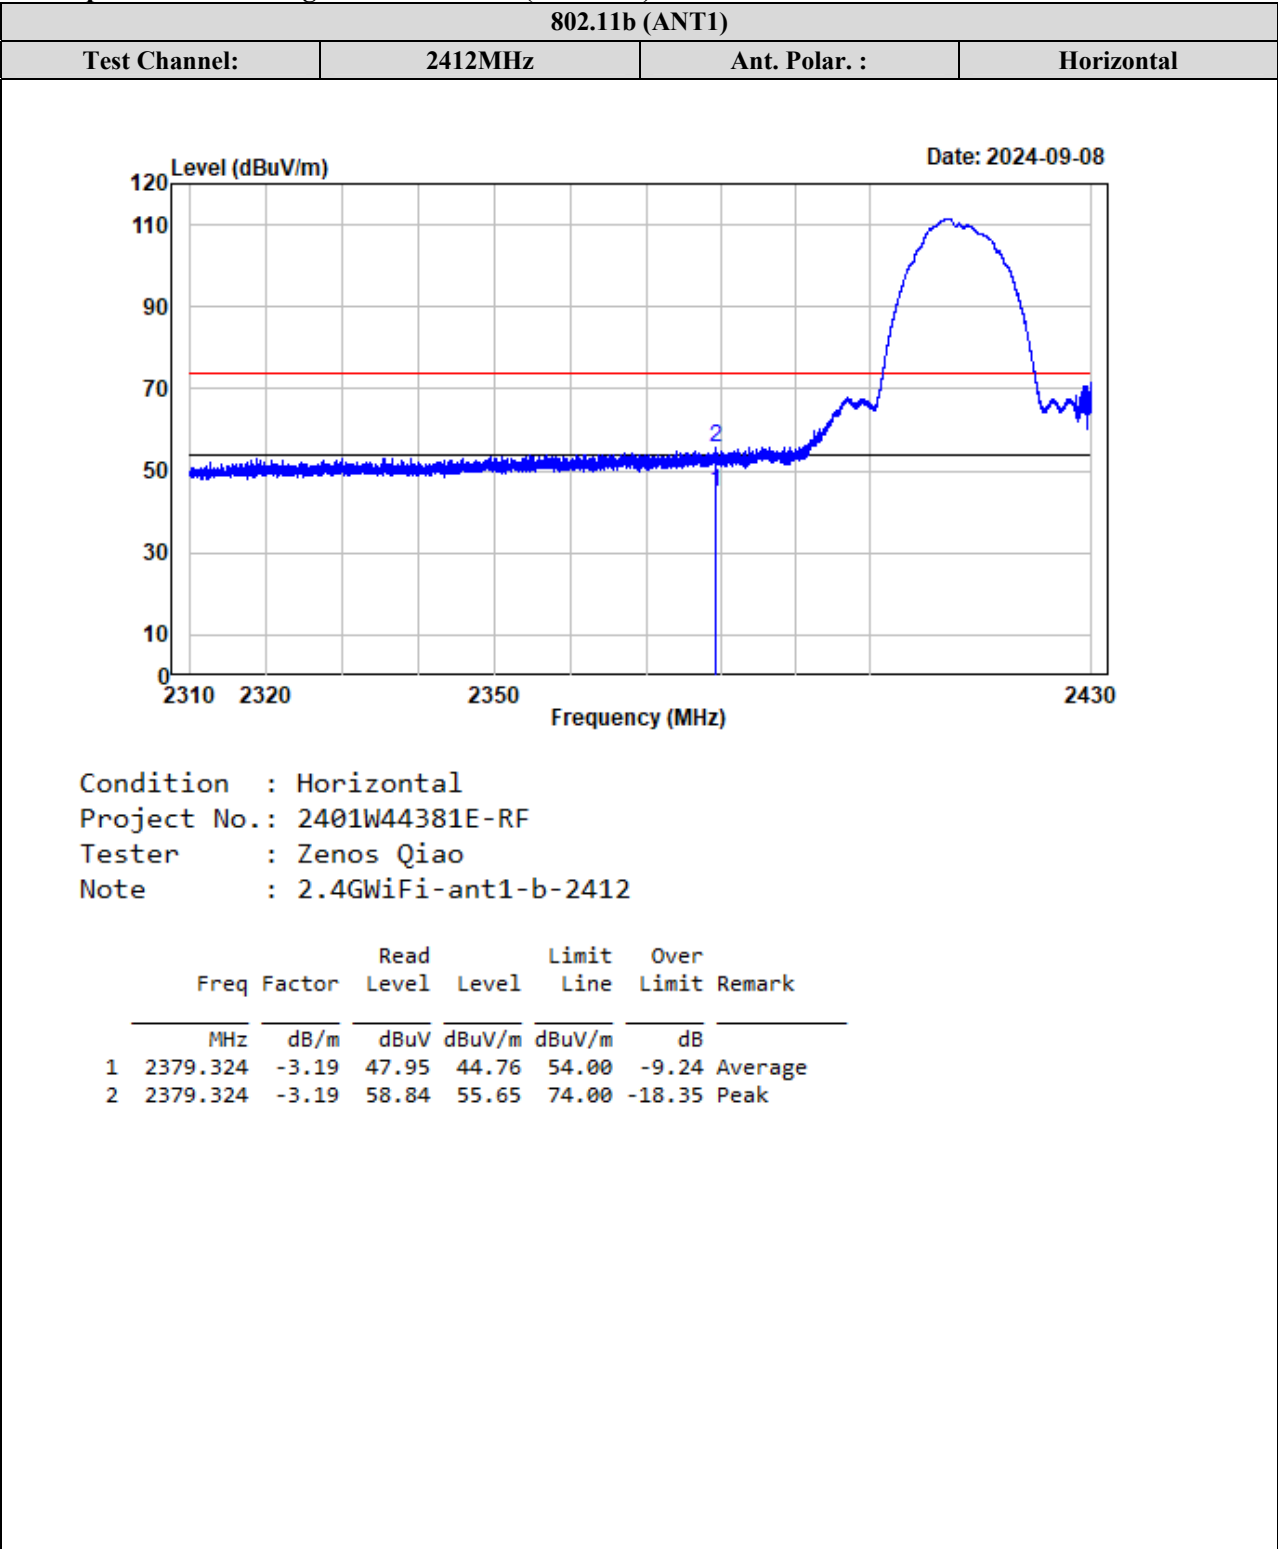


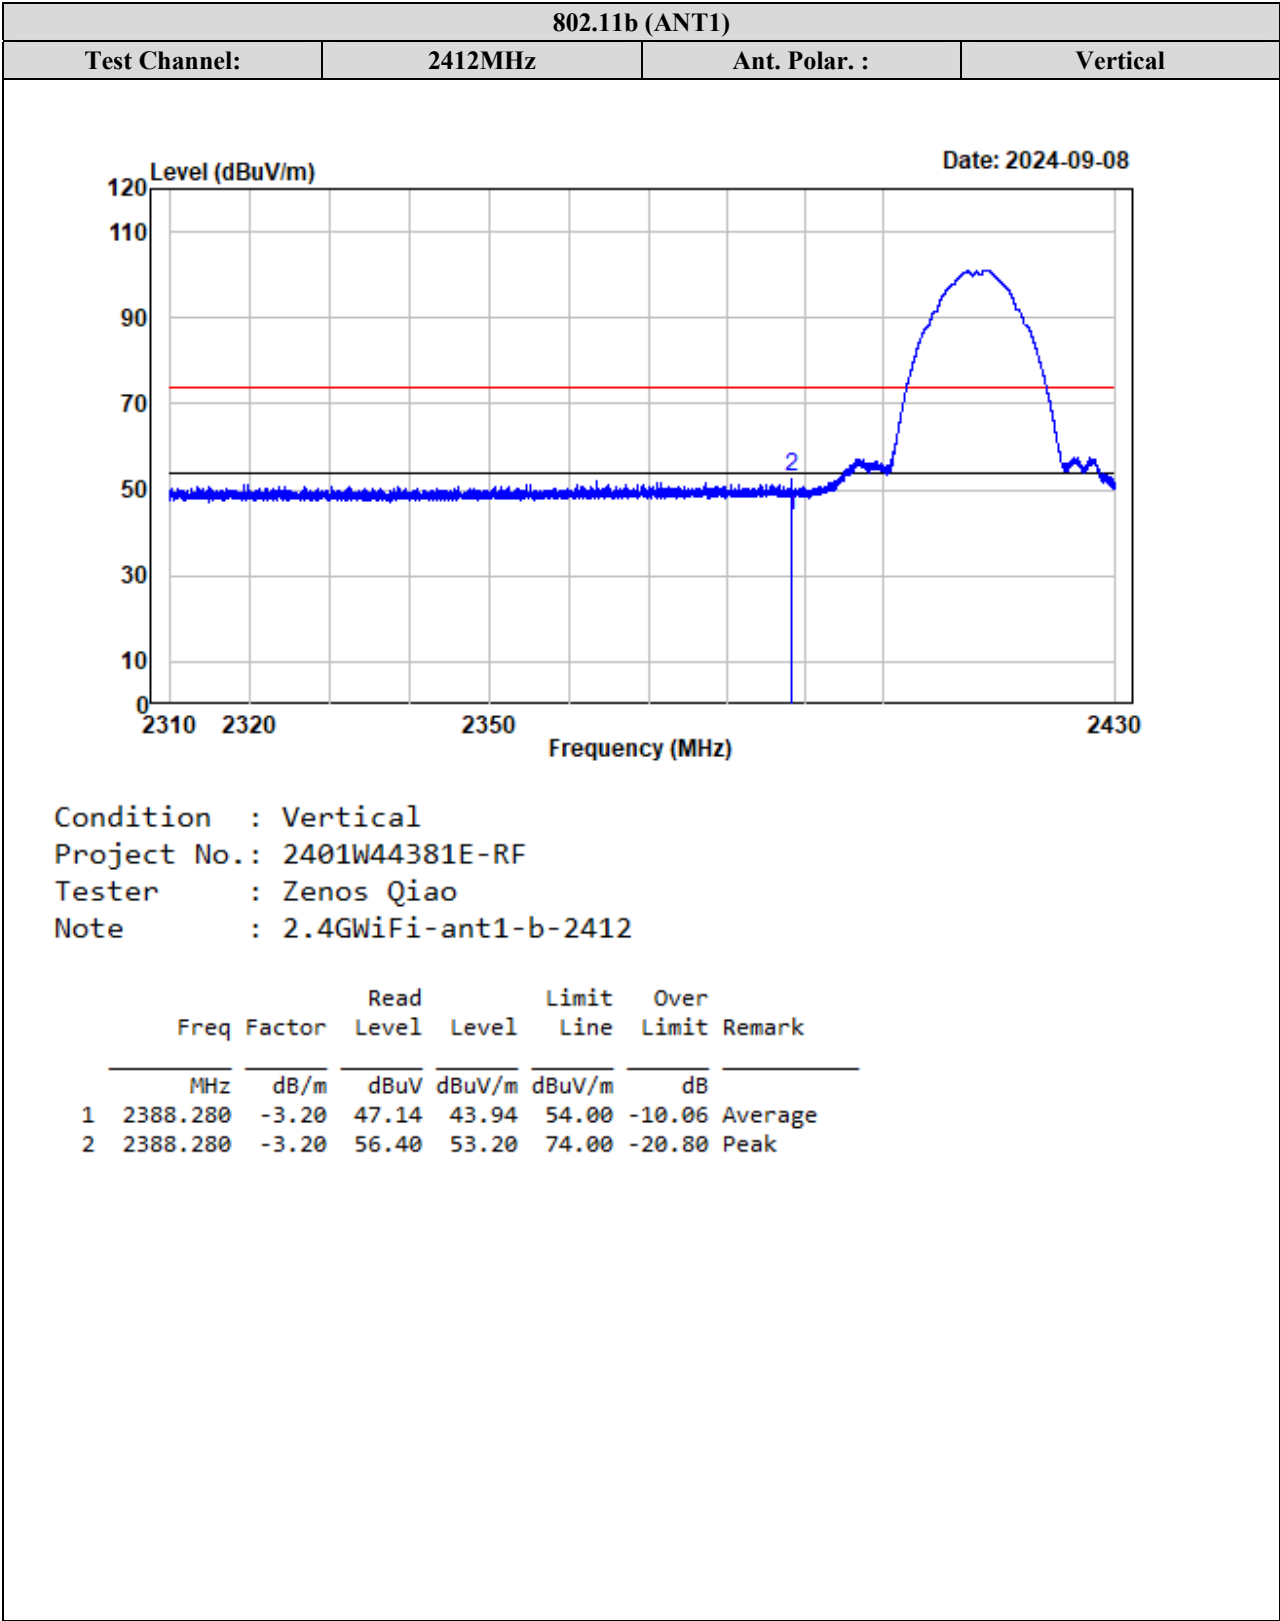


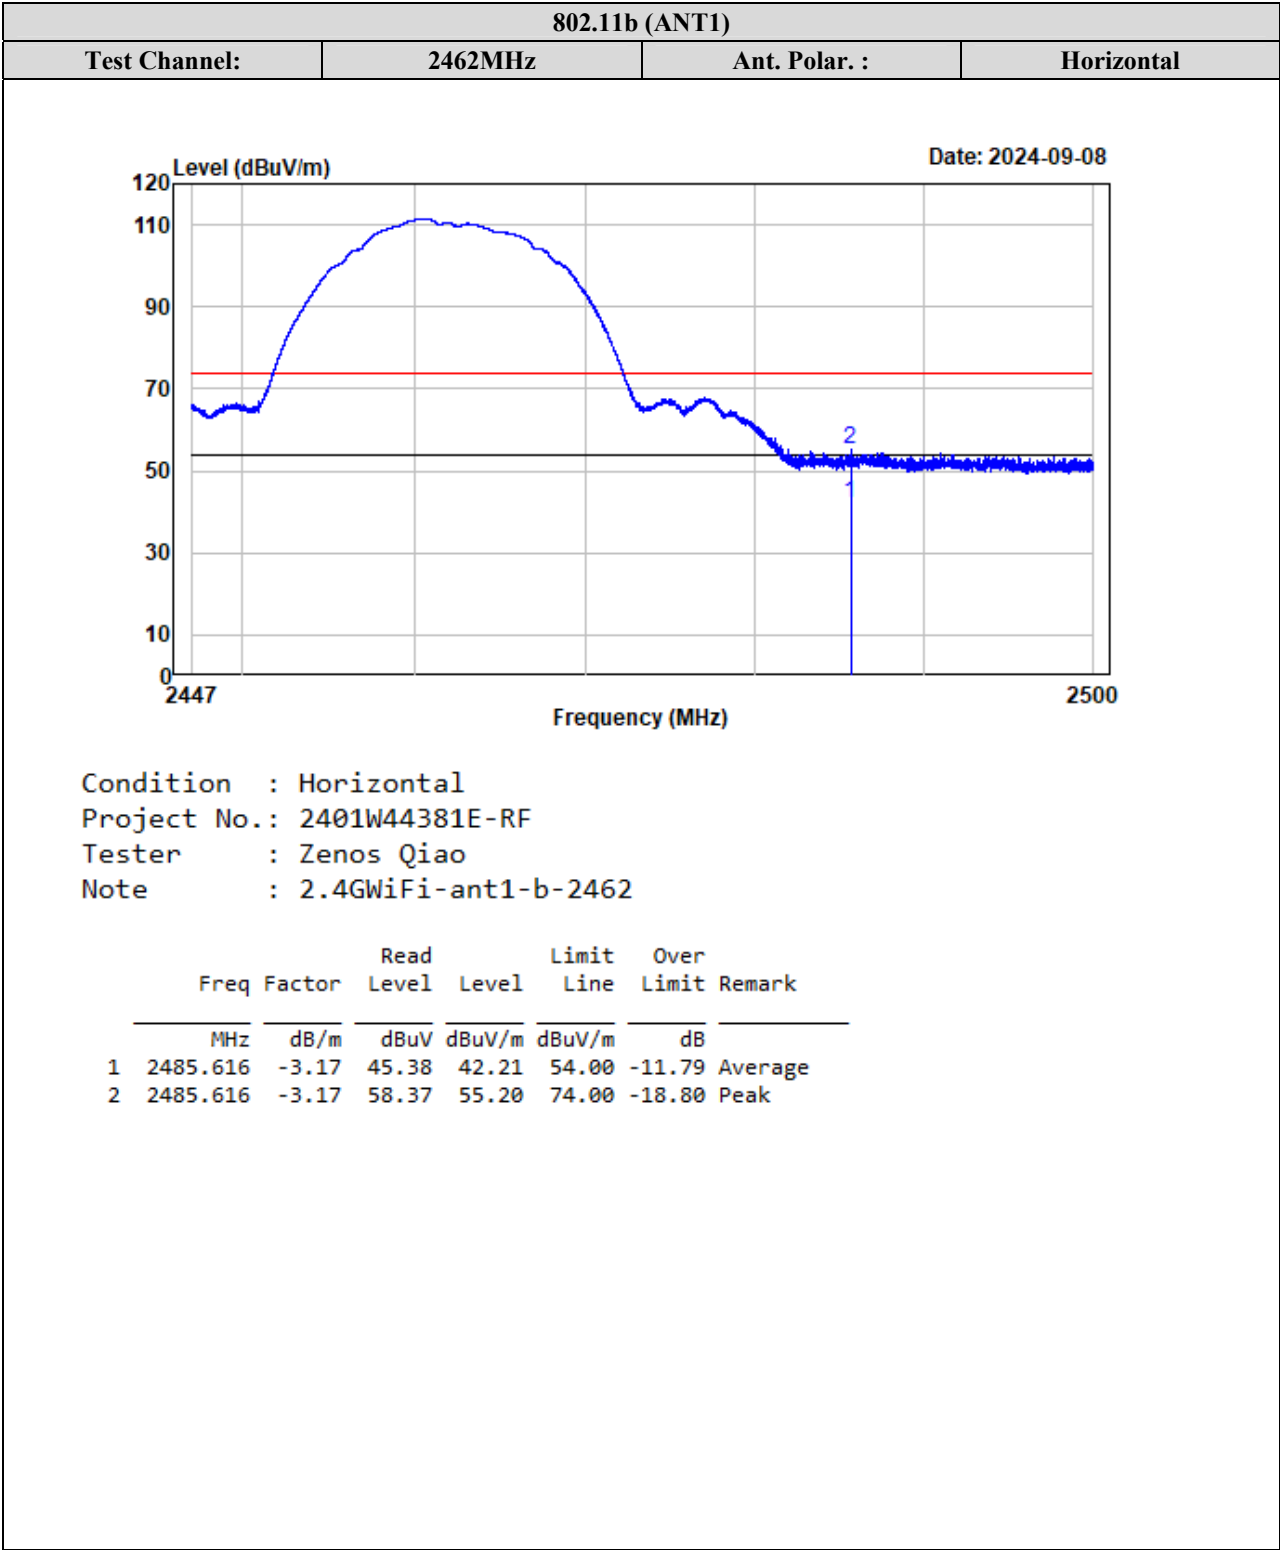


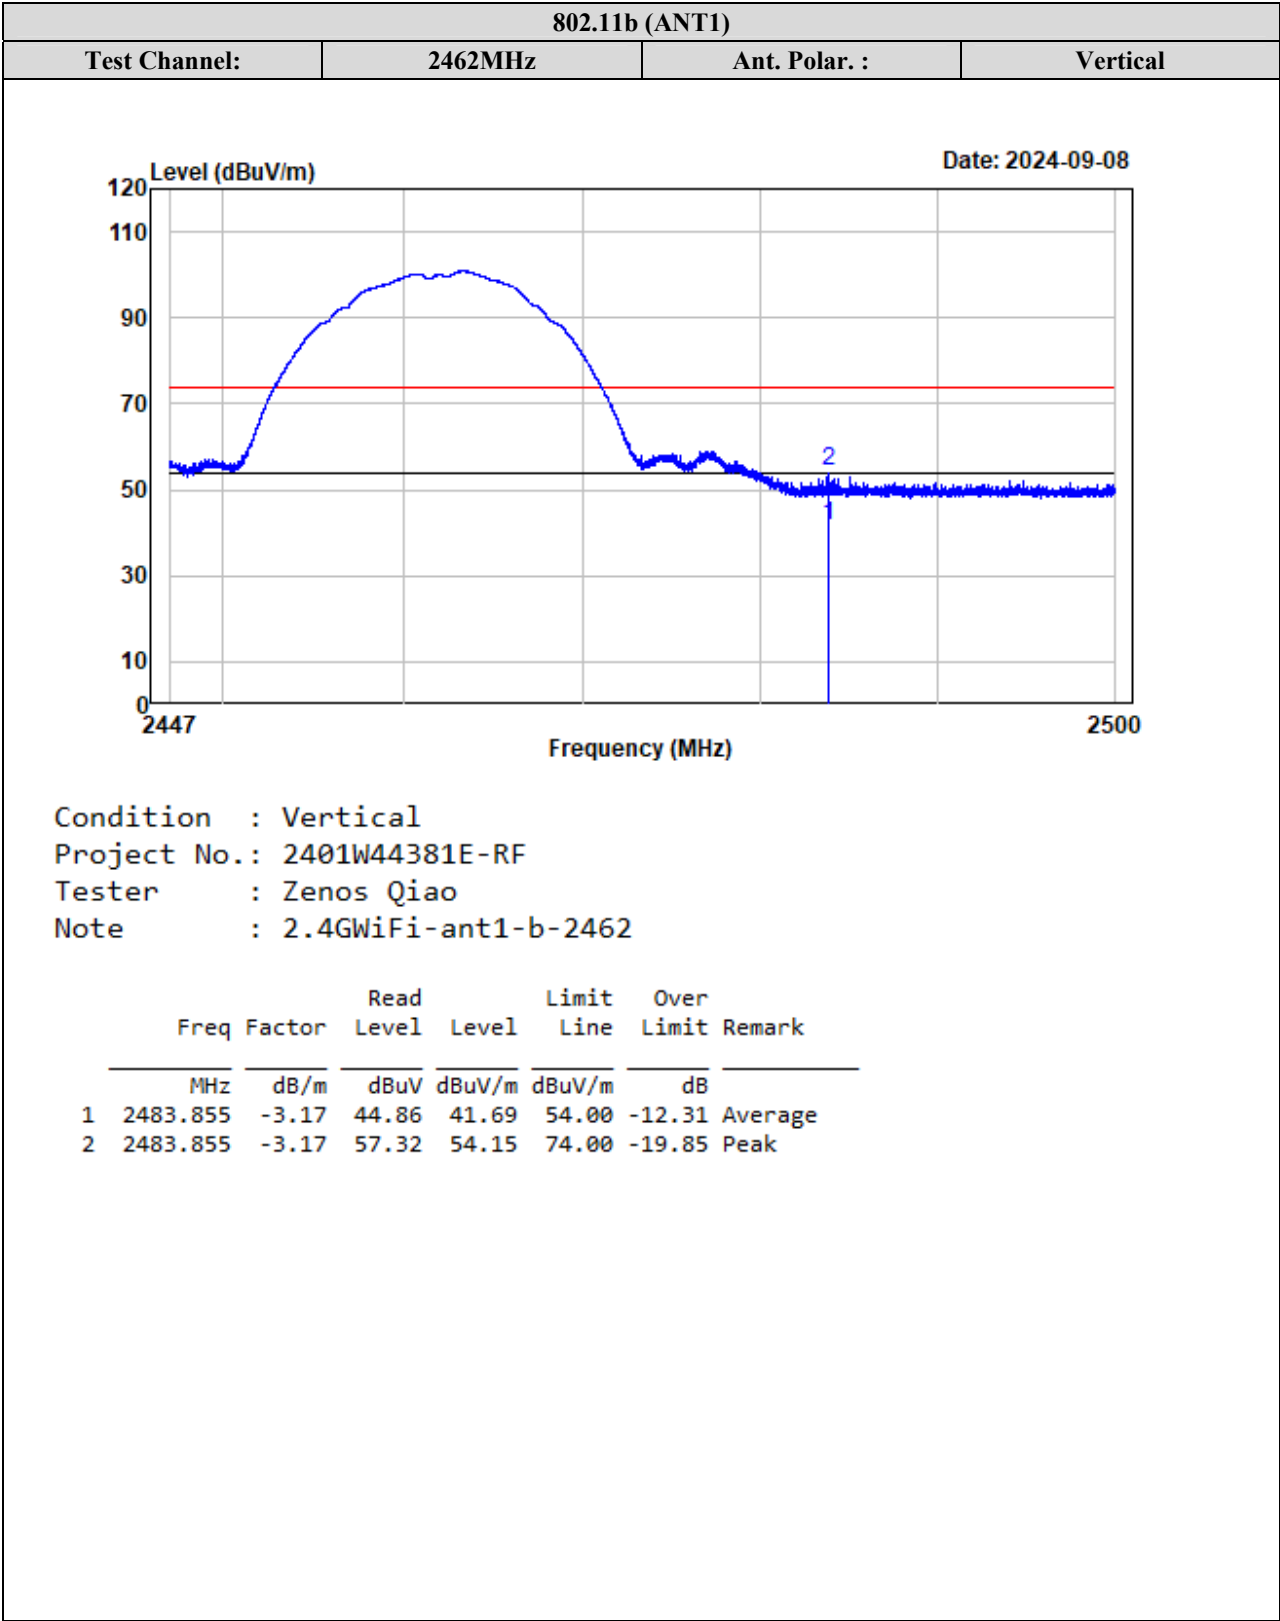


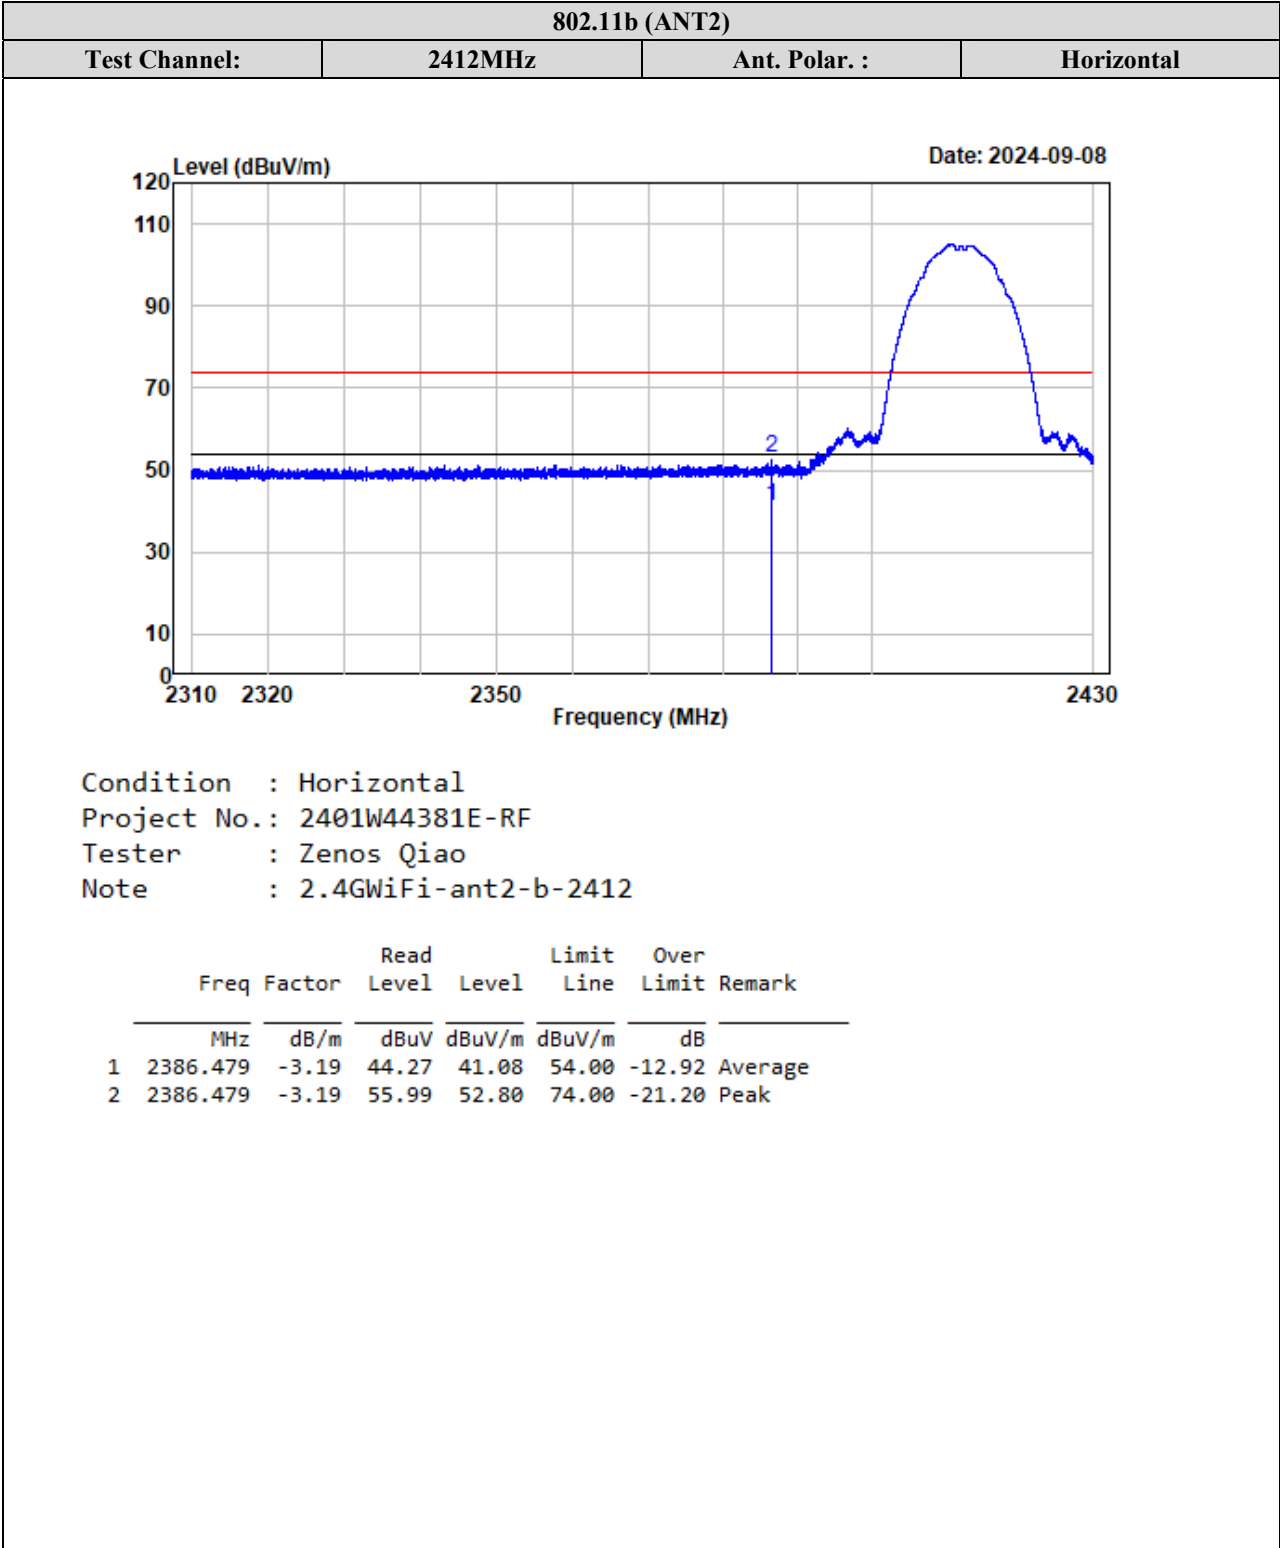


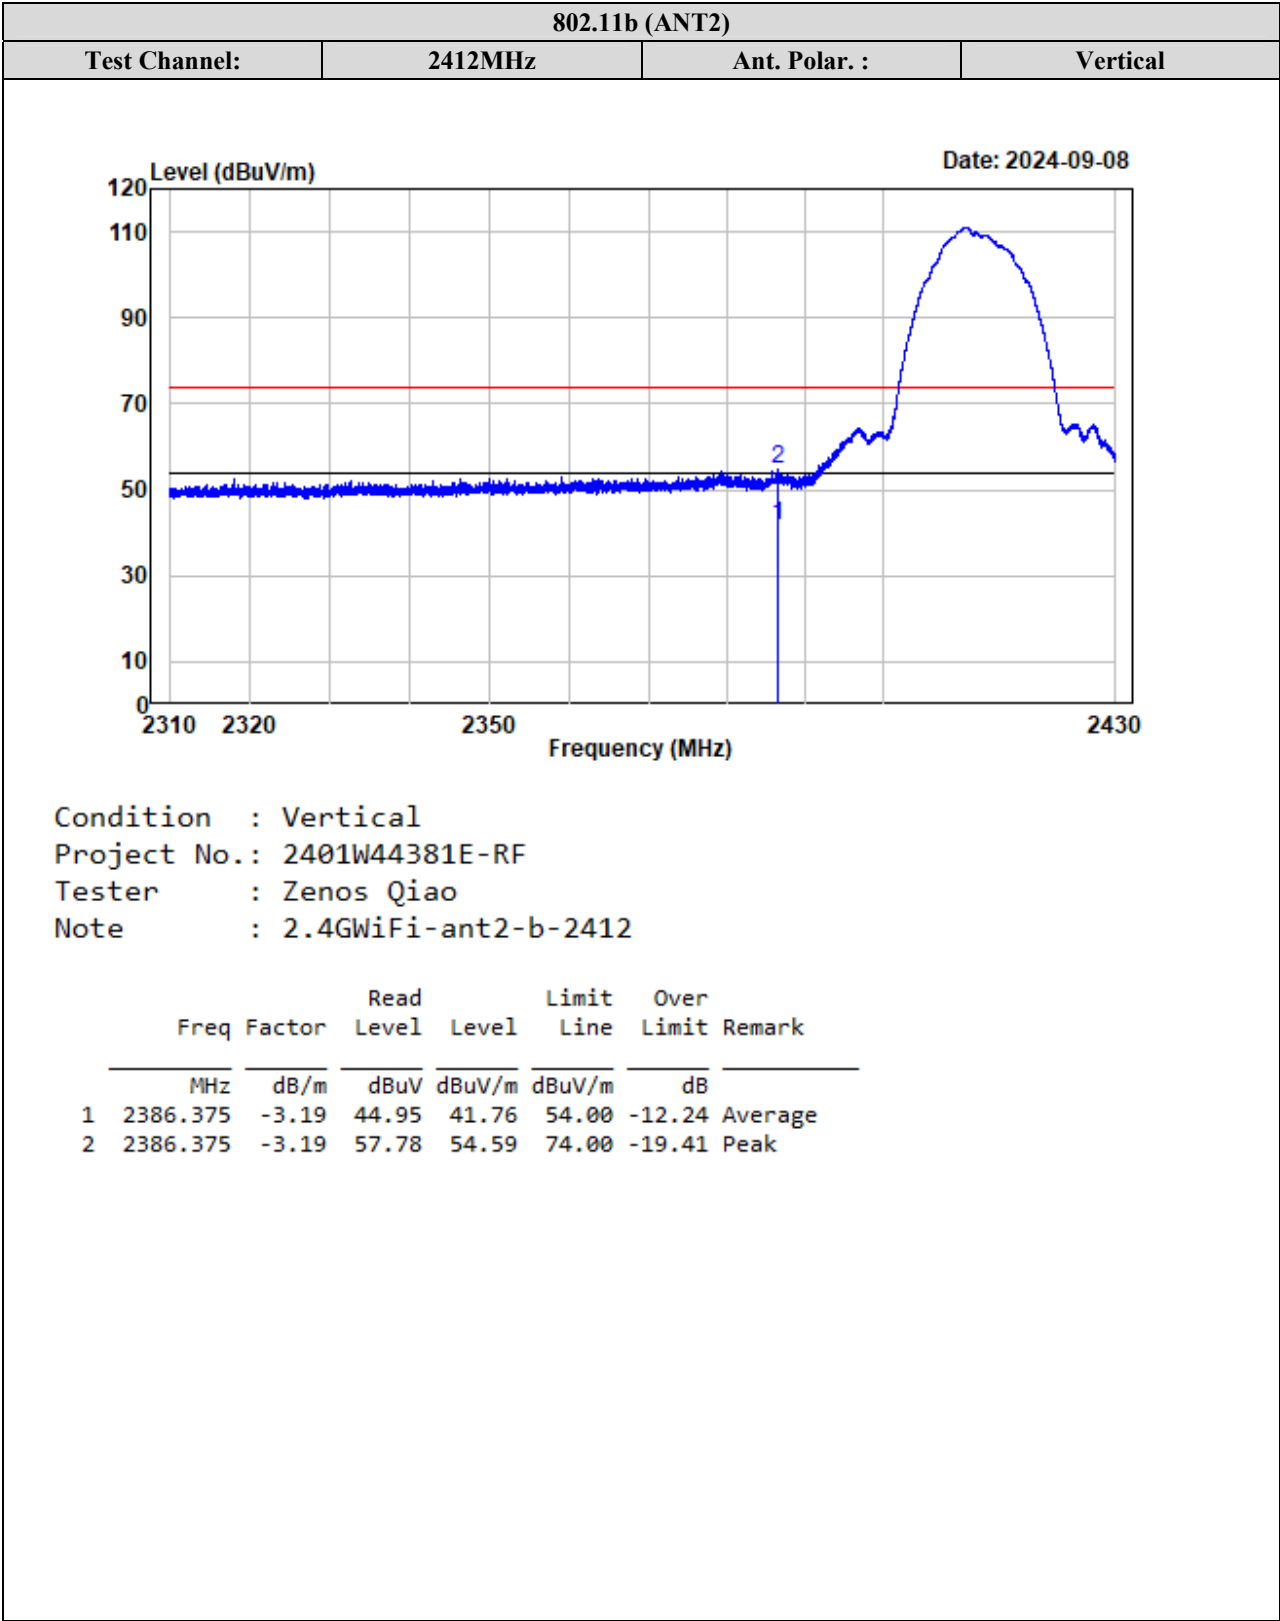


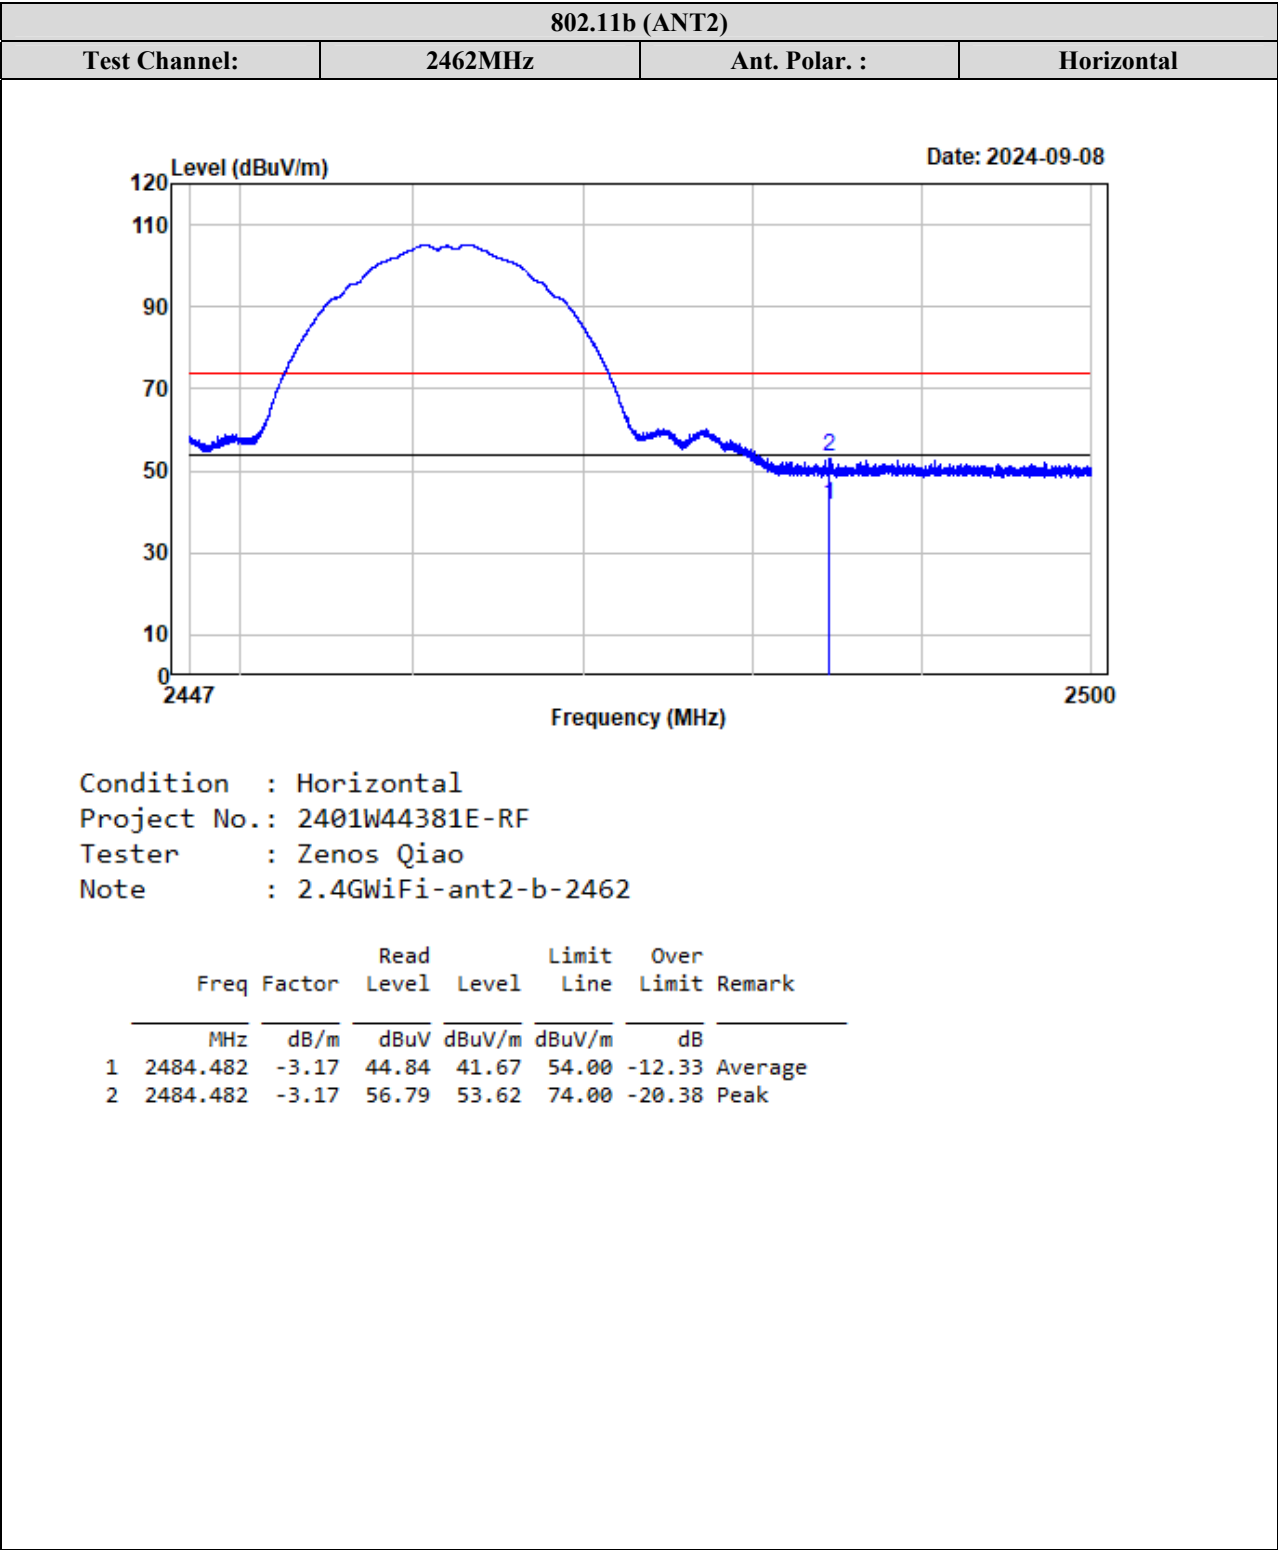


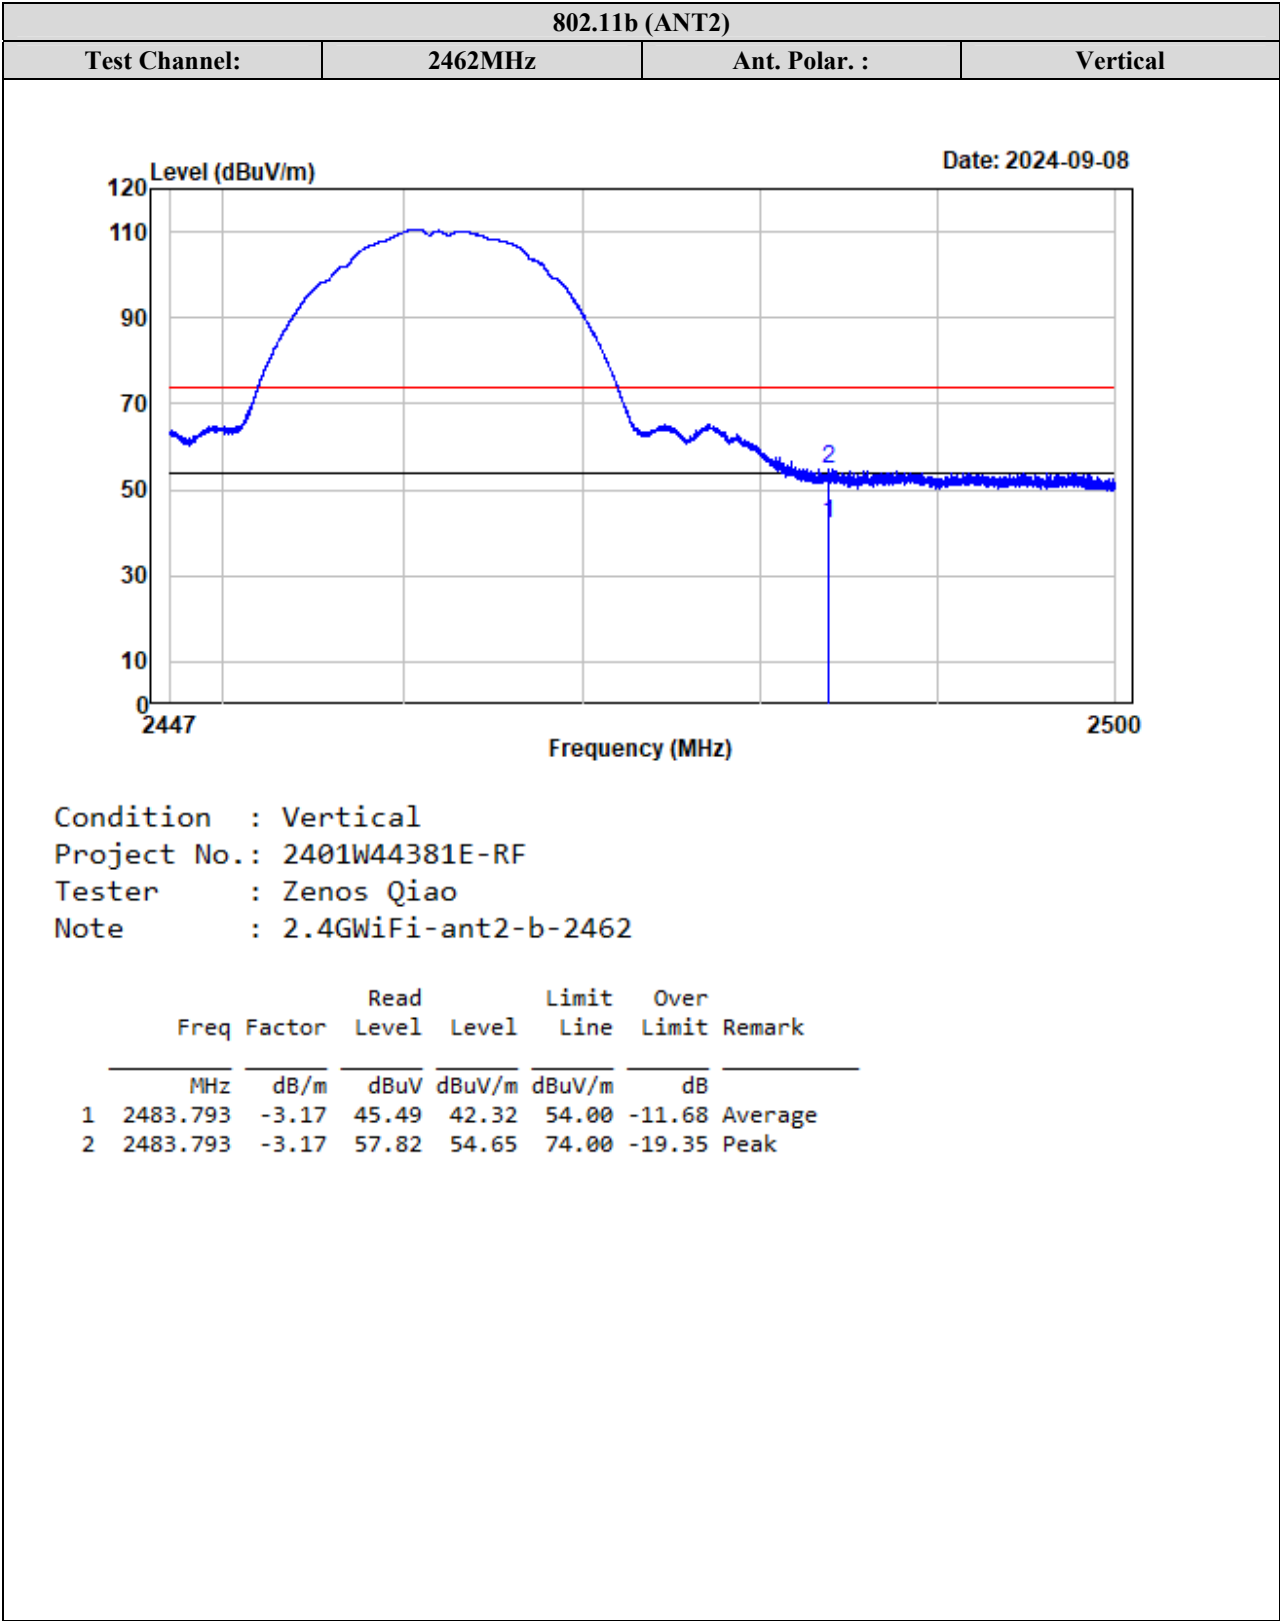


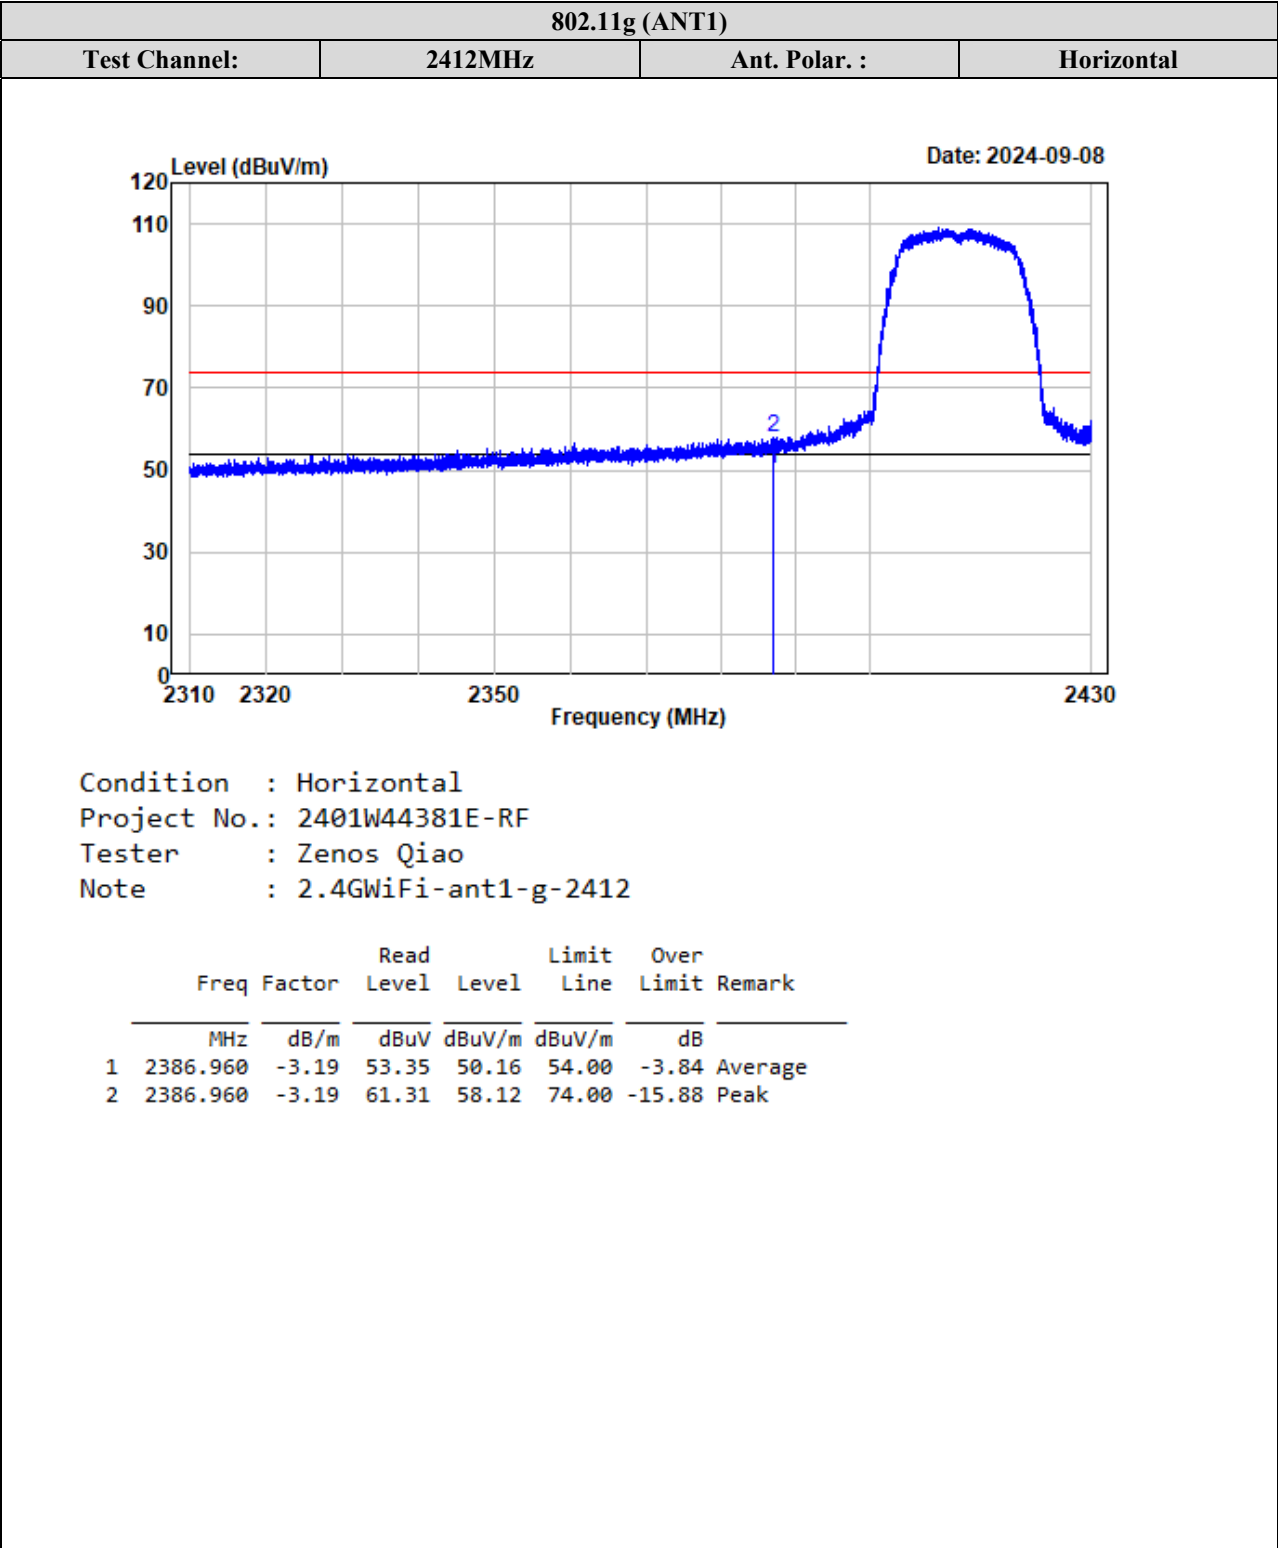


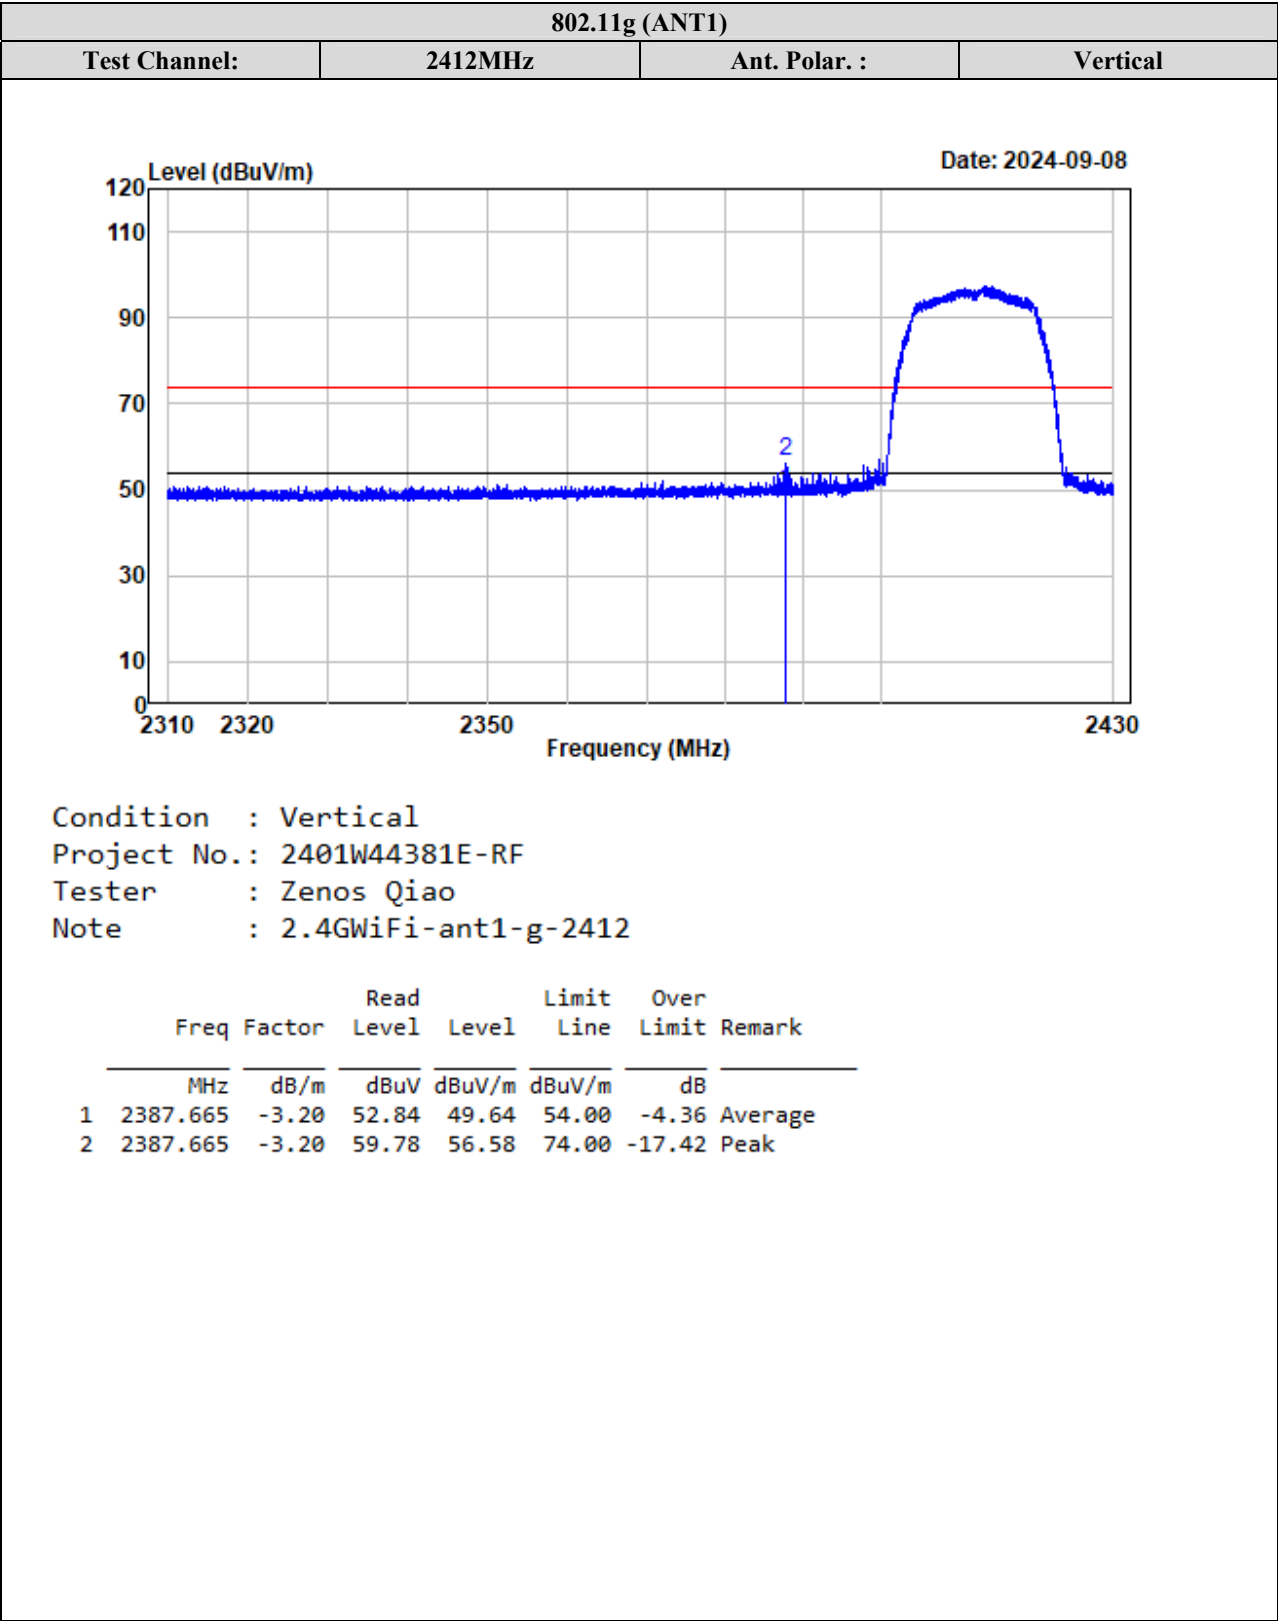


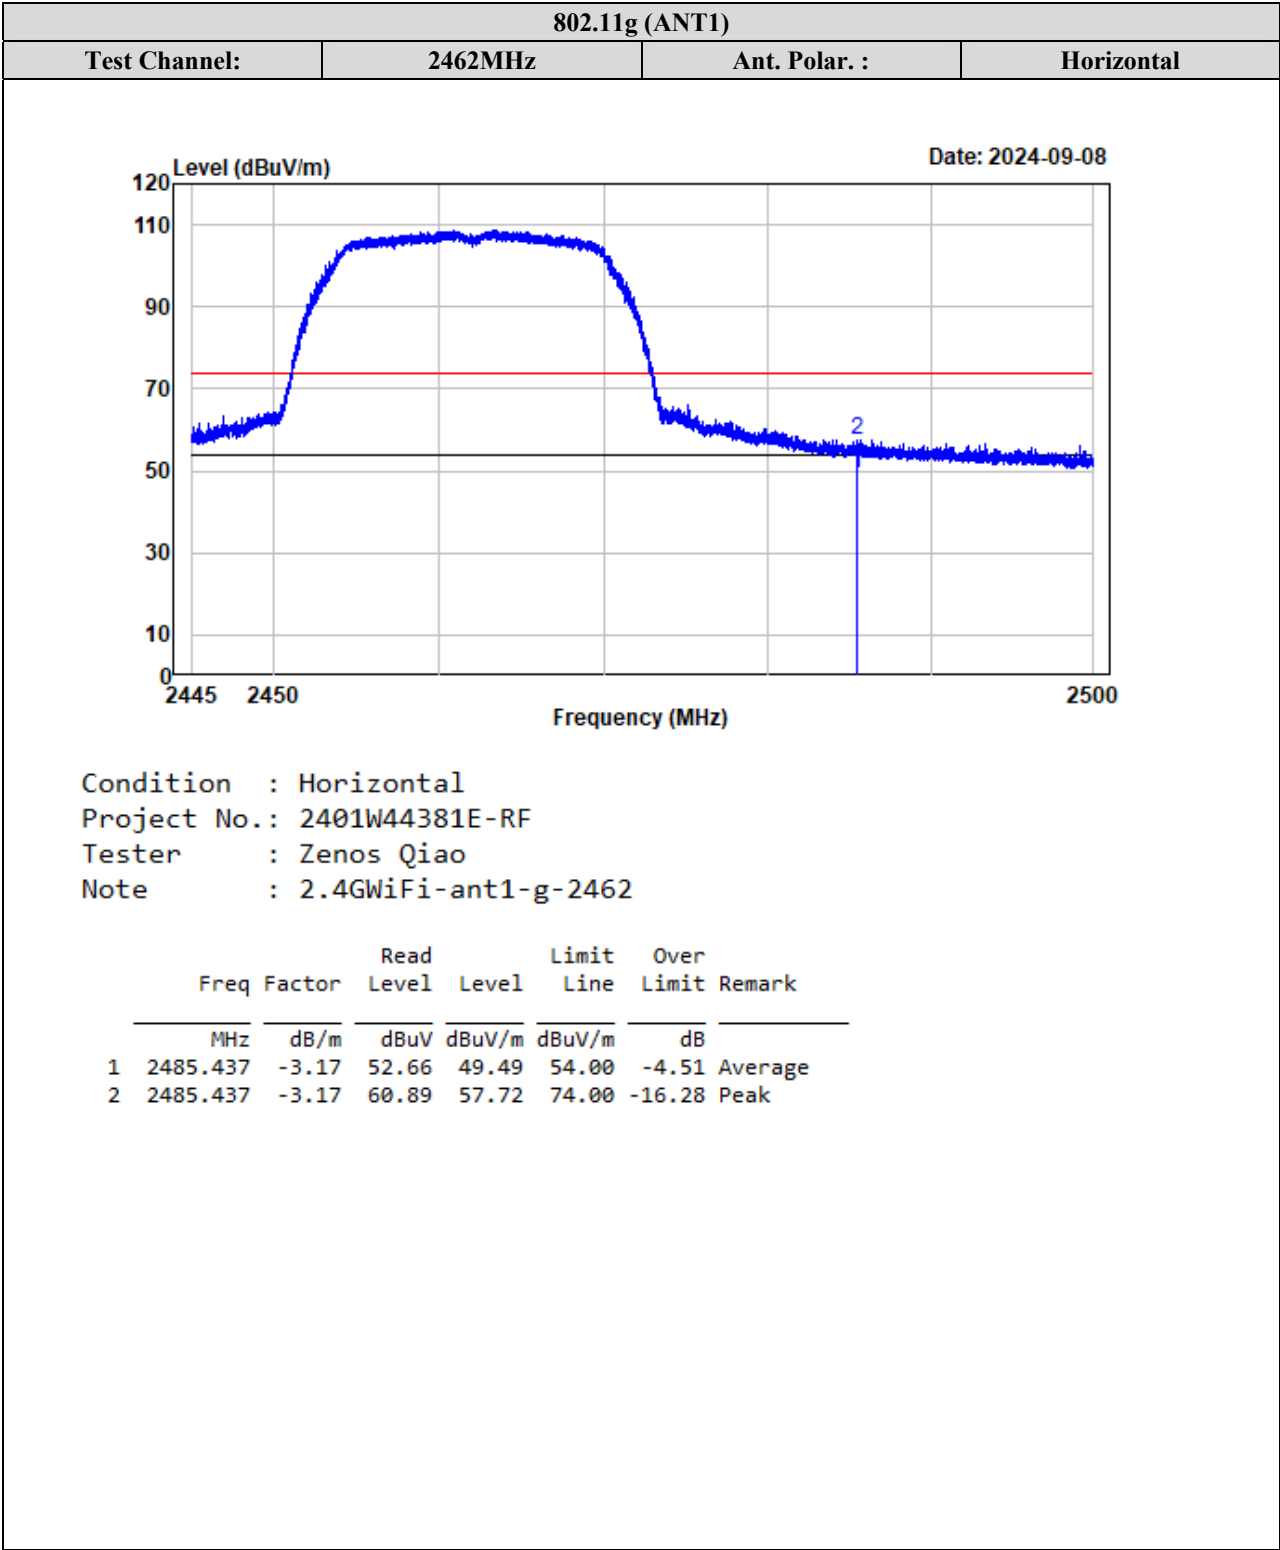


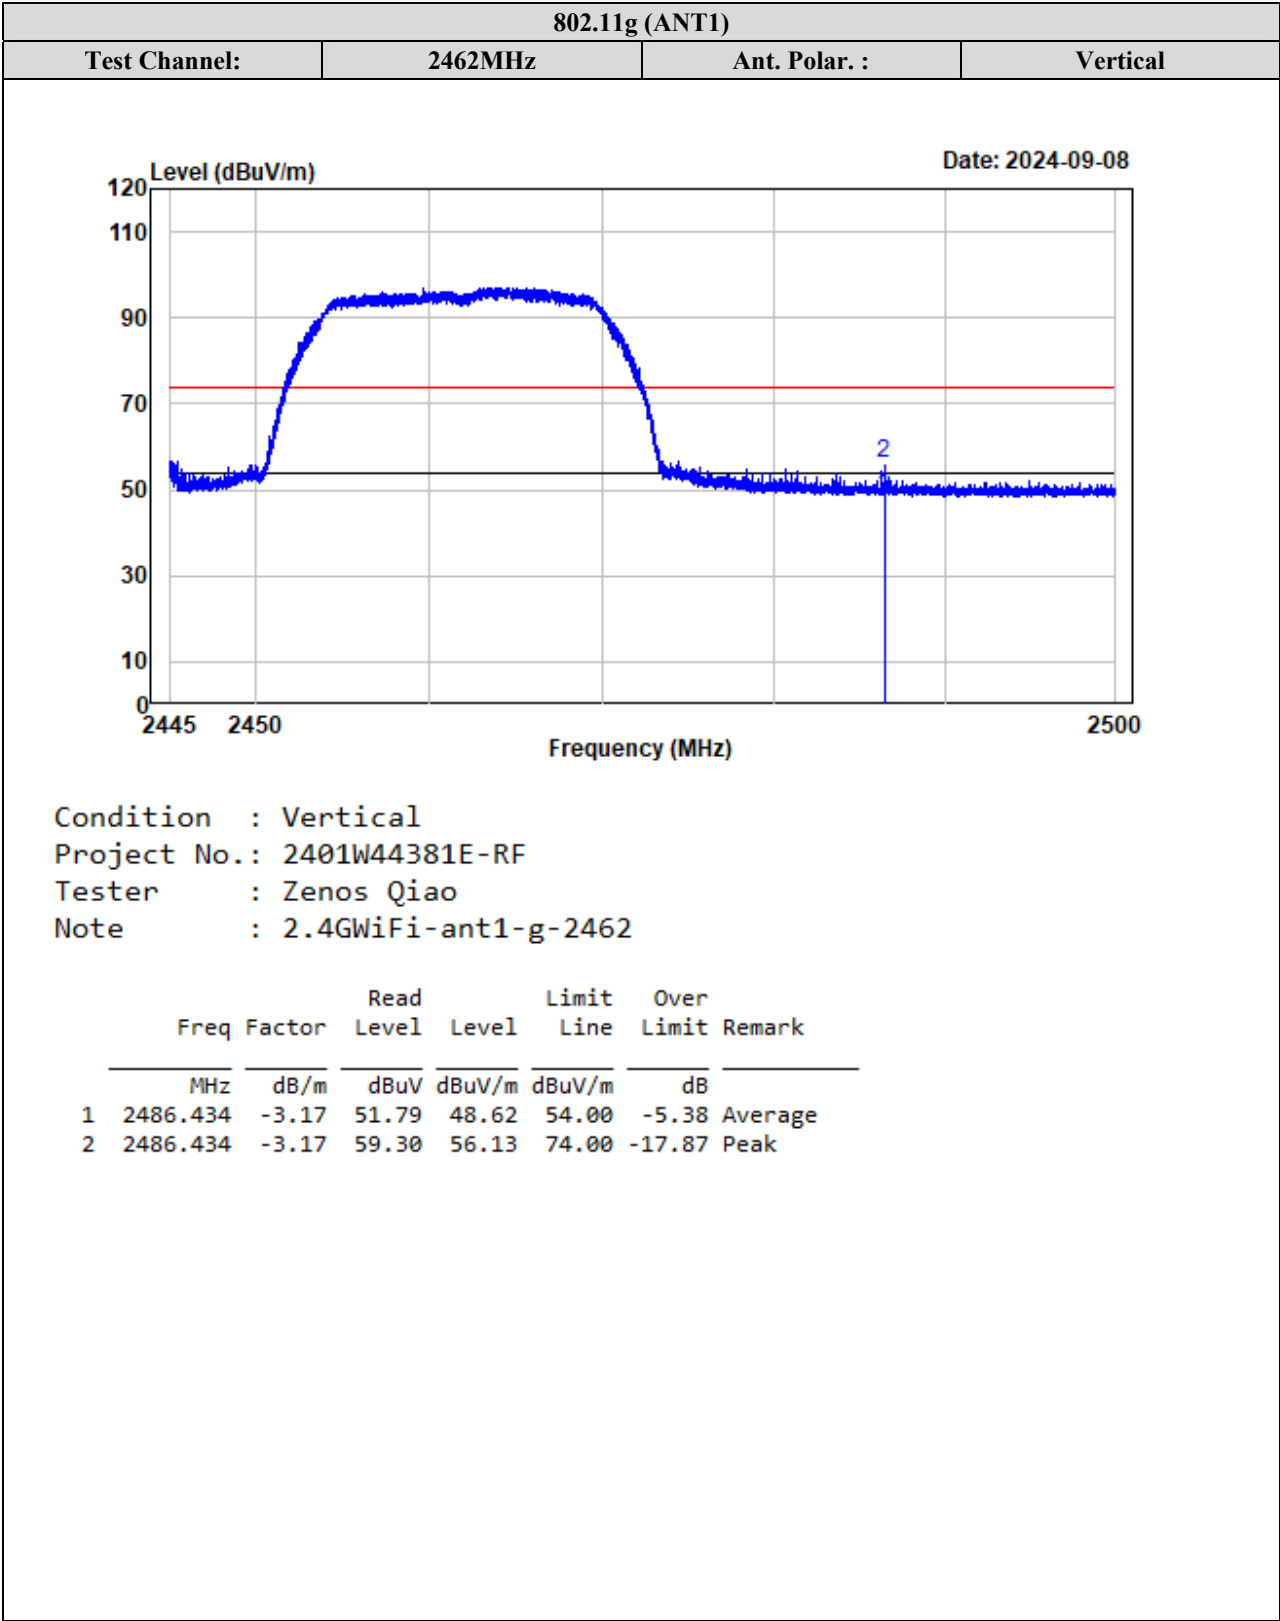


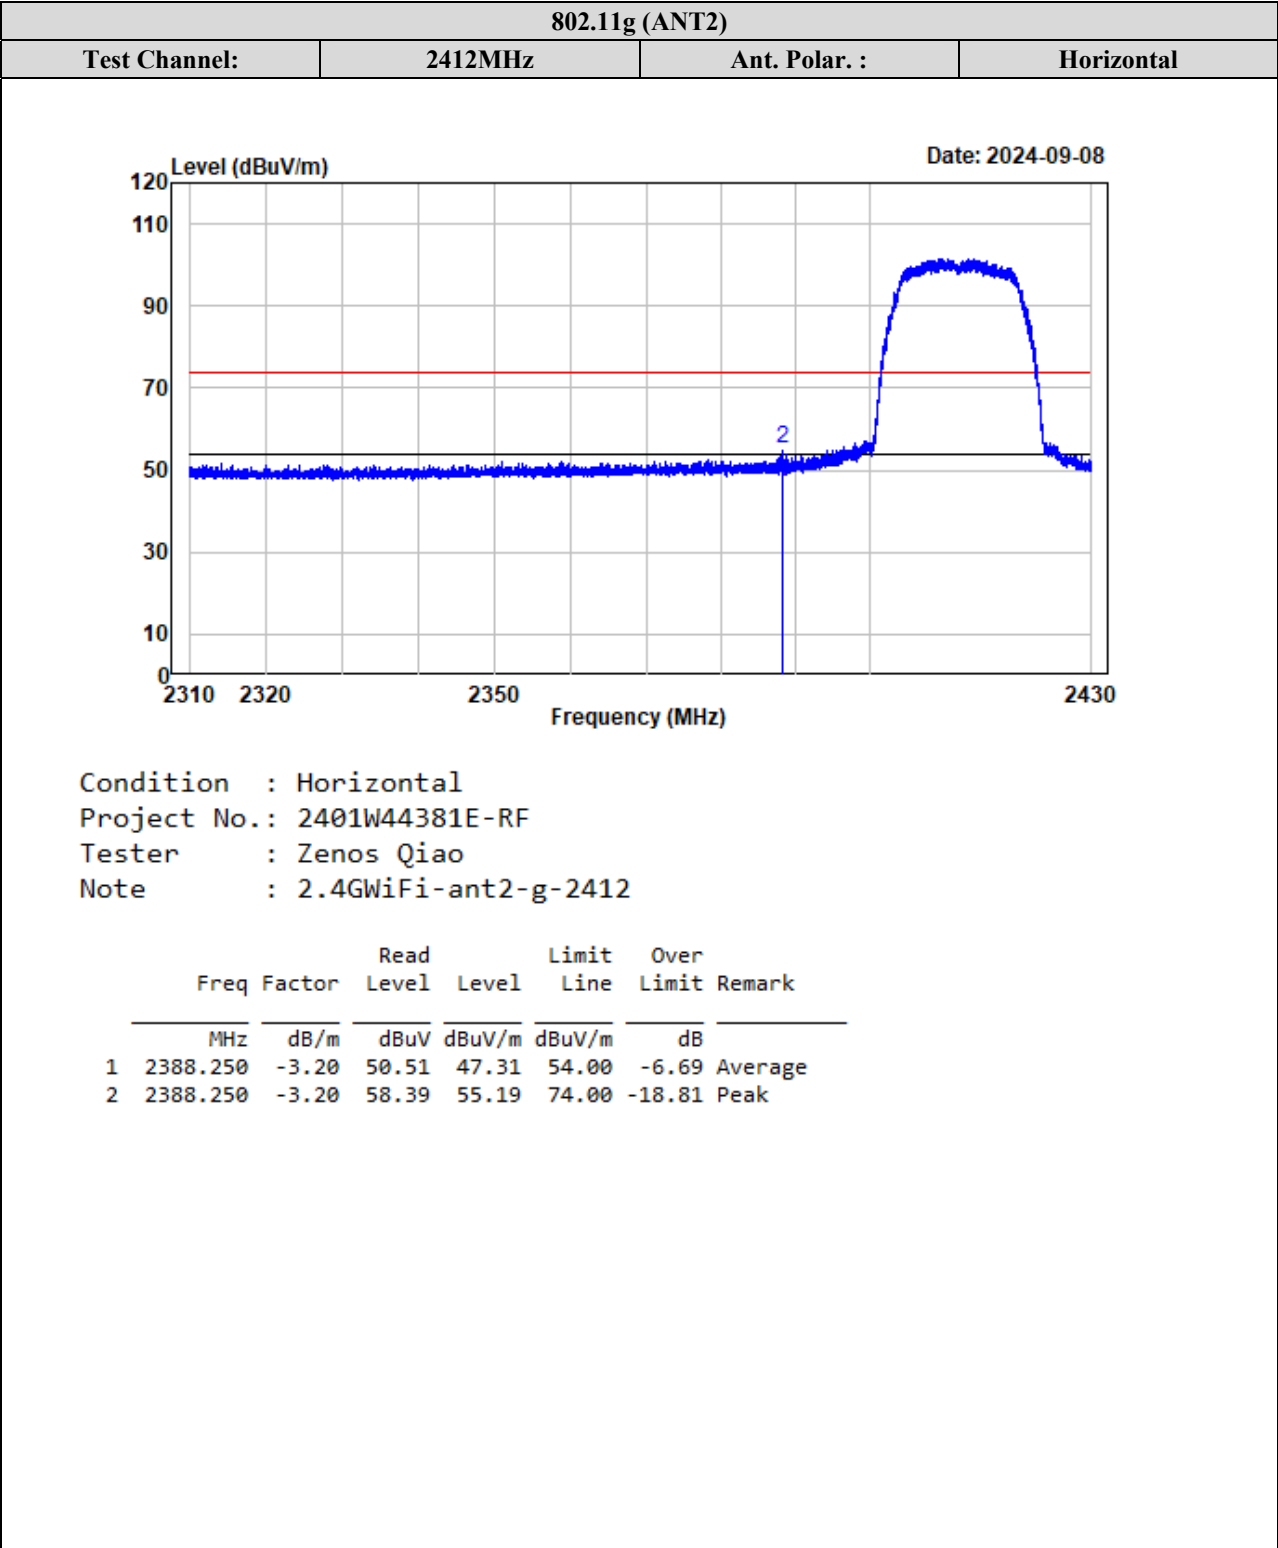


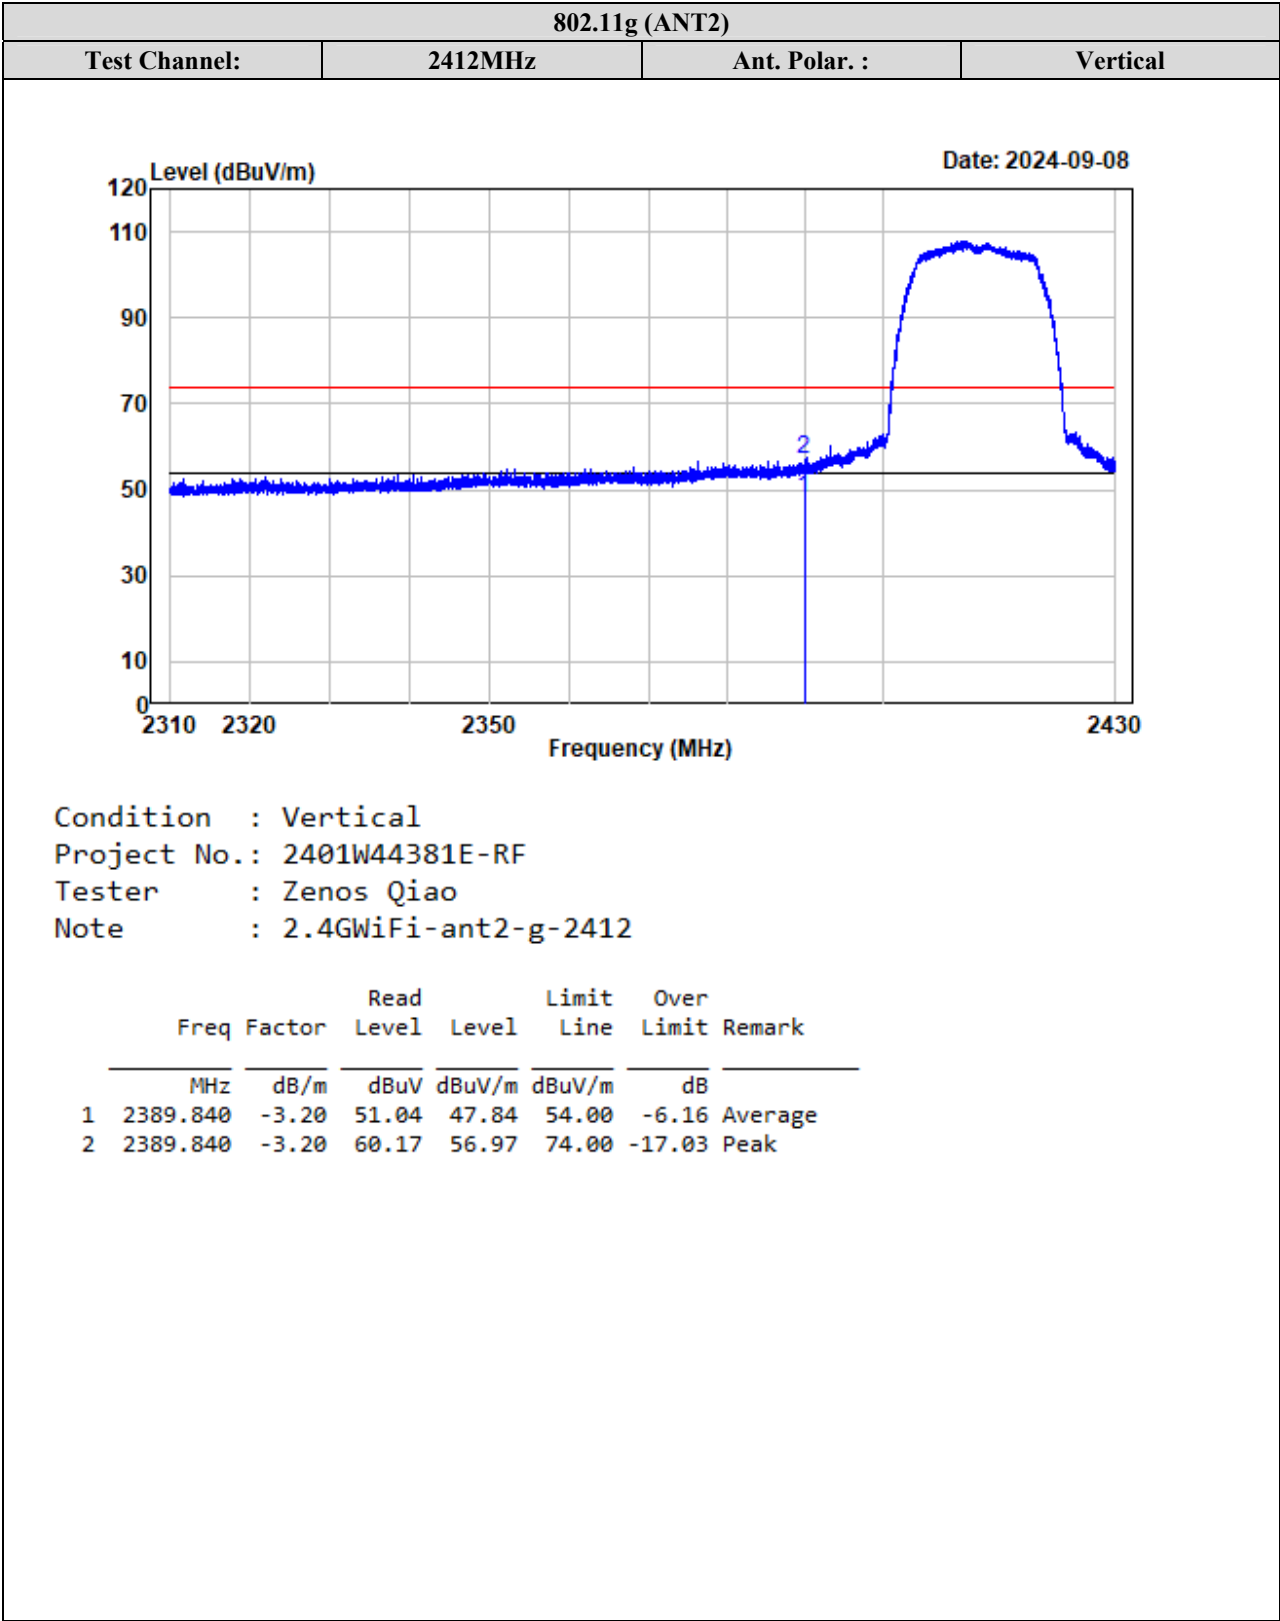


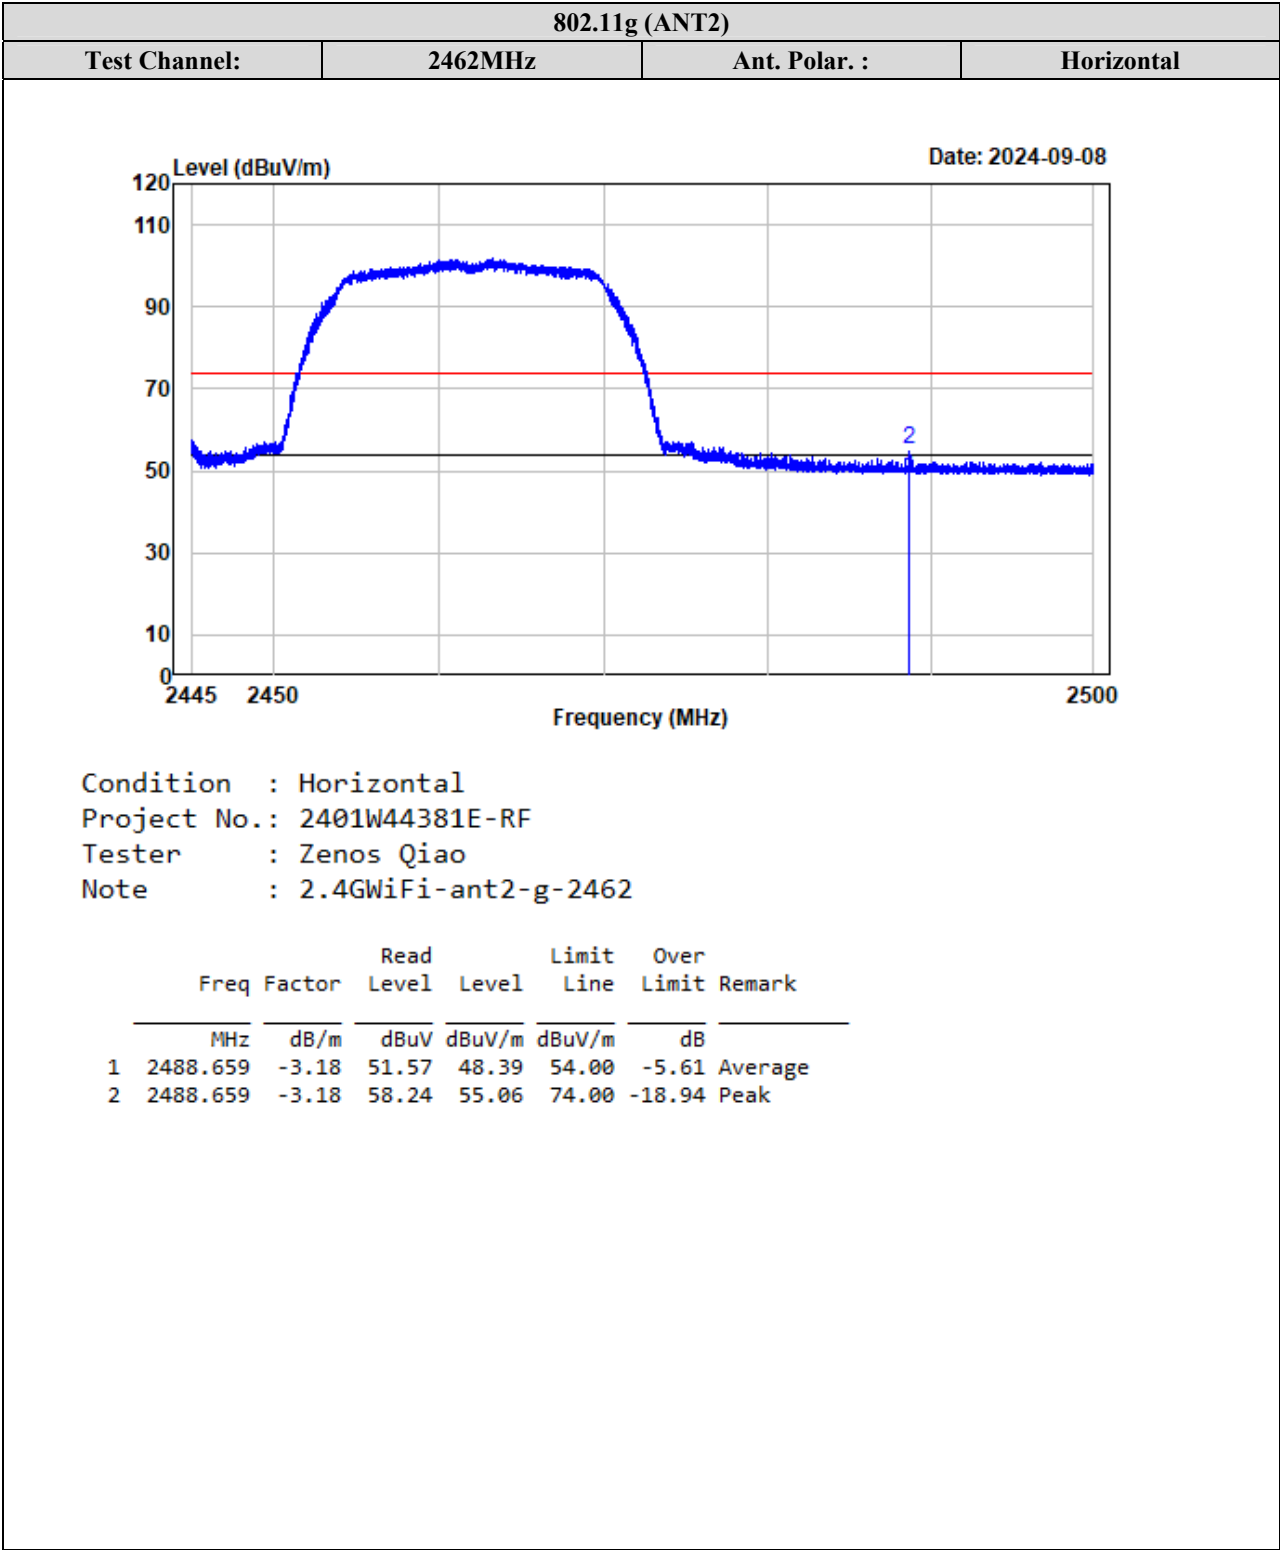


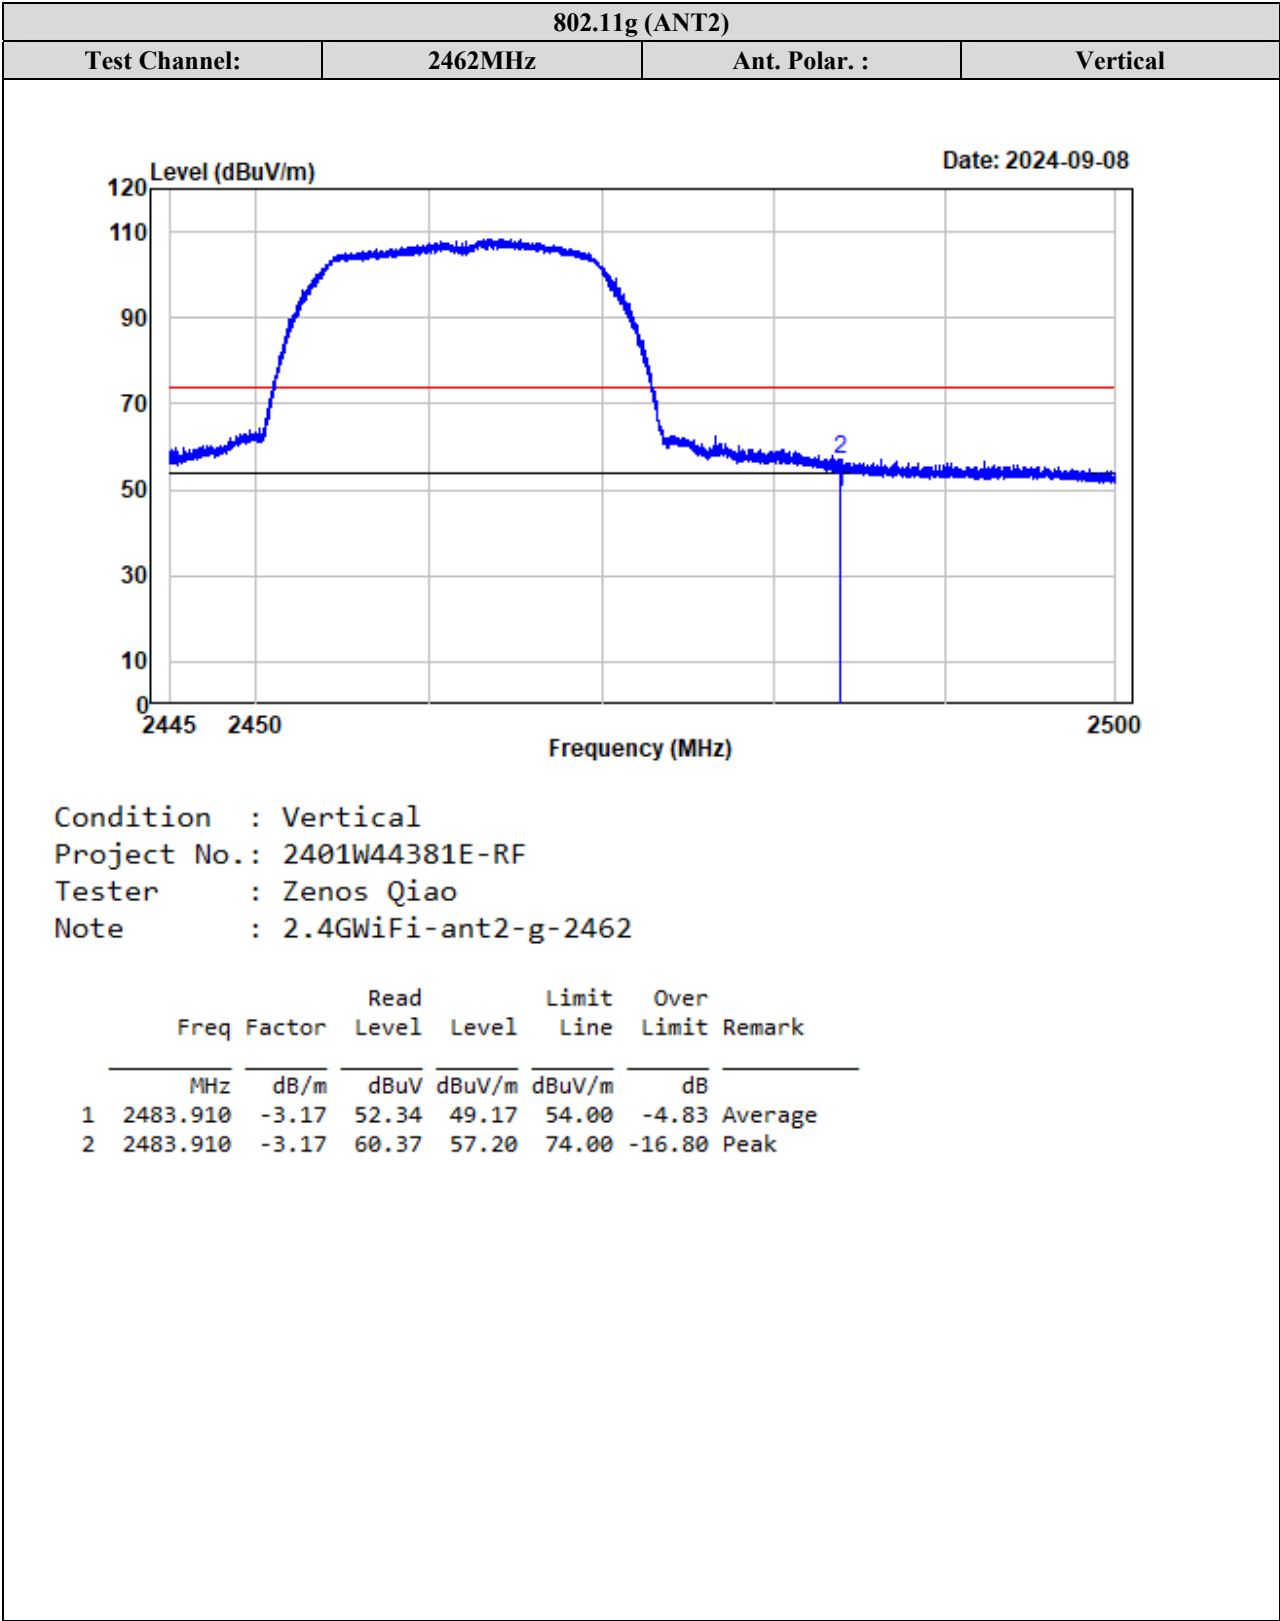


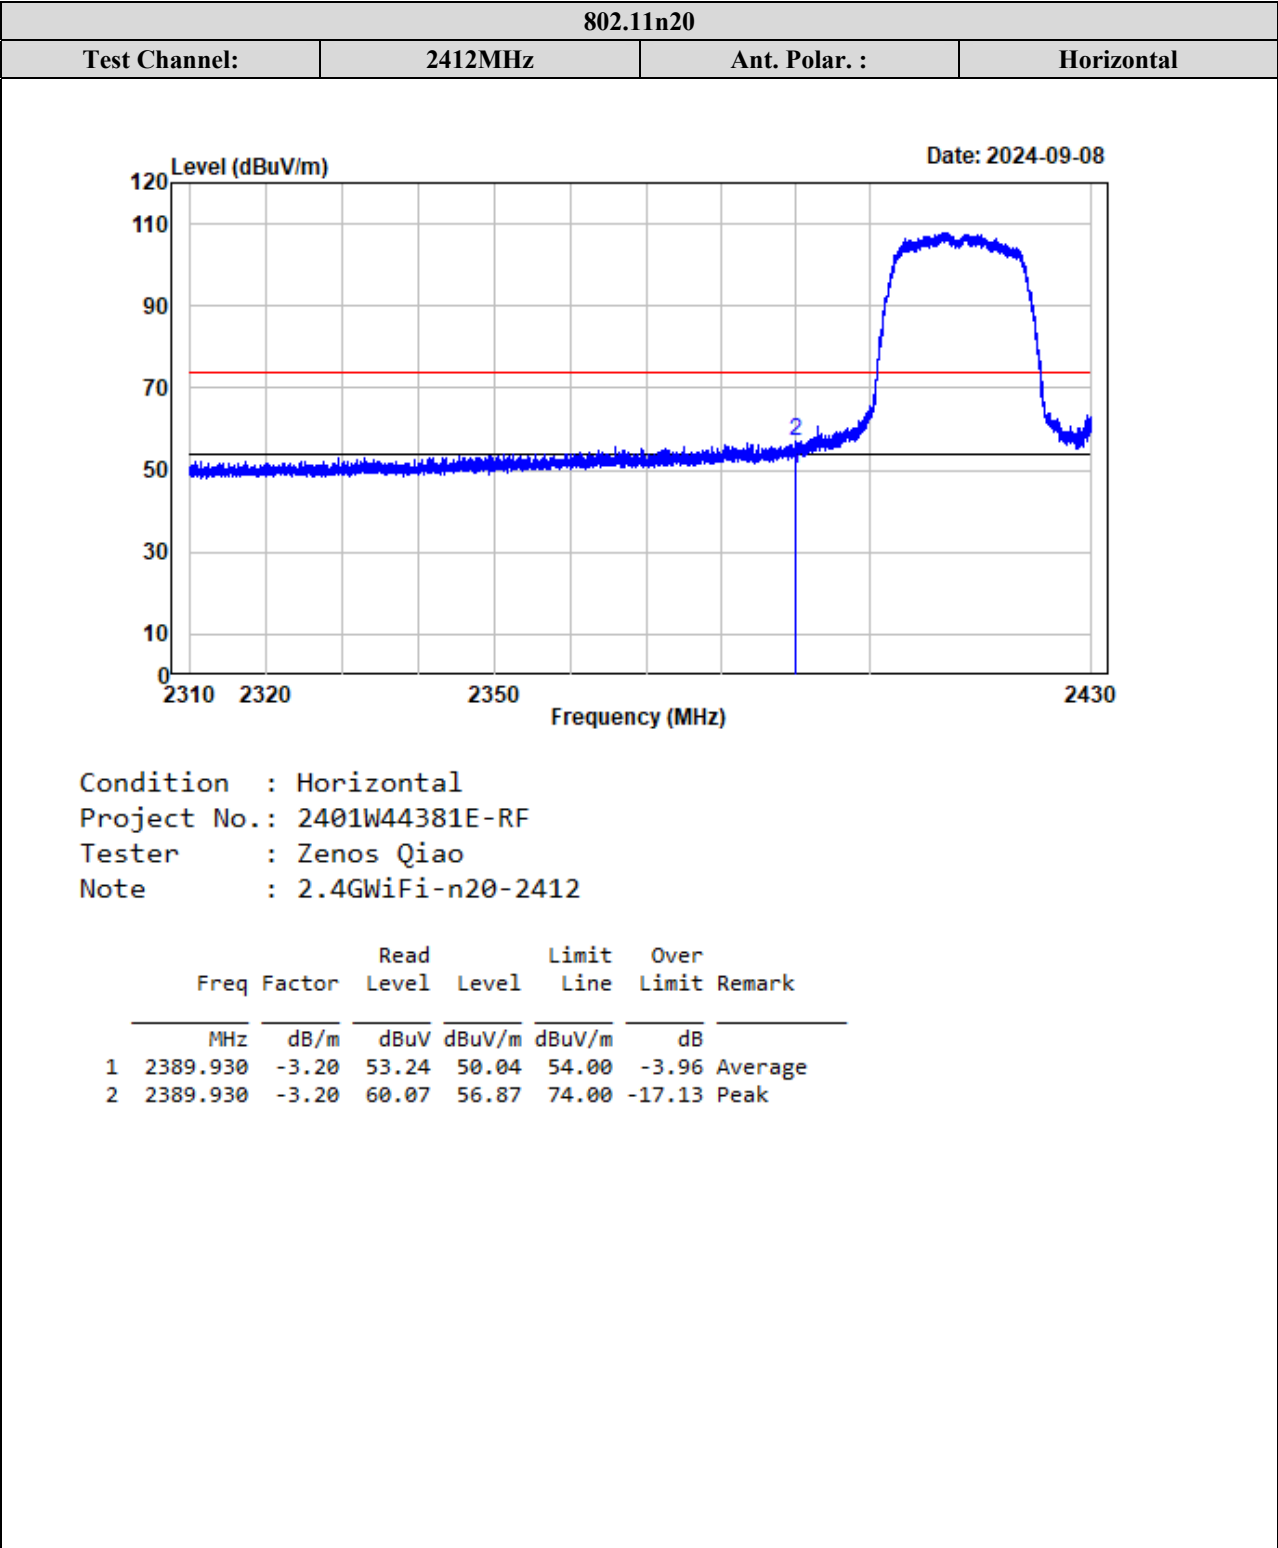


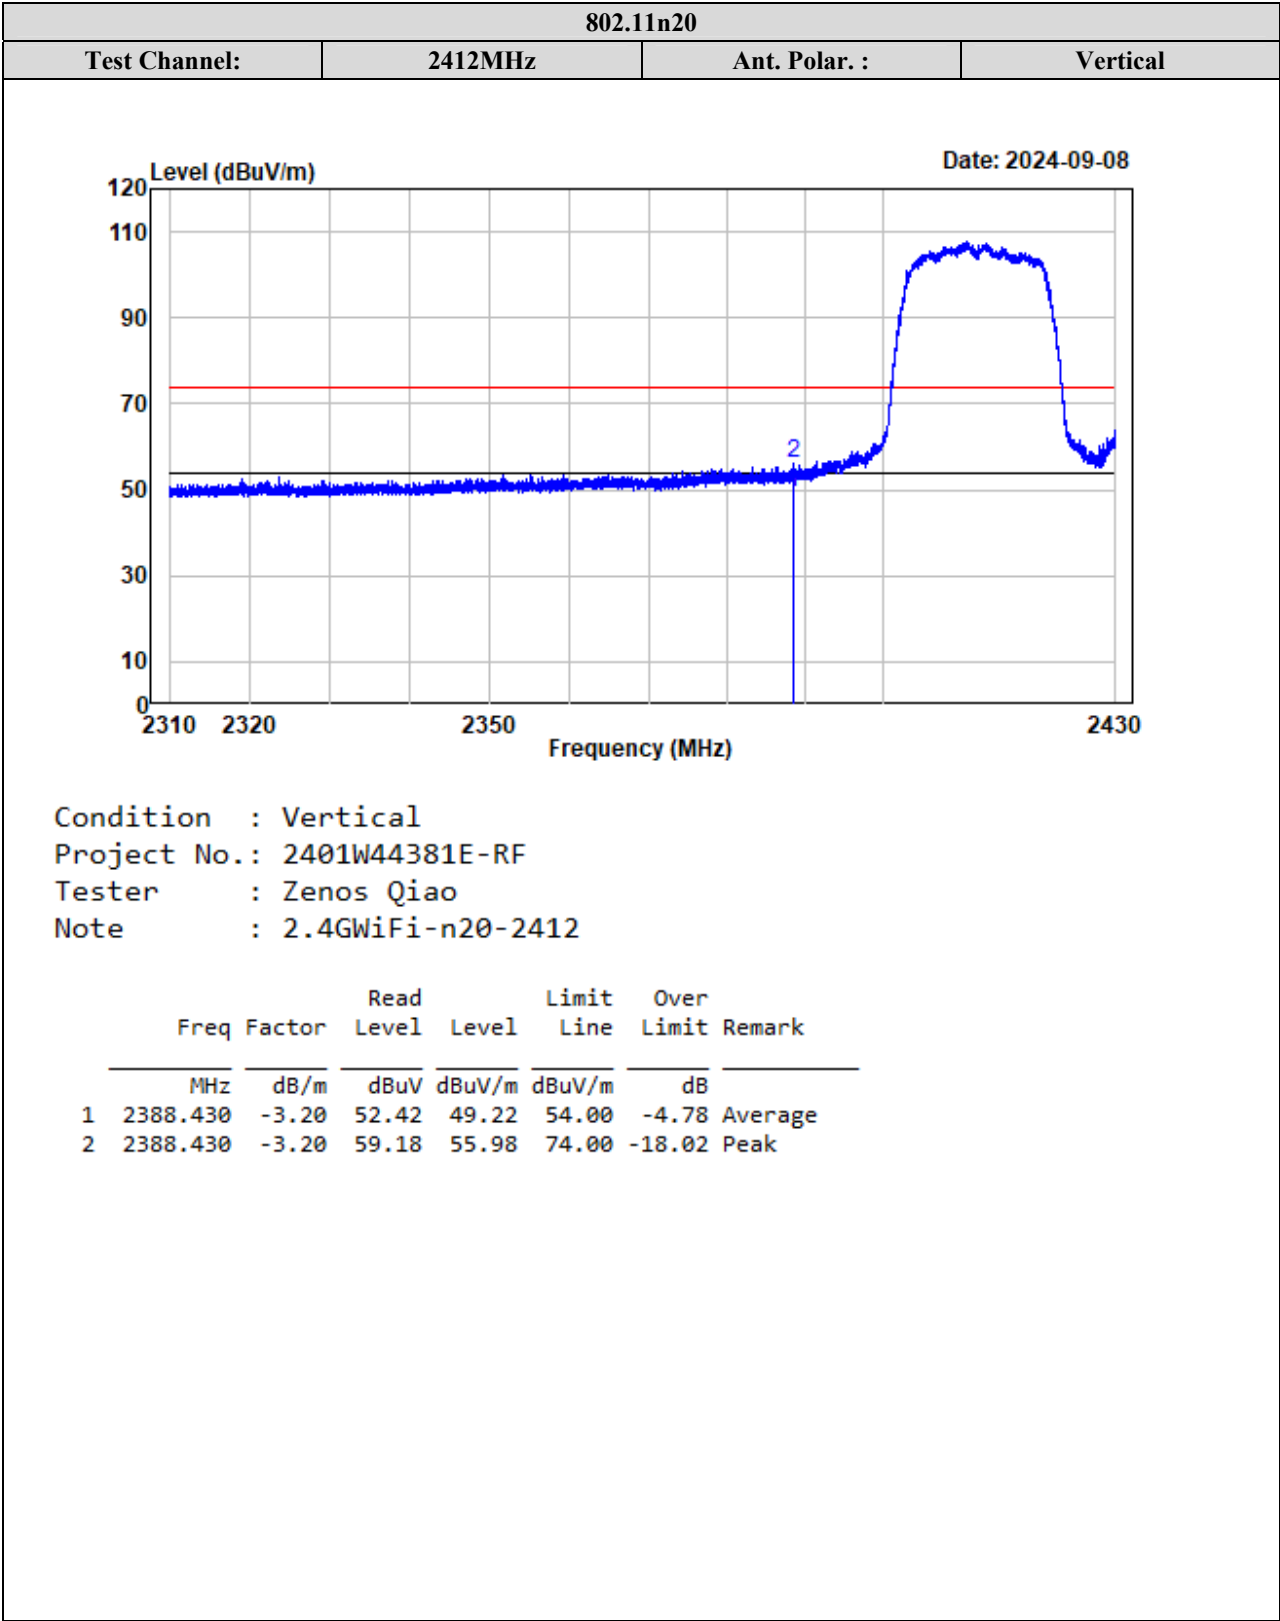


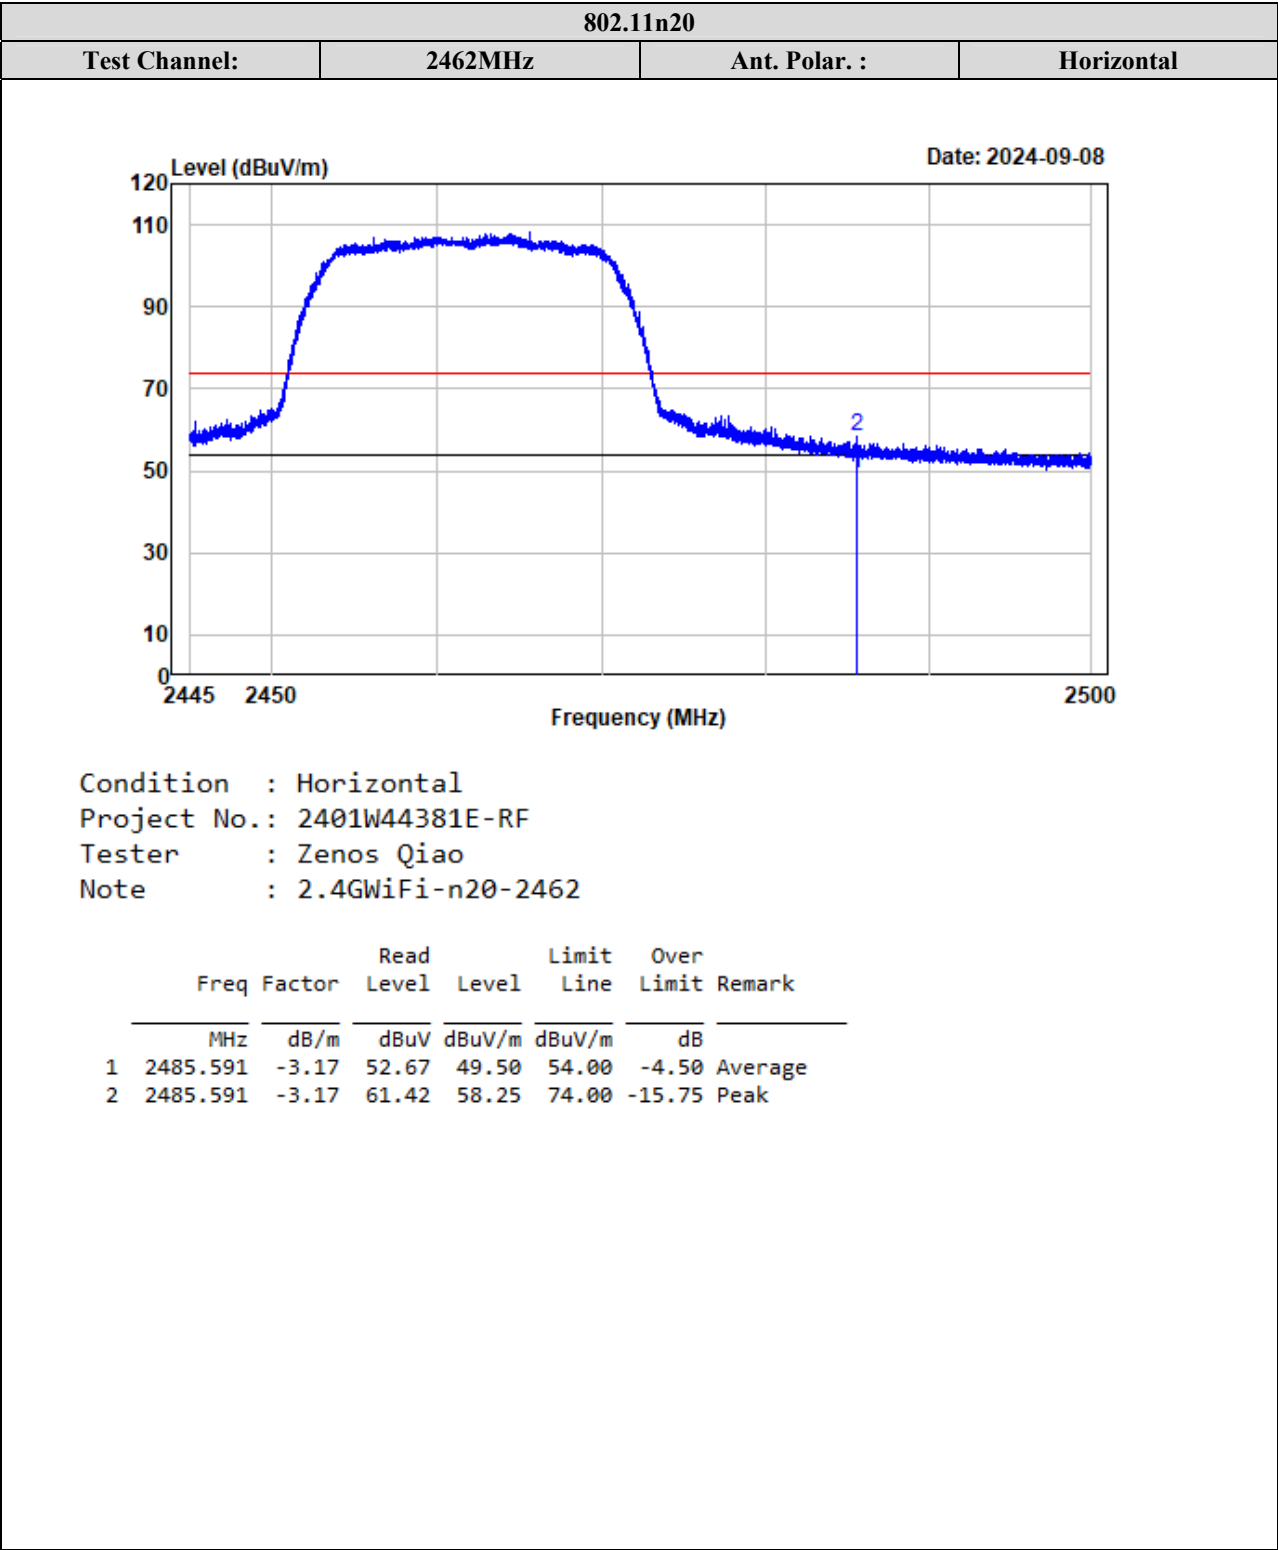


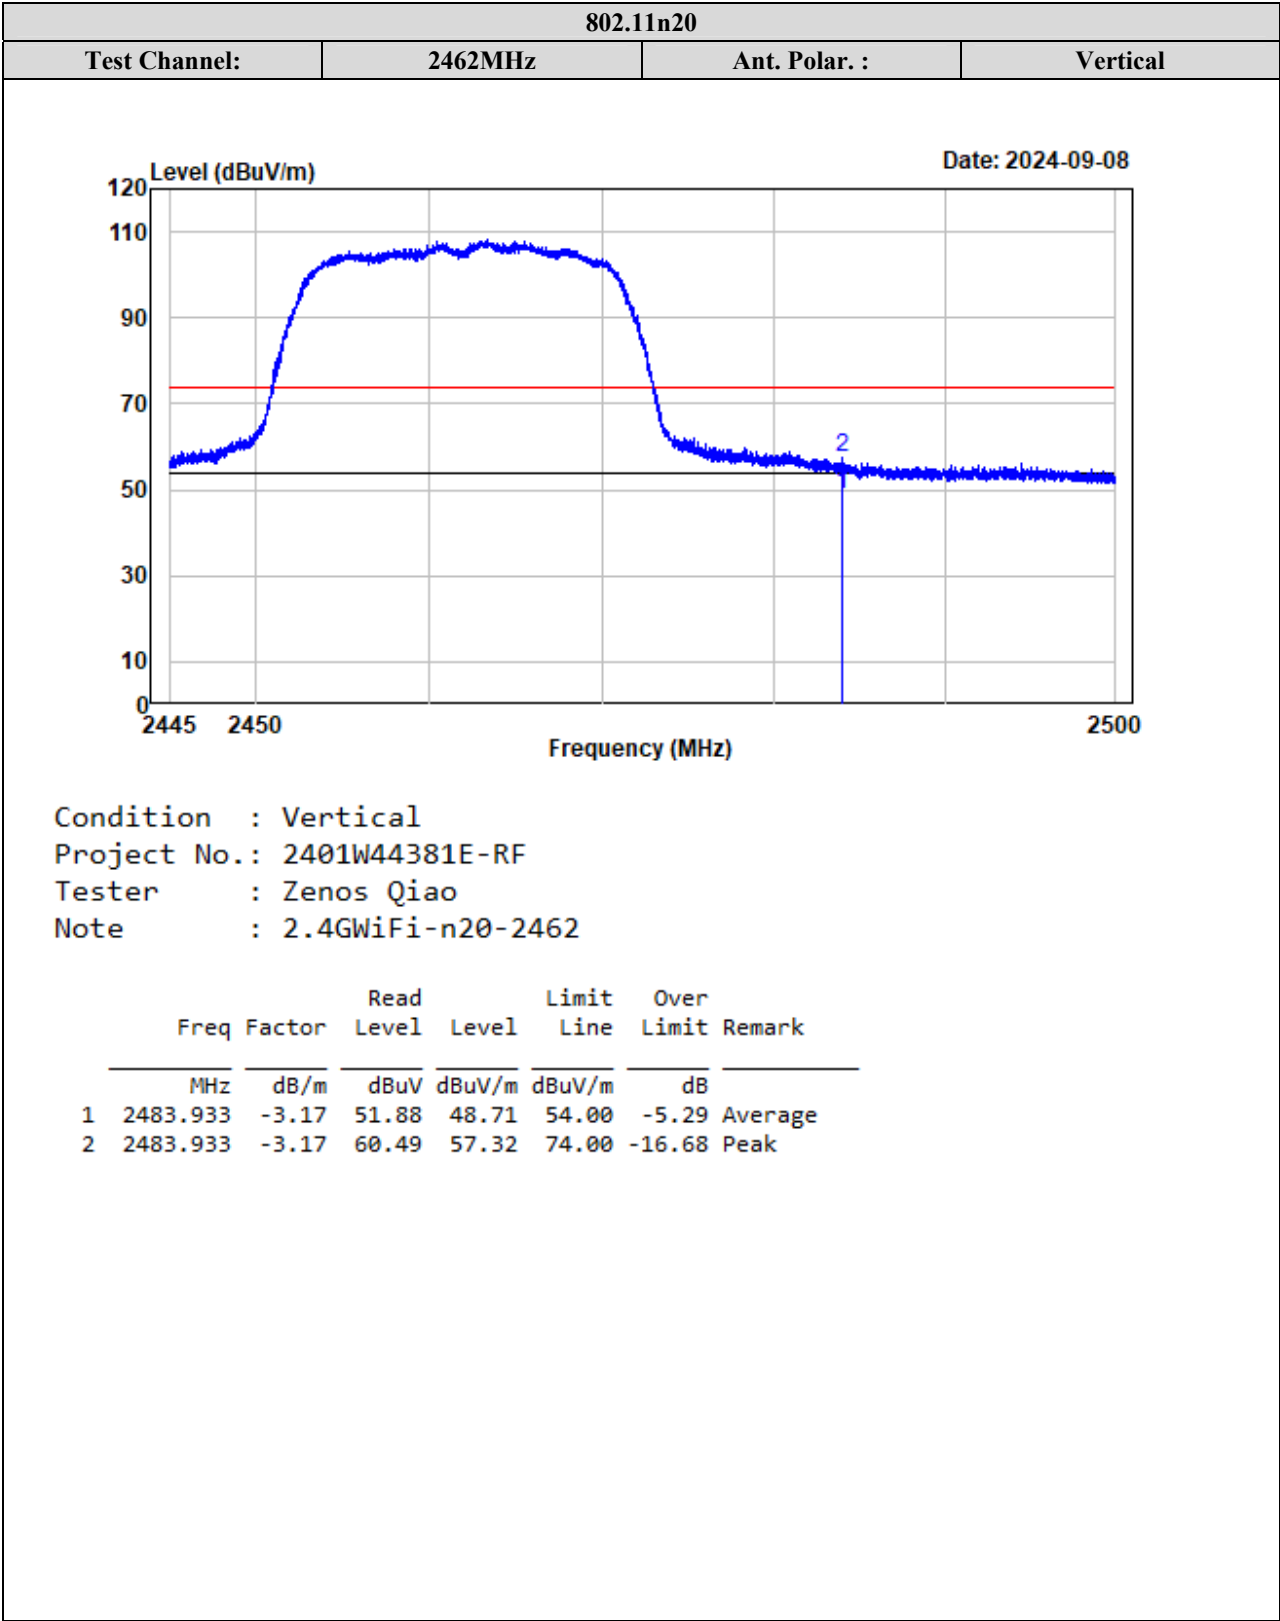

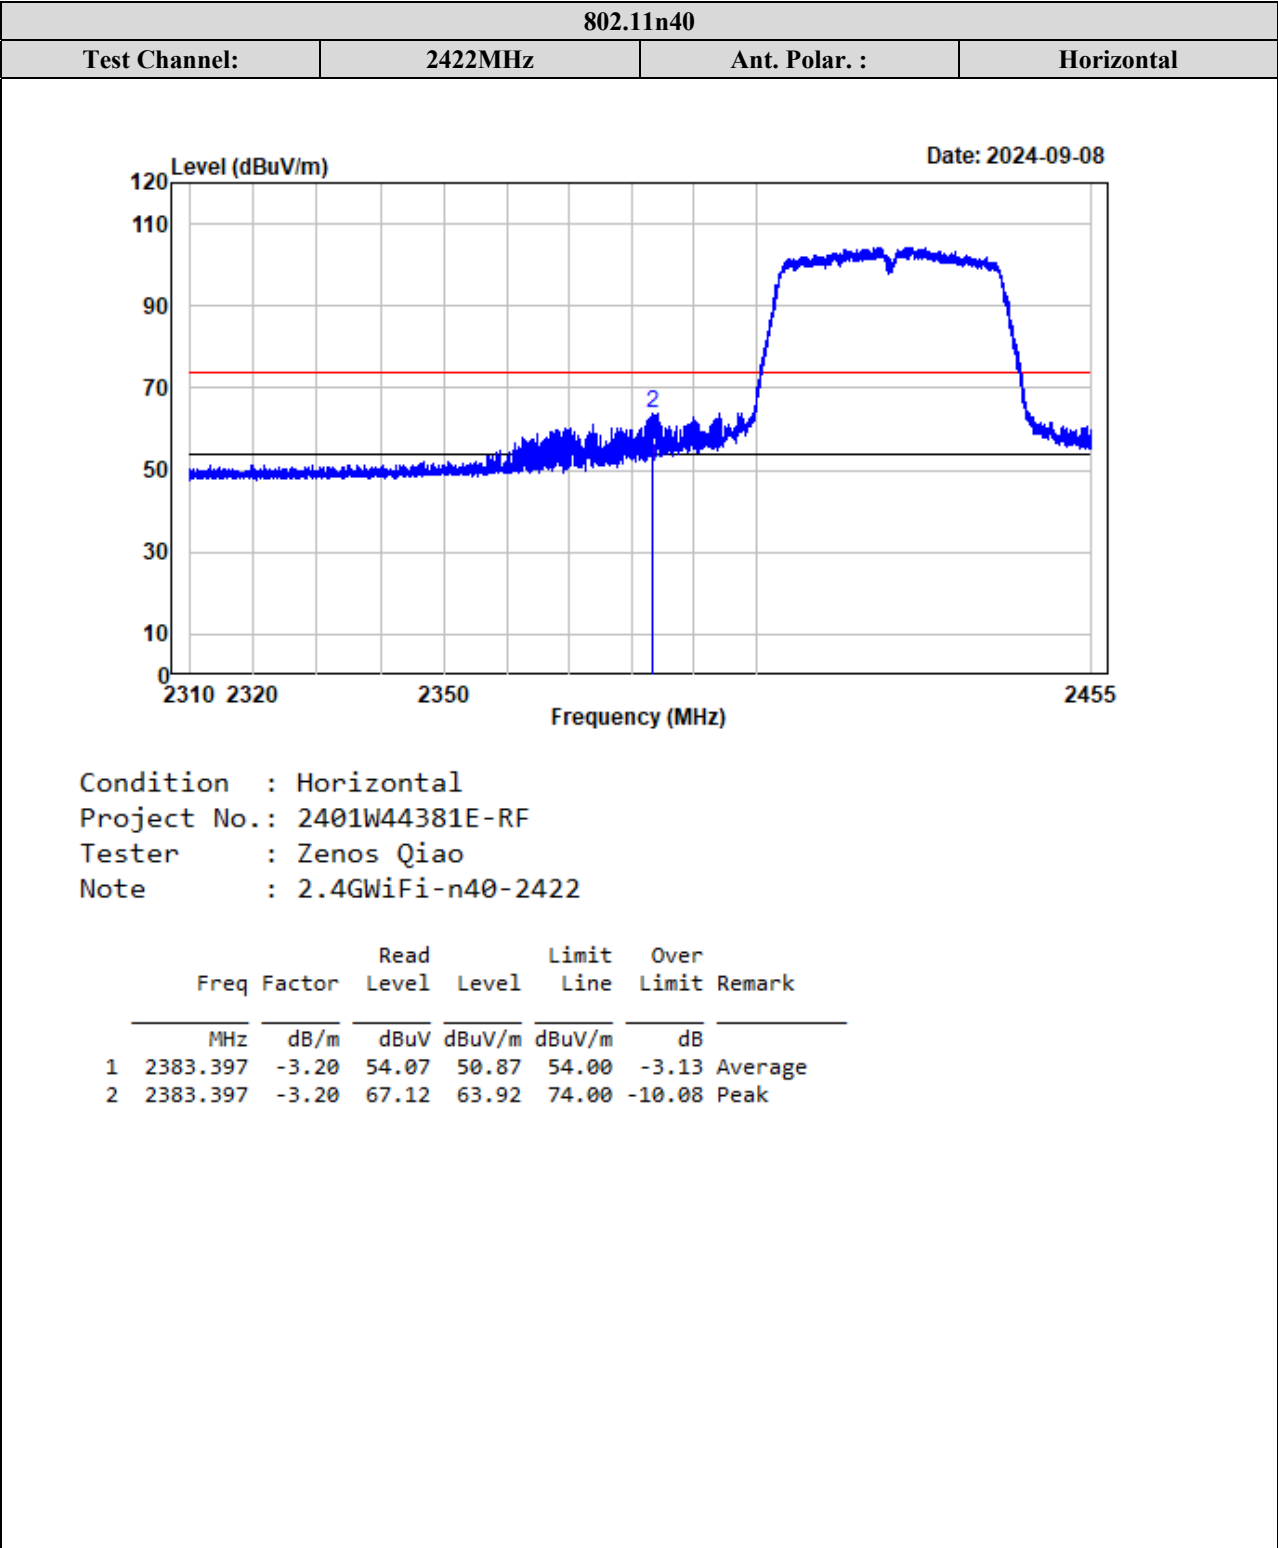

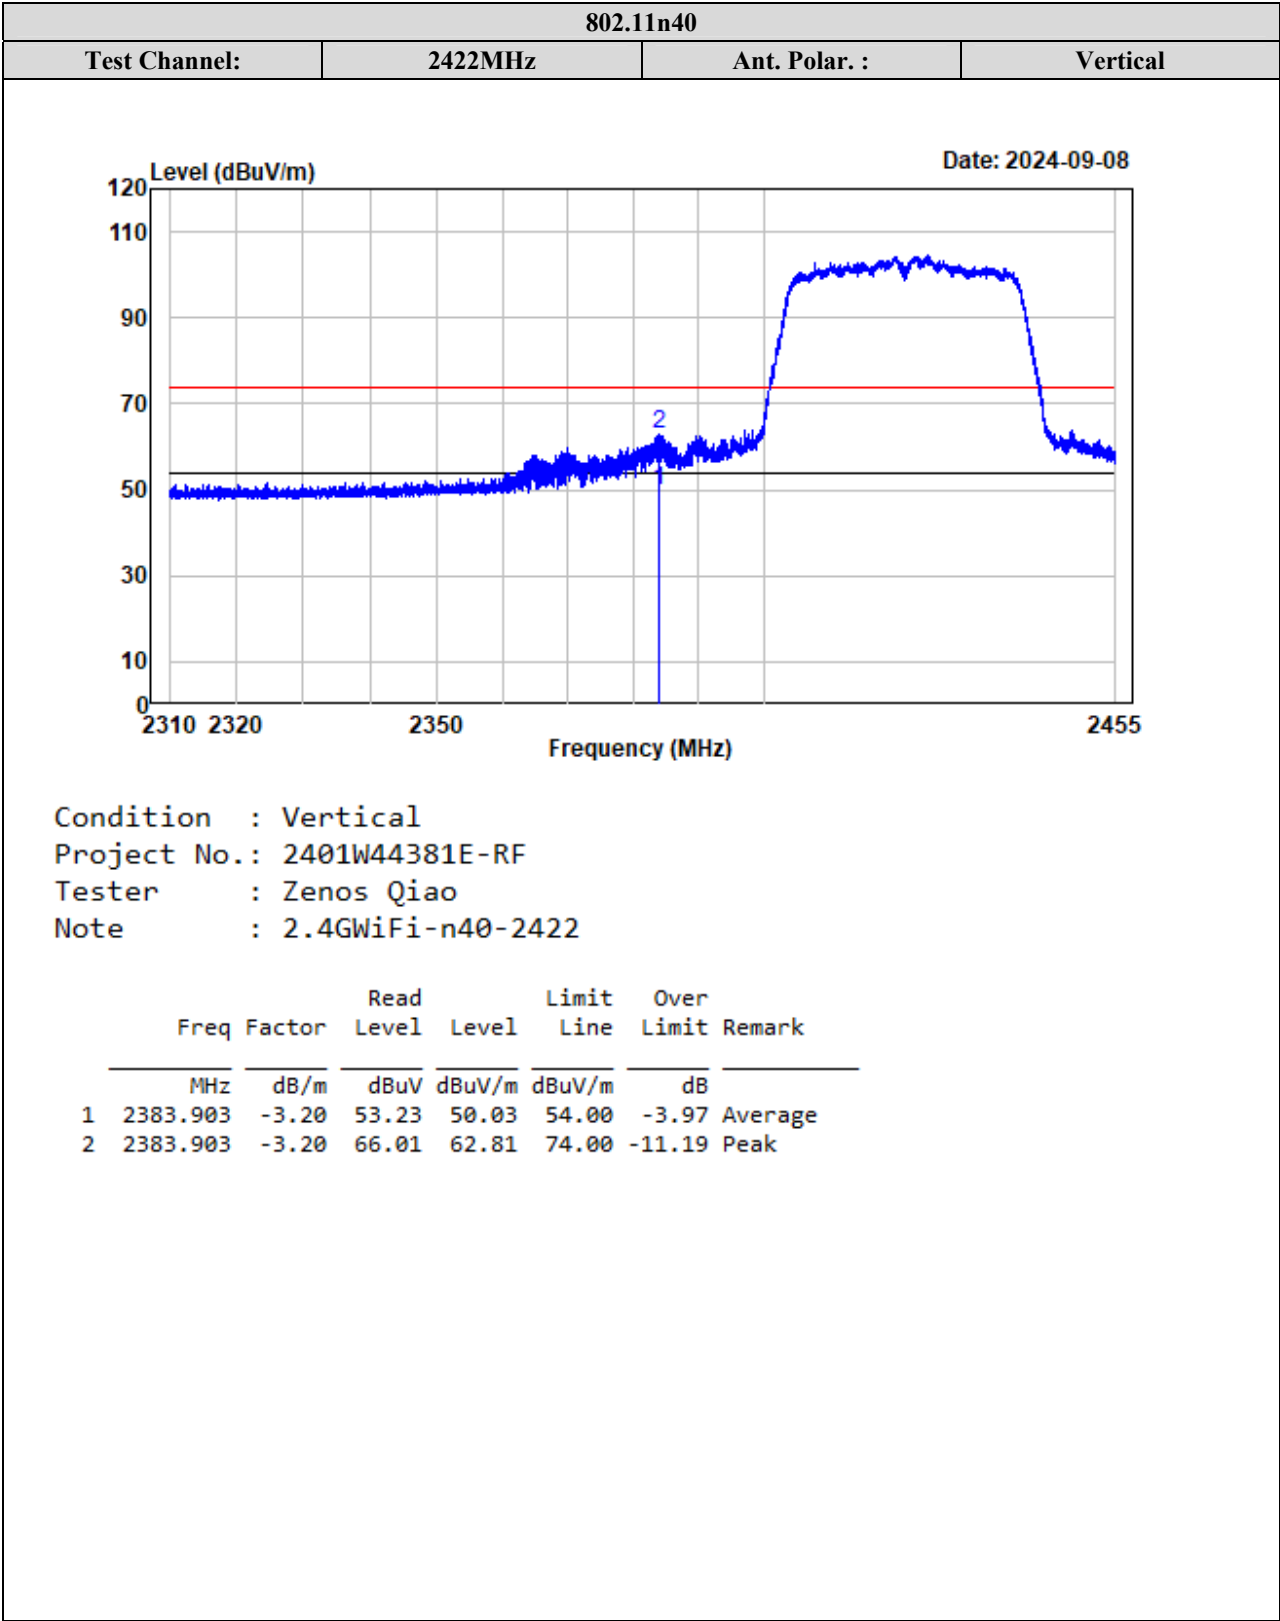

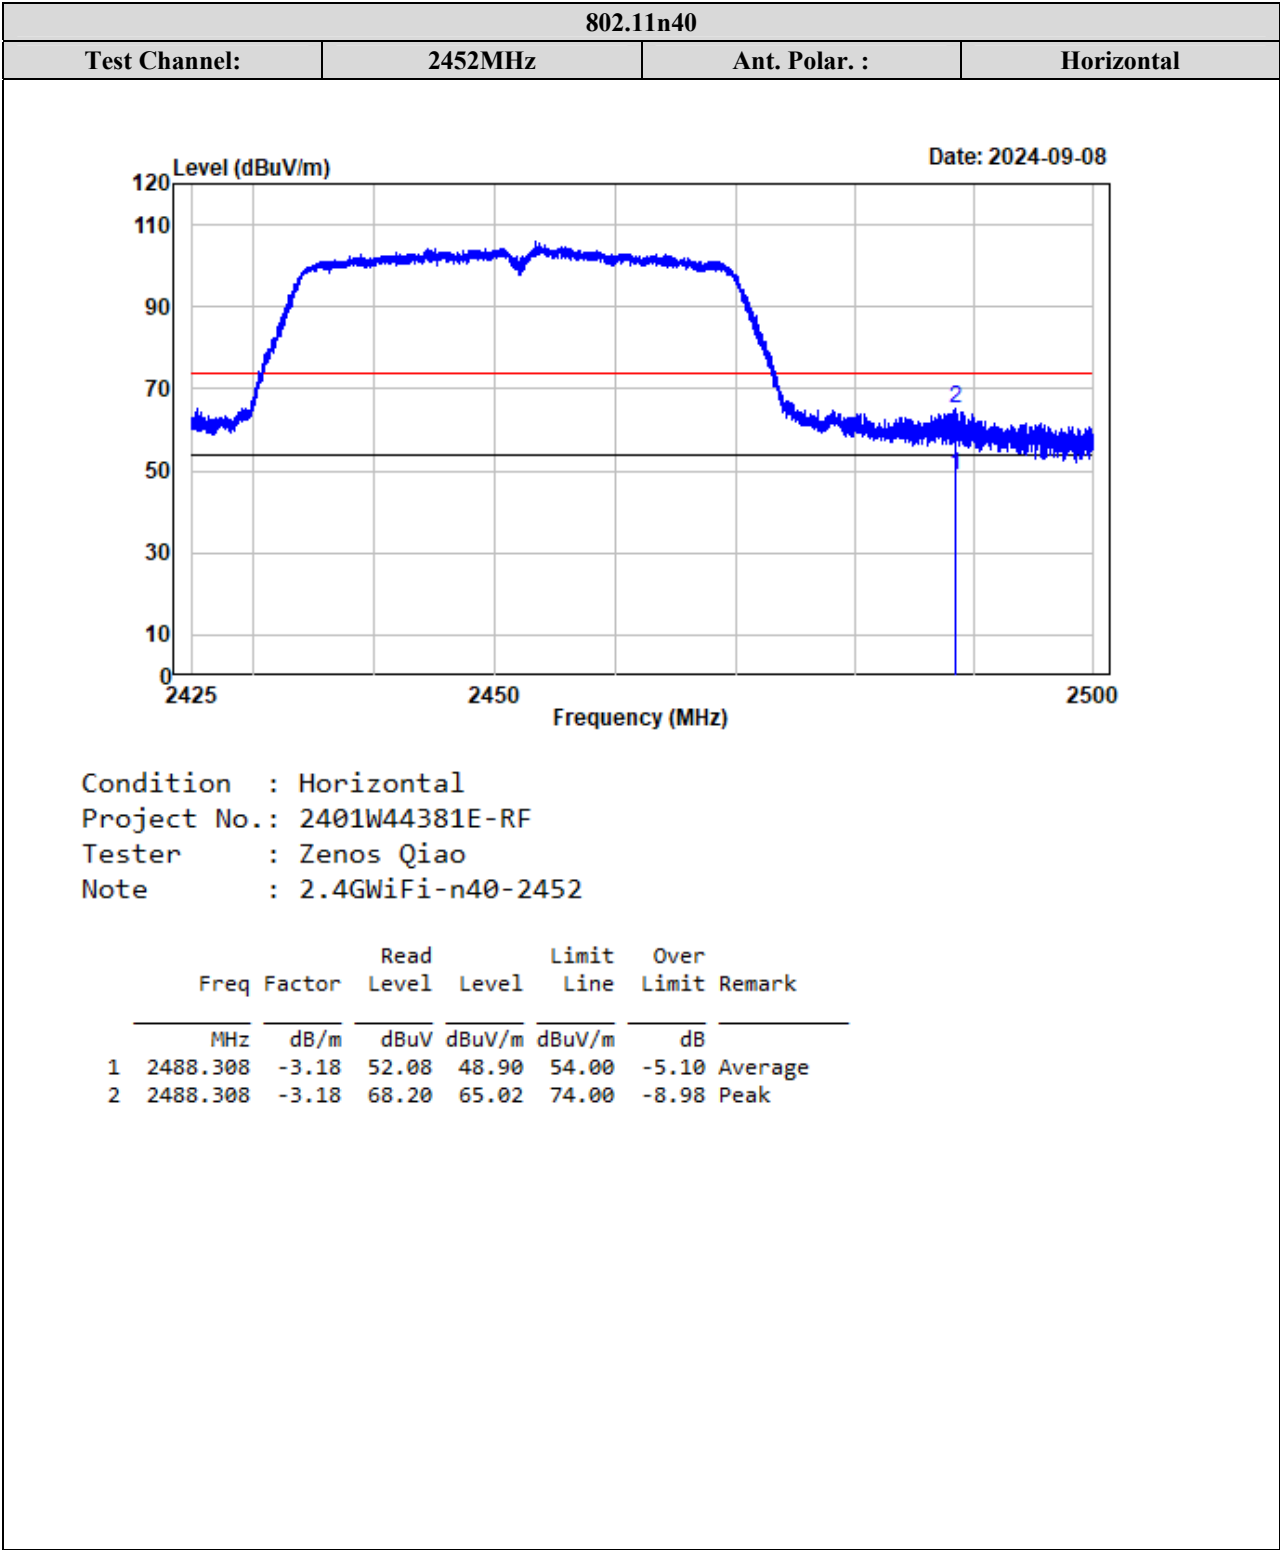

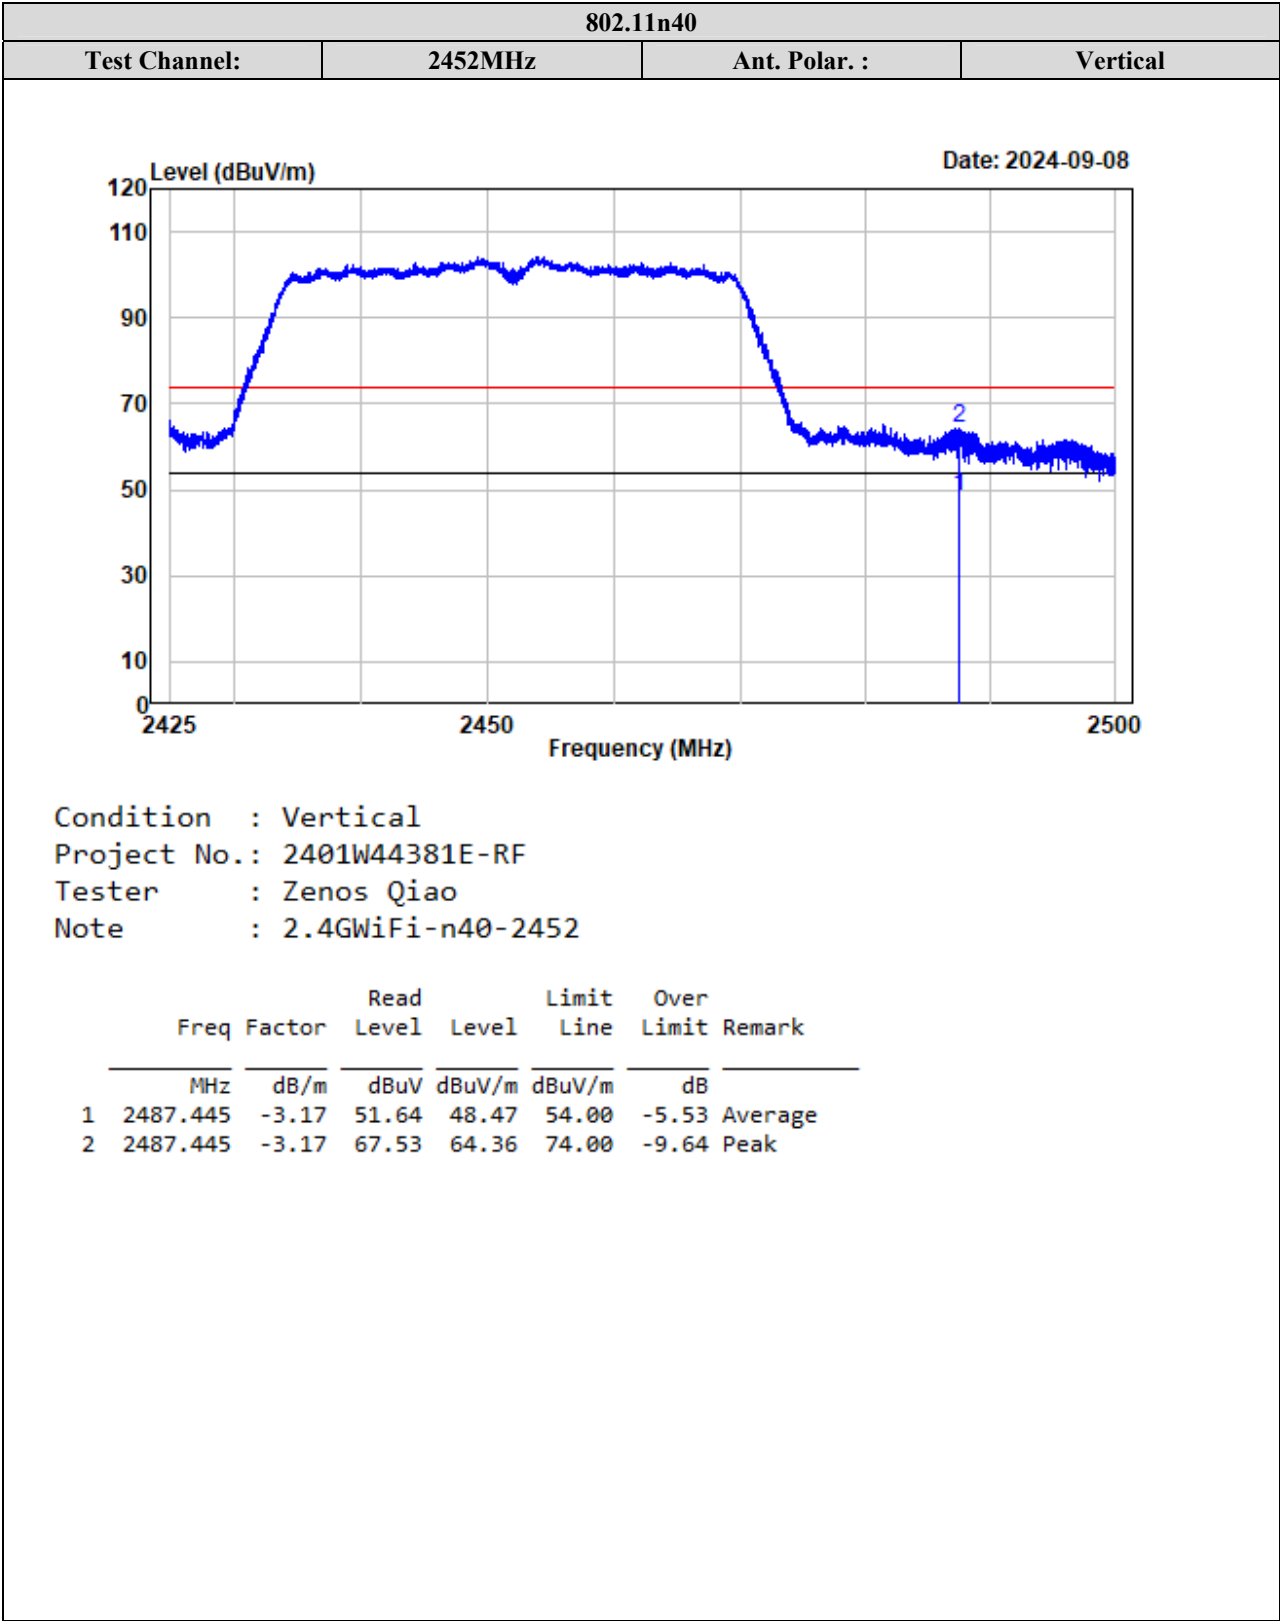



TR-EM-RF002


Page 74 of 174


Version 3.0

Listed with the worst harmonic margin test plot:
802.11b (ANT1)

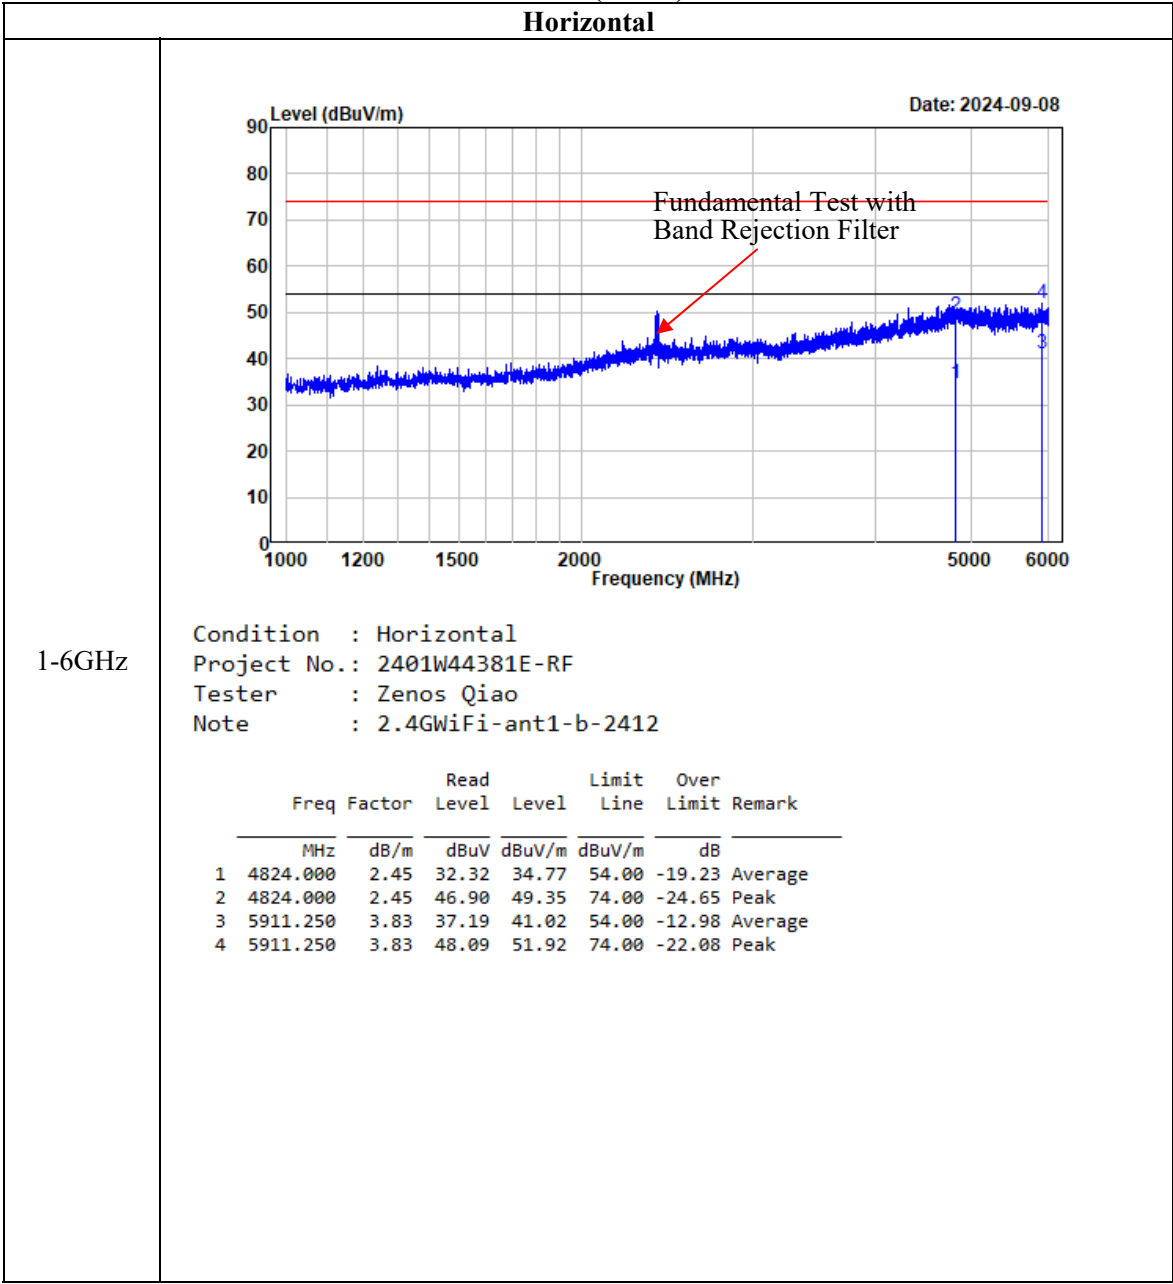

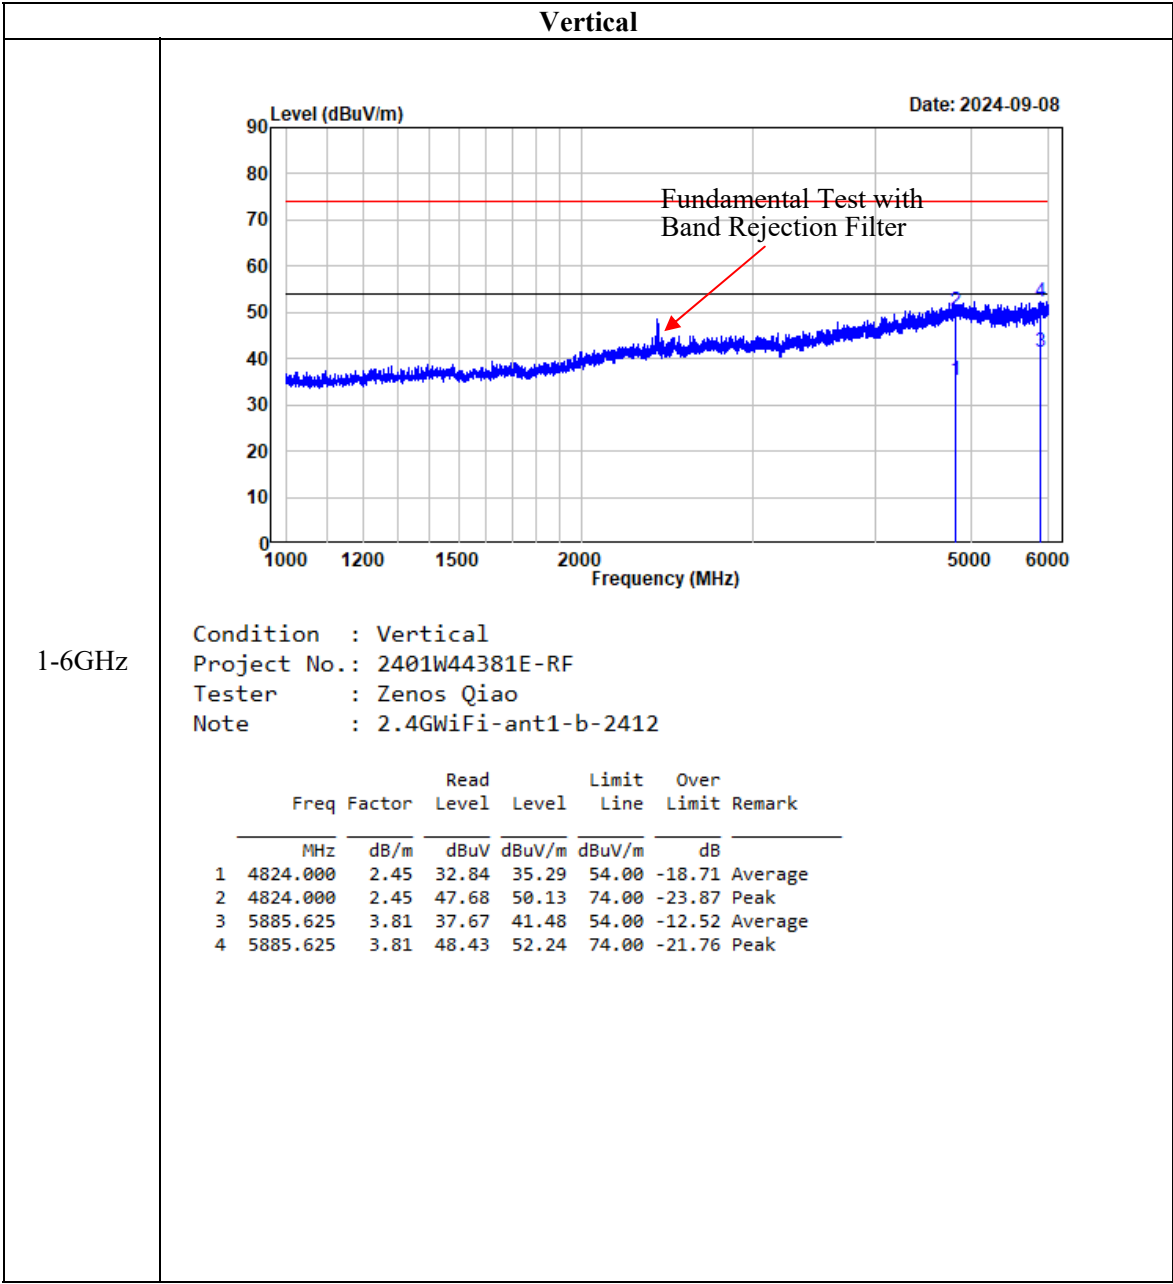


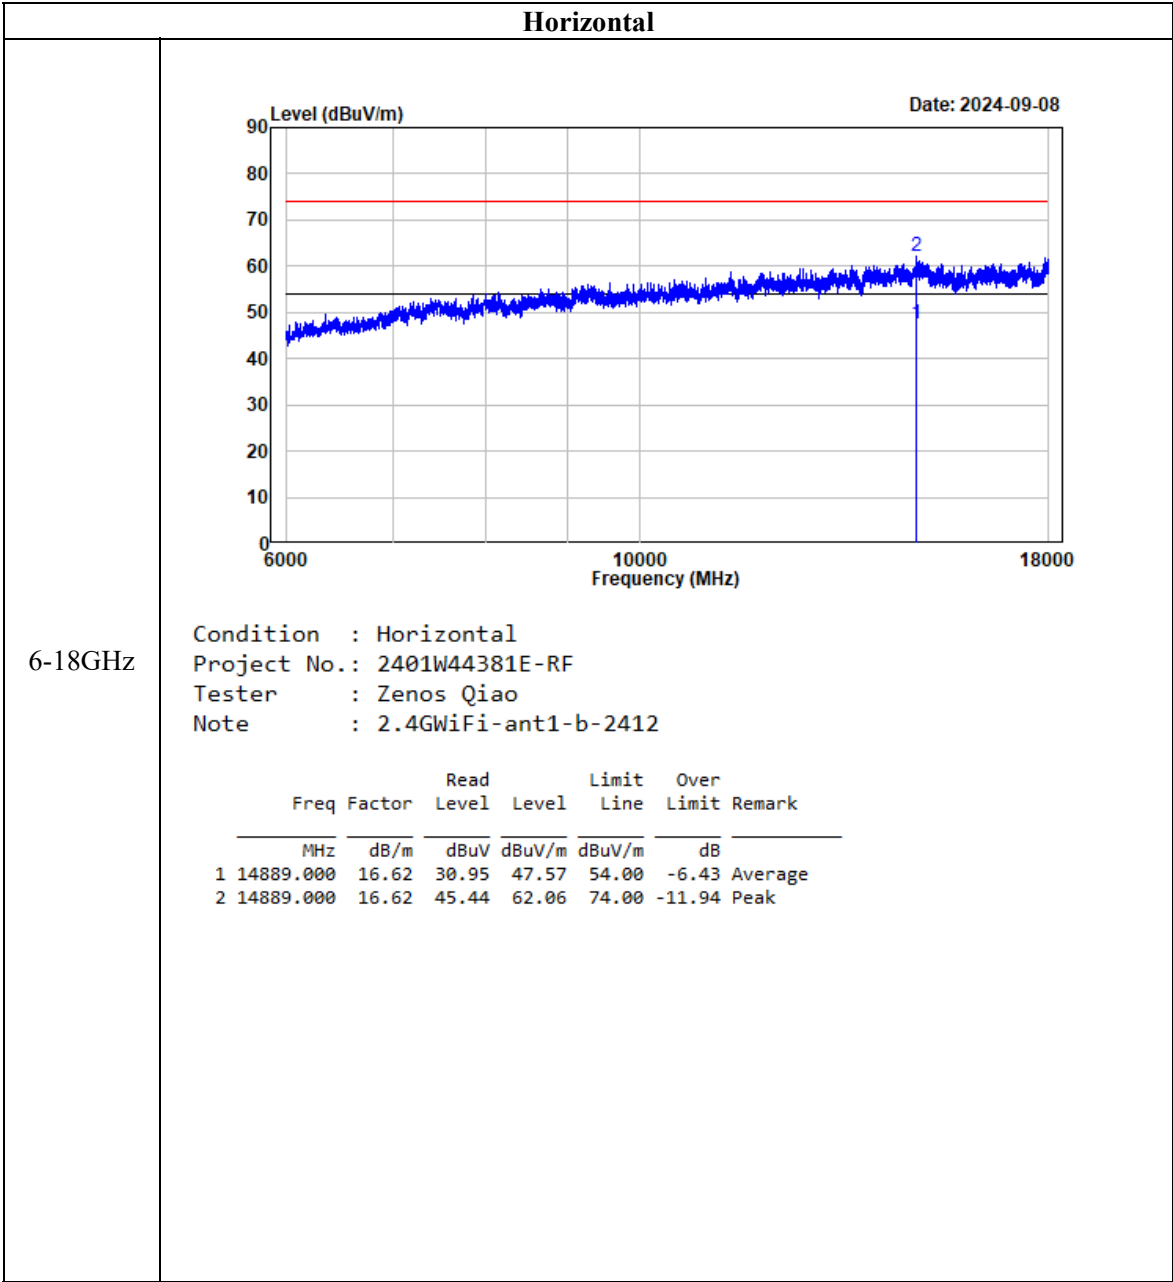


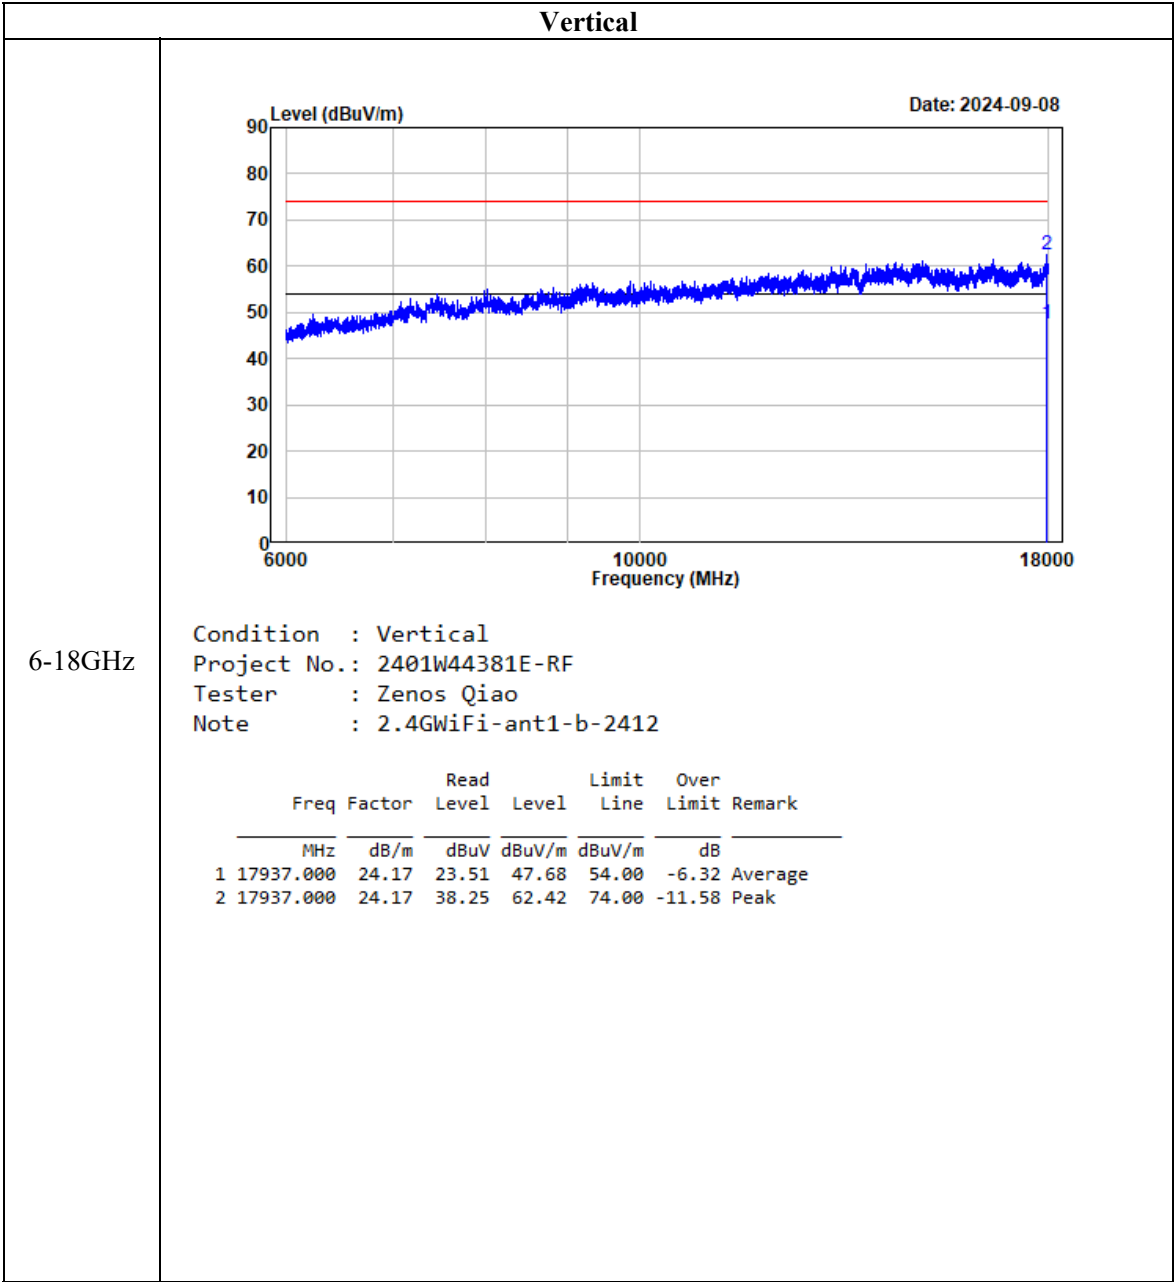



802.11b (ANT2)


Horizontal

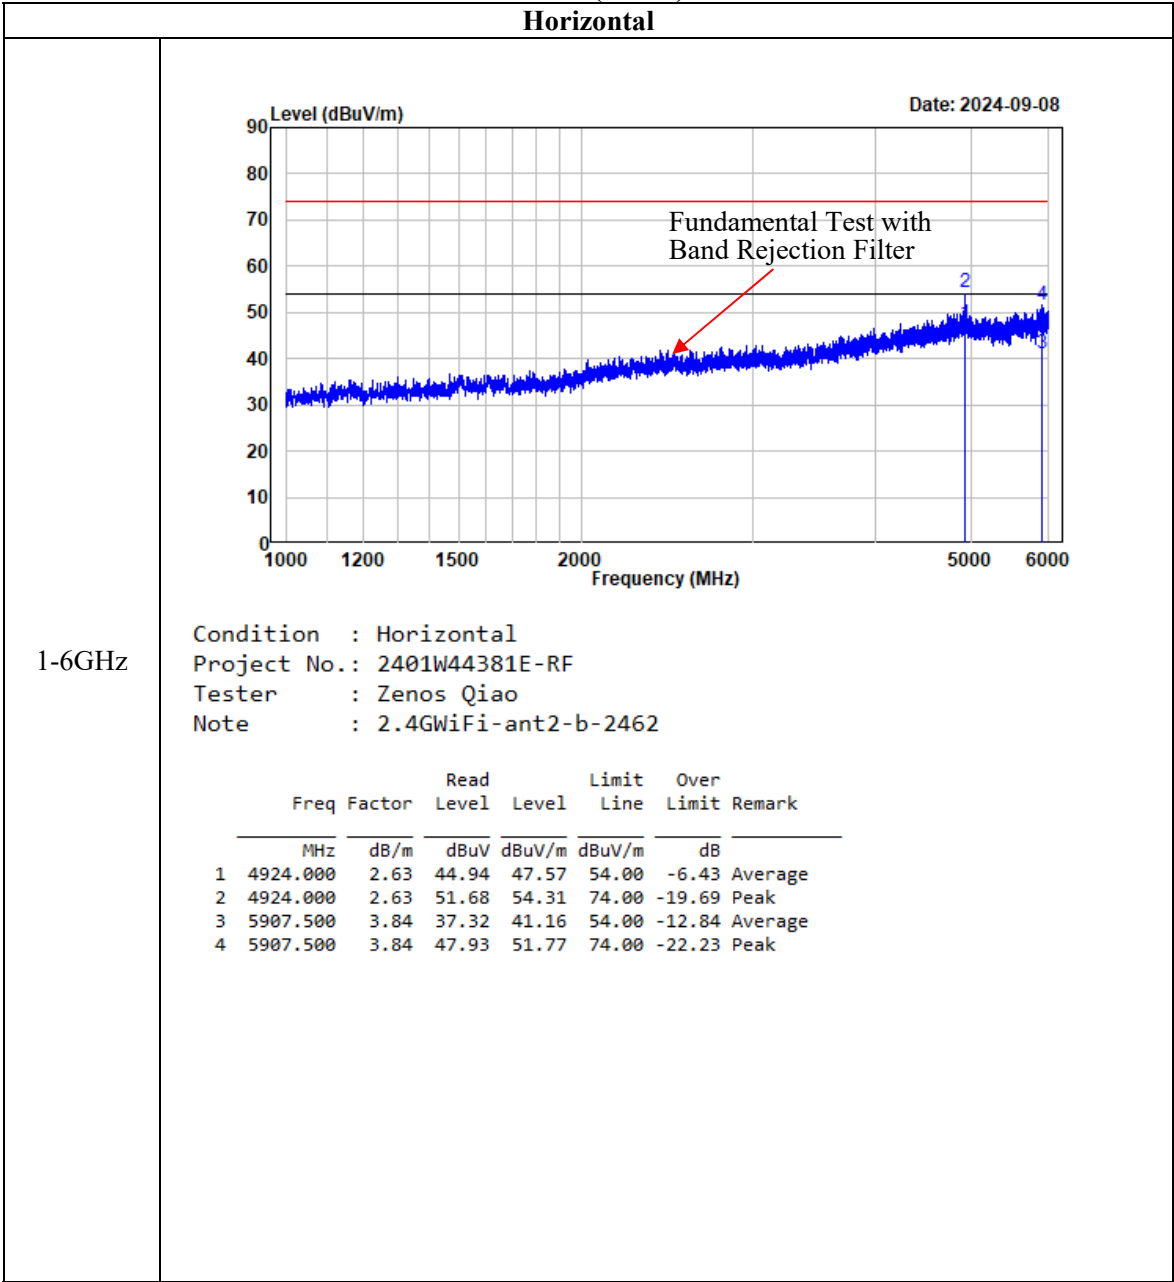


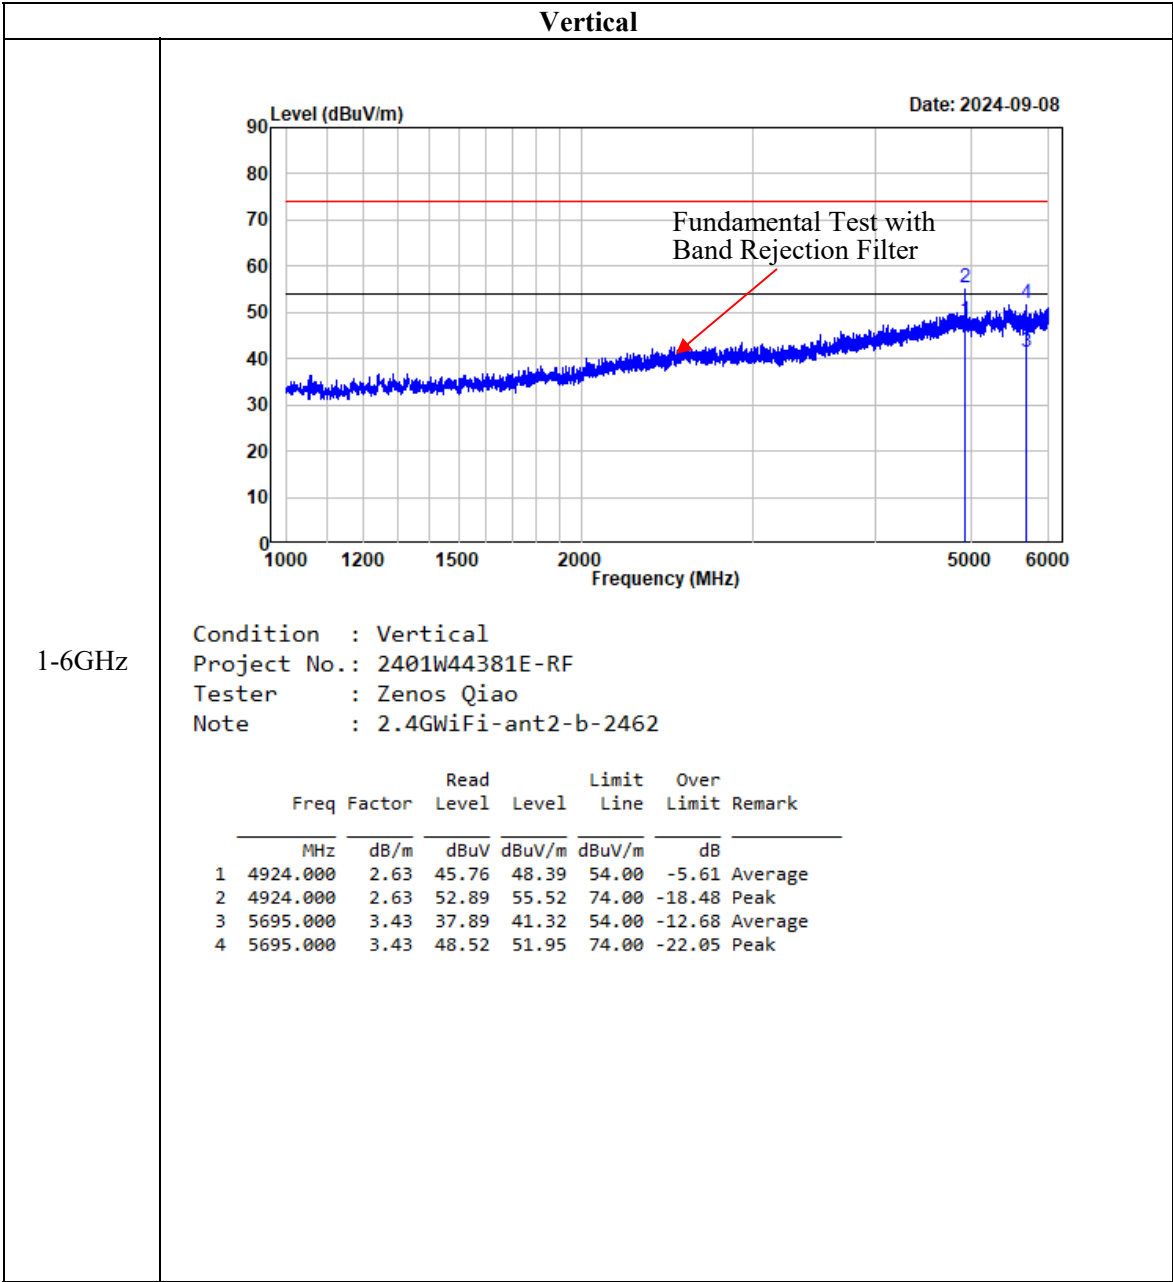

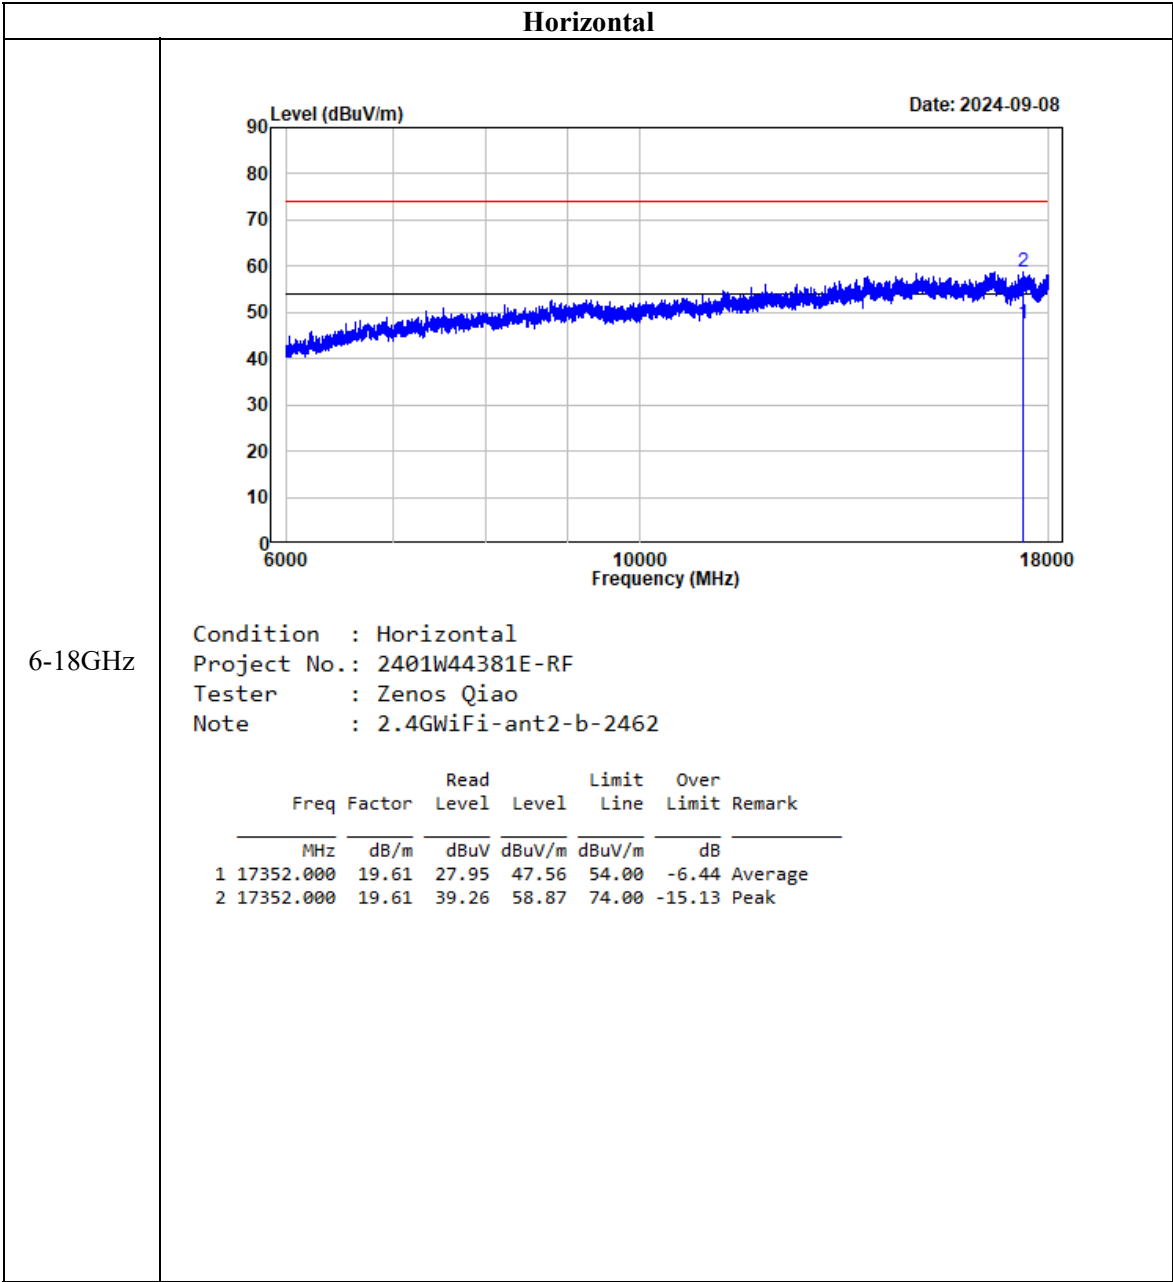


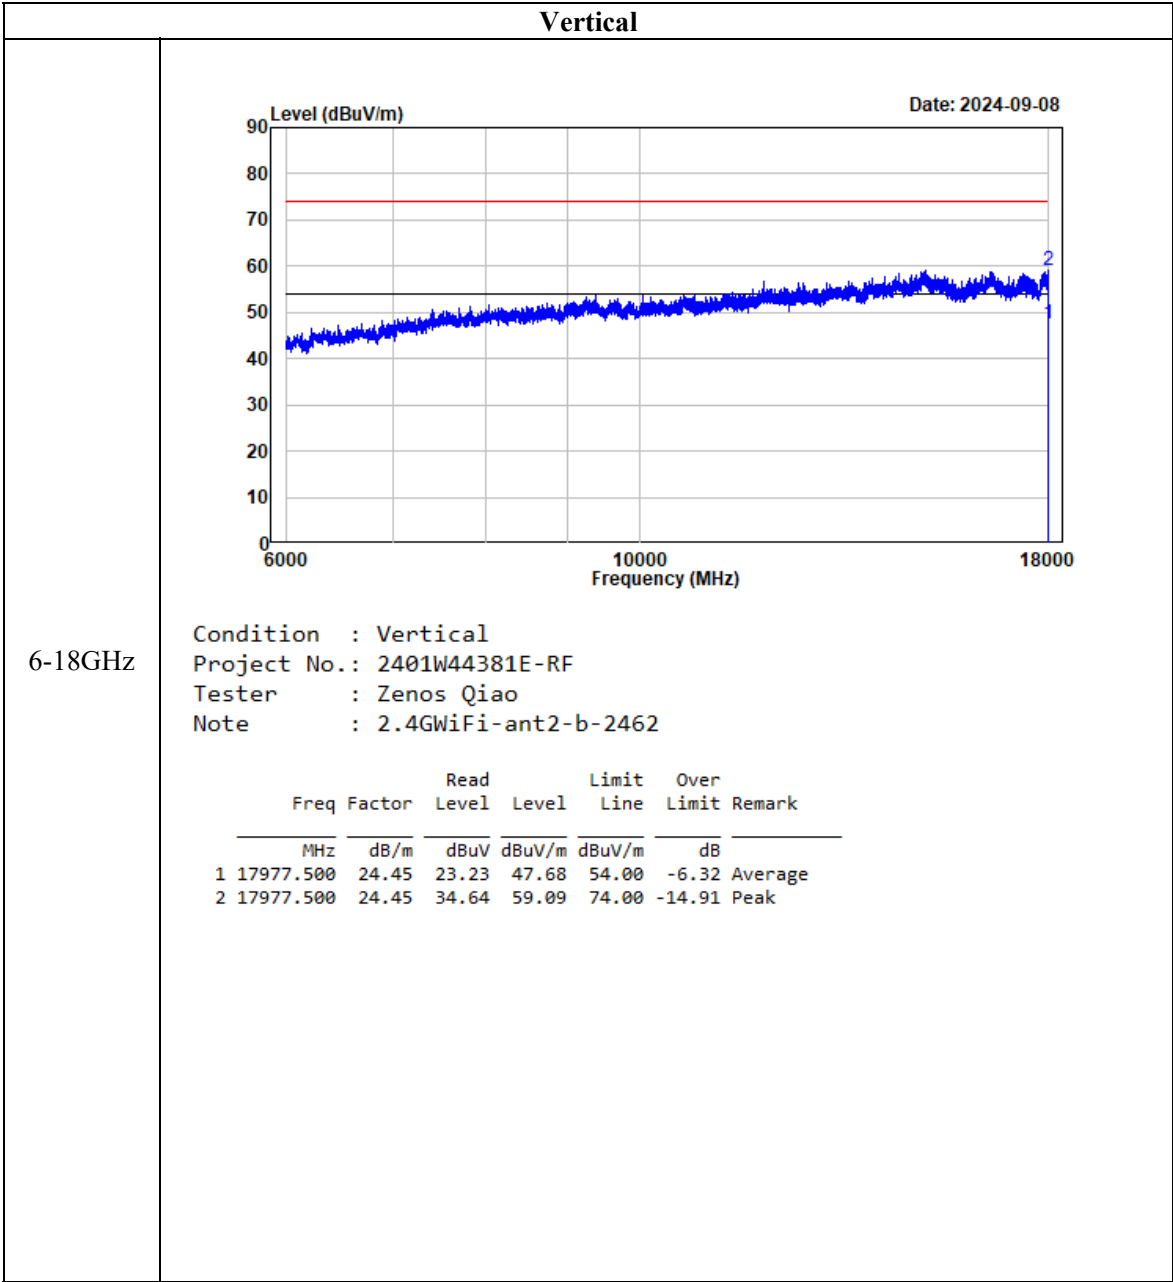


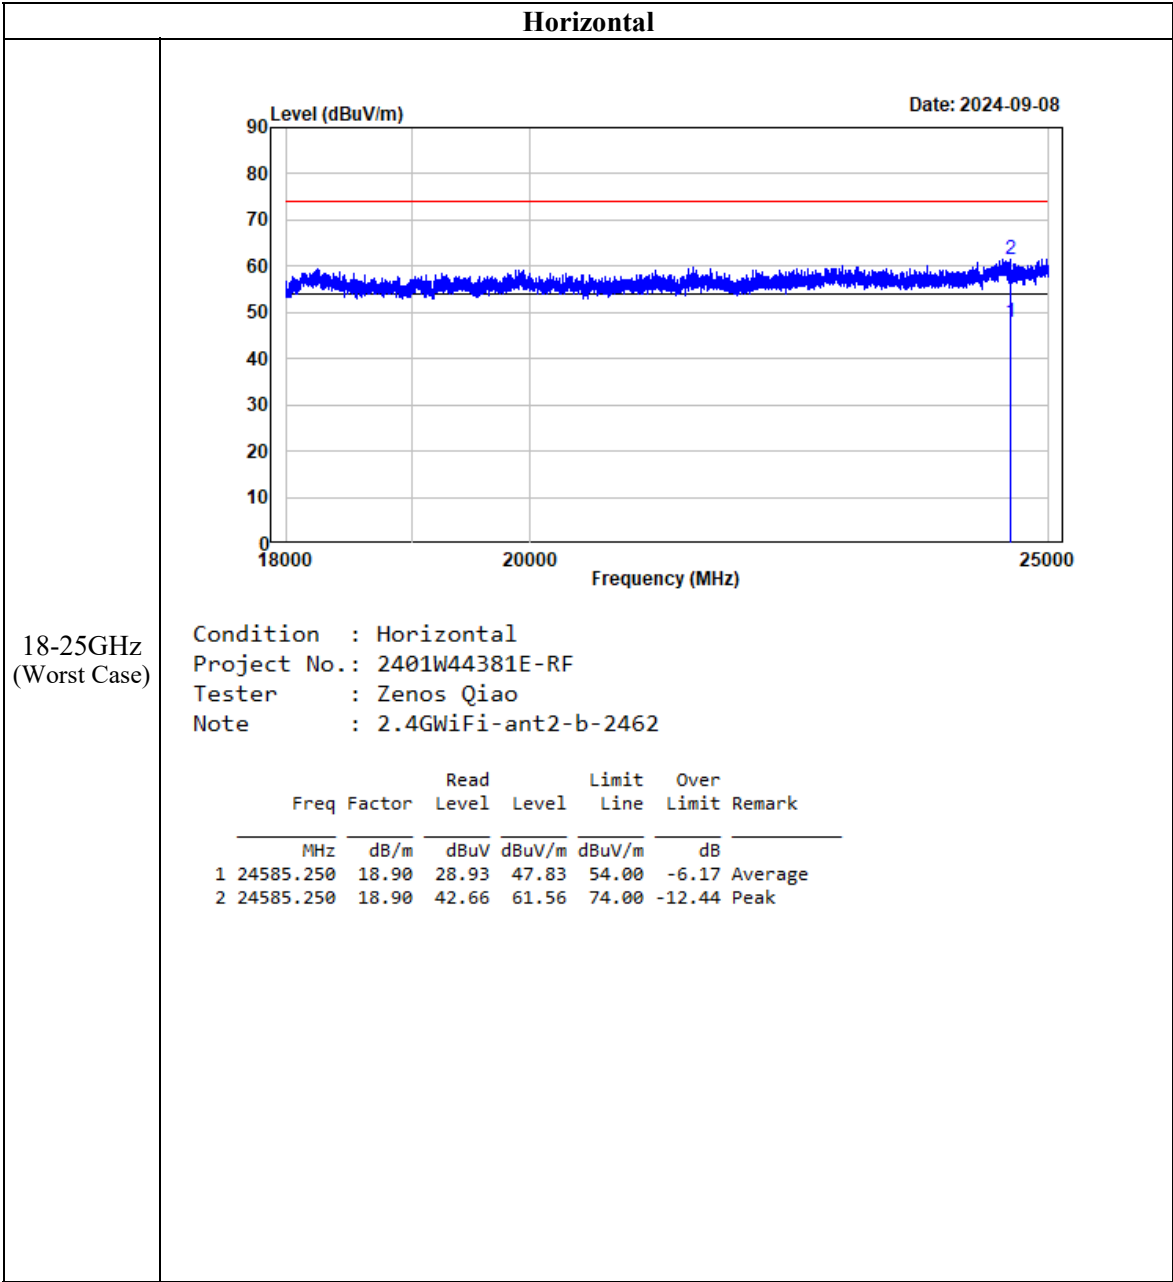


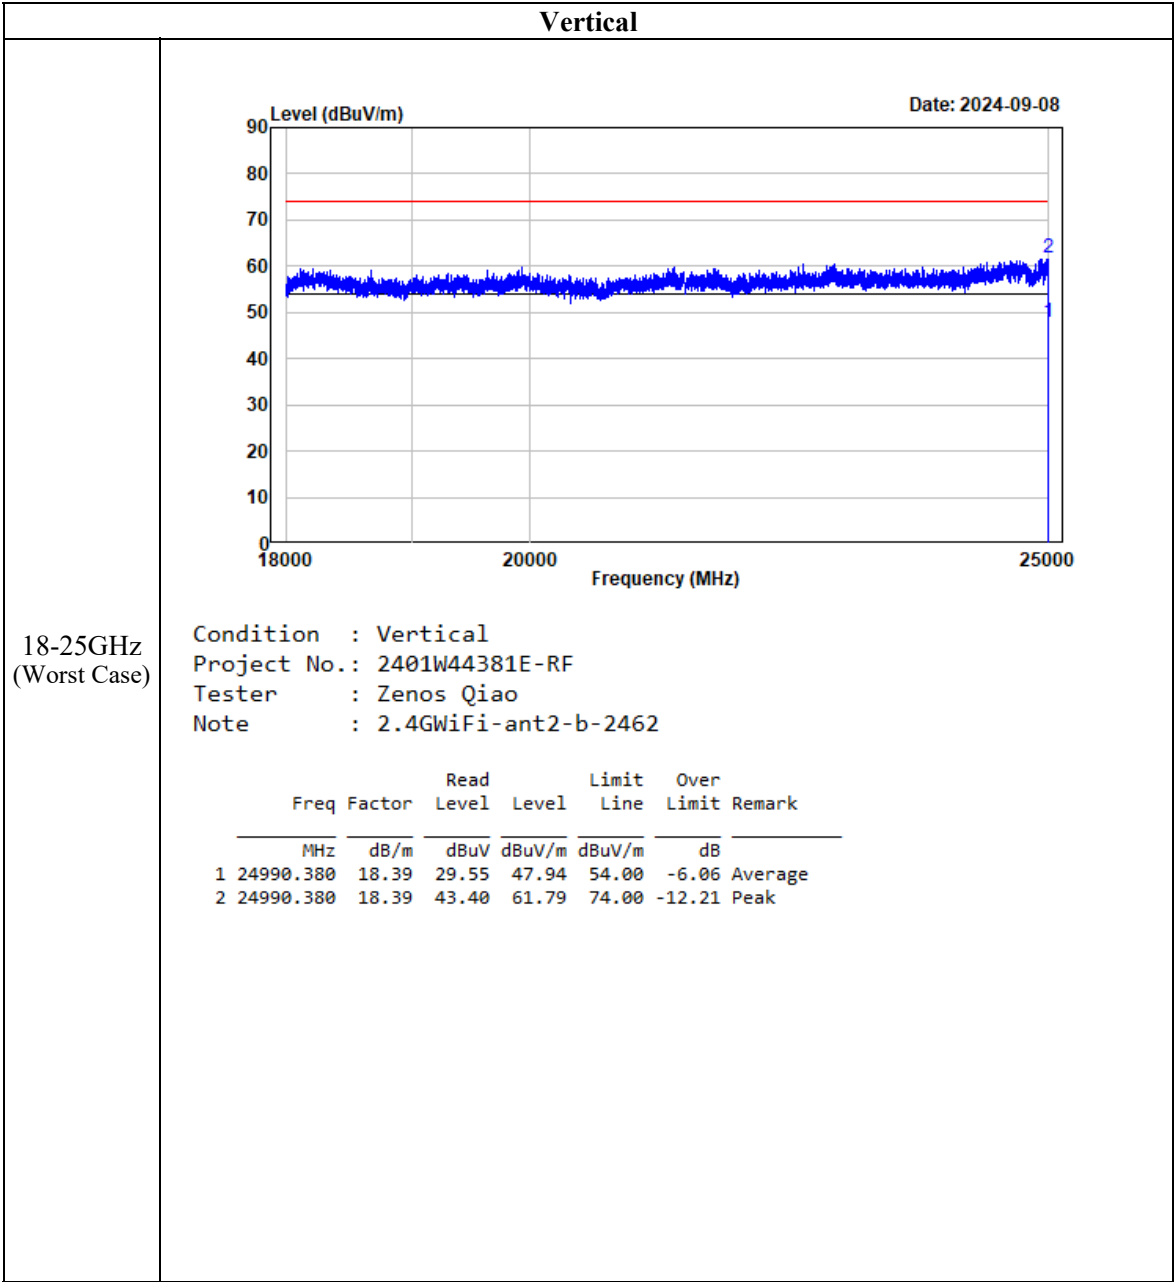


802.11g (ANT1)
Horizontal

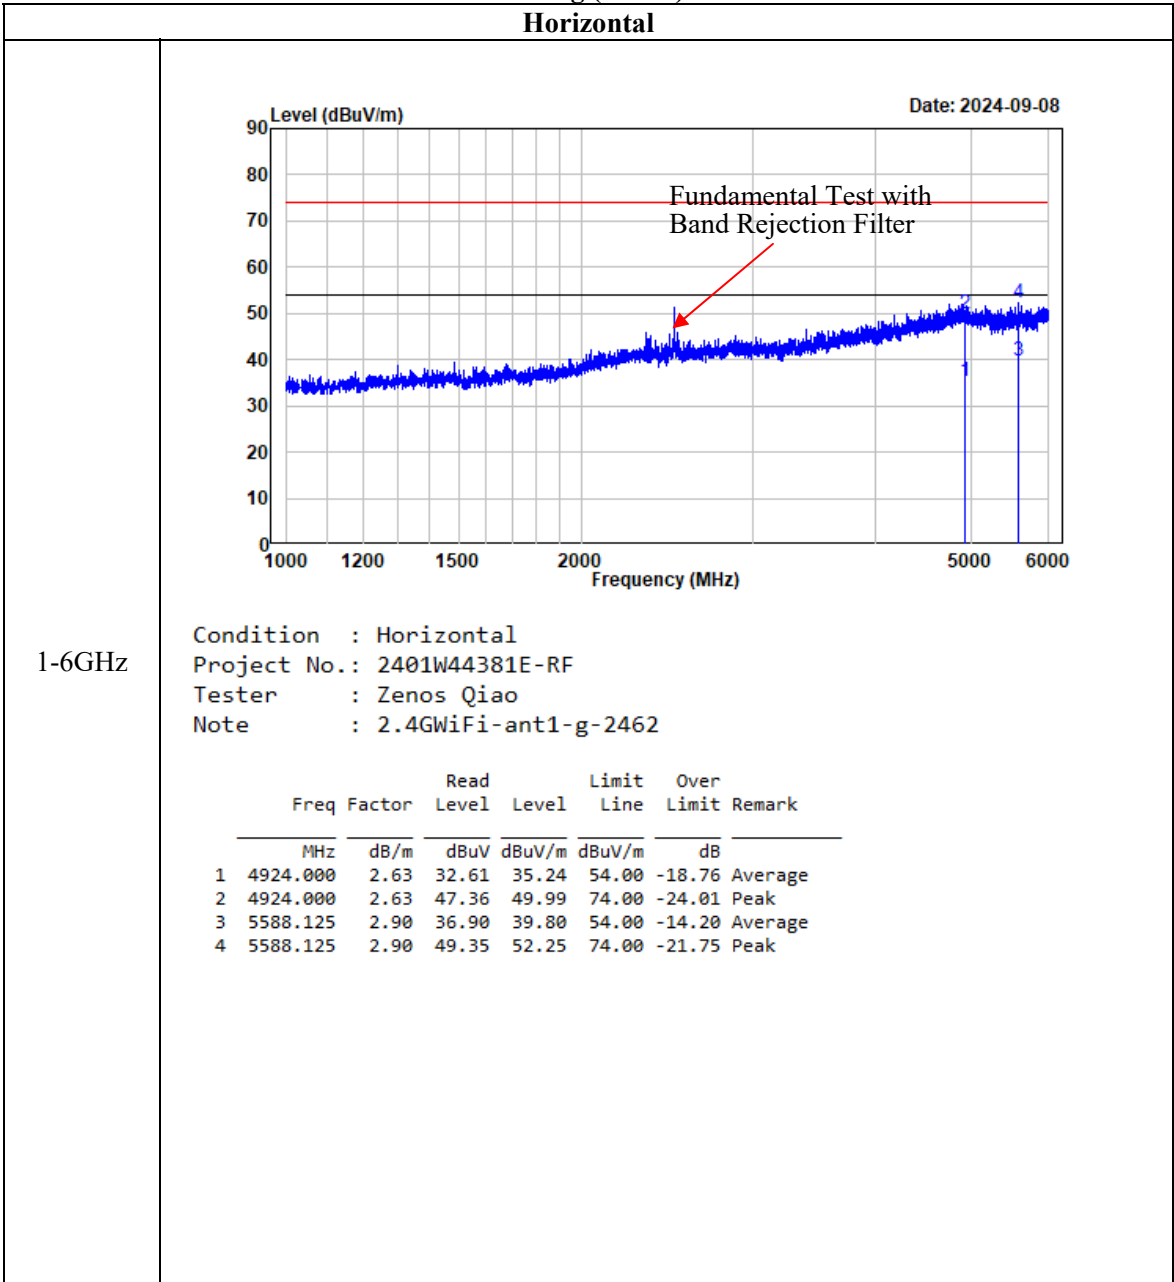


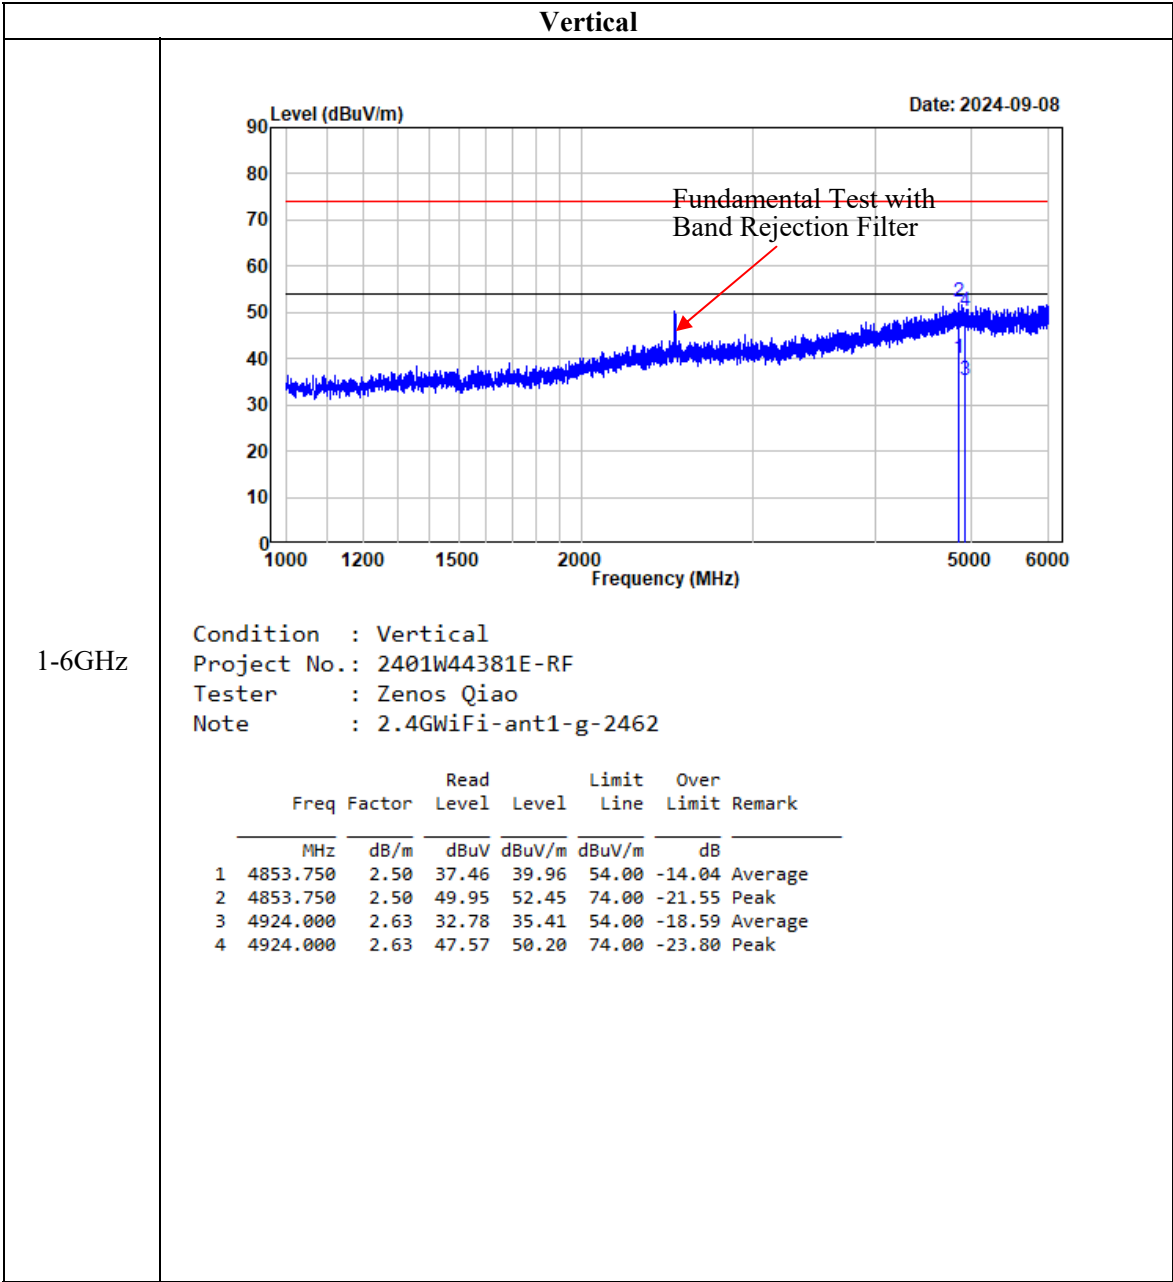


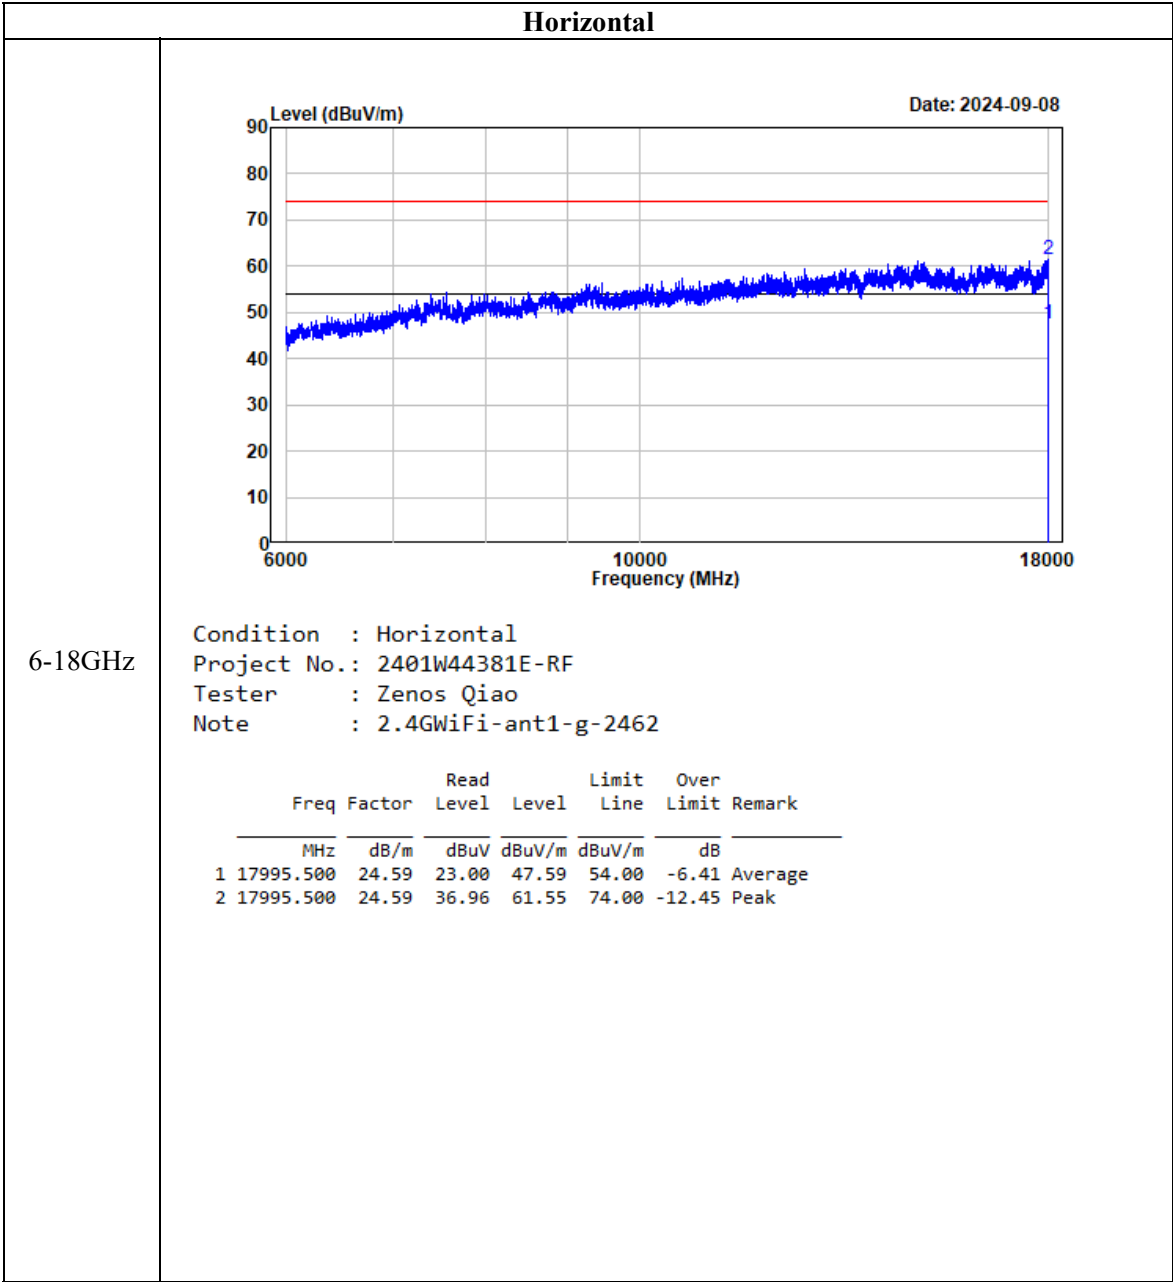


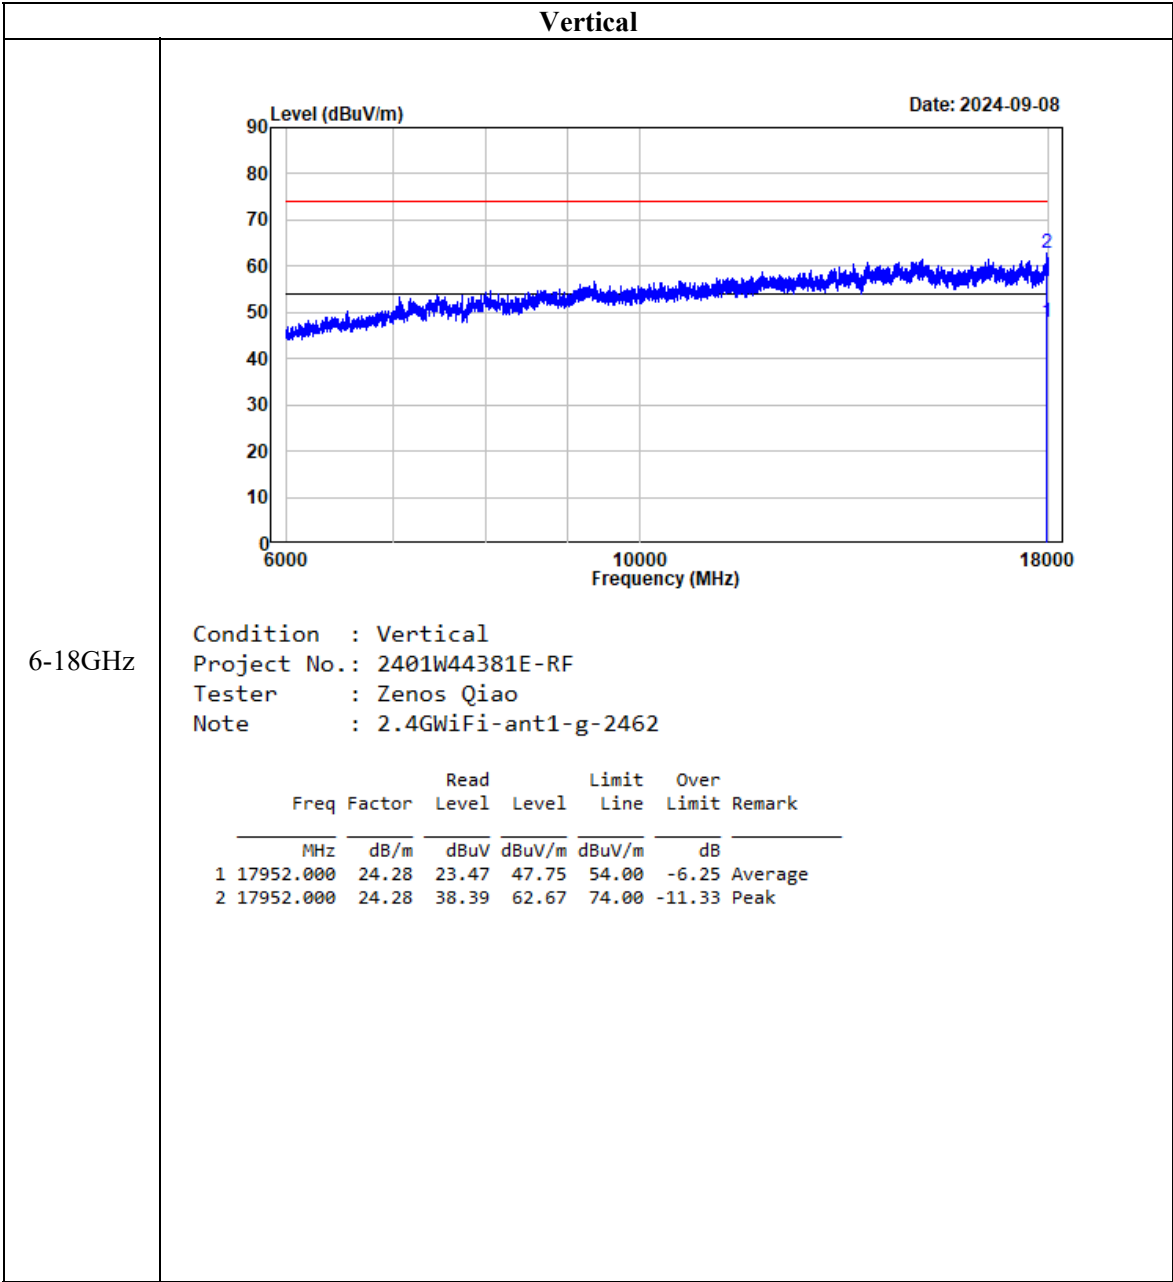


802.11g (ANT2)
Horizontal

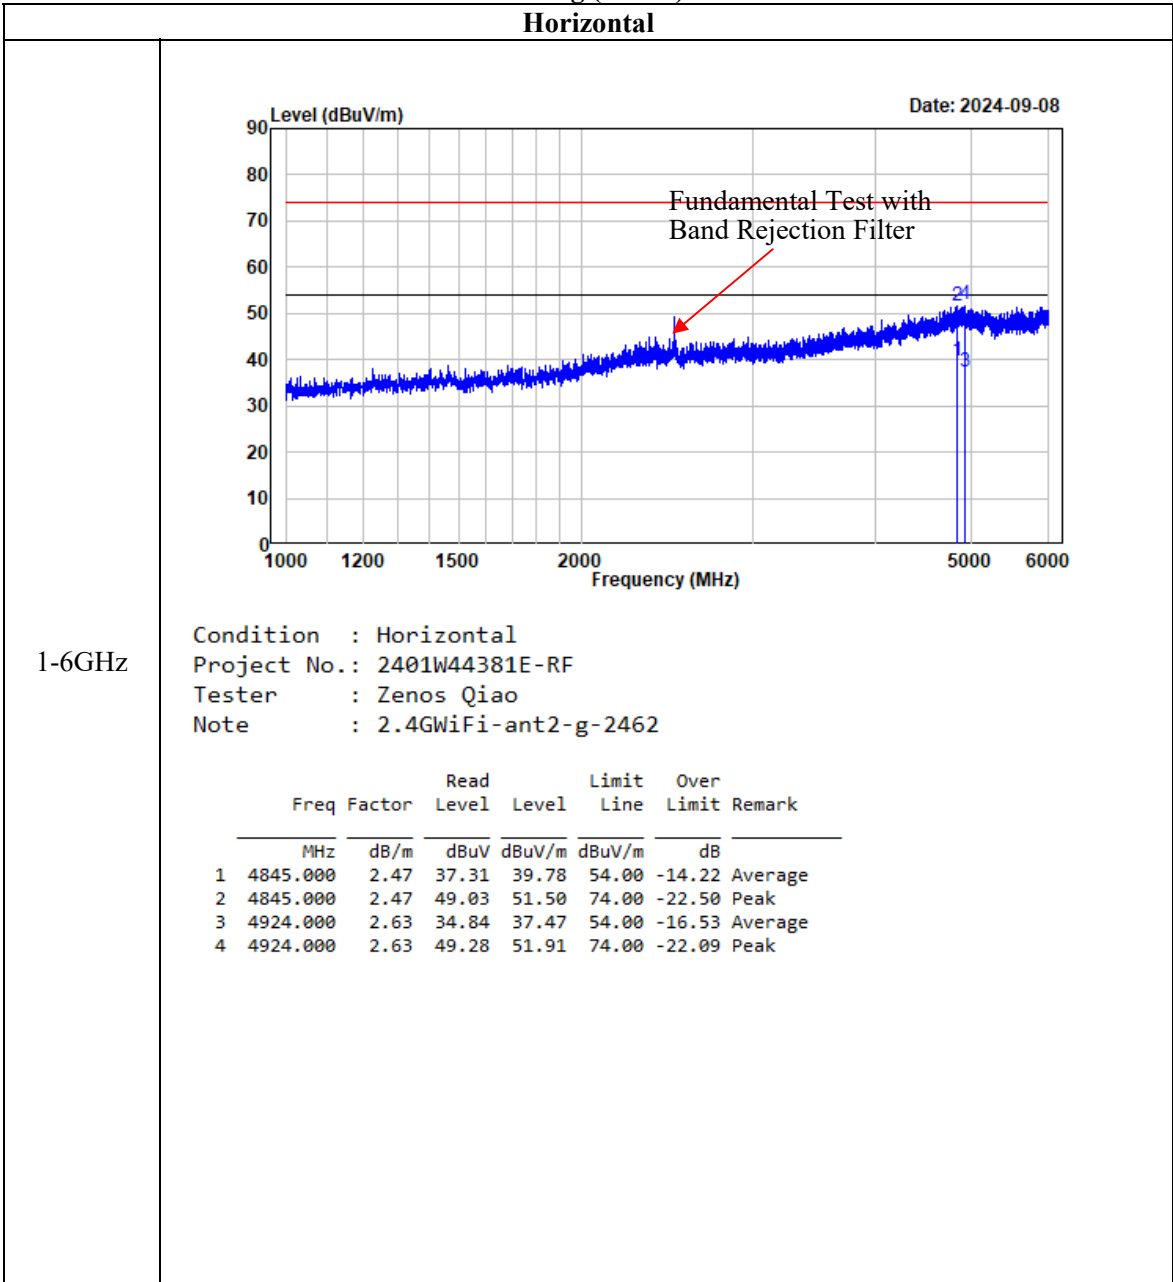

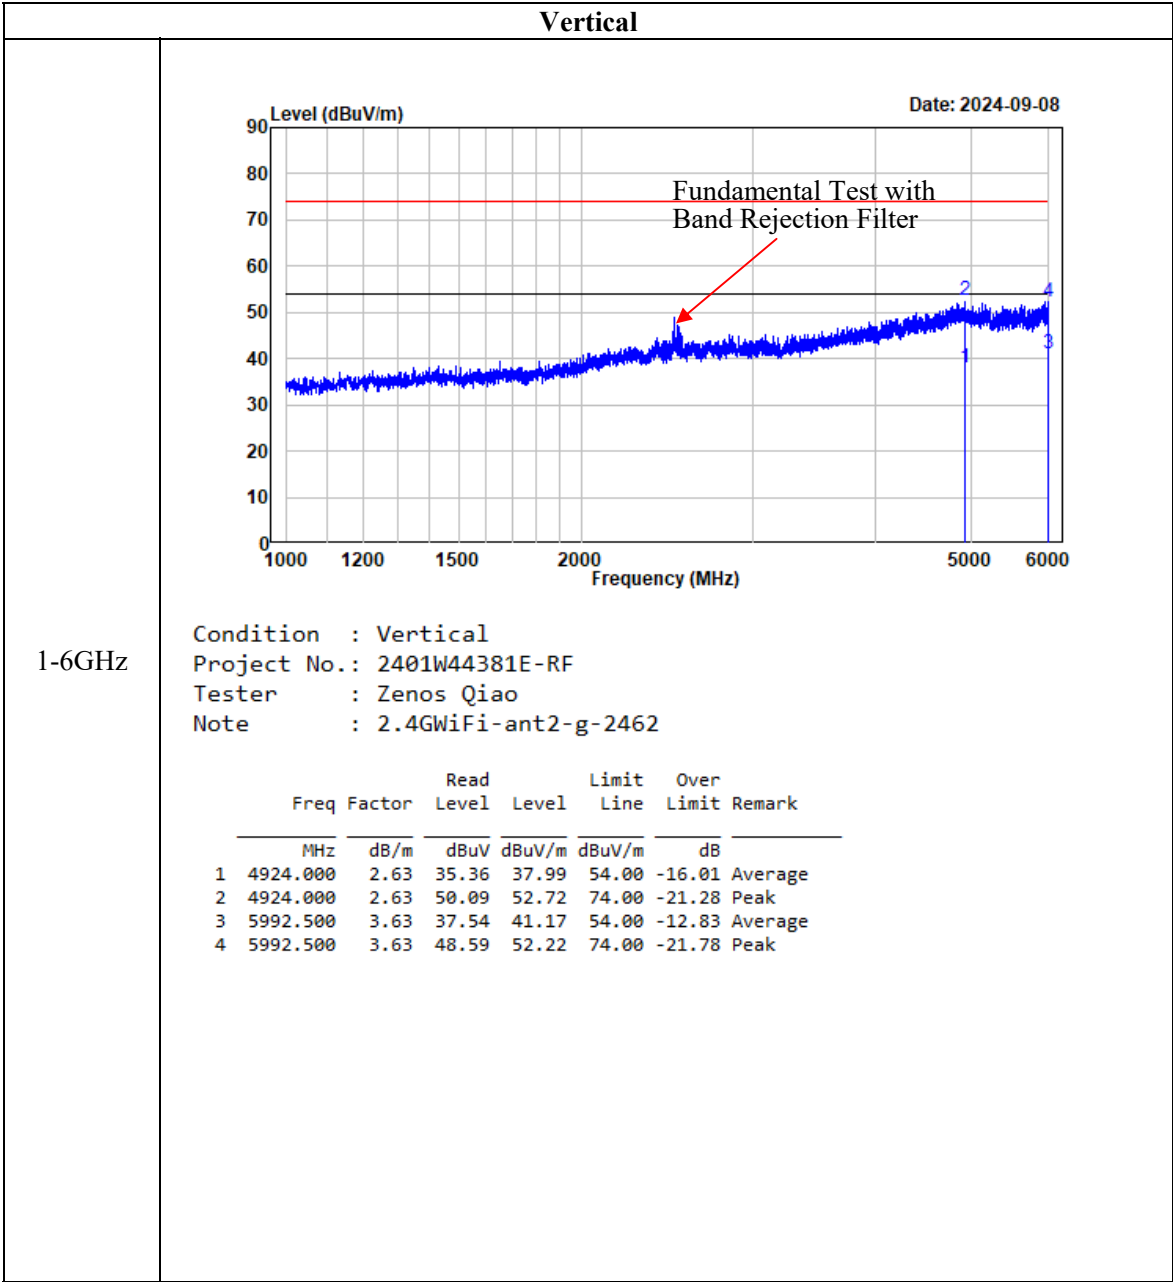

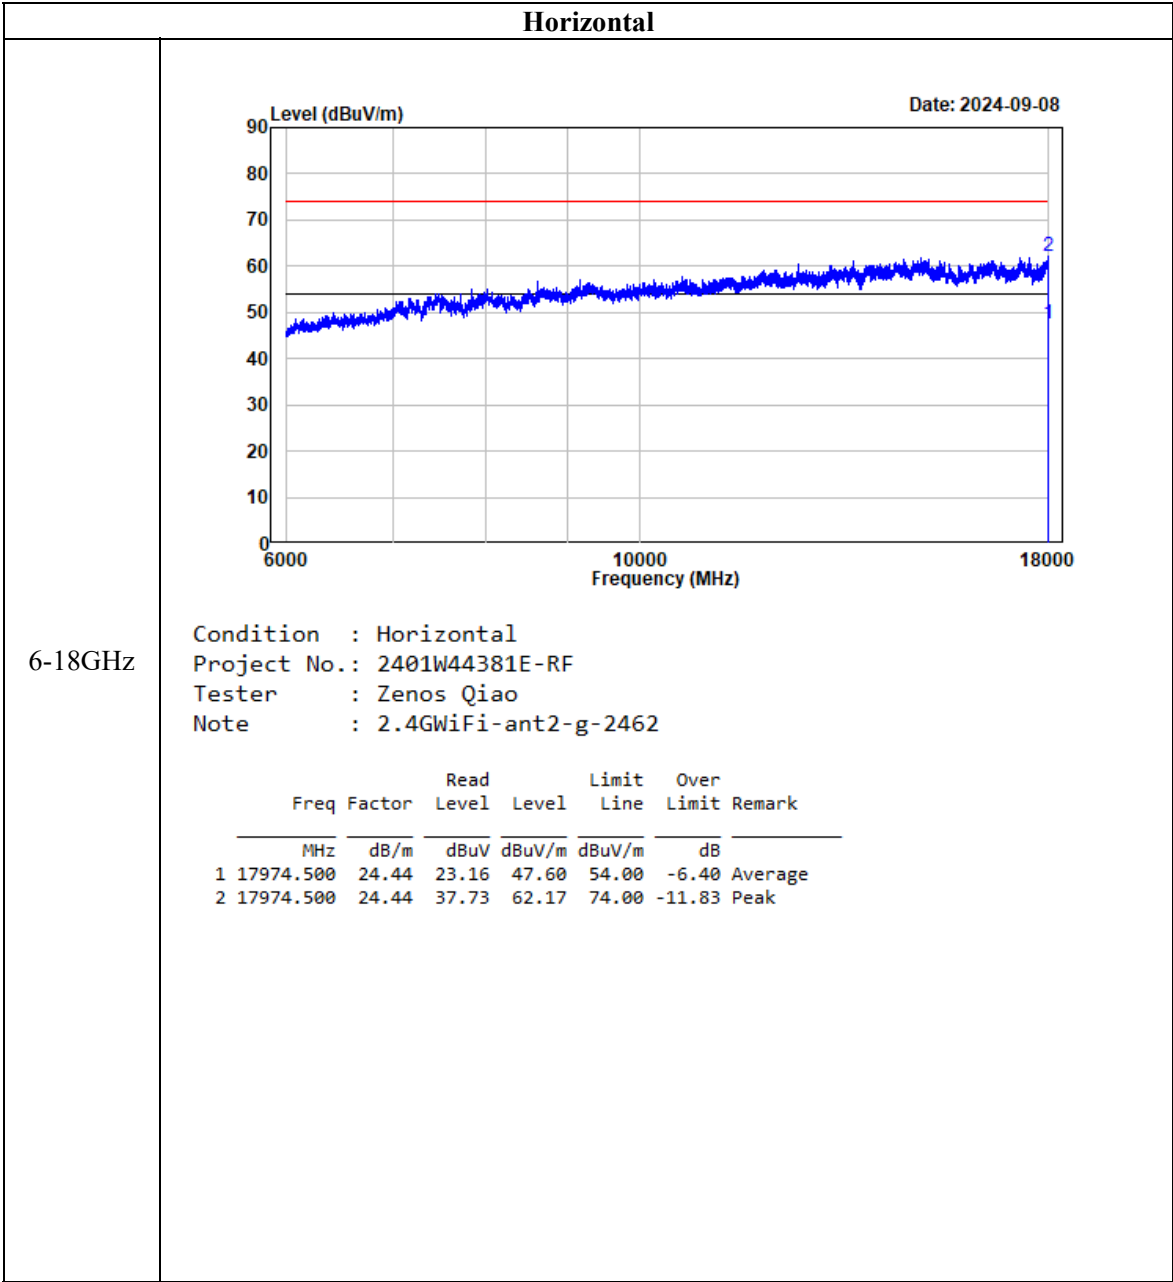


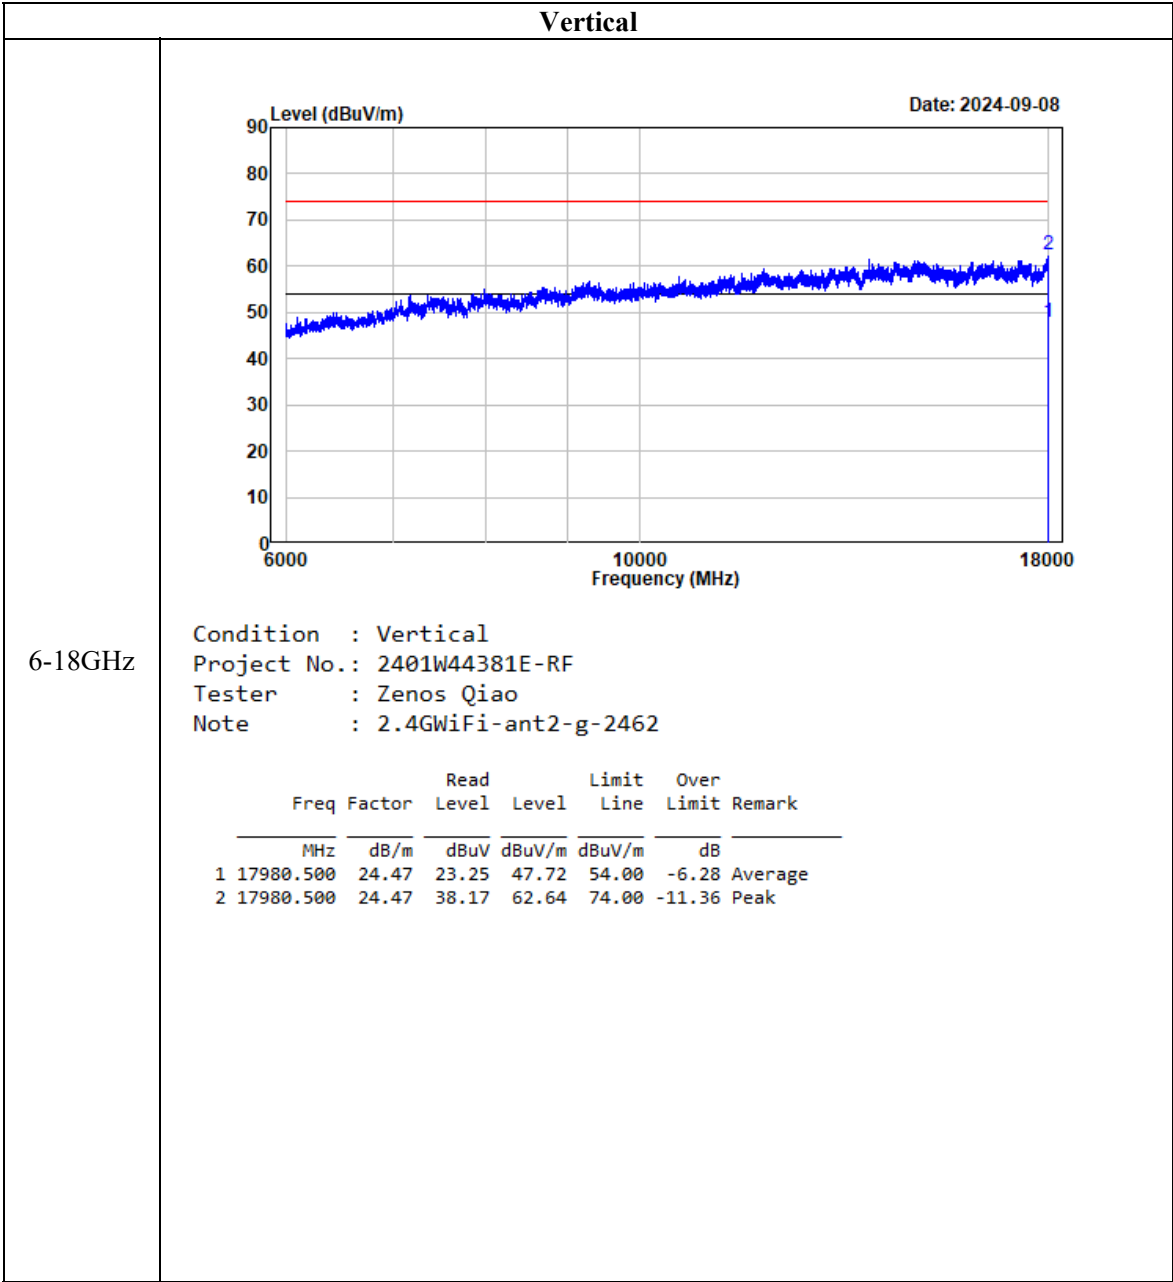

802.11n20


Horizontal


1-6GHz

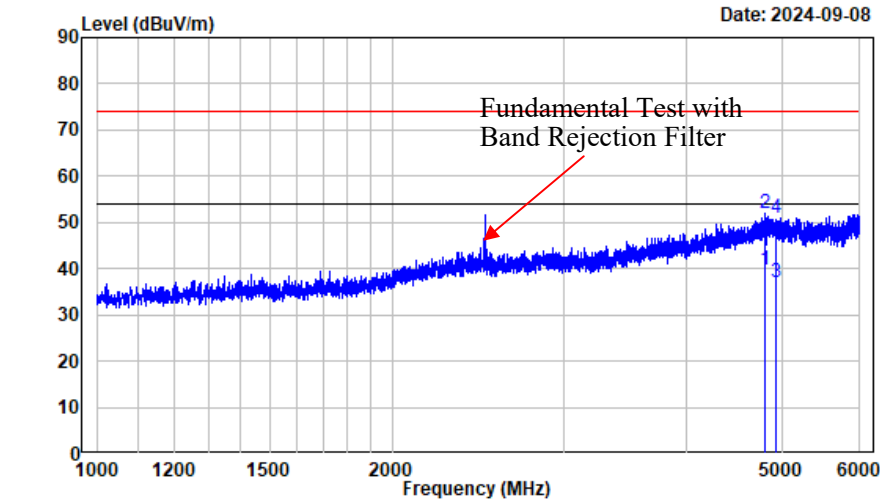


Condition : Horizontal
Project No.: 2401W44381E-RF
Tester : Zenos Qiao
Note : 2.4GWiFi-n20-2462


	Freq	Factor	Read Level	Read Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4799.375	2.42	37.25	39.67	54.00	-14.33	Average
2	4799.375	2.42	49.54	51.96	74.00	-22.04	Peak
3	4924.000	2.63	34.31	36.94	54.00	-17.06	Average
4	4924.000	2.63	48.24	50.87	74.00	-23.13	Peak

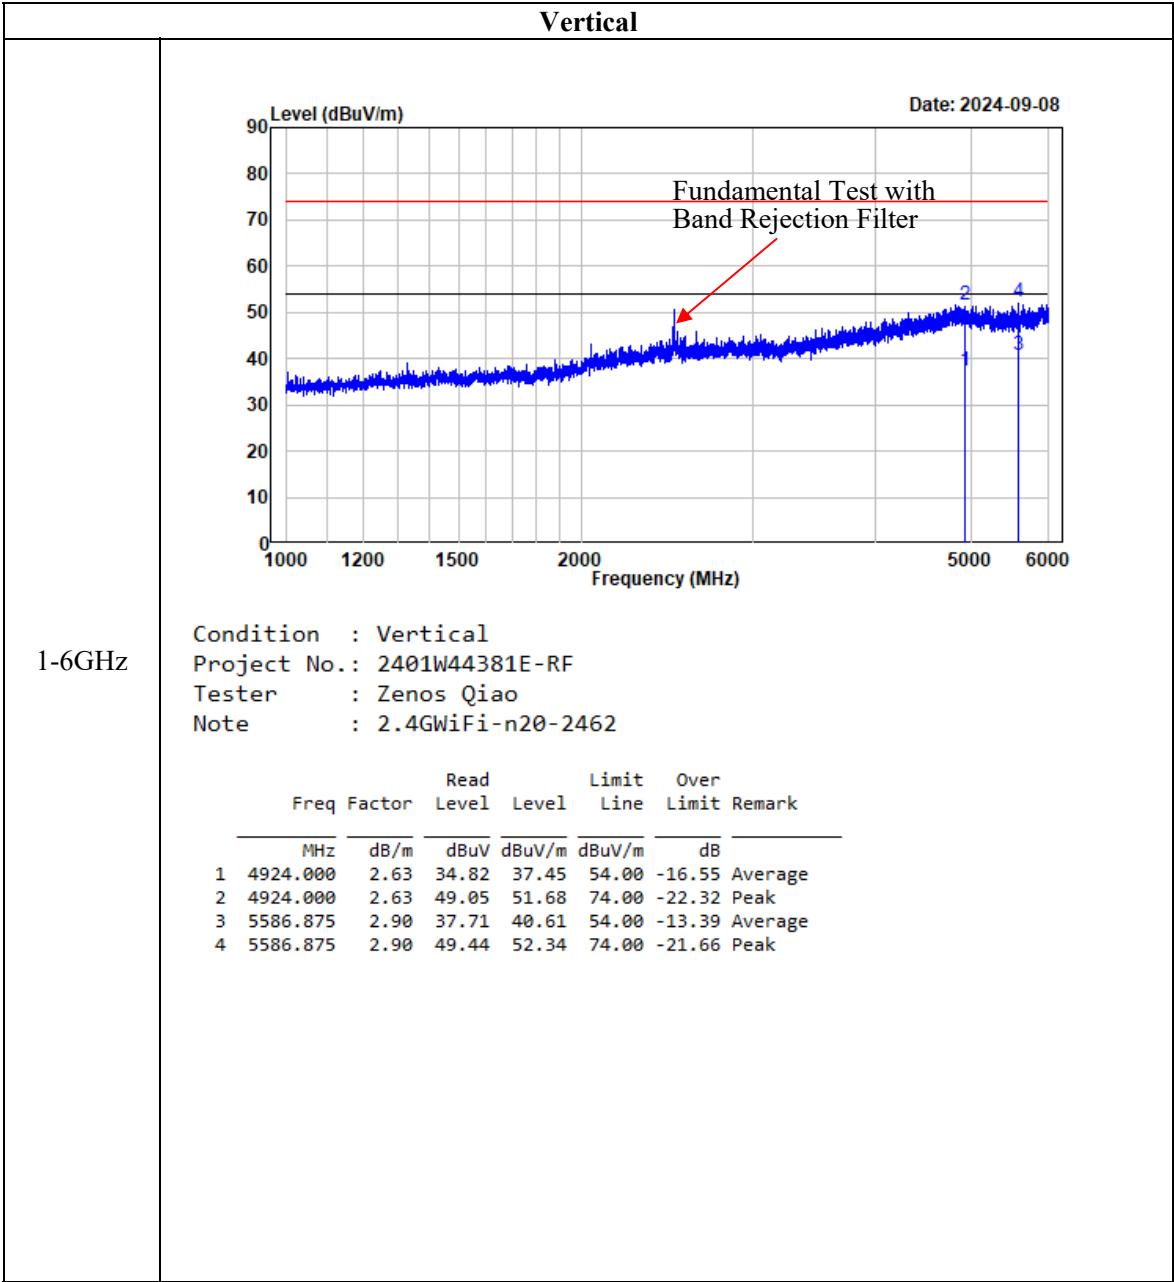


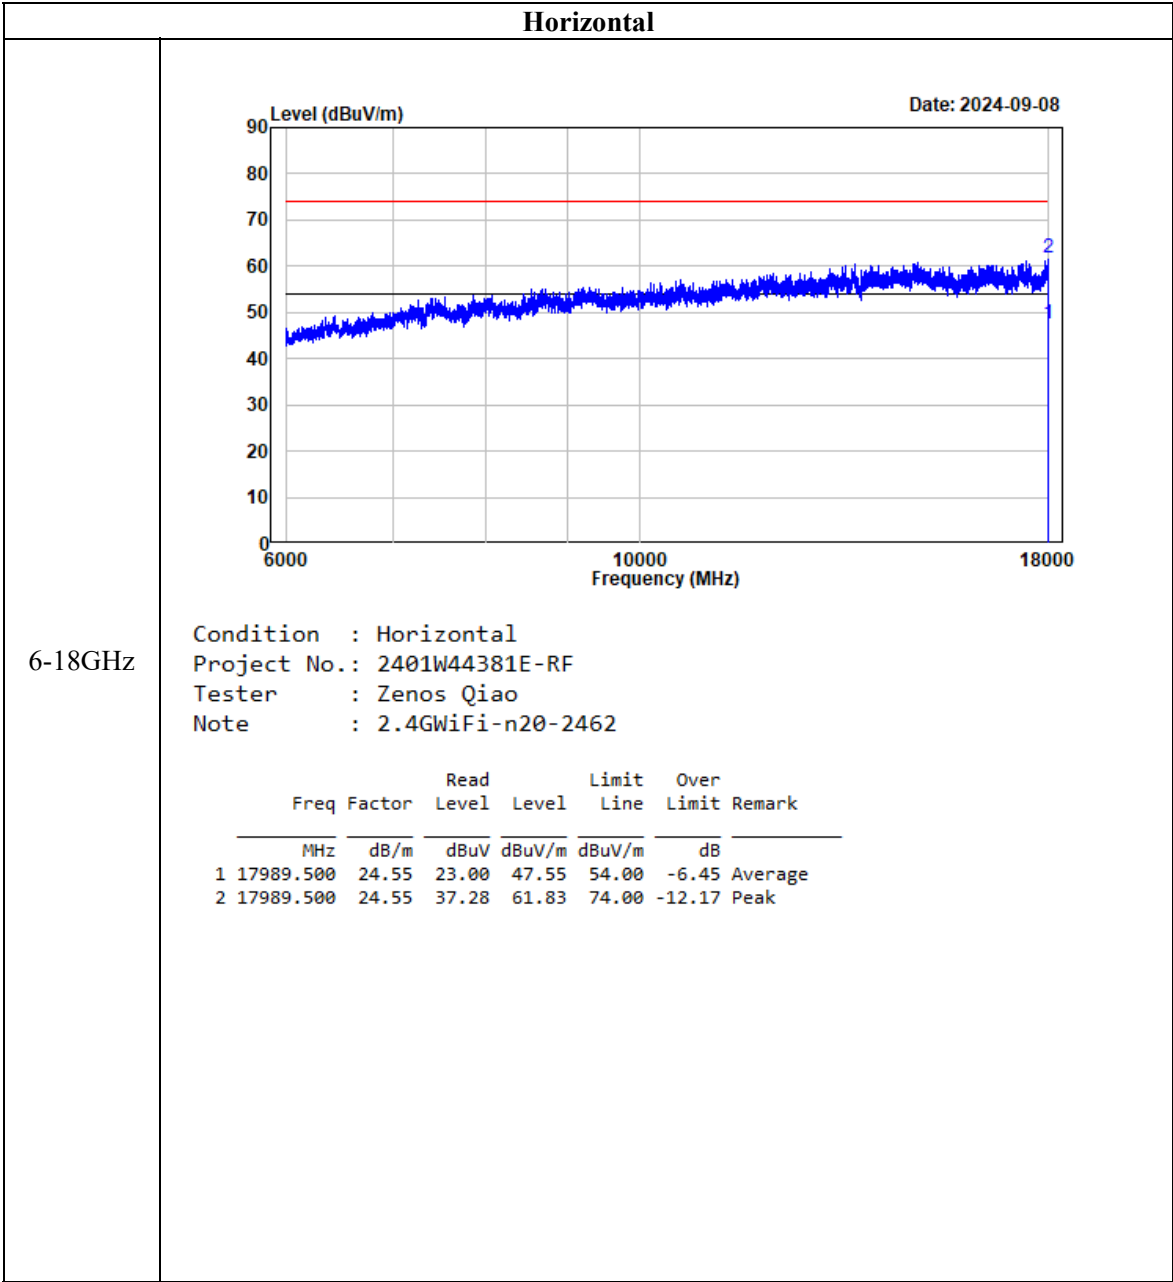


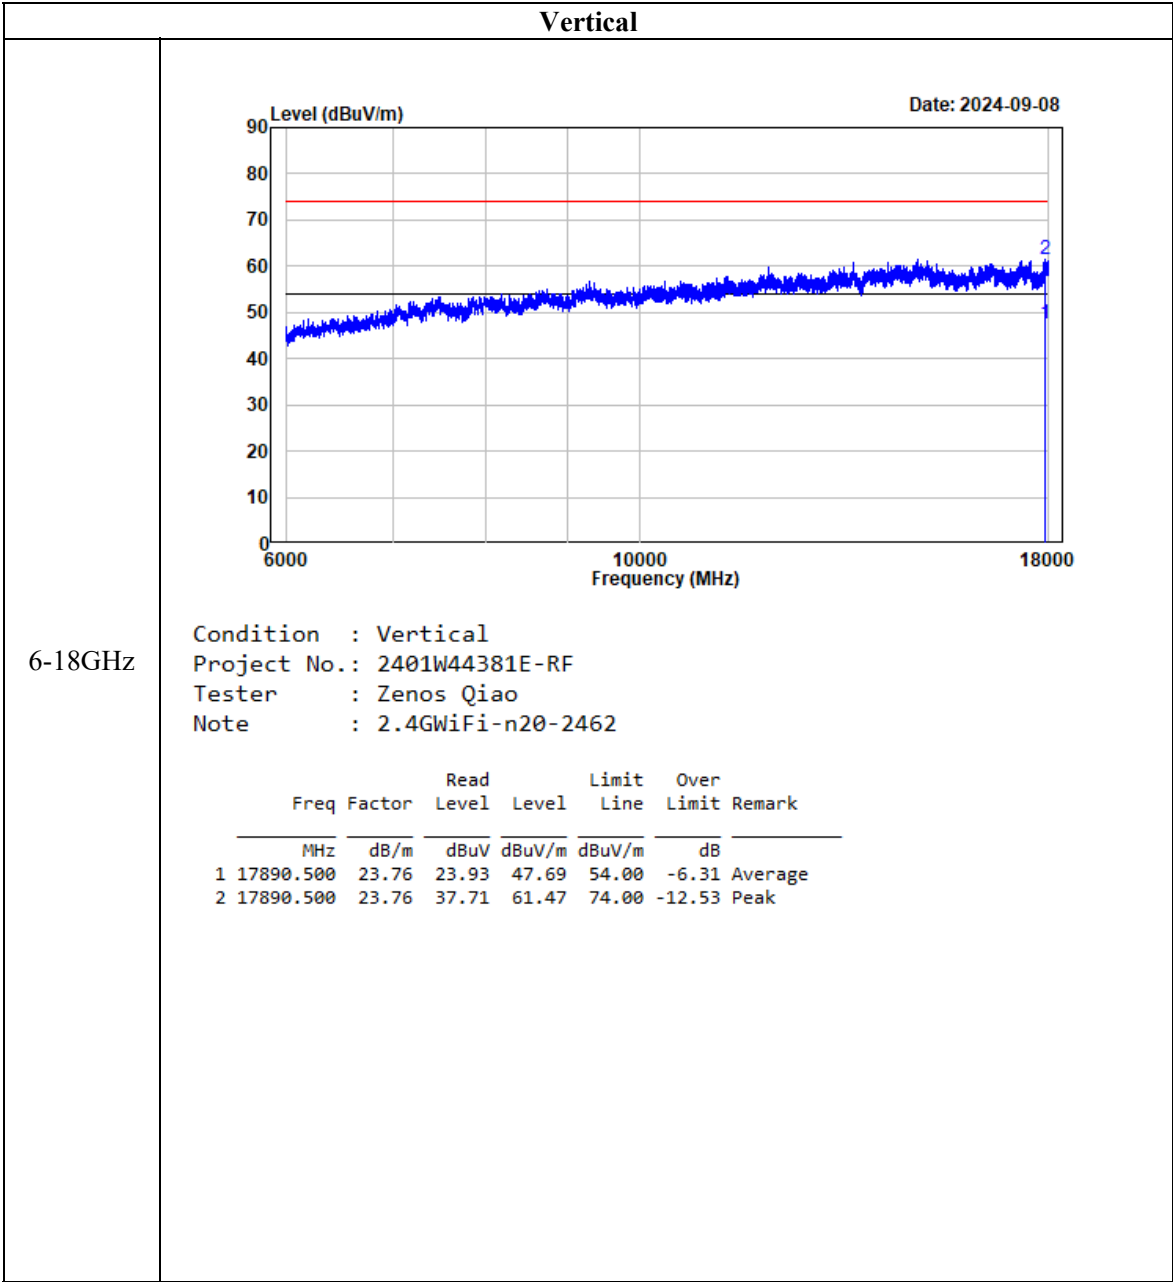


802.11n40
Horizontal

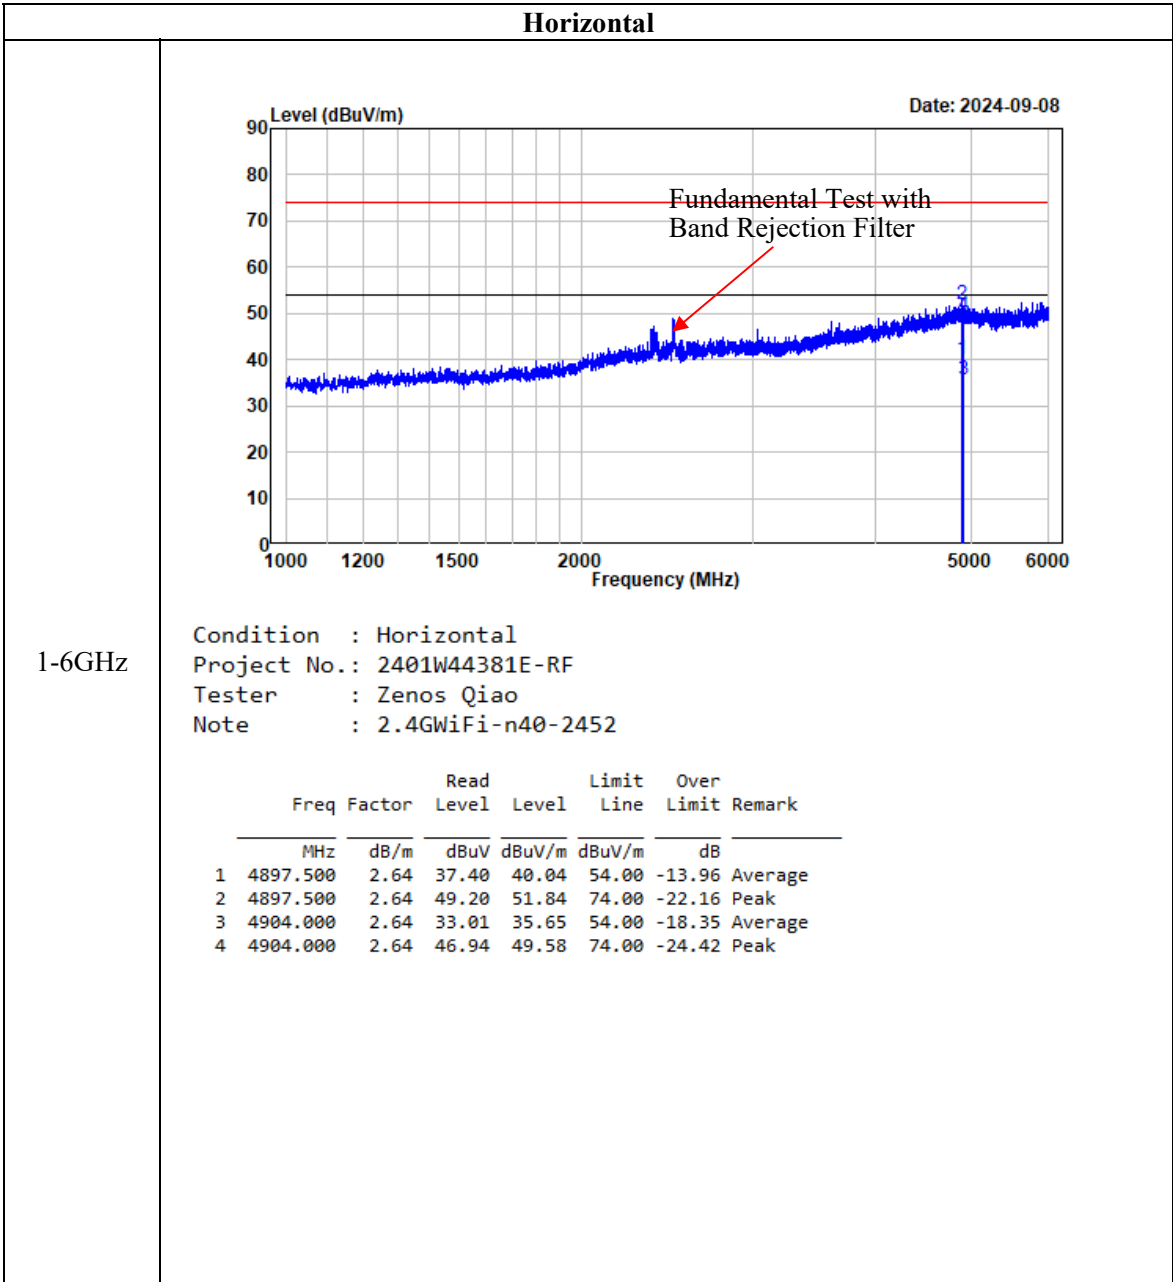

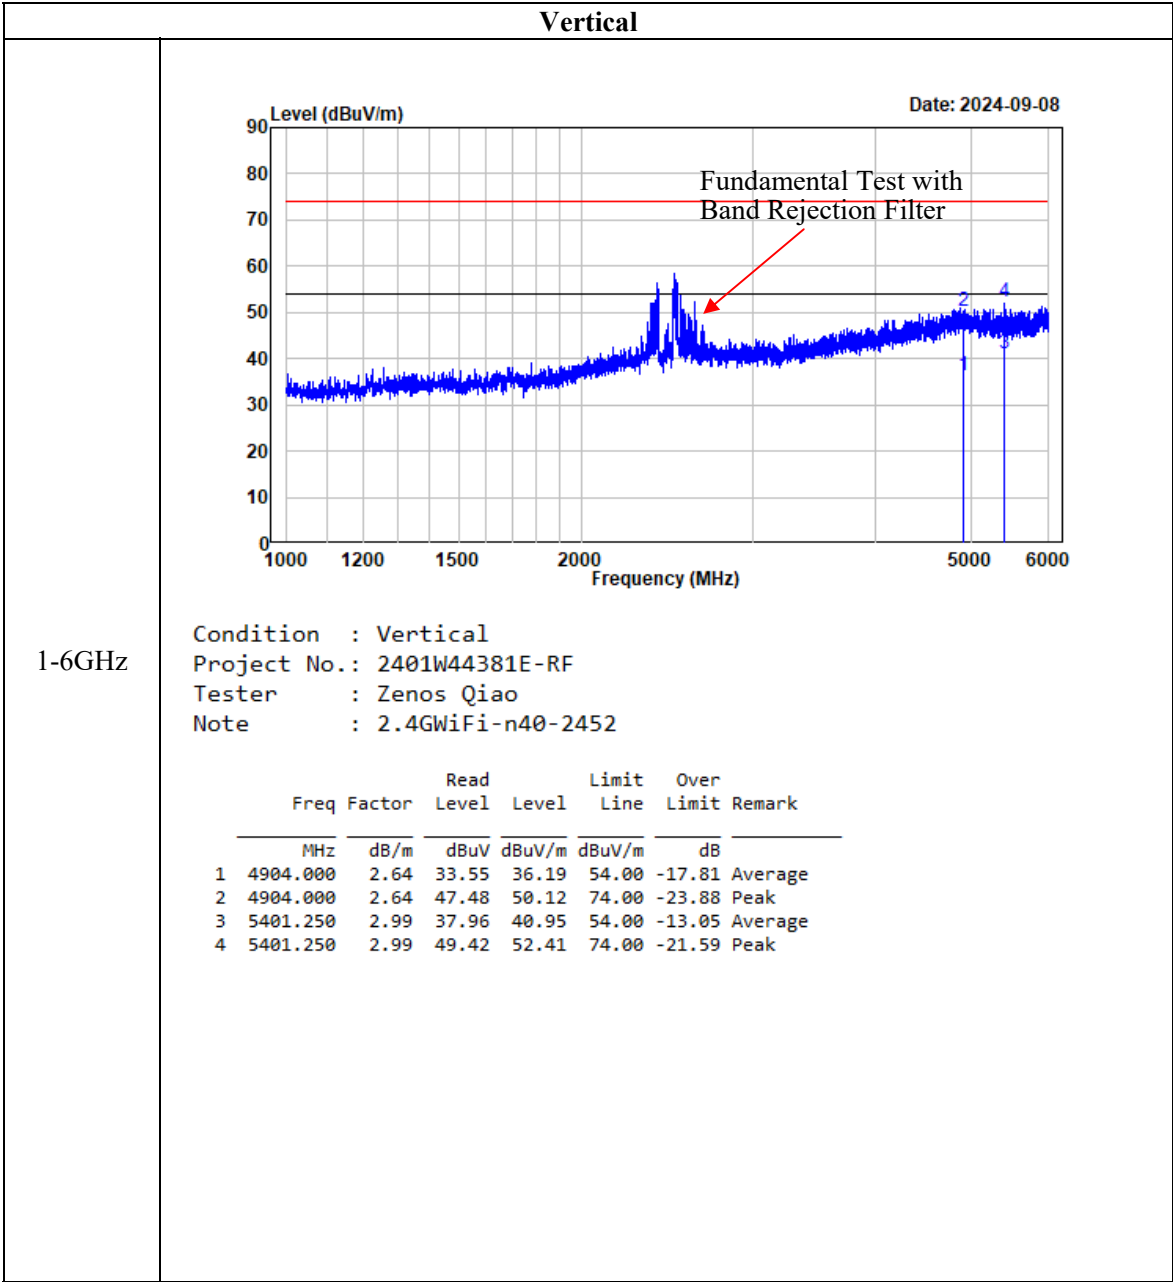

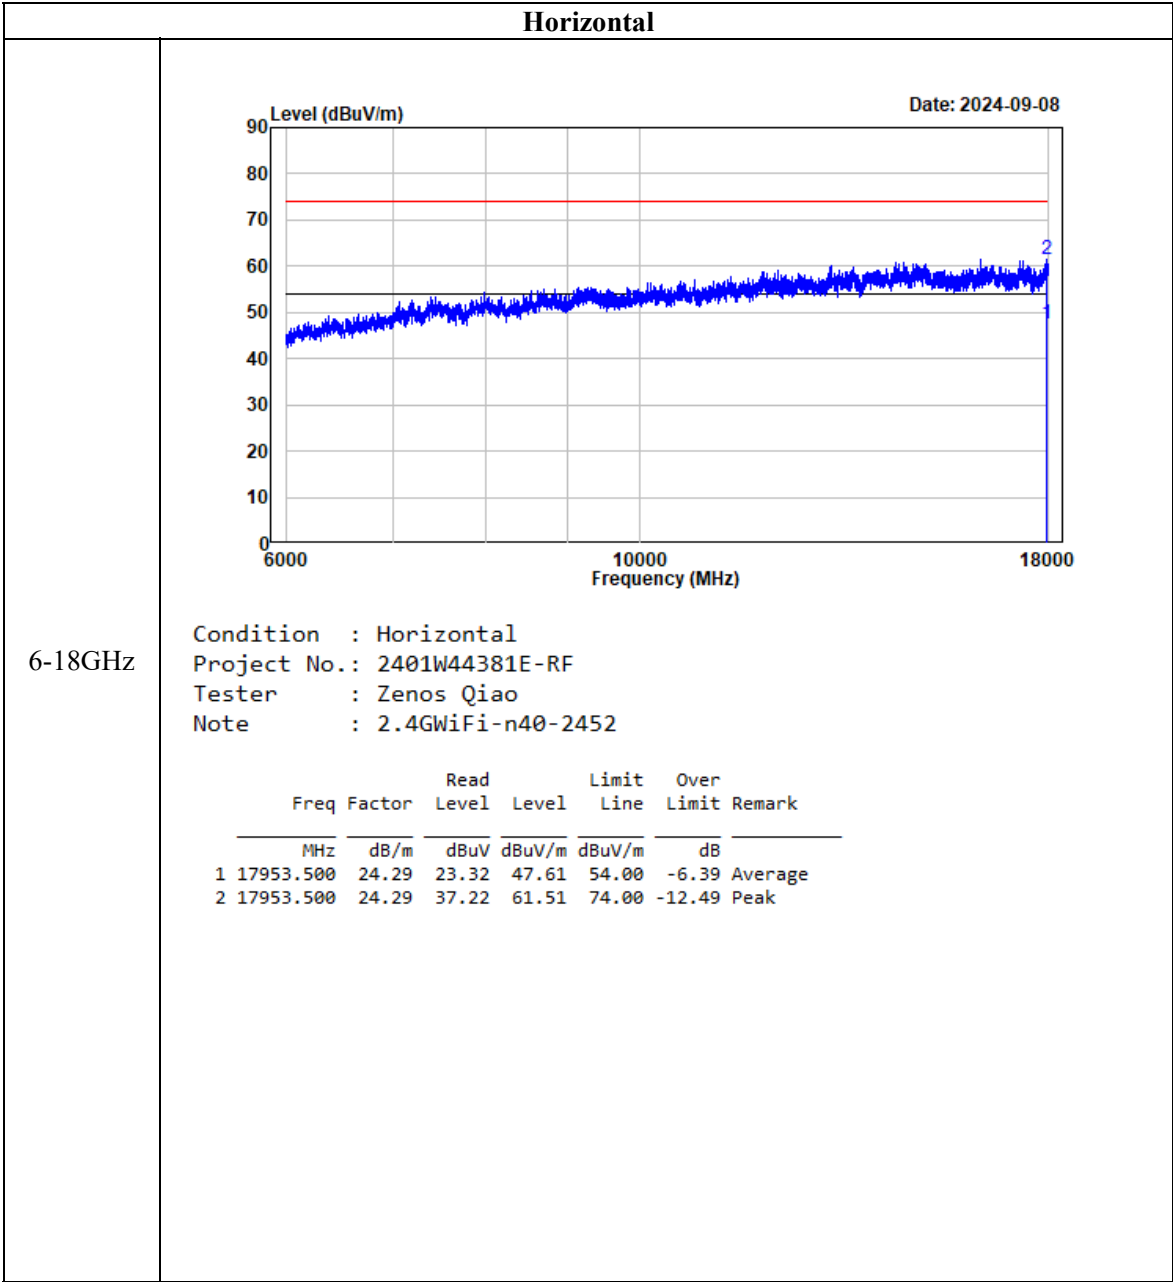

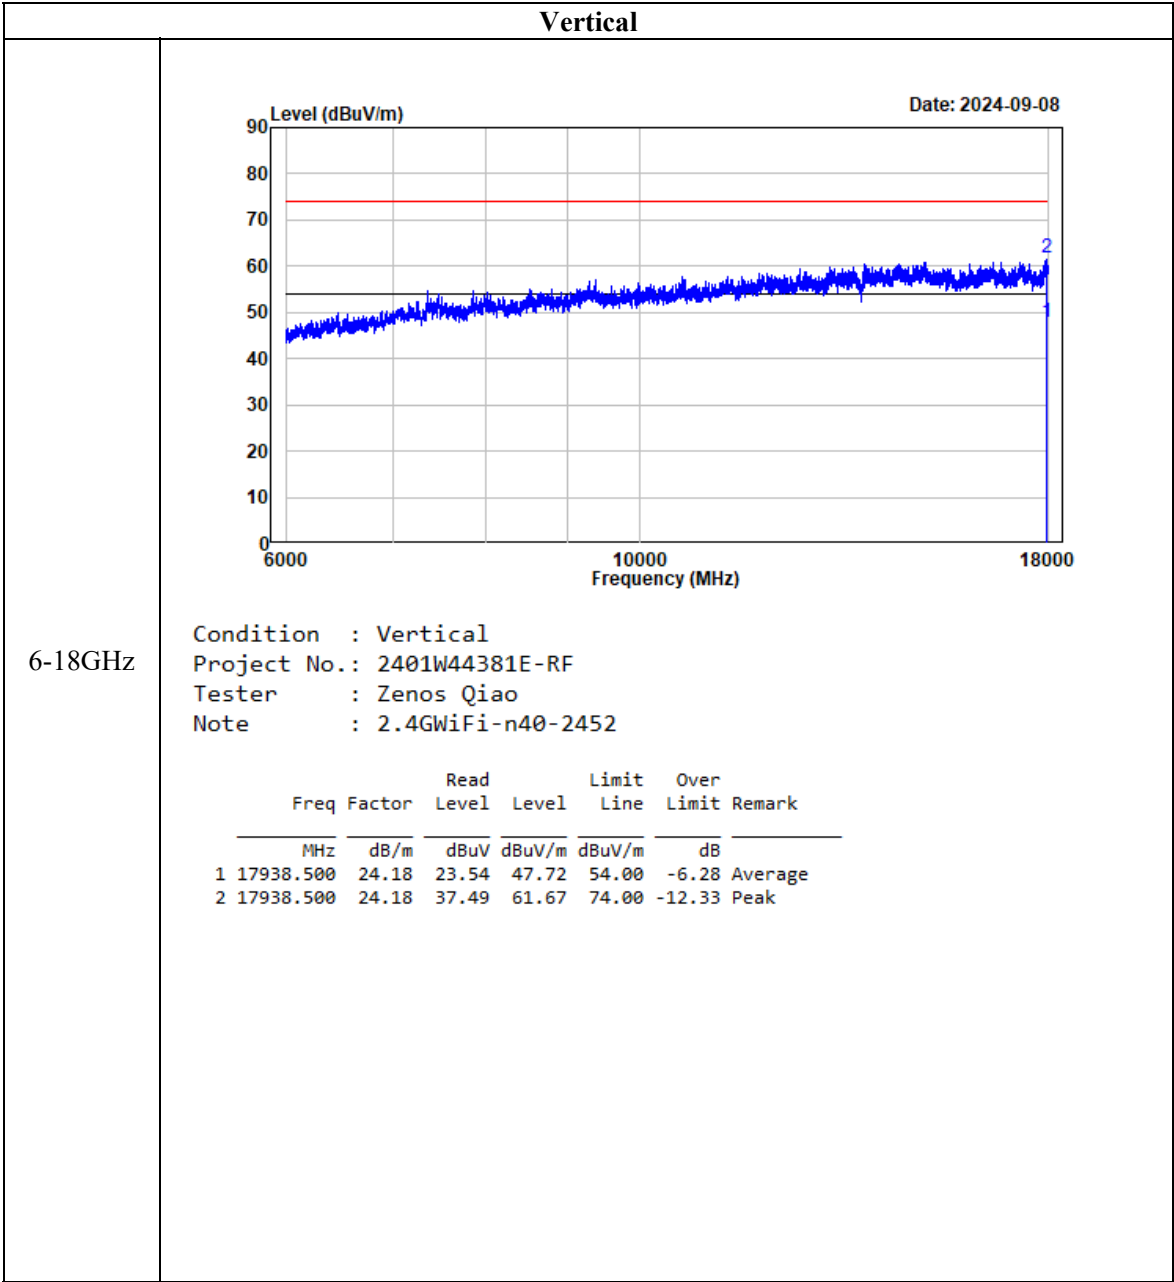

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

Applicable Standard


According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

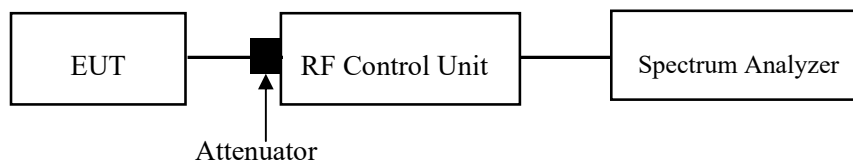

Test Data

Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-09-06 to 2024-09-10.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.1.3 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:



For BLE mode:

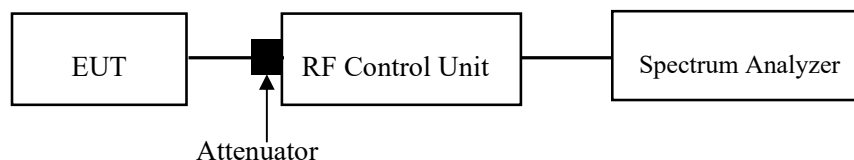

Test Data**Environmental Conditions**

Temperature:	24~26 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-09-06 to 2024-09-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

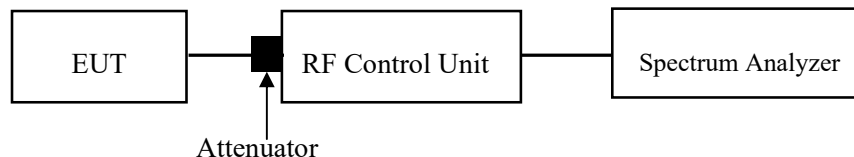**Test Data****Environmental Conditions**

Temperature:	24~26 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-09-06 to 2024-09-10.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

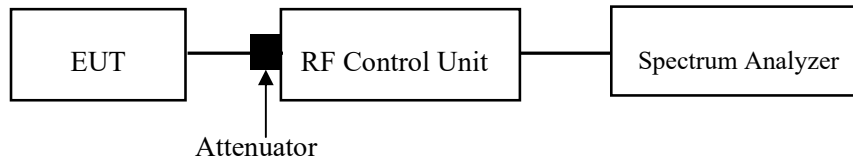

Test Data

Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	51~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-09-06 to 2024-09-27.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401W44381E-RF External photo and 2401W44381E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401W44381E-RFA Test Setup photo.


Appendix – BLE


Appendix A: DTS Bandwidth


Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.70	0.5	PASS
		2440	0.69	0.5	PASS
		2480	0.69	0.5	PASS
BLE_2M	Ant1	2402	1.16	0.5	PASS
		2440	1.16	0.5	PASS
		2480	1.16	0.5	PASS

Test Graphs

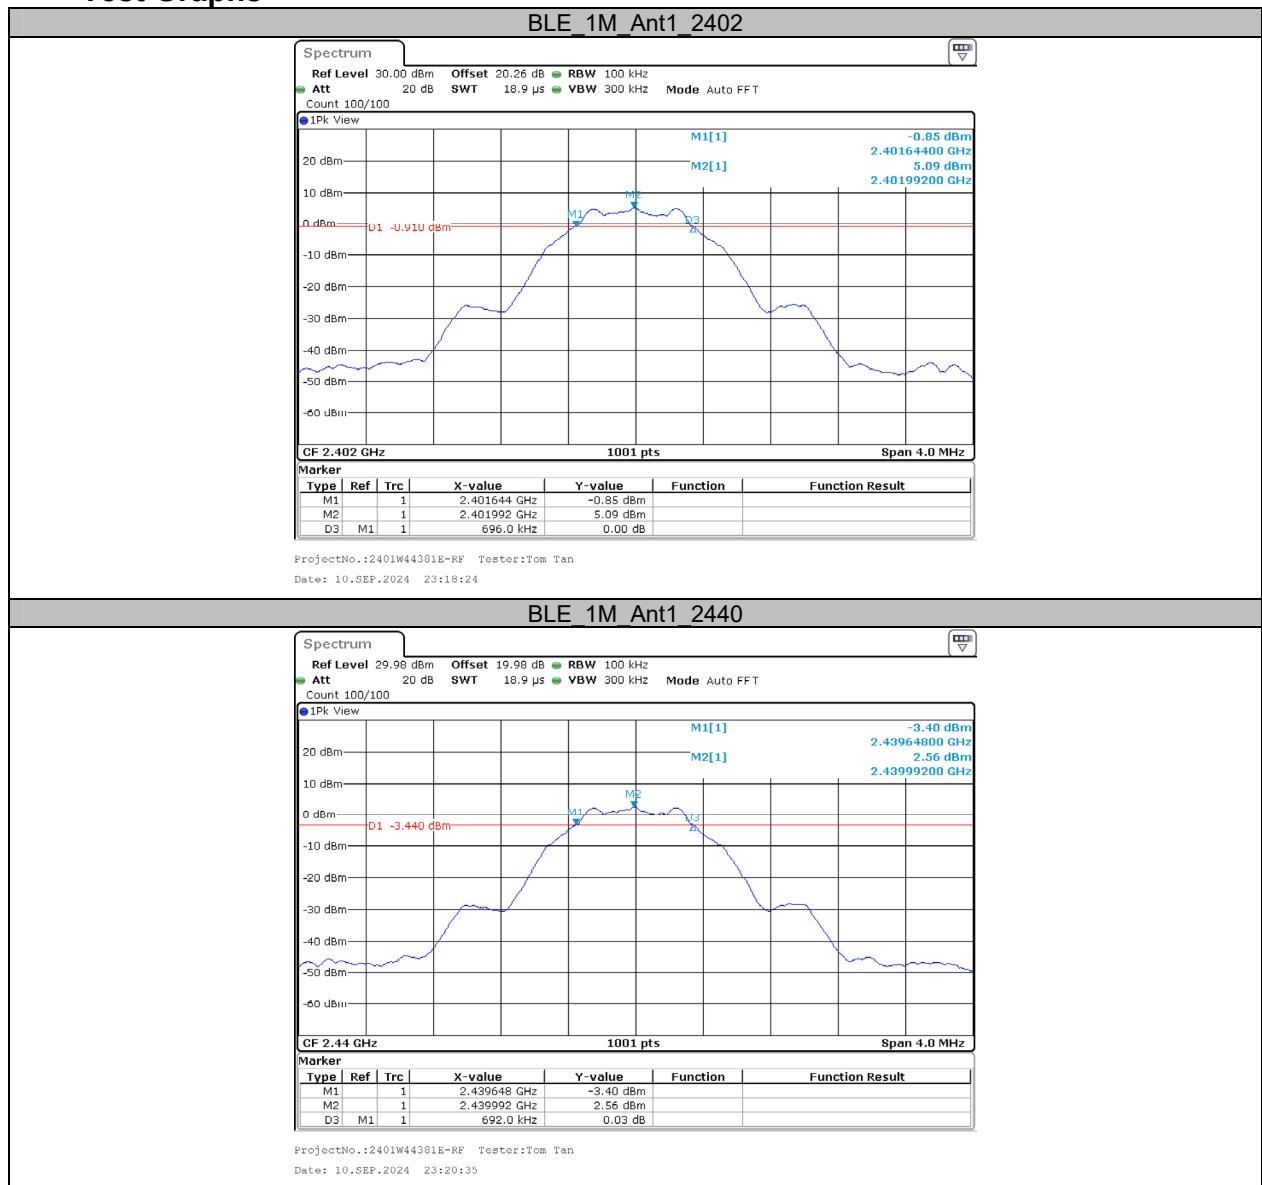


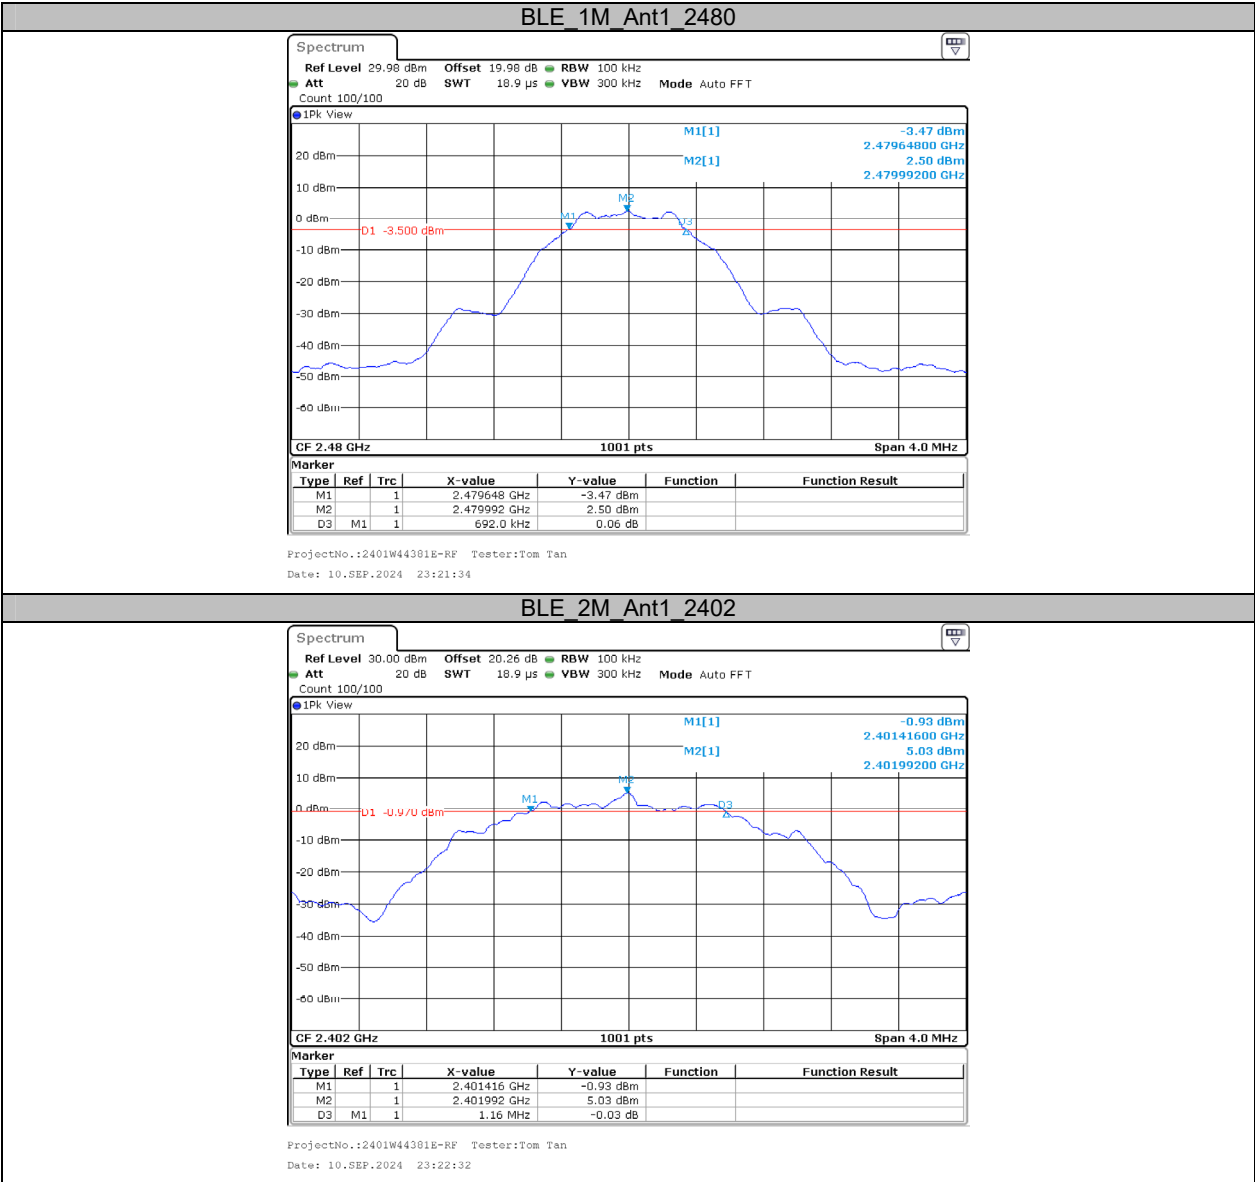


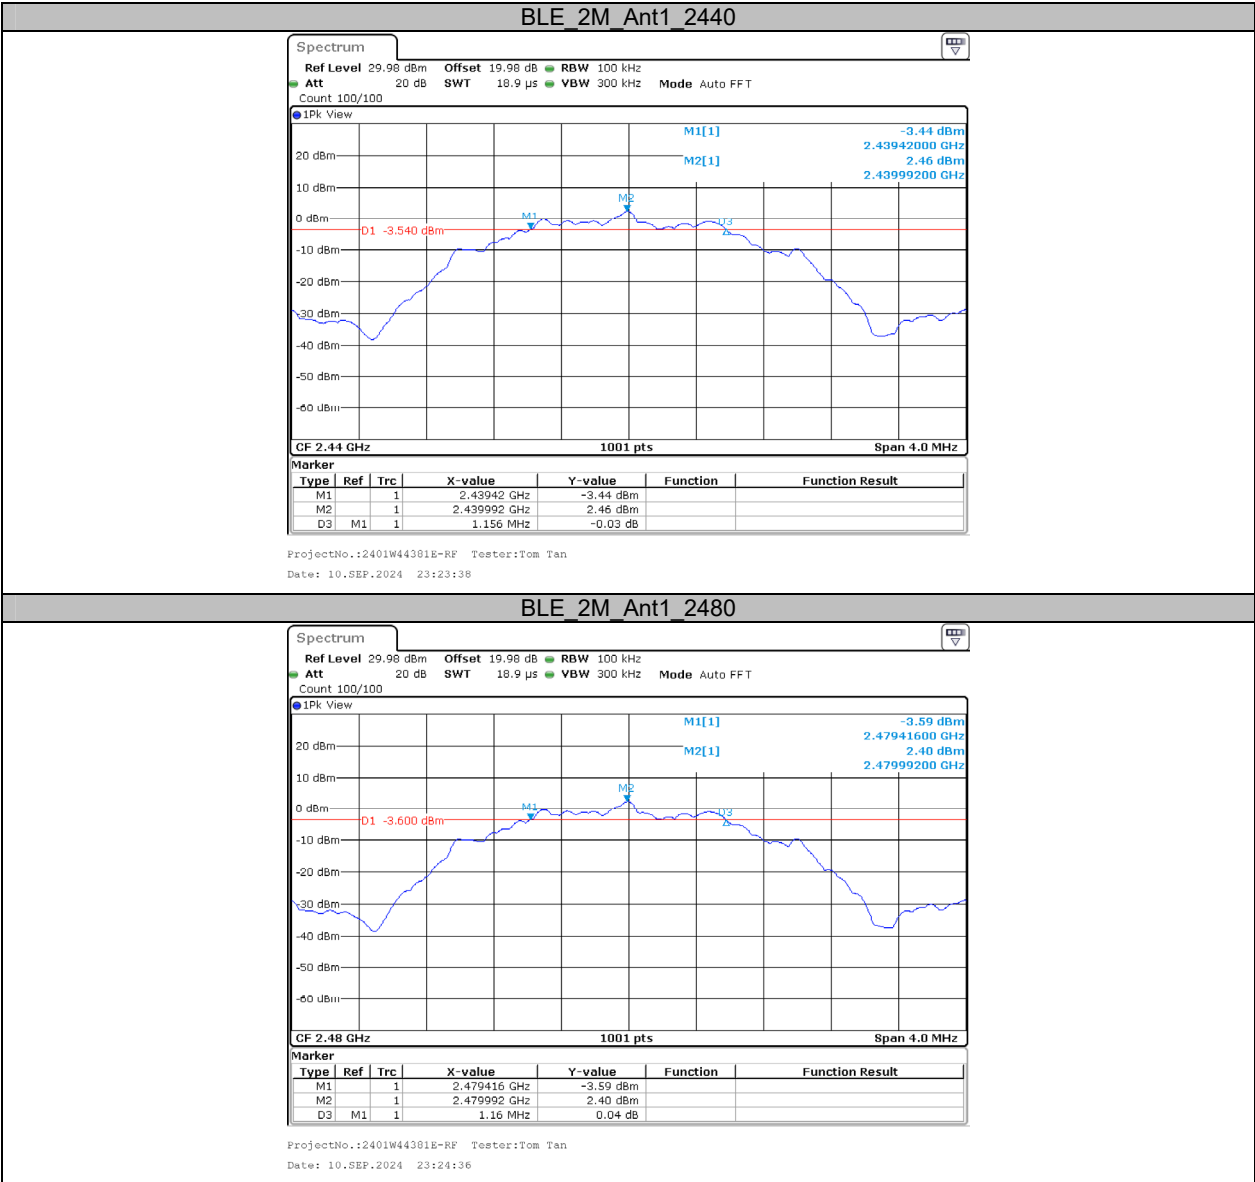


Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.039	---	---
		2440	1.039	---	---
		2480	1.039	---	---
BLE_2M	Ant1	2402	2.066	---	---
		2440	2.066	---	---
		2480	2.070	---	---

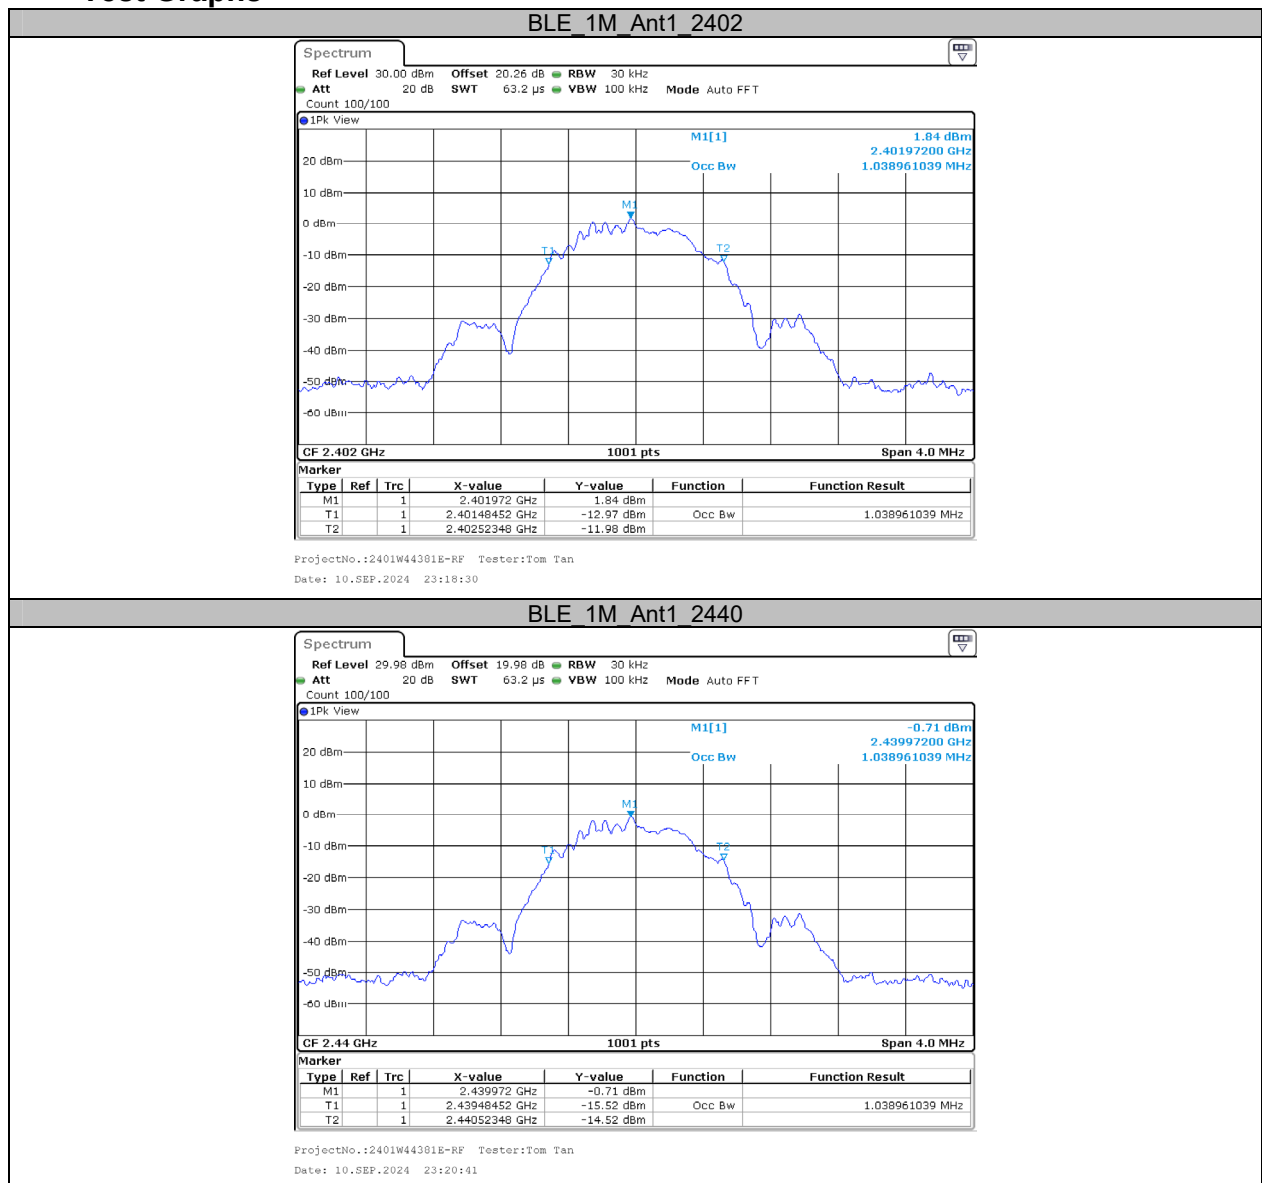
Test Graphs

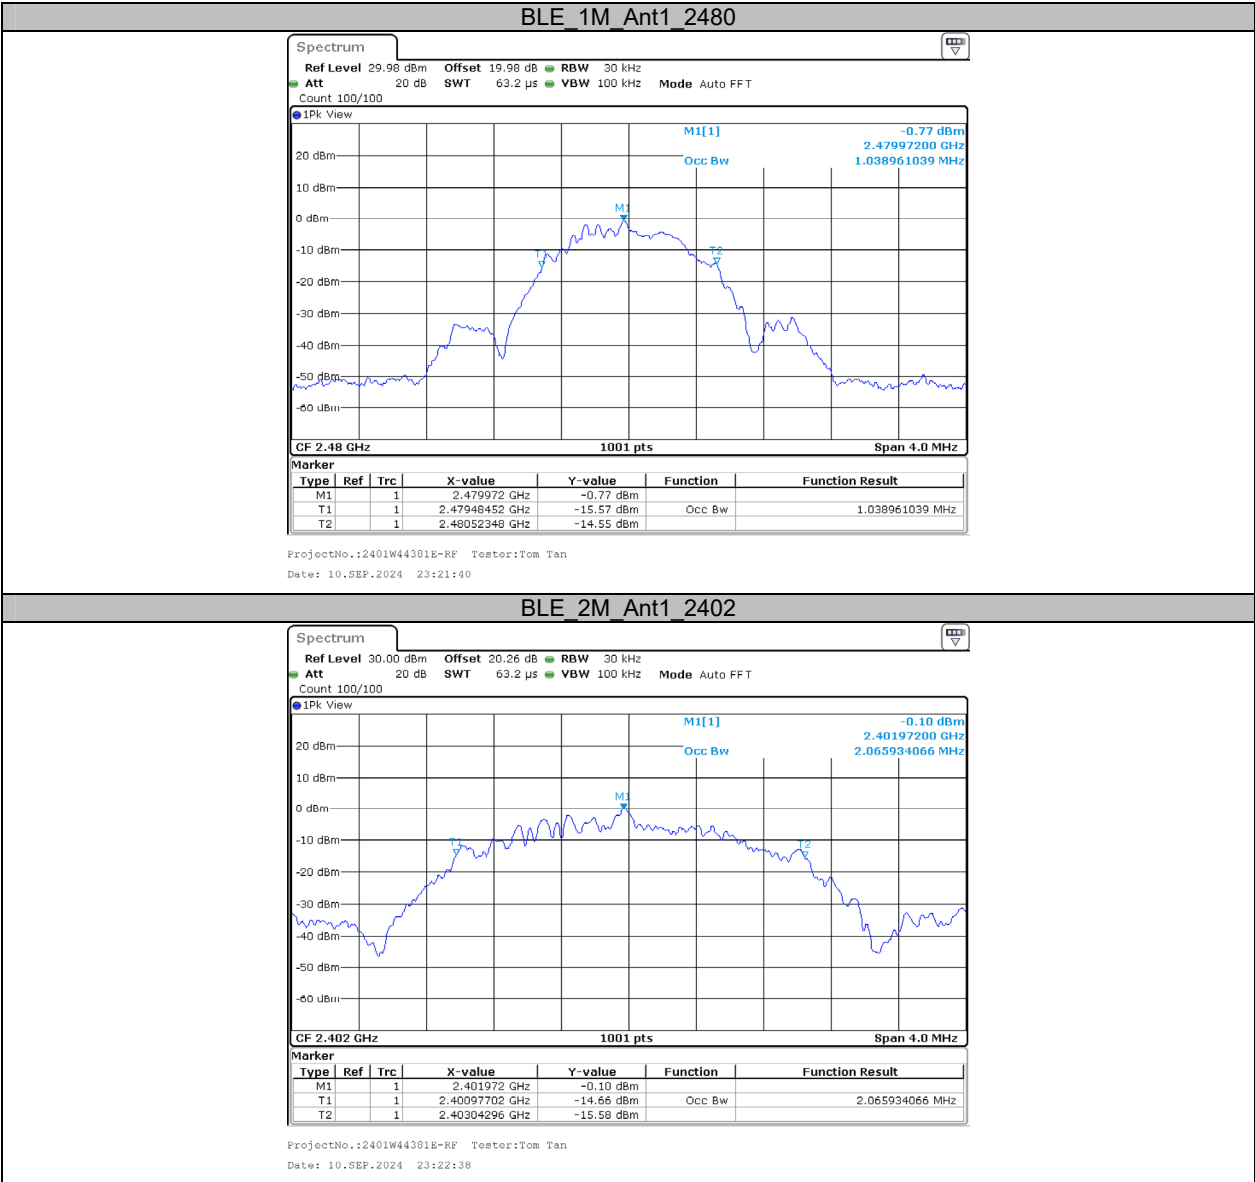


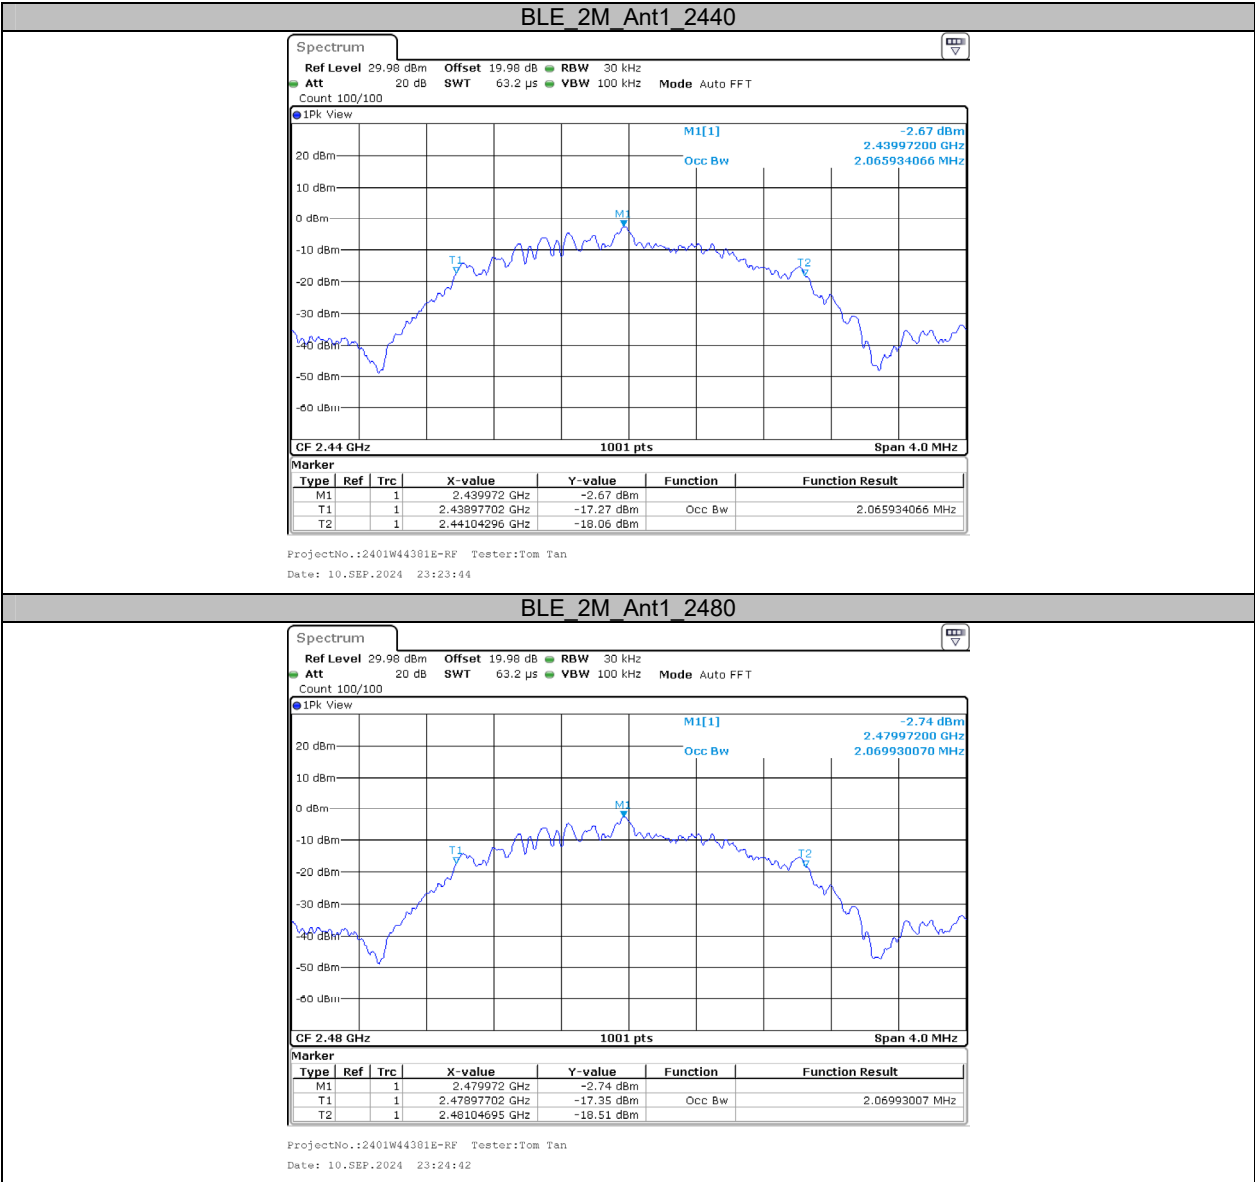


Appendix C: Maximum conducted output power**Test Result Peak**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	7.13	≤30	PASS
		2440	5.75	≤30	PASS
		2480	4.56	≤30	PASS
BLE_2M	Ant1	2402	7.12	≤30	PASS
		2440	5.73	≤30	PASS
		2480	4.51	≤30	PASS

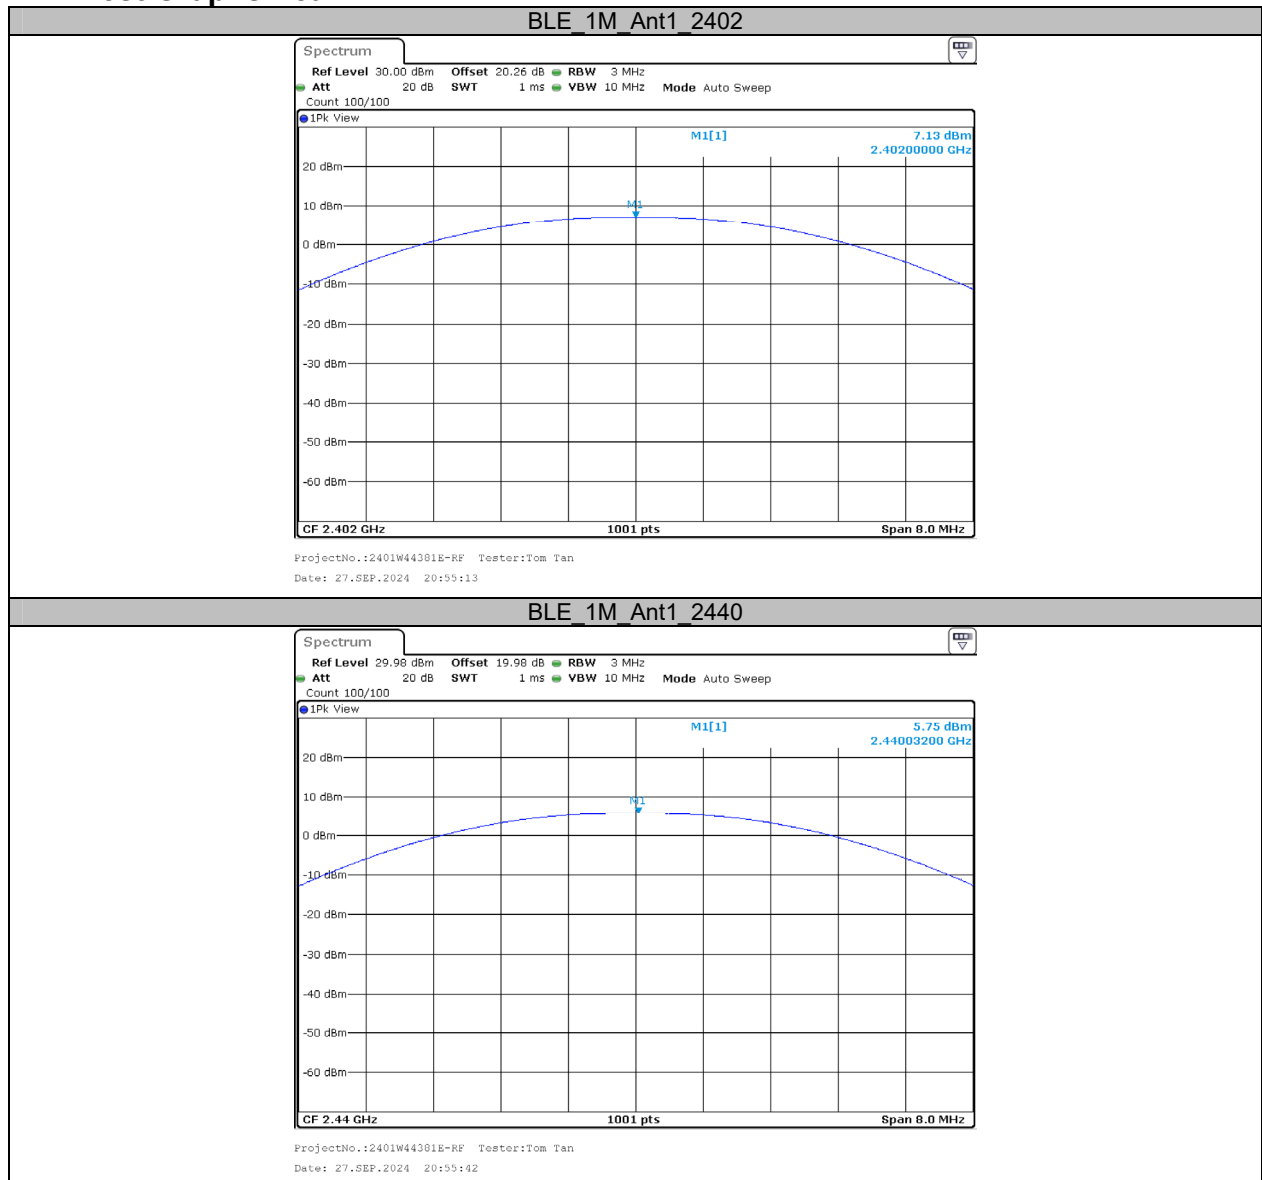
Test Graphs Peak

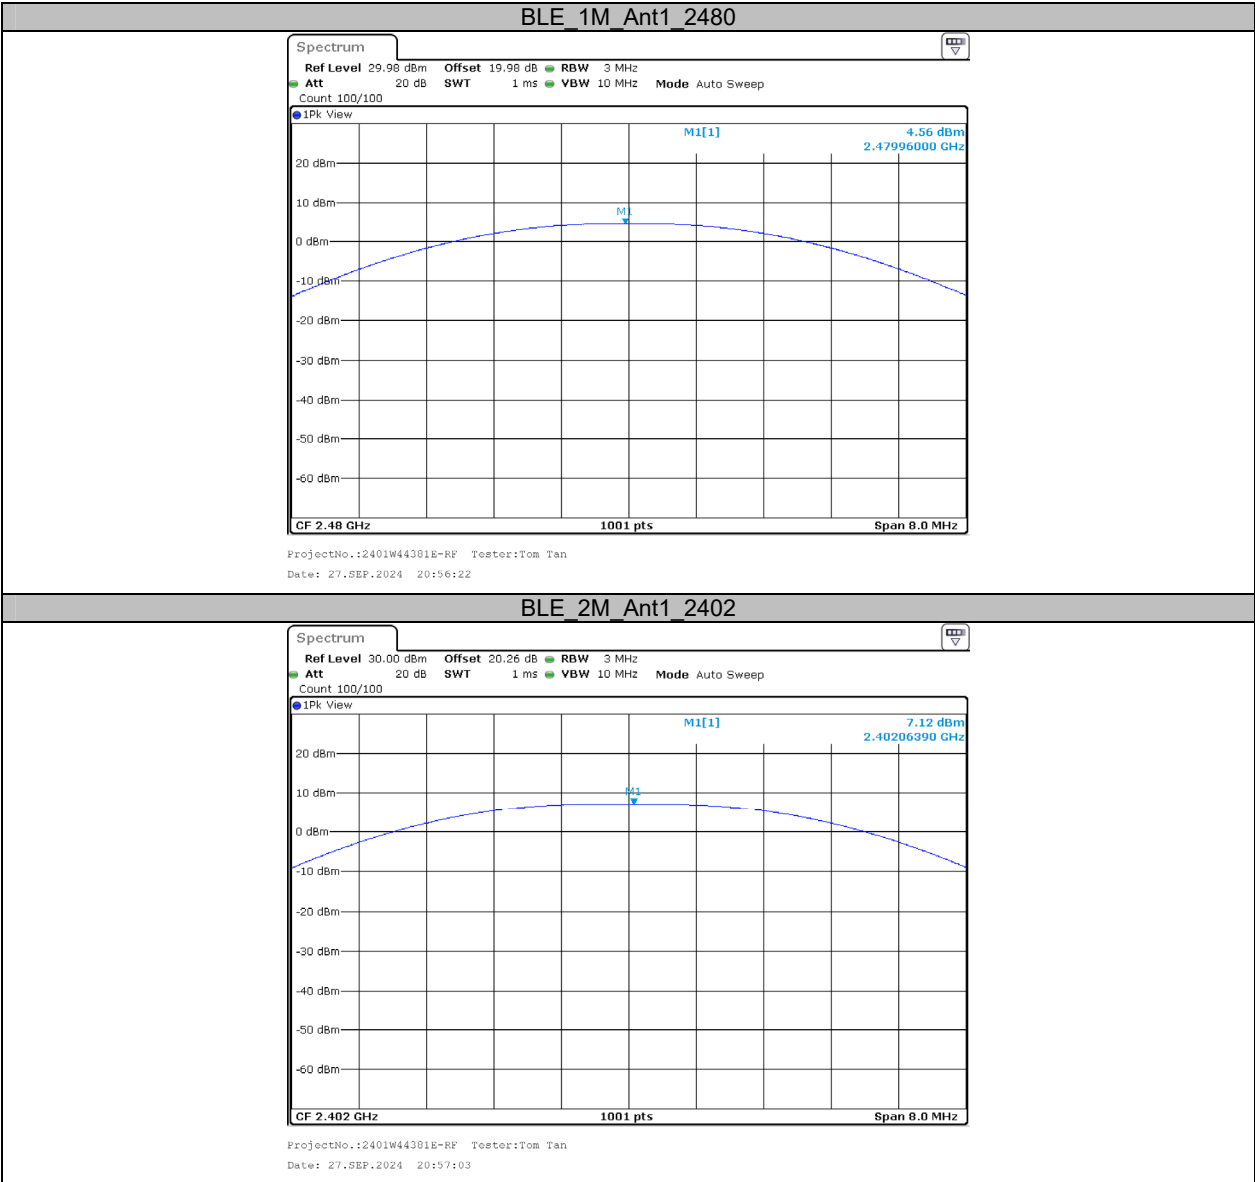


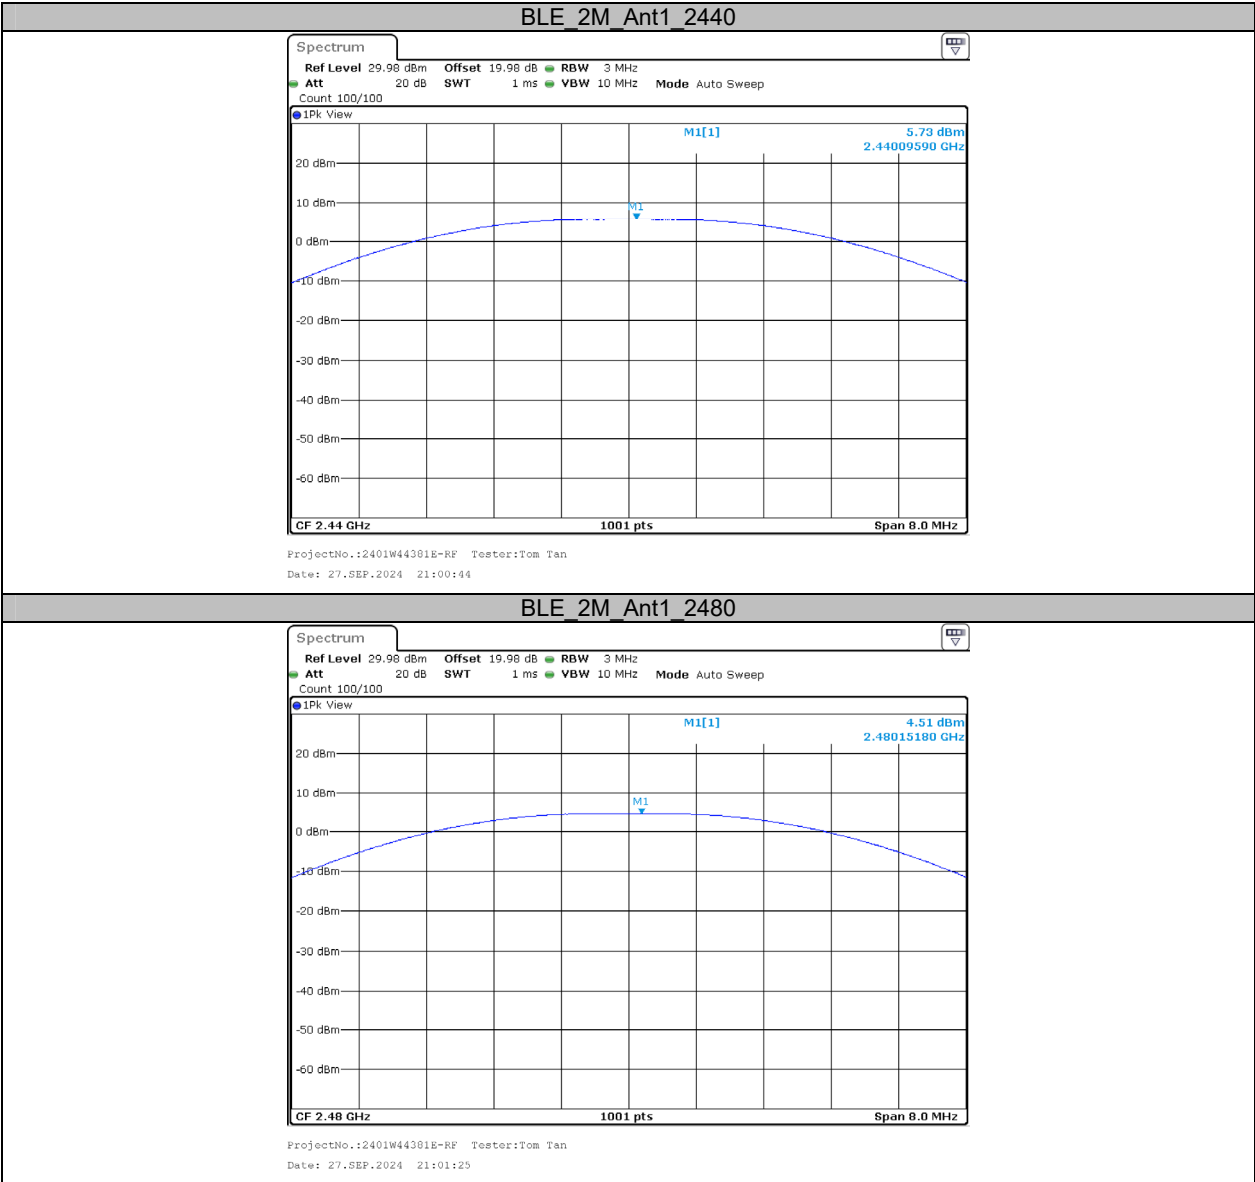


Appendix D: Maximum power spectral density**Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.45	≤8.00	PASS
		2440	-11.90	≤8.00	PASS
		2480	-12.01	≤8.00	PASS
BLE_2M	Ant1	2402	-11.96	≤8.00	PASS
		2440	-14.43	≤8.00	PASS
		2480	-14.54	≤8.00	PASS

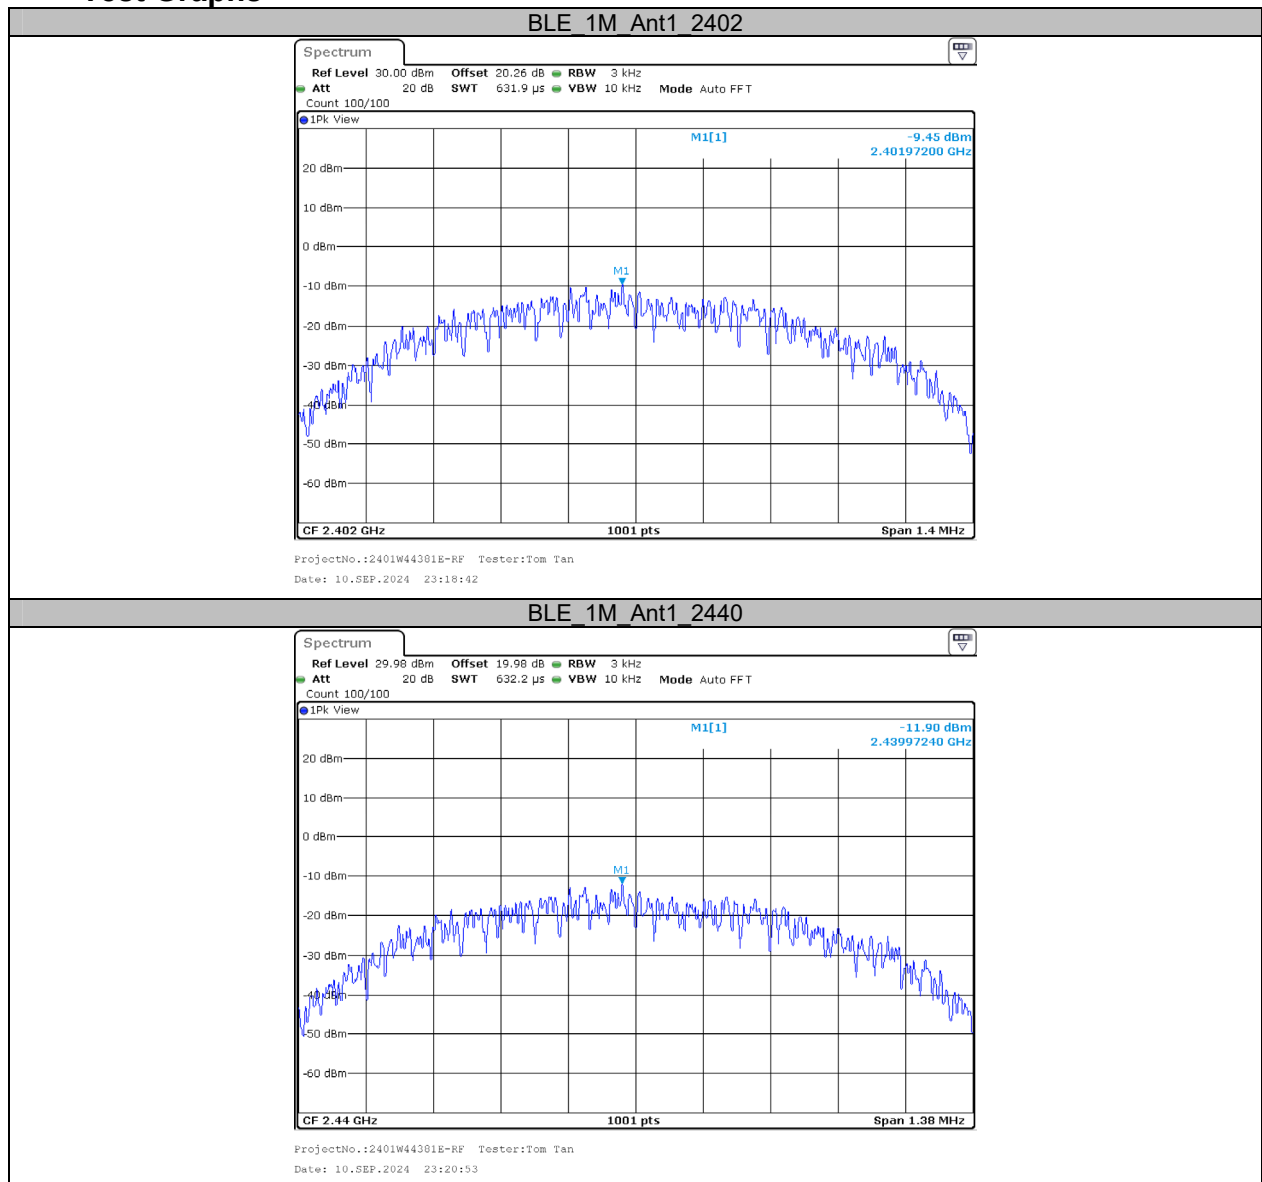
Test Graphs

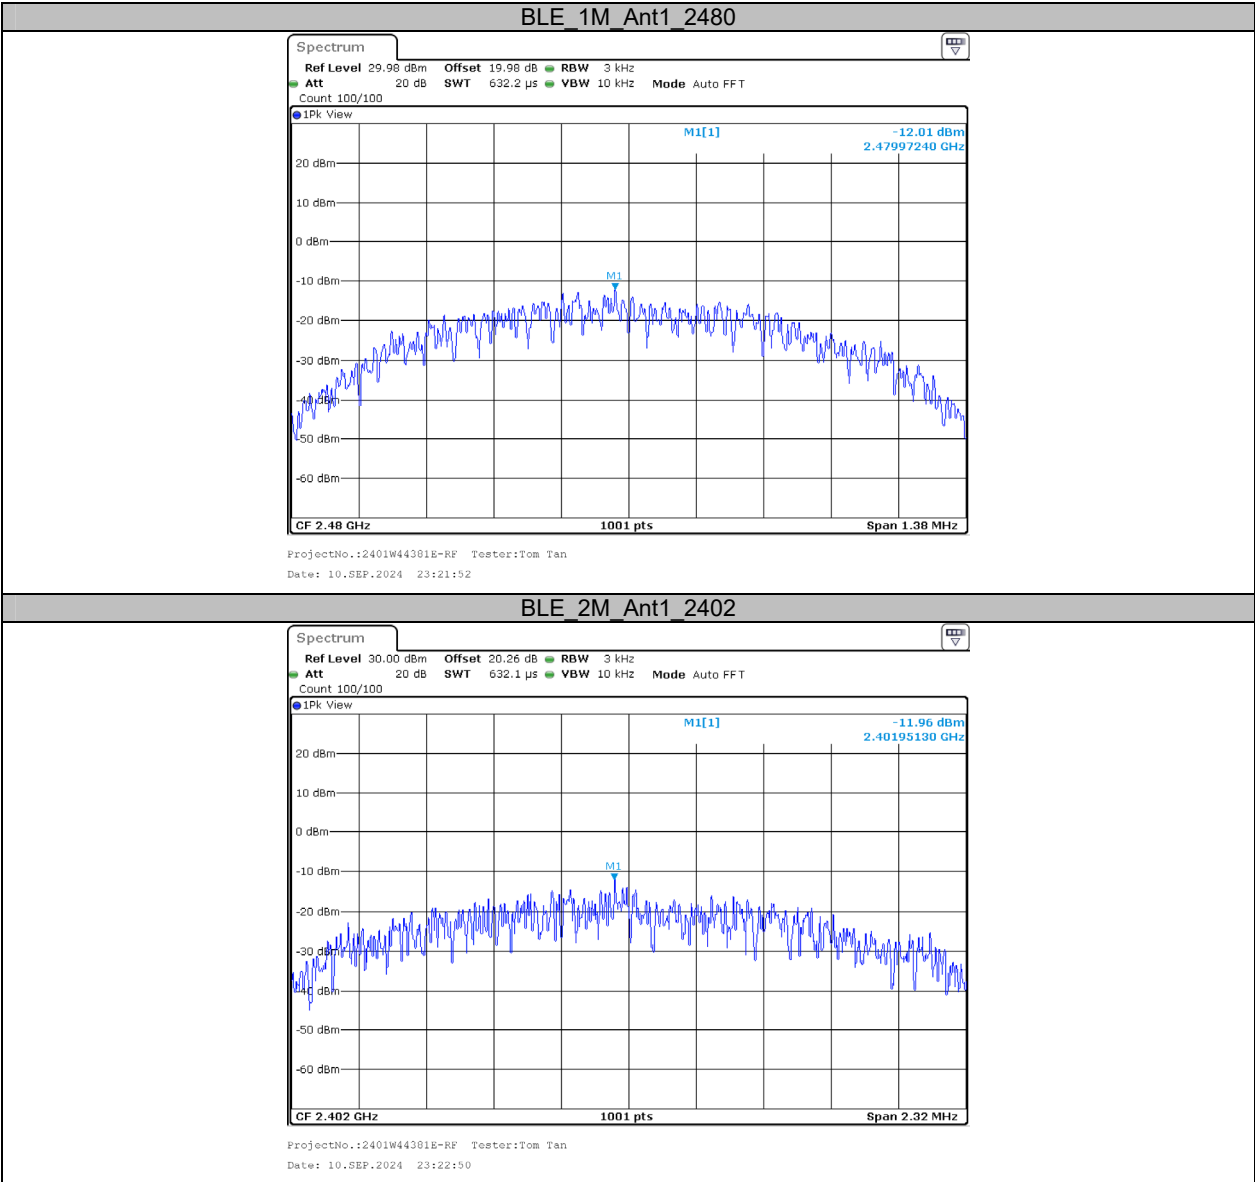


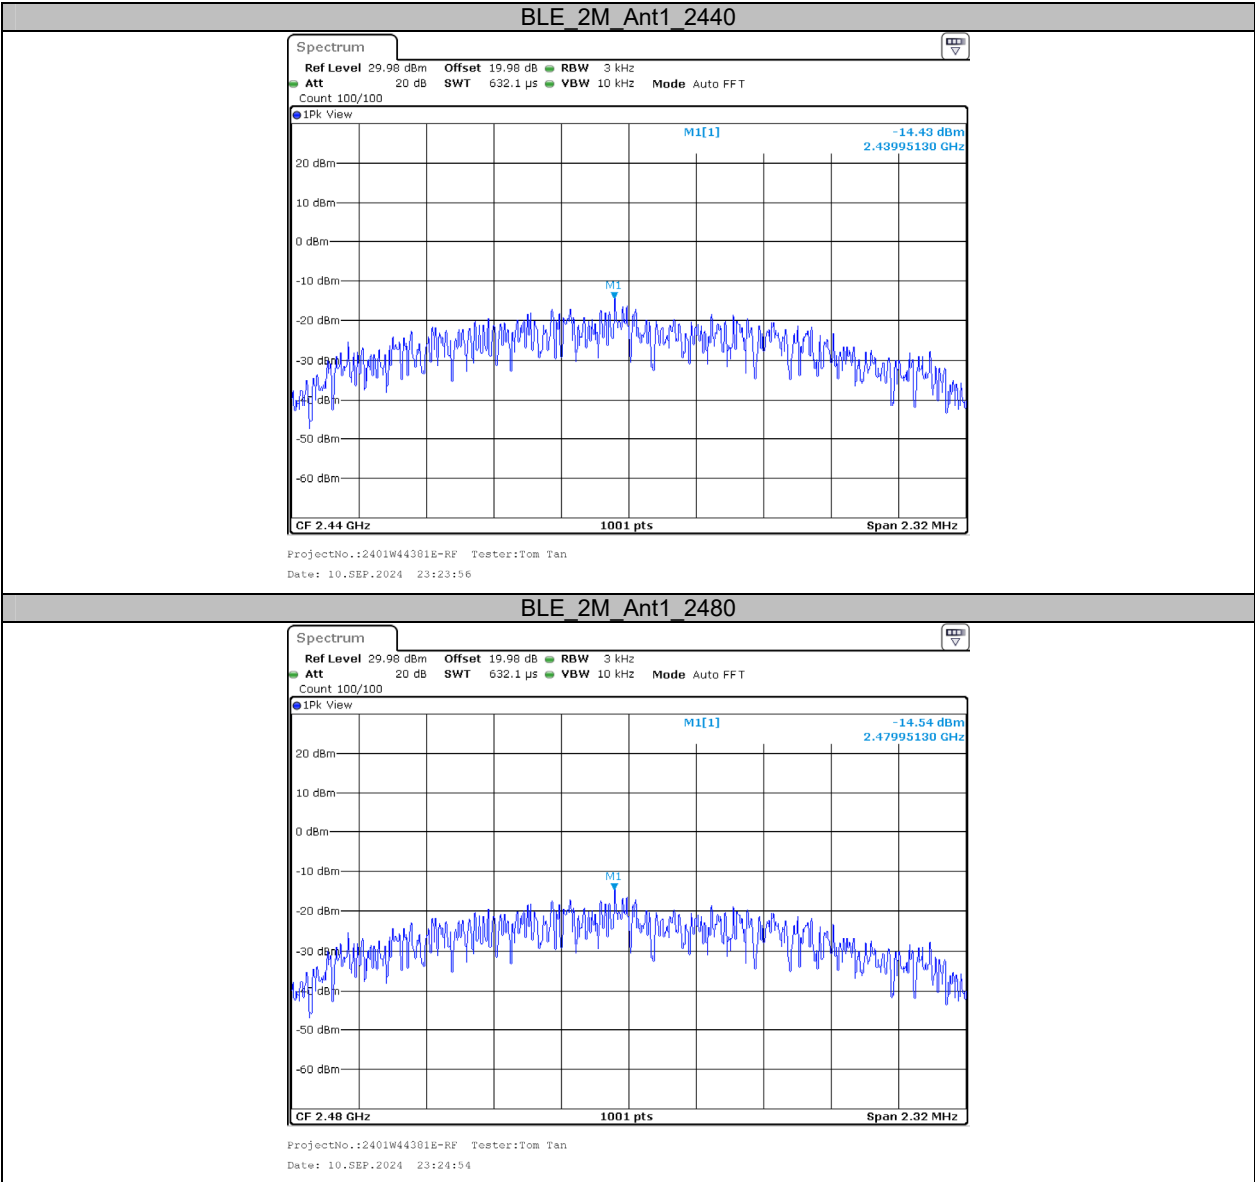

Appendix E: Band edge measurements


Test Graphs

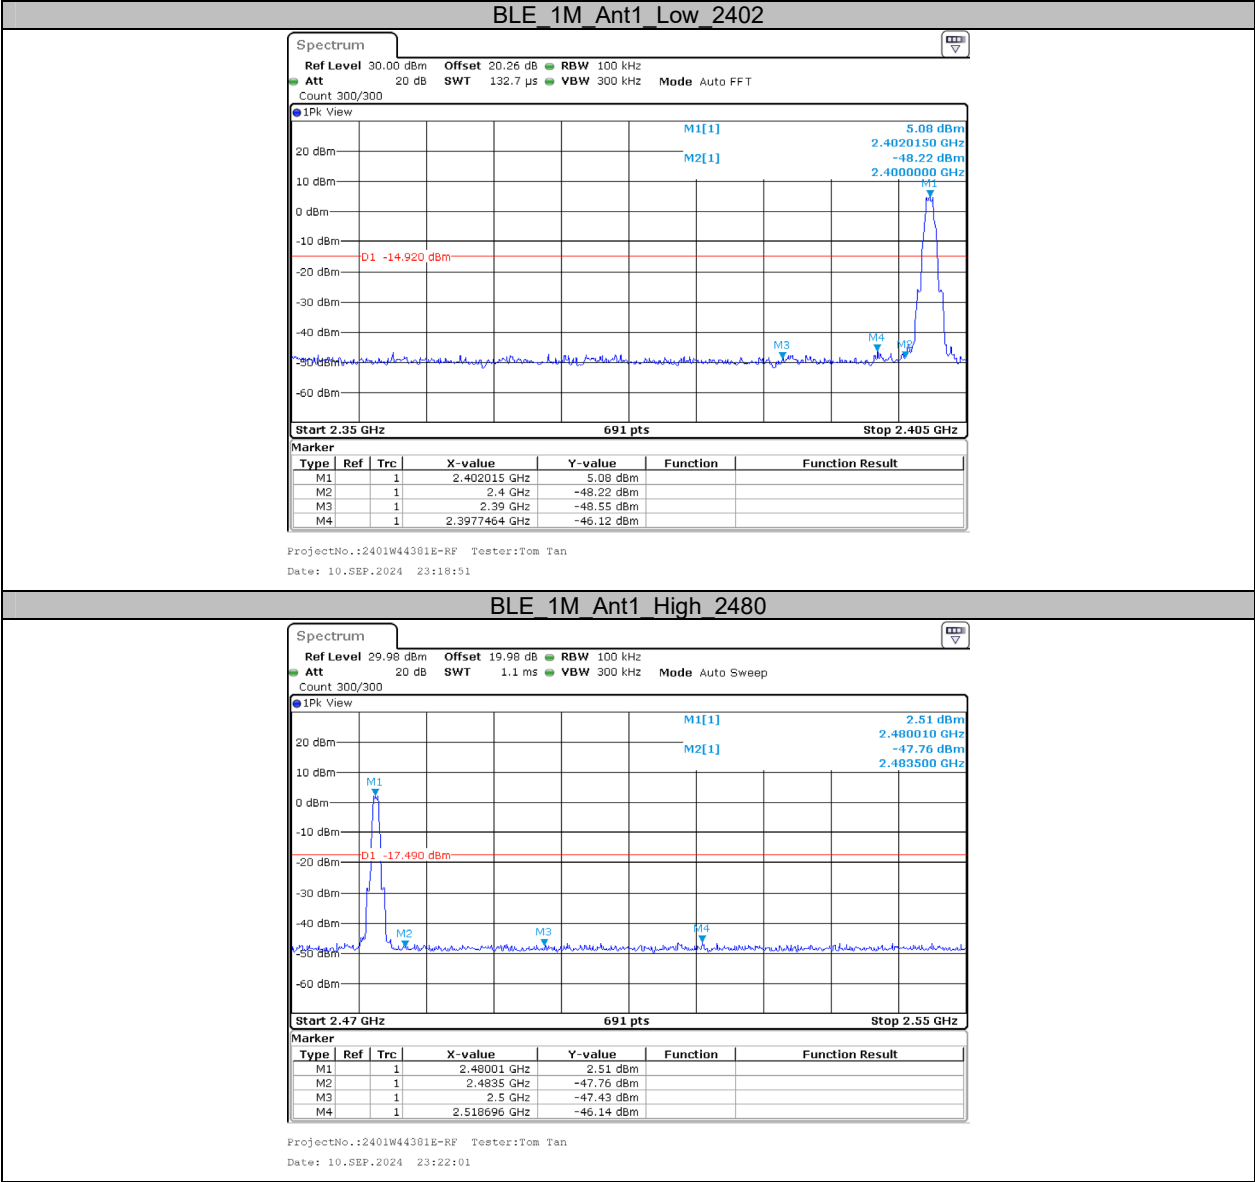

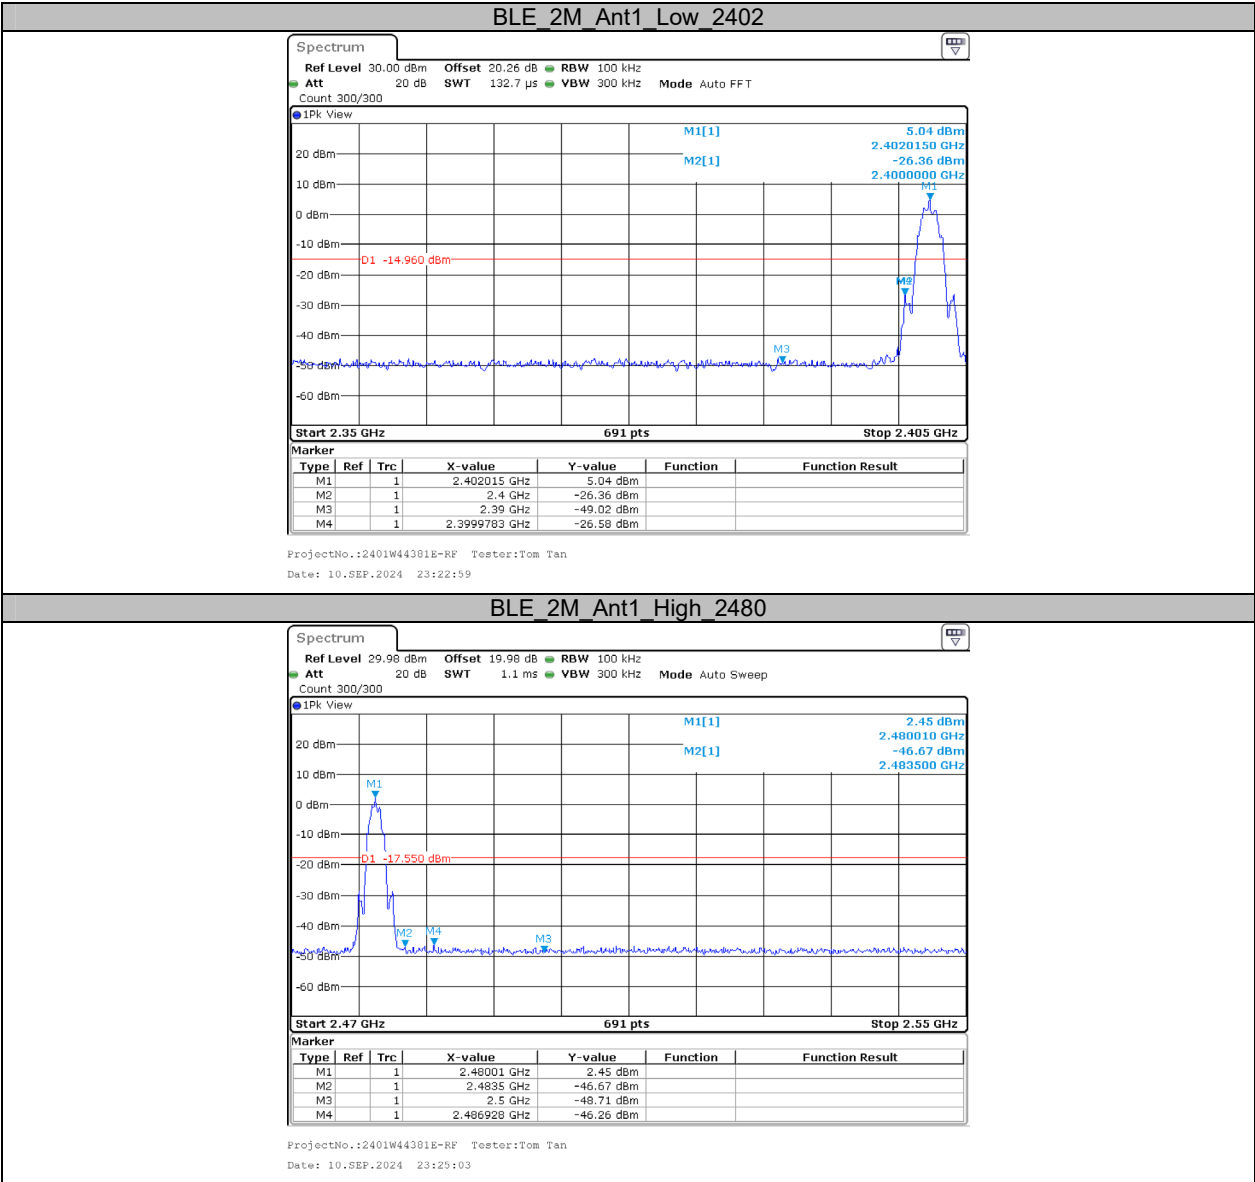

Appendix F: Duty Cycle**Test Result**

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T _{ON} [Hz]	VBW Setting [Hz]
BLE_1M	Ant1	2440	0.38	0.63	60.32	2632	3000
BLE_2M	Ant1	2440	0.20	0.63	31.75	5000	5000

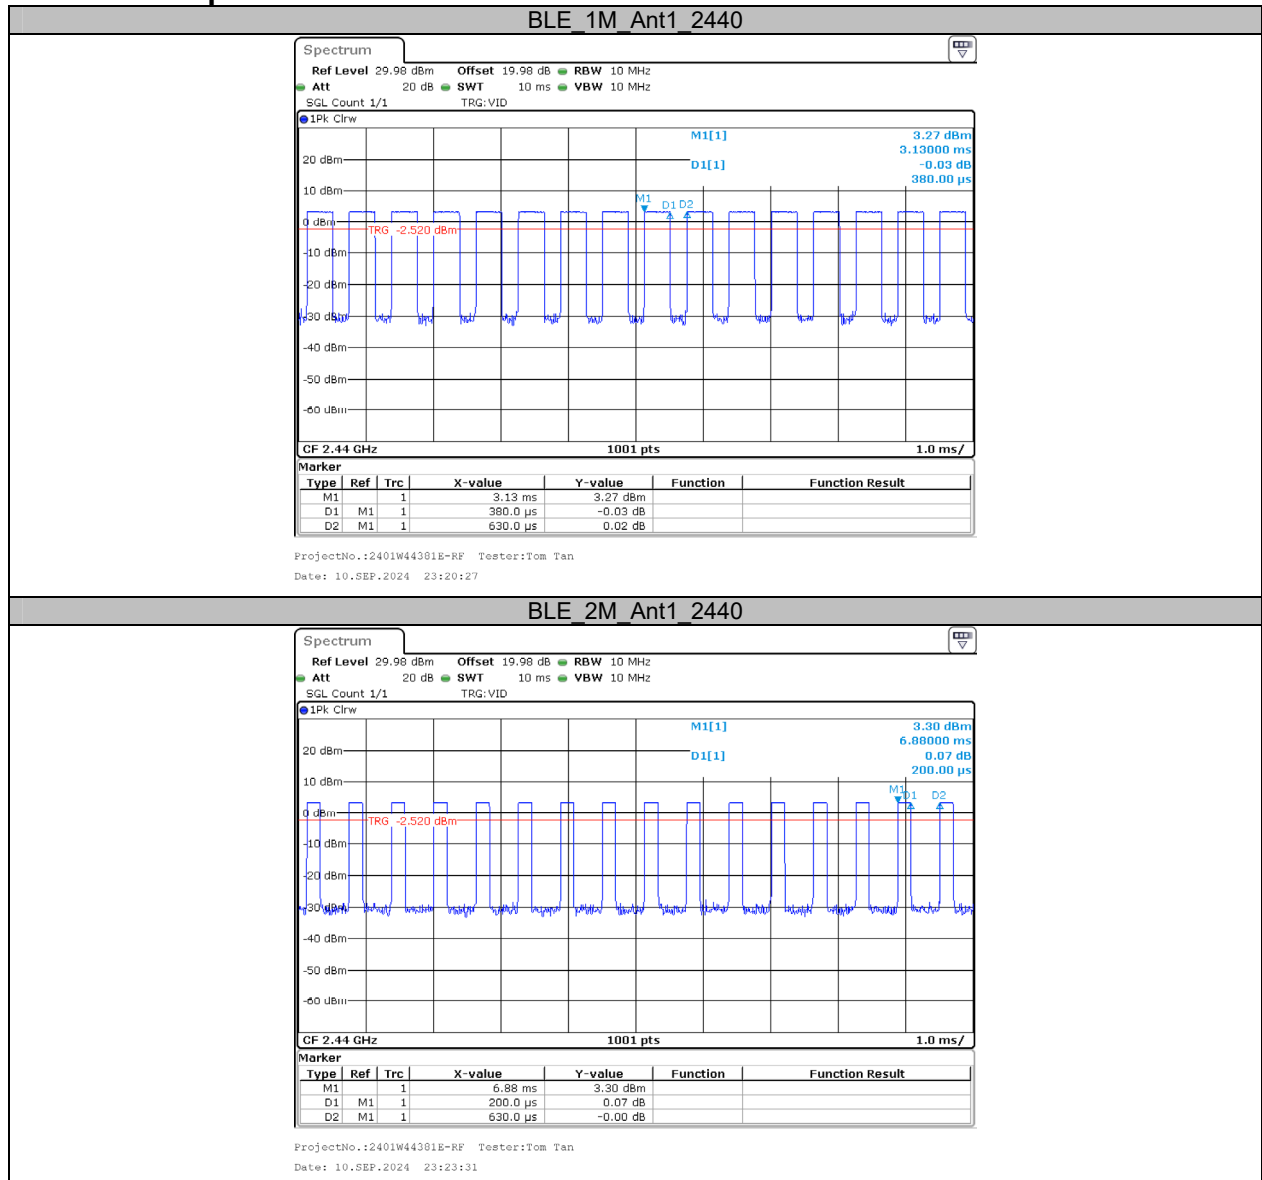Test Graphs


Appendix – Wi-Fi


Appendix A: DTS Bandwidth


Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.08	0.5	PASS
	Ant2	2412	8.08	0.5	PASS
	Ant1	2437	8.04	0.5	PASS
	Ant2	2437	8.04	0.5	PASS
	Ant1	2462	8.08	0.5	PASS
	Ant2	2462	9.08	0.5	PASS
11G	Ant1	2412	15.12	0.5	PASS
	Ant2	2412	16.04	0.5	PASS
	Ant1	2437	16.04	0.5	PASS
	Ant2	2437	15.12	0.5	PASS
	Ant1	2462	15.08	0.5	PASS
	Ant2	2462	15.12	0.5	PASS
11N20MIMO	Ant1	2412	16.28	0.5	PASS
	Ant2	2412	16.96	0.5	PASS
	Ant1	2437	15.12	0.5	PASS
	Ant2	2437	16.92	0.5	PASS
	Ant1	2462	16.00	0.5	PASS
	Ant2	2462	15.72	0.5	PASS
11N40MIMO	Ant1	2422	35.12	0.5	PASS
	Ant2	2422	35.12	0.5	PASS
	Ant1	2437	35.04	0.5	PASS
	Ant2	2437	35.04	0.5	PASS
	Ant1	2452	35.12	0.5	PASS
	Ant2	2452	35.12	0.5	PASS


Test Graphs

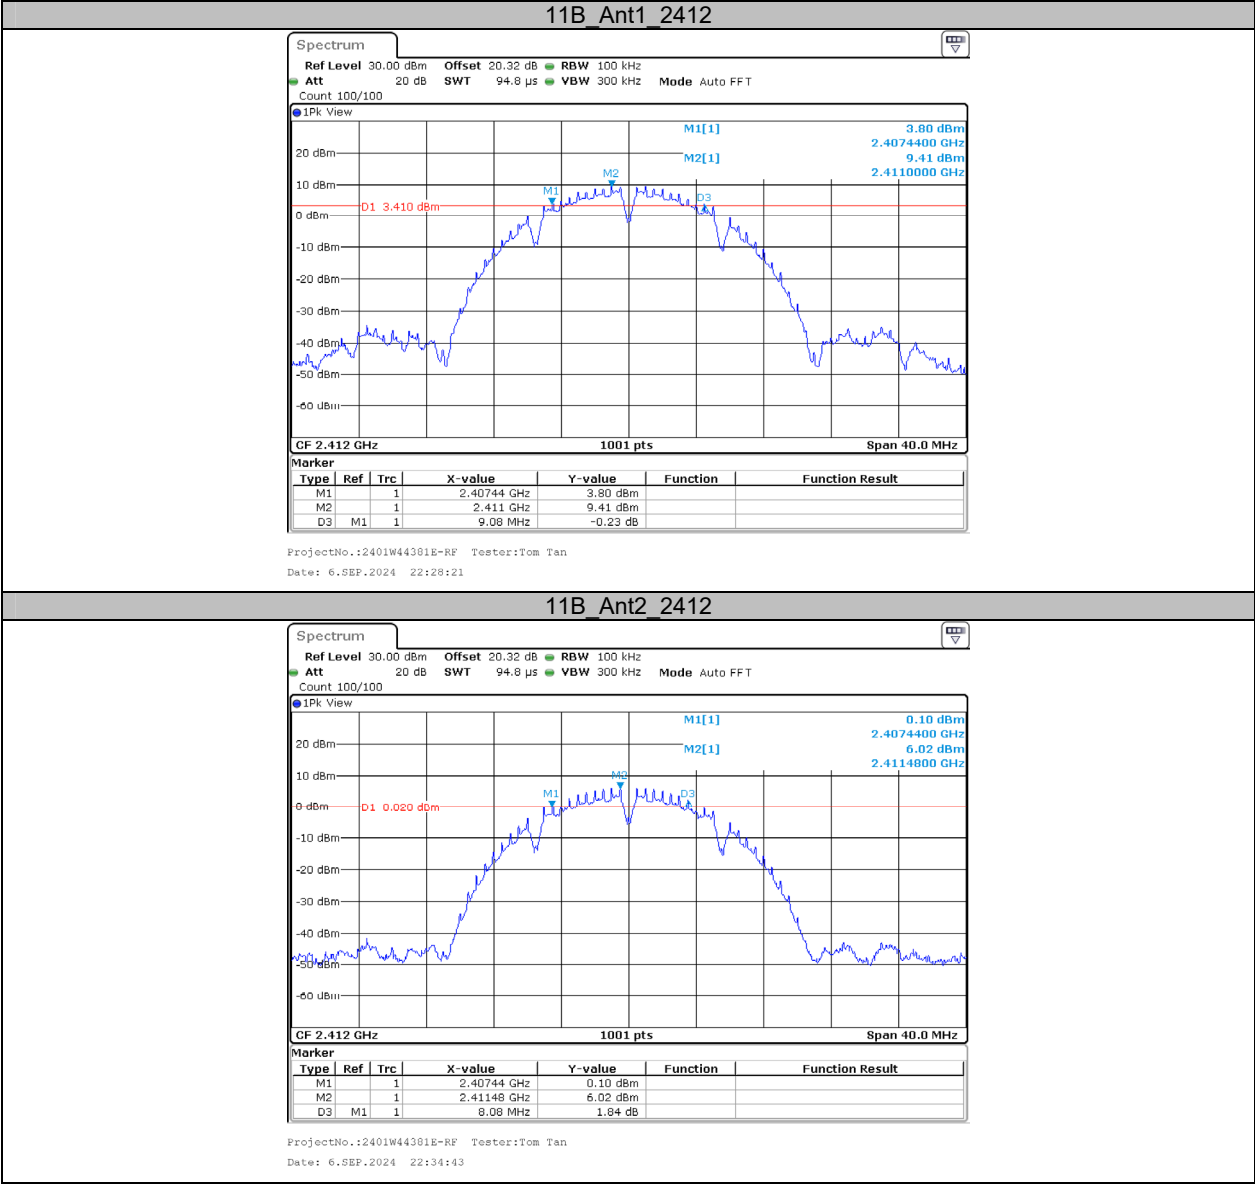


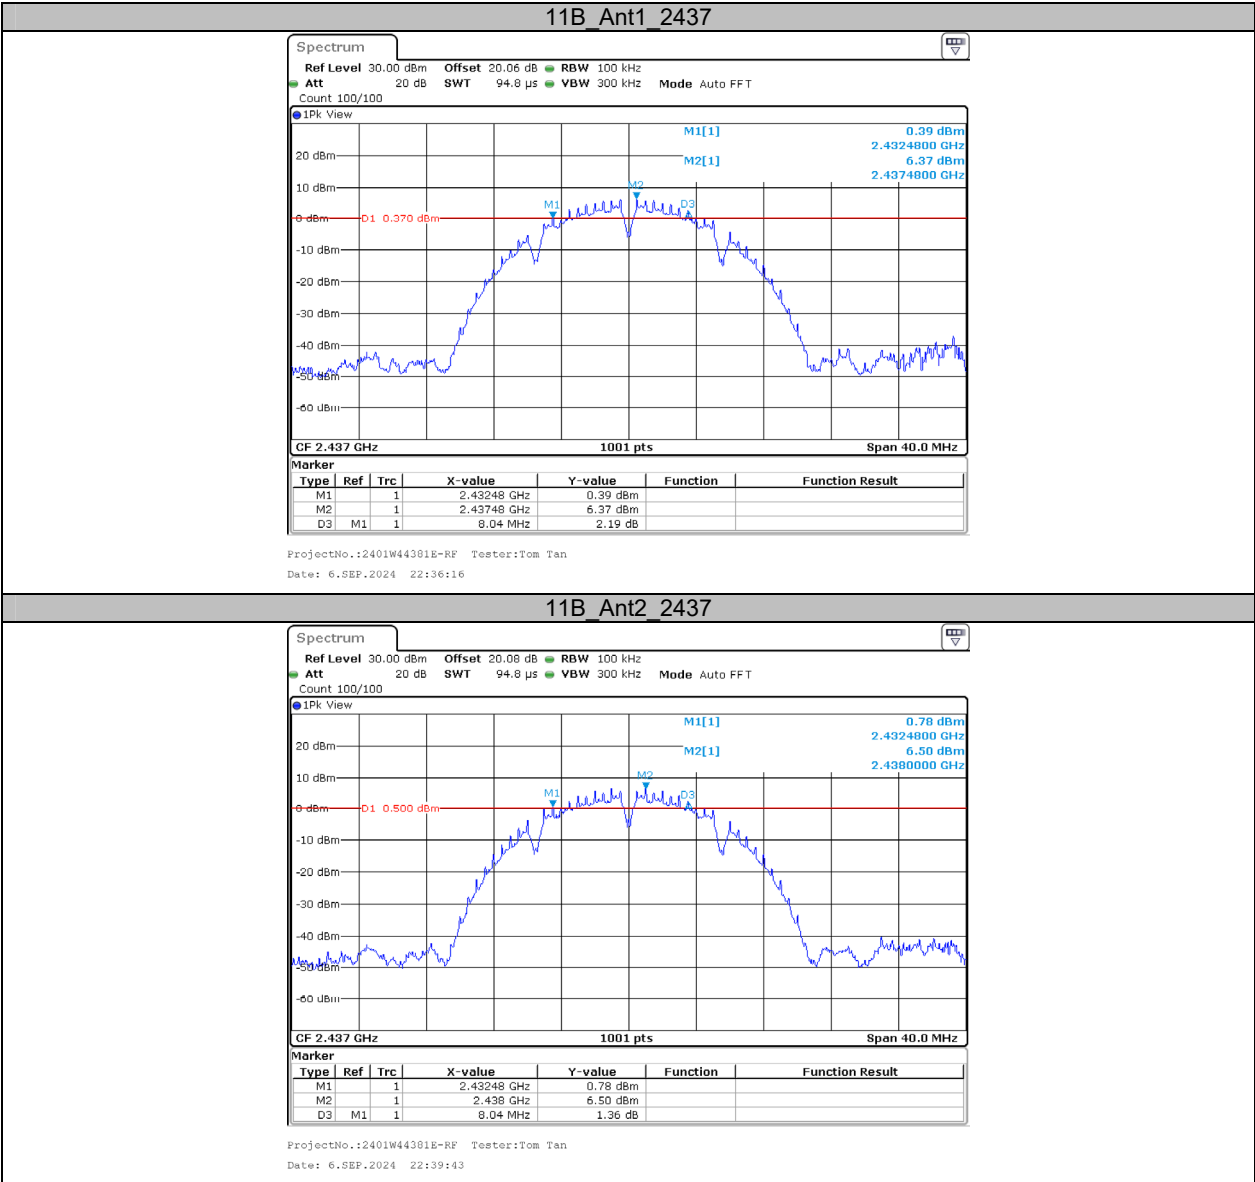


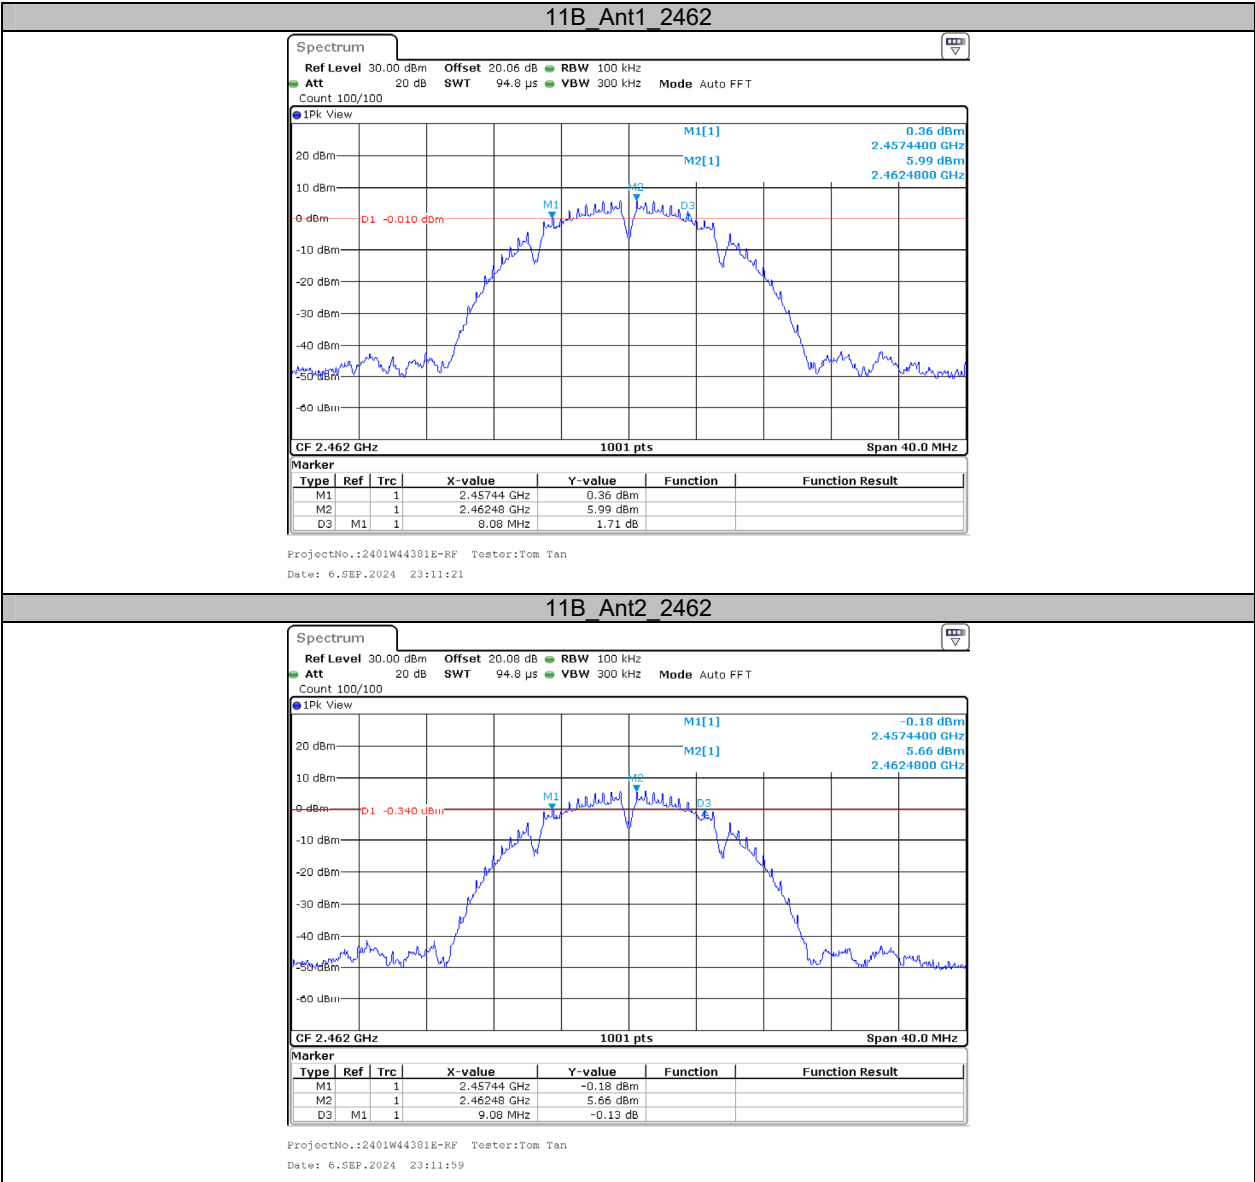


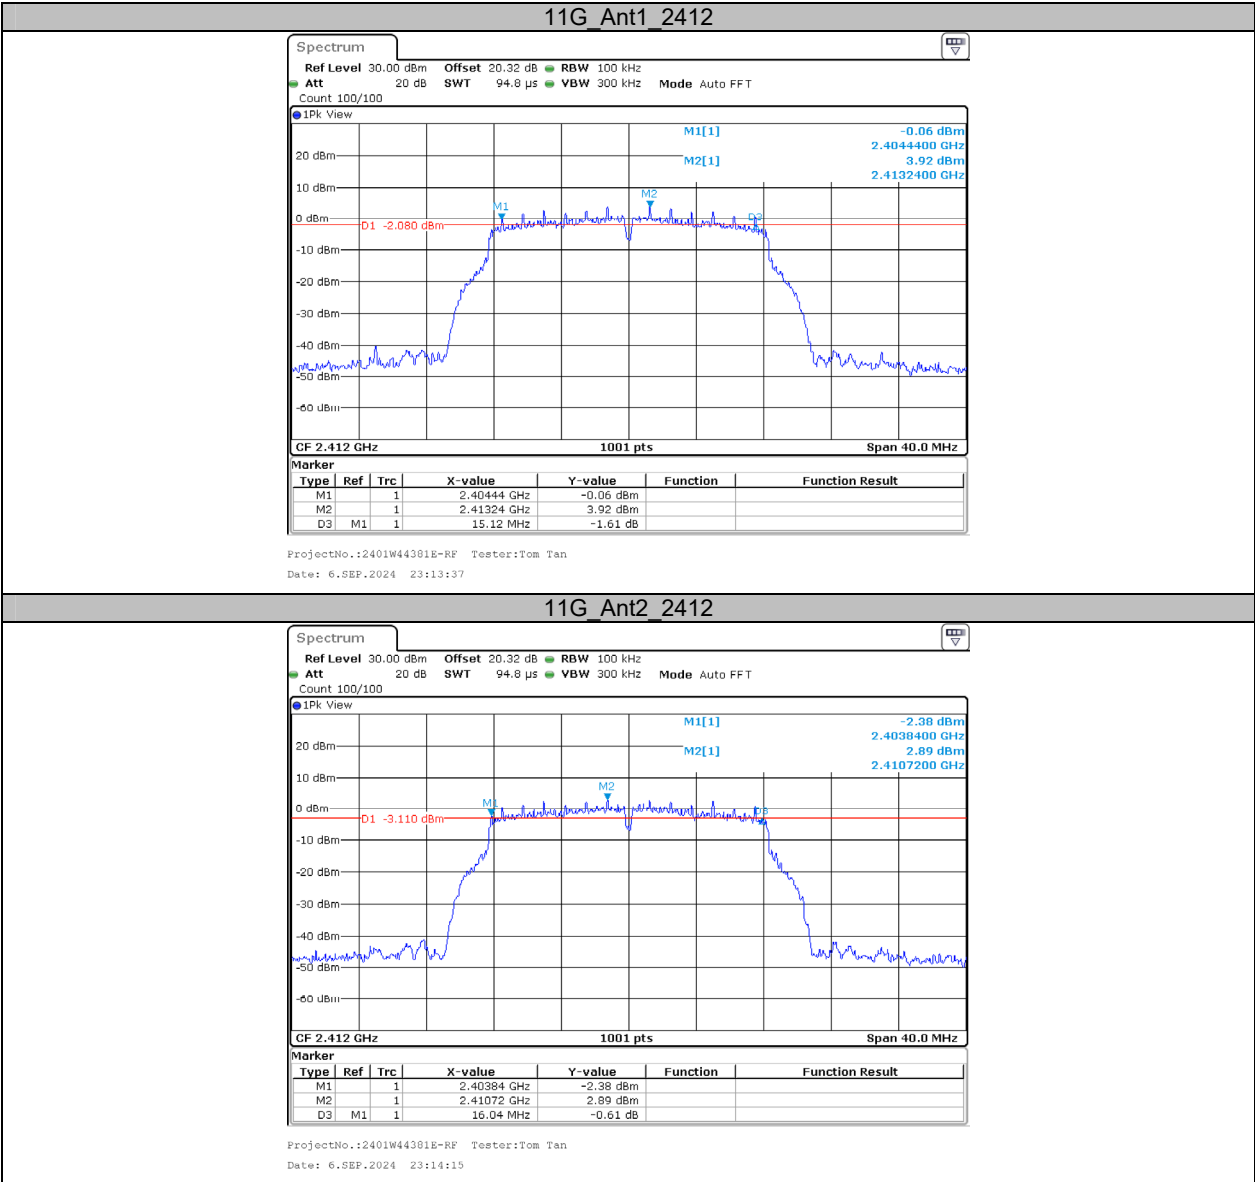


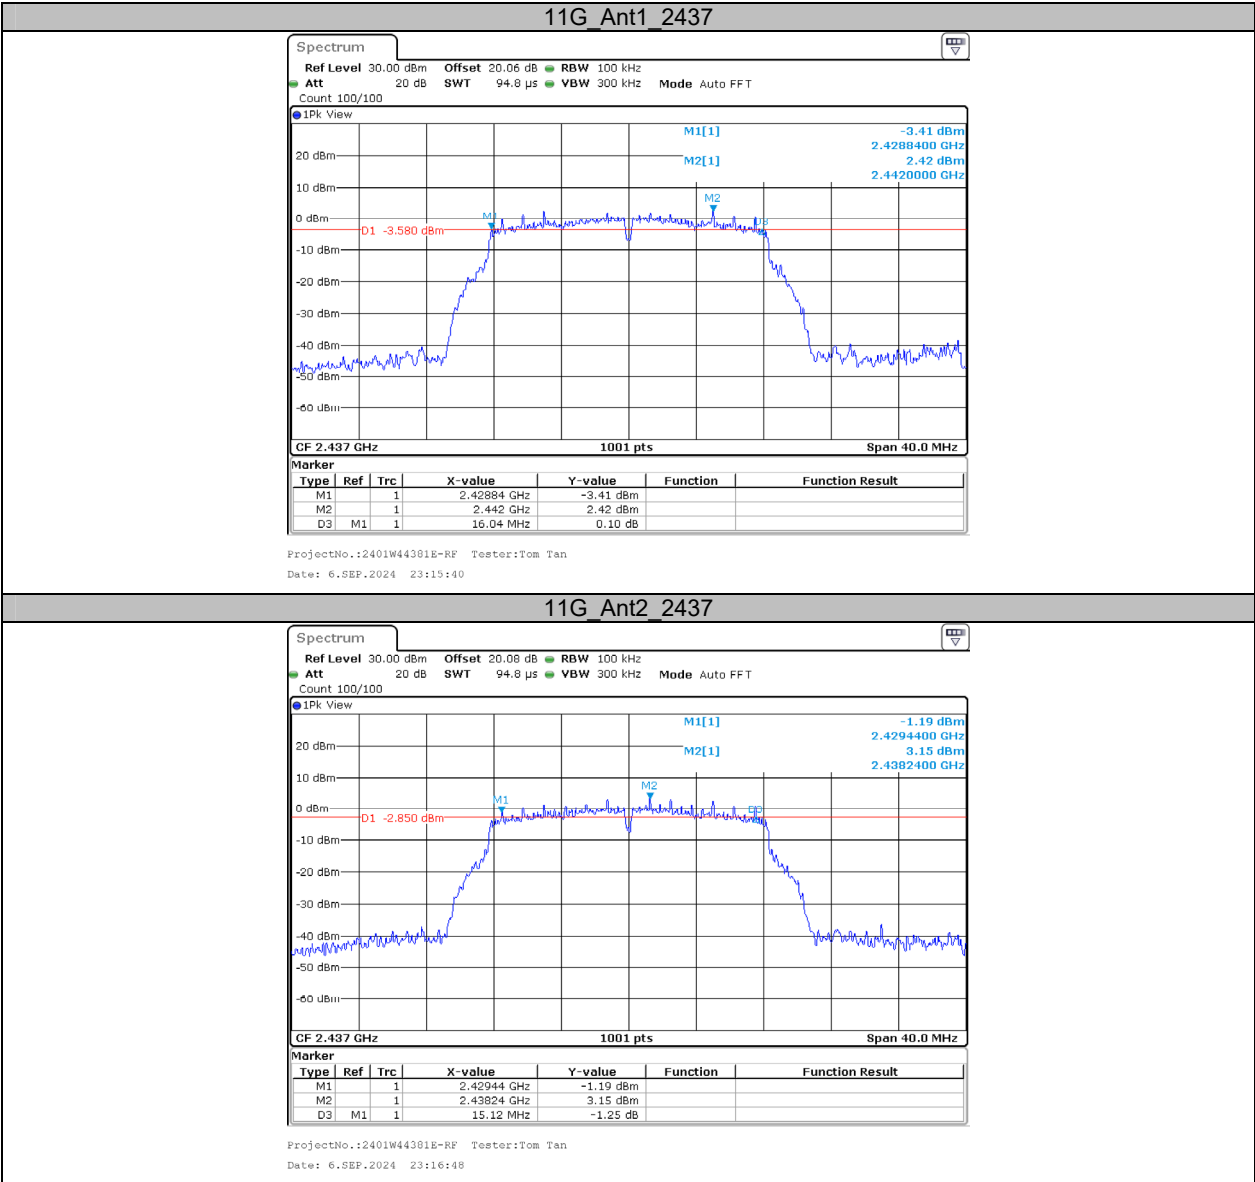


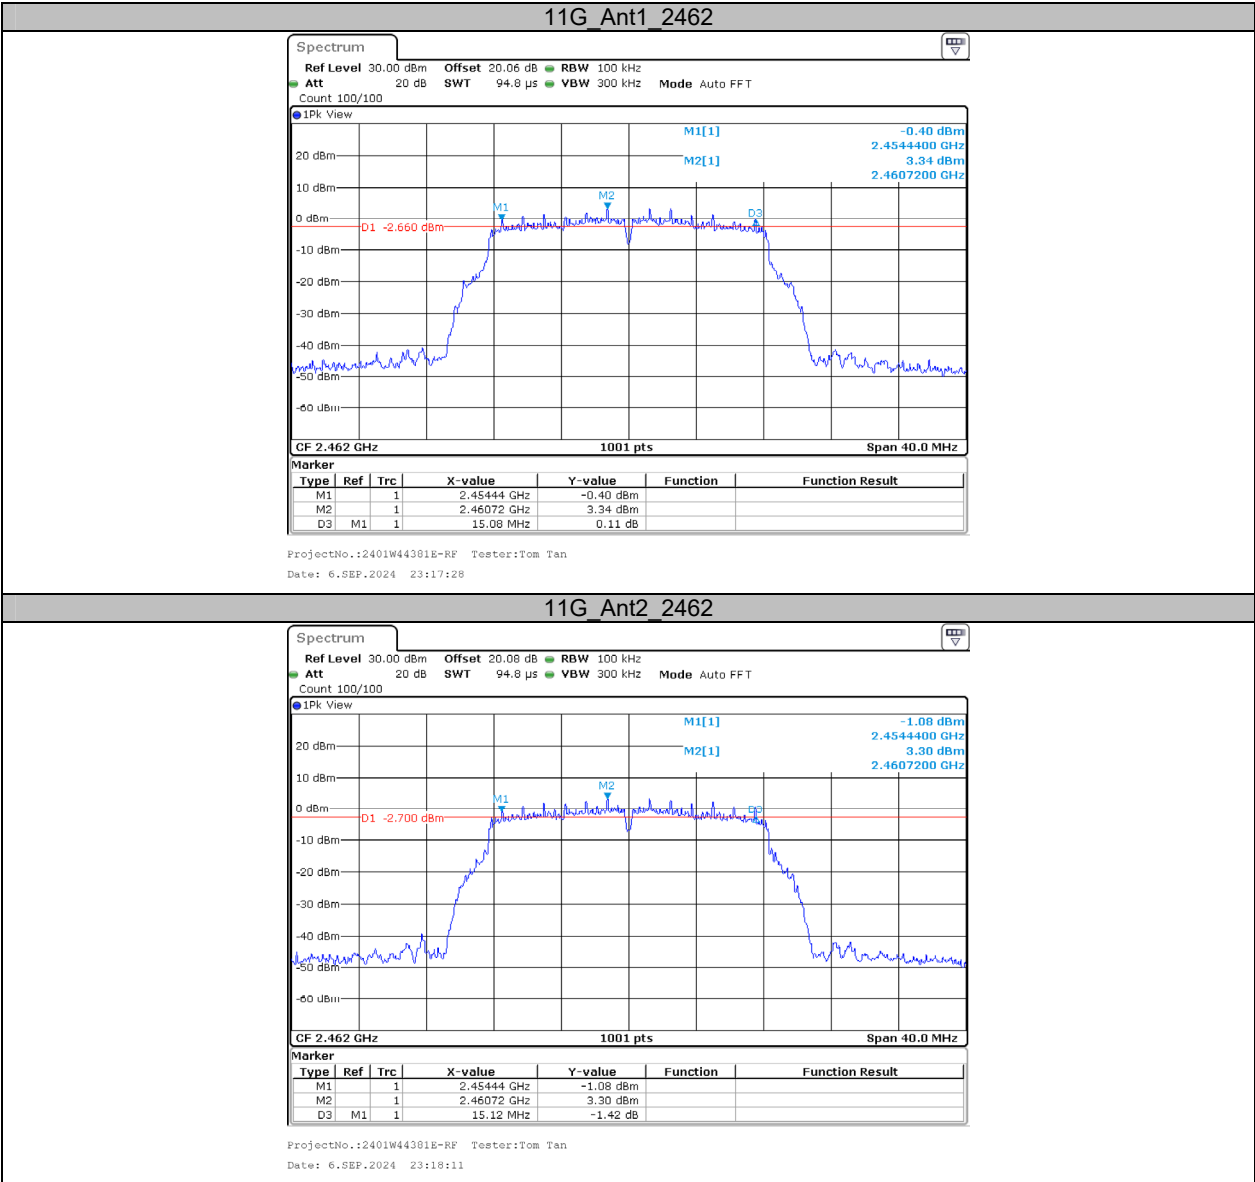


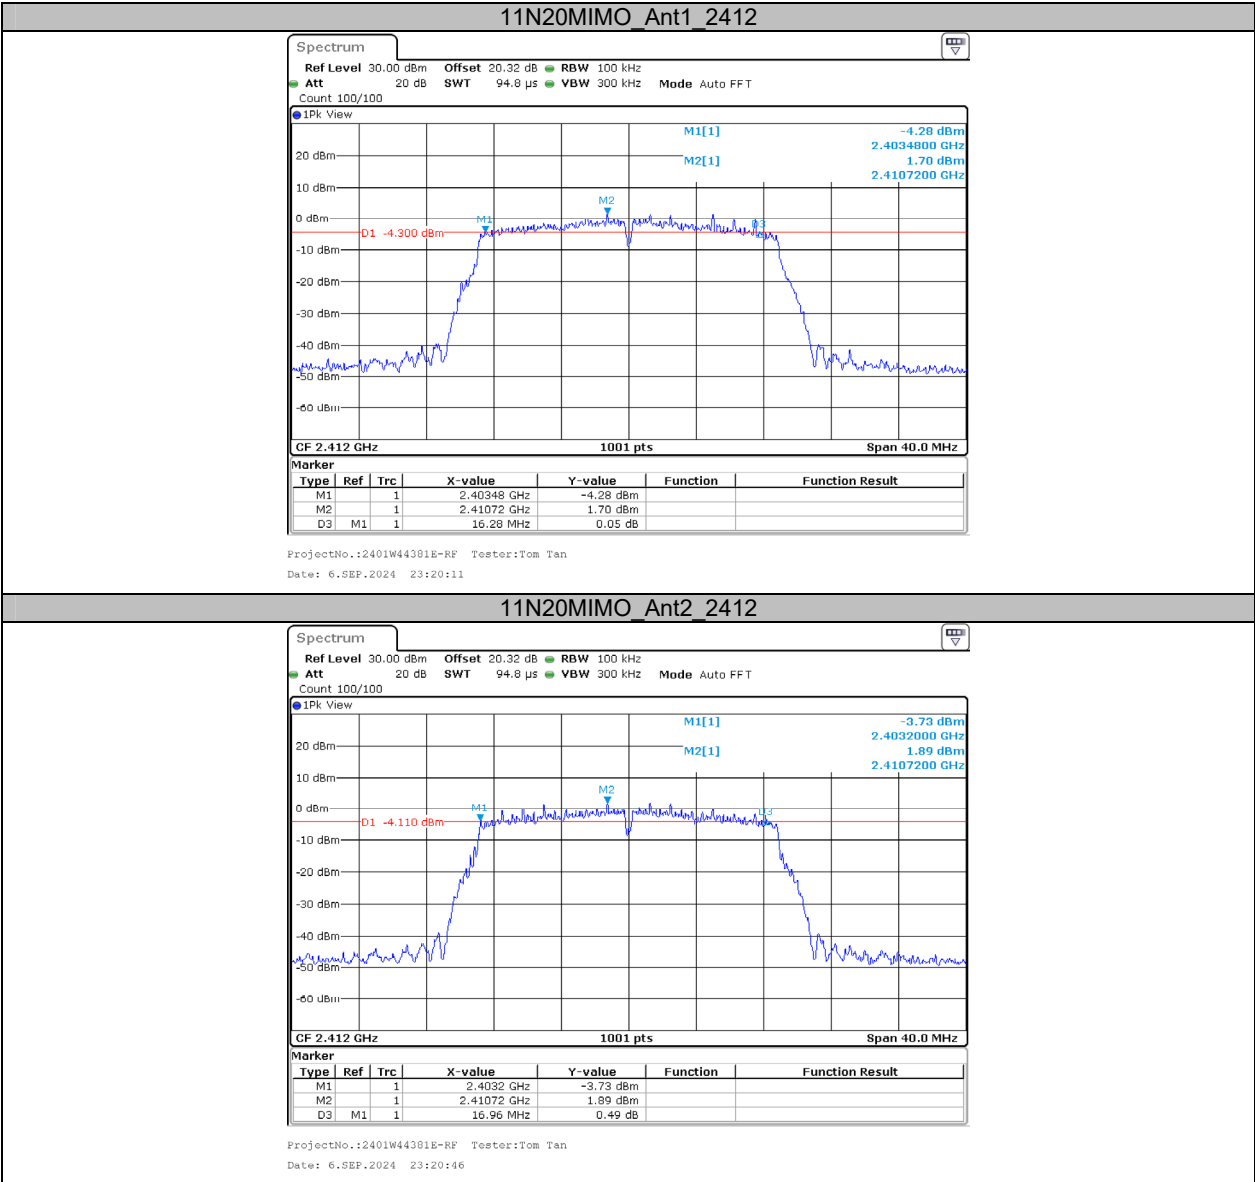


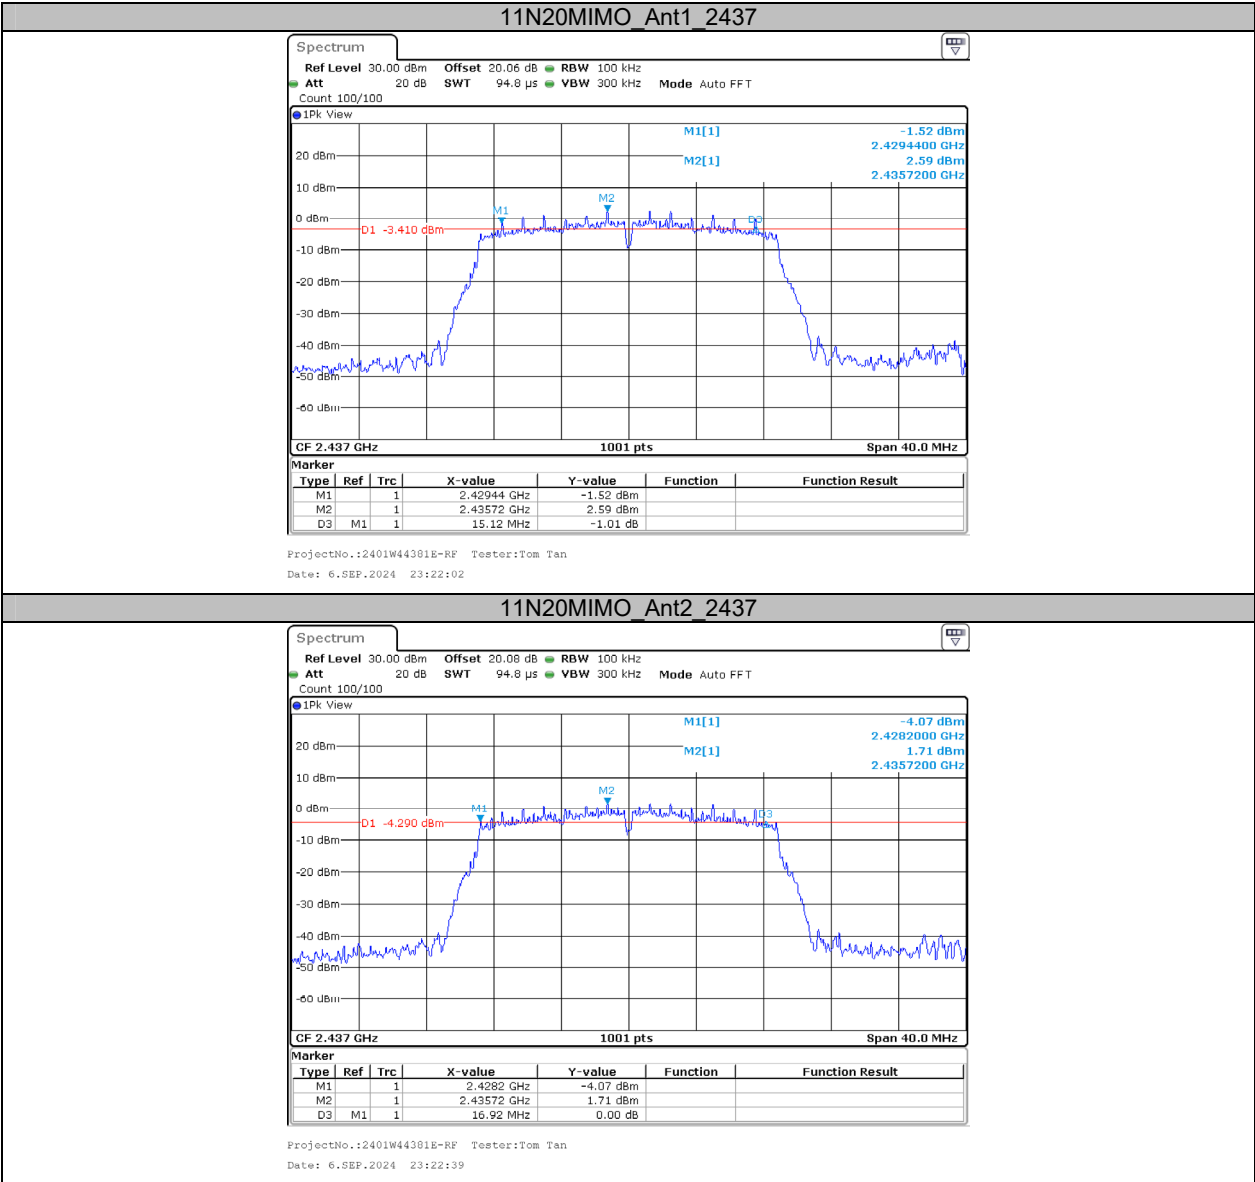

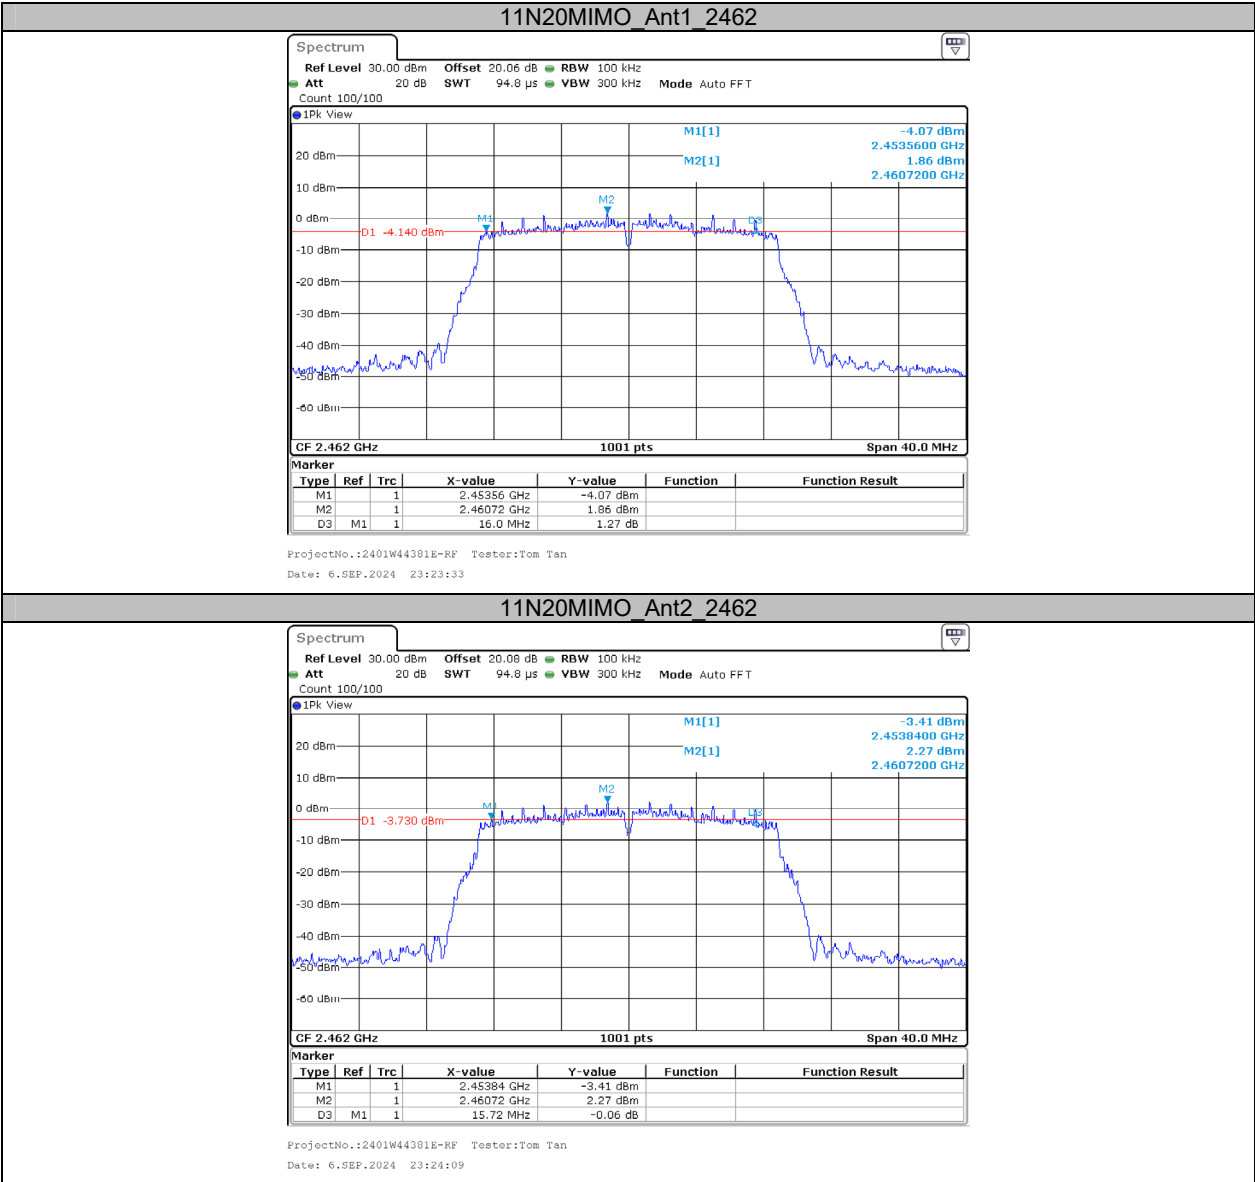

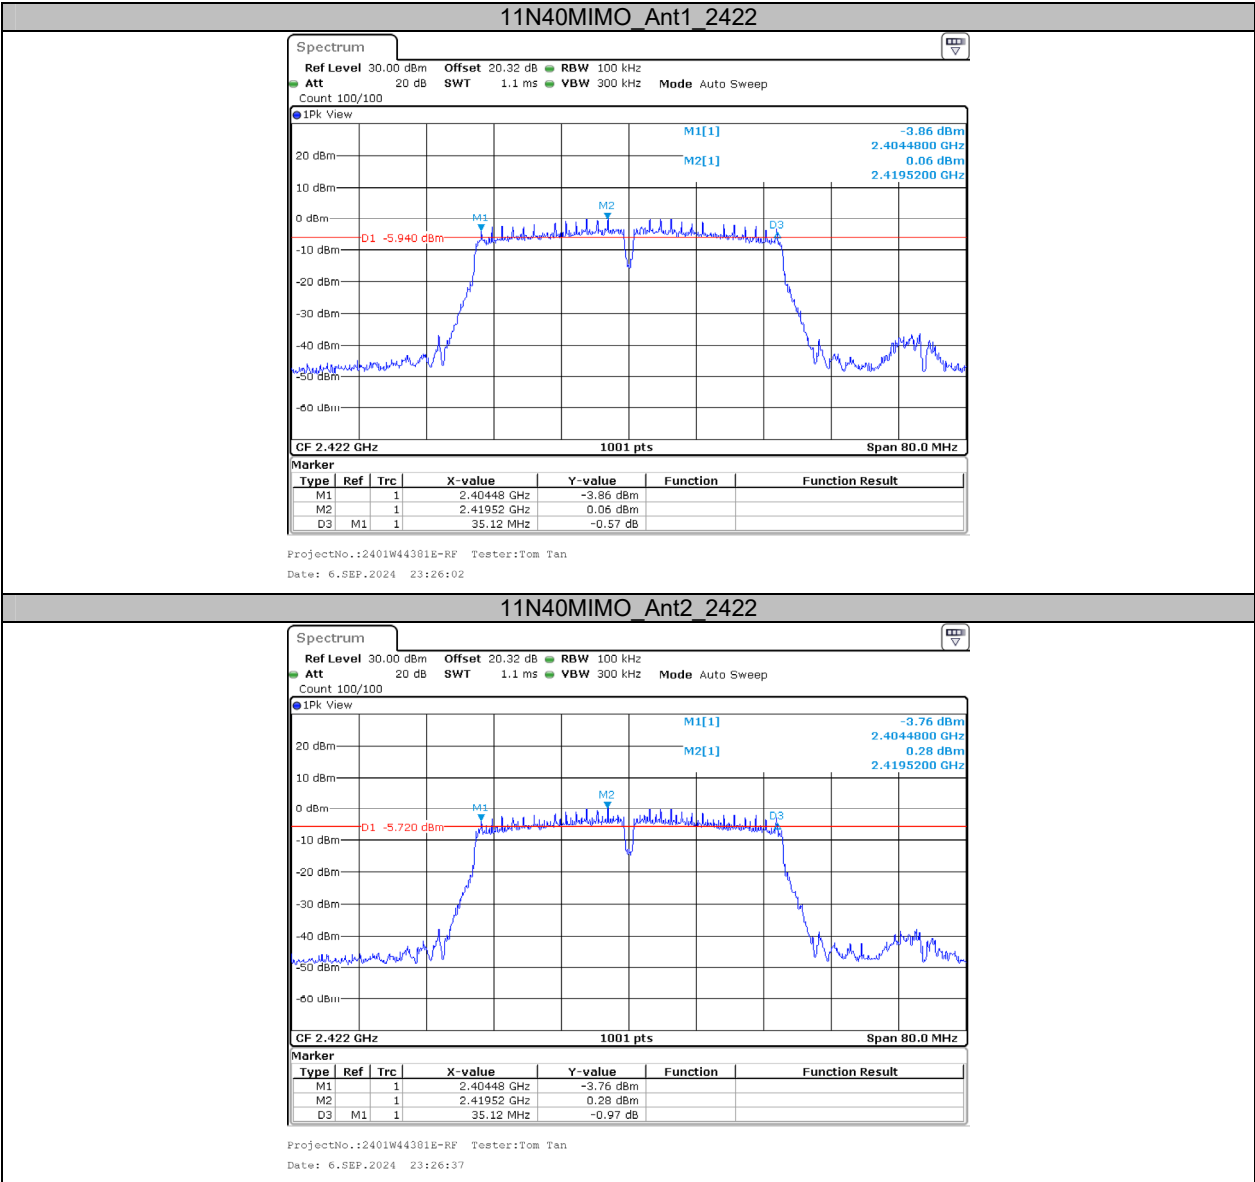

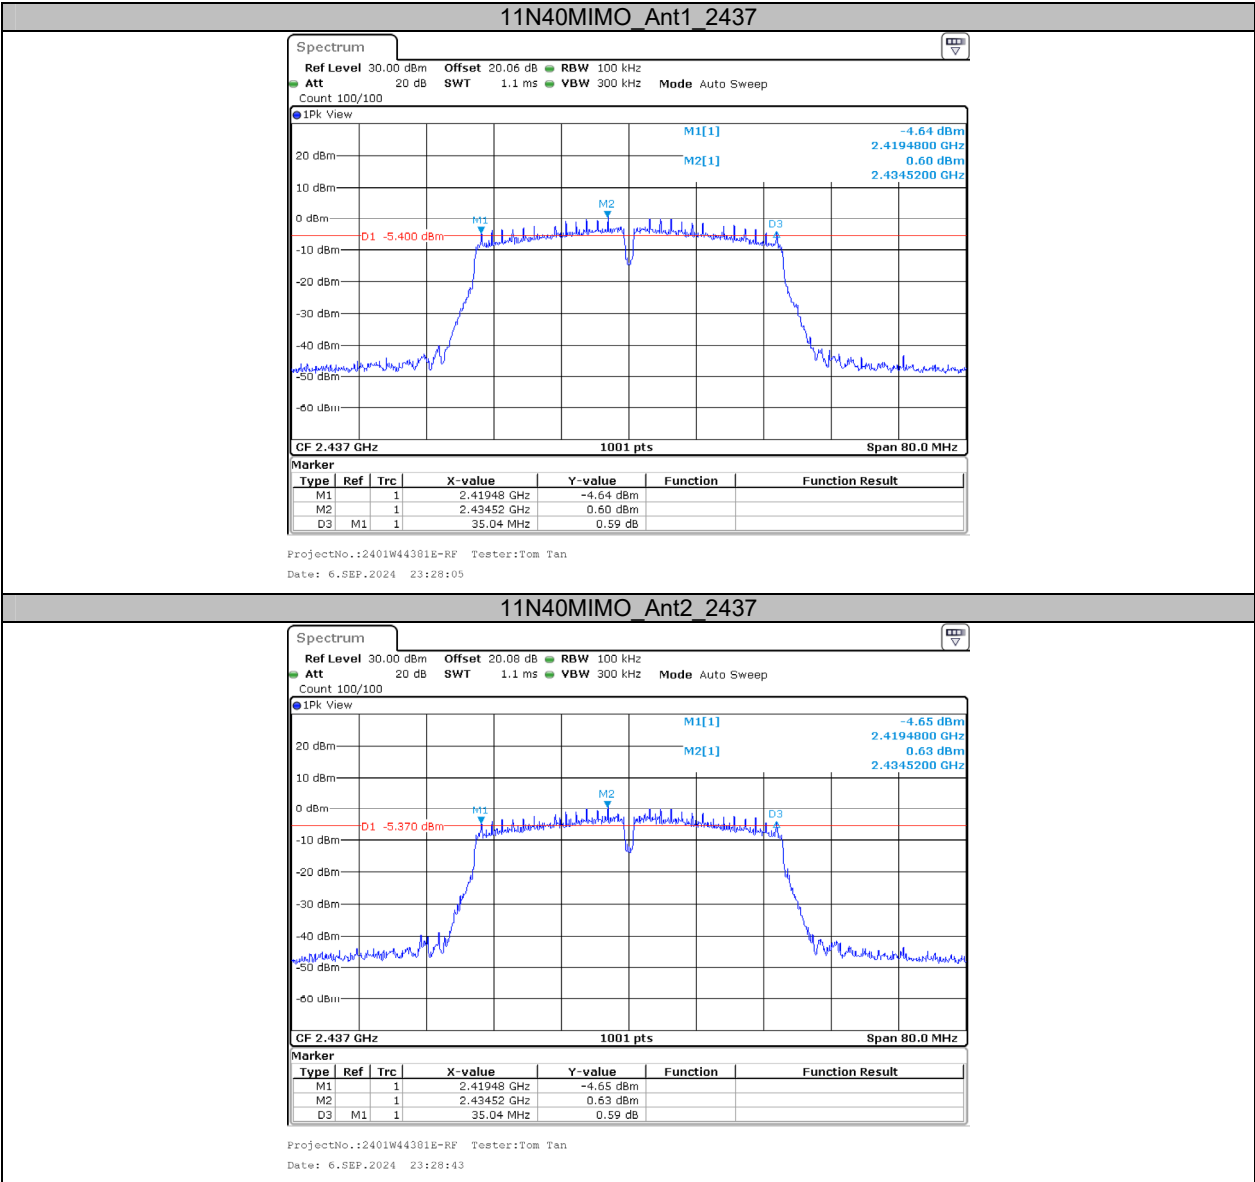

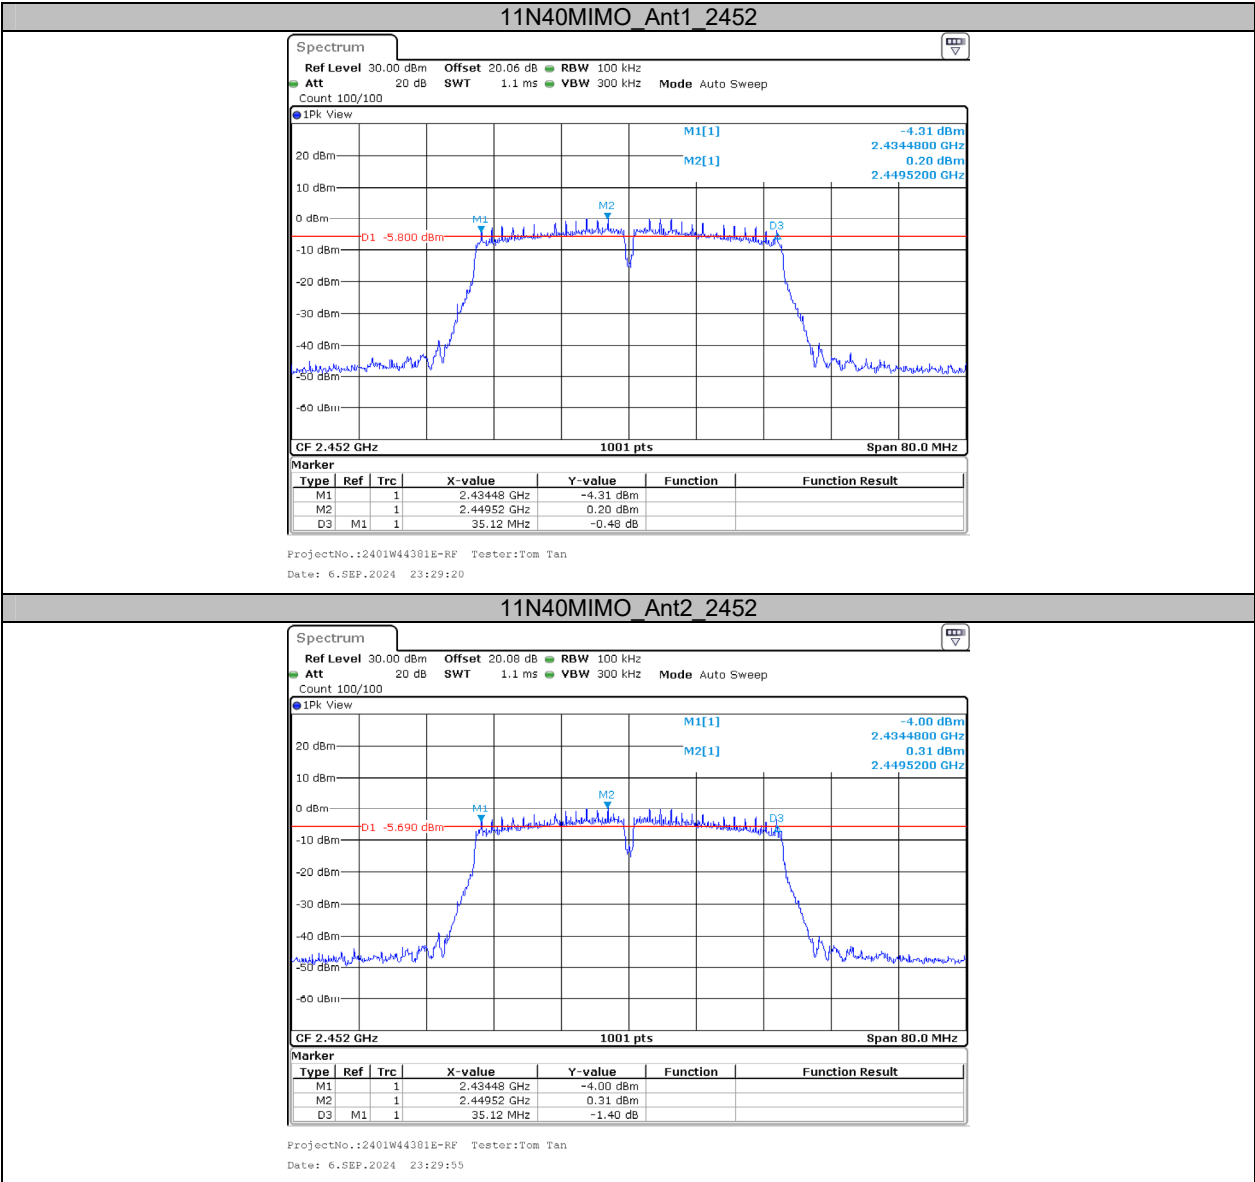

Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.467	---	---
	Ant2	2412	13.387	---	---
	Ant1	2437	13.307	---	---
	Ant2	2437	13.347	---	---
	Ant1	2462	13.347	---	---
	Ant2	2462	13.427	---	---
11G	Ant1	2412	17.143	---	---
	Ant2	2412	16.863	---	---
	Ant1	2437	17.143	---	---
	Ant2	2437	16.863	---	---
	Ant1	2462	17.143	---	---
	Ant2	2462	16.863	---	---
11N20MIMO	Ant1	2412	18.022	---	---
	Ant2	2412	17.742	---	---
	Ant1	2437	18.062	---	---
	Ant2	2437	17.782	---	---
	Ant1	2462	18.022	---	---
	Ant2	2462	17.822	---	---
11N40MIMO	Ant1	2422	36.444	---	---
	Ant2	2422	36.364	---	---
	Ant1	2437	36.204	---	---
	Ant2	2437	36.124	---	---
	Ant1	2452	36.364	---	---
	Ant2	2452	36.284	---	---

Test Graphs

